



FCC Test Report

FCC ID: 2ACMBLEARNIT

Product : Tablet PC

Trade Name : N/A

Model Number : Learnit

Serial Model : CEB

Report No. : NTEK-2015NT01061024F2

Prepared for

Caribbean eBook Ltd.

Brades, Montserrat, West Indies

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : Caribbean eBook Ltd.
Address : Brades, Montserrat, West Indies

Manufacturer's Name : Caribbean eBook Ltd.
Address : Brades, Montserrat, West Indies

Product description


Product name : Tablet PC
Model and/or type reference : Learnit
Standards : FCC Part15B:01 Oct.2014
ANSI C63.4:2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 06 Jan. 2015 ~26 Jan. 2015
Date of Issue : 26 Jan. 2015
Test Result : **Pass**

Testing Engineer : 

Denny Huang

Technical Manager : 

(Brown Lu)

Authorized Signatory : 

(Bill Yao)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 EUT OPERATING CONDITIONS	17
3.2.5 TEST RESULTS	18
3.2.6 TEST RESULTS(1000~12400MHz)	21
4 . EUT TEST PHOTO	22

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2014	Conducted Emission	Class B	PASS	
ANSI C63.4: 2003	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet PC						
Model Name	Learnit						
Additional Model Number(s)	CEB						
Model Difference	All the model are the same circuit and RF module, except the model name and colour.						
Product Description	<p>The EUT is a Tablet PC.</p> <table border="1"><tr><td>Connecting I/O port:</td><td>USB</td></tr><tr><td>Operation Frequency:</td><td>WIFI: 802.11b/g: 2412~2462MHz</td></tr><tr><td>Modulation Type:</td><td>WIFI: CCK/OFDM</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Connecting I/O port:	USB	Operation Frequency:	WIFI: 802.11b/g: 2412~2462MHz	Modulation Type:	WIFI: CCK/OFDM
Connecting I/O port:	USB						
Operation Frequency:	WIFI: 802.11b/g: 2412~2462MHz						
Modulation Type:	WIFI: CCK/OFDM						
Power Source	DC Voltage						
Adapter	Input: 100-240V~, 50/60 Hz, 0.35A Output: 5V---, 2.0A						
Battery	DC 3.7V ,2500mAh						

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Data Exchange
Mode 2	Playing+chagring
Mode 3	REC Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	Data Exchange
Mode 2	Playing+chagring
Mode 3	REC Mode


For Radiated Test	
Final Test Mode	Description
Mode 1	Data Exchange
Mode 2	Playing+chagring
Mode 3	REC Mode

Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worse case.


Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

RE

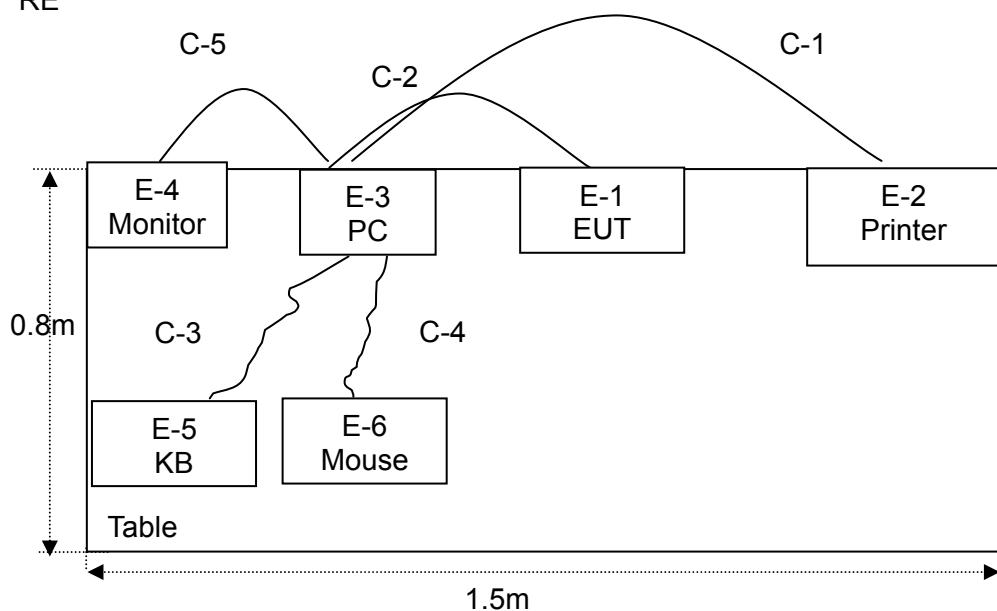

CE

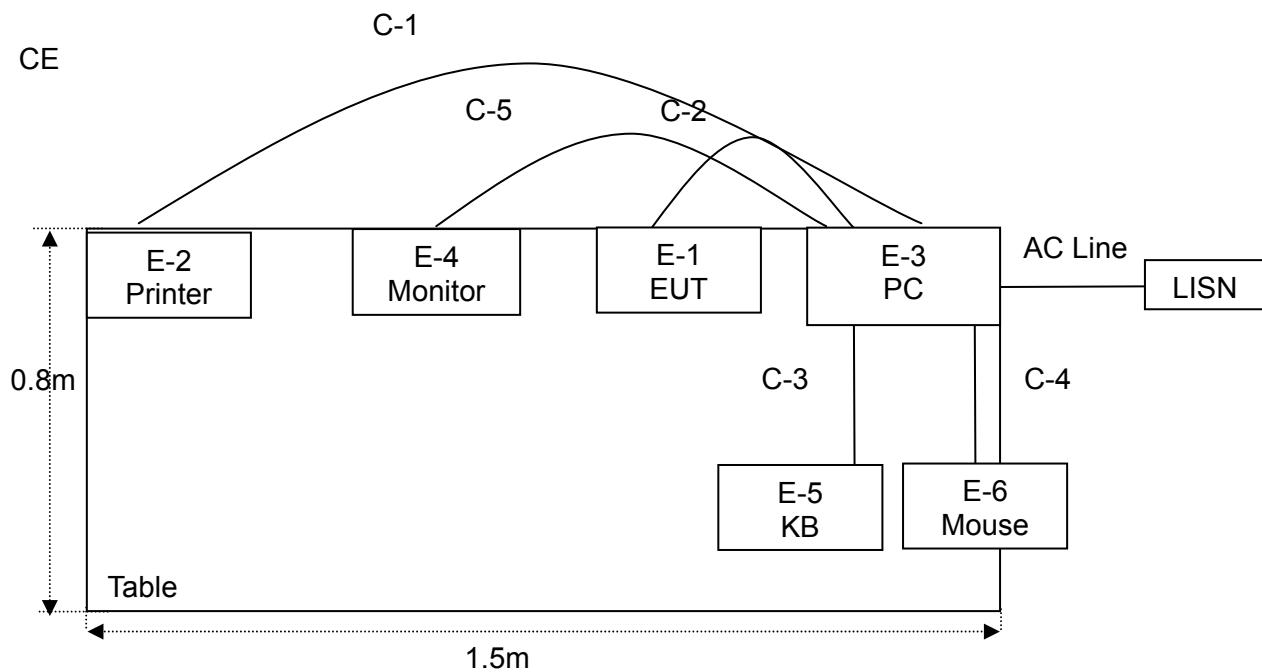

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Tablet PC	N/A	Learnit	N/A	EUT
E-2	Printer	Canon	L11121E	LBP2900	
E-3	Personal computer	DELL	FT4Y23X	34413561645	
E-4	Monitor	DELL	IN2020MB	cn-0y6mhx-74261-11f-67es	
E-5	Keyboard	DELL	SK-8185	OY526KUS	
E-6	Mouse	DELL	MS111-P	cn-011d3v-71581-11e-1th7	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	
C-3	NO	NO	1.0m	
C-4	NO	NO	1.0m	
C-5	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.4 MEASUREMENT INSTRUMENTS LIST

2.4.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101313	Jul. 06, 2014	Jul. 05, 2015	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129245	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Dec. 25, 2014	Dec. 24, 2015	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Test Cable	N/A	C01	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
6	Test Cable	N/A	C02	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
7	Test Cable	N/A	C03	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
8	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2014	Jul. 07, 2015	1 year

2.4.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2014	Jul. 05, 2015	1 year
2	Test Cable	N/A	R-01	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Test Cable	N/A	R-02	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2014	Jul. 05, 2015	1 year
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Amplifier	EM	EM-30180	060538	Jul. 06, 2014	Jul. 05, 2015	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06, 2014	Jul. 05, 2015	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

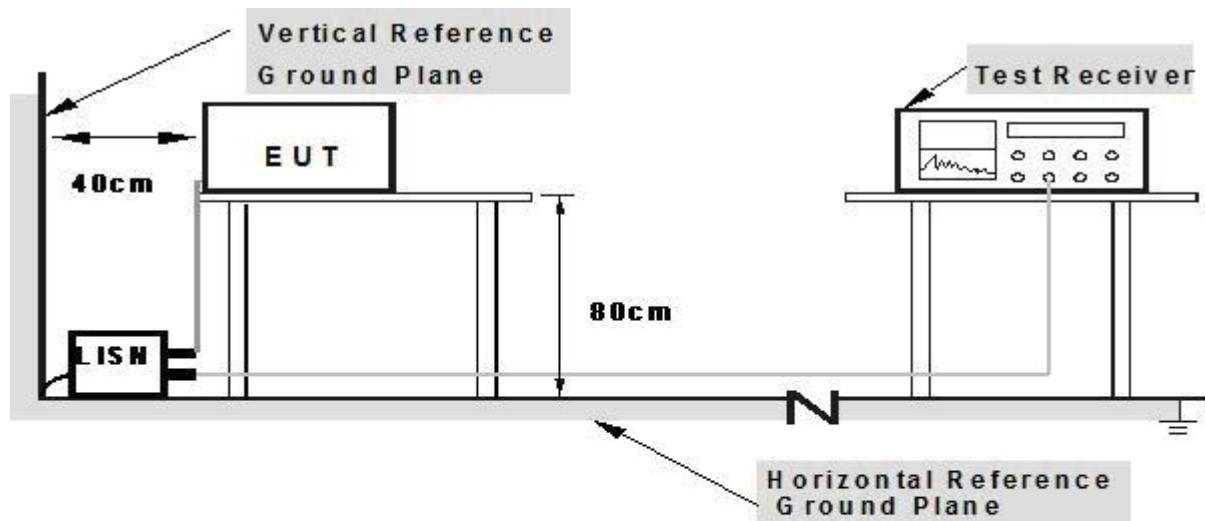

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (A and B) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT :	Tablet PC	Model Name. :	Learnit
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-01-22
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.2020	34.66	9.49	44.15	63.52	-19.37	QP
0.2020	31.62	9.49	41.11	53.52	-12.41	AVG
0.4020	19.71	9.50	29.21	57.81	-28.60	QP
0.4020	15.00	9.50	24.50	47.81	-23.31	AVG
1.1100	21.63	9.53	31.16	56.00	-24.84	QP
1.1100	19.30	9.53	28.83	46.00	-17.17	AVG
1.8140	23.40	9.55	32.95	56.00	-23.05	QP
1.8140	19.28	9.55	28.83	46.00	-17.17	AVG
5.2499	32.45	9.61	42.06	60.00	-17.94	QP
5.2499	21.62	9.61	31.23	50.00	-18.77	AVG
24.5658	30.07	10.19	40.26	60.00	-19.74	QP
24.5658	20.63	10.19	30.82	50.00	-19.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

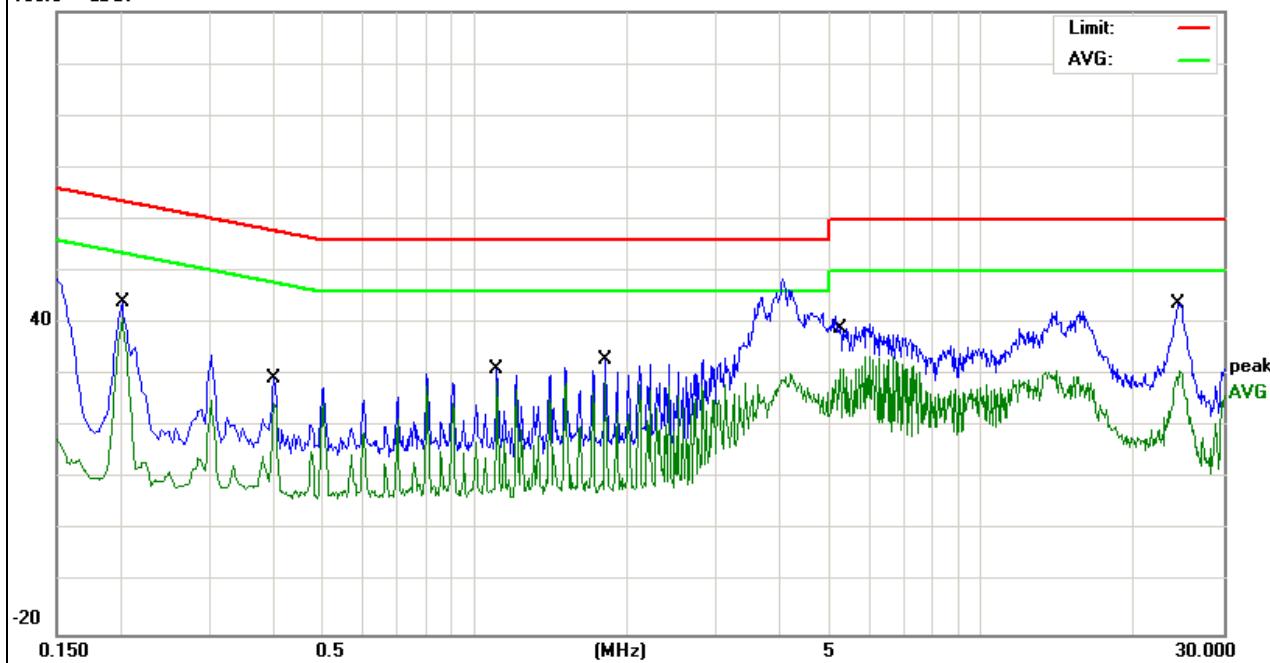
100.0 dB μ V

EUT :	Tablet PC	Model Name. :	Learnit
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-01-22
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.2020	34.59	9.50	44.09	63.52	-19.43	QP
0.2020	30.34	9.50	39.84	53.52	-13.68	AVG
0.8100	22.36	9.54	31.90	56.00	-24.10	QP
0.8100	18.73	9.54	28.27	46.00	-17.73	AVG
1.1100	23.00	9.55	32.55	56.00	-23.45	QP
1.1100	20.07	9.55	29.62	46.00	-16.38	AVG
2.1179	22.26	9.57	31.83	56.00	-24.17	QP
2.1179	18.65	9.57	28.22	46.00	-17.78	AVG
4.3939	36.93	9.60	46.53	56.00	-9.47	QP
4.3939	20.46	9.60	30.06	46.00	-15.94	AVG
5.9218	31.03	9.63	40.66	60.00	-19.34	QP
6.0179	25.67	9.64	35.31	50.00	-14.69	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

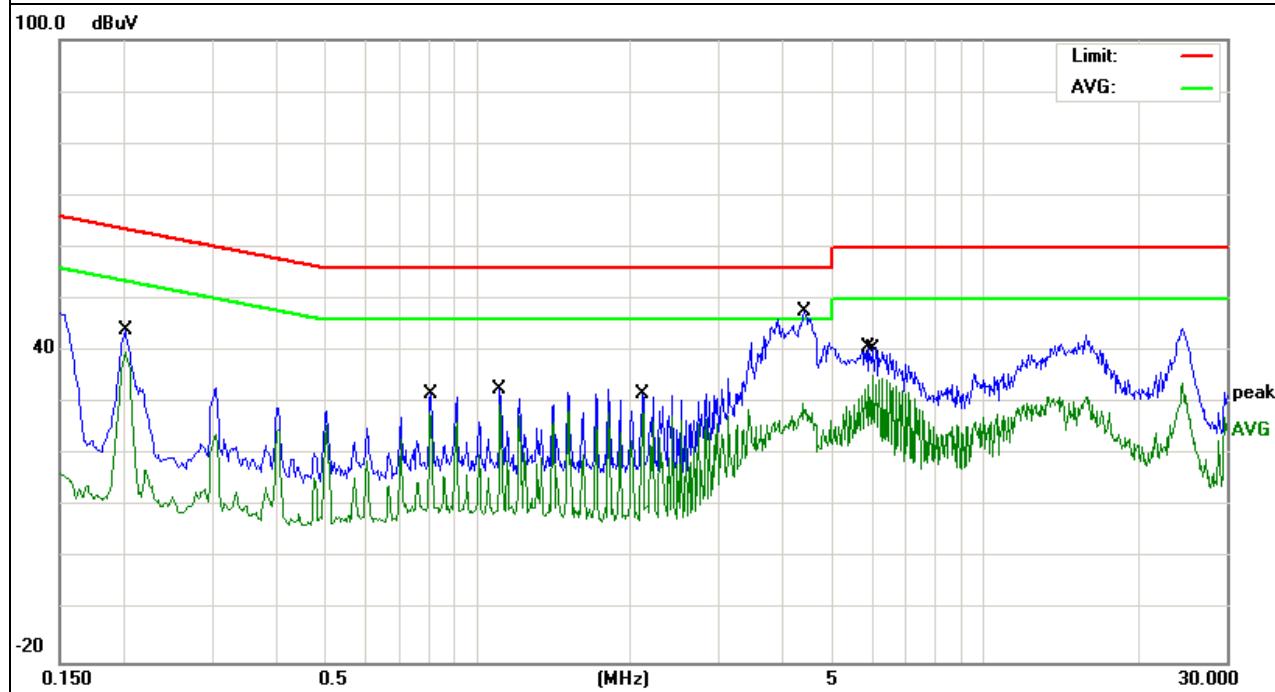

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report


During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz


3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz


For radiated emissions below 30MHz

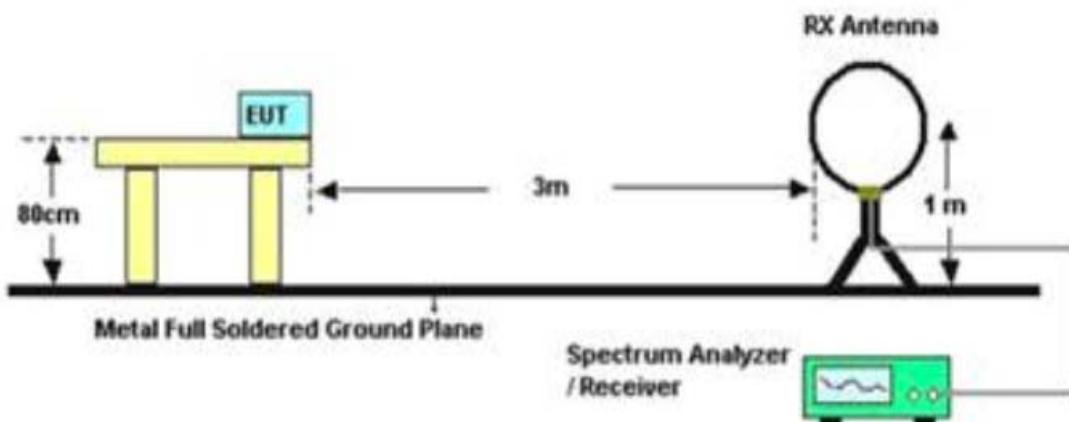

For Radiated Emission 30~1000MHz

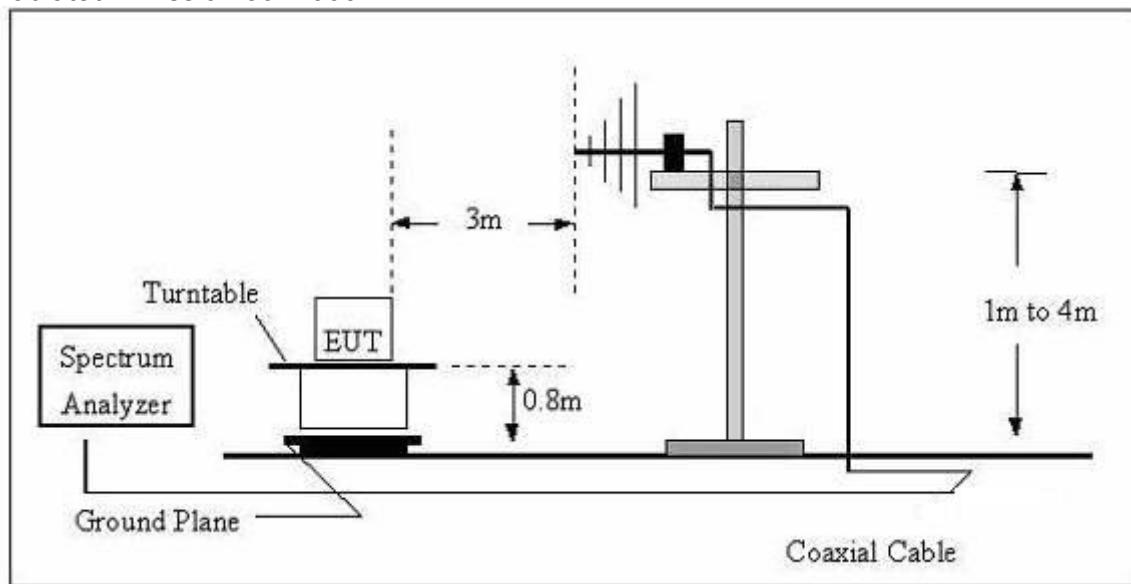

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

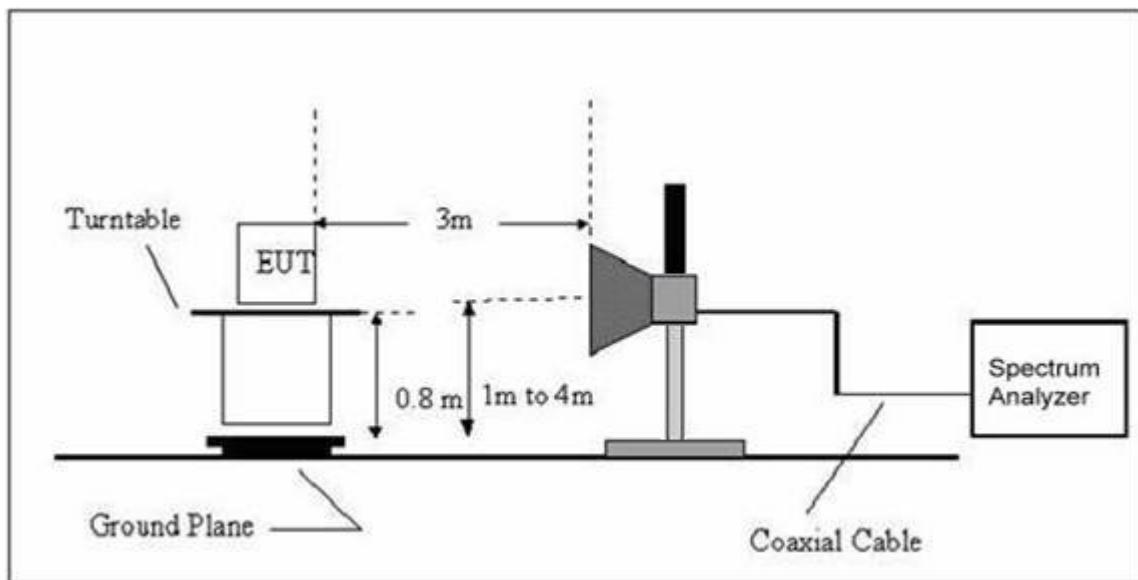

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 TEST RESULTS**TEST RESULTS (Below 30 MHz)**

EUT :	Tablet PC	Model Name :	Learnit
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	---
Test Mode :	TX	Polarization :	---

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P
--	--	--	--	P

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log \left(\frac{\text{specific distance}}{\text{test distance}} \right)$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


TEST RESULTS (30~1000 MHz)

EUT :	Tablet PC	Model Name :	Learnit
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-01-22
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
58.4074	25.74	8.28	34.02	40.00	-5.98	QP
64.8863	29.44	6.73	36.17	40.00	-3.83	QP
165.4866	21.90	10.52	32.42	43.50	-11.08	QP
480.5276	16.28	19.91	36.19	46.00	-9.81	QP
665.8034	18.20	23.85	42.05	46.00	-3.95	QP
721.7259	14.97	25.36	40.33	46.00	-5.67	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

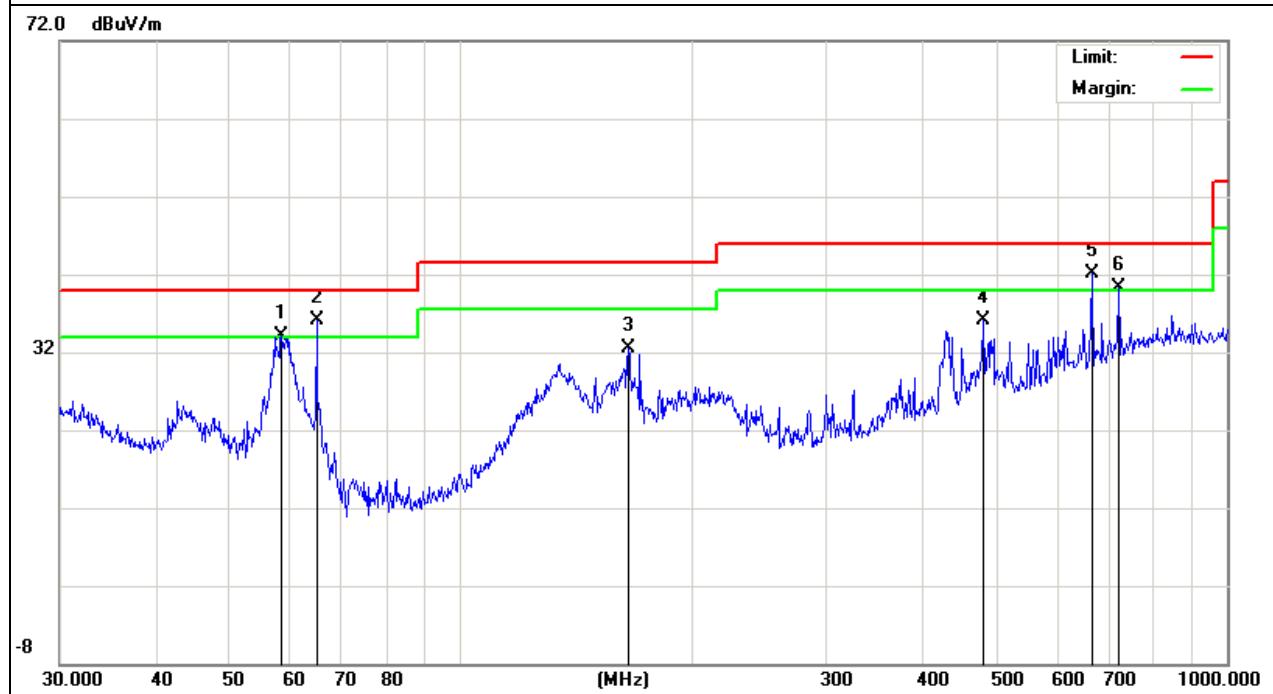


EUT :	Tablet PC	Model Name :	Learnit
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-01-22
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
171.3925	26.05	10.57	36.62	43.50	-6.88	QP
239.9874	28.95	13.49	42.44	46.00	-3.56	QP
374.6225	22.93	17.26	40.19	46.00	-5.81	QP
425.0280	20.76	18.81	39.57	46.00	-6.43	QP
550.9479	16.87	21.36	38.23	46.00	-7.77	QP
665.8034	13.69	23.85	37.54	46.00	-8.46	QP

Remark:

1. All readings are Peak and Average values.
2. Factor = Antenna Factor + Cable Loss - Amplifier.
3. N/A means All Data have pass Limit

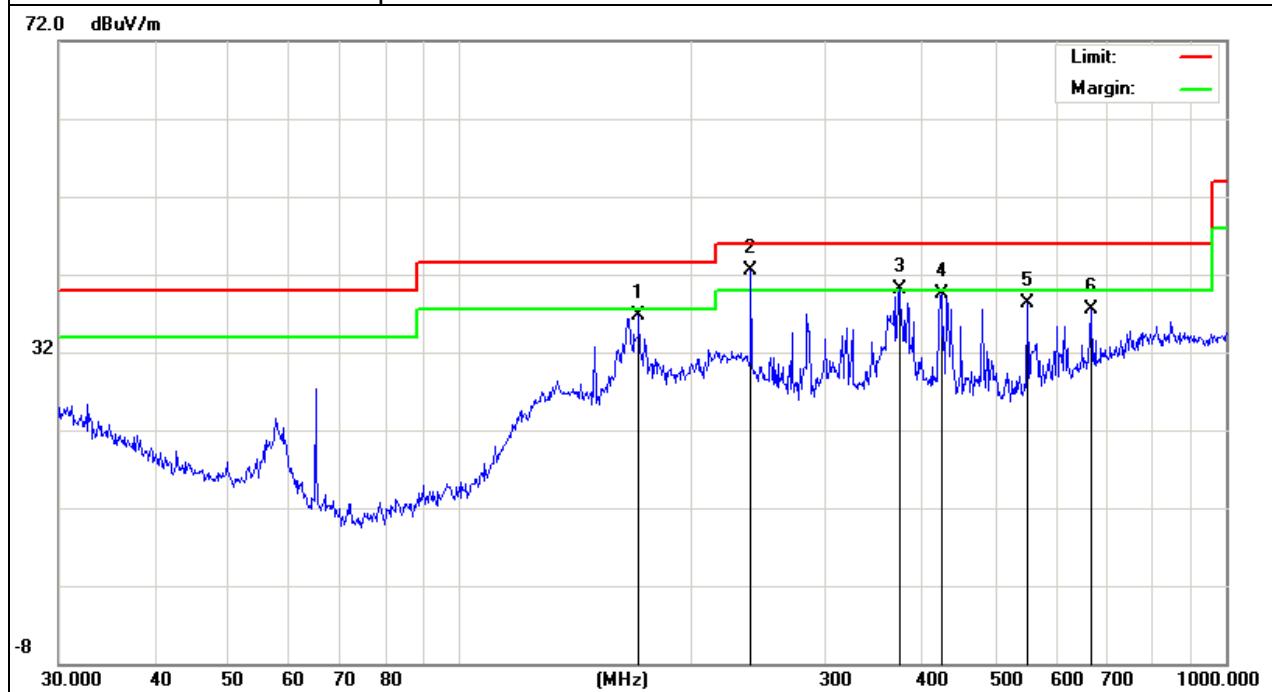

3.2.6 TEST RESULTS(1000~12400MHz)

Polar (H/V)	Freq.	Reading	Factor	Measurement	Limit	Over	Remark
	(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
V	1231.853	62.61	-15.95	46.66	74	-27.34	peak
V	1231.853	40.21	-15.95	24.26	54	-29.74	AVG
V	2043.944	60.88	-10.98	49.9	74	-24.1	peak
V	2043.944	39.43	-10.98	28.45	54	-25.55	AVG
V	2369.334	60.42	-10.73	49.69	74	-24.31	peak
V	2369.334	37.83	-10.73	27.1	54	-26.9	AVG
V	2769.137	61.15	-9.51	51.64	74	-22.36	peak
V	2769.137	38.15	-9.51	28.64	54	-25.36	AVG
V	2969.228	59.8	-9.64	50.16	74	-23.84	peak
V	2969.228	39.79	-9.64	30.15	54	-23.85	AVG
V	4094.039	56.62	-3.68	52.94	74	-21.06	peak
V	4094.039	35.2	-3.68	31.52	54	-22.48	AVG
H	1432.343	57.65	-15.11	42.54	74	-31.46	peak
H	1432.343	37.25	-15.11	22.14	54	-31.86	AVG
H	1631.969	57.83	-14.18	43.65	74	-30.35	peak
H	1631.969	38.02	-14.18	23.84	54	-30.16	AVG
H	2043.858	56.2	-10.98	45.22	74	-28.78	peak
H	2043.858	35.63	-10.98	24.65	54	-29.35	AVG
H	2819.237	56.09	-9.29	46.8	74	-27.2	peak
H	2819.237	34.76	-9.29	25.47	54	-28.53	AVG
H	3907.022	52.68	-4.93	47.75	74	-26.25	peak
H	3907.022	31.08	-4.93	26.15	54	-27.85	AVG
H	4881.866	50.58	-1.23	49.35	74	-24.65	peak
H	4881.866	29.48	-1.23	28.25	54	-25.75	AVG

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. EUT TEST PHOTO**Radiated Measurement Photos**

Conducted Measurement Photos