



RF - TEST REPORT

- FCC Part 15.247, RSS-247 -

Model Name : OneTouch Verio Flex / HVIN: ZH

Product Description : Blood glucose meter with BLE 5.0

Applicant : Lifescan Scotland Ltd.

Address : Beechwood Park North

INVERNESS, IV2 3ED, SCOTLAND

Manufacturer : Lifescan Europe GmbH

Address : Gubelstrasse 34

6300 ZUG, SWITZERLAND

Licence holder : Lifescan Europe GmbH

Address : Gubelstrasse 34

6300 ZUG, SWITZERLAND

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. : 80125751-06 Rev_0	15. February 2023 Date of issue
---	---



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

Contents

1	TEST STANDARDS	3
2	EQUIPMENT UNDER TEST	4
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	General remarks	4
2.4	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.5	Equipment type	4
2.6	Short description of the equipment under test (EUT)	4
2.7	Variants of the EUT	4
2.8	Operation frequency and channel plan	5
2.9	Transmit operating modes	5
2.10	Antenna	5
2.11	Power supply system utilised	5
2.12	Peripheral devices and interface cables	6
2.13	Determination of worst-case conditions for final measurement	6
3	TEST RESULT SUMMARY	7
3.1	Revision history of test report	7
3.2	Final assessment	7
4	TEST ENVIRONMENT	8
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	9
4.5	Measurement protocol for FCC and ISED	9
5	TEST CONDITIONS AND RESULTS	12
5.1	EBW and OBW	12
5.2	Maximum peak radiated output power	16
5.3	Power spectral density	21
5.4	Radiated emissions in restricted bands	24
5.5	Spurious emissions radiated	35
5.6	Correction for pulse operation (duty cycle)	36
5.7	Antenna application	38
6	USED TEST EQUIPMENT AND ACCESSORIES	39

ATTACHMENTs A, B1 as separate supplements

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September 2022)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September 2022)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204 modifications	External radio frequency power amplifiers and antenna
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
-------------------	-------------------------------------

KDB 558074 D01 v05r02	Guidance for compliance measurements on DTS; FHSS and hybrid system devices operating under Section 15.247 of the FCC rules, April 2, 2019.
-----------------------	---

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 General remarks

None

2.4 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.5 Equipment type

BLE device

2.6 Short description of the equipment under test (EUT)

The EUT is a blood glucose meter equipped with Bluetooth Low Energy. A single PCB antenna is used within the system. The EUT has only one integrated antenna, no temporary connector and no external antenna can be connected. The modulation used by the EUT is GFSK with a data rate of 1 Mbit/s.

Number of tested samples	: 1 (radiated sample)	1 (conducted sample)	1 (normal sample)
Serial number	: Z1QGJ07P	Z1QGJ08F	Z1QGJ073
Firmware number	: DTM version 1.0.0	DTM version 1.0.0	1.9.2
Type	: OneTouch Verio Flex	OneTouch Verio Flex	OneTouch Verio Flex

Items	Description
BT type	5.0 Low Energy
BT chipset type	Nordic Semiconductors nRF52805
Modulation	GFSK
Frequency range	2400 MHz to 2483.5 MHz
Channel numbers	40
Data rate (kbps)	1000
Antenna type	PCB

2.7 Variants of the EUT

The Element Verio Platform consists of two devices: OneTouch Verio Flex and OneTouch Ultra Plus Flex. According to the customer the only difference between the two devices is the colour of the housing and the different strip port connectors.

2.8 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	18	2442
0	2404	19	2444
1	2406	20	2446
2	2408	21	2448
3	2410	22	2450
4	2412	23	2452
5	2414	24	2454
6	2416	25	2456
7	2418	26	2458
8	2420	27	2460
9	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

Note: the marked frequencies are determined for final testing.

2.9 Transmit operating modes

The EUT uses GFSK modulation and may provide following data rates:

- 1000 kbps

(kbps = *kilobits per second*)

2.10 Antenna

A single integrated PCB antenna is used with the EUT, no other antenna can be used with the device.

All measurements were performed radiated, for additional photo documentation of the antenna please refer to Attachment A.

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 3 VDC (battery)

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- Lab notebook 'Mess_Funk 10033' Model : Lifebook, Fujitsu
- UART-USB adapter Model : TTL-232R-3V3, FTDI
- - Model : -

2.13 Determination of worst-case conditions for final measurement

Preliminary tests are performed in all three orthogonal axes of the EUT to locate at which position and at what setting of the EUT produce the maximum of the emissions. For the further measurement the EUT is set in X position.

The tests are carried out in the following frequency band:

2400 MHz – 2483.5 MHz

For the final test the following channels and test modes are selected:

Wireless system	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.15.1	0 - 39	37, 17, 39	P-4	DSSS	GFSK	1000 kbps

2.13.1 Test jig

No test jig is used.

2.13.2 Test software

The EUT has a special firmware that allows enabling the Direct Test Mode.

3 TEST RESULT SUMMARY

BLE device using digital modulation and operates in the 2400 MHz – 2483.5 MHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen, 8.8	AC power line conducted emissions	not applicable*
15.247(a)(2)	RSS-247, 5.2(a)	-6 dB EBW	passed
15.247(b)(3) 15.247(b)(4)	RSS-247, 5.4(d)	Maximum peak radiated output power	passed
15.247(d) 15.209	RSS-247, 5.5 RSS-Gen, 8.9	Spurious emissions	passed
15.247(e)	RSS-247, 5.2(b)	PSD	passed
15.35(c)	RSS-Gen, 8.2	Pulsed operation	passed
15.203		Antenna requirement	passed
-	RSS-Gen, 6.7	99 % Bandwidth	passed

*EUT is battery powered

The mentioned new RSS Rule Parts in the above table are related to:
RSS-Gen, Issue 5 + Amendment 1 + Amendment 2, February 2021
RSS-247, Issue 2, February 2017

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80125751-06	0	15 February 2023	Initial test report

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfils the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 27 June 2022

Testing concluded on : 14 February 2023

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Sabine Kugler
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
20 dB Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Peak conducted output power	902 MHz to 928 MHz	95%	$\pm 0.35 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISCED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011

ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

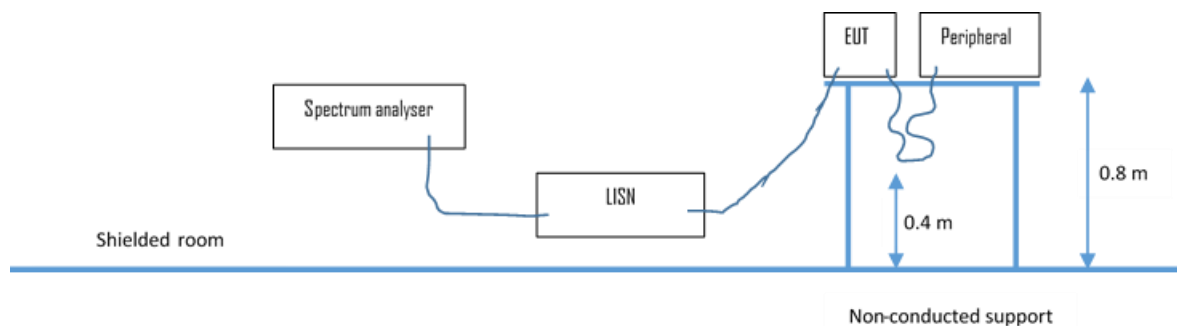

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):


Test setup according ANSI C63.10

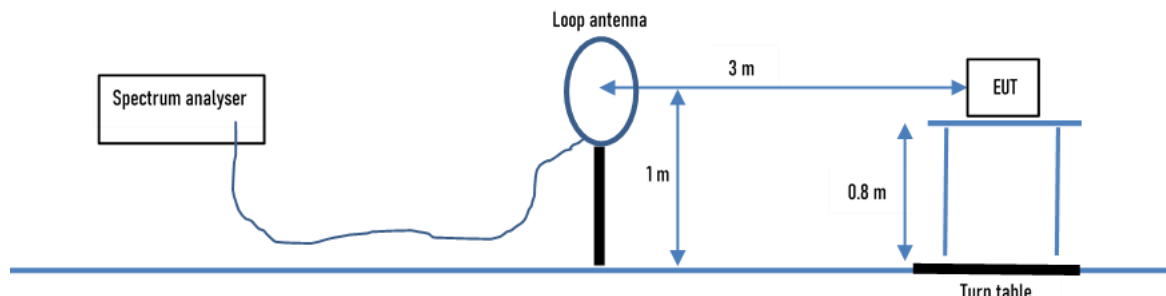

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

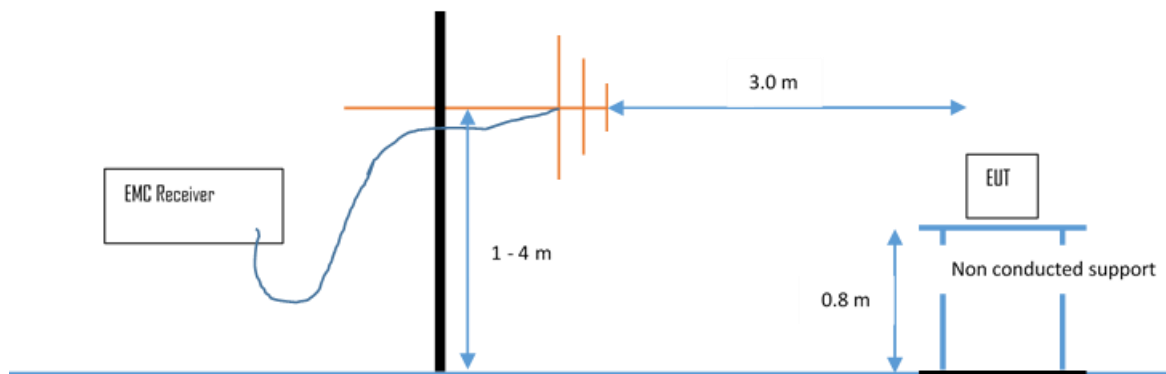

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dBμV/m is calculated by taking the reading from the EMI receiver (Level dBμV) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:


30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level (dBμV/m)	-	Limit (dBμV/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4


4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)

Test setup according ANSI C63.10.

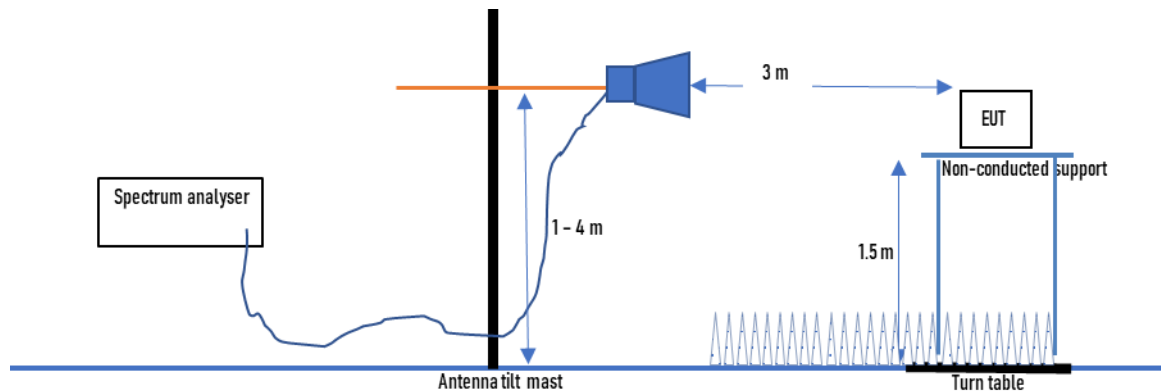

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)

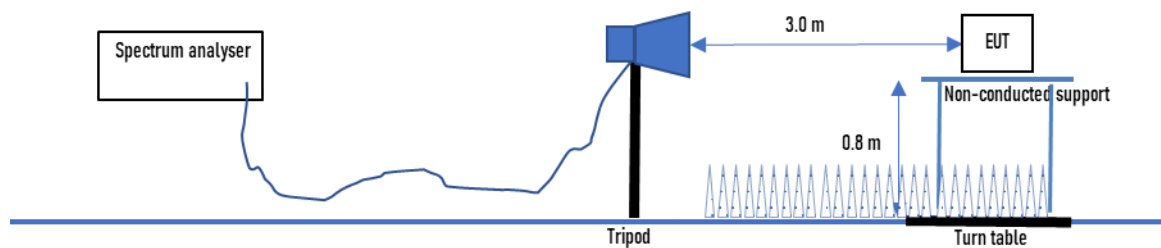

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit is adopted.

5 TEST CONDITIONS AND RESULTS


5.1 EBW and OBW

For test instruments and accessories used see section 6 Part CPR.

5.1.1 Description of the test location

Test location: Anechoic chamber 1

5.1.2 Photo documentation of the test set-up

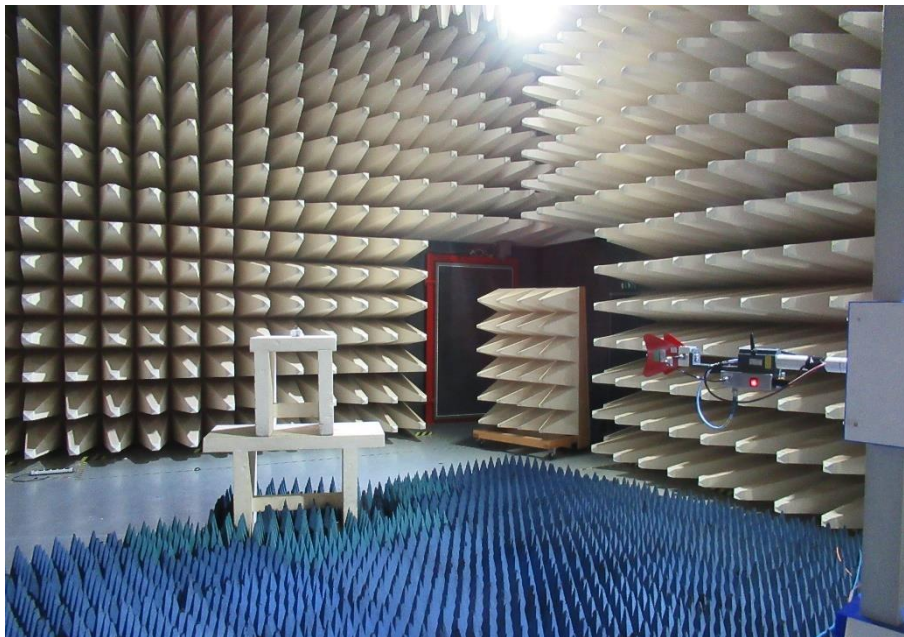

5.1.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.4 Description of Measurement

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings for EBW:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak, Sweep time: 5 s, Span: 2 EBW;

Spectrum analyser settings for OBW:

RBW: 1-5% OBW, VBW: 3 RBW, Detector: Max peak, Sweep time: 5 s, Span: 2 OBW;

5.1.5 Test result

6dB bandwidth

Channel	Centre frequency (MHz)	6 dB bandwidth (kHz)	Minimum limit (kHz)
37	2402	694.340	500
17	2440	689.430	500
39	2480	699.450	500

99% bandwidth

Channel	Centre frequency (MHz)	99 % bandwidth (kHz)
37	2402	1047.520
17	2440	1047.008
39	2480	1050.851


The requirements are **FULFILLED**.

Remarks:


For detailed test result please see the following test protocols

5.1.6 Test protocols EBW


Channel 37 (2402 MHz)

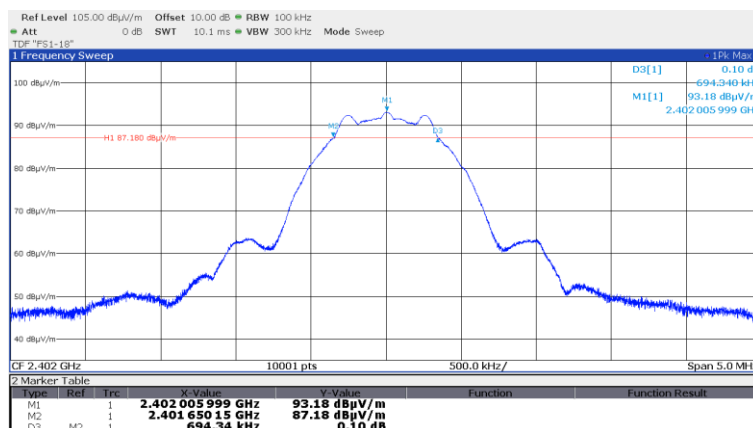

Channel 17 (2440 MHz)

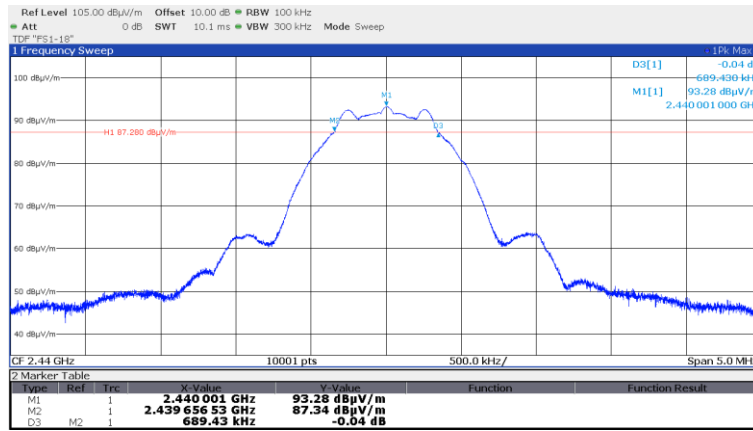


Channel 39 (2480 MHz)

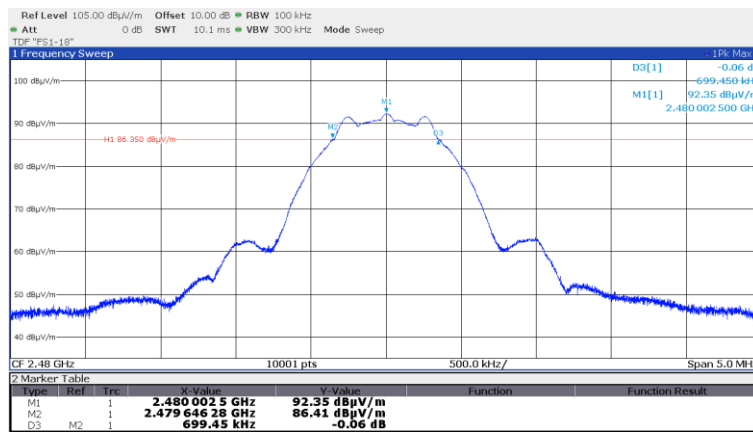


5.1.7 Test protocols OBW

Channel 37 (2402 MHz)

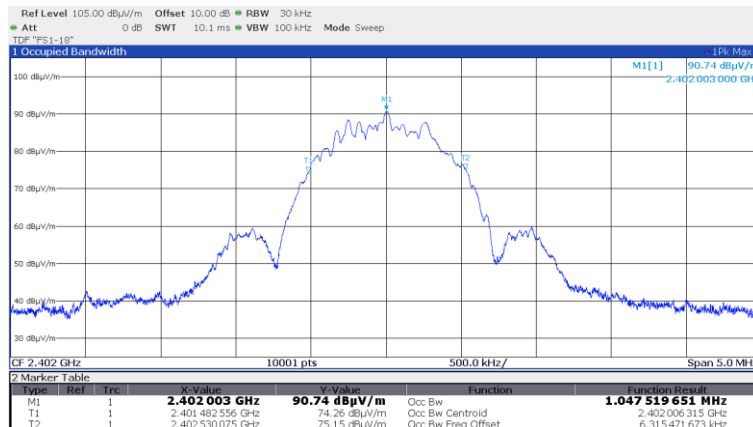


FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

Channel 17 (2440 MHz)

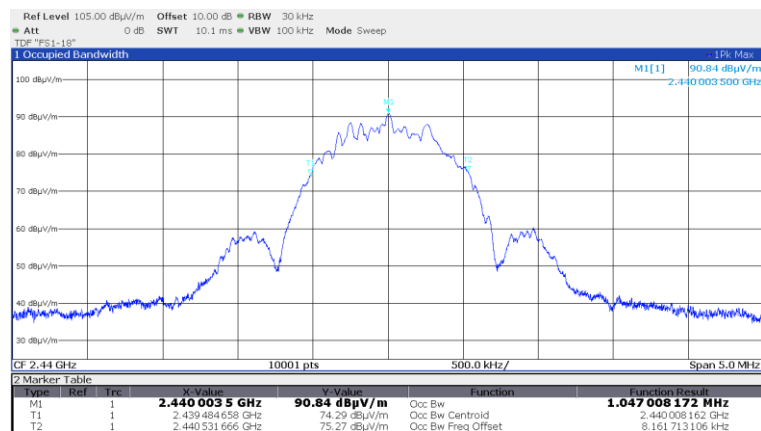

Channel 39 (2480 MHz)

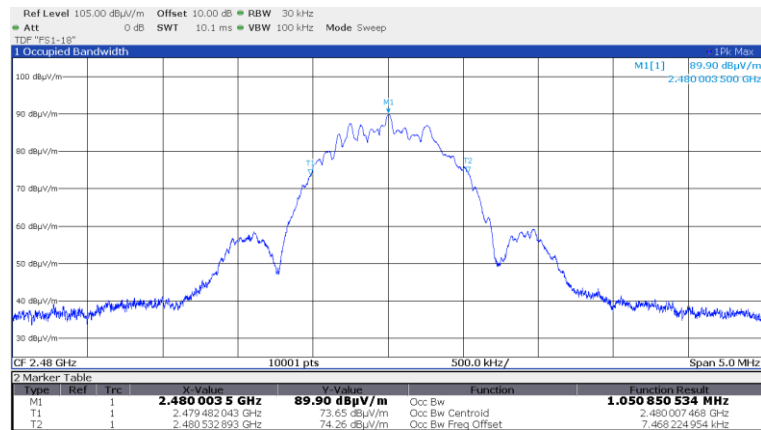


5.2 Maximum peak radiated output power

For test instruments and accessories used see section 6 Part CPR 3, CPC.

5.2.1 Description of the test location

Test location: Anechoic chamber 1

5.2.2 Photo documentation of the test set-up

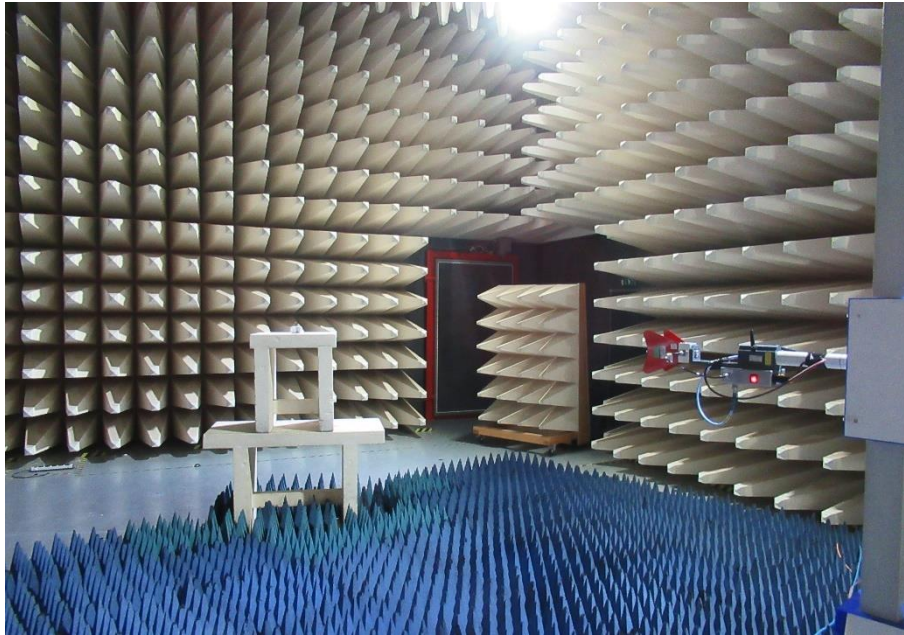

EUT orientation



5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2.4 Description of Measurement

The maximum peak radiated output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.2.2. The EUT is set in TX continuous mode while measuring. The radiated measurement was performed in terms of fieldstrength. Therefore, the formula set out in ANSI C63.10, item 9.5 (Equation 22) is changed into the following term:

$$E = \text{EIRP} - (20 \cdot \log_{10}(3)) + 104.7$$

5.2.5 Test result

Measured peak EIRP output power:

Test results radiated					
		Fieldstrength E (dBμV/m)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Lowest frequency: CH37					
T_{nom}	V_{nom}	93.4	-1.9	36.0	-37.9
Middle frequency: CH17					
T_{nom}	V_{nom}	93.4	-1.8	36.0	-37.8
Highest frequency: CH39					
T_{nom}	V_{nom}	92.5	-2.7	36.0	-38.7

Measured peak conducted output power:

Test results conducted				
		A (dBm)	Limit (dBm)	Margin (dB)
Lowest frequency: CH37				
T_{nom}	V_{nom}	-4.1	30.0	-34.1
Middle frequency: CH17				
T_{nom}	V_{nom}	-5.1	30.0	-35.1
Highest frequency: CH39				
T_{nom}	V_{nom}	-4.3	30.0	-34.3

FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(W)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

Frequency (MHz)	EIRP Limit	
	(dBm)	(W)
902-928	36	4.0
2400-2483.5	36	4.0
5725-5850	36	4.0

The requirements are **FULFILLED**.


Remarks:

For detailed test result please see the following test protocols


5.2.6 Test protocols

Radiated measurements:


Channel 37 (2402 MHz)

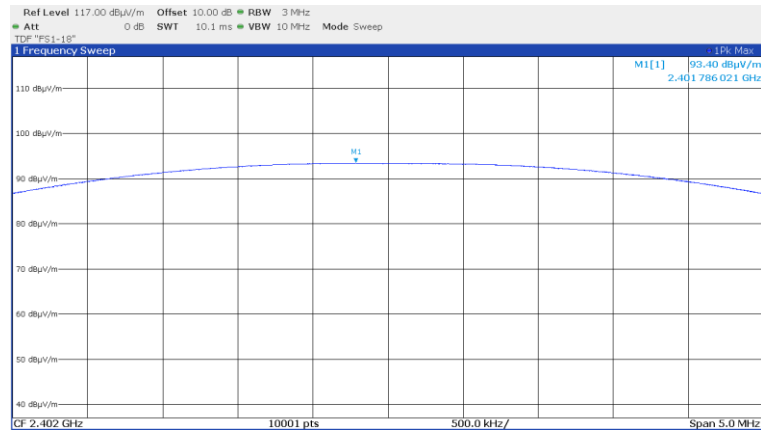

Channel 17 (2440 MHz)

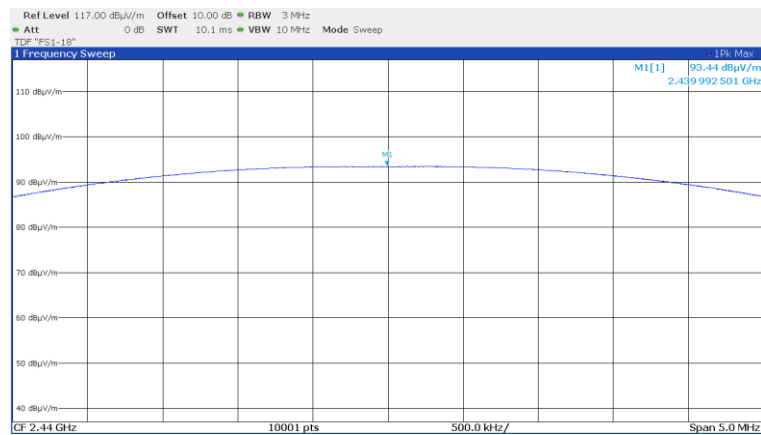


Channel 39 (2480 MHz)

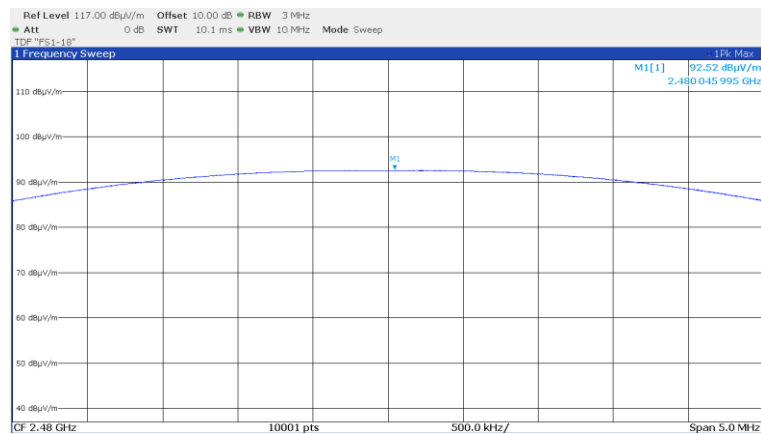


Conducted measurements:


Channel 37 (2402 MHz)

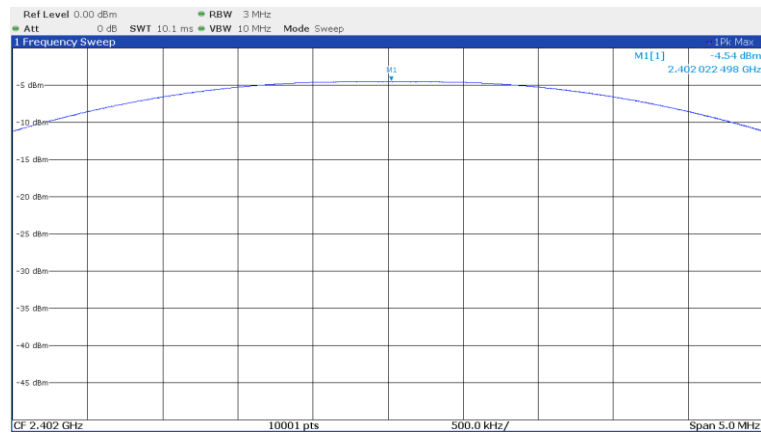

Channel 17 (2440 MHz)

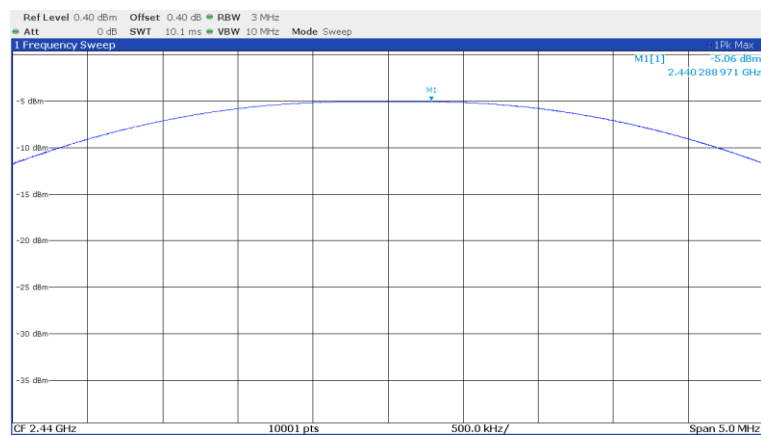

Channel 39 (2480 MHz)

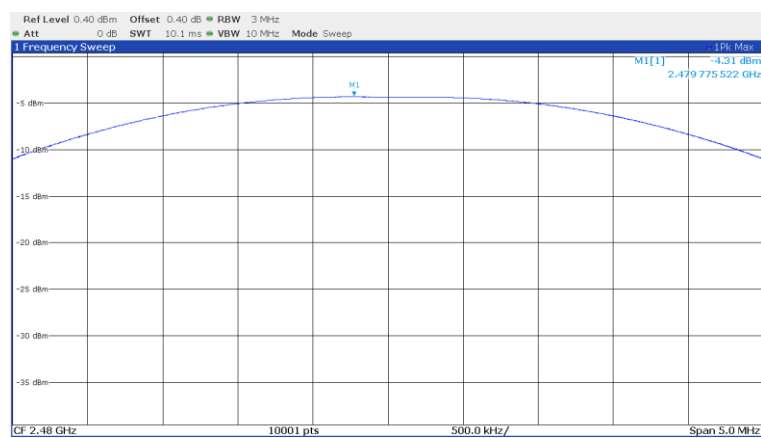


5.3 Power spectral density

For test instruments and accessories used see section 6 Part CPR.

5.3.1 Description of the test location

Test location: Anechoic chamber 1

5.3.2 Photo documentation of the test set-up

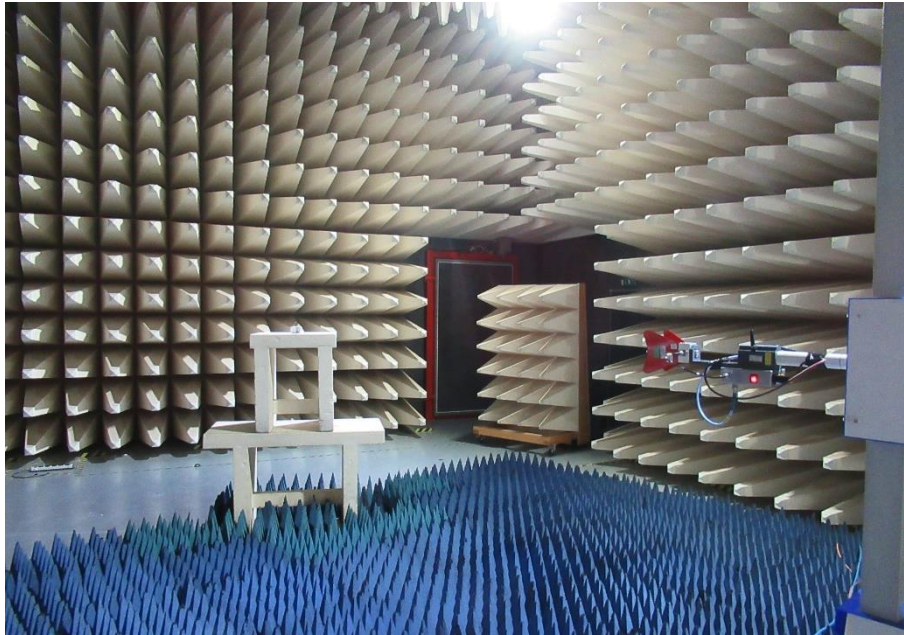

5.3.3 Applicable standard

According to FCC Part 15, Section 15.247(e):

For digitally modulated systems, the power spectral density radiated from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the radiated output power shall be used to determine the power spectral density.

5.3.4 Description of Measurement

The measurement is performed using the procedure set out in 11.10 of ANSI C63.10. The power measurement was done as peak power measurement. Therefore, the PKPSD is measured. The max peak was located and with the spectrum analyser and a marker set to peak.

Spectrum analyser settings:

RBW: 3 kHz, VBW: 10 kHz, Detector: Peak, Sweep time: Auto

5.3.5 Test result

Test results radiated					
		PSD (dBμV/m/3kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Lowest frequency: 2402 MHz					
T_{nom}	V_{nom}	77.8	-17.5	8.0	-25.5
Middle frequency: 2440 MHz					
T_{nom}	V_{nom}	78.5	-16.8	8.0	-24.8
Highest frequency: 2480 MHz					
T_{nom}	V_{nom}	77.0	-18.3	8.0	-26.3

Power spectral density limit according to FCC Part 15, Section 15.247(e):


Frequency (MHz)	Power spectral density limit
	(dBm/3 kHz)
2400 - 2483.5	8

The requirements are **FULFILLED**.

Remarks: For detailed test result please see the following test protocols


5.3.6 Test protocols

Channel 37 (2402 MHz)

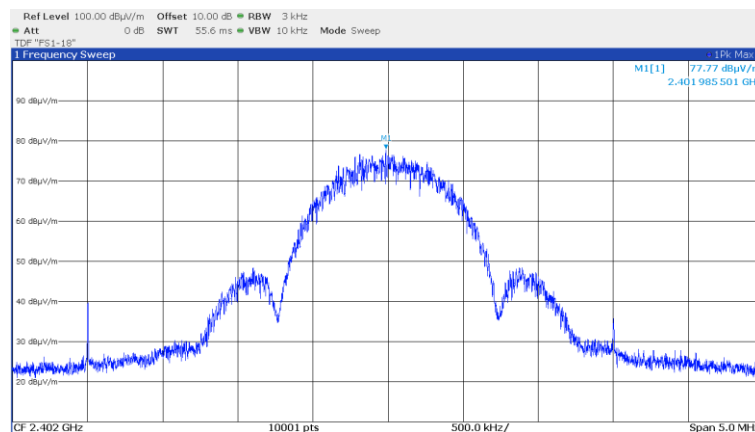


FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

Channel 17 (2440 MHz)

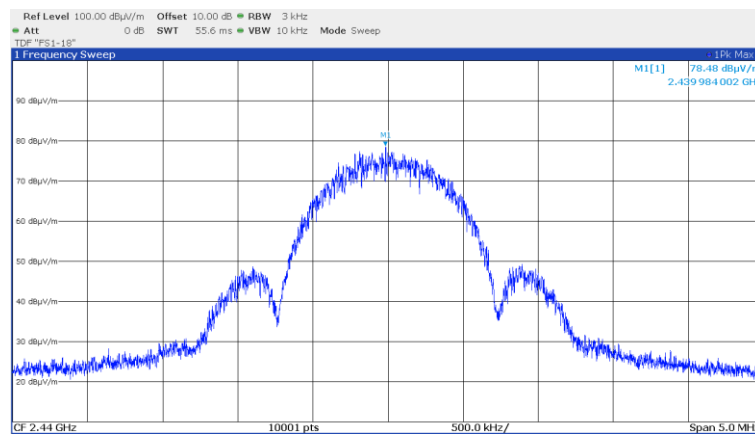

Channel 39 (2480 MHz)

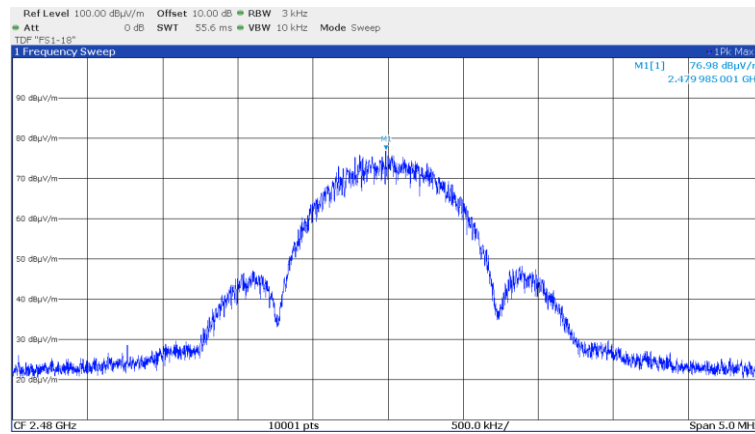

5.4 Radiated emissions in restricted bands

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3**.

5.4.1 Description of the test location



Test location: OATS 1
Test location: Anechoic chamber 1

Test distance: 3 m

5.4.2 Photo documentation of the test set-up



FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

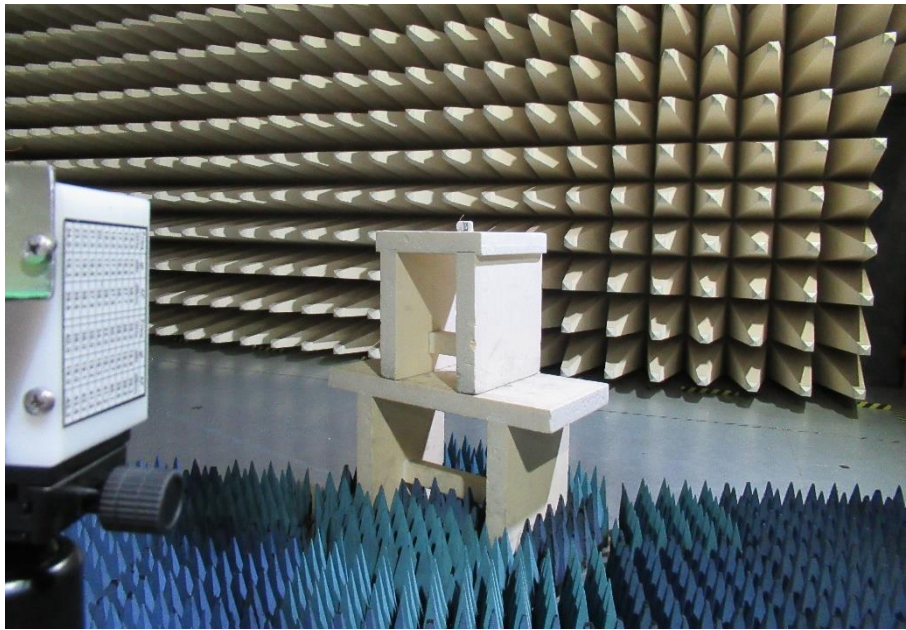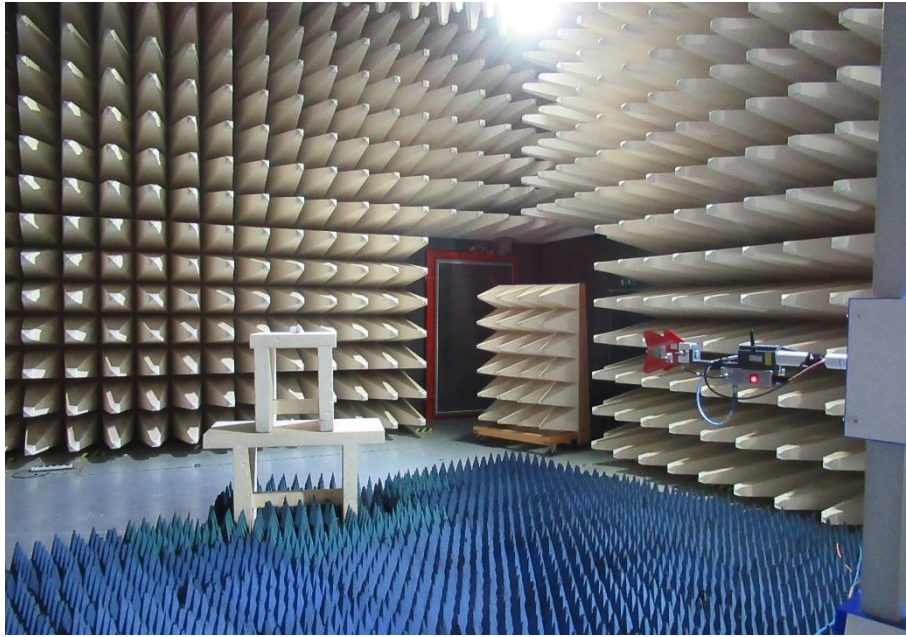

EUT orientation

X



Y



Z



5.4.3 Applicable standard

According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.4.4 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

Test receiver settings for SER1:

RBW: 200 Hz, Detector: Quasi peak, Meas. Time: 1 s, 9 kHz – 150 kHz

RBW: 9 kHz, Detector: Quasi peak, Meas. Time: 1 s, 150 kHz – 30 MHz

Test receiver settings for SER2:

RBW: 120 MHz, Detector: Quasi peak, Meas. Time: 1 s,

Spectrum analyser settings for SER3:

RBW: 1 MHz, VBW: 3 MHz, Detector: Max. peak, Trace: Max. hold, Sweep: Auto

5.4.5 Test result

f < 30 MHz

FCC Part 15.209 Radiated emission limits; general requirements (< 30 MHz)									
Frequency (kHz)	PK reading (dBμV)	QP reading (dBμV)	AV reading (dBμV)	Ant. factor (dB)	Distance corr. (dB)	AV level (dBμV/m)	QP level (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
15.0	42.1	28.3	25.7	20.0	-80.0	-34.3	-31.7	44.1	-78.4
48.0	30.7	13.9	10.4	20.0	-80.0	-49.6	-46.1	34.0	-83.6
120.0	16.4	1.3	-2.0	20.0	-80.0	-62.0	-58.7	26.0	-88.0
480.0	35.9	14.5	5.2	20.0	-80.0	-54.8	-45.5	14.0	-68.8
1200.0	38.5	33.7	29.8	20.0	-40.0	9.8	13.7	26.0	-12.3
4800.0	26.6	16.0	11.7	20.0	-40.0	6.6	-4.0	29.5	-33.5
25000.0	9.7	3.2	-2.7	20.0	-40.0	-10.3	-16.8	29.5	-46.3


Note: frequencies in bold characters fall into AV ranges.

RSS-Gen 8.9 Radiated emission limits; general requirements (< 30 MHz)							
Frequency (kHz)	QP reading (dBμV)	QP calc. (dBμA)	Ant. factor (dB)	Distance corr. (dB)	Corr. QP level (dBμA/m)	Limit (dBμA/m)	Dlimit (dB)
15.0	28.3	-23.2	20.0	-80.0	-83.2	12.6	-95.8
48.0	13.9	-37.6	20.0	-80.0	-97.6	2.5	-100.1
120.0	1.3	-50.2	20.0	-80.0	-110.2	-5.5	-104.7
480.0	14.5	-37.0	20.0	-80.0	-97.0	-17.5	-79.5
1200.0	33.7	-17.8	20.0	-40.0	-37.8	-25.5	-12.3
4800.0	16.0	-35.5	20.0	-40.0	-55.5	-21.9	-33.6
25000.0	3.2	-48.3	20.0	-40.0	-68.3	-21.9	-46.4

Note: No emissions detected in the frequency range 9 kHz to 30 MHz. The recorded values are solely noise values of the OATS.

30 MHz < f < 1000 MHz:



Frequency (MHz)	Reading Vert. (dBμV)	Reading Hor. (dBμV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBμV/m)	Level Hor. (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
65.00	-2.2	-0.8	16.4	17.3	14.2	16.5	40.0	-23.5
144.02	2.8	3.9	19.4	18.6	22.2	22.5	43.5	-21.0
299.96	-2.0	-0.2	20.2	20.7	18.2	20.5	46.0	-25.5
339.21	-2.1	-3.1	21.3	21.8	19.2	18.7	46.0	-26.8
369.20	-1.7	-3.8	22.2	22.6	20.5	18.8	46.0	-25.5
485.00	-2.6	2.9	25.3	25.6	22.7	28.5	46.0	-17.5
602.40	-3.2	0.2	28.0	28.4	24.8	28.6	46.0	-17.4

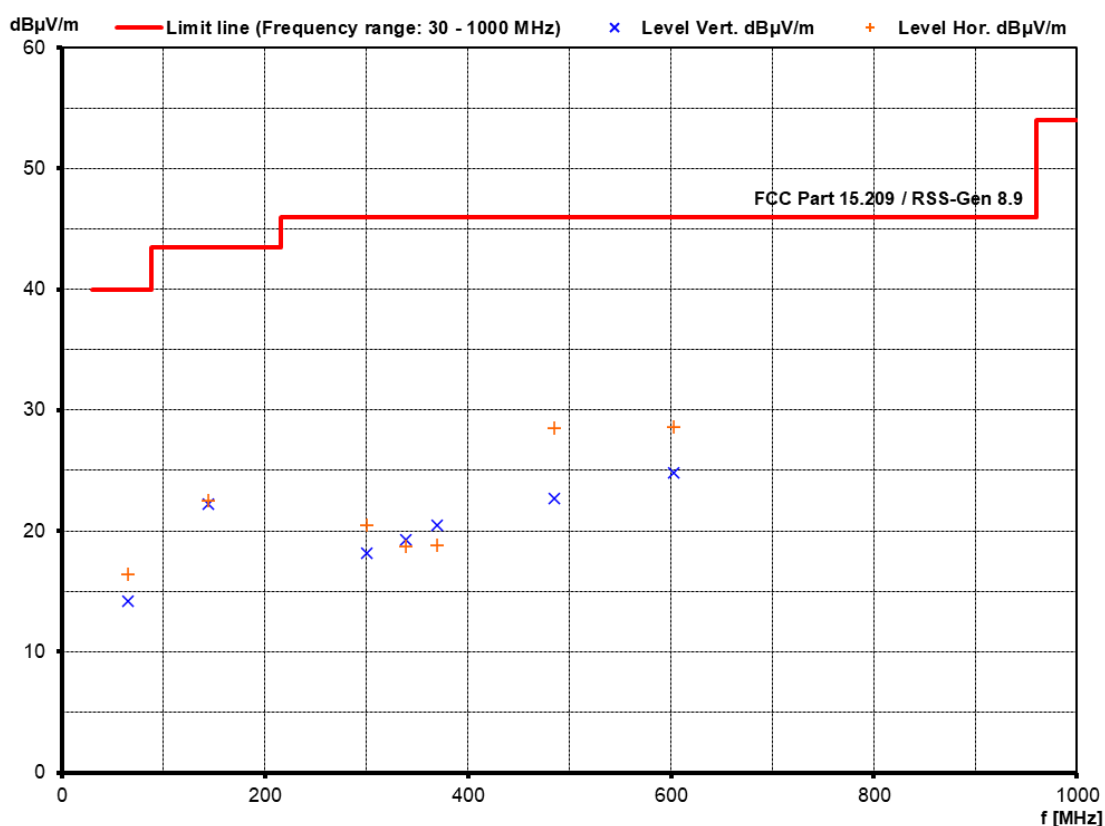

Note: No emissions detected in the frequency range 30 MHz to 1 GHz. The recorded values are solely noise values of the OATS.

f > 1000 MHz


CH37 – 2402 MHz – P-4:

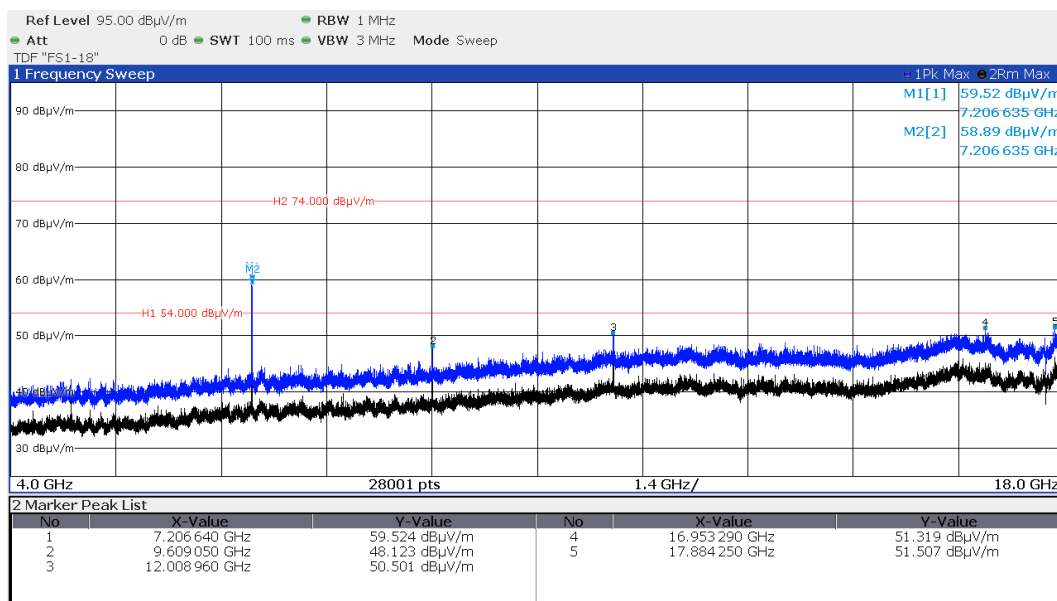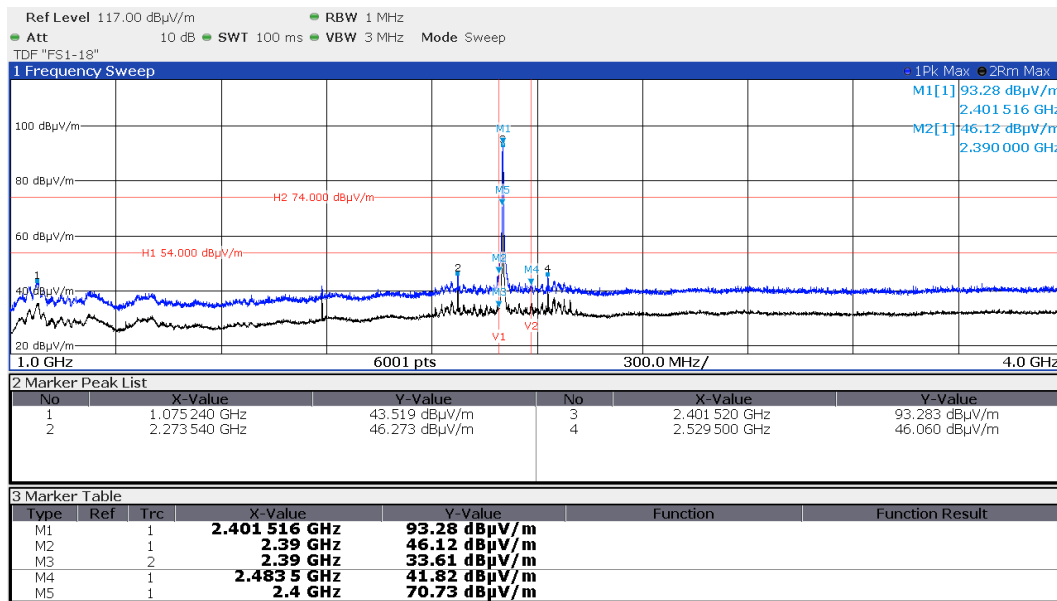


Correction for pulse operation (see section 5.6):

Frequency f	Peak emission	Peak limit	Peak margin	Correction factor K _E	Average value	Average limit	Average margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
7206.635	59.5	74.0	-14.5	-54.1	5.4	54.0	-48.6


FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

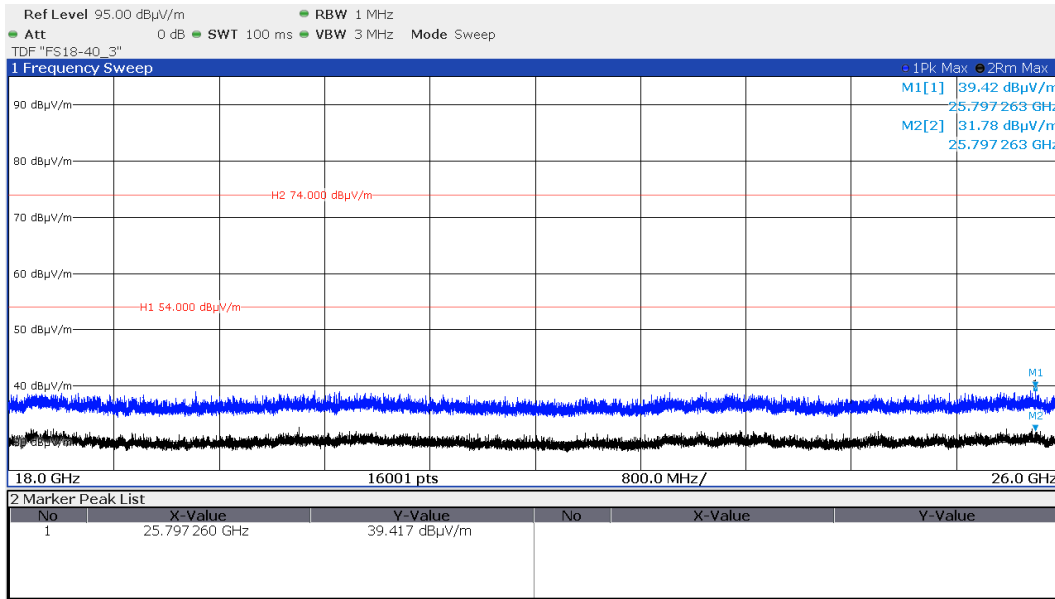

CH17 – 2440 MHz – P-4:

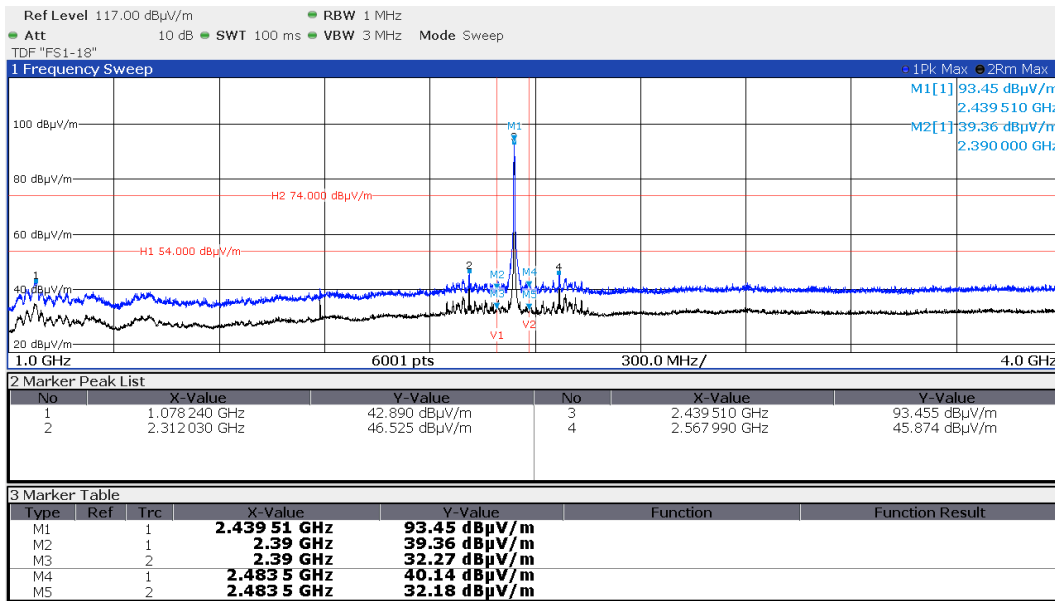


FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

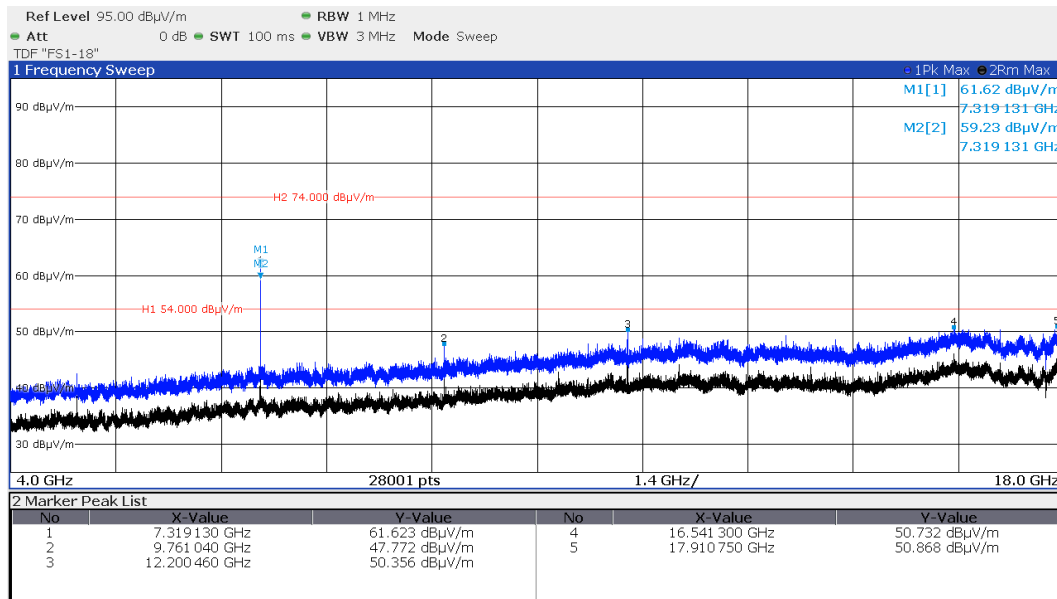


Correction for pulse operation (see section 5.6):

Frequency <i>f</i>	Peak emission	Peak limit	Peak margin	Correction factor <i>K_E</i>	Average value	Average limit	Average margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
7319.131	61.6	74.0	-12.4	-54.1	7.5	54.0	-46.5

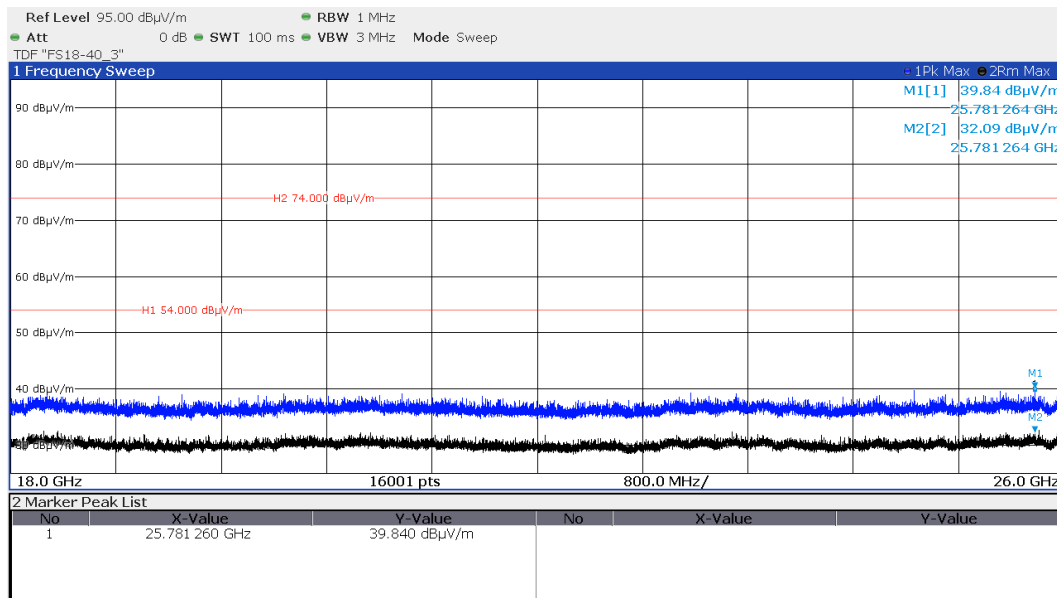


CH39 – 2480 MHz – P-4:

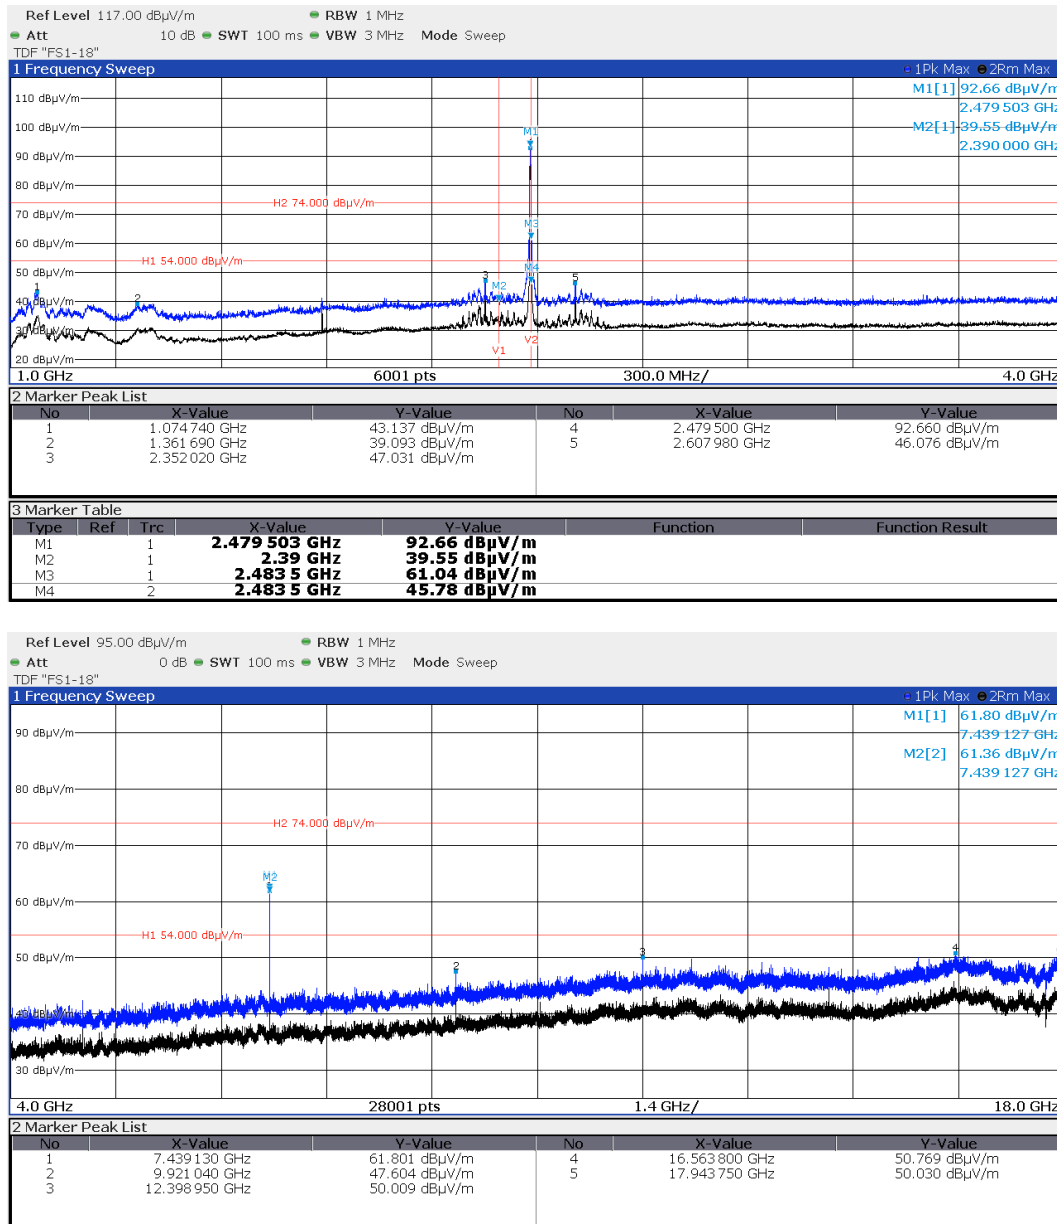

Correction for pulse operation (see section 5.6):

Frequency <i>f</i>	Peak emission	Peak limit	Peak margin	Correction factor <i>K_E</i>	Average value	Average limit	Average margin
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
7439.127	61.8	74.0	-12.2	-54.1	7.7	54.0	-46.3

FCC-ID: 2ACT5-Z02 IC-ID: 12202A-Z02

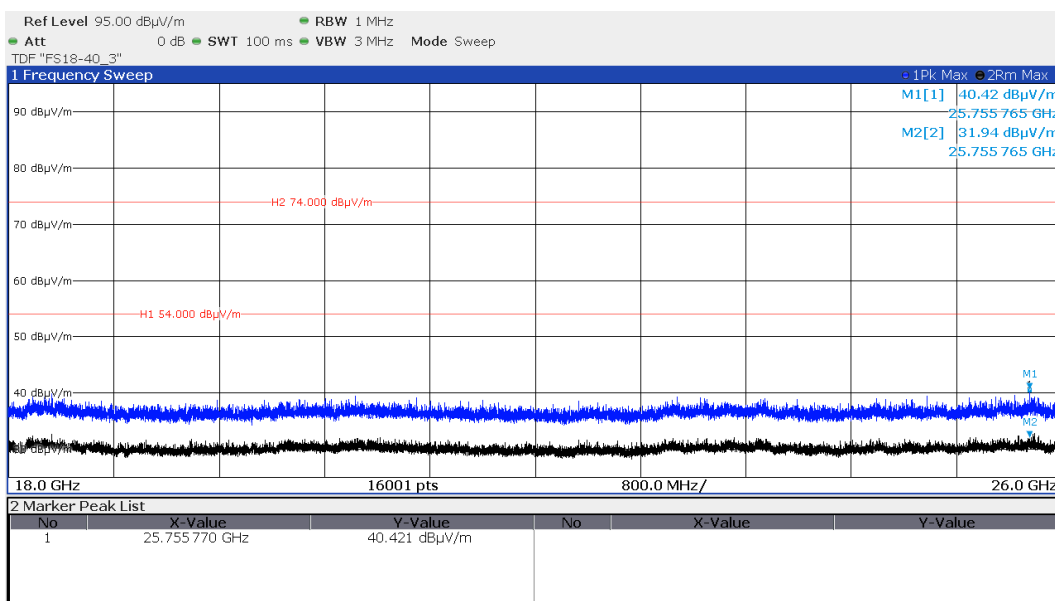

Radiated limits according to FCC Part 15 Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	15.209 Limits (μV/m)	Measurement distance (m)
0.009 - -0.49	2400/f(kHz)	300
0.49 – 1.705	24000/f(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

General radiated limit according to RSS-Gen 8.9:

Frequency (MHz)	RSS-Gen Limits (μA/m)	Measurement distance (m)
0.009 - -0.49	63.7/f(kHz)	300
0.49 – 1.705	63.7/f(kHz)	30
1.705 – 30.0	0.08	30

Frequency (MHz)	RSS-Gen Limits (μV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

RSS-Gen, Table 6 – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 – 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 – 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 – 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 – 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic. Only the worst-case plots are listed.

5.5 Spurious emissions radiated

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3**.

5.5.1 Description of the test location

Test location: NONE

5.5.2 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

5.5.3 Test result

Limit according to FCC Part 15, Section 15.247(d) for emissions falling not in restricted bands:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

The requirements are **FULFILLED**.

Remarks: General limits specified in Section 15.209(a) are fulfilled (see section 5.4), thus additional
measurements not required.


5.6 Correction for pulse operation (duty cycle)

For test instruments and accessories used see section 6 Part DC.

5.6.1 Description of the test location

Test location: Shielded Room S6

5.6.2 Photo documentation of the test set-up

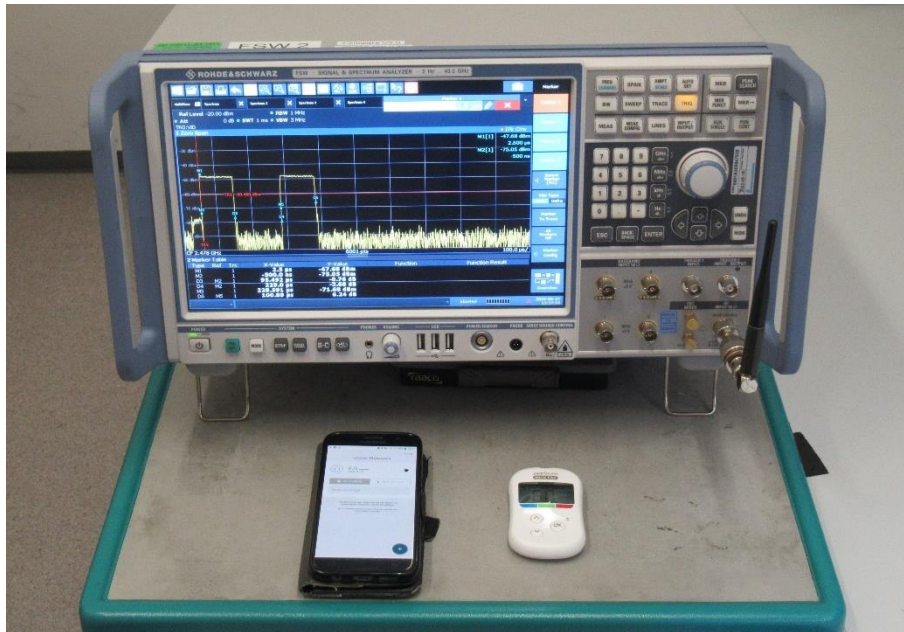

5.6.3 Applicable standard

According to FCC Part 15A, Section 15.35(c):

When the radiated emission limits are expressed in terms of average value and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1s. In cases where the pulse train exceeds 0.1s, the measured field strength shall be determined from the average absolute voltage during a 0.1s interval during which the field strength is at its maximum. The exact method of calculating the average field strength shall be submitted.

5.6.4 Description of Measurement

The duty cycle factor (dB) is calculated applying the following formula:

$$K_E = 20 \log (T_{on} / T_{conn})$$

K_E : pulse operation correction factor
 T_{on} on air duration
 T_{conn} connection interval duration



5.6.5 Test result

$$K_E = 20 \log ((0.0955 + 0.1009) / 100) = -54.1 \text{ dB}$$

Remarks: Worst case scenario: Download of 500 records from glucose meter to smart phone.

For detailed test results please see the following test protocol.

5.6.6 Test protocol

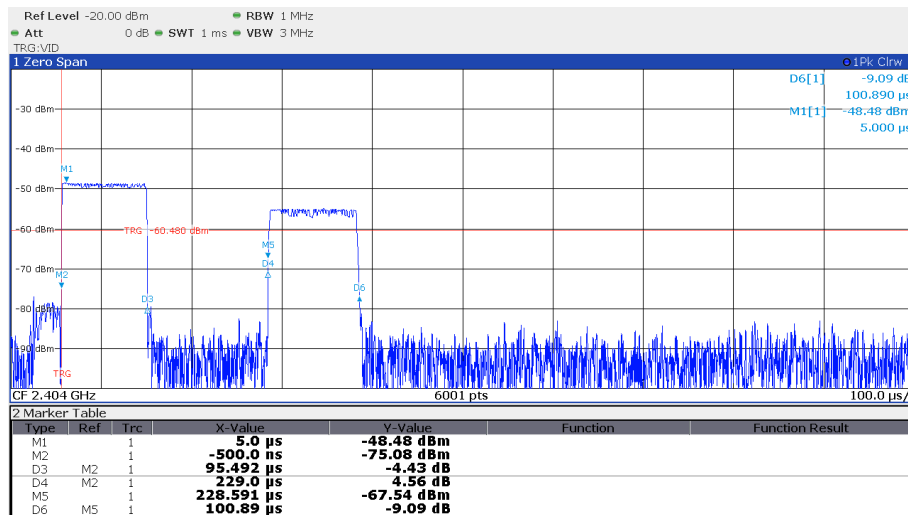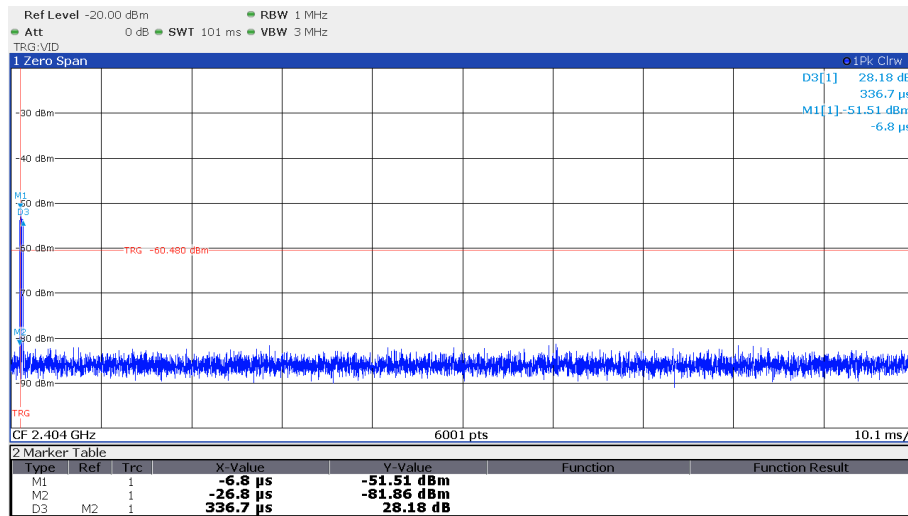

5.7 Antenna application

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has an integrated antenna. No other antenna can be used with the device.

The supplied antenna meets the requirements of part 15.203.

The requirements are **FULFILLED**.

Remarks: None

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPC	FSW43 minibend KR-16	02-02/11-15-001 02-02/50-16-018	22/04/2023	22/04/2022		
CPR 3	FSW43 AMF-6D-01002000-22-10P 3117 BAM 4.5-P NCD KK-SF106-2X11N-6,5M	02-02/11-15-001 02-02/17-15-004 02-02/24-05-009 02-02/50-17-024 02-02/50-17-025 02-02/50-18-016	22/04/2023 23/06/2023	22/04/2022 23/06/2022		
DC	FSW43	02-02/11-21-001	16/05/2023	16/05/2022		
SER 1	ESR 7 HFH 2 - Z 2 NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M	02-02/03-17-001 02-02/24-05-020 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028	05/08/2023 01/06/2025	05/08/2022 01/06/2022	01/06/2023	01/06/2022
SER 2	VULB 9168 ESVS 30 NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M 50F-003 N 3 dB	01-02/24-14-007 02-02/03-05-006 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028 02-02/50-21-010	04/04/2023 27/07/2023	04/04/2022 27/07/2022		
SER 3	FSW43 AMF-6D-01002000-22-10P LNA-40-18004000-33-5P 3117 BBHA 9170 WHK 3.0/18G-10EF BAM 4.5-P NCD KK-SF106-2X11N-6,5M KMS116-GL140SE-KMS116-	02-02/11-15-001 02-02/17-15-004 02-02/17-20-002 02-02/24-05-009 02-02/24-05-013 02-02/50-05-180 02-02/50-17-024 02-02/50-17-025 02-02/50-18-016 02-02/50-20-026	22/04/2023 23/06/2023 19/05/2023	22/04/2022 23/06/2022 19/05/2020	10/03/2023	10/03/2022

Notes:

- DC measurements performed on 27/06/2022
- all other measurements performed on 14/02/2023

- End of test report -

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.