



FCC PART 15.247

TEST REPORT

For

Hyndsite Vision Systems Inc.

59 Pine Street, Peterborough, NH 03458, United States

FCC ID: 2ACT7-CJTXR

Report Type Original Report	Product Type: Hyndsite Vision System Camera
<p>Test Engineer: <u>David. Hsu</u></p> <p>Report Number : <u>RDGA161207003-00A</u></p> <p>Report Date : <u>2017-02-13</u></p> <p>Reviewed By: <u>Jerry.Chang</u></p> <p>Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2)2647 6898 Fax: +886 (2) 2647 6895 www.baclcorp.com</p>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Revision History

Revision	Issue Date	Description
1.0	2017.02.13	Original Report

TABLE OF CONTENTS

GENERAL INFORMATION	5
Product Description for Equipment under Test (EUT)	5
Objective	6
Related Submittal(s)/Grant(s)	6
Test Methodology	6
Test Facility	6
SYSTEM TEST CONFIGURATION	7
Description of Test Configuration	7
EUT Exercise Software	7
Equipment Modifications	8
External I/O Cable	8
Block Diagram of Test Setup	9
SUMMARY OF TEST RESULTS	10
FCC §15.247 (i) & §1.1310 & §2.1091- MPE	11
Applicable Standard	11
Measurement Result	11
FCC §15.203-ANTENNA REQUIREMENT	12
Applicable Standard	12
Antenna Connector Construction	12
Result: Compliance.	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
Applicable Standard	13
Measurement Uncertainty	13
EUT Setup	13
EMI Test Receiver Setup	14
Test Procedure	14
Corrected Factor & Margin Calculation	14
Test Equipment List and Details	15
Test Results Summary	15
Test Data	15
FCC§15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	18
Applicable Standard	18
Measurement Uncertainty	18
EUT Setup	19
Test Procedure	20
Test Equipment List and Details	20
Corrected Amplitude & Margin Calculation	21
Test Results Summary	21
Test Data	21
FCC§15.247(a) (2) – 6 dB EMISSION BANDWIDTH	25
Applicable Standard	25

Test Procedure	25
Test Equipment List and Details	25
Test Data	25
FCC§15.247 15.247(f) - TIME OF OCCUPANCY (DWELL TIME)	28
Applicable Standard	28
Test Procedure	28
Test Equipment List and Details	28
Test Data	28
FCC§15.247(b) - PEAK OUTPUT POWER MEASUREMENT	31
Applicable Standard	31
Test Procedure	31
Test Equipment List and Details	31
Test Data	31
FCC§15.247(d) - BAND EDGES TESTING	34
Applicable Standard	34
Test Procedure	34
Test Equipment List and Details	34
Test Data	34
FCC§15.247(f) - Power Spectral Density	36
Applicable Standard	36
Test Procedure	36
Test Equipment List and Details	36
Test Data	36
Exhibit A -EUT Setup Photographs	39

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Hyndsite Vision Systems Inc. 59 Pine Street, Peterborough, NH 03458, United States
Manufacturer:	ALLIED HILL ENTERPRISE LTD SUITE 507, SILVER CORD TOWER 1, 30 CANTON ROAD, T.S.T KOWLOON, HONGKONG
Product:	Hyndsite Vision System Camera
Model:	HVS001CR
Frequency Range	2406 ~ 2469 MHz
Transmit Power	14.01 dBm
Number of Channels	19 channels
Antenna Specification	Dipole Antenna / Gain: 2.0 dBi
Input:	DC 3.7V from battery or DC 5V from adapter
Dimension	15.10 cm (L) × 8.00 cm (W) × 6.35 cm (H)
Date of Test:	2016.12.14~ 2017.02.13

**All measurement and test data in this report was gathered from production sample serial number: 161207003 (Assigned by BACL, Taiwan). The EUT supplied by the applicant was received on 2016-12-08.*

Adapter Information:

Model: XH012-050200USCU

Input: AC100-240V, 50/60Hz, 0.4A Max

Output: DC5.0V, 2.0A

Objective

This report is prepared on behalf of Hyndsite Vision Systems Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part of system submissions with FCC ID: 2ACT7-CJRXR

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on the 70, Lane 169, Sec. 2, Datong Road, XizhiDist., New Taipei City 22183, Taiwan, R.O.C.

Test site at Bay Area Compliance Laboratories Corp. (Taiwan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 22, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 431084. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode which was configured under maximum power output and switched the channels by keys.

The device employed hybrid systems, which are employ a combination of both frequency hopping and digital modulation techniques. 19 channels are employed by the system as below table:


Channels	Frequency (MHz)	Channels	Frequency (MHz)	Channels	Frequency (MHz)
1	2406	8	2430.5	15	2455
2	2409.5	9	2434	16	2458.5
3	2413	10	2437.5	17	2462
4	2416.5	11	2441	18	2465.5
5	2420	12	2444.5	19	2469
6	2423.5	13	2448	/	/
7	2427	14	2451.5	/	/

EUT was tested with Channel 2406 MHz, 2441 MHz and 2469 MHz.

EUT Exercise Software

No software was used in test. The test mode configured maximum power with maximum duty cycle, which provided by the manufacturer.

T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
7.06	7.12	99.16

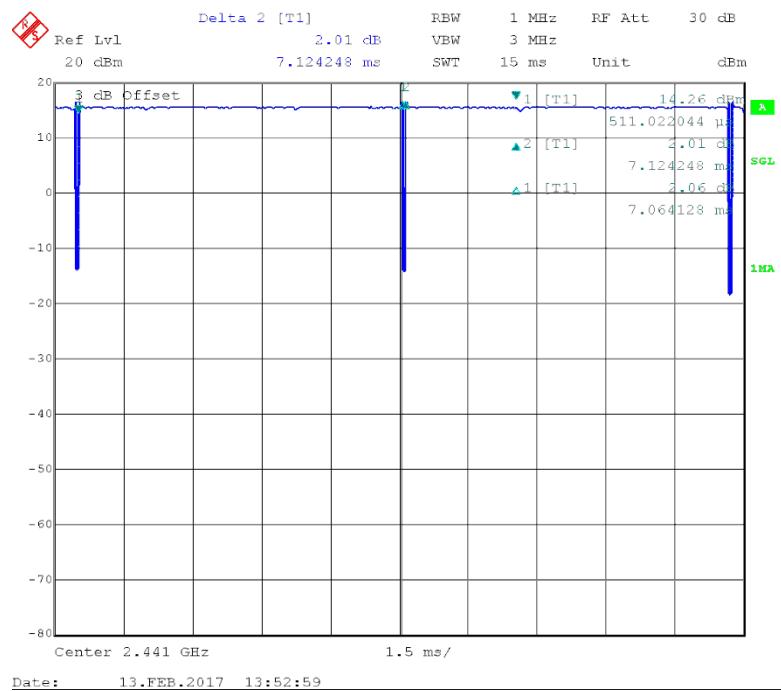


Equipment Modifications

No modification was made to the EUT.

External I/O Cable

Cable Description	Length (m)	From Port	To
Adapter cable	1.53	Adapter	EUT

Block Diagram of Test Setup

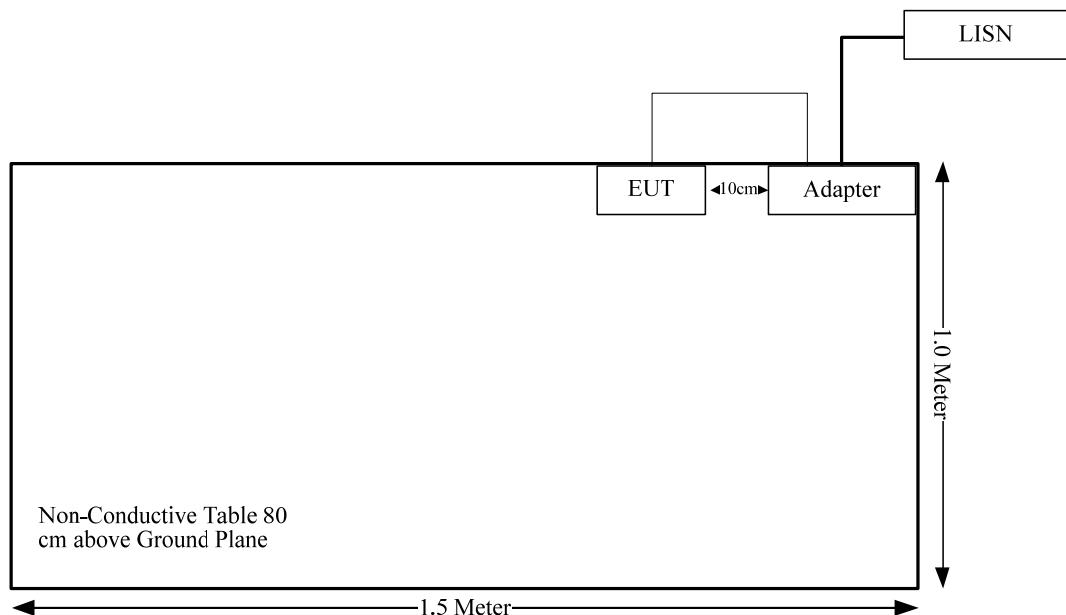

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(f)	Time of Occupancy (Dwell Time)	Compliance
§15.247(b)(3)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance
§15.247(f)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MPE

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Measurement Result

Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2406-2469	2	1.58	15	31.62	20.00	0.0100	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203—ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one dipole antenna with RP-SMA connector, the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207

Measurement Uncertainty


Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN/ISN and receiver, LISN/ISN voltage division factor, LISN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Taiwan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	2.71B

EUT Setup

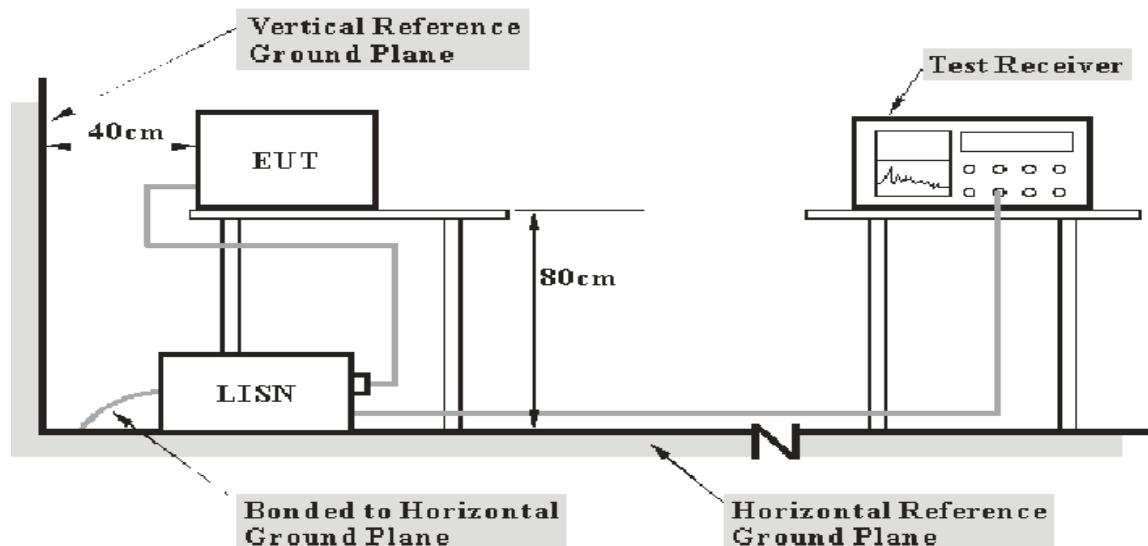

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The basic equation is as follows:

$$V_c = V_R + A_c + VDF$$

Herein,

V_c : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
LISN	Rohde & Schwarz	ENV216	101248	2016/7/27	2017/7/26
LISN	EMCO	3816/2	00075848	2016/8/4	2017/8/3
EMI Test Receiver	Rohde & Schwarz	ESCI	100540	2016/7/22	2017/7/21
RF Cable	EMEC	EM-CB5D	001	2016/7/27	2017/7/26
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

16.7 dB at 0.503608 MHz in the Line conducted mode


Test Data**Environmental Conditions**

Temperature:	26.6 °C
Relative Humidity:	42%
ATM Pressure:	101.4 kPa

The testing was performed by David. Hsu on 2016-12-14.


Test Mode: Charging & Transmitting

AC120 V, 60 Hz, Line:

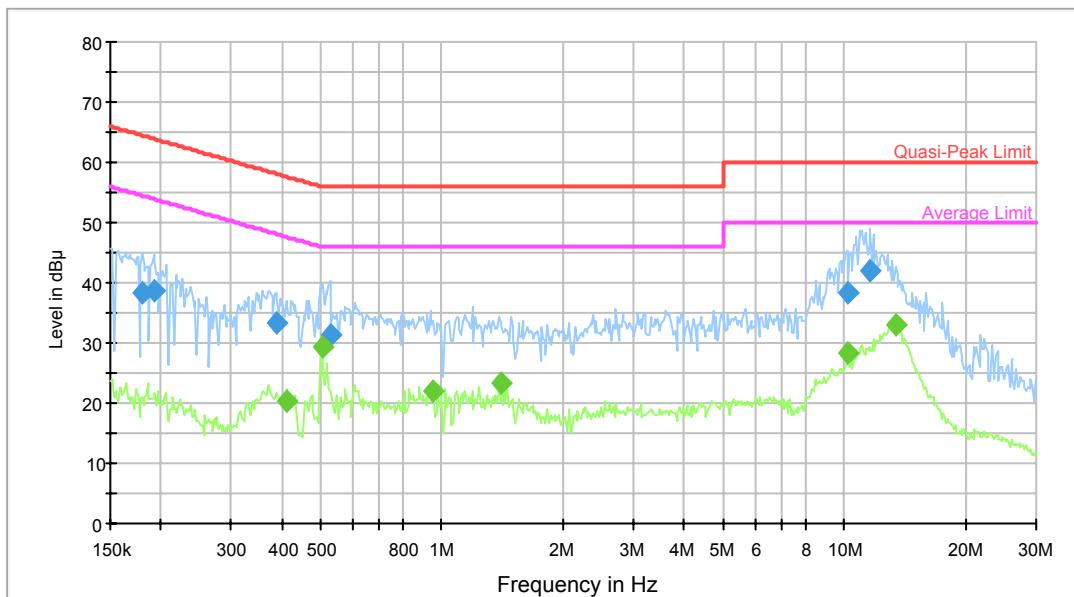

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.180171	38.4	9.000	L1	9.7	26.1	64.5	Compliance
0.192030	38.5	9.000	L1	9.7	25.4	63.9	Compliance
0.387164	33.5	9.000	L1	9.7	24.6	58.1	Compliance
0.528270	31.4	9.000	L1	9.7	24.6	56.0	Compliance
10.155774	38.4	9.000	L1	9.8	21.6	60.0	Compliance
11.628992	42.1	9.000	L1	9.9	17.9	60.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.412647	20.5	9.000	L1	9.7	27.1	47.6	Compliance
0.503608	29.3	9.000	L1	9.7	16.7	46.0	Compliance
0.952654	22.0	9.000	L1	9.7	24.0	46.0	Compliance
1.407671	23.4	9.000	L1	9.7	22.6	46.0	Compliance
10.155774	28.4	9.000	L1	9.8	21.6	50.0	Compliance
13.422446	33.2	9.000	L1	9.9	16.8	50.0	Compliance

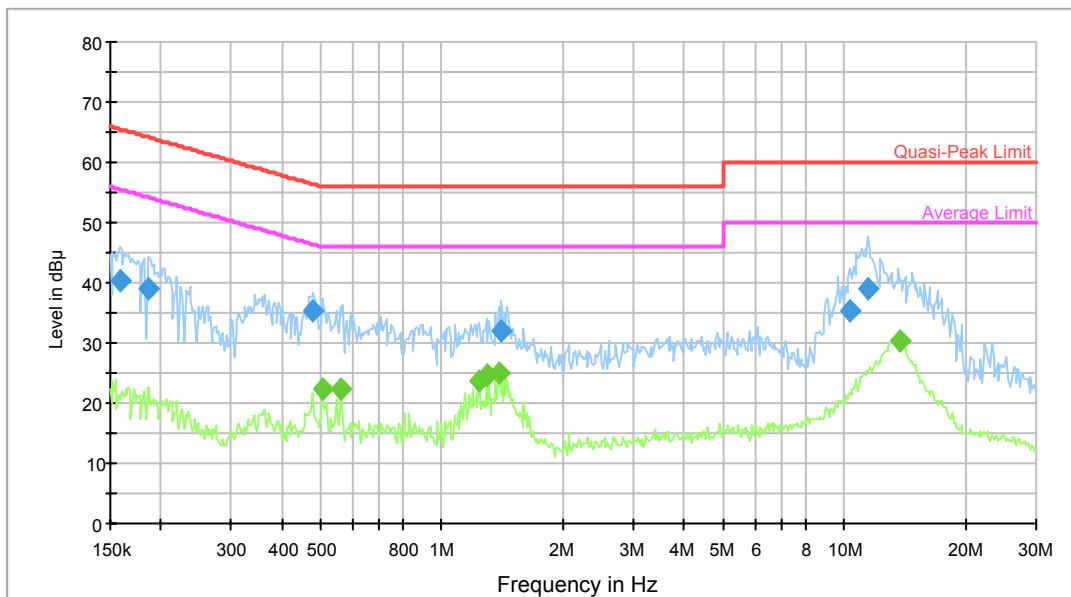AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.158604	40.4	9.000	N	9.6	25.1	65.5	Compliance
0.187494	39.1	9.000	N	9.6	25.0	64.1	Compliance
0.480097	35.3	9.000	N	9.6	21.0	56.3	Compliance
1.407671	31.8	9.000	N	9.7	24.2	56.0	Compliance
10.318917	35.5	9.000	N	9.8	24.5	60.0	Compliance
11.445138	39.0	9.000	N	9.9	21.0	60.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.503608	22.4	9.000	N	9.6	23.6	46.0	Compliance
0.563041	22.3	9.000	N	9.6	23.7	46.0	Compliance
1.239175	23.7	9.000	N	9.7	22.3	46.0	Compliance
1.289541	24.6	9.000	N	9.7	21.4	46.0	Compliance
1.385415	24.8	9.000	N	9.7	21.2	46.0	Compliance
13.747168	30.2	9.000	N	9.9	19.8	50.0	Compliance

FCC§15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC§15.247 (d); §15.209; §15.205;



Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Taiwan) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Table 1 – Values of U_{cisp}

Frequency	Polarity	Measurement uncertainty
30 MHz~200 MHz	Horizontal / Vertical	4.35 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	Horizontal / Vertical	5.78 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal / Vertical	4.51 dB (k=2, 95% level of confidence)
6 GHz~18 GHz	Horizontal / Vertical	4.88 dB (k=2, 95% level of confidence)
18 GHz~26 GHz	Horizontal / Vertical	4.30 dB (k=2, 95% level of confidence)
26 GHz~40 GHz	Horizontal / Vertical	4.30 dB (k=2, 95% level of confidence)

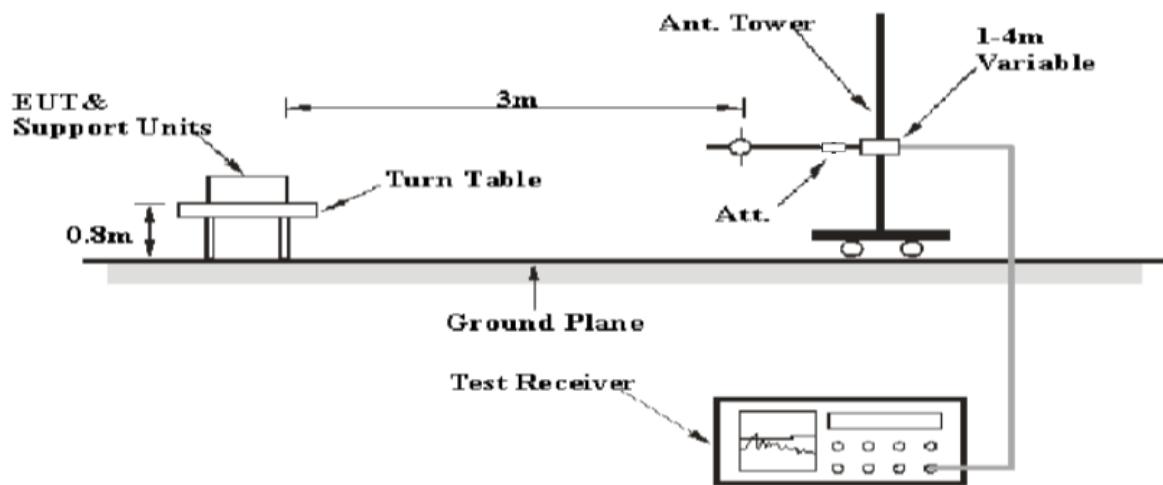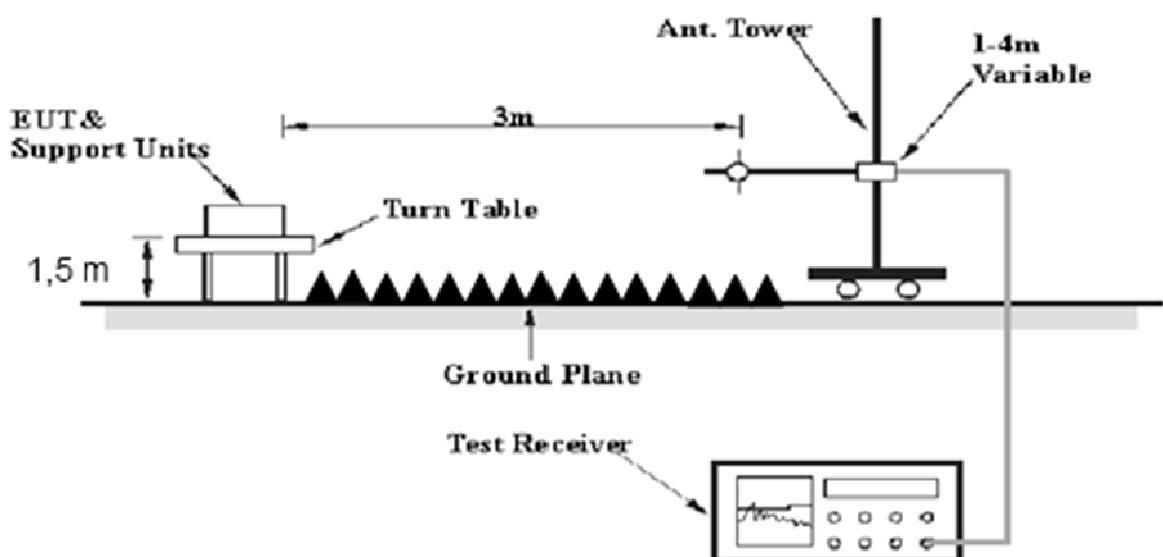EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Broadband Antenna	Sunol Sciences	JB6	A050115	2016/11/16	2017/11/15
Amplifier	Sonoma	310N	130602	2016/7/15	2017/7/14
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2016/11/3	2017/11/2
Mircoflex Cable	UTIFLEX	UFB311A-Q-144 0-300300	220490-006	2016/11/2	2017/11/1
Mircoflex Cable	UTIFLEX	UFB197C-1-236 2-70U-70U	225757-001	2016/7/15	2017/7/14
Mircoflex Cable	UTIFLEX	UFA210A-1-314 9-300300	MFR64639 226389-001	2016/12/1	2017/11/30
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	060772	N.C.R	N.C.R
Software	Farad	EZ_EMCA	BACL-03A1	N.C.R	N.C.R
Horn Antenna	EMCO	3115	9311-4158	2016/5/10	2017/5/9
Horn Antenna	ETS-Lindgren	3116	00062638	2016/9/5	2017/9/4
Preamplifier	EMEC	EM01G18G	060657	2016/12/13	2017/12/12
Preamplifier	EMEC	EM18G40G	060656	2016/12/13	2017/12/12
Spectrum Analyzer	Rohde & Schwarz	FSV40	101203	2016/7/14	2017/7/13
Mircoflex Cable	ROSNAL	K1K50-UP0264-K1K50-80CM	160309-2	2016/3/24	2017/3/23
Mircoflex Cable	ROSNAL	K1K50-UP0264-K1K50-450CM	160309-1	2016/3/24	2017/3/23

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows: Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain. The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

2.11 dB at 4938 MHz in the Vertical polarization

Test Data**Environmental Conditions**

Temperature:	23.6 °C
Relative Humidity:	50 %
ATM Pressure:	101kPa


The testing was performed by David Hsu on 2017-01-07.

Test Mode: Transmitting

Below 1 GHz (middle channel was the worst):


Horizontal

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
351.0700	40.35	QP	-4.05	36.30	46.00	9.70
428.6700	40.07	QP	-1.97	38.10	46.00	7.90
507.2400	39.95	QP	-0.75	39.20	46.00	6.80
546.0400	39.67	QP	-0.37	39.30	46.00	6.70
584.8400	40.86	QP	0.24	41.10	46.00	4.90
624.6100	39.20	QP	1.00	40.20	46.00	5.80

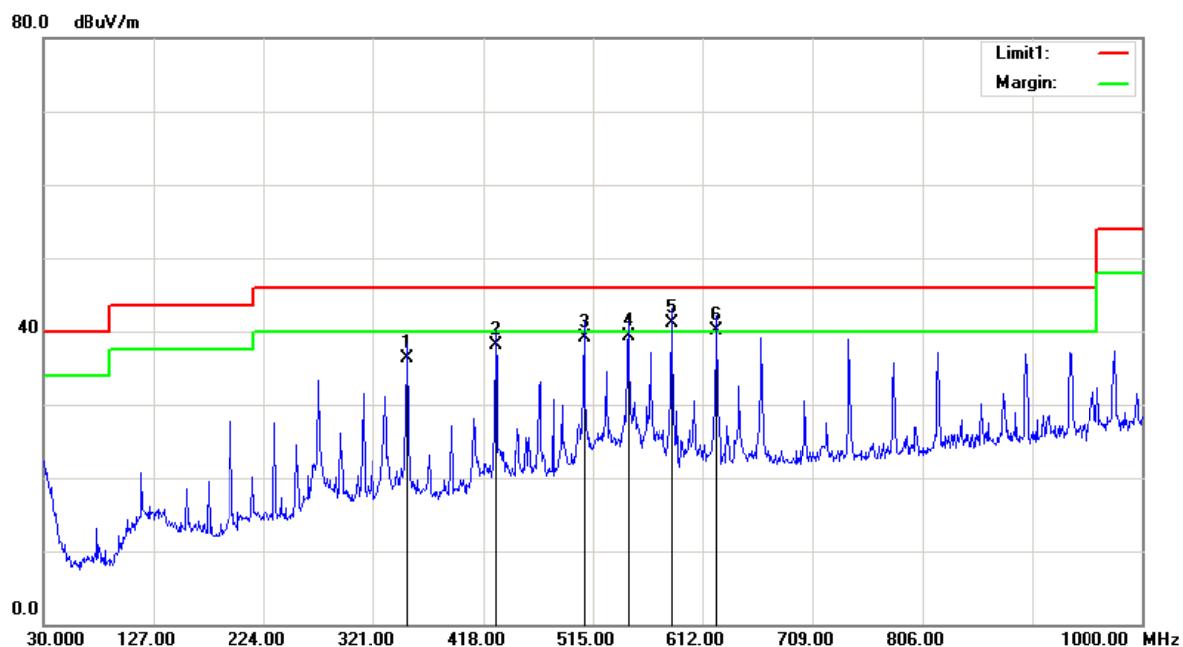

Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
194.9000	45.55	QP	-7.05	38.50	43.50	5.00
272.5000	45.24	QP	-5.54	39.70	46.00	6.30
351.0700	43.35	QP	-4.05	39.30	46.00	6.70
546.0400	39.87	QP	-0.37	39.50	46.00	6.50
584.8400	40.86	QP	0.24	41.10	46.00	4.90
663.4100	38.95	QP	1.05	40.00	46.00	6.00

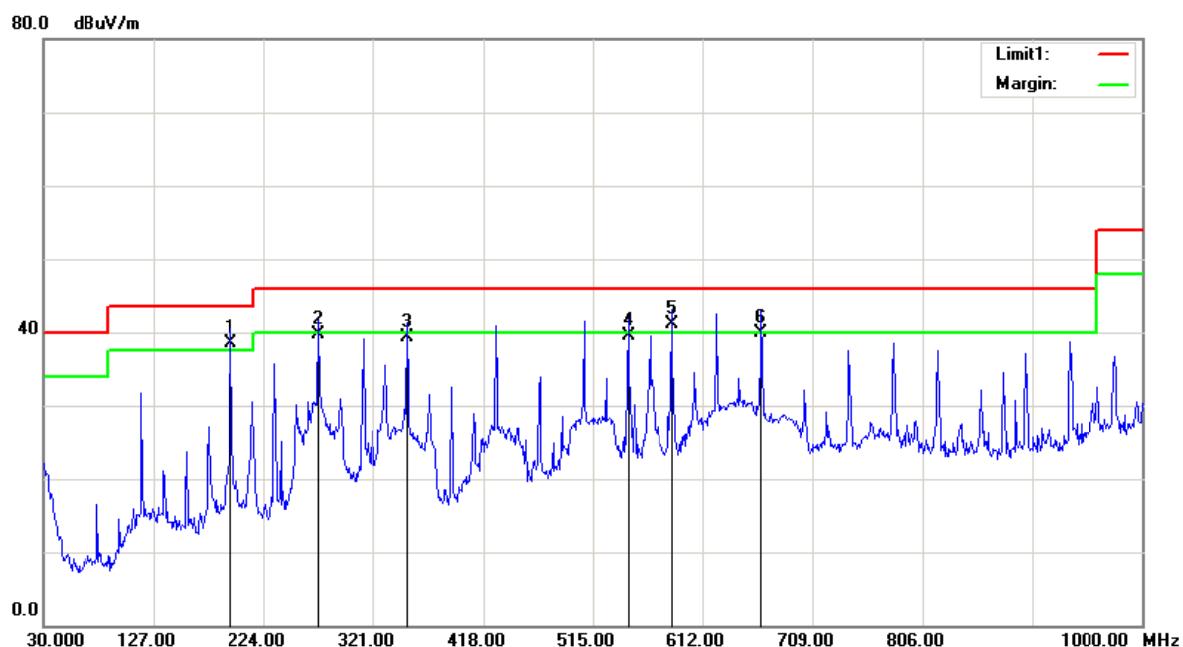

1 GHz-25GHz

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2406 MHz									
2406	72.39	PK	H	25.66	3.67	0.00	101.72	N/A	N/A
2406	66.81	AV	H	25.66	3.67	0.00	96.14	N/A	N/A
2406	80.59	PK	V	25.66	3.67	0.00	109.92	N/A	N/A
2406	70.53	AV	V	25.66	3.67	0.00	99.86	N/A	N/A
2388	30.65	PK	V	25.61	3.63	0.00	59.89	74.00	14.11
2388	22.13	AV	V	25.61	3.63	0.00	51.37	54.00	2.63
4812	46.92	PK	V	30.61	5.05	27.41	55.17	74.00	18.83
4812	36.43	AV	V	30.61	5.05	27.41	44.68	54.00	9.32
7218	35.63	PK	V	34.12	6.63	25.91	50.47	74.00	23.53
7218	25.74	AV	V	34.12	6.63	25.91	40.58	54.00	13.42
1286	32.89	PK	V	23.04	2.97	26.89	32.01	74.00	41.99
1286	23.62	AV	V	23.04	2.97	26.89	22.74	54.00	31.26
Middle Channel: 2441 MHz									
2441	72.06	PK	H	25.75	3.76	0.00	101.57	N/A	N/A
2441	65.31	AV	H	25.75	3.76	0.00	94.82	N/A	N/A
2441	81.63	PK	V	25.75	3.76	0.00	111.14	N/A	N/A
2441	74.24	AV	V	25.75	3.76	0.00	103.75	N/A	N/A
4882	50.16	PK	V	30.79	5.19	27.42	58.72	74.00	15.28
4882	39.88	AV	V	30.79	5.19	27.42	48.44	54.00	5.56
7323	35.62	PK	V	34.38	6.75	25.88	50.87	74.00	23.13
7323	25.43	AV	V	34.38	6.75	25.88	40.68	54.00	13.32
1538	35.62	PK	V	23.68	2.64	27.56	34.38	74.00	39.62
1538	25.37	AV	V	23.68	2.64	27.56	24.13	54.00	29.87
2245	34.53	PK	V	25.24	3.43	27.30	35.90	74.00	38.10
2245	24.85	AV	V	25.24	3.43	27.30	26.22	54.00	27.78
High Channel: 2469 MHz									
2469	71.34	PK	H	25.82	3.72	0.00	100.88	N/A	N/A
2469	64.25	AV	H	25.82	3.72	0.00	93.79	N/A	N/A
2469	80.18	PK	V	25.82	3.72	0.00	109.72	N/A	N/A
2469	73.03	AV	V	25.82	3.72	0.00	102.57	N/A	N/A
2484.5	32.56	PK	V	25.86	3.67	0.00	62.09	74.00	11.91
2484.5	21.68	AV	V	25.86	3.67	0.00	51.21	54.00	2.79
4938	51.21	PK	V	30.94	5.36	27.43	60.08	74.00	13.92
4938	43.02	AV	V	30.94	5.36	27.43	51.89	54.00	2.11
7407	34.52	PK	V	34.58	6.85	25.88	50.07	74.00	23.93
7407	26.31	AV	V	34.58	6.85	25.88	41.86	54.00	12.14
2033	48.05	PK	V	24.69	3.27	27.45	48.56	74.00	25.44
2033	40.13	AV	V	24.69	3.27	27.45	40.64	54.00	13.36

FCC§15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set are reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSU26	200268	2016/5/7	2017/5/6
N/A	RF Cable	N/A	1	Each Time	/
E-Microwave	DC Block	N/A	2	Each Time	/

Test Data

Environmental Conditions

Temperature:	26.2°C
Relative Humidity:	51 %
ATM Pressure:	101 kPa


The testing was performed by David. Hsu on 2017-01-21.

Test Mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Result
Low	2406	6.51	PASS
Mid	2441	6.48	PASS
High	2469	6.48	PASS


Please refer to the following tables and plots.

Low Channel

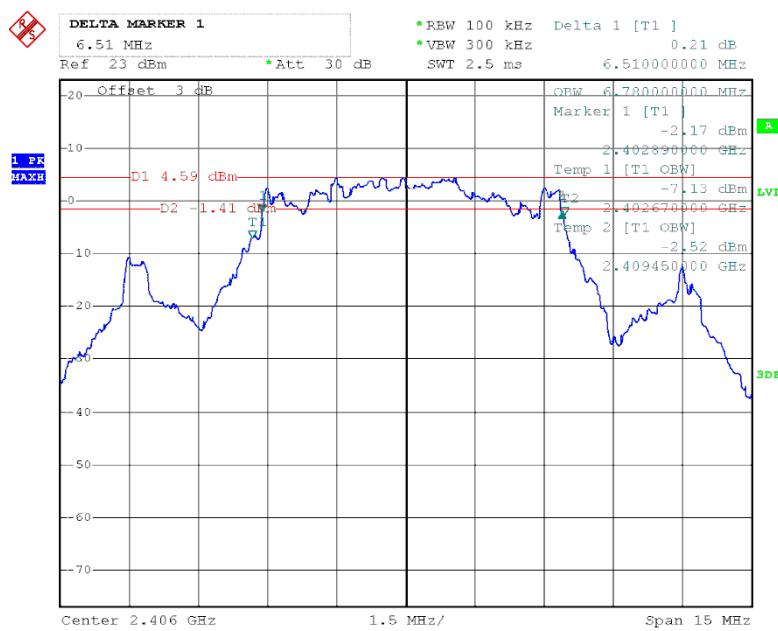


Date: 21.JAN.2017 13:44:52

Middle Channel

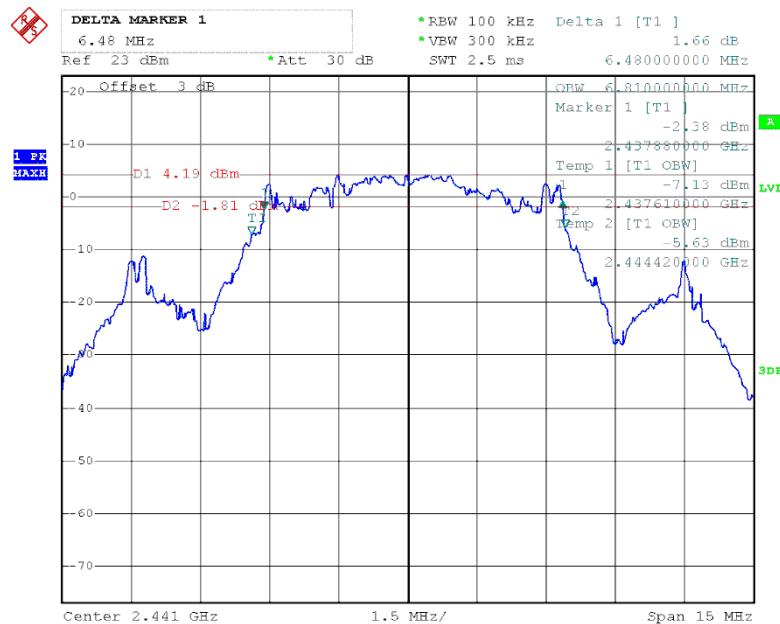

Date: 21.JAN.2017 13:50:41

High Channel

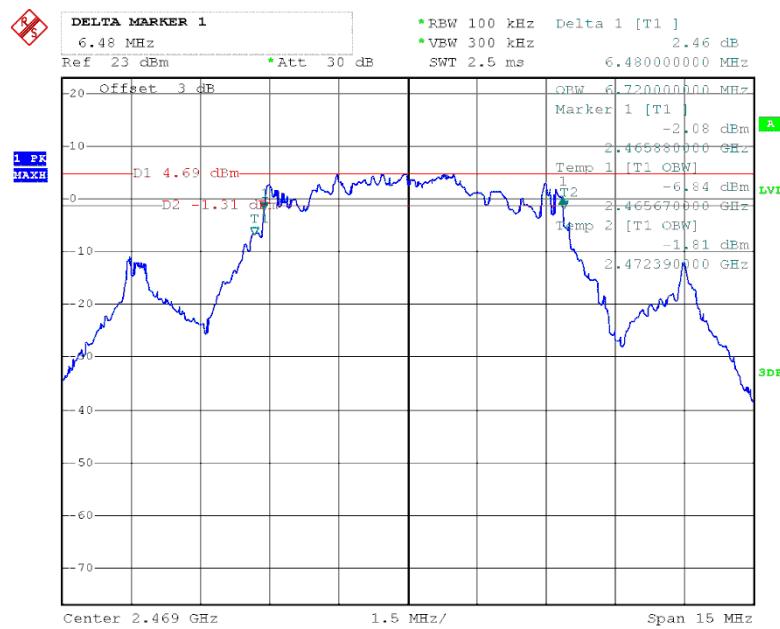

Date: 21.JAN.2017 13:53:17

FCC§15.247 15.247(f) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSU26	200268	2016/5/7	2017/5/6
N/A	RF Cable	N/A	1	Each Time	/
E-Microwave	DC Block	N/A	2	Each Time	/

Test Data

Environmental Conditions

Temperature:	26.1°C
Relative Humidity:	48 %
ATM Pressure:	101.2 kPa

The testing was performed by David. Hsu on 2017-01-10.


Test Mode: Transmitting



Channel	Pulse Width (ms)	Hopping Number per Second	Dwell Time (s)	Limit (s)	Result
Low	1.127	77	0.035	0.4	Pass
Middle	1.067	77	0.033	0.4	Pass
High	1.122	77	0.035	0.4	pass

Note: Dwell time=Pulse time (ms) × Hopping Number per second*hopping numbers/hopping numbers*0.4

Hopping rate(77 hopping per second) was declared by manufacturer.

Pulse Width, Low Channel

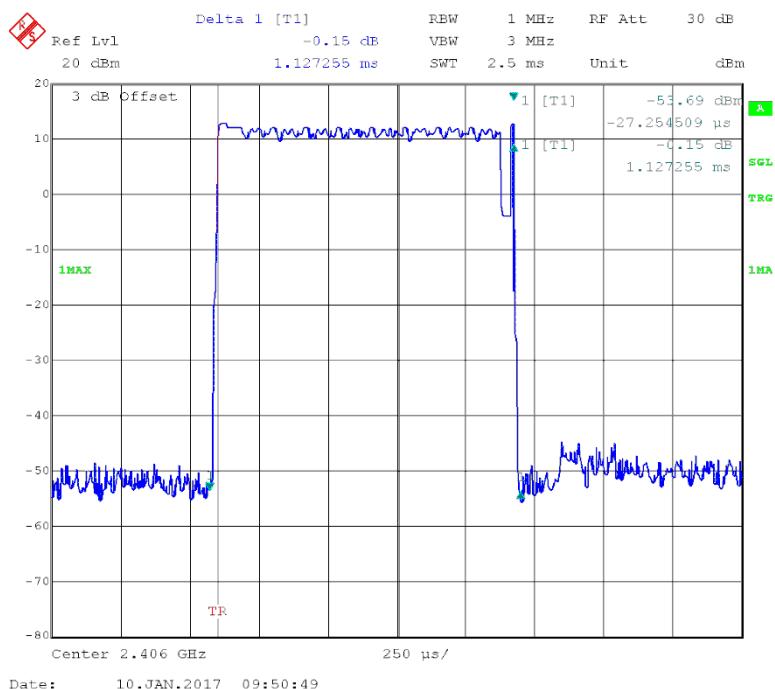

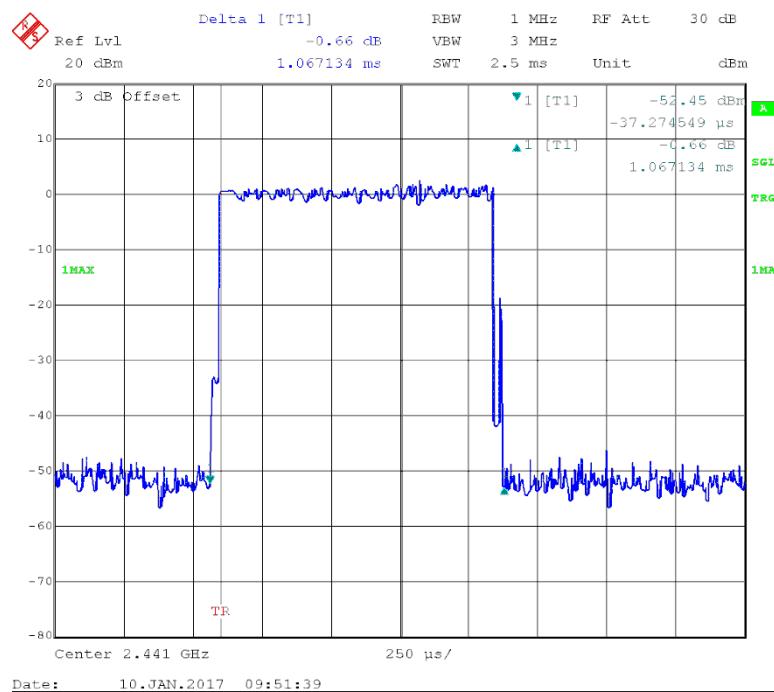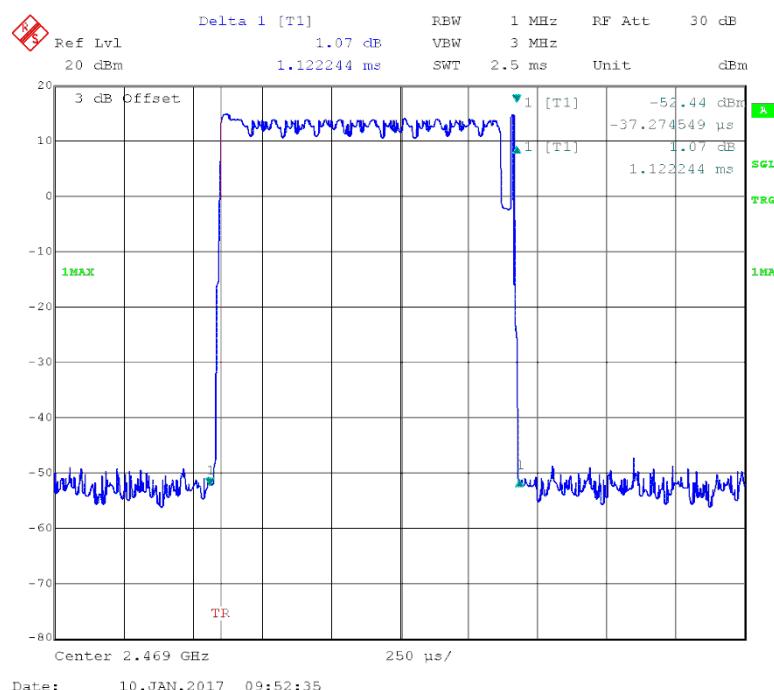Pulse Width, Middle Channel**Pulse Width, High Channel**

FCC§15.247(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSU26	200268	2016/5/7	2017/5/6
N/A	RF Cable	N/A	1	Each Time	/
E-Microwave	DC Block	N/A	2	Each Time	/

Test Data

Environmental Conditions


Temperature:	26.2°C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa



The testing was performed by David. Hsu on 2017-01-06.

Test Mode: Transmitting

Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)	Result
Low	2406	14.01	30	Pass
Middle	2441	13.69	30	Pass
High	2469	14.01	30	Pass

Output Power, Low Channel

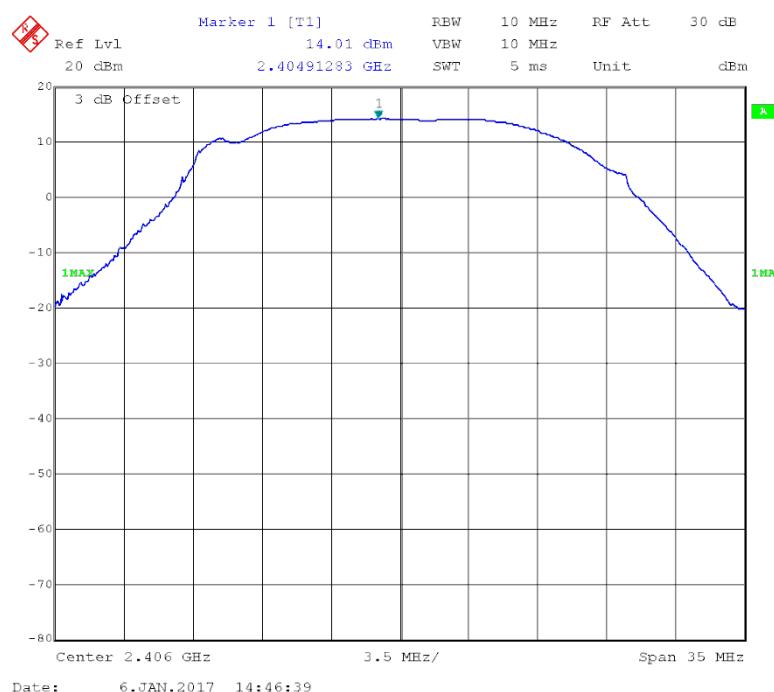

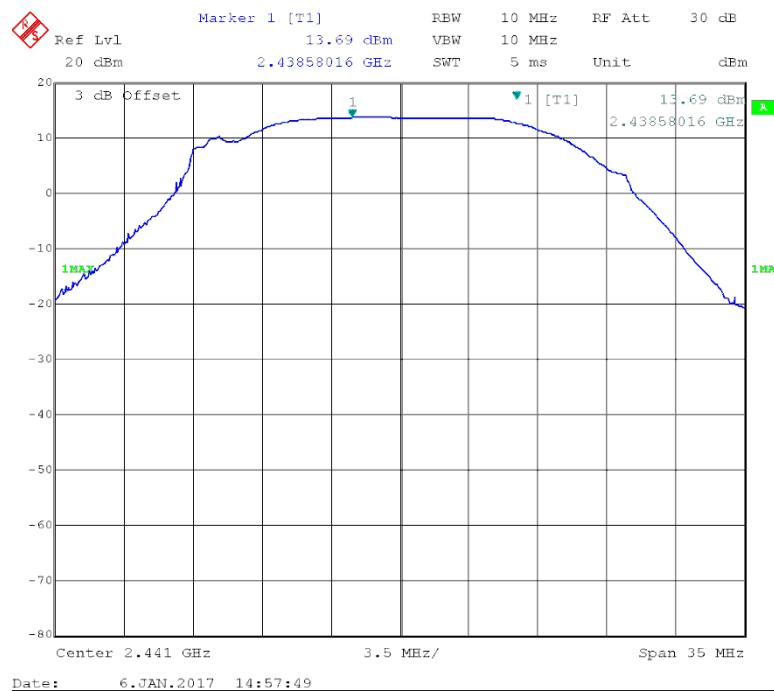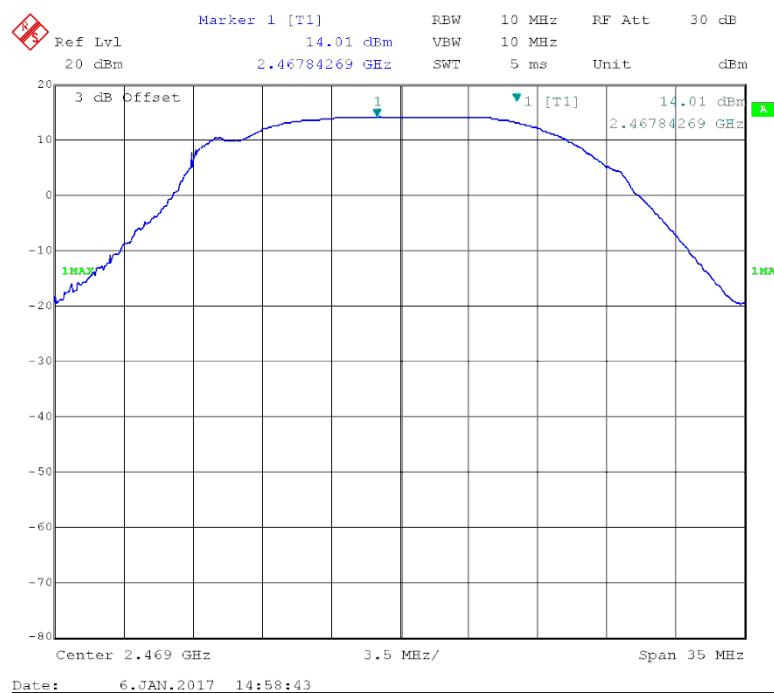Output Power, Middle Channel**Output Power, High Channel**

FCC§15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSU26	200268	2016/5/7	2017/5/6
N/A	RF Cable	N/A	1	Each Time	/
E-Microwave	DC Block	N/A	2	Each Time	/

Test Data


Environmental Conditions

Temperature:	26.2°C
Relative Humidity:	51 %
ATM Pressure:	101 kPa

The testing was performed by David. Hsu on 2017-01-21.

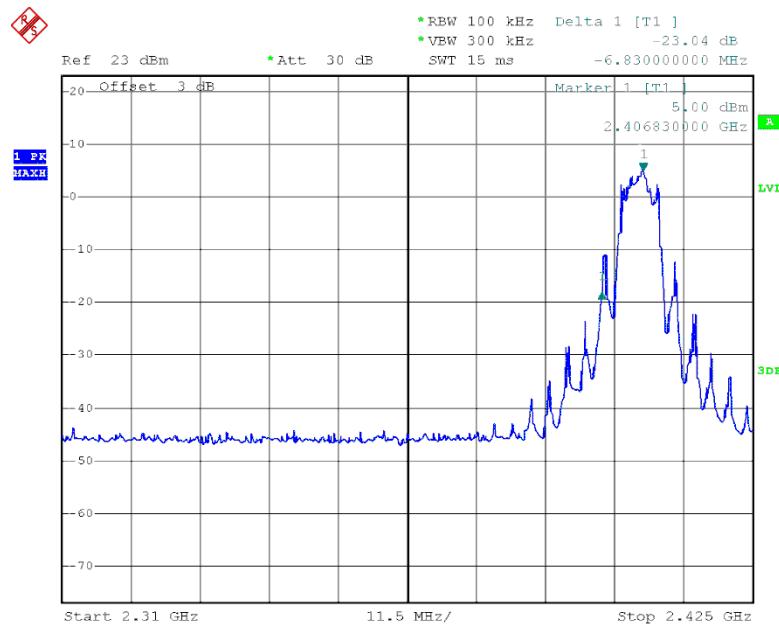Test Result: Compliance**Band Edge, Left Side**

Date: 21.JAN.2017 13:48:35

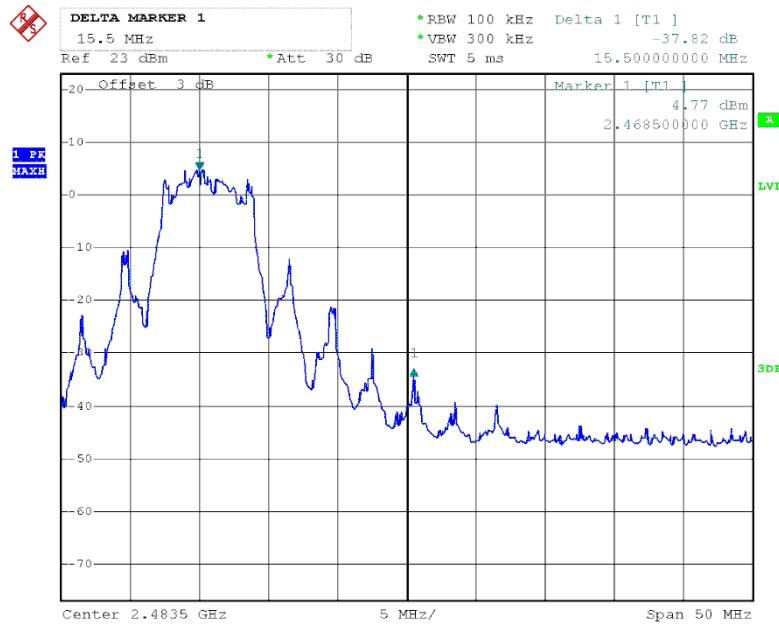Band Edge, Right Side

Date: 21.JAN.2017 13:54:26

FCC§15.247(f) - Power Spectral Density

Applicable Standard

For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSU26	200268	2016/5/7	2017/5/6
N/A	RF Cable	N/A	1	Each Time	/
E-Microwave	DC Block	N/A	2	Each Time	/

Test Data

Environmental Conditions


Temperature:	23.7 °C
Relative Humidity:	37%
ATM Pressure:	102.1kPa

The testing was performed by David. Hsu on 2017-02-13.


Test Result: Compliance

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limits dBm/3kHz	Result
Low	2406	-1.47	8	Pass
Middle	2441	-1.20	8	Pass
High	2469	-1.04	8	Pass

Low Channel

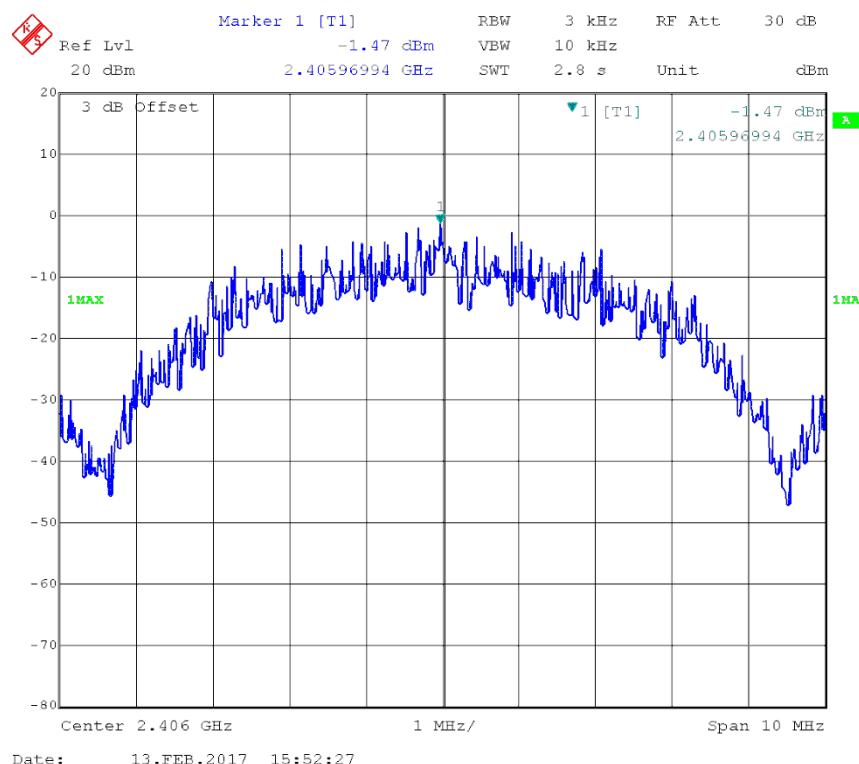

Middle Channel

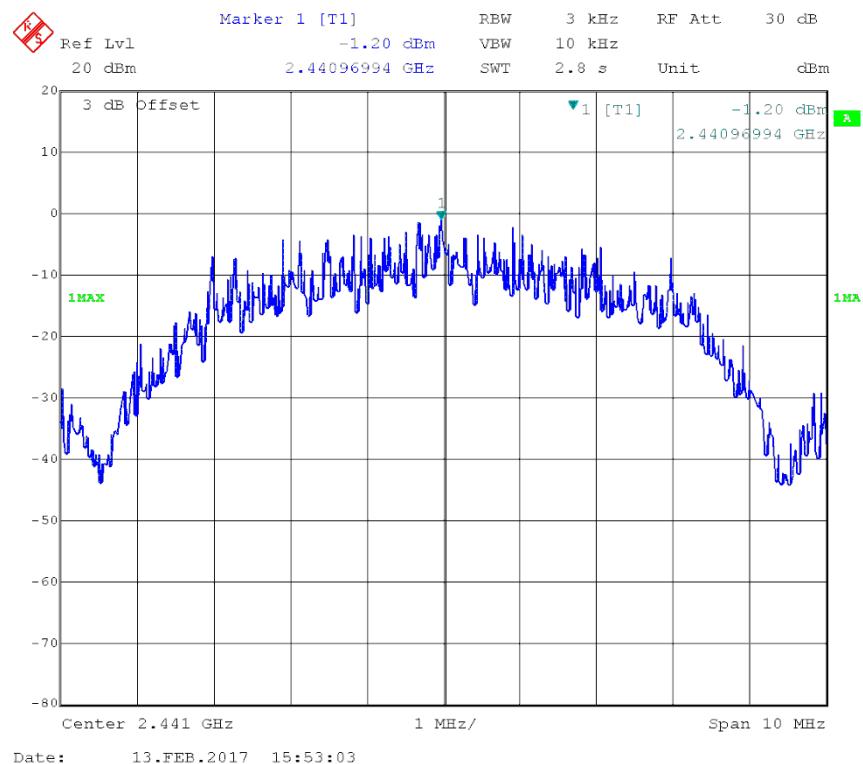

High Channel



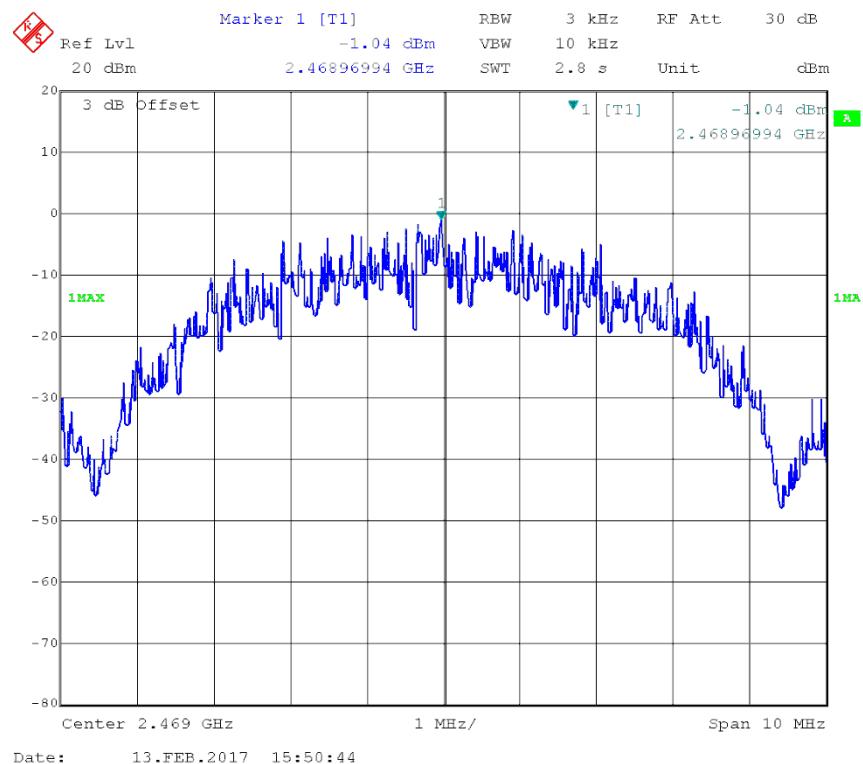


Exhibit A -EUT Setup Photographs


CON Front View

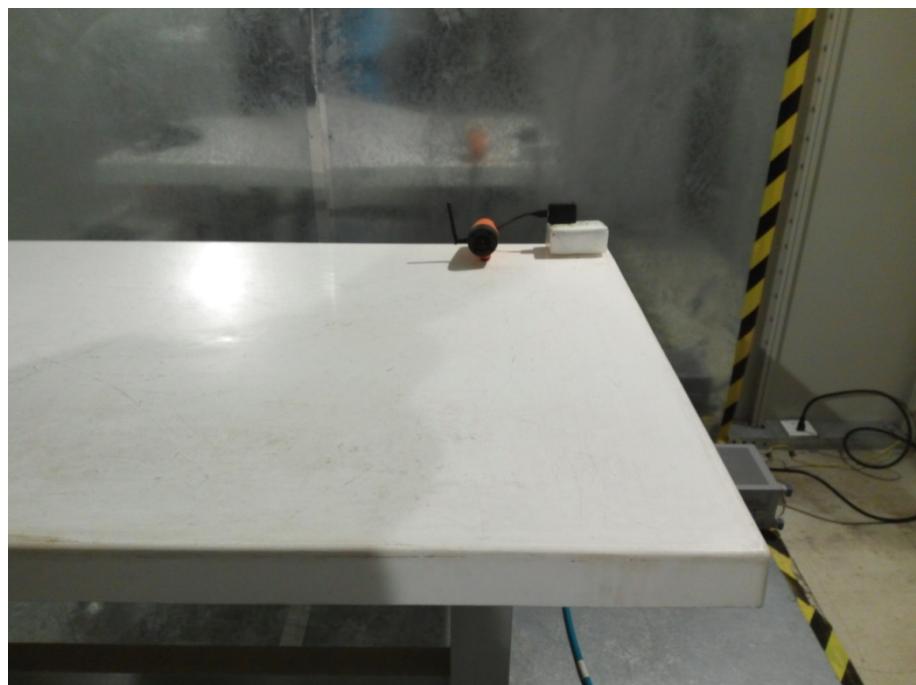


CON Rear View

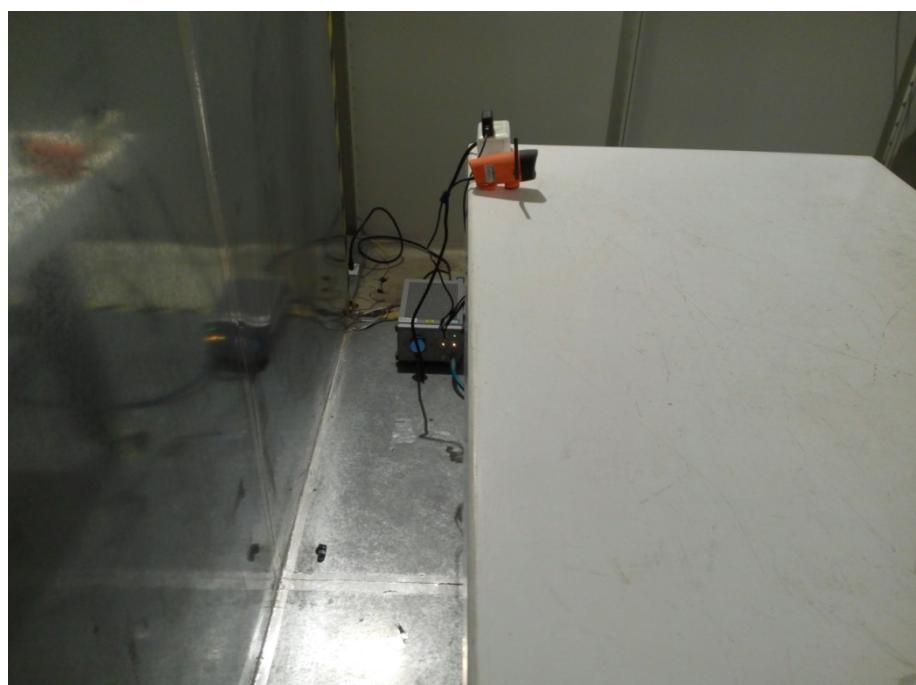


RAD Below 1G - Front View

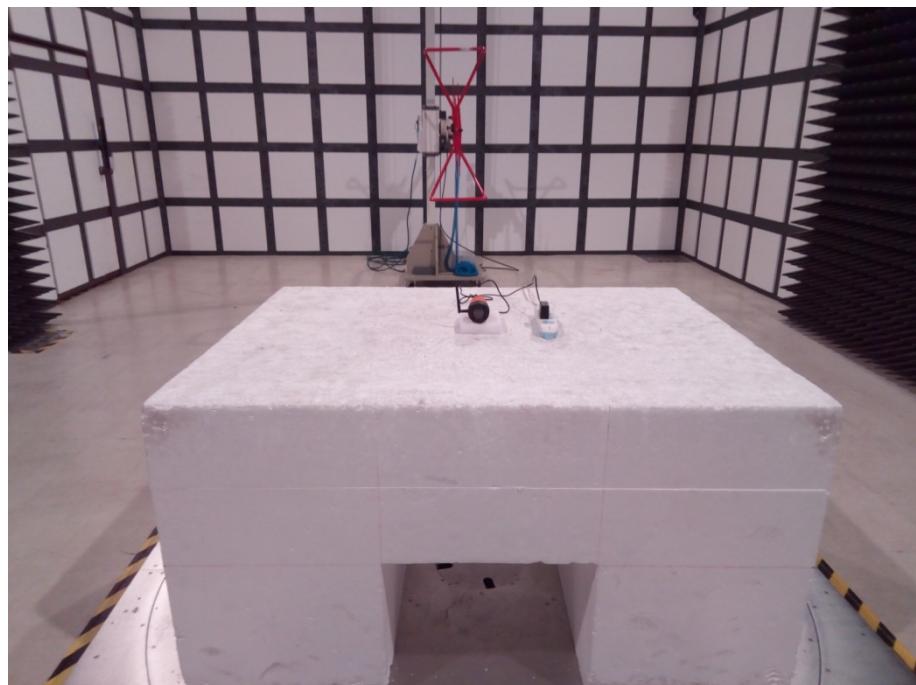


RAD Below 1G -Rear View

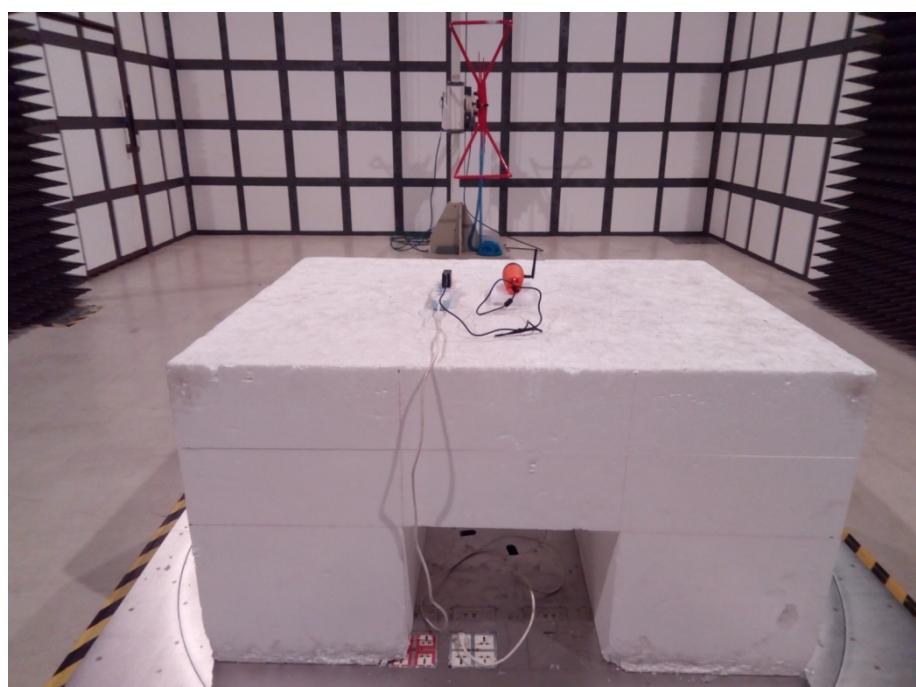

RAD Above 1G - Front View

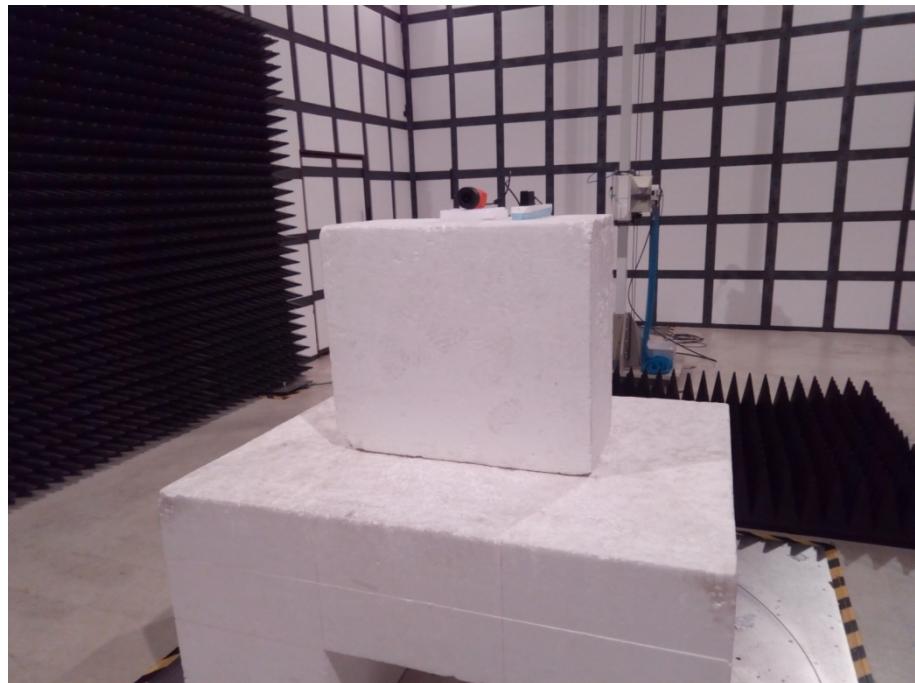

RAD Above 1G -Rear View

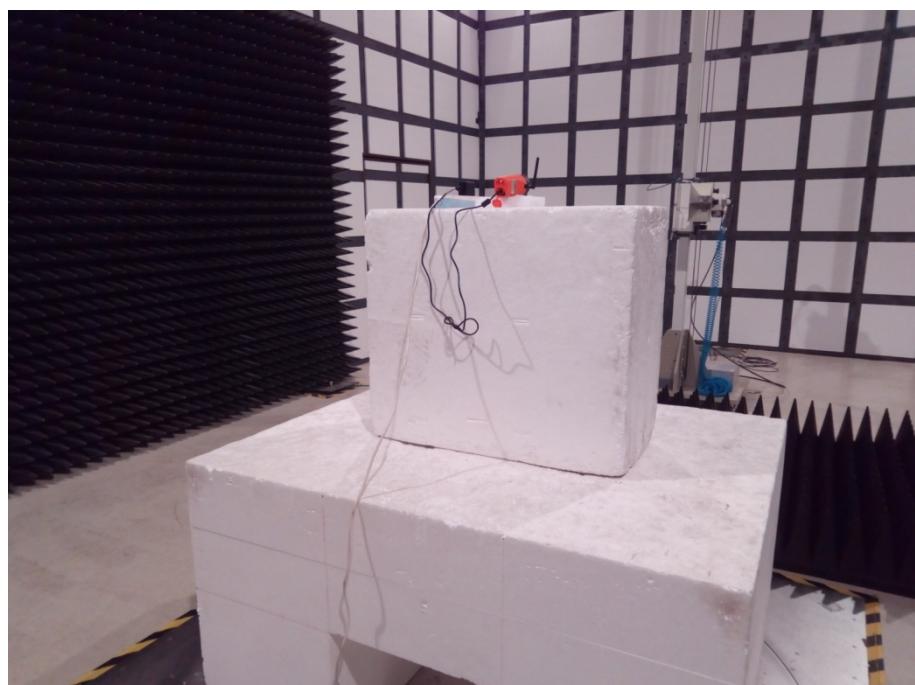

***** END OF REPORT *****