

RF TEST REPORT



Report No.: 17020575-FCC-R1

Supersede Report No.: N/A

Applicant	Nanjing Hanlong Technology Co., Ltd.	
Product Name	IP PHONE	
Model No.	UC926E	
Serial No.	UC924E	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	June 05 to June 20, 2017	
Issue Date	June 23, 2017	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Trety Lu	Deon Dai	
Trety Lu Test Engineer	Deon Dai Checked By	
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	17020575-FCC-R1
Page	3 of 85

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY.....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION.....	10
6.3 20DB BANDWIDTH	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	25
6.7 BAND EDGE	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	43
6.9 RADIATED EMISSIONS.....	57
ANNEX A. TEST INSTRUMENT.....	67
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	68
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	81
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	84
ANNEX E. DECLARATION OF SIMILARITY	85

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17020575-FCC-R1	NONE	Original	June 23, 2017

2. Customer information

Applicant Name	Nanjing Hanlong Technology Co., Ltd.
Applicant Add	5th Floor, 1st Building, Huashen Tech Park, 10 Huashen Temple, Yuhuatai Dis, Nanjing China
Manufacturer	Nanjing Hanlong Technology Co., Ltd.
Manufacturer Add	5th Floor, 1st Building, Huashen Tech Park, 10 Huashen Temple, Yuhuatai Dis, Nanjing China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ_EMU

4. Equipment under Test (EUT) Information

Description of EUT:	IP PHONE
Main Model:	UC926E
Serial Model:	UC924E
Date EUT received:	May 18, 2017
Test Date(s):	June 05 to June 20, 2017
Antenna Gain:	Bluetooth: 2.8 dBi
Type of Modulation:	Bluetooth: GFSK, π/4DQPSK, 8DPSK
RF Operating Frequency (ies):	Bluetooth: 2402-2480 MHz
Max. Output Power:	10.455 dBm
Number of Channels:	Bluetooth: 79CH
Port:	Power Port、Ext Port、Internet Port、PC Port、Earphone Port、Telephone Port
Input Power:	Adapter: Model:NBS05B050120VU Input Power:100-240V,50/60Hz,0.2A Output:5V,1.2A
Trade Name :	Htek
FCC ID:	2ACUGUC926ESERIAL

Operating Channel list

Channel	Frequency(MHz)								
00	2402	17	2419	34	2436	51	2453	68	2470
01	2403	18	2420	35	2437	52	2454	69	2471
02	2404	19	2421	36	2438	53	2455	70	2472
03	2405	20	2422	37	2439	54	2456	71	2473
04	2406	21	2423	38	2440	55	2457	72	2474
05	2407	22	2424	39	2441	56	2458	73	2475
06	2408	23	2425	40	2442	57	2459	74	2476
07	2409	24	2426	41	2443	58	2460	75	2477
08	2410	25	2427	42	2444	59	2461	76	2478
09	2411	26	2428	43	2445	60	2462	77	2479
10	2412	27	2429	44	2446	61	2463	78	2480
11	2413	28	2430	45	2447	62	2464		
12	2414	29	2431	46	2448	63	2465		
13	2415	30	2432	47	2449	64	2466		
14	2416	31	2433	48	2450	65	2467		
15	2417	32	2434	49	2451	66	2468		
16	2418	33	2435	50	2452	67	2469		

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antennas:

A permanently attached PCB antenna for Bluetooth, the gain is 2.8 dBi for Bluetooth.


Antenna must be permanently attached to the unit ,it meets up with the ANTENNA REQUIREMENT.

Result: Compliant.

6.2 Channel Separation

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	June 07, 2017
Tested By :	Trety Lu

Requirement(s):

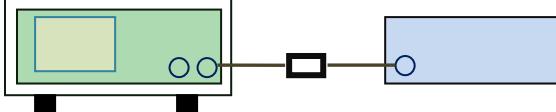Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq1% of the span - Video (or Average) Bandwidth (VBW) \geqRBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.694	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.005	0.696	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.008	0.912	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.002	0.913	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.868	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.002	0.871	Pass
	High Channel	2480			
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result




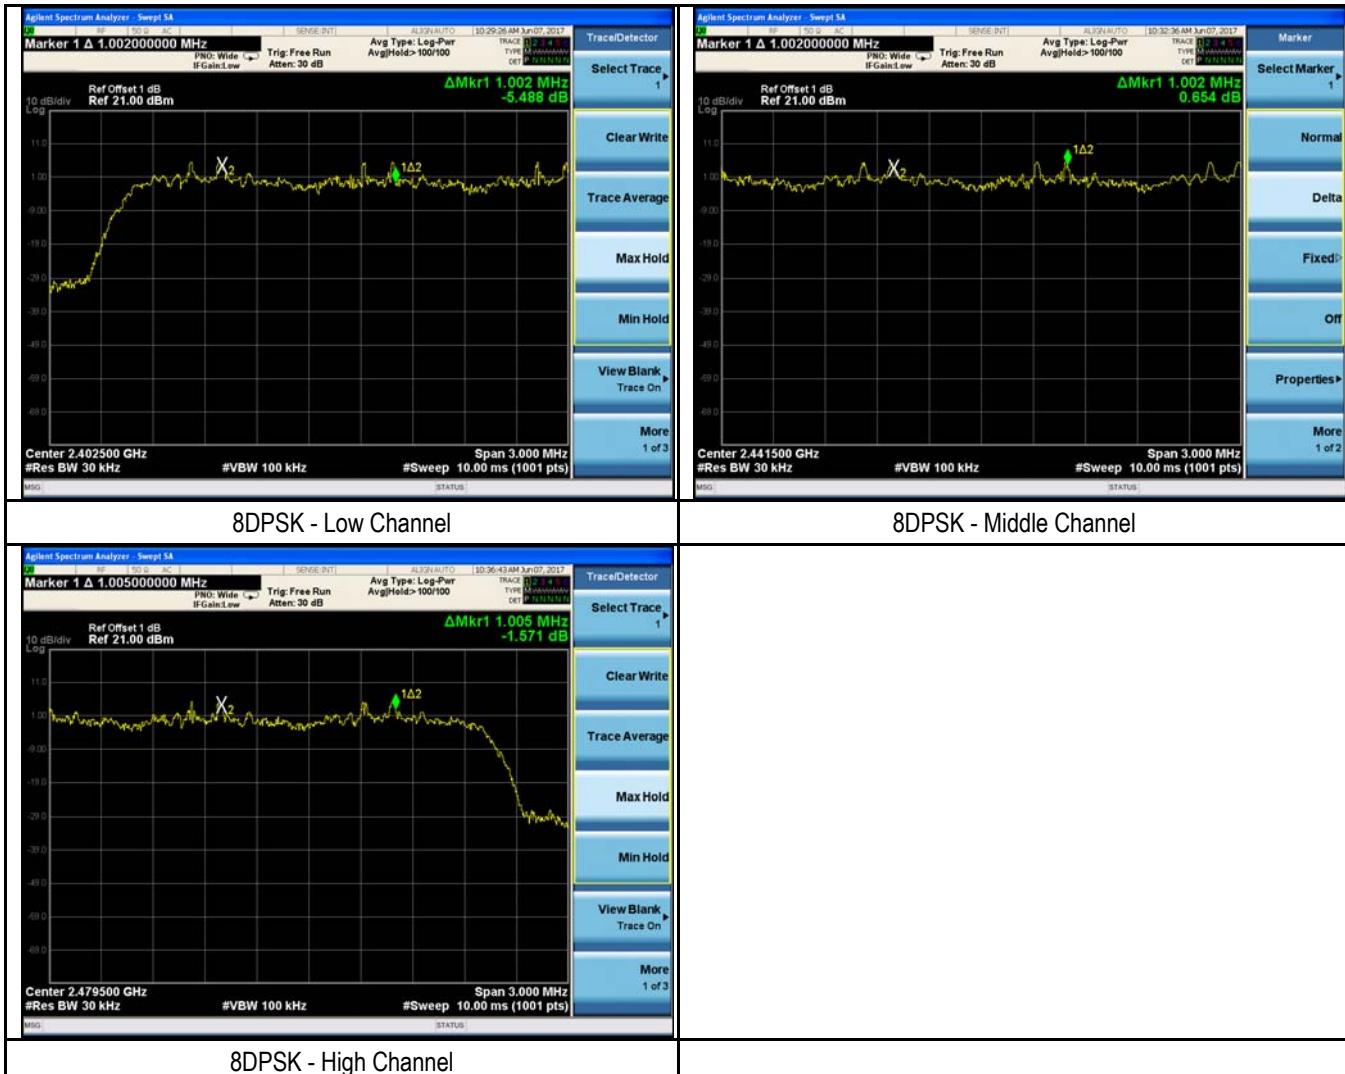

6.3 20dB Bandwidth

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	June 05, 2017
Tested By :	Trety Lu

Requirement(s):

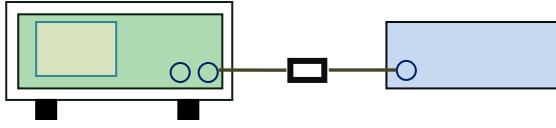Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.041	0.93636
	Mid	2441	1.044	0.94153
	High	2480	1.048	0.94941
$\pi/4$ DQPSK	Low	2402	1.368	1.2161
	Mid	2441	1.369	1.2168
	High	2480	1.373	1.2257
8-DPSK	Low	2402	1.302	1.1954
	Mid	2441	1.306	1.1980
	High	2480	1.331	1.2111

Test Plots


20dB Bandwidth measurement result



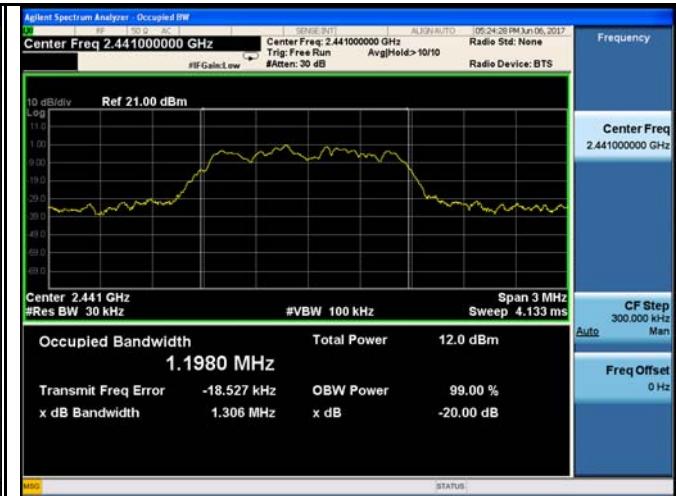

8DPSK - Low Channel

8DPSK - Middle Channel

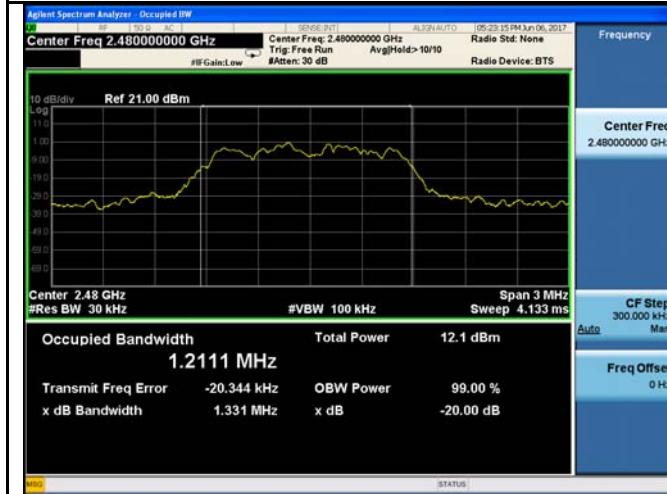


8DPSK - High Channel

6.4 Peak Output Power

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	June 05, 2017
Tested By :	Trety Lu

Requirement(s):

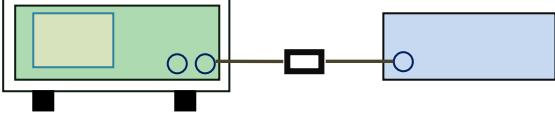Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geqRBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer. 	
Remark			
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	

Test Data Yes N/A


Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	8.150	125	Pass
		Mid	2441	8.344	125	Pass
		High	2480	8.286	125	Pass
	$\pi/4$ DQPSK	Low	2402	9.934	125	Pass
		Mid	2441	9.982	125	Pass
		High	2480	9.975	125	Pass
	8-DPSK	Low	2402	10.062	125	Pass
		Mid	2441	10.067	125	Pass
		High	2480	10.455	125	Pass

Test Plots

Output Power measurement result

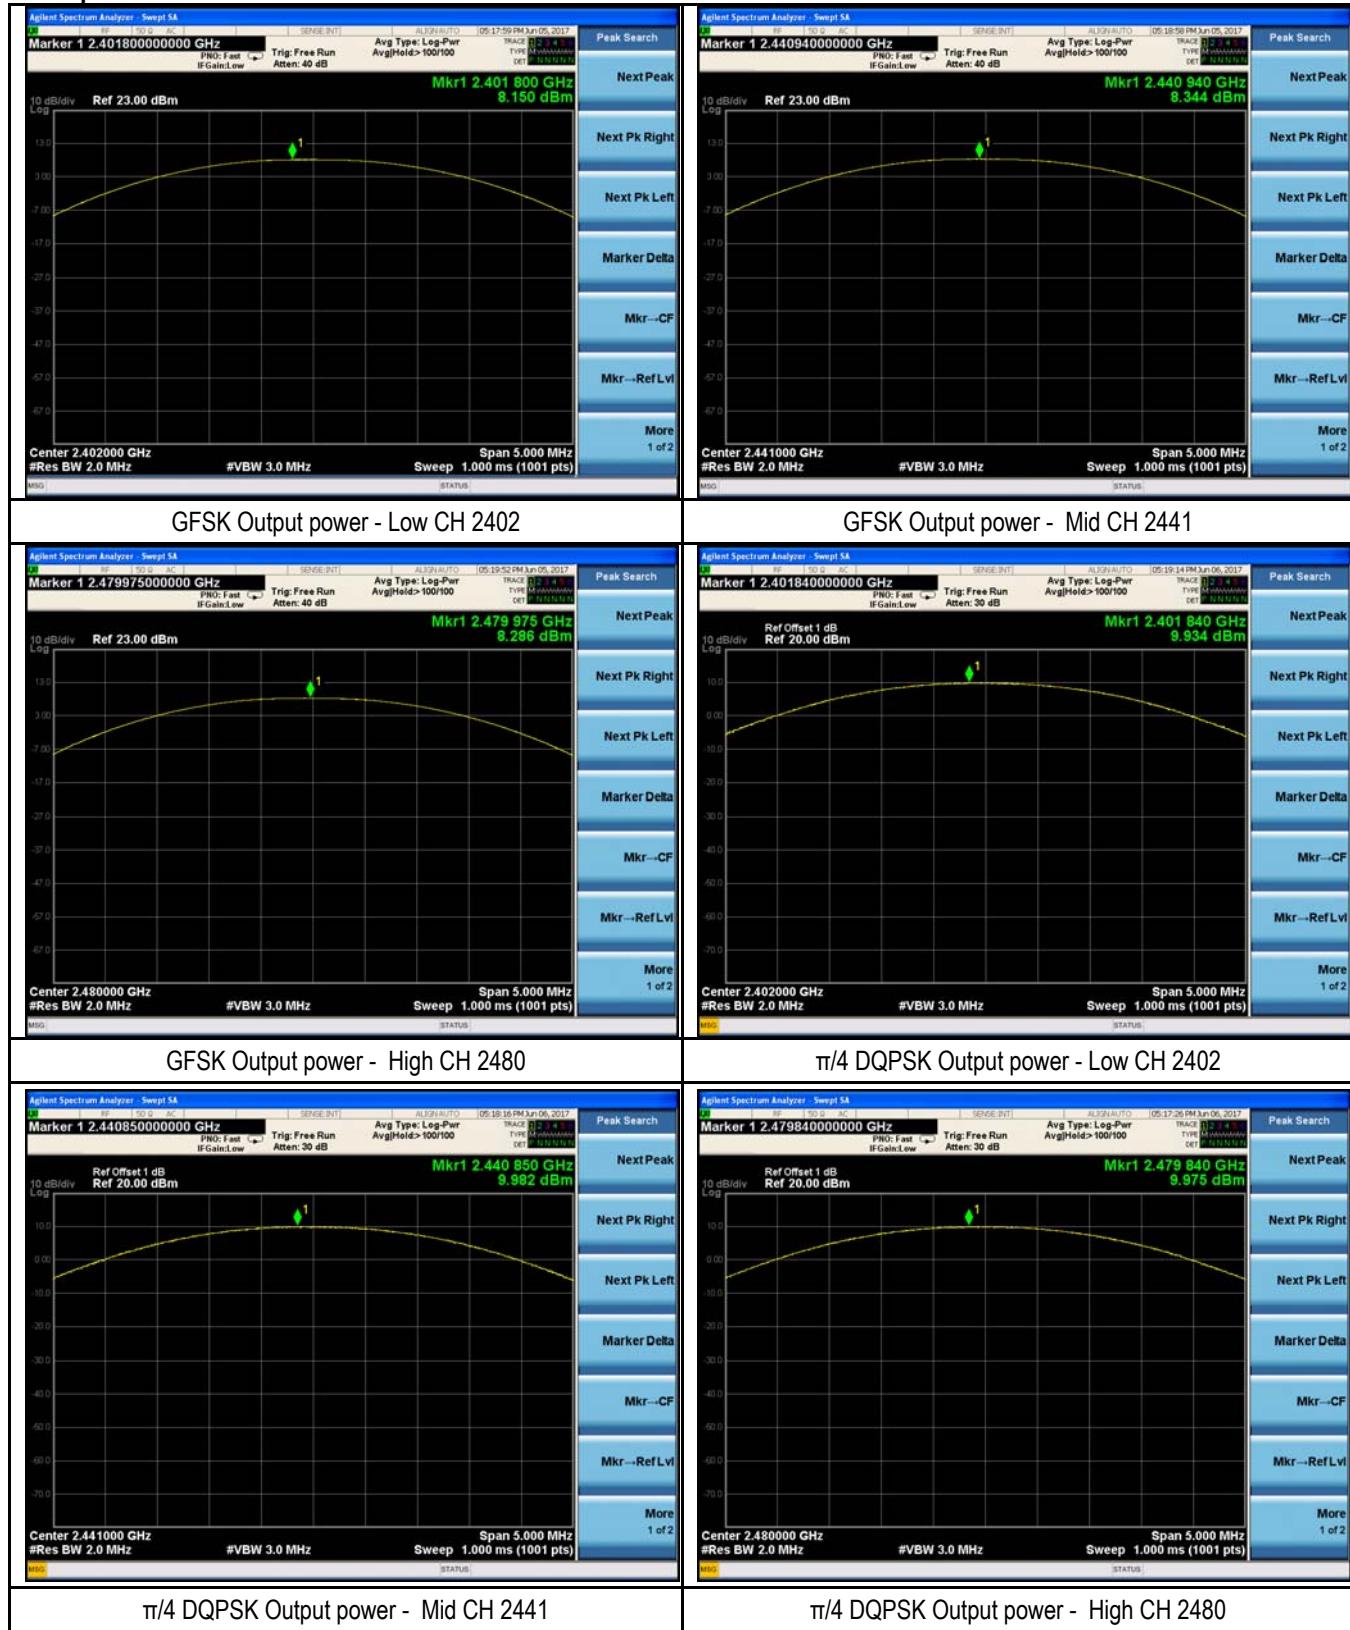


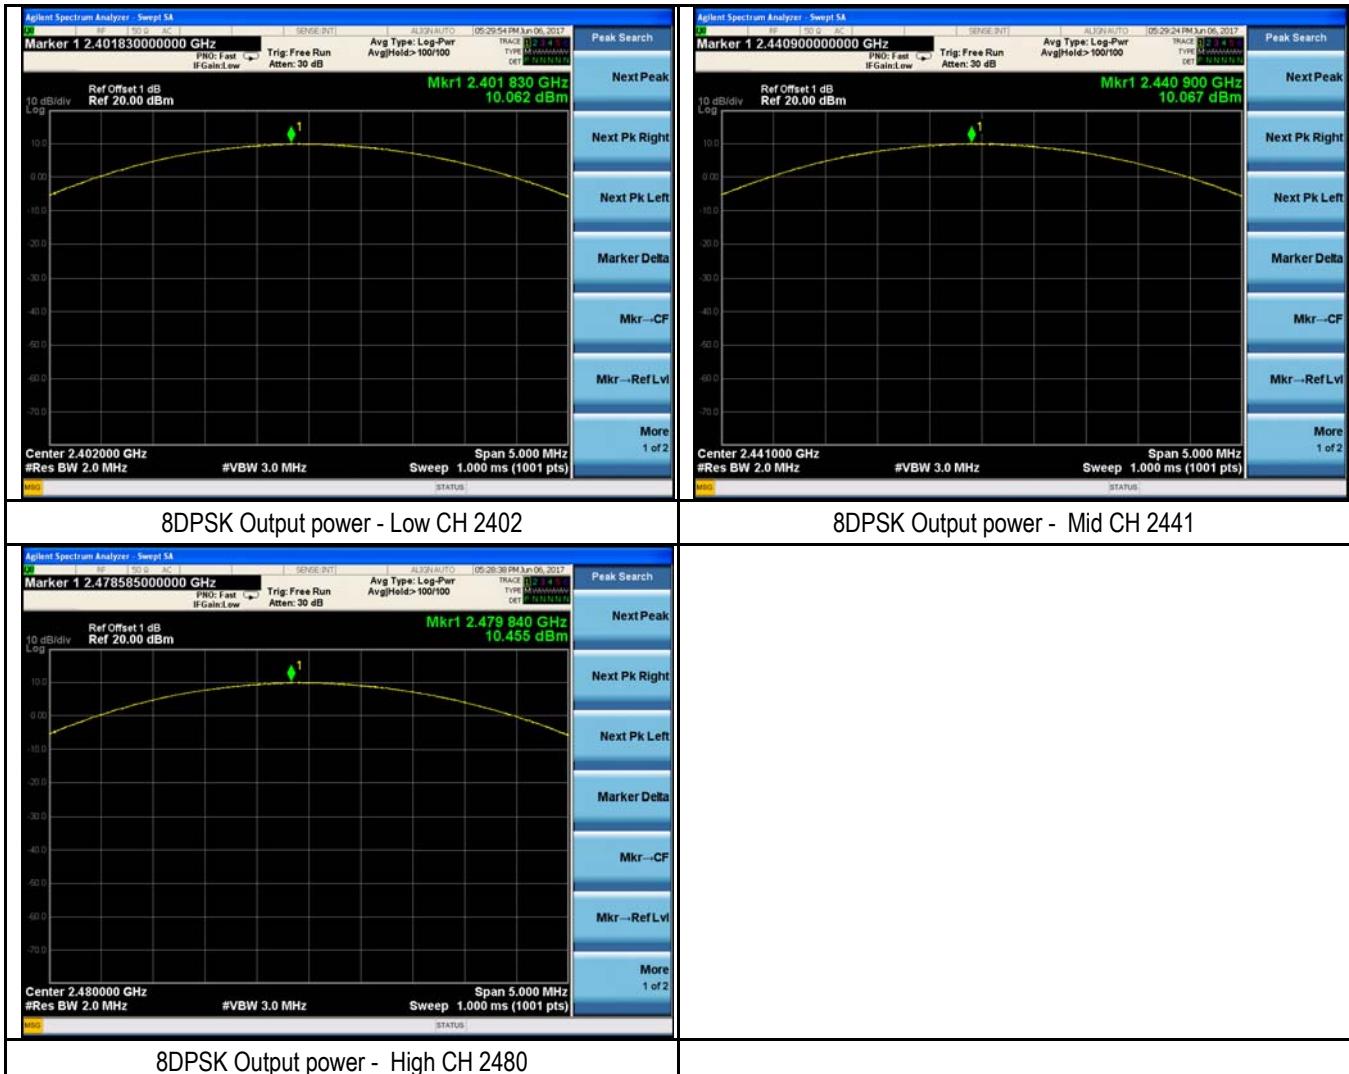

6.5 Number of Hopping Channel

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	June 07, 2017
Tested By :	Trety Lu

Requirement(s):

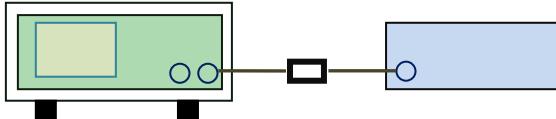Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15


Test Plots

Number of Hopping Channels measurement result

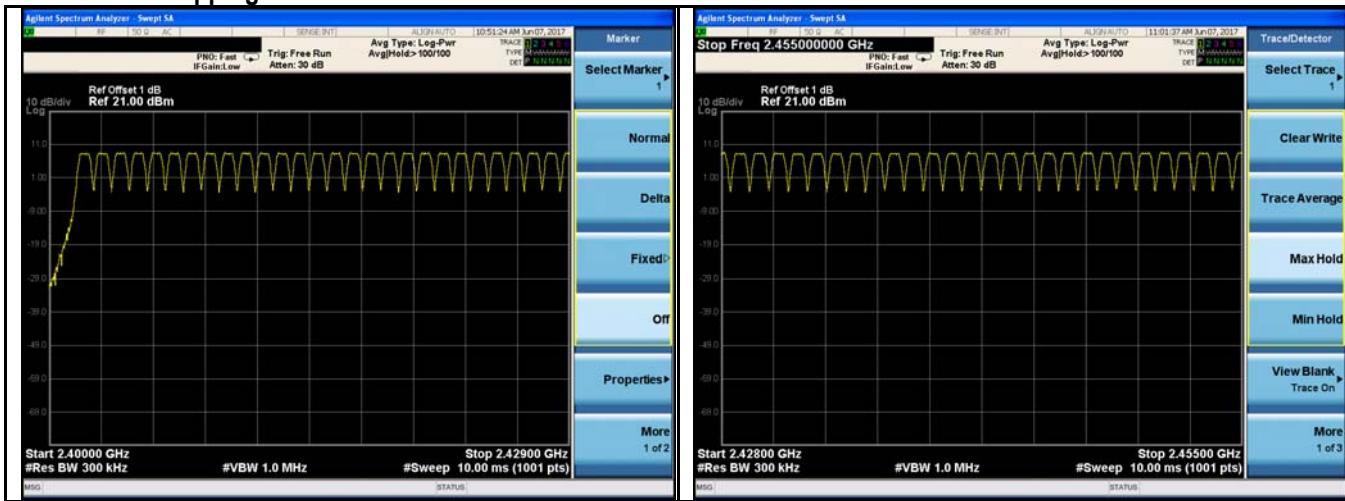

GFSK Number of Hopping Channels - 1


GFSK Number of Hopping Channels - 2

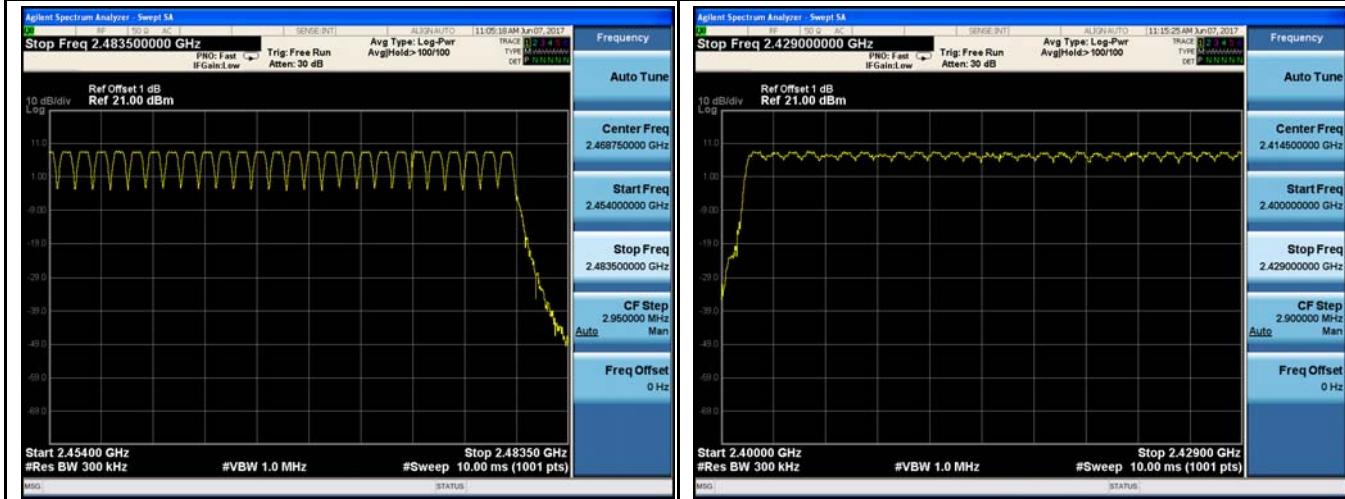


GFSK Number of Hopping Channels – 3

$\pi/4$ DQPSK Number of Hopping Channels - 1


Test Report No.	17020575-FCC-R1
Page	24 of 85

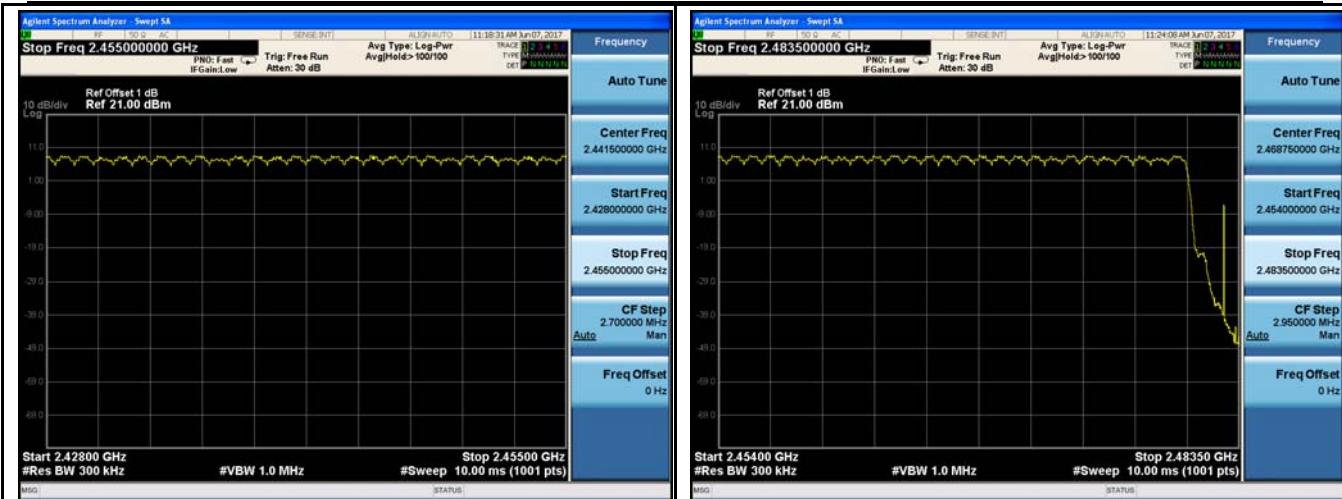

π/4 DQPSK Number of Hopping Channels - 2

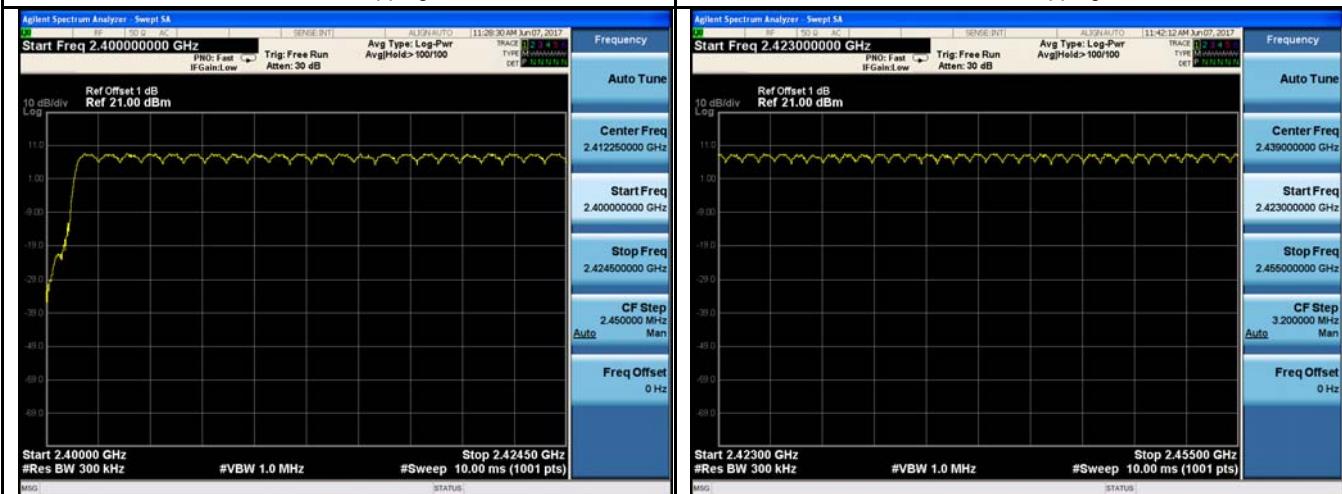

π/4 DQPSK Number of Hopping Channels - 3

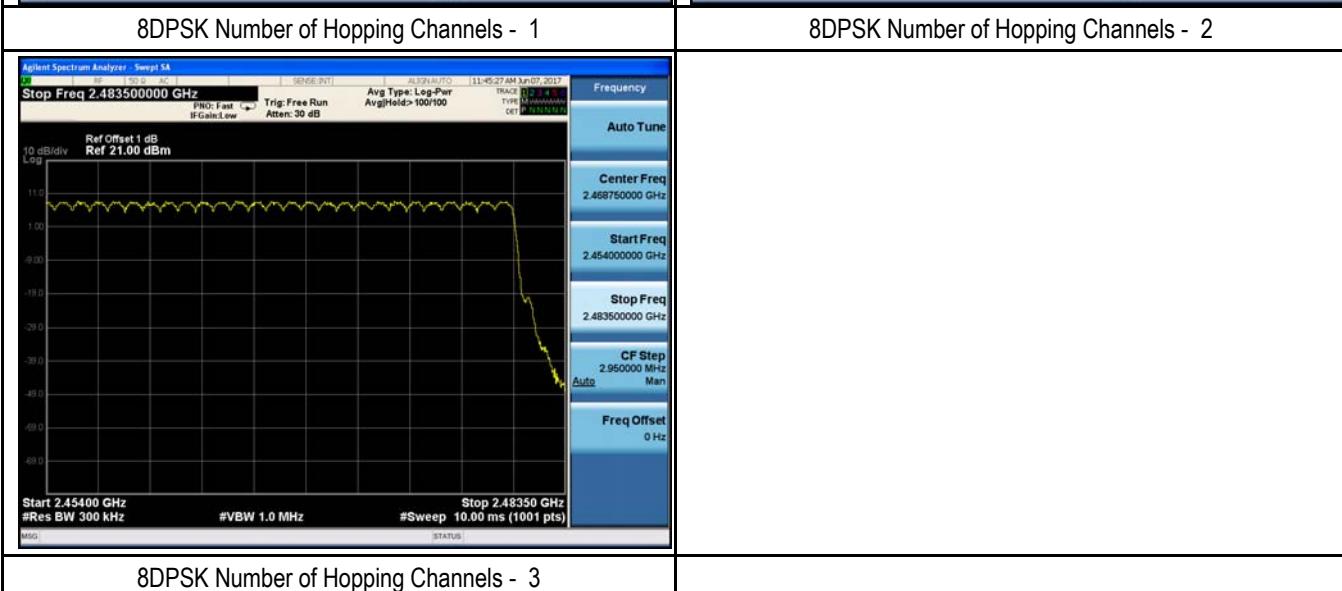


8DPSK Number of Hopping Channels - 1

8DPSK Number of Hopping Channels - 2

6.6 Time of Occupancy (Dwell Time)

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	June 07, 2017
Tested By :	Trety Lu

Requirement(s):

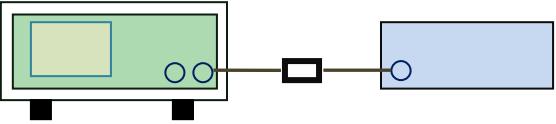Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.885	307.7	400	Pass
		Mid	2.885	307.7	400	Pass
		High	2.880	307.2	400	Pass
	$\pi/4$ DQPSK	Low	2.900	309.3	400	Pass
		Mid	2.900	309.3	400	Pass
		High	2.900	309.3	400	Pass
	8-DPSK	Low	2.900	309.3	400	Pass
		Mid	2.900	309.3	400	Pass
		High	2.900	309.3	400	Pass


Note: Dwell time=Pulse Time (ms) \times $(1600 \div 6 \div 79) \times 31.6$

Note : All packet have been tested (DH1、DH2、DH3) ,but only worst (DH5) case is the reported.

Test Plots

Dwell Time measurement result

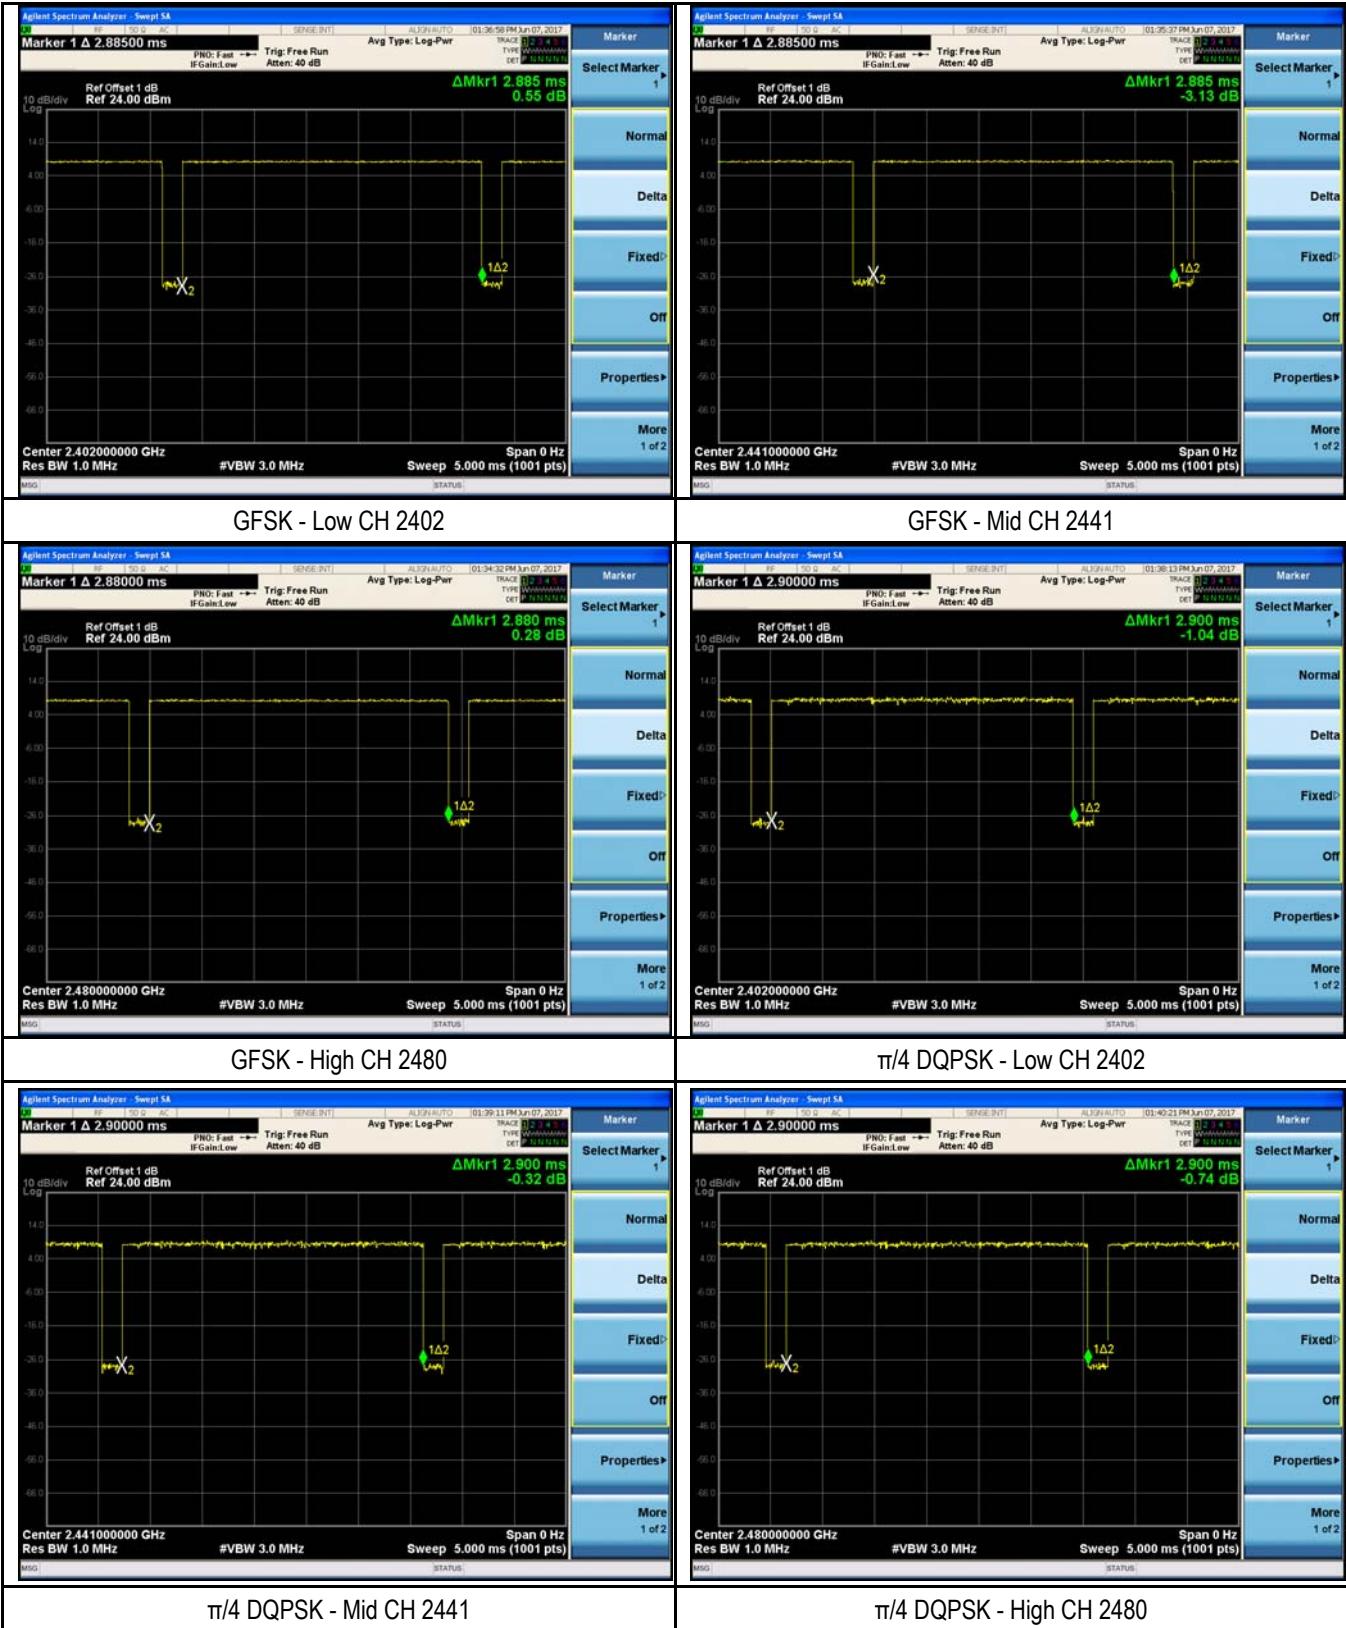


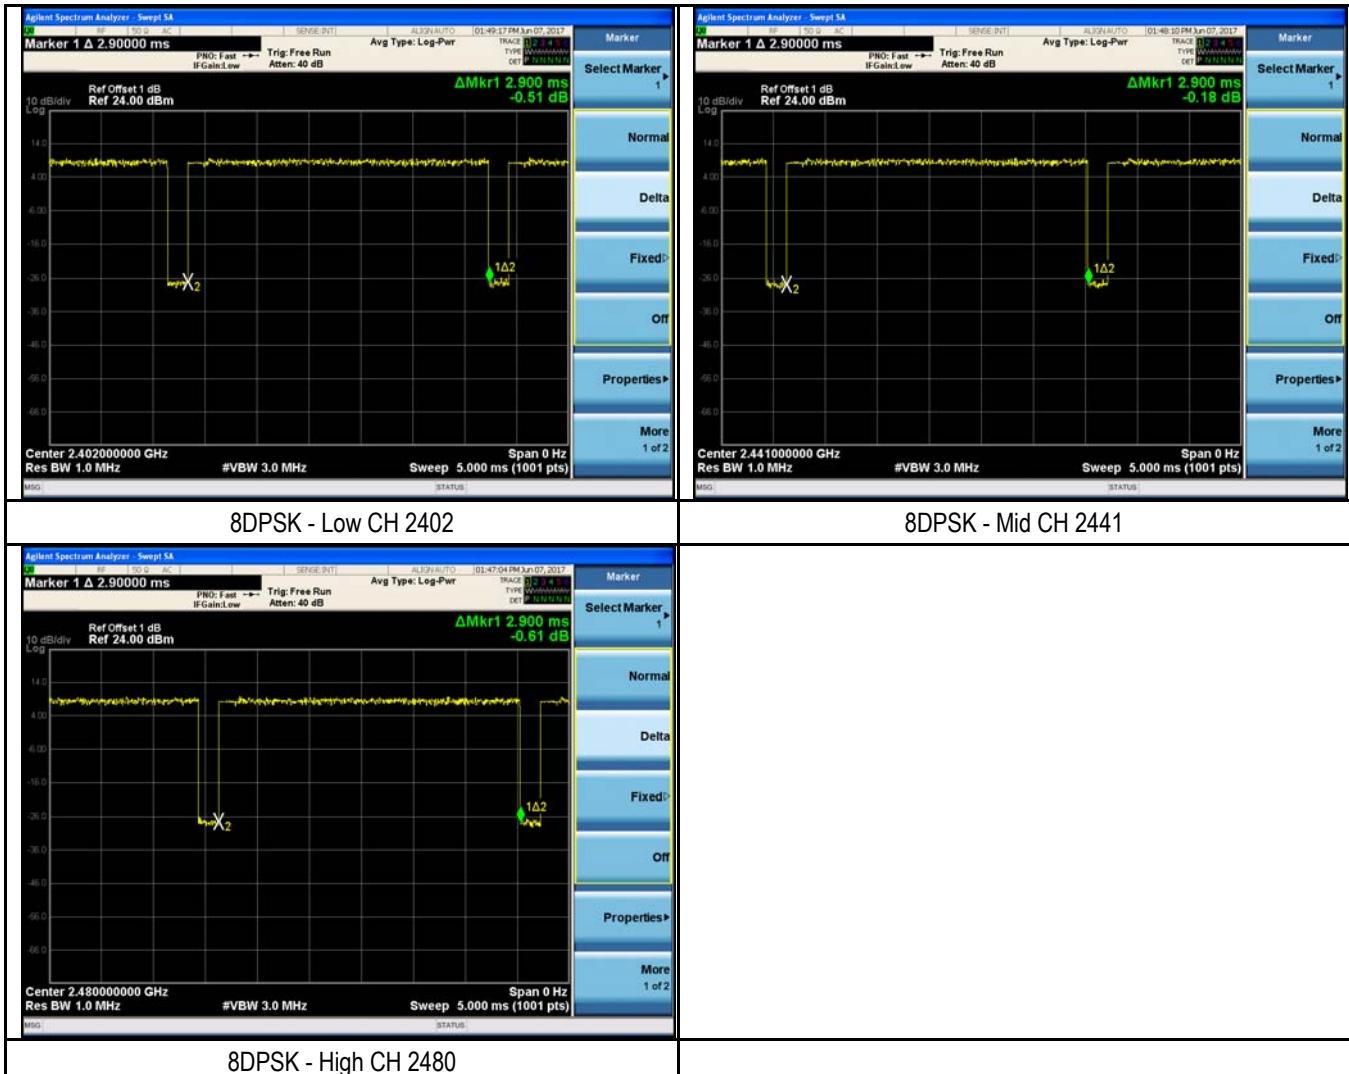

6.7 Band Edge

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	June 14, 2017
Tested By :	Trety Lu

Requirement(s):

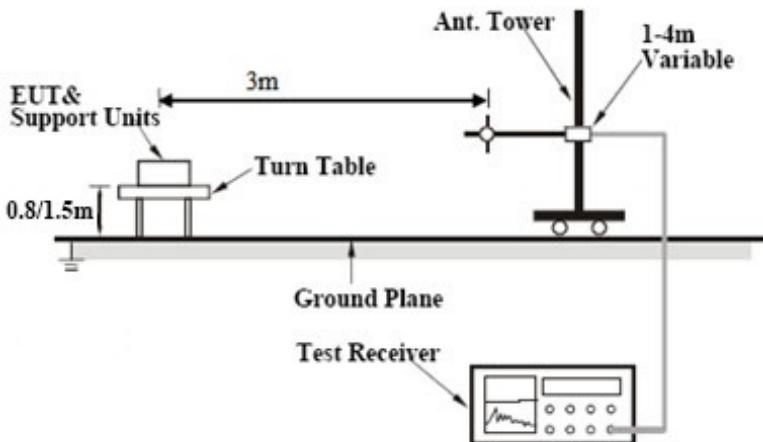Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup for measuring the band edge. It shows a 'Turn Table' with a 'EUT & Support Units' mounted on it, positioned 0.8/1.5m from the 'Ground Plane'. A '3m' horizontal distance separates the EUT from an 'Ant. Tower' mounted on a '1-4m Variable' height post. A 'Test Receiver' is connected to the Ant. Tower to measure the signal. </p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete. 		
Remark			

Test Report No.	17020575-FCC-R1
Page	30 of 85

Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
--------	--	-------------------------------

Test Data Yes N/A

Test Plot Yes (See below) N/A