

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

LED TV

MODEL No.: LE-65GUK-A1, WA65UFT1001, WA65UFB1001,
WA65UFA1001, WA65UFX1001, SE65FX1, EL4KAMZ6517,
EL4KAMZ6517T, WE65XXXXXXXX, SEXXXXXXXX, ELXXXXXXXX,
LE-65GXXXXXXXX (where X would be any Arabian number or English
letter or blank)

FCC ID: 2ACWIWA65UF

Trade Mark: THTF, Fluid, Westinghouse, Seiki, Element, ONN

REPORT NO.: ES161121025E4

ISSUE DATE: January 12, 2017

Prepared for

Shenyang Tongfang Multimedia Technology Co., Limited.
No.10 Nanping East Road HunNan New District Shenyang,
LiaoNing Province P.R .China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

1 TEST RESULT CERTIFICATION

Applicant:	Shenyang Tongfang Multimedia Technology Co., Limited. No.10 Nanping East Road HunNan New District Shenyang, LiaoNing Province P.R .China
Manufacturer:	Shenyang Tongfang Multimedia Technology Co., Limited. No.10 Nanping East Road HunNan New District Shenyang, LiaoNing Province P.R .China
Product Description:	LED TV
Model Number:	LE-65GUK-A1, WA65UFT1001, WA65UFB1001, WA65UFA1001, WA65UFX1001, SE65FX1, EL4KAMZ6517, EL4KAMZ6517T, WE65XXXXXXXX, SEXXXXXXXXX, ELXXXXXXXX, LE-65GXXXXXXXX (where X would be any Arabian number or English letter or blank) (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is appearance, trade mark and model name. for trading purpose. We prepare LE-65GUK-A1 for test, and the worst result recorded in the report.)
File Number:	ES161121025E3
Date of Test:	November 02, 2016 to January 09, 2017

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart E	PASS


The above equipment was tested by EMTEK(SHENZHEN) CO., LTD.. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

November 02, 2016 to January 09, 2017

Prepared by :


Yaping Shen

Yaping Shen/Editor

Reviewer :


Joe Xia

Joe Xia/Supervisor

Approve & Authorized Signer :


Lisa Wang

Lisa Wang/Manager

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	2
2	EUT TECHNICAL DESCRIPTION.....	4
3	SUMMARY OF TEST RESULT.....	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	11
5.1	FACILITIES	11
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	11
6	TEST SYSTEM UNCERTAINTY	12
7	SETUP OF EQUIPMENT UNDER TEST	13
7.1	RADIO FREQUENCY TEST SETUP	13
7.2	RADIO FREQUENCY TEST SETUP	13
7.3	CONDUCTED EMISSION TEST SETUP	15
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	16
7.5	SUPPORT EQUIPMENT.....	16
8	TEST REQUIREMENTS.....	17
8.1	BANDWIDTH MEASUREMENT	17
8.2	MAXIMUM CONDUCTED OUTPUT POWER.....	42
8.3	MAXIMUM PEAK POWER DENSITY	46
8.4	FREQUENCY STABILITY	79
8.5	UNDESIRABLE RADIATED SPURIOUS EMISSION.....	91
8.6	POWER LINE CONDUCTED EMISSIONS.....	114
8.7	ANTENNA APPLICATION	117

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)			
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g/a:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20)/ac(HT20): MCS0-MCS15; 802.11n(HT40): MCS0-MCS15; 802.11ac(HT40):MCS0-MCS19; 802.11ac(VHT80):MCS0-MCS19; Bluetooth DSS: 1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation Bluetooth DTS: 1Mbps for GFSK modulation			
Modulation	WIFI: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; DSSS with DBPSK/DQPSK/CCK for 802.11b; BT DSS: GFSK modulation (1Mbps) pi/4-DQPSK modulation (2Mbps) 8DPSK modulation (3Mbps) BT DTS: GFSK modulation (1Mbps)			
Operating Frequency Range	WIFI 5G Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n(HT20)/ac(VHT20)	5180-5240	4
		802.11n(HT40)/ac(VHT40)	5190-5230	2
		802.11 ac(VHT80)	5210	1
	UNII Band III	802.11a/n(HT20)/ac(VHT20)	5745-5825	5
		802.11n(HT40)/ac(VHT40)	5755-5795	2
		802.11 ac(VHT80)	5775	1
2.4G WIFI: 2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40); Bluetooth: 2402-2480MHz				
Transmit Power Max	21.46 dBm for WIFI 2.4G Band; 1.388 dBm for BT DSS; 1.612 dBm for BT DTS; 18.31 dBm for UNII Band I; 17.43 dBm for UNII Band III			

Antenna Type	Metel Antenna Two antenna for WIFI One antenna for BT
Max Antenna Gain	4.57 dBi for BT 4.57 dBi for BLE 4.57 dBi for WIFI 2.4 Band 6.68 dBi for WIFI 5G Band I 5.13 dBi for WIFI 5G Band III
Directional Gain	7.58 dBi for WIFI 2.4G Band 9.69 dBi for WIFI 5G Band I 8.14 dBi for WIFI 5G Band III
Power supply	AC 100-240V 50/60Hz 250W

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789003 D2 General UNII Test Procedures New Rules v01r03, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ACWIWA65UF filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789003 D2 General UNII Test Procedures New Rules v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/28/2016	05/28/2017
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/28/2016	05/28/2017
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	05/28/2017
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/28/2016	05/28/2017
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/28/2016	05/28/2017
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/28/2016	05/28/2017

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/28/2016	05/28/2017
Pre-Amplifier	HP	8447D	2944A07999	05/28/2016	05/28/2017
Bilog Antenna	Schwarzbeck	VULB9163	142	05/28/2016	05/28/2017
Loop Antenna	ARA	PLA-1030/B	1029	05/28/2016	05/28/2017
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/28/2016	05/28/2017
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/28/2016	05/28/2017
Cable	Schwarzbeck	AK9513	ACRX1	05/28/2016	05/28/2017
Cable	Rosenberger	N/A	FP2RX2	05/28/2016	05/28/2017
Cable	Schwarzbeck	AK9513	CRPX1	05/28/2016	05/28/2017
Cable	Schwarzbeck	AK9513	CRRX2	05/28/2016	05/28/2017

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/28/2016	05/28/2017
Peak power analyzer	Agilent	8990B	4657524	05/28/2016	05/28/2017
Spectrum Analyzer	Agilent	N9010A	My53470879	05/28/2016	05/28/2017
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	05/28/2016	05/28/2017

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT20): MCS15; 802.11n (HT40): MCS0; 802.11n (HT40): MCS15; 802.11ac (HT20): MCS0; 802.11ac (HT20): MCS15; 802.11ac (HT40): MCS0; 802.11ac (HT40): MCS19; 802.11ac (HT80): MCS0; 802.11ac (HT80): MCS19;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with UNII Band I

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n(VHT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac(HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

Wifi 5G with UNII Band III

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n(HT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac(VHT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR
Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS,2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements
ISO/IEC 17025.

Accredited by FCC, July 06, 2016

The Certificate Registration Number is 709623.

Accredited by FCC, July 06, 2016

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

Site Location

: EMTEK(SHENZHEN) CO., LTD.

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Power Density	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz :


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz :


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

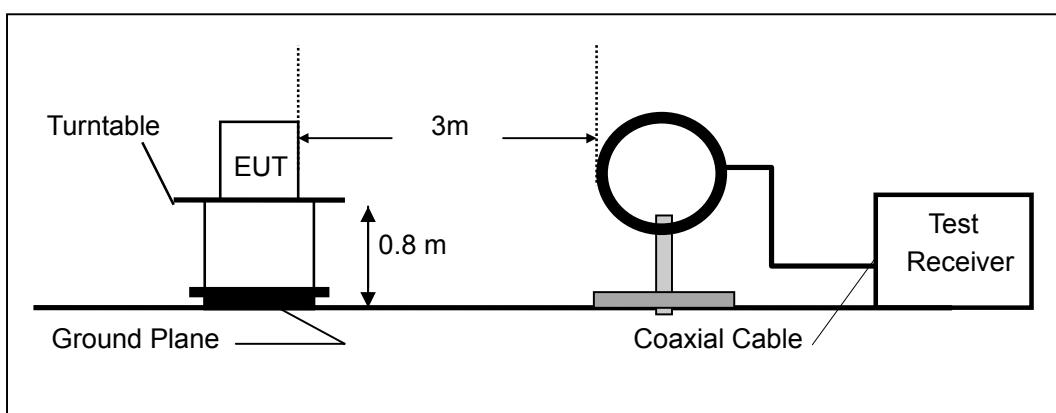

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

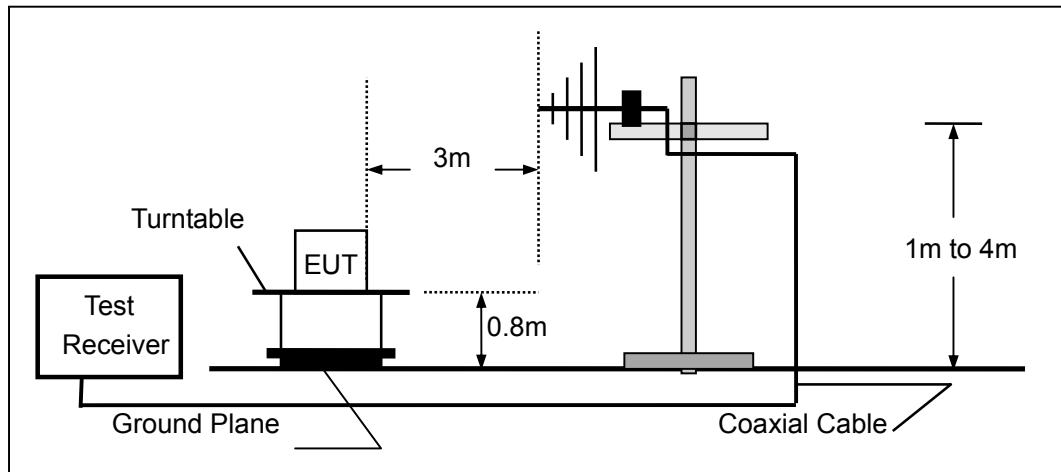

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

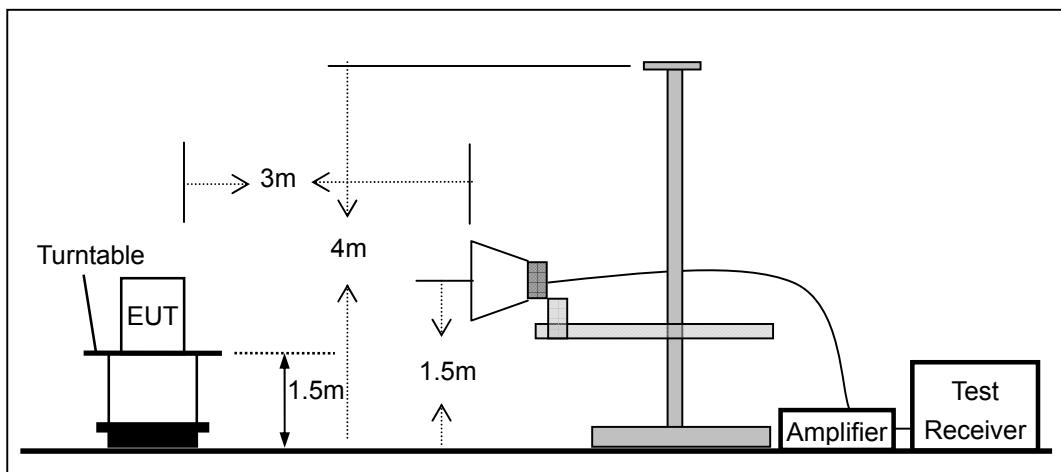


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

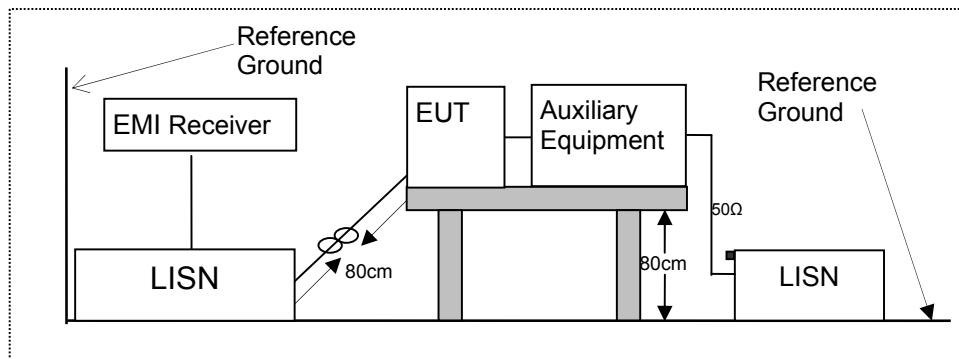

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

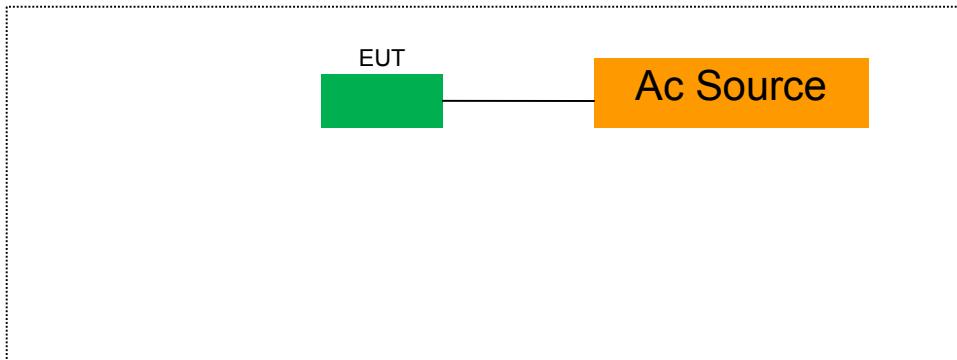

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(e) for UNII Band III

8.1.2 Conformance Limit

No limit requirement.

The minimum 6 dB emission bandwidth of at least 500 KHz for the UNII Band III.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below

■ The following procedure shall be used for measuring (26 dB) power bandwidth:

Center Frequency: test Frequency

Set RBW = approximately 1% of the emission bandwidth.

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

X dB Bandwidth: 26 dB

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Minimum Emission Bandwidth for the UNII Band III

Center Frequency: test Frequency

Set RBW = 100 kHz

Set VBW \geq 3 · RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

X dB Bandwidth: 6 dB

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ The following procedure shall be used for measuring (99 %) power bandwidth:

Set center frequency to the nominal EUT channel center frequency.

Set span = 1.5 times to 5.0 times the OBW.

Set RBW = 1 % to 5 % of the OBW

Set VBW \geq 3 · RBW

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used.

Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

The test data for Antenna A

<input checked="" type="checkbox"/> 802.11a mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	21.06	16.702	N/A	N/A
	CH40	5200	21.44	16.709	N/A	N/A
	CH48	5240	21.09	16.723	N/A	N/A
UNII Band III	CH149	5745	21.53	16.754	N/A	N/A
	CH157	5785	21.41	16.745	N/A	N/A
	CH165	5825	21.48	16.750	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	23.23	20.157	N/A	N/A
	CH40	5200	23.37	20.341	N/A	N/A
	CH48	5240	23.19	20.376	N/A	N/A
UNII Band III	CH149	5745	23.44	20.422	N/A	N/A
	CH157	5785	23.42	20.368	N/A	N/A
	CH165	5825	24.93	20.512	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11ac(VHT20) mode						
Temperature :	28	Test Date :	December 21, 2016			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	23.22	20.146	N/A	N/A
	CH40	5200	23.14	20.184	N/A	N/A
	CH48	5240	23.30	20.322	N/A	N/A
UNII Band III	CH149	5745	23.39	20.277	N/A	N/A
	CH157	5785	23.68	20.277	N/A	N/A
	CH165	5825	23.38	20.350	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT40) mode						
Temperature :	28	Test Date :	December 21, 2016			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH38	5190	39.73	36.372	N/A	N/A
	CH46	5230	40.08	36.254	N/A	N/A
UNII Band III	CH151	5755	39.91	36.382	N/A	N/A
	CH159	5795	39.84	36.342	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11ac(VHT40) mode						
Temperature :	28	Test Date :	December 21, 2016			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH38	5190	39.74	36.369	N/A	N/A
	CH46	5230	39.73	36.385	N/A	N/A
UNII Band III	CH151	5755	39.82	36.377	N/A	N/A
	CH159	5795	39.70	36.355	N/A	N/A
Note: N/A (Not Applicable)						

		<input checked="" type="checkbox"/> 802.11ac(VHT80) mode Test Date : December 21, 2016 Test By: King Kong				
Temperature :	28					
Humidity :	65 %					
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH42	5210	81.20	75.956	N/A	N/A
UNII Band III	CH155	5775	81.43	75.975	N/A	N/A
Note: N/A (Not Applicable)						

		<input checked="" type="checkbox"/> UNII Band III Test Date : December 21, 2016 Test By: King Kong				
Temperature :	28					
Humidity :	65 %					
Operation Mode	Channel Number	Channel Freq. (MHz)	6dB EBW		Limit (MHz)	Verdict
802.11a	CH149	5745	16.38		500	PASS
	CH157	5785	16.39		500	PASS
	CH165	5825	16.37		500	PASS
802.11n (VHT20)	CH149	5745	17.72		500	PASS
	CH157	5785	17.75		500	PASS
	CH165	5825	17.78		500	PASS
802.11ac (VHT20)	CH149	5745	17.70		500	PASS
	CH157	5785	17.76		500	PASS
	CH165	5825	17.80		500	PASS
802.11n (VHT40)	CH151	5755	36.35		500	PASS
	CH159	5795	36.41		500	PASS
802.11ac (VHT40)	CH151	5755	36.02		500	PASS
	CH159	5795	36.45		500	PASS
802.11ac (VHT80)	CH155	5775	75.85		500	PASS
Note: N/A (Not Applicable)						

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5180




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5200



Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model 802.11a	Frequency(MHz) 5240



Emission Bandwidth&99% Occupied Bandwidth	UNII Band III
Test Model 802.11a	Frequency(MHz) 5745

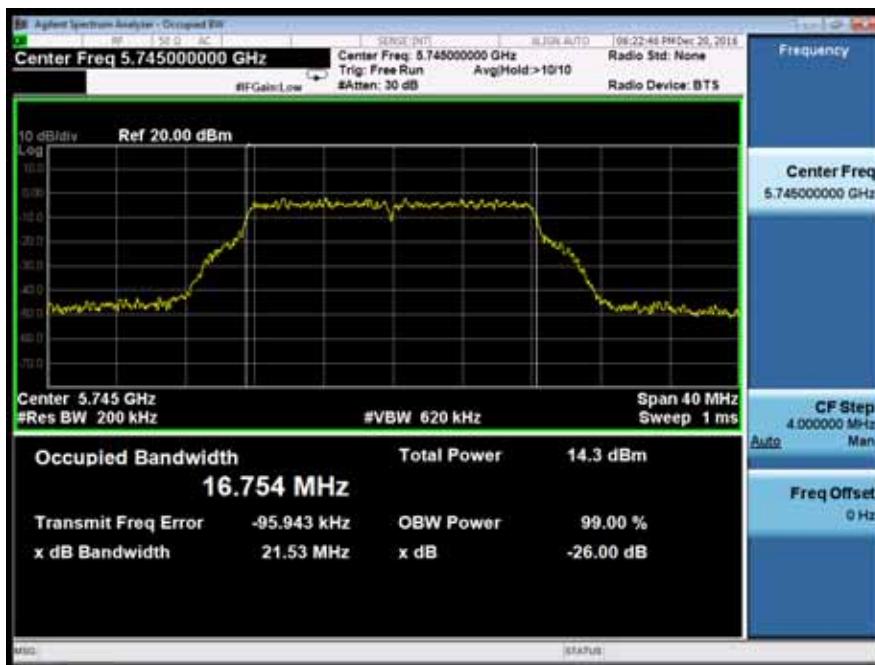

Emission Bandwidth&99% Occupied Bandwidth

Test Model 802.11a

UNII Band III

Frequency(MHz)

5785



Emission Bandwidth&99% Occupied Bandwidth

Test Model 802.11a


UNII Band III

Frequency(MHz)


5825




Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model	802.11n(VHT20) mode
Frequency(MHz)	5180

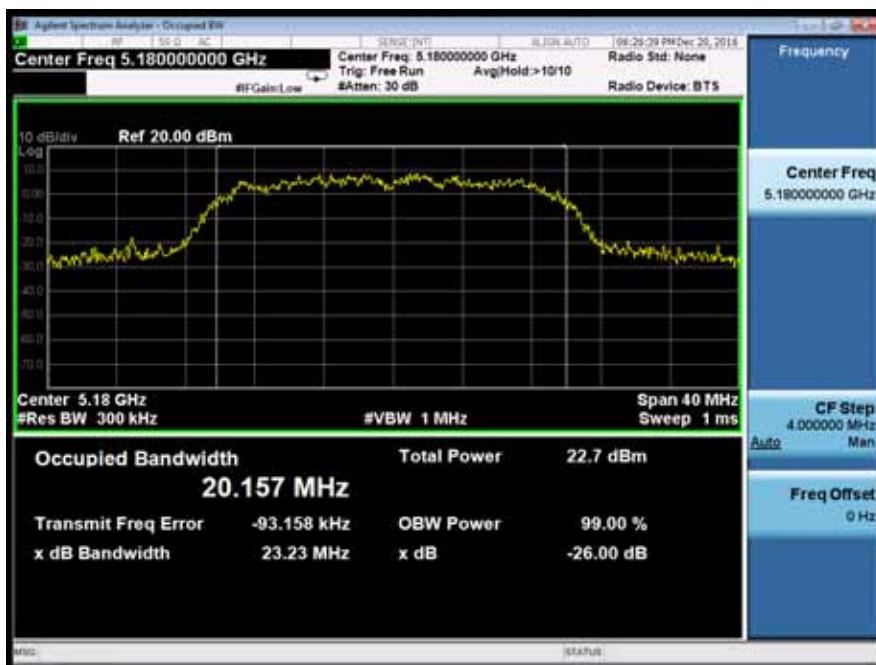


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model	802.11n(VHT20) mode
Frequency(MHz)	5200

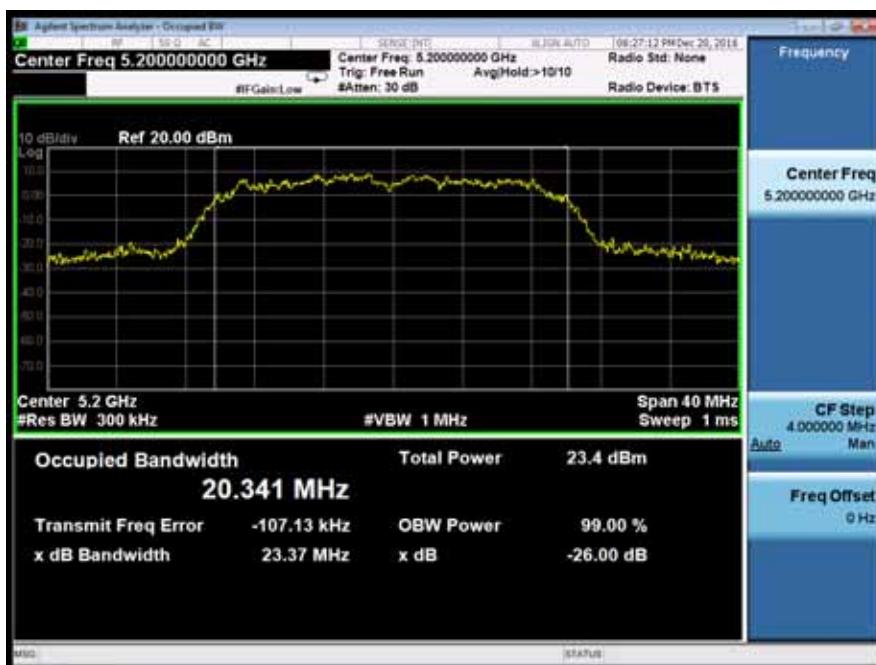


Emission Bandwidth&99% Occupied Bandwidth | UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5240

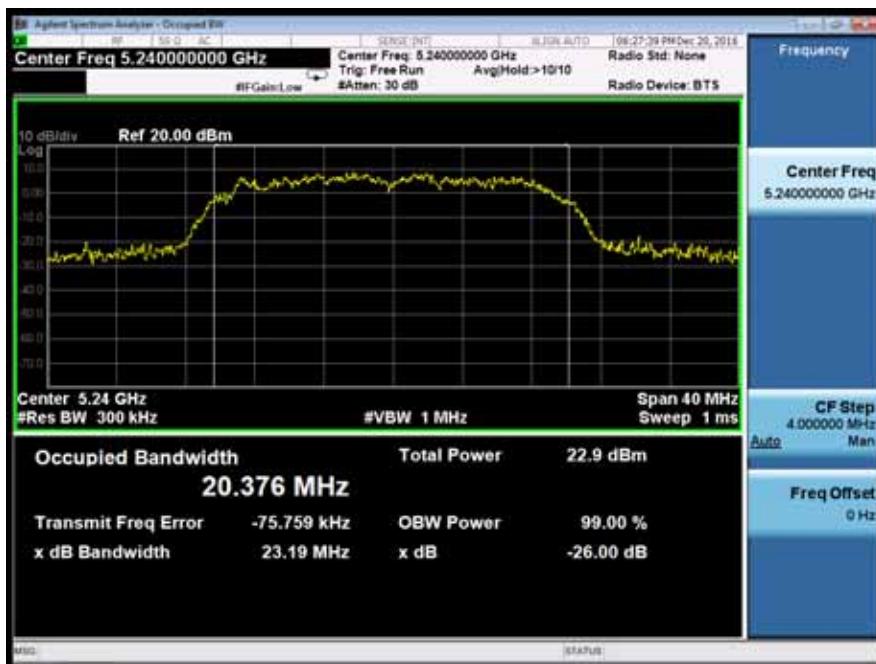


Emission Bandwidth&99% Occupied Bandwidth | UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5745

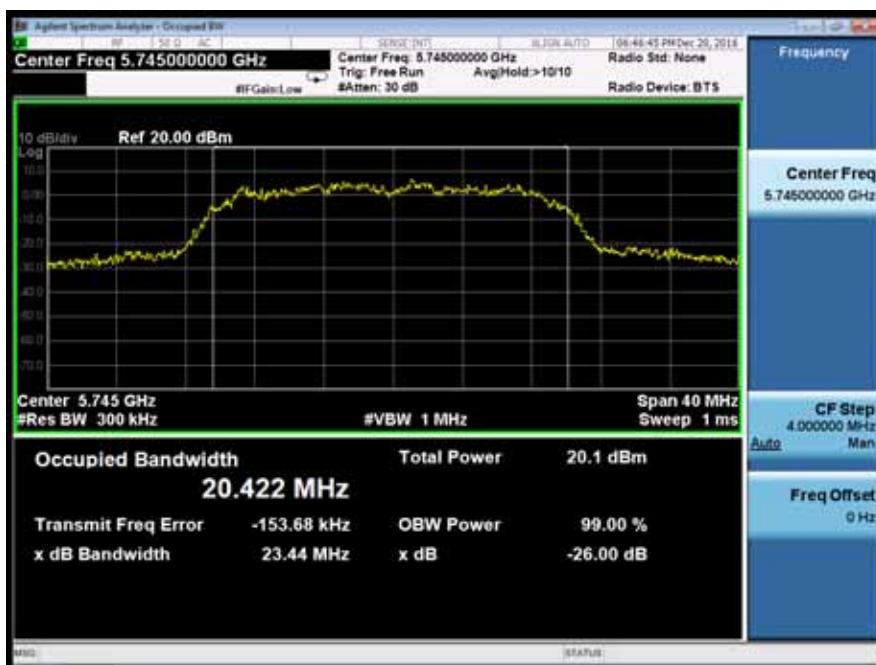

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5785

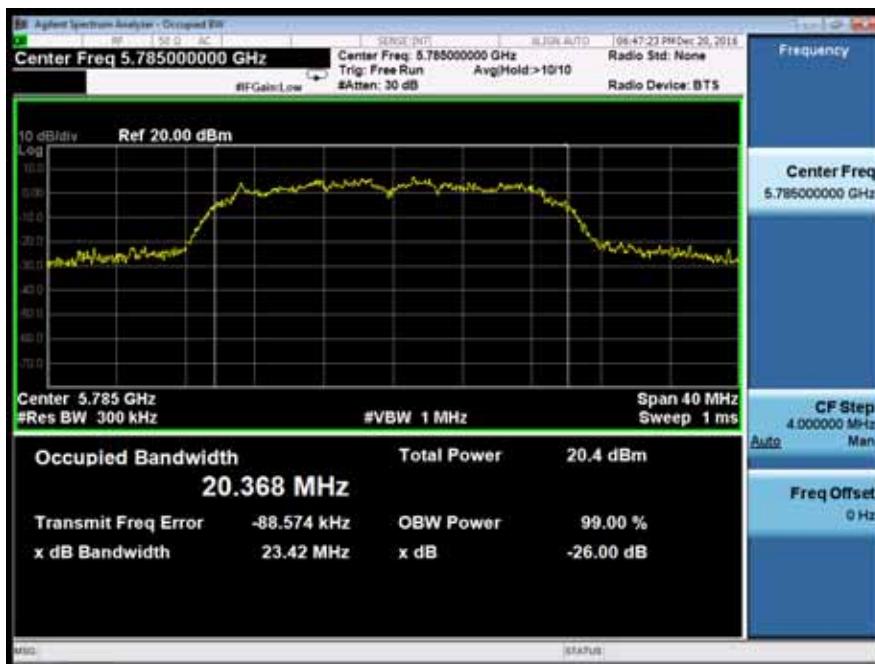


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5825

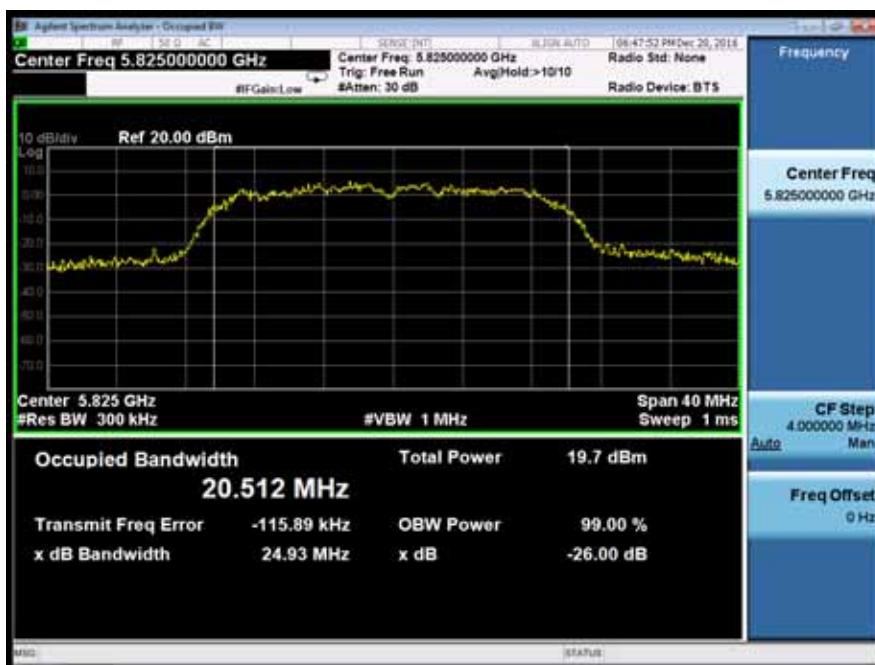

Emission Bandwidth&99% Occupied Bandwidth | UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5180




Emission Bandwidth&99% Occupied Bandwidth | UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5200

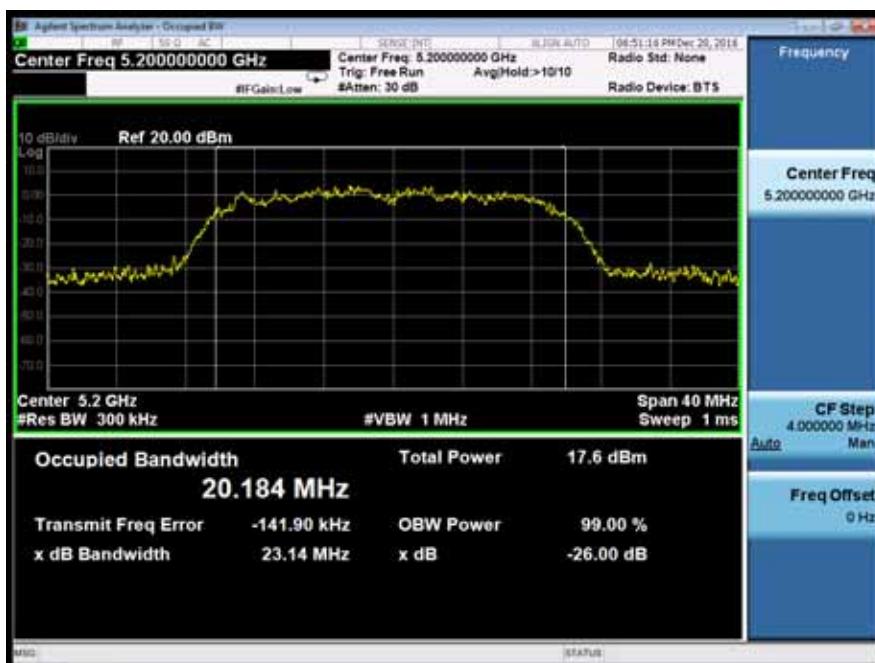


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5240



Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5745

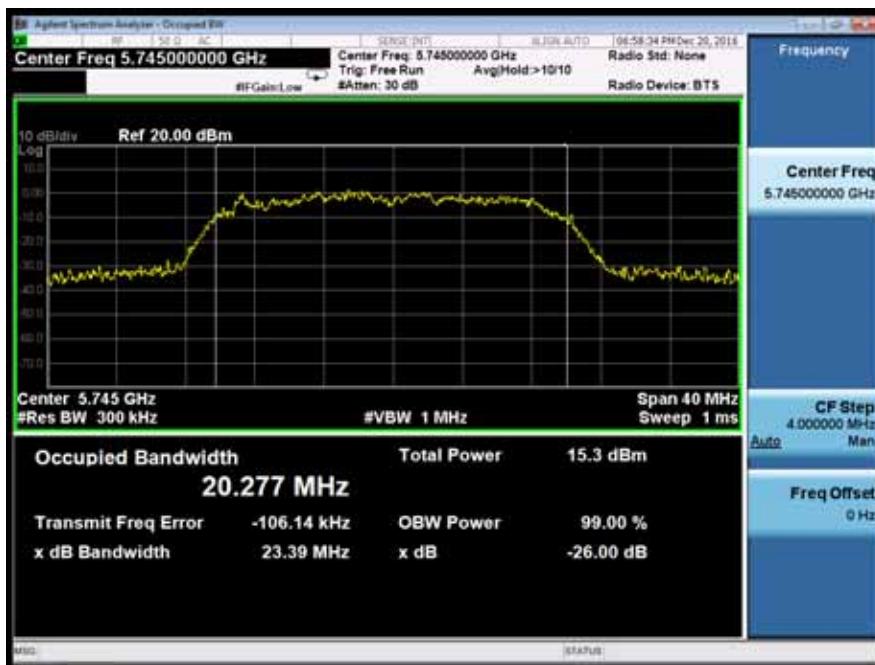

Emission Bandwidth	99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)	5785

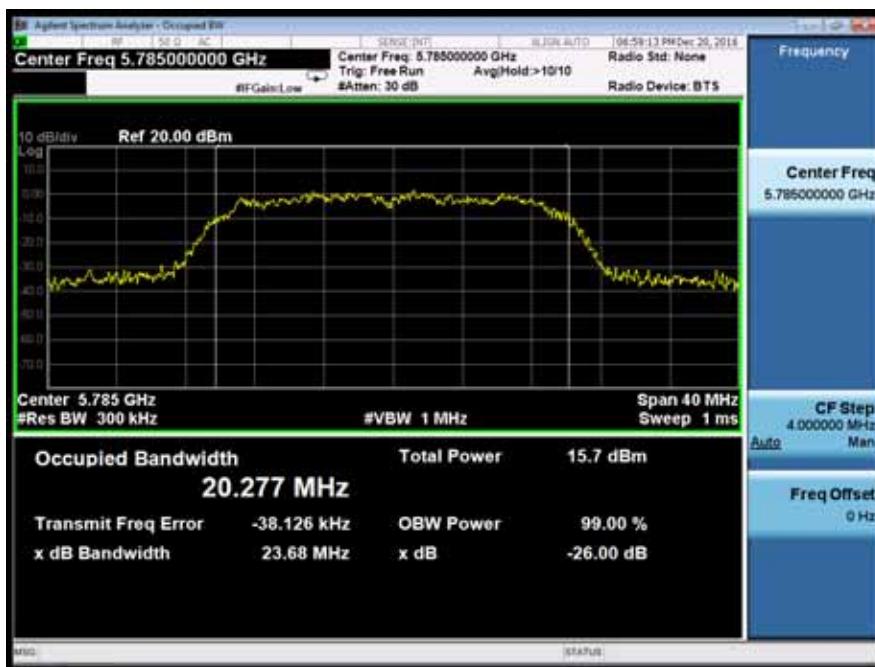


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III
Test Model 802.11ac(VHT20) mode	Frequency(MHz) 5825




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5190




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5230

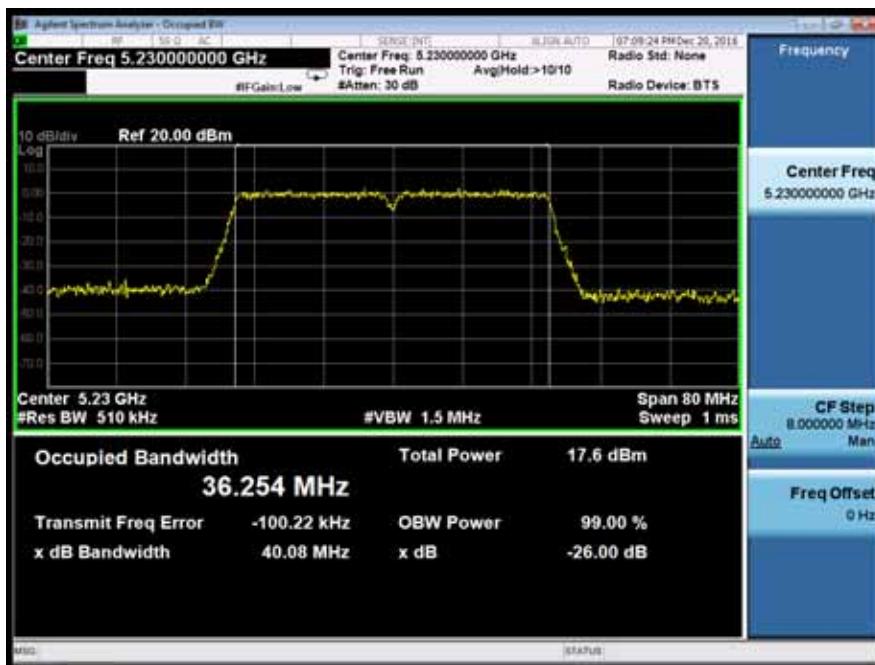


Emission Bandwidth&99% Occupied Bandwidth | UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5755

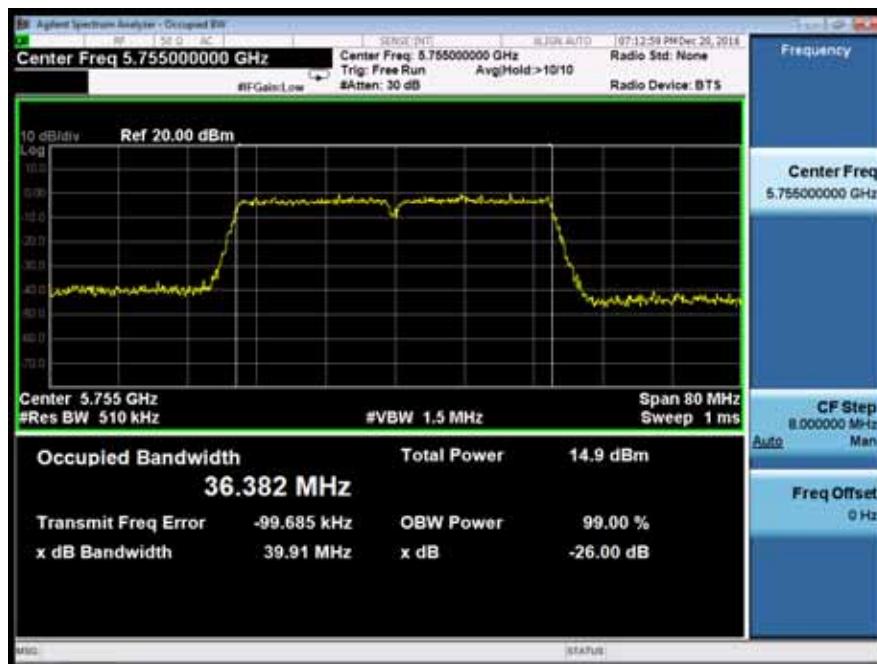


Emission Bandwidth&99% Occupied Bandwidth | UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5795

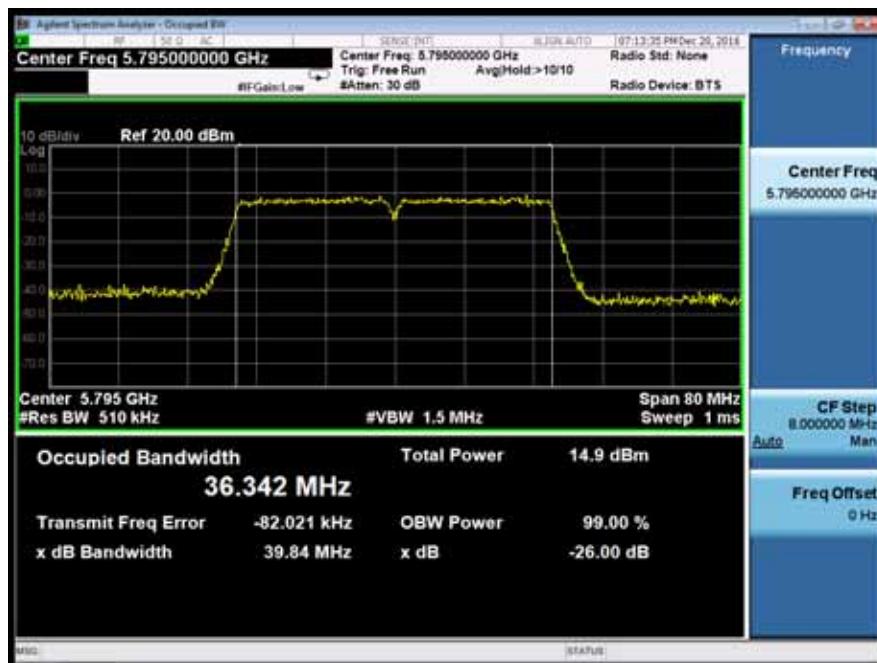


Emission Bandwidth&99% Occupied Bandwidth | UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5190

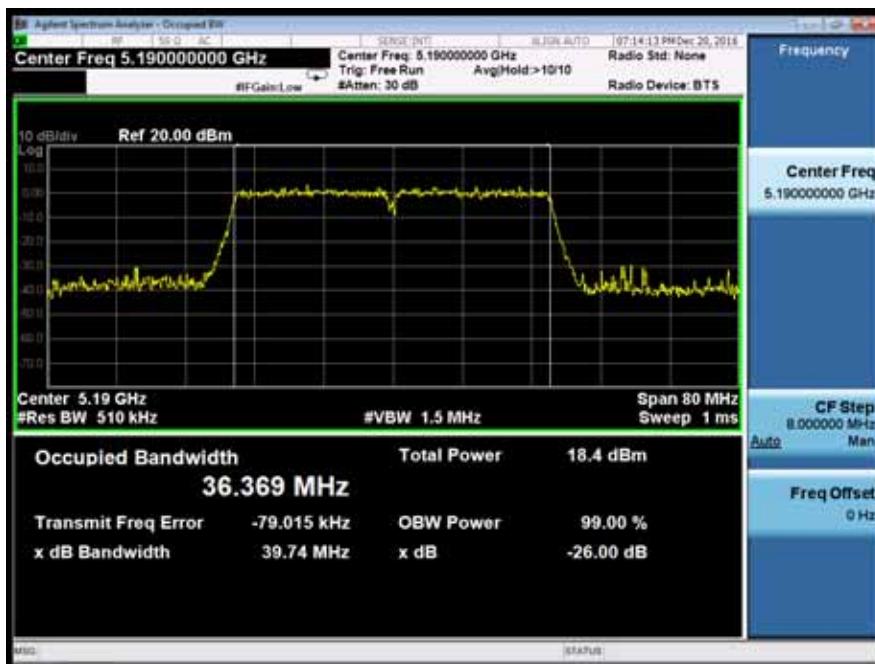


Emission Bandwidth&99% Occupied Bandwidth | UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5230

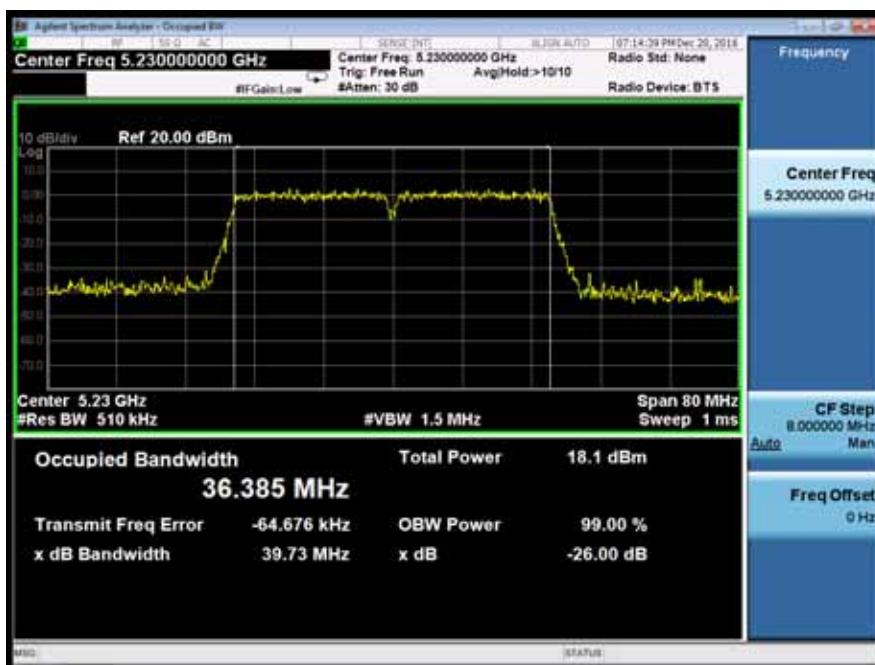


Emission Bandwidth&99% Occupied Bandwidth | UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5755

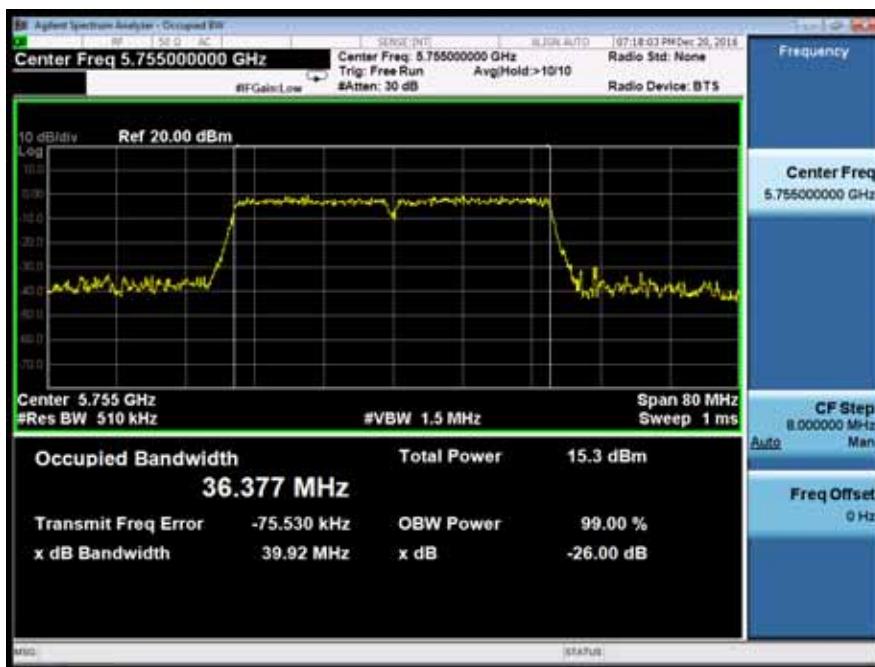


Emission Bandwidth&99% Occupied Bandwidth | UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5795

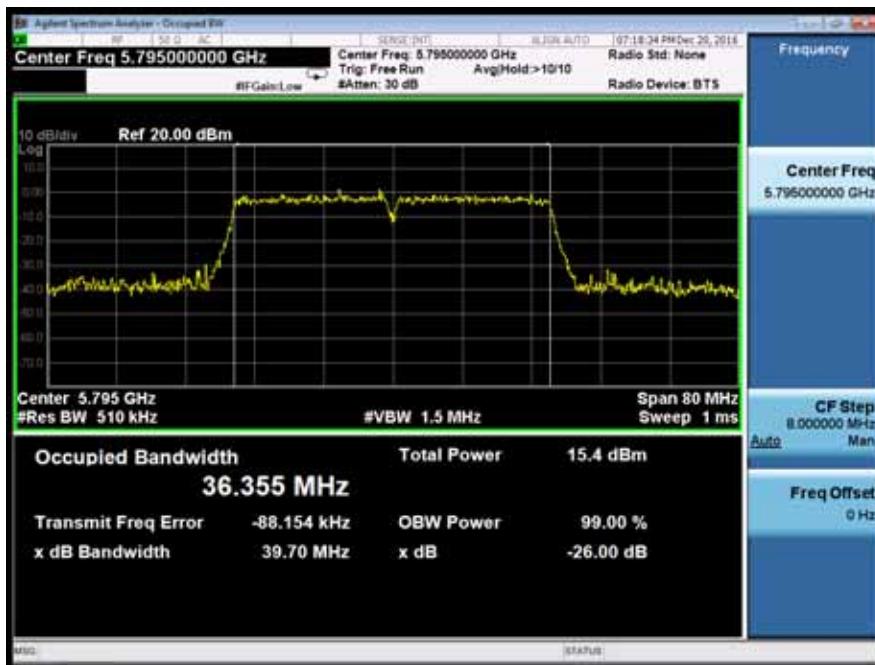

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5210

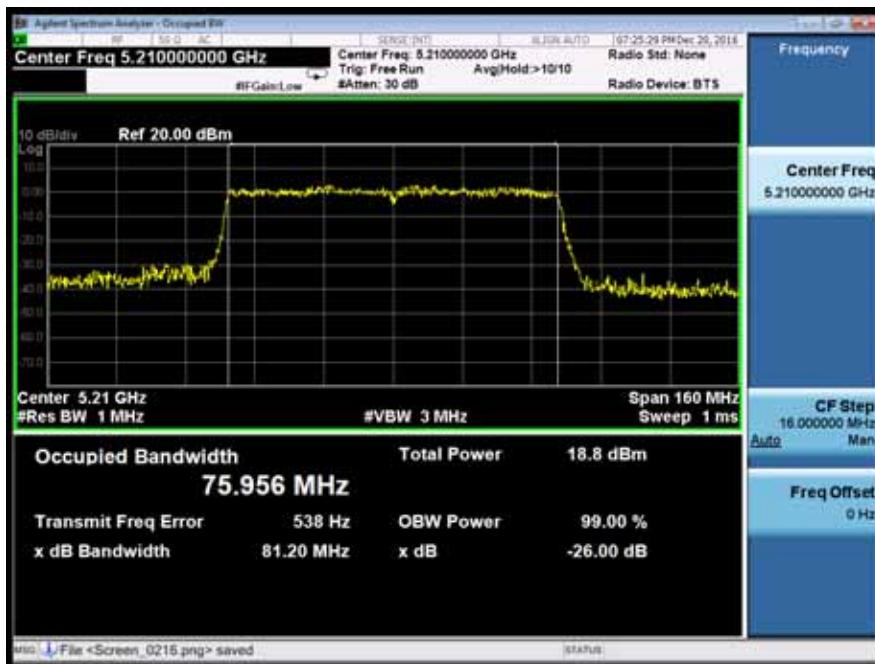

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5775

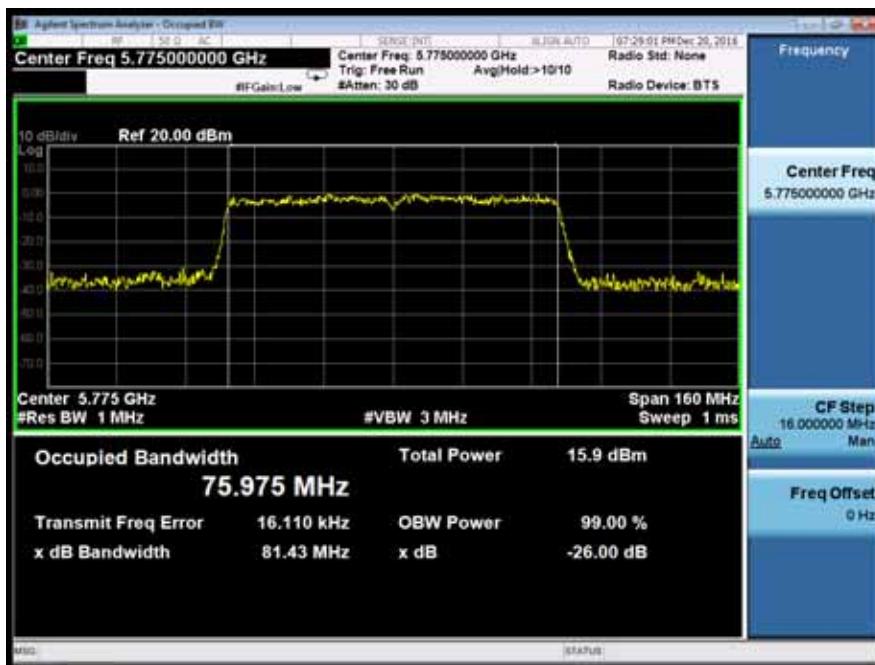


Minimum Emission Bandwidth Test Model 802.11a mode

UNII Band III
Frequency(MHz) | 5745



Minimum Emission Bandwidth Test Model 802.11a mode

UNII Band III
Frequency(MHz) 5785

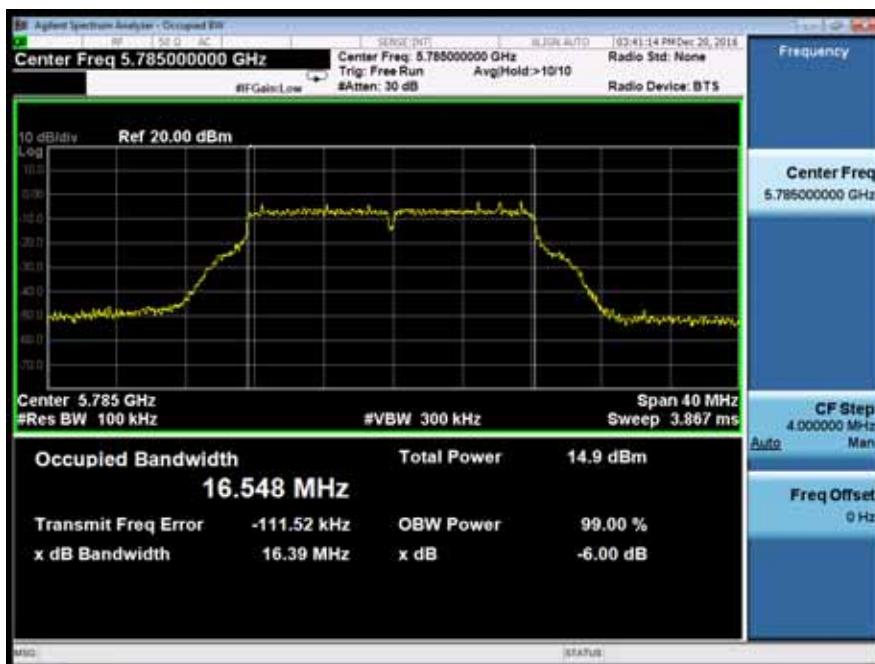

Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz) 5825




Minimum Emission Bandwidth
Test Model 802.11n(VHT20) mode


UNII Band III
Frequency(MHz) 5745



Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5785

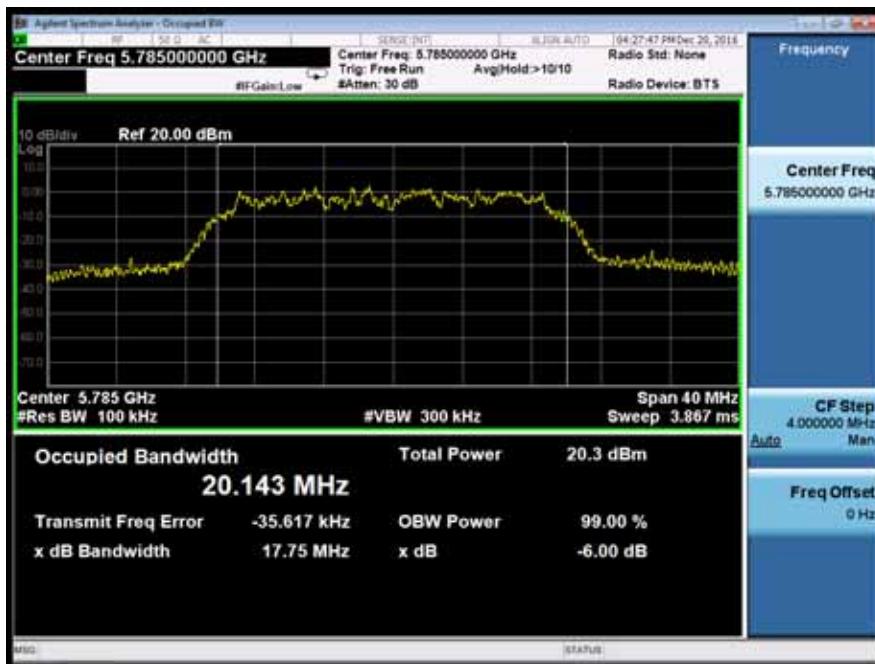

Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5825

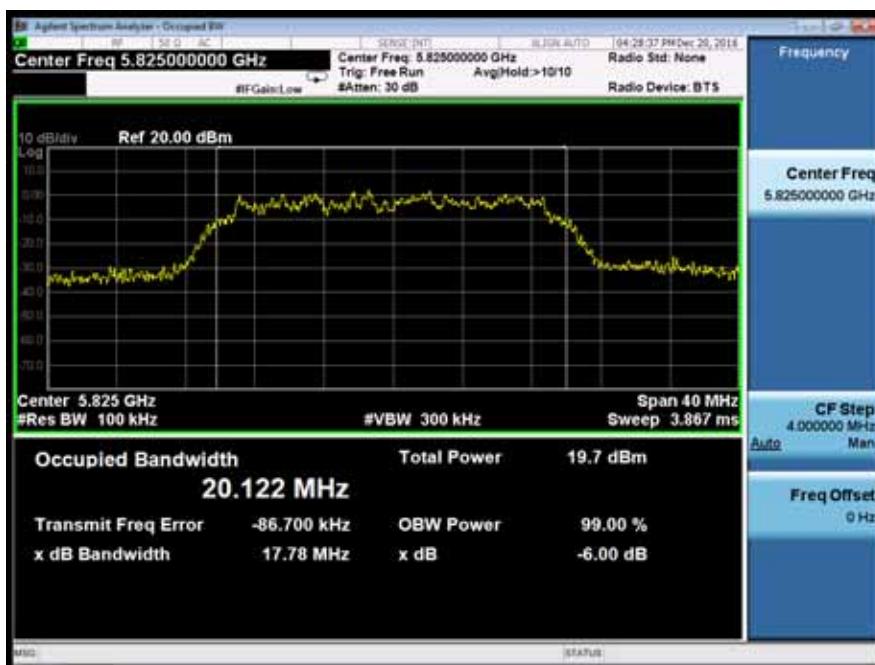

Minimum Emission Bandwidth	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5745




Minimum Emission Bandwidth	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5785




Minimum Emission Bandwidth	UNII Band III
Test Model 802.11ac(VHT20) mode	Frequency(MHz) 5825




Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz)

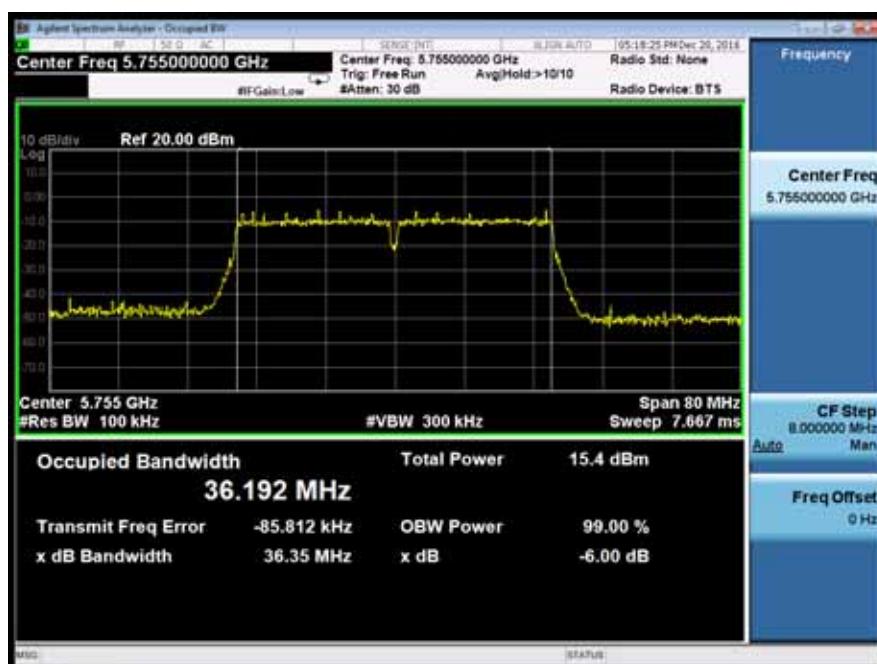


Minimum Emission Bandwidth	UNII Band III
Test Model	Frequency(MHz)
802.11n(VHT40) mode	5795

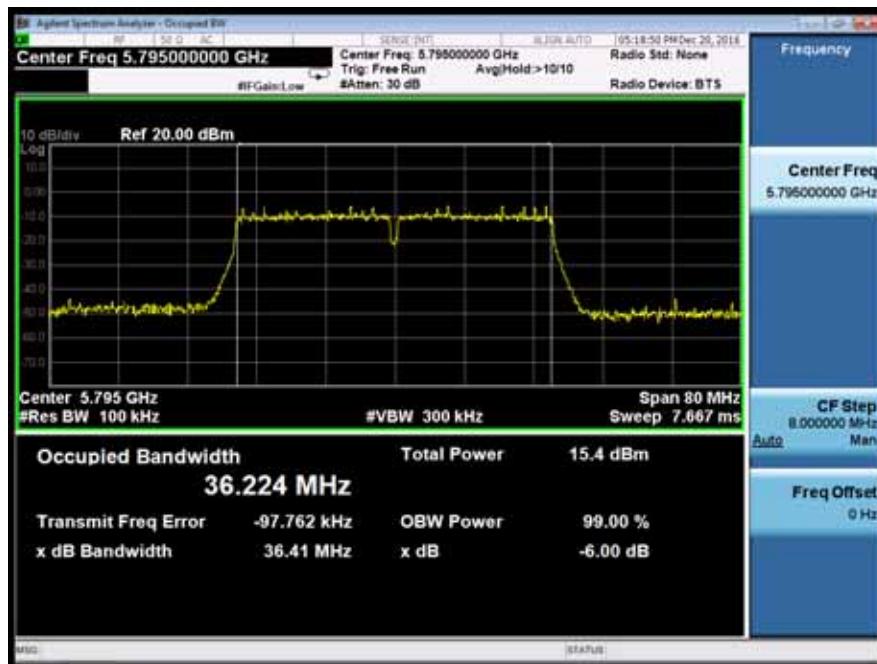


Minimum Emission Bandwidth	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT40) mode	5755

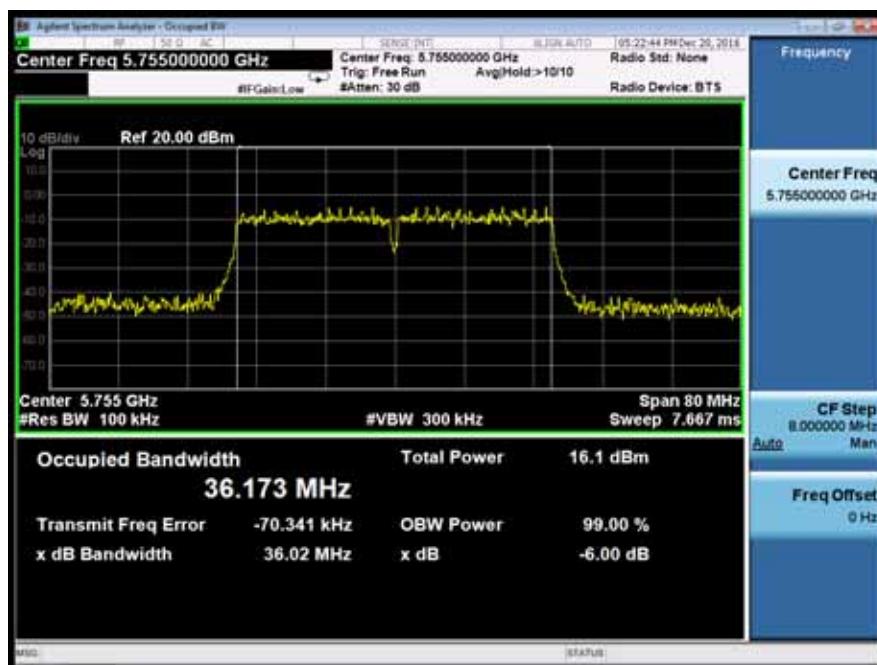

Minimum Emission Bandwidth | UNII Band III
Test Model 802.11ac(VHT40) mode | Frequency(MHz) | 5795

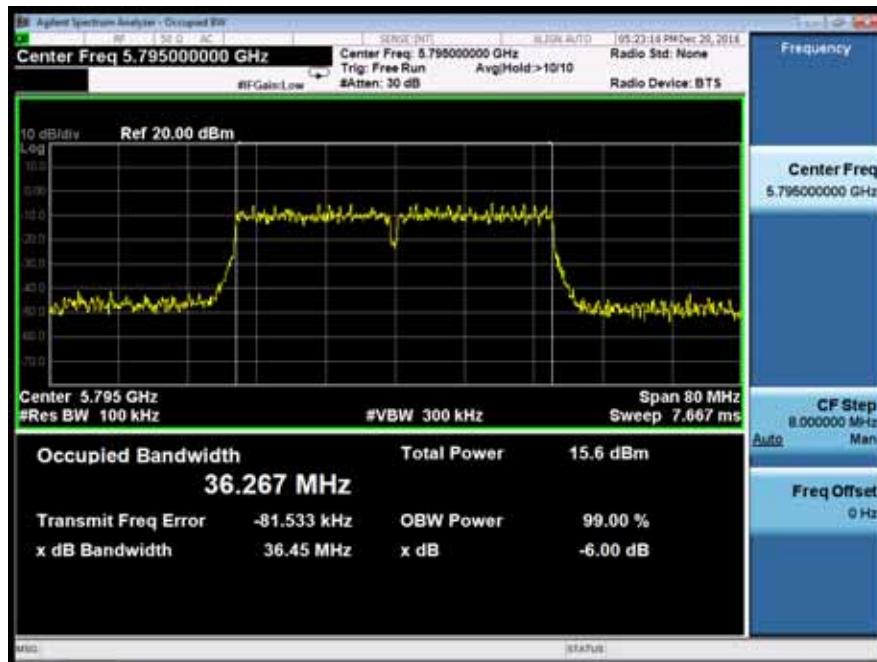

Minimum Emission Bandwidth | UNII Band III
Test Model 802.11ac(VHT80) mode | Frequency(MHz) | 5775

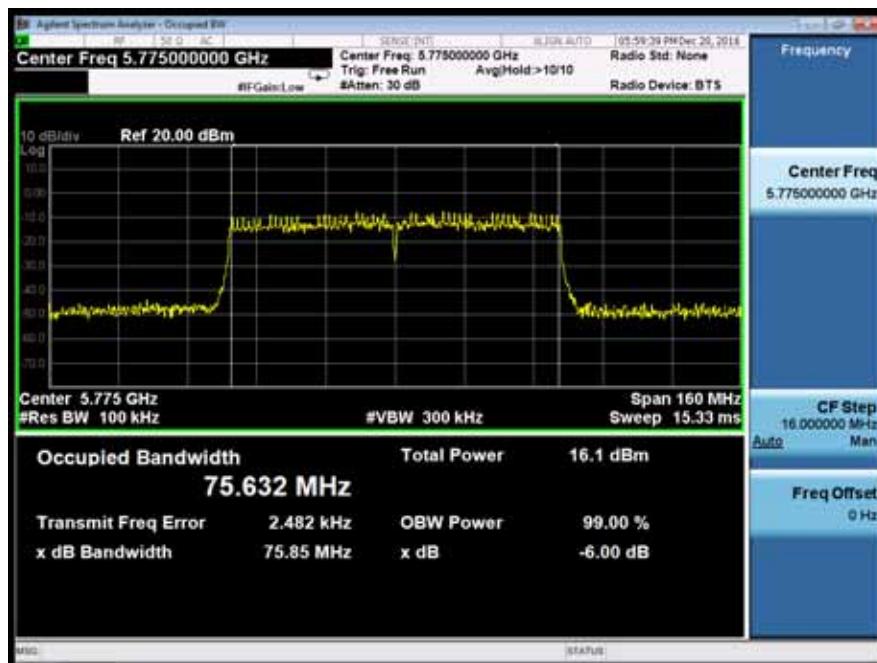

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

			☒ 802.11a mode				
Temperature : 28		Test Date : December 21, 2016		Test By: King Kong			
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	11.59	11.44	11.44	20.31	Pass
	CH40	5200	11.48	11.62	11.62	20.31	Pass
	CH48	5240	11.52	11.28	11.28	20.31	Pass
UNII Band III	CH149	5745	8.79	8.90	8.90	27.86	Pass
	CH157	5785	9.08	8.93	8.93	27.86	Pass
	CH165	5825	7.89	8.01	8.01	27.86	Pass
Note: N/A (Not Applicable)							

			☒ 802.11n(VHT20) mode				
Temperature : 28		Test Date : December 21, 2016		Test By: King Kong			
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	15.16	15.44	18.31	20.31	Pass
	CH40	5200	15.08	15.01	18.06	20.31	Pass
	CH48	5240	15.06	15.20	18.14	20.31	Pass
UNII Band III	CH149	5745	14.10	14.27	17.20	27.86	Pass
	CH157	5785	14.40	14.43	17.43	27.86	Pass
	CH165	5825	13.24	13.62	16.44	27.86	Pass
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11ac(VHT20) mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict	
UNII Band I	CH36	5180	Ant0 11.91	Ant1 11.88	Ant0+1 14.91	20.31 Pass
	CH40	5200	Ant0 11.87	Ant1 11.89	Ant0+1 14.89	20.31 Pass
	CH48	5240	Ant0 11.59	Ant1 11.60	Ant0+1 14.61	20.31 Pass
UNII Band III	CH149	5745	Ant0 9.67	Ant1 10.01	Ant0+1 12.85	27.86 Pass
	CH157	5785	Ant0 10.01	Ant1 10.30	Ant0+1 13.17	27.86 Pass
	CH165	5825	Ant0 8.60	Ant1 9.42	Ant0+1 12.04	27.86 Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT40) mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict	
UNII Band I	CH38	5190	Ant0 7.21	Ant1 8.01	Ant0+1 10.64	20.31 Pass
	CH46	5230	Ant0 7.18	Ant1 7.56	Ant0+1 10.38	20.31 Pass
UNII Band III	CH151	5755	Ant0 4.85	Ant1 4.96	Ant0+1 7.92	27.86 Pass
	CH159	5795	Ant0 4.49	Ant1 4.55	Ant0+1 7.53	27.86 Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11ac(VHT40) mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (MHz)	Verdict	
UNII Band I	CH38	5190	Ant0 11.50	Ant1 11.49	Ant0+1 14.51	20.31 Pass
	CH46	5230	Ant0 11.42	Ant1 11.62	Ant0+1 14.53	20.31 Pass
UNII Band III	CH151	5755	Ant0 9.04	Ant1 9.05	Ant0+1 12.06	27.86 Pass
	CH159	5795	Ant0 8.75	Ant1 8.95	Ant0+1 11.86	27.86 Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11ac(VHT80) mode						
Temperature : 28		Test Date : December 21, 2016				
Humidity : 65 %		Test By: King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict	
UNII Band I	CH42	5210	Ant0 6.96	Ant1 7.01	Ant0+1 10.00	20.31 Pass
	CH155	5775	Ant0 4.66	Ant1 4.48	Ant0+1 7.58	27.86 Pass
Note: N/A (Not Applicable)						

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power....".

2) Use the peak search function on the instrument to find the peak of the spectrum.

3) The result is the PPSD.

4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth

Note: As a practical matter, it is recommended to use reduced RBW of 500 kHz for the sections 5.c) and 5.d) above, since RBW=500 kHz is available on nearly all spectrum analyzers.

8.3.5 Test Results

			<input checked="" type="checkbox"/> 802.11a mode			
Temperature :		28	Test Date :		December 21, 2016	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density		Limit	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	-1.108	-1.138	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
	CH40	5200	-0.950	-1.057	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
	CH48	5240	-0.843	-0.868	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
UNII Band III	CH149	5745	-7.406	-7.111	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass
	CH157	5785	-7.197	-7.250	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass
	CH165	5825	-6.856	-7.474	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass
Note: N/A (Not Applicable)						

			<input checked="" type="checkbox"/> 802.11n(VHT20) mode			
Temperature :		28	Test Date :		December 21, 2016	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit
			Ant0	Ant1	Ant0+1	
UNII Band I	CH36	5180	-3.428	-3.544	-0.48	$\leq 7.31\text{dBm}/1\text{MHz}$
	CH40	5200	-3.699	-3.834	-0.76	$\leq 7.31\text{dBm}/1\text{MHz}$
	CH48	5240	-3.307	-3.053	-0.17	$\leq 7.31\text{dBm}/1\text{MHz}$
UNII Band III	CH149	5745	-7.229	-7.355	-4.28	$\leq 27.86\text{dBm}/500\text{KHz}$
	CH157	5785	-7.211	-7.302	-4.25	$\leq 27.86\text{dBm}/500\text{KHz}$
	CH165	5825	-7.769	-7.989	-4.87	$\leq 27.86\text{dBm}/500\text{KHz}$
Note: N/A (Not Applicable)						

			☒ 802.11ac(VHT20) mode		
Temperature :	28	Test Date :		December 21, 2016	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	-6.472	-6.916	-3.68	≤7.31dBm/1MHz	Pass
	CH40	5200	-6.333	-7.091	-3.69	≤7.31dBm/1MHz	Pass
	CH48	5240	-6.618	-7.085	-3.83	≤7.31dBm/1MHz	Pass
UNII Band III	CH149	5745	-11.477	-11.716	-8.58	≤27.86dBm/500KHz	Pass
	CH157	5785	-11.889	-11.476	-8.67	≤27.86dBm/500KHz	Pass
	CH165	5825	-12.118	-13.150	-9.59	≤27.86dBm/500KHz	Pass

Note:
N/A (Not Applicable)

			☒ 802.11n(VHT40) mode		
Temperature :	28	Test Date :		December 21, 2016	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	-4.696	-4.343	-1.51	≤7.31dBm/1MHz	Pass
	CH46	5230	-4.073	-4.699	-1.36	≤7.31dBm/1MHz	Pass
UNII Band III	CH151	5755	-10.701	-10.589	-7.63	≤27.86dBm/500KHz	Pass
	CH159	5795	-9.956	-10.893	-7.39	≤27.86dBm/500KHz	Pass

Note:
N/A (Not Applicable)

			<input checked="" type="checkbox"/> 802.11ac(VHT40) mode		
Temperature :	28	Test Date :		December 21, 2016	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	-8.954	-7.826	-5.34	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
	CH46	5230	-8.266	-8.027	-5.13	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
UNII Band III	CH151	5755	-13.291	-13.005	-10.14	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass
	CH159	5795	-13.211	-12.943	-10.06	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass

Note:
N/A (Not Applicable)


			<input checked="" type="checkbox"/> 802.11ac(VHT80) mode		
Temperature :	28	Test Date :		December 21, 2016	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	-11.817	-12.119	-8.96	$\leq 7.31\text{dBm}/1\text{MHz}$	Pass
	UNII Band III	CH155	-16.688	-18.088	-14.32	$\leq 27.86\text{dBm}/500\text{KHz}$	Pass


Note:
N/A (Not Applicable)

Power Spectral Density
Test Model 802.11a
Ant0

UNII Band I
Frequency(MHz) 5180

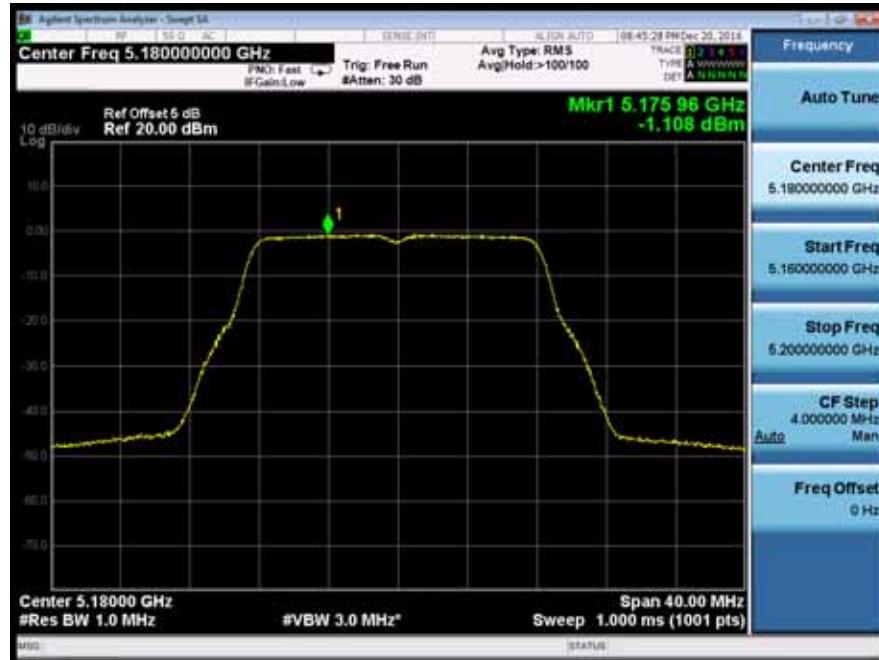


Ant1

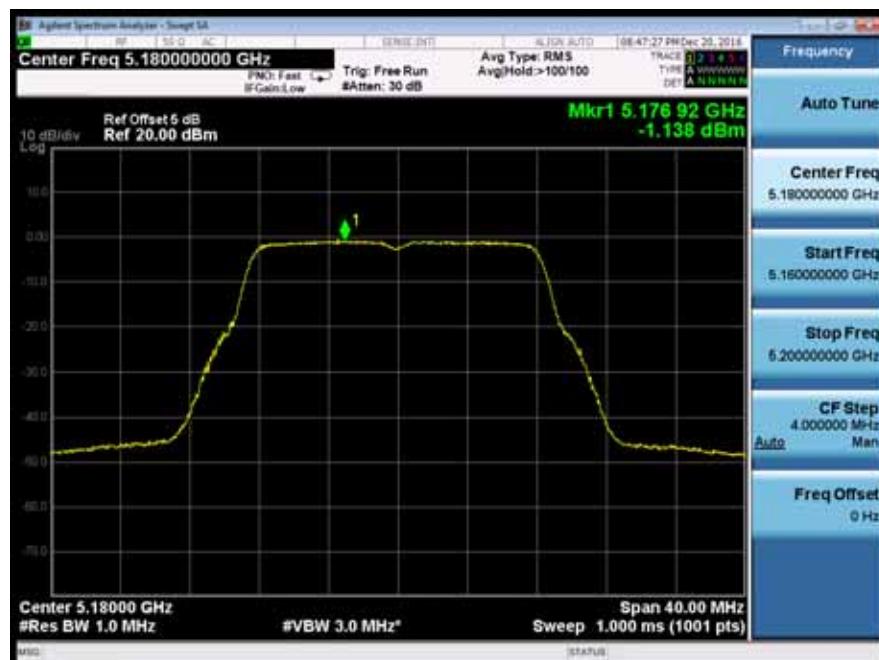

Power Spectral Density
Test Model 802.11a
Ant0

UNII Band I
Frequency(MHz) 5200

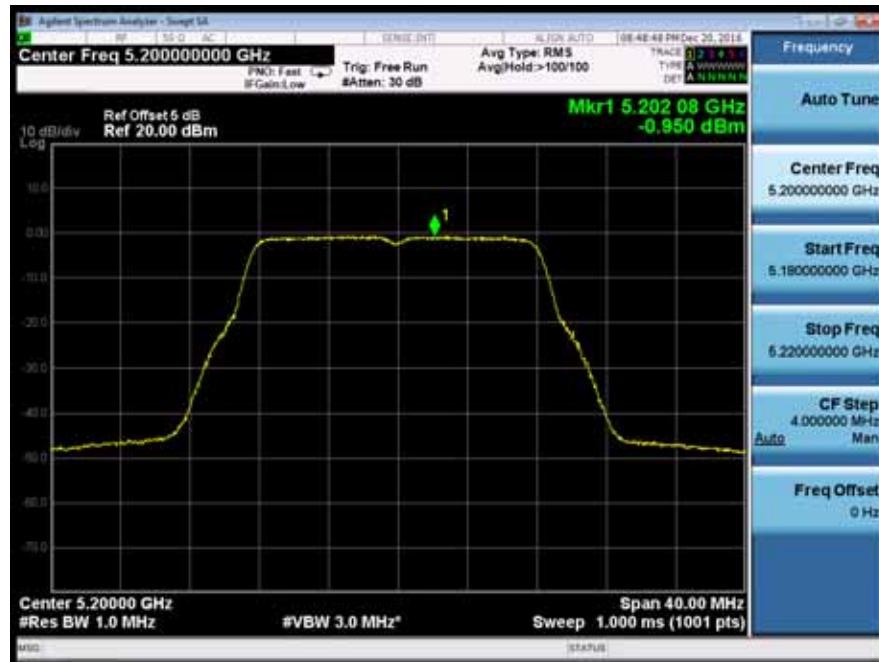

Ant1




Power Spectral Density
Test Model 802.11a
Ant0

UNII Band I
Frequency(MHz) 5240




Ant1

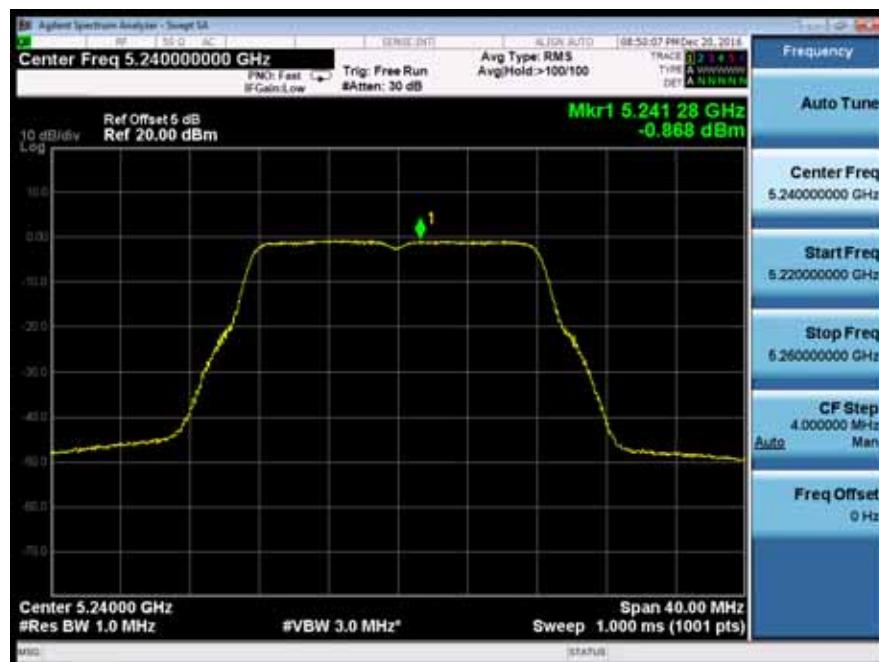


Power Spectral Density
Test Model 802.11a
Ant0

UNII Band III
Frequency(MHz) 5745

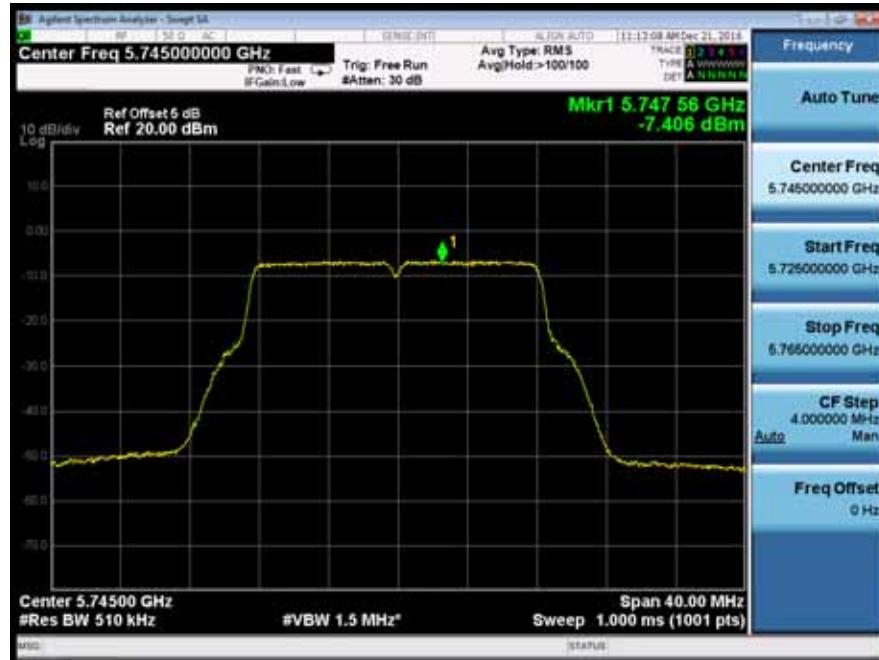


Ant1

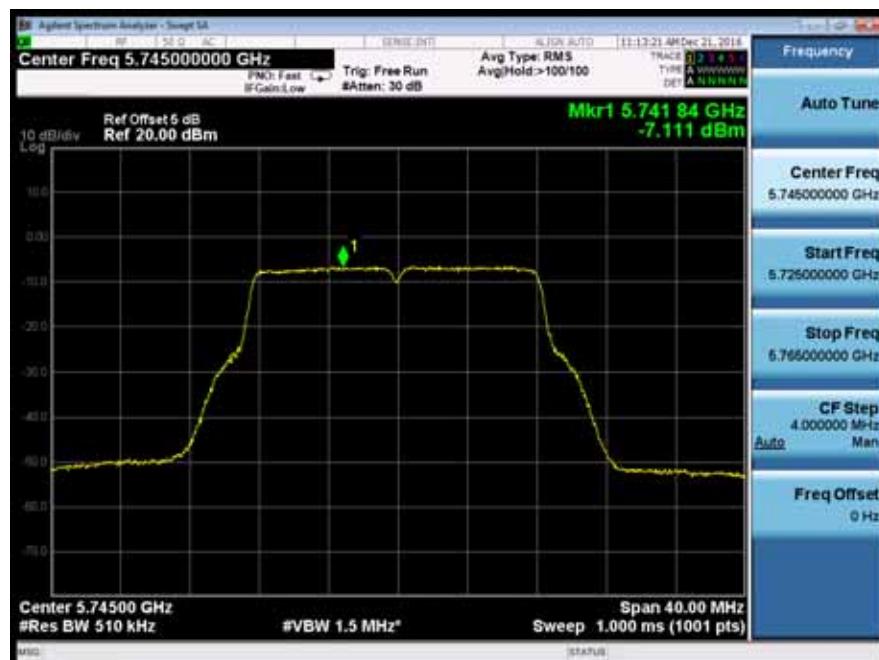


Power Spectral Density
Test Model 802.11a
Ant0

UNII Band III
Frequency(MHz) 5785

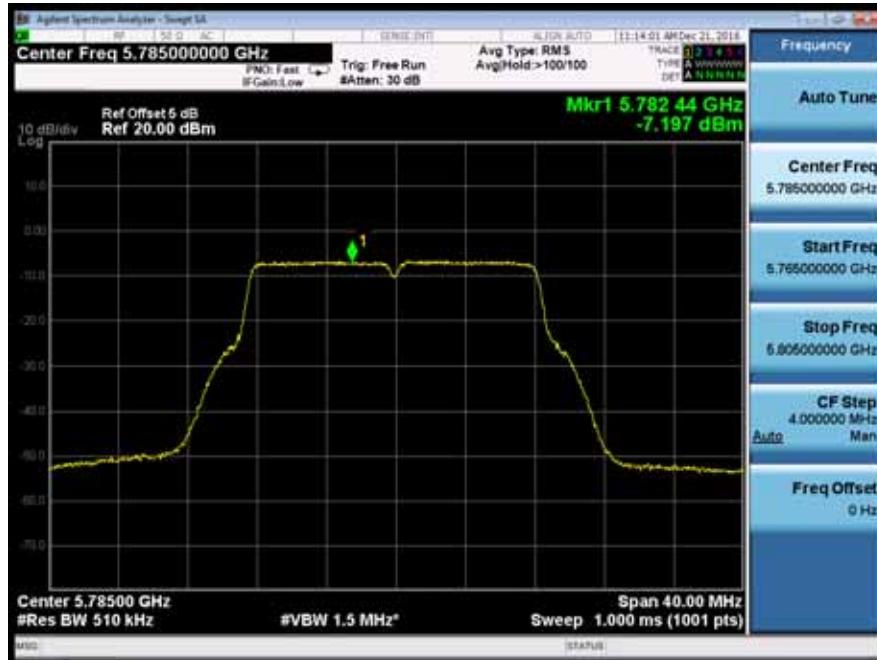

Ant1

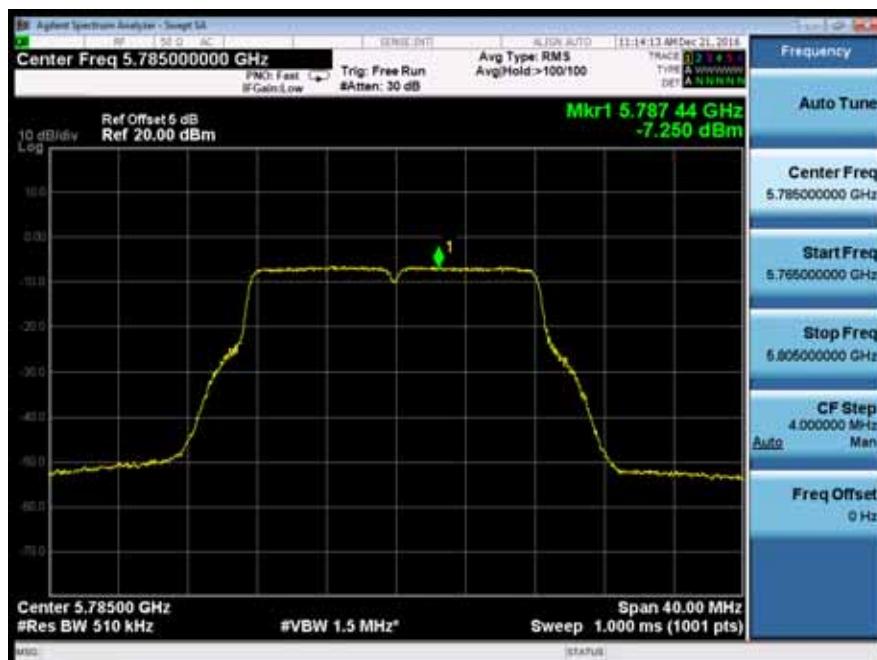

Power Spectral Density
Test Model 802.11a
Ant0


UNII Band III
Frequency(MHz) 5825



Ant1



Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz)
Ant0	5180

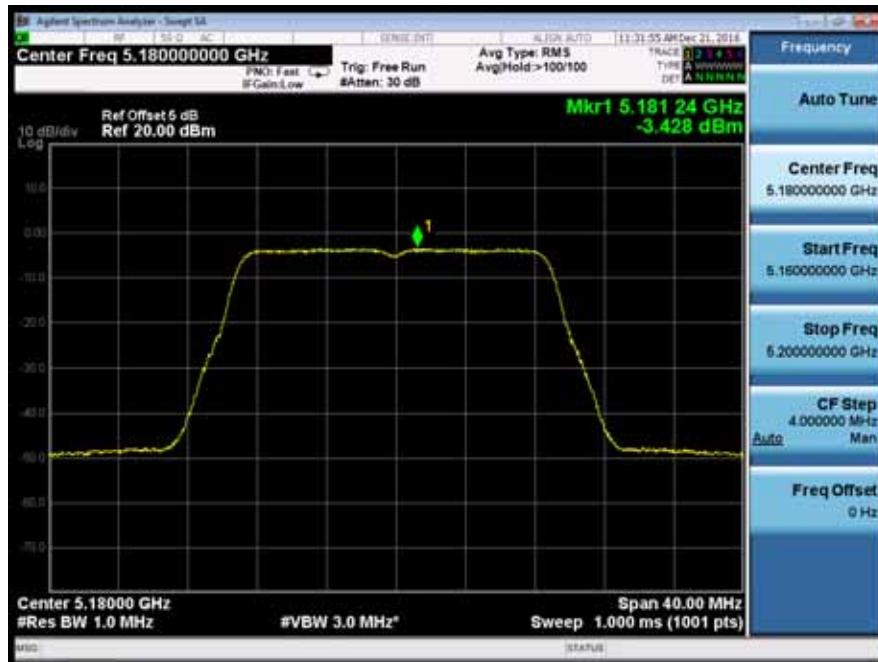

Ant1



Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5200
Ant0	




Ant1




Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5240
Ant0	



Ant1

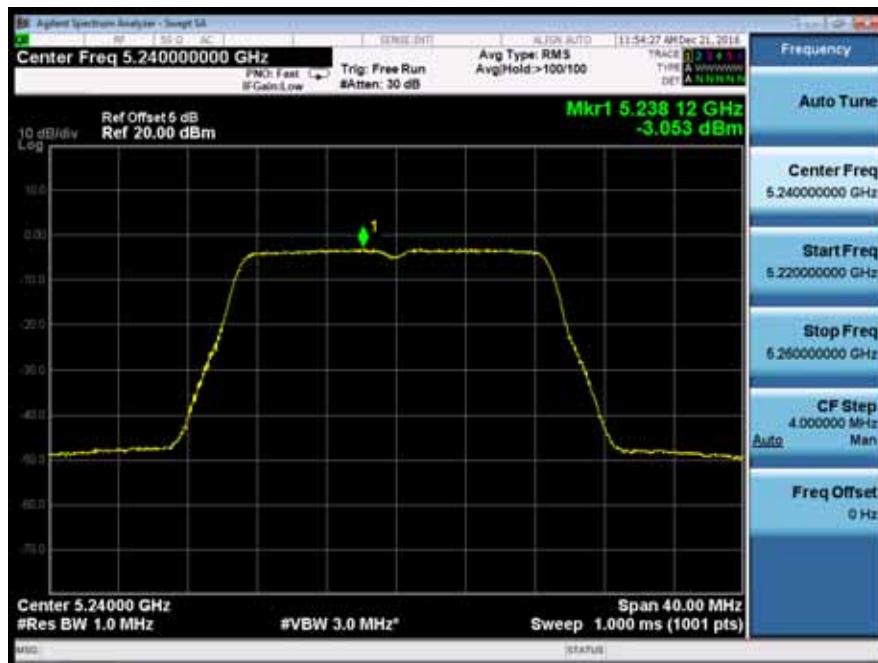

Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5745
Ant0	

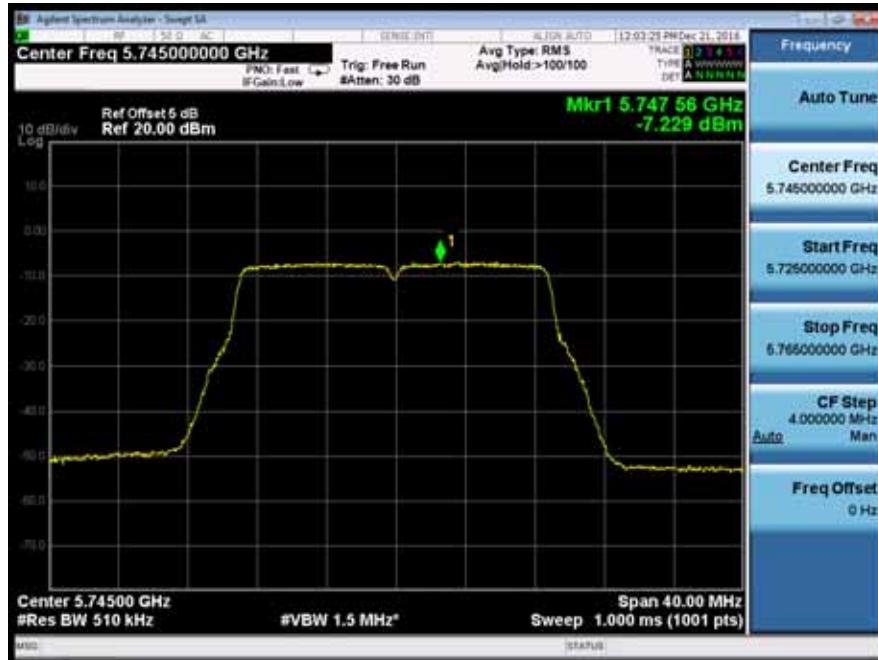


Ant1




Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5785
Ant0	



Ant1

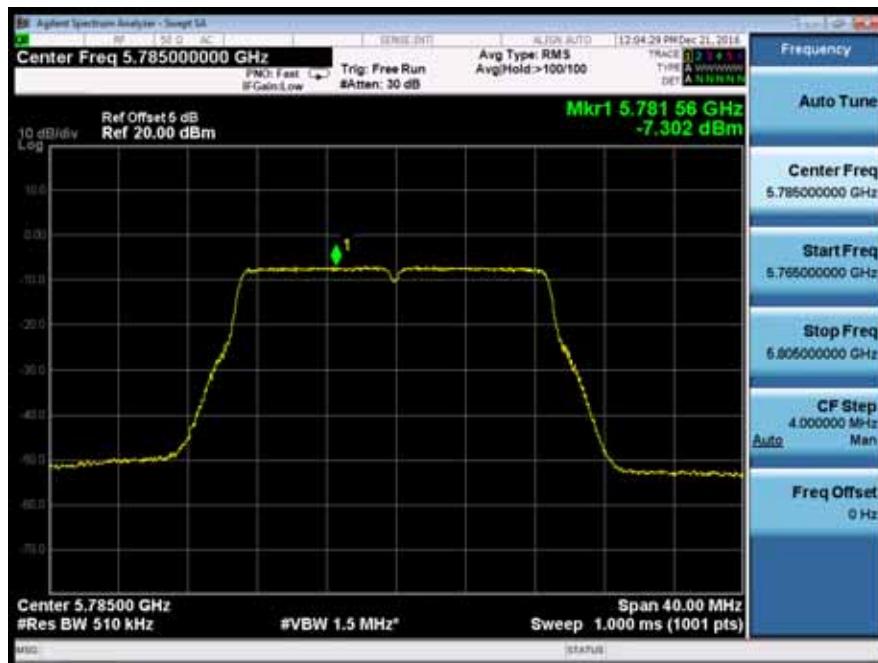


Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5825
Ant0	

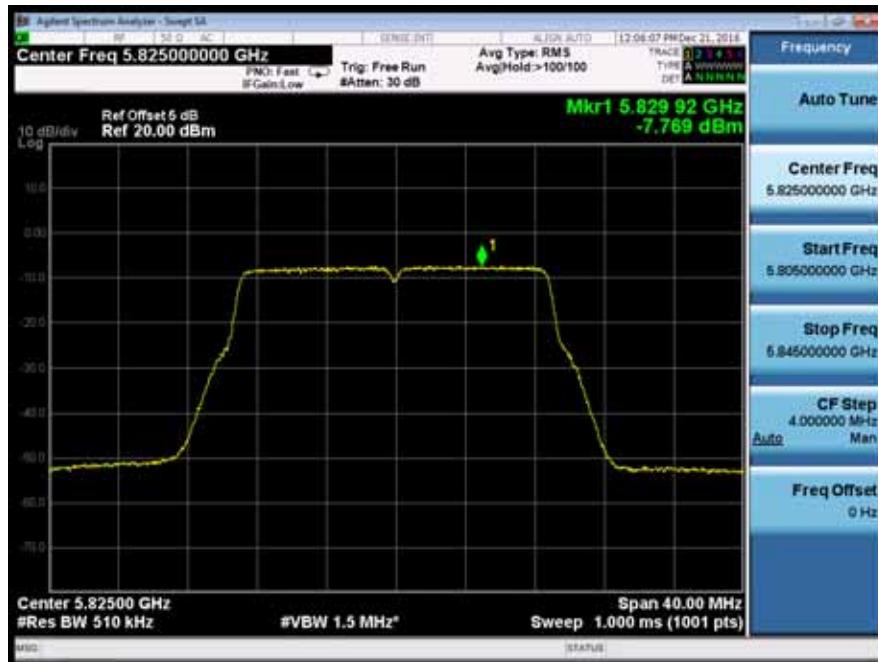

Ant1



Power Spectral Density	UNII Band I
Test Model 802.11ac(VHT20) mode	Frequency(MHz)
Ant0	5180

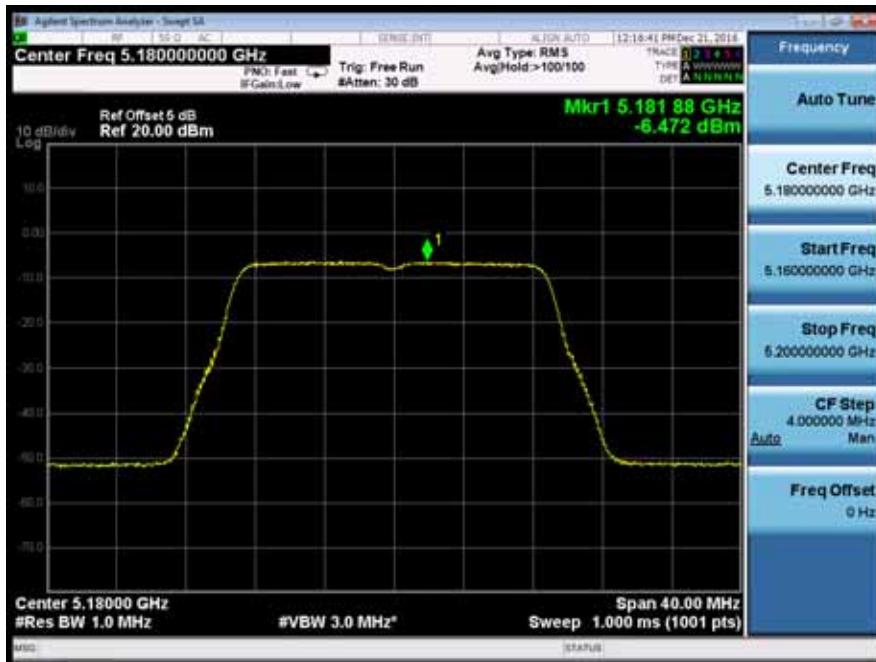

Ant1




Power Spectral Density	UNII Band I
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5200
Ant0	



Ant1



Power Spectral Density	UNII Band I
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5240
Ant0	

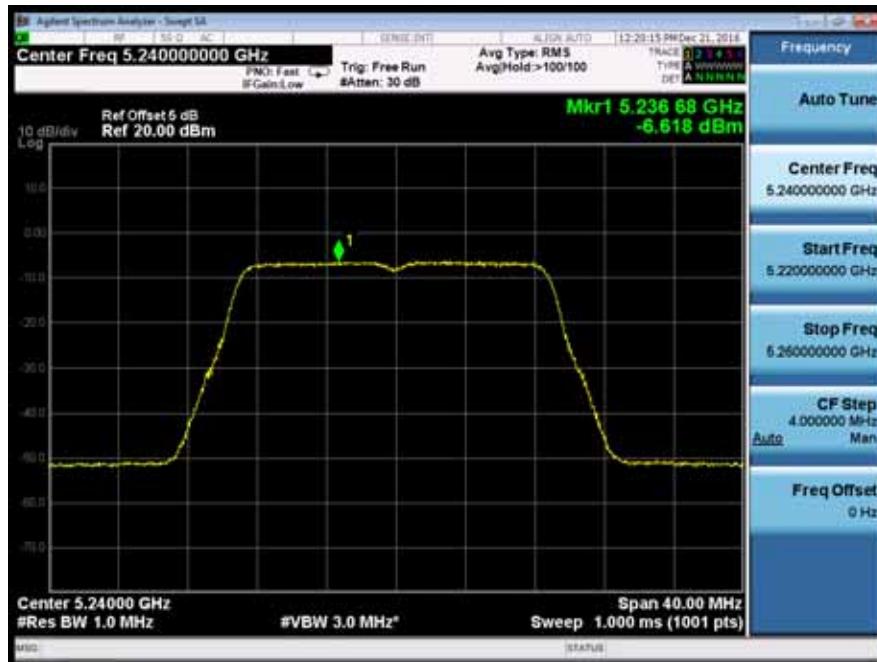

Ant1



Power Spectral Density	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5745
Ant0	



Ant1




Power Spectral Density	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5785
Ant0	




Ant1



Power Spectral Density	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT20) mode	5825
Ant0	

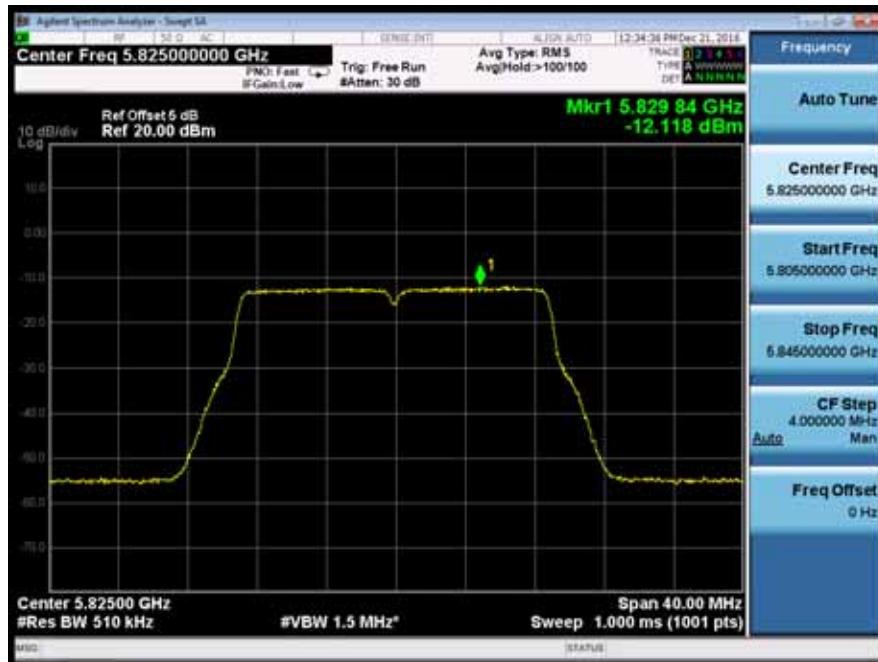

Ant1

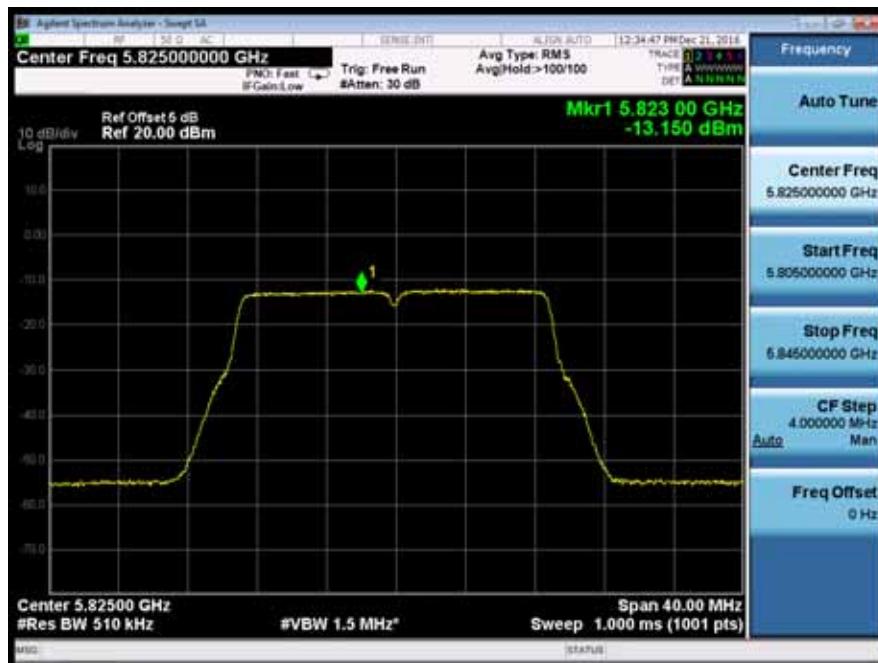


Power Spectral Density	UNII Band I
Test Model 802.11n(VHT40) mode	Frequency(MHz)
Ant0	5190




Ant1




Power Spectral Density	UNII Band I
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5230
Ant0	

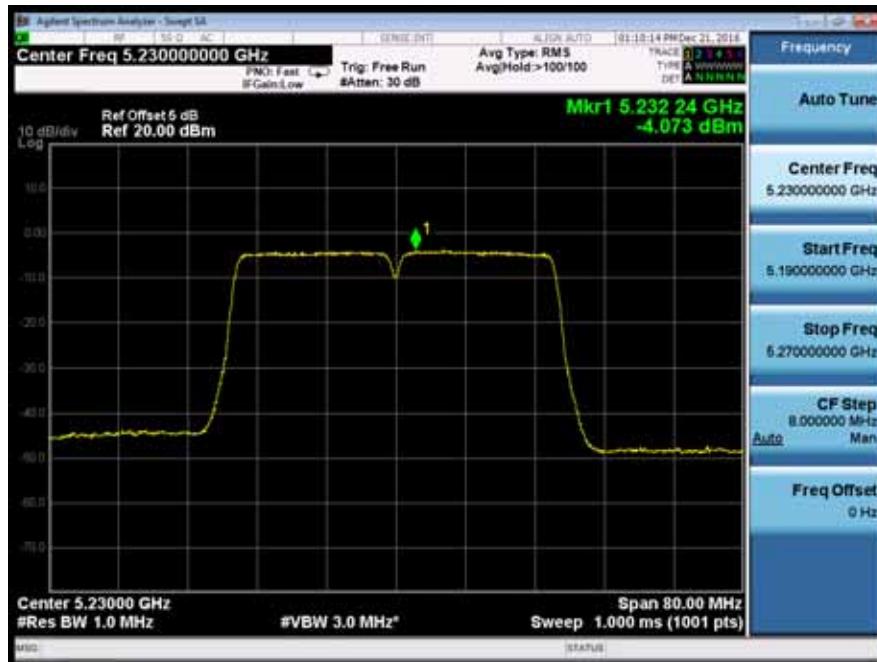


Ant1

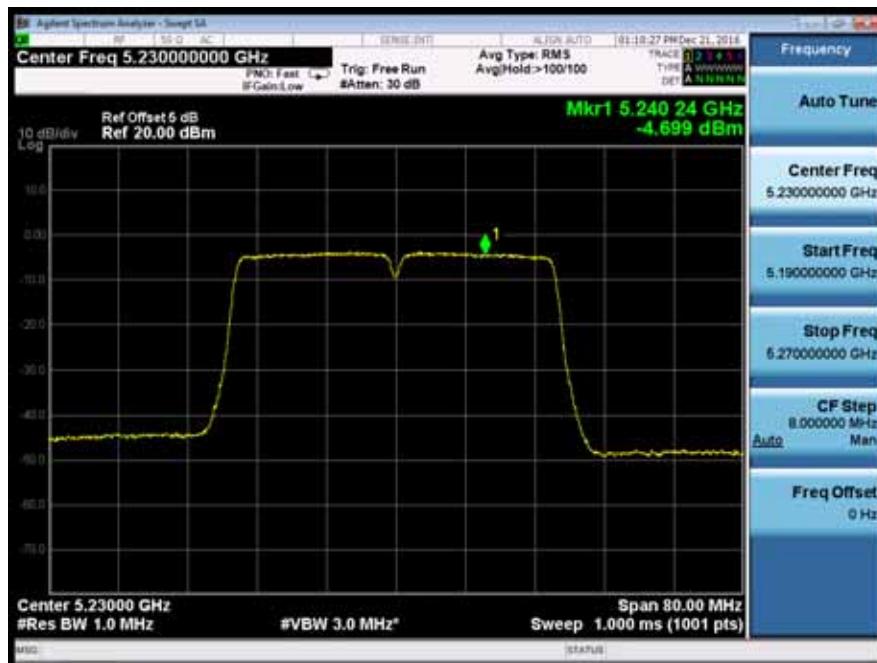


Power Spectral Density	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5755
Ant0	

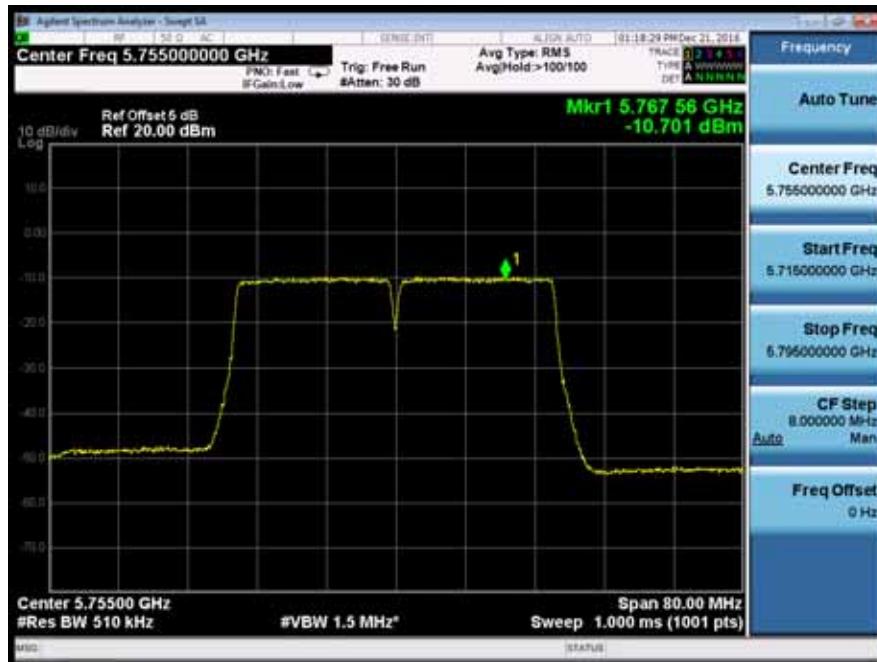

Ant1

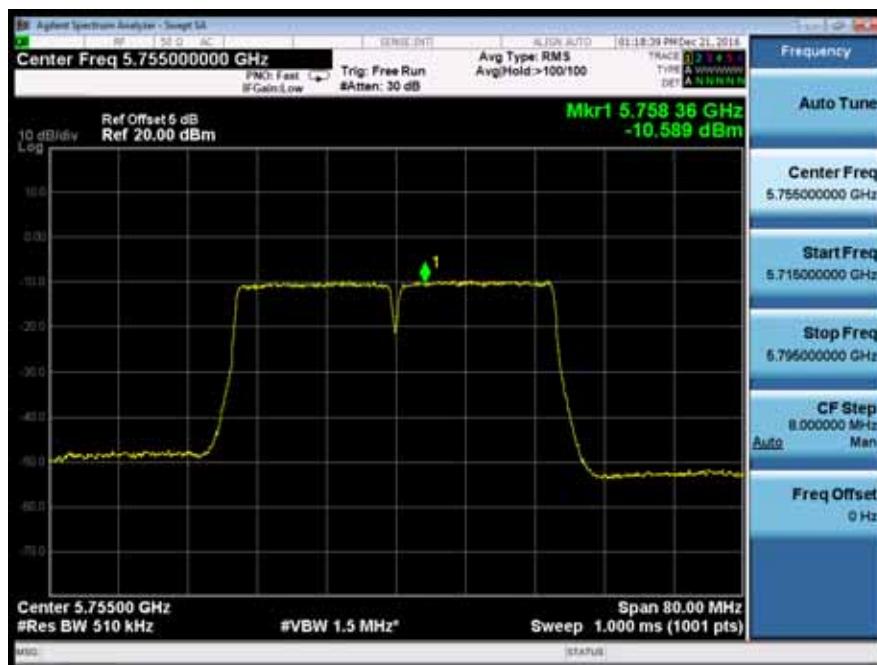


Power Spectral Density	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5795
Ant0	

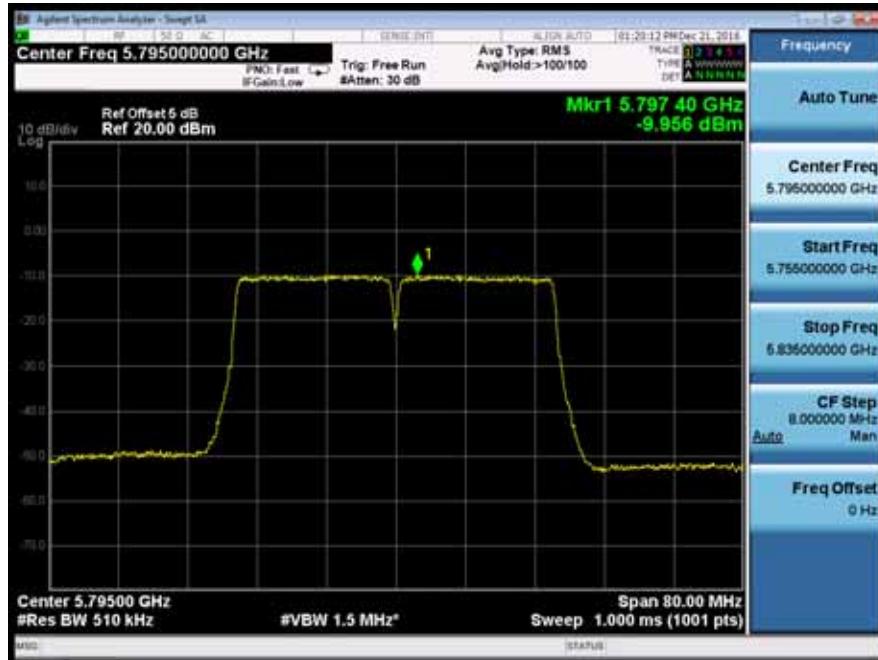


Ant1



Power Spectral Density	UNII Band I
Test Model	Frequency(MHz)
802.11ac(VHT40) mode	5190
Ant0	

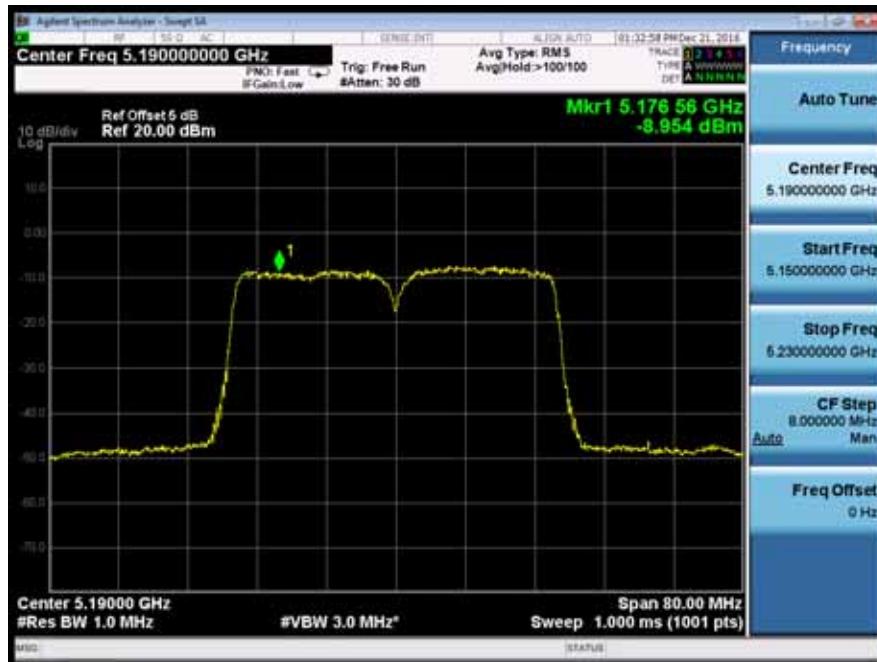

Ant1

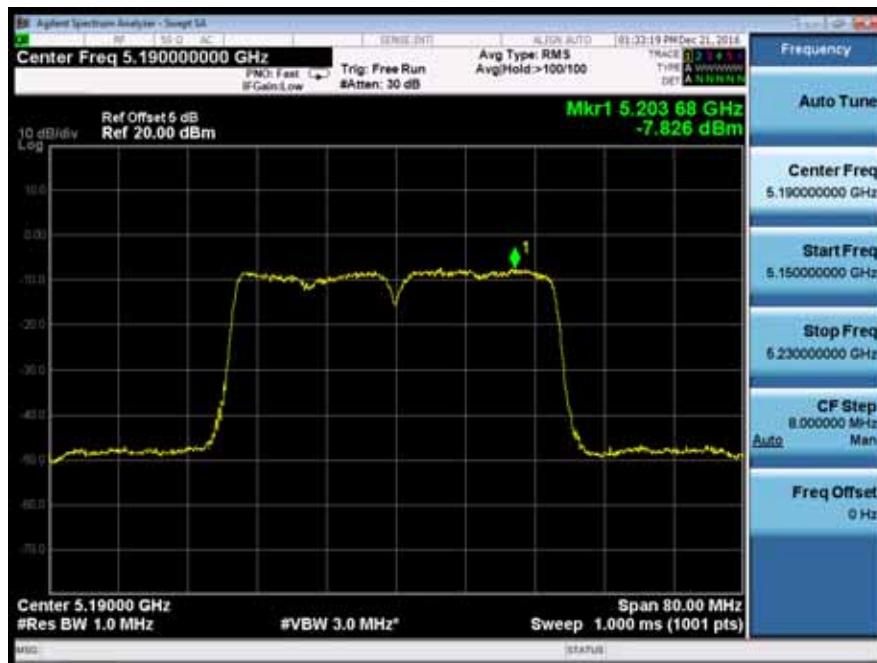


Power Spectral Density	UNII Band I
Test Model	Frequency(MHz)
802.11ac(VHT40) mode	5230
Ant0	




Ant1




Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT40) mode	Frequency(MHz)
Ant0	5755

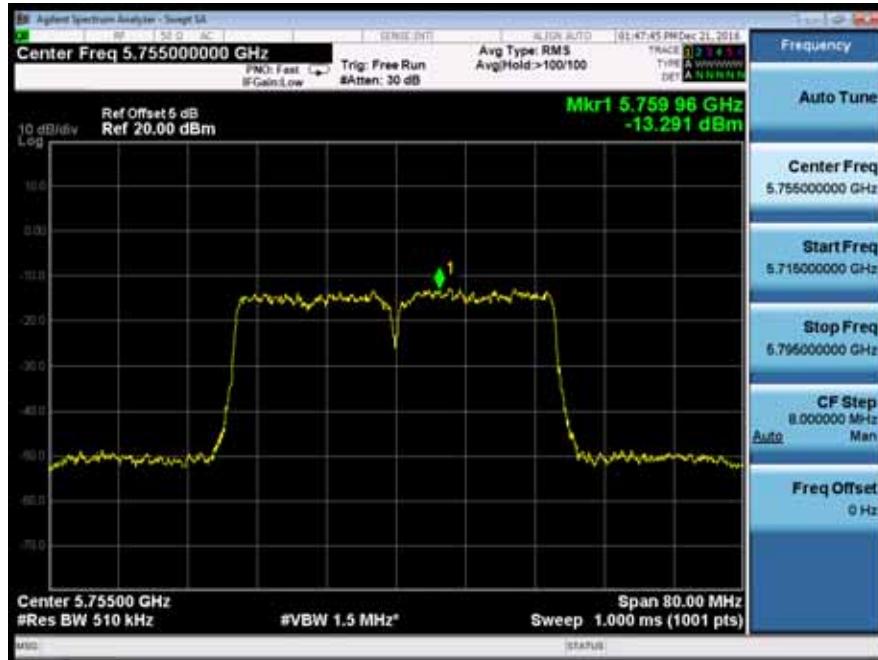

Ant1

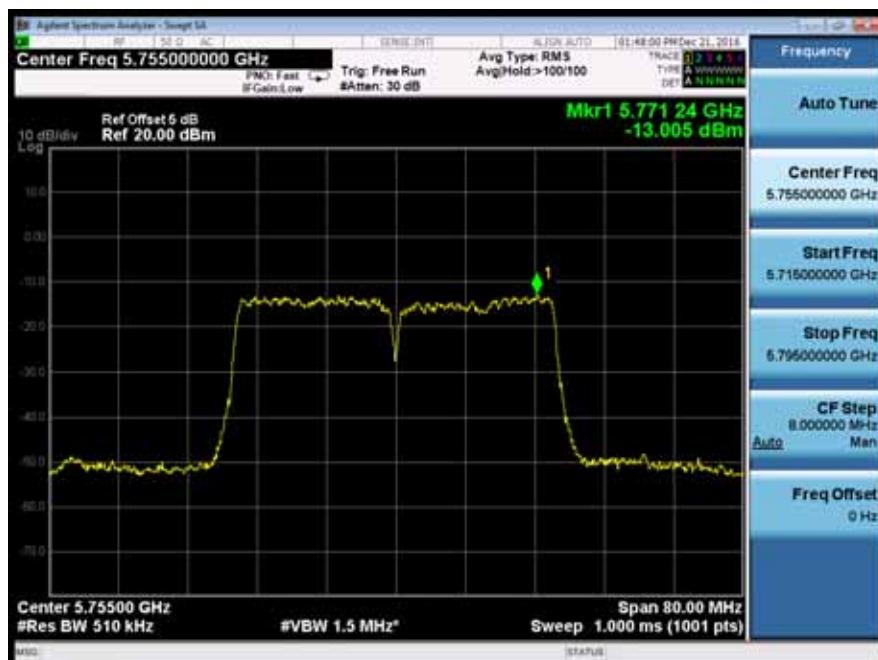

Power Spectral Density	UNII Band III
Test Model	Frequency(MHz)
802.11ac(VHT40) mode	5795
Ant0	

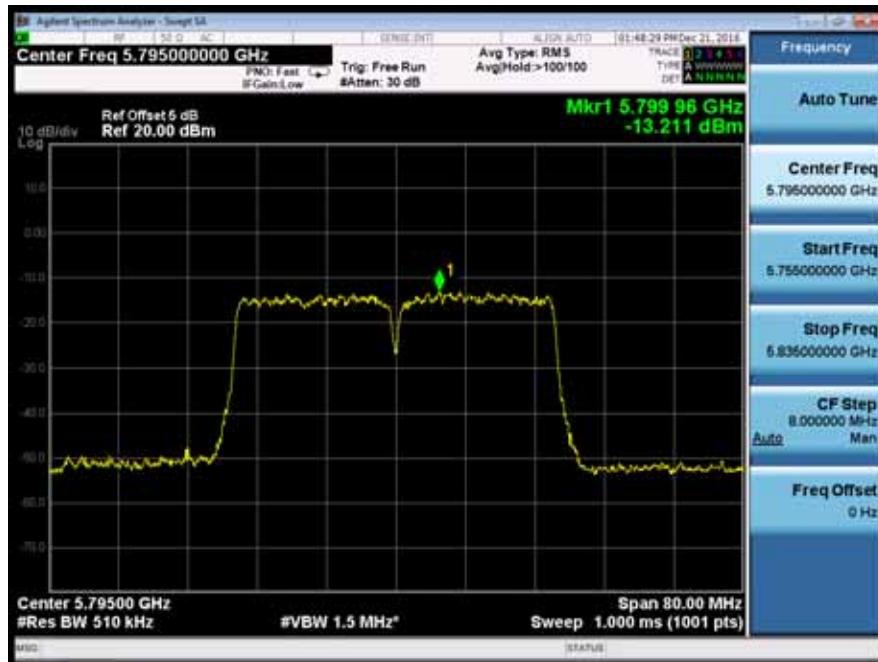

Ant1



Power Spectral Density	UNII Band I
Test Model	Frequency(MHz)
802.11ac(VHT80) mode	5210
Ant0	



Ant1



Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT80) mode	Frequency(MHz) 5775
Ant0	



Ant1



8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)

ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set the video bandwidth (VBW) =30 kHz.

Set Span= Entire absence of modulation emissions bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

The test data for Antenna A

802.11a mode		5180		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict	
Vnom	-20	5179.969189	-30.811	Pass	
	-10	5179.969197	-30.803	Pass	
	0	5179.969441	-30.559	Pass	
	10	5179.969545	-30.455	Pass	
	20	5179.969537	-30.463	Pass	
	30	5179.969298	-30.702	Pass	
	40	5179.969998	-30.002	Pass	
	50	5179.969587	-30.413	Pass	
	85% Vnom	20	5179.969536	-30.464	Pass
	115% Vnom	20	5179.969298	-30.702	Pass

802.11a mode		5200		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict	
Vnom	-20	5199.961073	-38.927	Pass	
	-10	5199.961433	-38.567	Pass	
	0	5199.961594	-38.406	Pass	
	10	5199.961551	-38.449	Pass	
	20	5200.038748	38.748	Pass	
	30	5199.961536	-38.464	Pass	
	40	5199.961865	-38.135	Pass	
	50	5199.961727	-38.273	Pass	
	85% Vnom	20	5199.961098	-38.902	Pass
	115% Vnom	20	5199.961060	-38.940	Pass

802.11a mode		5240		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict	
Vnom	-20	5239.977920	-22.080	Pass	
	-10	5239.977915	-22.085	Pass	
	0	5239.977618	-22.382	Pass	
	10	5239.977864	-22.136	Pass	
	20	5239.977658	-22.342	Pass	
	30	5239.977608	-22.392	Pass	
	40	5239.977298	-22.702	Pass	
	50	5239.977998	-22.002	Pass	
	85% Vnom	20	5239.977722	-22.278	Pass
	115% Vnom	20	5239.977618	-22.382	Pass

802.11a mode		5745		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.986224	-13.776	Pass
	-10	5744.986171	-13.829	Pass
	0	5744.986552	-13.448	Pass
	10	5744.986101	-13.899	Pass
	20	5744.986297	-13.703	Pass
	30	5744.986171	-13.829	Pass
	40	5744.986060	-13.940	Pass
	50	5744.986531	-13.469	Pass
	85% Vnom	20	5744.986600	-13.400
115% Vnom	20	5744.986062	-13.938	Pass

802.11a mode		5785		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.991175	-8.825	Pass
	-10	5784.991867	-8.133	Pass
	0	5784.991755	-8.245	Pass
	10	5784.991298	-8.702	Pass
	20	5784.991398	-8.602	Pass
	30	5784.991867	-8.133	Pass
	40	5784.991331	-8.669	Pass
	50	5784.991860	-8.140	Pass
	85% Vnom	20	5784.991887	-8.113
115% Vnom	20	5784.991863	-8.137	Pass

802.11a mode		5825		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.982608	-17.392	Pass
	-10	5824.982471	-17.529	Pass
	0	5824.982861	-17.139	Pass
	10	5824.982474	-17.526	Pass
	20	5824.982771	-17.229	Pass
	30	5824.982532	-17.468	Pass
	40	5824.982478	-17.522	Pass
	50	5824.982914	-17.086	Pass
	85% Vnom	20	5824.983008	-16.992
115% Vnom	20	5824.982968	-17.032	Pass

802.11n(VHT20) mode		5180		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5180.001142	1.142	Pass
	-10	5180.001142	1.142	Pass
	0	5180.001148	1.148	Pass
	10	5180.001170	1.170	Pass
	20	5180.001179	1.179	Pass
	30	5180.001549	1.549	Pass
	40	5180.001588	1.588	Pass
	50	5180.001549	1.549	Pass
	85% Vnom	20	5180.001548	1.548
115% Vnom	20	5180.001605	1.605	Pass

802.11n(VHT20) mode		5200		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.975995	-24.005	Pass
	-10	5199.975659	-24.341	Pass
	0	5199.975474	-24.526	Pass
	10	5199.975841	-24.159	Pass
	20	5199.975302	-24.698	Pass
	30	5199.975481	-24.519	Pass
	40	5199.975203	-24.797	Pass
	50	5199.975863	-24.137	Pass
	85% Vnom	20	5199.975171	-24.829
115% Vnom	20	5199.976008	-23.992	Pass

802.11n(VHT20) mode		5240		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.981967	-18.033	Pass
	-10	5239.981567	-18.433	Pass
	0	5239.981573	-18.427	Pass
	10	5239.981571	-18.429	Pass
	20	5239.981802	-18.198	Pass
	30	5239.981513	-18.487	Pass
	40	5239.981475	-18.525	Pass
	50	5239.981571	-18.429	Pass
	85% Vnom	20	5239.981878	-18.122
115% Vnom	20	5239.981482	-18.518	Pass

802.11n(VHT20) mode		5745		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.980671	-19.329	Pass
	-10	5744.980878	-19.122	Pass
	0	5744.980864	-19.136	Pass
	10	5744.980500	-19.500	Pass
	20	5744.980867	-19.133	Pass
	30	5744.980565	-19.435	Pass
	40	5744.980534	-19.466	Pass
	50	5744.980507	-19.493	Pass
	85% Vnom	20	5744.980431	-19.569
115% Vnom	20	5744.980458	-19.542	Pass

802.11n(VHT20) mode		5785		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.988785	-11.215	Pass
	-10	5784.988861	-11.139	Pass
	0	5784.988477	-11.523	Pass
	10	5784.988462	-11.538	Pass
	20	5784.988441	-11.559	Pass
	30	5784.988481	-11.519	Pass
	40	5784.988461	-11.539	Pass
	50	5784.988481	-11.519	Pass
	85% Vnom	20	5784.988180	-11.820
115% Vnom	20	5784.988509	-11.491	Pass

802.11n(VHT20) mode		5825		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.991886	-8.114	Pass
	-10	5824.991507	-8.493	Pass
	0	5824.991877	-8.123	Pass
	10	5824.991174	-8.826	Pass
	20	5824.991497	-8.503	Pass
	30	5824.991478	-8.522	Pass
	40	5824.991067	-8.933	Pass
	50	5824.991441	-8.559	Pass
	85% Vnom	20	5824.991567	-8.433
115% Vnom	20	5824.991867	-8.133	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5180

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.996369	-3.631	Pass
	-10	5179.996507	-3.493	Pass
	0	5179.996507	-3.493	Pass
	10	5179.996507	-3.493	Pass
	20	5179.996507	-3.493	Pass
	30	5179.996261	-3.739	Pass
	40	5179.996174	-3.826	Pass
	50	5179.996531	-3.469	Pass
	85% Vnom	20	5179.996507	-3.493
115% Vnom	20	5179.996669	-3.331	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5200

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.984985	-15.015	Pass
	-10	5199.984507	-15.493	Pass
	0	5199.984661	-15.339	Pass
	10	5199.984174	-15.826	Pass
	20	5199.984174	-15.826	Pass
	30	5199.984477	-15.523	Pass
	40	5199.984563	-15.437	Pass
	50	5199.984507	-15.493	Pass
	85% Vnom	20	5199.984174	-15.826
115% Vnom	20	5199.984369	-15.631	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5240

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5240.002195	2.195	Pass
	-10	5240.002569	2.569	Pass
	0	5240.002539	2.539	Pass
	10	5240.002539	2.539	Pass
	20	5240.002628	2.628	Pass
	30	5240.002079	2.079	Pass
	40	5240.002079	2.079	Pass
	50	5240.002584	2.584	Pass
	85% Vnom	20	5240.002717	2.717
115% Vnom	20	5240.002863	2.863	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5745

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.967133	-32.867	Pass
	-10	5744.967833	-32.167	Pass
	0	5744.967098	-32.902	Pass
	10	5744.967174	-32.826	Pass
	20	5744.967123	-32.877	Pass
	30	5744.967174	-32.826	Pass
	40	5744.967997	-32.003	Pass
	50	5744.967174	-32.826	Pass
	85% Vnom	20	5744.967238	-32.762
115% Vnom	20	5744.967133	-32.867	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5785

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.994133	-5.867	Pass
	-10	5784.994534	-5.466	Pass
	0	5784.994854	-5.146	Pass
	10	5784.994787	-5.213	Pass
	20	5784.994859	-5.141	Pass
	30	5784.994918	-5.082	Pass
	40	5784.994957	-5.043	Pass
	50	5784.994525	-5.475	Pass
	85% Vnom	20	5784.994392	-5.608
115% Vnom	20	5784.994899	-5.101	Pass

802.11ac(VHT20) mode

Temperature : --
Humidity : 65 %

5825

Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.987460	-12.540	Pass
	-10	5824.987965	-12.035	Pass
	0	5824.987658	-12.342	Pass
	10	5824.987761	-12.239	Pass
	20	5824.987654	-12.346	Pass
	30	5824.987475	-12.525	Pass
	40	5824.987998	-12.002	Pass
	50	5824.987655	-12.345	Pass
	85% Vnom	20	5824.987412	-12.588
115% Vnom	20	5824.987474	-12.526	Pass

802.11n(VHT40) mode		5190		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict	
Vnom	-20	5189.975117	-24.883	Pass	
	-10	5189.976000	-24.000	Pass	
	0	5189.975992	-24.008	Pass	
	10	5189.975954	-24.046	Pass	
	20	5189.975383	-24.617	Pass	
	30	5189.975663	-24.337	Pass	
	40	5189.975708	-24.292	Pass	
	50	5189.975658	-24.342	Pass	
	85% Vnom	20	5189.975861	-24.139	Pass
	115% Vnom	20	5189.975531	-24.469	Pass

802.11n(VHT40) mode		5230		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict	
Vnom	-20	5229.972374	-27.626	Pass	
	-10	5229.972717	-27.283	Pass	
	0	5229.972622	-27.378	Pass	
	10	5229.972617	-27.383	Pass	
	20	5229.972787	-27.213	Pass	
	30	5229.972903	-27.097	Pass	
	40	5229.972398	-27.602	Pass	
	50	5229.972460	-27.540	Pass	
	85% Vnom	20	5229.972878	-27.122	Pass
	115% Vnom	20	5229.972864	-27.136	Pass

802.11n(VHT40) mode		5755		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.994754	-5.246	Pass
	-10	5754.994854	-5.146	Pass
	0	5754.994863	-5.137	Pass
	10	5754.994658	-5.342	Pass
	20	5754.994870	-5.130	Pass
	30	5754.994534	-5.466	Pass
	40	5754.994898	-5.102	Pass
	50	5754.994788	-5.212	Pass
	85% Vnom	20	5754.994898	-5.102
115% Vnom	20	5754.994873	-5.127	Pass

802.11n(VHT40) mode		5795		
Temperature :	--	Test Date :	December 21, 2016	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.985750	-14.250	Pass
	-10	5794.985754	-14.246	Pass
	0	5794.985666	-14.334	Pass
	10	5794.985865	-14.135	Pass
	20	5794.985875	-14.125	Pass
	30	5794.985967	-14.033	Pass
	40	5794.985478	-14.522	Pass
	50	5794.985442	-14.558	Pass
	85% Vnom	20	5794.985918	-14.082
115% Vnom	20	5794.985998	-14.002	Pass

802.11ac(VHT40) mode

5190

Temperature : --

Test Date :

December 21, 2016

Humidity : 65 %

Test By:

King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.981015	-18.985	Pass
	-10	5189.980673	-19.327	Pass
	0	5189.980560	-19.440	Pass
	10	5189.980873	-19.127	Pass
	20	5189.980867	-19.133	Pass
	30	5189.980887	-19.113	Pass
	40	5189.980267	-19.733	Pass
	50	5189.980871	-19.129	Pass
	85% Vnom	20	5189.980292	-19.708
115% Vnom	20	5189.980830	-19.170	Pass

802.11ac(VHT40) mode

5230

Temperature : --

Test Date :

December 21, 2016

Humidity : 65 %

Test By:

King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.984792	-15.208	Pass
	-10	5229.984369	-15.631	Pass
	0	5229.984864	-15.136	Pass
	10	5229.984540	-15.460	Pass
	20	5229.984573	-15.427	Pass
	30	5229.984241	-15.759	Pass
	40	5229.984871	-15.129	Pass
	50	5229.984975	-15.025	Pass
	85% Vnom	20	5229.984867	-15.133
115% Vnom	20	5229.984875	-15.125	Pass

802.11ac(VHT40) mode

5755

Temperature : --

Test Date :

December 21, 2016

Humidity : 65 %

Test By:

King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.983534	-16.466	Pass
	-10	5754.983865	-16.135	Pass
	0	5754.984588	-15.412	Pass
	10	5754.983793	-16.207	Pass
	20	5754.983665	-16.335	Pass
	30	5754.983767	-16.233	Pass
	40	5754.983270	-16.730	Pass
	50	5754.983537	-16.463	Pass
	85% Vnom	5754.983131	-16.869	Pass
115% Vnom	20	5754.983721	-16.279	Pass

802.11ac(VHT40) mode

5795

Temperature : --

Test Date :

December 21, 2016

Humidity : 65 %

Test By:

King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.974859	-25.141	Pass
	-10	5794.974873	-25.127	Pass
	0	5794.974267	-25.733	Pass
	10	5794.974865	-25.135	Pass
	20	5794.974833	-25.167	Pass
	30	5794.974378	-25.622	Pass
	40	5794.974541	-25.459	Pass
	50	5794.974921	-25.079	Pass
	85% Vnom	5794.974807	-25.193	Pass
115% Vnom	20	5794.974865	-25.135	Pass

802.11ac(VHT80) mode
Temperature : --
Humidity : 65 %

5210
Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5209.969865	-30.135	Pass
	-10	5209.969543	-30.457	Pass
	0	5209.969475	-30.525	Pass
	10	5209.969543	-30.457	Pass
	20	5209.969475	-30.525	Pass
	30	5209.969543	-30.457	Pass
	40	5209.969534	-30.466	Pass
	50	5209.969534	-30.466	Pass
	85% Vnom	20	5209.969174	-30.826
115% Vnom	20	5209.969763	-30.237	Pass

802.11ac(VHT80) mode
Temperature : --
Humidity : 65 %

5775
Test Date : December 21, 2016
Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5774.980567	-19.433	Pass
	-10	5774.980567	-19.433	Pass
	0	5774.980477	-19.523	Pass
	10	5774.980477	-19.523	Pass
	20	5774.980873	-19.127	Pass
	30	5774.980833	-19.167	Pass
	40	5774.980443	-19.557	Pass
	50	5774.980873	-19.127	Pass
	85% Vnom	20	5774.980973	-19.027
115% Vnom	20	5774.980833	-19.167	Pass

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)

According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490-1.705	2400/F(KHz)	20 log (μ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Remark: 1. Emission level in dB μ V/m=20 log (μ V/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for f < 1 GHz(30MHz to 1GHz), 200Hz for f<150KHz(9KHz to 150KHz), 9KHz for <30MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set $VBW \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

■ For Undesirable radiated Spurious Emission in UNII Band I

The voltage 120V &240V and the modes 802.11a/n/ac has been tested and the worst result (801.11n(VHT20)) recorded as below:

- ☒Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6615.58	V	56.04	-39.19	-27	-12.19
9303.99	V	61.02	-34.21	-27	-7.21
12684.57	V	64.26	-30.97	-27	-3.97
6479.49	H	56.81	-38.42	-27	-11.42
9848.02	H	61.55	-33.68	-27	-6.68
12871.5	H	62.34	-32.89	-27	-5.89

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5200

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6614.21	V	55.35	-39.88	-27	-14.73
9305.03	V	60.55	-34.68	-27	-9.53
12685.62	V	63.99	-31.24	-27	-6.09
6478.15	H	56.18	-39.05	-27	-13.9
9849.08	H	60.7	-34.53	-27	-9.38
12870.15	H	59.17	-36.06	-27	-7.21

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6612.69	V	54.83	-40.4	-27	-13.4
9306.04	V	60.07	-35.16	-27	-8.16
12684.11	V	65.15	-30.08	-27	-3.08
6476.69	H	56.03	-39.2	-27	-12.2
9850.06	H	60.65	-34.58	-27	-7.58
12868.71	H	60.57	-34.66	-27	-7.66

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dB μ V/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

- ☒Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28	Test Date :	December 21, 2016		
Humidity :	65 %	Test By:	King Kong		
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5149.25	H	49.03	-46.2	-27	Pass
5140.70	V	46.14	-49.09	-27	Pass

Temperature :	28	Test Date :	December 21, 2016		
Humidity :	65 %	Test By:	King Kong		
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240		




Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5350.50	V	46.33	-48.9	-27	Pass
5351.55	H	47.44	-47.79	-27	Pass




Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dB μ V/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

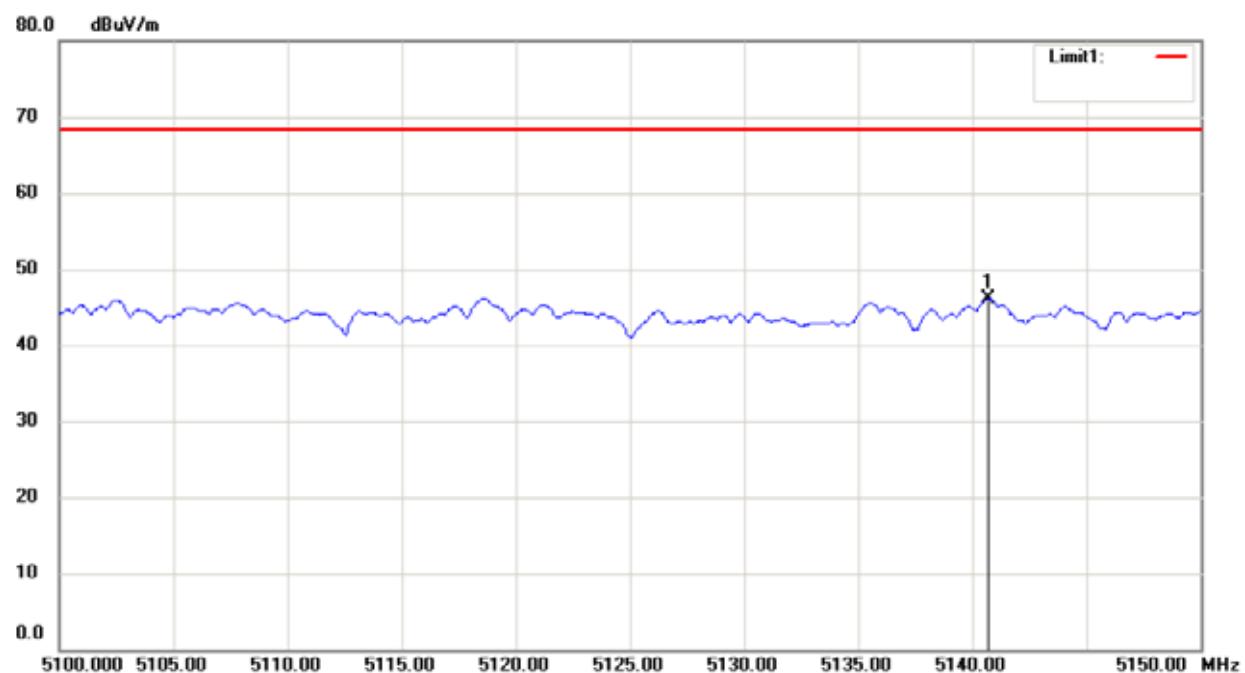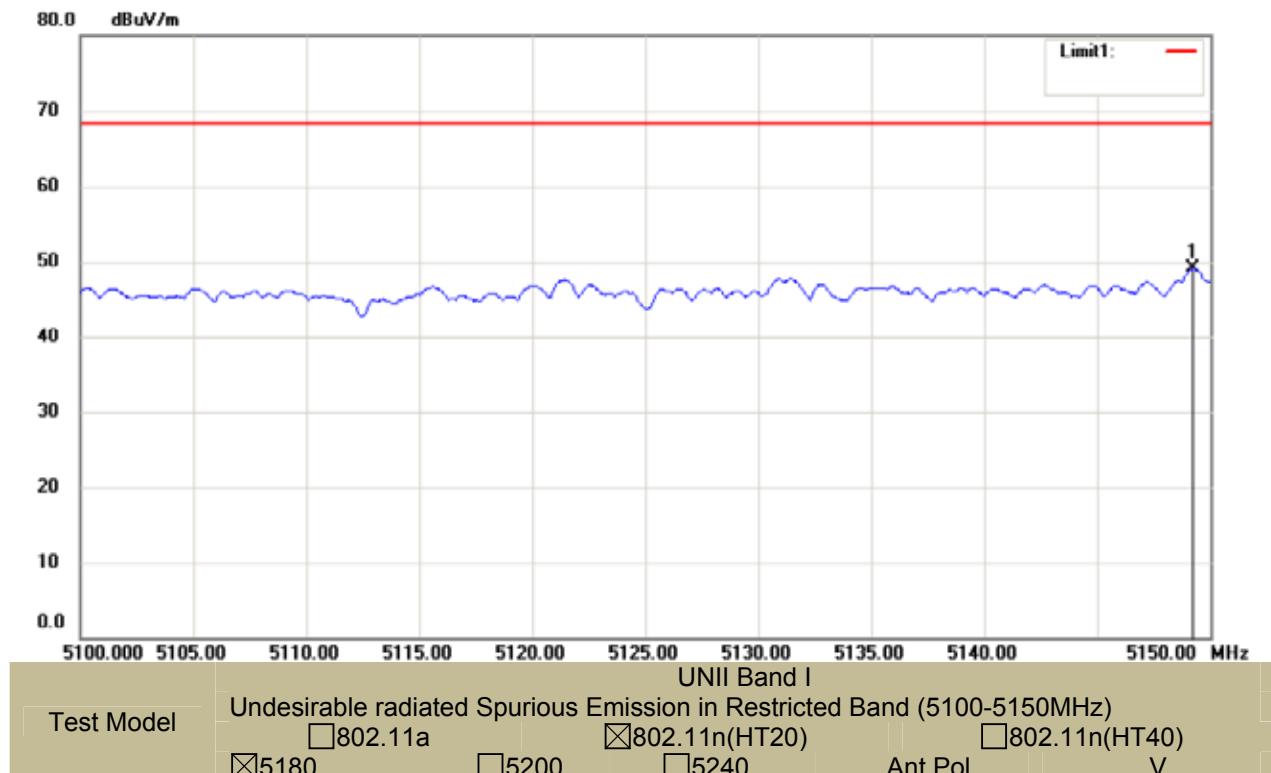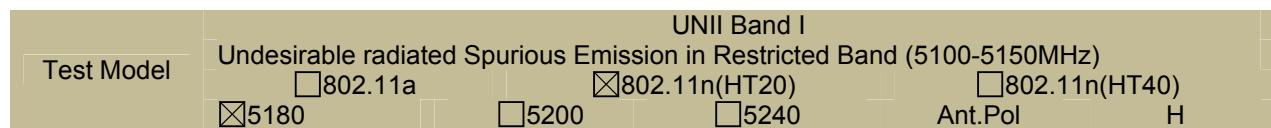

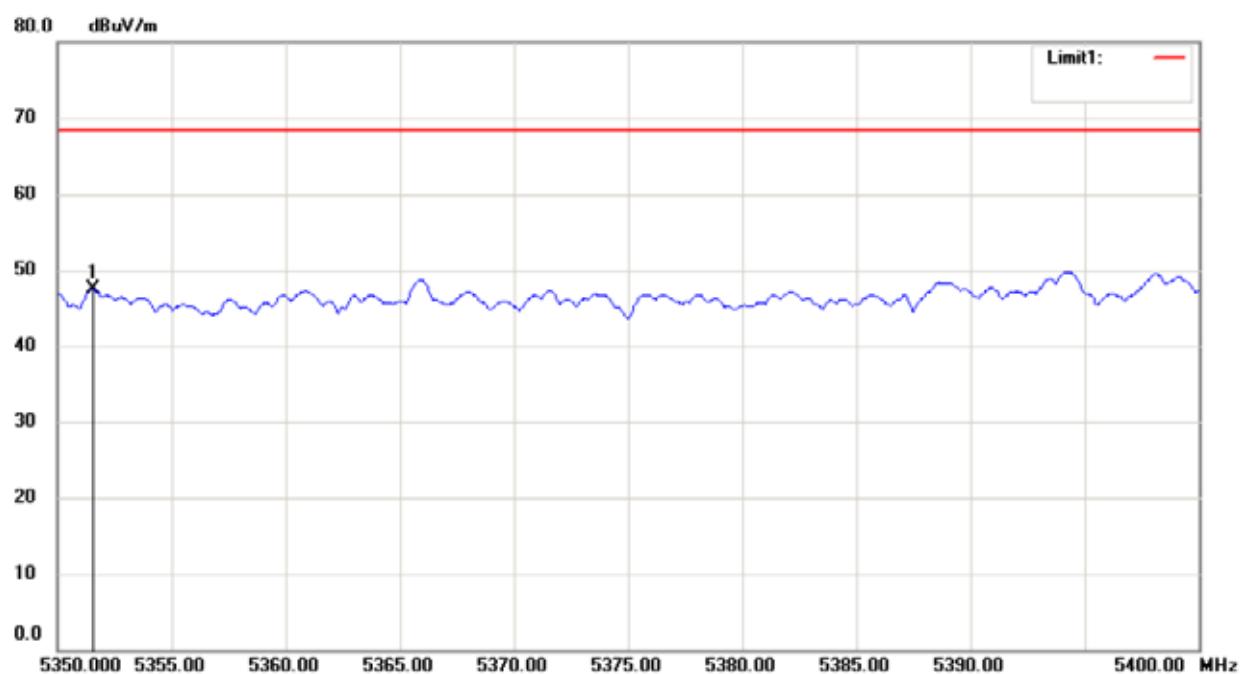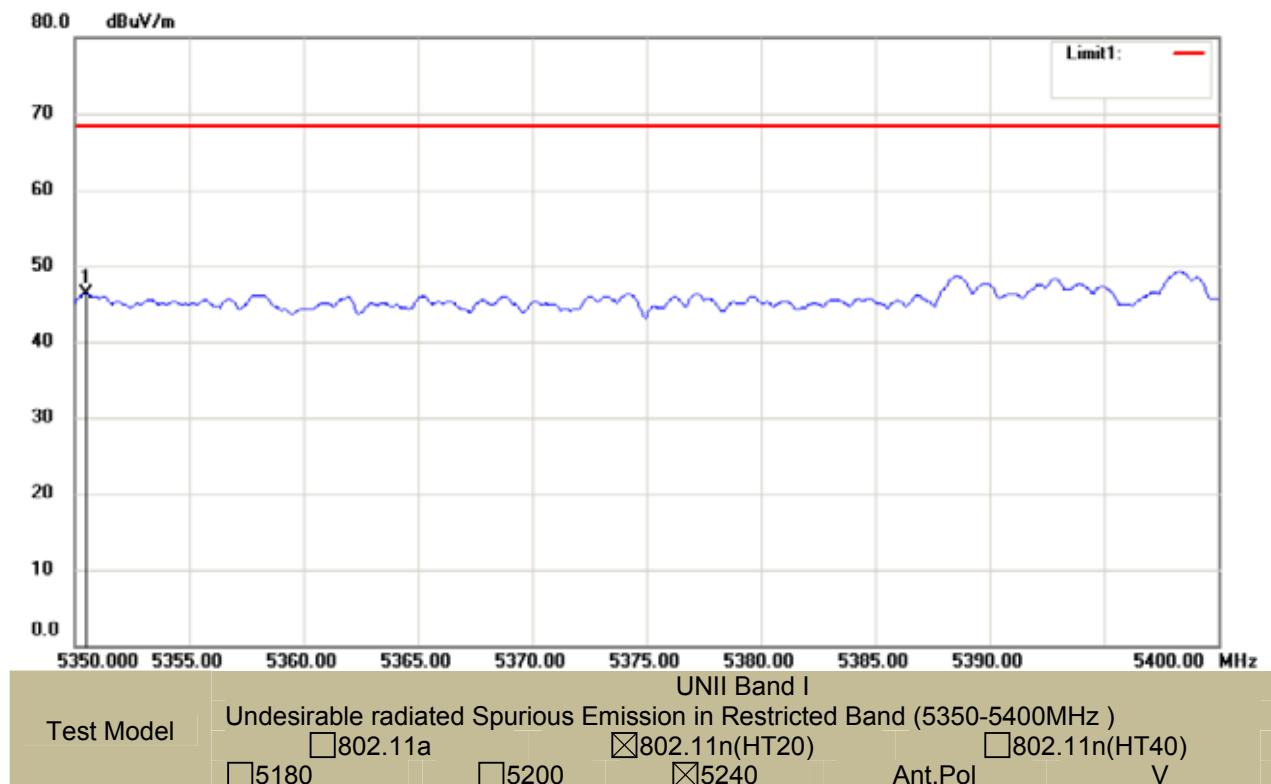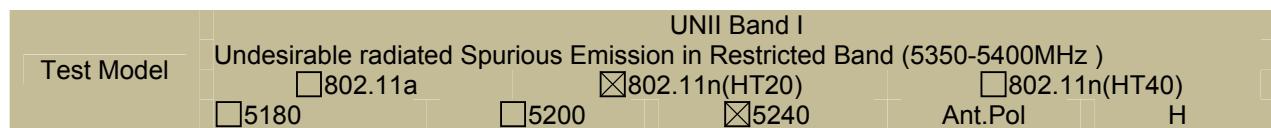

- For Undesirable radiated Spurious Emission in UNII Band III

All the modes 802.11a/n/ac has been tested and the worst result 802.11(HT20) recorded as below:

- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6667.95	V	46.33	-48.9	-27.00	-21.9
9363.64	V	47.44	-47.79	-27.00	-20.79
12739.37	V	61.12	-34.11	-27.00	-7.11
6529.28	H	49.63	-45.6	-27.00	-18.6
9907.72	H	53.94	-41.29	-27.00	-14.29
12923.73	H	57.06	-38.17	-27.00	-11.17

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5785

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6666.6	V	46.33	-48.9	-27.00	-21.9
9362.26	V	47.44	-47.79	-27.00	-20.79
12740.44	V	60.75	-34.48	-27.00	-7.48
6530.38	H	49.21	-46.02	-27.00	-19.02
9906.29	H	53.25	-41.98	-27.00	-14.98
12924.71	H	56.08	-39.15	-27.00	-12.15

Temperature :	28	Test Date :	December 21, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6667.67	V	46.33	-48.90	-27.00	-21.9
9360.89	V	47.44	-47.79	-27.00	-20.79
12741.48	V	60.28	-34.95	-27.00	-7.95
6531.43	H	48.94	-46.29	-27.00	-19.29
9904.95	H	52.62	-42.61	-27.00	-15.61
12925.77	H	55.23	-40.00	-27.00	-13.00

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dB μ V/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

- ☒Undesirable radiated Spurious Emission in band edge

Temperature :	28	Test Date :	December 21, 2016		
Humidity :	65 %	Test By:	King Kong		
Test mode:	802.11n(HT20)	Frequency:	5745		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5850.75	H	51.89	-43.34	-17	PASS
5873.75	V	60.96	-34.27	-17	PASS

Temperature :	28	Test Date :	December 21, 2016		
Humidity :	65 %	Test By:	King Kong		
Test mode:	802.11n(HT20)	Frequency:	5825		





Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5724.37	H	57.43	-37.8	-17	PASS
5724.25	V	56.92	-38.31	-17	PASS





Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)EIRP[dBm] = E[dB μ V/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

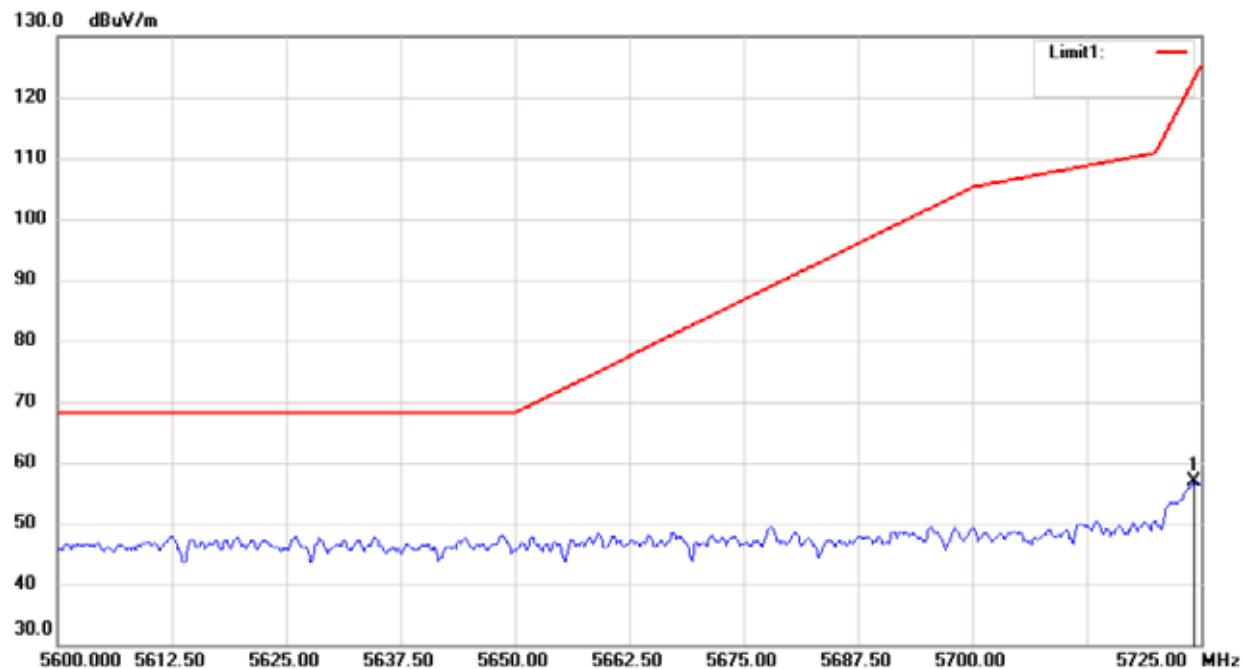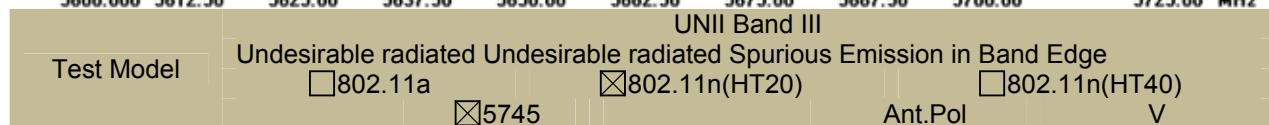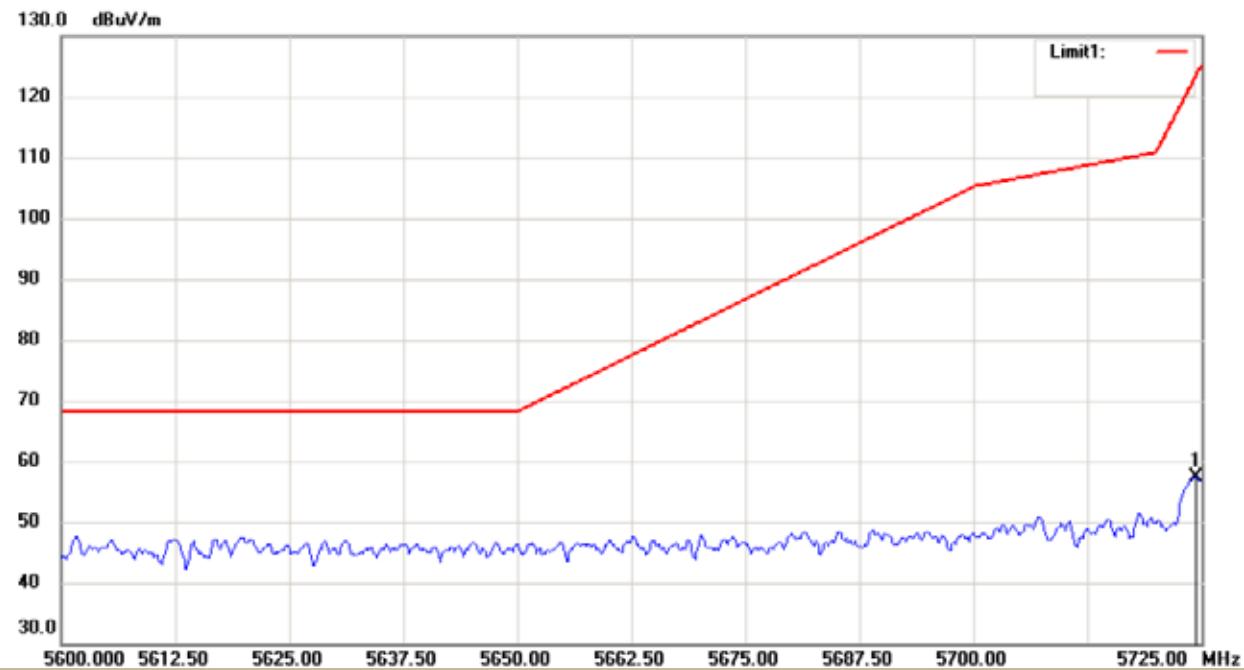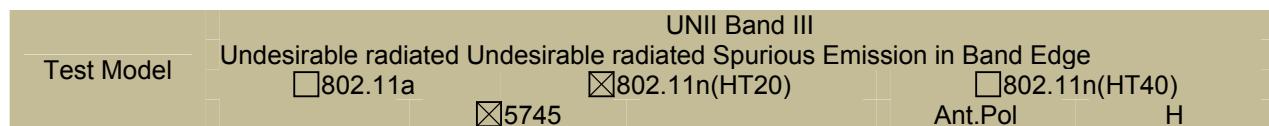

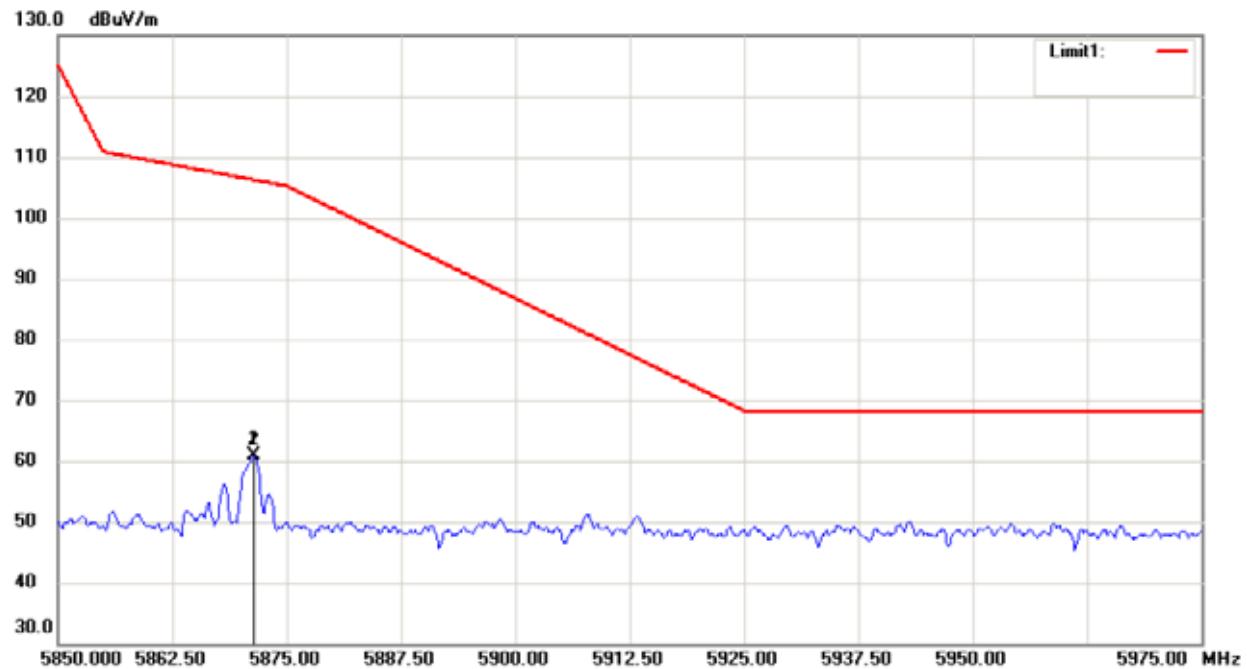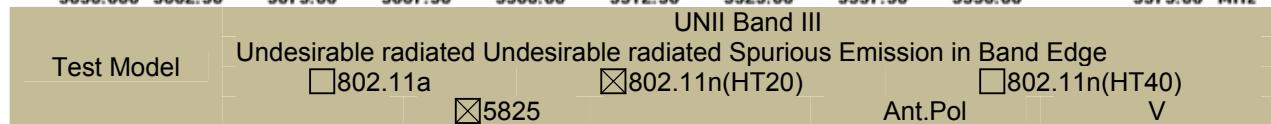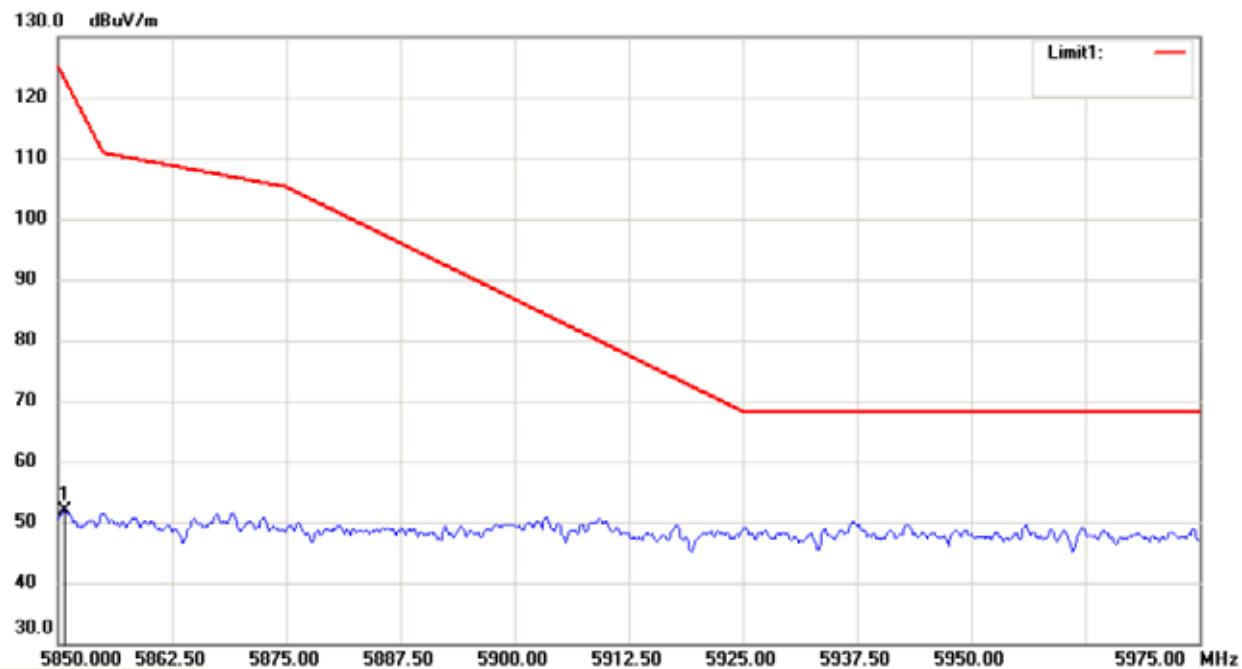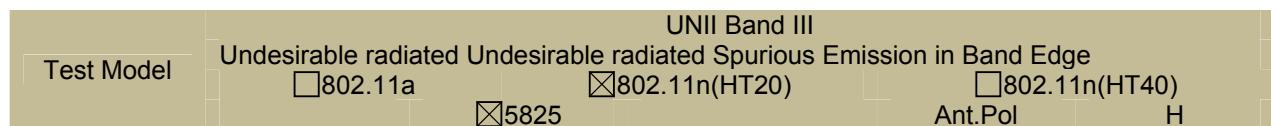


- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)




*:Maximum data x:Over limit !:over margin

Operator: KK

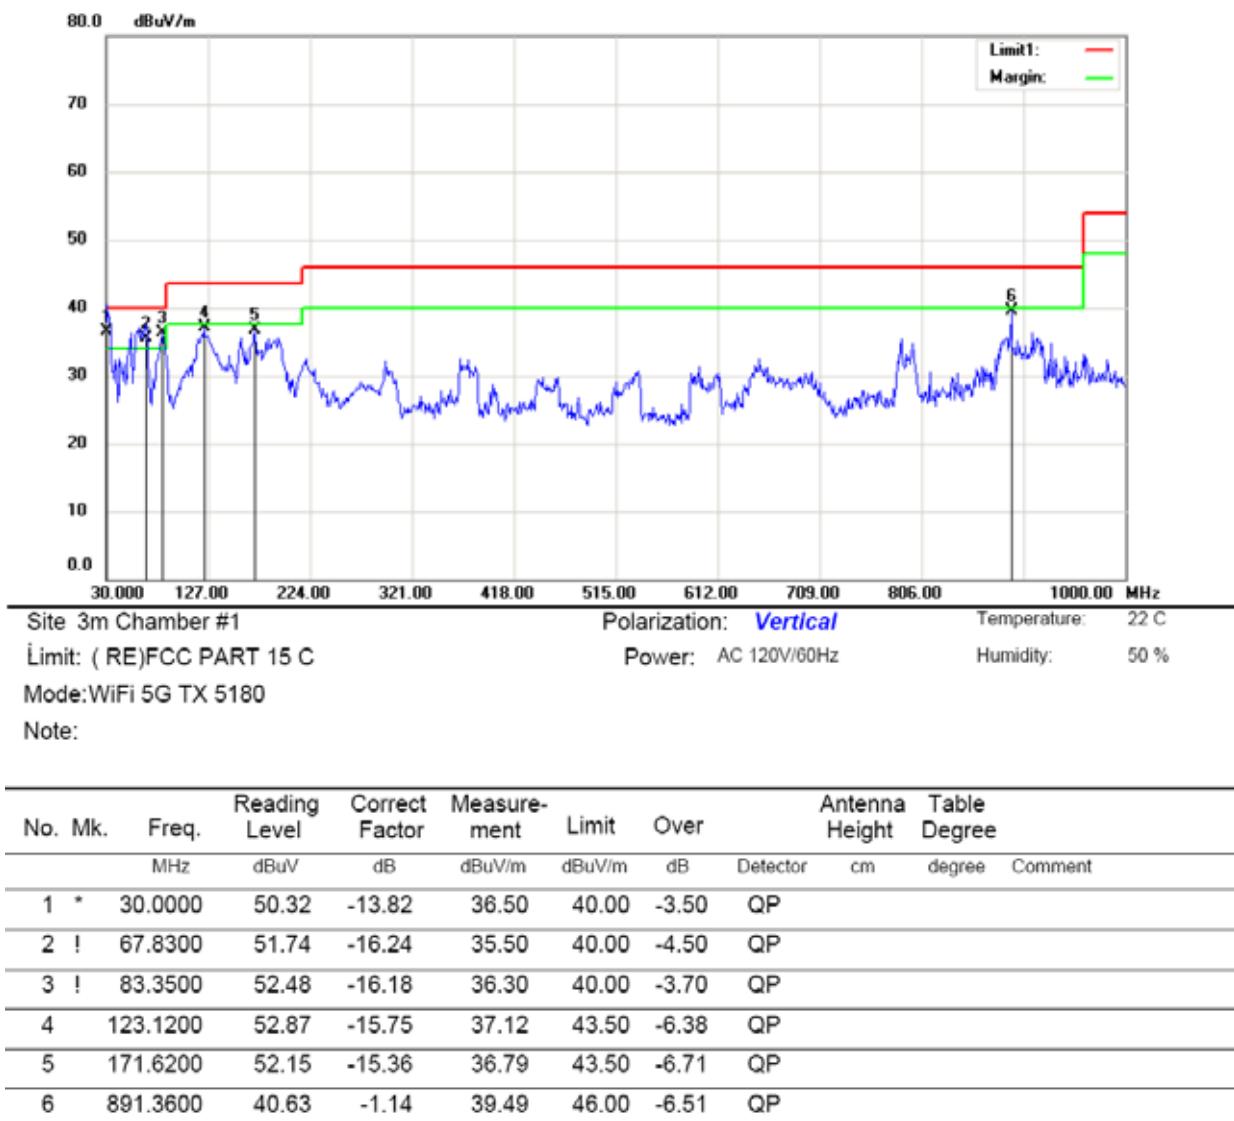

*:Maximum data x:Over limit !:over margin

Operator: KK

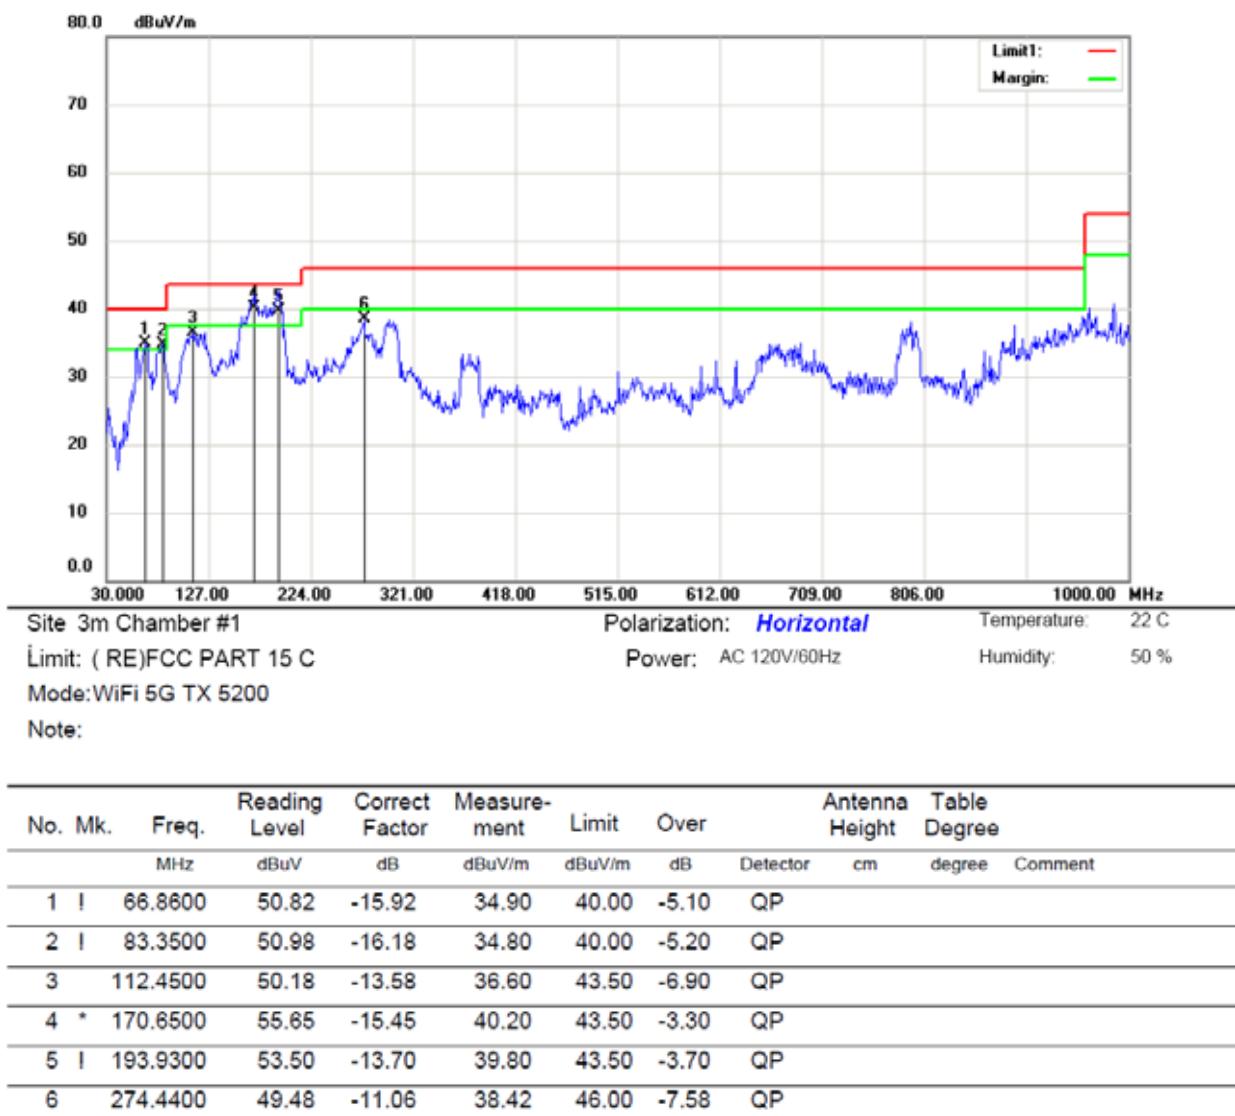

*:Maximum data x:Over limit l:over margin

Operator: KK



Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 50 %


Mode: WiFi 5G TX 5200

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	50.52	-13.82	36.70	40.00	-3.30	QP			
2	!	63.9500	49.96	-14.76	35.20	40.00	-4.80	QP			
3	!	83.3500	52.48	-16.18	36.30	40.00	-3.70	QP			
4	!	124.0900	53.60	-16.00	37.60	43.50	-5.90	QP			
5		157.0700	53.84	-16.47	37.37	43.50	-6.13	QP			
6		194.9000	50.58	-13.67	36.91	43.50	-6.59	QP			


*:Maximum data x:Over limit !:over margin

Operator: KK

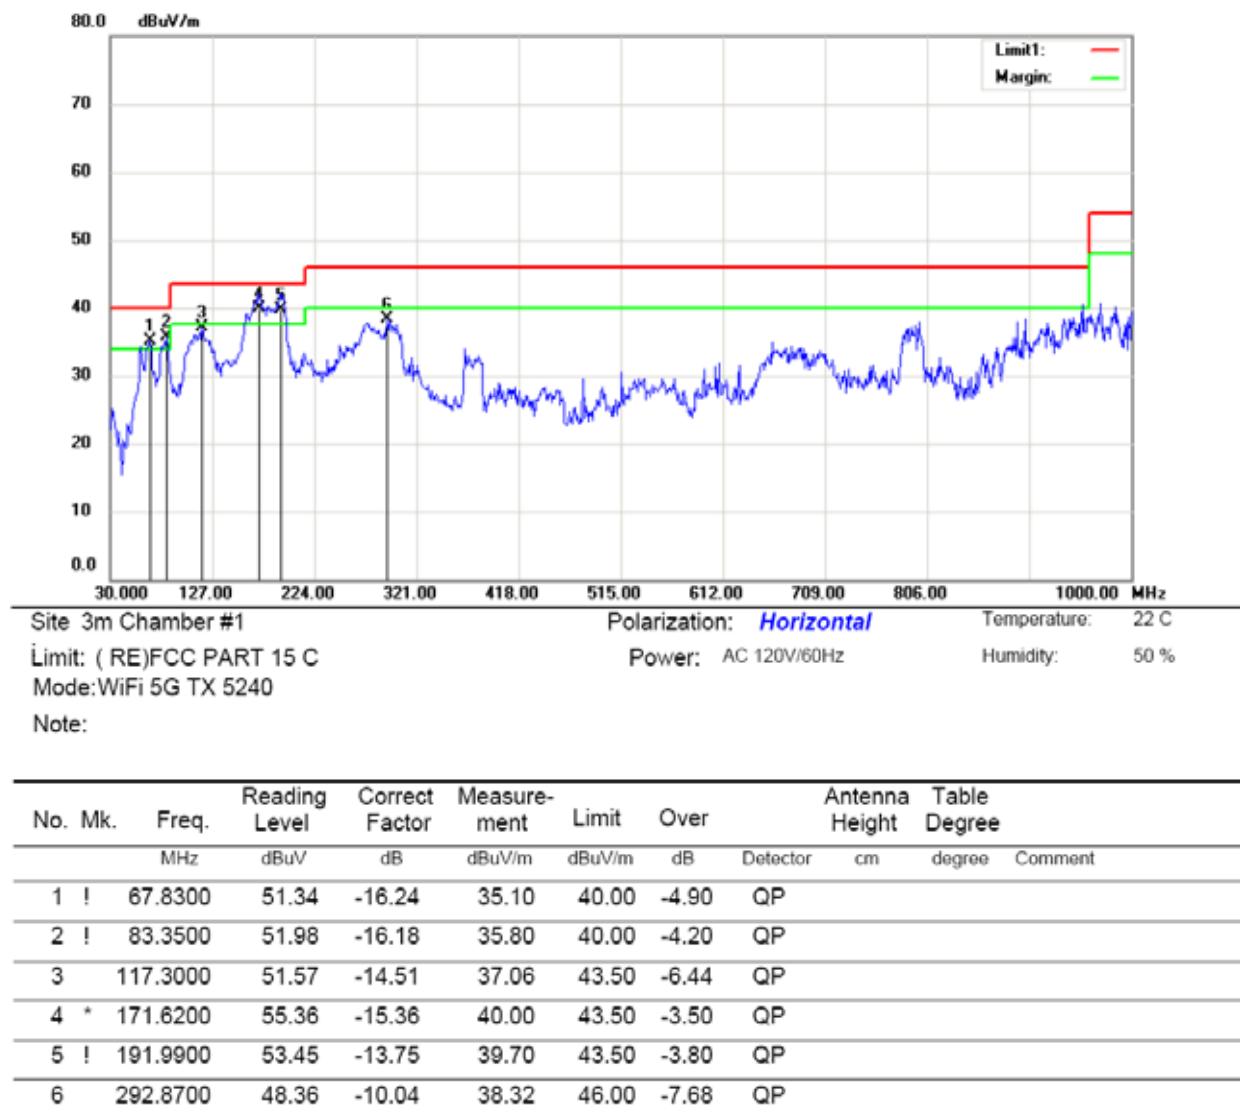


*:Maximum data x:Over limit !:over margin

Operator: KK

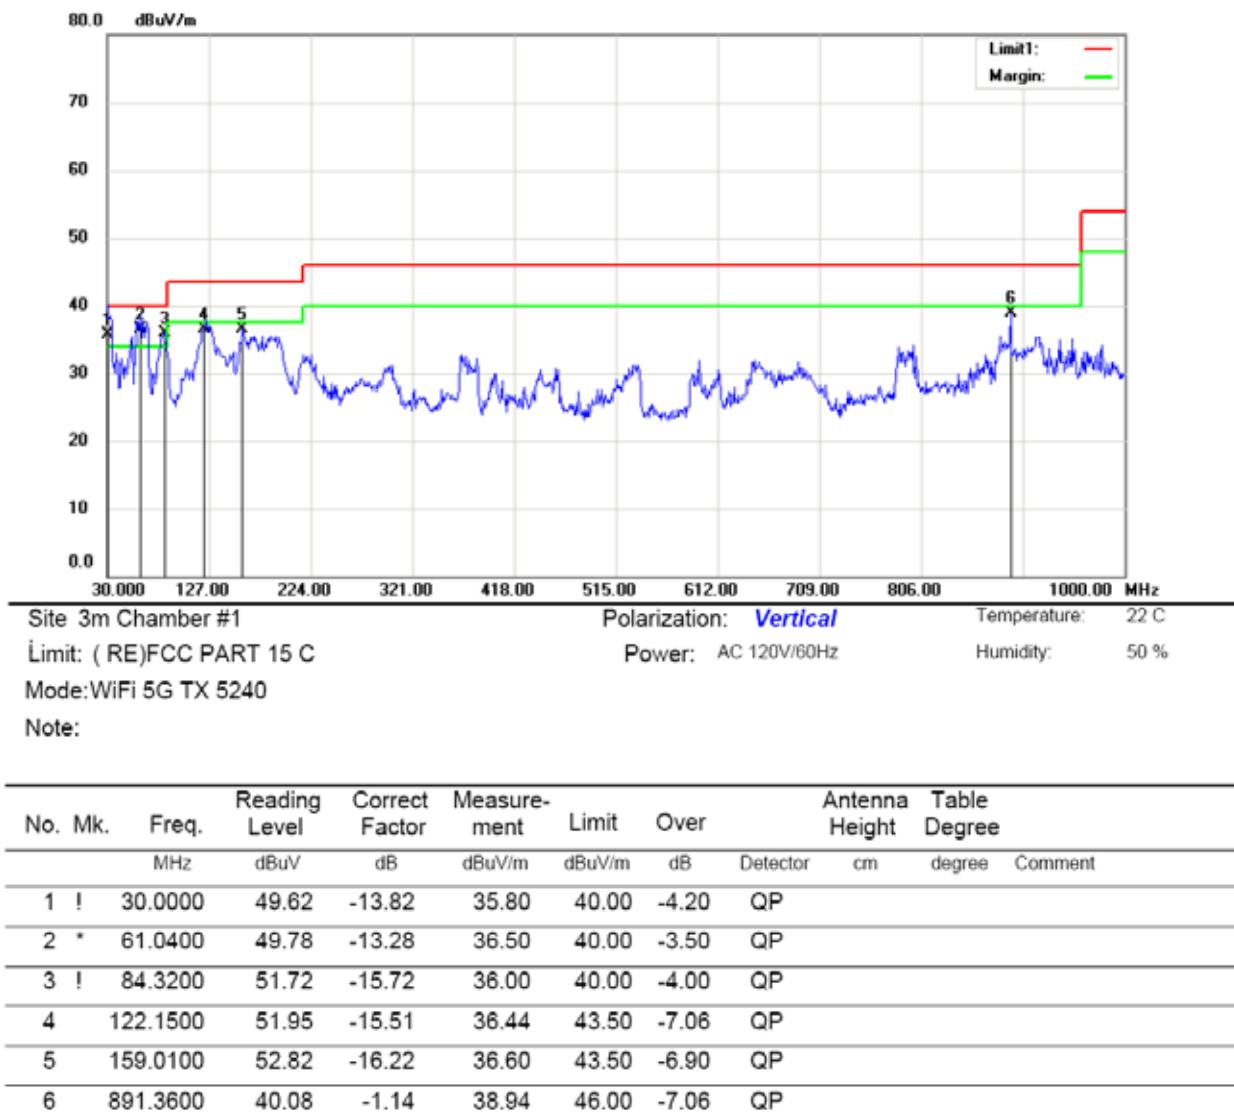


*:Maximum data x:Over limit !:over margin

Operator: KK

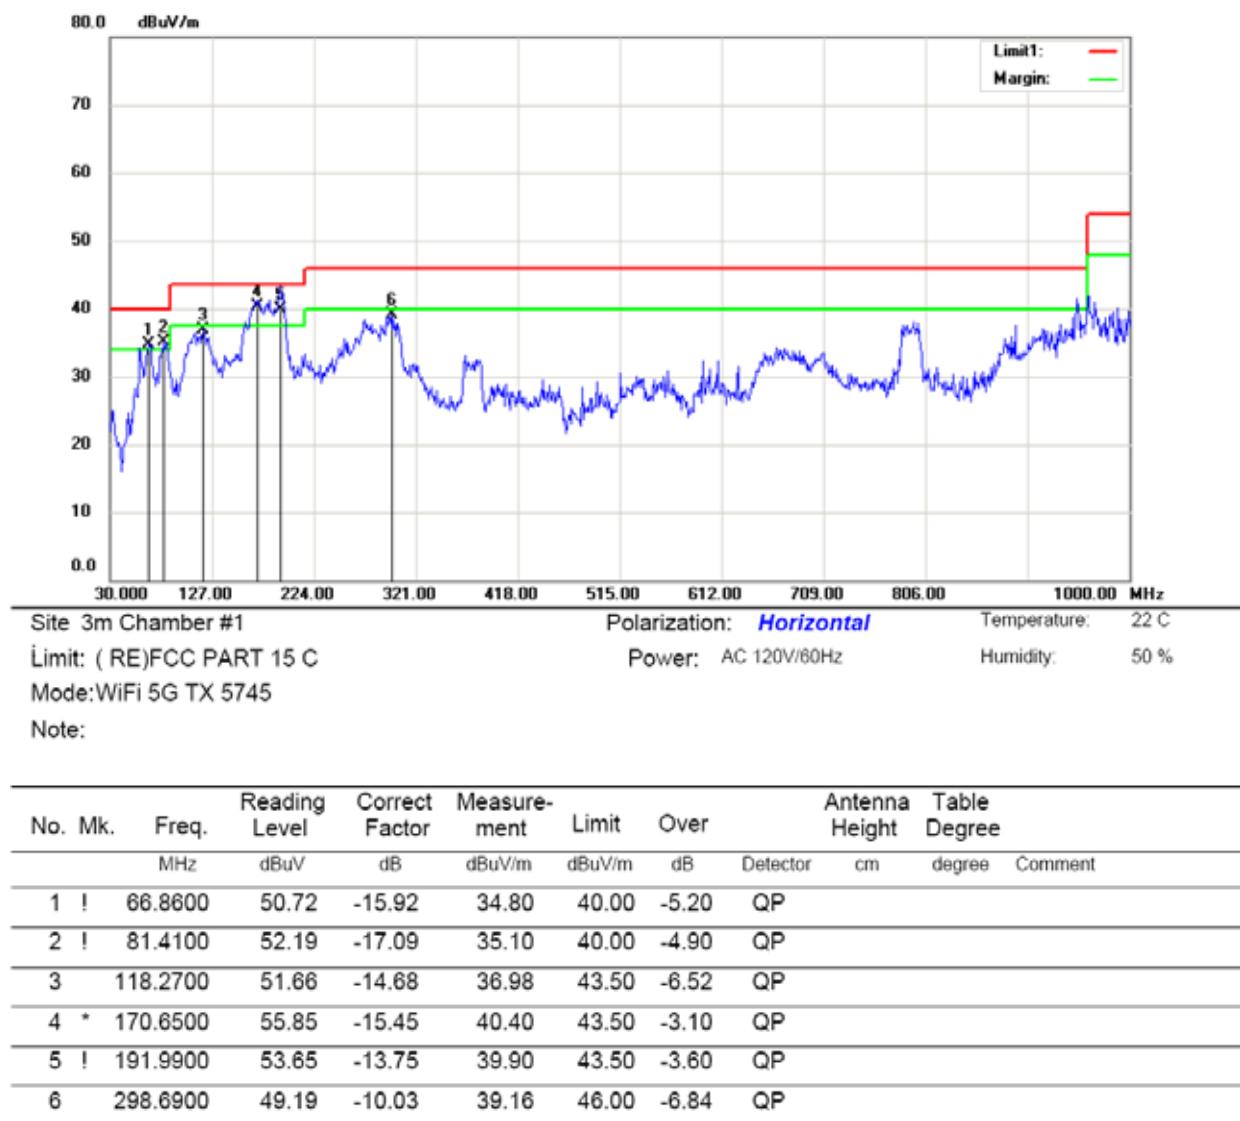


*:Maximum data x:Over limit !:over margin

Operator: KK

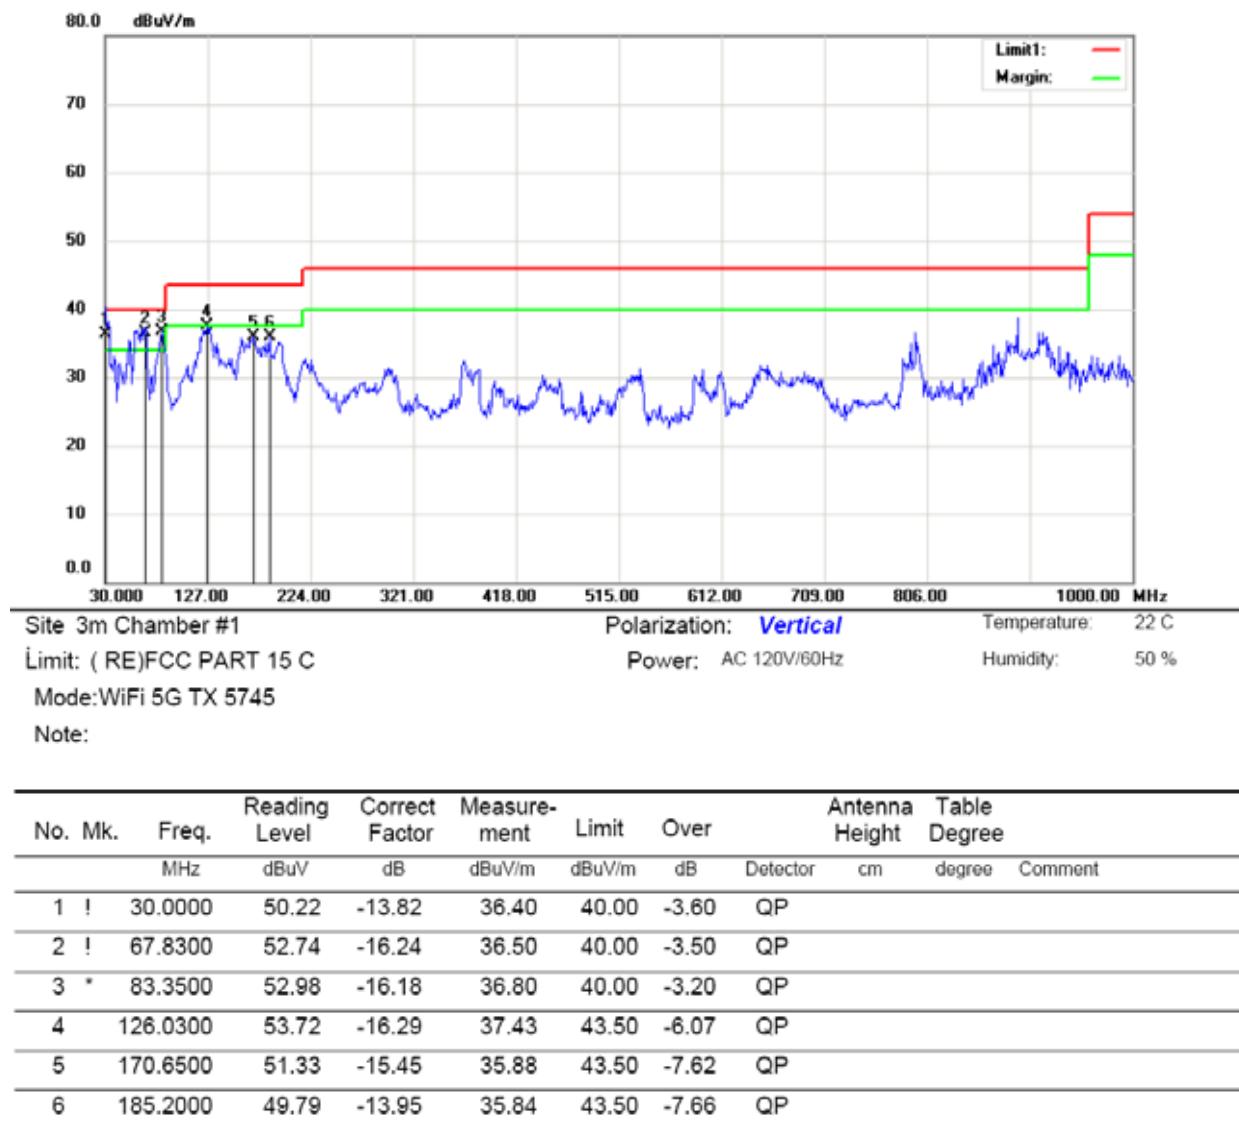


*:Maximum data x:Over limit !:over margin

Operator: KK

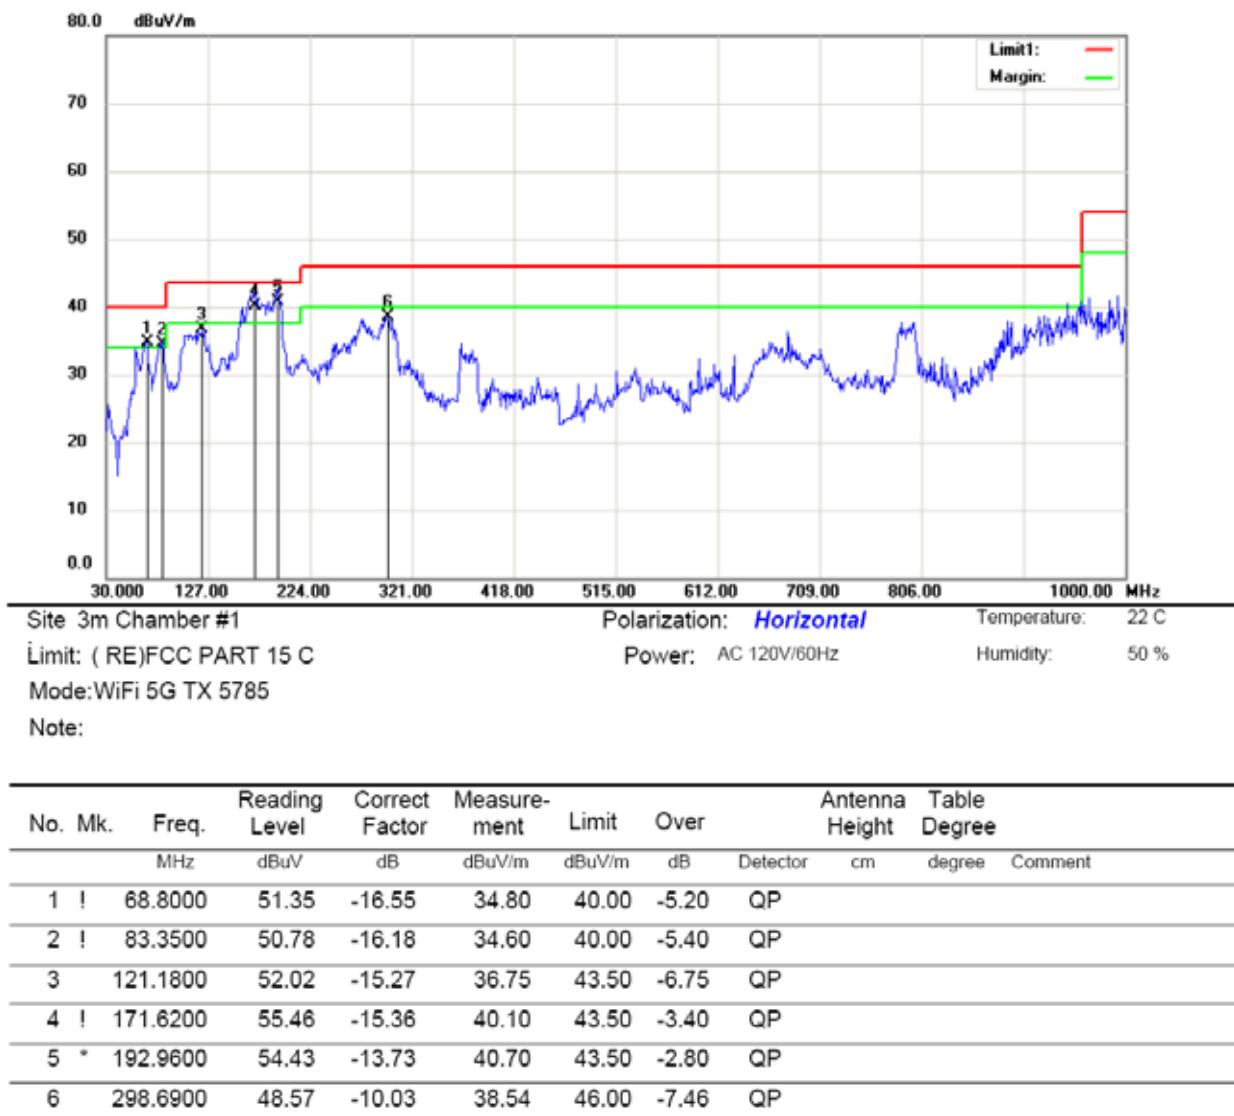


*:Maximum data x:Over limit !:over margin

Operator: KK

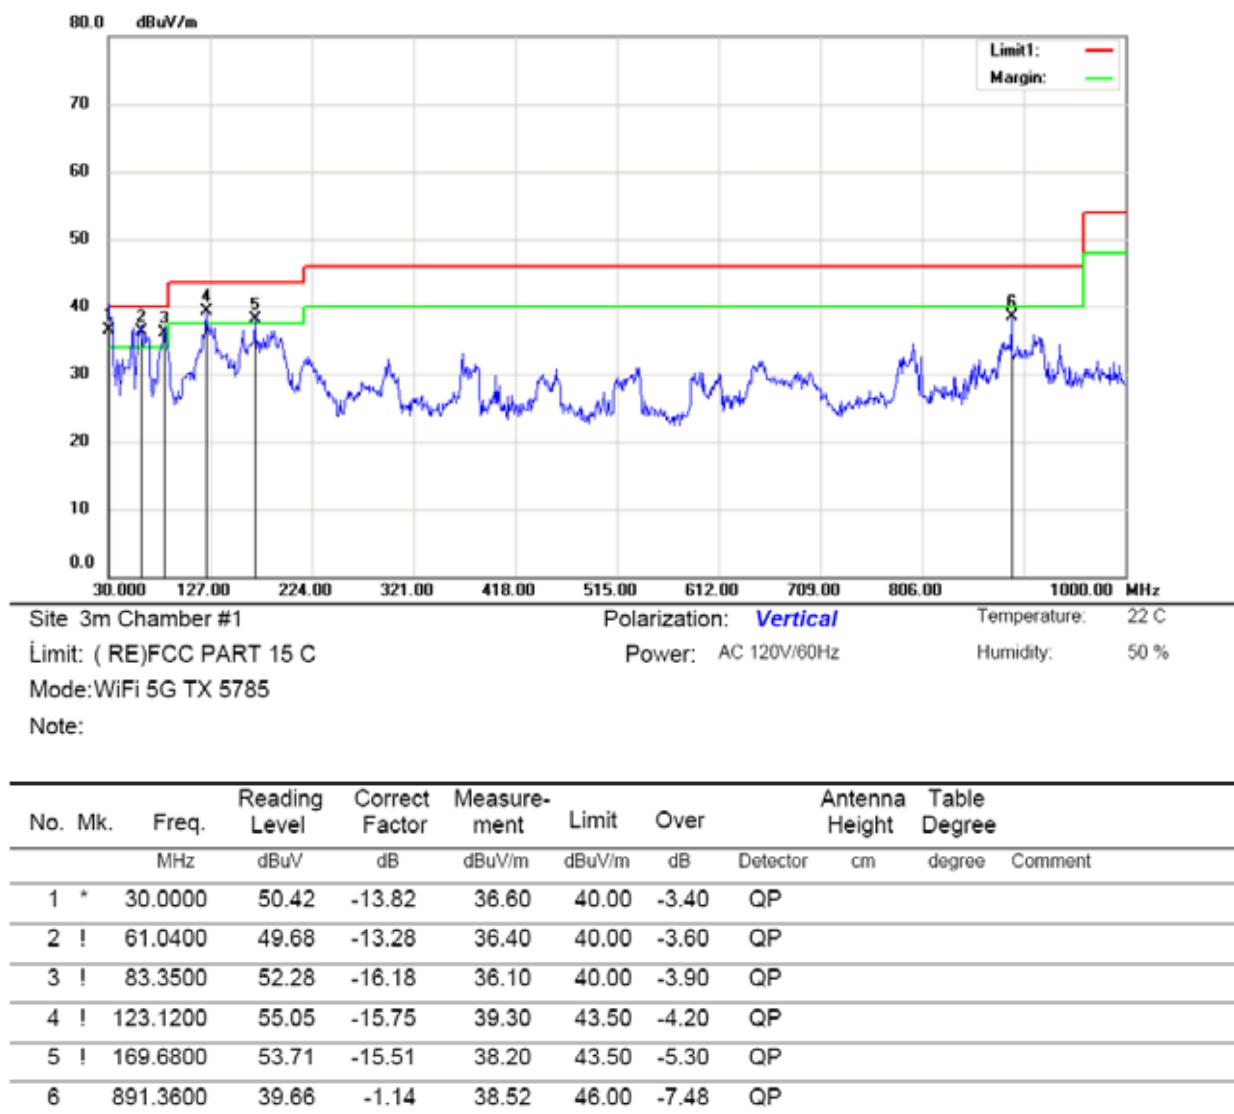


*:Maximum data x:Over limit !:over margin

Operator: KK

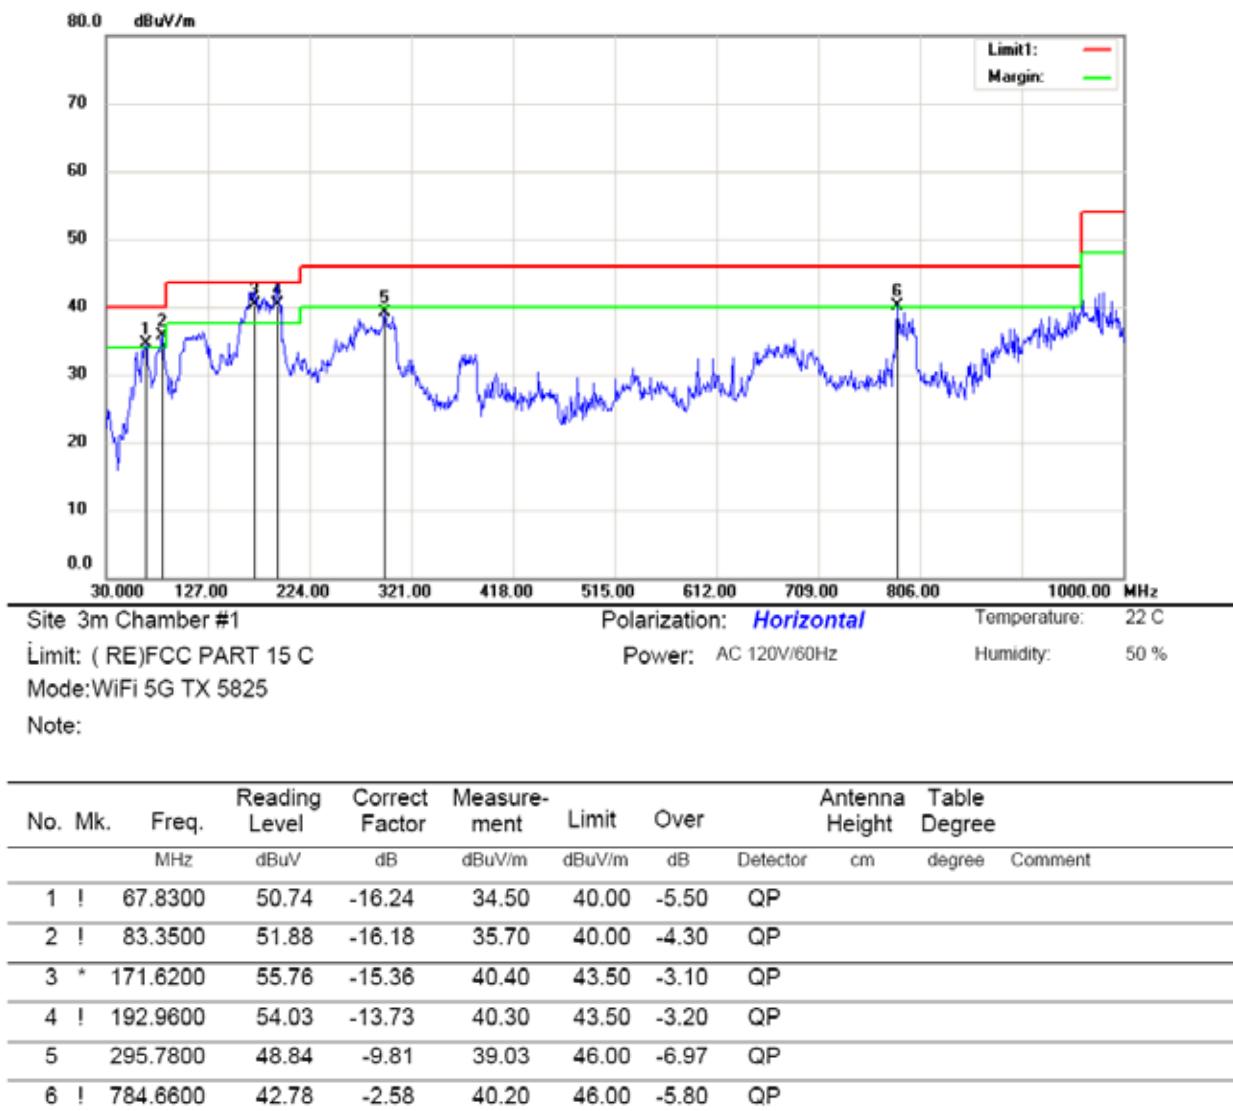

*:Maximum data x:Over limit !:over margin

Operator: KK

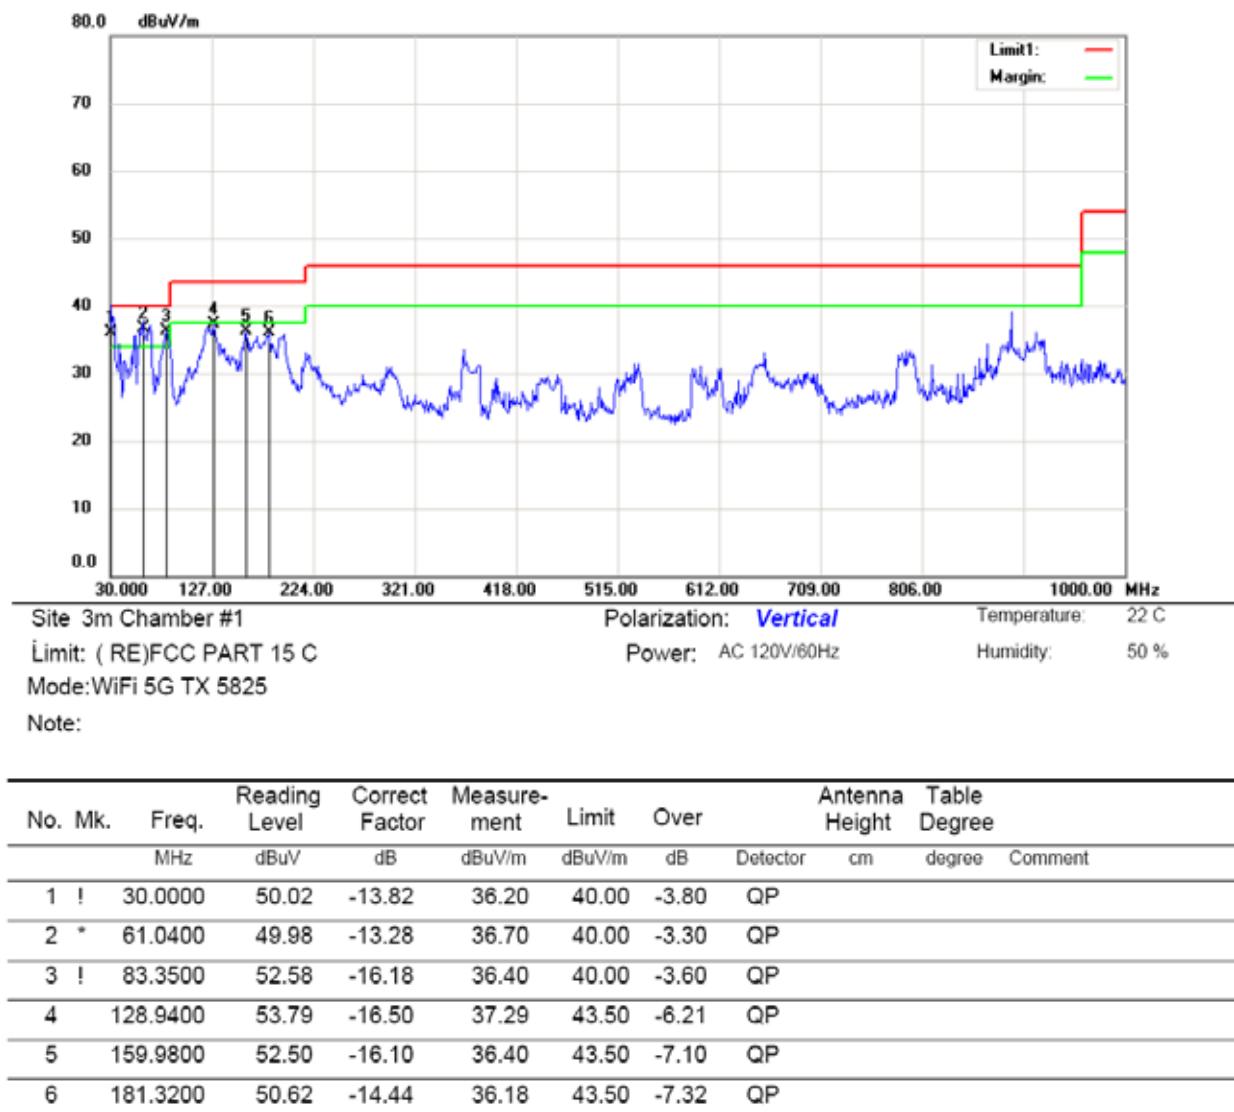

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

We test the EUT at 120V and 240V, and show the worst result as bellow.

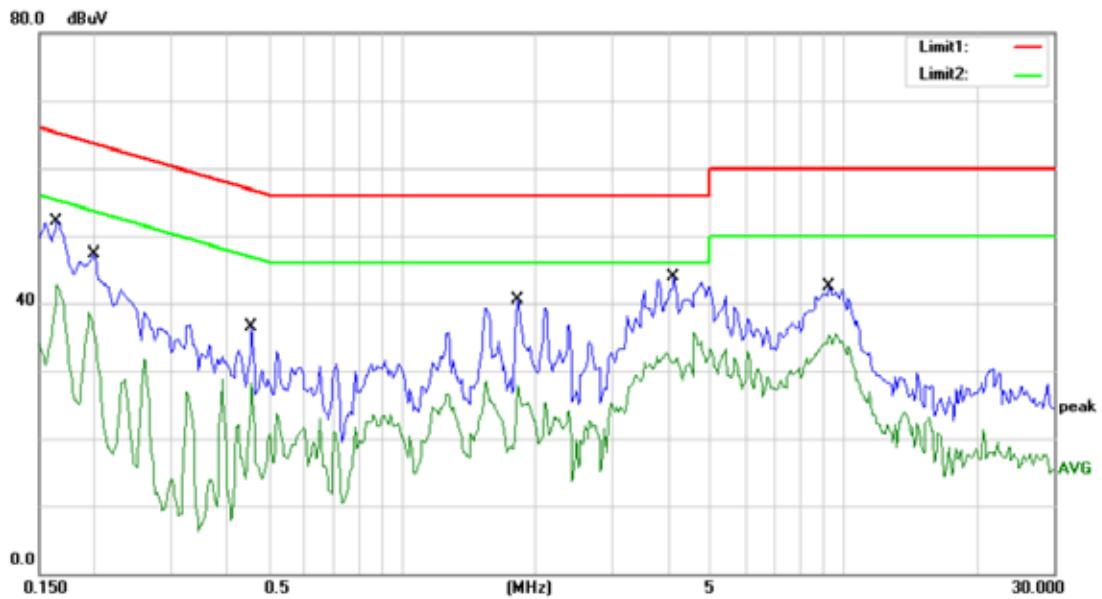

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: WIFI+BT ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1650	52.10	0.00	52.10	65.21	-13.11	QP	
2		0.1650	42.69	0.00	42.69	55.21	-12.52	AVG	
3		0.2000	47.35	0.00	47.35	63.61	-16.26	QP	
4		0.2000	38.67	0.00	38.67	53.61	-14.94	AVG	
5		0.4550	36.55	0.00	36.55	56.78	-20.23	QP	
6		0.4550	28.24	0.00	28.24	46.78	-18.54	AVG	
7		1.8200	40.50	0.00	40.50	56.00	-15.50	QP	
8		1.8200	27.81	0.00	27.81	46.00	-18.19	AVG	
9	*	4.1200	43.91	0.00	43.91	56.00	-12.09	QP	
10		4.1200	32.64	0.00	32.64	46.00	-13.36	AVG	
11		9.2750	42.44	0.00	42.44	60.00	-17.56	QP	
12		9.2750	35.55	0.00	35.55	50.00	-14.45	AVG	


*:Maximum data

x:Over limit

!:over margin

Comment: Factor build in receiver.

Operator: WAP

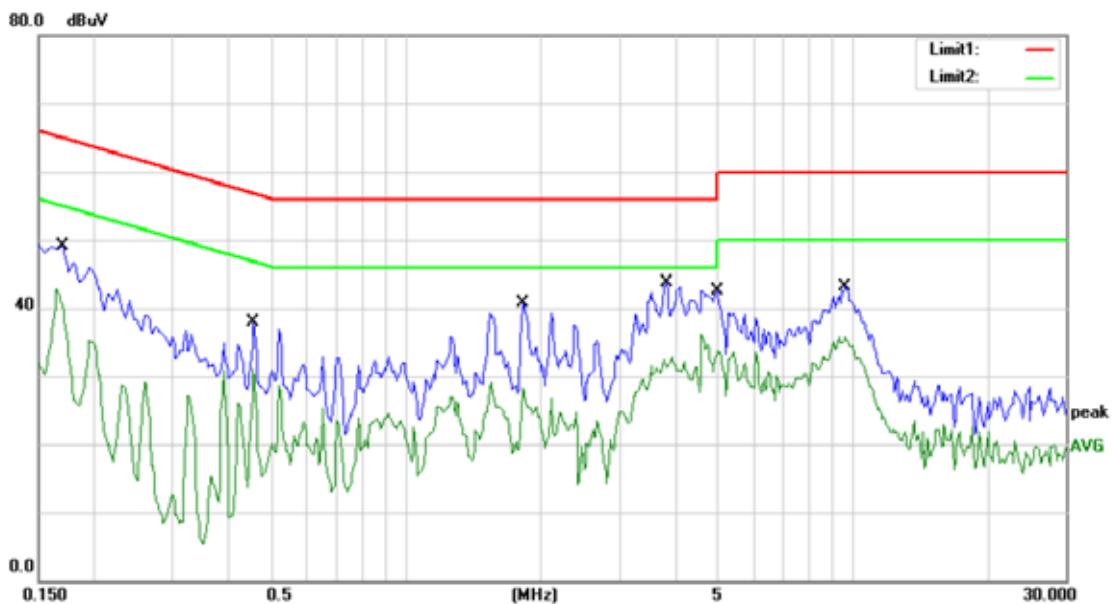

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: WIFI+BT ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1		0.1700	49.17	0.00	49.17	64.96	-15.79	QP	
2	*	0.1700	42.69	0.00	42.69	54.96	-12.27	AVG	
3		0.4550	37.92	0.00	37.92	56.78	-18.86	QP	
4		0.4550	31.07	0.00	31.07	46.78	-15.71	AVG	
5		1.8200	40.74	0.00	40.74	56.00	-15.26	QP	
6		1.8200	28.40	0.00	28.40	46.00	-17.60	AVG	
7		3.8200	43.67	0.00	43.67	56.00	-12.33	QP	
8		3.8200	32.82	0.00	32.82	46.00	-13.18	AVG	
9		4.9900	42.49	0.00	42.49	56.00	-13.51	QP	
10		4.9900	33.66	0.00	33.66	46.00	-12.34	AVG	
11		9.6500	43.18	0.00	43.18	60.00	-16.82	QP	
12		9.6500	35.75	0.00	35.75	50.00	-14.25	AVG	

*:Maximum data

x:Over limit

!:over margin

Comment: Factor build in receiver.

Operator: WAP

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

The EUT has a Metel antenna for BT, the max gain is 4.57 dBi;

The EUT has two Metel antenna for WIFI 2.4 Band, the max gain is 4.57 dBi;

The EUT has two Metel antenna: for WIFI 5G Band, the max gain is 6.68 dBi for WIFI 5G Band I, and the max gain is 5.12dBi for WIFI 5G Band II.

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.