
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2025/04/22

7_WLAN2.4GHz_802.11b-1M_CH1_Left-side_0mm_ANT Main**DUT: DIGITAL CAMERA ; Type: R09010**

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.91$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(6.39, 8.11, 6.76) @ 2412 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (7x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.228 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.98 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.391 W/kg

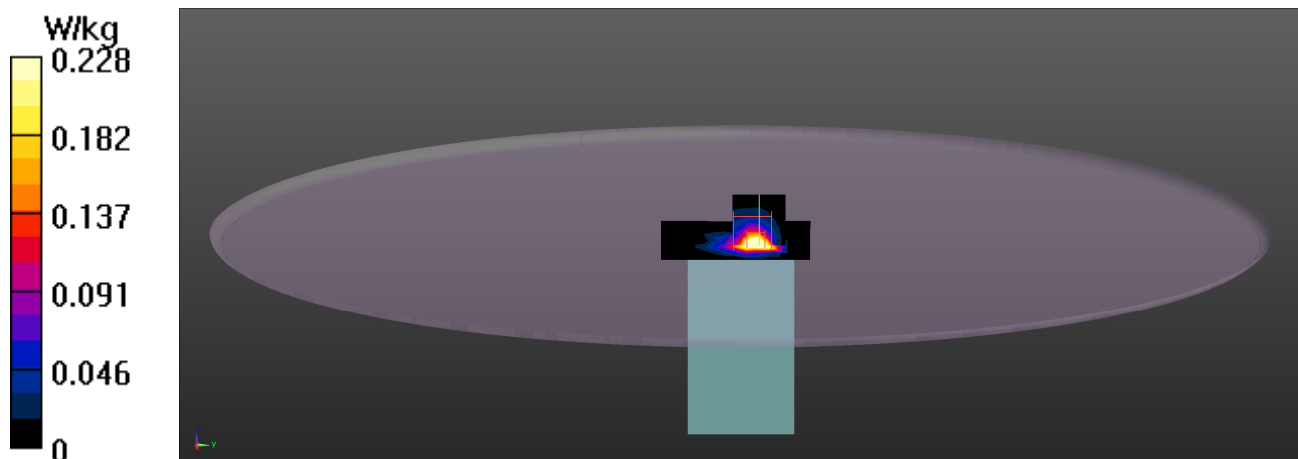

Test Laboratory: DEKRA

Date: 2025/04/23

11_WLAN5GHz_802.11ax80-HE0_CH42_Left-side_0mm_ANT Main**DUT: DIGITAL CAMERA ; Type: R09010**

Communication System: UID 0, WLAN 5G; Frequency: 5210 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.45$ S/m; $\epsilon_r = 37.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.53, 5.75, 4.8) @ 5210 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (8x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.15 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.003 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 4.45 W/kg

SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 2.34 W/kg

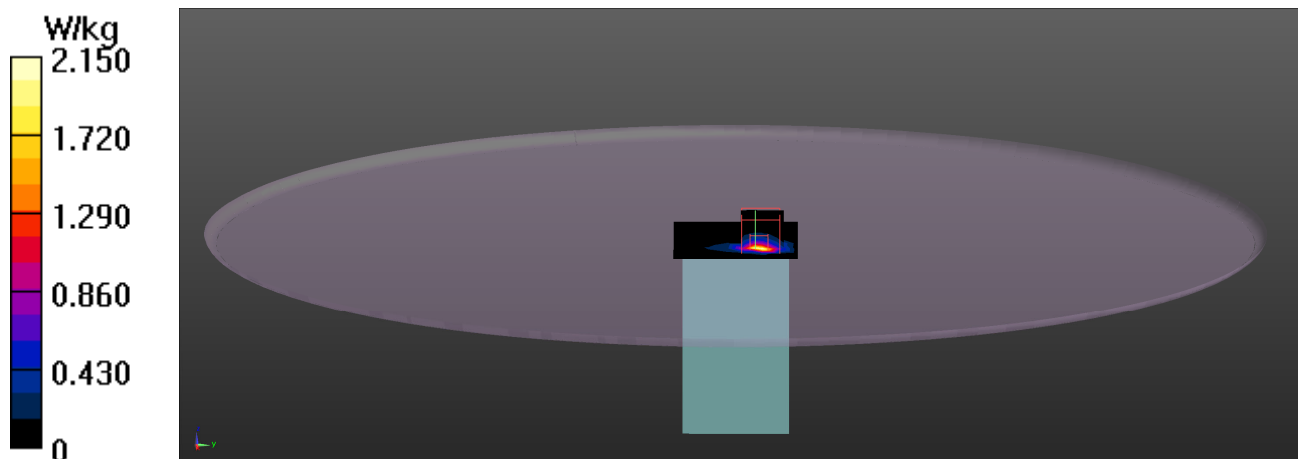

Test Laboratory: DEKRA

Date: 2025/04/23

15_WLAN5GHz_802.11ax80-HE0_CH155_Front_0mm_ANT Main**DUT: DIGITAL CAMERA ; Type: R09010**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.23, 5.36, 4.47) @ 5775 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.44 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.41 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.87 W/kg

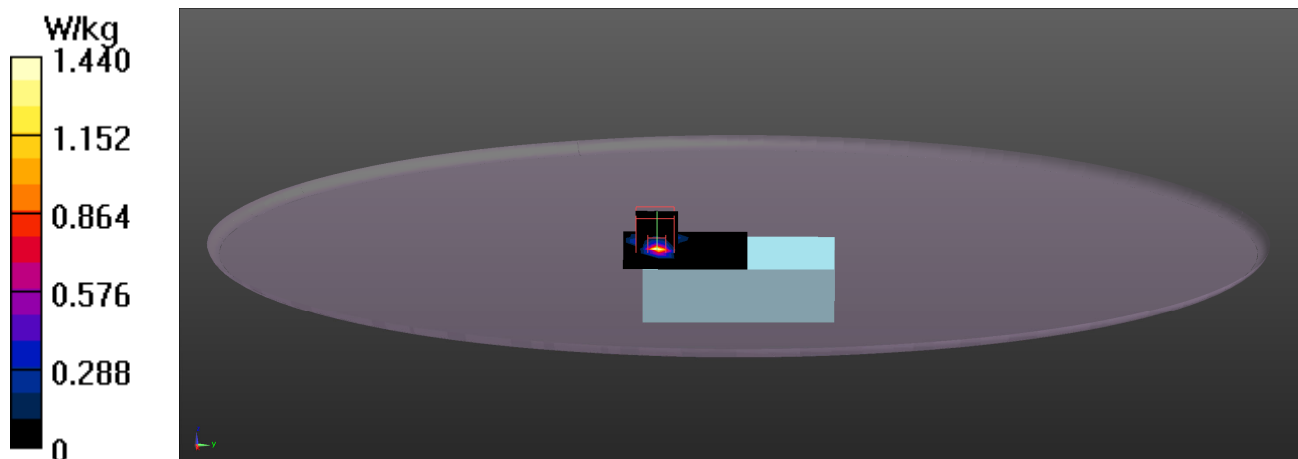

SAR Measurement Variability

Test Laboratory: DEKRA

Date: 2025/04/23

29_WLAN5GHz_802.11ax80-HE0_CH42_Left-side_0mm_ANT Main_Verify

DUT: DIGITAL CAMERA ; Type: R09010

Communication System: UID 0, WLAN 5G; Frequency: 5210 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.45$ S/m; $\epsilon_r = 37.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.53, 5.75, 4.8) @ 5210 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (8x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.01 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.386 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 2.50 W/kg

