


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2412MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|-----------|----------------------|-----------|------------|--|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer | |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M | |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M | |

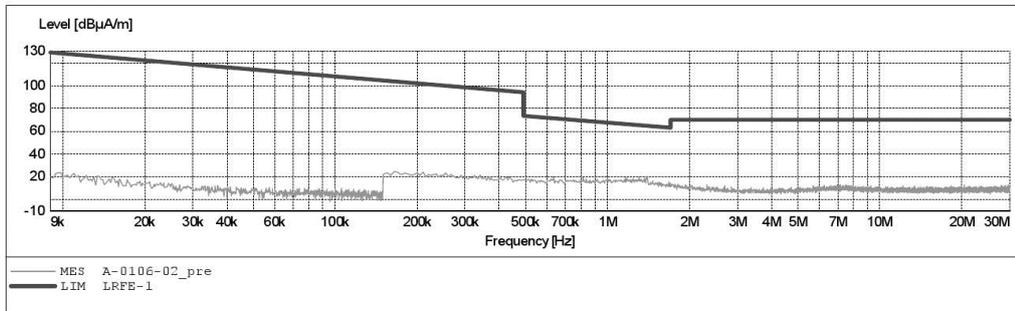


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2412MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|-----------|----------------------|-----------|------------|--|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer | |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M | |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M | |

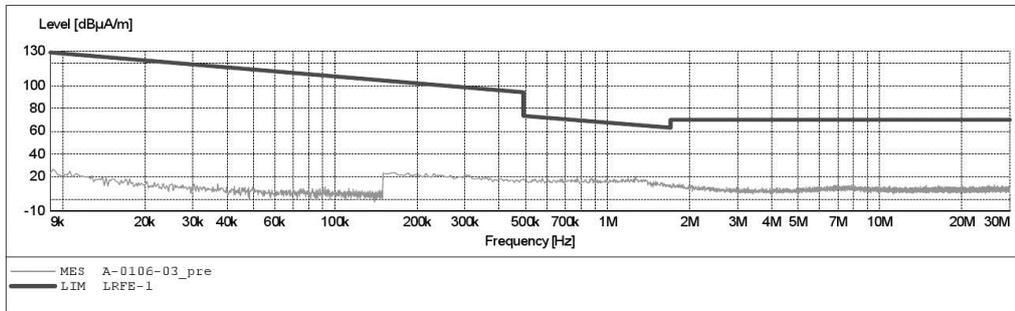


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

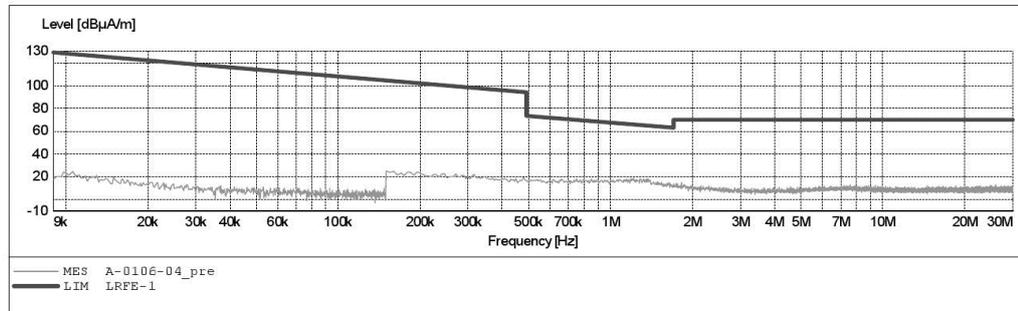


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

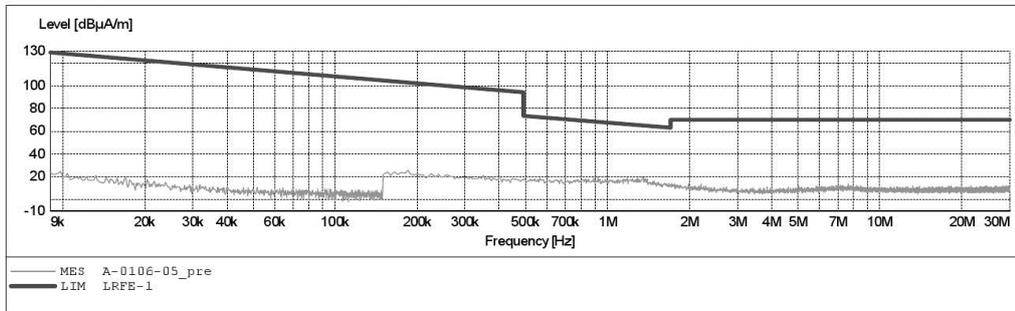


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

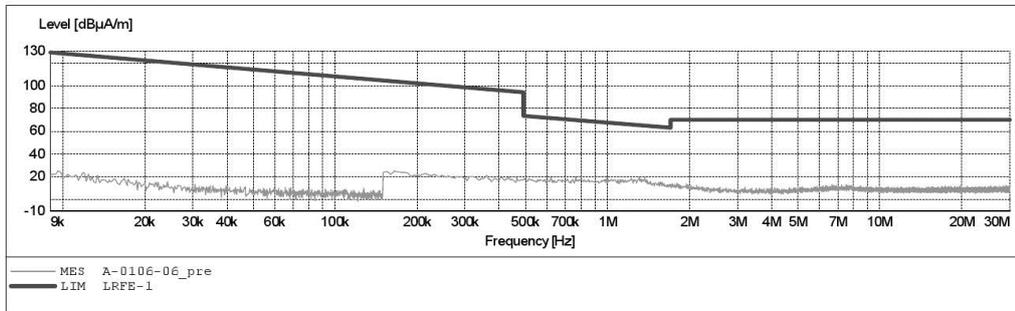


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
Manufacturer: HUAWEI
Operating Condition: TX 2462MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 5V
Comment: X
Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

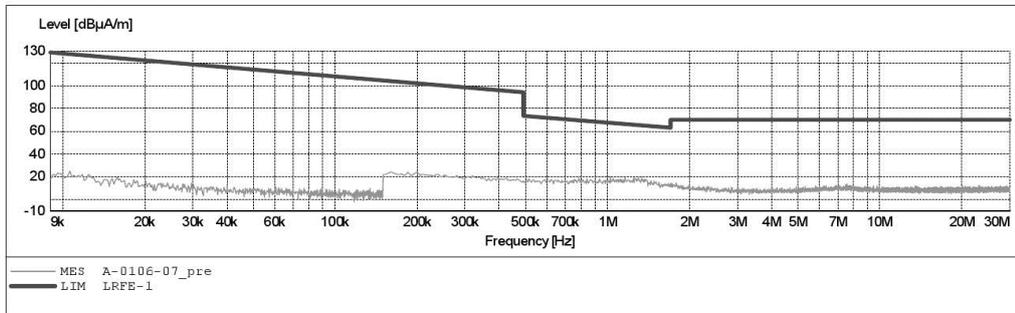


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2462MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

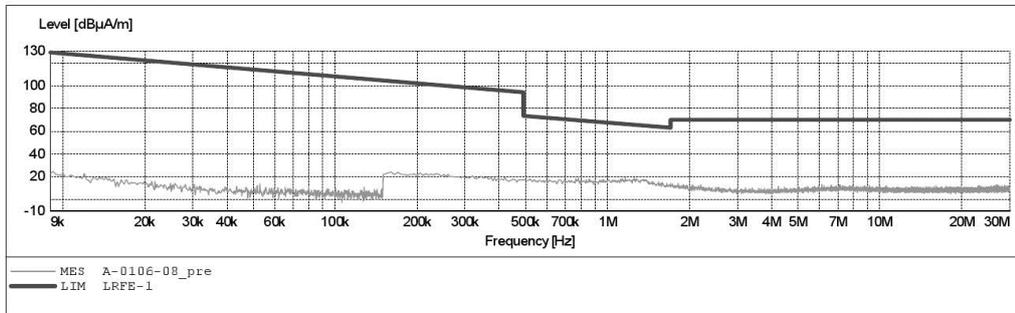


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
Manufacturer: HUAWEI
Operating Condition: TX 2462MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 5V
Comment: Z
Start of Test: 2015-1-6 /

SCAN TABLE: "LFRE Fin"

| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

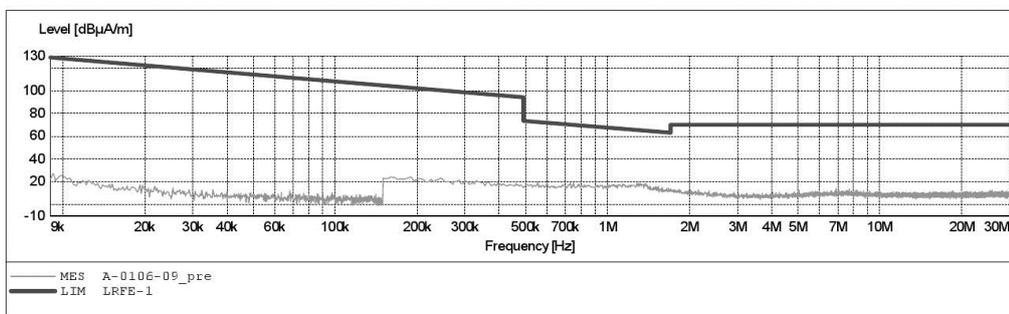



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|------------------------|
| Job No.: LAN2014 #2004 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2412MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

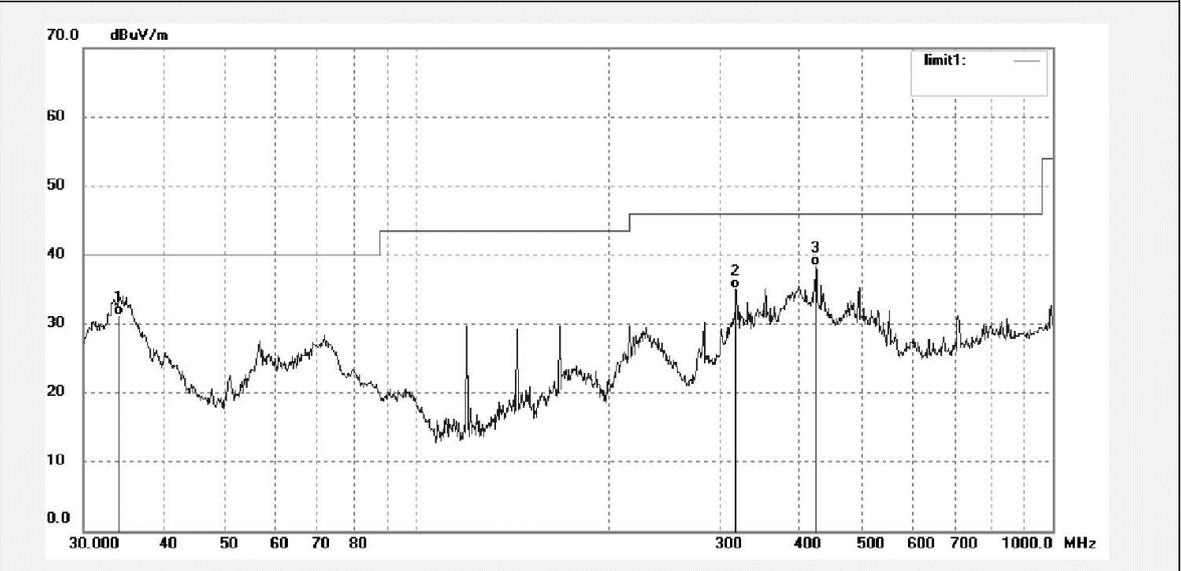

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 34.1561 | 41.58 | -10.33 | 31.25 | 40.00 | -8.75 | QP | | | |
| 2 | 317.7010 | 43.90 | -8.81 | 35.09 | 46.00 | -10.91 | QP | | | |
| 3 | 423.5403 | 44.61 | -6.16 | 38.45 | 46.00 | -7.55 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2005 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2412MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

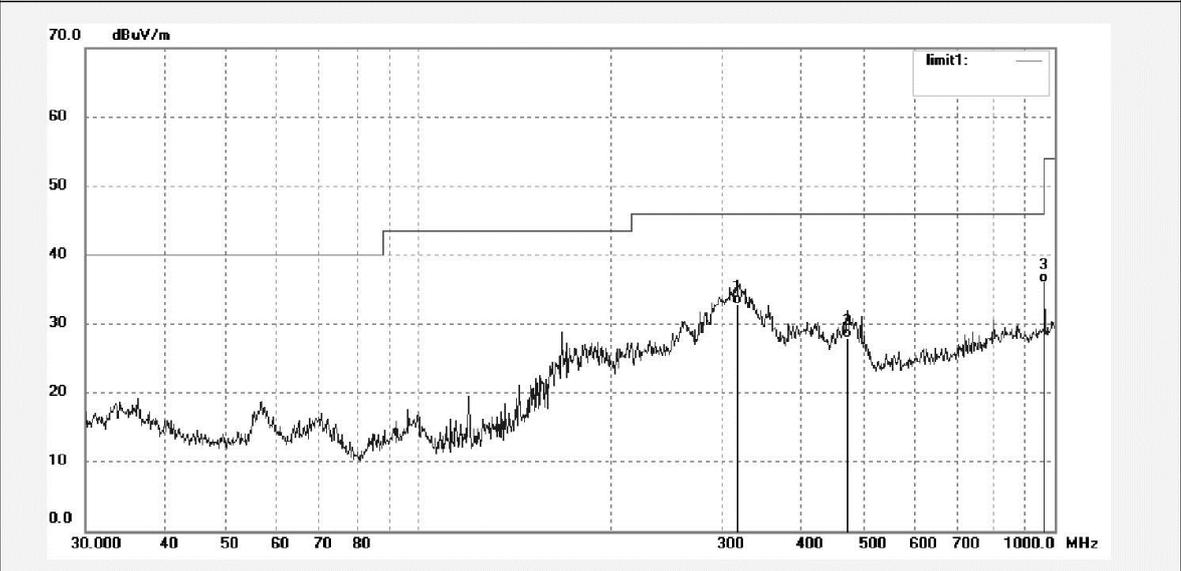

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 317.7010 | 41.63 | -8.81 | 32.82 | 46.00 | -13.18 | QP | | | |
| 2 | 472.1759 | 33.35 | -5.47 | 27.88 | 46.00 | -18.12 | QP | | | |
| 3 | 962.1621 | 33.61 | 2.38 | 35.99 | 54.00 | -18.01 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2006 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2437MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

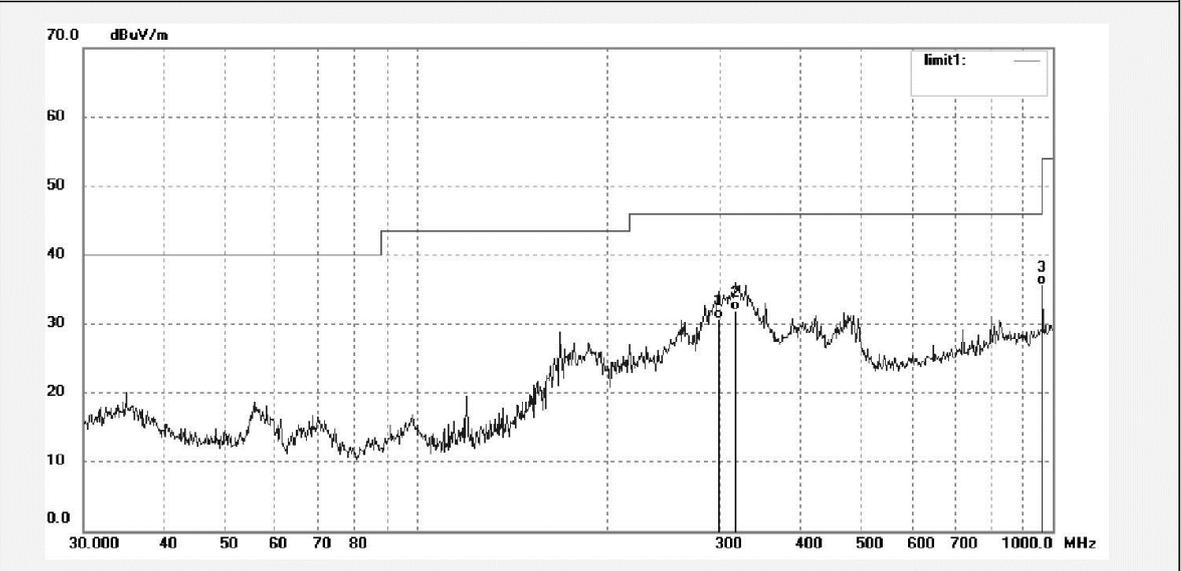

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 298.2681 | 40.08 | -9.32 | 30.76 | 46.00 | -15.24 | QP | | | |
| 2 | 317.7010 | 40.73 | -8.81 | 31.92 | 46.00 | -14.08 | QP | | | |
| 3 | 962.1621 | 33.26 | 2.37 | 35.63 | 54.00 | -18.37 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|------------------------|
| Job No.: LAN2014 #2007 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2437MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

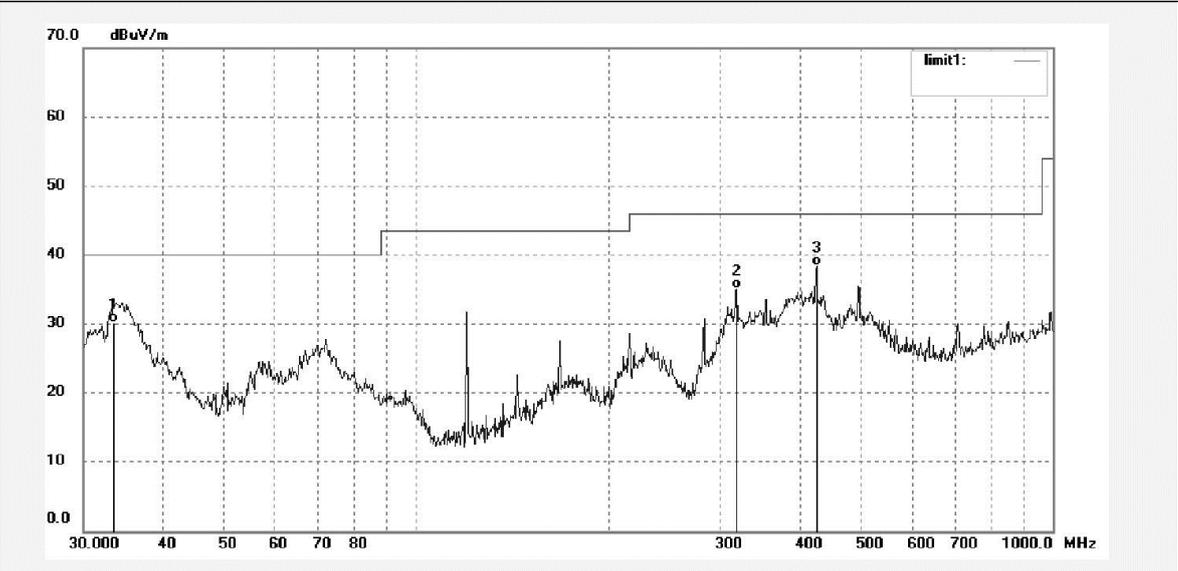

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 33.4448 | 40.39 | -10.26 | 30.13 | 40.00 | -9.87 | QP | | | |
| 2 | 318.8170 | 43.89 | -8.78 | 35.11 | 46.00 | -10.89 | QP | | | |
| 3 | 425.0280 | 44.56 | -6.16 | 38.40 | 46.00 | -7.60 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|------------------------|
| Job No.: LAN2014 #2008 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2462MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

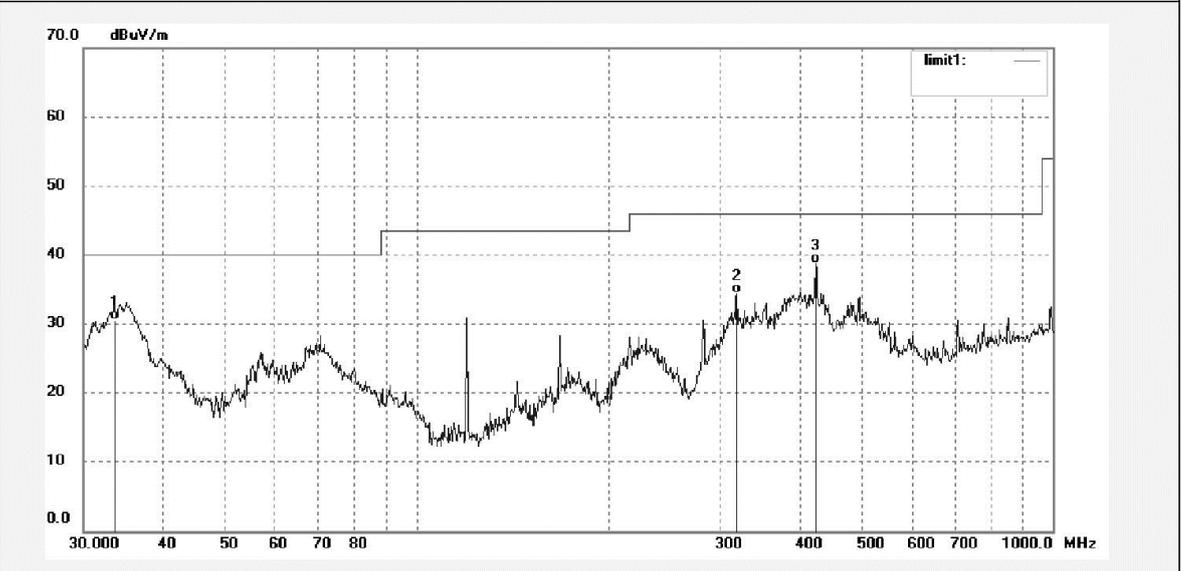

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 33.5623 | 40.74 | -10.27 | 30.47 | 40.00 | -9.53 | QP | | | |
| 2 | 318.8170 | 43.20 | -8.78 | 34.42 | 46.00 | -11.58 | QP | | | |
| 3 | 423.5403 | 44.89 | -6.16 | 38.73 | 46.00 | -7.27 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2009 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 14/12/30/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2462MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

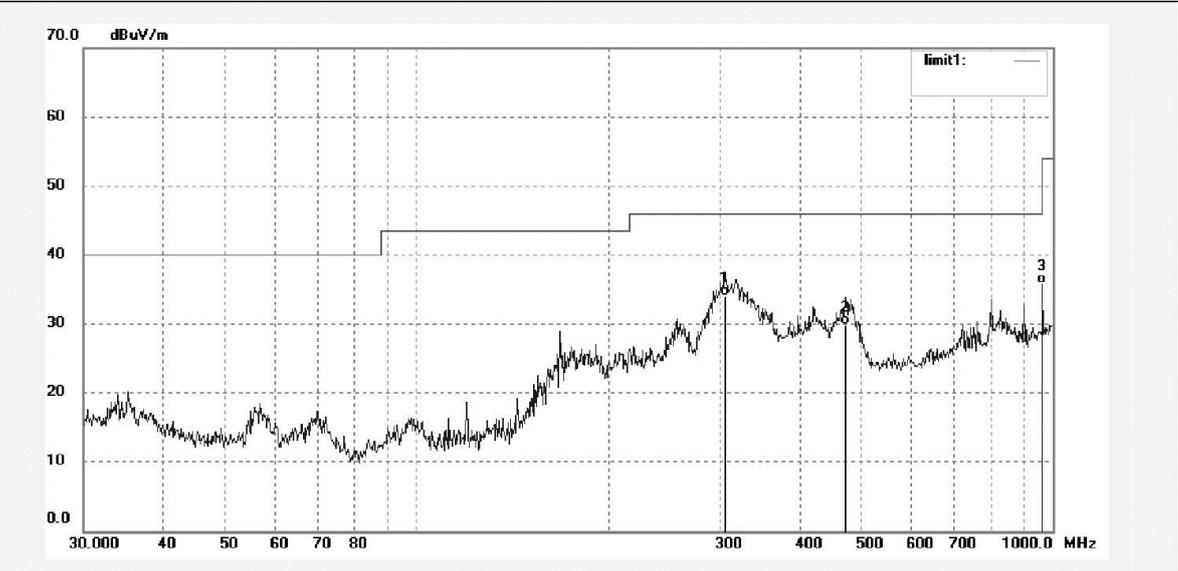

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 305.6800 | 43.13 | -9.18 | 33.95 | 46.00 | -12.05 | QP | | | |
| 2 | 472.1759 | 35.33 | -5.47 | 29.86 | 46.00 | -16.14 | QP | | | |
| 3 | 962.1622 | 33.41 | 2.37 | 35.78 | 54.00 | -18.22 | QP | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2193

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

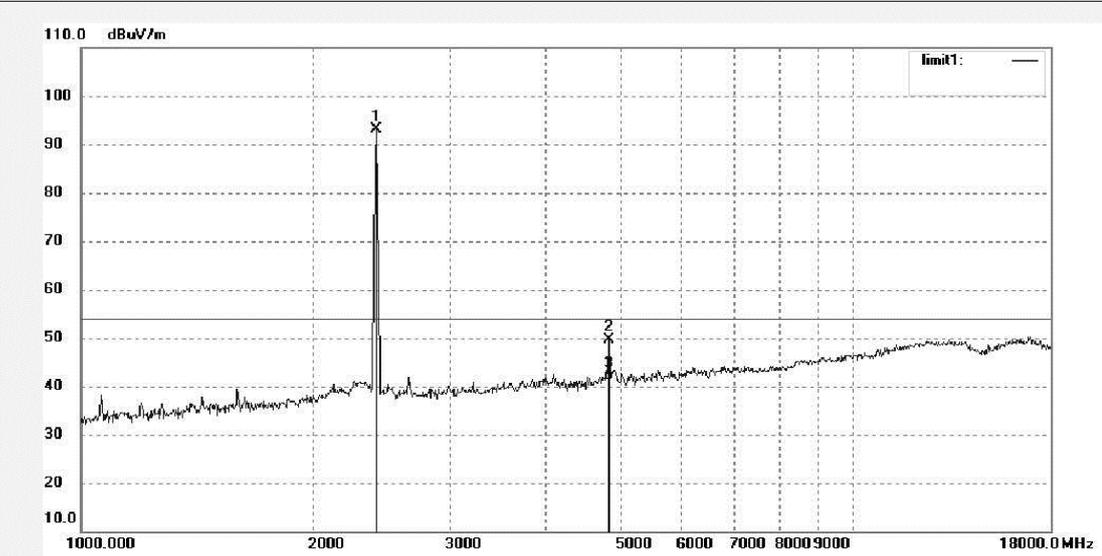

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2412.000 | 100.46 | -7.43 | 93.03 | / | / | peak | | | |
| 2 | 4824.253 | 49.81 | -0.19 | 49.62 | 74.00 | -24.38 | peak | | | |
| 3 | 4824.253 | 41.36 | -0.19 | 41.17 | 54.00 | -12.83 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2194

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2412MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

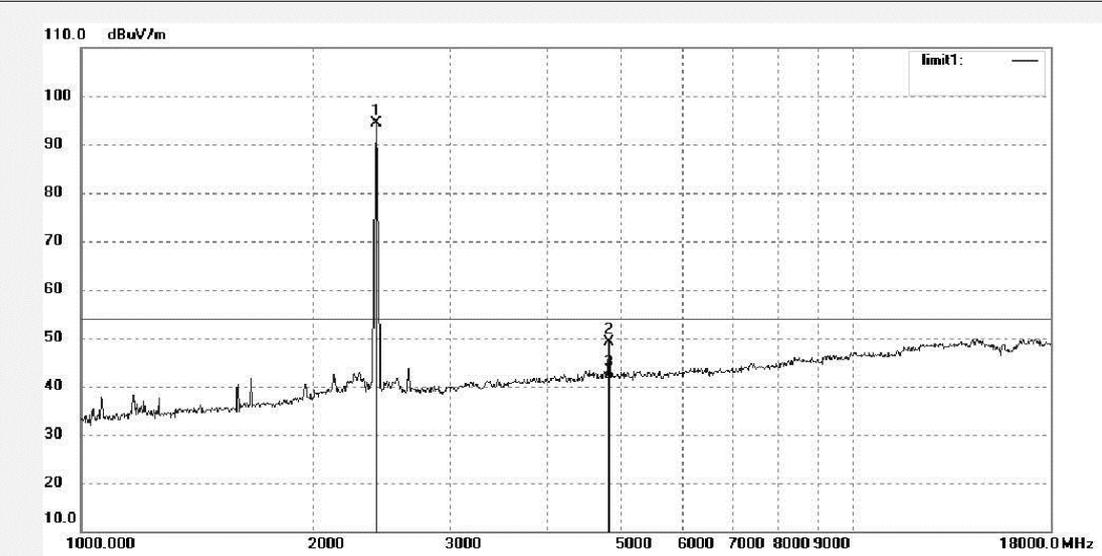

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2412.000 | 101.79 | -7.43 | 94.36 | / | / | peak | | | |
| 2 | 4824.250 | 49.33 | -0.19 | 49.14 | 74.00 | -24.86 | peak | | | |
| 3 | 4824.250 | 41.58 | -0.19 | 41.39 | 54.00 | -12.61 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2195

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

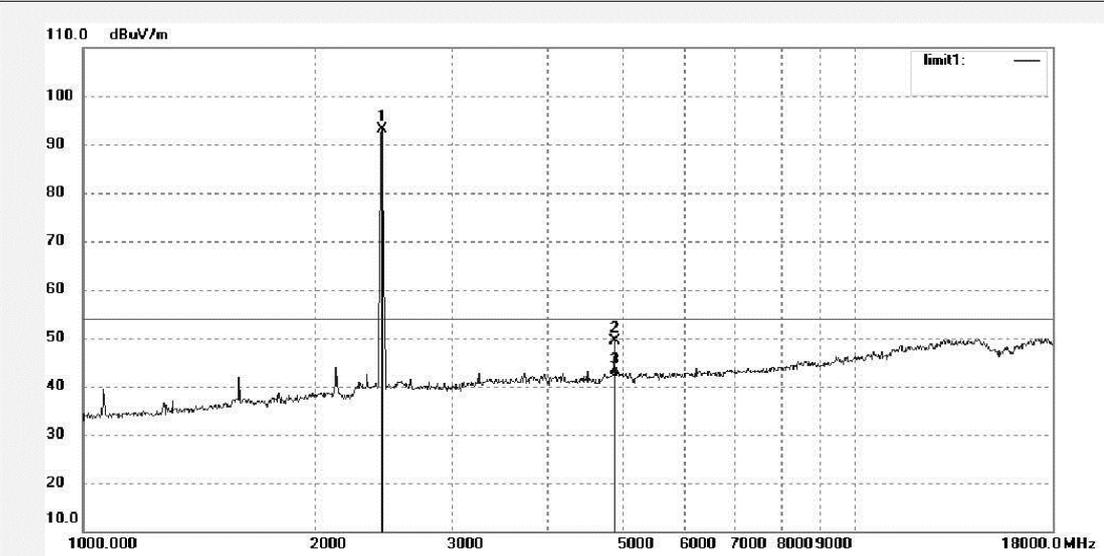

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2437.000 | 100.49 | -7.36 | 93.13 | / | / | peak | | | |
| 2 | 4874.238 | 49.37 | 0.09 | 49.46 | 74.00 | -24.54 | peak | | | |
| 3 | 4874.238 | 41.75 | 0.09 | 41.84 | 54.00 | -12.16 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2196

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2437MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

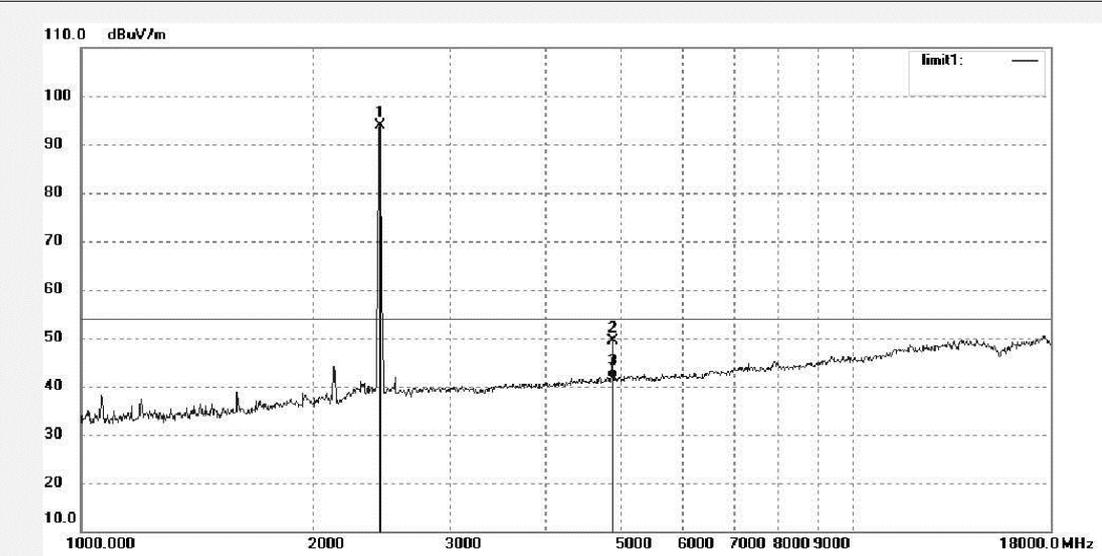

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2437.000 | 101.23 | -7.36 | 93.87 | / | / | peak | | | |
| 2 | 4874.265 | 49.40 | 0.09 | 49.49 | 74.00 | -24.51 | peak | | | |
| 3 | 4874.265 | 41.66 | 0.09 | 41.75 | 54.00 | -12.25 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2197

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Horizontal

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

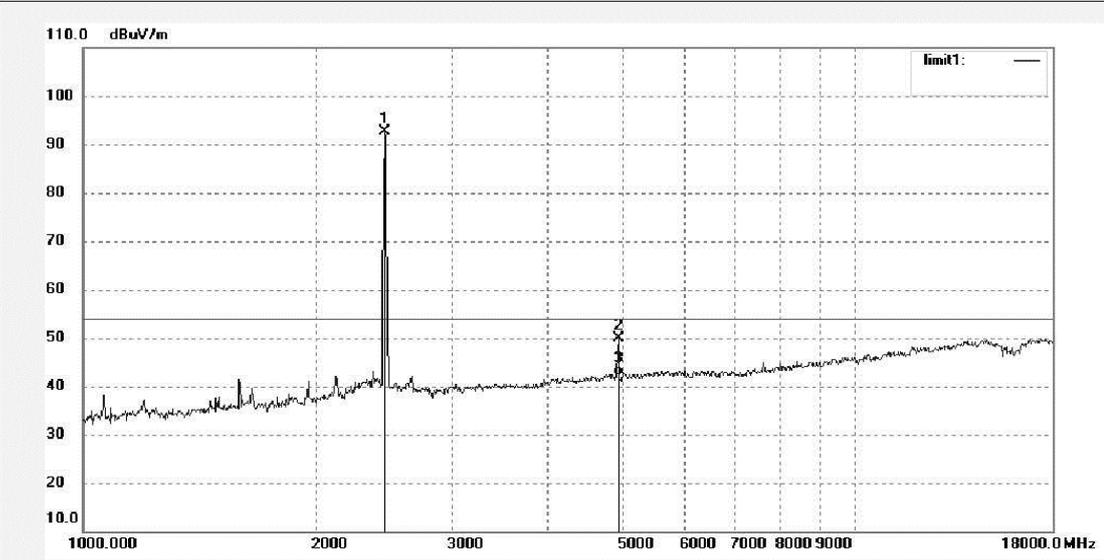

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2462.000 | 99.88 | -7.35 | 92.53 | / | / | peak | | | |
| 2 | 4924.314 | 49.55 | 0.34 | 49.89 | 74.00 | -24.11 | peak | | | |
| 3 | 4924.314 | 41.75 | 0.34 | 42.09 | 54.00 | -11.91 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2198

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Wi-Fi Dongle

Mode: TX 2462MHz

Model: TD-2021N-USB

Manufacturer: HUAWEI

Polarization: Vertical

Power Source: DC 5V


Date: 15/05/09/

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

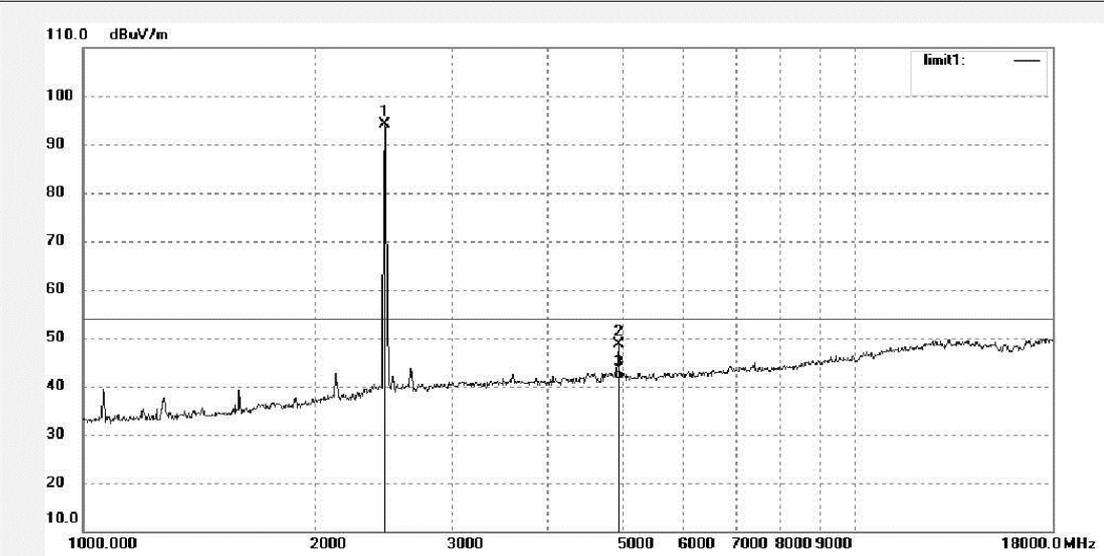

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 2462.000 | 101.36 | -7.35 | 94.01 | / | / | peak | | | |
| 2 | 4924.321 | 48.34 | 0.38 | 48.72 | 74.00 | -25.28 | peak | | | |
| 3 | 4924.321 | 40.96 | 0.38 | 41.34 | 54.00 | -12.66 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2260 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 15/05/09/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2412MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

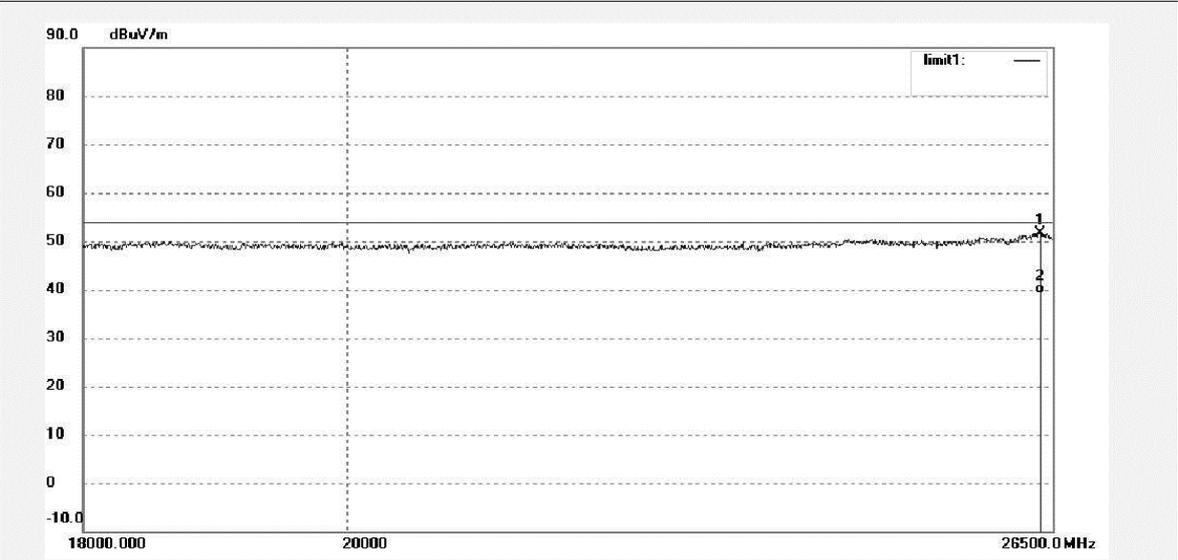

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26367.091 | 35.24 | 16.50 | 51.74 | 74.00 | -22.26 | peak | | | |
| 2 | 26367.091 | 22.68 | 16.50 | 39.18 | 54.00 | -14.82 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2261
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Wi-Fi Dongle
Mode: TX 2412MHz
Model: TD-2021N-USB
Manufacturer: HUAWEI

Polarization: Vertical
Power Source: DC 5V
Date: 15/05/09/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11b

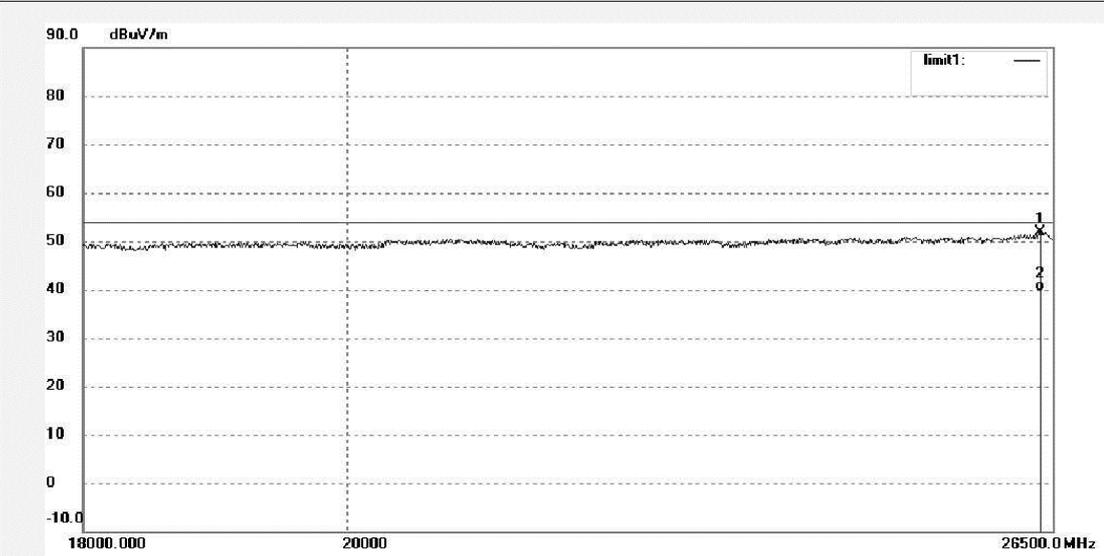

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26367.091 | 35.50 | 16.50 | 52.00 | 74.00 | -22.00 | peak | | | |
| 2 | 26367.091 | 23.12 | 16.50 | 39.62 | 54.00 | -14.38 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #2262
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Wi-Fi Dongle
Mode: TX 2437MHz
Model: TD-2021N-USB
Manufacturer: HUAWEI

Polarization: Vertical
Power Source: DC 5V
Date: 15/05/09/
Time:
Engineer Signature:
Distance: 3m

Note: 802.11b

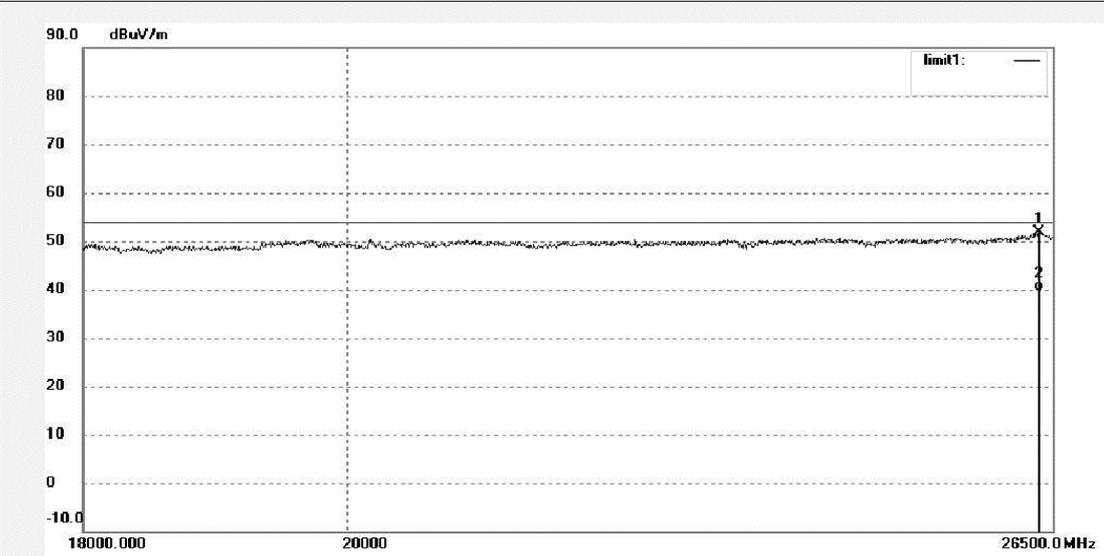

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26356.895 | 35.43 | 16.50 | 51.93 | 74.00 | -22.07 | peak | | | |
| 2 | 26356.895 | 23.04 | 16.50 | 39.54 | 54.00 | -14.46 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2263 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 15/05/09/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2437MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

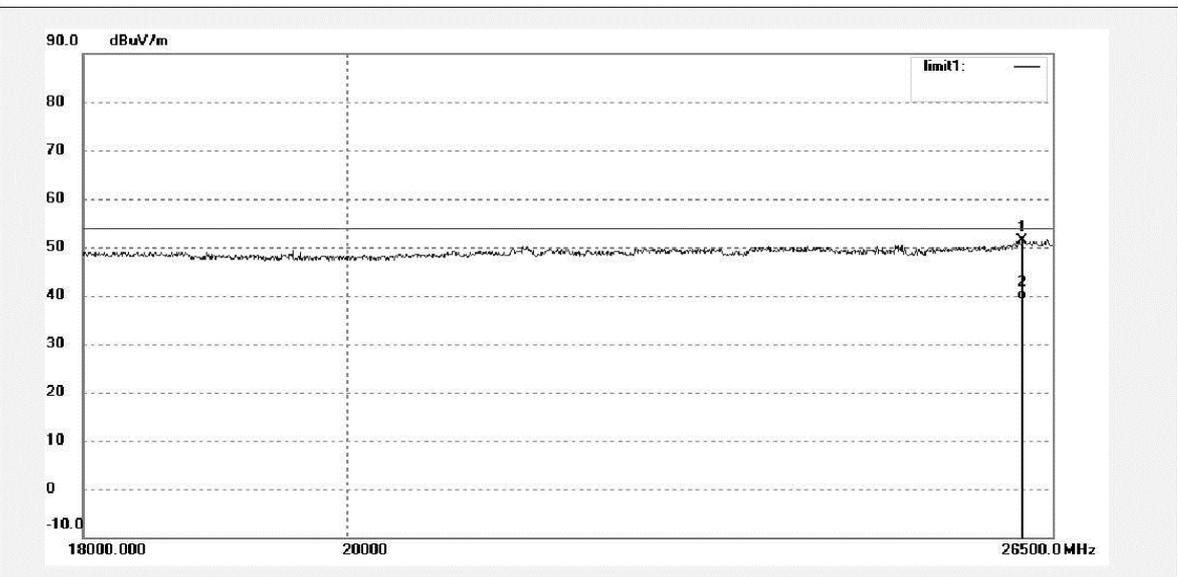

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26184.163 | 34.98 | 16.50 | 51.48 | 74.00 | -22.52 | peak | | | |
| 2 | 26184.163 | 22.75 | 16.50 | 39.25 | 54.00 | -14.75 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|--------------------------|
| Job No.: LAN2014 #2264 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 15/05/09/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2462MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

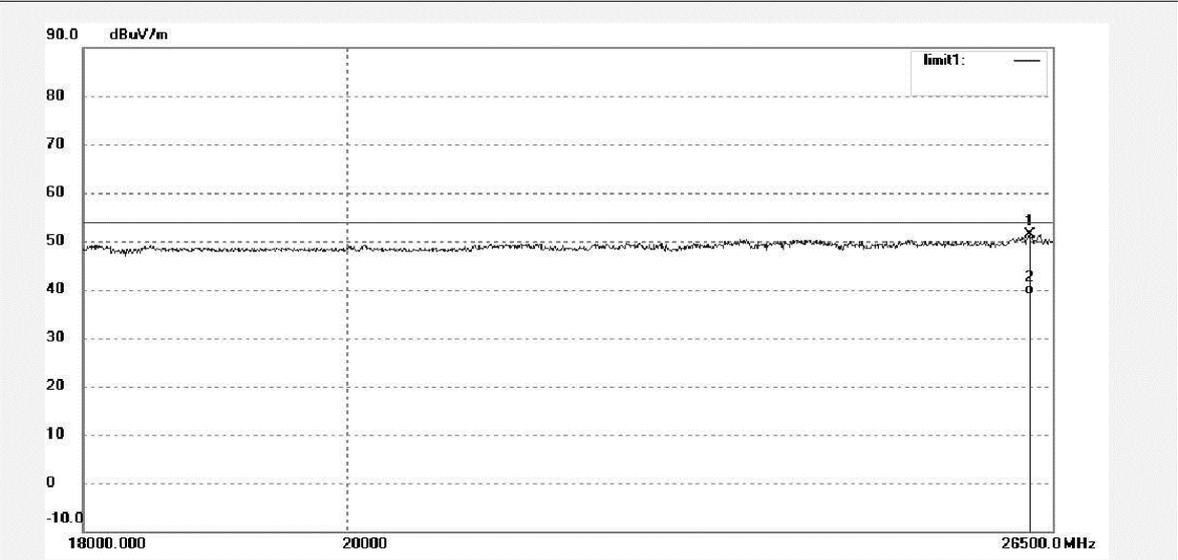

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26255.151 | 34.86 | 16.50 | 51.36 | 74.00 | -22.64 | peak | | | |
| 2 | 26255.151 | 22.49 | 16.50 | 38.99 | 54.00 | -15.01 | AVG | | | |



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

| | |
|-----------------------------------|------------------------|
| Job No.: LAN2014 #2265 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: DC 5V |
| Test item: Radiation Test | Date: 15/05/09/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: Wi-Fi Dongle | Engineer Signature: |
| Mode: TX 2462MHz | Distance: 3m |
| Model: TD-2021N-USB | |
| Manufacturer: HUAWEI | |

Note: 802.11b

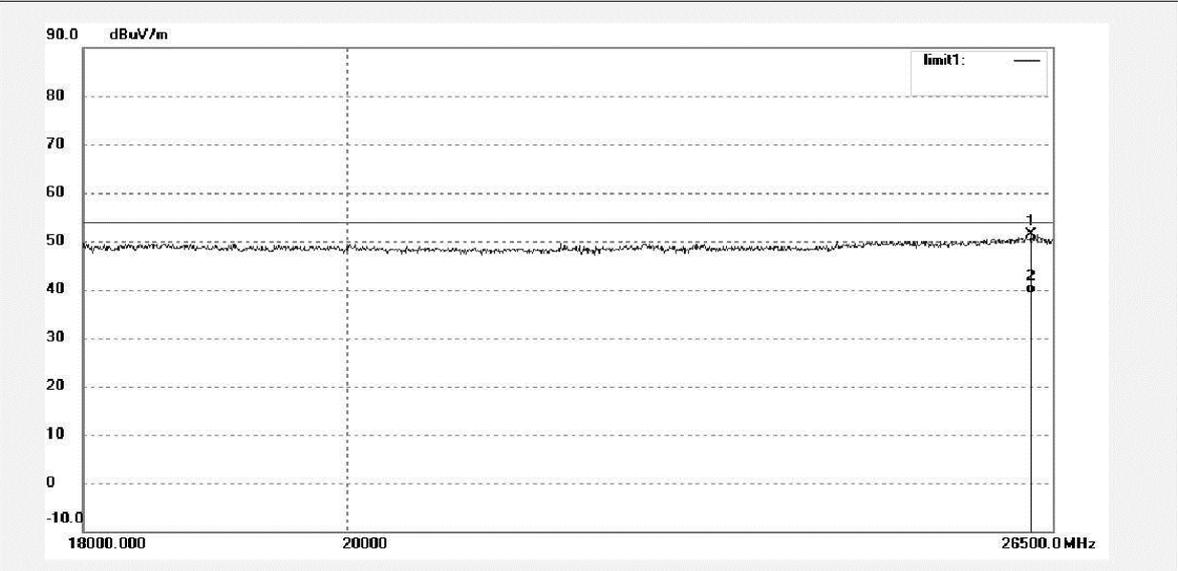

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26275.468 | 34.94 | 16.50 | 51.44 | 74.00 | -22.56 | peak | | | |
| 2 | 26275.468 | 22.64 | 16.50 | 39.14 | 54.00 | -14.86 | AVG | | | |

Appendix C.2: Spurious Emissions, 802.11g_1TX


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2412MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

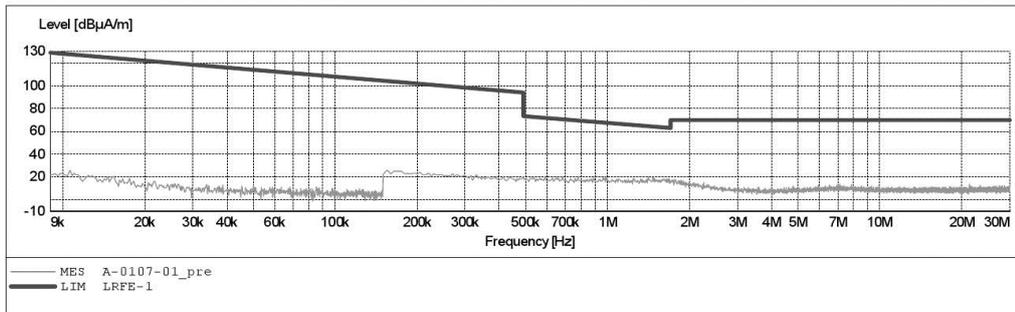


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2412MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Y
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------|-----------|----------|-----------|------------|-----------|------------|
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

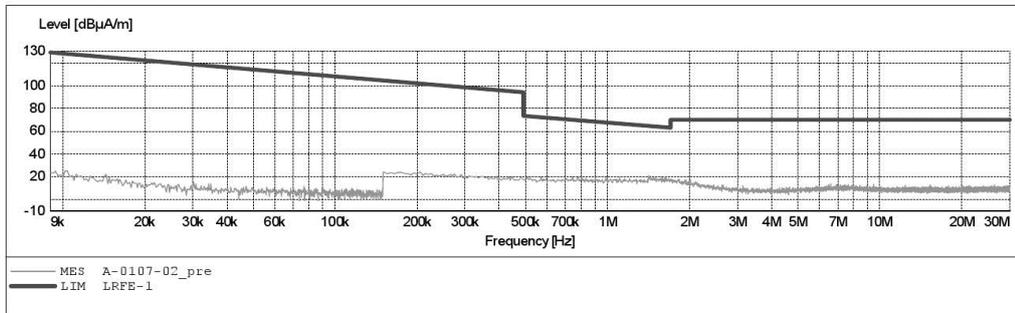


ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2412MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: Z
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | _SUB_STD_VTERM2 1.70 | | | | |
|--------------------|-----------|----------------------|-----------|------------|-----------|------------|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

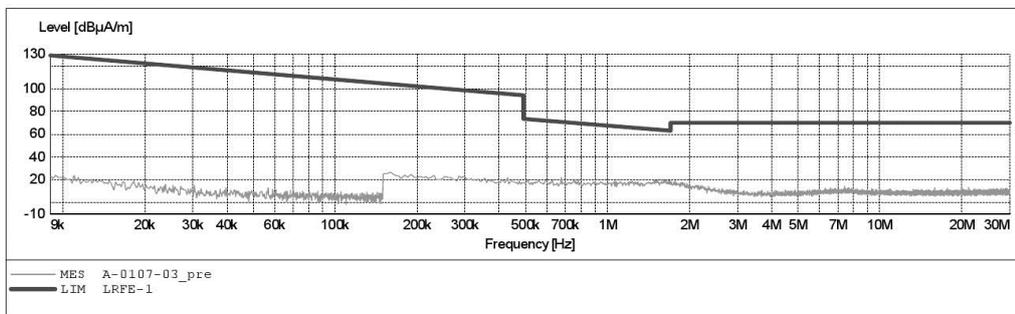

ACCURATE TECHNOLOGY CO., LTD

FCC Class B 3m Radiated

EUT: Wi-Fi Dongle M/N:TD-2021N-USB
 Manufacturer: HUAWEI
 Operating Condition: TX 2437MHz
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: DC 5V
 Comment: X
 Start of Test: 2015-1-7 /

SCAN TABLE: "LFRE Fin"

| Short Description: | | | _SUB_STD_VTERM2 1.70 | | | |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start | Stop | Step | Detector | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz | 150.0 kHz | 100.0 Hz | QuasiPeak | 1.0 s | 200 Hz | 1516M |
| 150.0 kHz | 30.0 MHz | 5.0 kHz | QuasiPeak | 1.0 s | 9 kHz | 1516M |

