

FCC TEST REPORT

For

MINIX TECHNOLOGY LIMITED

Mini PC with Android OS

Test Model: NEO U9-H

Additional Model No.:/

Prepared for : MINIX TECHNOLOGY LIMITED
Address : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Jan 09, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : Jan 09, 2017~Feb 14, 2017
Date of Report : Feb 14, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 E(15.407)

Report Reference No. : LCS1701090941E

Date of Issue : Feb 14, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards [checked]
Partial application of Harmonised standards [unchecked]
Other standard testing method [unchecked]

Applicant's Name : MINIX TECHNOLOGY LIMITED

Address : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407) / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Mini PC with Android OS

Trade Mark : MINIX

Test Model : NEO U9-H

Ratings : DC 5V/3A by adapter
Adapter input:100~240VAC, 50/60Hz, 0.5A

Result : Positive

Compiled by:

Calvin Weng

Calvin Weng/ Administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|---|--------------------------------------|
| Test Report No. : LCS1701090941E | <u>Feb 14, 2017</u> Date of issue |
|---|--------------------------------------|

| | |
|---|--|
| Test Model..... | : NEO U9-H |
| EUT..... | : Mini PC with Android OS |
| Applicant..... : MINIX TECHNOLOGY LIMITED | |
| Address..... | : Unit 01, 15/F, Chevalier Commercial Center, No.8 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... : XIANGUAN ELECTRONICS LIMITED | |
| Address..... | : 13F, Building B, Haisong Edifice, Tairan 9th Rd, Futian District, Shenzhen, China |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... : XIANGUAN ELECTRONICS LIMITED | |
| Address..... | : 13F, Building B, Haisong Edifice, Tairan 9th Rd, Futian District, Shenzhen, China |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|--------------|---------------|-------------|
| 00 | Feb 14, 2017 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1. DESCRIPTION OF DEVICE (EUT) | 6 |
| 1.2. SUPPORT EQUIPMENT LIST | 7 |
| 1.3. EXTERNAL I/O | 7 |
| 1.4. DESCRIPTION OF TEST FACILITY | 7 |
| 1.5. LIST OF MEASURING EQUIPMENT | 8 |
| 1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 10 |
| 1.7. MEASUREMENT UNCERTAINTY | 10 |
| 1.8. DESCRIPTION OF TEST MODES | 10 |
| 2. TEST METHODOLOGY | 12 |
| 2.1. EUT CONFIGURATION | 12 |
| 2.2. EUT EXERCISE | 12 |
| 2.3. GENERAL TEST PROCEDURES | 12 |
| 3. SYSTEM TEST CONFIGURATION | 13 |
| 3.1. JUSTIFICATION | 13 |
| 3.2. EUT EXERCISE SOFTWARE | 13 |
| 3.3. SPECIAL ACCESSORIES | 13 |
| 3.4. BLOCK DIAGRAM/SCHEMATICS | 13 |
| 3.5. EQUIPMENT MODIFICATIONS | 13 |
| 3.6. TEST SETUP | 13 |
| 4. SUMMARY OF TEST RESULTS..... | 14 |
| 5. TEST RESULT | 15 |
| 5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT | 15 |
| 5.2. POWER SPECTRAL DENSITY MEASUREMENT | 17 |
| 5.3. 6dB & 26dB BANDWIDTH MEASUREMENT | 25 |
| 5.4. RADIATED EMISSIONS MEASUREMENT | 33 |
| 5.6. POWER LINE CONDUCTED EMISSIONS | 52 |
| 5.7. ANTENNA REQUIREMENTS..... | 54 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | |
|--------------------------|---|
| EUT | : Mini PC with Android OS |
| Test Model | : NEO U9-H |
| Hardware Version | : JX912AV1.1 |
| Software Version | : V1.0 |
| Power Supply | : DC 5V/3A by adapter Adapter input:100~240VAC, 50/60Hz, 0.5A |
| EUT Supports | : 2.4GHz WIFI/5G WIFI/Bluetooth 4.1 |
| Radios Application | |
| Bluetooth | : |
| Operating Frequency | : 2.402-2.480GHz |
| Channel Number | : 40 channels for Bluetooth V4.1 (DTS) |
| Channel Spacing | : 2MHz for Bluetooth V4.1 (DTS) |
| Modulation Type | : GFSK for Bluetooth V4.1 (DTS) |
| Bluetooth Version | : V4.1 |
| Antenna Description | : R-SMA Antenna, 2.5dBi(Max.) |
| WIFI(2.4GHz Band) | : |
| Operating Frequency | : 2412-2462MHz |
| Channel Spacing | : 5MHz |
| Channel Number | : 11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz) |
| Modulation Type | : 802.11b: DSSS; 802.11g/n: OFDM |
| Antenna Description | : R-SMA Antenna, 2.5dBi(Max.) FPC Antenna, 2.5dBi(Max.) |
| WIFI(5GHz Band) | : |
| Operating Frequency | : 5180.00-5240.00MHz |
| Channel Number | : 4 Channel for 20MHz Bandwidth 2 channels for 40MHz Bandwidth 1 channels for 80MHz Bandwidth |
| Modulation Type | : 802.11a/n/ac: OFDM |
| Antenna Description | : R-SMA Antenna, 2.5dBi(Max.) FPC Antenna, 2.5dBi(Max.) |

1.2. Support Equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|---|---------------|--------------|---------------|-------------|
| Shenzhen City Yunsheng Plastic Electronics Co., Ltd | Power Adapter | YS03-050300U | --- | FCC VoC |

1.3. External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|------------------|
| USB Port | 3 | 0.5m, unshielded |
| TF Card Port | 1 | N/A |
| OTG Port | 1 | 0.2m, unshielded |
| RJ45 Port | 1 | N/A |
| HDMI Port | 1 | 0.5m, unshielded |
| DC in Port | 1 | 1.2m, unshielded |
| Earphone Port | 1 | N/A |
| Mic Port | 1 | N/A |

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10: 2013, CISPR 22/EN 55022 and CISPR16-1-4 SVSWR requirements.

1.5. List Of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Cal Date | Due Date |
|--------------------------------------|----------------|---------------------------|--------------|-----------------|--------------|--------------|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9kHz – 2.75GHz | Jun 18, 2016 | Jun 17, 2017 |
| Signal analyzer | Agilent | E4448A(External mixers to | US44300469 | 9kHz~40GHz | Jul 16, 2016 | Jul 15, 2017 |
| LISN | MESS Tec | NNB-2/16Z | 99079 | 9KHz-30MHz | Jun 18, 2016 | Jun 17, 2017 |
| LISN | EMCO | 3819/2NM | 9703-1839 | 9KHz-30MHz | Jun 18, 2016 | Jun 17, 2017 |
| RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 9KHz-30MHz | Jun 18, 2016 | Jun 17, 2017 |
| ISN | SCHAFFNER | ISN ST08 | 21653 | 9KHz-30MHz | Jun 18, 2016 | Jun 17, 2017 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30M-18GHz | Jun 18, 2016 | Jun 17, 2017 |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 9kHz-2GHz | Apr 18, 2016 | Apr 17, 2017 |
| Amplifier | Agilent | 8449B | 3008A02120 | 1GHz-26.5GHz | Apr 18, 2016 | Apr 17, 2017 |
| Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 26.5GHz-40GHz | Apr 18, 2016 | Apr 17, 2017 |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9k-30MHz | Apr 18, 2016 | Apr 17, 2017 |
| By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 30MHz-1GHz | Apr 18, 2016 | Apr 17, 2017 |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz-18GHz | Apr 18, 2016 | Apr 17, 2017 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15GHz-40GHz | Apr 18, 2016 | Apr 17, 2017 |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz-1GHz | Jun 18, 2016 | Jun 17, 2017 |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1GHz-40GHz | Jun 18, 2016 | Jun 17, 2017 |
| Power Meter | R&S | NRVS | 100444 | DC-40GHz | Jun 18, 2016 | Jun 17, 2017 |
| Power Sensor | R&S | NRV-Z51 | 100458 | DC-30GHz | Jun 18, 2016 | Jun 17, 2017 |
| Power Sensor | R&S | NRV-Z32 | 10057 | 30MHz-6GHz | Jun 18, 2016 | Jun 17, 2017 |
| AC Power Source | HPC | HPA-500E | HPA-9100024 | AC 0~300V | Jun 18, 2016 | Jun 17, 2017 |
| DC power Source | GW | GPC-6030D | C671845 | DC 1V-60V | Jun 18, 2016 | Jun 17, 2017 |
| Temp. and Humidity Chamber | Giant Force | GTH-225-20-S | MAB0103-00 | N/A | Jun 18, 2016 | Jun 17, 2017 |
| RF CABLE-1m | JYE Bao | RG142 | CB034-1m | 20MHz-7GHz | Jun 18, 2016 | Jun 17, 2017 |
| RF CABLE-2m | JYE Bao | RG142 | CB035-2m | 20MHz-1GHz | Jun 18, 2016 | Jun 17, 2017 |
| Signal Generator | R&S | SMR40 | 10016 | 10MHz~40GHz | Jul 16, 2016 | Jul 15, 2017 |
| Universal Radio Communication Tester | R&S | CMU200 | 112012 | N/A | Oct 27, 2016 | Oct 26, 2017 |
| Wideband Radio Communication Tester | R&S | CMW500 | 1201.0002K50 | N/A | Nov 19, 2016 | Nov 18, 2017 |

| | | | | | | |
|--|---------------|-------------------------|-----------------|------------------------|-----------------|--------------|
| MXG Vector Signal Generator | Agilent | N5182A | MY470711 51 | 250KHz~6GHz | Oct 27, 2016 | Oct 26, 2017 |
| MXG Vector Signal Generator | Agilent | E4438C | MY420813 96 | 250KHz~6GHz | Oct 27, 2016 | Oct 26, 2017 |
| PSG Analog Signal Generator | Agilent | N8257D | MY465205 21 | 250KHz~20GHz | Nov 19, 2016 | Nov 18, 2017 |
| MXA Signal Analyzer | Agilent | N9020A | MY505101 40 | 10Hz~26.5GHz | Oct 27, 2016 | Oct 26, 2017 |
| DC Power Supply | Agilent | E3642A | / | 0-8V,5A/0-20V,2 .5A | May 20, 2016 | May 19, 2017 |
| RF Control Unit | Tonscend | JS0806-1 | / | / | Nov 19, 2016 | Nov 18, 2017 |
| LTE Test Software | Tonscend | JS1120-1 | / | Version: 2.5.7.0 | N/A | N/A |
| X-series USB Peak and Average Power Sensor Agilent | Agilent | U2021XA | MY540800 22 | / | Oct 27, 2016 | Oct 26, 2017 |
| 4 Ch.Simultaneous Sampling 14 Bits 2 MS/s | Agilent | U2531A | MY540800 16 | / | Oct 27, 2016 | Oct 26, 2017 |
| Test Software | Ascentest | AT890-SW | 20141230 | Version: 20160630 | N/A | N/A |
| Splitter/Combiner(Qty: 2) | Mini-Circuits | ZAPD-50W 4.2-6.0 GHz | NN256400 424 | / | Oct 27, 2016 | Oct 26, 2017 |
| Splitter/Combine(Qty: 2) | MCLI | PS3-7 | 4463/4464 | / | Oct 27, 2016 | Oct 26, 2017 |
| ATT (Qty: 1) | Mini-Circuits | VAT-30+ | 30912 | / | Oct 27, 2016 | Oct 26, 2017 |
| Radiated Emission test software | Audix | e3 | / | / | N/A | N/A |

1.6. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|--------------------------|-----------------|-------------|------|
| Radiation Uncertainty : | 9KHz~30MHz | 3.10dB | (1) |
| | 30MHz~200MHz | 2.96dB | (1) |
| | 200MHz~1000MHz | 3.10dB | (1) |
| | 1GHz~26.5GHz | 3.80dB | (1) |
| | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty : | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance : | 30MHz~300MHz | 1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description Of Test Modes

The EUT has been tested under operating condition.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Y position.

For pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11a mode(High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11a mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

- 802.11a Mode: 6 Mbps, OFDM.
- 802.11n(HT20) Mode: MCS0, OFDM.
- 802.11n(HT40) Mode: MCS0, OFDM.
- 802.11ac(VHT20) Mode: MCS0, OFDM.
- 802.11ac(VHT40) Mode: MCS0, OFDM.
- 802.11ac(VHT80) Mode: MCS0, OFDM.

Support Bandwidth For 5G WIFI Part:

| Bandwidth Mode | 20MHz | 40MHz | 80MHz |
|-----------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 802.11a | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 802.11n(HT20) | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 802.11n(HT40) | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 802.11ac(VHT20) | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 802.11ac(VHT40) | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 802.11ac(VHT80) | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Channel & Frequency:

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 5180~5240MHz | 36 | 5180 | 44 | 5220 |
| | 38 | 5190 | 46 | 5230 |
| | 40 | 5200 | 48 | 5240 |
| | 42 | 5210 | / | / |

For 802.11a/n(HT20)/ac(VHT20), Channel 36, 44 and 48 were tested.
 For 802.11n(HT40)/ac(VHT40), Channel 38 and 46 were tested.
 For 802.11ac(VHT80), Channel 42 was tested.

Note: for BLE, only R-SMA antenna is used, for 2.4G & 5G Wi-Fi, both the R-SMA and FPC antenna are used.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01r03 is required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (RF test tool) provided by applicant.

3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/ unshielded | Notes |
|-----|---------------|--------------|-----------|------------|--------|-------------------------|-------|
| 1 | PC | Lenovo | Ideapad | A131101550 | / | / | DOC |
| 2 | Power adapter | Lenovo | CPA-A090 | 36200414 | 1.00m | unshielded | DOC |

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart E | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.407(a) | Maximum Conducted Output Power | Compliant |
| §15.407(a) | Power Spectral Density | Compliant |
| §15.407(e) | 6dB & 26dB Bandwidth | Compliant |
| §15.205, §15.407(b) | Radiated Spurious Emissions and Band Edge | Compliant |
| §15.407(g) | Frequency Stability | N/A |
| §15.407(h) | Transmit Power Control (TPC) | N/A |
| §15.207(a) | Line Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement

5.1.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.3. Test Setup Layout

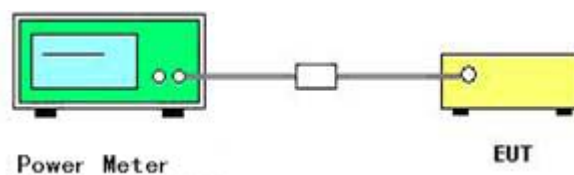

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Result of Maximum Conducted Output Power

| | | | |
|---------------|----------|----------------|--------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Chaz Liu | Configurations | 802.11a/n/ac |

Maximum Conducted Output Power Measurement Result For 5180~5240MHz Band

| Mode | Channel | Frequency (MHz) | Conducted Power (dBm, Average) | | | Max. Limit (dBm) | Result |
|-----------------|---------|-----------------|--------------------------------|-------|-------|------------------|----------|
| | | | Ant 0 | Ant 1 | Sum | | |
| 802.11a | 36 | 5180 | 14.78 | 14.82 | / | 24 | Complies |
| | 44 | 5220 | 14.76 | 14.19 | / | 24 | Complies |
| | 48 | 5240 | 15.09 | 14.54 | / | 24 | Complies |
| 802.11n(HT20) | 36 | 5180 | 14.12 | 13.87 | 17.01 | 24 | Complies |
| | 44 | 5220 | 14.02 | 13.73 | 16.89 | 24 | Complies |
| | 48 | 5240 | 14.25 | 13.60 | 16.95 | 24 | Complies |
| 802.11n(HT40) | 38 | 5190 | 14.31 | 13.97 | 17.16 | 24 | Complies |
| | 46 | 5230 | 14.25 | 13.71 | 17.00 | 24 | Complies |
| 802.11ac(VHT20) | 36 | 5180 | 14.06 | 13.79 | 16.94 | 24 | Complies |
| | 44 | 5220 | 14.10 | 13.49 | 16.82 | 24 | Complies |
| | 48 | 5240 | 14.70 | 13.98 | 17.36 | 24 | Complies |
| 802.11ac(VHT40) | 38 | 5190 | 14.27 | 13.92 | 17.11 | 24 | Complies |
| | 46 | 5230 | 14.23 | 14.16 | 17.21 | 24 | Complies |
| 802.11ac(VHT80) | 42 | 5210 | 14.07 | 13.55 | 16.83 | 24 | Complies |

5.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW/VBW = 1MHz/3MHz For the 5.15-5.25GHz band;
Set the RBW/VBW = 100KHz/300KHz For the 5.725-5.85GHz band.
- 4) Set the span to encompass the entire emission bandwidth of the signal.
- 5) Detector = RMS.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.

5.2.3. Test Setup Layout

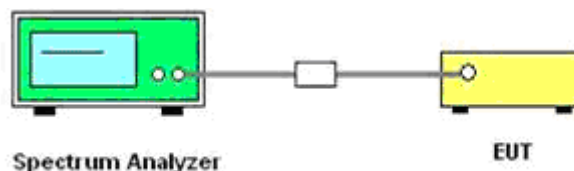

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Result of Power Spectral Density


| | | | |
|---------------|----------|----------------|--------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Chaz Liu | Configurations | 802.11a/n/ac |

Power Spectral Density Measurement Result For 5180~5240MHz Band



| Mode | Channel | Frequency (MHz) | Power Density (dBm/MHz) | | | Max. Limit (dBm/MHz) | Result |
|-----------------|---------|-----------------|-------------------------|--------|------|----------------------|----------|
| | | | Ant 0 | Ant 1 | Sum | | |
| 802.11a | 36 | 5180 | 4.870 | 4.475 | / | 11 | Complies |
| | 44 | 5220 | 4.472 | 4.433 | / | 11 | Complies |
| | 48 | 5240 | 4.767 | 4.957 | / | 11 | Complies |
| 802.11n(HT20) | 36 | 5180 | 4.474 | 3.767 | 7.15 | 11 | Complies |
| | 44 | 5220 | 4.095 | 3.582 | 6.86 | 11 | Complies |
| | 48 | 5240 | 4.971 | 3.585 | 7.34 | 11 | Complies |
| 802.11n(HT40) | 38 | 5190 | 2.654 | 1.934 | 5.32 | 11 | Complies |
| | 46 | 5230 | 2.707 | 2.239 | 5.49 | 11 | Complies |
| 802.11ac(VHT20) | 36 | 5180 | 4.480 | 3.542 | 7.05 | 11 | Complies |
| | 44 | 5220 | 4.689 | 3.391 | 7.10 | 11 | Complies |
| | 48 | 5240 | 4.536 | 3.825 | 7.21 | 11 | Complies |
| 802.11ac(VHT40) | 38 | 5190 | 2.455 | 1.732 | 5.12 | 11 | Complies |
| | 46 | 5230 | 2.900 | 1.596 | 5.31 | 11 | Complies |
| 802.11ac(VHT80) | 42 | 5210 | 1.025 | -1.156 | 3.08 | 11 | Complies |

The measured power density (dBm) has the offset with cable loss already.

Test Result of Power Spectral Density-ant 0


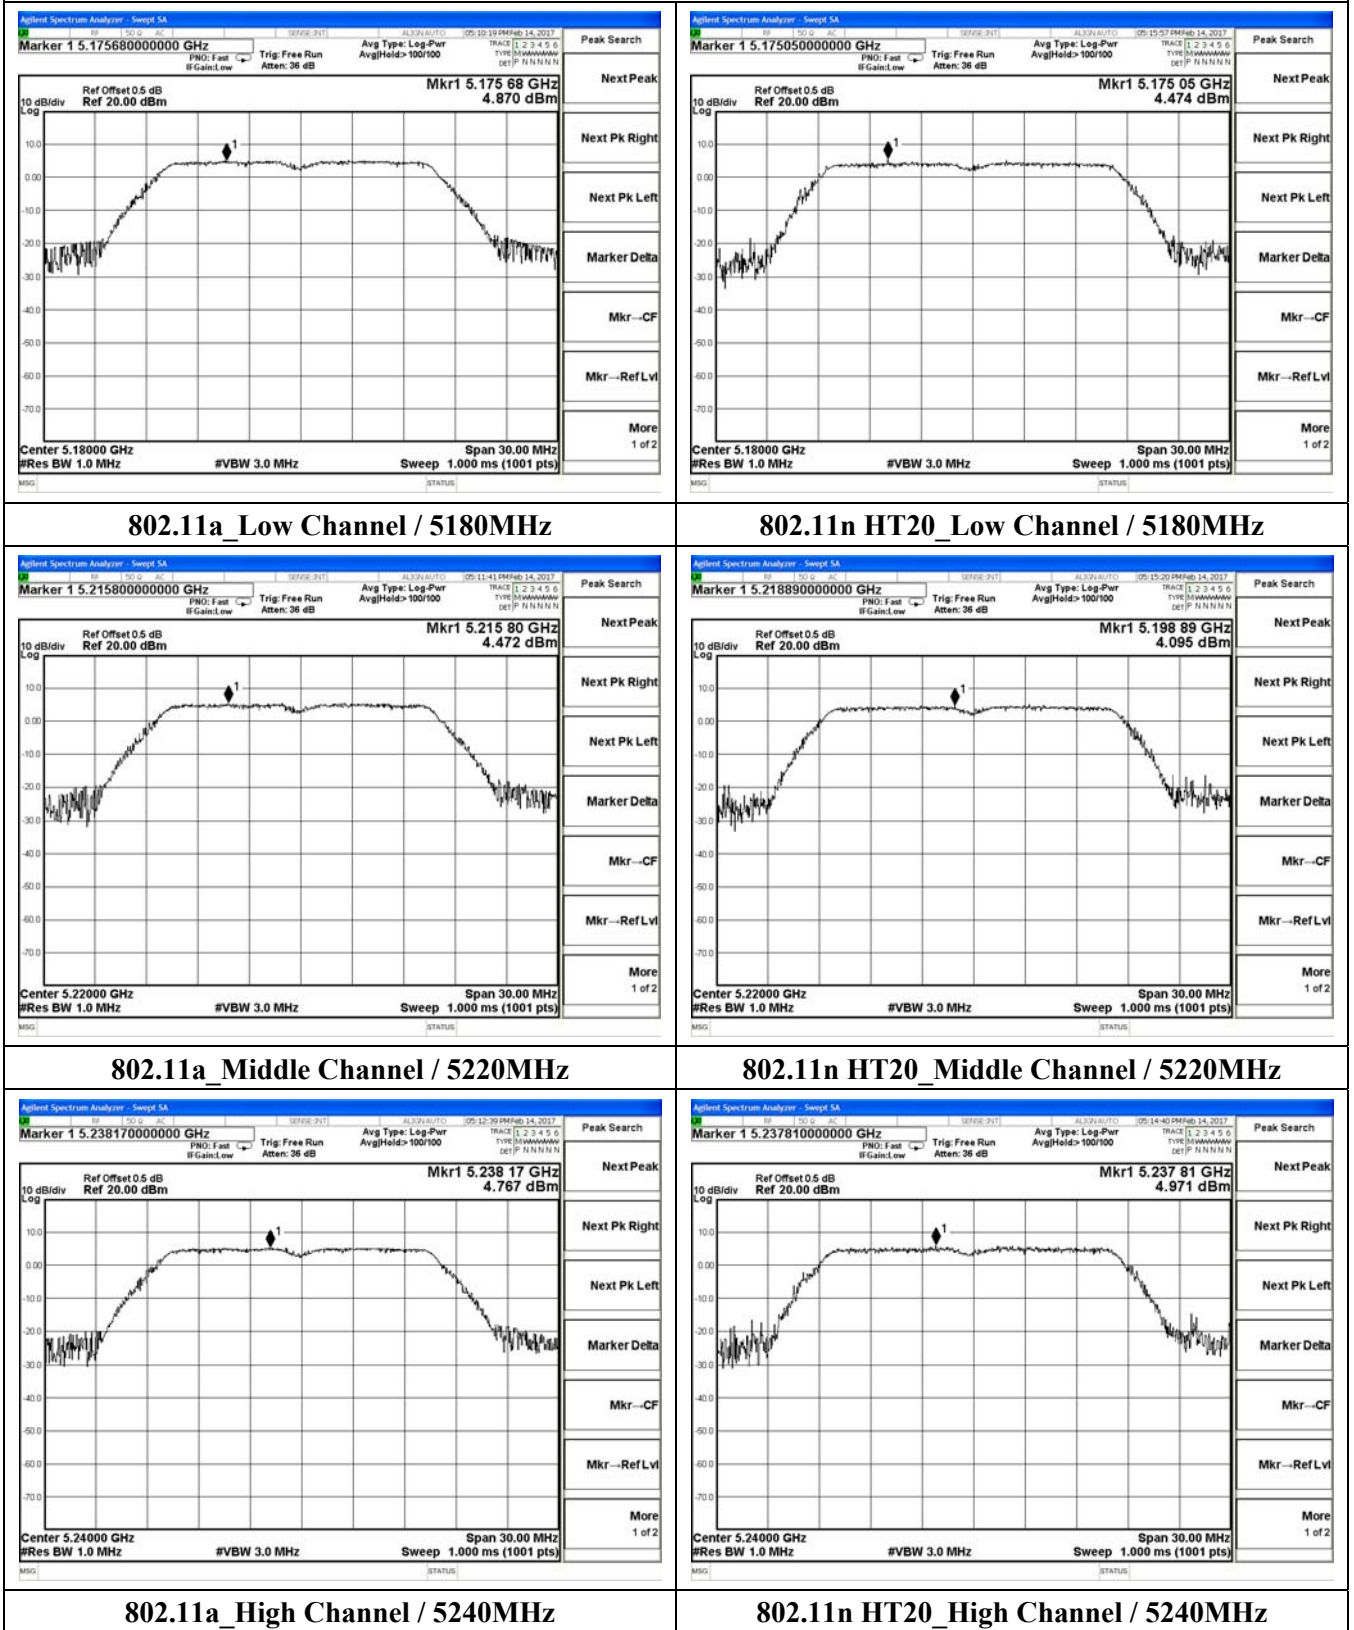


Test Result of Power Spectral Density-ant 0

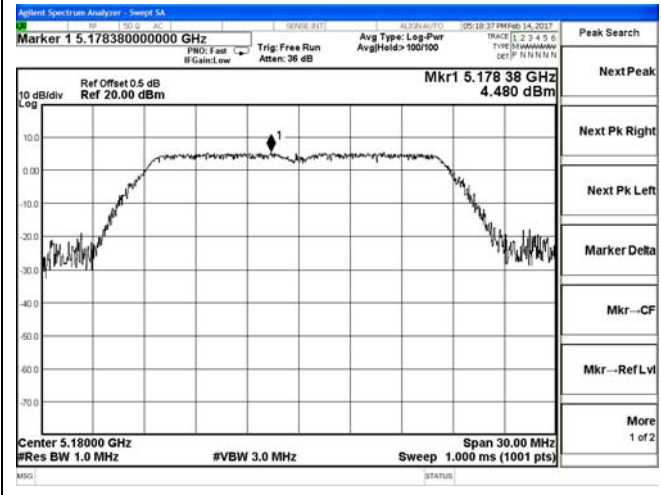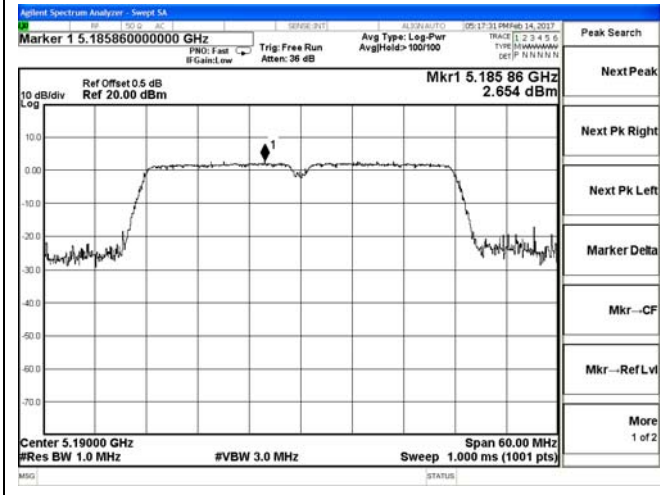


802.11n HT40_Low Channel / 5190MHz

802.11ac VHT20_Low Channel / 5180MHz

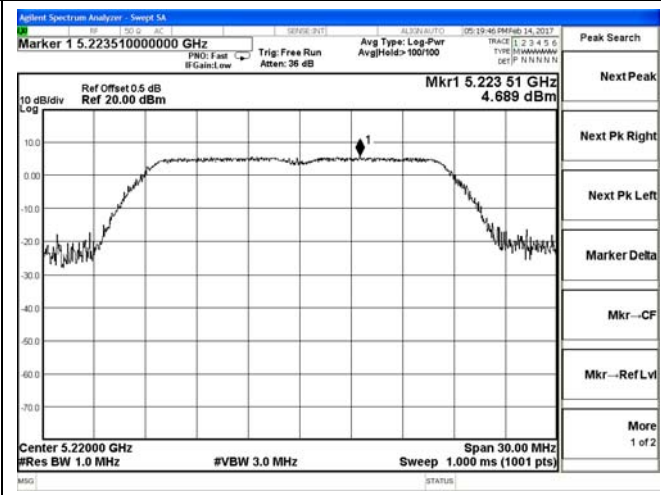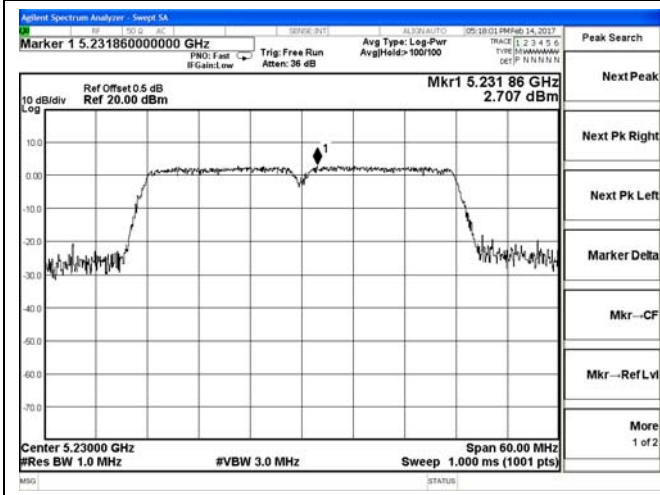


802.11n HT40_High Channel / 5230MHz

802.11ac VHT20_Mid Channel / 5220MHz

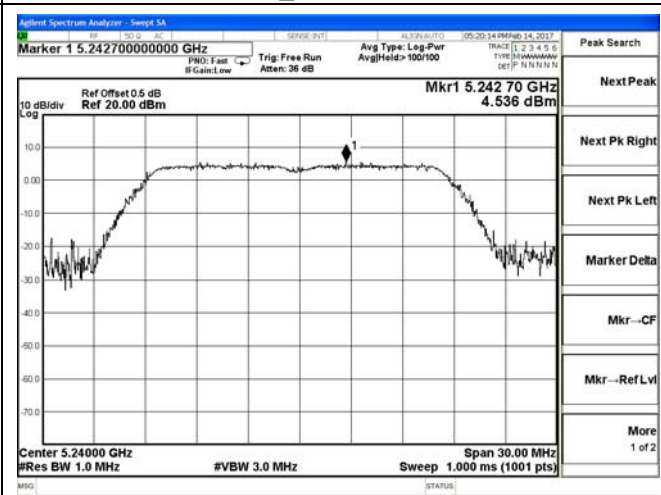


802.11ac VHT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 0

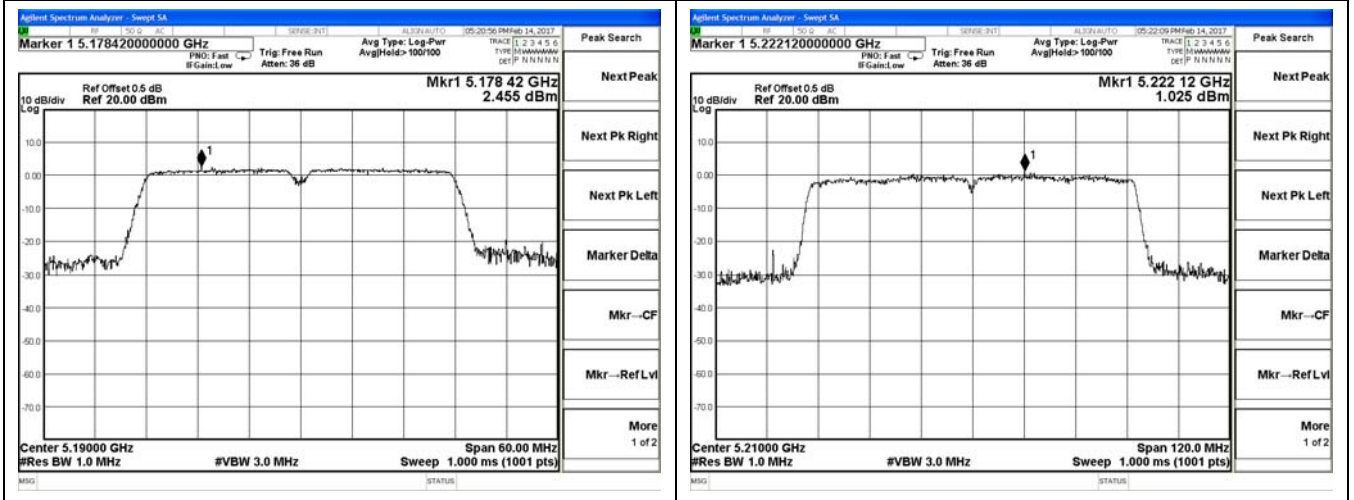



802.11ac VHT40_Low Channel / 5190MHz

802.11ac VHT80_ 5210MHz

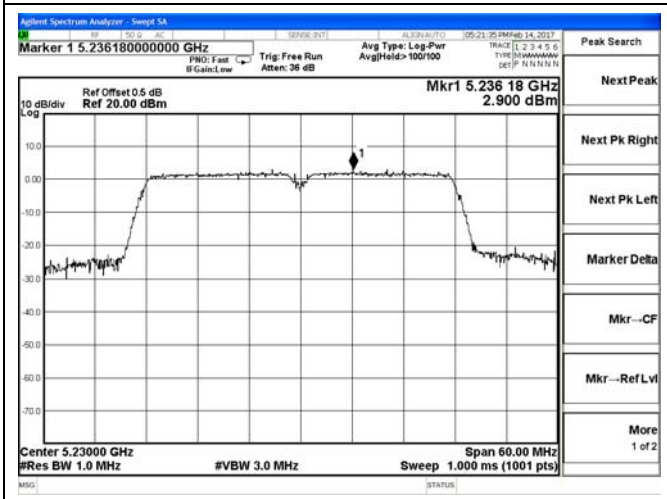



802.11ac VHT40_High Channel / 5230MHz

Test Result of Power Spectral Density-ant 1

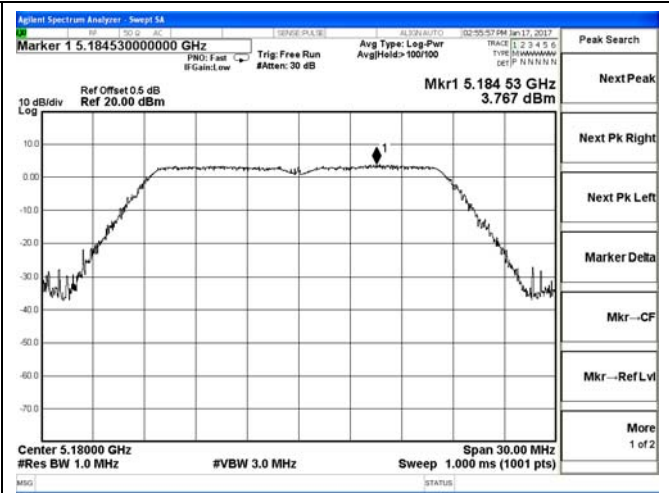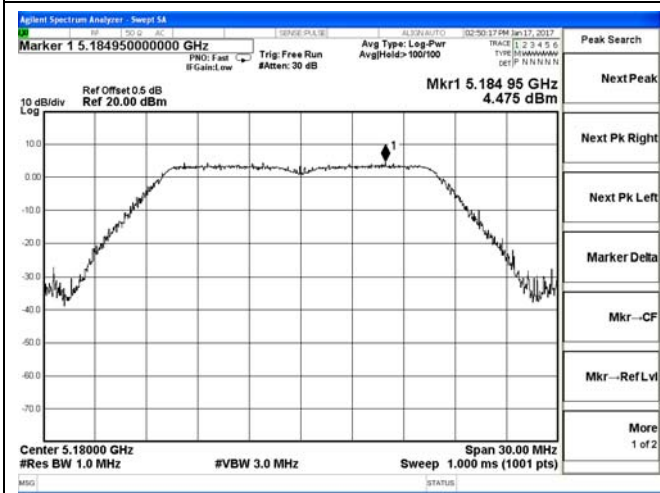



802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

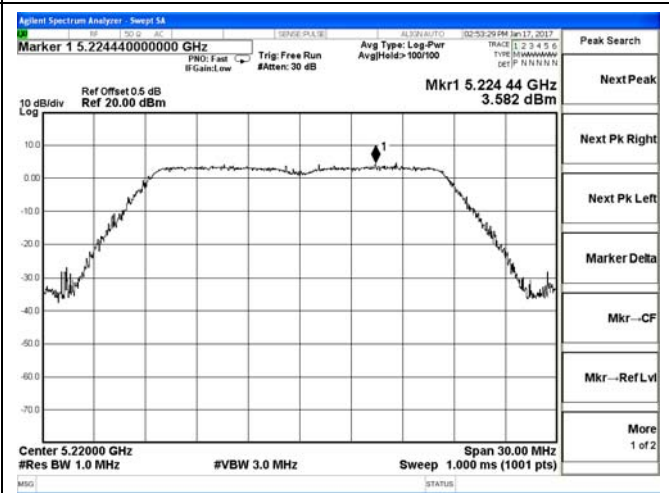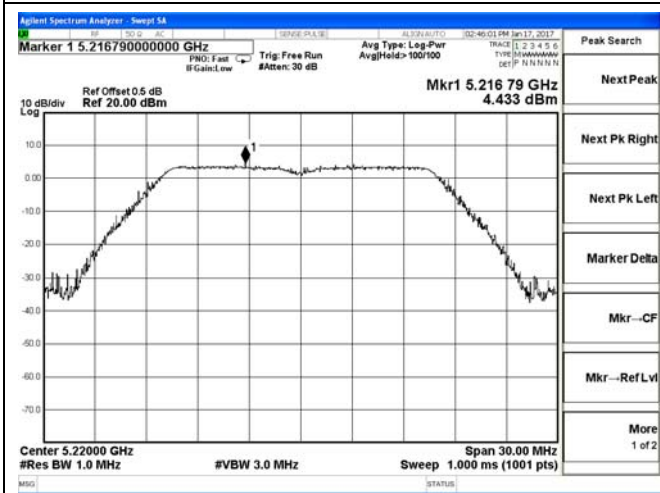

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

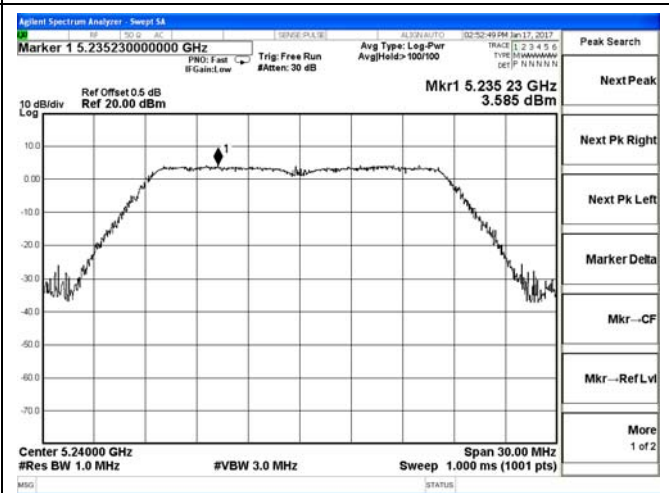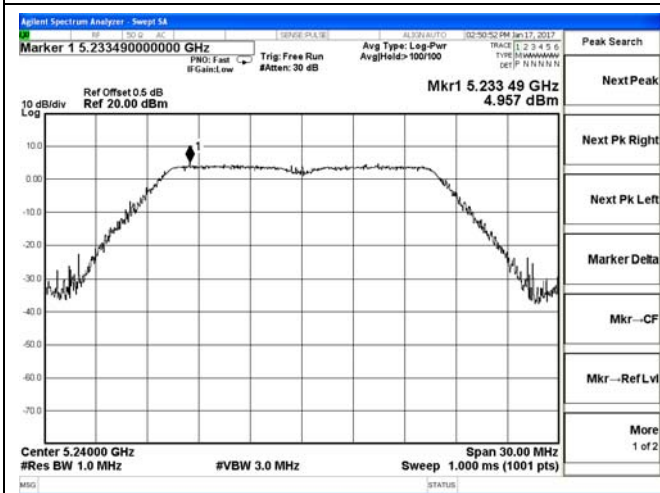

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 1

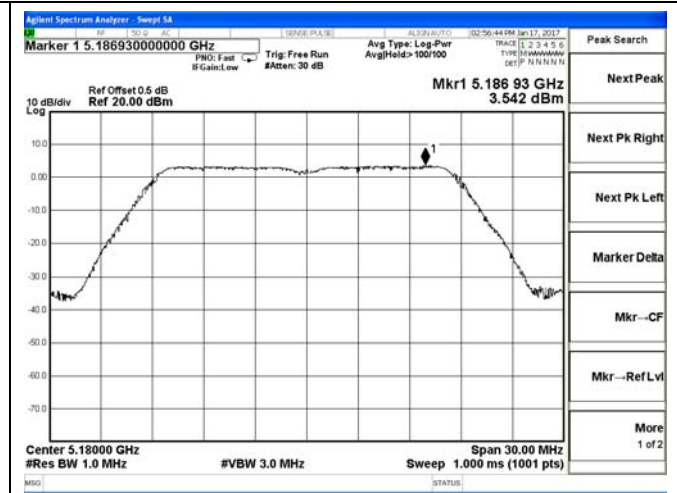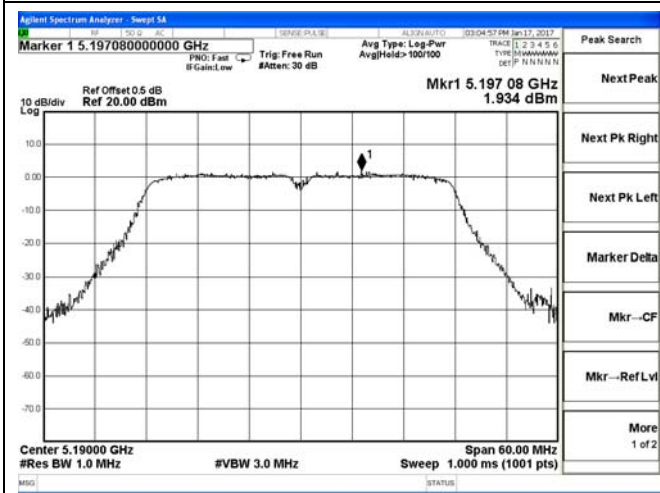


802.11n HT40_Low Channel / 5190MHz

802.11ac VHT20_Low Channel / 5180MHz

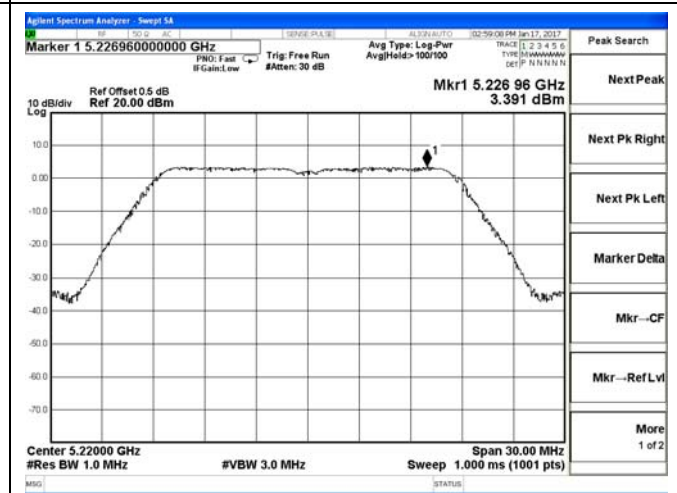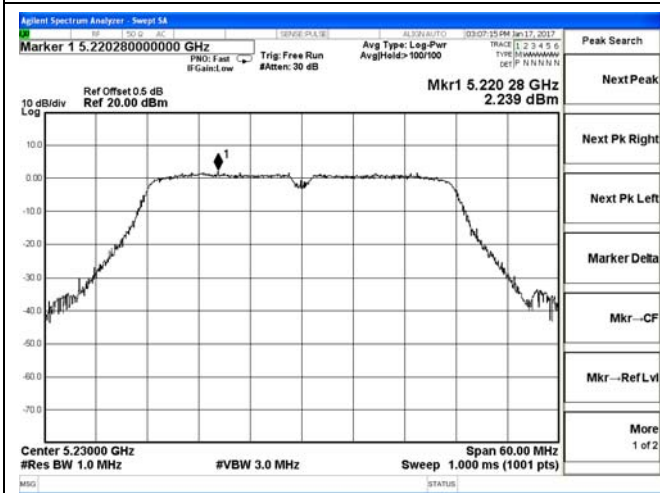



802.11n HT40_High Channel / 5230MHz

802.11ac VHT20_Mid Channel / 5220MHz

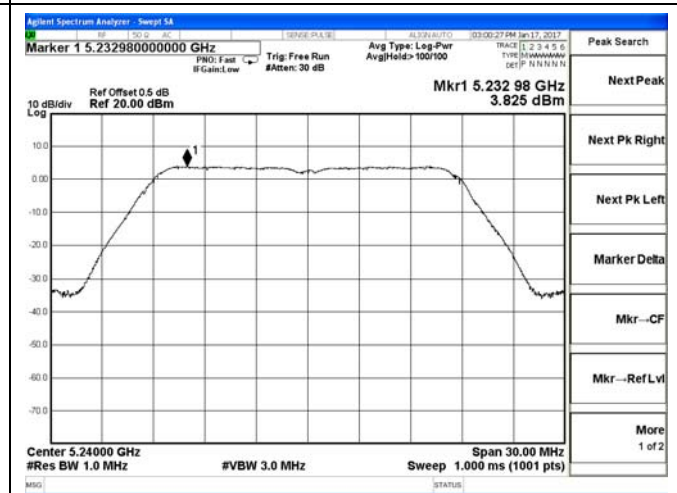


802.11ac VHT20_High Channel / 5240MHz

Test Result of Power Spectral Density-ant 1

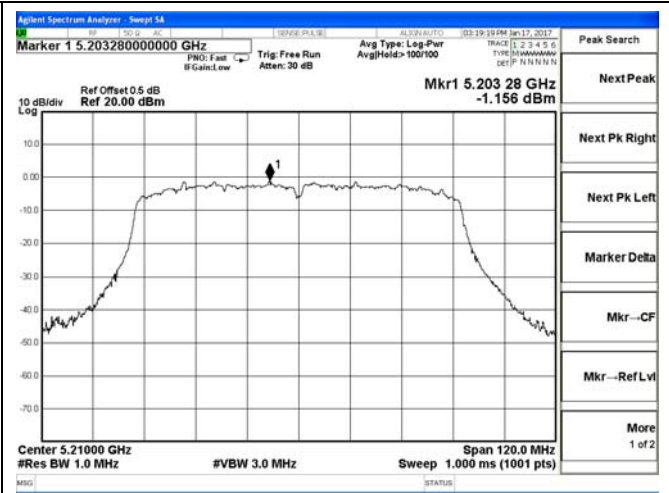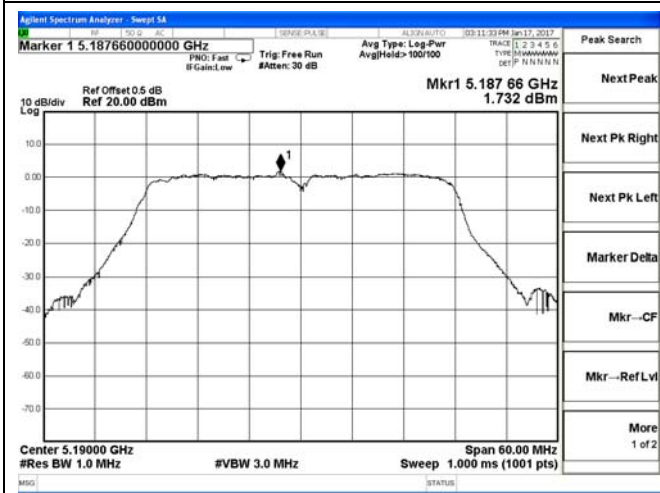

802.11ac VHT40_Low Channel / 5190MHz

802.11ac VHT80_5210MHz

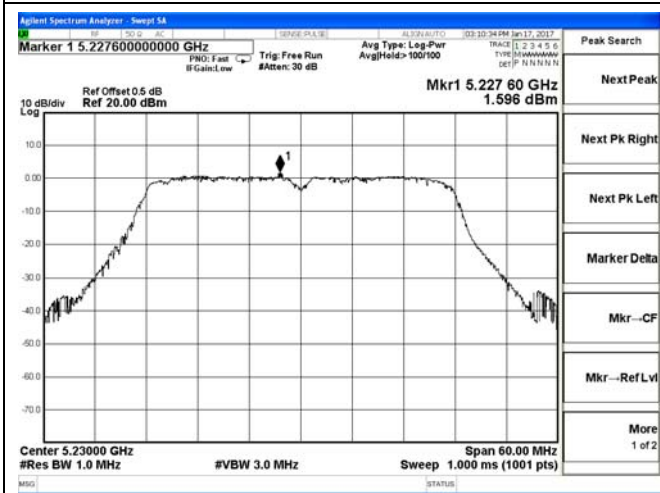

802.11ac VHT40_High Channel / 5230MHz

5.3. 6dB & 26dB Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

There is no restriction limits for 26dB & 99% occupied bandwidth, report only for reference.

5.3.2. Instruments Setting

The following table is the setting of the Spectrum Analyzer.

| 6dB Bandwidth Measurement (Only For 5745~5825MHz Band) | |
|---|----------------------------|
| Spectrum Parameter | Setting |
| Attenuation | Auto |
| RBW | 100KHz |
| VBW | $\geq 3 \times \text{RBW}$ |
| Detector | Peak |
| Trace | Max Hold |


| 26dB & 99%Bandwidth Measurement (Only For 5180~5240MHz Band) | |
|---|--|
| Spectrum Parameter | Setting |
| Attenuation | Auto |
| RBW | approximately 1% of the emission bandwidth |
| VBW | $\geq \text{RBW}$ |
| Detector | Peak |
| Trace | Max Hold |

5

5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- 3) For 5745~5825MHz Band, Measured the maximum width of the emission that is 6dB down from the peak of the emission.
- 4) For 5180~5240MHz Band, Measured the maximum width of the emission that is 26dB down from the peak of the emission. Record the 26dB & 99% Bandwidth.

5.3.4. Test Setup Layout

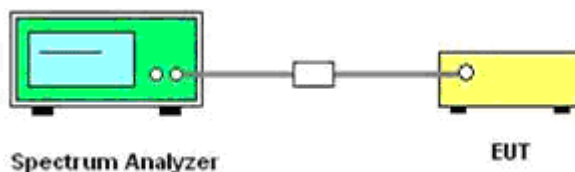

5.3.5. EUT Operation during Test



The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Spectrum Bandwidth

| | | | |
|---------------|----------|----------------|--------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Chaz Liu | Configurations | 802.11a/n/ac |



| Mode | Channel | Frequency (MHz) | 26dB BW (MHz) | | 99% BW (MHz) | | Limit |
|-----------------|---------|-----------------|---------------|-------|--------------|--------|---------------|
| | | | Ant 0 | Ant 1 | Ant 0 | Ant 1 | |
| 802.11a | 36 | 5180 | 22.66 | 21.56 | 17.054 | 17.074 | Non-specified |
| | 44 | 5220 | 22.42 | 21.71 | 17.119 | 17.086 | |
| | 48 | 5240 | 22.16 | 21.76 | 17.022 | 17.077 | |
| 802.11n(HT20) | 36 | 5180 | 22.39 | 25.70 | 18.051 | 18.126 | |
| | 44 | 5220 | 22.25 | 25.99 | 18.024 | 18.202 | |
| | 48 | 5240 | 22.41 | 26.24 | 18.061 | 18.180 | |
| 802.11n(HT40) | 38 | 5190 | 43.85 | 49.49 | 36.207 | 36.426 | |
| | 46 | 5230 | 42.72 | 48.21 | 36.205 | 36.412 | |
| 802.11ac(VHT20) | 36 | 5180 | 22.34 | 23.23 | 18.065 | 17.183 | |
| | 44 | 5220 | 22.16 | 23.11 | 18.067 | 18.096 | |
| | 48 | 5240 | 22.18 | 22.36 | 18.026 | 18.049 | |
| 802.11ac(VHT40) | 38 | 5190 | 42.28 | 40.38 | 36.191 | 36.412 | |
| | 46 | 5230 | 42.40 | 48.34 | 36.211 | 36.368 | |
| 802.11ac(VHT80) | 38 | 5190 | 84.36 | 91.58 | 74.674 | 75.956 | |

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

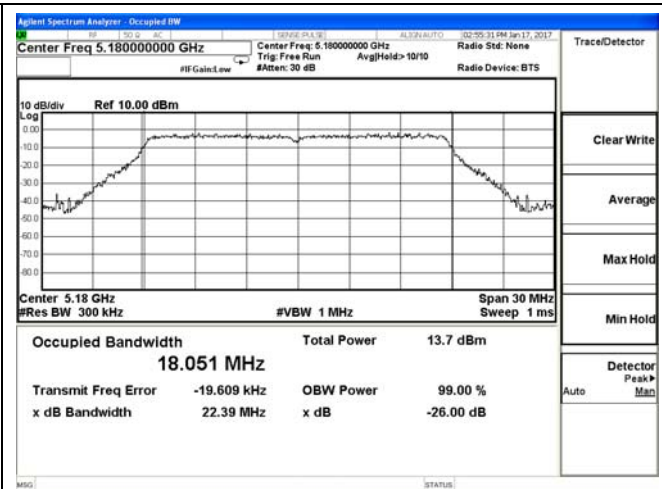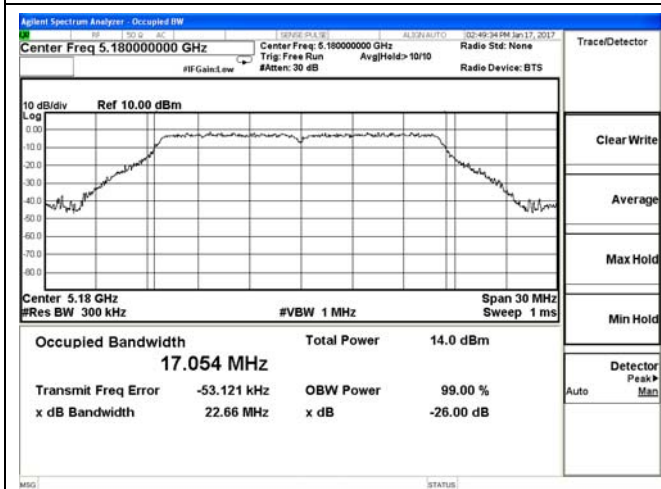


802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

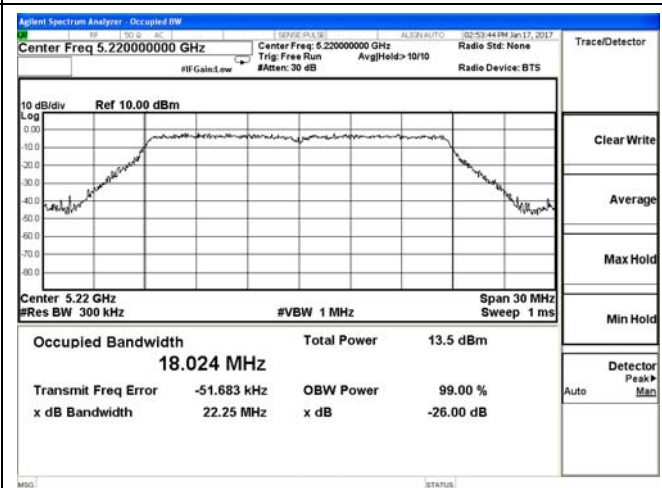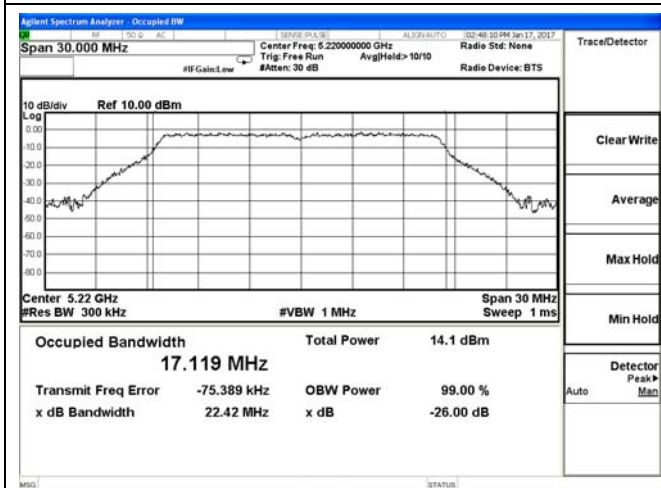

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

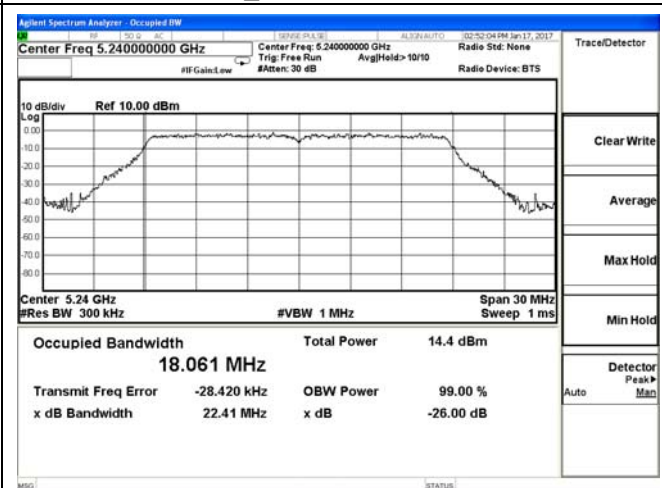

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

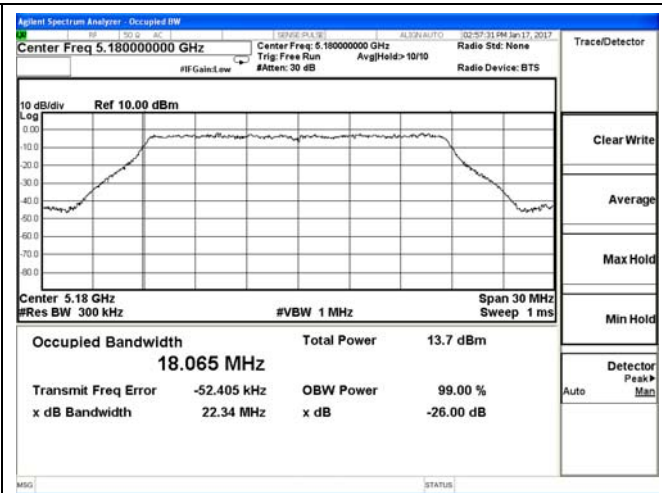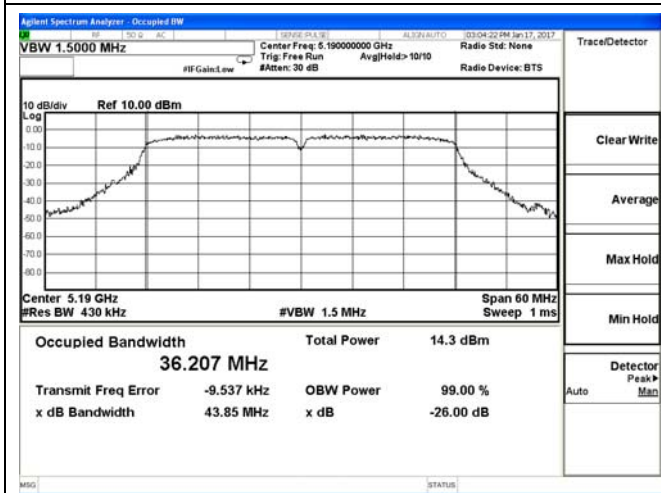


802.11n HT40_Low Channel / 5190MHz

802.11ac_VHT20_Low Channel / 5180MHz

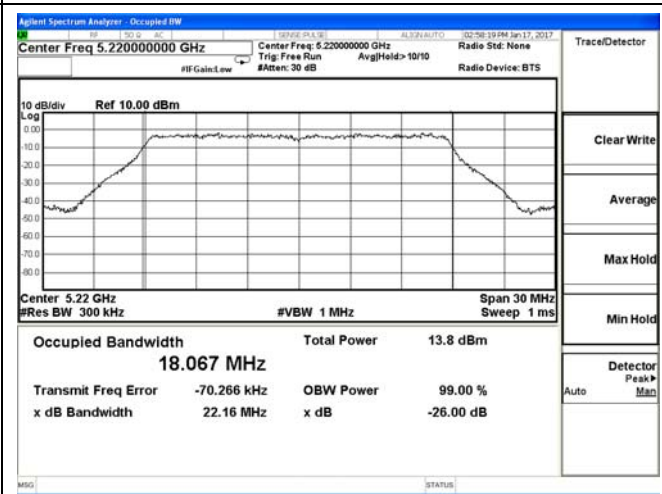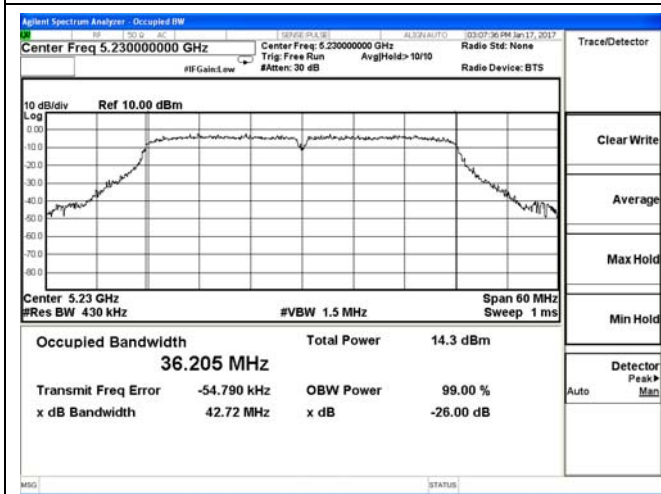



802.11n HT40_High Channel / 5230MHz

802.11ac_VHT20_Middle Channel / 5220MHz

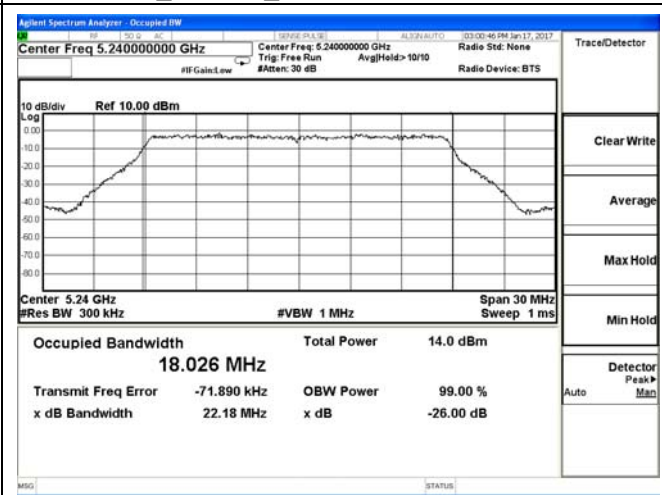


802.11ac_VHT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 0

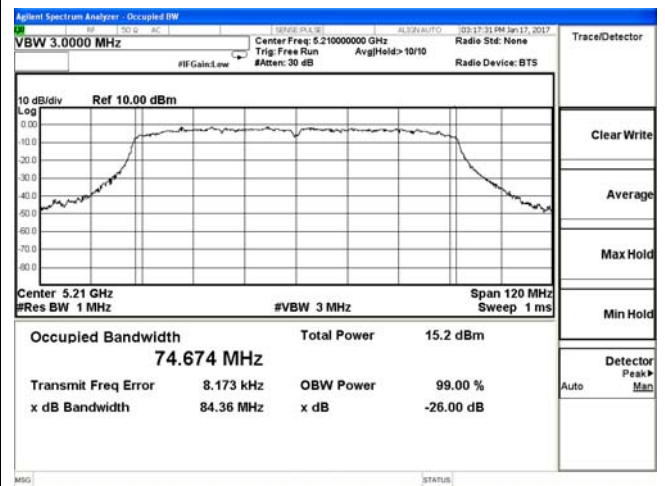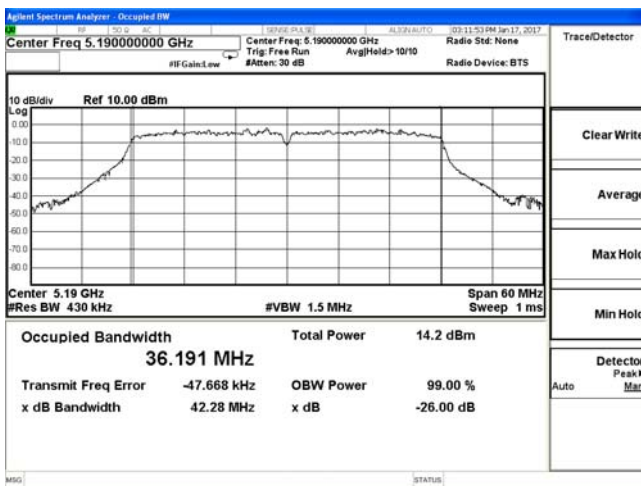



802.11ac_VHT40_Low Channel / 5190MHz

802.11ac_VHT80_5210MHz

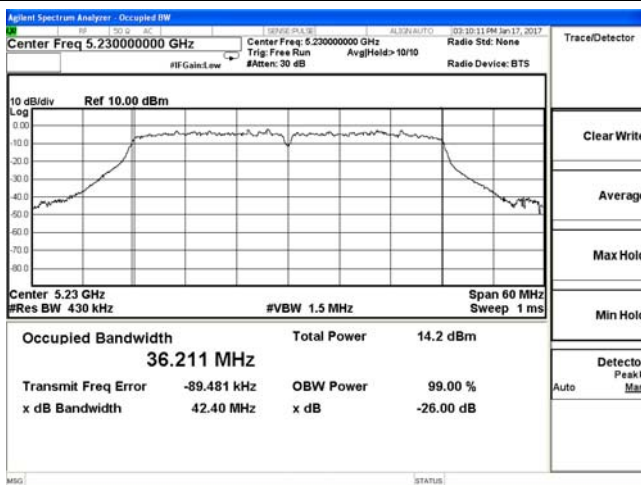



802.11ac_VHT40_High Channel / 5230MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

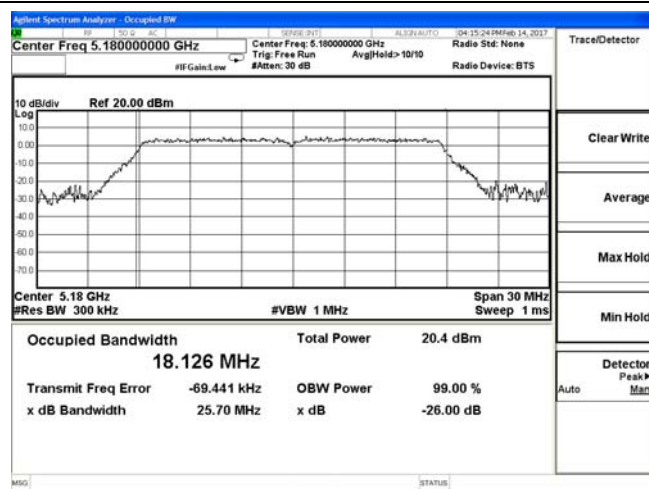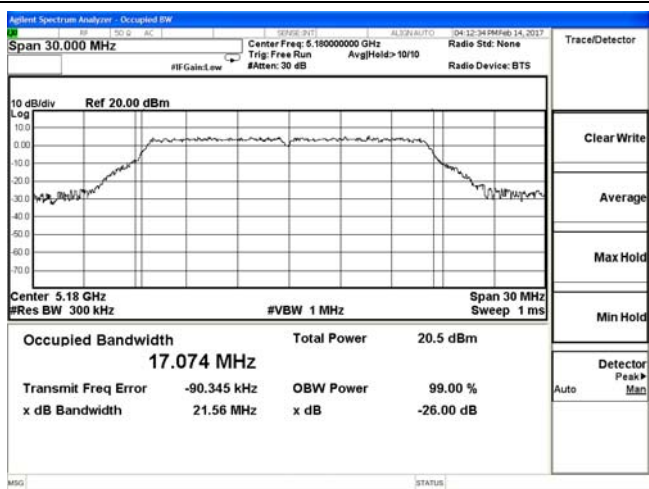



802.11a_Low Channel / 5180MHz

802.11n HT20_Low Channel / 5180MHz

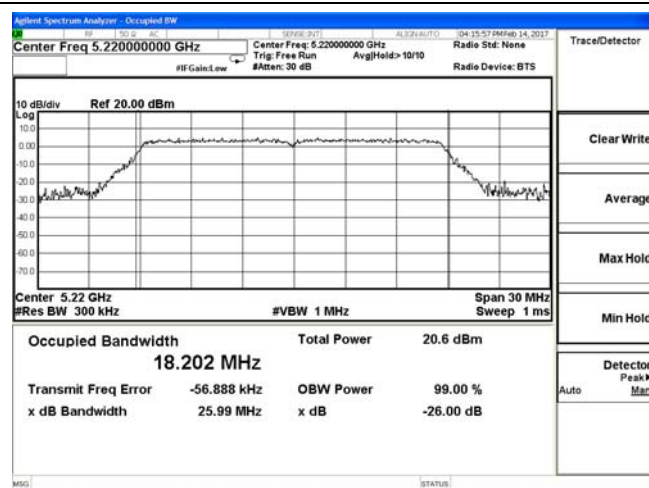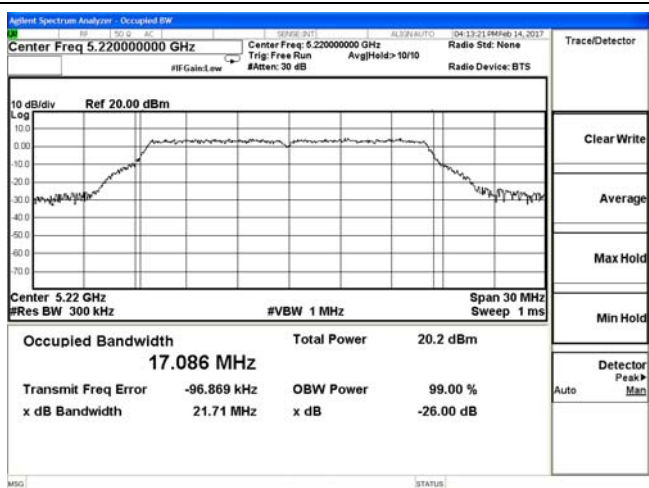

802.11a_Middle Channel / 5220MHz



802.11n HT20_Middle Channel / 5220MHz

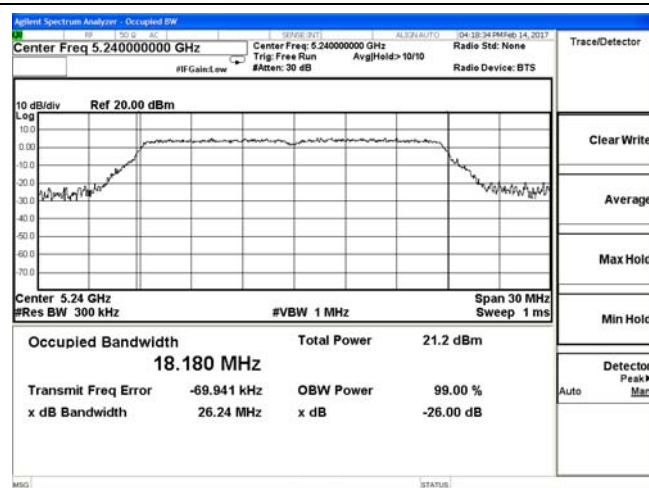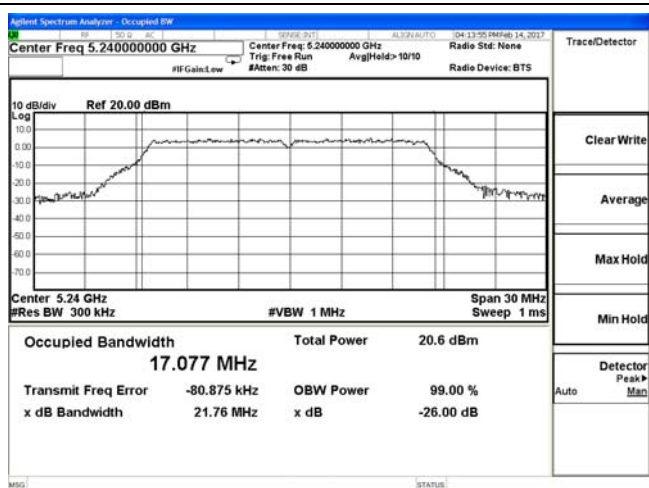

802.11a_High Channel / 5240MHz



802.11n HT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

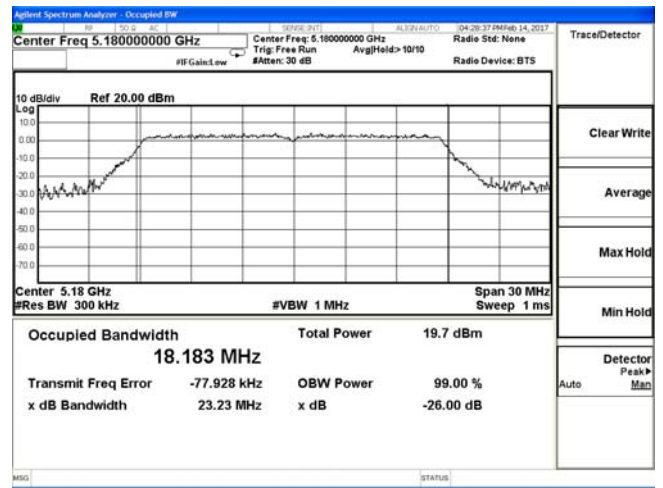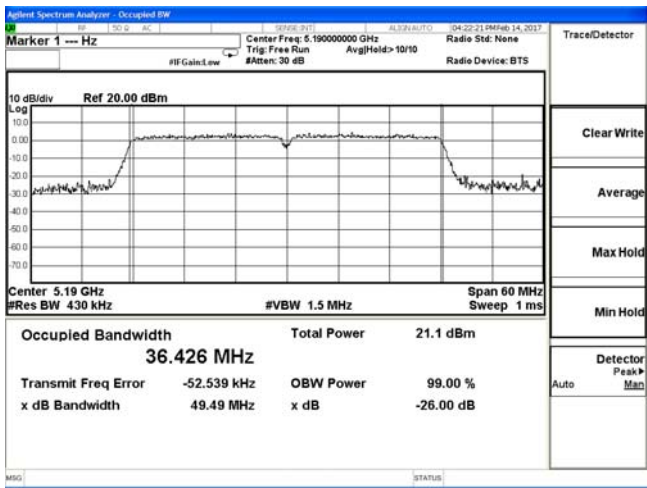


802.11n HT40_Low Channel / 5190MHz

802.11ac_VHT20_Low Channel / 5180MHz

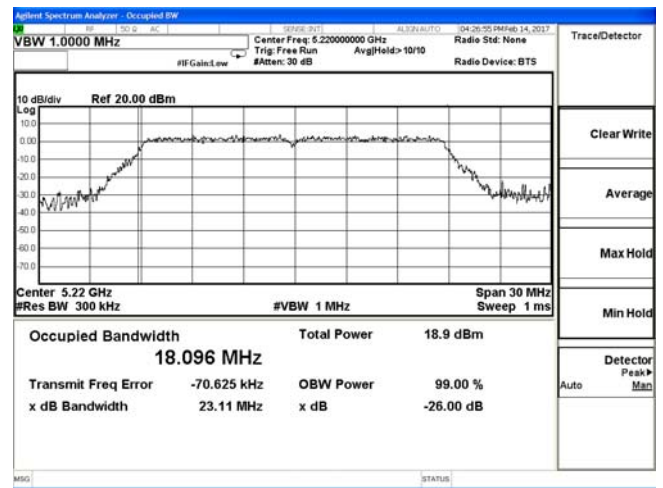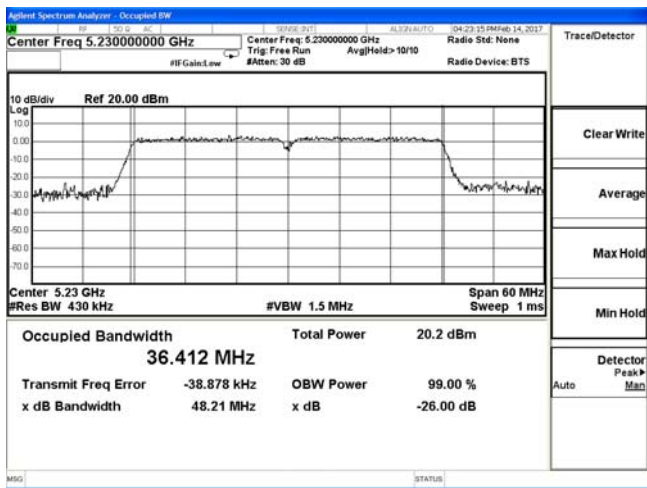



802.11n HT40_High Channel / 5230MHz

802.11ac_VHT20_Middle Channel / 5220MHz

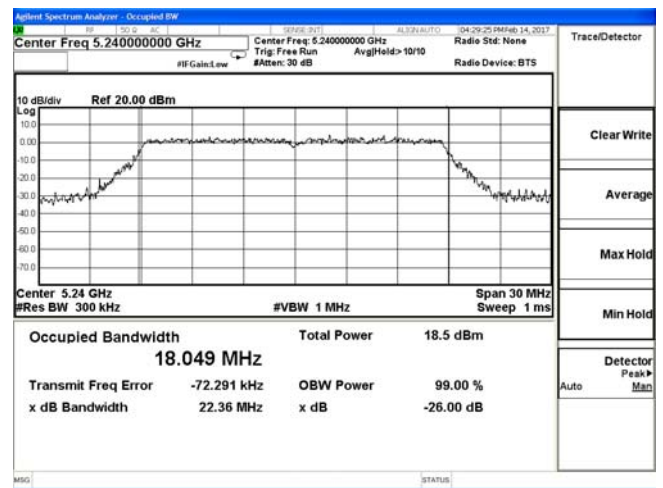


802.11ac_VHT20_High Channel / 5240MHz

Test Result of 26dB Bandwidth & 99% Bandwidth-ant 1

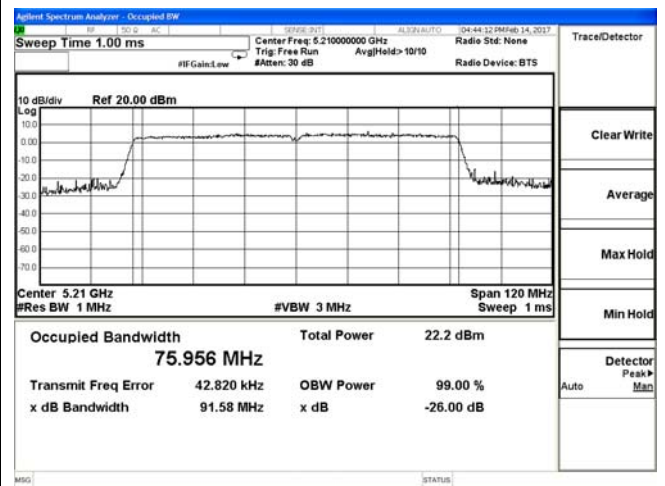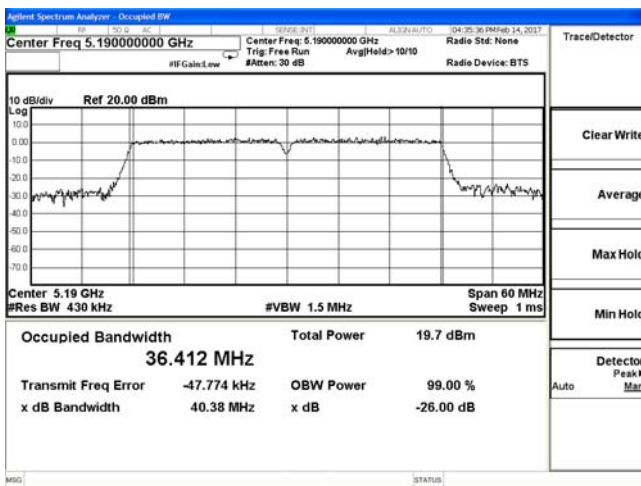

802.11ac_VHT40_Low Channel / 5190MHz

802.11ac_VHT80_5210MHz

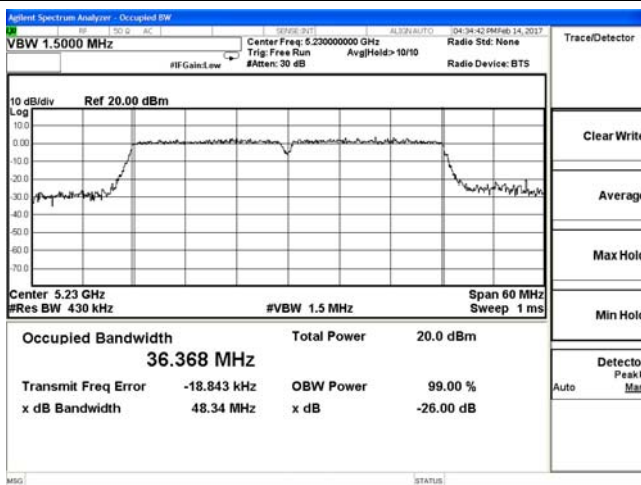

802.11ac_VHT40_High Channel / 5230MHz

5.4. Radiated Emissions Measurement

5.4.1. Standard Applicable

According to §15.407 (b)(1) to (6):

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz (78.2dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies(MHz) | Field Strength(microvolts/meter) | Measurement Distance(meters) |
|------------------|----------------------------------|------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |

5.4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.4.4. Test Setup Layout

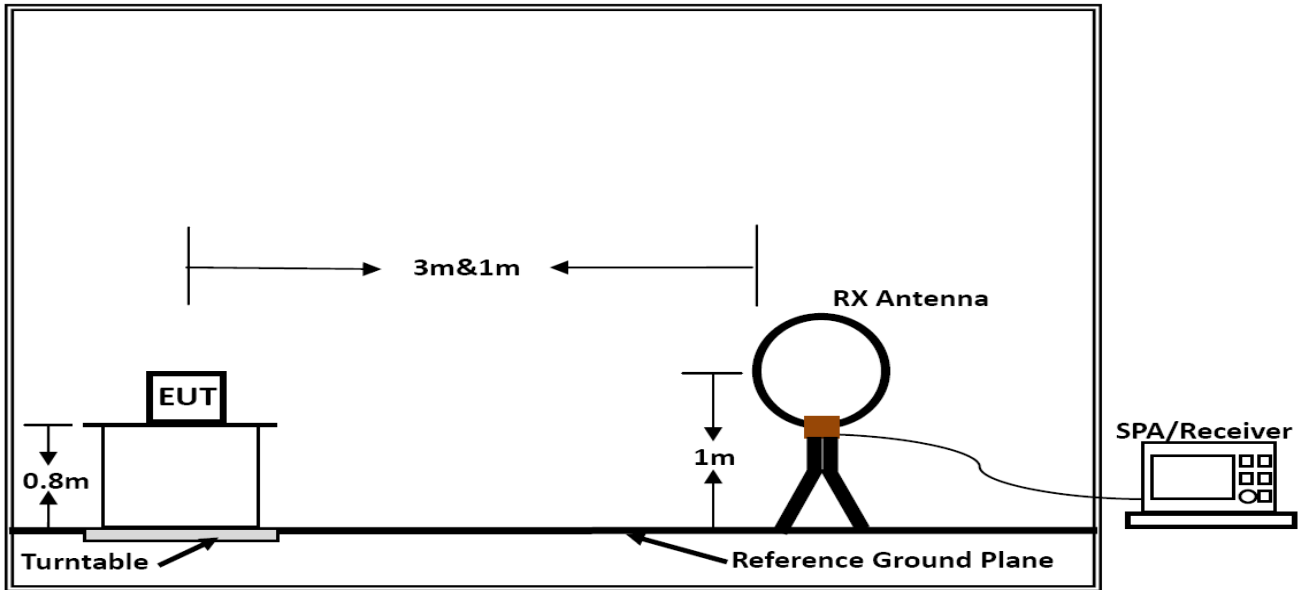

Below 30MHz

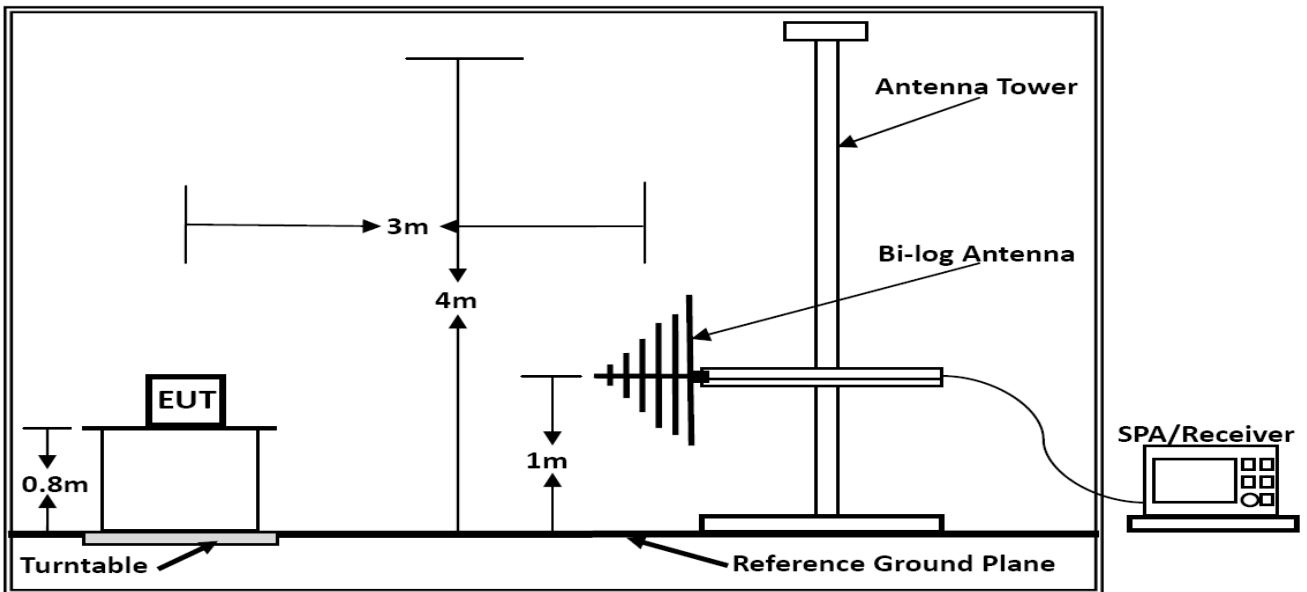

Below 1GHz

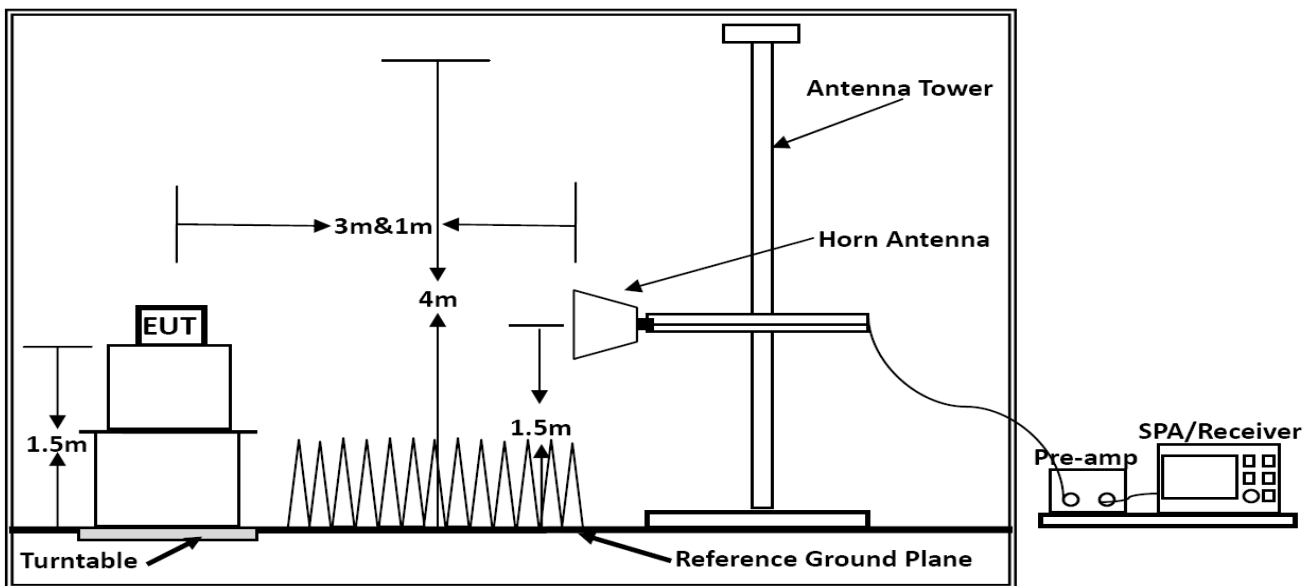

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}])$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|---------------|----------|----------------|-----------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Chaz Liu | Configurations | 802.11a/n |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |


Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Note: Only record the worst test result in this report.


Horizontal:

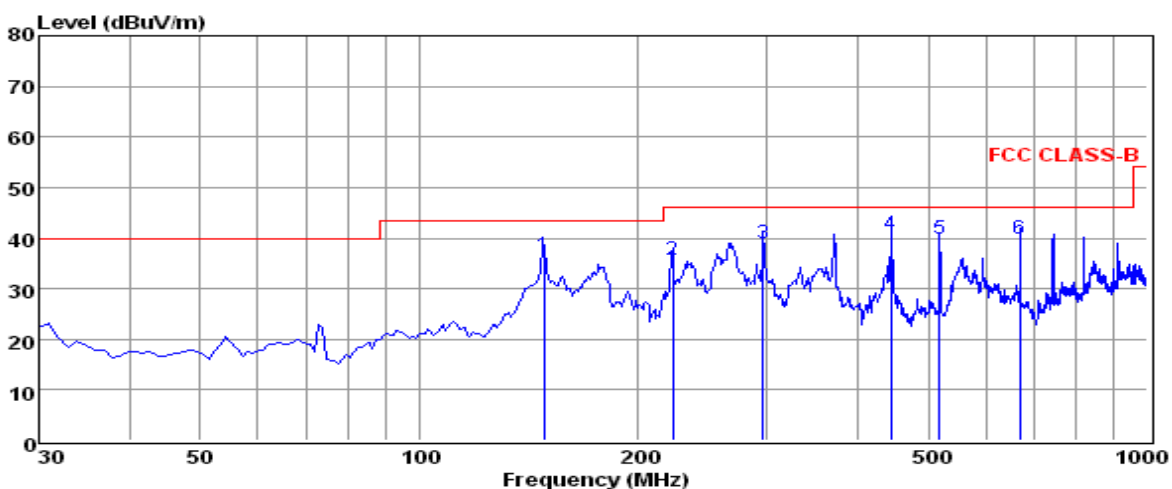

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 148.34 | 27.47 | 0.86 | 8.25 | 36.58 | 43.50 | -6.92 | QP |
| 2 | 223.03 | 23.44 | 0.95 | 11.33 | 35.72 | 46.00 | -10.28 | QP |
| 3 | 296.75 | 24.92 | 1.12 | 13.00 | 39.04 | 46.00 | -6.96 | QP |
| 4 | 445.16 | 23.68 | 1.42 | 15.57 | 40.67 | 46.00 | -5.33 | QP |
| 5 | 518.88 | 21.37 | 1.47 | 16.93 | 39.77 | 46.00 | -6.23 | QP |
| 6 | 668.26 | 19.44 | 1.71 | 18.70 | 39.85 | 46.00 | -6.15 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Vertical:

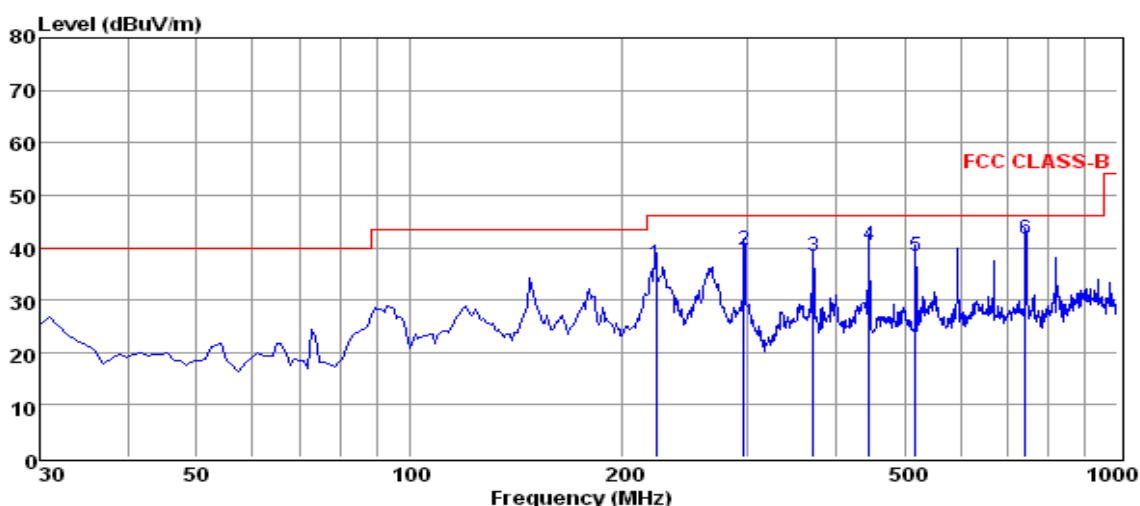

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|-------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 223.03 | 24.57 | 0.95 | 11.33 | 36.85 | 46.00 | -9.15 | QP |
| 2 | 296.75 | 25.42 | 1.12 | 13.00 | 39.54 | 46.00 | -6.46 | QP |
| 3 | 371.44 | 22.72 | 1.20 | 14.52 | 38.44 | 46.00 | -7.56 | QP |
| 4 | 446.13 | 23.58 | 1.42 | 15.57 | 40.57 | 46.00 | -5.43 | QP |
| 5 | 518.88 | 20.00 | 1.47 | 16.93 | 38.40 | 46.00 | -7.60 | QP |
| 6 | 741.98 | 20.55 | 1.78 | 19.33 | 41.66 | 46.00 | -4.34 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

***Note:

Pre-scan all mode and recorded the worst case results in this report (802.11a mode(High Channel)@AC120V).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Only recorded the worst test case in this report.

5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result of ant 0 in this report.

The Worst Test Result For 5180~5240MHz Band.

802.11a / Channel 36

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.36 | 45.56 | 33.21 | 35.82 | 9.52 | 52.47 | 68.20 | -15.73 | Peak | Horizontal |
| 10.36 | 34.84 | 33.21 | 35.82 | 9.52 | 41.75 | 54.00 | -12.25 | Average | Horizontal |
| 10.36 | 46.57 | 32.82 | 35.82 | 9.52 | 53.09 | 68.20 | -15.11 | Peak | Vertical |
| 10.36 | 35.12 | 32.82 | 35.82 | 9.52 | 41.64 | 54.00 | -12.36 | Average | Vertical |

802.11a / Channel 44

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.44 | 46.12 | 33.21 | 35.82 | 9.52 | 53.03 | 68.20 | -15.17 | Peak | Horizontal |
| 10.44 | 35.38 | 33.21 | 35.82 | 9.52 | 42.29 | 54.00 | -11.71 | Average | Horizontal |
| 10.44 | 47.24 | 32.82 | 35.82 | 9.52 | 53.76 | 68.20 | -14.44 | Peak | Vertical |
| 10.44 | 35.65 | 32.82 | 35.82 | 9.52 | 42.17 | 54.00 | -11.83 | Average | Vertical |

802.11a / Channel 48

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.48 | 46.54 | 33.21 | 35.82 | 9.52 | 53.45 | 68.20 | -14.75 | Peak | Horizontal |
| 10.48 | 35.86 | 33.21 | 35.82 | 9.52 | 42.77 | 54.00 | -11.23 | Average | Horizontal |
| 10.48 | 47.86 | 32.82 | 35.82 | 9.52 | 54.38 | 68.20 | -13.82 | Peak | Vertical |
| 10.48 | 36.32 | 32.82 | 35.82 | 9.52 | 42.84 | 54.00 | -11.16 | Average | Vertical |

802.11n(HT20) / Channel 36

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.36 | 45.24 | 33.21 | 35.82 | 9.52 | 52.15 | 68.20 | -16.05 | Peak | Horizontal |
| 10.36 | 34.40 | 33.21 | 35.82 | 9.52 | 41.31 | 54.00 | -12.69 | Average | Horizontal |
| 10.36 | 46.38 | 32.82 | 35.82 | 9.52 | 52.90 | 68.20 | -15.30 | Peak | Vertical |
| 10.36 | 34.90 | 32.82 | 35.82 | 9.52 | 41.42 | 54.00 | -12.58 | Average | Vertical |

802.11n(HT20) / Channel 44

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.44 | 45.98 | 33.21 | 35.82 | 9.52 | 52.89 | 68.20 | -15.31 | Peak | Horizontal |
| 10.44 | 34.80 | 33.21 | 35.82 | 9.52 | 41.71 | 54.00 | -12.29 | Average | Horizontal |
| 10.44 | 46.86 | 32.82 | 35.82 | 9.52 | 53.38 | 68.20 | -14.82 | Peak | Vertical |
| 10.44 | 35.41 | 32.82 | 35.82 | 9.52 | 41.93 | 54.00 | -12.07 | Average | Vertical |

802.11n(HT20) / Channel 48

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.48 | 46.35 | 33.21 | 35.82 | 9.52 | 53.26 | 68.20 | -14.94 | Peak | Horizontal |
| 10.48 | 35.32 | 33.21 | 35.82 | 9.52 | 42.23 | 54.00 | -11.77 | Average | Horizontal |
| 10.48 | 47.35 | 32.82 | 35.82 | 9.52 | 53.87 | 68.20 | -14.33 | Peak | Vertical |
| 10.48 | 35.95 | 32.82 | 35.82 | 9.52 | 42.47 | 54.00 | -11.53 | Average | Vertical |

802.11n(HT40) / Channel 38

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.38 | 45.75 | 33.21 | 35.82 | 9.52 | 52.66 | 68.20 | -15.54 | Peak | Horizontal |
| 10.38 | 34.91 | 33.21 | 35.82 | 9.52 | 41.82 | 54.00 | -12.18 | Average | Horizontal |
| 10.38 | 47.20 | 32.82 | 35.82 | 9.52 | 53.72 | 68.20 | -14.48 | Peak | Vertical |
| 10.38 | 35.71 | 32.82 | 35.82 | 9.52 | 42.23 | 54.00 | -11.77 | Average | Vertical |

802.11n(HT40) / Channel 46

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.46 | 46.14 | 33.21 | 35.82 | 9.52 | 53.05 | 68.20 | -15.15 | Peak | Horizontal |
| 10.46 | 35.59 | 33.21 | 35.82 | 9.52 | 42.50 | 54.00 | -11.50 | Average | Horizontal |
| 10.46 | 47.18 | 32.82 | 35.82 | 9.52 | 53.70 | 68.20 | -14.50 | Peak | Vertical |
| 10.46 | 35.66 | 32.82 | 35.82 | 9.52 | 42.18 | 54.00 | -11.82 | Average | Vertical |

802.11ac VHT20 / Channel 36

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.36 | 45.23 | 33.21 | 35.82 | 9.52 | 52.14 | 68.20 | -16.06 | Peak | Horizontal |
| 10.36 | 34.53 | 33.21 | 35.82 | 9.52 | 41.44 | 54.00 | -12.56 | Average | Horizontal |
| 10.36 | 46.34 | 32.82 | 35.82 | 9.52 | 52.86 | 68.20 | -15.34 | Peak | Vertical |
| 10.36 | 35.14 | 32.82 | 35.82 | 9.52 | 41.66 | 54.00 | -12.34 | Average | Vertical |

802.11ac VHT20 / Channel 44

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.44 | 45.82 | 33.21 | 35.82 | 9.52 | 52.73 | 68.20 | -15.47 | Peak | Horizontal |
| 10.44 | 35.02 | 33.21 | 35.82 | 9.52 | 41.93 | 54.00 | -12.07 | Average | Horizontal |
| 10.44 | 47.05 | 32.82 | 35.82 | 9.52 | 53.57 | 68.20 | -14.63 | Peak | Vertical |
| 10.44 | 35.63 | 32.82 | 35.82 | 9.52 | 42.15 | 54.00 | -11.85 | Average | Vertical |

802.11ac VHT20 / Channel 48

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.48 | 46.40 | 33.21 | 35.82 | 9.52 | 53.31 | 68.20 | -14.89 | Peak | Horizontal |
| 10.48 | 35.45 | 33.21 | 35.82 | 9.52 | 42.36 | 54.00 | -11.64 | Average | Horizontal |
| 10.48 | 47.51 | 32.82 | 35.82 | 9.52 | 54.03 | 68.20 | -14.17 | Peak | Vertical |
| 10.48 | 36.16 | 32.82 | 35.82 | 9.52 | 42.68 | 54.00 | -11.32 | Average | Vertical |

802.11ac VHT40 / Channel 38

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.38 | 45.34 | 33.21 | 35.82 | 9.52 | 52.25 | 68.20 | -15.95 | Peak | Horizontal |
| 10.38 | 34.54 | 33.21 | 35.82 | 9.52 | 41.45 | 54.00 | -12.55 | Average | Horizontal |
| 10.38 | 46.60 | 32.82 | 35.82 | 9.52 | 53.12 | 68.20 | -15.08 | Peak | Vertical |
| 10.38 | 34.93 | 32.82 | 35.82 | 9.52 | 41.45 | 54.00 | -12.55 | Average | Vertical |

802.11ac VHT40 / Channel 46

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.46 | 45.94 | 33.21 | 35.82 | 9.52 | 52.85 | 68.20 | -15.35 | Peak | Horizontal |
| 10.46 | 35.11 | 33.21 | 35.82 | 9.52 | 42.02 | 54.00 | -11.98 | Average | Horizontal |
| 10.46 | 47.37 | 32.82 | 35.82 | 9.52 | 53.89 | 68.20 | -14.31 | Peak | Vertical |
| 10.46 | 35.79 | 32.82 | 35.82 | 9.52 | 42.31 | 54.00 | -11.69 | Average | Vertical |

802.11ac VHT80 / Channel 42

| Freq. GHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 10.42 | 45.09 | 33.21 | 35.82 | 9.52 | 52.00 | 68.20 | -16.20 | Peak | Horizontal |
| 10.42 | 34.19 | 33.21 | 35.82 | 9.52 | 41.10 | 54.00 | -12.90 | Average | Horizontal |
| 10.42 | 46.54 | 32.82 | 35.82 | 9.52 | 53.06 | 68.20 | -15.14 | Peak | Vertical |
| 10.42 | 34.59 | 32.82 | 35.82 | 9.52 | 41.11 | 54.00 | -12.89 | Average | Vertical |

Notes:

1. Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~40GHz were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 40GHz are at least 20dB below the official limit and no need to report.

5.4.9. Results of Band Edges Test (Restricted Band)

Note: Only recorded the worst test result of ant 0 in this report.

| IEEE 802.11a | | | | | | |
|-----------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Converted Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -50.818 | 2.50 | 46.88 | Peak | 68.20 | PASS |
| 4500.000 | -61.769 | 2.50 | 35.93 | Avg | 54.00 | PASS |
| 5150.000 | -51.034 | 2.50 | 46.67 | Peak | 68.20 | PASS |
| 5150.000 | -59.266 | 2.50 | 38.43 | Avg | 54.00 | PASS |
| 5350.000 | -49.777 | 2.50 | 47.92 | Peak | 68.20 | PASS |
| 5350.000 | -60.064 | 2.50 | 37.64 | Avg | 54.00 | PASS |
| 5460.000 | -50.995 | 2.50 | 46.71 | Peak | 68.20 | PASS |
| 5460.000 | -60.818 | 2.50 | 36.88 | Avg | 54.00 | PASS |

| IEEE 802.11n HT20 | | | | | | |
|-------------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Converted Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -52.279 | 2.50 | 45.42 | Peak | 68.20 | PASS |
| 4500.000 | -61.355 | 2.50 | 36.35 | Avg | 54.00 | PASS |
| 5150.000 | -49.655 | 2.50 | 48.05 | Peak | 68.20 | PASS |
| 5150.000 | -60.051 | 2.50 | 37.65 | Avg | 54.00 | PASS |
| 5350.000 | -52.754 | 2.50 | 44.95 | Peak | 68.20 | PASS |
| 5350.000 | -60.409 | 2.50 | 37.29 | Avg | 54.00 | PASS |
| 5460.000 | -52.927 | 2.50 | 44.77 | Peak | 68.20 | PASS |
| 5460.000 | -60.512 | 2.50 | 37.19 | Avg | 54.00 | PASS |

| IEEE 802.11n HT40 | | | | | | |
|-------------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Converted Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -51.455 | 2.50 | 46.25 | Peak | 68.20 | PASS |
| 4500.000 | -61.179 | 2.50 | 36.52 | Avg | 54.00 | PASS |
| 5150.000 | -46.367 | 2.50 | 51.33 | Peak | 68.20 | PASS |
| 5150.000 | -57.504 | 2.50 | 40.20 | Avg | 54.00 | PASS |
| 5350.000 | -51.972 | 2.50 | 45.73 | Peak | 68.20 | PASS |
| 5350.000 | -60.325 | 2.50 | 37.38 | Avg | 54.00 | PASS |
| 5460.000 | -52.814 | 2.50 | 44.89 | Peak | 68.20 | PASS |
| 5460.000 | -60.857 | 2.50 | 36.84 | Avg | 54.00 | PASS |

| IEEE 802.11ac VHT20 | | | | | | |
|---------------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Converted Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -51.353 | 2.50 | 46.35 | Peak | 68.20 | PASS |
| 4500.000 | -61.396 | 2.50 | 36.30 | Avg | 54.00 | PASS |
| 5150.000 | -50.859 | 2.50 | 46.84 | Peak | 68.20 | PASS |
| 5150.000 | -59.463 | 2.50 | 38.24 | Avg | 54.00 | PASS |
| 5350.000 | -52.182 | 2.50 | 45.52 | Peak | 68.20 | PASS |
| 5350.000 | -60.525 | 2.50 | 37.18 | Avg | 54.00 | PASS |
| 5460.000 | -52.122 | 2.50 | 45.58 | Peak | 68.20 | PASS |
| 5460.000 | -61.057 | 2.50 | 36.64 | Avg | 54.00 | PASS |


| IEEE 802.11ac VHT40 | | | | | | |
|---------------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Converted Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -52.131 | 2.50 | 45.57 | Peak | 68.20 | PASS |
| 4500.000 | -61.357 | 2.50 | 36.34 | Avg | 54.00 | PASS |
| 5150.000 | -43.237 | 2.50 | 54.46 | Peak | 68.20 | PASS |
| 5150.000 | -57.384 | 2.50 | 40.32 | Avg | 54.00 | PASS |
| 5350.000 | -49.867 | 2.50 | 47.83 | Peak | 68.20 | PASS |
| 5350.000 | -60.607 | 2.50 | 37.09 | Avg | 54.00 | PASS |
| 5460.000 | -50.929 | 2.50 | 46.77 | Peak | 68.20 | PASS |
| 5460.000 | -61.021 | 2.50 | 36.68 | Avg | 54.00 | PASS |

| IEEE 802.11ac VHT80 | | | | | | |
|---------------------|-----------------------|--------------------|---|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Convert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 4500.000 | -51.287 | 2.50 | 46.41 | Peak | 68.20 | PASS |
| 4500.000 | -61.316 | 2.50 | 36.38 | Avg | 54.00 | PASS |
| 5150.000 | -44.157 | 2.50 | 53.54 | Peak | 68.20 | PASS |
| 5150.000 | -57.815 | 2.50 | 39.89 | Avg | 54.00 | PASS |
| 5350.000 | -52.516 | 2.50 | 45.18 | Peak | 68.20 | PASS |
| 5350.000 | -60.614 | 2.50 | 37.09 | Avg | 54.00 | PASS |
| 5460.000 | -51.592 | 2.50 | 46.11 | Peak | 68.20 | PASS |
| 5460.000 | -60.702 | 2.50 | 37.00 | Avg | 54.00 | PASS |


Remark:

1. $EIRP [dBm] = E [dB\mu V/m] - 95.23$
2. Measured undesirable emission at difference data rate for each mode and recorded worst case for each mode.
3. Test results including cable loss;
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Undesirable Emissions-Peak

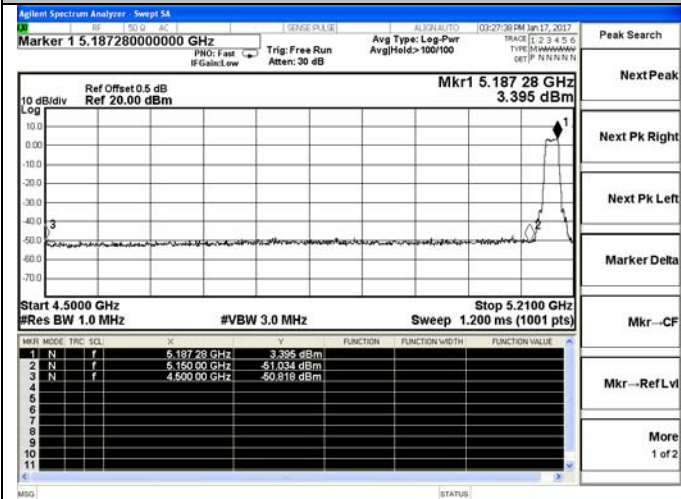


802.11a Channel 36 / 5180 MHz – Peak

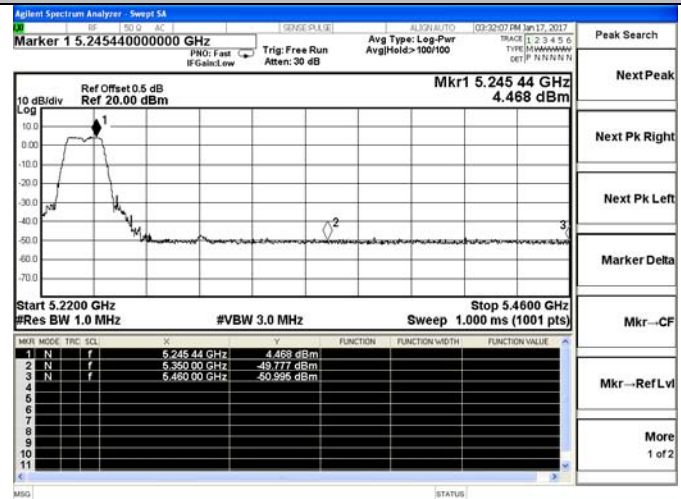


802.11a Channel 48 / 5240 MHz – Peak

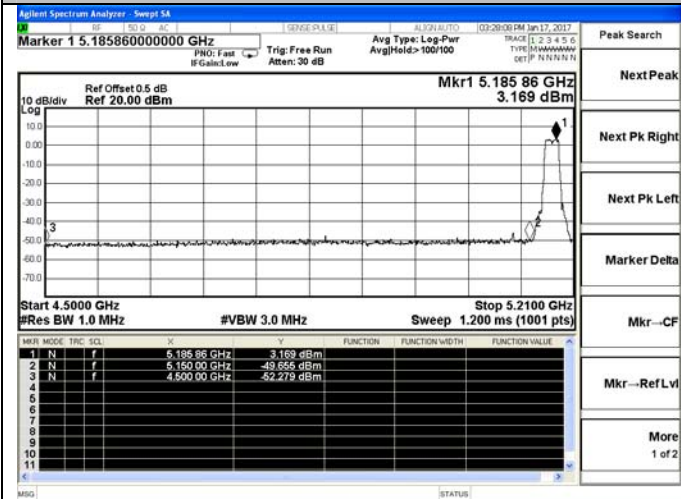


802.11n HT20 Channel 36 / 5180 MHz – Peak

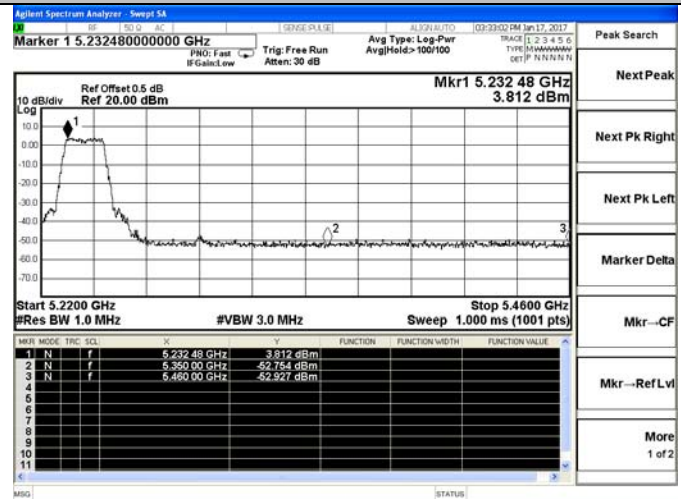

802.11n HT20 Channel 48 / 5240 MHz – Peak


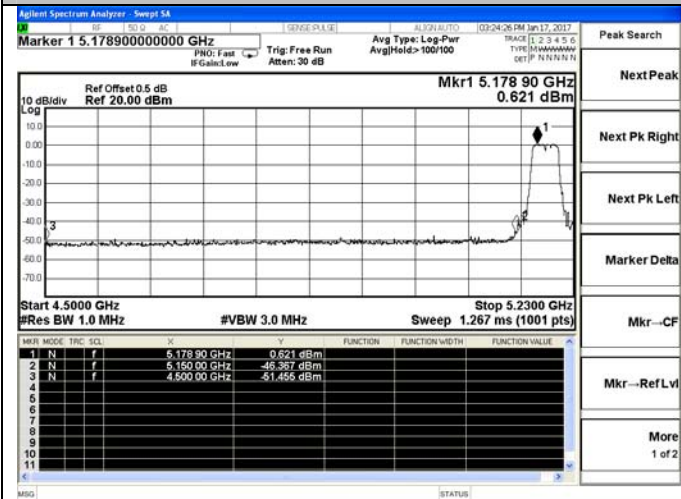


802.11n HT40 Channel 38 / 5190 MHz – Peak

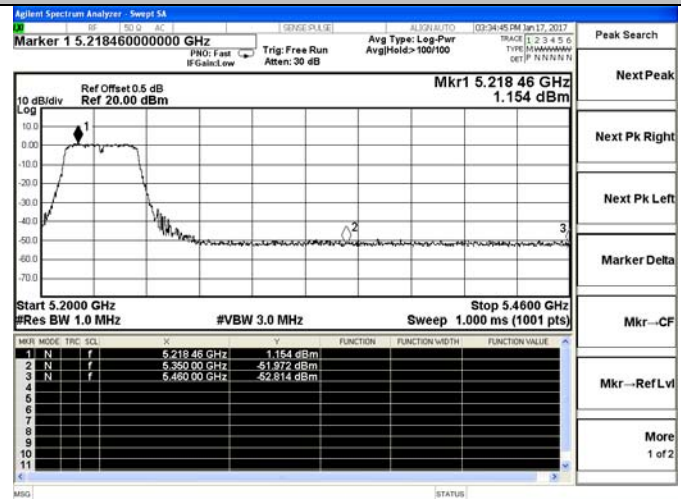



802.11n HT40 Channel 46 / 5230 MHz – Peak

Undesirable Emissions-Peak

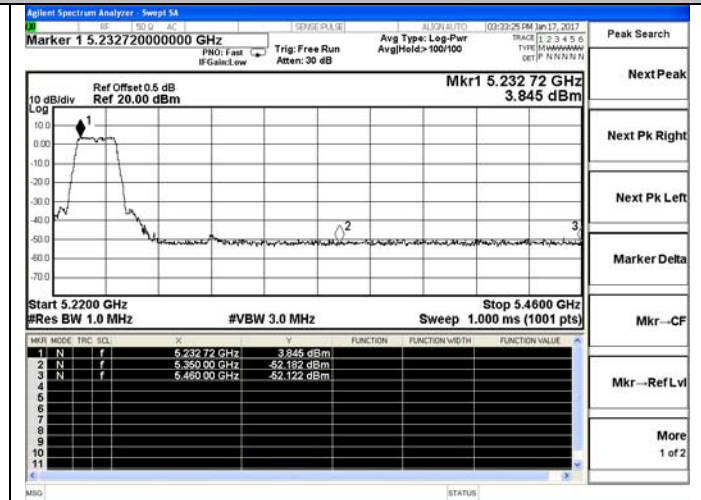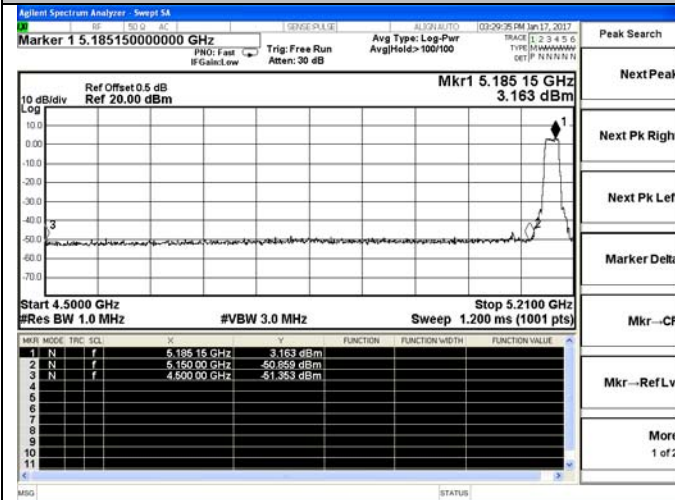



802.11ac VHT20 Channel 36 / 5180 MHz – Peak

802.11ac VHT20 Channel 48 / 5240 MHz – Peak

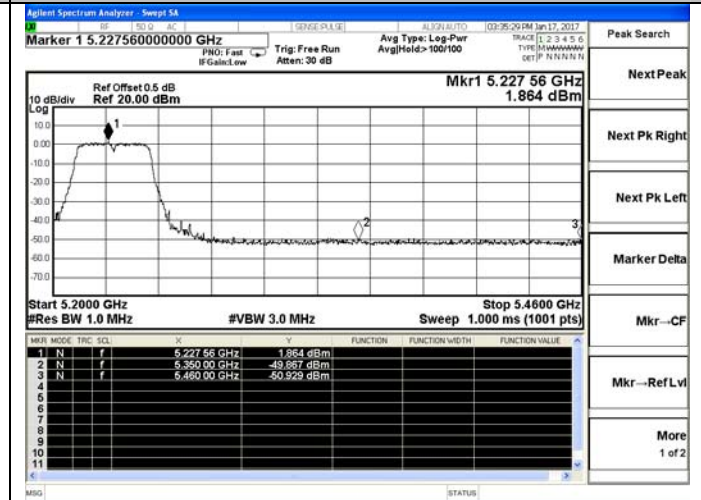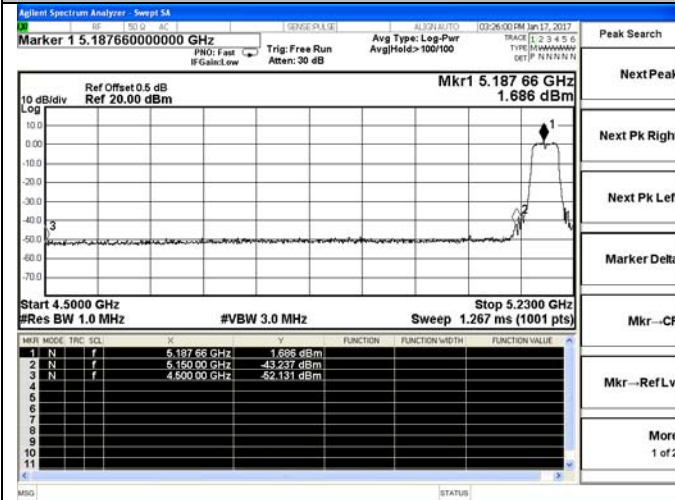

802.11ac VHT40 Channel 38 / 5190 MHz – Peak



802.11ac VHT40 Channel 46 / 5230 MHz – Peak

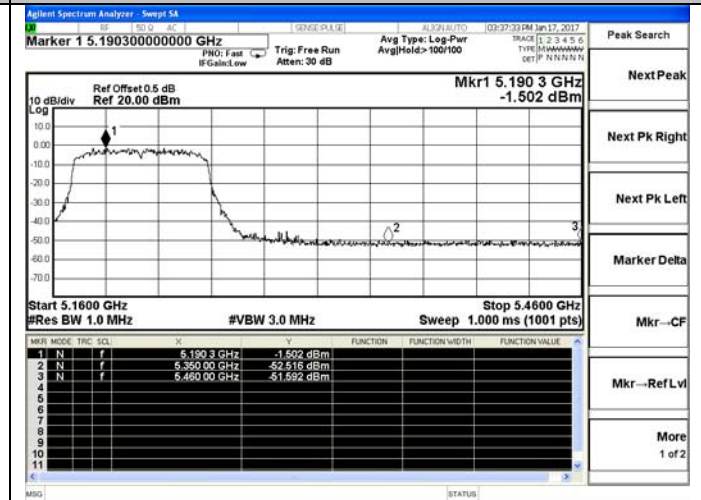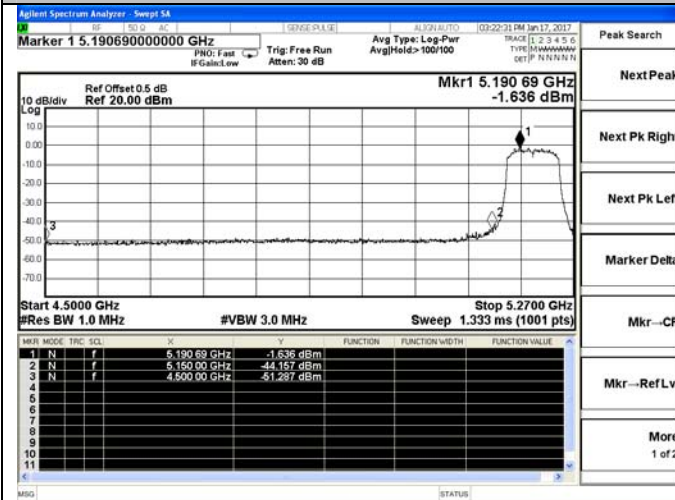

802.11ac VHT80 Channel 42 / 5210 MHz – Peak



802.11ac VHT80 Channel 42 / 5210 MHz – Peak

Undesirable Emissions-Avg

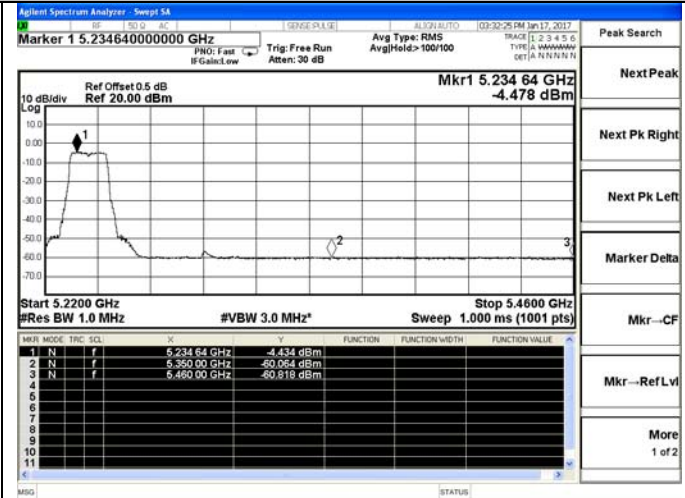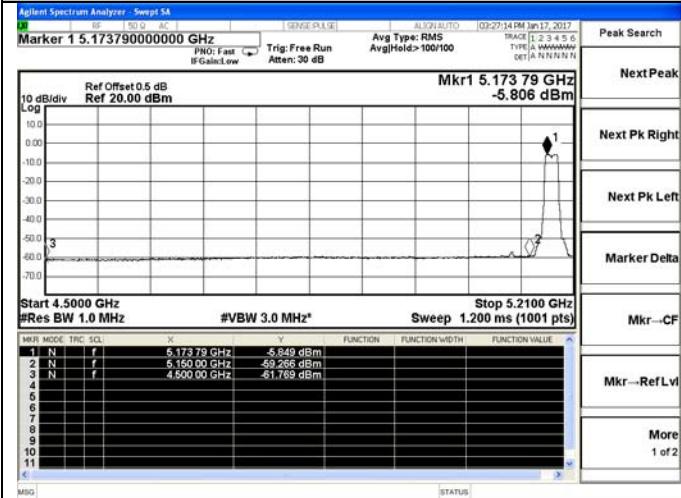



802.11a Channel 36 / 5180 MHz – Avg

802.11a Channel 48 / 5240 MHz – Avg

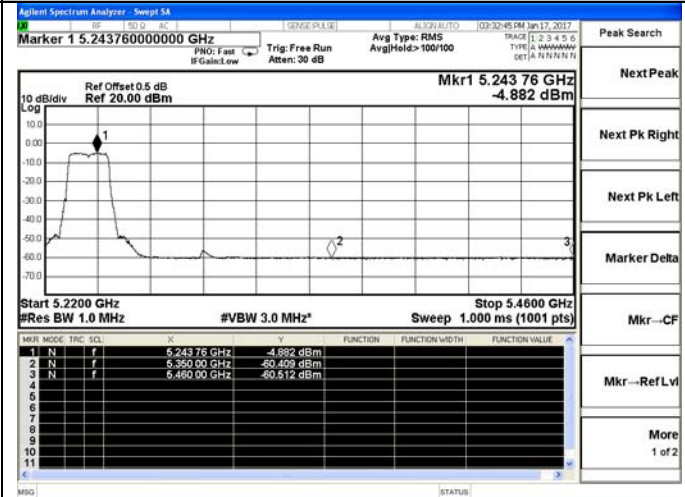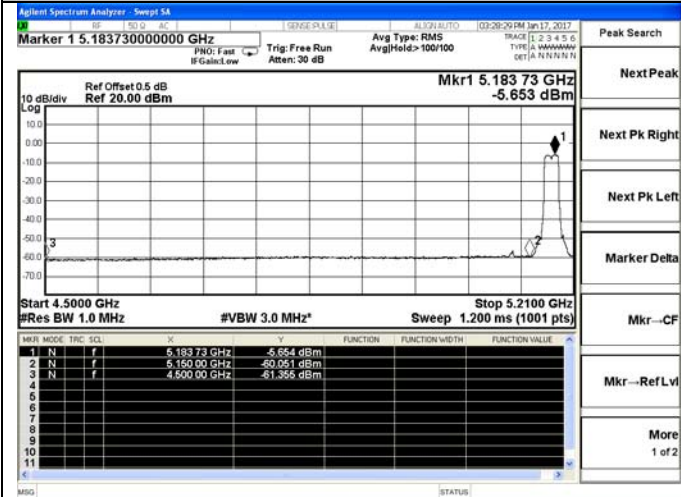

802.11n HT20 Channel 36 / 5180 MHz – Avg



802.11n HT20 Channel 48 / 5240 MHz – Avg

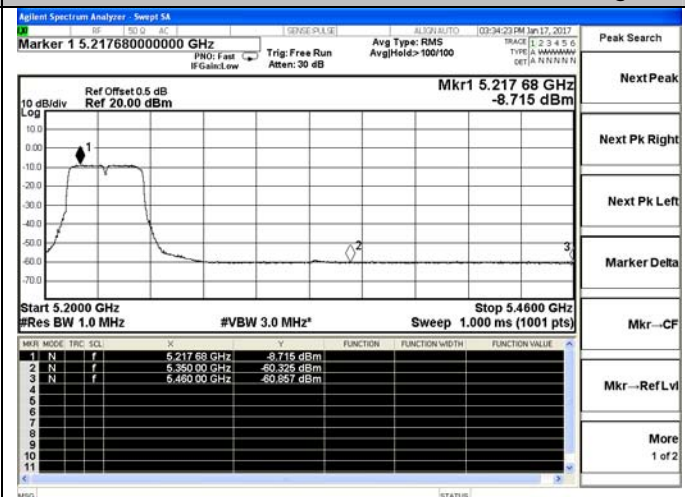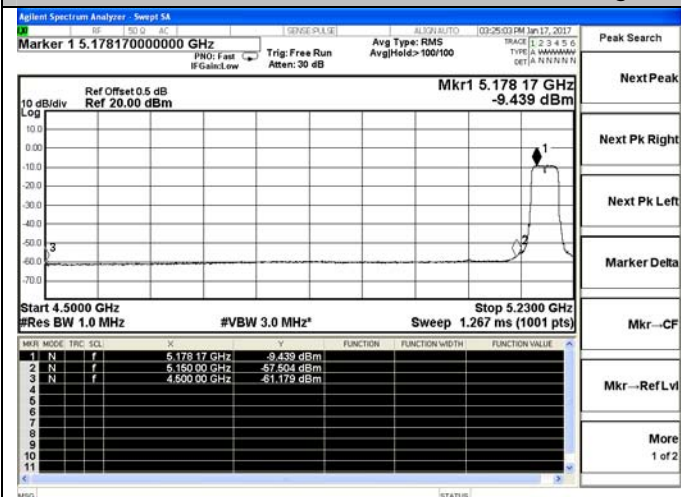

802.11n HT40 Channel 38 / 5190 MHz – Avg



802.11n HT40 Channel 46 / 5230 MHz – Avg

Undesirable Emissions-Avg

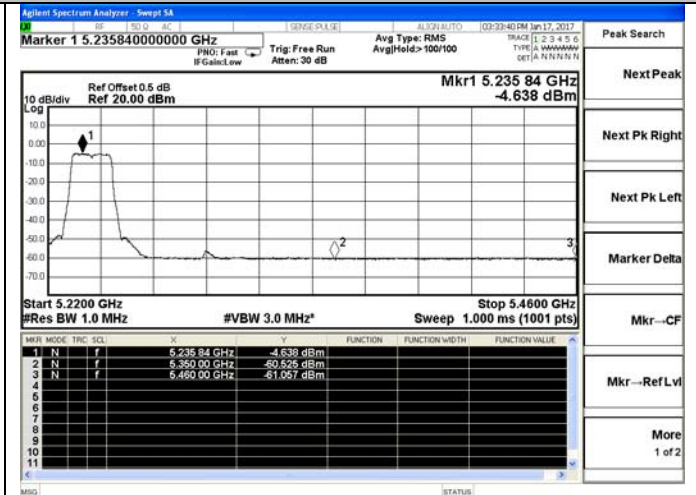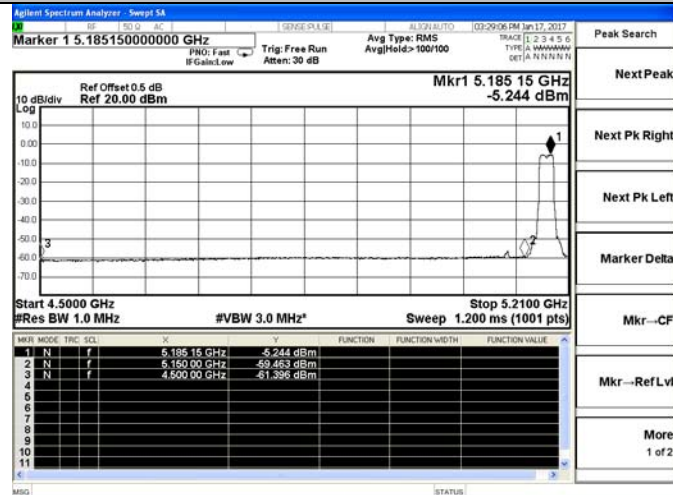



802.11ac VHT20 Channel 36 / 5180 MHz – Avg

802.11ac VHT20 Channel 48 / 5240 MHz – Avg

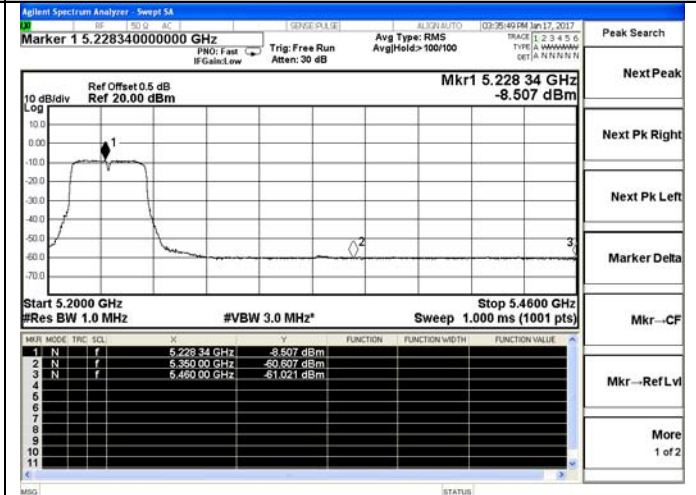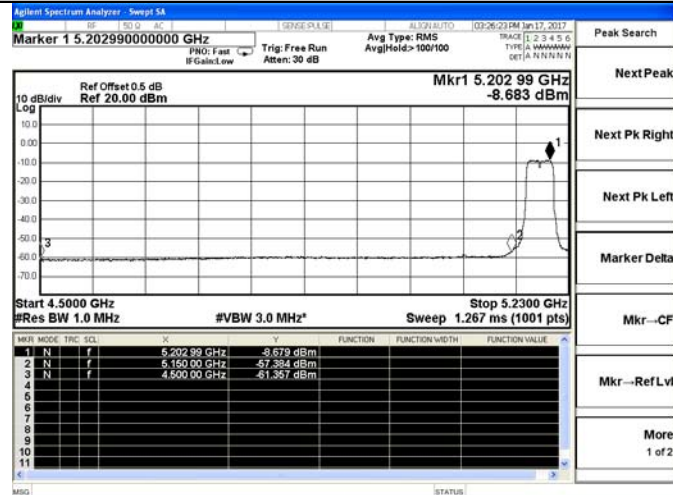

802.11ac VHT40 Channel 38 / 5190 MHz – Avg

802.11ac VHT40 Channel 46 / 5230 MHz – Avg

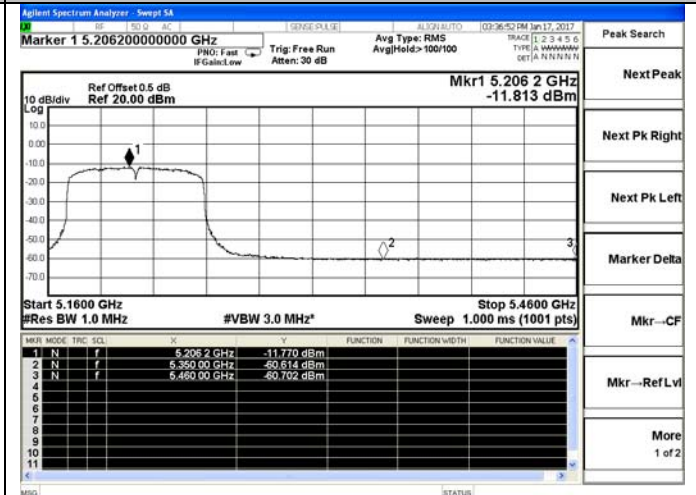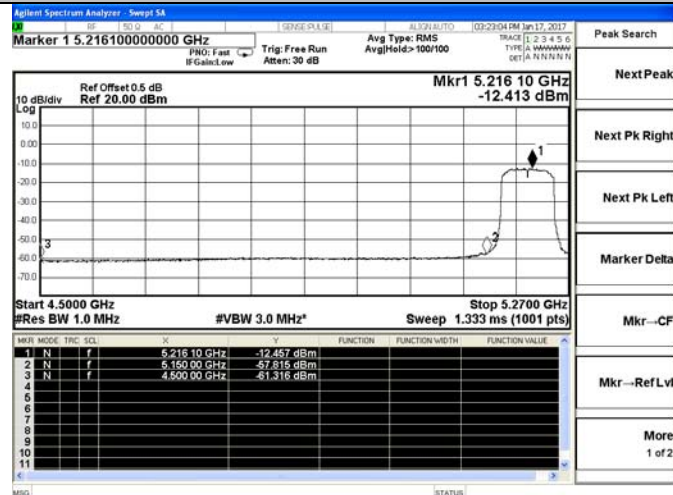

802.11ac VHT80 Channel 42 / 5210 MHz – Avg

802.11ac VHT80 Channel 42 / 5210 MHz – Avg


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

5.6.2 Block Diagram of Test Setup

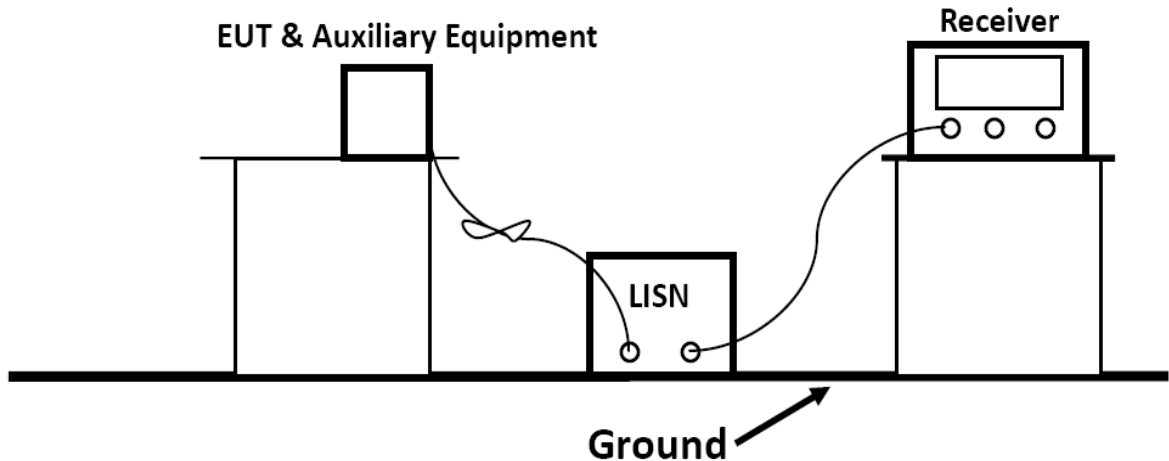

5.6.3 Test Results


PASS.

Only recorded the worst test case in this report.

The test data please refer to following page.

Test Result For Line Power Input AC 120V/60Hz (Worst Case)


Live Line:

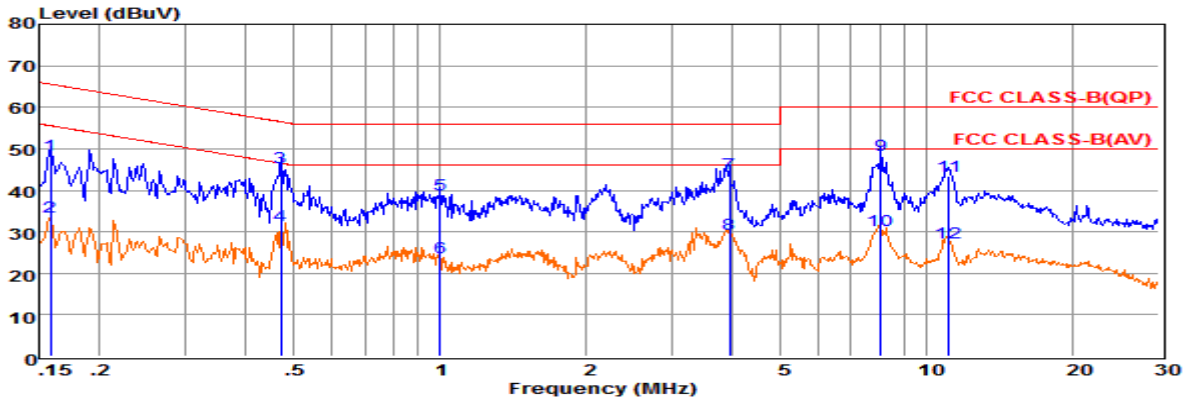

| | Freq | Reading | LisnFac | CabLos | Measured | Limit | Over | Remark |
|----|-------|---------|---------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB | dBuV/m | dBuV/m | dBuV/m | |
| 1 | 0.16 | 28.91 | 9.58 | 0.02 | 48.51 | 65.56 | -17.05 | QP |
| 2 | 0.16 | 13.95 | 9.58 | 0.02 | 33.55 | 55.55 | -22.00 | Average |
| 3 | 0.47 | 25.92 | 9.62 | 0.04 | 45.58 | 56.49 | -10.91 | QP |
| 4 | 0.47 | 11.94 | 9.62 | 0.04 | 31.60 | 46.49 | -14.89 | Average |
| 5 | 1.00 | 19.17 | 9.63 | 0.05 | 38.85 | 56.00 | -17.15 | QP |
| 6 | 1.00 | 4.03 | 9.63 | 0.05 | 23.71 | 46.00 | -22.29 | Average |
| 7 | 3.94 | 24.42 | 9.65 | 0.06 | 44.13 | 56.00 | -11.87 | QP |
| 8 | 3.94 | 9.72 | 9.65 | 0.06 | 29.43 | 46.00 | -16.57 | Average |
| 9 | 8.06 | 28.86 | 9.68 | 0.07 | 48.61 | 60.00 | -11.39 | QP |
| 10 | 8.06 | 10.66 | 9.68 | 0.07 | 30.41 | 50.00 | -19.59 | Average |
| 11 | 11.14 | 23.67 | 9.70 | 0.09 | 43.46 | 60.00 | -16.54 | QP |
| 12 | 11.14 | 7.70 | 9.70 | 0.09 | 27.49 | 50.00 | -22.51 | Average |

Remarks: 1. C.F (Correction Factor) = Insertion loss + Cable loss.
 2. Measured = Reading + Lisn Factor +Cable Loss.

Neutral:

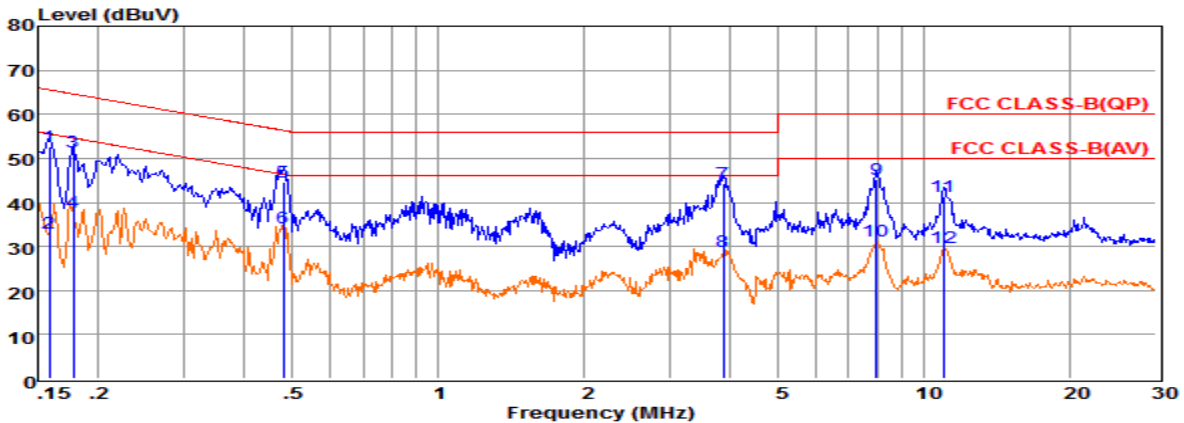

| | Freq | Reading | LisnFac | CabLos | Measured | Limit | Over | Remark |
|----|-------|---------|---------|--------|----------|--------|--------|---------|
| | MHz | dBuV | dB | dB | dBuV/m | dBuV/m | dBuV/m | |
| 1 | 0.16 | 33.02 | 9.68 | 0.02 | 52.72 | 65.56 | -12.84 | QP |
| 2 | 0.16 | 13.28 | 9.68 | 0.02 | 32.98 | 55.55 | -22.57 | Average |
| 3 | 0.18 | 31.71 | 9.64 | 0.02 | 51.37 | 64.59 | -13.22 | QP |
| 4 | 0.18 | 17.98 | 9.63 | 0.02 | 37.63 | 54.59 | -16.96 | Average |
| 5 | 0.48 | 25.07 | 9.62 | 0.04 | 44.73 | 56.32 | -11.59 | QP |
| 6 | 0.48 | 14.66 | 9.62 | 0.04 | 34.32 | 46.32 | -12.00 | Average |
| 7 | 3.86 | 24.49 | 9.65 | 0.06 | 44.20 | 56.00 | -11.80 | QP |
| 8 | 3.86 | 9.09 | 9.65 | 0.06 | 28.80 | 46.00 | -17.20 | Average |
| 9 | 7.98 | 25.39 | 9.70 | 0.07 | 45.16 | 60.00 | -14.84 | QP |
| 10 | 7.98 | 11.59 | 9.70 | 0.07 | 31.36 | 50.00 | -18.64 | Average |
| 11 | 10.96 | 21.47 | 9.73 | 0.09 | 41.29 | 60.00 | -18.71 | QP |
| 12 | 10.96 | 9.99 | 9.73 | 0.09 | 29.81 | 50.00 | -20.19 | Average |

Remarks: 1. C.F (Correction Factor) = Insertion loss + Cable loss.
 2. Measured = Reading + Lisn Factor +Cable Loss.

Note: Pre-scan all modes and recorded the worst case results in this report.

5.7. Antenna Requirements

5.7.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

The 5.2GHz WLAN use a R-SMA antenna and FPC antenna, the maximum gain is 2.5dBi for each antenna.

5.7.3. Results: Compliance.

Measurement parameters

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep Time: | Auto |
| Resolution bandwidth: | 1MHz |
| Video bandwidth: | 3MHz |
| Trace-Mode: | Max hold |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the IEEE 802.11a mode is used.

Limits

| FCC | IC |
|--------------|----|
| Antenna Gain | |
| 6 dBi | |

| Tnom | Vnom | lowest channel 5180 MHz | | middle channel 5220 MHz | | highest channel 5240 MHz | |
|---|------|----------------------------|-------|------------------------------------|-------|-----------------------------|-------|
| | | Ant 0 | Ant 1 | Ant 0 | Ant 1 | Ant 0 | Ant 1 |
| Conducted power [dBm] Measured with OFDM modulation | | 14.78 | 14.82 | 14.76 | 14.19 | 15.09 | 14.54 |
| Radiated power [dBm] Measured with OFDM modulation | | 15.91 | 16.03 | 16.27 | 15.72 | 17.06 | 15.89 |
| Gain [dBi] Calculated | | 1.13 | 1.21 | 1.51 | 1.53 | 1.20 | 1.35 |
| Measurement uncertainty | | | | ± 1.6 dB (cond.) / ± 3.8 dB (rad.) | | | |

Result: -/-

-----THE END OF REPORT-----