

CFR 47 FCC PART 22 H CFR 47 FCC PART 24 E CFR 47 FCC PART 27

TEST REPORT

For

LTE Smart Phone

FCC ID: 2ADINS6006L Model Name: S6006L, NUU X7, X7

Report Number: 4791221995-1-RF-6 Issue Date: July 23, 2024

Prepared for

Sun Cupid Technology (HK) Ltd.

16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

> Tel: +86 769 22038881 Fax: +86 769 33244054 Website: www.ul.com



REPORT NO.: 4791221995-1-RF-6 Page 2 of 234

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	July 23, 2024	Initial Issue	\


Note:

- 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
- 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 22 H >< CFR 47 FCC PART 24 E>< CFR 47 FCC PART 27> when < Simple Acceptance > decision rule is applied.



TABLE OF CONTENTS

1. AT	TESTATION OF TEST RESULTS	5
2. TE	ST METHODOLOGY	6
3. FA	CILITIES AND ACCREDITATION	6
4. CA	LIBRATION AND UNCERTAINTY	7
4.1.	MEASURING INSTRUMENT CALIBRATION	7
4.2.	MEASUREMENT UNCERTAINTY	7
5. EQ	UIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	TEST CHANNEL CONFIGURATION	8
5.3.	MAXIMUM ERP/EIRP POWER AND EMISSION DESIGNATOR	9
5.4.	WORST-CASE CONFIGURATION AND MODE	10
5.5.	DESCRIPTION OF AVAILABLE ANTENNAS	11
5.6.	DESCRIPTION OF TEST SETUP	12
6. ME	EASURING INSTRUMENT AND SOFTWARE USED	13
7. AN	ITENNA TERMINAL TEST RESULTS	14
7.1.	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	14
7.2.	PEAK TO AVERAGE RADIO	16
7.3.	OCCUPIED BANDWIDTH	17
7.4.	BAND EDGE EMISSIONS	18
7.5.	SPURIOUS EMISSION AT ANTENNA TERMINAL	20
7.6.	FREQUENCY STABILITY	22
8. AP	PENDIX	24
8.1.	AppendixA: Effective (Isotropic) Radiated Power Output Data	
8.1		
8.2. 8.2	AppendixB:Peak-to-Average Ratio	
8.2		
8.3.	AppendixC:26dB Bandwidth and Occupied Bandwidth	
8.3		
8.3	·	
<i>8.4.</i> 8.4	AppendixD:Band Edge	
8.4	•	
8.5.	AppendixE:Conducted SpuriousEmission	
გ.5	5.1. Test Result	108





REPORT NO.: 4791221995-1-RF-6 Page 5 of 234

1. ATTESTATION OF TEST RESULTS

Applicant Information

Applicant illionnation				
Company Name:	Sun Cupid Technology (HK) Ltd.			
Address:	16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong			
EUT Information				
EUT Name:	LTE Smart Phone			
Model:	S6006L			
Series Model:	NUU X7, X7			
Brand:	NUU			
Sample Received Date:	March 28, 2024			
Sample Status:	Normal			
Sample ID:	7066315			
Date of Tested:	March 31, 2024 ~ July 23, 2024			

APPLICABLE STANDARDS						
STANDARD TEST RESULTS						
CFR 47 FCC PART 22 H	PASS					
CFR 47 FCC PART 24 E	PASS					
CFR 47 FCC PART 27	PASS					

Pre	pared	R۱	<i>,</i> ·
1 10	parca	-	

James Qin Project Engineer Checked By:

Denny Huang

Senior Project Engineer

Approved By:

Stephen Guo

Operations Manager



REPORT NO.: 4791221995-1-RF-6 Page 6 of 234

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26-2015, 971168 D01 Power Meas License Digital Systems v03r01, 971168 D02 Misc Rev Approv License Devices v02r01, 412172 D01 v01r01 Determining ERP and EIRP, CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27.

3. FACILITIES AND ACCREDITATION

	A2LA (Certificate No.: 4102.01)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with A2LA.
	FCC (FCC Designation No.: CN1187)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	Has been recognized to perform compliance testing on equipment subject
	to the Commission's Delcaration of Conformity (DoC) and Certification rules
	ISED (Company No.: 21320)
A 1'.4 - 4'	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Accreditation	has been registered and fully described in a report filed with ISED.
Certificate	The Company Number is 21320 and the test lab Conformity Assessment
	Body Identifier (CABID) is CN0046.
	VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)
	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
	has been assessed and proved to be in compliance with VCCI, the
	Membership No. is 3793.
	Facility Name:
	Chamber D, the VCCI registration No. is G-20192 and R-20202.
	Shielding Room B, the VCCI registration No. is C-20153 and T-20155.

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

REPORT NO.: 4791221995-1-RF-6 Page 7 of 234

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty				
Conduction emission	3.62 dB				
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB				
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB				
D # 4 15 1 1	5.78 dB (1 GHz-18 GHz)				
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.23dB (18 GHz-26 GHz)				
(, (,,,,,, (5.64 dB (26 GHz-40 GHz)				
Bandwidth	1.1 %				
Frequency Error	±1.4Hz				
Note: This upportainty represents an expanded upportainty expressed at approximately the					

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Page 8 of 234

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	LTE smart phone
Model:	S6006L
Series Model:	NUU X7, X7
Model Difference:	NUU X7, X7 have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with S6006L. The difference lies only the model number. all these changes do not degrade the unwanted emissions of the certified product.

EUT configurations:

Material type	First resources material information		Second resources material information		
	Part number	Supplier	Part number	Supplier	
MODU(Baseband chips)	MT6761V/WBA	MTK	MT8766V/WBA	MTK	

5.2. TEST CHANNEL CONFIGURATION

Band	Mode Low Middle		Middle	High
WCDMA Band 2	HSDPA/HSUPA	9262	9400	9538
WCDIVIA Ballu Z	HSDFA/HSUFA	1852.4 MHz 1880.0 MHz		1907.6 MHz
WCDMA Band 4	HSDPA/HSUPA	1312	1413	1513
WCDIVIA Ballu 4	HSDFA/HSUFA	1712.4 MHz	1732.6 MHz	1752.6 MHz
WCDMA Band 5	HSDPA/HSUPA	4132	4182	4233
WCDINIA Barid 5	HODPA/HOUPA	826.4 MHz	836.4 MHz	846.6 MHz



REPORT NO.: 4791221995-1-RF-6 Page 9 of 234

5.3. MAXIMUM ERP/EIRP POWER AND EMISSION DESIGNATOR

WCDMA Band2

Part 24		_				
EIRP Limit(W) 2.0						
Antenna Gain (dBi)	1.62					
Mode		Frequency Range (MHz)	Conducted Average power (dBm)	EIRP (W)	99% OBW (MHz)	Emission Designator
REL99			23.97	0.36	4.165	4M17F9W
HSDPA		1852.4 ~ 1907.6	23.02	0.29	4.168	4M17F9W
HSUPA			21.94	0.23	4.196	4M20F9W

WCDMA Band4

Part 27						
EIRP Limit(W) 1.0						
Antenna Gain (dBi)	0.23					
Mode		Frequency Range (MHz)	Conducted Average power (dBm)	EIRP (W)	99% OBW (MHz)	Emission Designator
REL99			23.44	0.23	4.173	4M17F9W
HSDPA		1712.4 ~ 1752.6	22.54	0.19	4.172	4M17F9W
HSUPA			21.55	0.15	4.214	4M21F9W

WCDMA Band5

Fall 22		_				
ERP Limit(W)	7.0					
Antenna Gain (dBi)	-0.96					
Mode		Frequency Range (MHz)	Conducted Average power (dBm)	ERP (W)	99% OBW (MHz)	Emission Designator
REL99			24.02	0.12	4.160	4M16F9W
HSDPA		826.4 ~ 846.6	23.09	0.10	4.174	4M17F9W
HSUPA	·		22.08	80.0	4.223	4M22F9W



REPORT NO.: 4791221995-1-RF-6 Page 10 of 234

5.4. WORST-CASE CONFIGURATION AND MODE

The radiated spurious emissions measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was the worst-case orientation.

Radiated spurious emissions were investigated below 30 MHz, 30 MHz - 1 GHz and above 1 GHz. There were no emissions found on below 1GHz and above 18 GHz, the emissions between 1 GHz – 18 GHz were tested at the low, mid, high channel and the worst configuration. Only the worst result is reported.

Note:

1. Based on preliminary testing, there were no significant differences between the two models and therefore model [MT6761 version] was fully tested.



REPORT NO.: 4791221995-1-RF-6 Page 11 of 234

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Band	Antenna Type	MAX Antenna Gain (dBi)
Ant1	WCDMA Band 2	FPC	1.62
Ant1	WCDMA Band 4	FPC	0.23
Ant2	WCDMA Band 5	FPC	-0.96


Band	Transmit and Receive Mode	Description
WCDMA Band 2	⊠1TX, 2RX	Ant0 antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
WCDMA Band 4	⊠1TX, 2RX	Ant0 antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
WCDMA Band 5	⊠1TX, 2RX	Ant0 antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna

Note: The value of the antenna gain was declared by customer.




5.6. DESCRIPTION OF TEST SETUP

Conducted

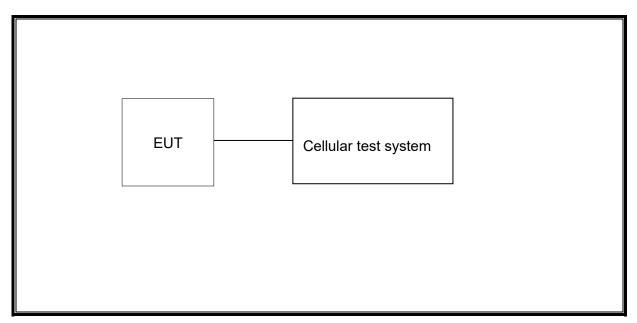

Radiated

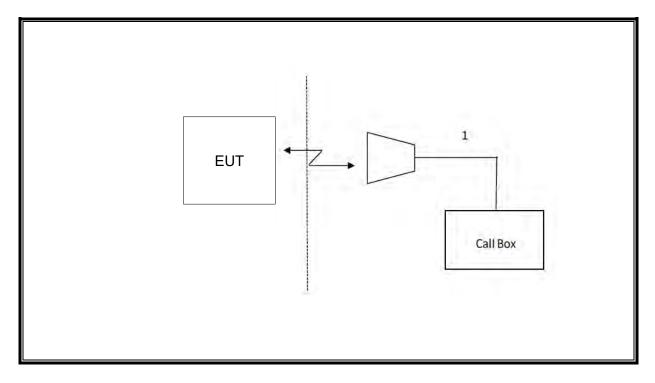



REPORT NO.: 4791221995-1-RF-6 Page 13 of 234

6. MEASURING INSTRUMENT AND SOFTWARE USED

6. M	6. MEASURING INSTRUMENT AND SOFTWARE USED							
	Antenna Terminal Test							
			Inst	rument	t			
Used	Equipment	Manufacturer	Mod	el No.	Serial No.		Last Cal.	Next Cal.
\checkmark	Spectrum Analyzer	R&S	FS	V40	S42	2060001	Oct.12, 202	3 Oct.11, 2024
V	Wideband Radio Communication Tester	R&S	CM\	W500	155523		Oct.12, 202	3 Oct.11, 2024
			Sof	ftware				
Used	Descrip	tion	Mar	nufactu	rer		Name	Version
V	Tonsend Cellular	Test System	T	onsend	d		RF Auto Tes System	t 3.1.46
Radiated Test								
			Inst	rument	t			
Used	Equipment	Manufacturer	Mod	el No.	Se	rial No.	Last Cal.	Next Cal.
V	MXE EMI Receiver	KESIGHT	N90	038A	MY5	6400036	Oct.12, 202	3 Oct.11, 2024
V	Hybrid Log Periodic Antenna	TDK	l l	LP- 03C	13	30959	Aug.02, 202	1 Aug.01, 2024
V	Preamplifier	HP	84	47D	2944	4A09099	Oct.12, 202	3 Oct.11, 2024
V	EMI Measurement Receiver	R&S	ES	R26	10	01377	Oct.12, 202	3 Oct.11, 2024
V	Horn Antenna	TDK	HRN	HRN-0118		30939	Apr. 29, 202	2 Apr. 28, 2025
V	Horn Antenna	Schwarzbeck	ввн	A9170		697	June 30, 2024	June 29, 2027
V	Preamplifier	TDK		x-02- 118		S-305- 0067	Oct.12, 202	3 Oct.11, 2024
V	Preamplifier	TDK	PA-	-02-2		S-307- 0003	Oct.12, 202	3 Oct.11, 2024
\checkmark	Loop antenna	Schwarzbeck	15	1519B		8000	Dec.14, 202	1 Dec.13, 2024
V	High Pass Filter	Wi	WHKX10- 2700- 3000- 18000- 40SS			23	Oct.12, 202	3 Oct.11, 2024
			So	ftware				
Used	Desci	ription		Manuf	actur	er	Name	Version
\checkmark	Test Software for R	Radiated disturbance Farad			rad		EZ-EMC	Ver. UL-3A1

REPORT NO.: 4791221995-1-RF-6 Page 14 of 234

7. ANTENNA TERMINAL TEST RESULTS

7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP. 27.50(d) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watts EIRP.

27.50(h) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to ANSI C63.26:2015 and KDB 971168 D01 Section 5.6

ERP/ EIRP = PMeas + GT - LC

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);


PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

The transmitter has a maximum radiated ERP / EIRP output powers as follows:

TEST SETUP

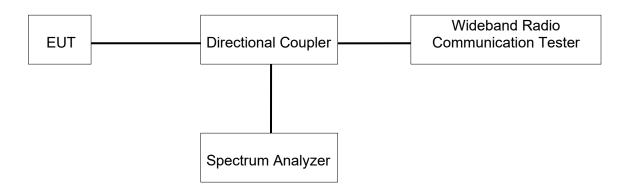



TEST ENVIRONMENT

REPORT NO.: 4791221995-1-RF-6 Page 15 of 234

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.8 V

RESULTS

Please refer to Appendix A.



REPORT NO.: 4791221995-1-RF-6 Page 16 of 234

7.2. PEAK TO AVERAGE RADIO

LIMITS


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR was measured on the Spectrum Analyzer.

TEST SETUP

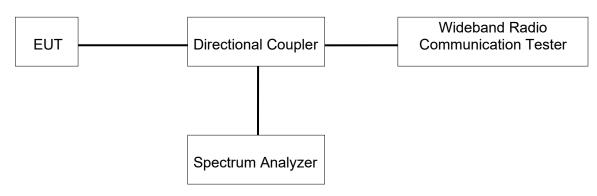

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.8 V

RESULTS

The results from all CCDF plots are passed with 13dB peak-to-average power ratio criteria. Please refer to Appendix B.



REPORT NO.: 4791221995-1-RF-6 Page 17 of 234

7.3. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS


For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01)

TEST SETUP

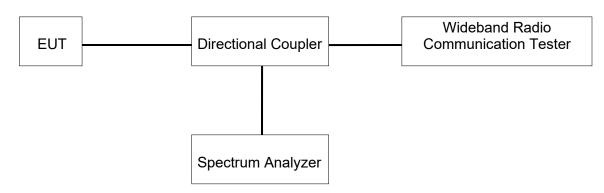

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.8 V

RESULTS

Please refer to Appendix C.



7.4. BAND EDGE EMISSIONS

RULE PART(S)

FCC §2.1051, §22.917, §24.238, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

REPORT NO.: 4791221995-1-RF-6

Page 18 of 234


TEST PROCEDURE

Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01 The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

- a) Set the RBW = 1 ~ 1.5 % of OBW (Typically limited to a minimum RBW of 1% of the OBW)
- b) Set VBW ≥ 3 × RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = Auto;
- e) Detector = RMS;
- f) Ensure that the number of measurement points ≥ 2*Span/RBW;
- g) Trace mode = Average (100);



Solutions

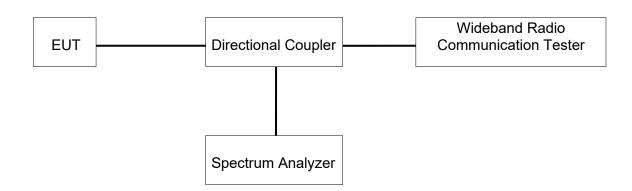

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.8 V

RESULTS

Please refer to Appendix D.

REPORT NO.: 4791221995-1-RF-6 Page 20 of 234

7.5. SPURIOUS EMISSION AT ANTENNA TERMINAL

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53

LIMITS

FCC: §22.901, §22.917, §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100 kHz for emission below 1GHz and 1MHz for emissions above 1GHz (Tests were performed 1 MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW \geq 3 × RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average (LTE 5), Maxhold (LTE Band7);

Note: Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

TEST SETUP

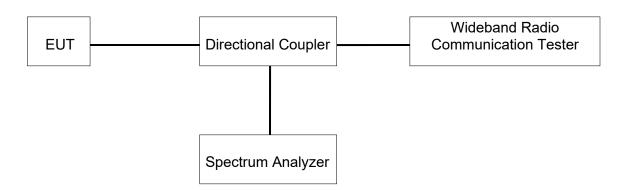



TEST ENVIRONMENT

REPORT NO.: 4791221995-1-RF-6 Page 21 of 234

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.8 V

RESULTS

Please refer to Appendix E.



REPORT NO.: 4791221995-1-RF-6 Page 22 of 234

7.6. FREQUENCY STABILITY

Rule Part:

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

§24.235 and §27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE


Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	45 % - 75 %	/
Atmospheric Pressure	100 kPa ~102 kPa	1
Temperature	T _N (Normal Temperature):	T _L (Low Temperature): -30 °C
	24.7 °C	T _H (High Temperature): 50 °C
Cupply Voltage	V _N (Normal Voltage):	V _L (Low Voltage): DC 3.23V
Supply Voltage	DC 3.8 V	V _H (High Voltage): DC 4.37 V



Page 23 of 234

TEST SETUP

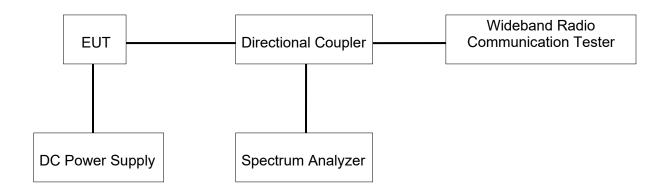

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	/

RESULTS

The peak frequency error is recorded (worst-case).

Please refer to Appendix F.

8. APPENDIX

8.1. AppendixA: Effective (Isotropic) Radiated Power Output Data 8.1.1. Test Result

Band 2		Average Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.97	23.83	23.65
	Subtest 1	23.02	22.82	22.68
HSDPA	Subtest 2	22.95	22.81	22.52
HSDPA	Subtest 3	22.94	22.71	22.51
	Subtest 4	22.93	22.58	22.52
	Subtest 1	20.99	20.89	20.69
	Subtest 2	21.01	20.91	20.65
HSUPA	Subtest 3	21.00	20.89	20.65
	Subtest 4	20.54	20.40	20.23
	Subtest 5	21.94	21.85	21.64

Band 4		Average Power (dBm)			
		1312CH	1413CH	1513CH	
WCDMA	12.2kbps RMC	23.44	23.34	23.44	
	Subtest 1	22.48	22.41	22.54	
HSDPA	Subtest 2	22.50	22.40	22.53	
	Subtest 3	22.52	22.40	22.52	
	Subtest 4	22.46	22.39	22.53	
HSUPA	Subtest 1	20.49	20.51	20.57	
	Subtest 2	20.55	20.47	20.58	
	Subtest 3	21.59	21.48	21.57	
	Subtest 4	20.08	19.99	20.08	
	Subtest 5	21.52	21.45	21.55	

Band 5		Average Power (dBm)			
		4132CH	4182CH	4233CH	
WCDMA	12.2kbps RMC	23.86	23.94	24.02	
	Subtest 1	22.88	22.92	23.07	
HSDPA	Subtest 2	22.86	22.95	23.09	
	Subtest 3	22.92	22.90	23.02	
	Subtest 4	22.85	22.86	23.03	
HSUPA	Subtest 1	20.87	20.95	21.02	
	Subtest 2	20.92	20.93	21.03	
	Subtest 3	21.92	21.96	22.08	
	Subtest 4	20.87	20.54	20.64	
	Subtest 5	21.85	21.90	22.09	

REPORT NO.: 4791221995-1-RF-6 Page 25 of 234

8.2. AppendixB:Peak-to-Average Ratio 8.2.1. Test Result

REL99:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9262	2.86	13	PASS
Band2	9400	2.94	13	PASS
Band2	9538	2.74	13	PASS
Band4	1312	3.08	13	PASS
Band4	1413	3.02	13	PASS
Band4	1513	3.02	13	PASS
Band5	4132	3.16	13	PASS
Band5	4182	3.3	13	PASS
Band5	4233	3.26	13	PASS

HSDPA:

HSDPA:					
Band	Channel	SubTest	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9262	1	3.06	13	PASS
Band2	9400	1	3.16	13	PASS
Band2	9538	1	3	13	PASS
Band2	9262	2	3.06	13	PASS
Band2	9400	2	3.16	13	PASS
Band2	9538	2	3	13	PASS
Band2	9262	3	3.04	13	PASS
Band2	9400	3	3.16	13	PASS
Band2	9538	3	3	13	PASS
Band2	9262	4	3.04	13	PASS
Band2	9400	4	3.16	13	PASS
Band2	9538	4	3	13	PASS
Band4	1312	1	3.2	13	PASS
Band4	1413	1	3.18	13	PASS
Band4	1513	1	3.16	13	PASS
Band4	1312	2	3.2	13	PASS
Band4	1413	2	3.18	13	PASS
Band4	1513	2	3.16	13	PASS
Band4	1312	3	3.2	13	PASS
Band4	1413	3	3.18	13	PASS
Band4	1513	3	3.16	13	PASS
Band4	1312	4	3.2	13	PASS
Band4	1413	4	3.16	13	PASS
Band4	1513	4	3.18	13	PASS
Band5	4132	1	3.34	13	PASS
Band5	4182	1	3.44	13	PASS
Band5	4233	1	3.4	13	PASS
Band5	4132	2	3.34	13	PASS
Band5	4182	2	3.44	13	PASS
Band5	4233	2	3.4	13	PASS
Band5	4132	3	3.36	13	PASS
Band5	4182	3	3.44	13	PASS
Band5	4233	3	3.42	13	PASS
Band5	4132	4	3.36	13	PASS
Band5	4182	4	3.44	13	PASS
Band5	4233	4	3.4	13	PASS

Page 26 of 234


HSUPA:

Band	Channel	SubTest	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9262	1	4.5	13	PASS
Band2	9400	1	4.58	13	PASS
Band2	9538	1	4.46	13	PASS
Band2	9262	2	5.6	13	PASS
Band2	9400	2	5.68	13	PASS
Band2	9538	2	5.52	13	PASS
Band2	9262	3	5	13	PASS
Band2	9400	3	5.12	13	PASS
Band2	9538	3	4.88	13	PASS
Band2	9262	4	5.4	13	PASS
Band2	9400	4	5.52	13	PASS
Band2	9538	4	5.36	13	PASS
Band2	9262	5	4.2	13	PASS
Band2	9400	5	4.26	13	PASS
Band2	9538	5	4.1	13	PASS
Band4	1312	1	4.66	13	PASS
Band4	1413	1	4.6	13	PASS
Band4	1513	1	4.68	13	PASS
Band4	1312	2	5.82	13	PASS
Band4	1413	2	5.74	13	PASS
Band4	1513	2	5.78	13	PASS
Band4	1312	3	5.22	13	PASS
Band4	1413	3	5.16	13	PASS
Band4	1513	3	5.18	13	PASS
Band4	1312	4	5.66	13	PASS
Band4	1413	4	5.56	13	PASS
Band4	1513	4	5.6	13	PASS
Band4	1312	5	4.36	13	PASS
Band4	1413	5	4.32	13	PASS
Band4	1513	5	4.3	13	PASS
Band5	4132	1	4.86	13	PASS
Band5	4182	1	4.9	13	PASS
Band5	4233	1	4.84	13	PASS
Band5	4132	2	5.96	13	PASS
Band5	4182	2	6.08	13	PASS
Band5	4233	2	5.96	13	PASS
Band5	4132	3	5.38	13	PASS
Band5	4182	3	5.46	13	PASS
Band5	4233	3	5.38	13	PASS
Band5	4132	4	5.66	13	PASS
Band5	4182	4	5.72	13	PASS
Band5	4233	4	5.68	13	PASS
Band5	4132	5	4.5	13	PASS
Band5	4182	5	4.58	13	PASS
Band5	4233	5	4.56	13	PASS




8.2.1. Test Graphs


REL99:

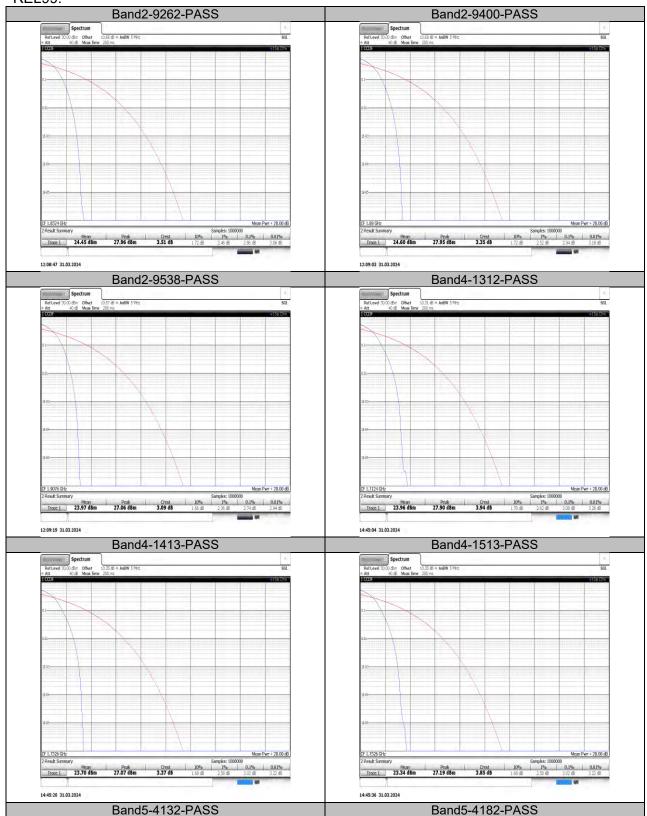

Page 28 of 234

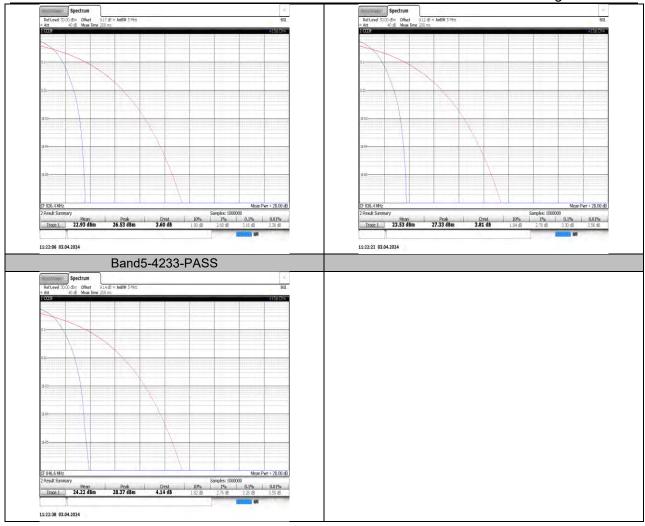

HSDPA:

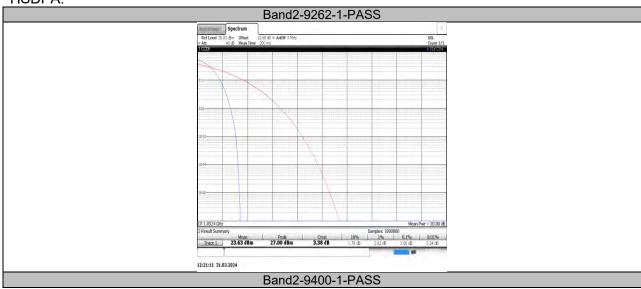

Page 29 of 234



Page 30 of 234




Page 31 of 234




Page 32 of 234



Page 33 of 234

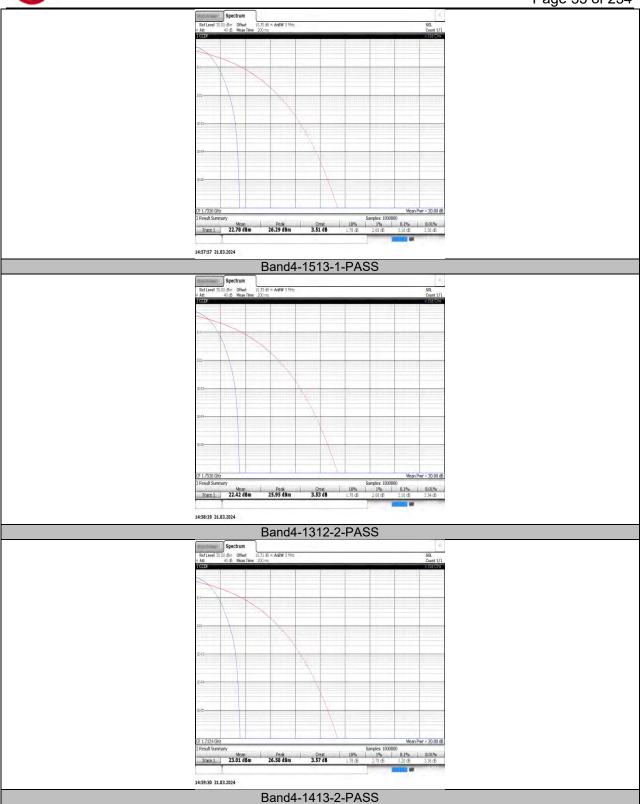


Page 34 of 234

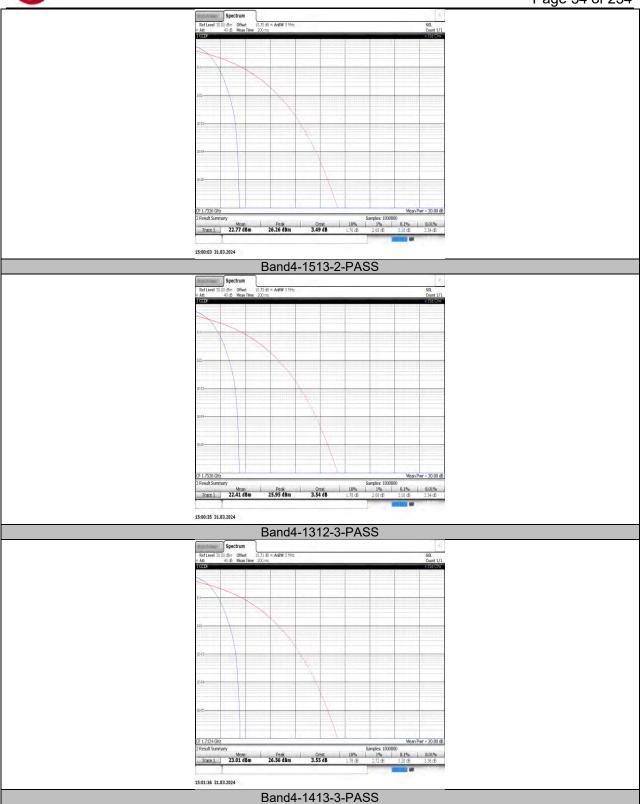


Page 35 of 234




Page 36 of 234

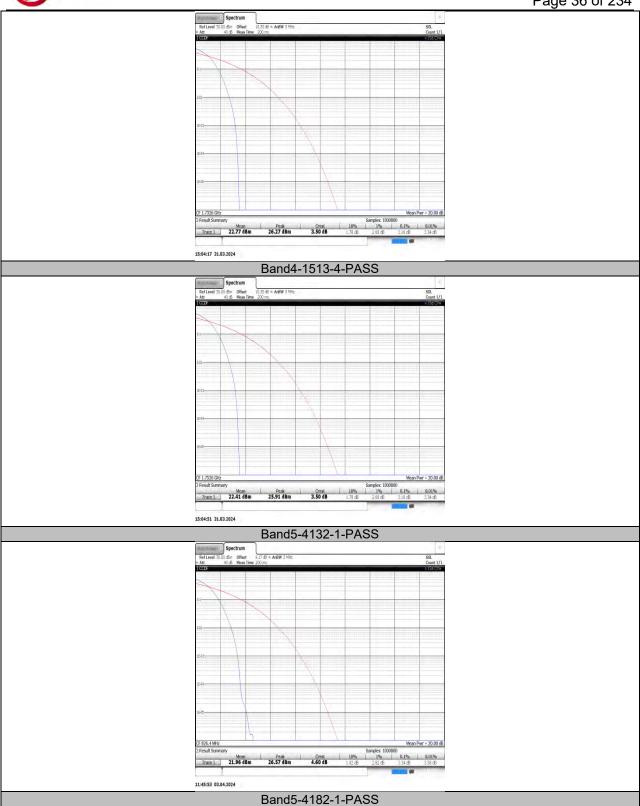


Page 37 of 234

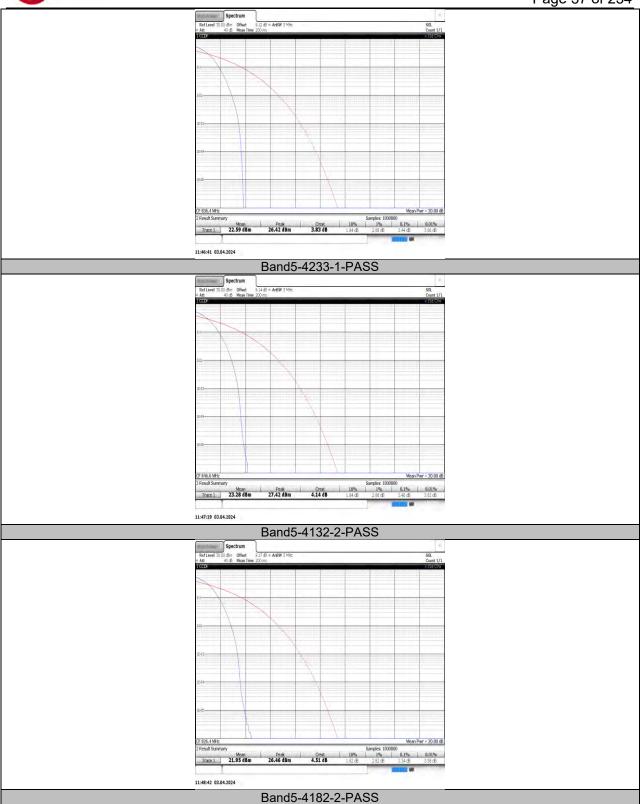


Page 38 of 234

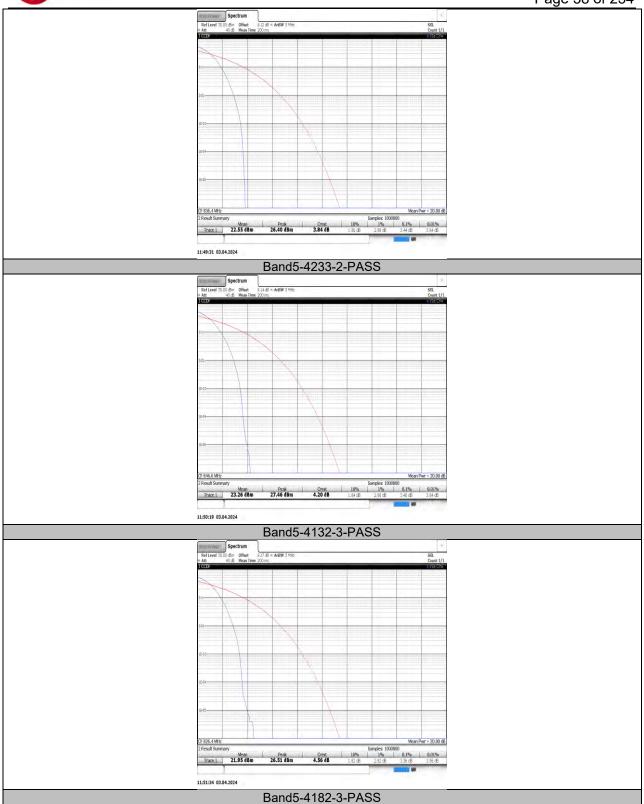


Page 39 of 234

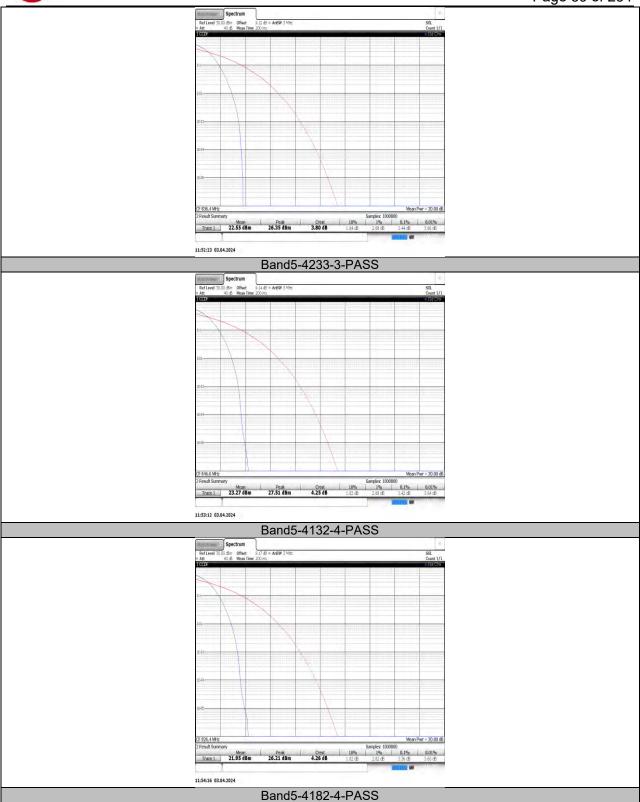


Page 40 of 234

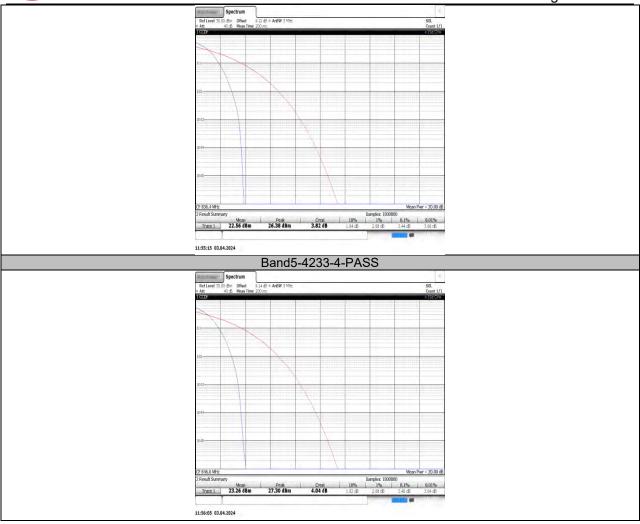


HSUPA:

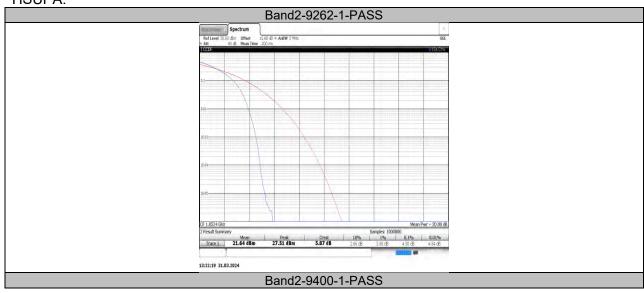


Page 41 of 234

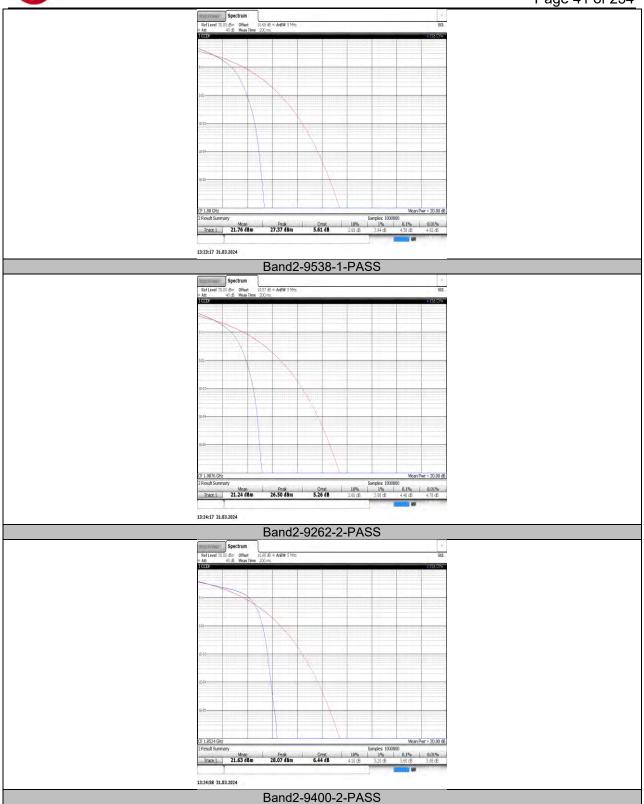


Page 42 of 234

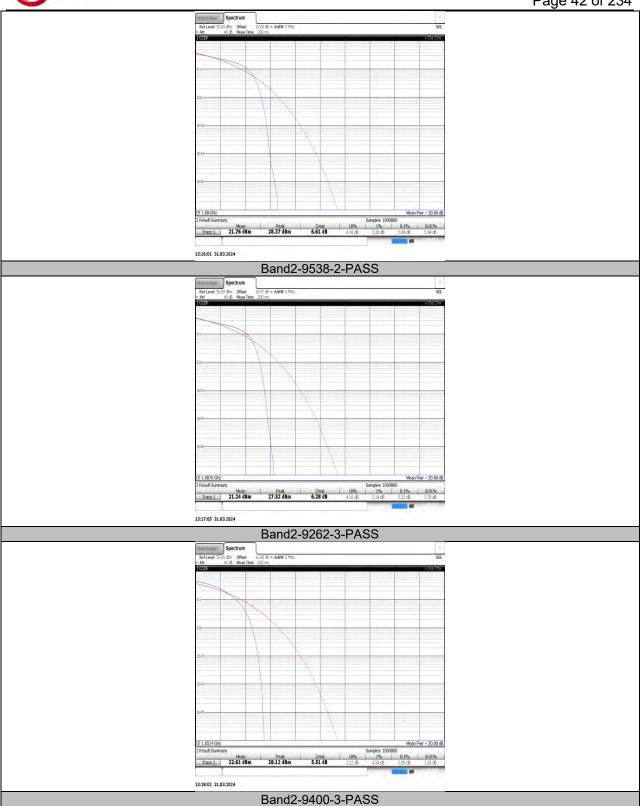


Page 43 of 234

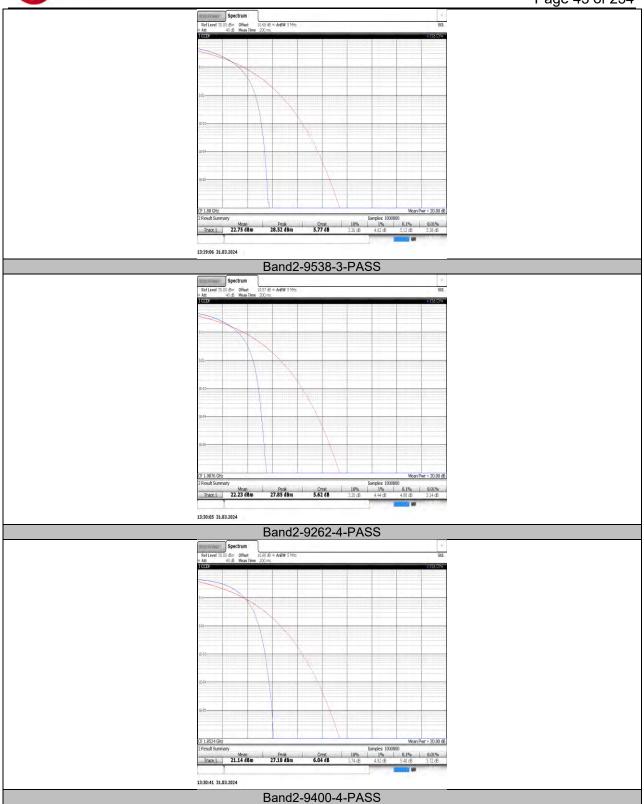


Page 44 of 234

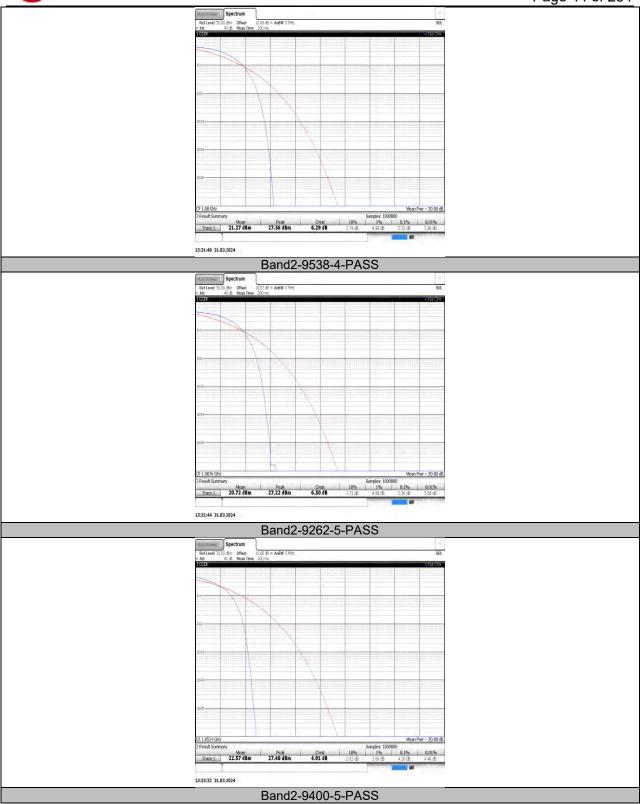


Page 45 of 234

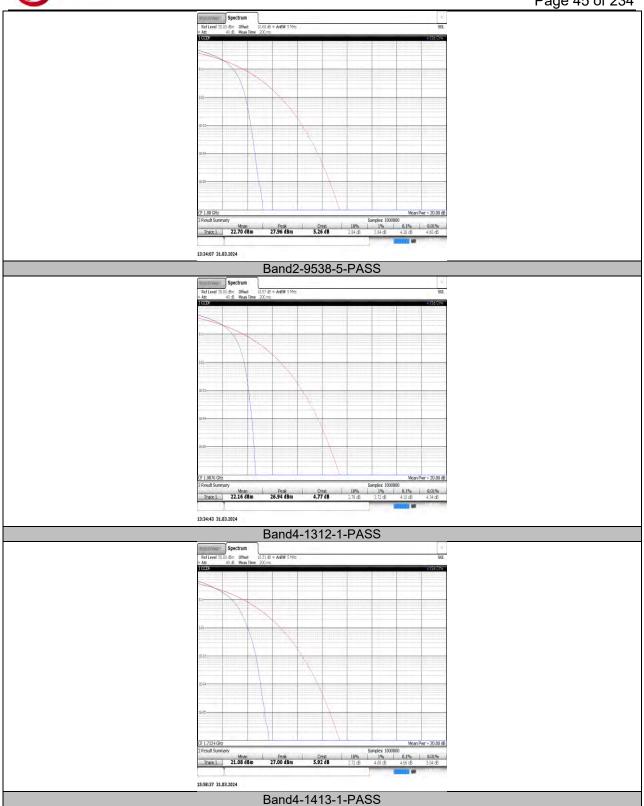


Page 46 of 234

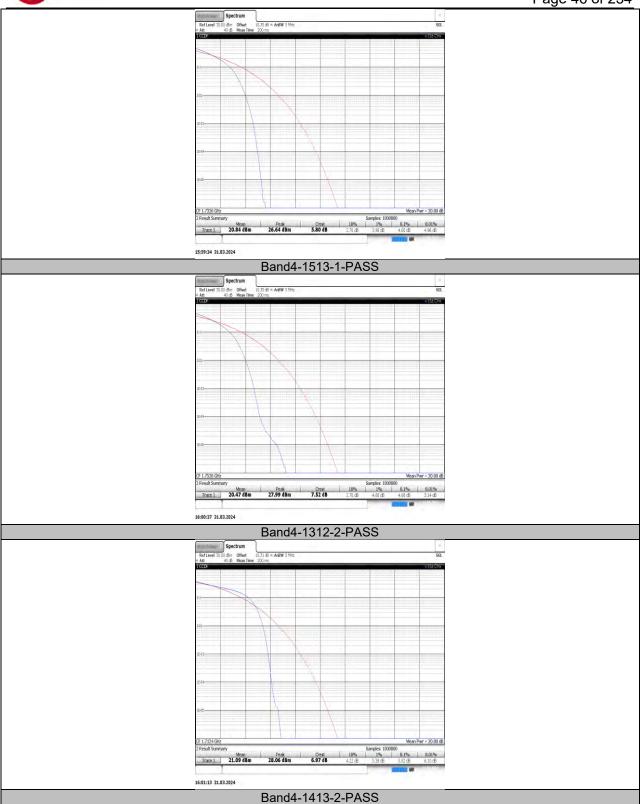


Page 47 of 234

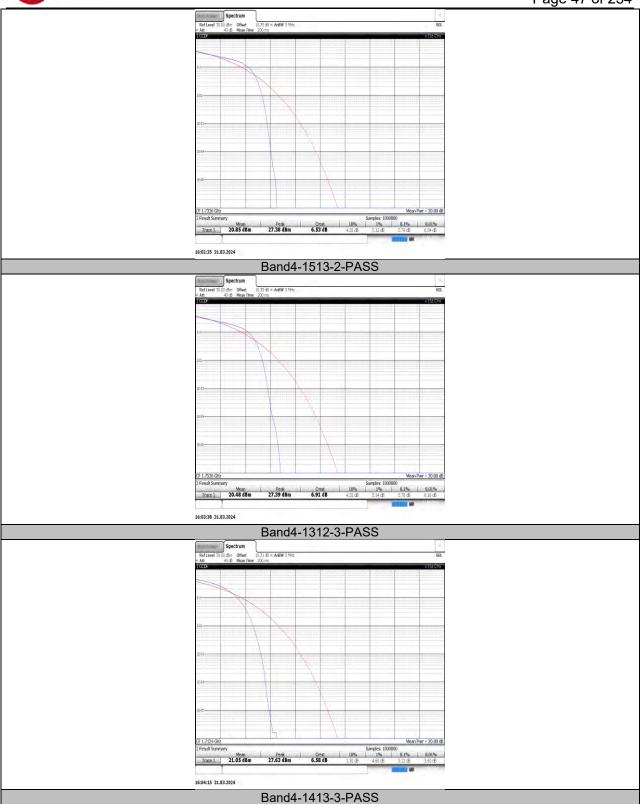


Page 48 of 234

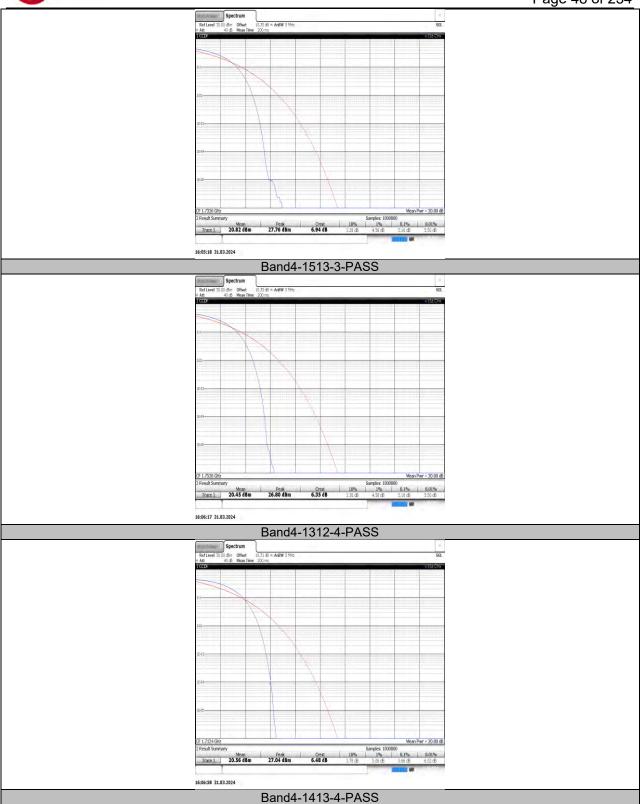


Page 49 of 234

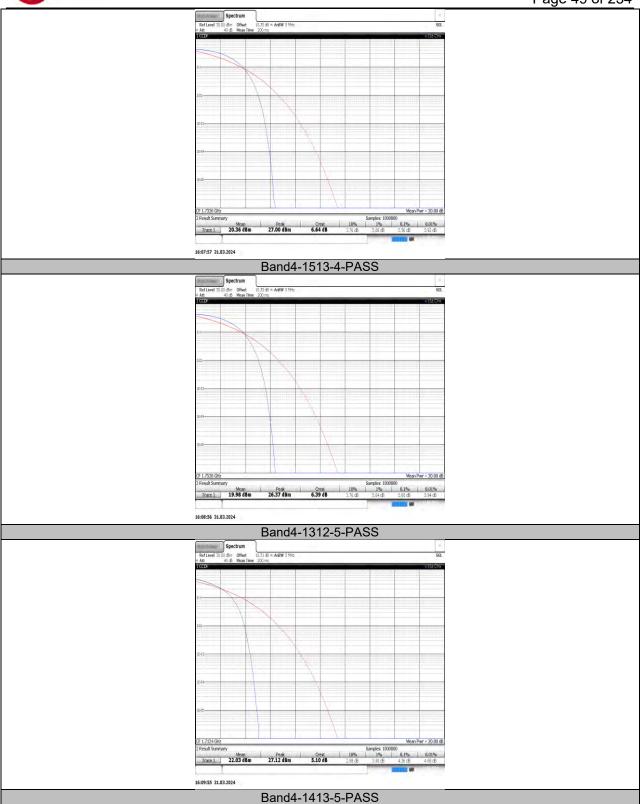


Page 50 of 234

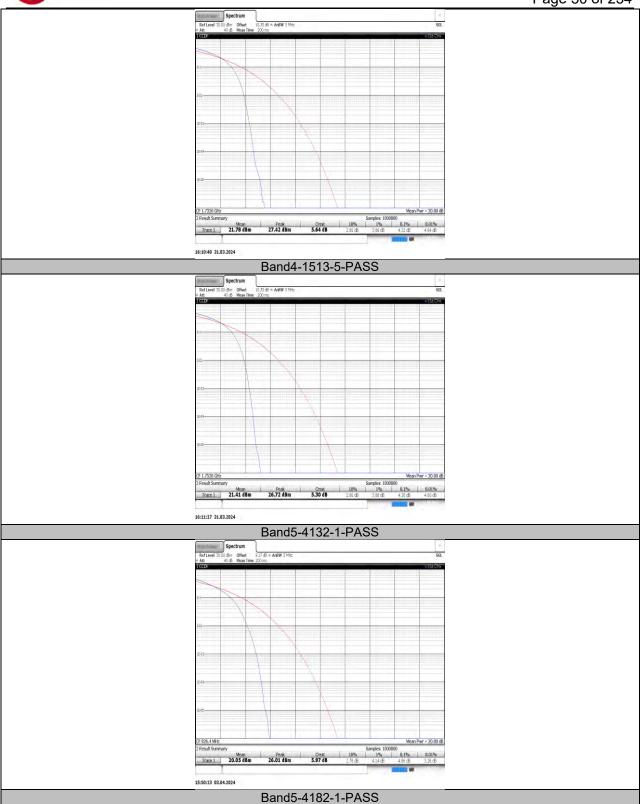


Page 51 of 234

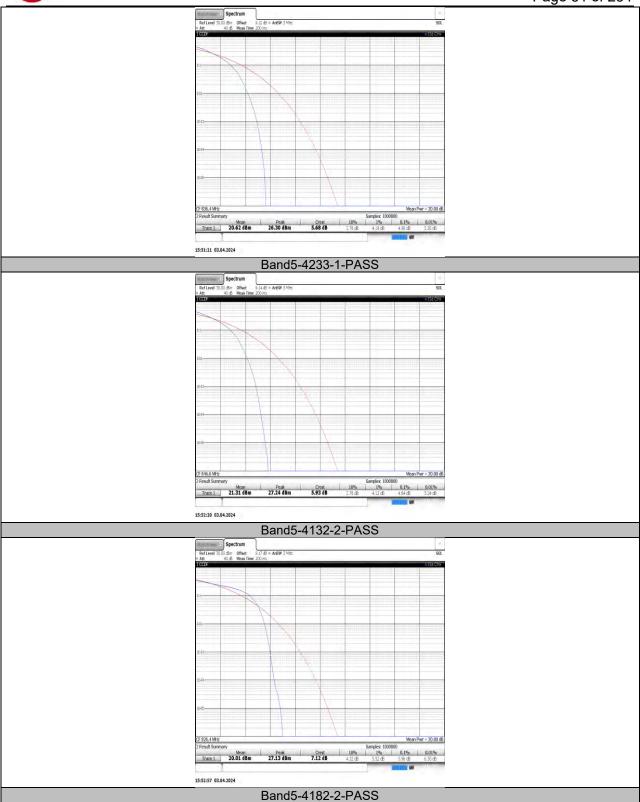


Page 52 of 234

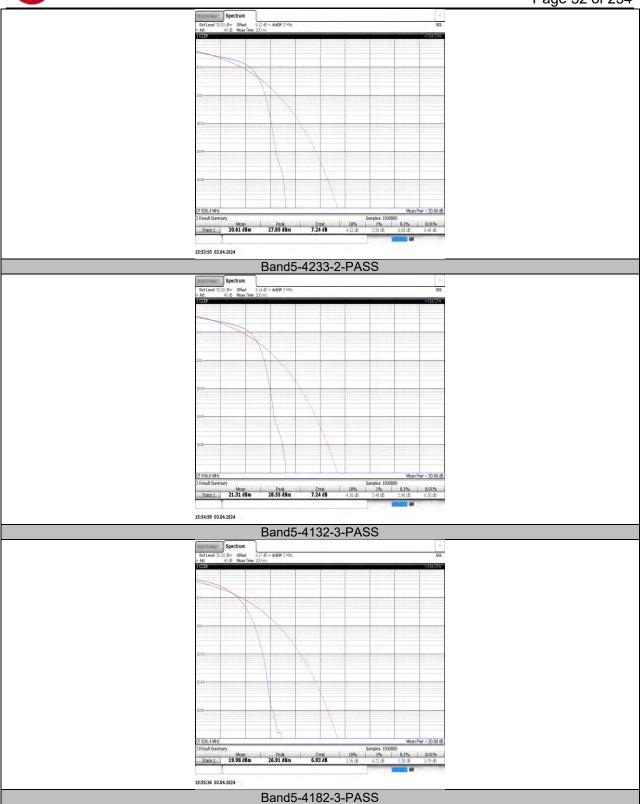


Page 53 of 234

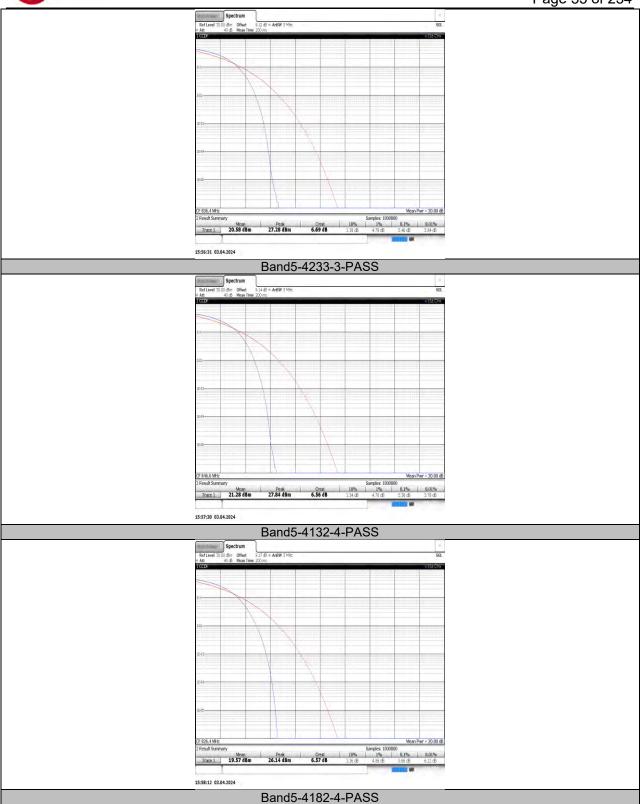

Page 54 of 234

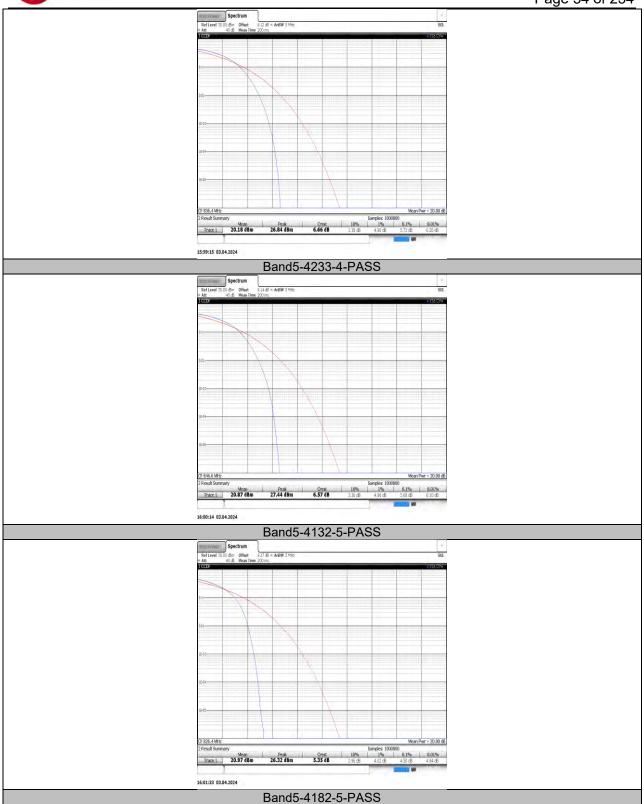

Page 55 of 234

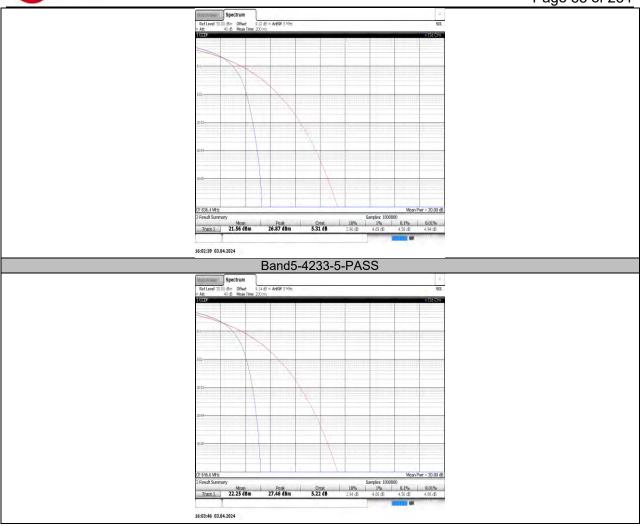

8.3. AppendixC:26dB Bandwidth and Occupied Bandwidth 8.3.1. Test Result

REL99:

INEESS.					
Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(MHz)	Verdict
Band2	9262	4.165	4.72		PASS
Band2	9400	4.152	4.72		PASS
Band2	9538	4.161	4.73		PASS
Band4	1312	4.168	4.73		PASS
Band4	1413	4.169	4.71		PASS
Band4	1513	4.173	4.73		PASS
Band5	4132	4.160	4.71		PASS
Band5	4182	4.160	4.71		PASS
Band5	4233	4.150	4.69		PASS

HSDPA:

Band	Channel	SubTest	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(MHz)	Verdict
Band2	9262	1	4.164	4.72		PASS
Band2	9400	1	4.164	4.71		PASS

Page 56 of 234

					•
Band2	9538	1	4.161	4.73	 PASS
Band2	9262	2	4.161	4.71	 PASS
Band2	9400	2	4.164	4.72	 PASS
Band2	9538	2	4.154	4.72	 PASS
Band2	9262	3	4.165	4.72	 PASS
Band2	9400	3	4.163	4.72	 PASS
Band2	9538	3	4.158	4.72	 PASS
Band2	9262	4	4.168	4.71	 PASS
Band2	9400	4	4.162	4.71	 PASS
Band2	9538	4	4.159	4.73	 PASS
Band4	1312	1	4.166	4.72	 PASS
Band4	1413	1	4.17	4.72	 PASS
Band4	1513	1	4.169	4.71	 PASS
Band4	1312	2	4.166	4.71	 PASS
Band4	1413	2	4.168	4.72	 PASS
Band4	1513	2	4.166	4.71	 PASS
Band4	1312	3	4.169	4.72	 PASS
Band4	1413	3	4.169	4.72	 PASS
Band4	1513	3	4.167	4.72	 PASS
Band4	1312	4	4.164	4.71	 PASS
Band4	1413	4	4.172	4.72	 PASS
Band4	1513	4	4.169	4.73	 PASS
Band5	4132	1	4.164	4.72	 PASS
Band5	4182	1	4.172	4.70	 PASS
Band5	4233	1	4.152	4.71	 PASS
Band5	4132	2	4.168	4.70	 PASS
Band5	4182	2	4.171	4.72	 PASS
Band5	4233	2	4.151	4.70	 PASS
Band5	4132	3	4.168	4.71	 PASS
Band5	4182	3	4.174	4.71	 PASS
Band5	4233	3	4.153	4.71	 PASS
Band5	4132	4	4.169	4.71	 PASS
Band5	4182	4	4.168	4.71	 PASS
Band5	4233	4	4.148	4.70	 PASS

HSUPA:

HOUPA.						
Band	Channel	SubTest	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(MHz)	Verdict
Band2	9262	1	4.187	4.71		PASS
Band2	9400	1	4.186	4.71		PASS
Band2	9538	1	4.187	4.71		PASS
Band2	9262	2	4.187	4.72		PASS
Band2	9400	2	4.181	4.73		PASS
Band2	9538	2	4.187	4.73		PASS
Band2	9262	3	4.195	4.74		PASS
Band2	9400	3	4.192	4.73		PASS
Band2	9538	3	4.191	4.74		PASS
Band2	9262	4	4.196	4.75		PASS
Band2	9400	4	4.189	4.75		PASS
Band2	9538	4	4.184	4.73		PASS
Band2	9262	5	4.174	4.71		PASS
Band2	9400	5	4.172	4.70		PASS
Band2	9538	5	4.163	4.72		PASS
Band4	1312	1	4.183	4.72		PASS
Band4	1413	1	4.187	4.74		PASS
Band4	1513	1	4.191	4.93		PASS
Band4	1312	2	4.204	4.75		PASS
Band4	1413	2	4.196	4.73		PASS
Band4	1513	2	4.187	4.74		PASS


REPORT NO.: 4791221995-1-RF-6 Page 57 of 234

PASS Band4 1312 3 4.201 4.73 5.20 **PASS** Band4 1413 3 4.212 Band4 1513 3 4.195 4.73 PASS Band4 1312 4 4.202 4.76 **PASS** Band4 1413 4 4.214 5.99 **PASS** Band4 1513 4 4.198 4.75 **PASS** 5 4.74 **PASS** Band4 1312 4.176 Band4 1413 5 4.173 4.72 **PASS** Band4 1513 5 4.175 4.71 **PASS** Band5 4132 1 4.192 4.73 **PASS** 4182 1 4.204 4.71 **PASS** Band5 Band5 4233 1 4.182 4.72 **PASS** Band5 4132 2 4.216 4.76 **PASS** 4182 2 4.223 4.78 **PASS** Band5 Band5 4233 2 4.194 4.75 PASS Band5 4132 3 4.211 4.73 **PASS** 3 4.75 Band5 4182 4.207 **PASS** Band5 4233 3 4.194 4.76 **PASS** 4 4.212 5.54 **PASS** Band5 4132 4182 4 4.223 4.78 **PASS** Band5 Band5 4233 4 4.194 4.77 **PASS** 4.73 Band5 4132 5 4.177 **PASS** 4.72 4182 5 4.173 Band5 **PASS** Band5 4233 5 4.156 4.70 **PASS**




8.3.2. Test Graphs


REL99:

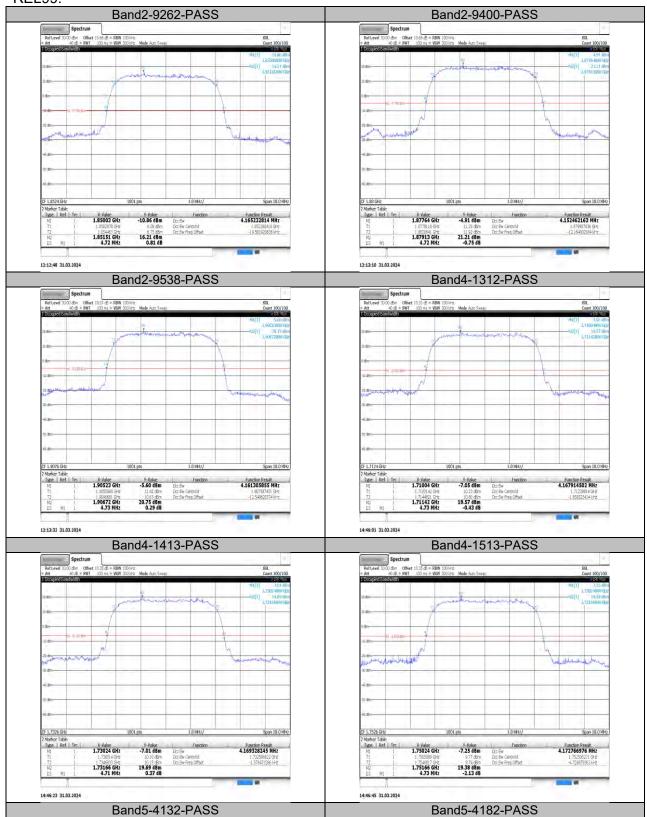


Page 59 of 234

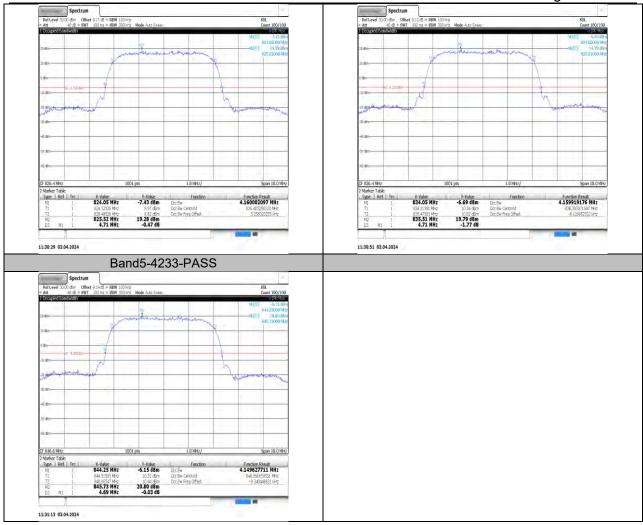


HSDPA:

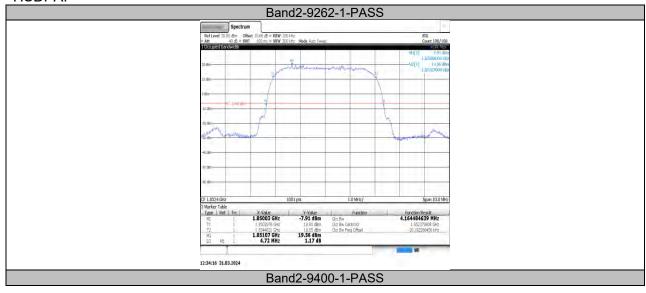


Page 60 of 234

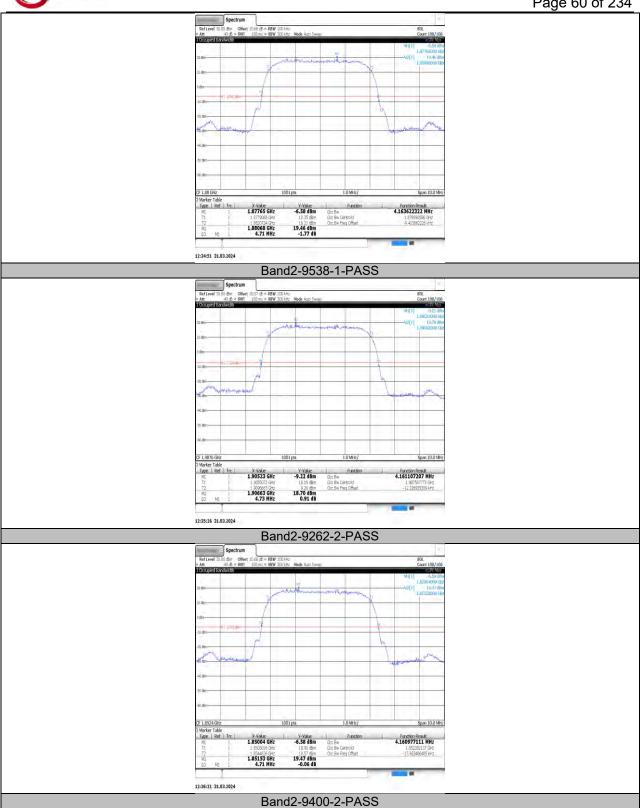


Page 61 of 234

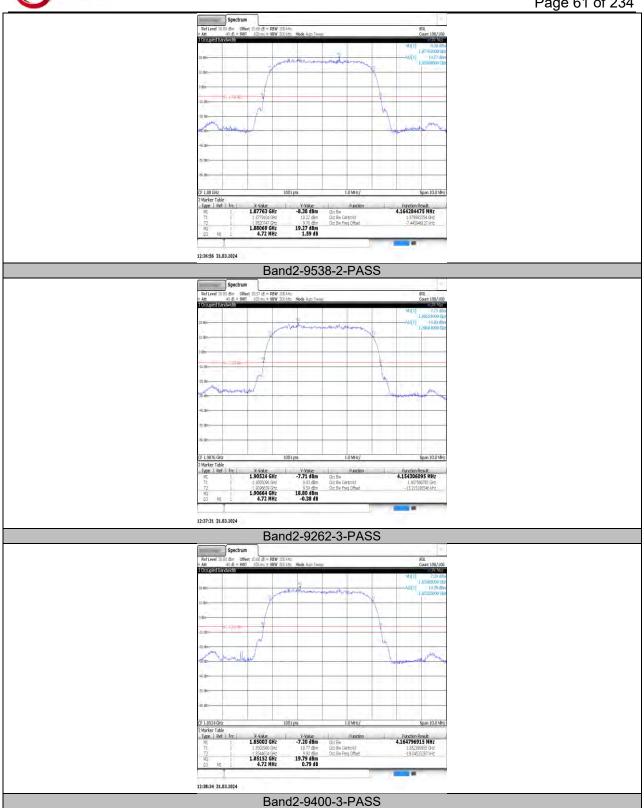


Page 62 of 234

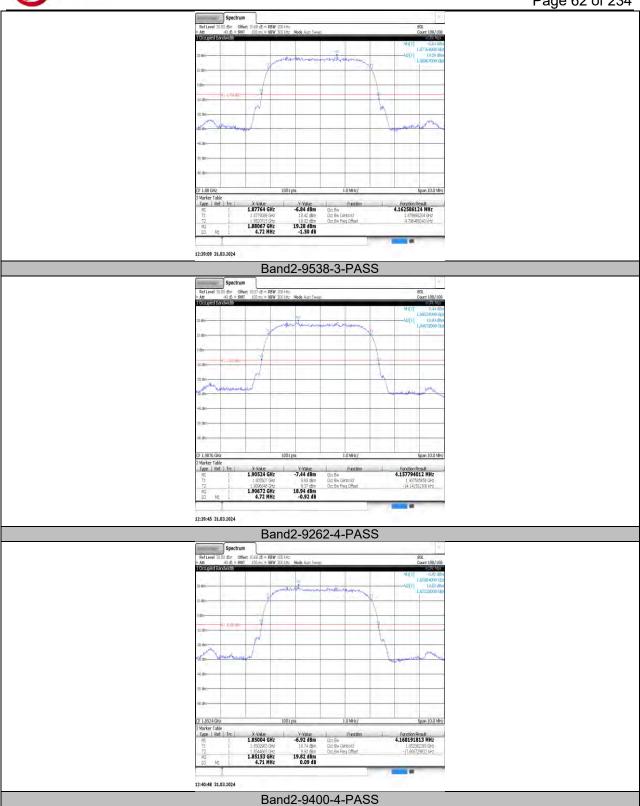


Page 63 of 234

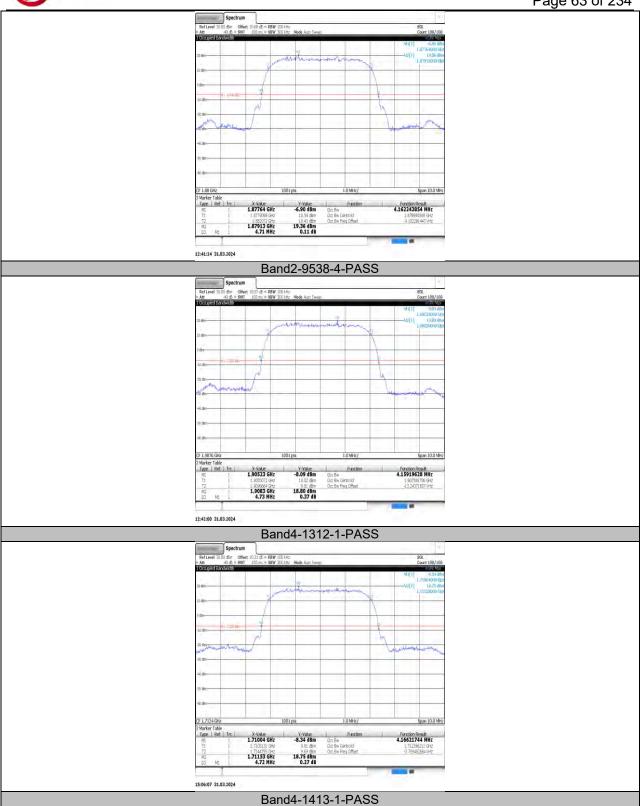


Page 64 of 234

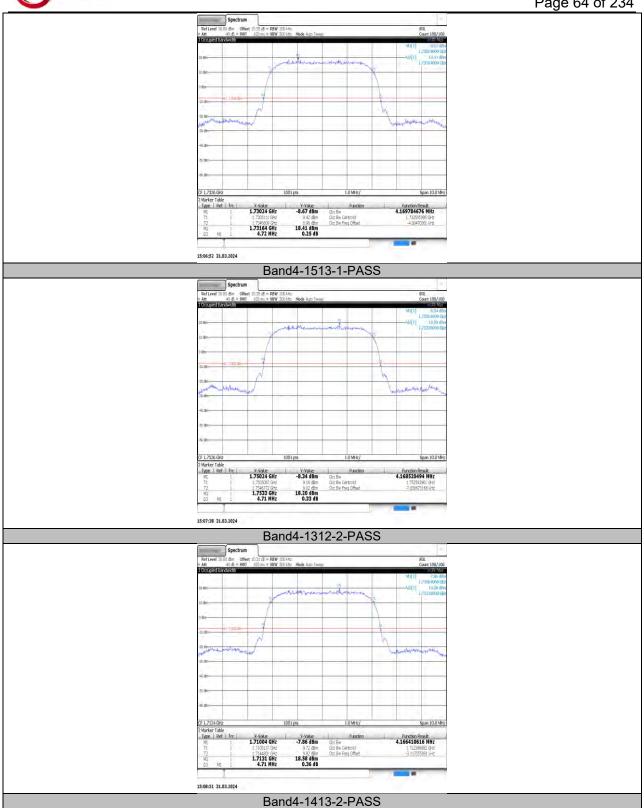


Page 65 of 234

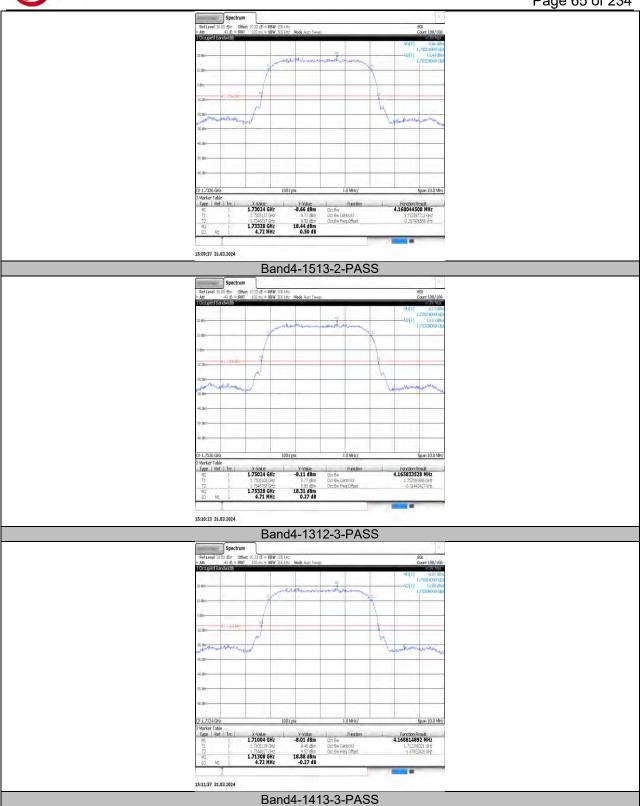


Page 66 of 234

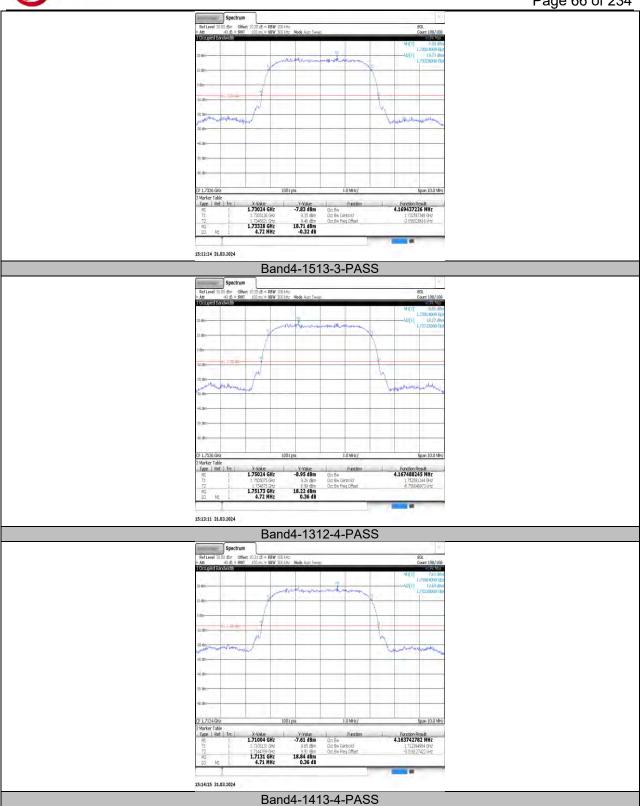


Page 67 of 234

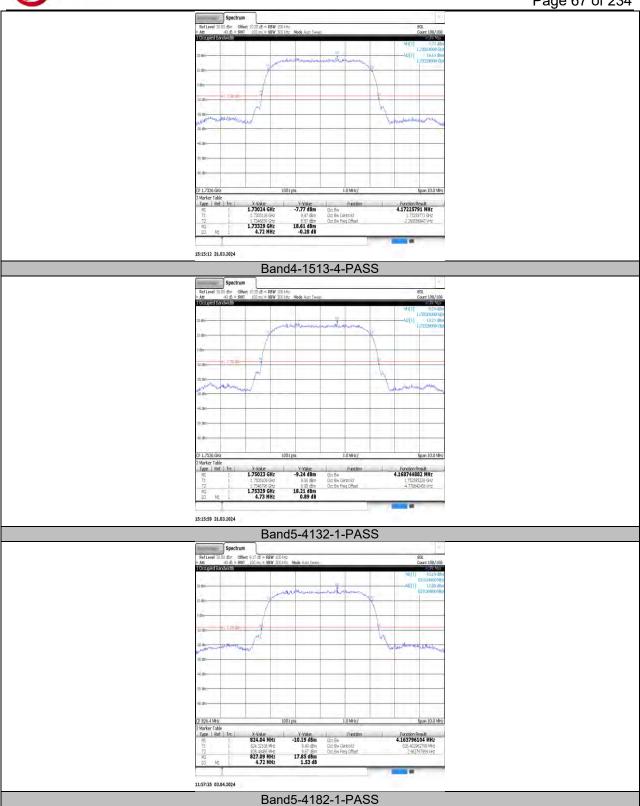


Page 68 of 234

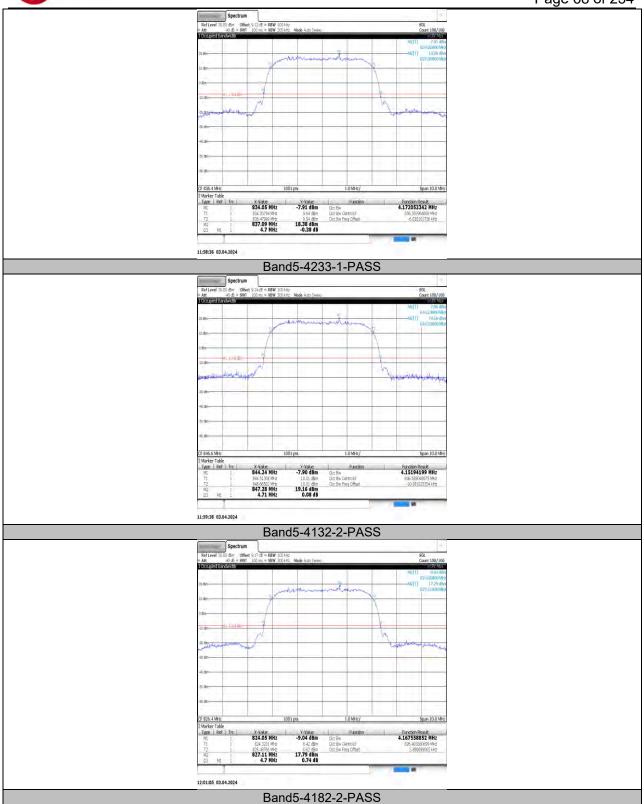


Page 69 of 234

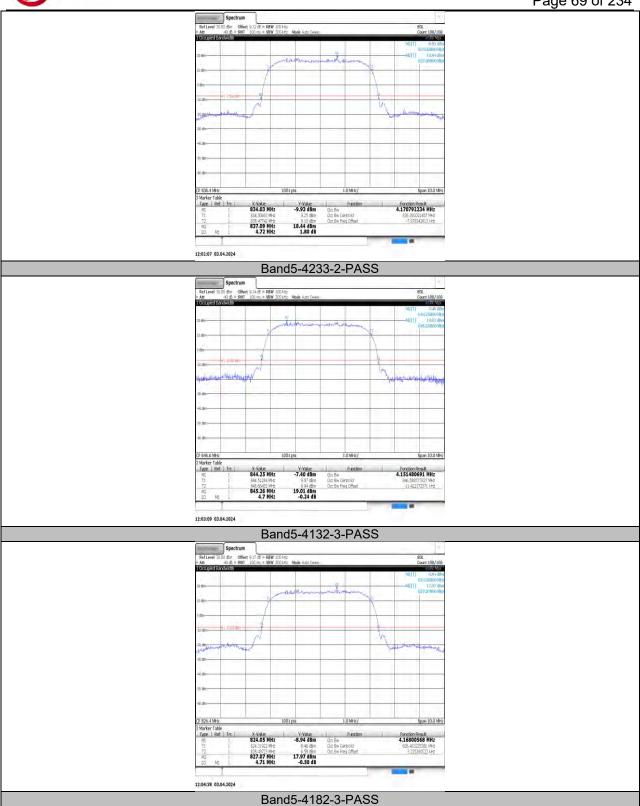


Page 70 of 234

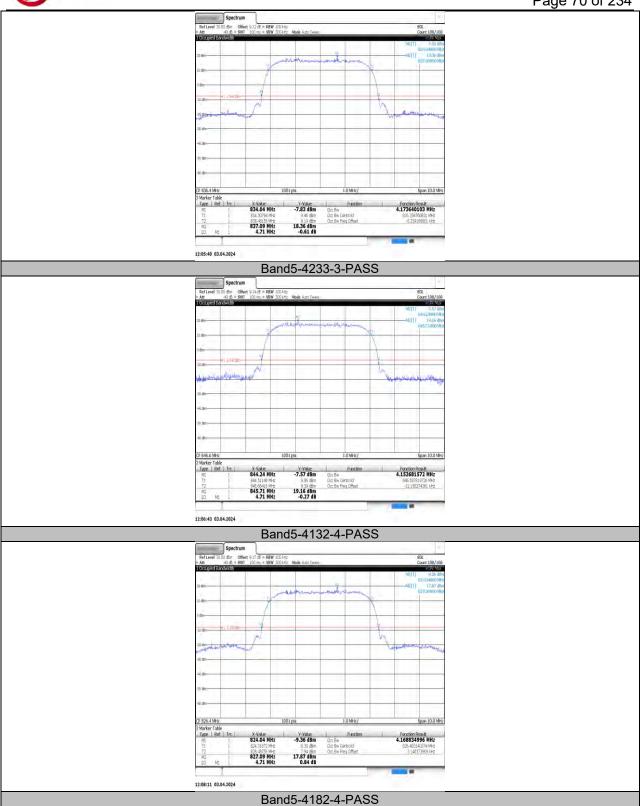


Page 71 of 234

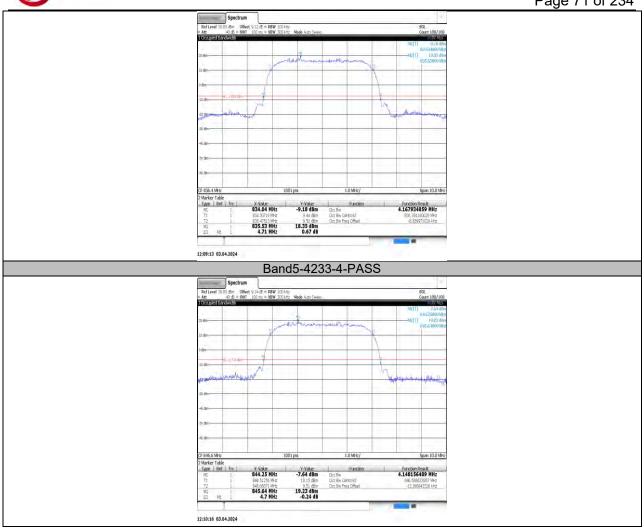




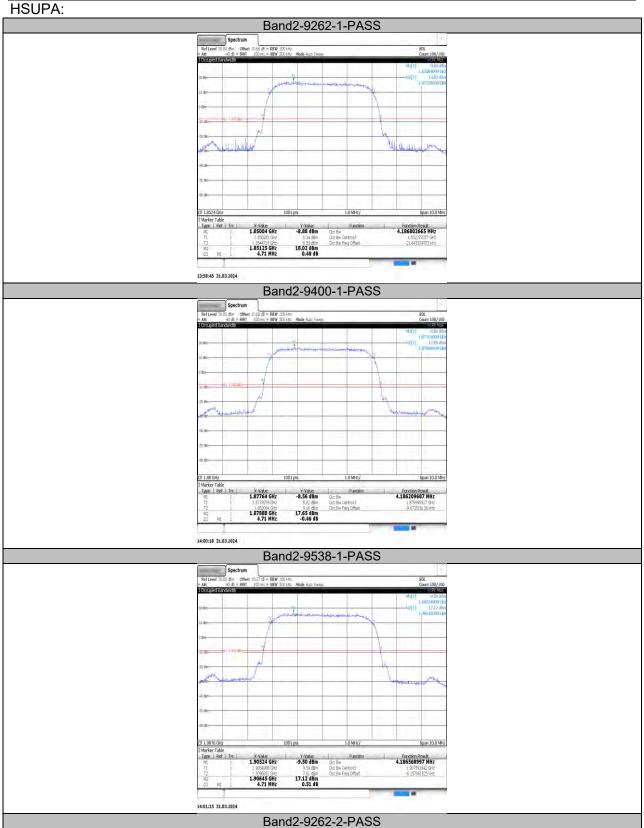


Page 73 of 234

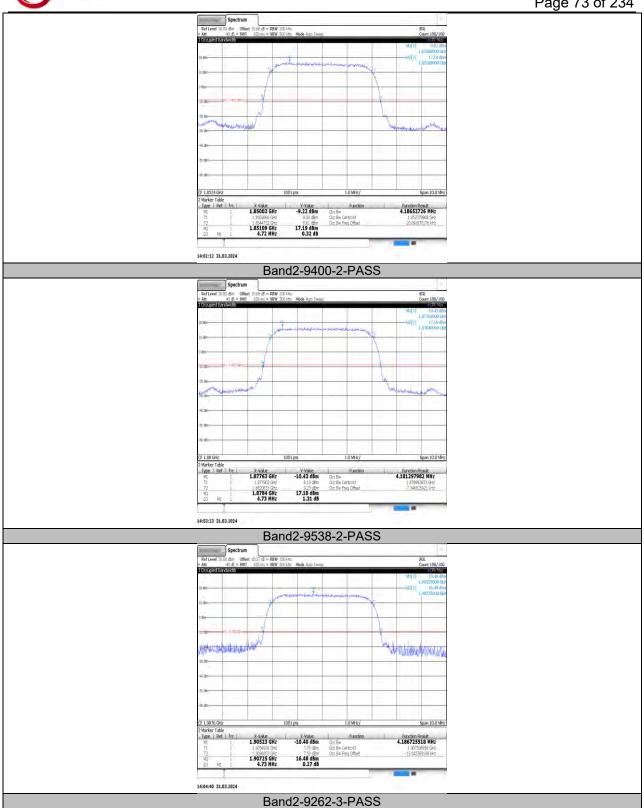


Page 74 of 234

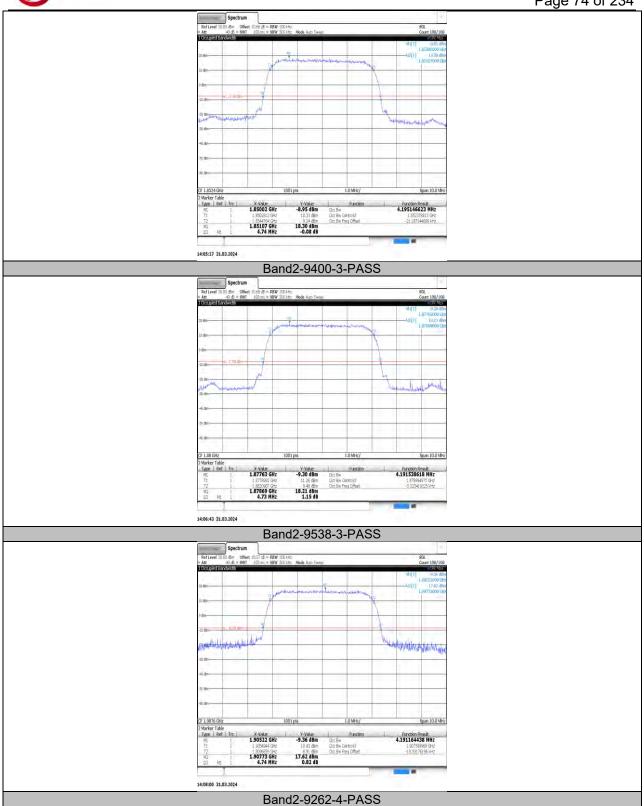


Page 75 of 234

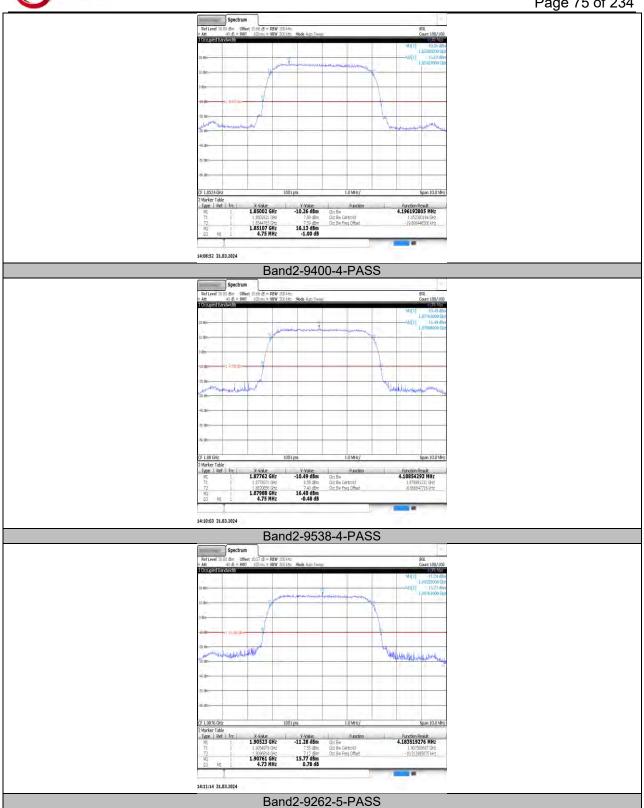


Page 76 of 234

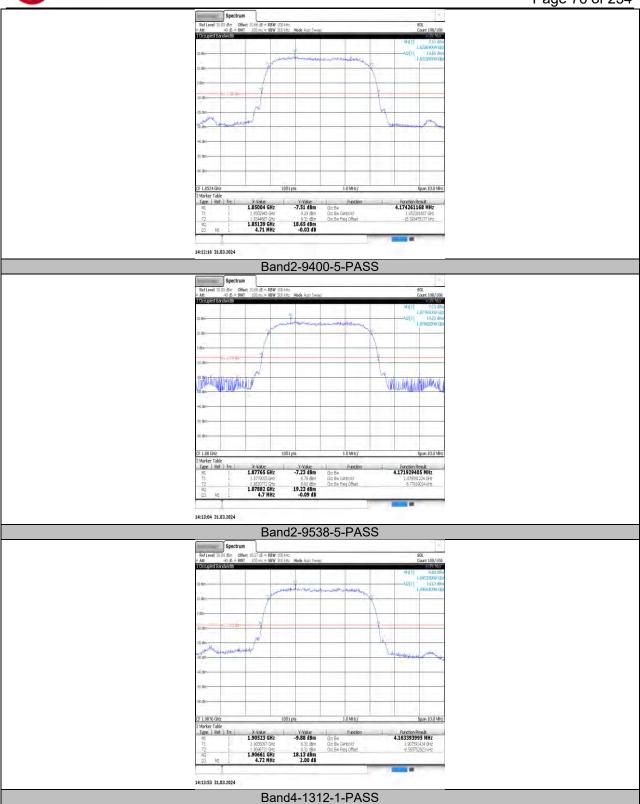


Page 77 of 234

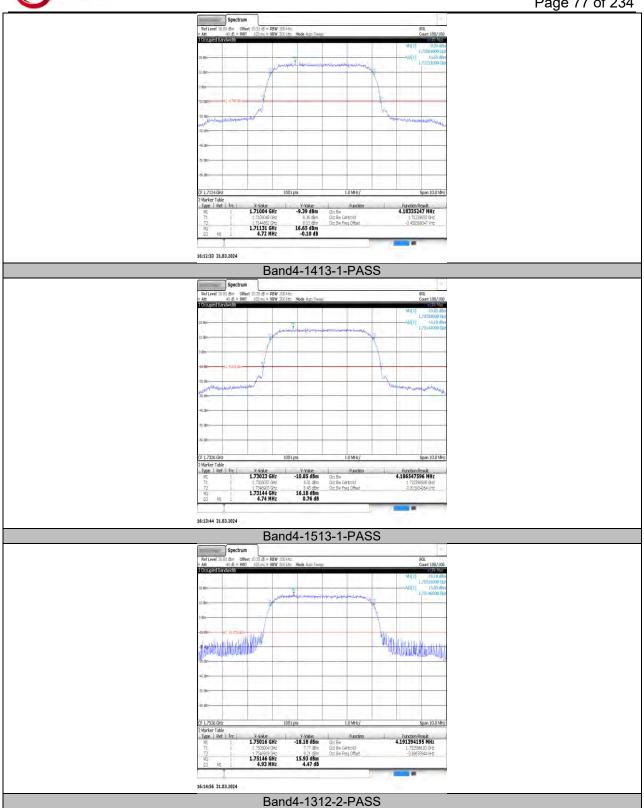


Page 78 of 234

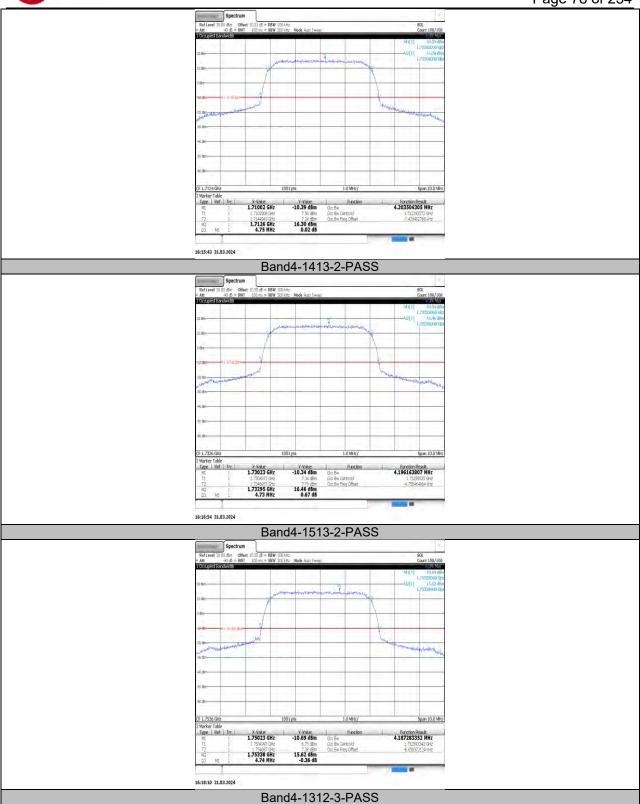


Page 79 of 234

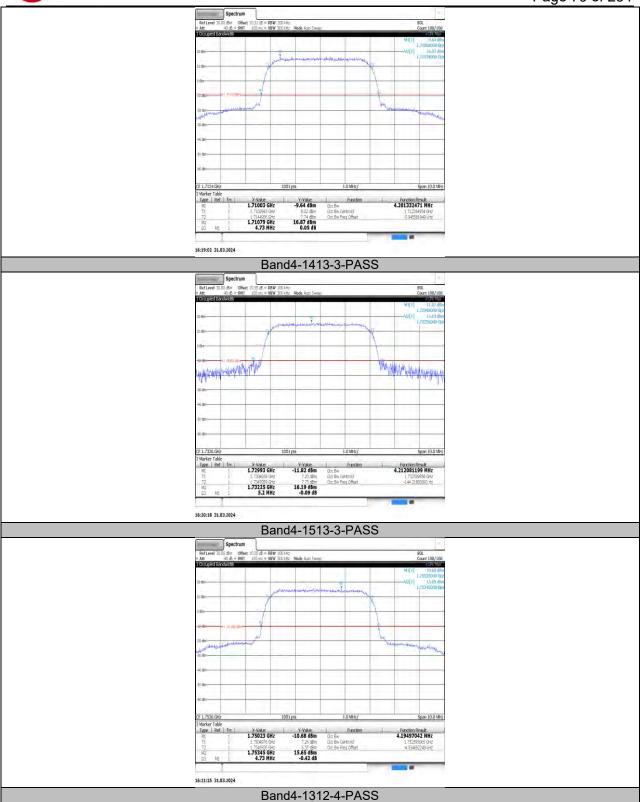


Page 80 of 234

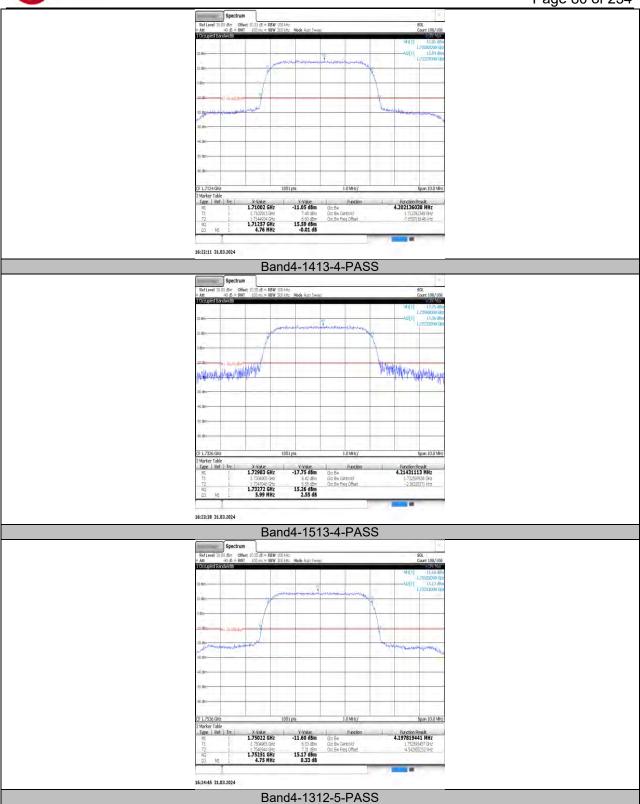


Page 81 of 234

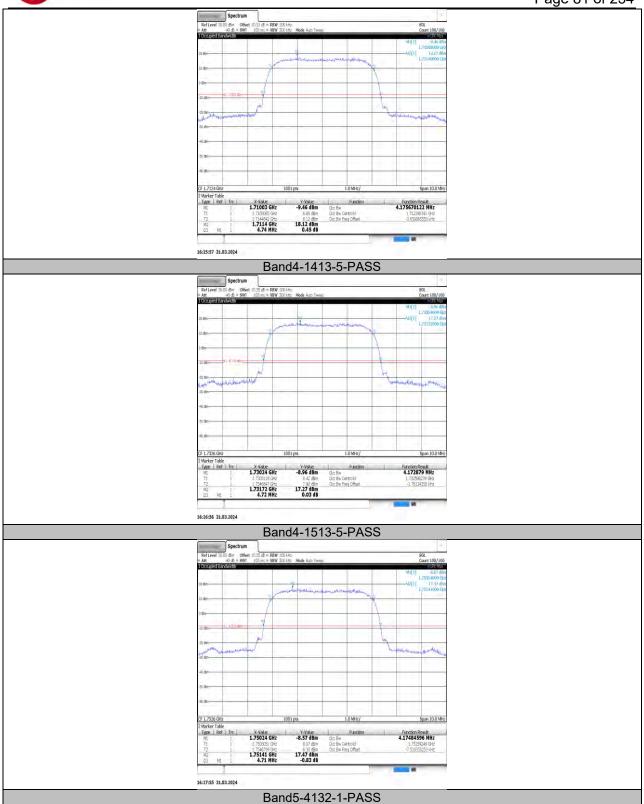


Page 82 of 234

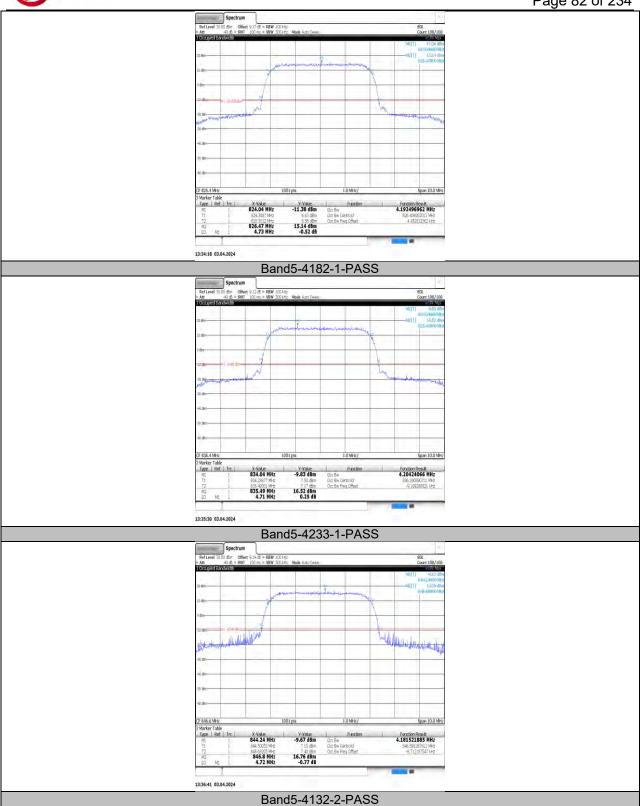


Page 83 of 234

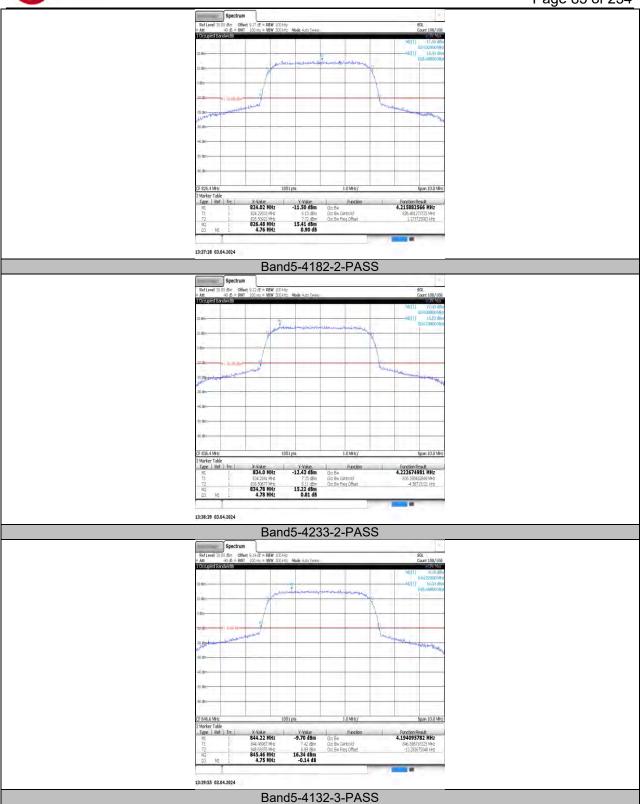


Page 84 of 234

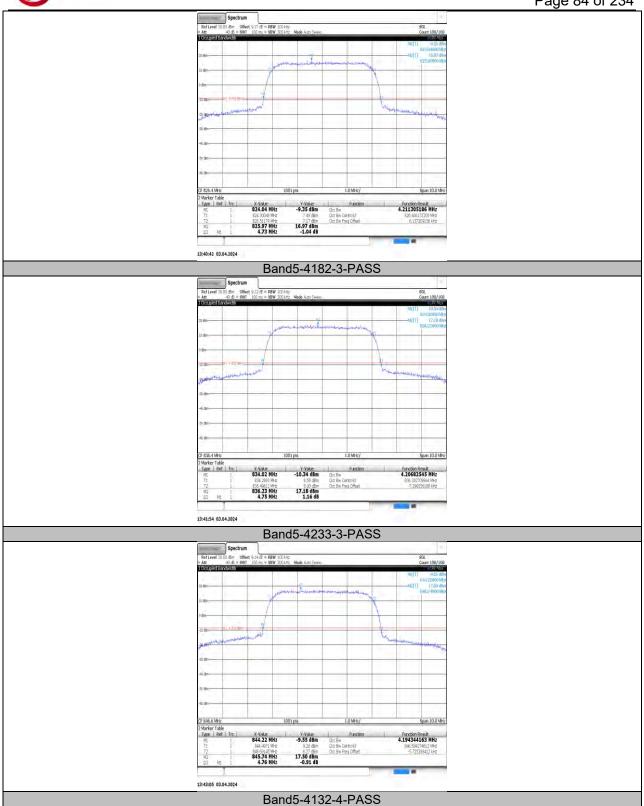

Page 85 of 234

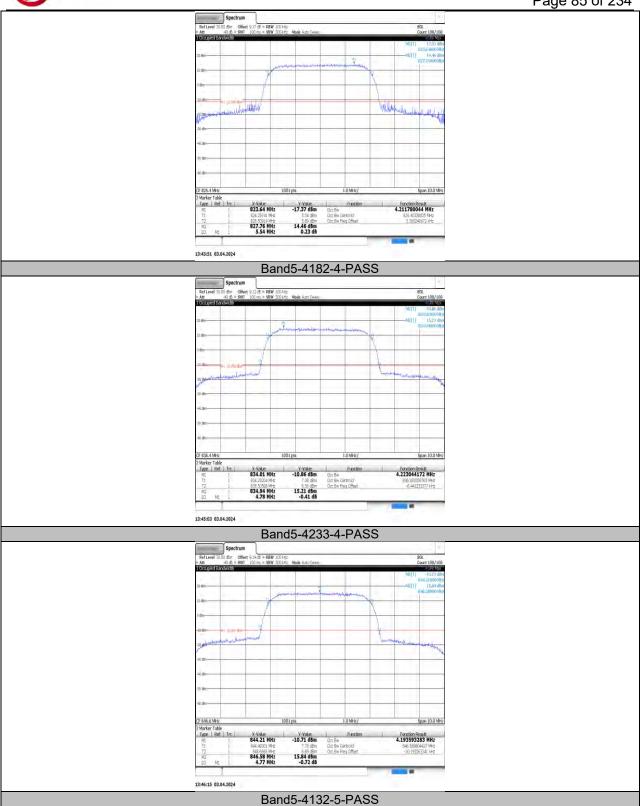

Page 86 of 234

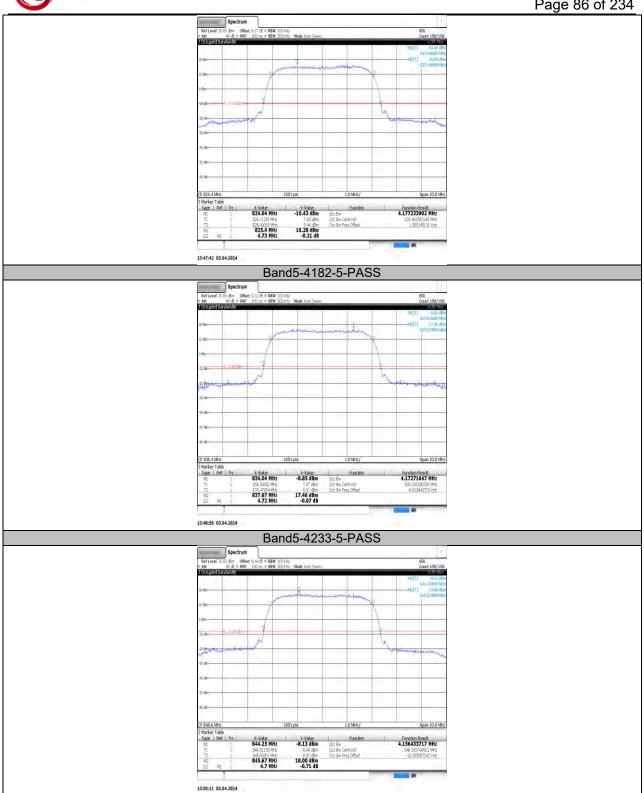



REPORT NO.: 4791221995-1-RF-6 Page 87 of 234

8.4. AppendixD:Band Edge 8.4.1. Test Result

REL99:

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-25.53	-13	PASS
Band2	9538	1910.00	-26.05	-13	PASS
Band4	1312	1709.86	-25.02	-13	PASS
Band4	1513	1755.12	-27.81	-13	PASS
Band5	4132	823.83	-44.36	-13	PASS
Band5	4233	849.14	-25.04	-13	PASS

HSDPA:

Band	Channel	SubTest	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1	1849.88	-26.93	-13	PASS
Band2	9538	1	1910.12	-29.32	-13	PASS
Band2	9262	2	1849.88	-26.79	-13	PASS
Band2	9538	2	1910.12	-29.44	-13	PASS
Band2	9262	3	1849.89	-26.78	-13	PASS
Band2	9538	3	1910.12	-29.44	-13	PASS
Band2	9262	4	1849.87	-26.78	-13	PASS
Band2	9538	4	1910.13	-29.26	-13	PASS
Band4	1312	1	1709.89	-25.36	-13	PASS
Band4	1513	1	1755.11	-27.31	-13	PASS
Band4	1312	2	1709.87	-25.18	-13	PASS
Band4	1513	2	1755.12	-27.32	-13	PASS
Band4	1312	3	1709.88	-25.59	-13	PASS
Band4	1513	3	1755.11	-27.40	-13	PASS
Band4	1312	4	1709.89	-25.26	-13	PASS
Band4	1513	4	1755.13	-27.30	-13	PASS
Band5	4132	1	823.89	-24.89	-13	PASS
Band5	4233	1	849.13	-25.55	-13	PASS
Band5	4132	2	823.88	-24.85	-13	PASS
Band5	4233	2	849.11	-25.42	-13	PASS
Band5	4132	3	823.88	-24.55	-13	PASS
Band5	4233	3	849.10	-25.45	-13	PASS
Band5	4132	4	823.88	-24.71	-13	PASS
Band5	4233	4	849.12	-25.46	-13	PASS

HSUPA:

Band	Channel	SubTest	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1	1849.86	-28.02	-13	PASS
Band2	9538	1	1910.13	-30.06	-13	PASS
Band2	9262	2	1849.87	-28.77	-13	PASS
Band2	9538	2	1910.12	-29.50	-13	PASS
Band2	9262	3	1849.86	-27.38	-13	PASS
Band2	9538	3	1910.13	-28.99	-13	PASS
Band2	9262	4	1850.00	-30.01	-13	PASS
Band2	9538	4	1910.00	-31.80	-13	PASS
Band2	9262	5	1849.87	-27.78	-13	PASS
Band2	9538	5	1910.11	-30.22	-13	PASS
Band4	1312	1	1709.88	-26.99	-13	PASS
Band4	1513	1	1755.14	-28.94	-13	PASS
Band4	1312	2	1710.00	-26.56	-13	PASS
Band4	1513	2	1755.00	-28.96	-13	PASS




REPORT NO.: 4791221995-1-RF-6 Page 88 of 234

Band4	1312	3	1709.86	-26.30	-13	PASS
Band4	1513	3	1755.12	-28.58	-13	PASS
Band4	1312	4	1709.13	-56.03	-13	PASS
Band4	1513	4	1755.89	-55.90	-13	PASS
Band4	1312	5	1709.86	-26.82	-13	PASS
Band4	1513	5	1755.12	-29.02	-13	PASS
Band5	4132	1	823.90	-26.71	-13	PASS
Band5	4233	1	849.13	-26.96	-13	PASS
Band5	4132	2	824.00	-26.26	-13	PASS
Band5	4233	2	849.00	-26.45	-13	PASS
Band5	4132	3	823.91	-26.34	-13	PASS
Band5	4233	3	849.12	-26.86	-13	PASS
Band5	4132	4	824.00	-26.80	-13	PASS
Band5	4233	4	849.00	-27.13	-13	PASS
Band5	4132	5	823.89	-26.63	-13	PASS
Band5	4233	5	849.11	-27.42	-13	PASS




8.4.2. Test Graphs


REL99:

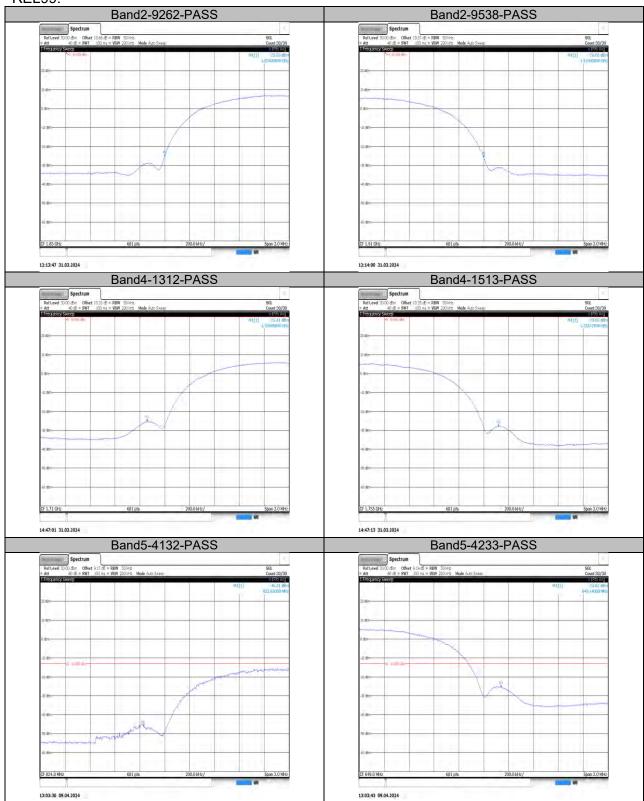




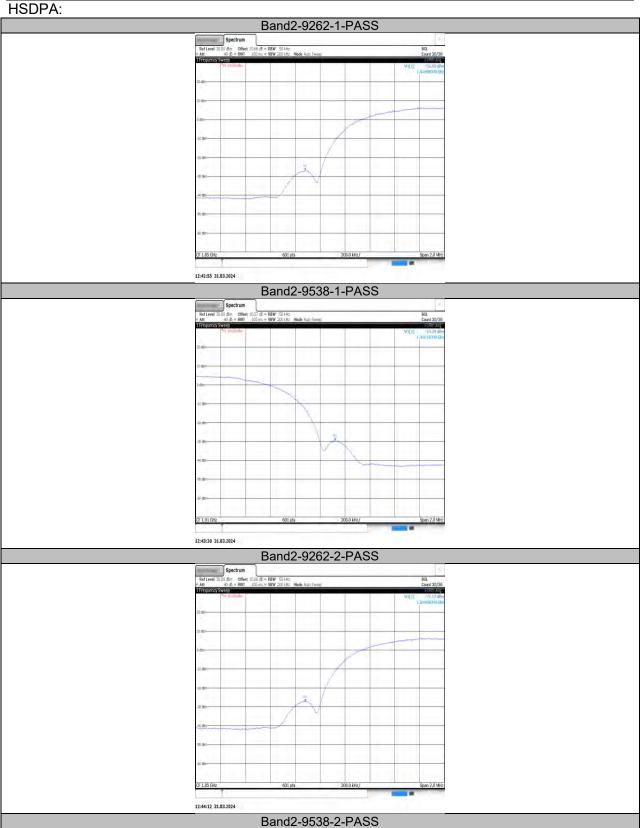


Page 91 of 234

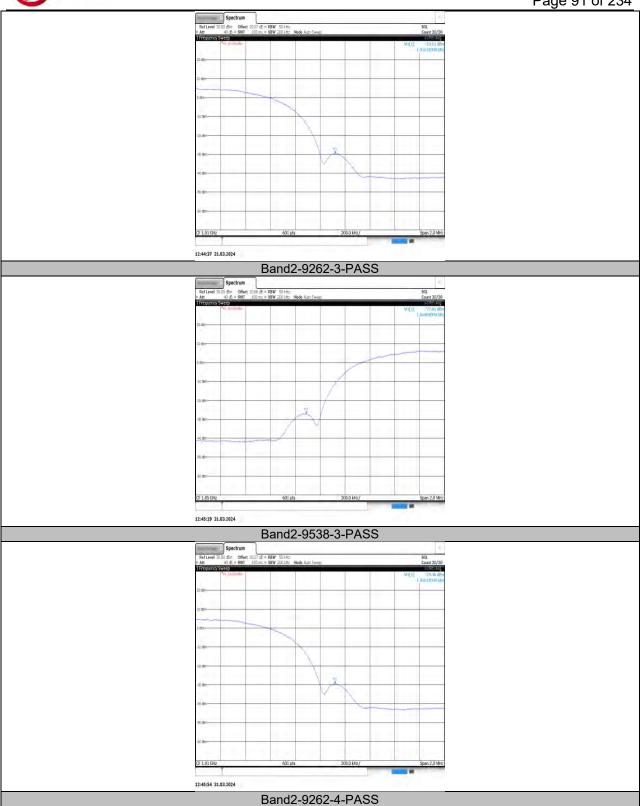


Page 92 of 234

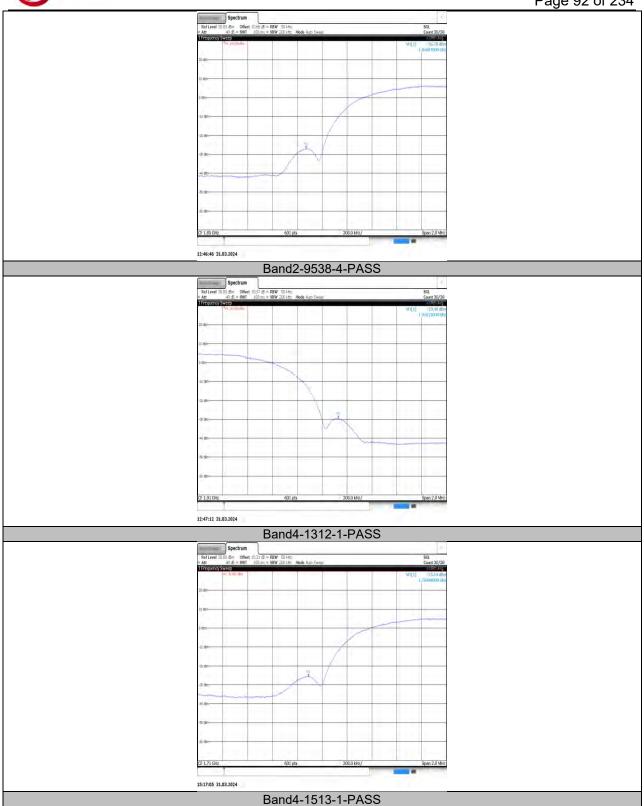


Page 93 of 234

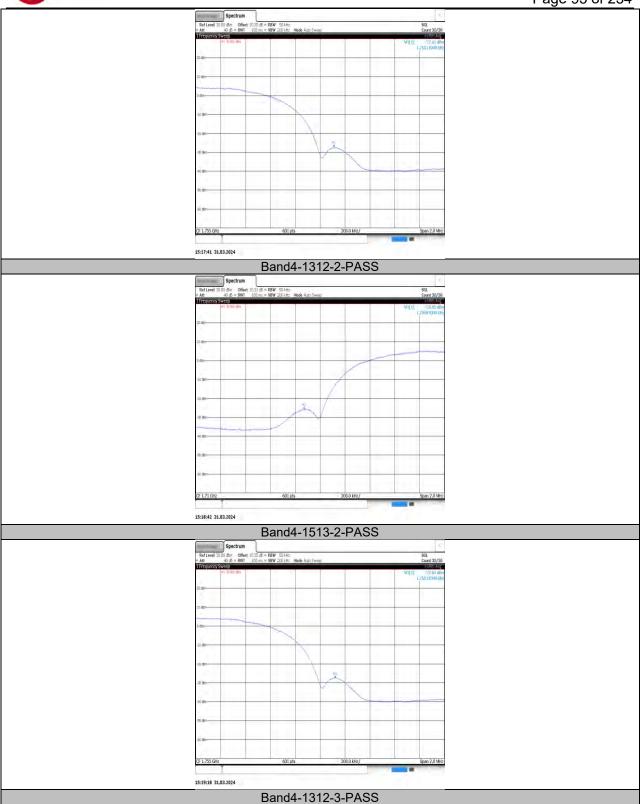


Page 94 of 234

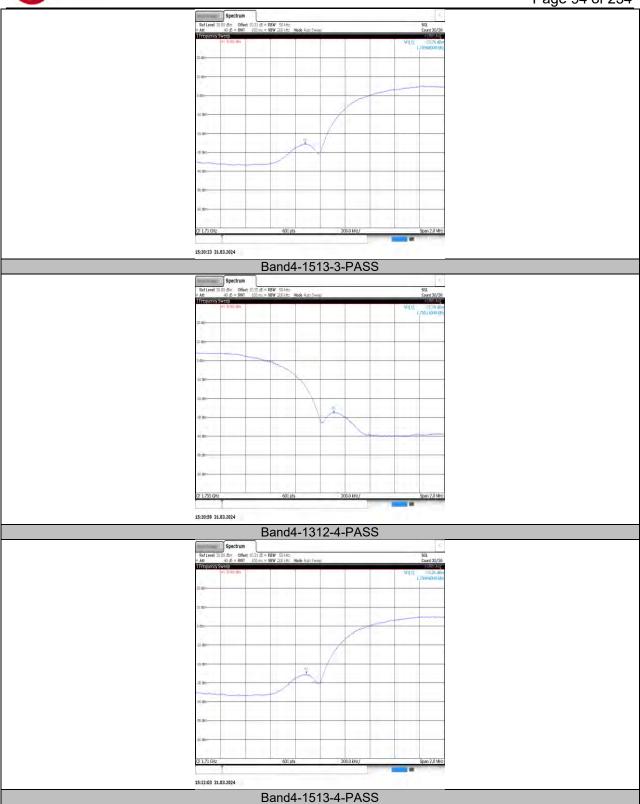


Page 95 of 234

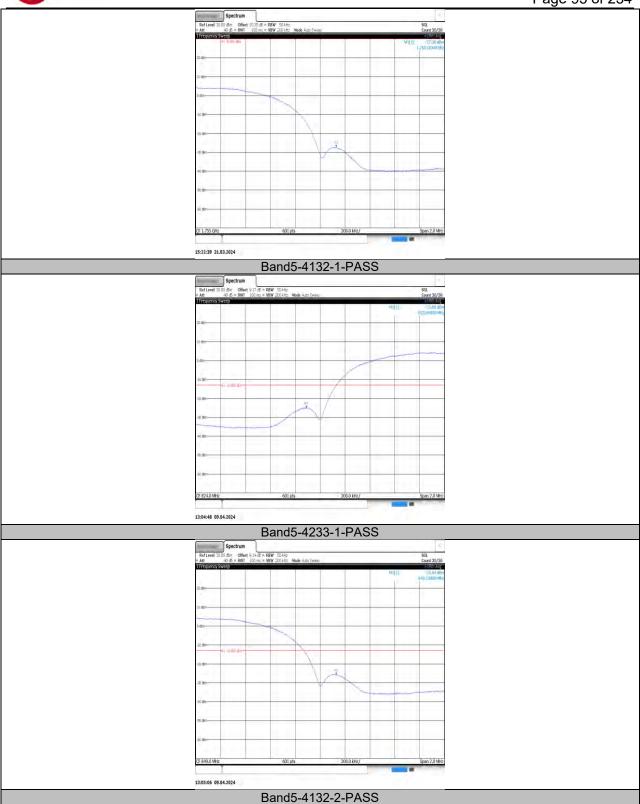


Page 96 of 234

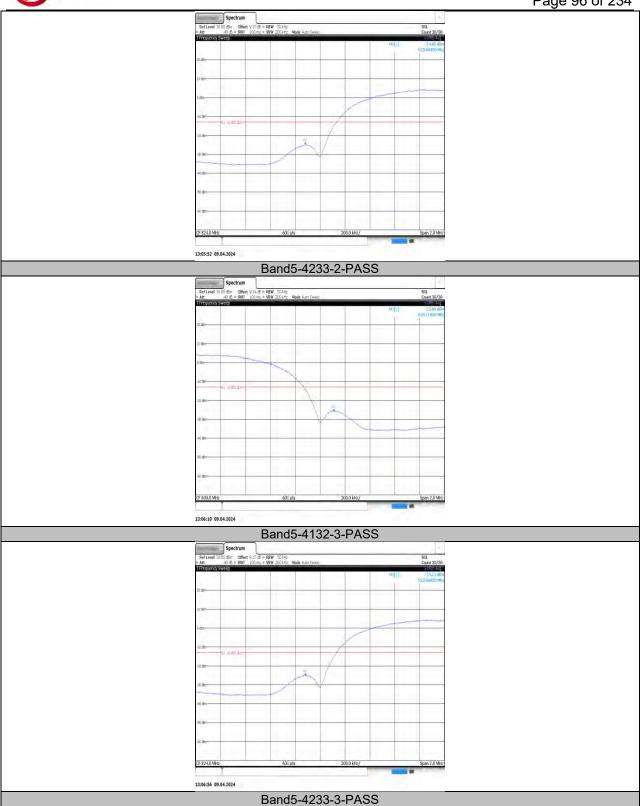


Page 97 of 234

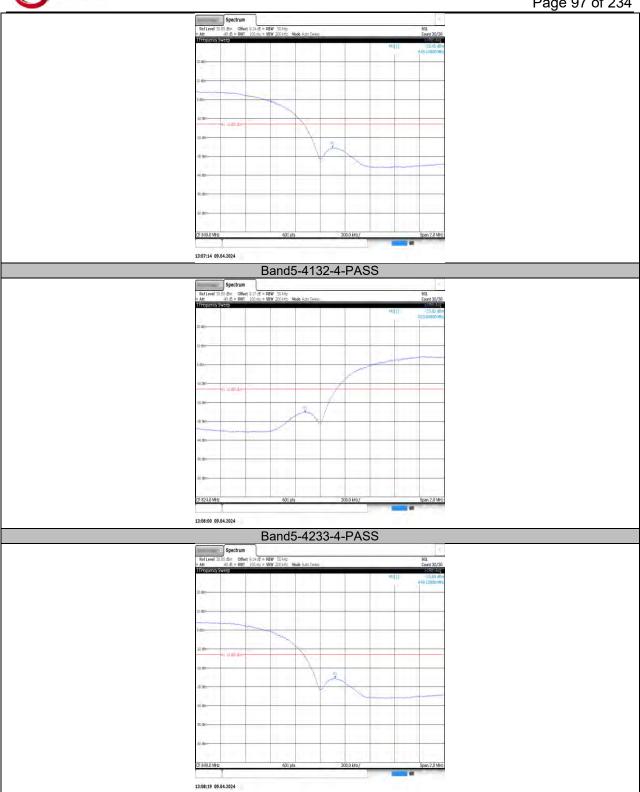



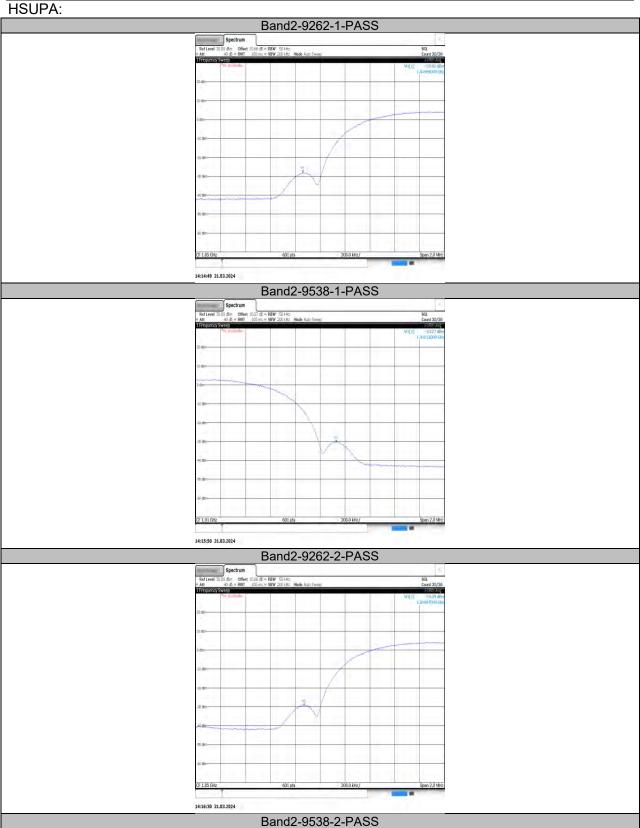


Page 99 of 234

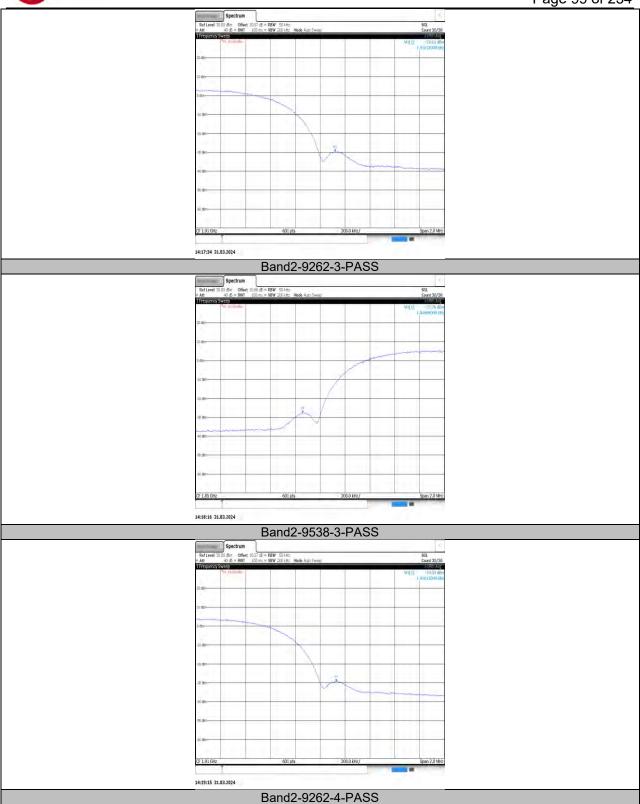


REPORT NO.: 4791221995-1-RF-6 Page 100 of 234 14:19:56 31.03.2024 Band2-9538-4-PASS 14:20:55 31.03.2024 Band2-9262-5-PASS


Band2-9538-5-PASS

Page 101 of 234

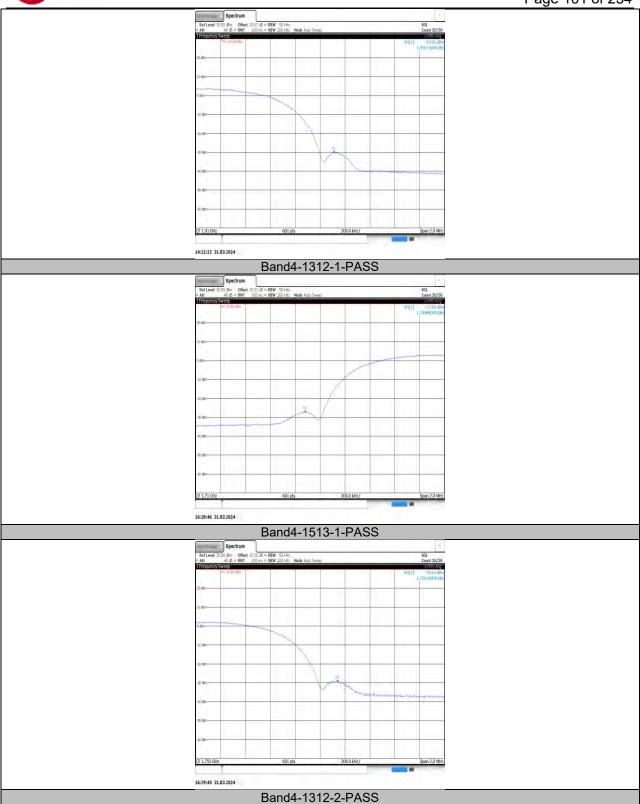


Page 102 of 234

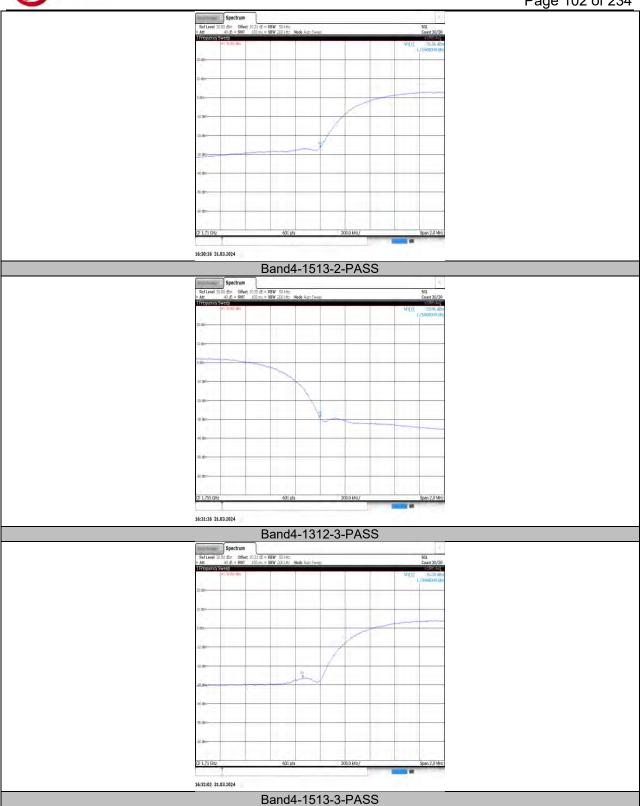


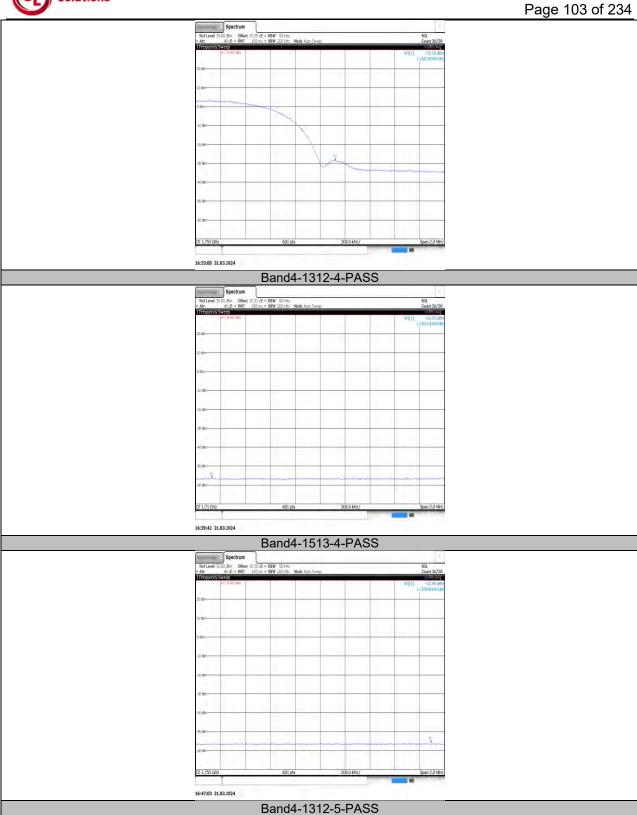


Page 104 of 234

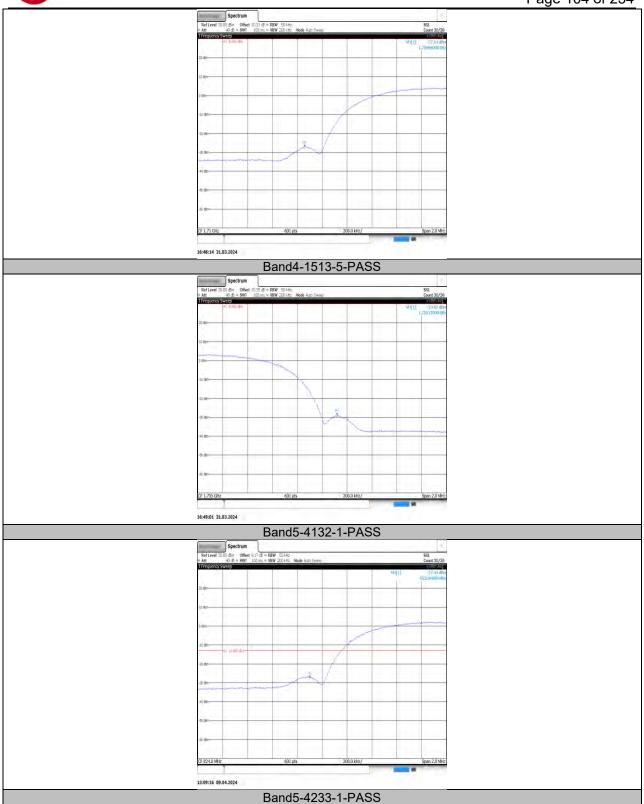


Page 105 of 234

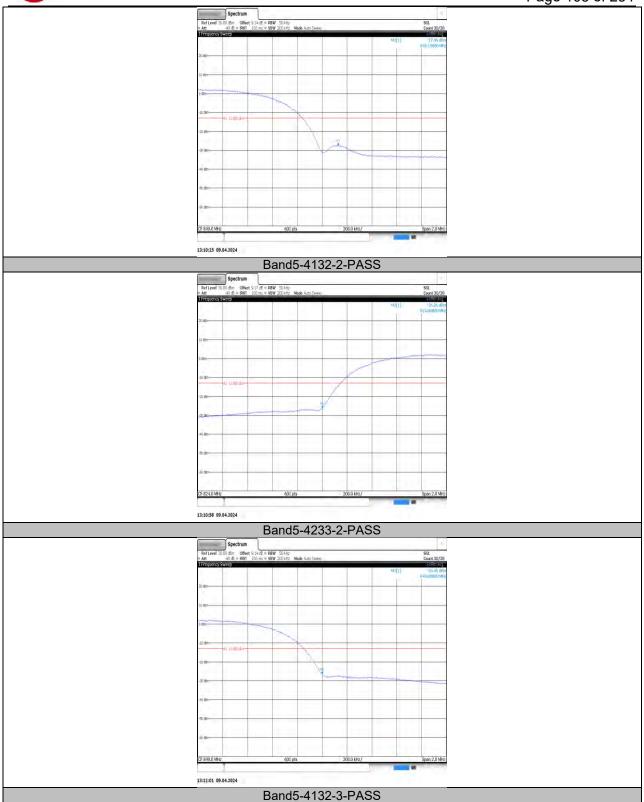

Page 106 of 234

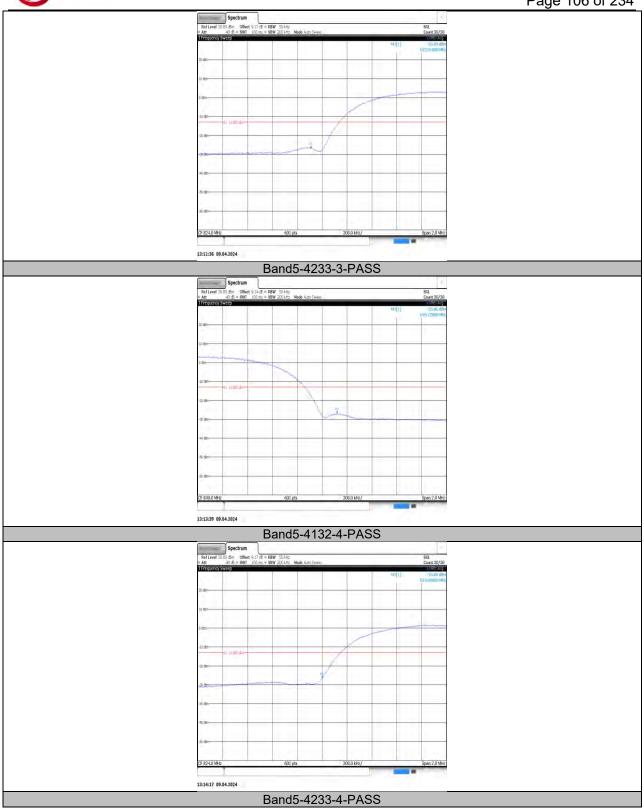

Page 107 of 234

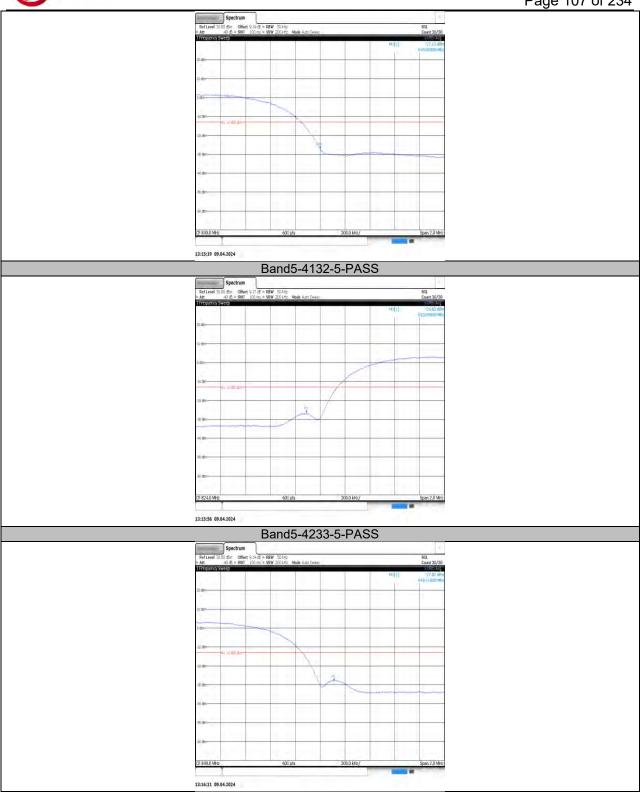

REPORT NO.: 4791221995-1-RF-6 Page 108 of 234

8.5. AppendixE:Conducted SpuriousEmission 8.5.1. Test Result

Rel99:

Reigg.						
Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.009~0.15MHz	0.02	-74.24	-43	PASS
Band2	9262	0.15~30MHz	12.69	-70.19	-23	PASS
Band2	9262	30~1000MHz	547.96	-50.9	-13	PASS
Band2	9262	1000~20000MHz	7015.88	-42.52	-13	PASS
Band2	9400	0.009~0.15MHz	0.03	-73	-43	PASS
Band2	9400	0.15~30MHz	0.34	-70.58	-23	PASS
Band2	9400	30~1000MHz	554.75	-50.74	-13	PASS
Band2	9400	1000~20000MHz	7967.78	-42.43	-13	PASS
Band2	9538	0.009~0.15MHz	0.04	-72.04	-43	PASS
Band2	9538	0.15~30MHz	0.28	-70.44	-23	PASS
Band2	9538	30~1000MHz	555.72	-50.83	-13	PASS
Band2	9538	1000~20000MHz	7104.23	-42.46	-13	PASS
Band4	1312	0.009~0.15MHz	0.02	-72.54	-43	PASS
Band4	1312	0.15~30MHz	25.81	-70.47	-23	PASS
Band4	1312	30~1000MHz	555.23	-50.77	-13	PASS
Band4	1312	1000~20000MHz	7957.33	-42.6	-13	PASS
Band4	1413	0.009~0.15MHz	0.04	-71.04	-43	PASS
Band4	1413	0.15~30MHz	12.63	-69.63	-23	PASS
Band4	1413	30~1000MHz	555.72	-50.61	-13	PASS
Band4	1413	1000~20000MHz	7936.43	-42.47	-13	PASS
Band4	1513	0.009~0.15MHz	0.04	-73.16	-43	PASS
Band4	1513	0.15~30MHz	9.41	-70.57	-23	PASS
Band4	1513	30~1000MHz	555.23	-50.78	-13	PASS
Band4	1513	1000~20000MHz	7939.28	-42.51	-13	PASS
Band5	4132	0.009~0.15MHz	0.03	-73.33	-33	PASS
Band5	4132	0.15~30MHz	0.28	-70.11	-13	PASS
Band5	4132	30~1000MHz	962.66	-59.42	-13	PASS
Band5	4132	1000~10000MHz	7015.07	-42.9	-13	PASS
Band5	4182	0.009~0.15MHz	0.04	-69.88	-33	PASS
Band5	4182	0.15~30MHz	0.17	-70.52	-13	PASS
Band5	4182	30~1000MHz	547.98	-59.14	-13	PASS
Band5	4182	1000~10000MHz	7919.98	-42.82	-13	PASS
Band5	4233	0.009~0.15MHz	0.01	-72.76	-33	PASS
Band5	4233	0.15~30MHz	0.31	-70.38	-13	PASS
Band5	4233	30~1000MHz	554.77	-59.49	-13	PASS
Band5	4233	1000~10000MHz	7989.28	-42.86	-13	PASS



REPORT NO.: 4791221995-1-RF-6 Page 109 of 234

HSDPA:

HSDPA:			Frequency Range	Frequency	Result	Limit	
Band	Channel	SubTest	(Mhz)	(dBm)	(dBm)	(dBm)	Verdict
Band2	9262	4	0.009~0.15MHz	0.03	-72.45	-23	PASS
Band2	9262	4	0.15~30MHz	0.28	-69.3	-13	PASS
Band2	9262	4	30~1000MHz	554.75	-50.73	-13	PASS
Band2	9262	4	1000~20000MHz	7089.5	-42.28	-43	PASS
Band2	9400	4	0.009~0.15MHz	0.01	-72.38	-43	PASS
Band2	9400	4	0.15~30MHz	15.7	-69.97	-23	PASS
Band2	9400	4	30~1000MHz	554.75	-50.7	-13	PASS
Band2	9400	4	1000~20000MHz	7991.05	-42.25	-13	PASS
Band2	9538	4	0.009~0.15MHz	0.02	-72.18	-43	PASS
Band2	9538	4	0.15~30MHz	0.31	-69.98	-13	PASS
Band2	9538	4	30~1000MHz	562.51	-51.03	-23	PASS
Band2	9538	4	1000~20000MHz	7008.75	-42.36	-13	PASS
Band4	1312	4	0.009~0.15MHz	0.04	-69.5	-43	PASS
Band4	1312	4	0.15~30MHz	13.2	-70.48	-23	PASS
Band4	1312	4	30~1000MHz	556.69	-50.68	-13	PASS
Band4	1312	4	1000~20000MHz	7862.8	-42.37	-13	PASS
Band4	1413	4	0.009~0.15MHz	0.01	-72.7	-23	PASS
Band4	1413	4	0.15~30MHz	10.96	-70.56	-13	PASS
Band4	1413	4	30~1000MHz	558.14	-50.77	-13	PASS
Band4	1413	4	1000~20000MHz	7097.58	-42.41	-43	PASS
Band4	1513	4	0.009~0.15MHz	0.01	-73.6	-43	PASS
Band4	1513	4	0.15~30MHz	1.36	-69.75	-23	PASS
Band4	1513	4	30~1000MHz	555.23	-50.86	-13	PASS
Band4	1513	4	1000~20000MHz	6993.08	-42.61	-13	PASS
Band5	4132	4	0.009~0.15MHz	0.01	-71.93	-13	PASS
Band5	4132	4	0.15~30MHz	0.52	-70.61	-13	PASS
Band5	4132	4	30~1000MHz	581.45	-59.77	-13	PASS
Band5	4132	4	1000~10000MHz	7126.67	-42.44	-33	PASS
Band5	4182	4	0.009~0.15MHz	0.04	-70.28	-13	PASS
Band5	4182	4	0.15~30MHz	0.79	-70.14	-13	PASS
Band5	4182	4	30~1000MHz	548.47	-59.69	-13	PASS
Band5	4182	4	1000~10000MHz	7892.08	-42.86	-33	PASS
Band5	4233	4	0.009~0.15MHz	0.02	-72.9	-13	PASS
Band5	4233	4	0.15~30MHz	11.14	-69.73	-33	PASS
Band5	4233	4	30~1000MHz	561.56	-59.42	-13	PASS
Band5	4233	4	1000~10000MHz	7888.03	-42.84	-13	PASS