

16. Measurement Uncertainty

| Error Description | Unc. value, $\pm\%$ | Prob. Dist. | Div. | c_i 1g | c_i 10g | Std.Unc . $\pm\%, 1g$ | Std.Unc . $\pm\%, 10g$ | V_i V_{eff} |
|---------------------------------|---------------------|-------------|------------|-------------|--------------|--------------------------------|--------------------------------|--------------------|
| Measurement System | | | | | | | | |
| Probe Calibration | 6.0 | N | 1 | 1 | 1 | 6.0 | 6.0 | ∞ |
| Axial Isotropy | 0.5 | R | $\sqrt{3}$ | 0.7 | 0.7 | 0.2 | 0.2 | ∞ |
| Hemispherical Isotropy | 2.6 | R | $\sqrt{3}$ | 0.7 | 0.7 | 1.1 | 1.1 | ∞ |
| Boundary Effects | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| Linearity | 0.6 | R | $\sqrt{3}$ | 1 | 1 | 0.3 | 0.3 | ∞ |
| System Detection Limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Readout Electronics | 0.7 | N | 1 | 1 | 1 | 0.7 | 0.7 | ∞ |
| Response Time | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| Integration Time | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | 1.5 | ∞ |
| RF Ambient Noise | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| RF Ambient Reflections | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Probe Positioner | 1.5 | R | $\sqrt{3}$ | 1 | 1 | 0.9 | 0.9 | ∞ |
| Probe Positioning | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Max. SAR Eval. | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | 2.9 | N | 1 | 1 | 1 | 2.9 | 2.9 | 145 |
| Device Holder | 3.6 | N | 1 | 1 | 1 | 3.6 | 3.6 | 5 |
| Diople | | | | | | | | |
| Power Drift | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Dipole Positioning | 2.0 | N | 1 | 1 | 1 | 2.0 | 2.0 | ∞ |
| Dipole Input Power | 5.0 | N | 1 | 1 | 1 | 5.0 | 5.0 | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| Liquid Conductivity (target) | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Conductivity (meas.) | 2.5 | N | 1 | 0.64 | 0.43 | 1.6 | 1.1 | ∞ |
| Liquid Permittivity (target) | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| Liquid Permittivity (meas.) | 2.5 | N | 1 | 0.6 | 0.49 | 1.5 | 1.2 | ∞ |
| Combined Std Uncertainty | | | | | | | | |
| Expanded Std Uncertainty | | | | | | $\pm 11.2\%$ | $\pm 10.9\%$ | 387 |
| Expanded Std Uncertainty | | | | | | $\pm 22.4\%$ | $\pm 21.8\%$ | |

17. Main Test Instrument

Table 17.1: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|----------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | N5242A | MY51221755 | Jan 18, 2016 | One year |
| 02 | Power meter | NRVD | 102257 | | |
| 03 | Power sensor | NRV-Z5 | 100241 | May 12, 2016 | One year |
| | | | 100644 | | |
| 04 | Signal Generator | E4438C | MY49072044 | Jan 22, 2016 | One Year |
| 05 | Amplifier | NTWPA-0086010F | 12023024 | No Calibration Requested | |
| 06 | Coupler | 778D | MY4825551 | May 12, 2016 | One year |
| 07 | BTS | E5515C | MY50266468 | Jan 18, 2016 | One year |
| 08 | E-field Probe | EX3DV4 | 7375 | Dec 8, 2016 | One year |
| 09 | DAE | SPEAG DAE4 | 360 | Nov 8, 2016 | One year |
| 10 | Dipole Validation Kit | SPEAG D835V2 | 4d112 | Oct 22, 2015 | Two year |
| | | SPEAG D1750V2 | 1044 | Nov 3,2015 | Two year |
| | | SPEAG D1900V2 | 5d134 | Nov 4,2015 | Two year |
| | | SPEAG D2450V2 | 858 | Oct 30,2015 | Two year |
| | | SPEAG D2600V2 | 1031 | Oct 30,2015 | Two year |

ANNEX A. GRAPH RESULTS

GSM 850MHz Right Cheek High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 40.807$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM Professional 835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

GSM 850MHz Right Cheek High/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.330 W/kg

GSM 850MHz Right Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.367 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.235 W/kg

Maximum of SAR (measured) = 0.323 W/kg

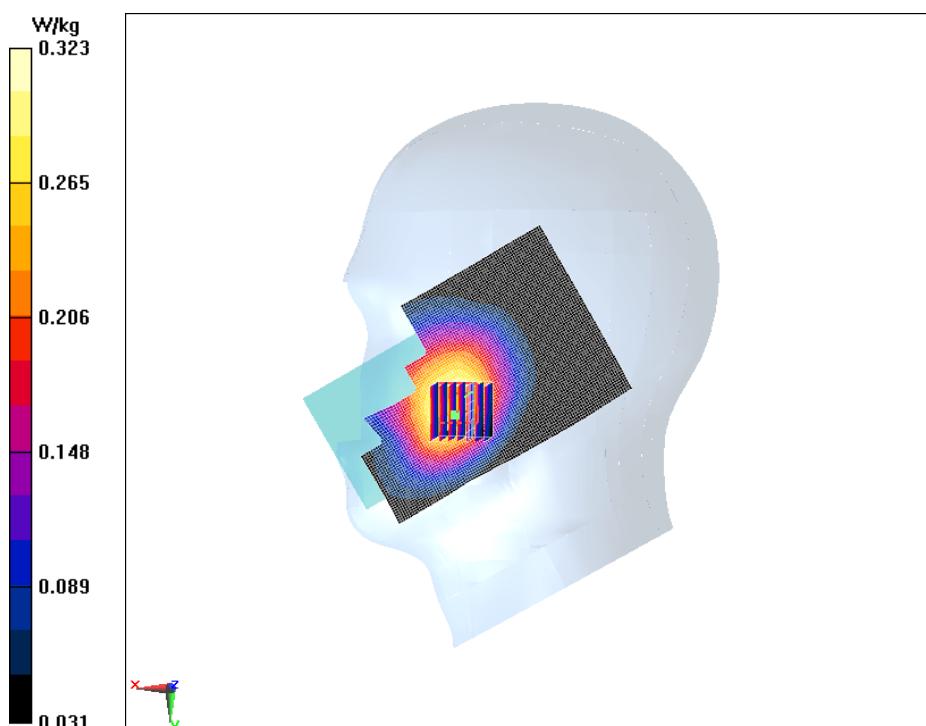


Fig.1 GSM 850MHz Right Cheek High

GSM 1900MHz Left Cheek High

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 39.622$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM Professional 1900MHz; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

GSM 1900MHz Left Cheek High/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.206 W/kg

GSM 1900MHz Left Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.333 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

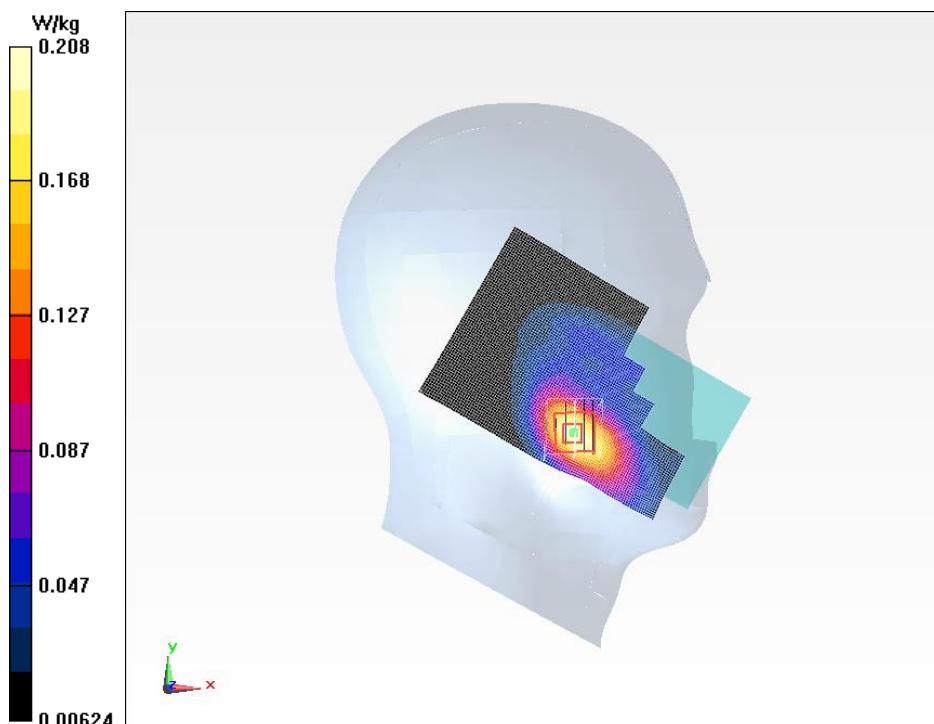


Fig.2 GSM 1900MHz Left Cheek High

WCDMA Band 2 Left Cheek Middle

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

WCDMA Band 2 Left Cheek Middle/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.144 W/kg

WCDMA Band 2 Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.604 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

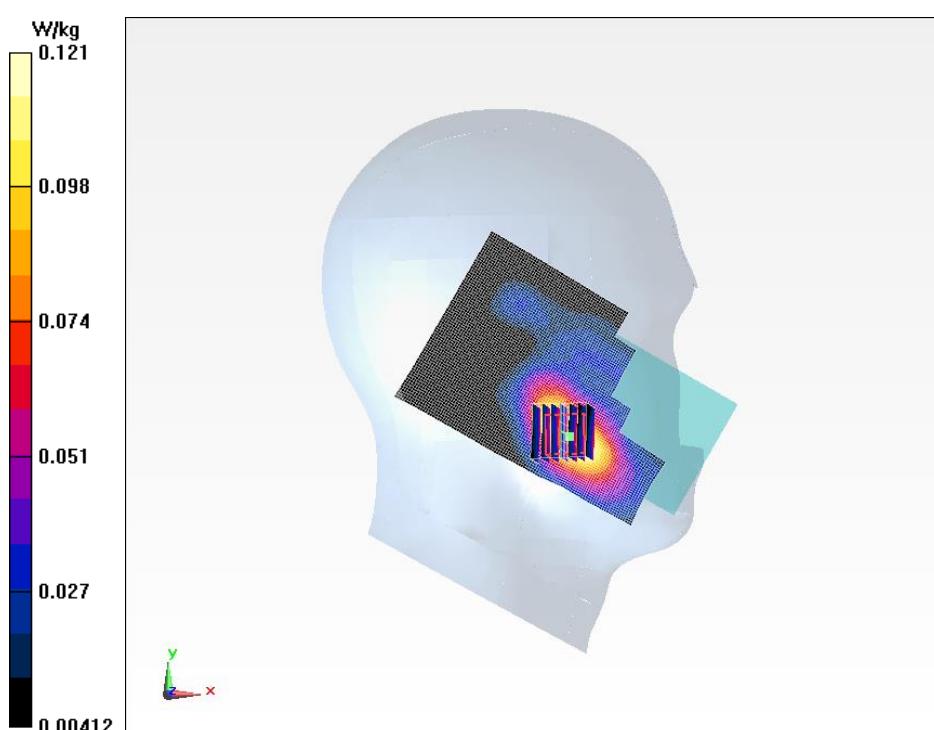


Fig.3 WCDMA Band 2 Left Cheek Middle

WCDMA Band 4 Left Cheek Low

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31); Calibrated: 12/8/2016

WCDMA Band 4 Left Cheek Low/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.276 W/kg

WCDMA Band 4 Left Cheek Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.730 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.170 W/kg

Maximum of SAR (measured) = 0.281 W/kg

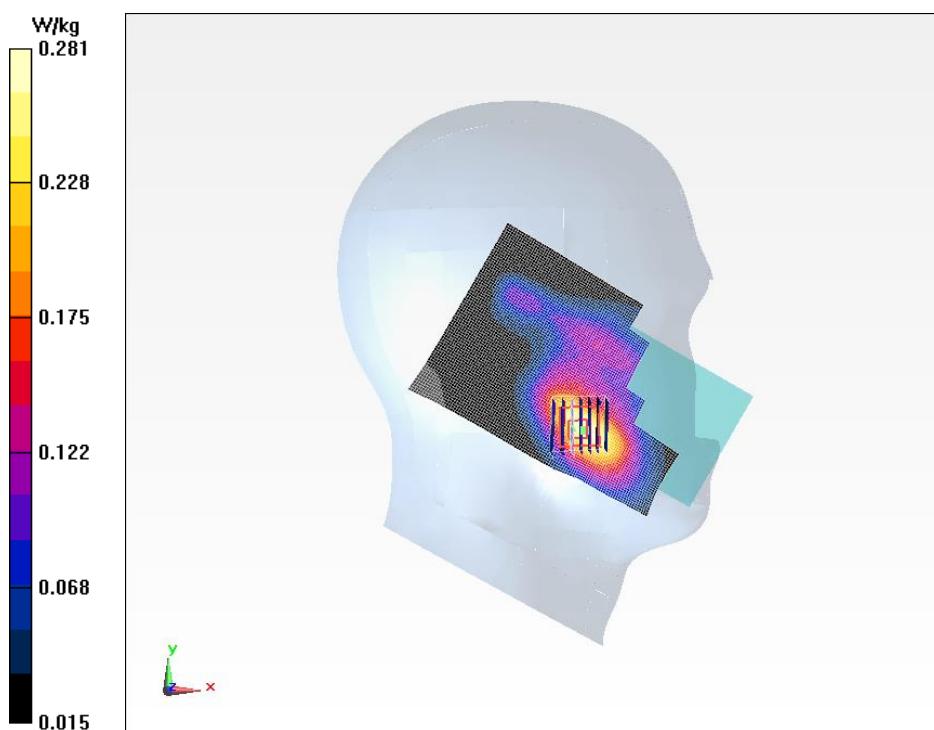


Fig.4 WCDMA Band 4 Left Cheek Low

WCDMA Band5 Right Cheek High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 847$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Professional 835MHz; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

WCDMA Band5 Right Cheek High/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.182 W/kg

WCDMA Band5 Right Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.642 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.118 W/kg

Maximum of SAR (measured) = 0.161 W/kg

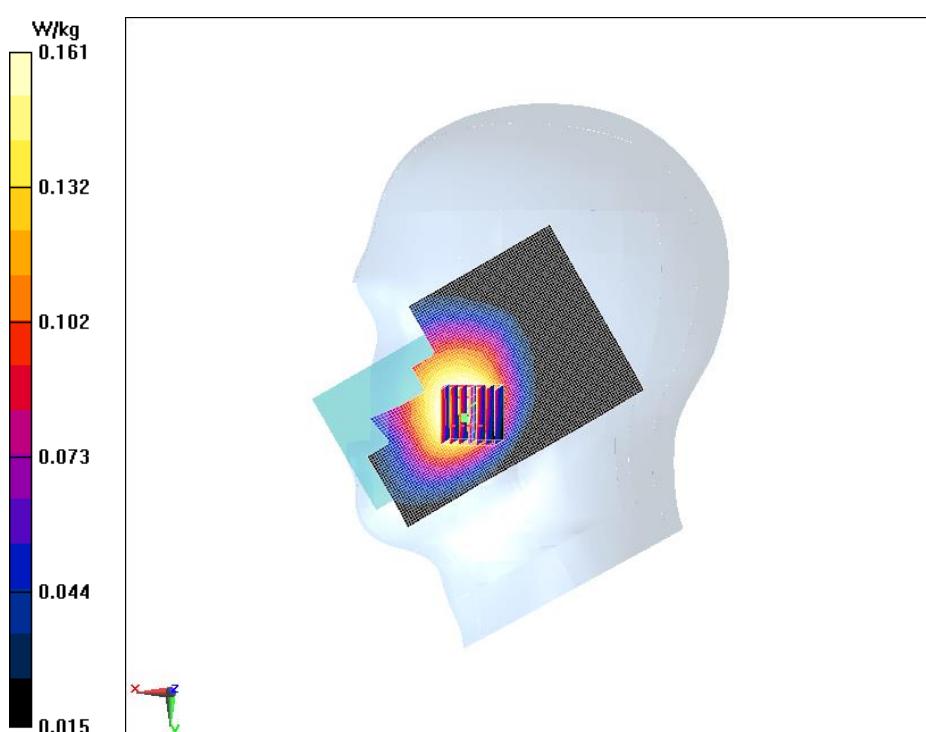


Fig.5 WCDMA Band5 Right Cheek High

LTE Band 2 Left Cheek Middle

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.868$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 2 Professional 1900MHz; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

LTE Band 2 Left Cheek Middle/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.315 W/kg

LTE Band 2 Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.430 V/m; Power Drift = 1.48 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.165 W/kg

Maximum of SAR (measured) = 0.299 W/kg

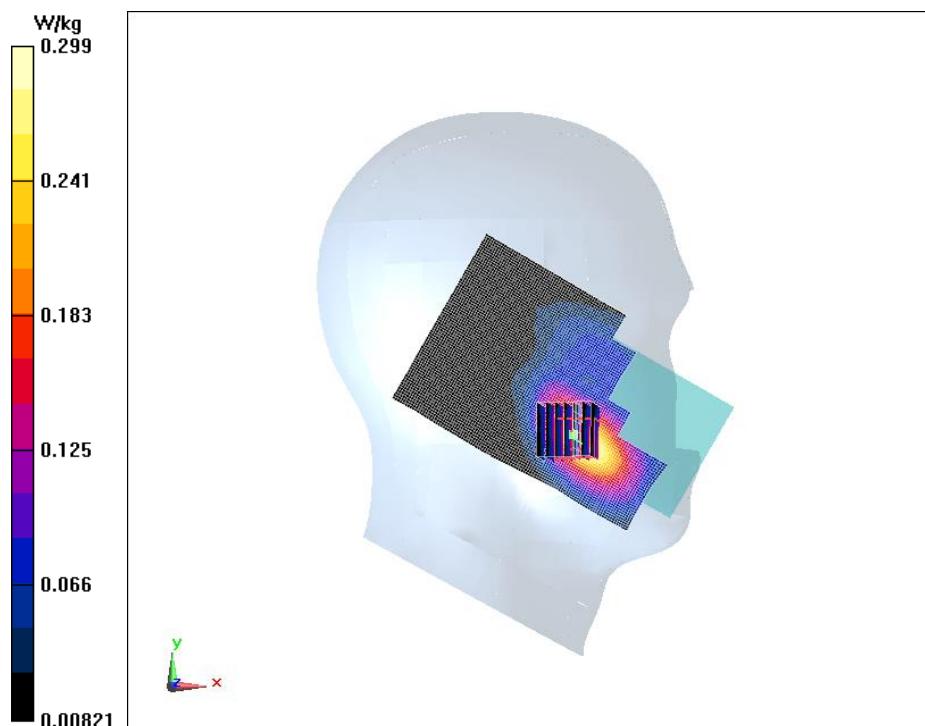


Fig.6 LTE Band 2 Left Cheek Middle

LTE Band 2 Left Cheek Middle 50 RB

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 2 Professional 1900MHz; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

LTE Band 2 Left Cheek Middle 50 RB/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.195 W/kg

LTE Band 2 Left Cheek Middle 50 RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.460 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

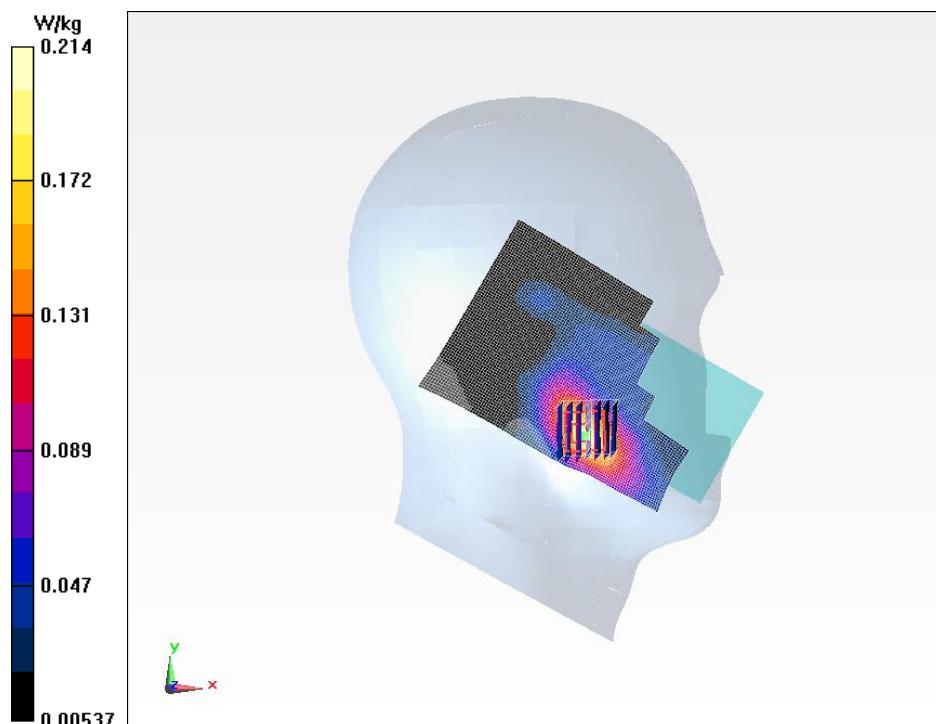


Fig.7 LTE Band 2 Left Cheek Middle 50 RB

LTE Band 4 Left Cheek High

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 38.839$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1745 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31); Calibrated: 12/8/2016

LTE Band 4 Left Cheek High/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.468 W/kg

LTE Band 4 Left Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.087 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.260 W/kg

Maximum of SAR (measured) = 0.432 W/kg

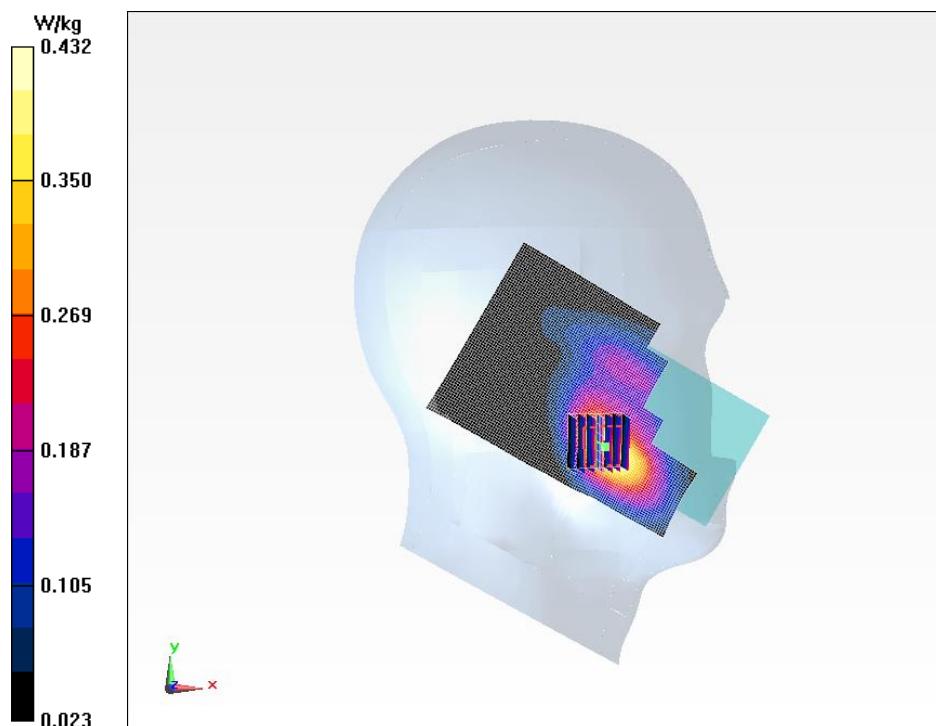


Fig.8 LTE Band 4 Left Cheek High

LTE Band 4 Left Cheek High 50RB

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 38.839$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1745 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31); Calibrated: 12/8/2016

LTE Band 4 Left Cheek High 50RB/Area Scan (121x71x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Warning: Interpolation/extrapolation of medium parameters failed. Please check that there are at least two entries in your medium table within 50 MHz of your DUT frequency, or that there is a single entry for 1745 MHz. Maximum value of SAR (Measurement) = 0.264 W/kg

LTE Band 4 Left Cheek High 50RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.174 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.164 W/kg

Maximum of SAR (measured) = 0.274 W/kg

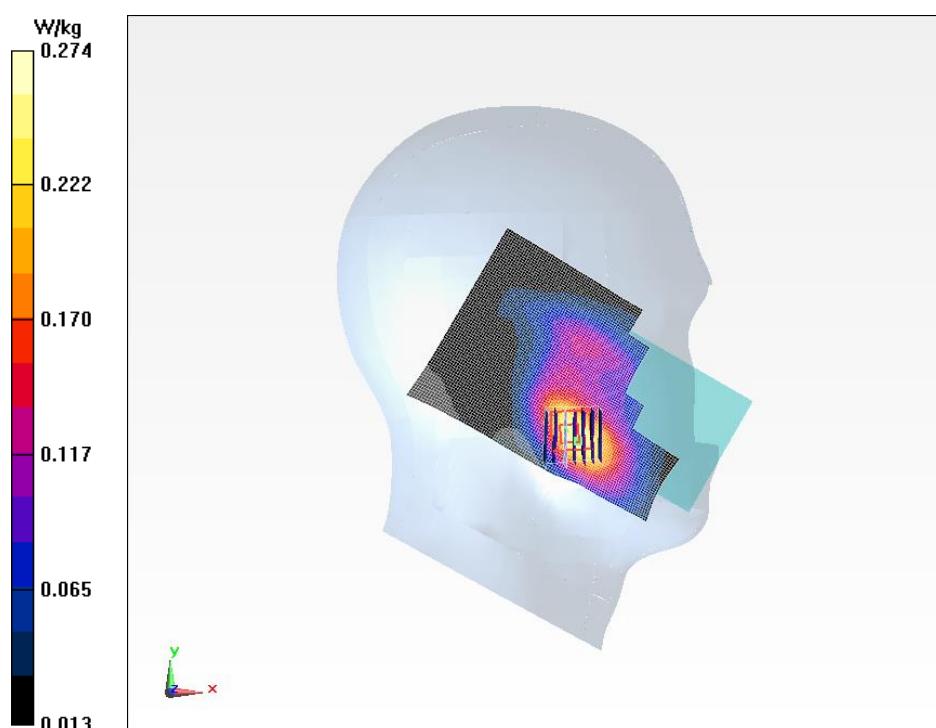


Fig.9 LTE Band 4 Left Cheek High 50RB

LTE Band 5 Right Cheek High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 844$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 40.847$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 5 Professional 835MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

LTE Band 5 Right Cheek High/Area Scan (121x71x1):

Measurement grid: $dx = 10$ mm, $dy = 10$ mm

Maximum value of SAR (Measurement) = 0.235 W/kg

LTE Band 5 Right Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx = 5$ mm, $dy = 5$ mm, $dz = 5$ mm

Reference Value = 3.802 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

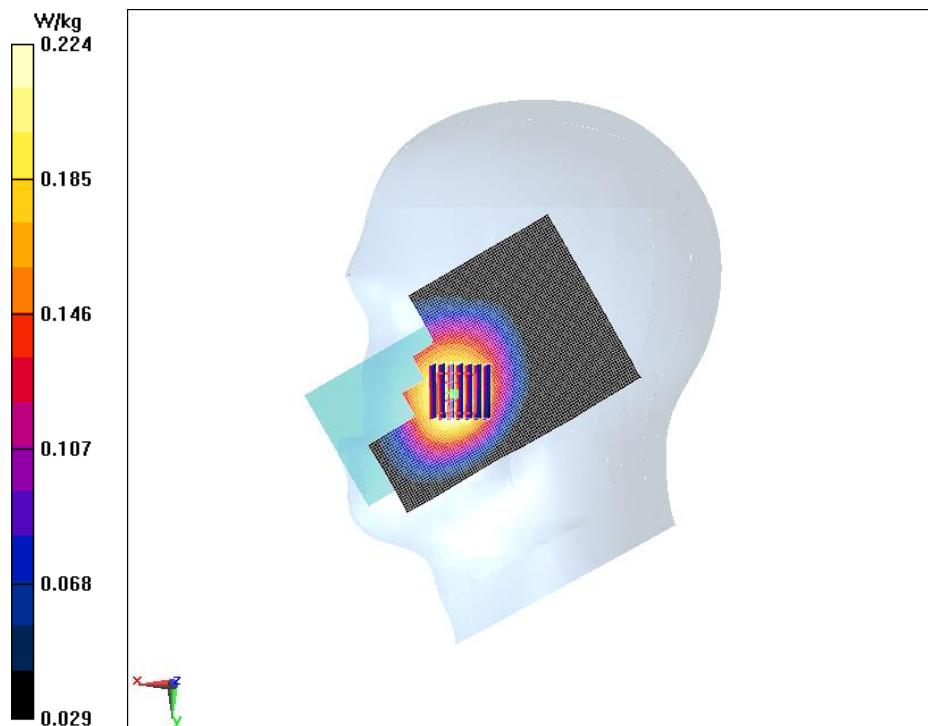


Fig.10 LTE Band 5 Right Cheek High

LTE Band 5 Right Cheek Middle 25RB

Date/Time: 2016/12/29

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 5 Professional 835MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

LTE Band 5 Right Cheek Middle 25RB/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.282 W/kg

LTE Band 5 Right Cheek Middle 25RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.213 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

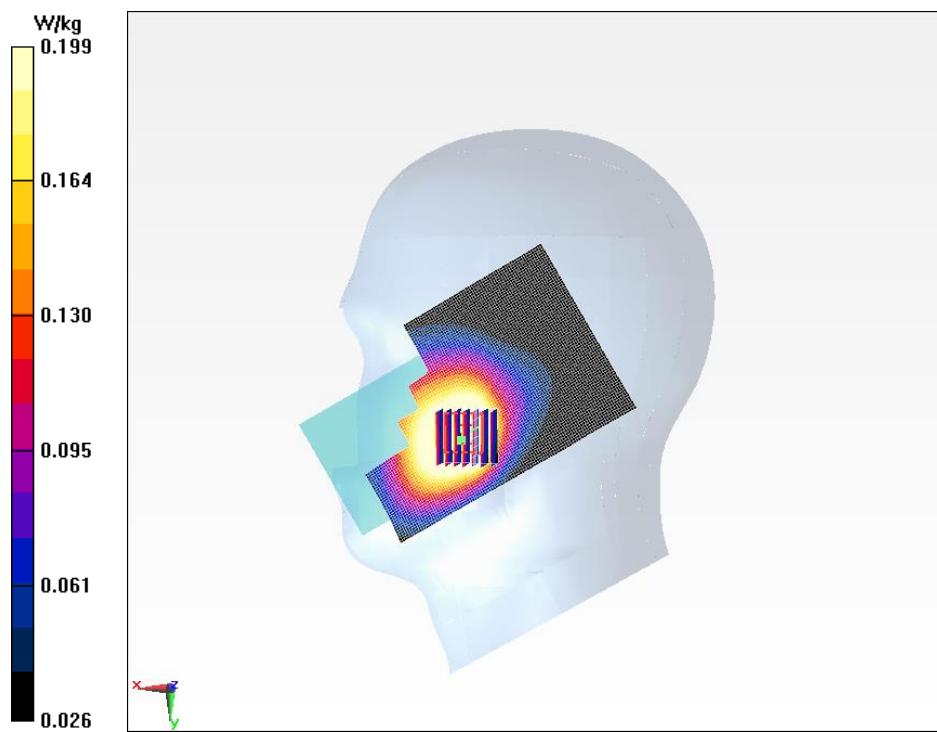


Fig.11 LTE Band 5 Right Cheek Middle 25RB

LTE Band 7 Left Cheek High

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Head 2550MHz

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 7 Professional 2550MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.25, 7.25, 7.25); Calibrated: 12/8/2016

LTE Band 7 Left Cheek High/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.211 W/kg

LTE Band 7 Left Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.047 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.035 W/kg

Maximum of SAR (measured) = 0.155 W/kg

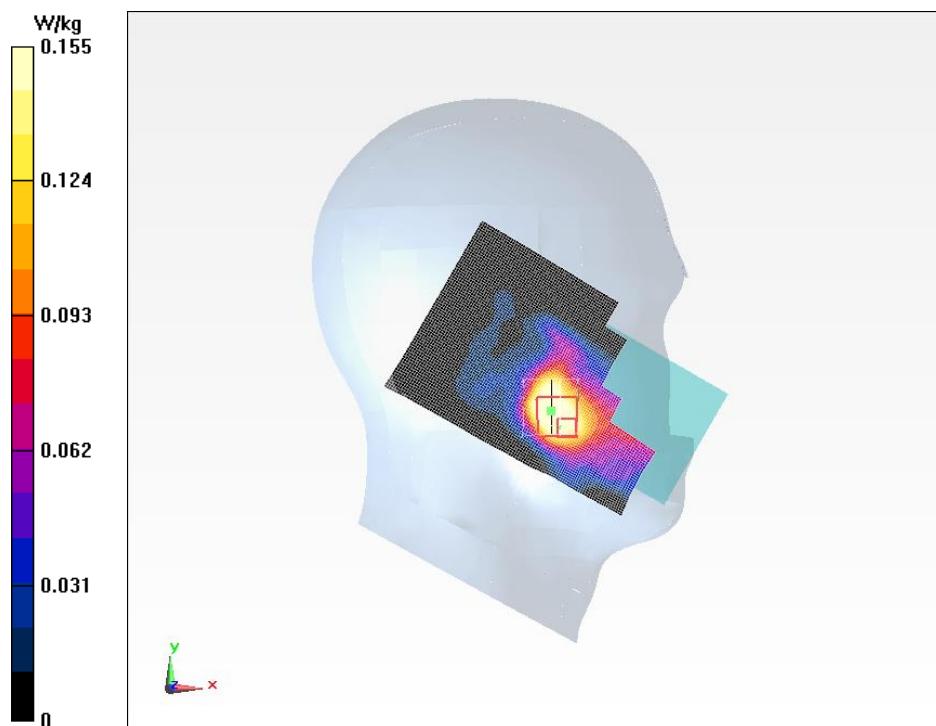


Fig.12 LTE Band 7 Left Cheek High

LTE Band 7 Left Cheek High 50RB

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Head 2550MHz

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 7 Professional 2550MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.25, 7.25, 7.25); Calibrated: 12/8/2016

LTE Band 7 Left Cheek High 50RB/Area Scan (121x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.119 W/kg

LTE Band 7 Left Cheek High 50RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.636 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.049 W/kg

Maximum of SAR (measured) = 0.113 W/kg

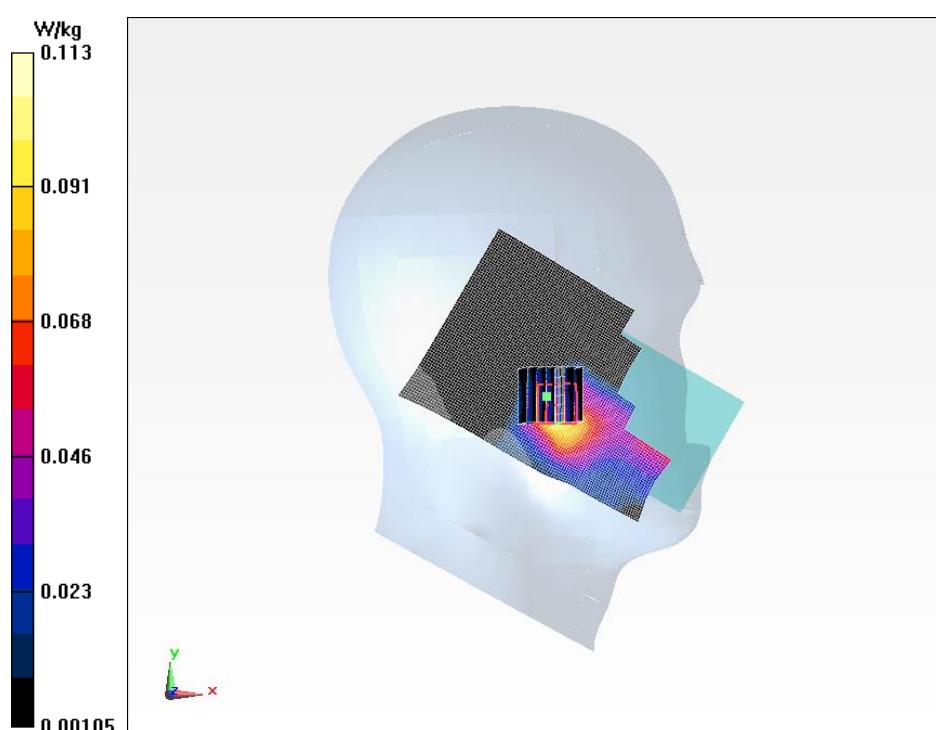


Fig.13 LTE Band 7 Left Cheek High 50RB

WiFi 802.11b Right Cheek Middle

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 39.162$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.26, 7.26, 7.26); Calibrated: 1/13/2017

WiFi 802.11b Right Cheek Middle/Area Scan (131x81x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.520 W/kg

WiFi 802.11b Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.710 V/m; Power Drift = 0.01 dB

Peak SAR = 0.910 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.465 W/kg

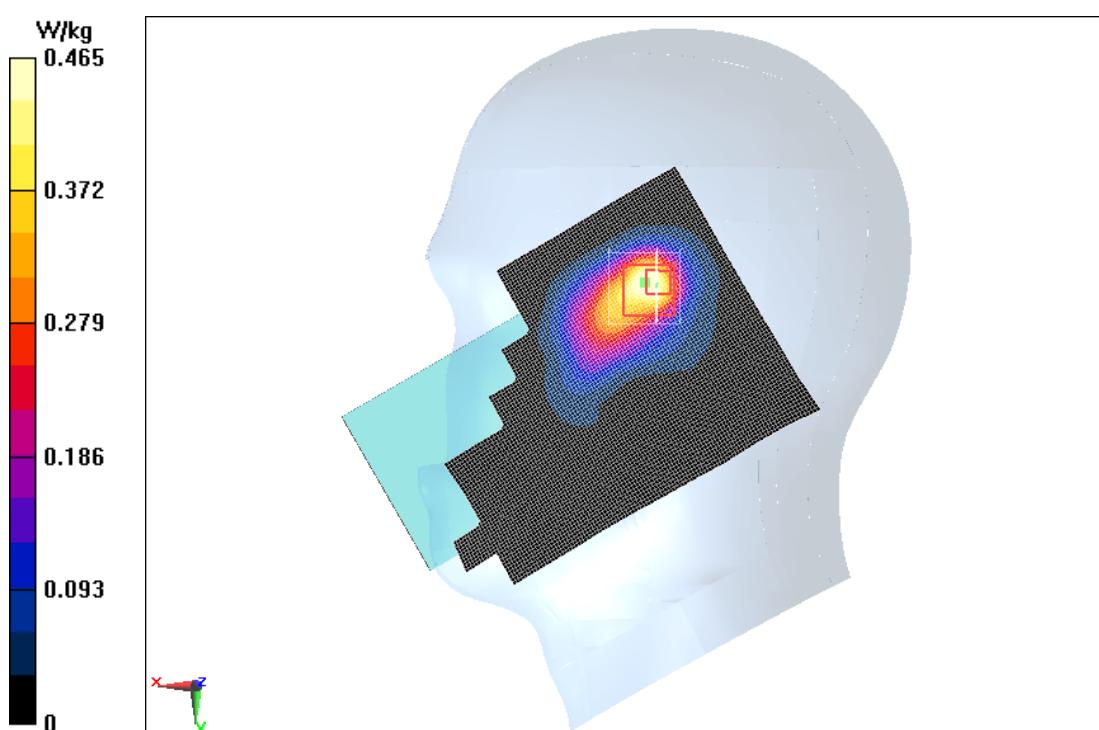


Fig.14 WiFi 802.11b Right Cheek Middle

GPRS 850MHz 4TS Ground Mode High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 850MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 1.014$ S/m; $\epsilon_r = 55.206$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

GPRS 850MHz 4TS Ground Mode High/Area Scan (61x111x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.387 W/kg

GPRS 850MHz 4TS Ground Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.51 V/m; Power Drift = 0.04 dB

Peak SAR = 0.559 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.256 W/kg

Maximum of SAR (measured) = 0.406 W/kg

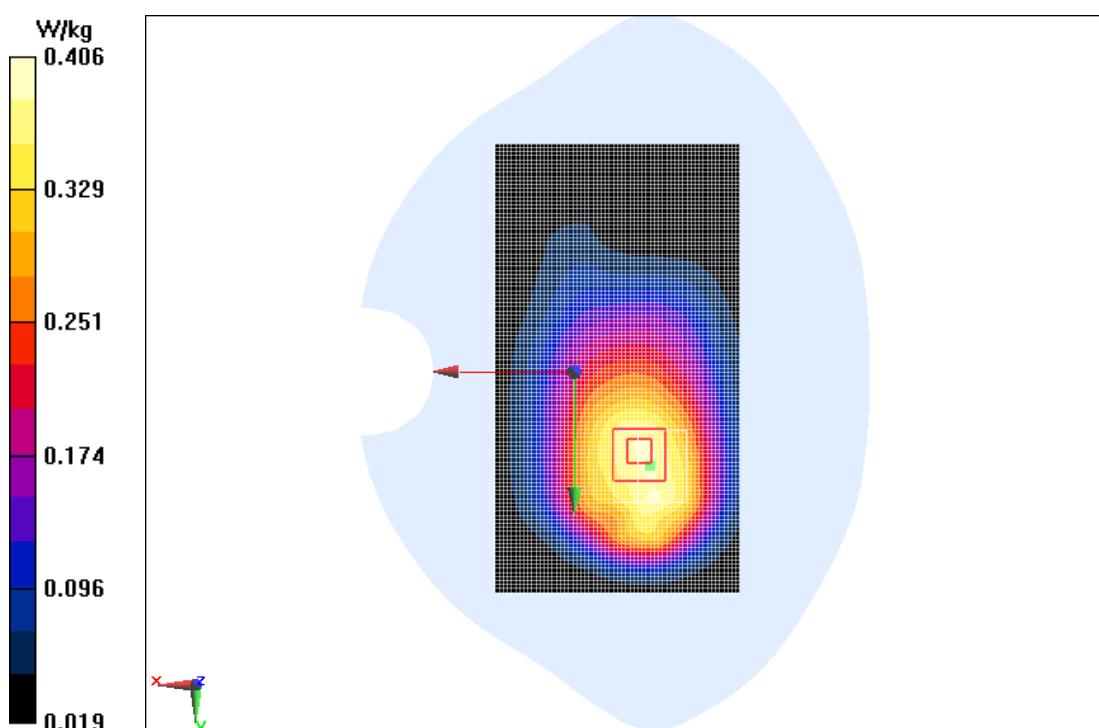


Fig.15 GPRS 850MHz 4TS Ground Mode High

GPRS 1900MHz 4TS Ground Mode High

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ S/m; $\epsilon_r = 53.185$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

GPRS 1900MHz 4TS Ground Mode High /Area Scan (71x141x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.500 W/kg

GPRS 1900MHz 4TS Ground Mode High /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.464 V/m; Power Drift = 0.10 dB

Peak SAR = 0.887 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.528 W/kg

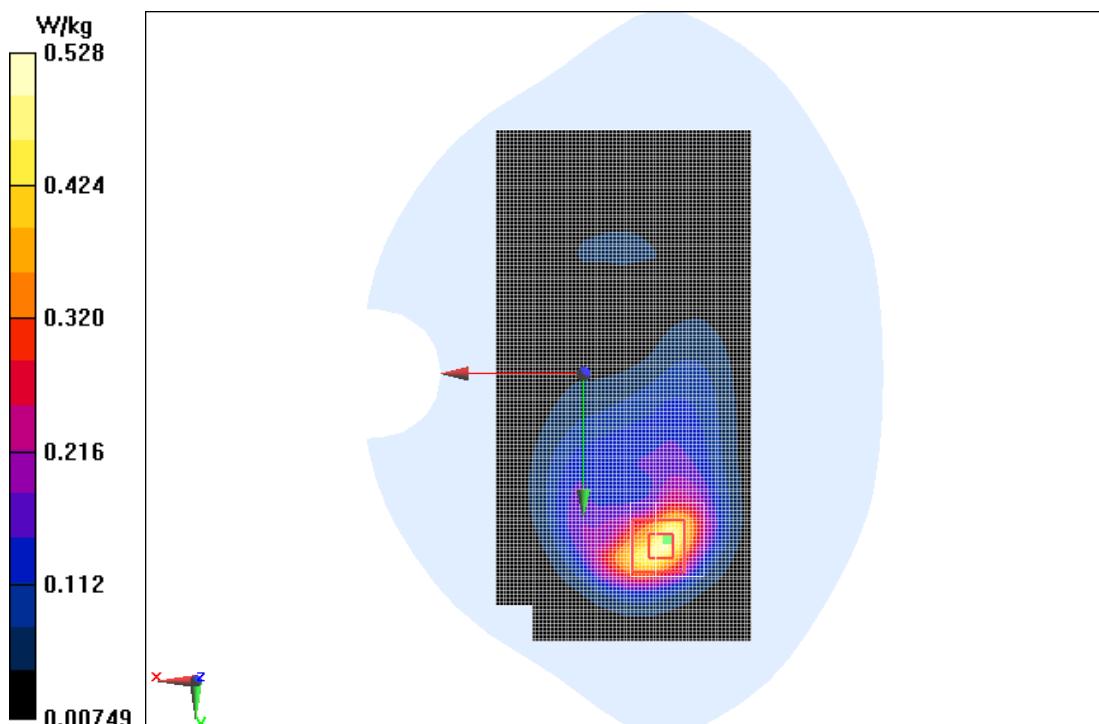


Fig.16 GPRS 1900MHz 4TS Ground Mode High

WCDMA Band 2 Ground Mode High

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 1950MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.198$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Professional Band I ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

WCDMA Band 2 Ground Mode High /Area Scan (71x111x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.949 W/kg

WCDMA Band 2 Ground Mode High /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.886 V/m; Power Drift = 0.13 dB

Peak SAR = 1.65 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.472 W/kg

Maximum of SAR (measured) = 0.988 W/kg

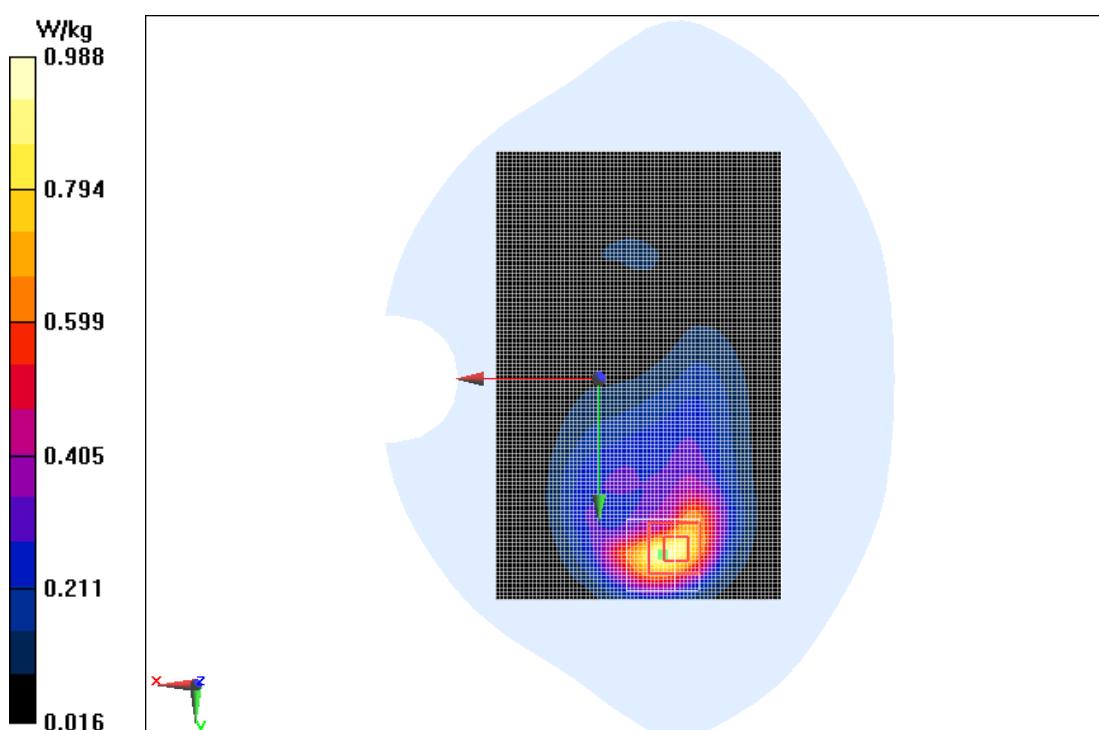


Fig.17 WCDMA Band 2 Ground Mode High

WCDMA Band 2 Ground Mode High repeated

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 1950MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 53.198$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Professional Band I ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

WCDMA Band 2 Ground Mode High repeated/Area Scan (71x111x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.958 W/kg

WCDMA Band 2 Ground Mode High repeated/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.908 V/m; Power Drift = 0.11 dB

Peak SAR = 1.66 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.475 W/kg

Maximum of SAR (measured) = 0.999 W/kg

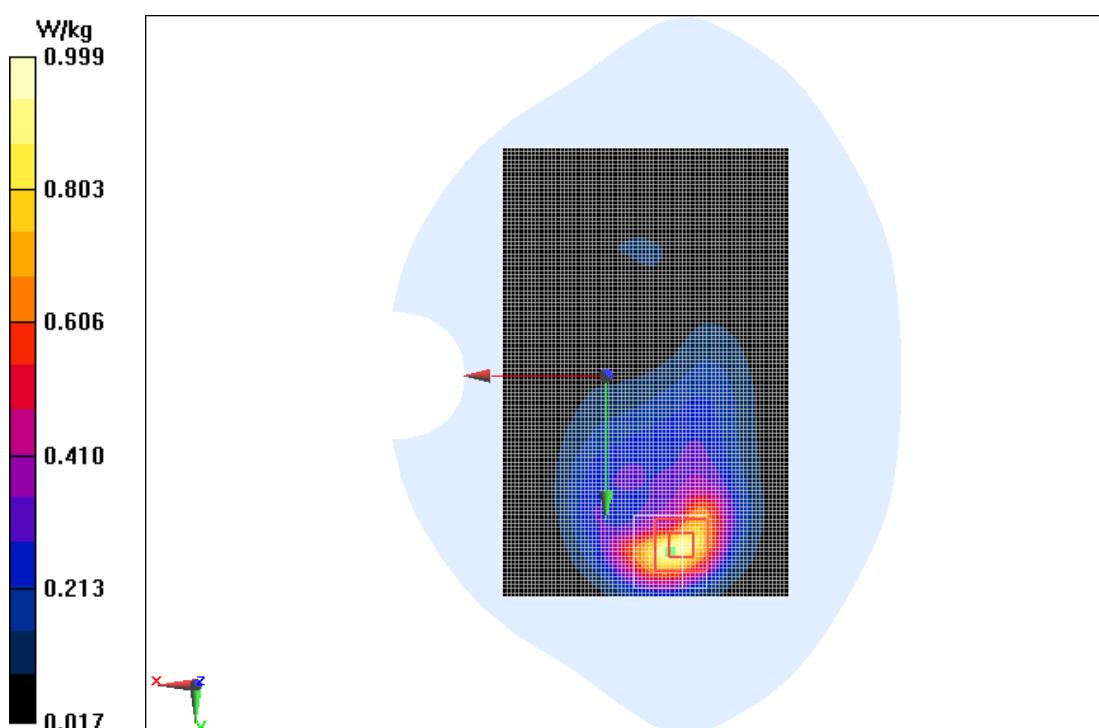


Fig.29 WCDMA Band 2 Ground Mode High repeated

WCDMA Band 4 Ground Mode Middle

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 52.306$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Professional 1800MHz; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

WCDMA Band 4 Ground Mode Middle /Area Scan (71x121x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.502 W/kg

WCDMA Band 4 Ground Mode Middle /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.11 V/m; Power Drift = 0.18 dB

Peak SAR = 0.706 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.274 W/kg

Maximum of SAR (measured) = 0.458 W/kg

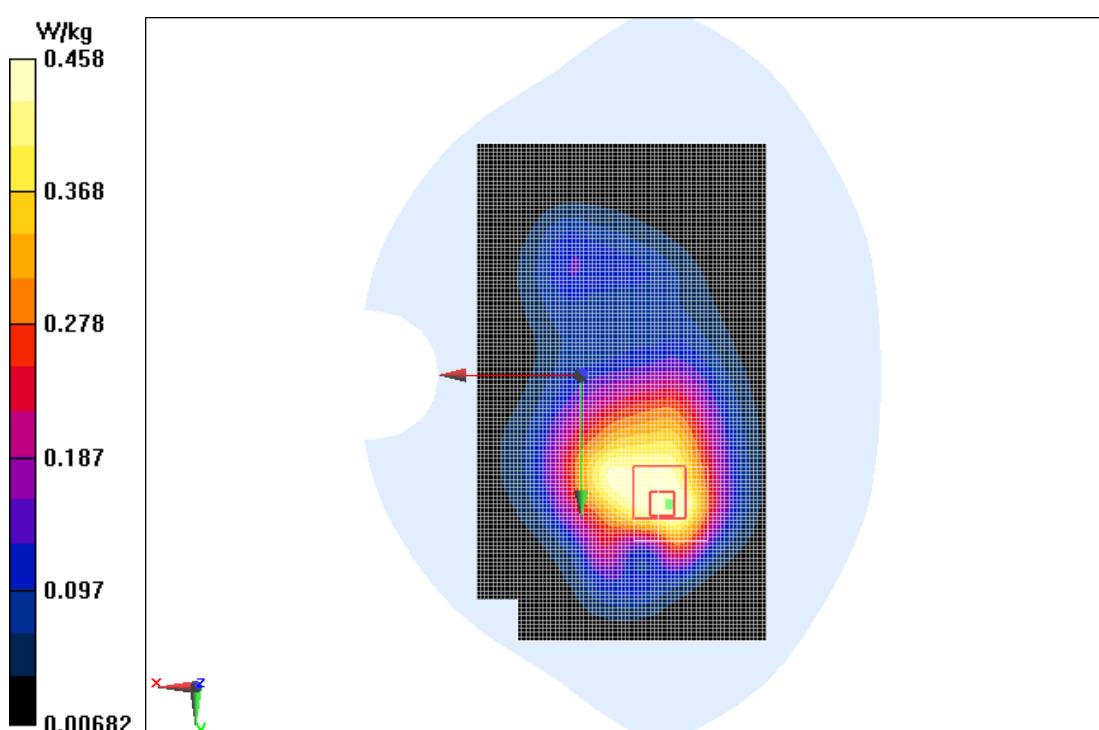


Fig.18 WCDMA Band 4 Ground Mode Middle

WCDMA Band5 Ground Mode High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 850MHz

Medium parameters used: $f = 847$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 55.215$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: WCDMA Professional Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

WCDMA Band5 Ground Mode High /Area Scan (71x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.358 W/kg

WCDMA Band5 Ground Mode High /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.09 V/m; Power Drift = -0.02 dB

Peak SAR = 0.581 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

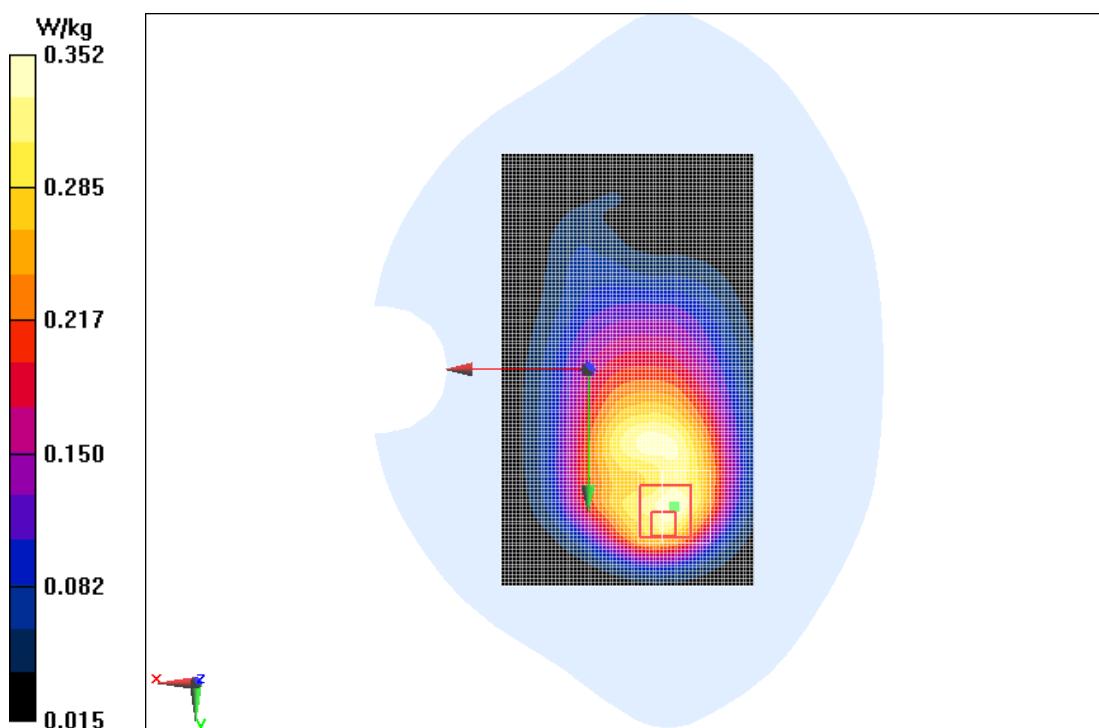


Fig.19 WCDMA Band5 Ground Mode High

LTE Band 2 Ground Mode Middle

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Body 1950MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 53.319$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 2 Professional 1950MHz; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

LTE Band 2 Ground Mode Middle/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.656 W/kg

LTE Band 2 Ground Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.007 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.351 W/kg

Maximum of SAR (measured) = 0.737 W/kg

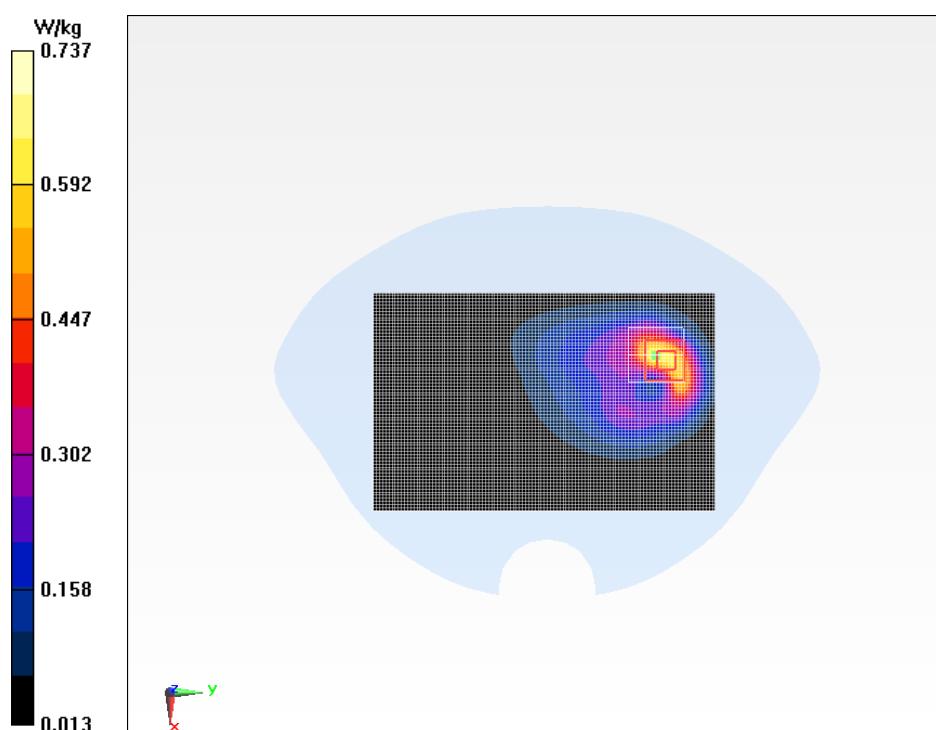


Fig.20 LTE Band 2 Ground Mode Middle

LTE Band 2 Ground Mode High 50RB

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 1950MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: LTE Band 2 Professional 1950MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

LTE Band 2 Ground Mode High 50RB/Area Scan (71x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.572 W/kg

LTE Band 2 Ground Mode High 50RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.388 V/m; Power Drift = -0.14 dB

Peak SAR = 1.02 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

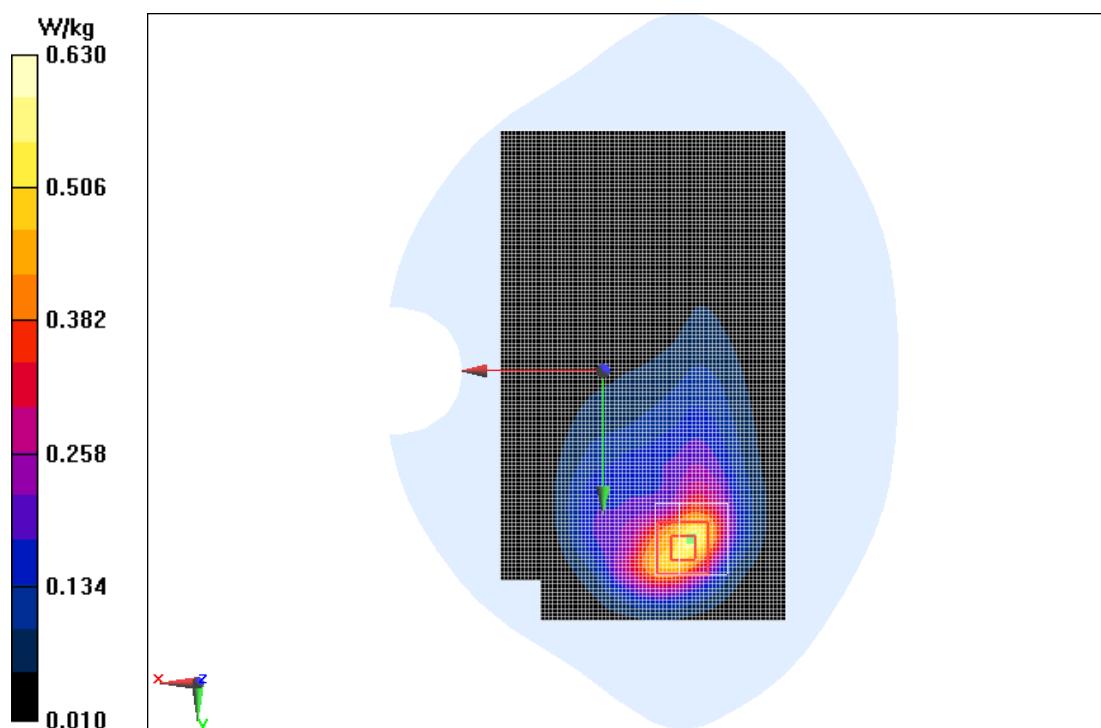


Fig.21 LTE Band 2 Ground Mode High 50RB

LTE Band 4 Ground Mode Low

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 52.303$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1720 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

LTE Band 4 Ground Mode Low/Area Scan (81x131x1):

Measurement grid: $dx = 10$ mm, $dy = 10$ mm

Maximum value of SAR (Measurement) = 0.420 W/kg

LTE Band 4 Ground Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx = 5$ mm, $dy = 5$ mm, $dz = 5$ mm

Reference Value = 8.140 V/m; Power Drift = 0.05 dB

Peak SAR = 0.669 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.250 W/kg

Maximum of SAR (measured) = 0.415 W/kg

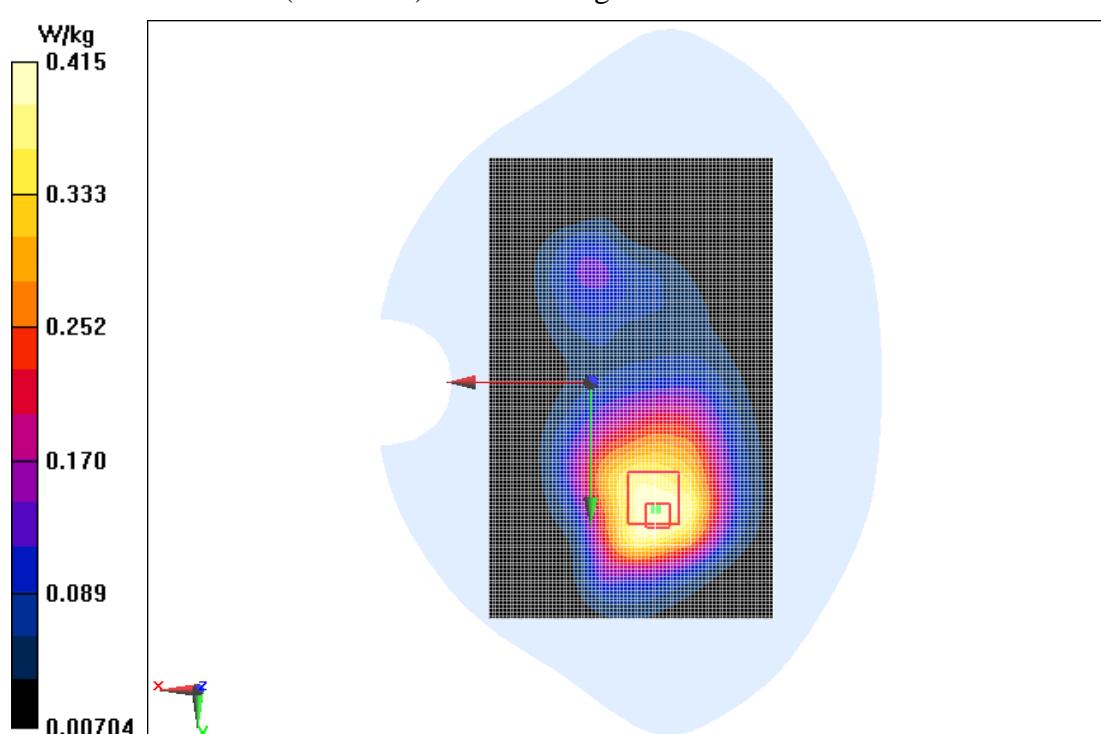


Fig.22 LTE Band 4 Ground Mode Low

LTE Band 4 Ground Mode High 50RB

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 53.23$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1745 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.22, 8.22, 8.22); Calibrated: 12/8/2016

LTE Band 4 Ground Mode High 50RB/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.328 W/kg

LTE Band 4 Ground Mode High 50RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.757 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.182 W/kg

Maximum of SAR (measured) = 0.311 W/kg

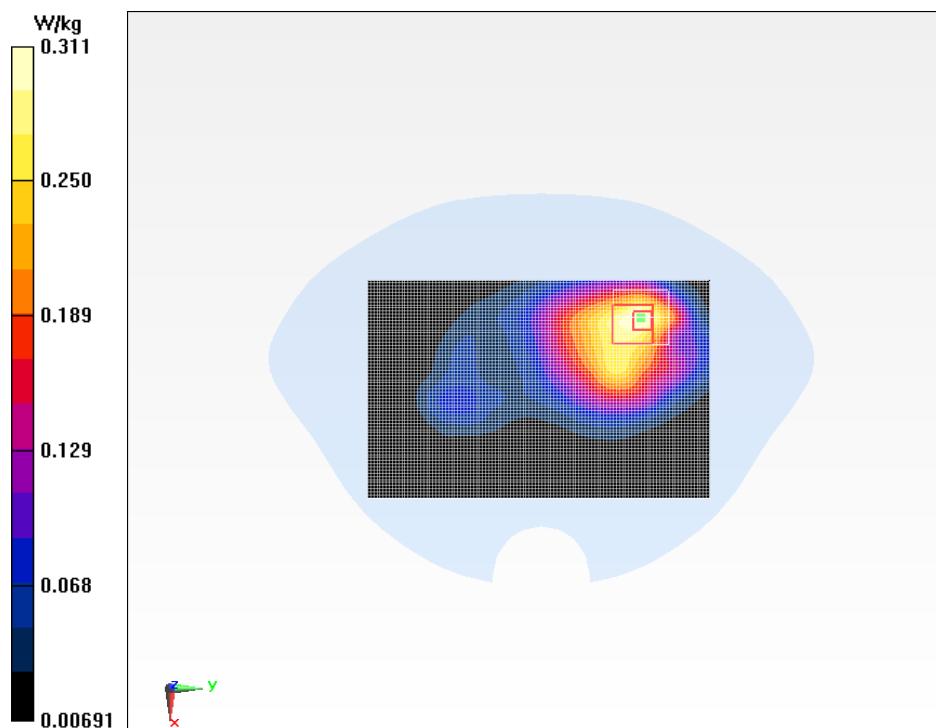


Fig.23 LTE Band 4 Ground Mode High 50RB

LTE Band 5 Ground Mode High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 850MHz

Medium parameters used: $f = 844$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 55.202$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: LTE Band 5 Professional 850MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

LTE Band 5 Ground Mode High /Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.365 W/kg

LTE Band 5 Ground Mode High /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.35 V/m; Power Drift = -0.17 dB

Peak SAR = 0.524 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.225 W/kg

Maximum of SAR (measured) = 0.368 W/kg

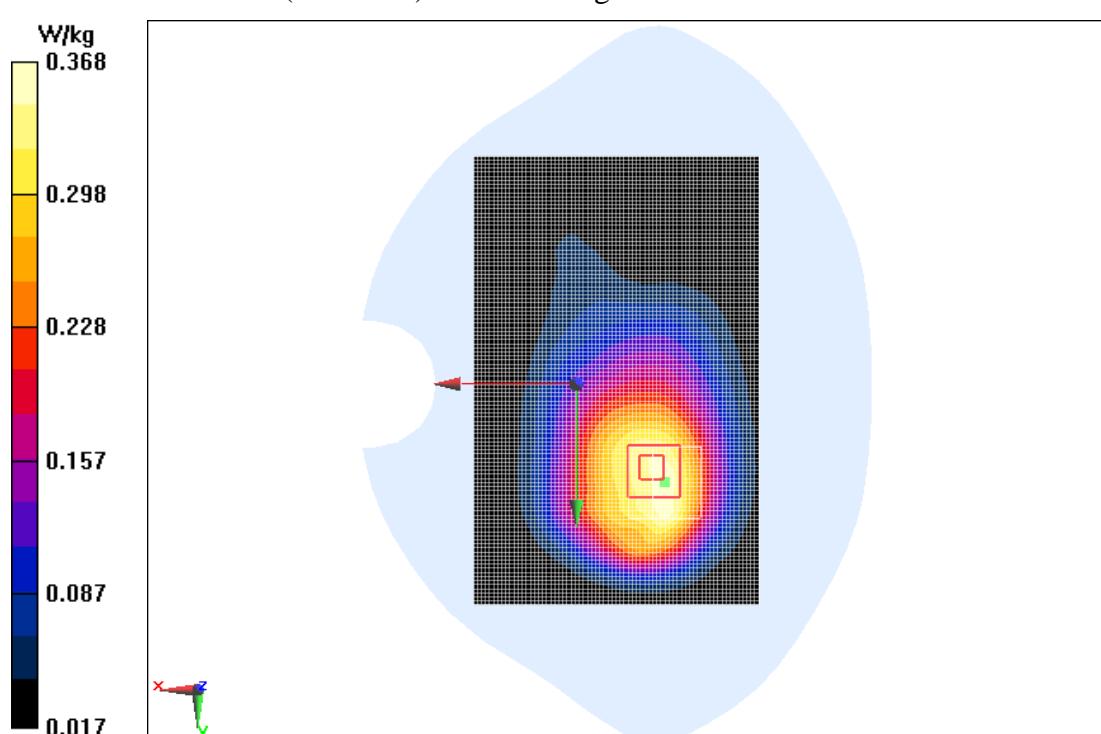


Fig.24 LTE Band 5 Ground Mode High

LTE Band 5 Ground Mode High 25RB

Date/Time: 2016/12/29

Electronics: DAE3 Sn360

Medium: Body 850MHz

Medium parameters used: $f = 844$ MHz; $\sigma = 1.008$ S/m; $\epsilon_r = 55.203$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 5 Professional 850MHz; Frequency: 844 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.94, 9.94, 9.94); Calibrated: 12/8/2016

LTE Band 5 Ground Mode High 25RB/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.497 W/kg

LTE Band 5 Ground Mode High 25RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.05 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.808 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.262 W/kg

Maximum of SAR (measured) = 0.503 W/kg

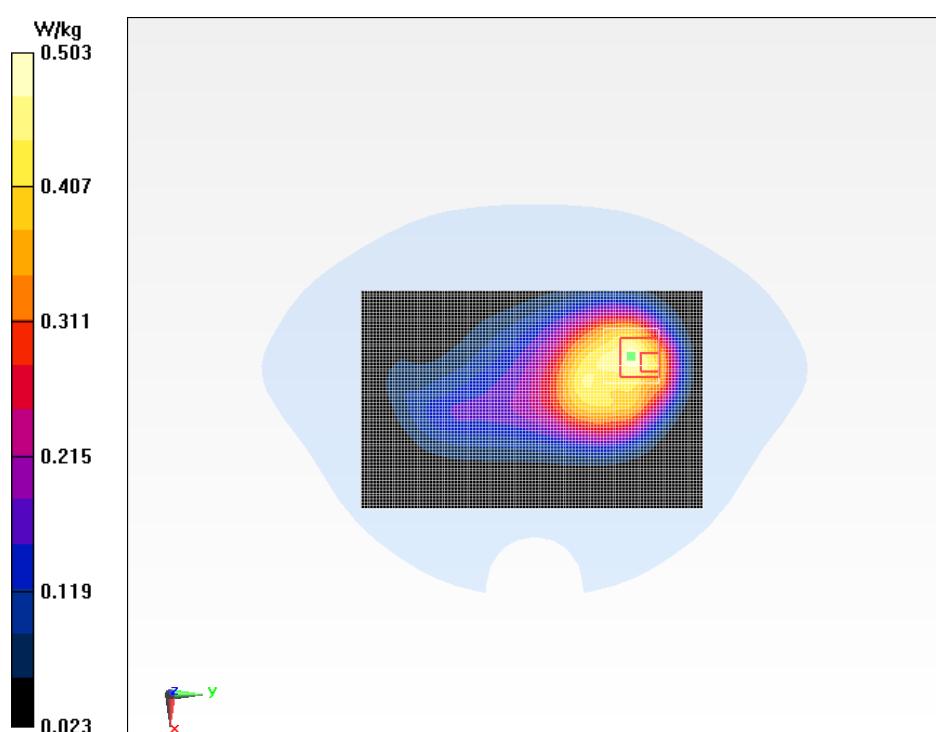


Fig.25 LTE Band 5 Ground Mode High 25RB

LTE Band 7 Ground Mode High

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 2600MHz

Medium parameters used : $f = 2560$ MHz; $\sigma = 2.031$ S/m; $\epsilon_r = 53.659$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5 °C Liquid Temperature:22.5 °C

Communication System: LTE Band 7 Professional 2450MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.16, 7.16, 7.16);

LTE Band 7 Ground Mode High /Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.16 W/kg

LTE Band 7 Ground Mode High /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.888 V/m; Power Drift = -0.03 dB

Peak SAR = 2.20 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

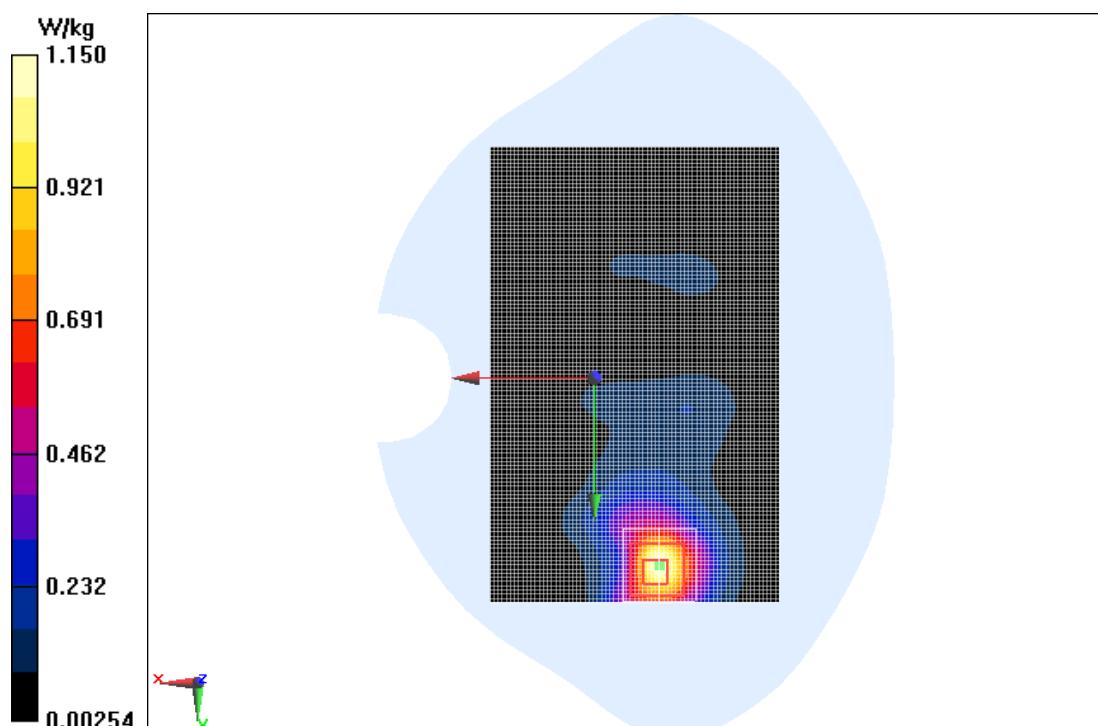


Fig.26 LTE Band 7 Ground Mode High

LTE Band 7 Ground Mode High repeated

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 2600MHz

Medium parameters used : $f = 2560$ MHz; $\sigma = 2.031$ S/m; $\epsilon_r = 53.659$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5 °C Liquid Temperature:22.5 °C

Communication System: LTE Band 7 Professional 2450MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.16, 7.16, 7.16);

LTE Band 7 Ground Mode High repeated/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.22 W/kg

LTE Band 7 Ground Mode High repeated/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.120 V/m; Power Drift =0.11 dB

Peak SAR = 2.26 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

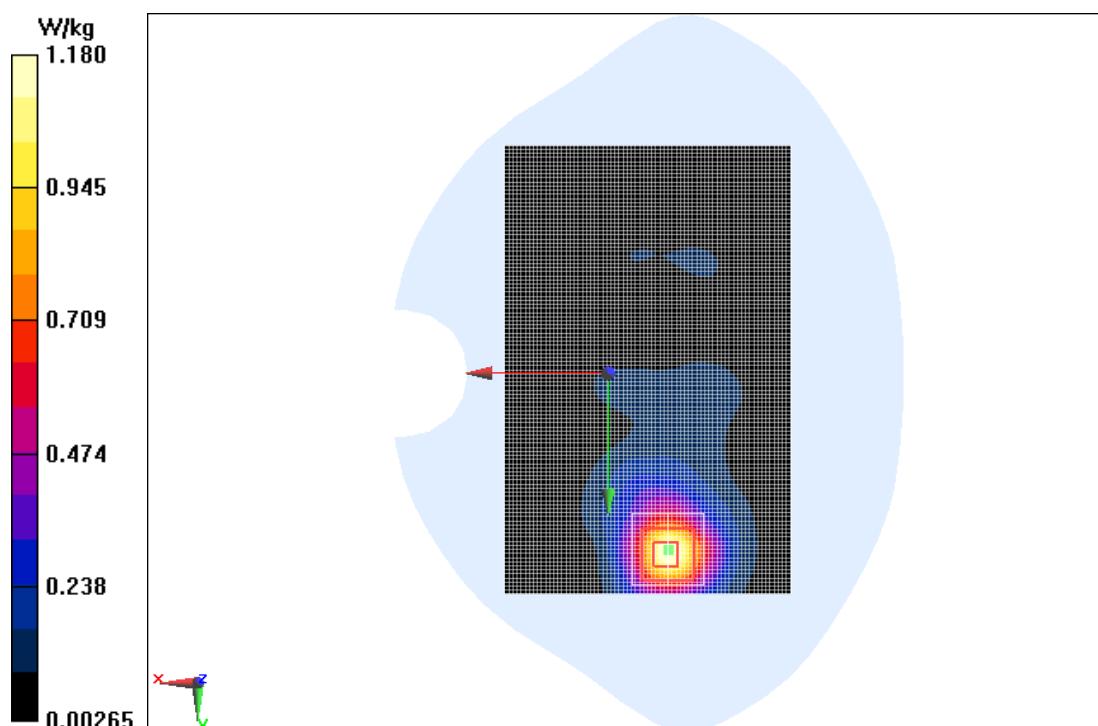


Fig.30 LTE Band 7 Ground Mode High repeated

LTE Band 7 Ground Mode Middle 50RB

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Body 2450MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 53.723$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: LTE Band 7 Professional 2450MHz; Frequency: 2535 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.16, 7.16, 7.16); Calibrated: 12/8/2016

LTE Band 7 Ground Mode Middle 50RB/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.458 W/kg

LTE Band 7 Ground Mode Middle 50RB/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.451 V/m; Power Drift = 0.41 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

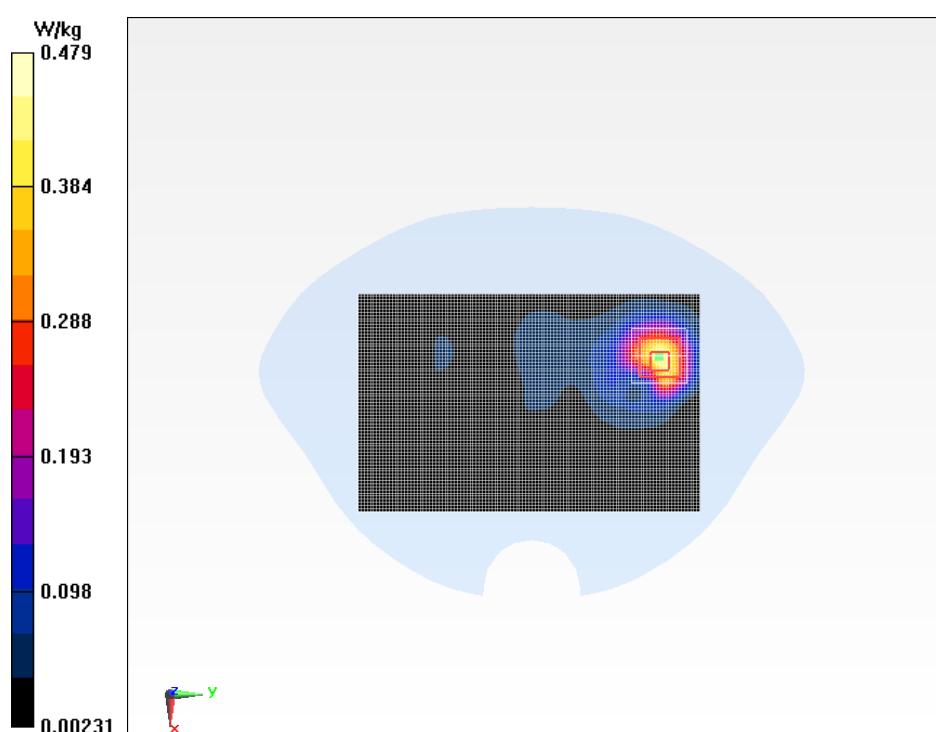


Fig.27 LTE Band 7 Ground Mode Middle 50RB

WiFi 802.11b Ground Mode Low

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 2450MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 53.924$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.33, 7.33, 7.33);

WiFi 802.11b Ground Mode Low/Area Scan (71x111x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.253 W/kg

WiFi 802.11b Ground Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.755 V/m; Power Drift = 0.08 dB

Peak SAR = 0.599 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

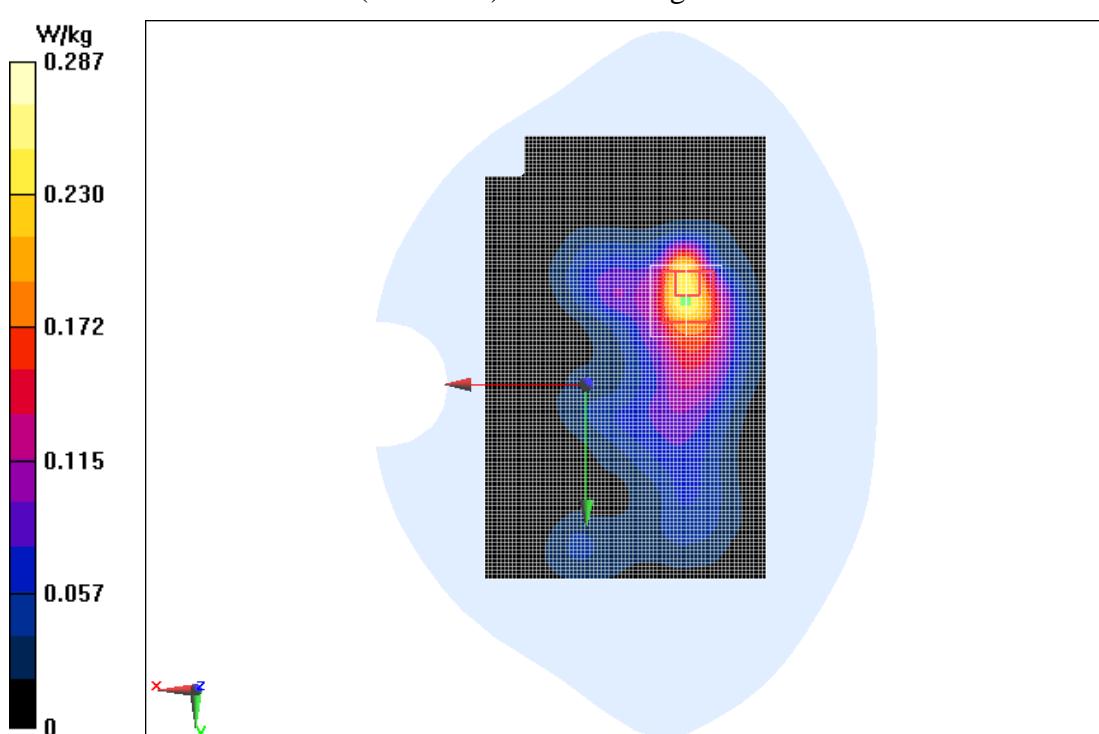


Fig.28 WiFi 802.11b Ground Mode Low

ANNEX B. SYSTEM VALIDATION RESULTS

835 MHz

Date/Time: 2016/12/29

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 40.942$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 835MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73);

System Validation /Area Scan (60x120x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.77 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5 \text{ mm}$, $dy=5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 52.32 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.78 W/kg

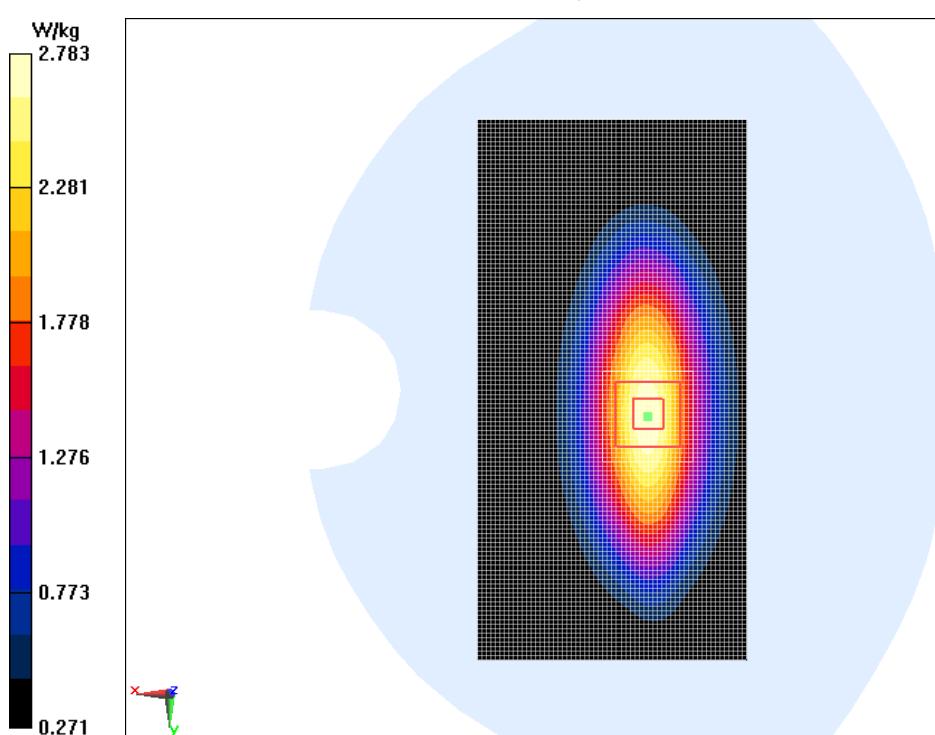

1750 MHz

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 38.833$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1800MHz; Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31);

System validation /Area Scan (40x100x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 12.6 W/kg

System validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.69 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.16W/kg

Maximum value of SAR (measured) = 12.7 W/kg

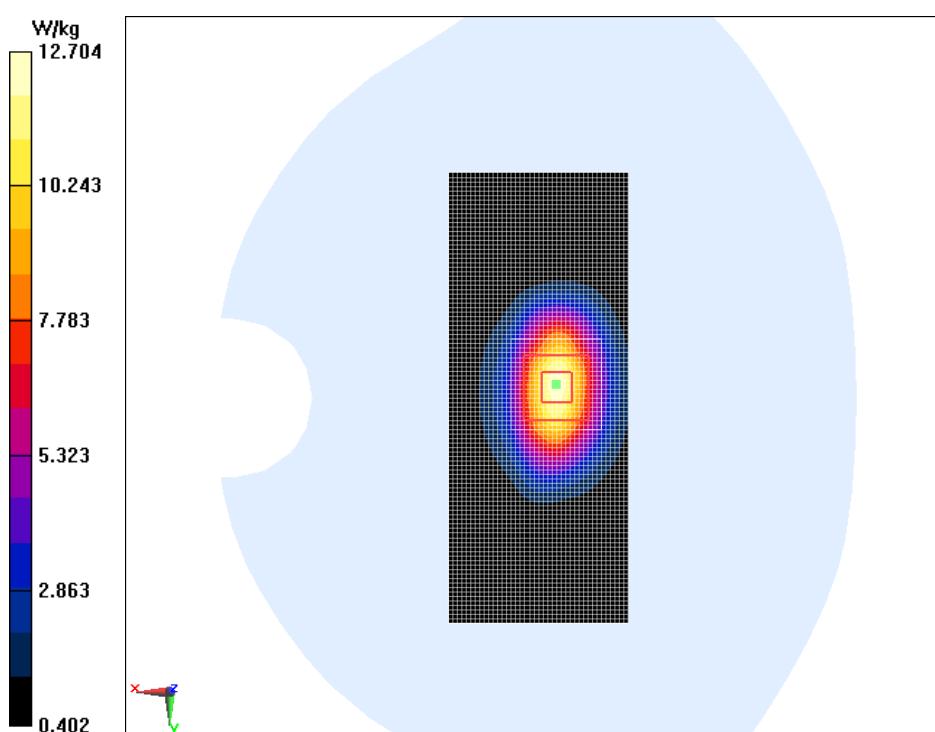

1900MHz

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.634$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.92, 7.92, 7.92);

System check Validation /Area Scan (60x60x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 15.1 W/kg

System check Validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.0 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 9.89 W/kg; SAR(10 g) = 5.16 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

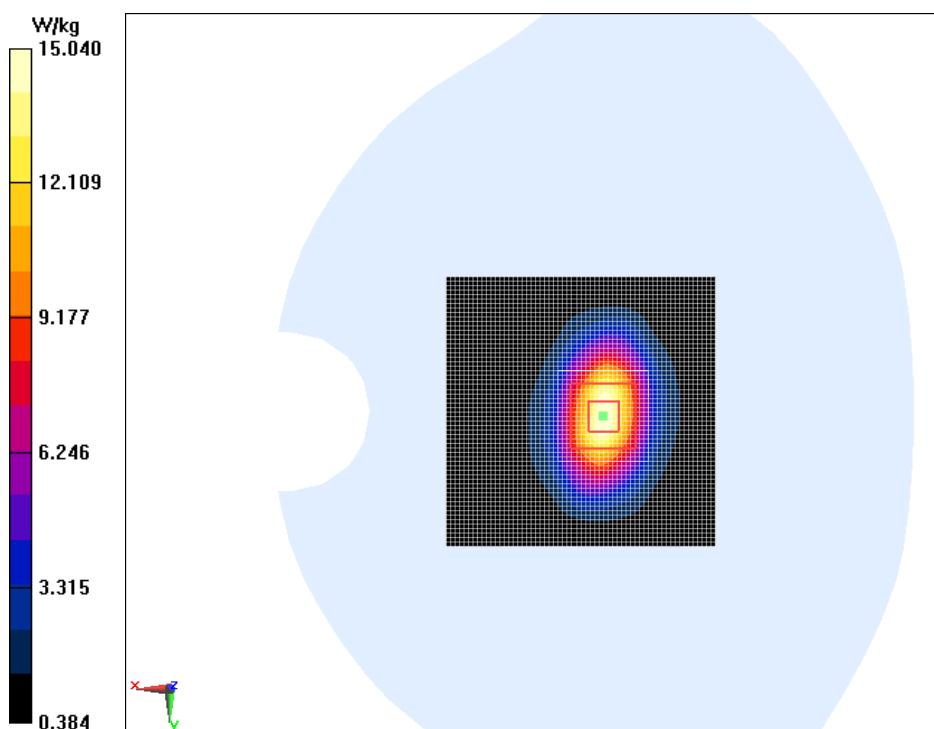

2450MHz

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 40.083$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 2450MHz; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27);

System Validation /Area Scan (40x80x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 20.4 W/kg

System Validation/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.92 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

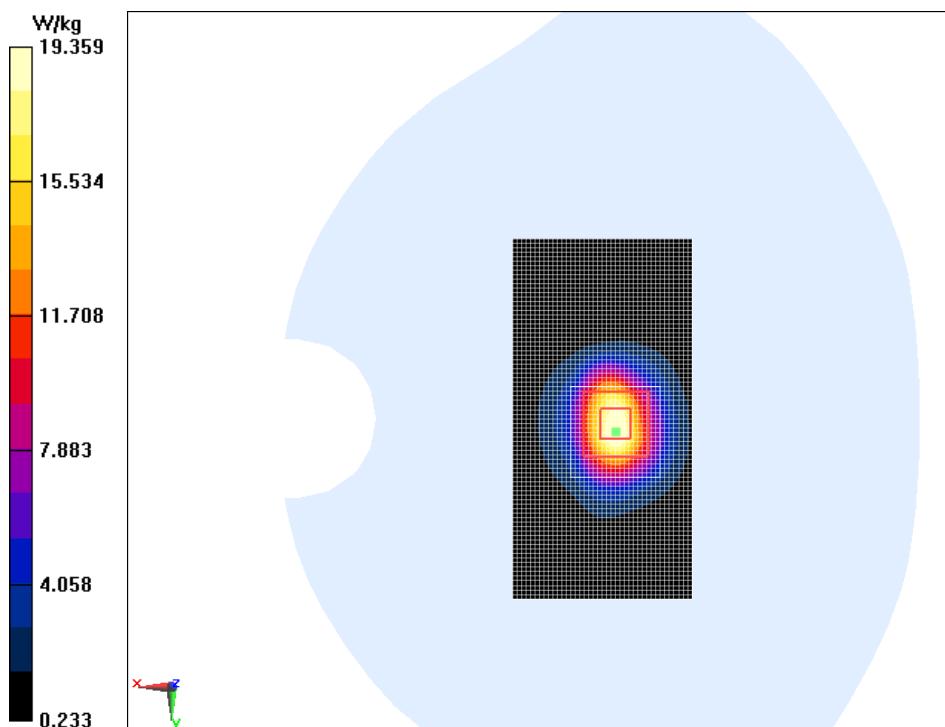

2600 MHz

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Head 2550MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 38.961$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 2550MHz; Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.25, 7.25, 7.25);

System Validation/Area Scan (60x70x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 16.8 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.29 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.57 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

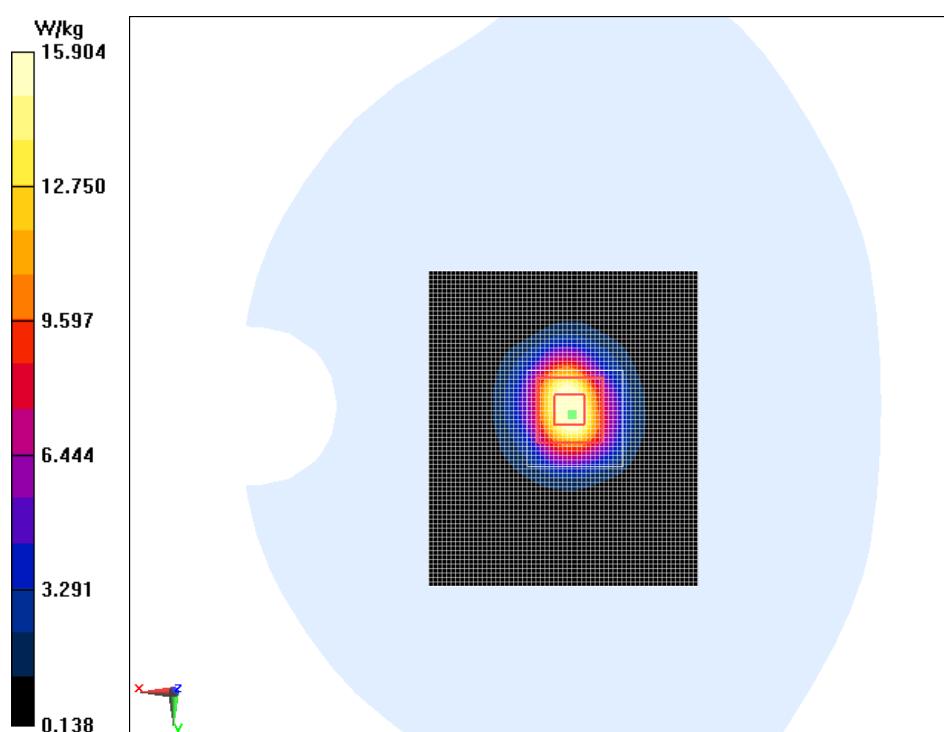

835 MHz Body

Date/Time: 2016/12/29

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 55.092$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 850MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

System Validation/Area Scan (60x120x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.77 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5 \text{ mm}$, $dy=5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 54.23 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

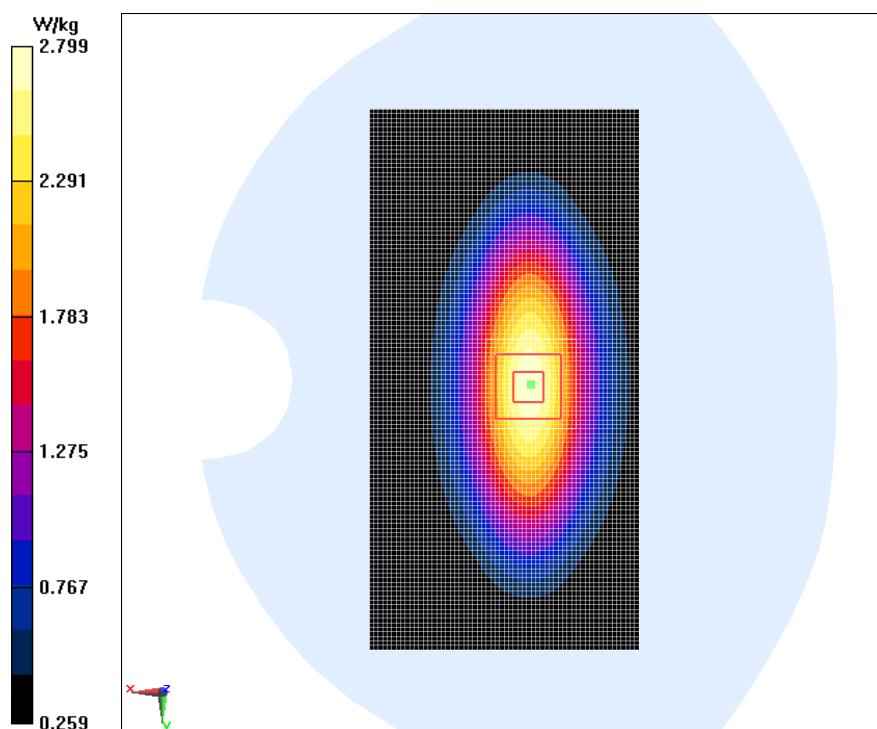

1750MHz Body

Date/Time: 2016/12/30

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.219$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

System Validation/Area Scan (40x100x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 11.8 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.89 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.38 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 12.1 W/kg

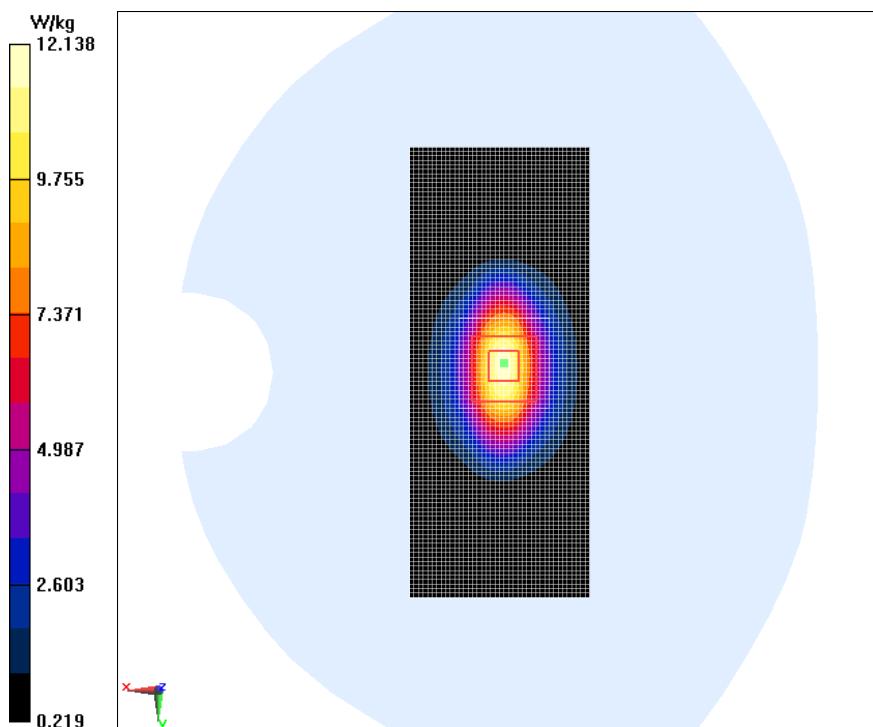

1900MHz Body

Date/Time: 2016/12/31

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 53.259$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

System Validation/Area Scan (60x90x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 14.0 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 88.14 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

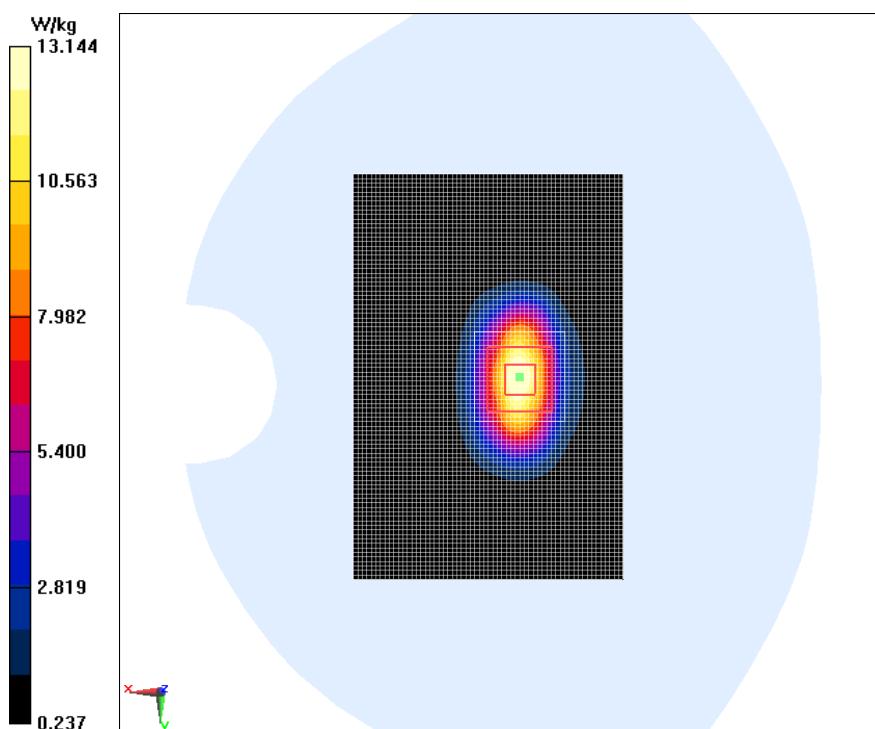

2450MHz Body

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 53.942$; $\rho = 1000$ kg/m³

Ambien Temperature: 22.5° C Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.33, 7.33, 7.33);

System Validation/ Area Scan (100x100x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 22.94 mW/g

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.86 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 28.36 mW/g

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.13 mW/g

Maximum value of SAR (measured) = 19.8 mW/g

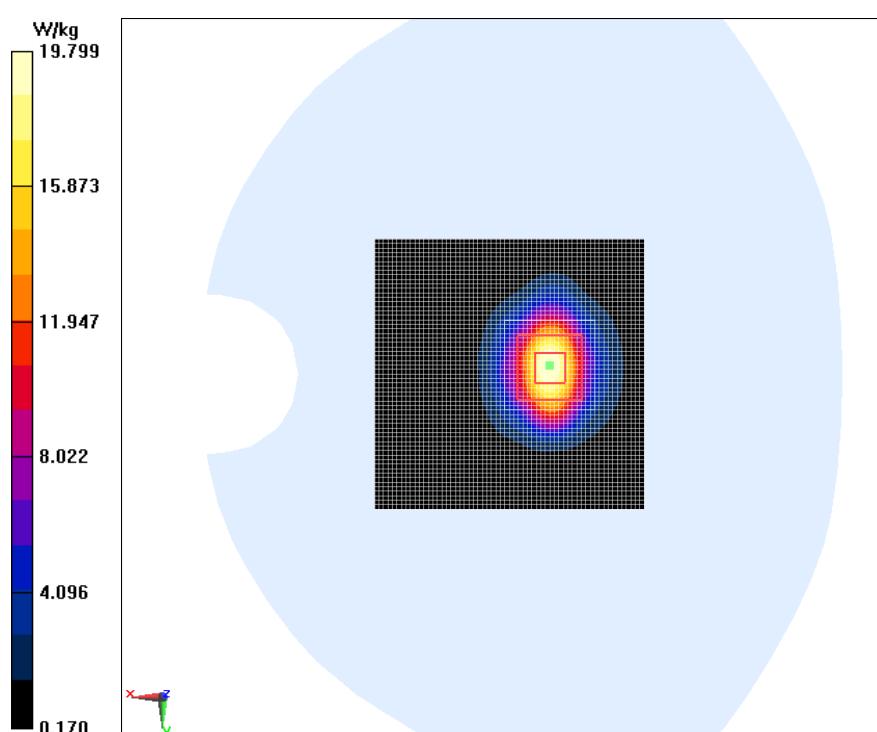

2600MHz Body

Date/Time: 2017/1/2

Electronics: DAE3 Sn360

Medium: Body 2600MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.082$ S/m; $\epsilon_r = 53.623$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.16, 7.16, 7.16);

System Validation/Area Scan (60x70x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 20.5 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 101.2V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.18 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

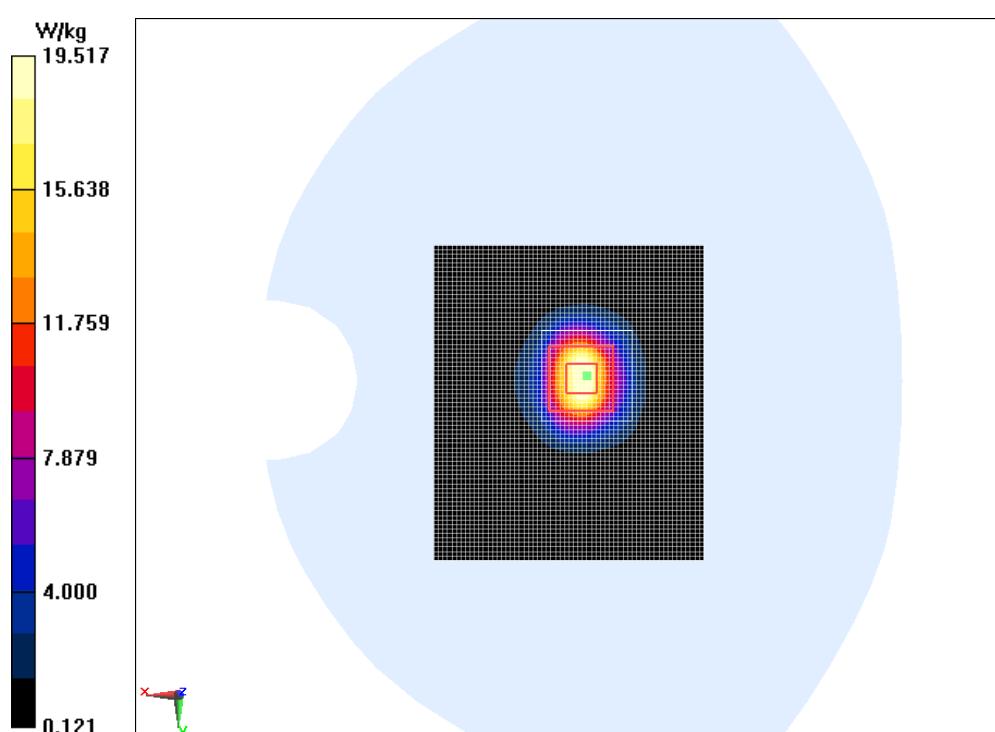

835 MHz

Date/Time: 2017/01/22

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 40.853$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 835MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73);

System Validation /Area Scan (60x120x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.78 W/kg

System Validation /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5 \text{ mm}$, $dy=5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 52.55 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

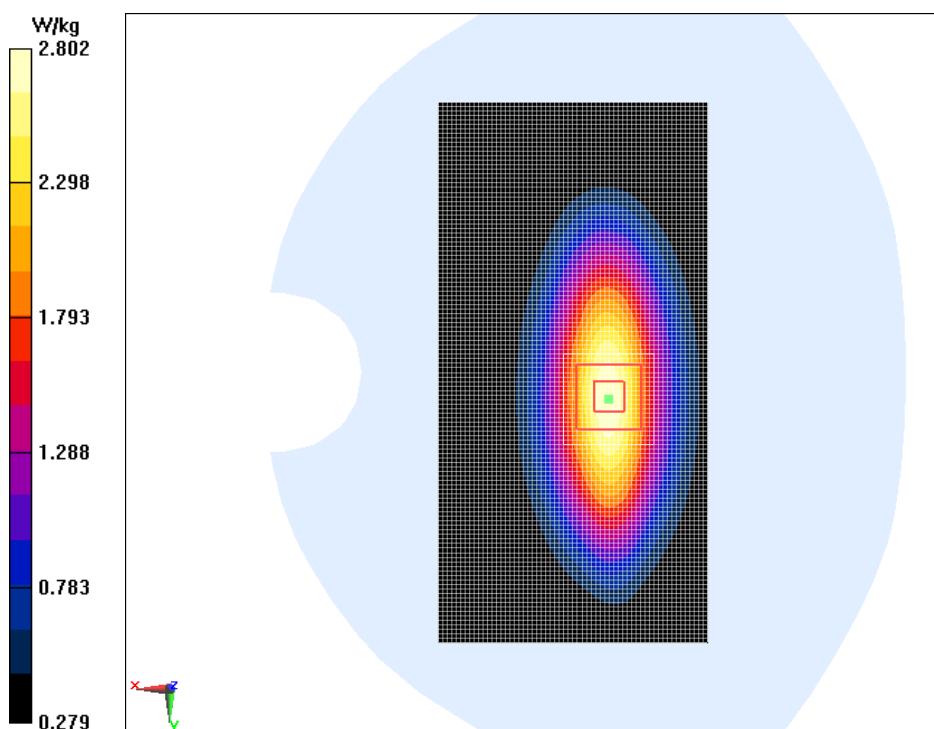

1900MHz

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.814$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.92, 7.92, 7.92);

System check Validation /Area Scan (60x60x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 15.2 W/kg

System check Validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.5 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 9.86 W/kg; SAR(10 g) = 5.12 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

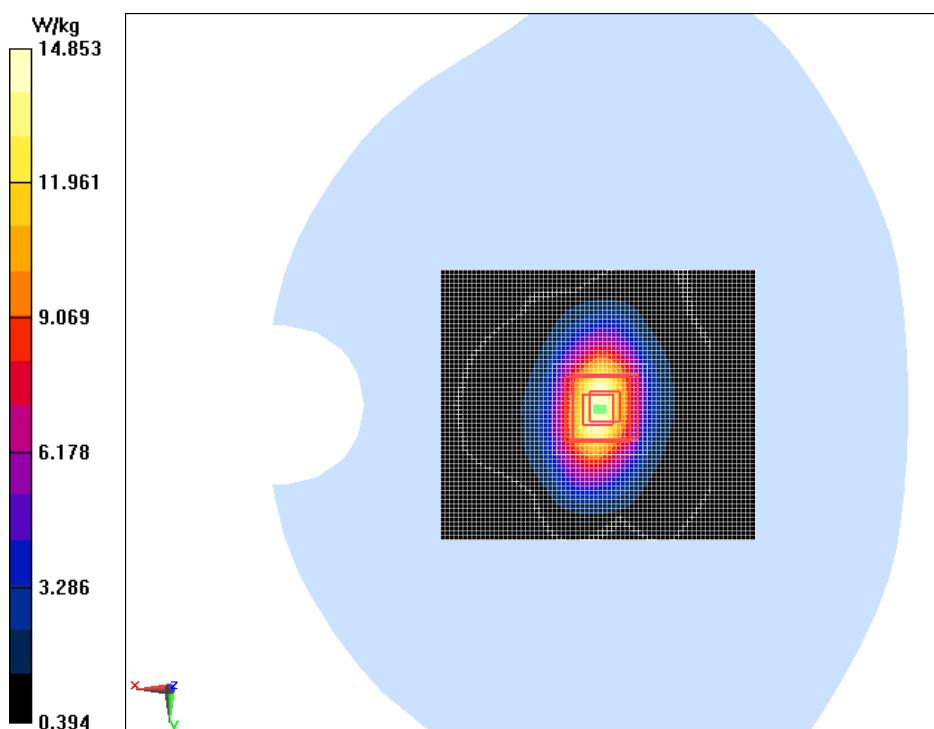

2450MHz

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 39.862$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 2450MHz; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27);

System Validation /Area Scan (40x80x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 21.1 W/kg

System Validation/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.2 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

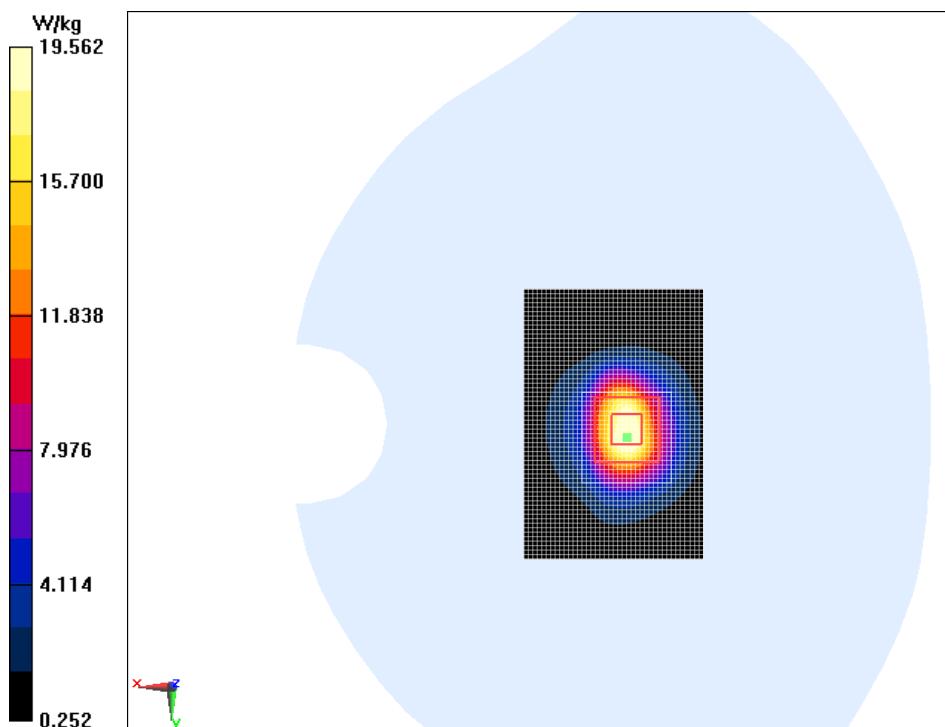

835 MHz Body

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.999 \text{ S/m}$; $\epsilon_r = 55.152$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 850MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

System Validation/Area Scan (60x120x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.78 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5 \text{ mm}$, $dy=5 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 54.16 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

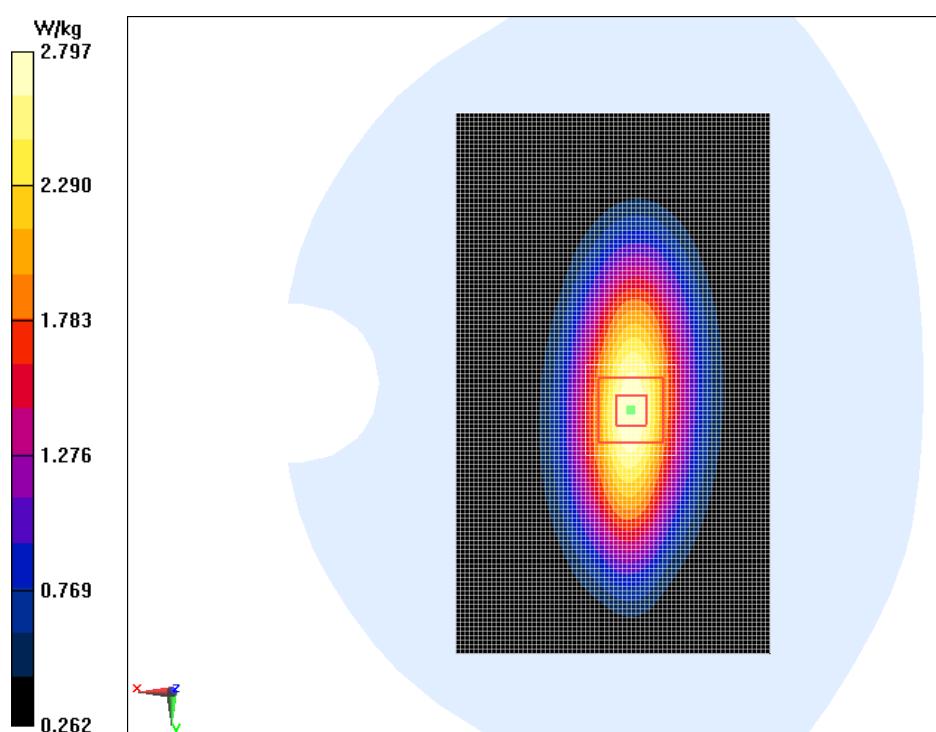

1750MHz Body

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.569$ S/m; $\epsilon_r = 52.814$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

System Validation/Area Scan (40x100x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 11.9 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.13 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.35 W/kg; SAR(10 g) = 5.12 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

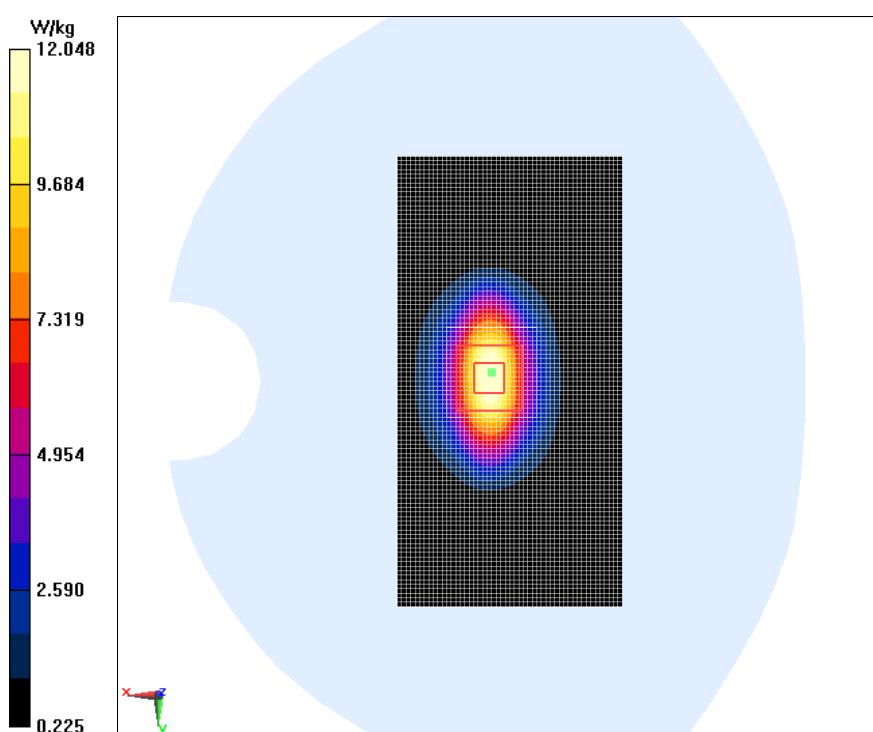

1900MHz Body

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.525$ S/m; $\epsilon_r = 53.313$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

System Validation/Area Scan (60x90x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 13.9 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 88.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.23 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

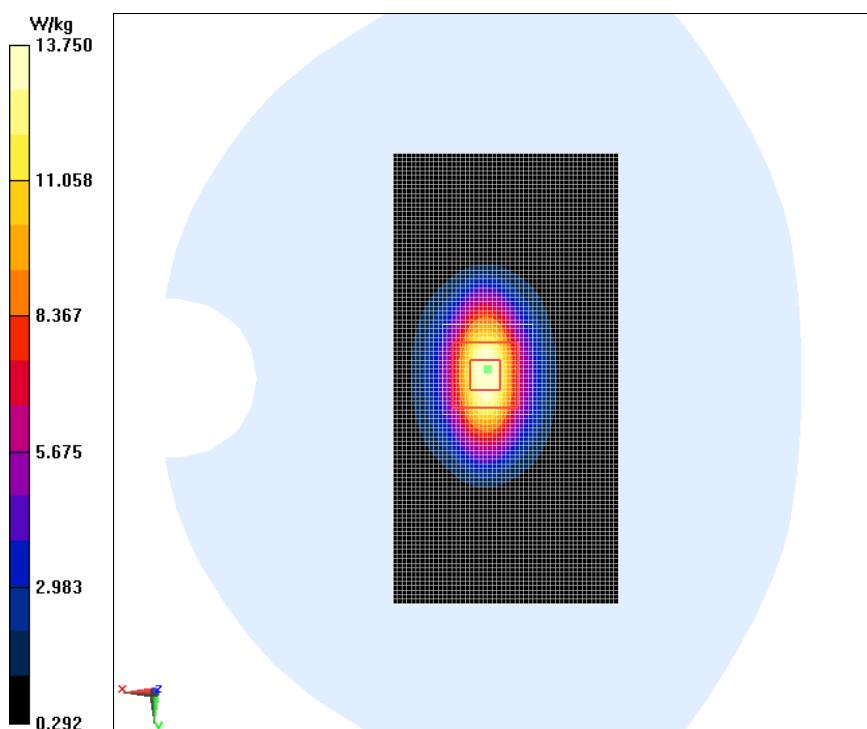

2450MHz Body

Date/Time: 2017/1/23

Electronics: DAE3 Sn360

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 53.848$; $\rho = 1000$ kg/m³

Ambien Temperature: 22.5° C Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.33, 7.33, 7.33);

System Validation/ Area Scan (100x100x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 22.71 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.7 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 28.34 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

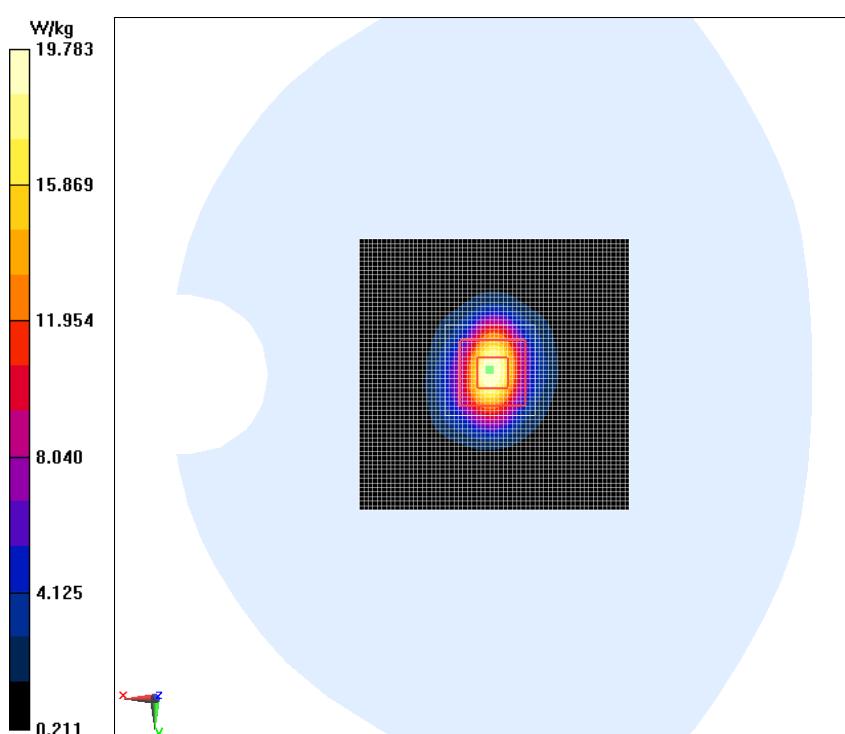

2600MHz Body

Date/Time: 2017/1/22

Electronics: DAE3 Sn360

Medium: Body 2600MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.079$ S/m; $\epsilon_r = 53.687$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.16, 7.16, 7.16);

System Validation/Area Scan (60x70x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 20.7 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.5V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.21 W/kg


Maximum value of SAR (measured) = 20.0 W/kg

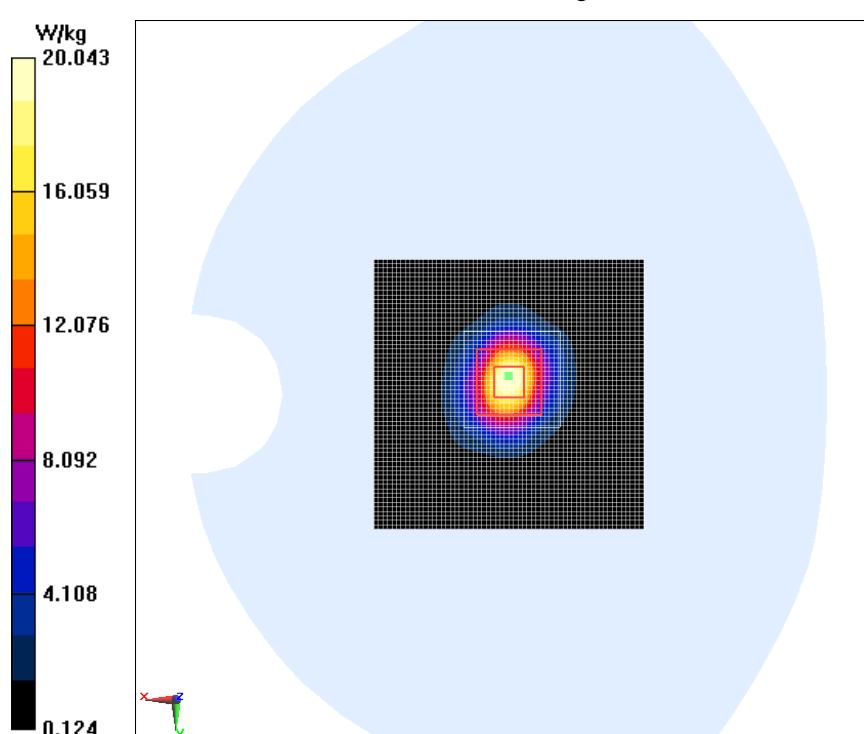

ANNEX C. SAR Measurement Setup

C.1. Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

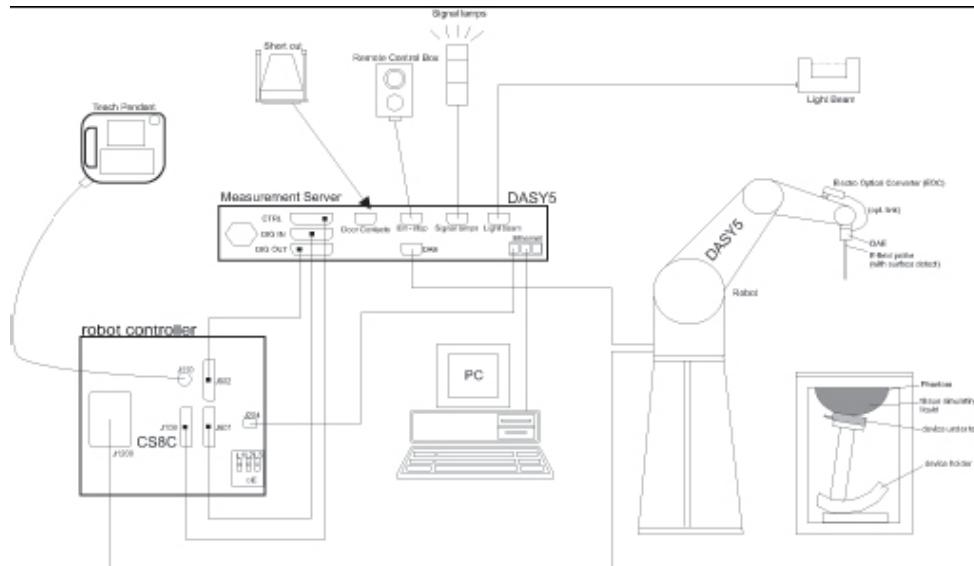

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as

- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model: ES3DV3, EX3DV4

Frequency

Range: 700MHz — 2.6GHz(ES3DV3)

Calibration: In head and body simulating tissue at
Frequencies from 835 up to 2450MHz

Linearity:

± 0.2 dB(700MHz — 2.0GHz) for ES3DV3

Dynamic Range: 10 mW/kg — 100W/kg

Probe Length: 330 mm

Probe Tip

Length: 20 mm

Body Diameter: 12 mm

Tip Diameter: 2.5 mm (3.9 mm for ES3DV3)

Tip-Center: 1 mm (2.0mm for ES3DV3)

Application: SAR Dosimetry Testing

Compliance tests of mobile phones

Dosimetry in strong gradient fields



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4. Other Test Equipment

C.4.1. Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for

commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU broad with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O broad, which is directly connected to the PC/104 bus of the CPU broad.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\varepsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.


<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with

the Twin-SAM and ELI phantoms.



Picture C.7: Device Holder

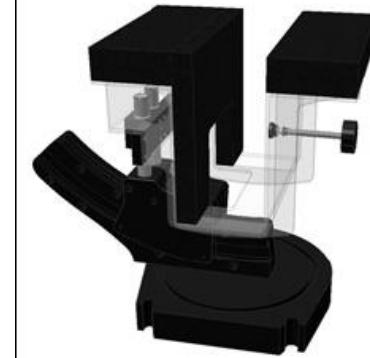

Picture C.8: Laptop Extension Kit

C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.9: SAM Twin Phantom


ANNEX D. Position of the wireless device in relation to the phantom

D.1. General considerations


This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

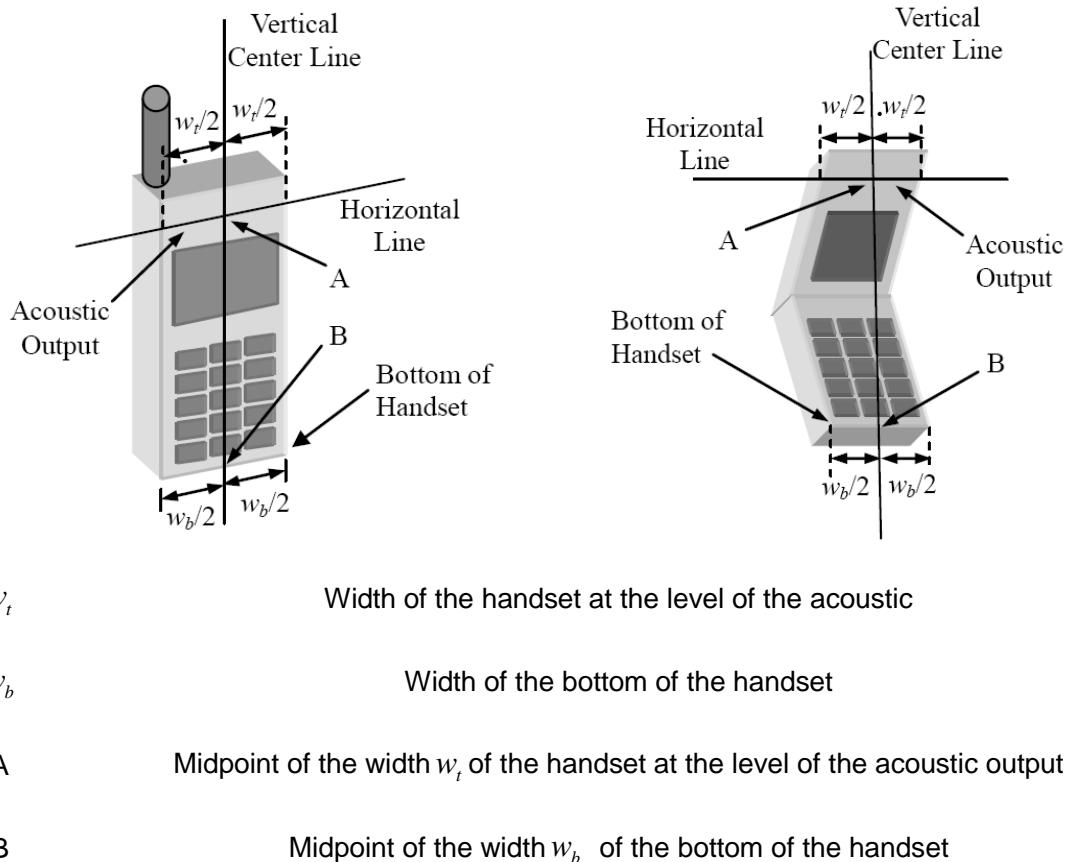

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

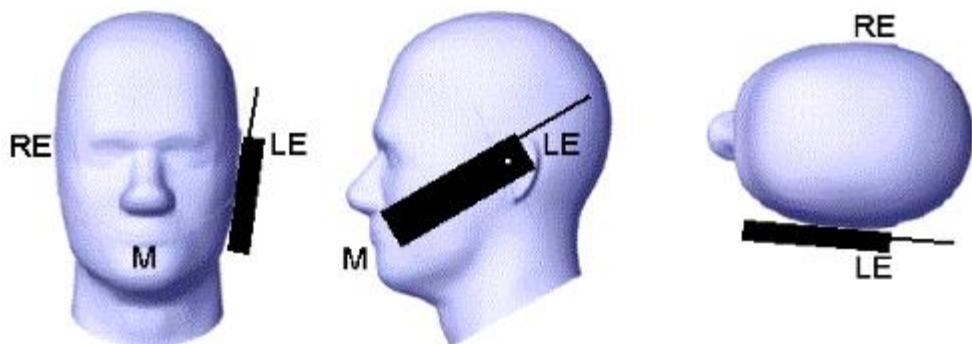


Picture D.2 Cheek position of the wireless device on the left side of SAM

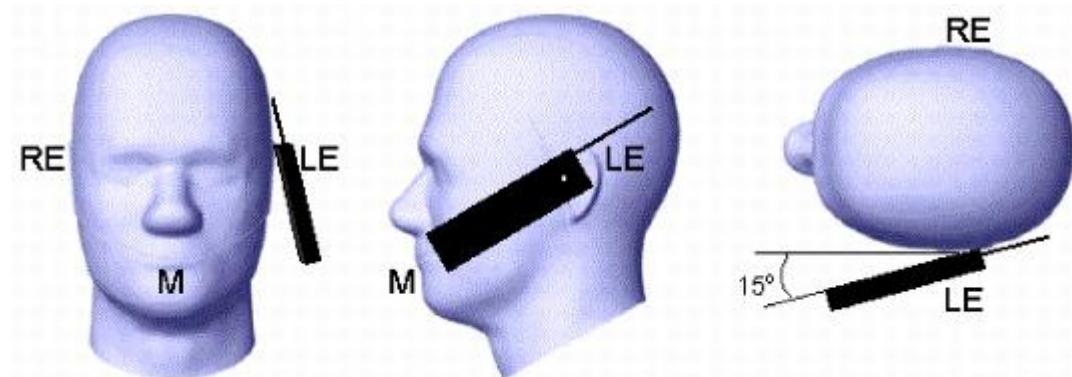

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

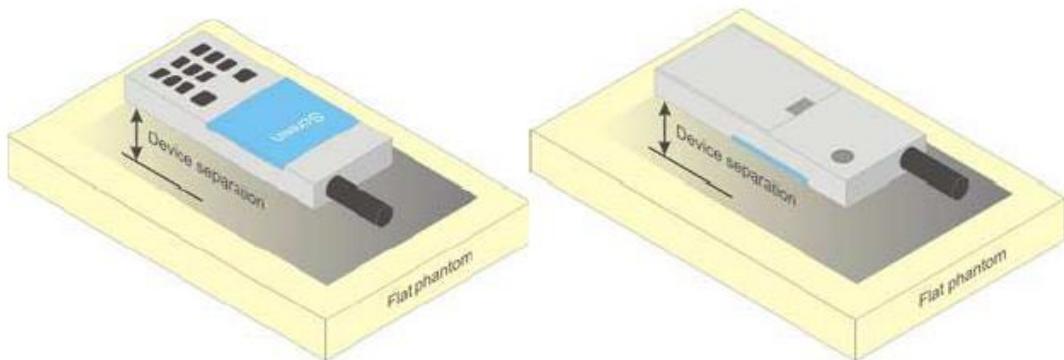


Picture D.4 Test positions for body-worn devices

D.3. Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

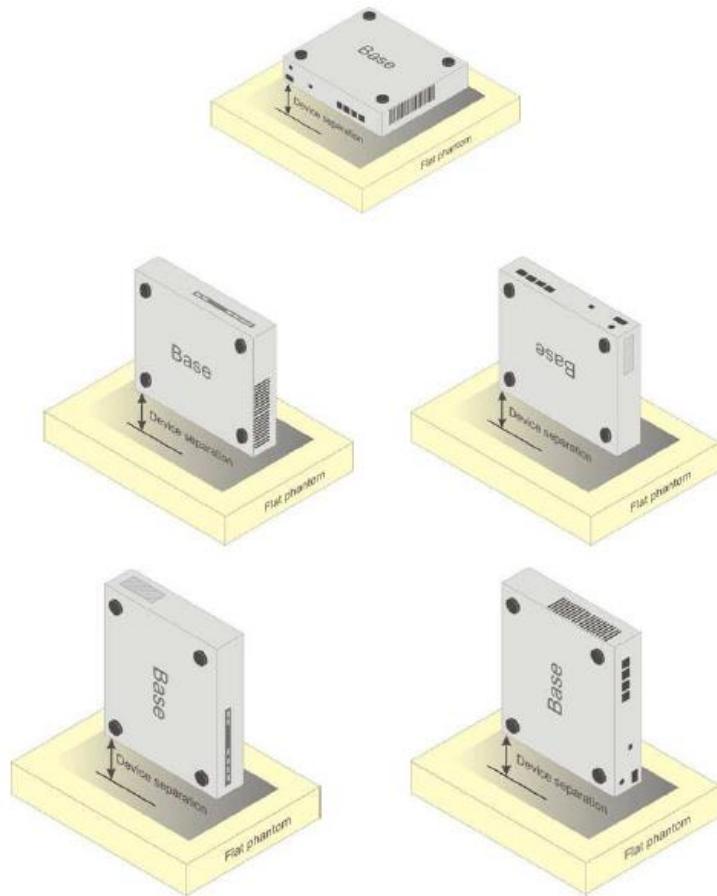

Picture D.5 Test positions for desktop devices

D.4. DUT Setup Photos

Picture D.6 DSY5 system Set-up

Note:

The photos of test sample and test positions show in additional document.

ANNEX E. Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 Head | 835 Body | 1900 Head | 1900 Body | 2450 Head | 2450 Body |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Ingredients (% by weight) | | | | | | |
| Water | 41.45 | 52.5 | 55.242 | 69.91 | 58.79 | 72.60 |
| Sugar | 56.0 | 45.0 | \ | \ | \ | \ |
| Salt | 1.45 | 1.4 | 0.306 | 0.13 | 0.06 | 0.18 |
| Preventol | 0.1 | 0.1 | \ | \ | \ | \ |
| Cellulose | 1.0 | 1.0 | \ | \ | \ | \ |
| Glycol Monobutyl | \ | \ | 44.452 | 29.96 | 41.15 | 27.22 |
| Dielectric Parameters Target Value | $\epsilon=41.5$ $\sigma=0.90$ | $\epsilon=55.2$ $\sigma=0.97$ | $\epsilon=40.0$ $\sigma=1.40$ | $\epsilon=53.3$ $\sigma=1.52$ | $\epsilon=39.2$ $\sigma=1.80$ | $\epsilon=52.7$ $\sigma=1.95$ |

ANNEX F. System Validation

The SAR system must be validated against its performance specifications before it is deployed.

When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.


Table F.1: System Validation Part 1

| System No. | Probe SN. | Liquid name | Validation date | Frequency point | Permittivity ϵ | Conductivity σ (S/m) |
|------------|-----------|--------------|-----------------|-----------------|-------------------------|-----------------------------|
| 1 | 7375 | Head 835MHz | Dec 29, 2016 | 835MHz | 40.942 | 0.925 |
| 2 | 7375 | Head 1750MHz | Dec 30, 2016 | 1750MHz | 38.833 | 1.383 |
| 3 | 7375 | Head 1900MHz | Dec 31, 2016 | 1900MHz | 39.634 | 1.387 |
| 4 | 7375 | Head 2450MHz | Jan 2, 2017 | 2450MHz | 40.083 | 1.801 |
| 5 | 7375 | Head 2600MHz | Jan 2, 2017 | 2600MHz | 38.961 | 1.946 |
| 6 | 7375 | Body 835MHz | Dec 29, 2016 | 835MHz | 55.092 | 1.002 |
| 7 | 7375 | Body 1750MHz | Dec 30, 2016 | 1750MHz | 53.219 | 1.512 |
| 8 | 7375 | Body 1900MHz | Dec 31, 2016 | 1900MHz | 53.259 | 1.527 |
| 9 | 7375 | Body 2450MHz | Jan 2, 2017 | 2450MHz | 53.942 | 1.921 |
| 10 | 7375 | Body 2600MHz | Jan 2, 2017 | 2600MHz | 53.623 | 2.082 |
| 11 | 7375 | Head 835MHz | Jan 22, 2017 | 835MHz | 40.85 | 0.928 |
| 12 | 7375 | Head 1900MHz | Jan 23, 2017 | 1900MHz | 38.81 | 1.424 |
| 13 | 7375 | Head 2450MHz | Jan 23, 2017 | 2450MHz | 39.86 | 1.811 |
| 14 | 7375 | Body 835MHz | Jan 22, 2017 | 835MHz | 55.15 | 0.999 |
| 15 | 7375 | Body 1750MHz | Jan 22, 2017 | 1750MHz | 52.81 | 1.569 |
| 16 | 7375 | Body 1900MHz | Jan 23, 2017 | 1900MHz | 53.31 | 1.525 |
| 17 | 7375 | Body 2450MHz | Jan 23, 2017 | 2450MHz | 53.85 | 1.924 |
| 18 | 7375 | Body 2600MHz | Jan 22, 2017 | 2600MHz | 53.69 | 2.079 |

Table F.2: System Validation Part 2

| | | | |
|-------------------|-----------------|------|------|
| CW Validation | Sensitivity | PASS | PASS |
| | Probe linearity | PASS | PASS |
| | Probe Isotropy | PASS | PASS |
| Mod Validation | MOD.type | GMSK | GMSK |
| | MOD.type | OFDM | OFDM |
| | Duty factor | PASS | PASS |
| | PAR | PASS | PASS |

ANNEX G. Probe and DAE Calibration Certificate

| | | | |
|---|--|--|--|
|  In Collaboration with s p e a g CALIBRATION LABORATORY | | Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209 E-mail: ctl@chinattl.com Http://www.chinattl.cn |   中国认可 国际互认 校准 CALIBRATION CNAS L0570 |
| Client : Auden | | Certificate No: Z16-97204 | |
| CALIBRATION CERTIFICATE | | | |
| Object | DAE3 - SN: 360 | | |
| Calibration Procedure(s) | FD-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx) | | |
| Calibration date: | November 08, 2016 | | |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. | | | |
| All calibrations have been conducted in the closed laboratory facility: environment temperature(22 ± 3)°C and humidity<70%. | | | |
| Calibration Equipment used (M&TE critical for calibration) | | | |
| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Process Calibrator 753 | 1971018 | 27-June-16 (CTTL, No:J16X04778) | June-17 |
| Calibrated by: | Name | Function | Signature |
| | Yu Zongying | SAR Test Engineer |  |
| Reviewed by: | Qi Dianyuan | SAR Project Leader |  |
| Approved by: | Lu Bingsong | Deputy Director of the laboratory |  |
| Issued: November 09, 2016 | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |
| Certificate No: Z16-97204 | | Page 1 of 3 | |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|------------------------------------|------------------------------------|------------------------------------|
| High Range | $404.141 \pm 0.15\% \text{ (k=2)}$ | $404.039 \pm 0.15\% \text{ (k=2)}$ | $404.054 \pm 0.15\% \text{ (k=2)}$ |
| Low Range | $3.93503 \pm 0.7\% \text{ (k=2)}$ | $3.93694 \pm 0.7\% \text{ (k=2)}$ | $3.97213 \pm 0.7\% \text{ (k=2)}$ |

Connector Angle

| | |
|---|--------------------------|
| Connector Angle to be used in DASY system | $37.5^\circ \pm 1^\circ$ |
|---|--------------------------|

Certificate No: Z16-97204

Page 3 of 3



In Collaboration with

s p e a g
CALIBRATION LABORATORYAdd: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client

Auden

Certificate No: Z16-97206

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:7375

Calibration Procedure(s) FD-Z11-004-01
Calibration Procedures for Dosimetric E-field Probes




Calibration date: December 08, 2016

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|-------------|--|-----------------------|
| Power Meter NRP2 | 101919 | 27-Jun-16 (CTTL, No.J16X04777) | Jun-17 |
| Power sensor NRP-Z91 | 101547 | 27-Jun-16 (CTTL, No.J16X04777) | Jun-17 |
| Power sensor NRP-Z91 | 101548 | 27-Jun-16 (CTTL, No.J16X04777) | Jun-17 |
| Reference10dBAttenuator | 18N50W-10dB | 13-Mar-16(CTTL, No.J16X01547) | Mar-18 |
| Reference20dBAttenuator | 18N50W-20dB | 13-Mar-16(CTTL, No.J16X01548) | Mar-18 |
| Reference Probe EX3DV4 | SN 7307 | 19-Feb-16(SPEAG, No.EX3-7307_Feb16) | Feb-17 |
| DAE4 | SN 1331 | 21-Jan-16(SPEAG, No.DAE4-1331_Jan16) | Jan -17 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGeneratorMG3700A | 6201052605 | 27-Jun-16 (CTTL, No.J16X04776) | Jun-17 |
| Network Analyzer E5071C | MY46110673 | 26-Jan-16 (CTTL, No.J16X00894) | Jan -17 |

| Calibrated by: | Name | Function | Signature |
|----------------|-------------|-----------------------------------|---|
| | Yu Zongying | SAR Test Engineer |  |
| Reviewed by: | Qi Dianyuan | SAR Project Leader |  |
| Approved by: | Lu Bingsong | Deputy Director of the laboratory |  |

Issued: December 09, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z16-97206

Page 1 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

| | |
|-----------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A,B,C,D | modulation dependent linearization parameters |
| Polarization Φ | Φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f \geq 1800$ MHz: waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(x,y,z) = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $A_{x,y,z}$; $B_{x,y,z}$; $C_{x,y,z}$; $VR_{x,y,z}$; A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the $NORM_{x,y,z}$ (no uncertainty required).

Certificate No: Z16-97206

Page 2 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Probe EX3DV4

SN: 7375


Calibrated: December 08, 2016

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: Z16-97206

Page 3 of 11



Add: No 51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7375**Basic Calibration Parameters**

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-------------|
| Norm(μ V/(V/m) ²) ^A | 0.52 | 0.42 | 0.46 | \pm 10.8% |
| DCP(mV) ^B | 99.7 | 98.3 | 100.7 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB/ μ V | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|------|---------------|-----|------|-------|------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 195.6 | \pm 2.4% |
| | | Y | 0.0 | 0.0 | 1.0 | | 177.1 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 187.8 | |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Certificate No: Z16-97206

Page 4 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ettl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7375**Calibration Parameter Determined in Head Tissue Simulating Media**

| f [MHz] ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 9.90 | 9.90 | 9.90 | 0.40 | 0.75 | ± 12% |
| 835 | 41.5 | 0.90 | 9.73 | 9.73 | 9.73 | 0.15 | 1.41 | ± 12% |
| 900 | 41.5 | 0.97 | 9.78 | 9.78 | 9.78 | 0.15 | 1.43 | ± 12% |
| 1750 | 40.1 | 1.37 | 8.31 | 8.31 | 8.31 | 0.30 | 0.95 | ± 12% |
| 1900 | 40.0 | 1.40 | 7.92 | 7.92 | 7.92 | 0.25 | 1.04 | ± 12% |
| 2000 | 40.0 | 1.40 | 7.99 | 7.99 | 7.99 | 0.26 | 1.04 | ± 12% |
| 2100 | 39.8 | 1.49 | 8.30 | 8.30 | 8.30 | 0.32 | 0.92 | ± 12% |
| 2300 | 39.5 | 1.67 | 7.57 | 7.57 | 7.57 | 0.32 | 1.02 | ± 12% |
| 2450 | 39.2 | 1.80 | 7.27 | 7.27 | 7.27 | 0.38 | 1.01 | ± 12% |
| 2600 | 39.0 | 1.96 | 7.25 | 7.25 | 7.25 | 0.49 | 0.81 | ± 12% |
| 3500 | 37.9 | 2.91 | 7.01 | 7.01 | 7.01 | 0.38 | 1.22 | ± 13% |
| 5200 | 36.0 | 4.66 | 5.58 | 5.58 | 5.58 | 0.36 | 1.55 | ± 13% |
| 5300 | 35.9 | 4.76 | 5.31 | 5.31 | 5.31 | 0.36 | 1.55 | ± 13% |
| 5500 | 35.6 | 4.96 | 5.09 | 5.09 | 5.09 | 0.36 | 1.55 | ± 13% |
| 5600 | 35.5 | 5.07 | 4.79 | 4.79 | 4.79 | 0.36 | 1.68 | ± 13% |
| 5800 | 35.3 | 5.27 | 4.78 | 4.78 | 4.78 | 0.40 | 1.65 | ± 13% |

^c Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Page 5 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.com>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7375**Calibration Parameter Determined in Body Tissue Simulating Media**

| f [MHz] ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 9.94 | 9.94 | 9.94 | 0.30 | 0.85 | ± 12% |
| 835 | 55.2 | 0.97 | 9.94 | 9.94 | 9.94 | 0.15 | 1.50 | ± 12% |
| 900 | 55.0 | 1.05 | 9.89 | 9.89 | 9.89 | 0.21 | 1.22 | ± 12% |
| 1750 | 53.4 | 1.49 | 8.22 | 8.22 | 8.22 | 0.23 | 1.12 | ± 12% |
| 1900 | 53.3 | 1.52 | 7.62 | 7.62 | 7.62 | 0.19 | 1.24 | ± 12% |
| 2000 | 53.3 | 1.52 | 7.90 | 7.90 | 7.90 | 0.16 | 1.62 | ± 12% |
| 2100 | 53.2 | 1.62 | 8.17 | 8.17 | 8.17 | 0.17 | 1.75 | ± 12% |
| 2300 | 52.9 | 1.81 | 7.43 | 7.43 | 7.43 | 0.45 | 0.95 | ± 12% |
| 2450 | 52.7 | 1.95 | 7.33 | 7.33 | 7.33 | 0.33 | 1.22 | ± 12% |
| 2600 | 52.5 | 2.16 | 7.16 | 7.16 | 7.16 | 0.48 | 0.92 | ± 12% |
| 3500 | 51.3 | 3.31 | 6.52 | 6.52 | 6.52 | 0.44 | 1.33 | ± 13% |
| 5200 | 49.0 | 5.30 | 4.82 | 4.82 | 4.82 | 0.45 | 1.50 | ± 13% |
| 5300 | 48.9 | 5.42 | 4.57 | 4.57 | 4.57 | 0.45 | 1.50 | ± 13% |
| 5500 | 48.6 | 5.65 | 4.20 | 4.20 | 4.20 | 0.48 | 1.60 | ± 13% |
| 5600 | 48.5 | 5.77 | 3.99 | 3.99 | 3.99 | 0.50 | 1.65 | ± 13% |
| 5800 | 48.2 | 6.00 | 4.08 | 4.08 | 4.08 | 0.55 | 1.95 | ± 13% |

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Certificate No: Z16-97206

Page 6 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

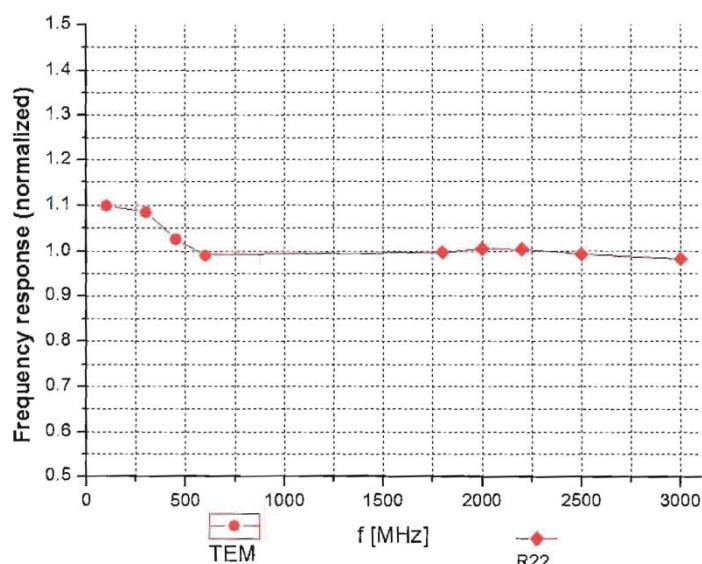

Uncertainty of Frequency Response of E-field: $\pm 7.5\%$ ($k=2$)

Certificate No: Z16-97206


Page 7 of 11



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.cn <http://www.chinattl.cn>

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

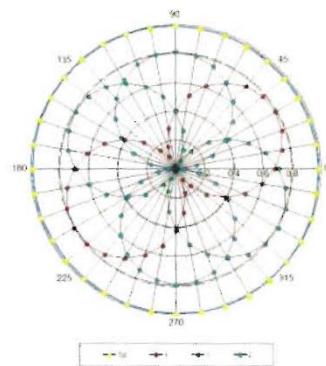

f=1800 MHz, R22

