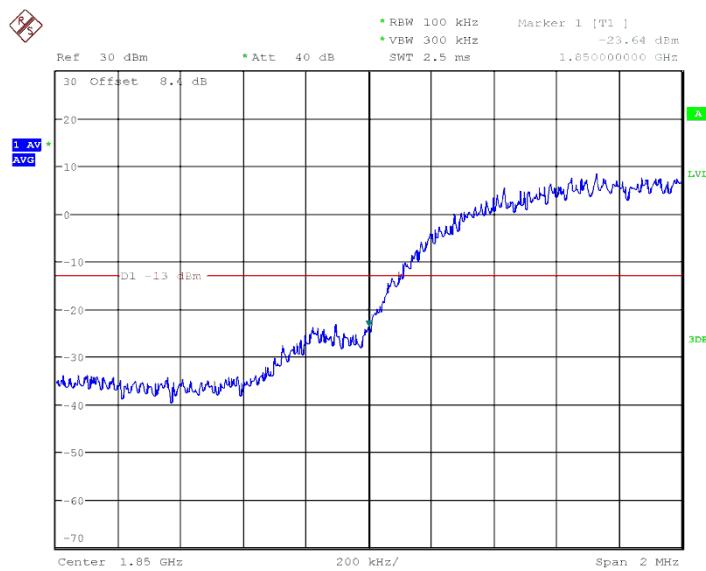
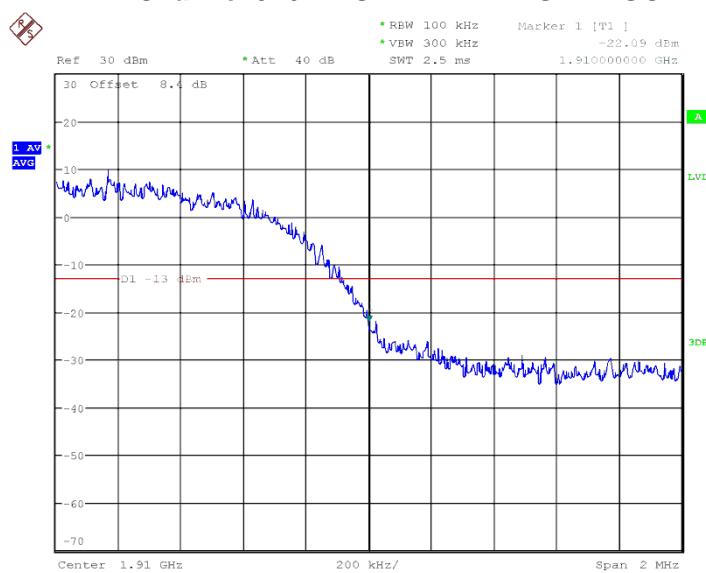



WCDMA BAND II


Date: 27.FEB.2018 05:07:03

Channel 9262- LOW BAND EDGE BLOCK


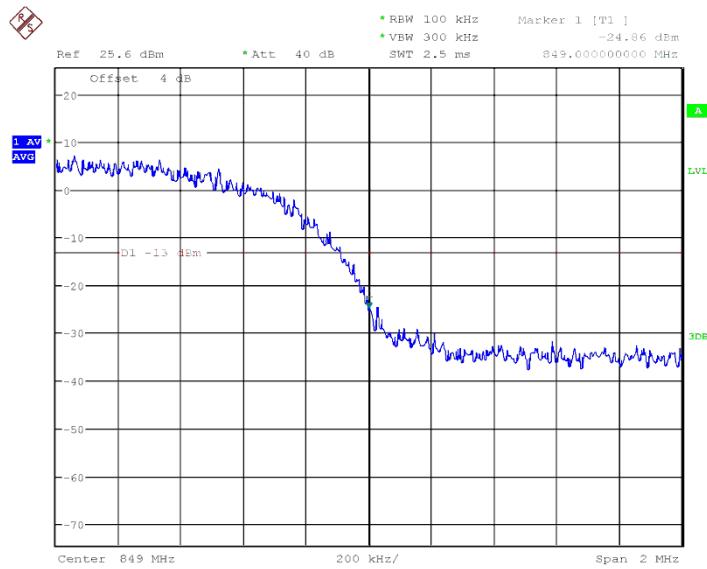
Date: 27.FEB.2018 05:07:41

Channel 9538- HIGH BAND EDGE BLOCK
Conclusion: PASS
WCDMA BAND IV

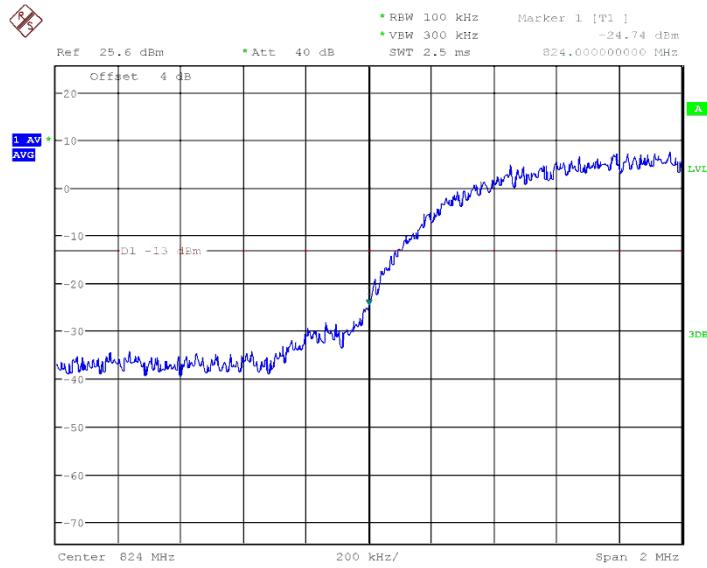

Date: 27.FEB.2018 05:08:42


Channel 1312- LOW BAND EDGE BLOCK



Date: 27.FEB.2018 05:09:05


Channel 1513- HIGH BAND EDGE BLOCK

Conclusion: PASS
WCDMA BAND V

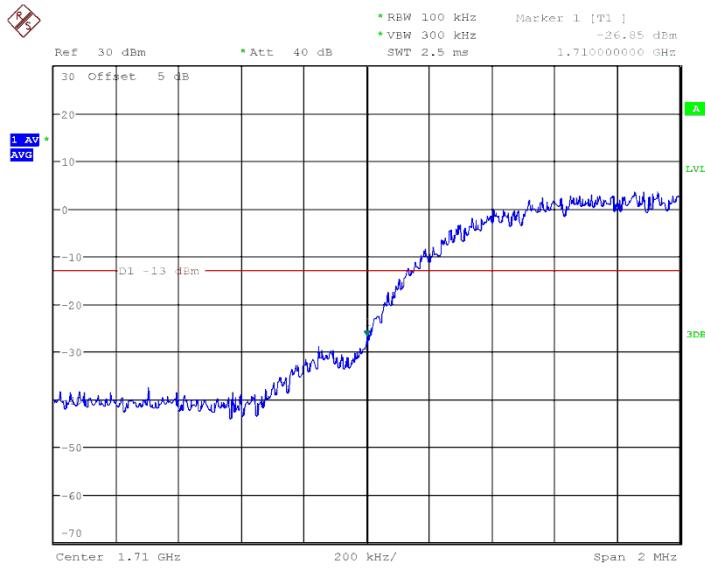

Date: 27.FEB.2018 05:10:57

Channel 4132- LOW BAND EDGE BLOCK

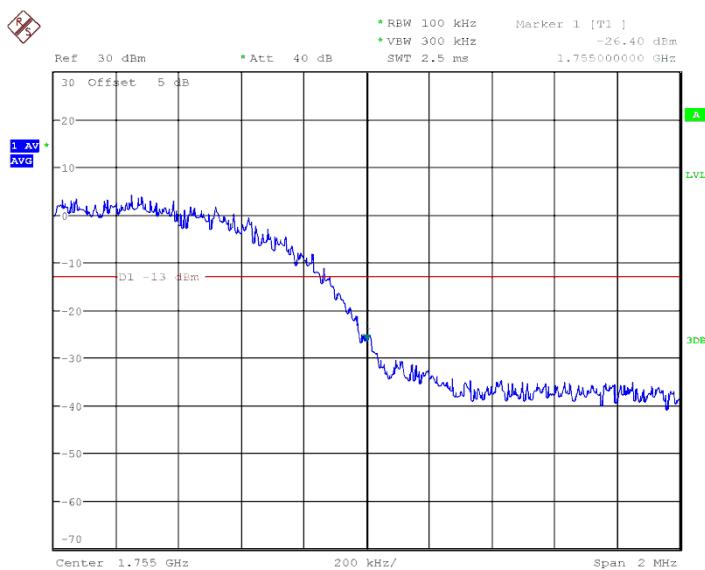

Date: 27.FEB.2018 05:12:41

Channel 4233- HIGH BAND EDGE BLOCK

Conclusion: PASS

ANNEX A.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 D01 v03 clause 9

A.5.1. Method of Measurement and test procedures

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.5.2. Measurement Limit

A.5.2.1. For Hand carried battery powered equipment

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.

A.5.2.2. For equipment powered by primary supply voltage

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.5.3 Test results**GSM850Mid Channel/fc(MHz) 189/836.4****Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	26.09	2091
3.8	-20	24.6	2091
3.8	-10	25.57	2091
3.8	0	24.41	2091
3.8	10	23.31	2091
3.8	20	23.7	2091
3.8	30	26.6	2091
3.8	40	27.51	2091
3.8	50	23.7	2091

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.5	25	23.44	2091
3.8	25	23.25	2091
4.35	25	22.47	2091

PCS1900 Mid Channel/fc(MHz) 661/1880**Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	55.53	4700
3.8	-20	55.92	4700
3.8	-10	57.02	4700
3.8	0	57.02	4700
3.8	10	57.6	4700
3.8	20	60.83	4700
3.8	30	57.86	4700
3.8	40	55.85	4700
3.8	50	55.27	4700

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.5	25	55.85	4700
3.8	25	60.96	4700
4.35	25	55.85	4700

WCDMA BAND II Mid Channel/fc(MHz) 9400 /1880**Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-14.54	4700
3.8	-20	-15.75	4700
3.8	-10	-15.05	4700
3.8	0	-19.42	4700
3.8	10	-14.53	4700
3.8	20	-17.21	4700
3.8	30	-11.17	4700
3.8	40	-11.54	4700
3.8	50	-13.31	4700

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.5	25	-13.61	4700
3.8	25	-15.59	4700
4.35	25	-12.44	4700

WCDMA BAND IV Mid Channel/fc(MHz) 1413/1732.6**Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-13.32	4331.5
3.8	-20	-13.42	4331.5
3.8	-10	-14.09	4331.5
3.8	0	-12.09	4331.5
3.8	10	-13.22	4331.5
3.8	20	-15.79	4331.5
3.8	30	-12.32	4331.5
3.8	40	-12.46	4331.5
3.8	50	-15.09	4331.5

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.5	25	-12.88	4331.5
3.8	25	-13.99	4331.5
4.35	25	-13.45	4331.5

WCDMA BAND V Mid Channel/fc(MHz) 4183/836.6**Frequency Error VS Temperature**

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.8	-30	-14.57	2091.5
3.8	-20	-13.4	2091.5
3.8	-10	-13.52	2091.5
3.8	0	-14.01	2091.5
3.8	10	-14.33	2091.5
3.8	20	-14.08	2091.5
3.8	30	-15.96	2091.5

3.8	40	-14.25	2091.5
3.8	50	-5.48	2091.5

Frequency Error VS Voltage

Power Supply (VDc)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.5	25	-10.47	2091.5
3.8	25	-11.6	2091.5
4.35	25	-12.86	2091.5

Conclusion: PASS

ANNEX A.7. CONDUCTED SPURIOUS EMISSION**A.7.1. GSM Measurement Method and test procedures**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM 850 Transmitter

Channel	Frequency(MHz)
128	824.2
189	836.4
251	848.8

PCS 1900 Transmitter

Channel	Frequency(MHz)
512	1850.2
661	1880.0
810	1909.8

A.7.1.1. Measurement Limit

Part 24.238, Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A7.1.2. Measurement result

Spurious emission limit -13dBm.


Note: peak above the limit line is the carrier frequency.

A7.1.2.1. GSM850

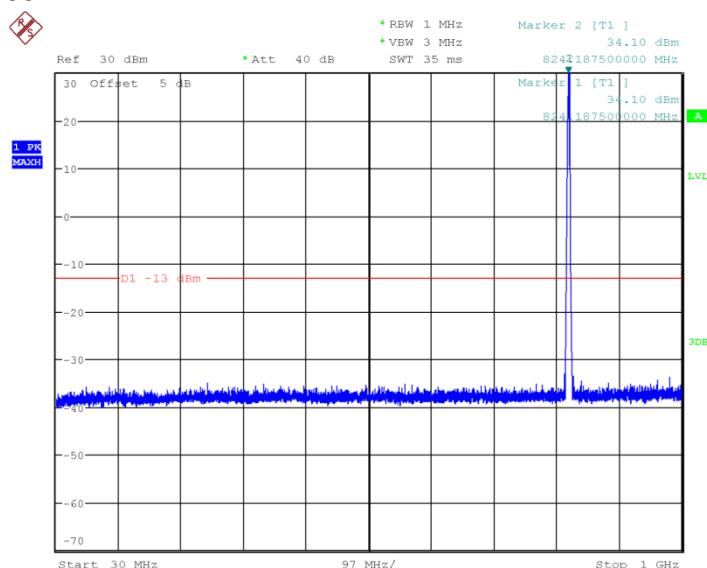


Date: 5.FEB.2018 09:31:33

Channel 128: 30MHz~1GHz

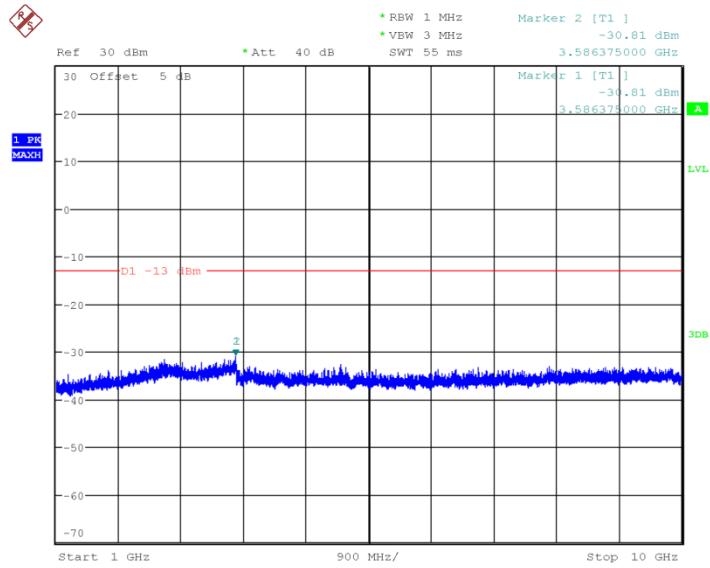


Date: 5.FEB.2018 09:31:55

Channel 128: 1GHz~10GHz

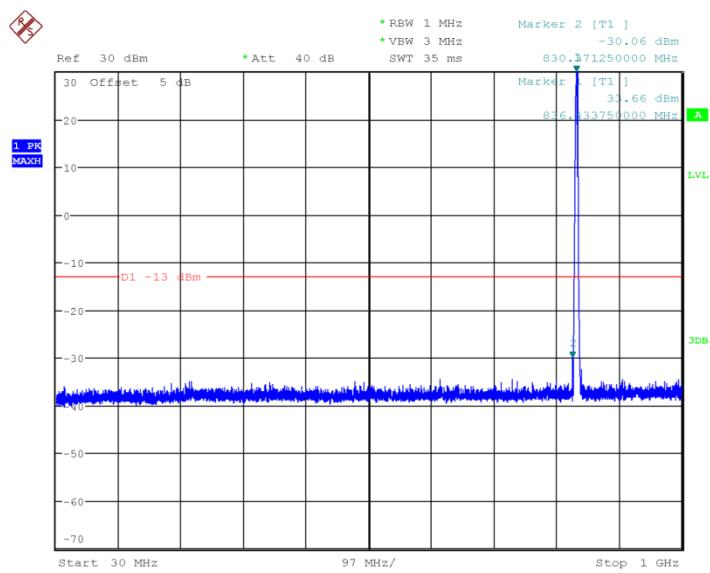


Date: 5.FEB.2018 09:30:30

Channel 189: 30MHz~1GHz

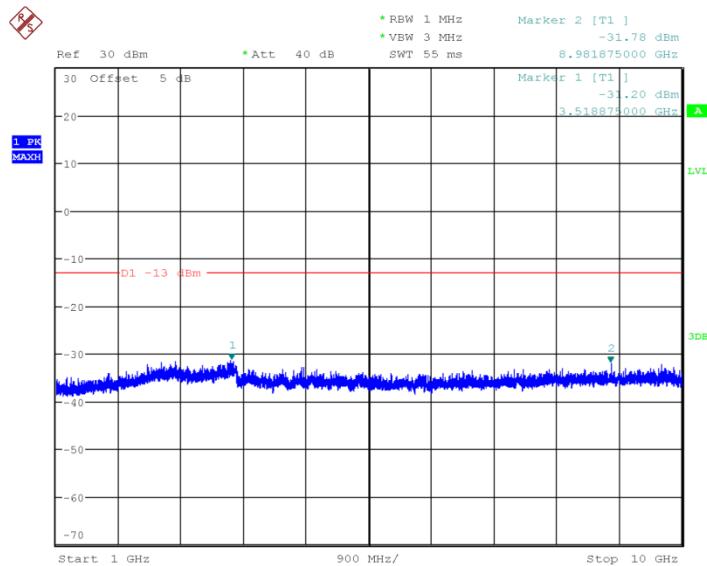


Date: 5.FEB.2018 09:30:53

Channel 189: 1GHz~10GHz

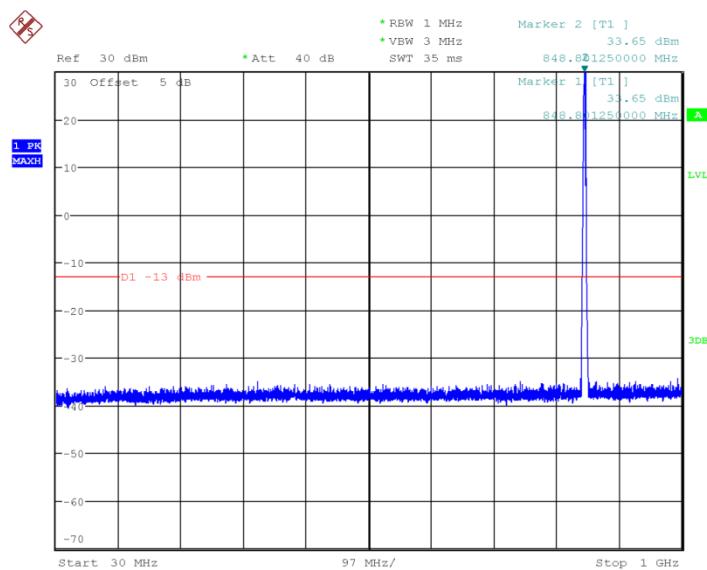

Date: 5.FEB.2018 09:32:35


Channel 251: 30MHz~1GHz

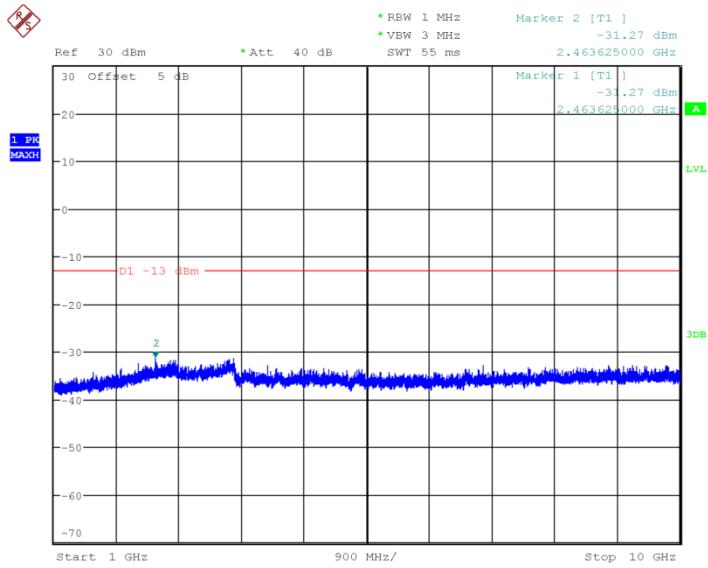

Date: 5.FEB.2018 09:32:58


Channel 251: 1GHz~10GHz

A7.1.2.2. GSM1900

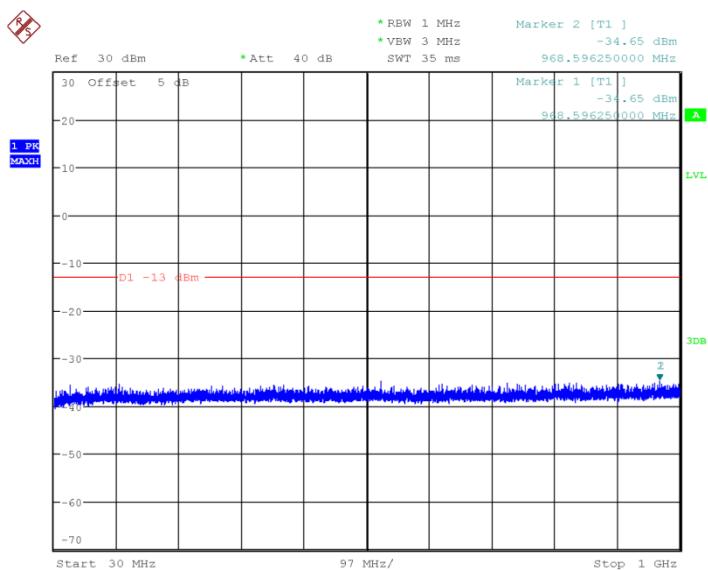


Date: 5.FEB.2018 09:42:09

Channel 512: 30MHz~1GHz

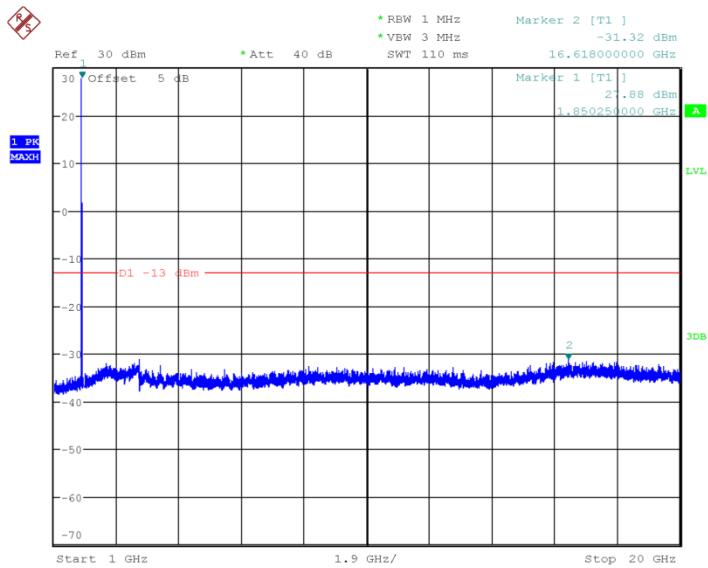


Date: 5.FEB.2018 09:42:31

Channel 512: 1GHz~20GHz

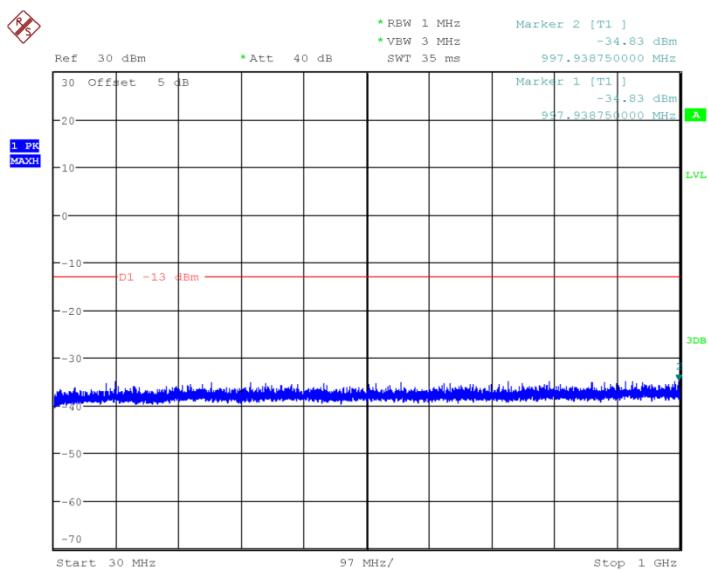


Date: 5.FEB.2018 09:41:06

Channel 661: 30MHz~1GHz

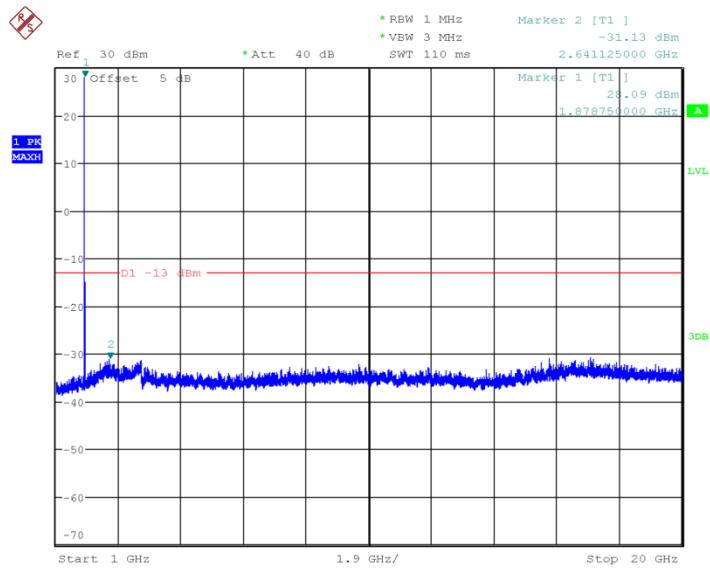


Date: 5.FEB.2018 09:41:29

Channel 661: 1GHz~20GHz

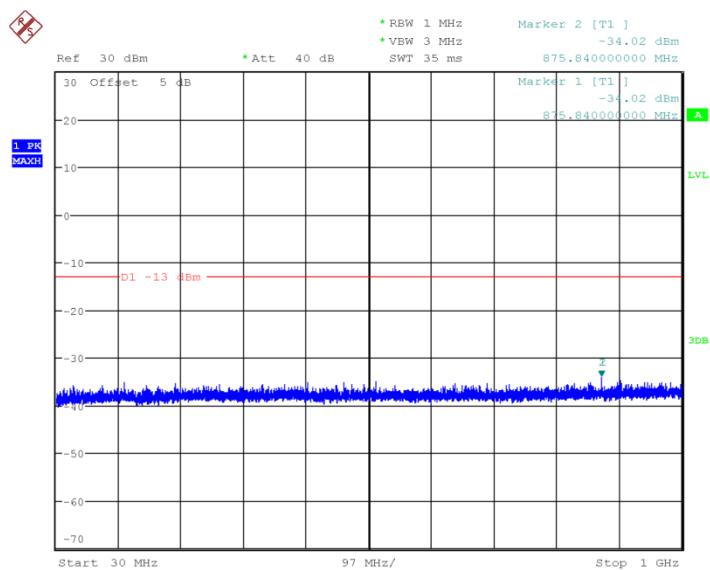

Date: 5.FEB.2018 09:43:11

Channel 810: 30MHz~1GHz

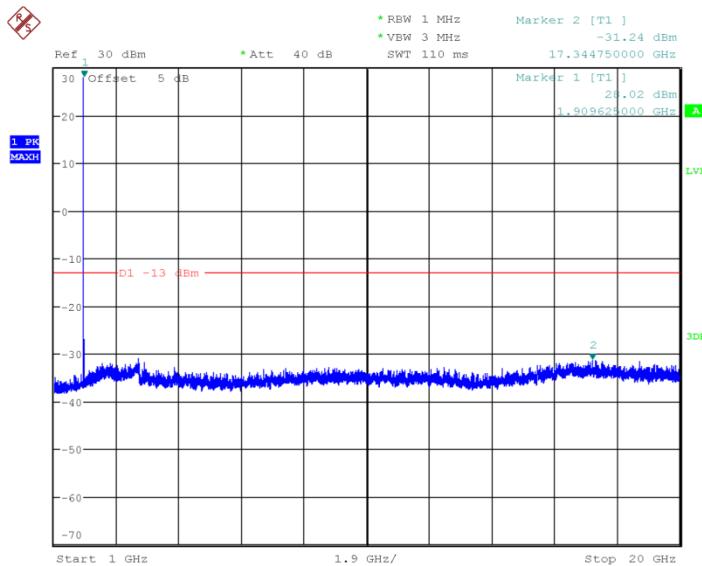

Date: 5.FEB.2018 09:43:34

Channel 810: 1GHz~20GHz

Conclusion: PASS

A7.2. WCDMA Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:

The trace mode is set to MaxHold to get the highest signal at each frequency;

Wait 25 seconds;

Get the result.

4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00

9538	1907.60
------	---------

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1413	1732.60
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A 7.2.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A 7.2.2. Measurement result

Spurious emission limit -13dBm.


Note: peak above the limit line is the carrier frequency.

A 7.2.2.1. WCDMA Band II

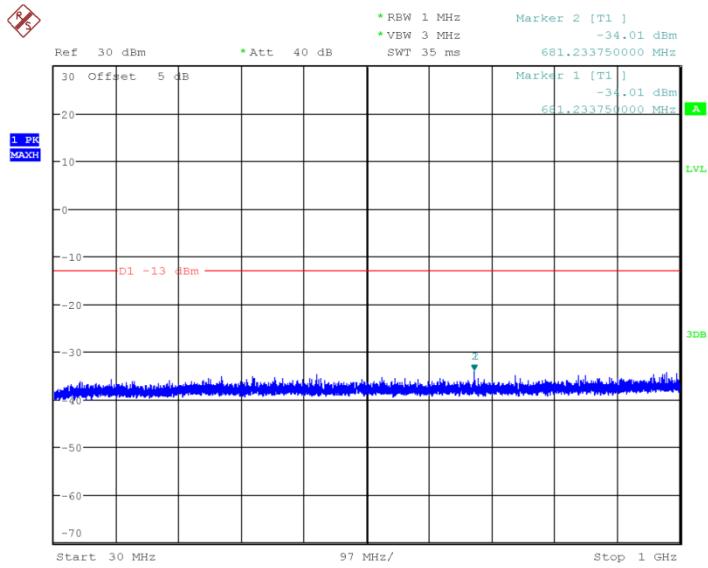


Date: 5.FEB.2018 10:22:27

Channel 9262: 30MHz~1GHz

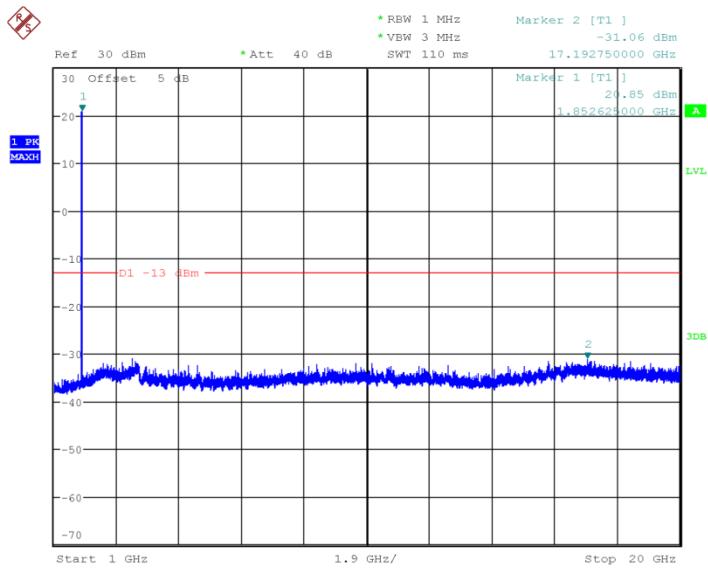


Date: 5.FEB.2018 10:22:50

Channel 9262:1GHz~20GHz

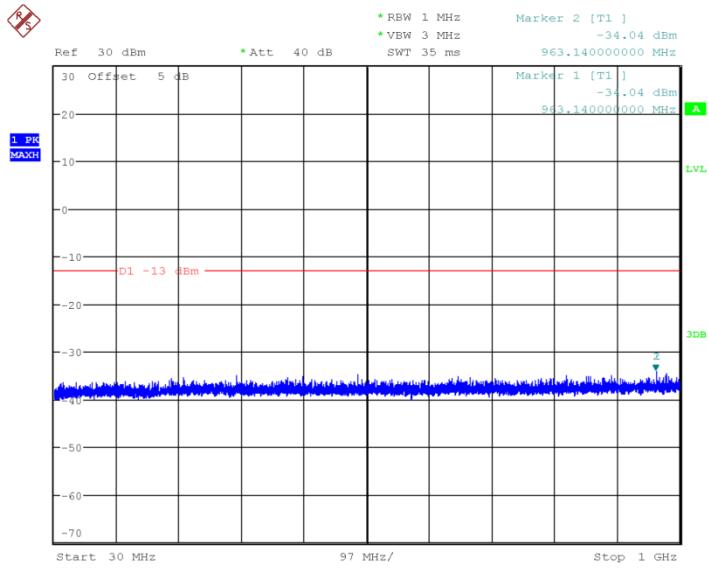


Date: 5.FEB.2018 10:21:20

Channel 9400: 30MHz~1GHz

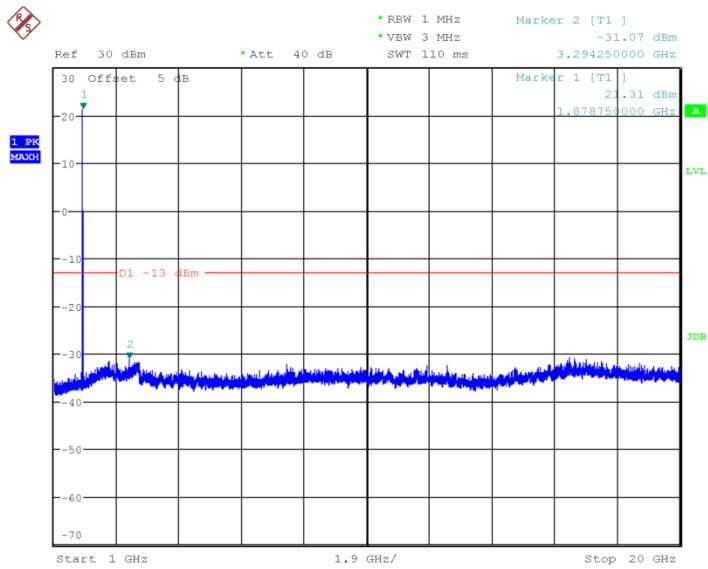


Date: 5.FEB.2018 10:21:43

Channel 9400:1GHz~20GHz

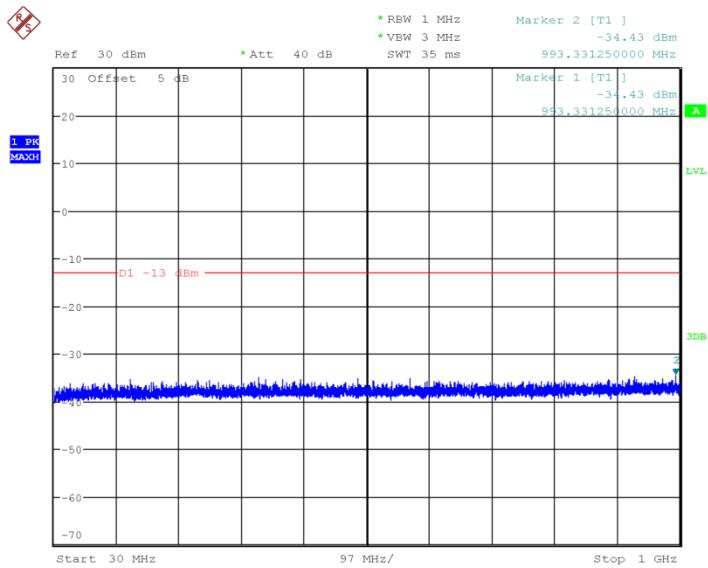

Date: 5.FEB.2018 10:23:34

Channel 9538: 30MHz~1GHz

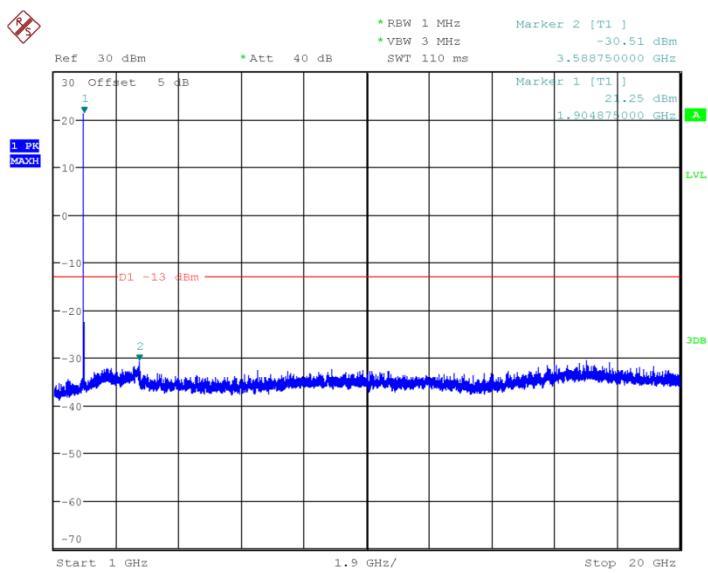


Date: 5.FEB.2018 10:23:57

Channel 9538:1GHz~20GHz


Conclusion: PASS

A 7.2.2.2. WCDMA Band IV

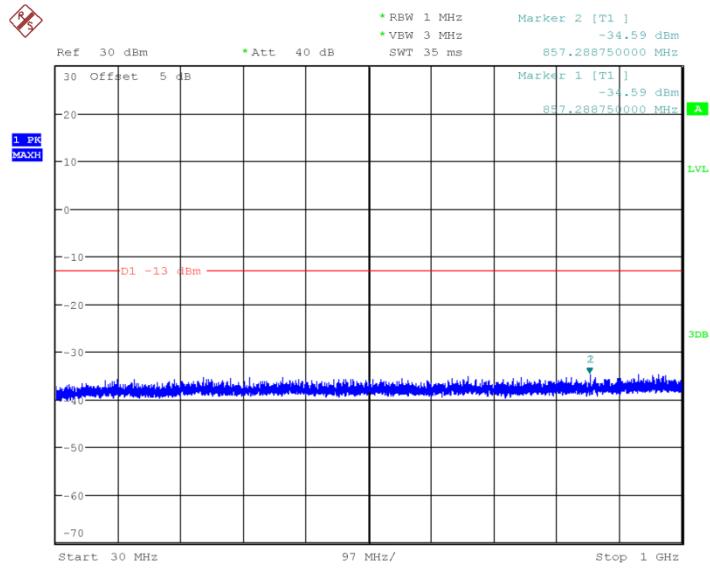


Date: 5.FEB.2018 10:25:56

Channel 1312: 30MHz~1GHz

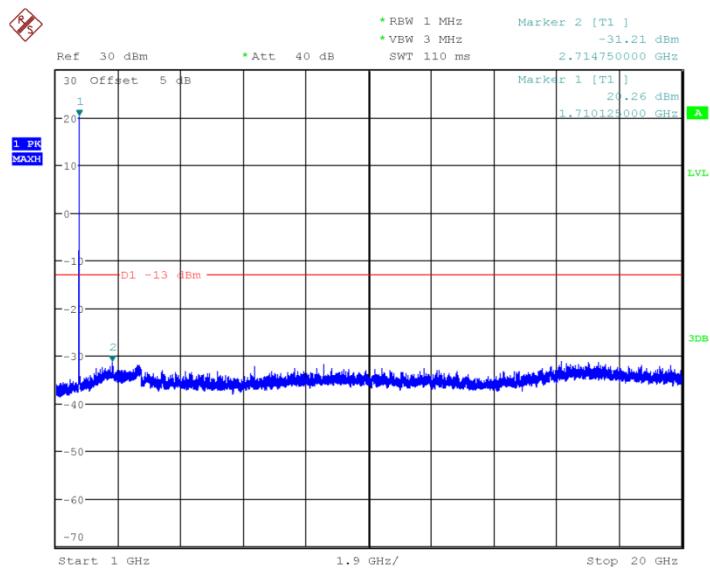


Date: 5.FEB.2018 10:26:19

Channel 1312:1GHz~20GHz

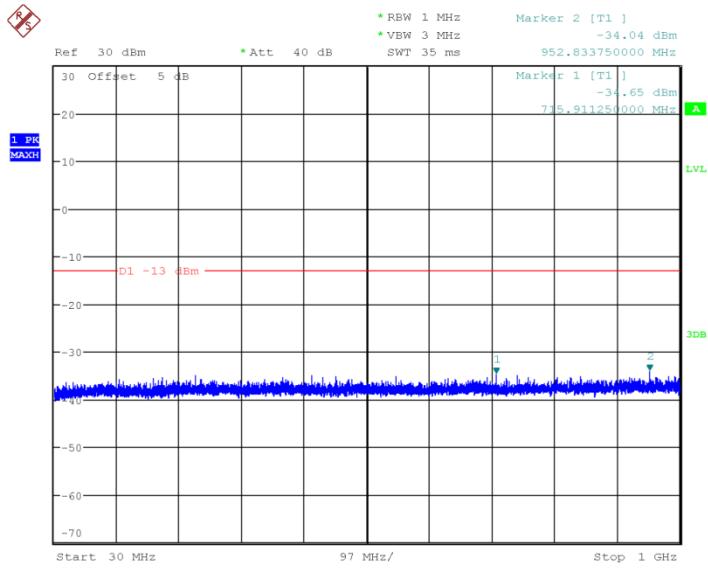


Date: 5.FEB.2018 10:24:49

Channel 1413: 30MHz~1GHz

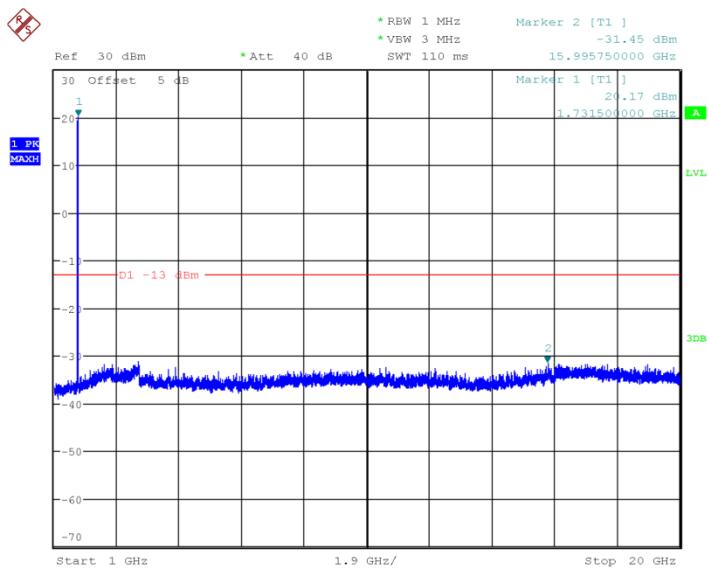


Date: 5.FEB.2018 10:25:12

Channel 1413:1GHz~20GHz

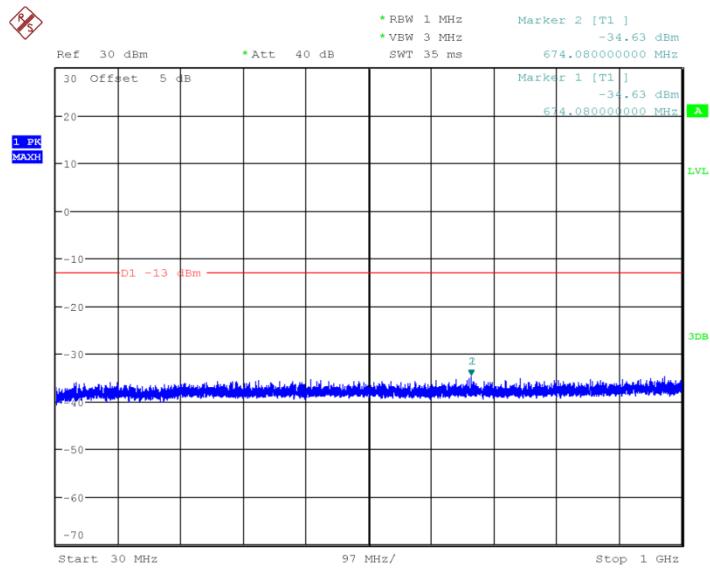

Date: 5.FEB.2018 10:27:04

Channel 1513: 30MHz~1GHz

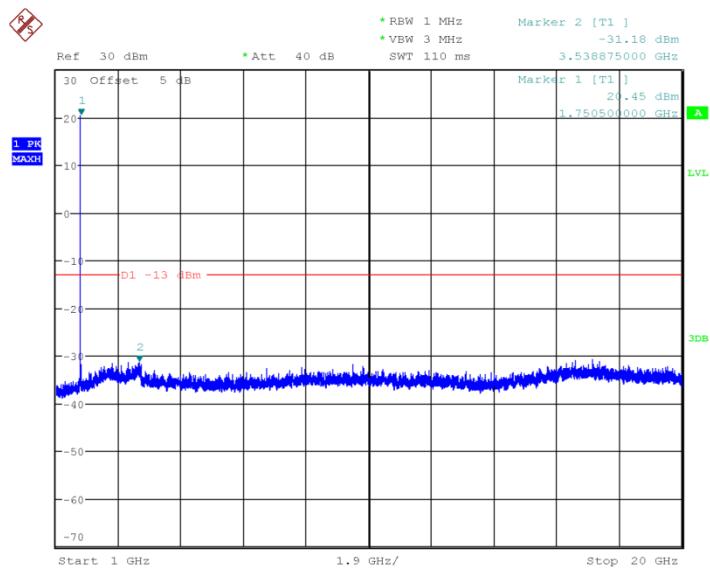


Date: 5.FEB.2018 10:27:27

Channel 1513:1GHz~20GHz


Conclusion: PASS

A 7.2.2.3. WCDMA Band V

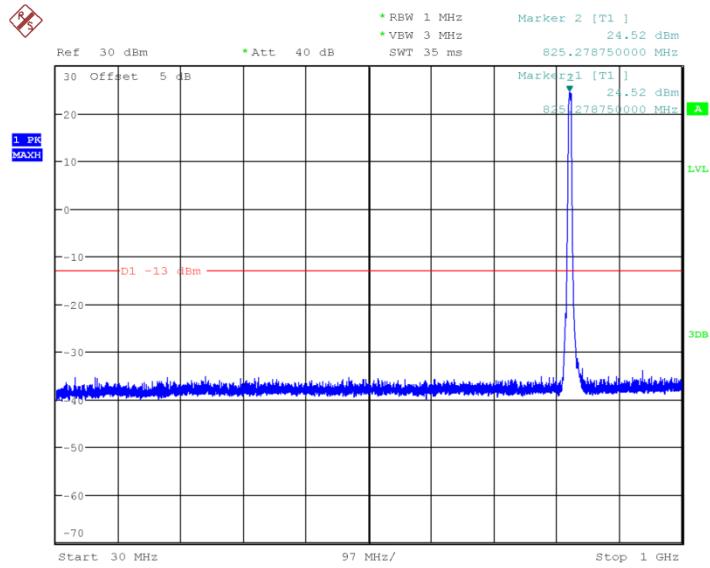


Date: 5.FEB.2018 10:29:26

Channel 4132: 30MHz~1GHz

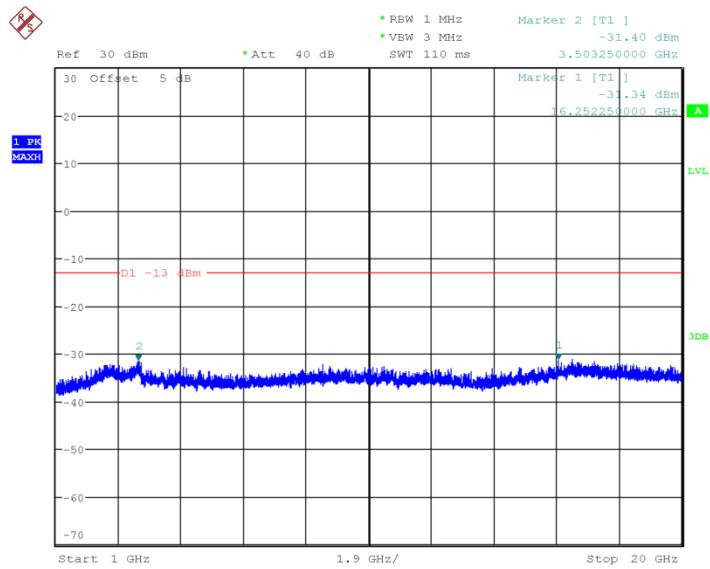


Date: 5.FEB.2018 10:29:49

Channel 4132:1GHz~20GHz

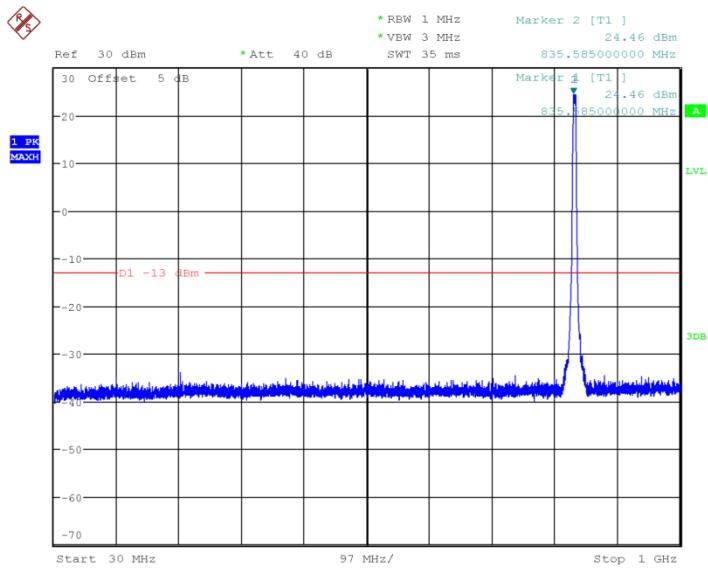


Date: 5.FEB.2018 10:28:19

Channel 4183: 30MHz~1GHz

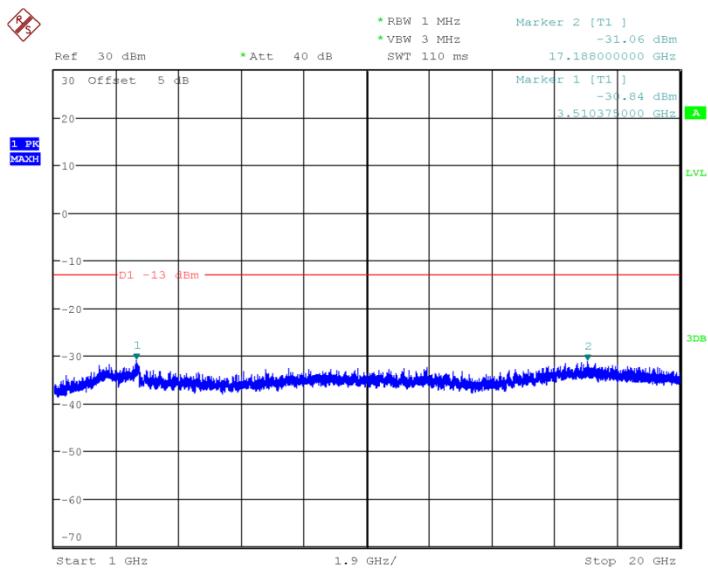


Date: 5.FEB.2018 10:28:42

Channel 4183:1GHz~20GHz

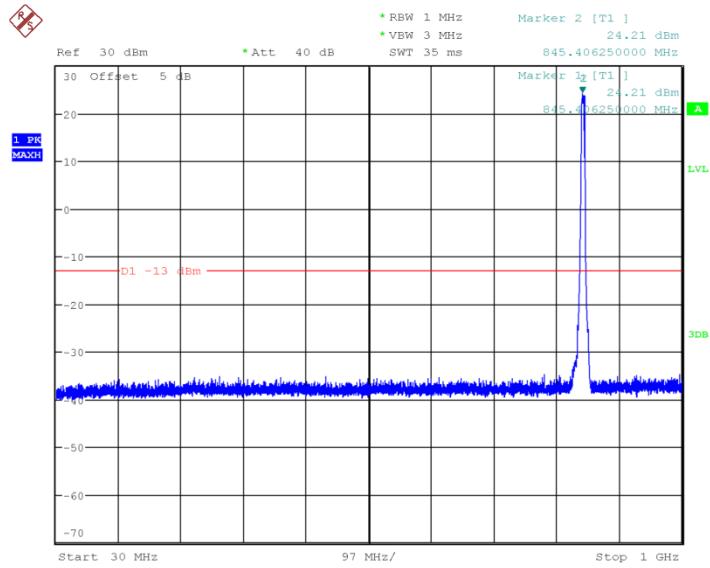

Date: 5.FEB.2018 10:30:34

Channel 4233: 30MHz~1GHz

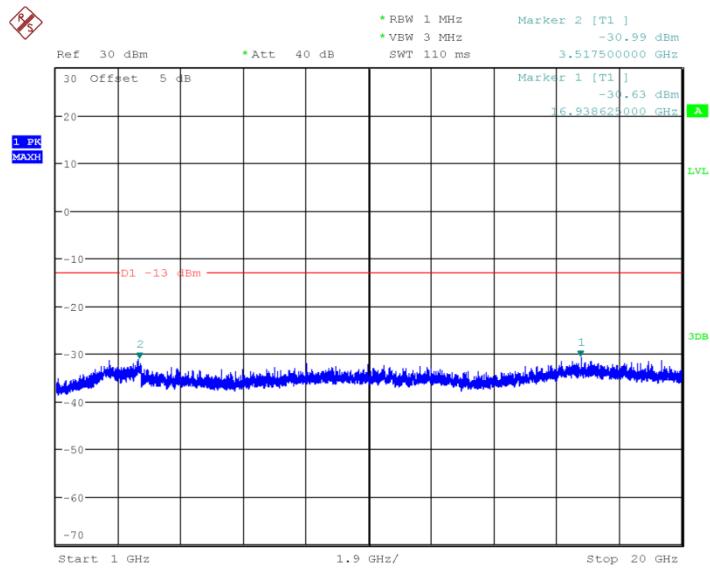

Date: 5.FEB.2018 10:30:57

Channel 4233:1GHz~20GHz

Conclusion: PASS

ANNEX A.8. RADIATED

A.8.1. ERP

A.8.1.1. GSM ERP

A.8.1.1.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.8.1.1.2. Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

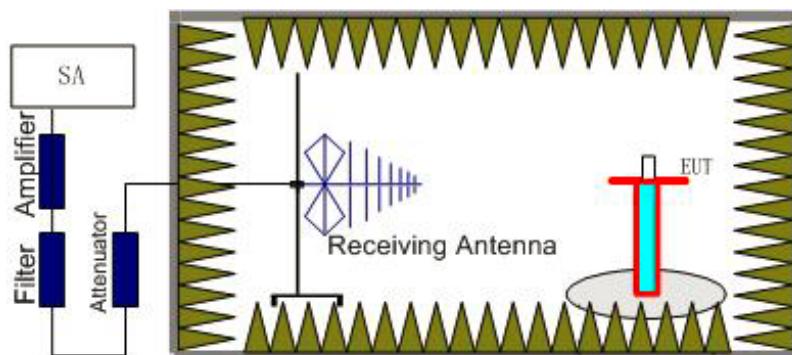

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

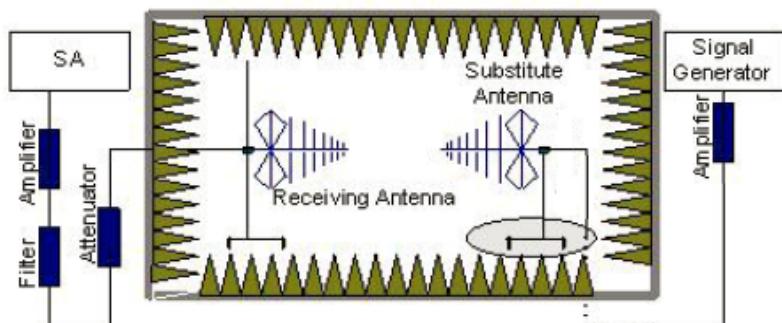

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.8.1.1.3 GSM 850-ERP 22.913(a)

A.8.1.1.3.1 Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	$\leq 38.45\text{dBm}$ (7W)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)
EDGE	6	$\leq 38.45\text{dBm}$ (7W)

A.8.1.1.3.2 Measurement result

Main supply

GSM(GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-6.48	3.1	37	3.11	30.53	H
836.6	-7.57	3.1	37	3.11	29.44	H
848.8	-8.3	3.1	37	3.11	28.71	H

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-8.12	3.1	37	3.11	28.89	H
836.6	-8.51	3.1	37	3.11	28.5	H
848.8	-8.72	3.1	37	3.11	28.29	H

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-13.35	3.1	37	3.11	23.66	H
836.6	-13.88	3.1	37	3.11	23.13	H
848.8	-14.54	3.1	37	3.11	22.47	H

Frequency: 824.2MHz

$$\text{Peak ERP(dBm)} = P_{\text{Mea}}(-13.35\text{dBm}) - P_{\text{cl}}(3.1\text{dB}) + P_{\text{Ag}}(37\text{dB}) + G_a(3.11\text{dBd}) \\ = 23.66\text{dBm}$$

Note: ANALYZER SETTINGS: RBW = VBW = 3MHz
Secondary supply
GSM(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-6.81	3.1	37	3.11	30.2	H

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-8.42	3.1	37	3.11	28.59	H

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
824.2	-13.98	3.1	37	3.11	23.03	H

A.8.1.1.4 PCS 1900-EIRP 24.232(c)
A.8.1.1.4.1 Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤33dBm (2W)
EDGE	6	≤33dBm (2W)

A.8.1.1.4.2 Measurement result
Main supply
GSM(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-9.66	4.6	36	4.7	26.44	V
1880.0	-8.19	4.6	35.6	4.7	27.51	H
1909.8	-7.5	4.7	36	4.7	28.5	V

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-9.58	4.6	36	4.7	26.52	V
1880.0	-8	4.6	35.6	4.7	27.7	H
1909.8	-7.68	4.7	36	4.7	28.32	V

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1850.2	-13.97	4.6	36	4.7	22.13	V
1880.0	-12.3	4.6	35.6	4.7	23.4	H
1909.8	-11.26	4.7	36	4.7	24.74	V

Frequency: 1850.2MHz
Peak EIRP(dBm)= P_{Mea}(-13.97dBm) - P_{cl}(4.6dB)+ P_{Ag}(36dB) +G_a(4.7dB)=22.13dBm
ANALYZER SETTINGS: RBW = VBW = 3MHz

Secondary supply**GSM(GMSK)**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1909.8	-8.09	4.7	36	4.7	27.91	V

GPRS(GMSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1909.8	-7.28	4.7	36	4.7	28.72	V

EDGE(8PSK)

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1909.8	-11.92	4.7	36	4.7	24.08	V

A.8.1.2. WCDMA ERP**A.8.1.2.1. Description**


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.8.1.2.2. Method of Measurement

The measurement procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

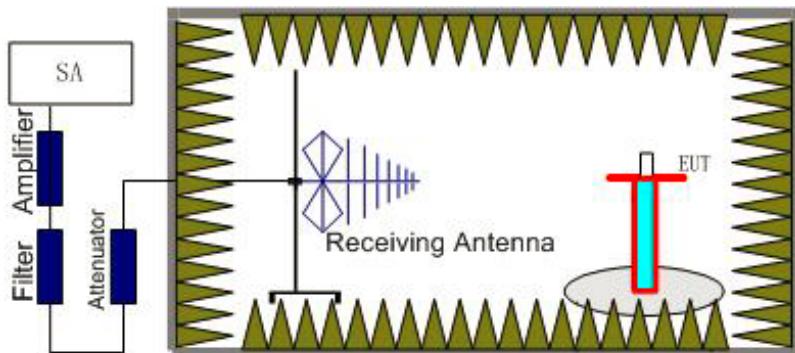

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

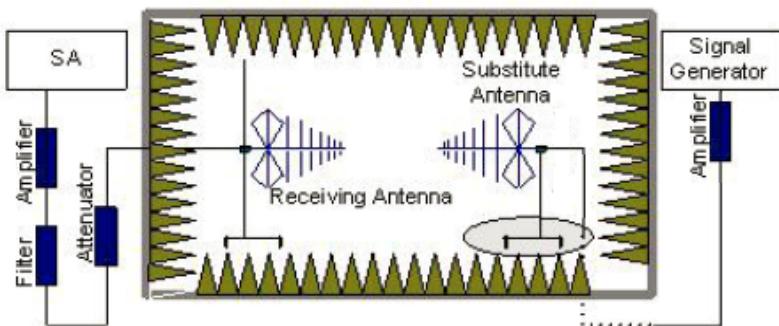

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.8.1.2.4 WCDMA Band II-ERP

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

A.8.1.2.3.2 Measurement result
Main supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1852.4	-22.89	3.54	43.8	2.9	20.27	V
1880.0	-21.98	3.54	43.8	2.9	21.18	H
1907.6	-21.54	3.54	43.8	2.9	21.62	V

Frequency: 1852.40MHz
Peak EIRP(dBm)= P_{Mea}(-22.89dBm)- P_{cl}(3.54dB)+ P_{Ag}(43.8dB)+G_a(2.9dB)=20.27dBm
ANALYZER SETTINGS: RBW = VBW = 5MHz
Secondary supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	PeakEIRP(dBm)	Polarization
1907.6	-21.77	3.54	43.8	2.9	21.39	V

A.8.1.2.4.1 Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤33dBm (2W)

A.8.1.2.4.2 Measurement result
Main supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
1712.4	-13.95	4.6	36	2.9	20.35	H
1732.6	-14.42	4.6	36	2.9	19.88	H
1752.6	-14.28	4.6	36	2.9	20.02	H

Frequency: 1712.4 MHz
Peak ERP(dBm)= P_{Mea}(-13.95dBm)- P_{cl}(4.6dB)+P_{Ag}(36dB)+G_a(2.9dBd)=20.35dBm
ANALYZER SETTINGS: RBW = VBW = 5MHz
Secondary supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization

1712.4	-14.03	4.6	36	2.9	20.27	H
--------	--------	-----	----	-----	-------	---

A.8.1.2.4.1 Limits

	Burst Peak EIRP (dBm)
WCDMA Band V	≤38.45dBm (7W)

A.8.1.2.4.2 Measurement result
Main supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
826.4	-15.8	3.1	37	2.9	21	H
836.6	-16.32	3.1	37	2.9	20.48	H
846.6	-16.67	3.1	37	2.9	20.13	H

Frequency: 826.4 MHz
Peak ERP(dBm)= P_{Mea}(-15.8dBm)- P_{cl}(3.1dB)+P_{Ag}(37dB)+G_a(2.9dBd)=21dBm
ANALYZER SETTINGS: RBW = VBW = 5MHz
Secondary supply

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBd)	PeakERP(dBm)	Polarization
826.4	-15.1	3.1	37	2.9	21.7	H

Note: the EUT was displayed in several different direction, the worst cases were shown.
A.8.2 EMISSION LIMIT (§2.1051/§22.917§24.238)
A.8.2.1 GSM Measurement Method


The measurement procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.


A.8.2.2 The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured

with peak detector.

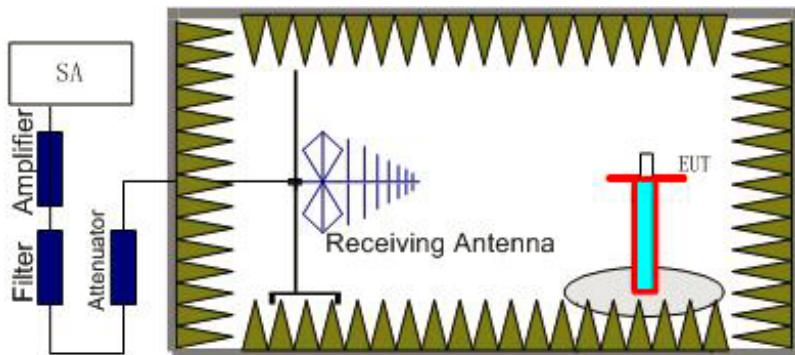

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

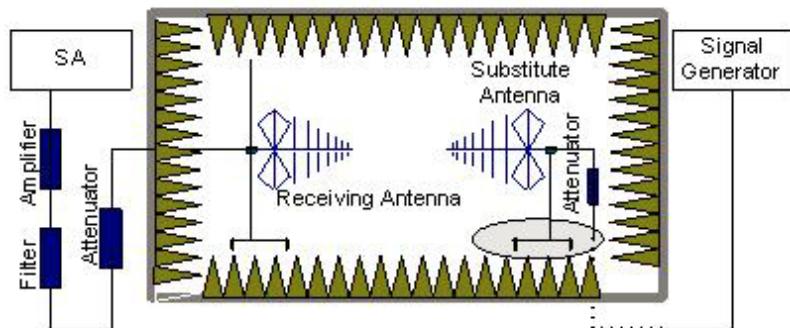

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$

A.8.2.3 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.2.4 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.2.5 Measurement Results

Measurements results:

Frequency	Channel	Frequency Range	Result
GSM850	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
GSM1900	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

Main supply

GSM850

GSM Mode Channel 128

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
2472.8571 43	-34.04	5.3	3.7	-35.64	-13	H
3295.3846 15	-46.71	6.2	5.1	-47.81	-13	V

4433.0769 23	-44.87	7.3	7.4	-44.77	-13	H
6672.3076 92	-46.54	9.1	12	-43.64	-13	H
7544.6153 85	-46.19	9.7	14.7	-41.19	-13	H
8280	-48.89	10.1	17.4	-41.59	-13	V

Note:

GSM 850, CH128

Power(ERP)= Pmea-Pcl+Ga=-34.04-5.3+3.7=-35.64dbm

This method Applicable to the following table.

GSM Mode Channel 189

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
2509.2857 14	-31.52	5.4	3.7	-33.22	-13	H
3346.1538 46	-46.87	6.2	5.3	-47.77	-13	H
4367.3076 92	-45.94	7.2	7.5	-45.64	-13	H
6943.0769 23	-45.72	9.3	12.8	-42.22	-13	V
7870.7692 31	-47.29	9.9	15.9	-41.29	-13	V
8404.6153 85	-47.67	10.2	17.8	-40.07	-13	H

GSM Mode Channel 251

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
2546.7857 14	-35.73	5.4	3.8	-37.33	-13	V
3395.7692 31	-46.52	6.3	5.6	-47.22	-13	H
6216.9230 77	-44.97	8.7	10.7	-42.97	-13	H

7195.3846 15	-46.96	9.5	13.5	-42.96	-13	H
8612.3076 92	-49.93	10.3	18.3	-41.93	-13	H
9389.2307 69	-47.94	10.7	18.6	-40.04	-13	V

GPRS Mode Channel 128**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1650	-42.83	4.3	3.1	-44.03	-13	H
2416.0714 29	-36.51	5.3	3.5	-38.31	-13	V
3956.5384 62	-46.43	6.8	7	-46.23	-13	H
4868.0769 23	-45.59	7.6	8.3	-44.89	-13	V
5683.8461 54	-46.66	8.5	10.3	-44.86	-13	H
6393.8461 54	-44.28	8.9	11.2	-41.98	-13	H

Note:**GPRS 850, CH128**
$$\text{Power(ERP)} = \text{Pmea} - \text{Pcl} + \text{Ga} = -42.83 - 4.3 + 3.1 = -44.03 \text{ dbm}$$
This method Applicable to the following table.**GPRS Mode Channel 189****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1630.7142 86	-43.4	4.3	3.1	-44.6	-13	H
2570.3571 43	-35.36	5.4	3.8	-36.96	-13	V

3346.1538 46	-45.48	6.2	5.3	-46.38	-13	H
4356.9230 77	-46.07	7.2	7.5	-45.77	-13	H
5904.2307 69	-46.66	8.5	10.4	-44.76	-13	V
8407.6923 08	-48.65	10.2	17.8	-41.05	-13	H

GPRS Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1508.5714 29	-44.45	4.1	3.4	-45.15	-13	V
2633.5714 29	-35.34	5.5	3.9	-36.94	-13	H
4965	-44.61	7.7	8.8	-43.51	-13	V
6389.2307 69	-45.49	8.9	11.2	-43.19	-13	H
7610.7692 31	-47.18	9.7	14.9	-41.98	-13	V
9332.3076 92	-48.06	10.7	18.5	-40.26	-13	V

EGPRS Mode Channel 128
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1836.4285 72	-40.47	4.6	2.9	-42.17	-13	H
3315	-47.16	6.2	5.1	-48.26	-13	V
5607.6923 08	-46.8	8.3	9.9	-45.2	-13	V
6703.0769 23	-46.4	9.1	12.1	-43.4	-13	V

7207.6923 08	-46.4	9.5	13.5	-42.4	-13	H
8263.0769 23	-48.69	10.1	17.3	-41.49	-13	V

Note:
EGPRS 850, CH128

$$\text{Power(ERP)} = \text{Pmea} - \text{Pcl} + \text{Ga} = -40.47 - 4.6 + 2.9 = -42.17 \text{ dbm}$$

This method Applicable to the following table.

EGPRS Mode Channel 189
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1592.1428 57	-42.91	4.3	3.2	-44.01	-13	V
3471.9230 77	-45.65	6.4	5.9	-46.15	-13	H
4183.8461 54	-46.53	7	7.6	-45.93	-13	V
6744.6153 85	-46.23	9.2	12.3	-43.13	-13	V
8333.8461 54	-48.99	10.1	17.6	-41.49	-13	V
9210.7692 31	-47.62	10.5	18.5	-39.62	-13	V

EGPRS Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarizatio n
1675.7142 86	-43.89	4.4	3	-45.29	-13	H
3395.7692 31	-46.37	6.3	5.6	-47.07	-13	H
4074.2307 69	-46.65	6.9	7.3	-46.25	-13	H
5035.3846 15	-46.3	7.8	8.9	-45.2	-13	V

5940	-46.68	8.5	10.4	-44.78	-13	V
7501.5384 62	-46.77	9.7	14.6	-41.87	-13	H

GSM1900**GSM Mode Channel 512****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3700.2	-47.13	6.6	6.2	-47.53	-13	V
5551.2	-45.55	8.2	9.7	-44.05	-13	H
7676.4	-49.8	9.8	15.1	-44.5	-13	H
9195.6	-50.32	10.5	18.5	-42.32	-13	V
10856.4	-44.47	11.8	17.8	-38.47	-13	V
14301.6	-42.29	13.6	23.4	-32.49	-13	H

GSM Mode Channel 661**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3760.2	-42.77	6.6	6.2	-43.17	-13	H
5640.6	-46.21	8.3	10.1	-44.41	-13	H
7878	-50.15	9.9	16	-44.05	-13	V
9502.8	-50.15	10.7	18.6	-42.25	-13	H
11095.2	-44.95	12.1	18.3	-38.75	-13	H

13608	-43.36	13.8	24	-33.16	-13	V
-------	--------	------	----	--------	-----	---

GSM Mode Channel 810**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3819.6	-40.55	6.7	6.4	-40.85	-13	H
5729.4	-46.04	8.5	10.4	-44.14	-13	V
7468.8	-49.7	9.7	14.4	-45	-13	H
9717.6	-48.73	10.9	18.2	-41.43	-13	V
10818	-45.15	11.7	17.5	-39.35	-13	V
14677.2	-40.99	14	23	-31.99	-13	V

Conclusion: PASS**Note: the EUT was displayed in several different direction, the worst cases were shown.****GPRS Mode Channel 512****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3700.2	-47.2	6.6	6.2	-47.6	-13	H
4569	-47.01	7.4	7.4	-47.01	-13	V
5475.6	-48.16	8.2	9.4	-46.96	-13	H
7159.2	-49.79	9.4	13.4	-45.79	-13	V
8154	-51.62	10	17	-44.62	-13	H
9928.8	-48.4	11.1	17.6	-41.9	-13	H

GPRS Mode Channel 661**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3759.6	-44.58	6.6	6.2	-44.98	-13	H
5640	-46.34	8.3	10.1	-44.54	-13	V
7603.2	-50.48	9.7	14.9	-45.28	-13	H
9616.8	-50.3	10.8	18.4	-42.7	-13	V
10803.6	-44.44	11.7	17.5	-38.64	-13	V
14305.2	-42.35	13.6	23.4	-32.55	-13	V

GPRS Mode Channel 810**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3819.6	-43.84	6.7	6.4	-44.14	-13	H
5730	-49.02	8.5	10.4	-47.12	-13	V
7587.6	-49.61	9.7	14.8	-44.51	-13	H
9562.8	-49.84	10.8	18.5	-42.14	-13	H
11611.2	-42.84	12.2	17.9	-37.14	-13	H
14302.8	-42.26	13.6	23.4	-32.46	-13	V

Conclusion: PASS

Note: the EUT was displayed in several different direction, the worst cases were shown.

EGPRS Mode Channel 512**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3700.8	-47.75	6.6	6.2	-48.15	-13	H
5550.6	-39.94	8.2	9.7	-38.44	-13	V
7400.4	-46.96	9.7	14.2	-42.46	-13	V
9180	-49.82	10.5	18.5	-41.82	-13	V
11294.4	-44.5	12.1	18.4	-38.2	-13	H
13336.8	-42.6	13.7	22.3	-34	-13	V

EGPRS Mode Channel 661**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3760.2	-45.08	6.6	6.2	-45.48	-13	H
5640	-41.87	8.3	10.1	-40.07	-13	H
7638	-50	9.7	15	-44.7	-13	V
9438	-50.06	10.7	18.6	-42.16	-13	V
11587.2	-43.55	12.2	17.9	-37.85	-13	V
16070.4	-35.68	15	20.5	-30.18	-13	V

EGPRS Mode Channel 810**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3819	-44.72	6.7	6.4	-45.02	-13	H
5729.4	-43.24	8.5	10.4	-41.34	-13	H
7668	-49.97	9.7	15	-44.67	-13	V
9190.8	-50.01	10.5	18.5	-42.01	-13	H
11289.6	-44.2	12.1	18.4	-37.9	-13	V
13287.6	-42.74	13.5	22	-34.24	-13	H

Secondary supply**GSM850****GSM Mode Channel 128****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1728.214286	-43.48	4.5	3	-44.98	-13	V
2607.857143	-36.31	5.5	3.8	-38.01	-13	H
3565.384615	-48.22	6.4	6	-48.62	-13	H
4401.923077	-48.51	7.3	7.5	-48.31	-13	H
5244.230769	-48.15	8	8.7	-47.45	-13	H
6096.923077	-49.62	8.7	10.6	-47.72	-13	V

Note:**GSM 850, CH128**

$$\text{Power(ERP)} = \text{Pmea} - \text{Pcl} + \text{Ga} = -34.04 - 5.3 + 3.7 = -35.64 \text{ dbm}$$

This method Applicable to the following table.**GSM Mode Channel 189**

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1781.7857 14	-42.27	4.5	2.9	-43.87	-13	H
2561.7857 14	-35.7	5.4	3.8	-37.3	-13	V
3363.4615 39	-49.62	6.2	5.4	-50.42	-13	H
4211.5384 62	-49.86	7	7.6	-49.26	-13	V
5106.9230 77	-49	7.9	8.9	-48	-13	V
6009.2307 69	-48.73	8.6	10.4	-46.93	-13	V

GSM Mode Channel 251**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1767.8571 43	-42.12	4.5	2.9	-43.72	-13	V
2628.2142 86	-35.71	5.5	3.9	-37.31	-13	H
3567.6923 08	-47.84	6.4	6	-48.24	-13	H
4400.7692 31	-49.12	7.3	7.5	-48.92	-13	H
5255.7692 31	-48.49	8	8.7	-47.79	-13	H
6116.9230 77	-49.28	8.7	10.6	-47.38	-13	V

Conclusion: PASS

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.7.2.2. WCDMA Measurement Method

The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

The procedure of radiated spurious emissions is the same like GSM.

A.7.2.2.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.2.2.2. Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.7.2.2.3. Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band IV	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band V	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P

	High	30MHz~20GHz	P
--	------	-------------	---

Main supply**WCDMA BAND II Mode Channel 9262****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3958.4	-56.48	6.8	7	-56.28	-13	V
5554.4	-55.19	8.2	9.7	-53.69	-13	H
7412.8	-52.57	9.7	14.2	-48.07	-13	V
9258.4	-47.95	10.6	18.5	-40.05	-13	V
12973.65	-48.3	13.1	20.1	-41.3	-13	V
17459.25	-42.8	15.4	20	-38.2	-13	V

WCDMA BAND II Mode Channel 9400**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3856	-56.89	6.7	6.6	-56.99	-13	H
5643.2	-56.05	8.3	10.1	-54.25	-13	V
7515.2	-51.54	9.7	14.6	-46.64	-13	V
9394.4	-49.4	10.7	18.6	-41.5	-13	V
10840.8	-52.47	11.7	17.6	-46.57	-13	H
13150.05	-50.97	13	21	-42.97	-13	V

WCDMA BAND II Mode Channel 9538**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3813.2	-53.6	6.7	6.4	-53.9	-13	V
5720	-54.79	8.5	10.4	-52.89	-13	V
7633.6	-49.17	9.7	15	-43.87	-13	V
9544.4	-48.24	10.7	18.5	-40.44	-13	V
13367.4	-51.82	13.7	22.5	-43.02	-13	V
16889.1	-41.63	16.3	20.5	-37.43	-13	H

WCDMA BAND IV Mode Channel 1312**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3426	-60.03	6.4	5.7	-60.73	-13	H
6852.8	-52.08	9.2	12.5	-48.78	-13	V
8567.6	-47.32	10.3	18.2	-39.42	-13	V
10757.2	-51.46	11.7	17.3	-45.86	-13	H
11991.9	-47.71	12.6	17.1	-43.21	-13	V
15982.95	-44.59	15	20.6	-38.99	-13	H

WCDMA BAND IV Mode Channel 1413**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5200	-47.2	8	8.8	-46.4	-13	V
6930.4	-47.92	9.3	12.8	-44.42	-13	V
8658.8	-38.86	10.3	18.4	-30.76	-13	V
10390	-46.18	11.6	17.2	-40.58	-13	V
12121.05	-48.02	12.6	17.3	-43.32	-13	V
14301.9	-50.53	13.6	23.4	-40.73	-13	V

WCDMA BAND IV Mode Channel 1513
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
5256.4	-53.09	8	8.7	-52.39	-13	V
7013.6	-50.99	9.3	12.9	-47.39	-13	V
8758.4	-41.45	10.4	18.5	-33.35	-13	V
10824.4	-52.18	11.7	17.6	-46.28	-13	V
12275.75	-46.93	12.7	17.6	-42.03	-13	V
15385.5	-50.65	14.4	24.6	-40.45	-13	V

WCDMA BAND V Mode Channel 4132
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1823.9285 71	-54.66	4.6	2.9	-56.36	-13	H
2621.1538 46	-49.28	5.5	3.8	-50.98	-13	H
4548	-56.35	7.4	7.4	-56.35	-13	H
5965.2	-56.65	8.5	10.4	-54.75	-13	V
6967.6	-56.6	9.3	12.8	-53.1	-13	V
8647.6	-60.08	10.3	18.4	-51.98	-13	H

WCDMA BAND V Mode Channel 4183
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1696.7857 14	-57.07	4.4	3	-58.47	-13	H
4411.6	-56.09	7.3	7.5	-55.89	-13	H
5805.6	-57.87	8.4	10.5	-55.77	-13	V
6721.2	-57.15	9.1	12.2	-54.05	-13	V
8431	-59.99	10.2	17.9	-52.29	-13	V
9508.6	-58.57	10.7	18.6	-50.67	-13	V

WCDMA BAND V Mode Channel 4233

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
1501.7857 14	-58.78	4.1	3.4	-59.48	-13	H
2553.4615 39	-49.75	5.4	3.8	-51.35	-13	V
4535.6	-55.45	7.4	7.4	-55.45	-13	H
5550.8	-57.97	8.2	9.7	-56.47	-13	V
6998.8	-57.12	9.3	12.9	-53.52	-13	H
8414.8	-60.24	10.2	17.8	-52.64	-13	H

Secondary supply**WCDMA BAND IV Mode Channel 1312****Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3602.4	-59.99	6.5	6.1	-60.39	-13	H
5242.4	-59.46	8	8.7	-58.76	-13	H
6990.4	-61.65	9.3	12.9	-58.05	-13	H
8793.2	-63.97	10.4	18.5	-55.87	-13	V
10450.8	-58.93	11.6	17.1	-53.43	-13	V
12117.9	-55.34	12.6	17.3	-50.64	-13	H

WCDMA BAND IV Mode Channel 1413**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3492.4	-63.5	6.4	6	-63.9	-13	H
5136.4	-59.38	7.9	8.8	-58.48	-13	V
6934.8	-59.83	9.3	12.8	-56.33	-13	V
8654	-64.06	10.3	18.4	-55.96	-13	V
10369.2	-57.12	11.6	17.2	-51.52	-13	V
12054.2	-55.63	12.6	17.4	-50.83	-13	H

WCDMA BAND IV Mode Channel 1513**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Peak ERP (dBm)	Limit (dBm)	Polarization
3600.8	-60.54	6.5	6.1	-60.94	-13	H
5228	-58.04	8	8.7	-57.34	-13	V
7171.6	-61.1	9.4	13.4	-57.1	-13	H
9048.4	-63.6	10.4	18.3	-55.7	-13	V
10812.8	-56.4	11.7	17.5	-50.6	-13	H
12541.75	-56.87	12.7	18.8	-50.77	-13	V

Conclusion: PASS

Note: the EUT was displayed in several different direction, the worst cases were shown.

ANNEX B. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*****End Of Report*****