

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11a	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)
802.11ac VHT20	MCS0(6.5 Mbps)
802.11ac VHT40	MCS0(13.5 Mbps)
802.11ac VHT80	MCS0(29.3 Mbps)

We chose the Worst-modes are shown as following table:

Test Mode	Chain	Note
802.11a	Chain1	---
802.11n HT20	Chain0+Chain1	Cover 802.11ac VHT20
802.11ac VHT40	Chain0+Chain1	Cover 802.11n HT40
802.11ac VHT80	Chain0+Chain1	---

2.2.6.4.2 Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (94.07 dBuV/m) = (46.27 dBμV) + (12.4 dB) + (35.40 dB), the corresponding frequency is 5180MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11a

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	94.07	46.27	N/A	N/A	12.40	35.40
2	5150	50.68	2.88	-17.52	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11a

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	89.67	41.87	N/A	N/A	12.40	35.40
2	5150	50.42	2.62	-17.78	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11a

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.58	43.78	N/A	N/A	12.40	35.40
2	5150	39.09	-8.71	-14.91	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11a

Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	87.38	39.58	N/A	N/A	12.40	35.40
2	5150	38.52	-9.28	-15.48	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.94	42.94	N/A	N/A	12.60	35.40
2	5340	50.30	2.30	-17.90	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.79	39.79	N/A	N/A	12.60	35.40
2	5340	49.88	1.88	-18.32	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.37	39.37	N/A	N/A	12.60	35.40
2	5340	40.26	-7.74	-13.74	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	83.62	35.62	N/A	N/A	12.60	35.40
2	5340	38.84	-9.16	-15.16	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.:36
Test Mode: 802.11n (HT20)
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.80	46.00	N/A	N/A	12.40	35.40
2	5150	50.12	2.32	-18.08	68.20	12.40	35.40

Carrier frequency (MHz): 5180
Channel No.:36
Test Mode: 802.11n (HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	90.47	42.67	N/A	N/A	12.40	35.40
2	5150	48.18	0.38	-20.02	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11n (HT20)
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	92.43	44.63	N/A	N/A	12.40	35.40
2	5150	39.84	-7.96	-14.16	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11n (HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	--------------------	------------------------------	----------------------------	-----------------------	-------------------	-----------------------	---------------------------

1	5180	87.99	40.19	N/A	N/A	12.40	35.40
2	5150	38.76	-9.04	-15.24	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	89.94	41.94	N/A	N/A	12.60	35.40
2	5340	50.67	2.67	-17.53	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.18	39.18	N/A	N/A	12.60	35.40
2	5340	49.78	1.78	-18.42	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.12	39.12	N/A	N/A	12.60	35.40
2	5340	41.79	-6.21	-12.21	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11n (HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	82.64	34.64	N/A	N/A	12.60	35.40
2	5340	41.00	-7.00	-13.00	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.61	45.81	N/A	N/A	12.40	35.40
2	5150	50.69	2.89	-17.51	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	90.84	43.04	N/A	N/A	12.40	35.40
2	5150	48.90	1.10	-19.30	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	92.68	44.88	N/A	N/A	12.40	35.40
2	5150	40.67	-7.13	-13.33	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	87.88	40.08	N/A	N/A	12.40	35.40
2	5150	40.15	-7.65	-13.85	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz

Channel No.:64

Test Mode: 802.11ac (VHT20)

Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	89.96	41.96	N/A	N/A	12.60	35.40
2	5340	51.58	3.58	-16.62	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	85.17	37.17	N/A	N/A	12.60	35.40
2	5340	50.36	2.36	-17.84	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64

Test Mode: 802.11ac (VHT20)

Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	87.36	39.36	N/A	N/A	12.60	35.40
2	5340	40.39	-7.61	-13.61	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	82.78	34.78	N/A	N/A	12.60	35.40
2	5340	38.47	-9.53	-15.53	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38

Test Mode: 802.11n (HT40)

Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	93.70	45.90	N/A	N/A	12.40	35.40
2	5150	49.98	2.18	-18.22	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.52	42.72	N/A	N/A	12.40	35.40
2	5150	49.18	1.38	-19.02	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40)
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	92.78	44.98	N/A	N/A	12.40	35.40
2	5150	40.67	-7.13	-13.33	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n (HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	88.72	40.92	N/A	N/A	12.40	35.40
2	5150	40.53	-7.27	-13.47	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11n (HT40)
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	-----------------	------------------------	----------------------	-----------------	----------------	-----------------	---------------------

1	5310	94.07	46.07	N/A	N/A	12.60	35.40
2	5350	50.56	2.56	-17.64	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.57	42.57	N/A	N/A	12.60	35.40
2	5350	50.45	2.45	-17.75	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	91.96	43.96	N/A	N/A	12.60	35.40
2	5350	40.52	-7.48	-13.48	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11n (HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	89.40	41.40	N/A	N/A	12.60	35.40
2	5350	39.27	-8.73	-14.73	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	93.57	45.77	N/A	N/A	12.40	35.40
2	5150	49.67	1.87	-18.53	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	89.88	42.08	N/A	N/A	12.40	35.40
2	5150	47.81	0.01	-20.39	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	92.68	44.88	N/A	N/A	12.40	35.40
2	5150	39.58	-8.22	-14.42	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz

Channel No.:38

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	89.24	41.44	N/A	N/A	12.40	35.40
2	5150	39.43	-8.37	-14.57	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	93.34	45.34	N/A	N/A	12.60	35.40
2	5350	51.80	3.80	-16.40	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.34	42.34	N/A	N/A	12.60	35.40
2	5350	50.58	2.58	-17.62	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	91.79	43.79	N/A	N/A	12.60	35.40
2	5350	41.69	-6.31	-12.31	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz

Channel No.:62

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	89.70	41.70	N/A	N/A	12.60	35.40
2	5350	40.21	-7.79	-13.79	54.00	12.60	35.40

Carrier frequency (MHz): 5210 MHz

Channel No.:42

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	89.47	41.67	N/A	N/A	12.40	35.40
2	5150	49.74	1.94	-18.46	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz

Channel No.:42

Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	86.05	38.25	N/A	N/A	12.40	35.40
2	5150	49.28	1.48	-18.92	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz

Channel No.:42

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	87.62	39.82	N/A	N/A	12.40	35.40
2	5150	39.58	-8.22	-14.42	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz

Channel No.:42

Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	85.58	37.78	N/A	N/A	12.40	35.40
2	5150	38.76	-9.04	-15.24	54.00	12.40	35.40

Carrier frequency (MHz): 5290 MHz

Channel No.:58

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	89.13	41.13	N/A	N/A	12.40	35.40
2	5210	50.92	2.92	-17.28	68.20	12.40	35.40

Carrier frequency (MHz): 5290 MHz

Channel No.:58

Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	--------------------	------------------------------	----------------------------	-----------------------	-------------------	-----------------------	---------------------------

1	5290	85.02	37.02	N/A	N/A	12.40	35.40
2	5210	49.35	1.35	-18.85	68.20	12.40	35.40

Carrier frequency (MHz): 5290 MHz

Channel No.:58

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	88.33	40.33	N/A	N/A	12.40	35.40
2	5210	41.73	-6.27	-12.27	54.00	12.40	35.40

Carrier frequency (MHz): 5290 MHz

Channel No.:58

Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	84.42	36.42	N/A	N/A	12.40	35.40
2	5210	41.67	-6.33	-12.33	54.00	12.40	35.40

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11a

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	96.39	49.09	N/A	N/A	12.70	34.60
2	5480	52.44	5.14	-15.76	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11a

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	94.24	46.94	N/A	N/A	12.70	34.60
2	5480	51.52	4.22	-16.68	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

The State Radio_monitoring_centerTesting Center (SRTC)

Tel: 86-10-57996183

Fax:86-10-57996388

Page number:83 of 231

V3.0.0

Channel No.:100
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.70	45.40	N/A	N/A	12.70	34.60
2	5480	40.93	-6.37	-13.07	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	88.88	41.58	N/A	N/A	12.70	34.60
2	5480	39.98	-7.32	-14.02	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.41	39.81	N/A	N/A	12.90	34.70
2	5845	52.76	5.16	-15.44	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	84.43	36.83	N/A	N/A	12.90	34.70
2	5845	52.71	5.11	-15.49	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	84.84	37.24	N/A	N/A	12.90	34.70
2	5845	40.15	-7.45	-13.85	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	82.59	34.99	N/A	N/A	12.90	34.70
2	5845	39.33	-8.27	-14.67	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n (HT20)
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	96.62	49.32	N/A	N/A	12.70	34.60
2	5480	51.65	4.35	-16.55	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n (HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	93.44	46.14	N/A	N/A	12.70	34.60
2	5480	51.56	4.26	-16.64	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n (HT20)
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	--------------------	------------------------------	----------------------------	-----------------------	-------------------	-----------------------	---------------------------

1	5500	91.77	44.47	N/A	N/A	12.70	34.60
2	5480	41.04	-6.26	-12.96	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11n (HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	89.72	42.42	N/A	N/A	12.70	34.60
2	5480	39.04	-8.26	-14.96	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.61	40.01	N/A	N/A	12.90	34.70
2	5845	51.30	3.70	-16.90	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	82.79	35.19	N/A	N/A	12.90	34.70
2	5845	49.52	1.92	-18.68	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	84.63	37.03	N/A	N/A	12.90	34.70
2	5845	41.45	-6.15	-12.55	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11n (HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	80.67	33.07	N/A	N/A	12.90	34.70
2	5845	39.74	-7.86	-14.26	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	96.61	49.31	N/A	N/A	12.70	34.60
2	5480	51.07	3.77	-17.13	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.81	45.51	N/A	N/A	12.70	34.60
2	5480	51.02	3.72	-17.18	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	91.92	44.62	N/A	N/A	12.70	34.60
2	5480	41.06	-6.24	-12.94	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz

Channel No.:100

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	89.38	42.08	N/A	N/A	12.70	34.60
2	5480	40.41	-6.89	-13.59	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	86.11	38.51	N/A	N/A	12.90	34.70
2	5845	51.79	4.19	-16.41	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	81.87	34.27	N/A	N/A	12.90	34.70
2	5845	51.07	3.47	-17.13	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11ac (VHT20)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	84.35	36.75	N/A	N/A	12.90	34.70
2	5845	41.52	-6.08	-12.48	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz

Channel No.:165

Test Mode: 802.11ac (VHT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	80.49	32.89	N/A	N/A	12.90	34.70
2	5845	40.96	-6.64	-13.04	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40)
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	95.37	48.07	N/A	N/A	12.70	34.60
2	5470	52.13	4.83	-16.07	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	92.85	45.55	N/A	N/A	12.70	34.60
2	5470	51.05	3.75	-17.15	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40)
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	91.50	44.20	N/A	N/A	12.70	34.60
2	5470	41.67	-5.63	-12.33	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n (HT40)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	--------------------	------------------------------	----------------------------	-----------------------	-------------------	-----------------------	---------------------------

1	5510	89.45	42.15	N/A	N/A	12.70	34.60
2	5470	40.36	-6.94	-13.64	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.83	40.23	N/A	N/A	12.90	34.70
2	5835	51.32	3.72	-16.88	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	83.35	35.75	N/A	N/A	12.90	34.70
2	5835	50.67	3.07	-17.53	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.23	37.63	N/A	N/A	12.90	34.70
2	5835	41.75	-5.85	-12.25	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11n (HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	82.00	34.40	N/A	N/A	12.90	34.70
2	5835	41.19	-6.41	-12.81	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	95.67	48.37	N/A	N/A	12.70	34.60
2	5470	52.61	5.31	-15.59	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	91.81	44.51	N/A	N/A	12.70	34.60
2	5470	51.90	4.60	-16.30	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	92.11	44.81	N/A	N/A	12.70	34.60
2	5470	41.19	-6.11	-12.81	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz

Channel No.:102

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	87.96	40.66	N/A	N/A	12.70	34.60
2	5470	40.01	-7.29	-13.99	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11ac (VHT40)

Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.50	39.90	N/A	N/A	12.90	34.70
2	5835	51.34	3.74	-16.86	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	84.52	36.92	N/A	N/A	12.90	34.70
2	5835	49.39	1.79	-18.81	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11ac (VHT40)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.23	37.63	N/A	N/A	12.90	34.70
2	5835	41.83	-5.77	-12.17	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz

Channel No.:159

Test Mode: 802.11ac (VHT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	82.59	34.99	N/A	N/A	12.90	34.70
2	5835	41.34	-6.26	-12.66	54.00	12.90	34.70

Carrier frequency (MHz): 5530 MHz

Channel No.:106

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	91.85	44.55	N/A	N/A	12.70	34.60
2	5450	52.97	5.67	-15.23	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	87.41	40.11	N/A	N/A	12.70	34.60
2	5450	51.70	4.40	-16.50	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80)
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	88.43	41.13	N/A	N/A	12.70	34.60
2	5450	40.96	-6.34	-13.04	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac (VHT80)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	83.64	36.34	N/A	N/A	12.70	34.60
2	5450	39.89	-7.41	-14.11	54.00	12.70	34.60

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac (VHT80)
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
----	-----------------	------------------------	----------------------	-----------------	----------------	-----------------	---------------------

1	5775	88.81	41.21	N/A	N/A	12.90	34.70
2	5695	51.74	4.14	-16.46	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz

Channel No.:155

Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	85.81	38.21	N/A	N/A	12.90	34.70
2	5695	50.43	2.83	-17.77	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz

Channel No.:155

Test Mode: 802.11ac (VHT80)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	85.16	37.56	N/A	N/A	12.90	34.70
2	5695	40.30	-7.30	-13.70	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz

Channel No.:155


Test Mode: 802.11ac (VHT80)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	81.46	33.86	N/A	N/A	12.90	34.70
2	5695	39.28	-8.32	-14.72	54.00	12.90	34.70

Full Spectrum

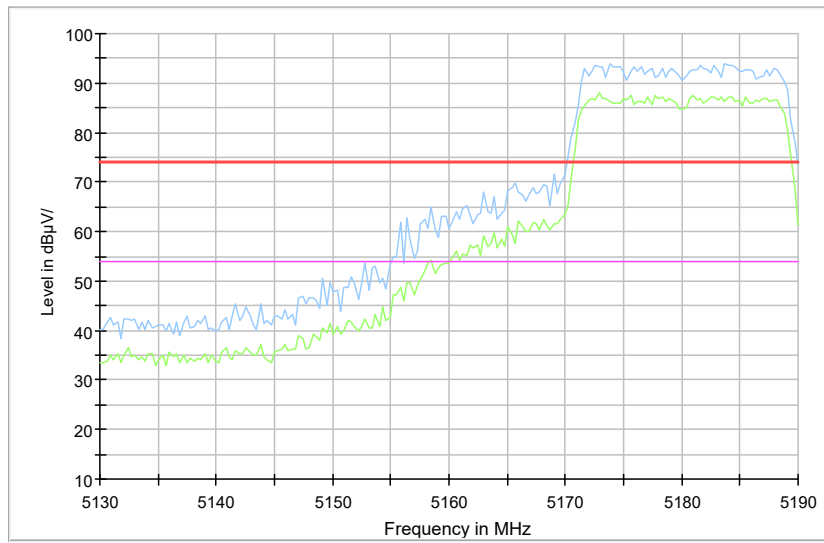

Comment

Radiated Emission Band Edge for 5180MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(21.25 \text{ dB}\mu\text{V/m}) = (42.55 \text{ dB}\mu\text{V}) + (-21.3 \text{ dB/m})$, the corresponding frequency is 30.000000MHz.

The worst case attitude: The mobile lay down.

For 802.11a Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	21.25	-21.3	42.55	Vertical	40.00
51.873500	12.60	-17.8	30.40	Vertical	40.00
59.827500	23.42	-18.8	42.22	Vertical	40.00
85.484000	15.57	-22.7	38.27	Vertical	40.00
646.580500	14.05	-7.7	21.75	Vertical	46.00
932.730500	19.11	-2.9	22.01	Vertical	46.00

For 802.11n(HT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	21.19	-21.3	42.49	Vertical	40.00
53.037500	12.46	-17.9	30.36	Vertical	40.00
59.100000	23.60	-18.7	42.30	Vertical	40.00
85.532500	15.73	-22.7	38.43	Vertical	40.00
162.841500	13.40	-21.9	35.30	Vertical	43.50
942.818500	19.18	-2.8	21.98	Vertical	46.00

For 802.11ac(VHT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	21.09	-21.3	42.39	Vertical	40.00
53.377000	12.12	-18.0	30.12	Vertical	40.00
59.536500	23.73	-18.8	42.53	Vertical	40.00
85.629500	15.64	-22.7	38.34	Vertical	40.00
713.656000	14.60	-6.6	21.20	Vertical	46.00
947.280500	19.11	-2.8	21.91	Vertical	46.00

For 802.11a Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.339500	19.68	-21.2	40.88	Vertical	40.00

51.970500	12.30	-17.8	30.10	Vertical	40.00
59.682000	23.68	-18.8	42.48	Vertical	40.00
85.532500	15.38	-22.7	38.08	Vertical	40.00
735.481000	15.08	-5.9	20.98	Vertical	46.00
929.529500	19.10	-2.9	22.00	Vertical	46.00

For 802.11n(HT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.91	-21.3	42.21	Vertical	40.00
51.437000	11.88	-17.7	29.58	Vertical	40.00
59.488000	23.77	-18.8	42.57	Vertical	40.00
86.114500	15.17	-22.5	37.67	Vertical	40.00
96.639000	13.91	-19.8	33.71	Vertical	43.50
921.963500	18.72	-3.0	21.72	Vertical	46.00

For 802.11ac(VHT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.339500	19.54	-21.2	40.74	Vertical	40.00
41.543000	12.37	-18.3	30.67	Vertical	40.00
59.148500	23.71	-18.7	42.41	Vertical	40.00
86.357000	14.82	-22.4	37.22	Vertical	40.00
160.513500	13.42	-22.0	35.42	Vertical	43.50
885.928000	17.93	-3.5	21.43	Vertical	46.00

For 802.11a Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.66	-21.3	41.96	Vertical	40.00
41.009500	12.82	-18.4	31.22	Vertical	40.00
59.439500	23.72	-18.8	42.52	Vertical	40.00
86.260000	15.32	-22.5	37.82	Vertical	40.00
96.736000	13.82	-19.8	33.62	Vertical	43.50
955.040500	19.09	-2.6	21.69	Vertical	46.00

For 802.11n(HT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194000	20.09	-21.2	41.29	Vertical	40.00
41.543000	12.28	-18.3	30.58	Vertical	40.00
59.342500	23.74	-18.8	42.54	Vertical	40.00
86.357000	15.08	-22.4	37.48	Vertical	40.00
737.421000	15.15	-5.8	20.95	Vertical	46.00
929.335500	19.16	-2.9	22.06	Vertical	46.00

For 802.11ac(VHT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	20.46	-21.3	41.76	Vertical	40.00
40.233500	12.55	-18.5	31.05	Vertical	40.00
59.924500	23.31	-18.8	42.11	Vertical	40.00
86.648000	14.46	-22.3	36.76	Vertical	40.00
97.318000	13.86	-19.7	33.56	Vertical	43.50
895.482500	18.17	-3.4	21.57	Vertical	46.00

For 802.11n(HT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097000	19.86	-21.2	41.06	Vertical	40.00
52.261500	12.42	-17.8	30.22	Vertical	40.00
59.051500	23.54	-18.7	42.24	Vertical	40.00
86.017500	15.07	-22.5	37.57	Vertical	40.00
317.265500	22.01	-15.5	37.51	Vertical	46.00
926.910500	19.10	-2.9	22.00	Vertical	46.00

For 802.11ac(VHT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	19.66	-21.3	40.96	Vertical	40.00
40.767000	12.58	-18.4	30.98	Vertical	40.00
59.197000	23.73	-18.7	42.43	Vertical	40.00
86.211500	15.10	-22.5	37.60	Vertical	40.00
317.896000	22.16	-15.5	37.66	Vertical	46.00
948.687000	19.21	-2.8	22.01	Vertical	46.00

For 802.11n(HT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	18.87	-21.2	40.07	Vertical	40.00
59.051500	23.70	-18.7	42.40	Vertical	40.00
86.260000	14.73	-22.5	37.23	Vertical	40.00
309.796500	20.60	-15.8	36.40	Vertical	46.00
315.665000	22.26	-15.6	37.86	Vertical	46.00
949.560000	19.15	-2.7	21.85	Vertical	46.00

For 802.11ac(VHT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	18.83	-21.2	40.03	Vertical	40.00

59.585000	23.79	-18.8	42.59	Vertical	40.00
86.163000	14.98	-22.5	37.48	Vertical	40.00
309.845000	21.79	-15.8	37.59	Vertical	46.00
320.903000	23.40	-15.4	38.80	Vertical	46.00
954.264500	19.12	-2.7	21.82	Vertical	46.00

For 802.11ac(VHT80) Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	19.30	-21.3	40.60	Vertical	40.00
59.245500	23.84	-18.7	42.54	Vertical	40.00
86.114500	14.91	-22.5	37.41	Vertical	40.00
310.427000	21.03	-15.8	36.83	Vertical	46.00
320.175500	23.71	-15.4	39.11	Vertical	46.00
880.738500	17.85	-3.6	21.45	Vertical	46.00

For 802.11a Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	16.88	-21.3	38.18	Vertical	40.00
59.148500	23.93	-18.7	42.63	Vertical	40.00
85.484000	14.33	-22.7	37.03	Vertical	40.00
310.572500	17.28	-15.8	33.08	Vertical	46.00
322.940000	16.33	-15.3	31.63	Vertical	46.00
942.867000	19.17	-2.8	21.97	Vertical	46.00

For 802.11n(HT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	16.77	-21.3	38.07	Vertical	40.00
59.051500	23.87	-18.7	42.57	Vertical	40.00
85.435500	14.35	-22.7	37.05	Vertical	40.00
310.572500	20.62	-15.8	36.42	Vertical	46.00
320.272500	23.29	-15.4	38.69	Vertical	46.00
945.146500	19.12	-2.8	21.92	Vertical	46.00

For 802.11ac(VHT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.242500	15.88	-21.2	37.08	Vertical	40.00
59.294000	23.91	-18.7	42.61	Vertical	40.00
85.435500	14.14	-22.7	36.84	Vertical	40.00
307.177500	17.44	-15.9	33.34	Vertical	46.00
319.011500	17.75	-15.5	33.25	Vertical	46.00
928.511000	19.04	-2.9	21.94	Vertical	46.00

For 802.11a Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.54	-21.3	37.84	Vertical	40.00
59.003000	23.84	-18.7	42.54	Vertical	40.00
85.823500	13.92	-22.6	36.52	Vertical	40.00
306.692500	22.01	-15.9	37.91	Vertical	46.00
321.485000	21.99	-15.4	37.39	Vertical	46.00
941.315000	19.28	-2.8	22.08	Vertical	46.00

For 802.11n(HT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.47	-21.3	37.77	Vertical	40.00
53.668000	11.96	-18.0	29.96	Vertical	40.00
59.536500	23.78	-18.8	42.58	Vertical	40.00
85.193000	13.70	-22.8	36.50	Vertical	40.00
306.789500	21.12	-15.9	37.02	Vertical	46.00
318.187000	22.83	-15.5	38.33	Vertical	46.00

For 802.11ac(VHT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097000	16.30	-21.2	37.50	Vertical	40.00
59.197000	23.90	-18.7	42.60	Vertical	40.00
86.454000	13.56	-22.4	35.96	Vertical	40.00
309.505500	22.42	-15.8	38.22	Vertical	46.00
322.649000	25.31	-15.3	40.61	Vertical	46.00
935.301000	19.11	-2.8	21.91	Vertical	46.00

For 802.11a Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.55	-21.3	37.85	Vertical	40.00
52.892000	11.52	-17.9	29.42	Vertical	40.00
59.148500	23.94	-18.7	42.64	Vertical	40.00
309.505500	22.84	-15.8	38.64	Vertical	46.00
324.201000	25.62	-15.3	40.92	Vertical	46.00
949.608500	19.09	-2.7	21.79	Vertical	46.00

For 802.11n(HT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	16.35	-21.3	37.65	Vertical	40.00

59.294000	23.97	-18.7	42.67	Vertical	40.00
85.338500	14.09	-22.8	36.89	Vertical	40.00
309.651000	24.33	-15.8	40.13	Vertical	46.00
322.794500	27.06	-15.3	42.36	Vertical	46.00
933.700500	19.11	-2.9	22.01	Vertical	46.00

For 802.11ac(VHT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	18.82	-21.3	40.12	Vertical	40.00
59.488000	23.90	-18.8	42.70	Vertical	40.00
85.920500	14.36	-22.6	36.96	Vertical	40.00
310.524000	21.74	-15.8	37.54	Vertical	46.00
320.078500	23.60	-15.4	39.00	Vertical	46.00
906.007000	18.45	-3.2	21.65	Vertical	46.00

For 802.11n(HT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.630500	15.53	-21.1	36.63	Vertical	40.00
59.294000	23.88	-18.7	42.58	Vertical	40.00
85.144500	14.01	-22.8	36.81	Vertical	40.00
310.524000	21.66	-15.8	37.46	Vertical	46.00
325.219500	23.34	-15.2	38.54	Vertical	46.00
951.597000	19.11	-2.7	21.81	Vertical	46.00

For 802.11ac(VHT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	18.63	-21.3	39.93	Vertical	40.00
53.328500	11.68	-18.0	29.68	Vertical	40.00
59.051500	23.80	-18.7	42.50	Vertical	40.00
310.475500	20.65	-15.8	36.45	Vertical	46.00
314.840500	22.05	-15.6	37.65	Vertical	46.00
928.802000	19.16	-2.9	22.06	Vertical	46.00

For 802.11n(HT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194000	17.52	-21.2	38.72	Vertical	40.00
58.857500	23.73	-18.7	42.43	Vertical	40.00
87.375500	12.92	-22.1	35.02	Vertical	40.00
307.565500	20.37	-15.9	36.27	Vertical	46.00
317.168500	23.44	-15.5	38.94	Vertical	46.00
896.646500	18.12	-3.4	21.52	Vertical	46.00

For 802.11ac(VHT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	17.26	-21.3	38.56	Vertical	40.00
59.585000	23.86	-18.8	42.66	Vertical	40.00
86.211500	13.93	-22.5	36.43	Vertical	40.00
310.572500	19.43	-15.8	35.23	Vertical	46.00
323.619000	21.71	-15.3	37.01	Vertical	46.00
927.056000	19.09	-2.9	21.99	Vertical	46.00

For 802.11ac(VHT80) Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	17.51	-21.3	38.81	Vertical	40.00
59.003000	23.87	-18.7	42.57	Vertical	40.00
86.066000	14.31	-22.5	36.81	Vertical	40.00
310.087500	21.77	-15.8	37.57	Vertical	46.00
320.757500	23.80	-15.4	39.20	Vertical	46.00
934.719000	19.07	-2.8	21.87	Vertical	46.00

For 802.11a Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	14.30	-21.3	35.60	Vertical	40.00
53.765000	16.28	-18.0	34.28	Vertical	40.00
58.615000	23.69	-18.6	42.29	Vertical	40.00
310.233000	25.08	-15.8	40.88	Vertical	46.00
320.466500	26.60	-15.4	42.00	Vertical	46.00
910.566000	18.63	-3.1	21.73	Vertical	46.00

For 802.11n(HT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.42	-21.3	37.72	Vertical	40.00
59.003000	23.89	-18.7	42.59	Vertical	40.00
85.969000	13.94	-22.6	36.54	Vertical	40.00
308.147500	24.84	-15.8	40.64	Vertical	46.00
324.201000	26.42	-15.3	41.72	Vertical	46.00
935.252500	19.14	-2.8	21.94	Vertical	46.00

For 802.11ac(VHT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.42	-21.3	37.72	Vertical	40.00

59.003000	23.89	-18.7	42.59	Vertical	40.00
85.969000	13.94	-22.6	36.54	Vertical	40.00
308.147500	24.84	-15.8	40.64	Vertical	46.00
324.201000	26.42	-15.3	41.72	Vertical	46.00
935.252500	19.14	-2.8	21.94	Vertical	46.00

For 802.11a Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
38.875500	11.33	-18.8	30.13	Vertical	40.00
59.585000	24.31	-18.8	43.11	Vertical	40.00
85.823500	15.15	-22.6	37.75	Vertical	40.00
309.505500	25.47	-15.8	41.27	Vertical	46.00
325.704500	26.73	-15.2	41.93	Vertical	46.00
939.132500	19.16	-2.8	21.96	Vertical	46.00

For 802.11n(HT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.048500	16.01	-21.3	37.31	Vertical	40.00
58.760500	23.82	-18.7	42.52	Vertical	40.00
85.969000	13.95	-22.6	36.55	Vertical	40.00
309.408500	22.55	-15.8	38.35	Vertical	46.00
321.194000	25.60	-15.4	41.00	Vertical	46.00
931.906000	19.04	-2.9	21.94	Vertical	46.00

For 802.11ac(VHT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194000	15.34	-21.2	36.54	Vertical	40.00
58.954500	23.90	-18.7	42.60	Vertical	40.00
85.387000	13.93	-22.7	36.63	Vertical	40.00
309.602500	25.53	-15.8	41.33	Vertical	46.00
323.037000	26.56	-15.3	41.86	Vertical	46.00
944.855500	19.16	-2.8	21.96	Vertical	46.00

For 802.11a Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.242500	15.04	-21.2	36.24	Vertical	40.00
58.663500	23.82	-18.7	42.52	Vertical	40.00
86.454000	13.40	-22.4	35.80	Vertical	40.00
309.457000	24.23	-15.8	40.03	Vertical	46.00
321.388000	26.91	-15.4	42.31	Vertical	46.00
926.086000	18.96	-2.9	21.86	Vertical	46.00

For 802.11n(HT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	15.34	-21.2	36.54	Vertical	40.00
58.809000	23.88	-18.7	42.58	Vertical	40.00
85.872000	13.94	-22.6	36.54	Vertical	40.00
309.408500	18.72	-15.8	34.52	Vertical	46.00
321.388000	26.46	-15.4	41.86	Vertical	46.00
950.675500	19.11	-2.7	21.81	Vertical	46.00

For 802.11ac(VHT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.291000	14.78	-21.2	35.98	Vertical	40.00
58.663500	23.81	-18.7	42.51	Vertical	40.00
85.726500	14.19	-22.6	36.79	Vertical	40.00
306.547000	19.28	-15.9	35.18	Vertical	46.00
314.161500	25.84	-15.6	41.44	Vertical	46.00
947.911000	19.13	-2.8	21.93	Vertical	46.00

For 802.11n(HT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.533500	13.05	-21.1	34.15	Vertical	40.00
41.446000	12.27	-18.3	30.57	Vertical	40.00
58.663500	23.91	-18.7	42.61	Vertical	40.00
308.196000	24.79	-15.8	40.59	Vertical	46.00
321.388000	25.90	-15.4	41.30	Vertical	46.00
937.047000	19.17	-2.8	21.97	Vertical	46.00

For 802.11ac(VHT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	14.83	-21.3	36.13	Vertical	40.00
59.245500	23.98	-18.7	42.68	Vertical	40.00
85.678000	13.67	-22.7	36.37	Vertical	40.00
309.699500	24.80	-15.8	40.60	Vertical	46.00
322.940000	26.22	-15.3	41.52	Vertical	46.00
909.547500	18.56	-3.1	21.66	Vertical	46.00

For 802.11n(HT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	15.14	-21.3	36.44	Vertical	40.00
40.961000	12.32	-18.4	30.72	Vertical	40.00
59.633500	23.66	-18.8	42.46	Vertical	40.00
86.842000	11.99	-22.3	34.29	Vertical	40.00
308.196000	22.41	-15.8	38.21	Vertical	46.00
321.436500	24.93	-15.4	40.33	Vertical	46.00

For 802.11ac(VHT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	14.98	-21.3	36.28	Vertical	40.00
59.100000	24.02	-18.7	42.72	Vertical	40.00
85.193000	13.26	-22.8	36.06	Vertical	40.00
309.748000	22.65	-15.8	38.45	Vertical	46.00
324.249500	22.66	-15.3	37.96	Vertical	46.00
935.931500	19.20	-2.8	22.00	Vertical	46.00

For 802.11n(HT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	14.43	-21.2	35.63	Vertical	40.00
53.571000	12.77	-18.0	30.77	Vertical	40.00
58.663500	24.02	-18.7	42.72	Vertical	40.00
309.651000	21.95	-15.8	37.75	Vertical	46.00
318.429500	22.94	-15.5	38.44	Vertical	46.00
952.518500	19.06	-2.7	21.76	Vertical	46.00

For 802.11ac(VHT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	14.54	-21.3	35.84	Vertical	40.00
53.813500	15.98	-18.0	33.98	Vertical	40.00
59.051500	23.83	-18.7	42.53	Vertical	40.00
308.826500	24.47	-15.8	40.27	Vertical	46.00
318.332500	20.95	-15.5	36.45	Vertical	46.00
944.176500	19.18	-2.8	21.98	Vertical	46.00

For 802.11ac(VHT80) Channel No.:106

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.166500	13.13	-18.7	31.83	Vertical	40.00
53.765000	16.80	-18.0	34.80	Vertical	40.00
59.051500	23.09	-18.7	41.79	Vertical	40.00
310.184500	25.14	-15.8	40.94	Vertical	46.00

318.963000	26.57	-15.5	42.07	Vertical	46.00
932.973000	19.07	-2.9	21.97	Vertical	46.00

For 802.11ac(VHT80) Channel No.:122

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	16.26	-21.2	37.46	Vertical	40.00
52.601000	14.14	-17.9	32.04	Vertical	40.00
57.596500	22.53	-18.5	41.03	Vertical	40.00
308.826500	24.81	-15.8	40.61	Vertical	46.00
314.937500	21.04	-15.6	36.64	Vertical	46.00
928.705000	19.07	-2.9	21.97	Vertical	46.00

For 802.11ac(VHT80) Channel No.:138

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.894000	12.67	-18.5	31.17	Vertical	40.00
41.640000	11.93	-18.3	30.23	Vertical	40.00
59.391000	21.77	-18.8	40.57	Vertical	40.00
85.823500	13.95	-22.6	36.55	Vertical	40.00
308.778000	25.03	-15.8	40.83	Vertical	46.00
321.921500	26.46	-15.4	41.86	Vertical	46.00

For 802.11a Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.215000	13.52	-18.7	32.22	Vertical	40.00
53.037500	16.19	-17.9	34.09	Vertical	40.00
57.111500	22.08	-18.4	40.48	Vertical	40.00
310.136000	24.73	-15.8	40.53	Vertical	46.00
317.605000	25.60	-15.5	41.10	Vertical	46.00
956.301500	18.98	-2.6	21.58	Vertical	46.00

For 802.11n(HT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097000	17.57	-21.2	38.77	Vertical	40.00
53.716500	17.44	-18.0	35.44	Vertical	40.00
58.566500	21.28	-18.6	39.88	Vertical	40.00
89.946000	16.77	-21.3	38.07	Vertical	43.50
310.233000	24.37	-15.8	40.17	Vertical	46.00
318.963000	25.88	-15.5	41.38	Vertical	46.00

For 802.11ac(VHT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl	Pmea	Polarity	Limit
----------------	----------------	------	------	----------	-------

		(dB)	(dBuV/m)		(dBuV/m)
30.388000	16.25	-21.1	37.35	Vertical	40.00
53.328500	16.65	-18.0	34.65	Vertical	40.00
58.081500	20.53	-18.6	39.13	Vertical	40.00
308.729500	24.38	-15.8	40.18	Vertical	46.00
318.963000	26.27	-15.5	41.77	Vertical	46.00
930.936000	19.05	-2.9	21.95	Vertical	46.00

For 802.11a Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.339500	16.30	-21.2	37.50	Vertical	40.00
53.571000	16.67	-18.0	34.67	Vertical	40.00
56.141500	21.96	-18.3	40.26	Vertical	40.00
87.666500	14.88	-22.0	36.88	Vertical	40.00
309.990500	23.42	-15.8	39.22	Vertical	46.00
321.727500	24.52	-15.4	39.92	Vertical	46.00

For 802.11n(HT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	16.74	-21.3	38.04	Vertical	40.00
53.183000	16.29	-17.9	34.19	Vertical	40.00
57.596500	22.19	-18.5	40.69	Vertical	40.00
85.629500	15.10	-22.7	37.80	Vertical	40.00
310.039000	22.68	-15.8	38.48	Vertical	46.00
321.776000	24.62	-15.4	40.02	Vertical	46.00

For 802.11ac(VHT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	17.48	-21.3	38.78	Vertical	40.00
53.280000	16.53	-18.0	34.53	Vertical	40.00
57.160000	21.94	-18.5	40.44	Vertical	40.00
85.969000	15.73	-22.6	38.33	Vertical	40.00
310.136000	24.49	-15.8	40.29	Vertical	46.00
318.817500	25.21	-15.5	40.71	Vertical	46.00

For 802.11a Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	17.87	-21.3	39.17	Vertical	40.00
53.522500	16.97	-18.0	34.97	Vertical	40.00
56.093000	21.26	-18.3	39.56	Vertical	40.00
85.629500	15.75	-22.7	38.45	Vertical	40.00

310.136000	24.70	-15.8	40.50	Vertical	46.00
321.921500	25.93	-15.4	41.33	Vertical	46.00

For 802.11n(HT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194000	18.00	-21.2	39.20	Vertical	40.00
53.425500	16.83	-18.0	34.83	Vertical	40.00
56.093000	21.07	-18.3	39.37	Vertical	40.00
85.872000	16.25	-22.6	38.85	Vertical	40.00
308.487000	22.45	-15.8	38.25	Vertical	46.00
320.078500	23.21	-15.4	38.61	Vertical	46.00

For 802.11ac(VHT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.097000	18.41	-21.2	39.61	Vertical	40.00
52.746500	15.90	-17.9	33.80	Vertical	40.00
59.100000	19.59	-18.7	38.29	Vertical	40.00
86.502500	16.30	-22.4	38.70	Vertical	40.00
309.893500	22.41	-15.8	38.21	Vertical	46.00
320.224000	24.66	-15.4	40.06	Vertical	46.00

For 802.11n(HT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	18.69	-21.3	39.99	Vertical	40.00
53.765000	17.16	-18.0	35.16	Vertical	40.00
57.742000	19.65	-18.5	38.15	Vertical	40.00
86.793500	15.96	-22.3	38.26	Vertical	40.00
308.681000	23.42	-15.8	39.22	Vertical	46.00
315.956000	24.32	-15.6	39.92	Vertical	46.00

For 802.11ac(VHT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	19.56	-21.3	40.86	Vertical	40.00
53.183000	14.12	-17.9	32.02	Vertical	40.00
56.869000	17.65	-18.4	36.05	Vertical	40.00
85.678000	15.42	-22.7	38.12	Vertical	40.00
310.039000	23.25	-15.8	39.05	Vertical	46.00
320.369500	23.35	-15.4	38.75	Vertical	46.00

For 802.11n(HT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl	Pmea	Polarity	Limit
----------------	----------------	------	------	----------	-------

		(dB)	(dBuV/m)		(dBuV/m)
30.097000	19.56	-21.2	40.76	Vertical	40.00
53.377000	13.80	-18.0	31.80	Vertical	40.00
56.529500	17.76	-18.4	36.16	Vertical	40.00
86.066000	14.62	-22.5	37.12	Vertical	40.00
307.032000	22.42	-15.9	38.32	Vertical	46.00
320.224000	24.34	-15.4	39.74	Vertical	46.00


For 802.11ac(VHT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.388000	18.87	-21.1	39.97	Vertical	40.00
53.522500	15.08	-18.0	33.08	Vertical	40.00
57.160000	17.85	-18.5	36.35	Vertical	40.00
85.775000	14.81	-22.6	37.41	Vertical	40.00
308.584000	20.67	-15.8	36.47	Vertical	46.00
316.053000	21.40	-15.6	37.00	Vertical	46.00


For 802.11ac(VHT80) Channel No.:155

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.242500	18.81	-21.2	40.01	Vertical	40.00
53.086000	12.98	-17.9	30.88	Vertical	40.00
59.100000	19.21	-18.7	37.91	Vertical	40.00
85.581000	14.74	-22.7	37.44	Vertical	40.00
309.845000	20.93	-15.8	36.73	Vertical	46.00
320.224000	20.05	-15.4	35.45	Vertical	46.00

Carrier frequency (MHz): 5180
Channel No.:36

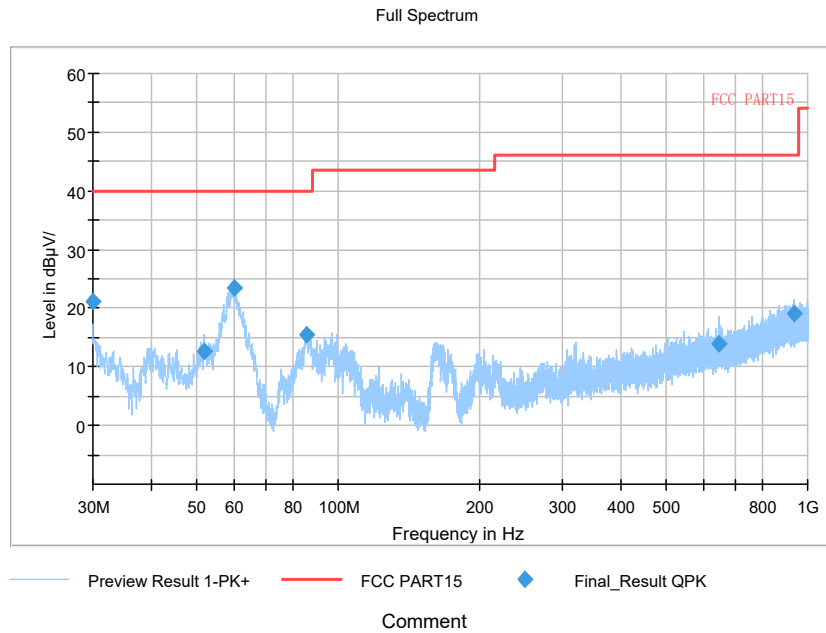


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

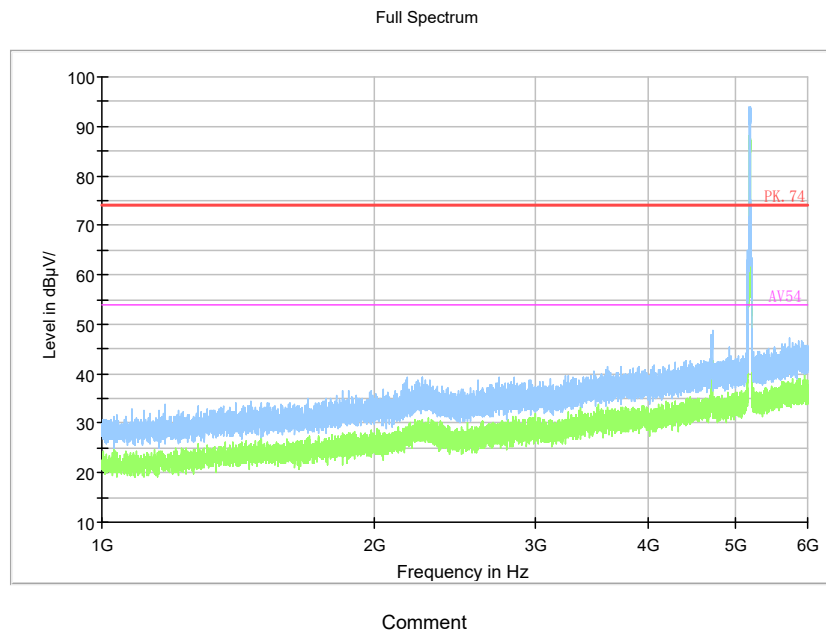

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

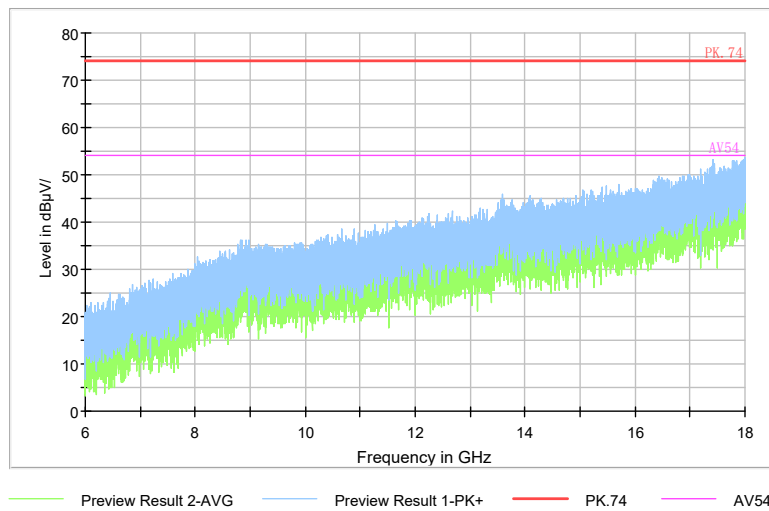

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

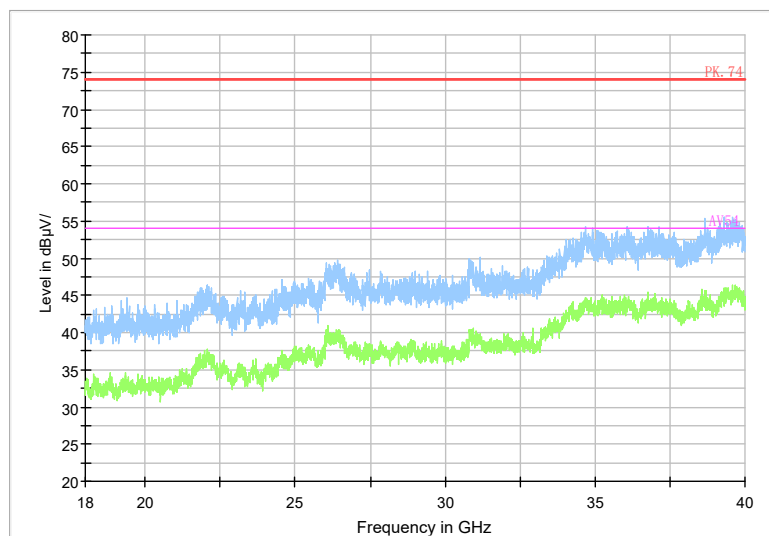

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

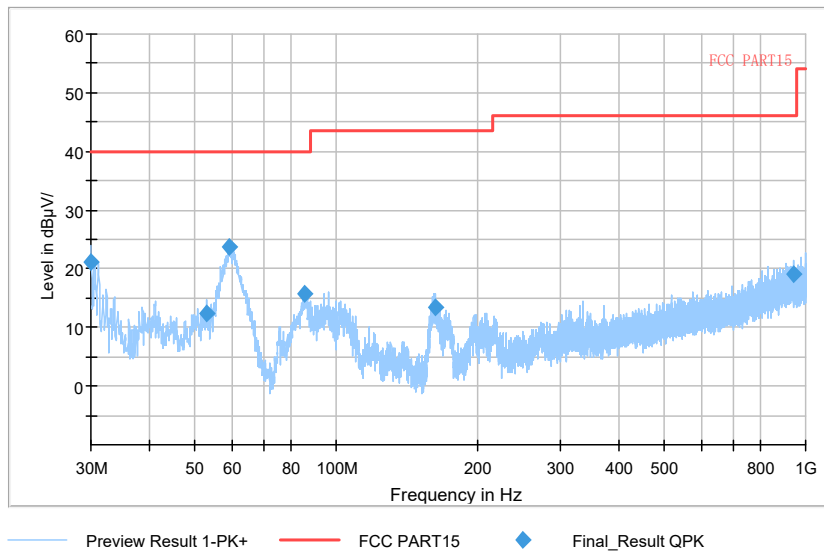

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

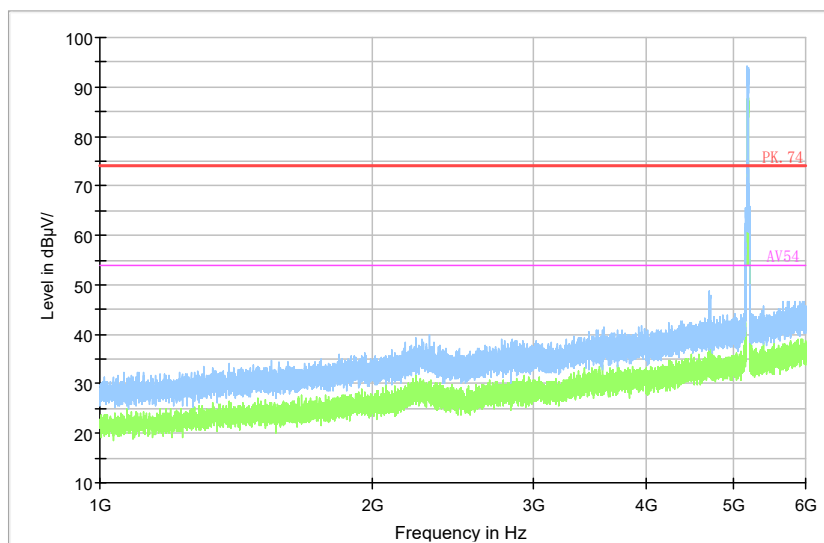

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

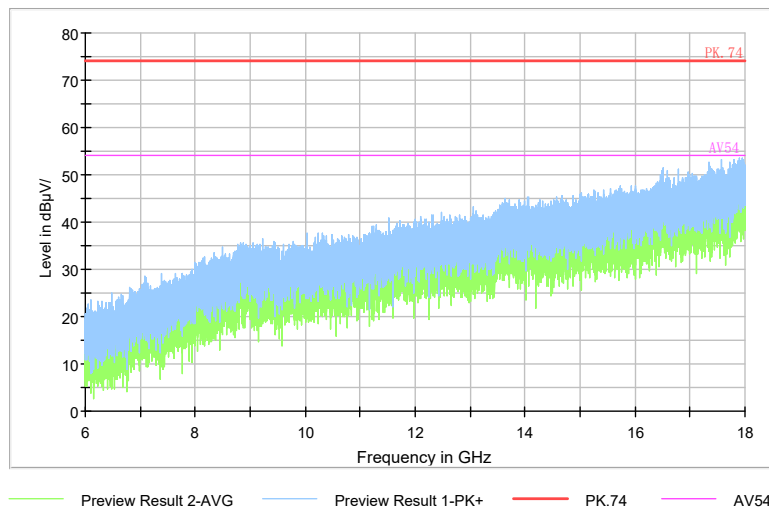


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

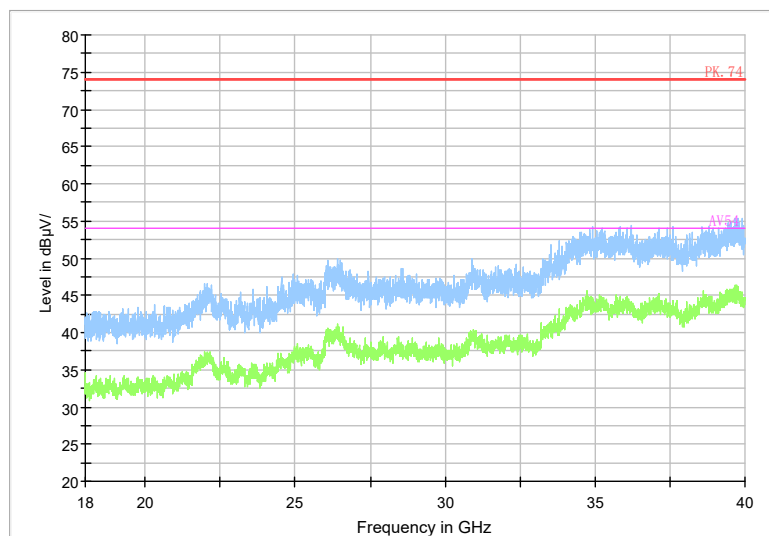


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

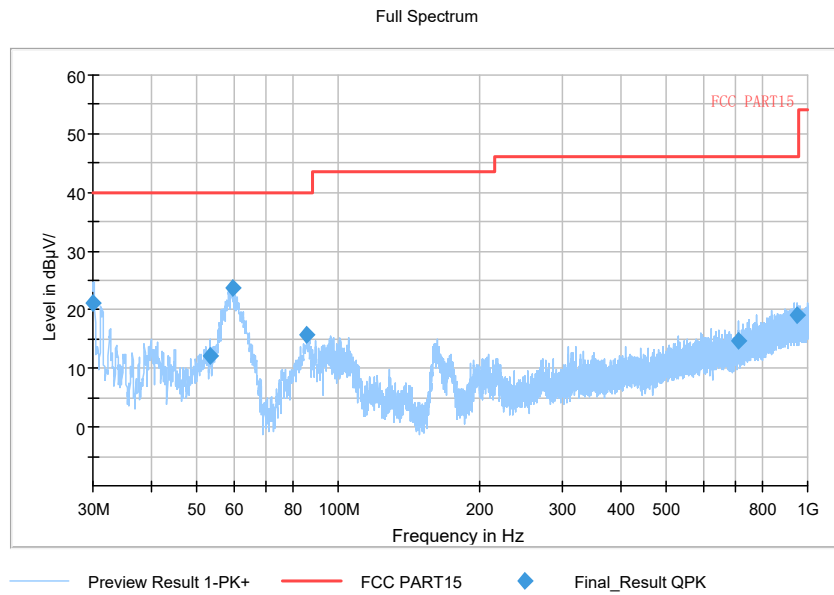


Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

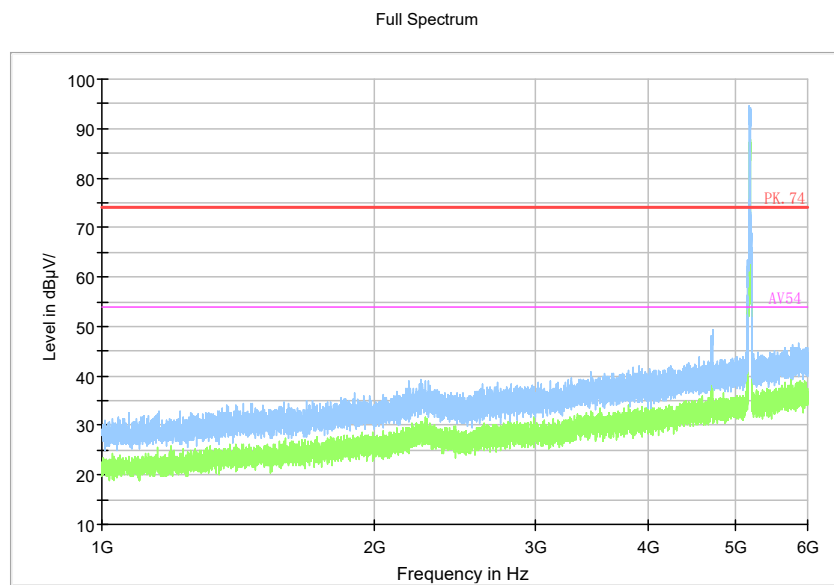


Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

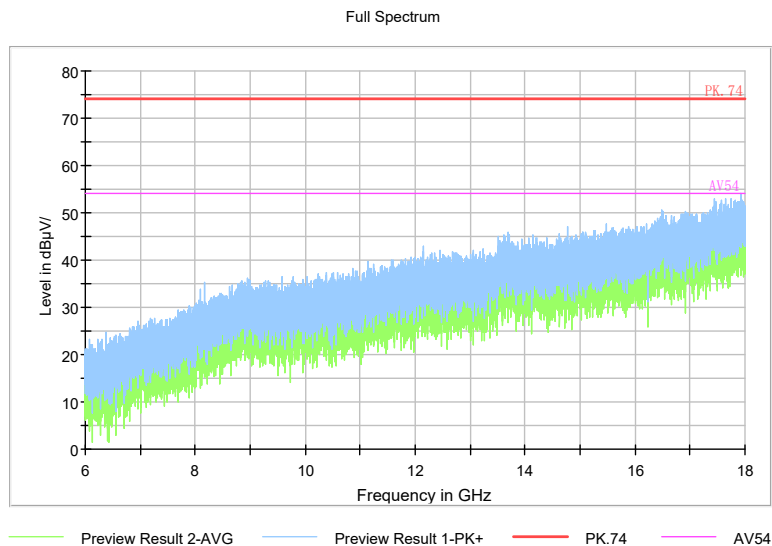


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

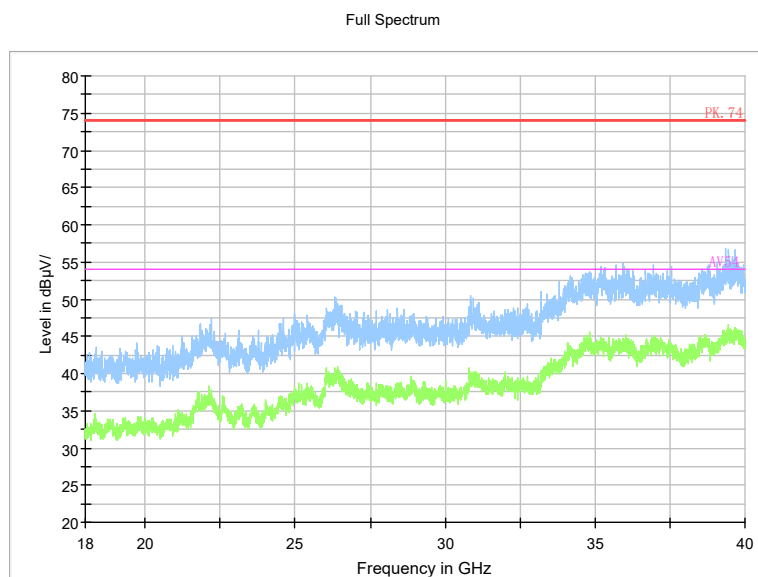


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5200
Channel No.:40

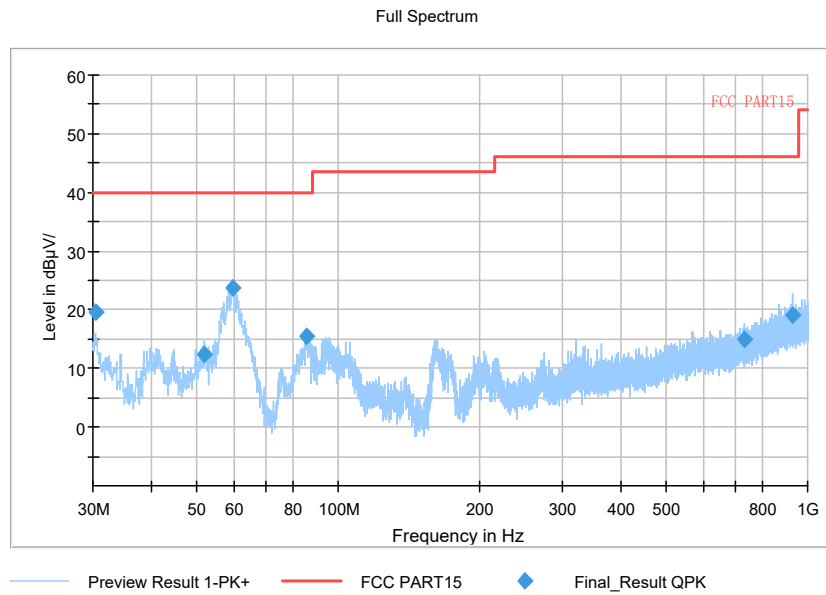

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

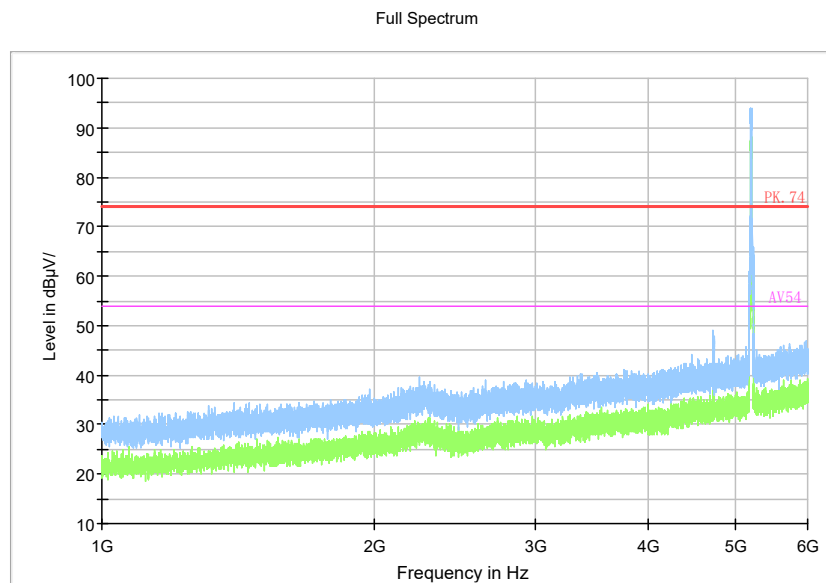

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

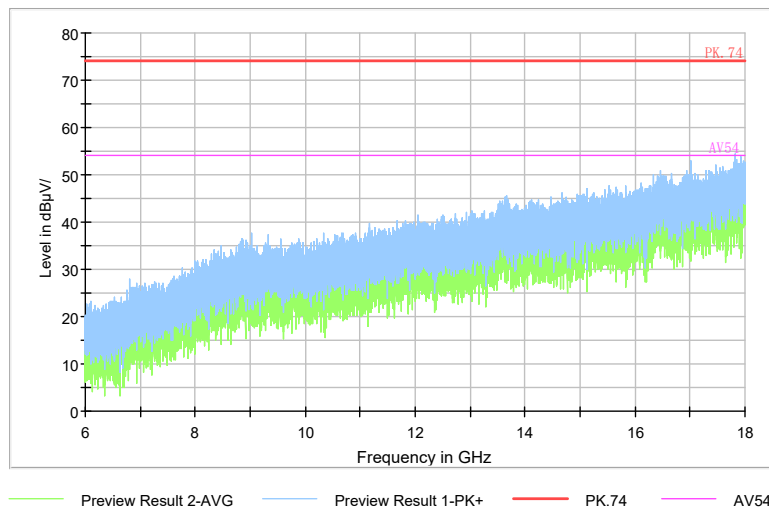


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

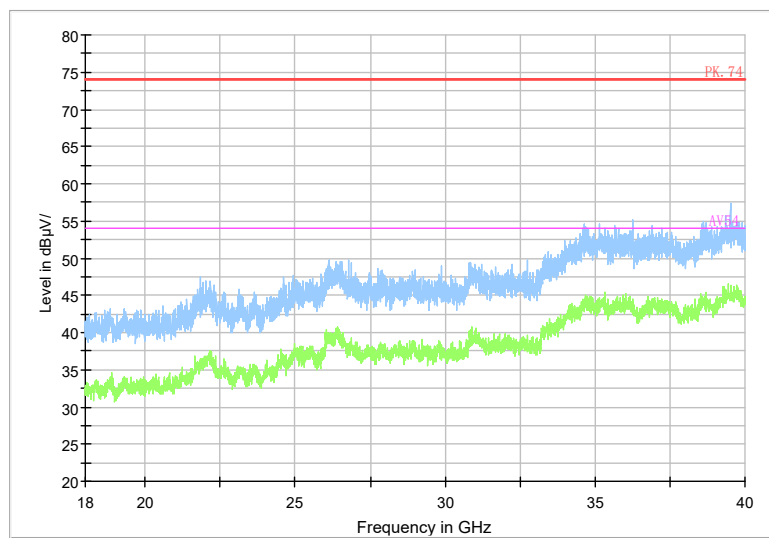


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

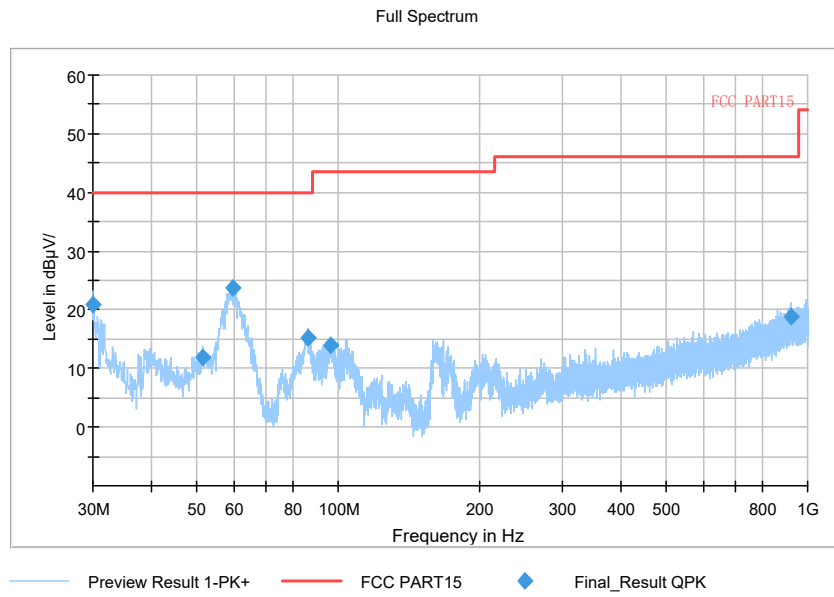

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

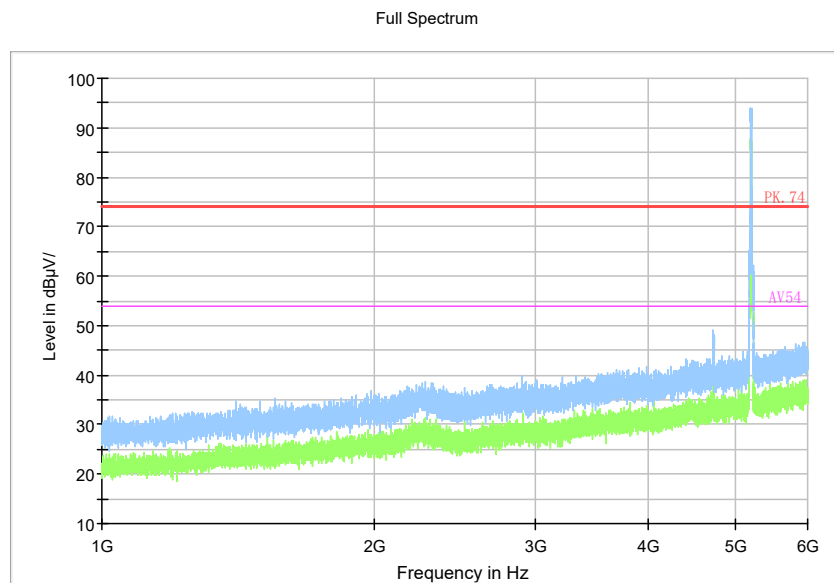

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

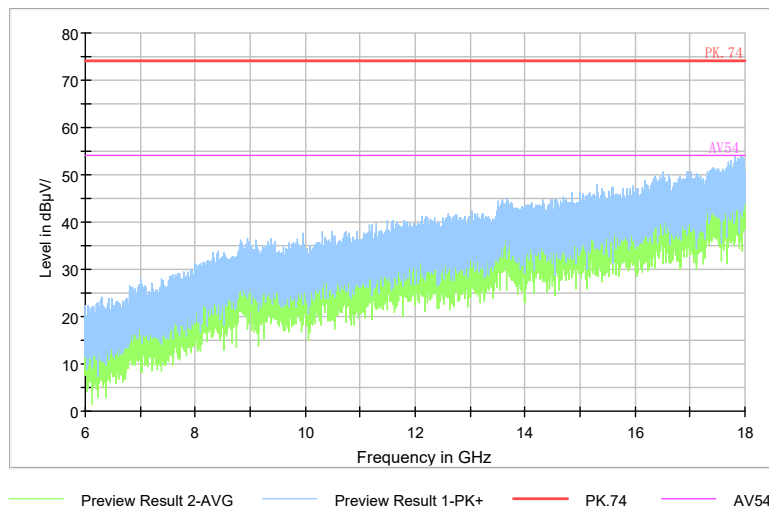

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

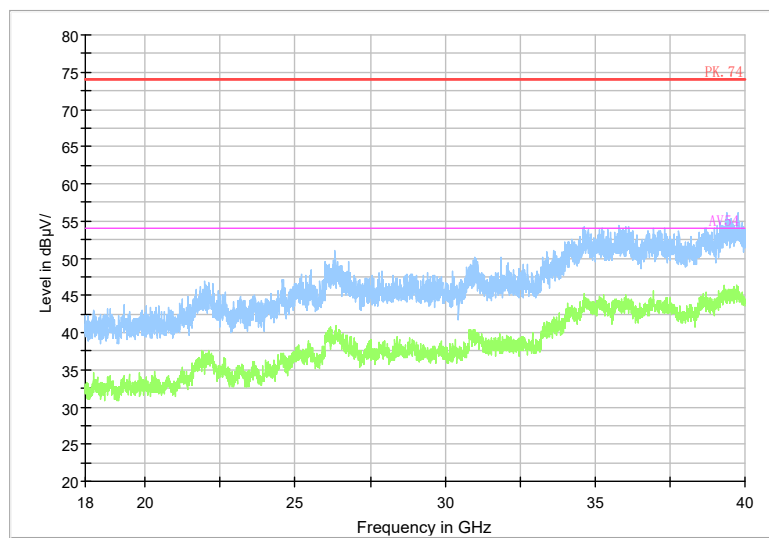

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

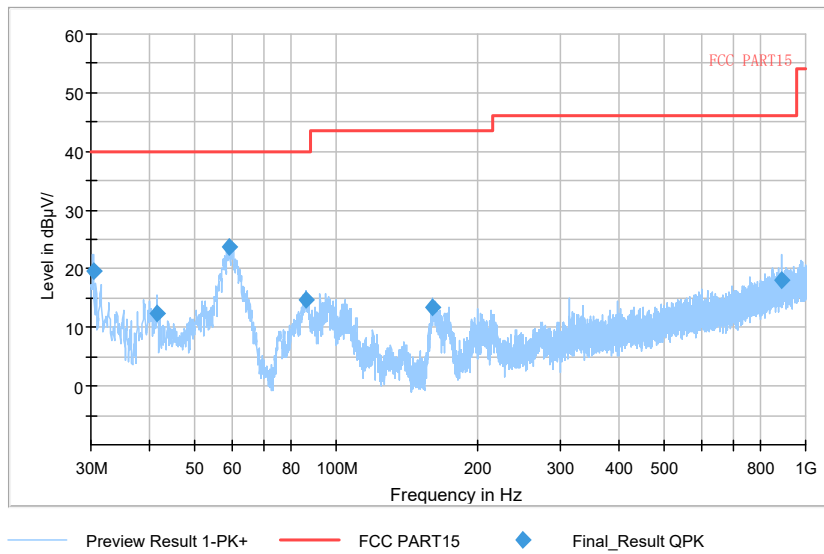

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

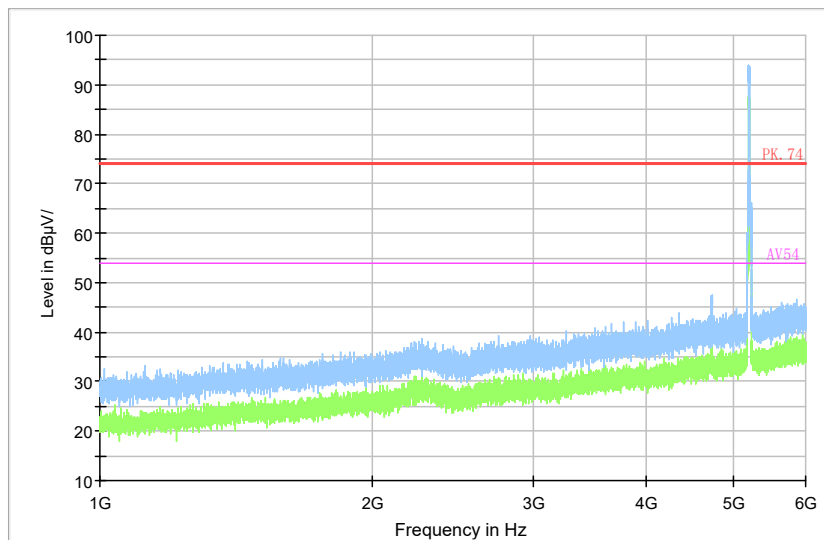

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

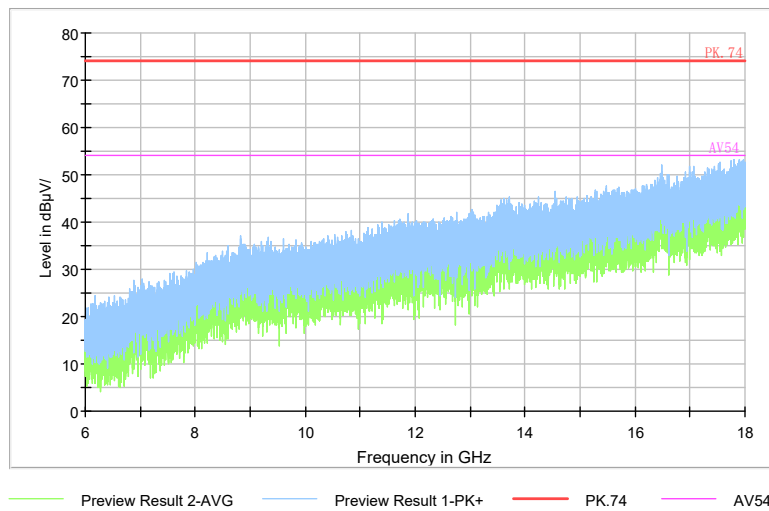

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Full Spectrum

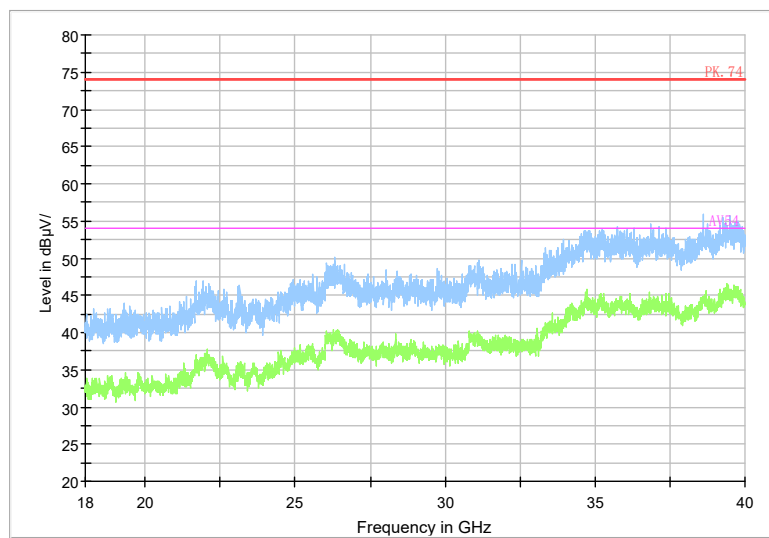


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5240
Channel No.:48

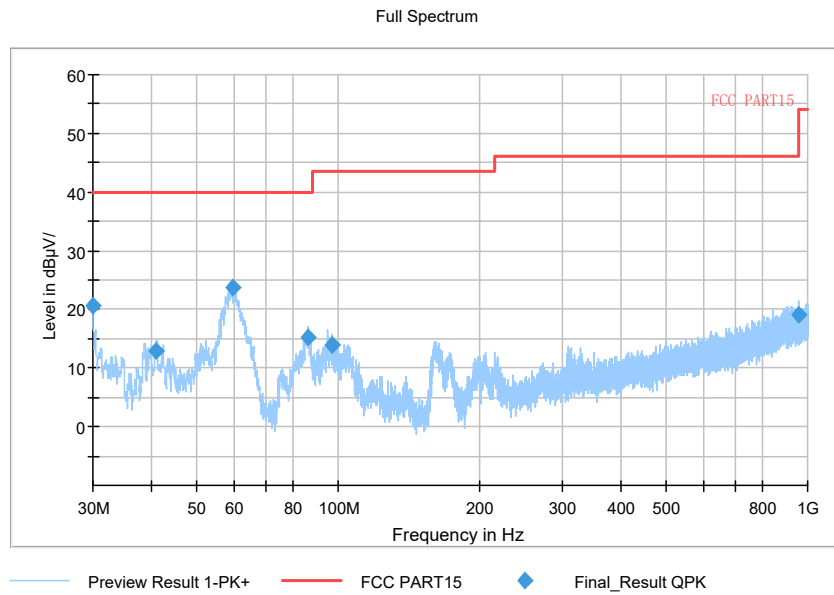

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

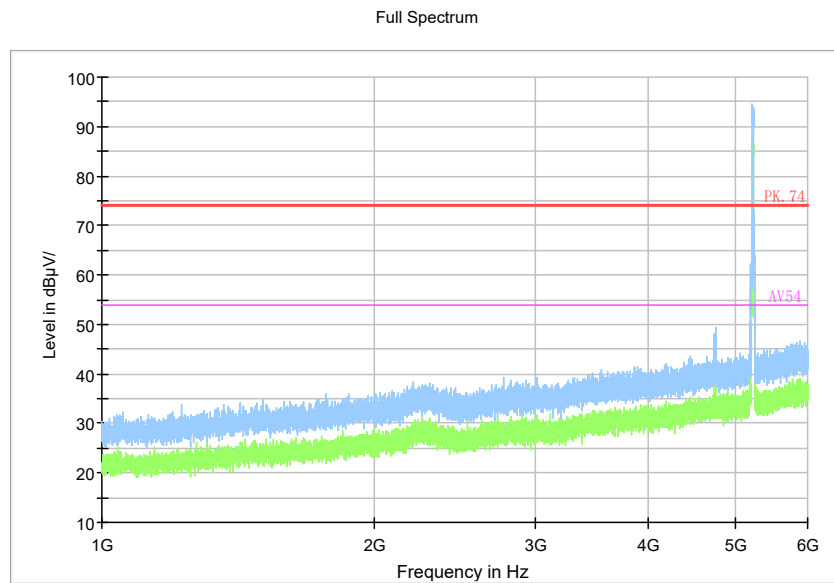

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

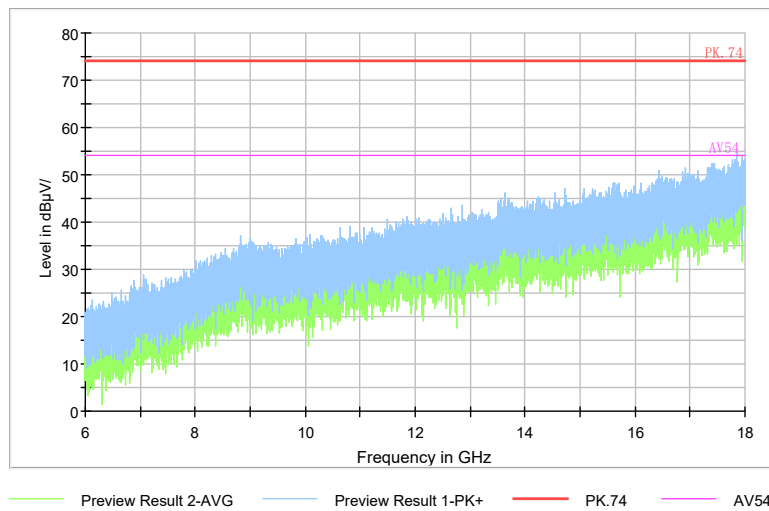

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

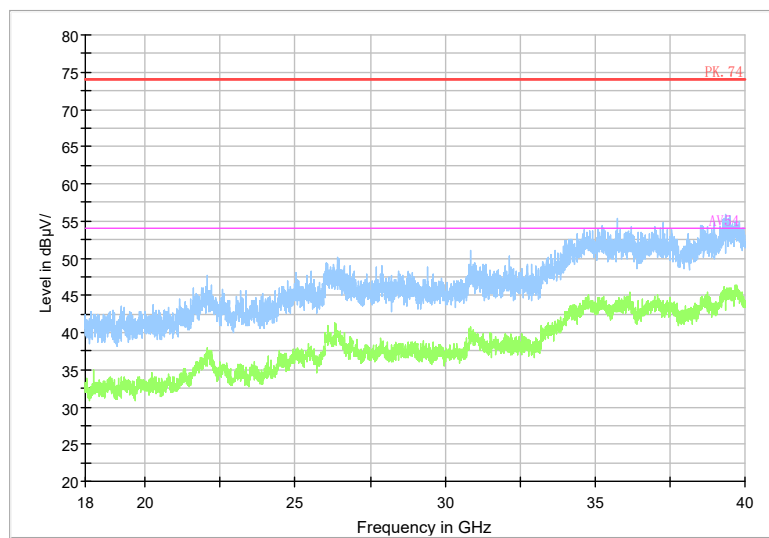

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

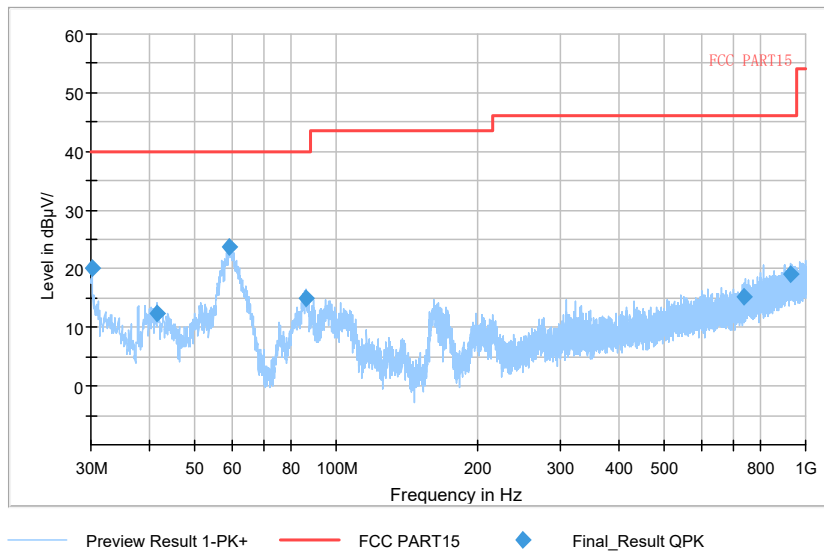

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

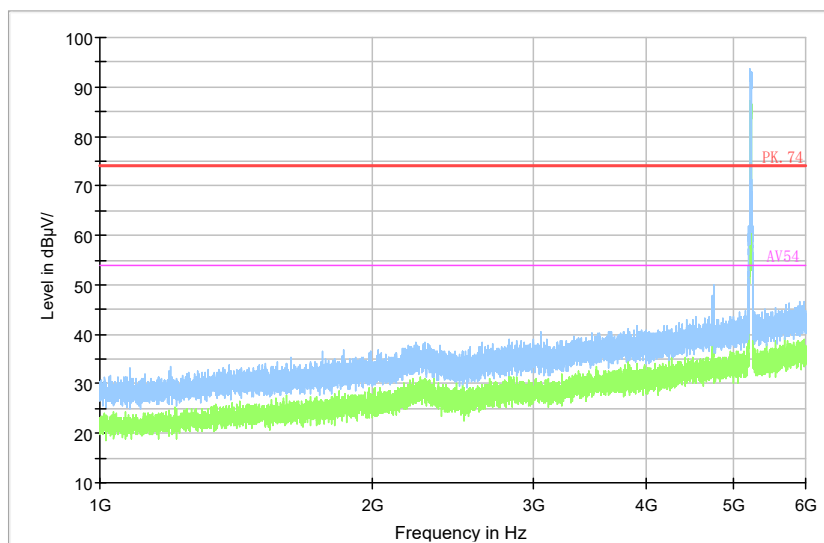

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

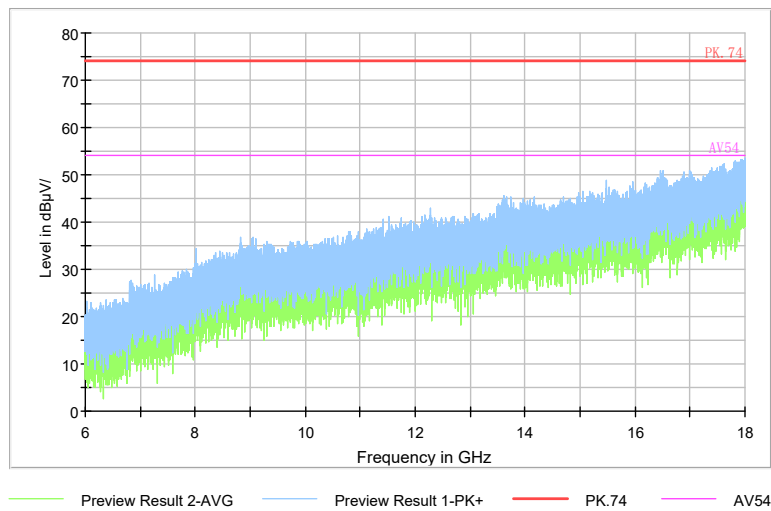


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

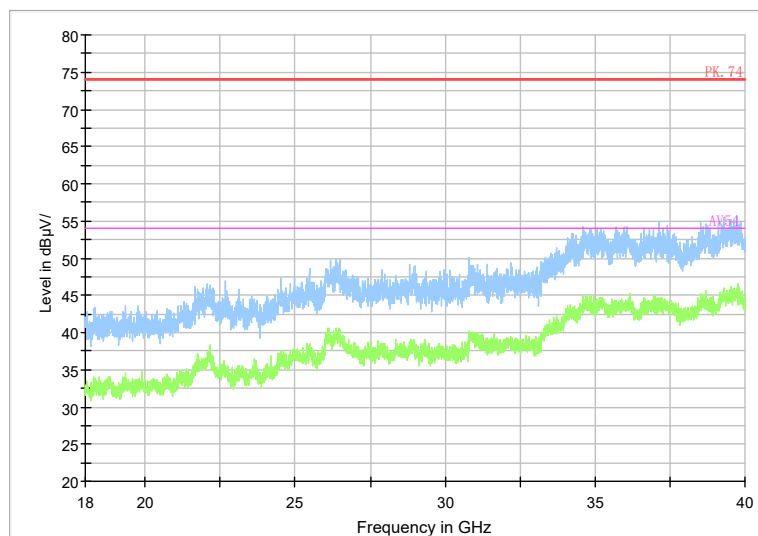


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

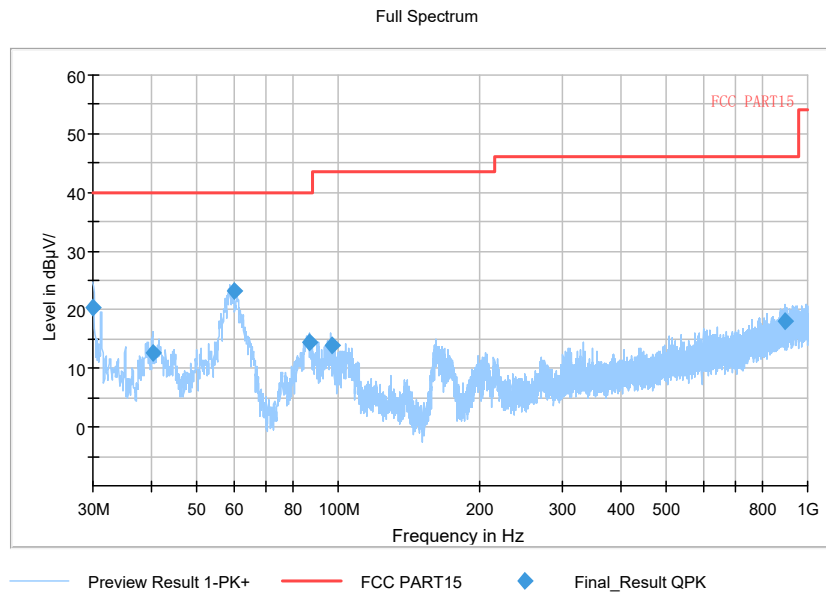


Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

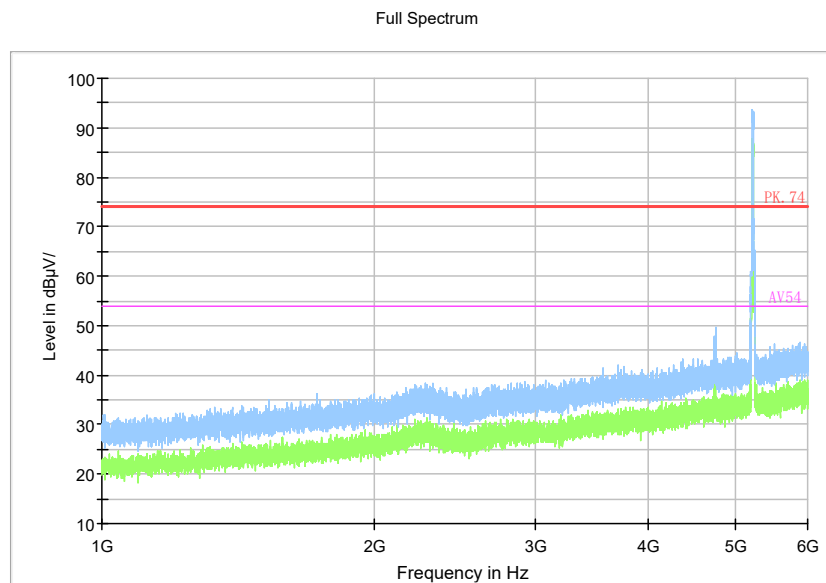


Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

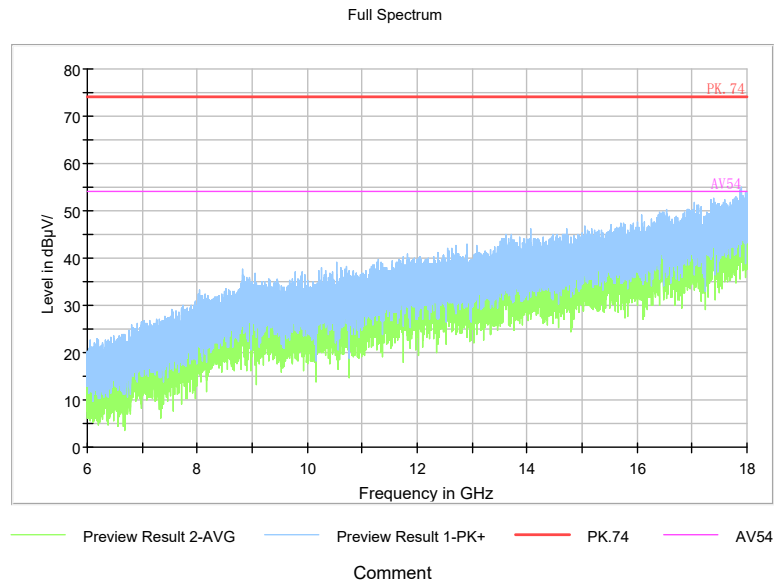


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

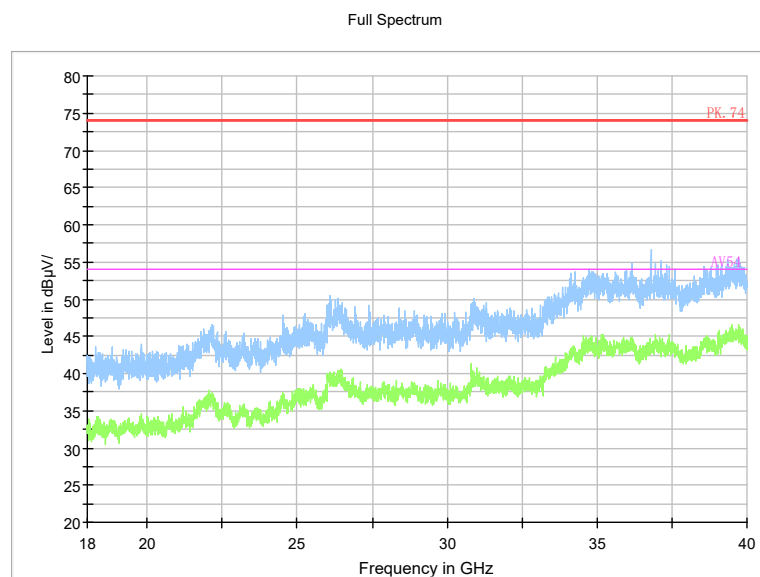

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5190
Channel No.:38


Full Spectrum

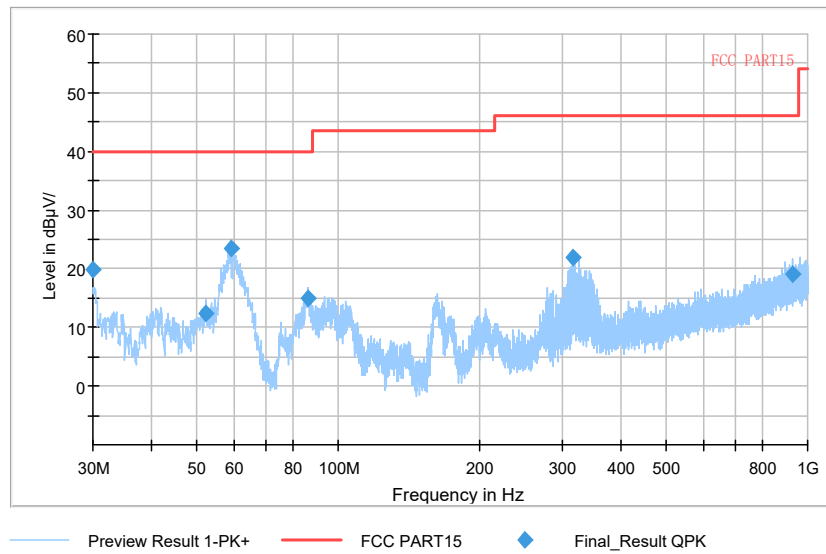

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)


Full Spectrum

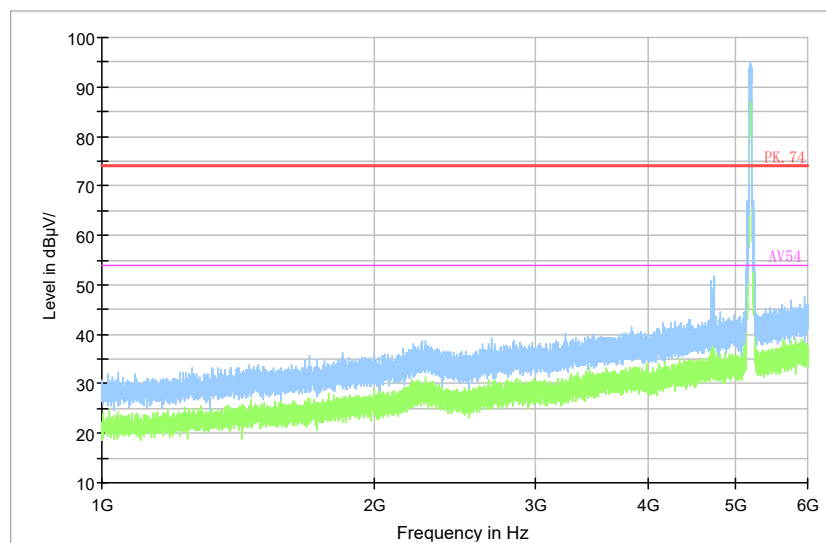

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

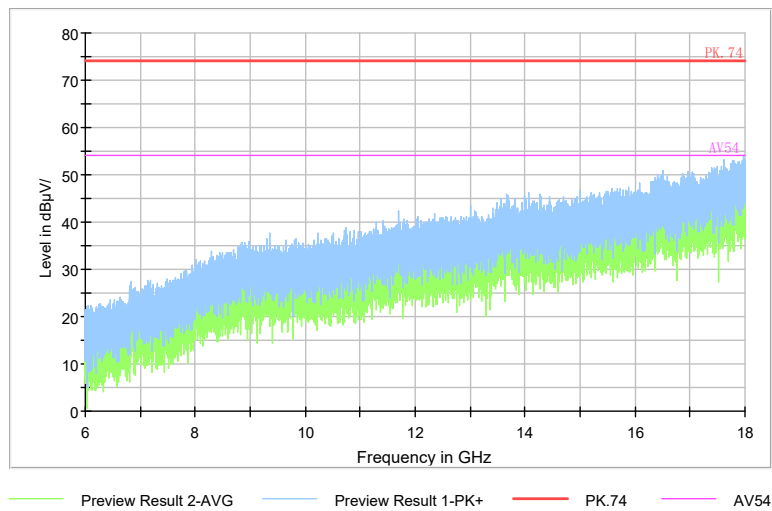

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

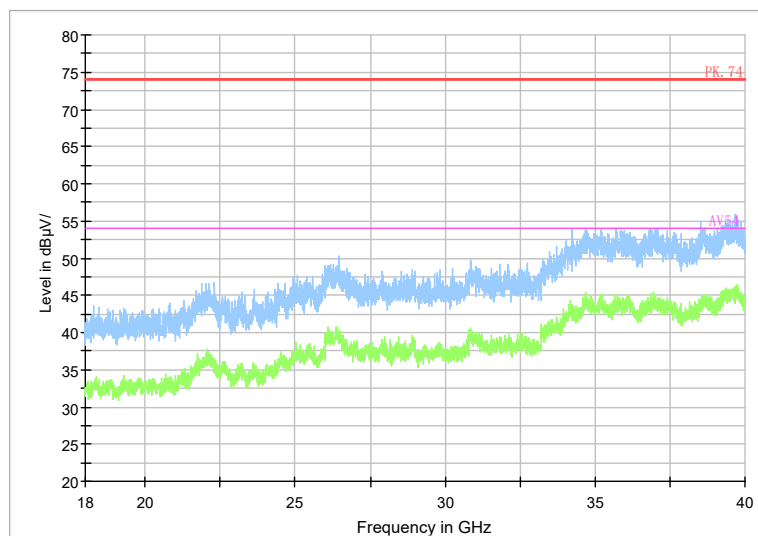

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

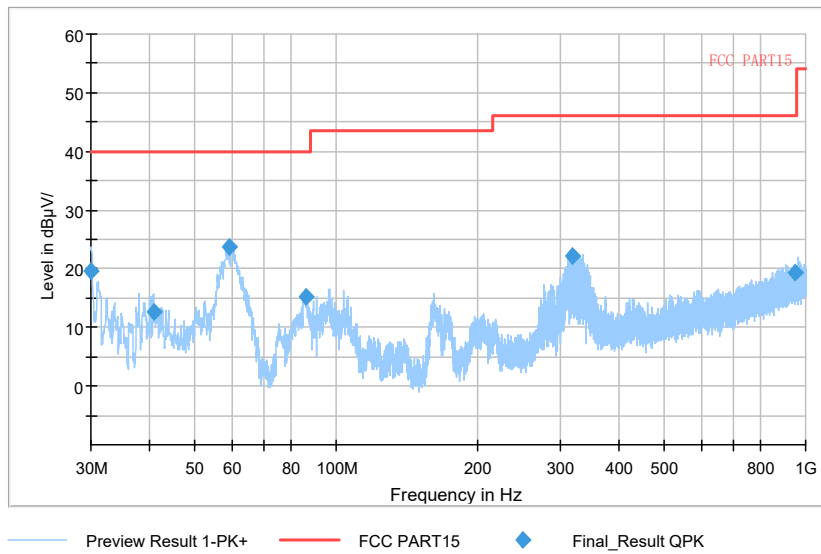

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)


Full Spectrum

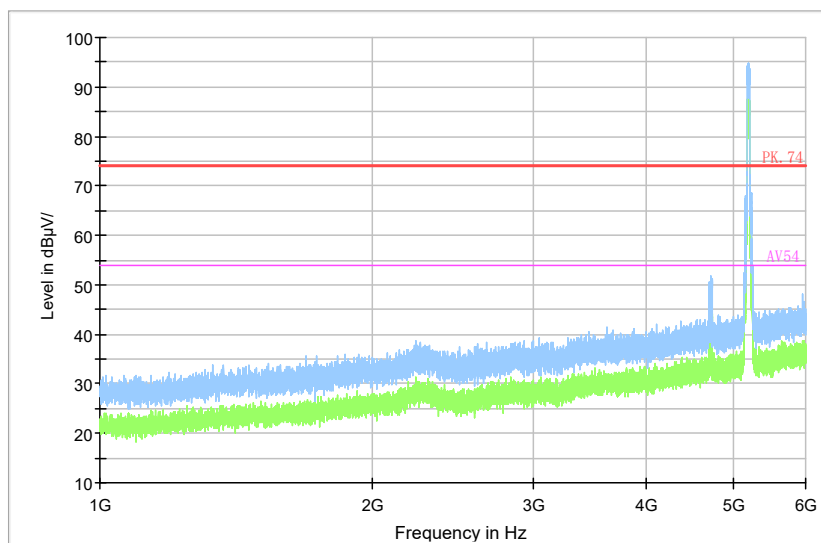

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)


Full Spectrum

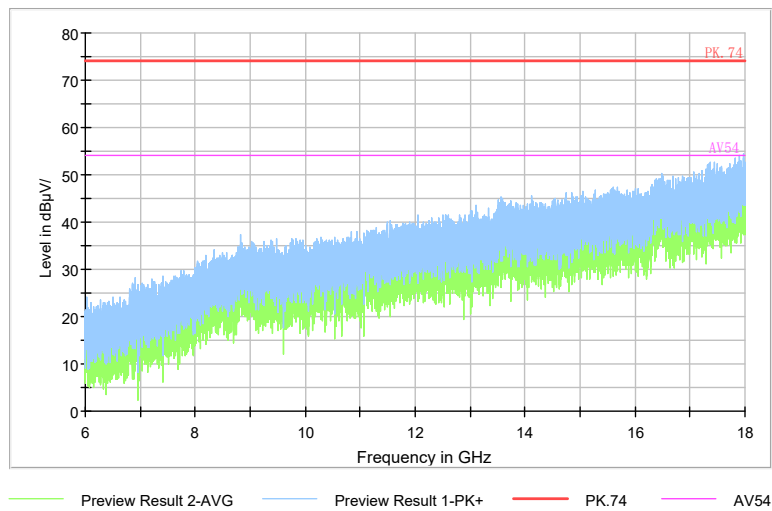

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Full Spectrum

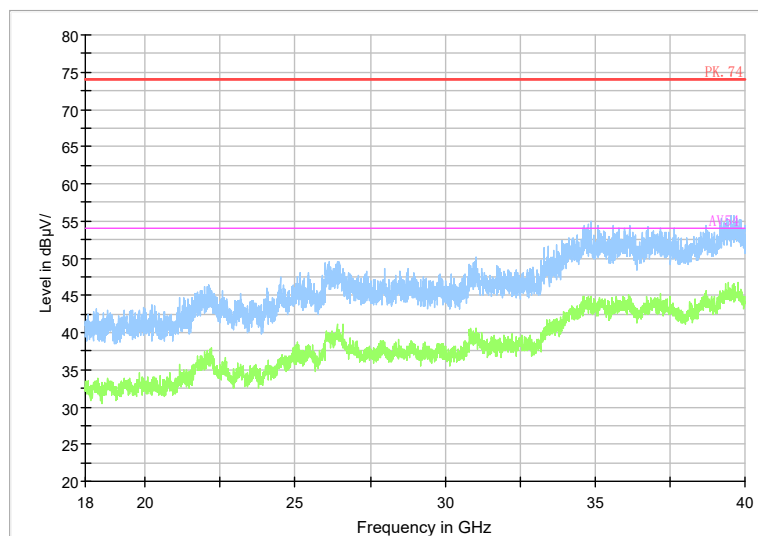


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5230

Channel No.:46


Full Spectrum

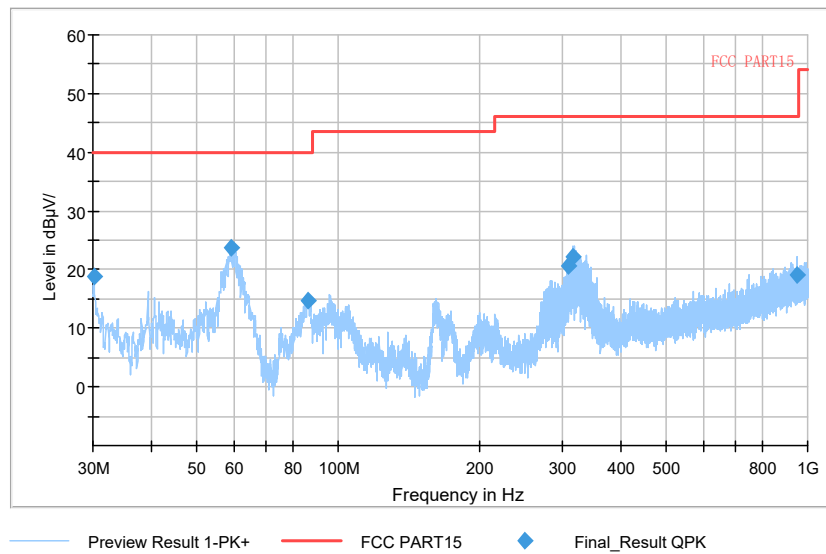

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)


Full Spectrum

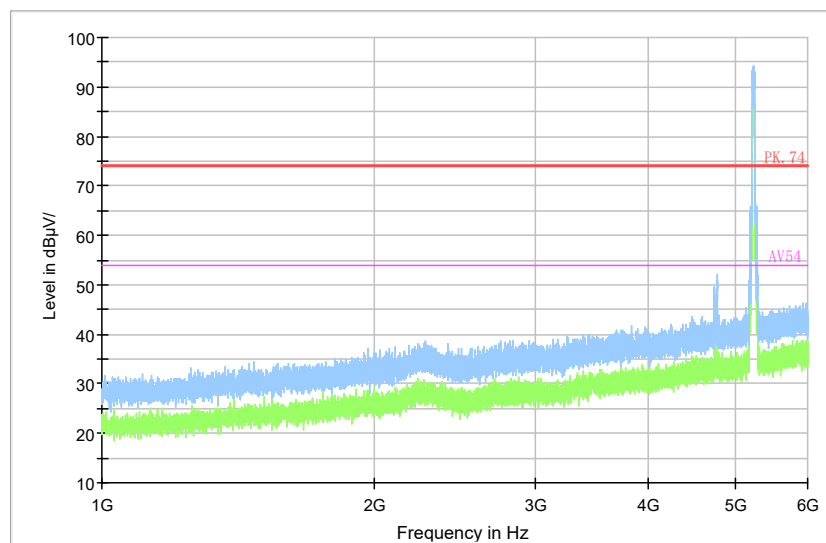

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)


Full Spectrum

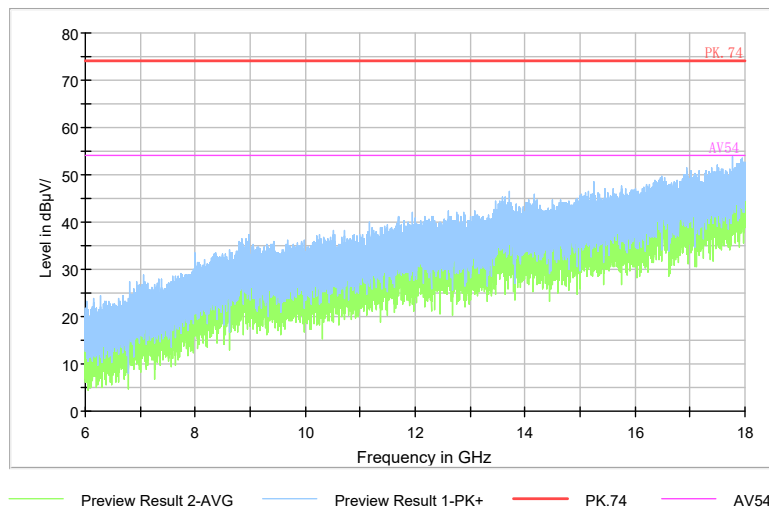


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

Full Spectrum

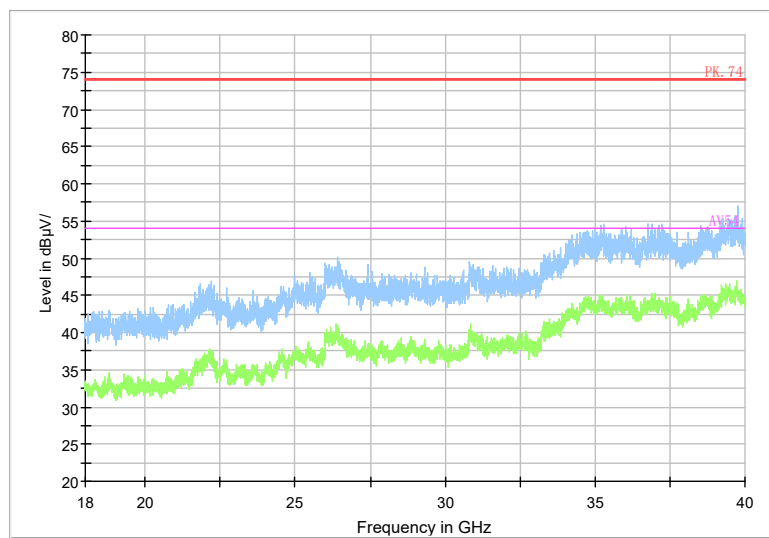


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

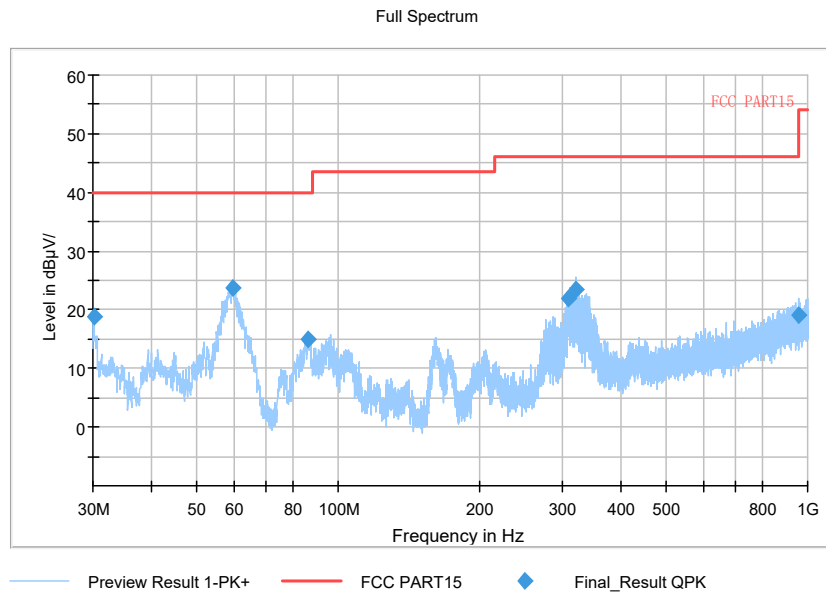

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

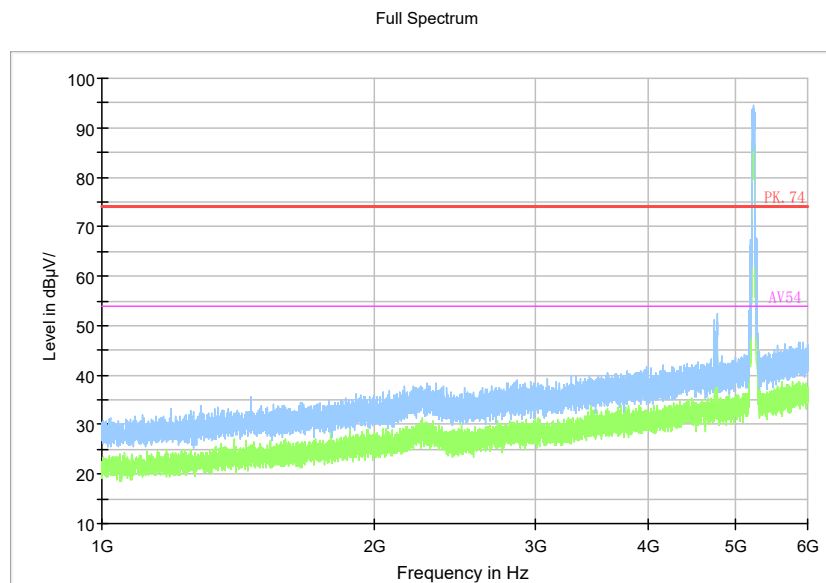

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)


Full Spectrum

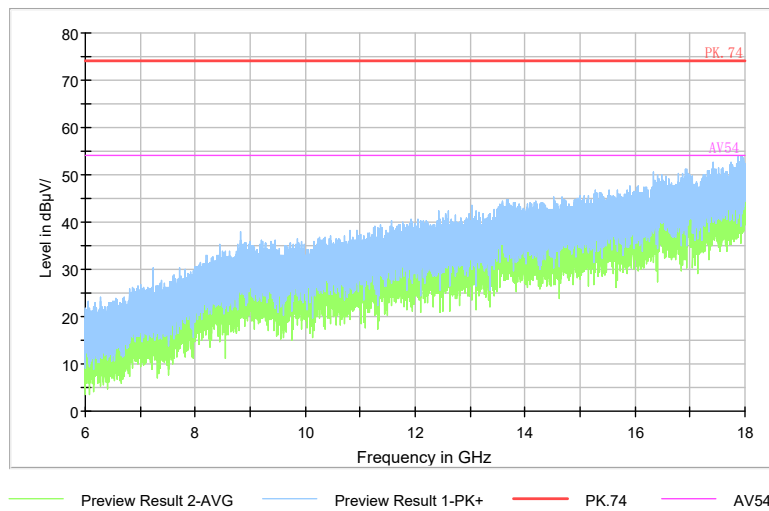

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Full Spectrum

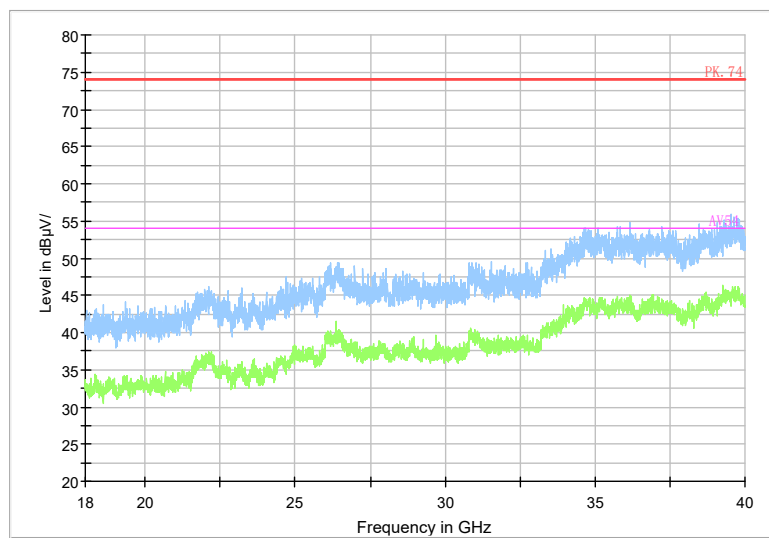


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5210

Channel No.:42


Full Spectrum

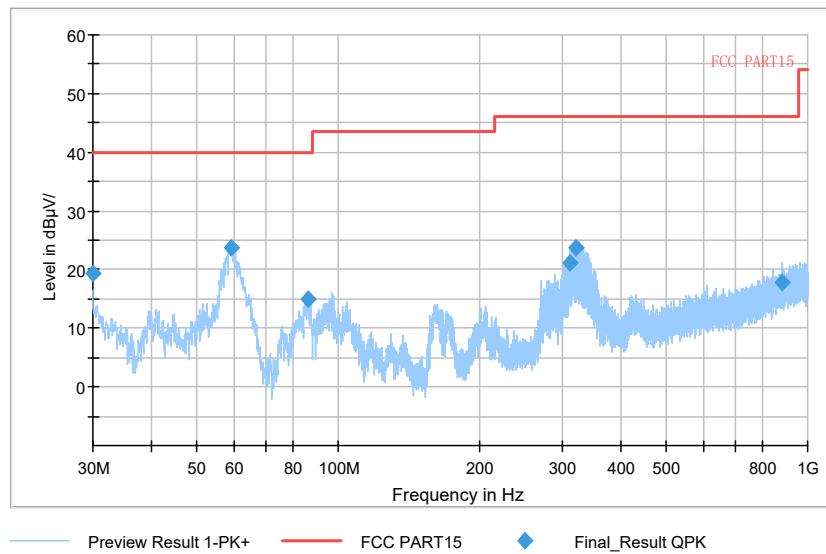

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT80)


Full Spectrum

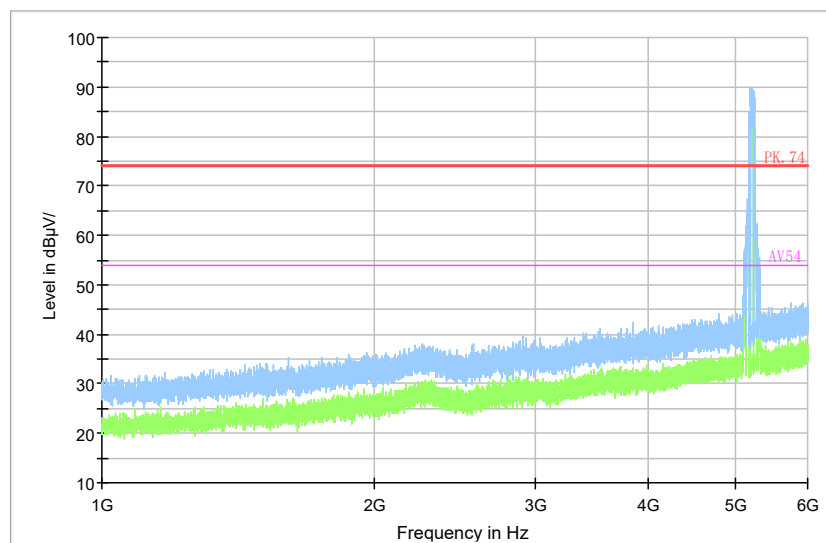

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)


Full Spectrum

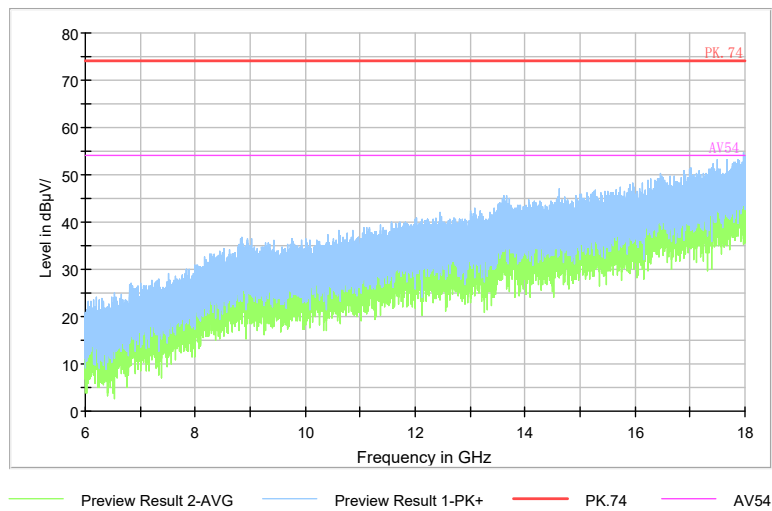

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)


Full Spectrum

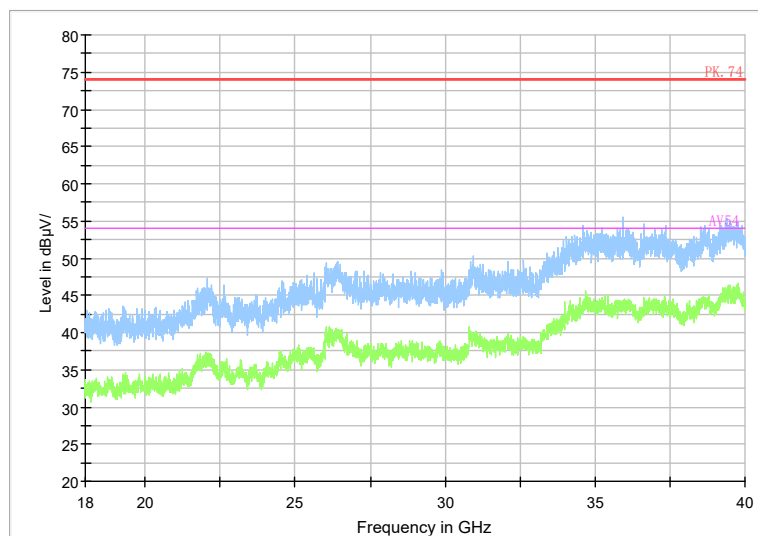

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

Carrier frequency (MHz): 5260
Channel No.:52


Full Spectrum

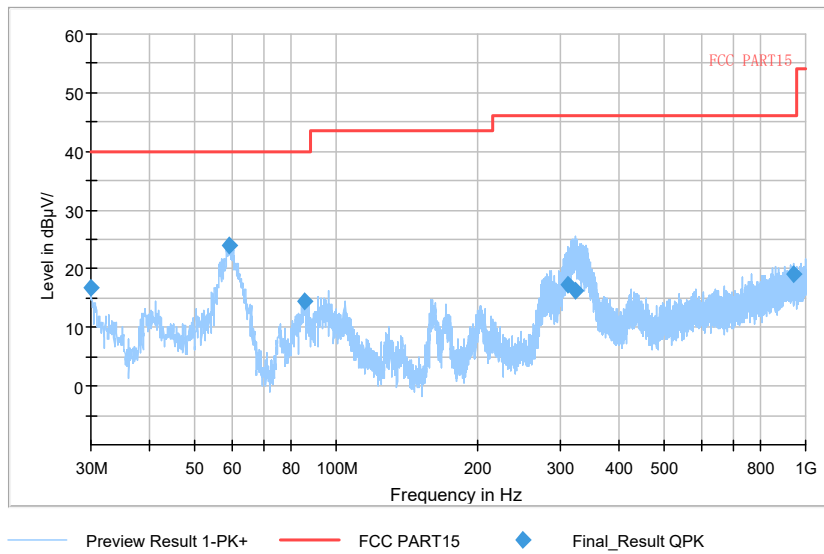

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a


Full Spectrum

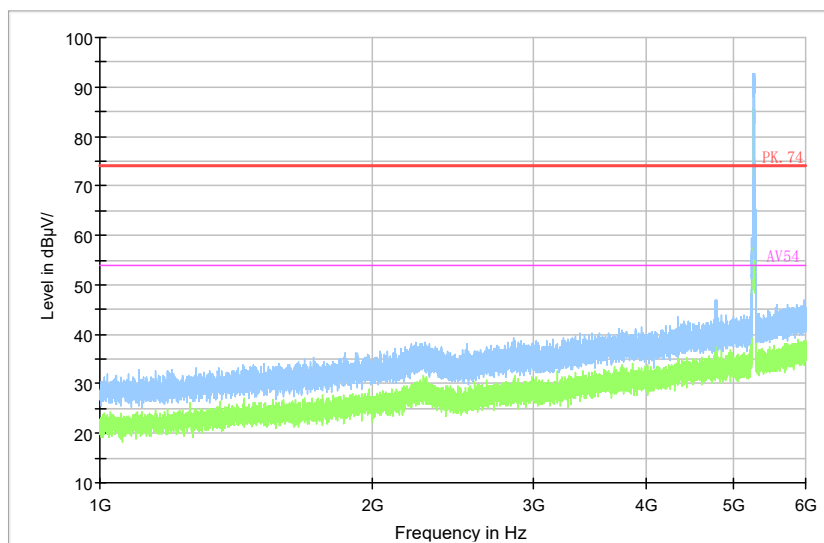

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

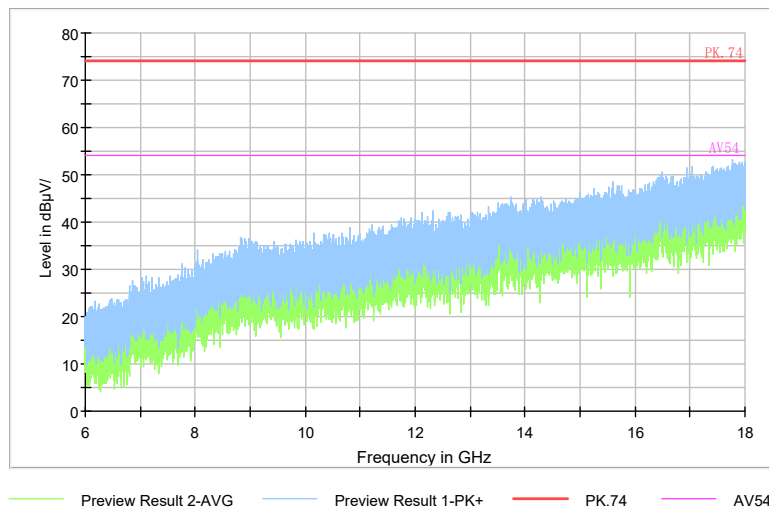

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

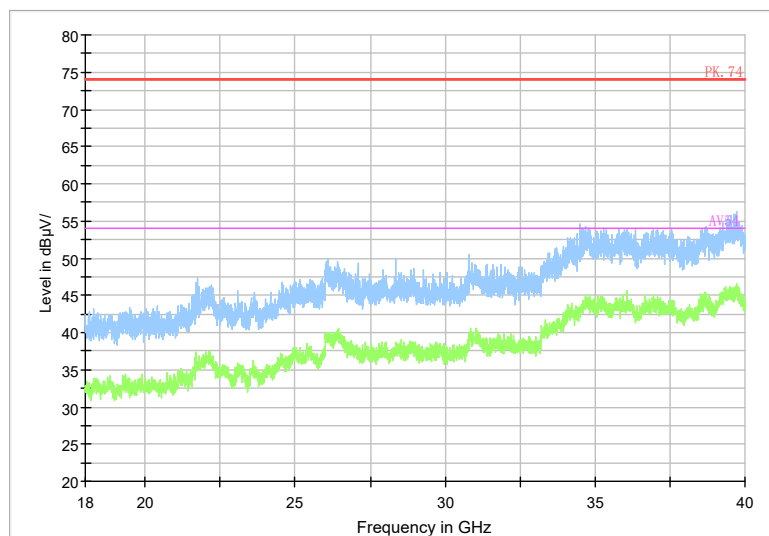

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

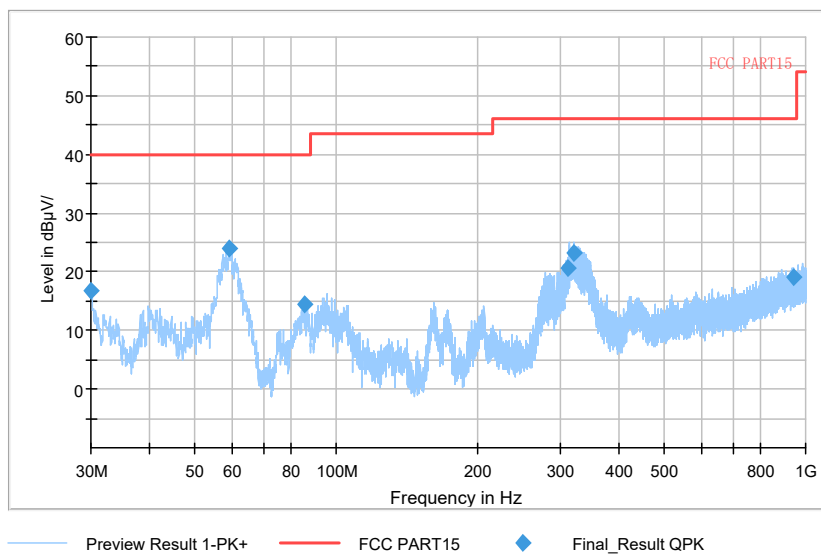

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

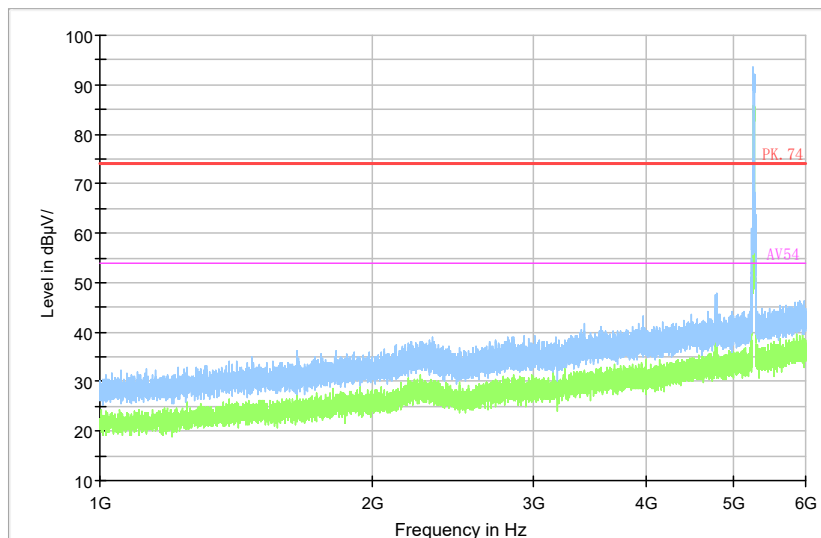

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

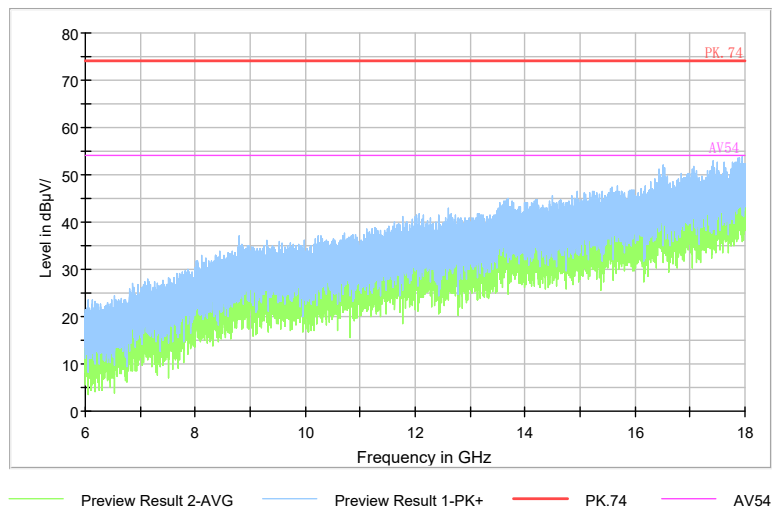


Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

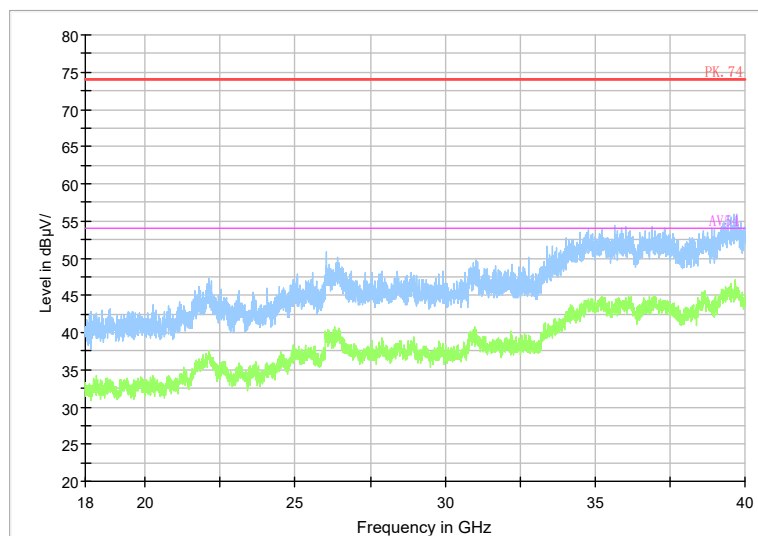


Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

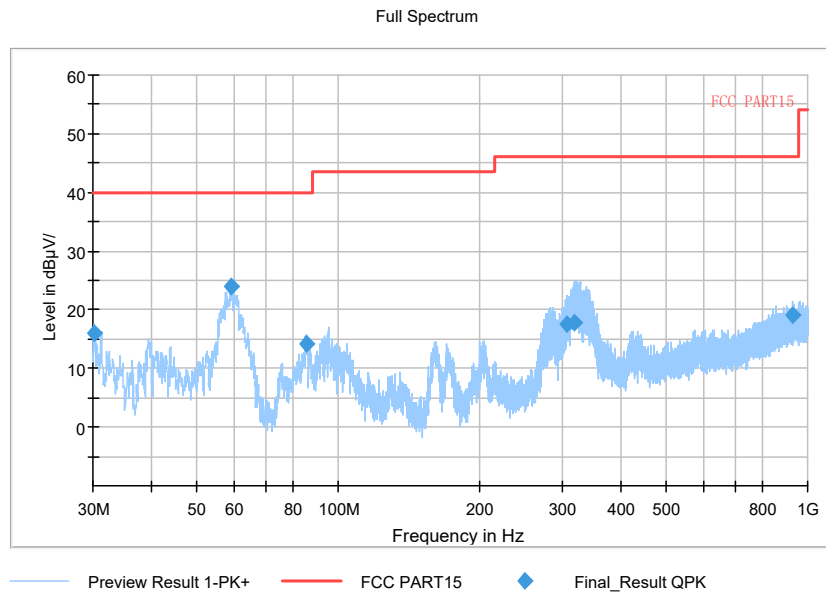

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

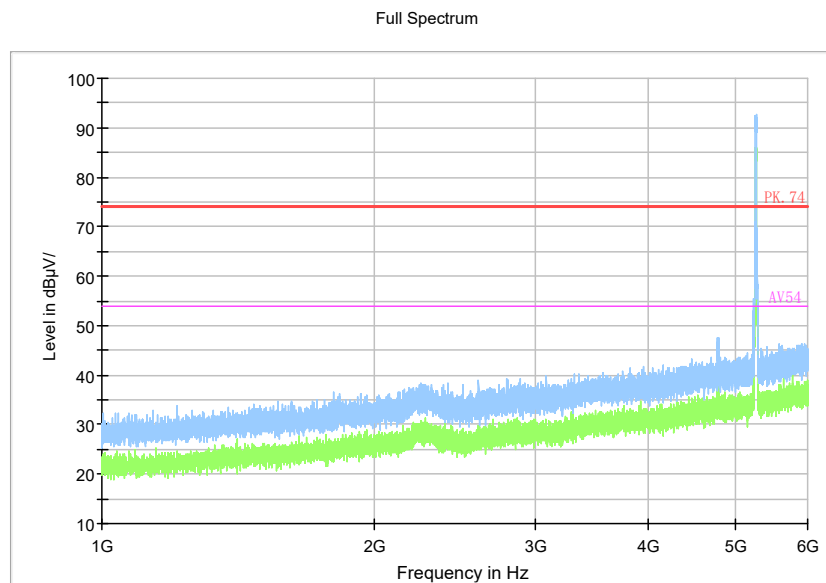

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

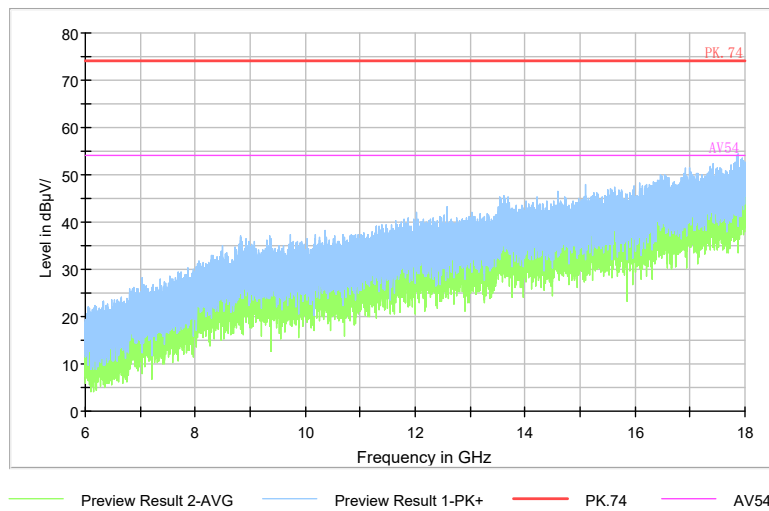

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

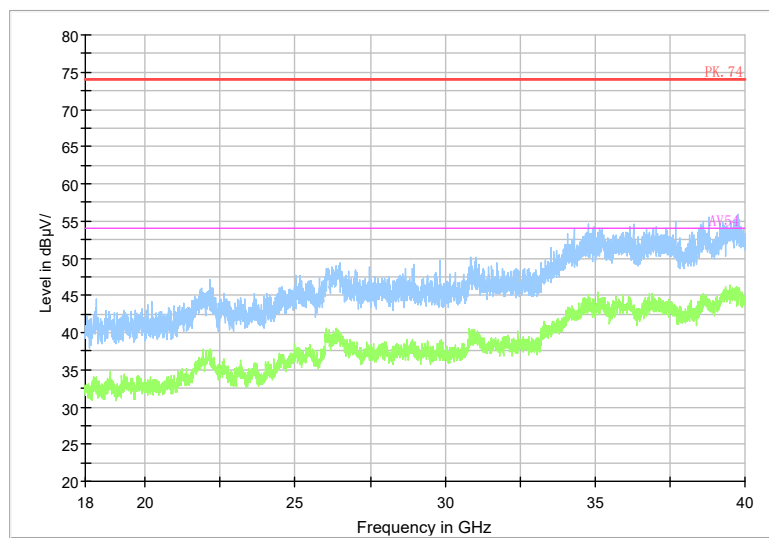

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Carrier frequency (MHz): 5300

Channel No.:60

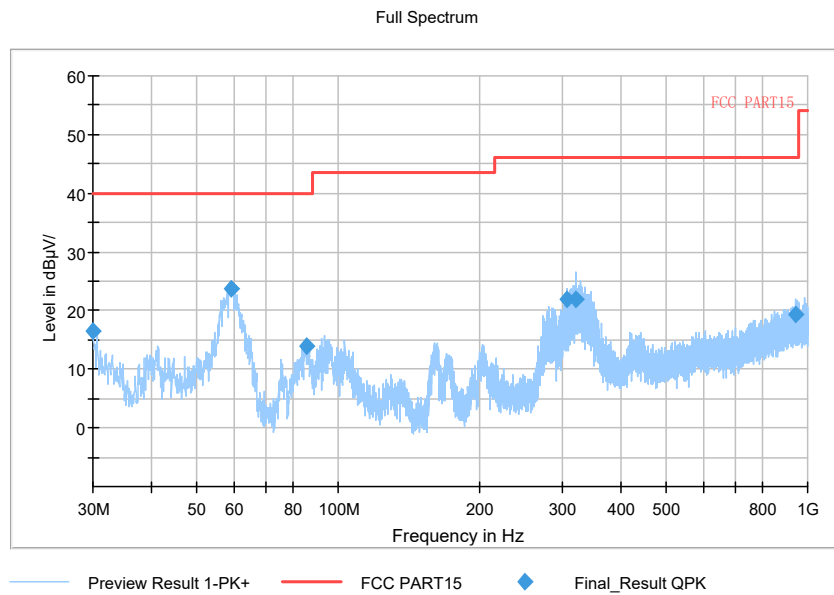

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

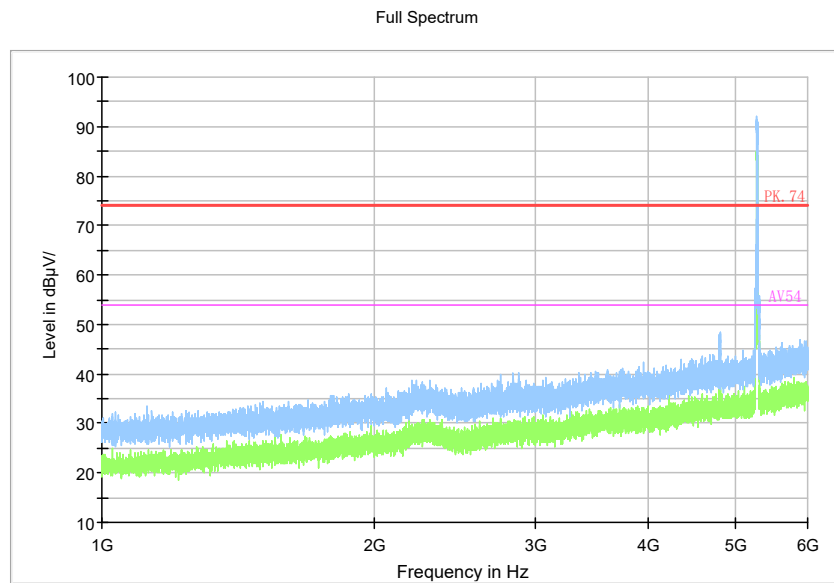

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

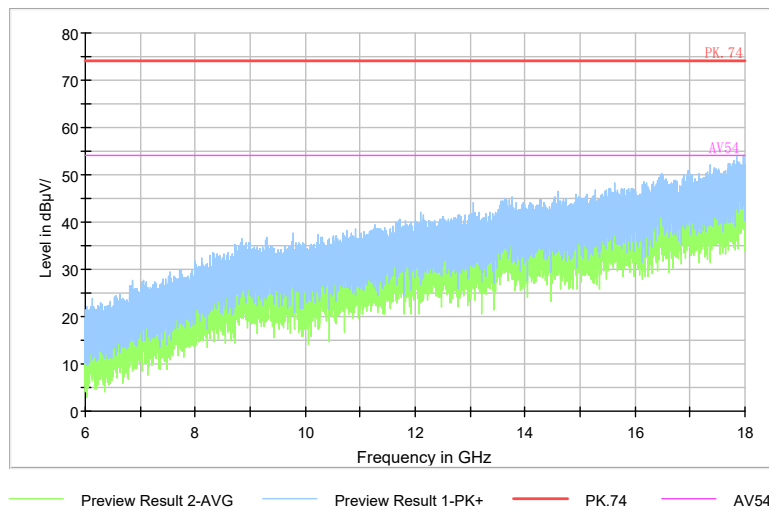

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

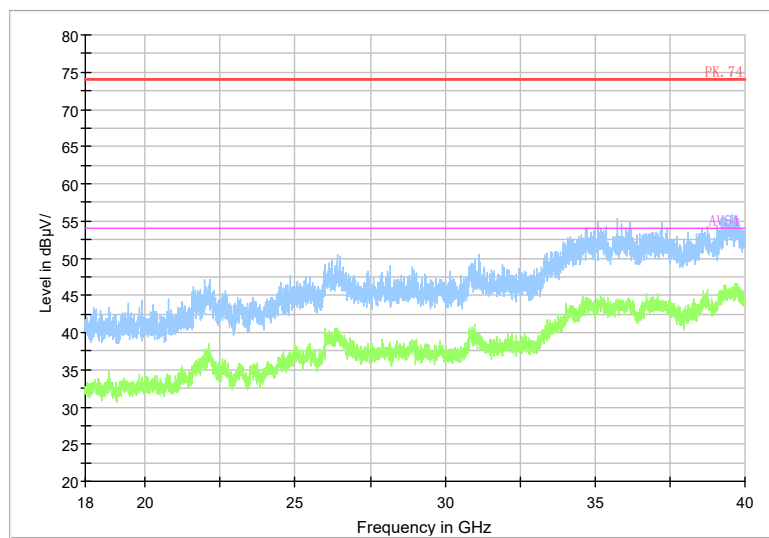

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

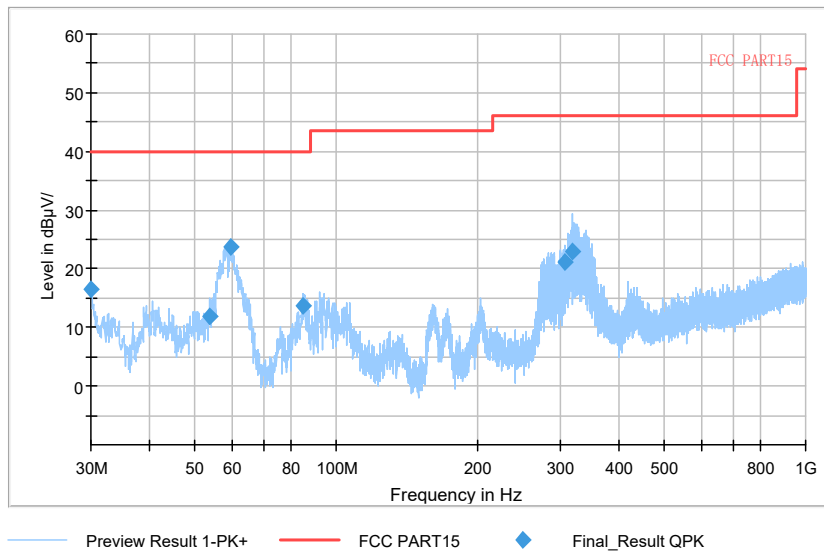

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

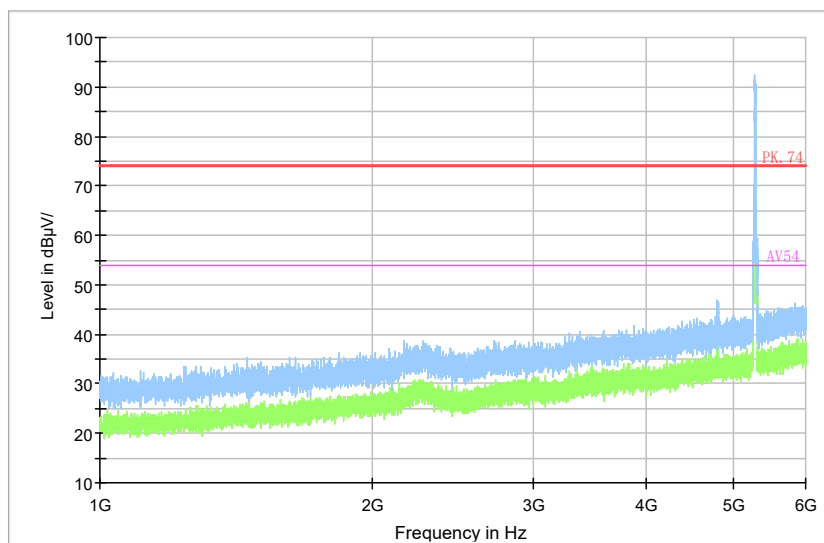

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

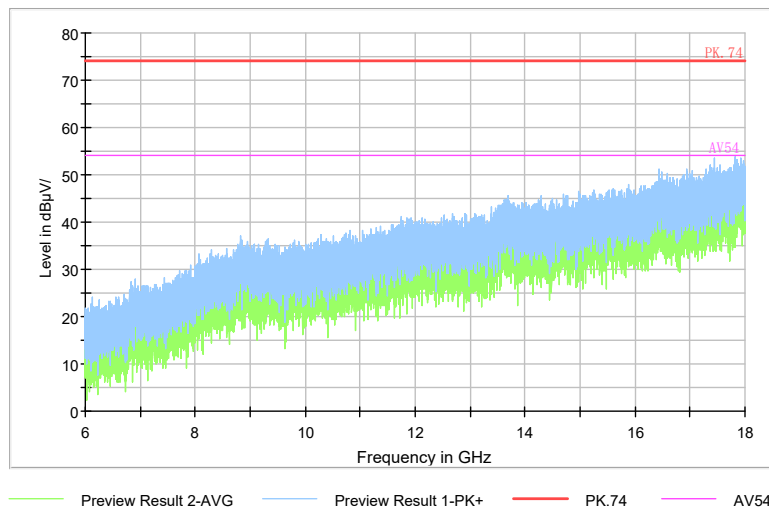

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

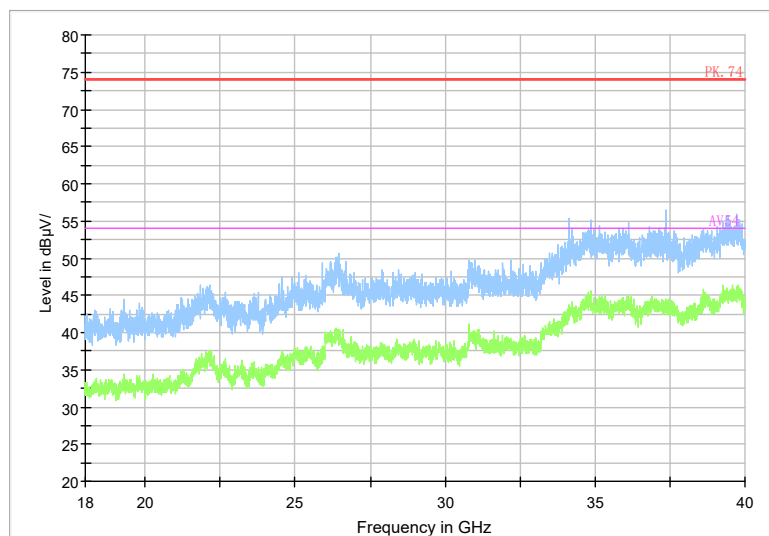

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

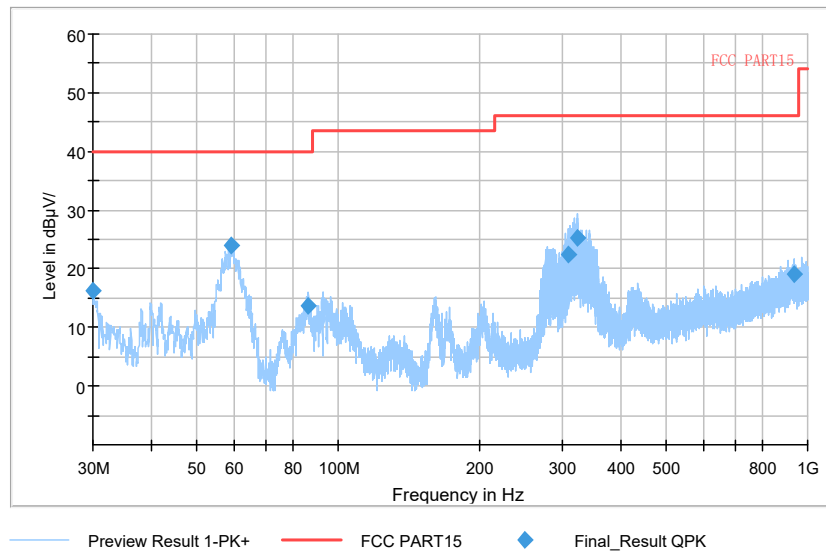

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

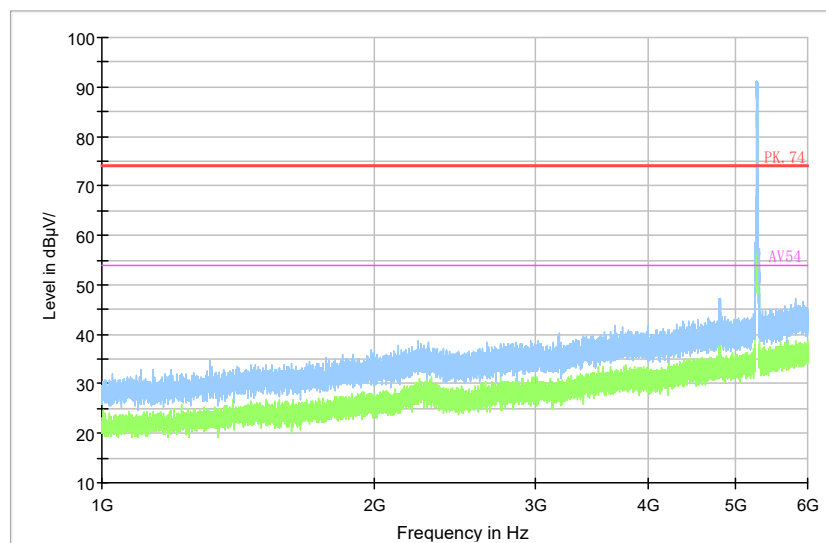

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

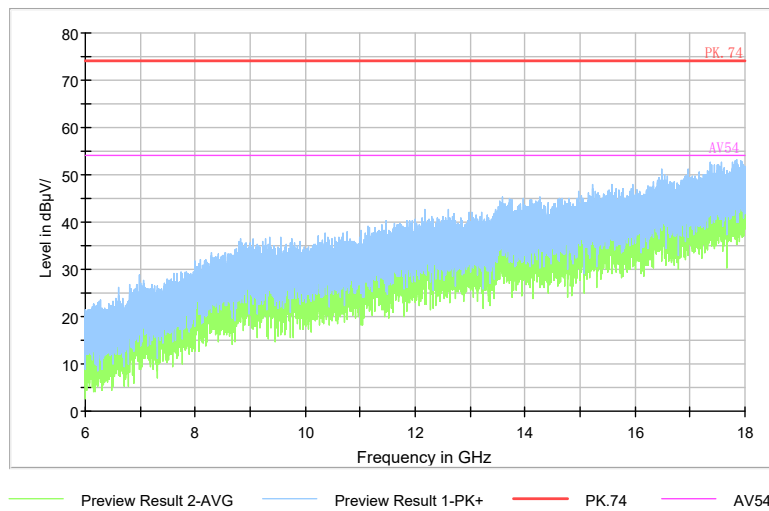

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Full Spectrum

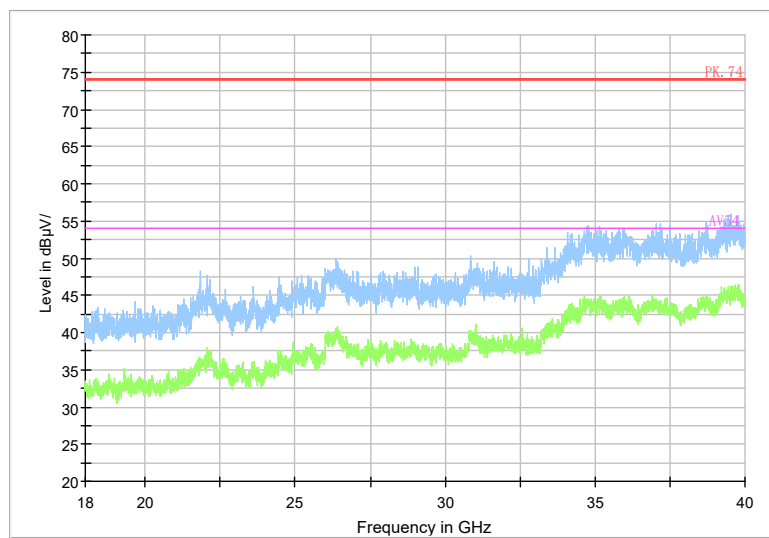

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)


Carrier frequency (MHz): 5320

Channel No.:64

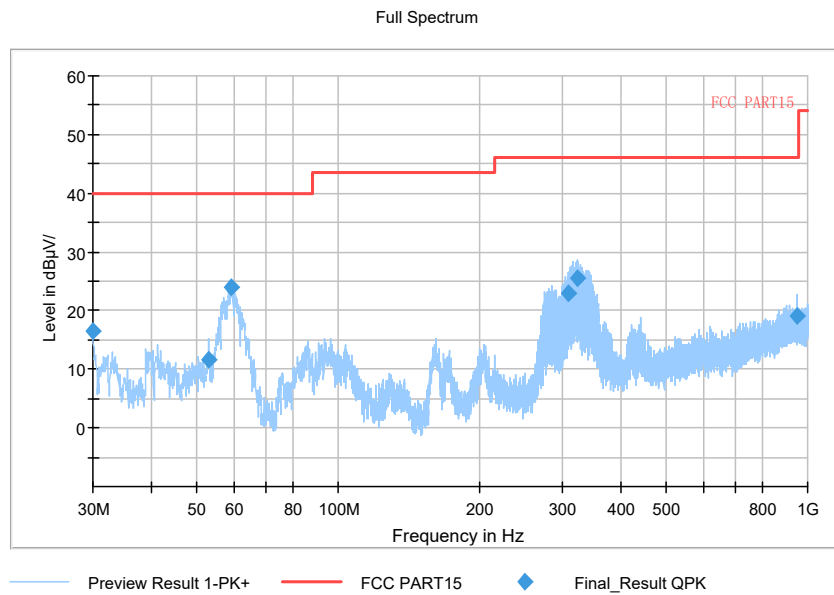

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

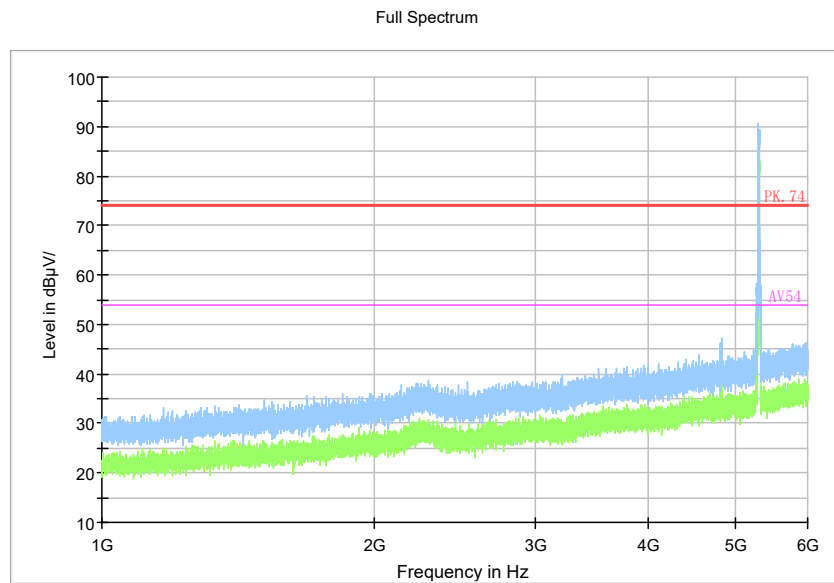

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

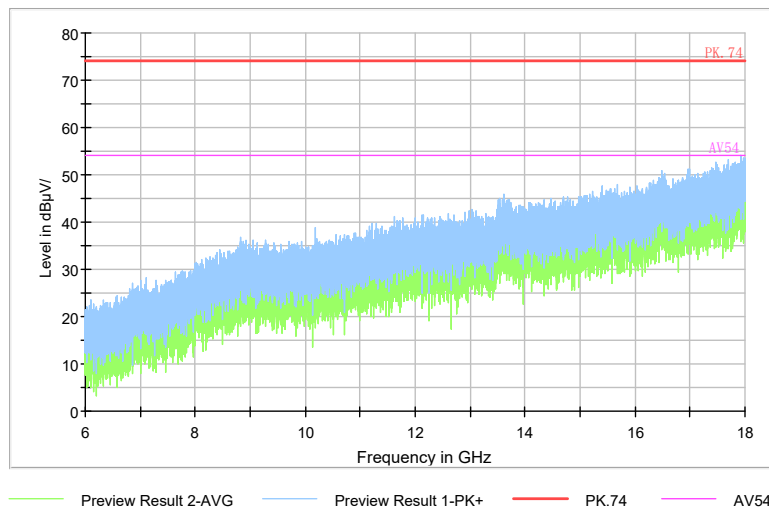

Comment


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

Full Spectrum

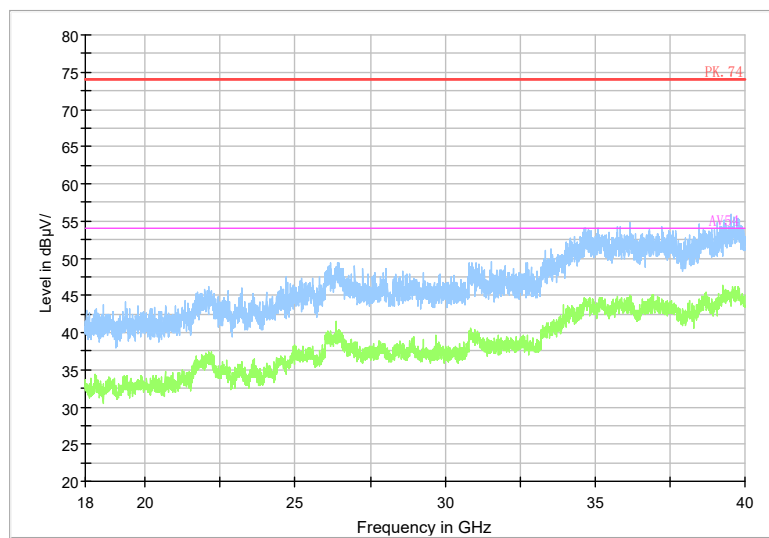

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a


Full Spectrum

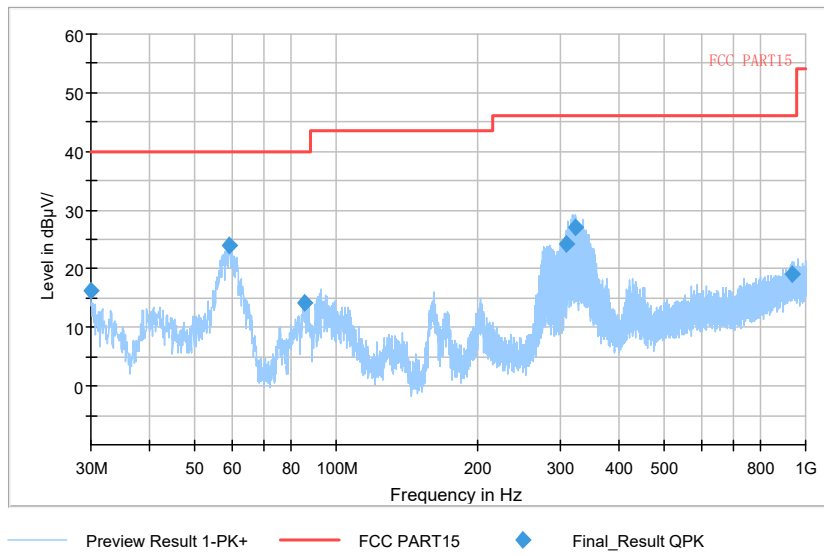

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

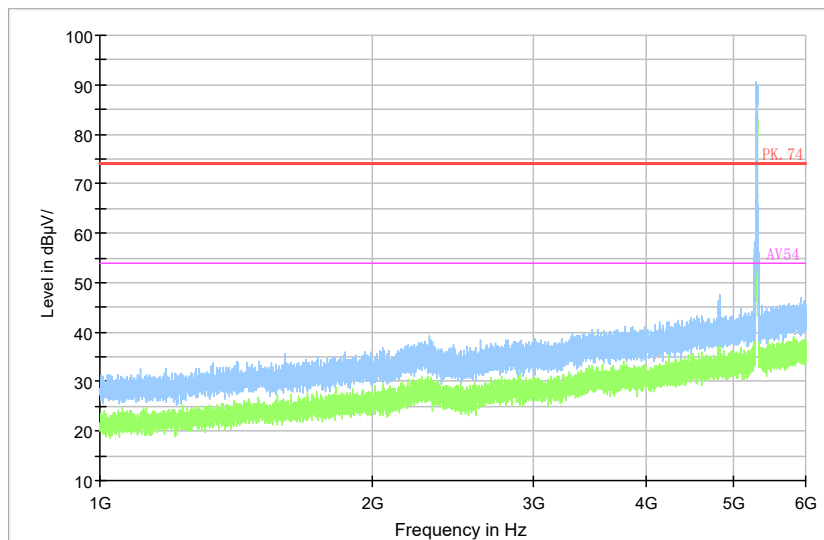

Comment

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

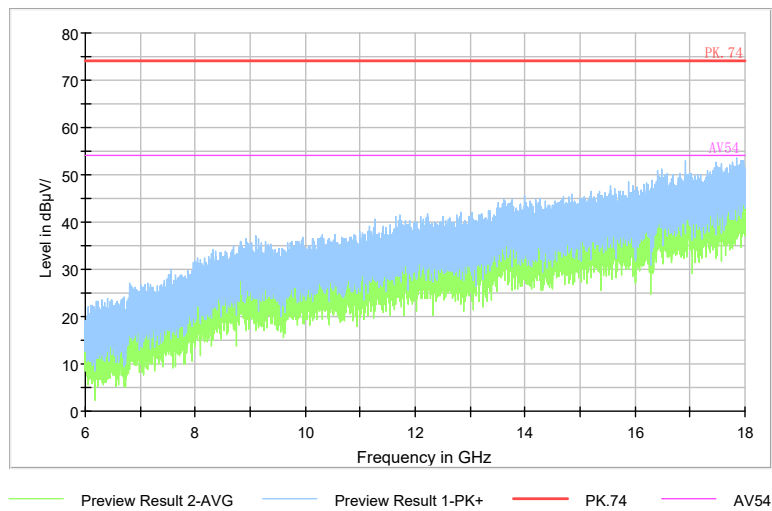

Comment

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

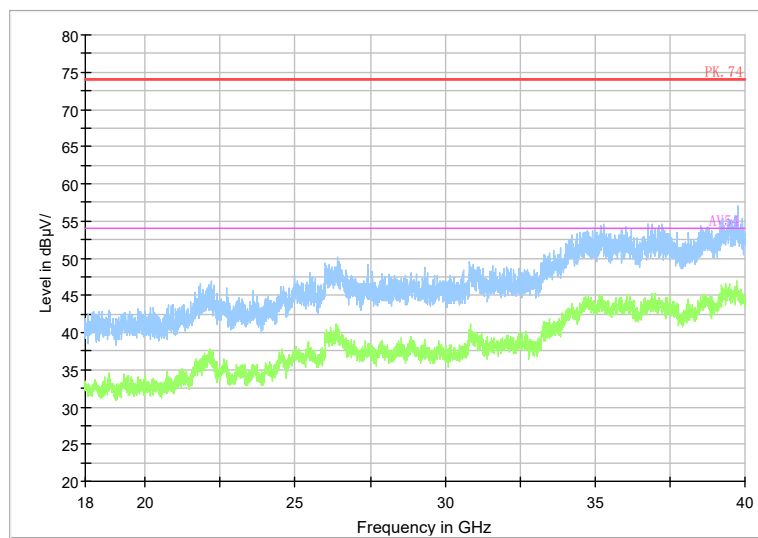

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)