



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

IR NETWORK CAMERA

MODEL NUMBER: DS-2CD2426G2-IW

**ADDITIONAL MODEL NUMBER: DS-2CD2426G2-IWUHK, DS-2CD2426G2-IWCKV,
DS-2CD2426G2-IWUVS, DS-2CD2426G2-IWKVO, DS-2CD2426G2-IWHUN,
DS-2CD2423G2-IW, DS-2CD2423G2-IWUHK, DS-2CD2423G2-IWCKV,
DS-2CD2423G2-IWUVS, DS-2CD2423G2-IWKVO, DS-2CD2423G2-IWHUN**

PROJECT NUMBER: 4789920513

REPORT NUMBER: 4789920513-4

FCC ID: 2ADTD-I0R2400

ISSUE DATE: May, 24,2021

Prepared for

HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO., LTD.

Prepared by

UL-CCIC COMPANY LIMITED

No. 2, Chengwan Road, Suzhou Industrial Park, People's Republic of China

Tel: + 86-512-6808 6400

Fax: + 86-512-6808 4099

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	05/24/2021	Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	9
5.3. CHANNEL LIST	9
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.7. THE WORSE CASE CONFIGURATIONS	11
5.8. TEST ENVIRONMENT	12
5.9. DESCRIPTION OF TEST SETUP	13
5.10. MEASURING INSTRUMENT AND SOFTWARE USED	14
6. MEASUREMENT METHODS	15
7. ANTENNA PORT TEST RESULTS	16
7.1. ON TIME AND DUTY CYCLE	16
7.2. 6 dB BANDWIDTH	19
7.3. CONDUCTED POWER	33
7.4. POWER SPECTRAL DENSITY	35
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	49
7.6. RADIATED TEST RESULTS	110
7.6.1. LIMITS AND PROCEDURE	110
7.6.2. TEST ENVIRONMENT	115
7.6.3. RESTRICTED BANDEDGE	115
7.6.4. SPURIOUS EMISSIONS	132
8. AC POWER LINE CONDUCTED EMISSIONS	189
9. ANTENNA REQUIREMENTS	192

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO., LTD.
Address: No.555 Qianmo Road,Binjiang District Hangzhou 310052,China

Manufacturer Information

Company Name: HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO., LTD.
Address: No.555 Qianmo Road,Binjiang District Hangzhou 310052,China

Factory Information(1)

Company Name: Hangzhou Hikvision Technology Co., Ltd.
Address: No.700,DongliuRoad, Binjiang District, Hangzhou Ctiy,Zhejiang, 310052, China.

Factory Information(2)

Company Name: Hangzhou Hikvision Electronics Co., Ltd.
Address: No.299,Qiushi Road,Tonglu Economic Development Zone,Tonglu County, Hangzhou,Zhejiang,310052,China.

Factory Information(3)

Company Name: Hangzhou Hikvision Digital Technology Co., Ltd.
Address: No.555 Qianmo Road,Binjiang District Hangzhou 310052,China.

EUT Description

Product Name: IR NETWORK CAMERA
Model Name: DS-2CD2426G2-IW
Additional No. DS-2CD2426G2-IWUHK,DS-2CD2426G2-IWCKV,
DS-2CD2426G2-IWUVS,DS-2CD2426G2-IWKVO,DS-
2CD2426G2-IWHUN,DS-2CD2423G2-IW,DS-2CD2423G2-
IWUHK,DS-2CD2423G2-IWCKV,DS-2CD2423G2-IWUVS,
DS-2CD2423G2-IWKVO,DS-2CD2423G2-IWHUN

Sample Number: 3889192

Data of Receipt Sample: May 08, 2021

Date Tested: May 08, 2021~ May. 22, 2021

APPLICABLE STANDARDS

STANDARD

CFR 47 Part 15 Subpart C

TEST RESULTS

PASS



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6db DTS Bandwidth	FCC 15.247 (a) (2)	Complied
2	Conducted Power	FCC 15.247 (b) (3)	Complied
3	Power Spectral Density	FCC 15.247 (e)	Complied
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	Complied
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Complied
6	Conducted Emission Test For AC Power Port	FCC 15.207	Complied
7	Antenna Requirement	FCC 15.203	Complied

Remark:

1) The measurement result for the sample received is <Pass> according to < ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15C> when <Accuracy Method> decision rule is applied.

Prepared By:

Tom Tang

Tom Tang
Project Engineer

Reviewed By:

Leon Wu

Leon Wu
Senior Project Engineer

Authorized By:

Chris Zhong

Chris Zhong
Laboratory Leader

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4829.01) UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1247) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>IC (IC Designation No.: 25056) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, People's Republic of China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS.

Note 3: The test anechoic chamber in UL-CCIC COMPANY LIMITED had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.1dB
Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	3.4dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	3.4dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	3.9dB (1GHz-18Gz) 4.2dB (18GHz-26.5Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Product Name:	IR NETWORK CAMERA
Model No.:	DS-2CD2426G2-IW
Operating Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Type of Modulation:	IEEE for 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE for 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n (HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Channels Step:	Channels with 5MHz step
Test software of EUT:	Secure CRT (manufacturer declare)
Antenna Type:	Internal antenna
Antenna Gain:	Antenna1 and Antenna 2 : 0.5 dBi Remark: This data is provided by customer and our lab isn't responsible for this data

Remark:

Model No.:

Number:	Name:	Number:	Name:	Number:	Name:
1	DS-2CD2426G2-IW	2	DS-2CD2426G2-IWUHK	3	DS-2CD2426G2-IWCKV
4	DS-2CD2426G2-IWUVS	5	DS-2CD2426G2-IWKVO	6	DS-2CD2426G2-IWHUN
7	DS-2CD2423G2-IW	8	DS-2CD2423G2-IWUHK	9	DS-2CD2423G2-IWCKV
10	DS-2CD2423G2-IWUVS	11	DS-2CD2423G2-IWKVO	12	DS-2CD2423G2-IWHUN

Only the main model **DS-2CD2426G2-IW** was tested and only the data of this model is shown in this test report. Since Their electrical circuit design, layout, components used and internal wiring are identical, only the name of the models.

5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Channel Number	Max AV Conducted Power (dBm)
1	IEEE 802.11B SISO	1-11[11]	10.75
1	IEEE 802.11G SISO	1-11[11]	12.49
2	IEEE 802.11N HT20 MIMO MIMO	1-11[11]	15.94
2	IEEE 802.11N HT40 MIMO MIMO	3-9[7]	16.37

Remark: For this product, it has two antennas, antenna1 and antenna2, but only the 802.11N HT20 MIMO and 802.11N HT40 MIMO modes can support both the SISO and MIMO technical.

5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452		

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11N HT20 MIMO)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11N HT40 MIMO)	CH 3, CH 6, CH 9	2422MHz, 2437MHz, 2452MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		SecureCRT					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1/2	N/A	N/A	N/A	/		
802.11g	1/2	N/A	N/A	N/A			
802.11N HT20 MIMO	1/2	N/A	N/A	N/A			
802.11N HT40 MIMO	1/2	/			N/A	N/A	N/A

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)	Directional gain(dBi) For MIMO mode
1	2400-2483.5	Internal Antenna	0.5	3.51
2	2400-2483.5	Internal Antenna	0.5	

Remark:

- 1) Directional gain= $10\log [(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}] = 3.51 \text{ dBi}$
- 2) N_{ANT} : the number of Antenna
- 3) For this product, it has two antennas, antenna1 and antenna2, but only the 802.11N HT20 and 802.11N HT40 modes can support both the SISO and MIMO technical.

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	Antenna1 or Antenna2 can be used as transmitting/receiving antenna independently.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	Antenna1 or Antenna2 can be used as transmitting/receiving antenna independently.
IEEE 802.11N (HT20) MIMO	<input checked="" type="checkbox"/> 2TX, 2RX	Antenna1 or Antenna2 can be used as transmitting/receiving antenna independently.
IEEE 802.11N (HT20) MIMO	<input checked="" type="checkbox"/> 2TX, 2RX	Antenna1 or Antenna2 can be used as transmitting/receiving antenna independently.

Remark:

- 1) For this product, it has two antennas, antenna1 and antenna2, only the 802.11N HT20 and 802.11N HT40 modes can support both the SISO and MIMO technical. But for the 11B and 11G modes only support the SISO technical.
- 2) For the 11N mode (including the 11N HT20 SISO, 11N HT20 MIMO, 11N HT40 SISO, 11N HT40 MIMO), pre-testing all test modes, only the worst case modes is included in this report.

5.7. THE WORSE CASE CONFIGURATIONS

For the product, there two transmission antennas, and pre-testing both of them, only the worse data for the antenna is recorded in the report.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11b mode: 6 Mbps
802.11N HT20 mode: MCS0
802.11N HT40 mode: MCS0

5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	AC 120V
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Description
1	Laptop	ThinkPad	E550c	N/A
2	Fixed Frequency Board	N/A	N/A	Supply by UL Lab
3	AC adapter	HONOR	MODEL:ADS-24S-12 1224GPCN INPUT:100-240V~, 50/60Hz, 0.7A OUTPUT:12.0V 2.0A	Supply by UL Lab

I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	LAN	LAN	LAN Cable	100cm Length (Supply by UL Lab)	N/A
2	USB	USB	USB-VGA	100cm Length (Supply by UL Lab)	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	Micro SD card	Kingston	32GB	Supply by UL lab

TEST SETUP

The EUT can work in an engineer mode with a software through a table PC.

SETUP DIAGRAM FOR TESTS

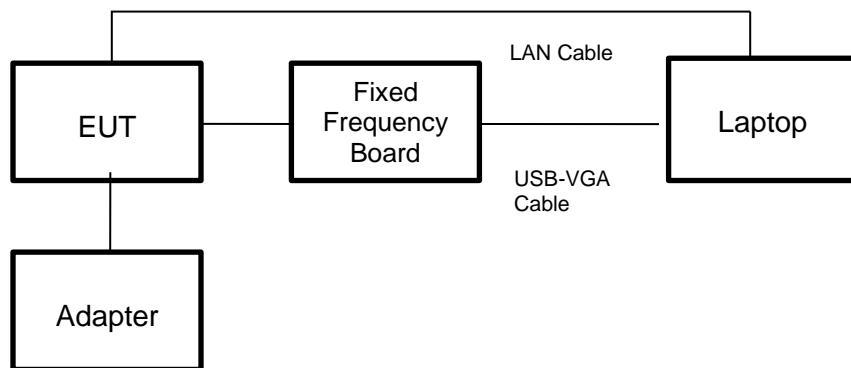

Remark: The EUT has been built one SD card during the testing.



5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions (Instrument)

Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	126700	2019-12-12	2020-12-05	2021-12-04
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	126701	2019-12-12	2020-12-05	2021-12-04
<input checked="" type="checkbox"/>	Artificial Mains Networks	R&S	ENY81	126711	2019-12-12	2020-12-05	2021-12-04

Software

Used	Description	Manufacturer	Name	Version	
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	R&S	EMC32	Ver. 9.25	

Radiated Emissions (Instrument)

Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	MY57110128	2020-05-10	2021-05-09	2022-05-08
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR26	1267603	2019-12-12	2020-12-05	2021-12-04
<input checked="" type="checkbox"/>	Receiver Antenna (9kHz-30MHz)	Schwarzbeck	FMZB 1513	513-265	N/A	2018-06-15	2021-06-14
<input checked="" type="checkbox"/>	Receiver Antenna (30MHz-1GHz)	SunAR RF Motion	JB1	177821	N/A	2019-01-28	2022-01-27
<input checked="" type="checkbox"/>	Receiver Antenna (1GHz-18GHz)	R&S	HF907	126705	2018-01-29	2019-01-28	2022-01-27
<input checked="" type="checkbox"/>	Receiver Antenna (18GHz-26.5GHz)	Schwarzbeck	BBHA9170	126706	2019-02-06	2020-12-05	2021-12-04
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	Compliance Direction System Inc.	PAP-1G18-50	14140-13467	2019-03-18	2020-12-05	2021-12-04
<input checked="" type="checkbox"/>	Pre-amplification (To 26.5GHz)	R&S	SCU-26D	134668	2019-02-06	2020-09-27	2021-09-26
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	1	2020-05-10	2021-05-09	2022-05-08
<input checked="" type="checkbox"/>	Highpass Filter	Wainwright	WHKX10-2700-3000-18000-40SS	2	2020-05-10	2021-05-09	2022-05-08

Software

Used	Description	Manufacturer	Name	Version	
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Tonscend	JS32	V1.0	

Other instruments

Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	MY57110128	2020-05-10	2021-05-09	2022-05-08
<input checked="" type="checkbox"/>	Power Meter	Keysight	U2021XA	MY57110002	2020-05-10	2021-05-09	2022-05-08

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	8.2
2	Conducted Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	8.3.1.3/8.3.2.3
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

FCC KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP





TEST ENVIRONMENT



Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)	Final Minimum VBW (KHz)
11B	12.41	12.555	0.988	98.8	0.05	0.08	1
11G	2.056	10.022	0.205	20.5	6.88	0.50	1
11N20 MIMO	1.911	9.985	0.191	19.1	7.19	0.52	1
11N40 MIMO	0.9348	9.982	0.094	9.4	10.27	1.07	2

Note: 1) Duty Cycle Correction Factor=10log(1/x).
2) Where: x is Duty Cycle(Linear)
3) Where: T is On Time (transmit duration)
4) Pre-testing Antenna 1 and Antenna2, and pre-testing SISO and MIMO modes, only the data of worse case is shown in this test report.

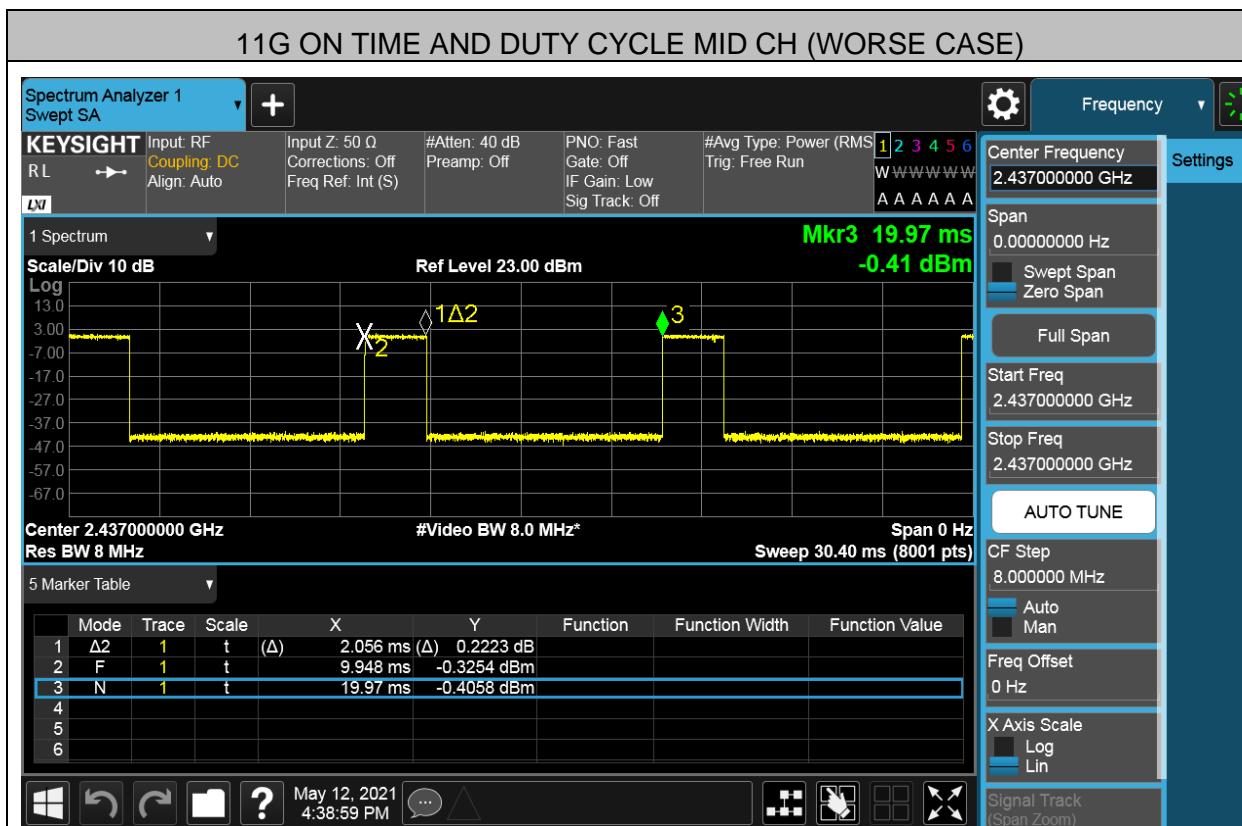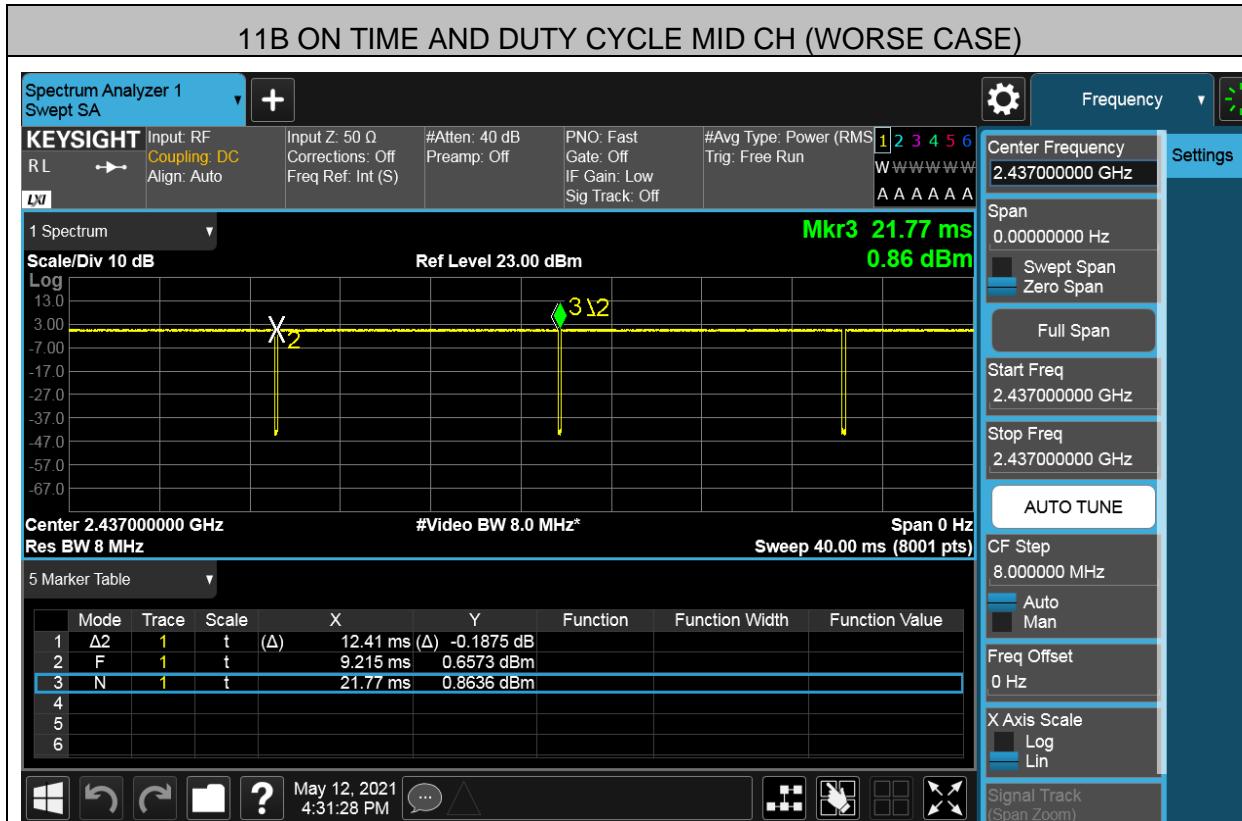

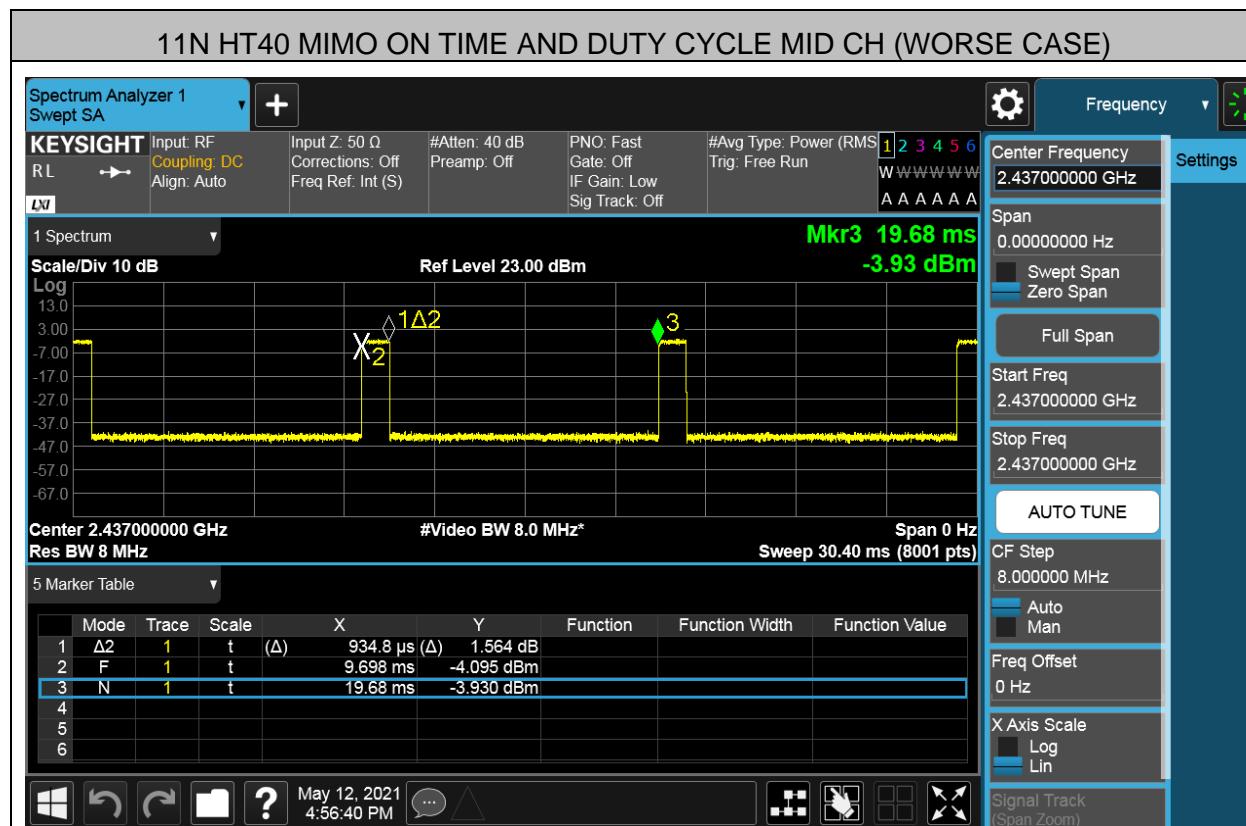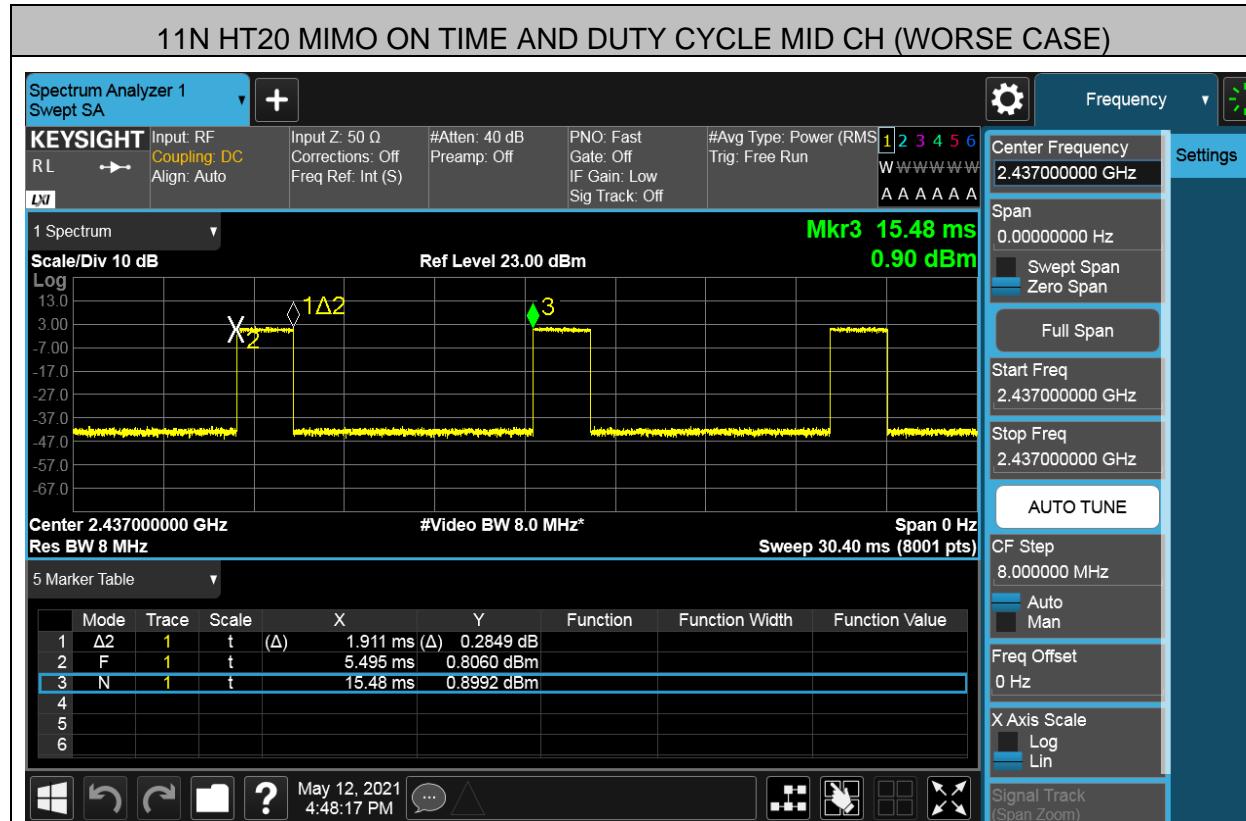

7.2. 6 dB BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5


TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100K
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

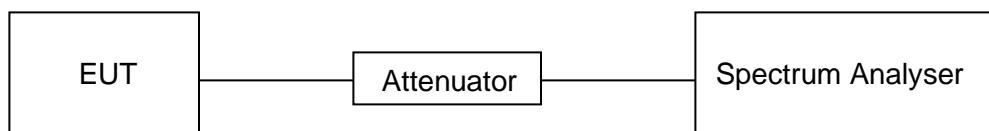




RESULTS



Test Mode	Test Antenna	Test Channel	6dB bandwidth (MHz)	Result
11B SISO	Antenna 1	LCH	10.05	Pass
		MCH	9.538	Pass
		HCH	10.07	Pass
	Antenna 2	LCH	9.568	Pass
		MCH	9.540	Pass
		HCH	10.03	Pass
11G SISO	Antenna 1	LCH	16.35	Pass
		MCH	16.33	Pass
		HCH	16.30	Pass
	Antenna 2	LCH	16.32	Pass
		MCH	16.29	Pass
		HCH	16.32	Pass
11N20MIMO	Antenna 1	LCH	17.05	Pass
		MCH	16.69	Pass
		HCH	17.18	Pass
	Antenna 2	LCH	17.05	Pass
		MCH	16.97	Pass
		HCH	17.29	Pass
11N40MIMO	Antenna 1	LCH	35.01	Pass
		MCH	35.07	Pass
		HCH	35.42	Pass
	Antenna 2	LCH	35.40	Pass
		MCH	34.96	Pass
		HCH	35.40	Pass



Test Graphs



For Antenna1 part:


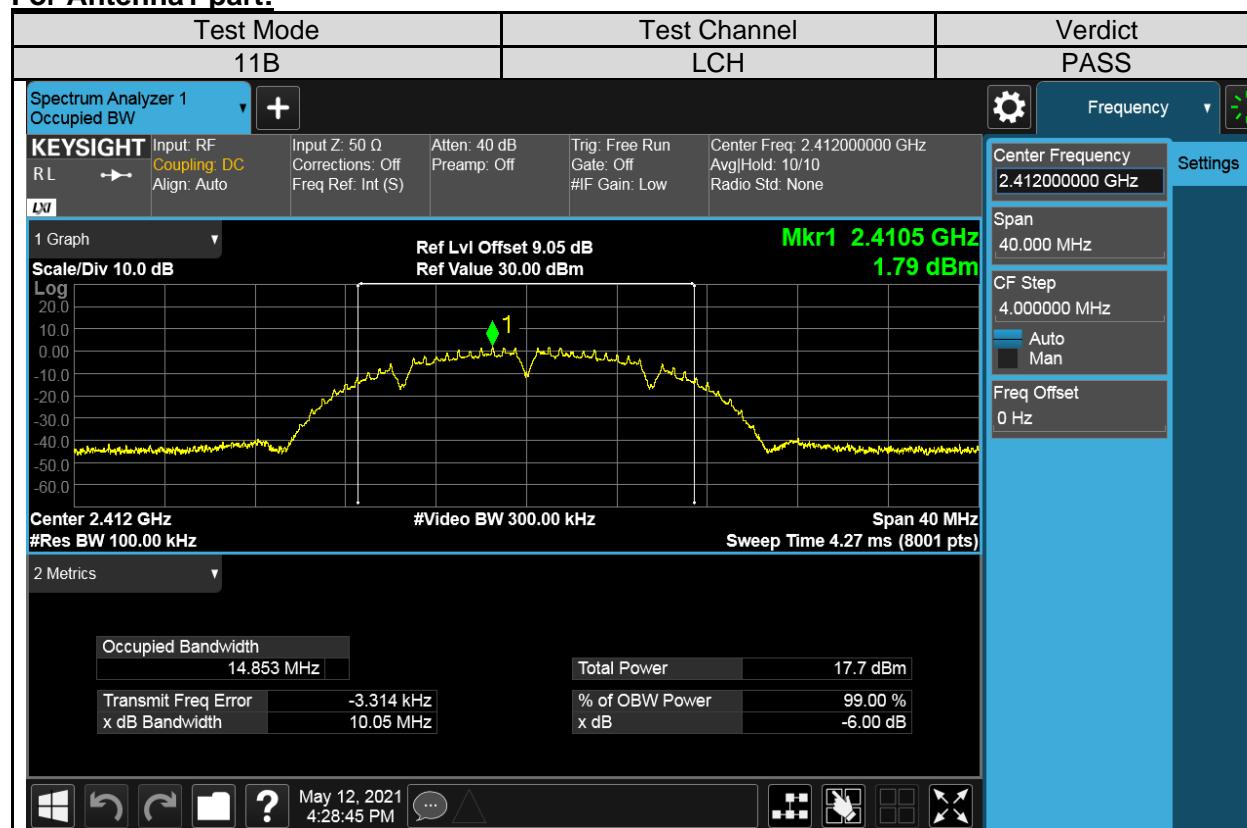


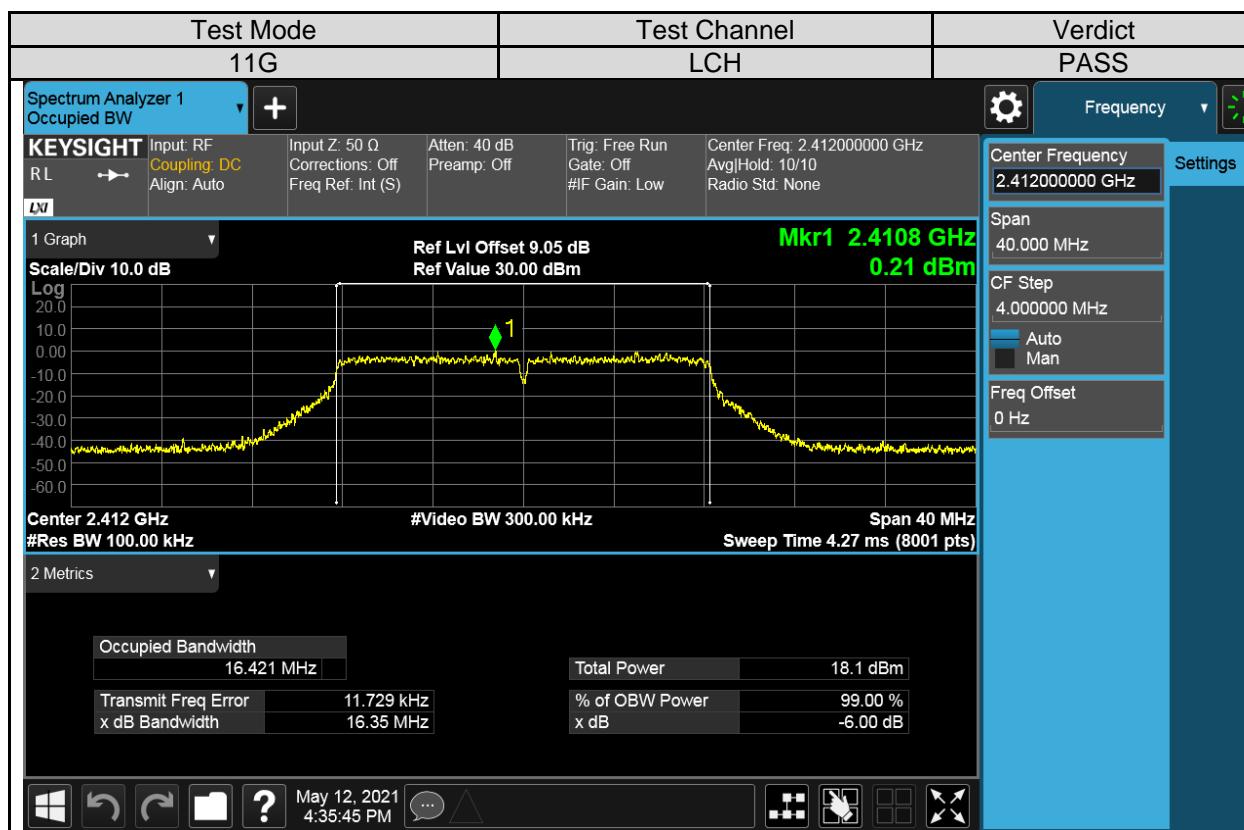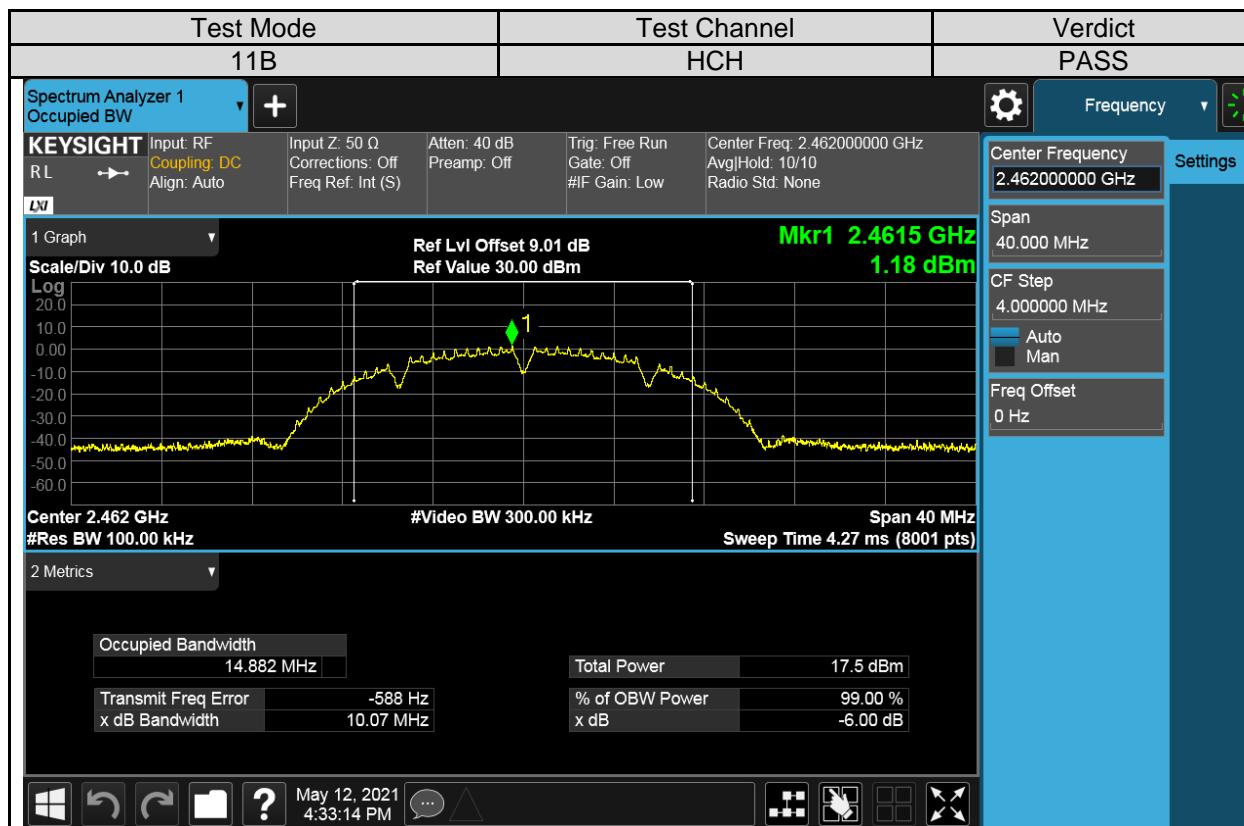


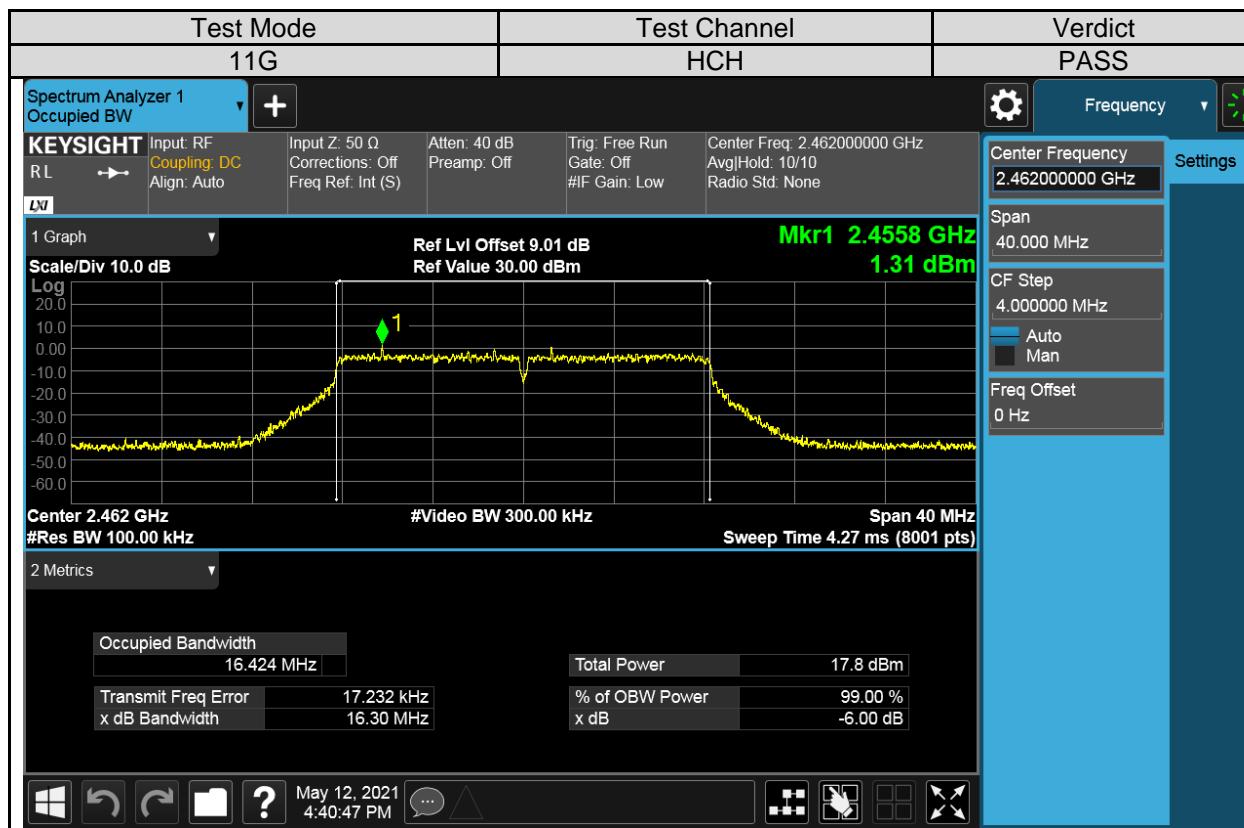
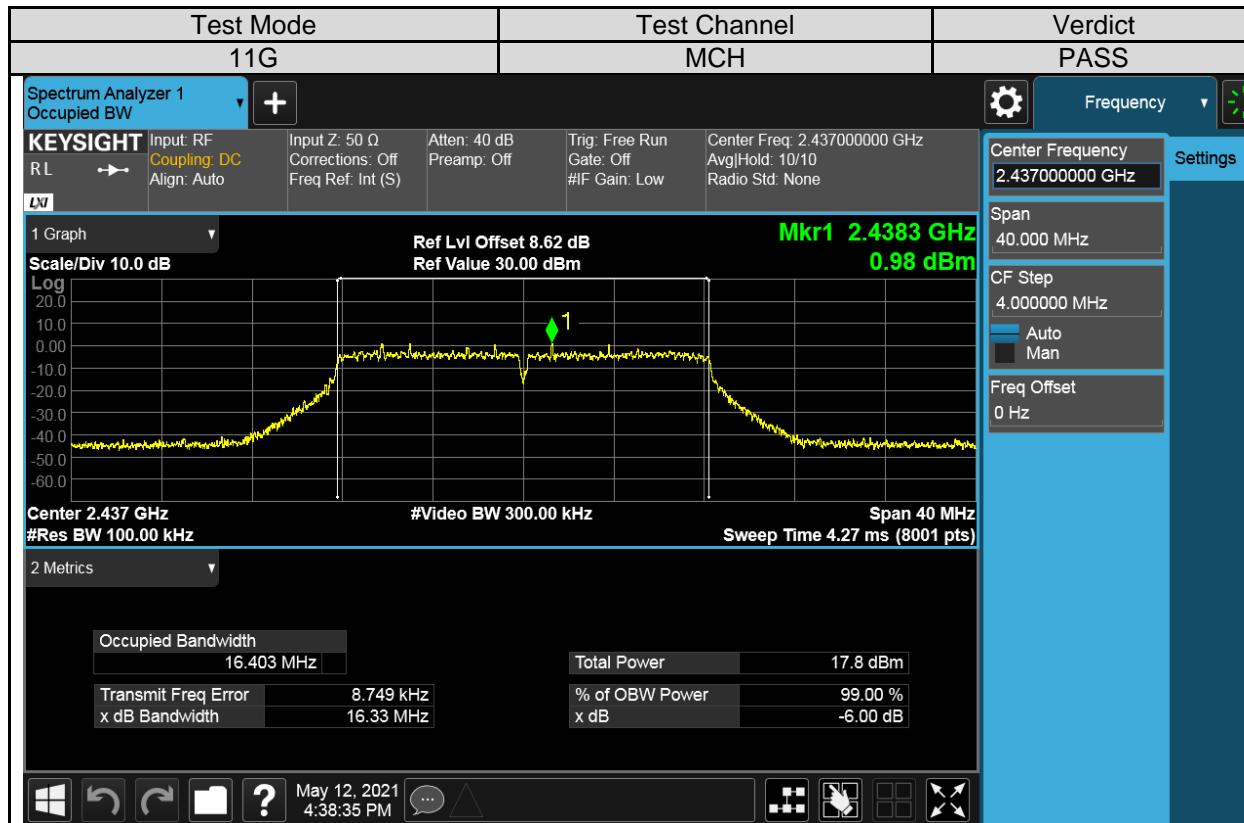


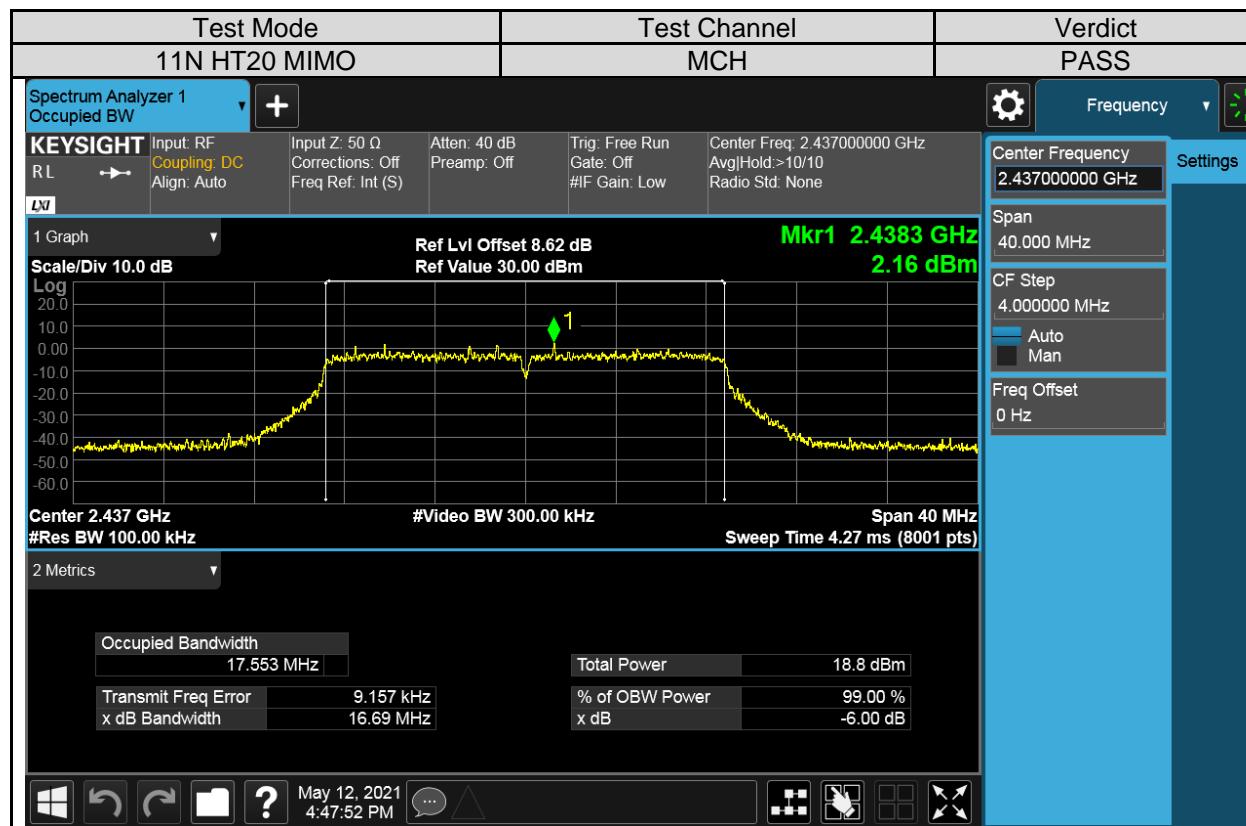
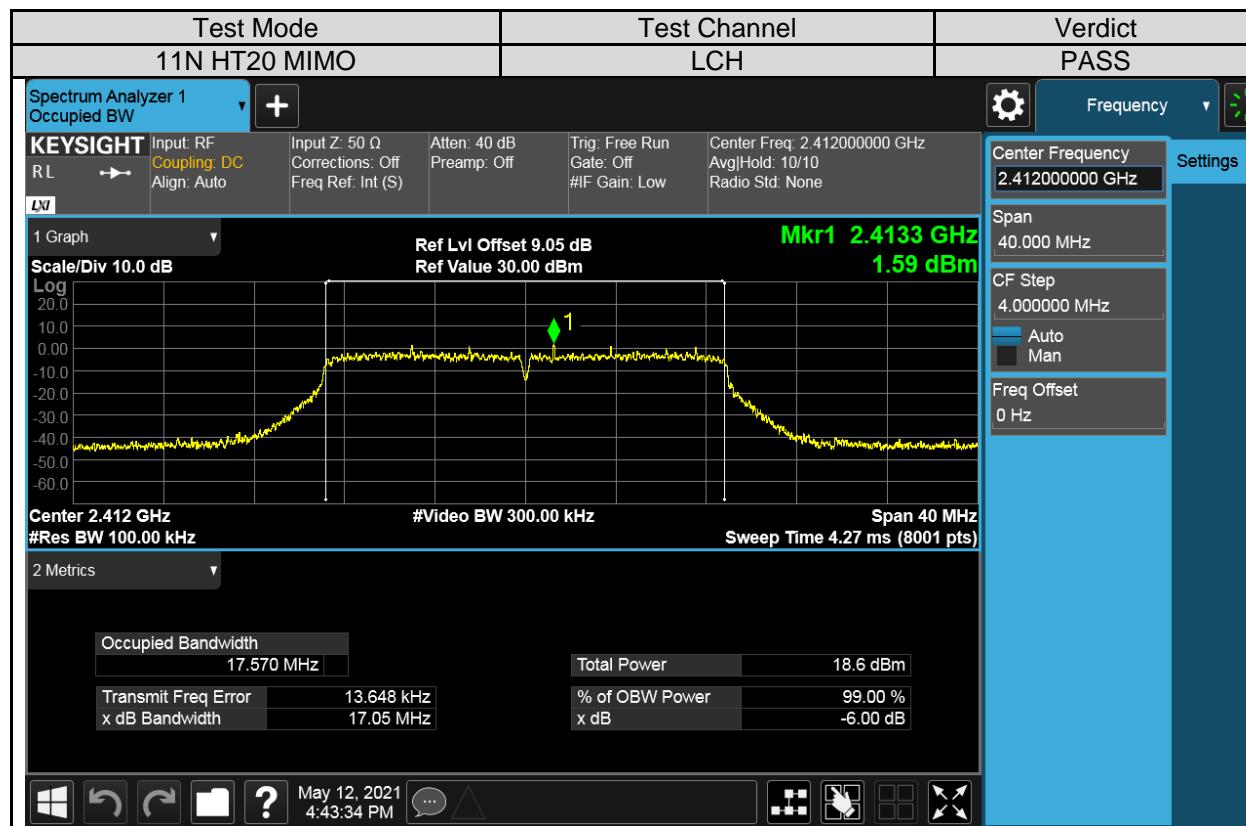


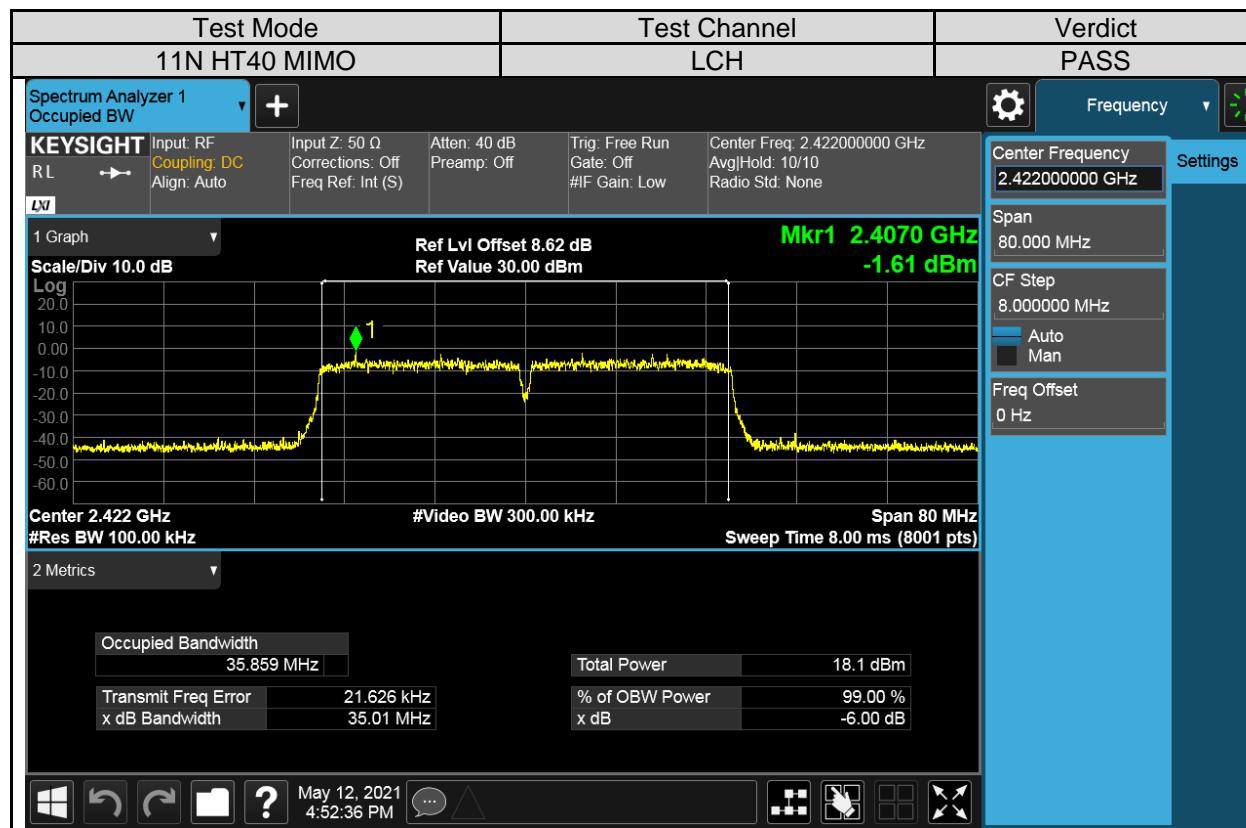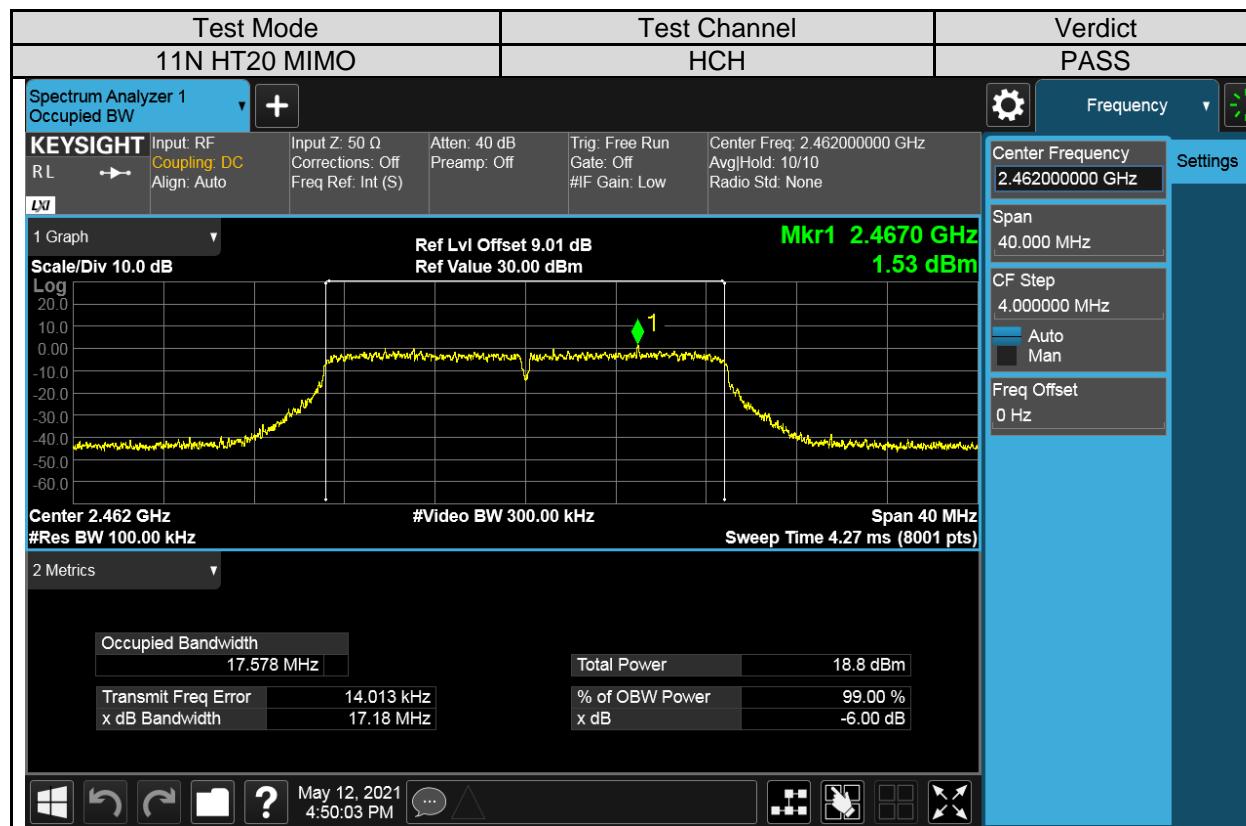


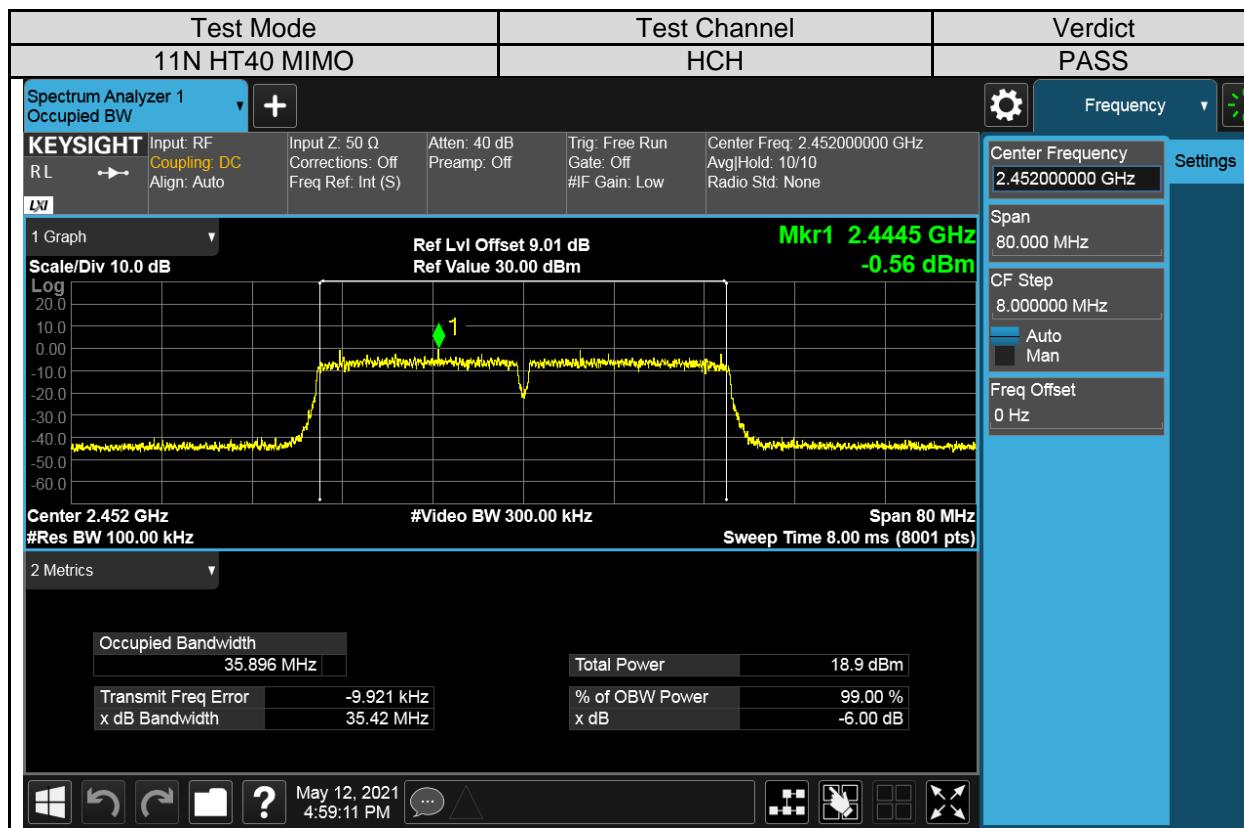
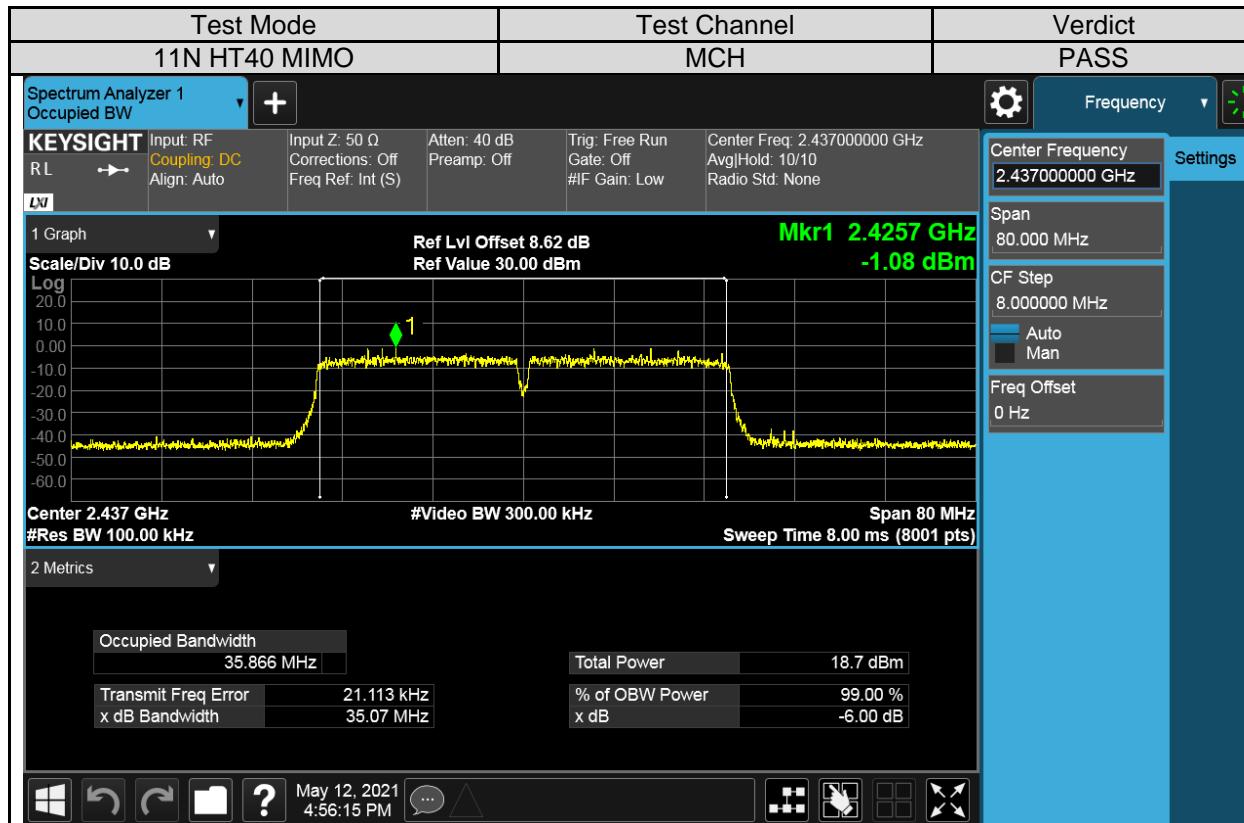



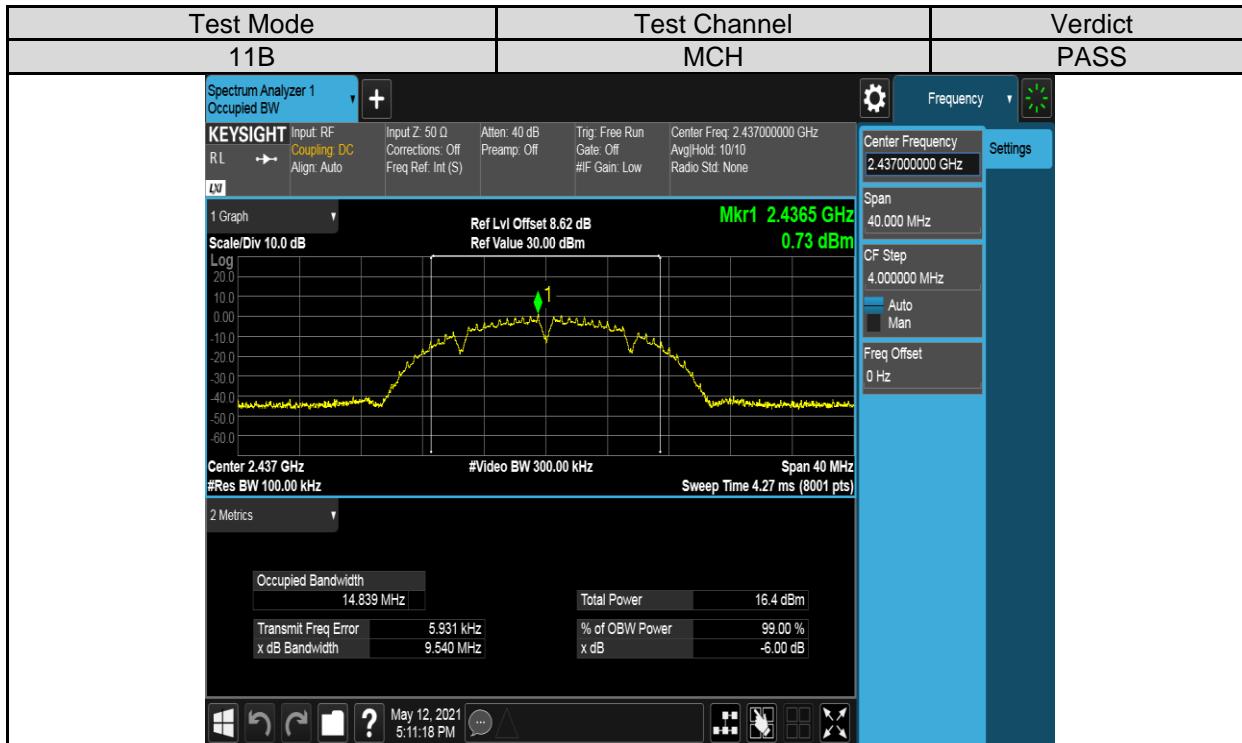
For Antenna2 part:

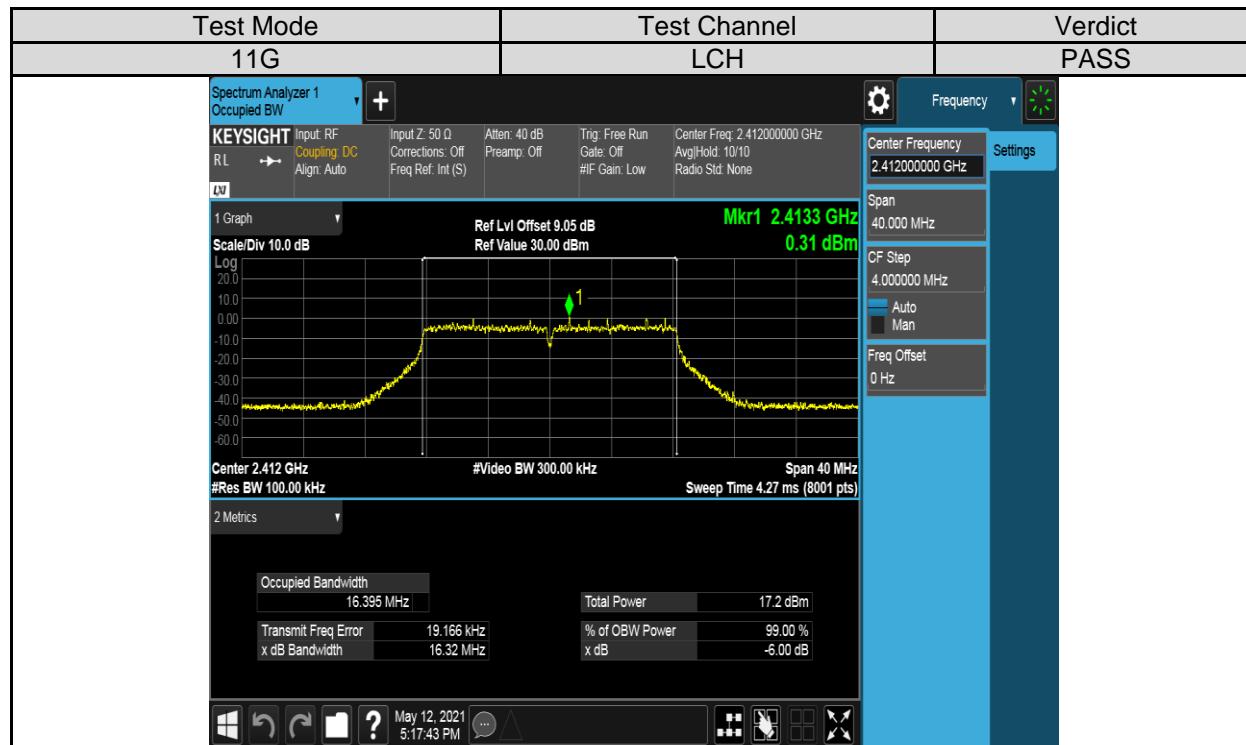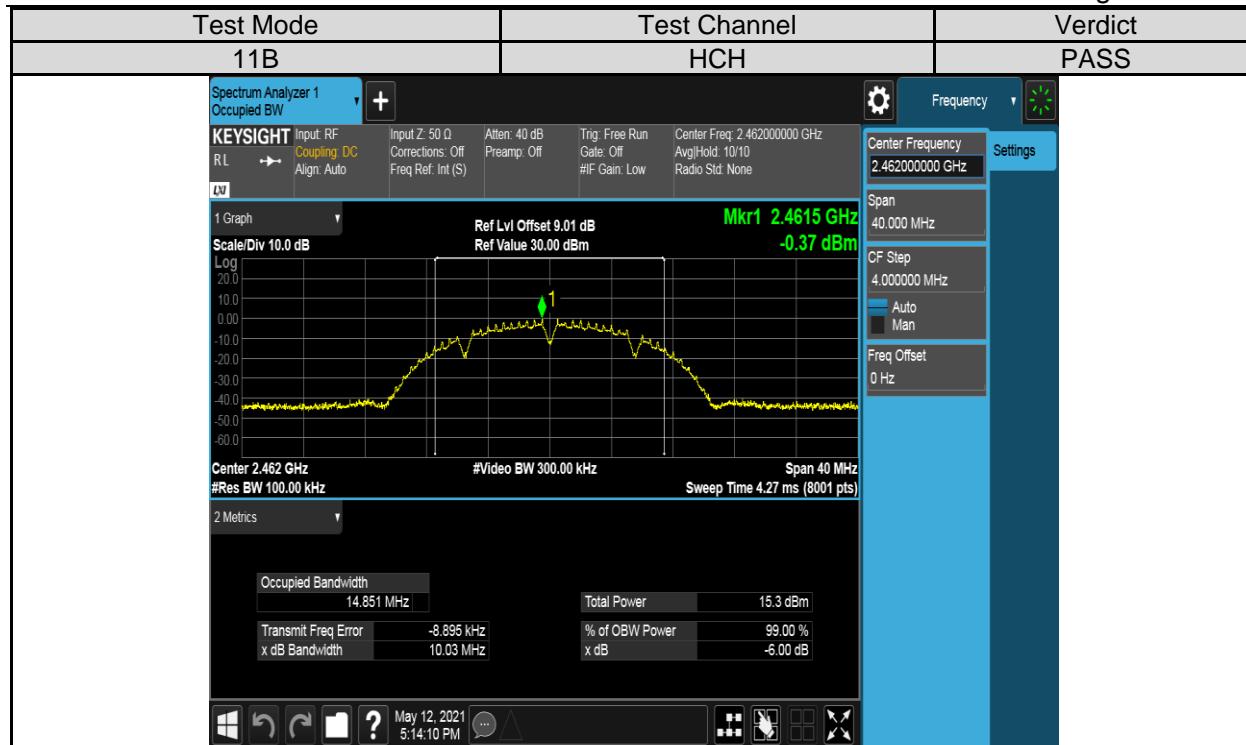

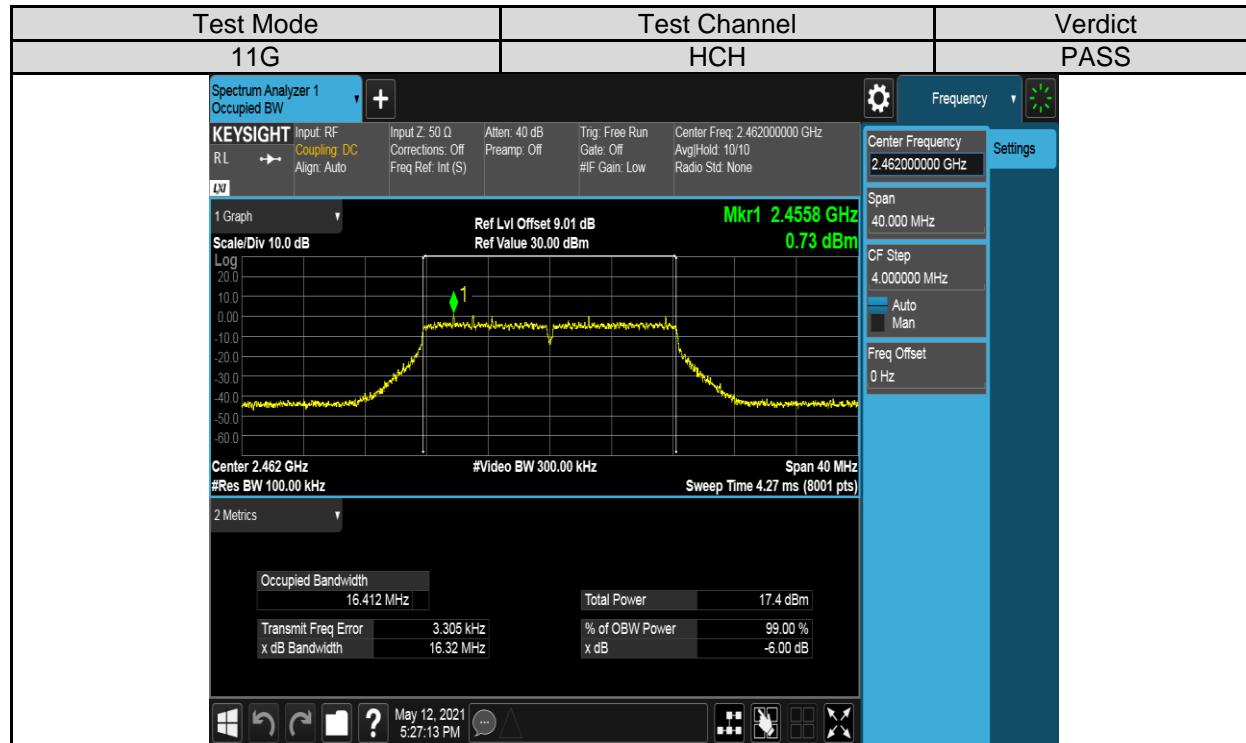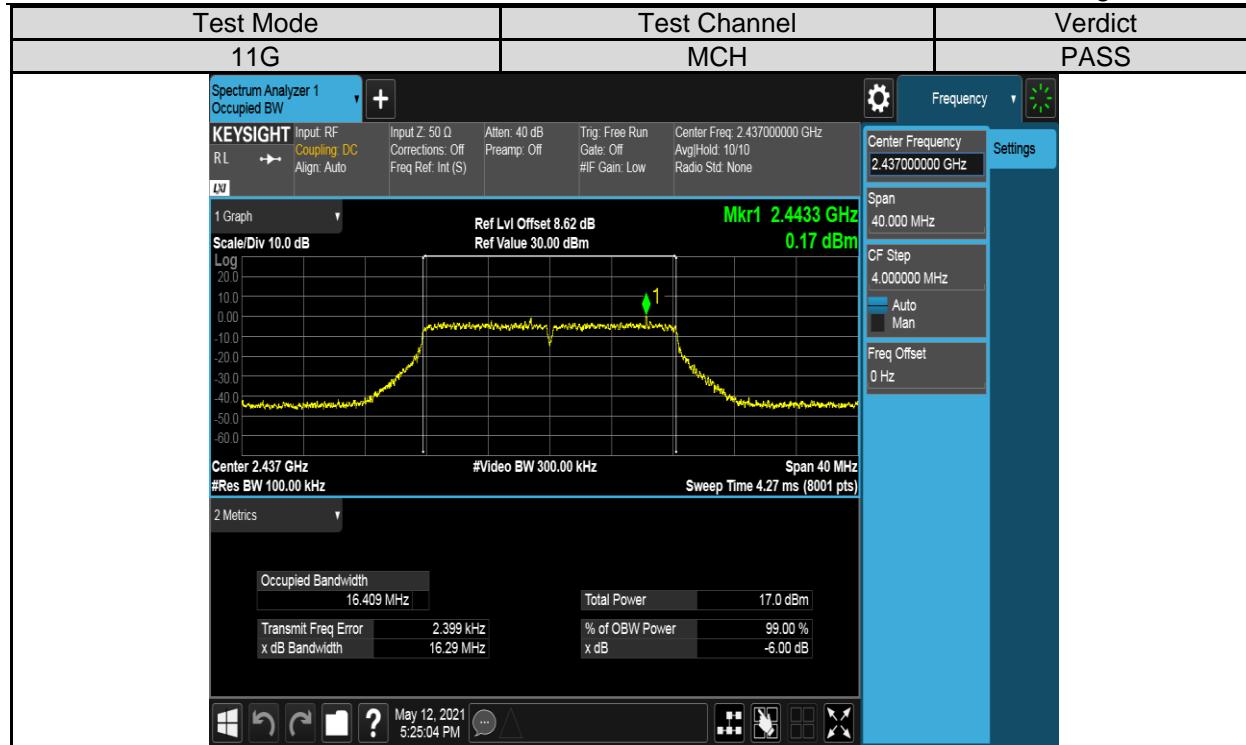

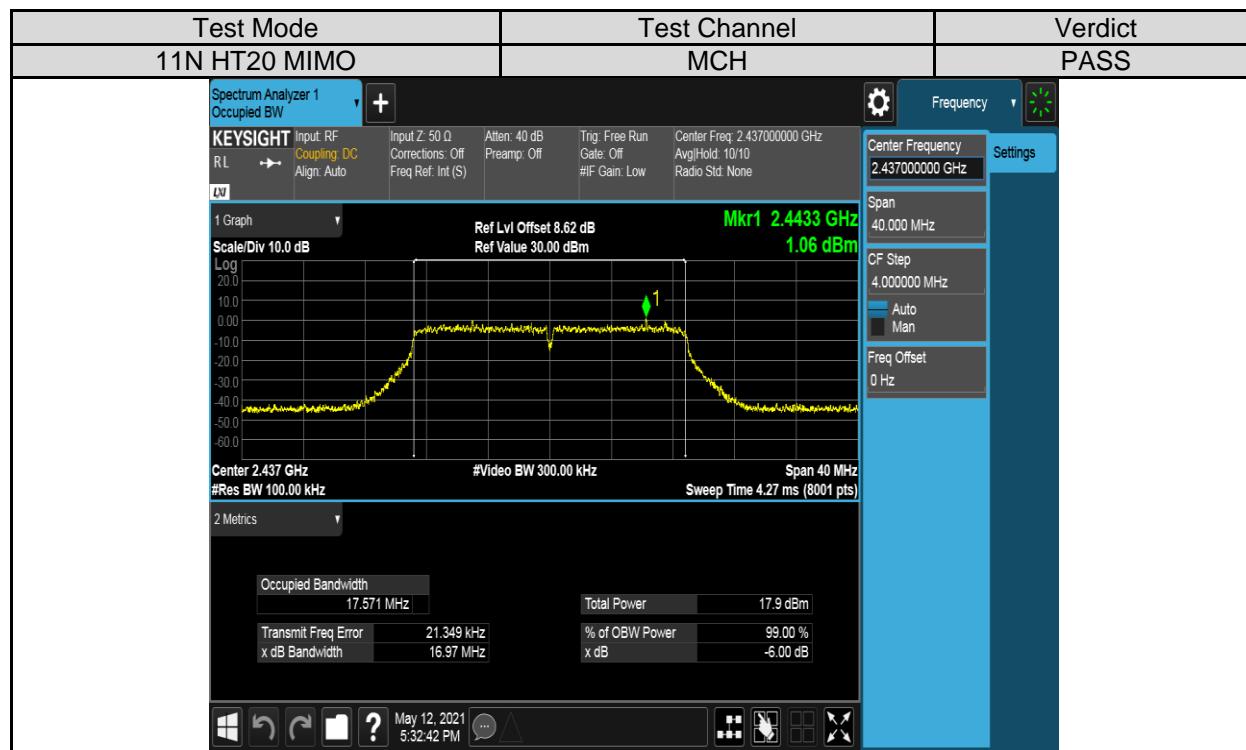

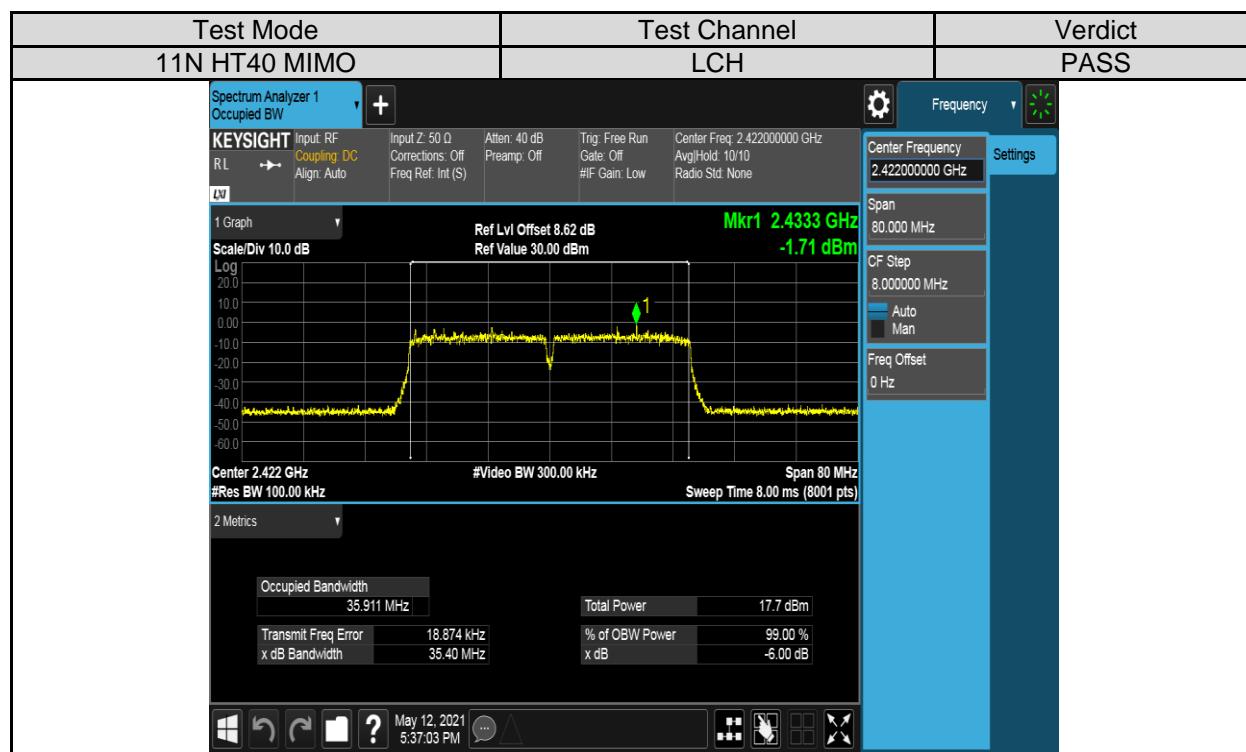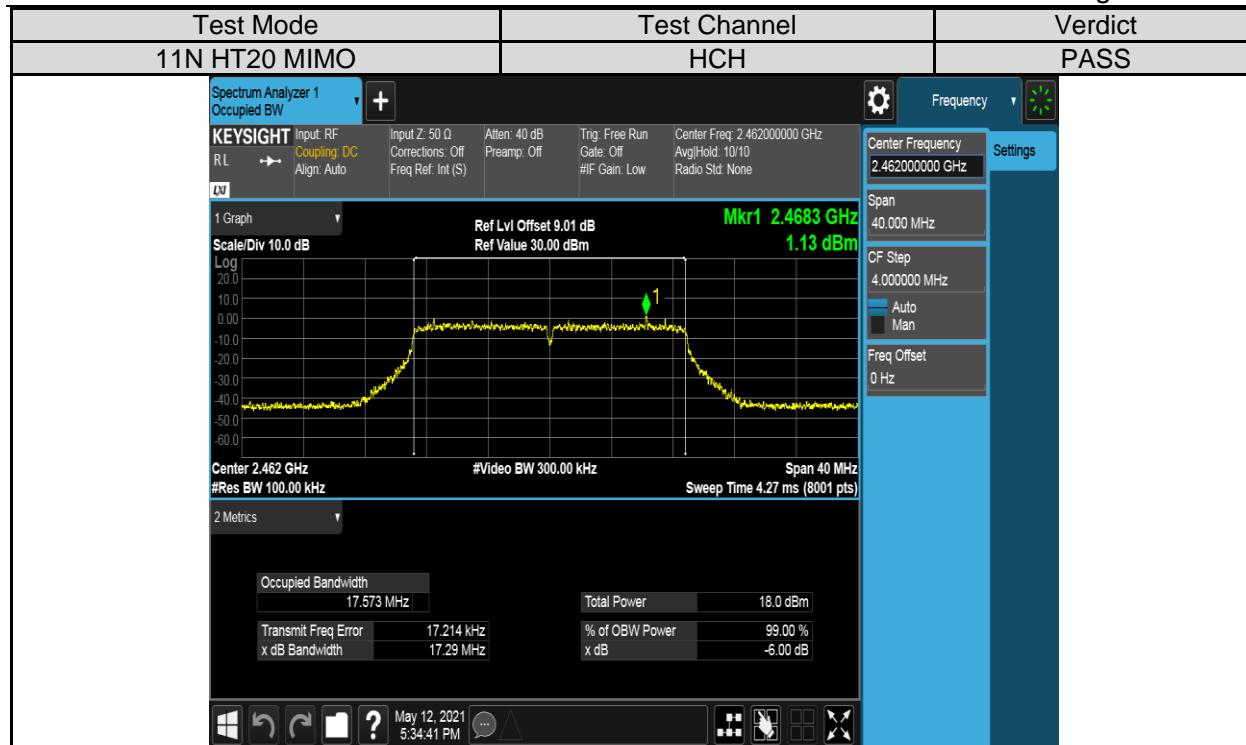

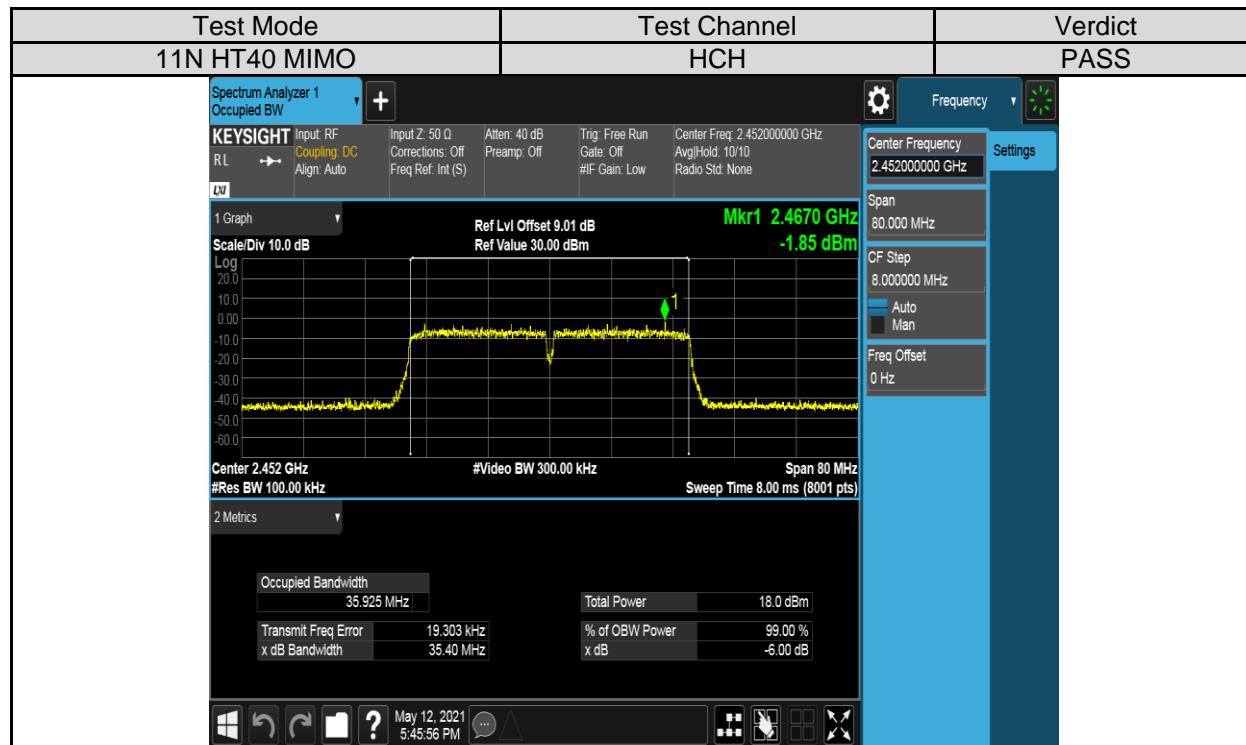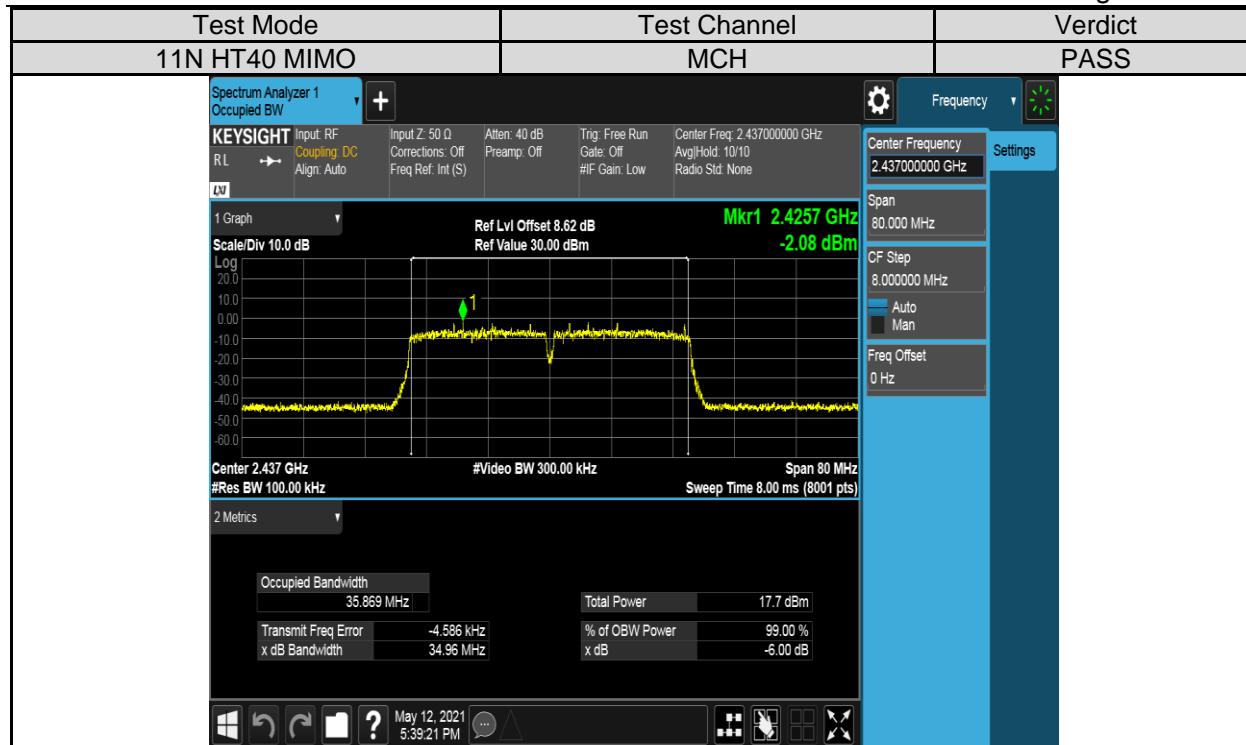


7.3. CONDUCTED POWER

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Conducted Output Power	1 watt or 30dBm	2400-2483.5
1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.			

TEST PROCEDURE


Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure the power of each channel.

AVG Detector use for AVG result.

TEST SETUP



RESULTS

Test Mode	Test Antenna	Test Channel	Maximum Average Conducted Output Power (dBm)	Result
11B	Antenna 1	LCH	10.75	Pass
		MCH	10.47	Pass
		HCH	10.47	Pass
	Antenna 2	LCH	9.87	Pass
		MCH	9.35	Pass
		HCH	8.37	Pass
11G	Antenna 1	LCH	12.49	Pass
		MCH	12.19	Pass
		HCH	12.23	Pass
	Antenna 2	LCH	11.46	Pass
		MCH	11.46	Pass
		HCH	11.66	Pass
11N20MIMO	Antenna 1	LCH	12.86	Pass
		MCH	13.25	Pass
		HCH	13.31	Pass
	Antenna 2	LCH	12.49	Pass
		MCH	12.30	Pass
		HCH	12.52	Pass
	Antenna 1+2	LCH	15.69	Pass
		MCH	15.91	Pass
		HCH	15.94	Pass
11N40MIMO	Antenna 1	LCH	13.00	Pass
		MCH	13.55	Pass
		HCH	13.77	Pass
	Antenna 2	LCH	12.55	Pass
		MCH	12.66	Pass
		HCH	12.90	Pass
	Antenna 1+2	LCH	15.79	Pass
		MCH	16.14	Pass
		HCH	16.37	Pass

Remark: 1) For all the test results has been adjusted the duty cycle factor.
 2) For Correction Factor is refer to the result in section 7.1
 3) For this product, it has two antennas, antenna1 and antenna2, but only the 802.11N HT20 and 802.11N HT40 modes can support both the SISO and MIMO technical.
 4) Through pre-testing all the test modes of 11N 20 and 11N40, including SISO and MIMO, but only the data if worse case is included in this test report.

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5
1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.			

TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	3 kHz \leq RBW \leq 100 kHz
VBW	\geq 3 \times RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

TEST SETUP







RESULTS



Test Mode	Test Antenna	Test Channel	Maximum Peak power spectral density(dBm/30kHz)	Result
11B	Antenna 1	LCH	-1.91	Pass
		MCH	-2.42	Pass
		HCH	-2.53	Pass
	Antenna 2	LCH	-2.25	Pass
		MCH	-3.30	Pass
		HCH	-5.19	Pass
11G	Antenna 1	LCH	-2.75	Pass
		MCH	-3.12	Pass
		HCH	-4.21	Pass
	Antenna 2	LCH	-5.23	Pass
		MCH	-5.63	Pass
		HCH	-4.26	Pass
11N20MIMO	Antenna 1	LCH	-2.90	Pass
		MCH	-2.84	Pass
		HCH	-2.44	Pass
	Antenna 2	LCH	-3.38	Pass
		MCH	-2.78	Pass
		HCH	-4.29	Pass
	Antenna 1+2	LCH	-0.12	Pass
		MCH	0.20	Pass
		HCH	-0.26	Pass
11N40MIMO	Antenna 1	LCH	-6.65	Pass
		MCH	-5.65	Pass
		HCH	-5.18	Pass
	Antenna 2	LCH	-7.34	Pass
		MCH	-6.92	Pass
		HCH	-6.47	Pass
	Antenna 1+2	LCH	-3.97	Pass
		MCH	-3.23	Pass
		HCH	-2.77	Pass



Remark:



- 1) For this product, it has two antennas, antenna1 and antenna2, but only the 802.11N HT20 and 802.11N HT40 modes can support both the SISO and MIMO technical.
- 2) Through pre-testing all the test modes of 11N 20 and 11N40, including SISO and MIMO, but only the data if worse case is included in this test report.

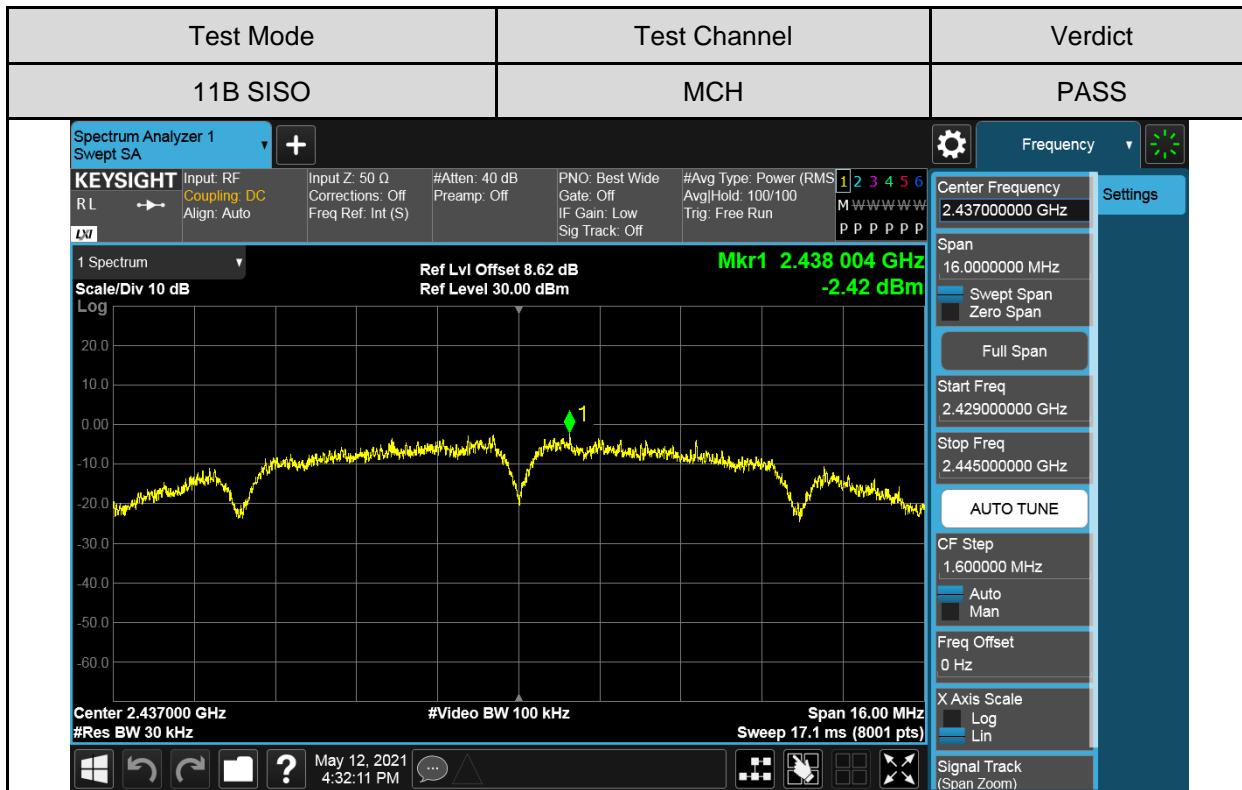
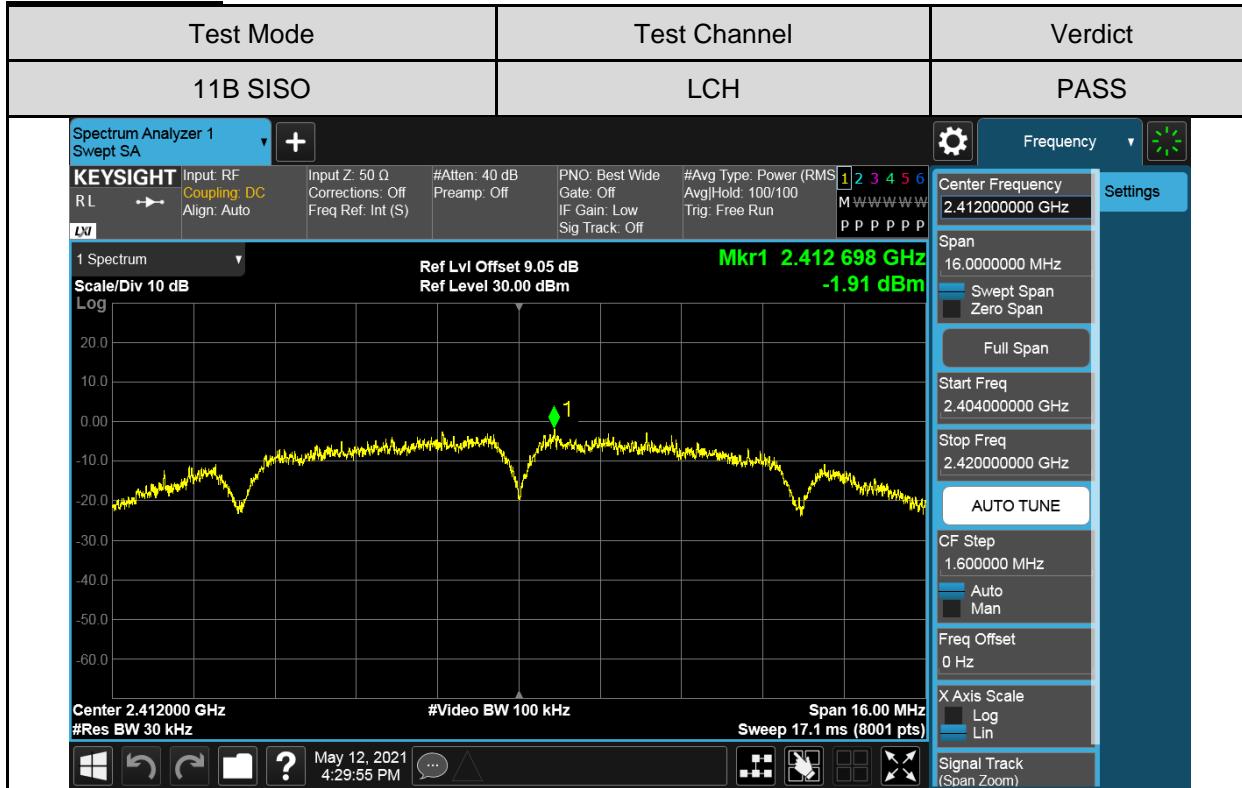
Test Graphs:**Antenna 1 Part:**

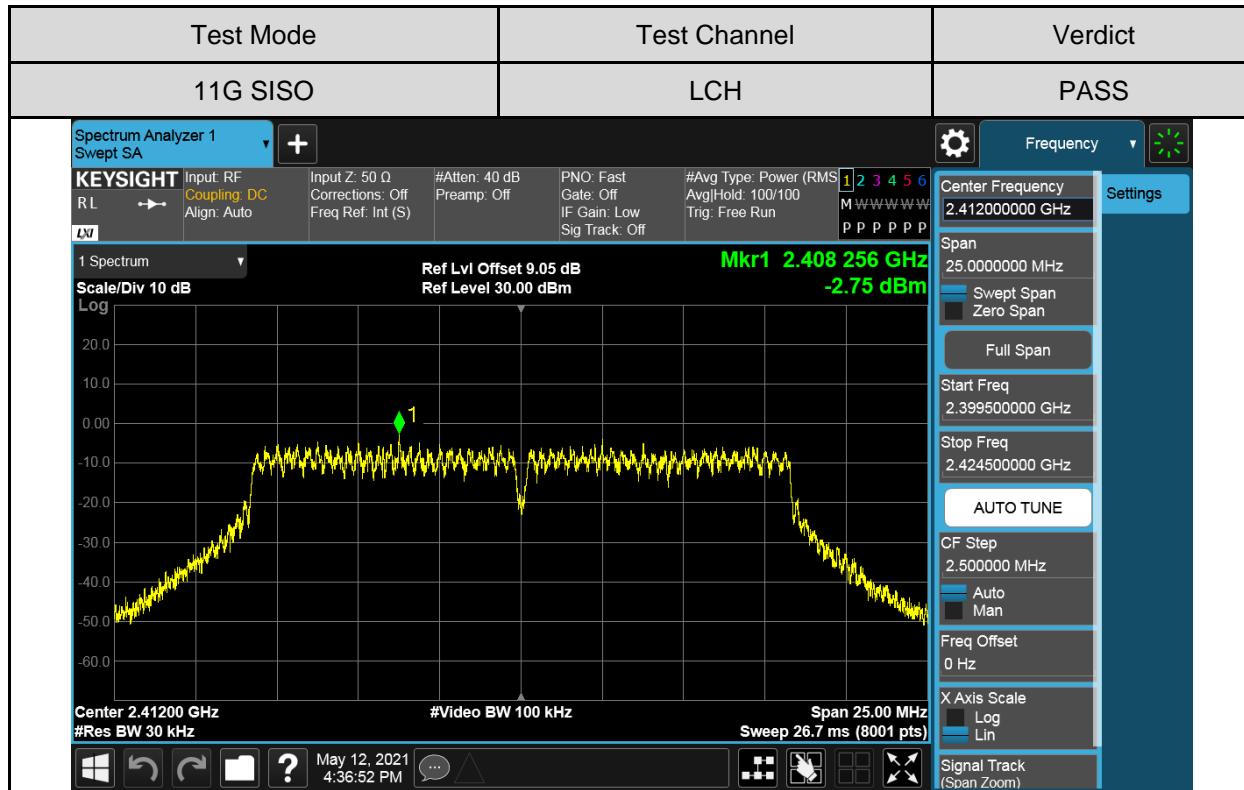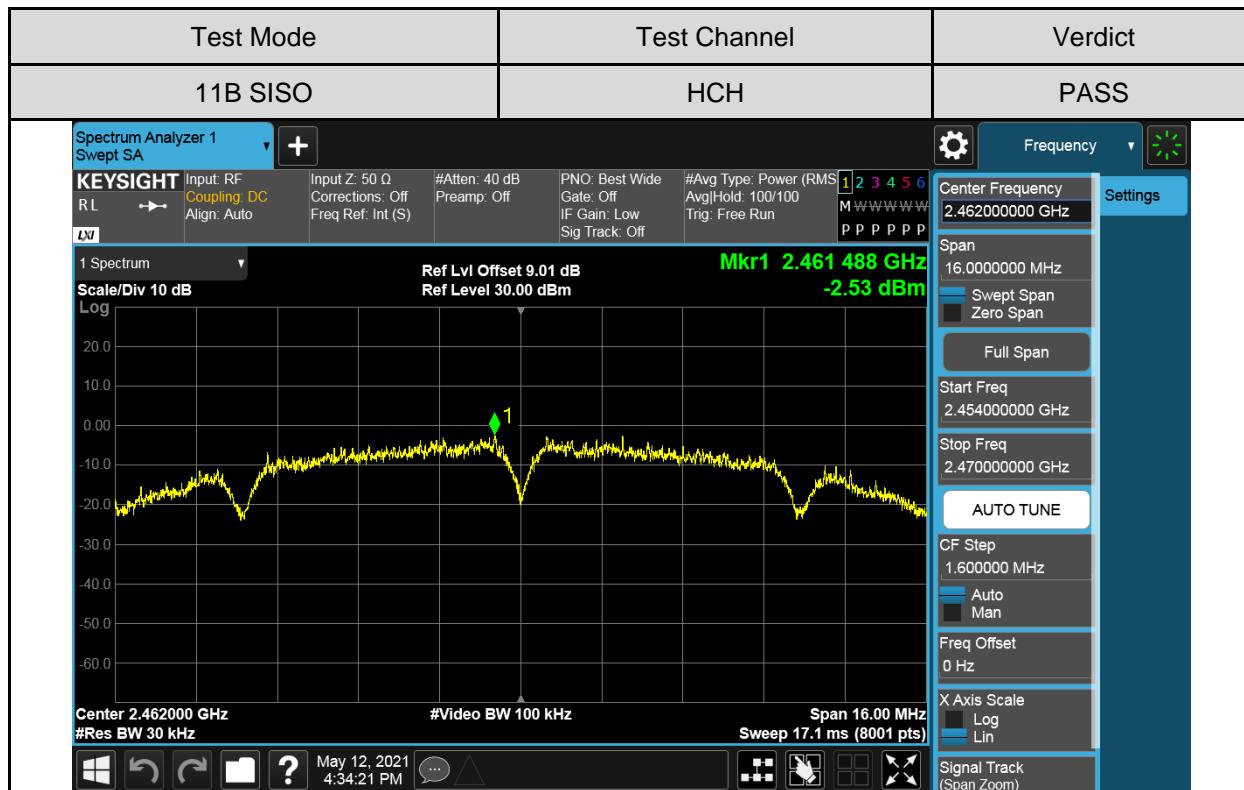

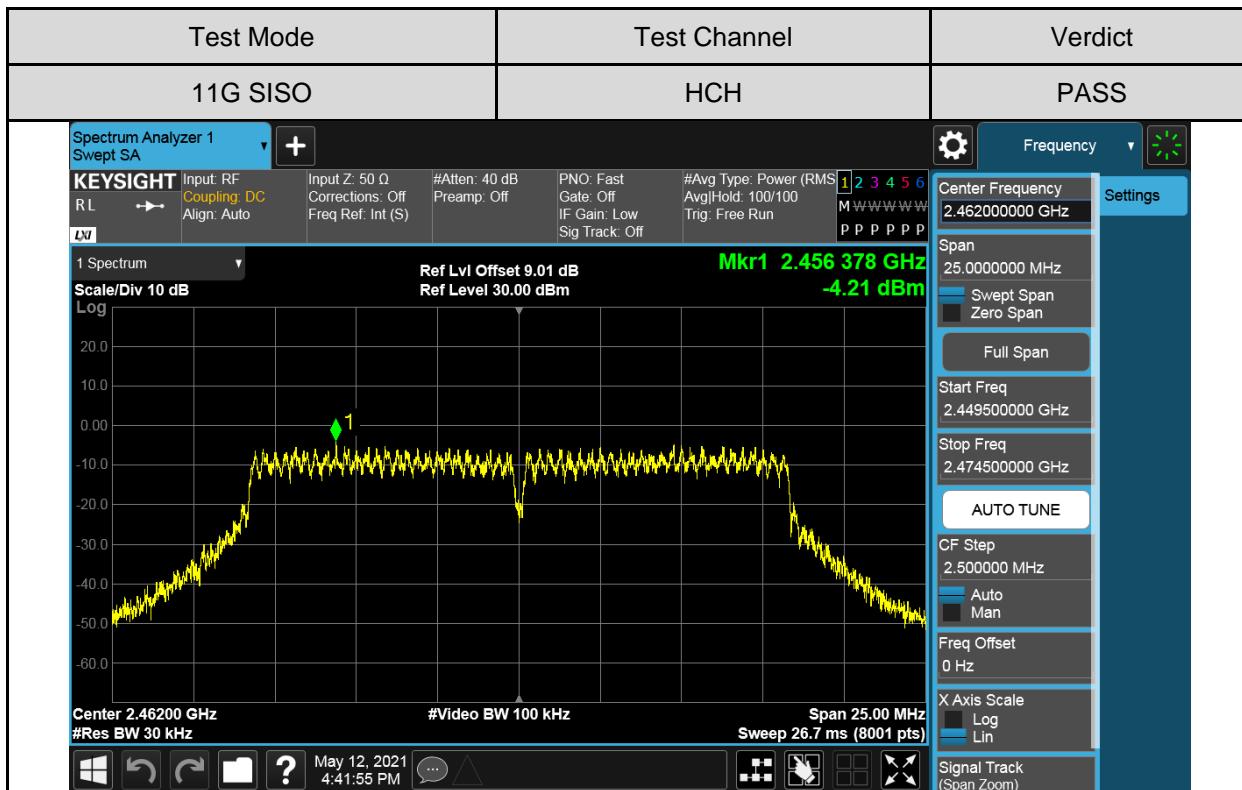
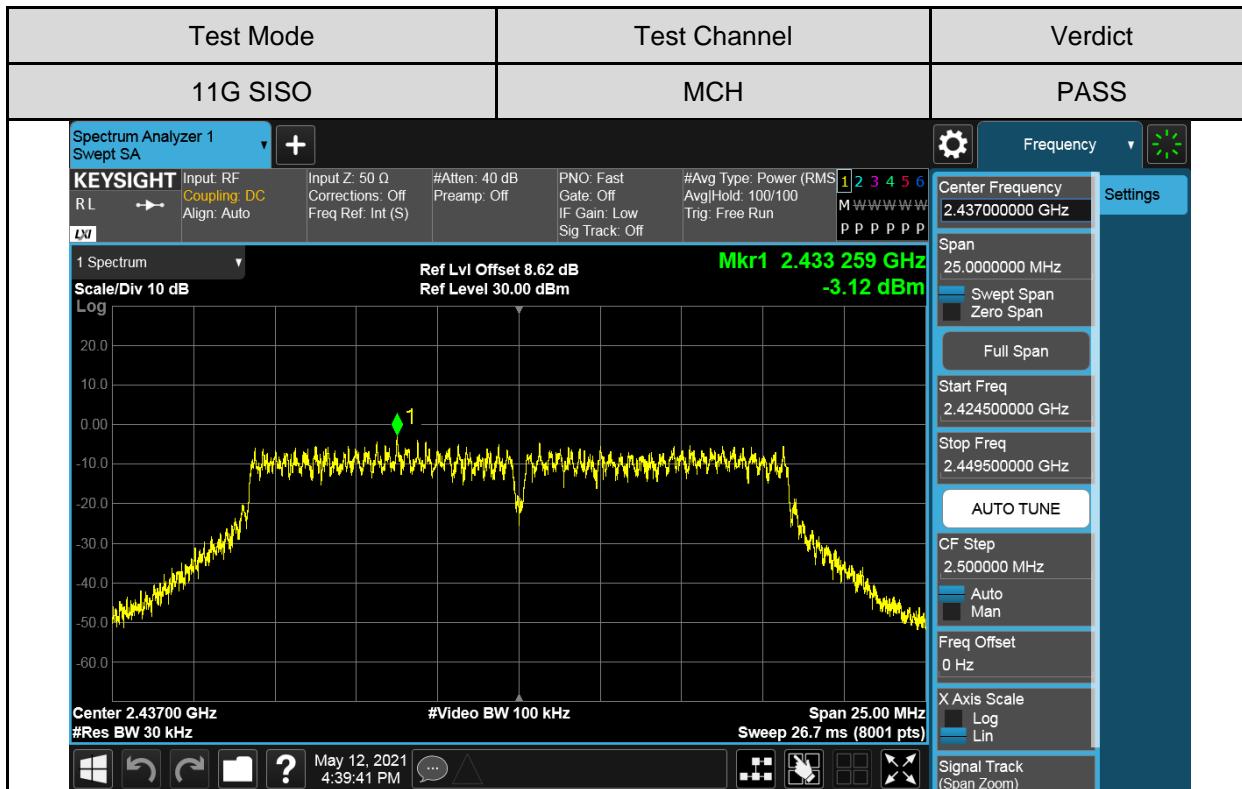


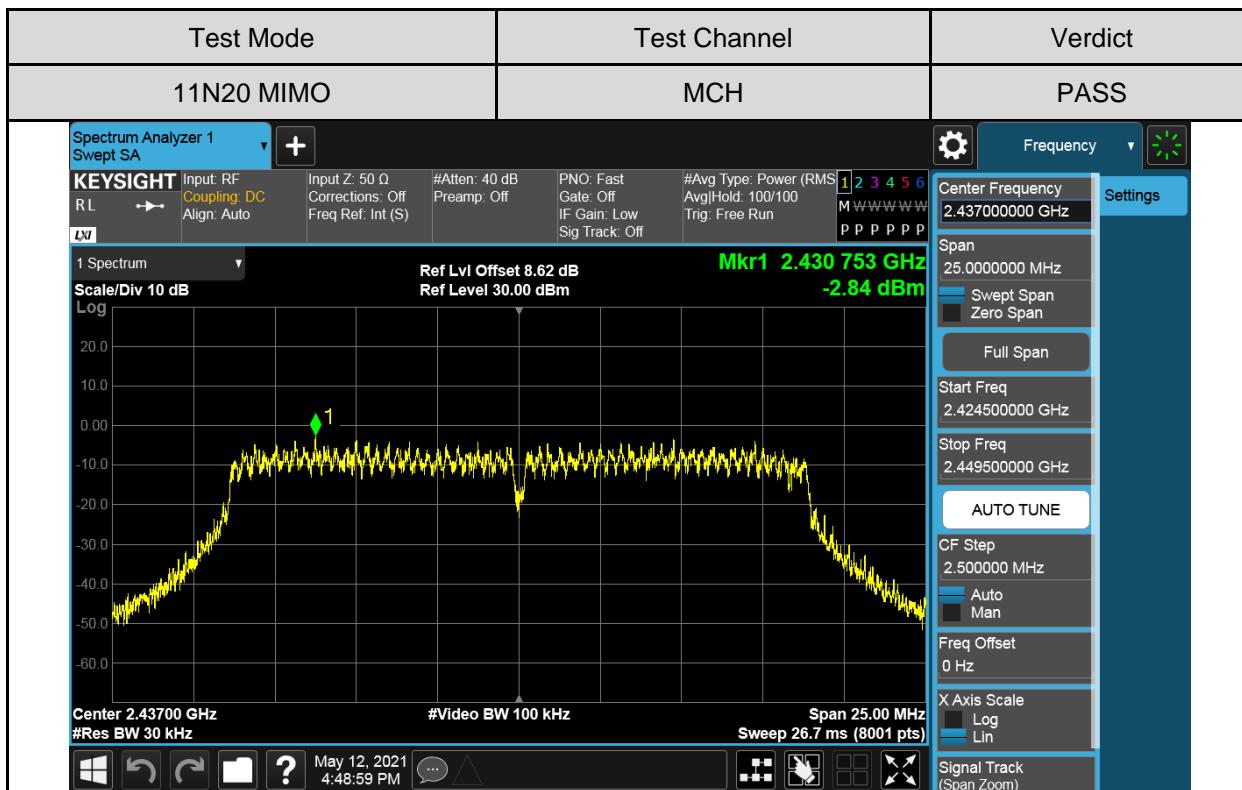
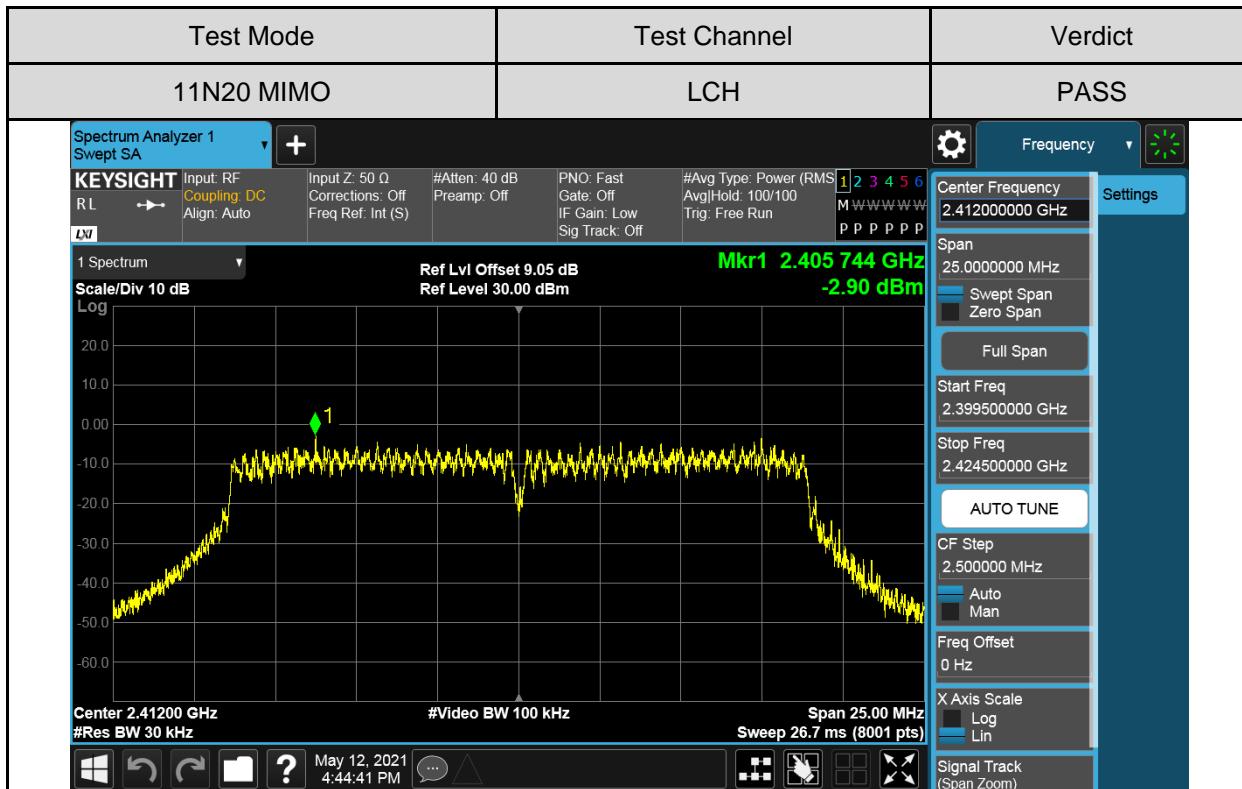


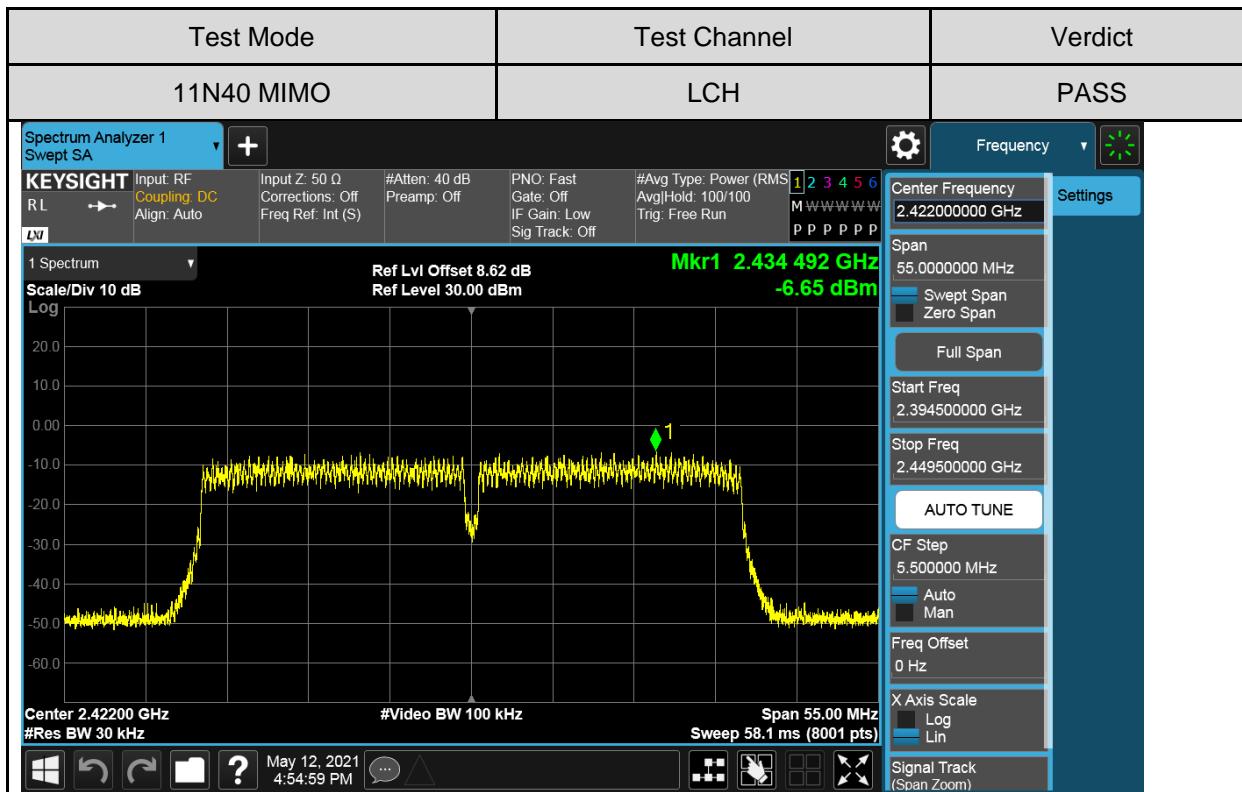
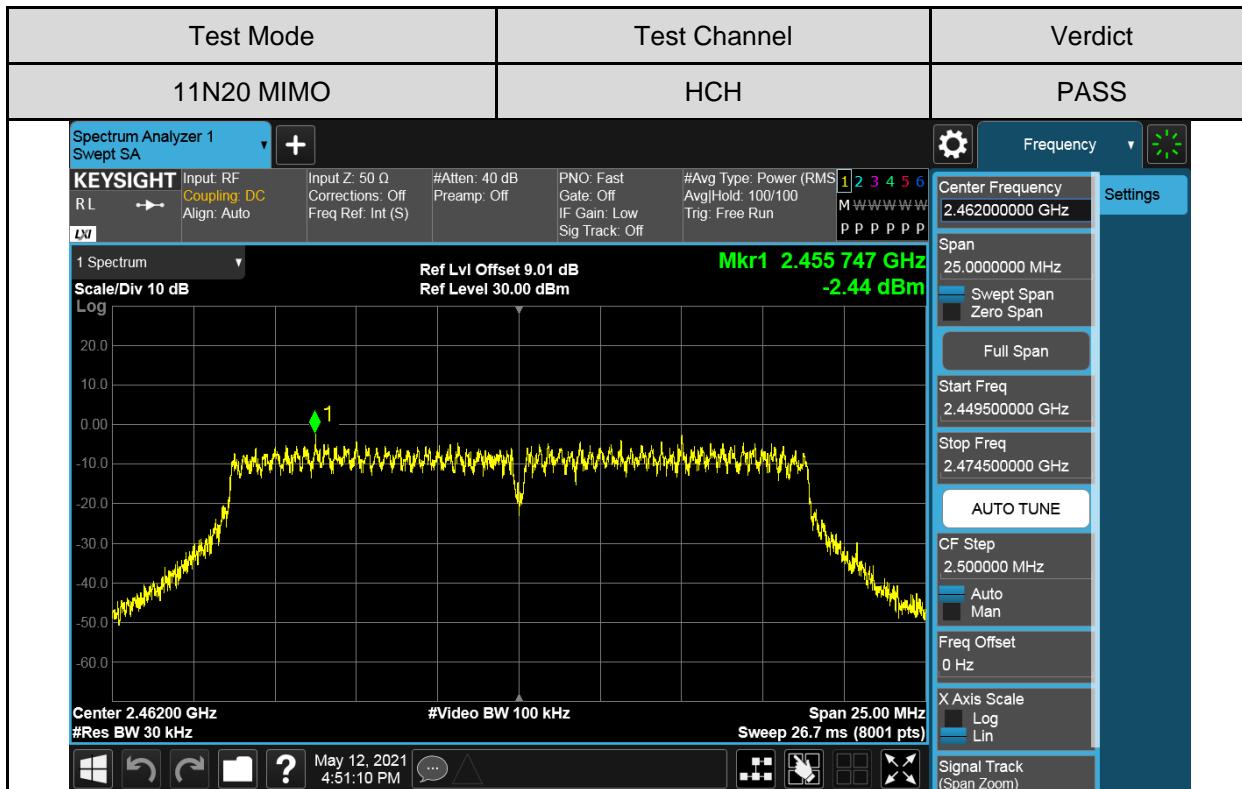


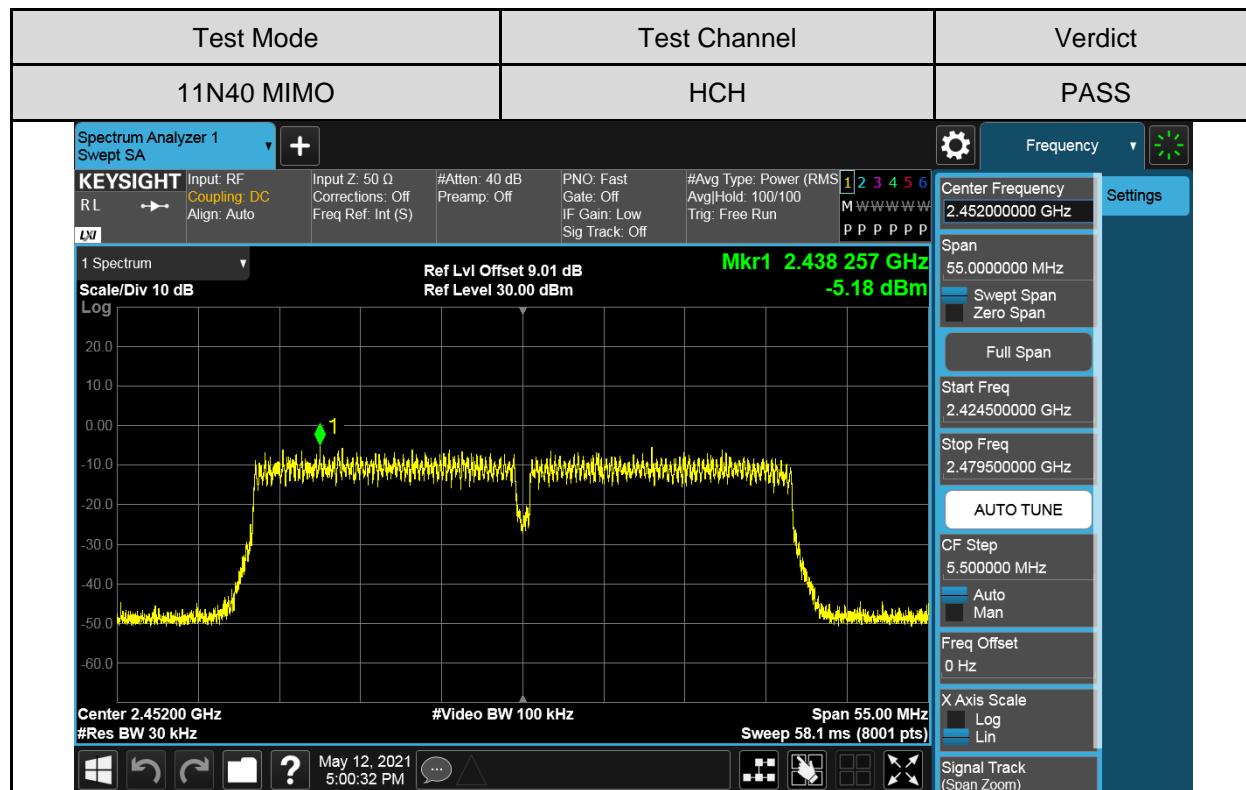
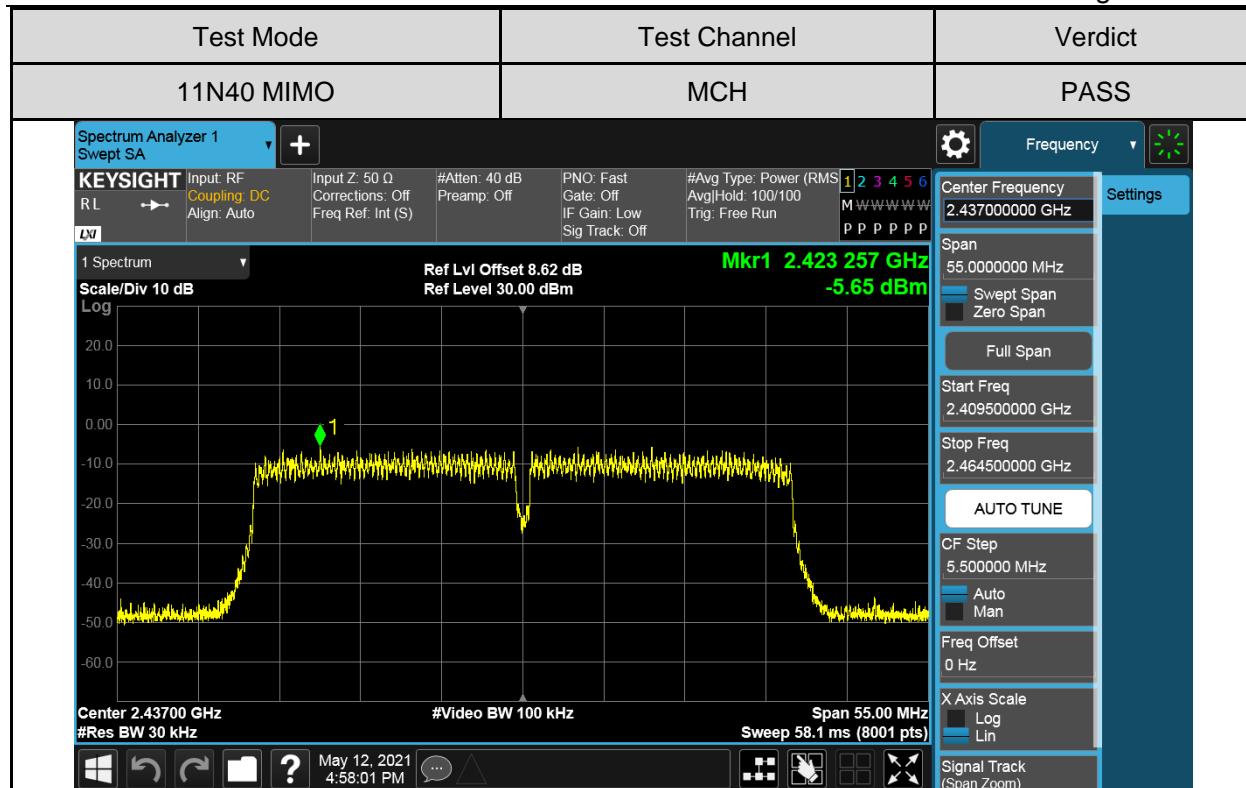




Antenna2 Part:

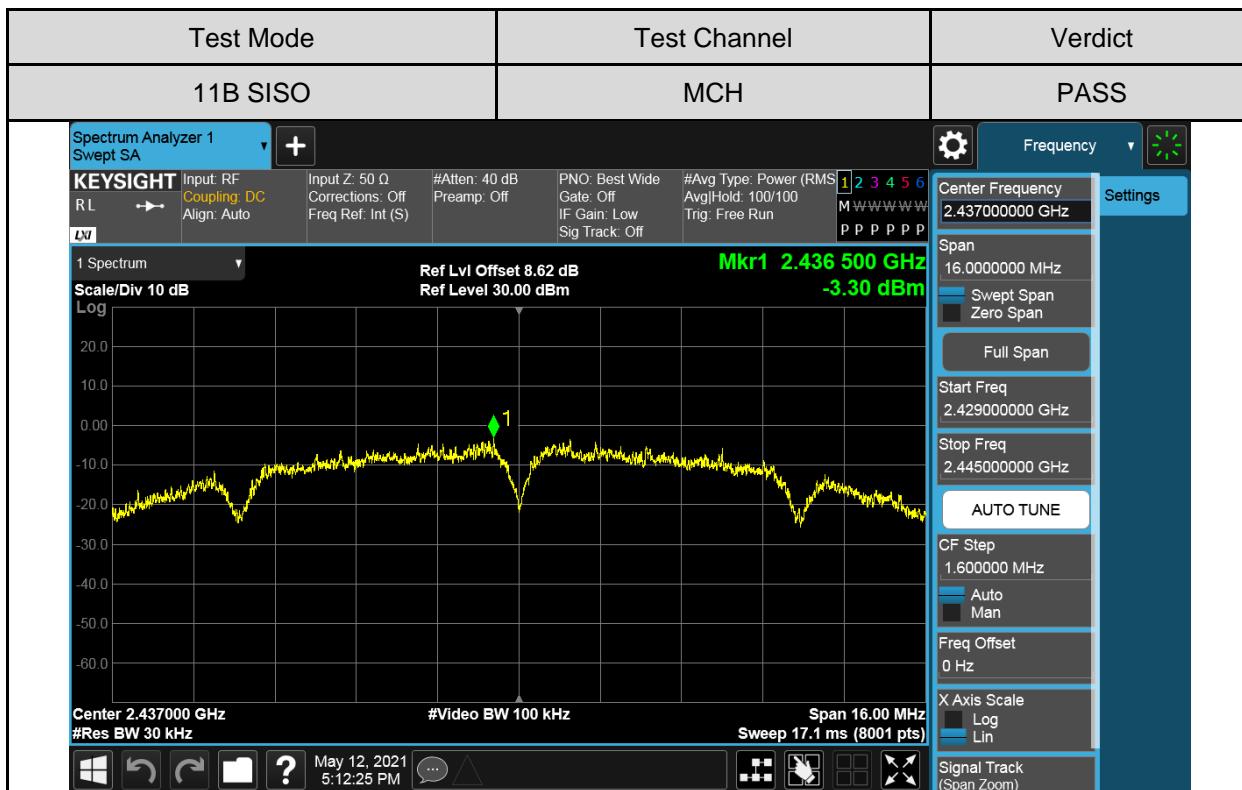
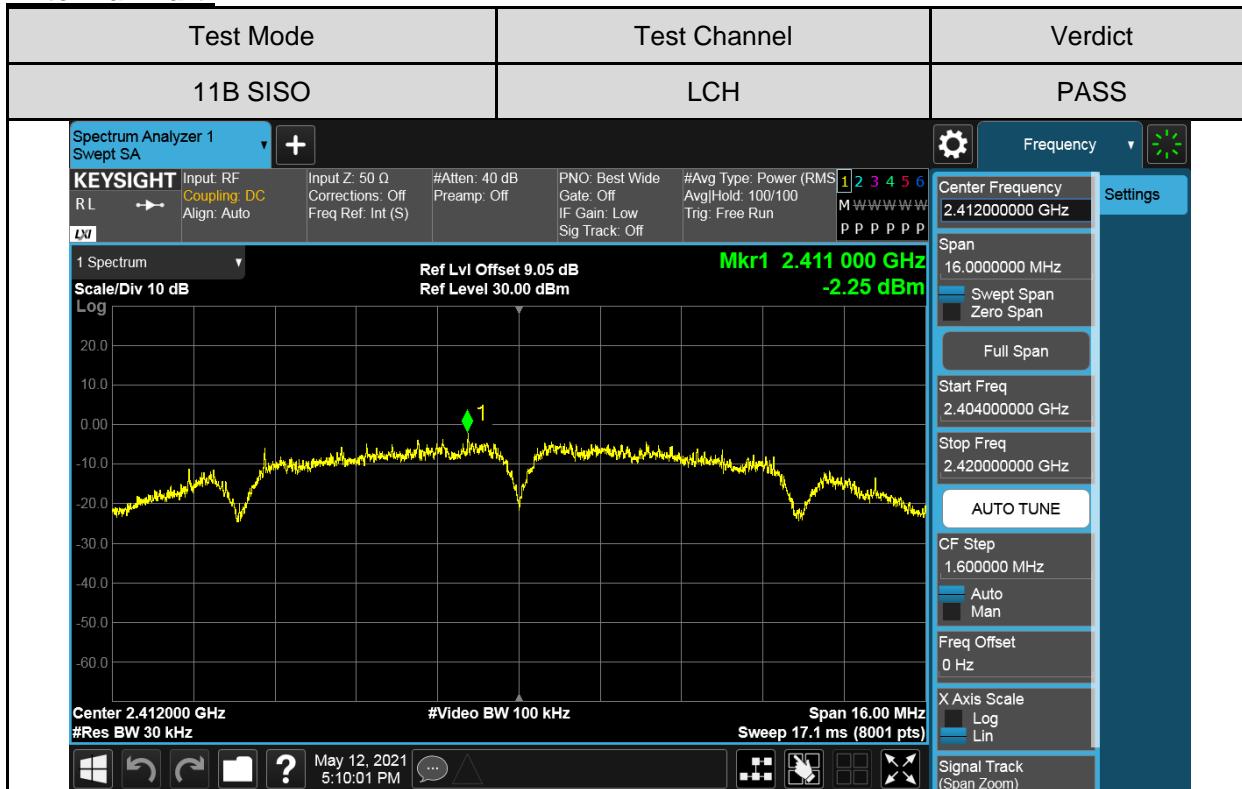


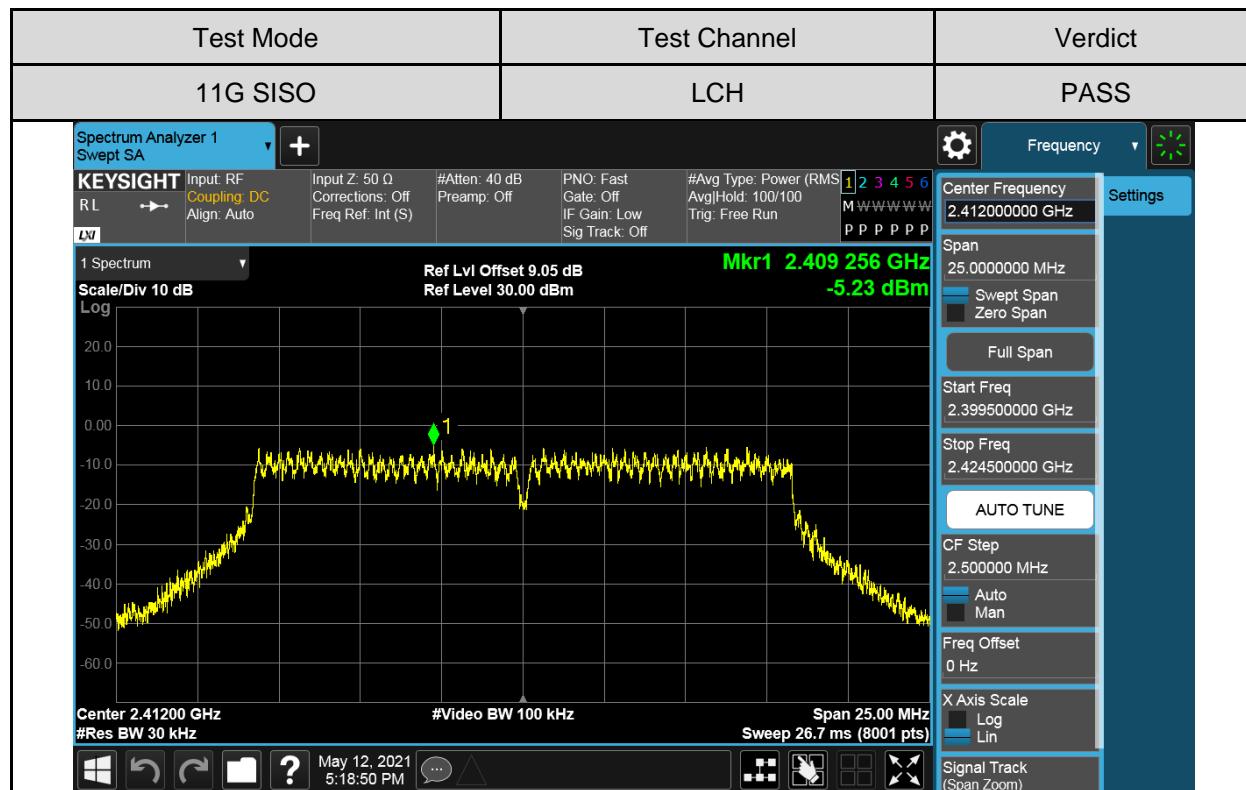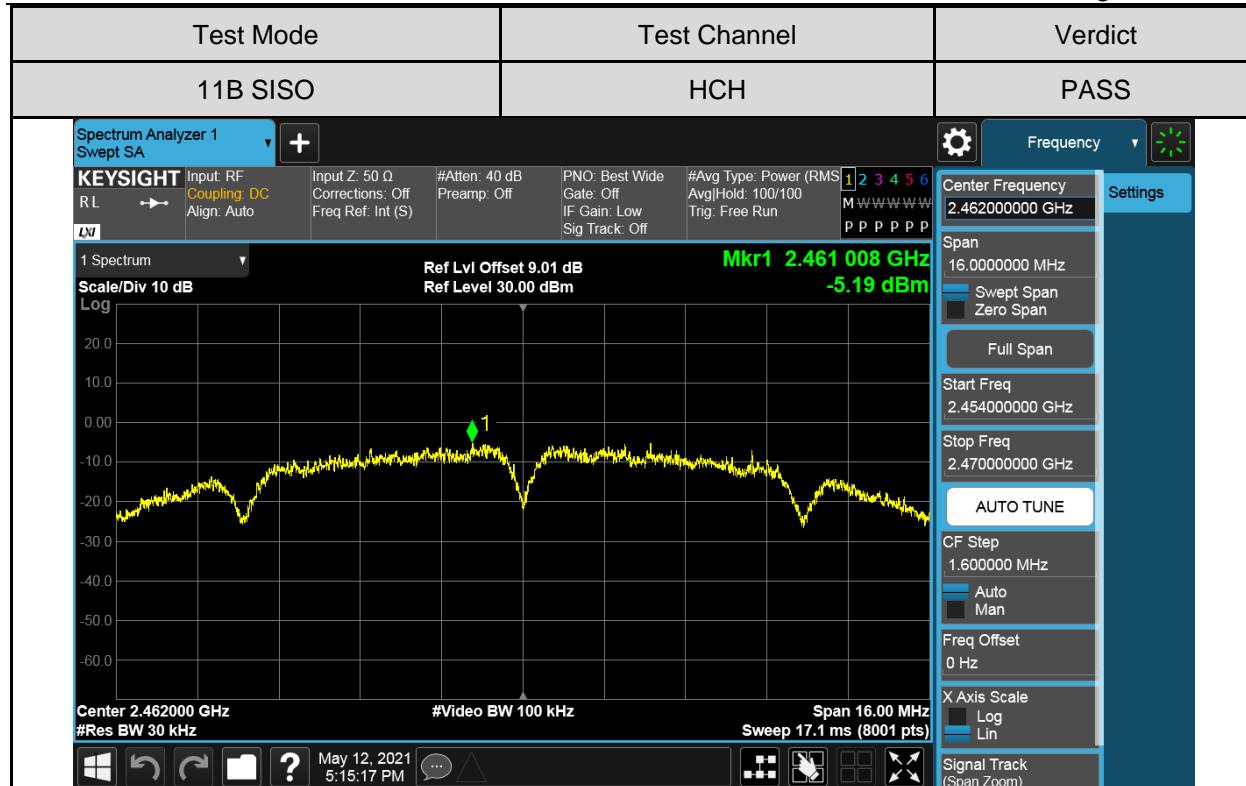

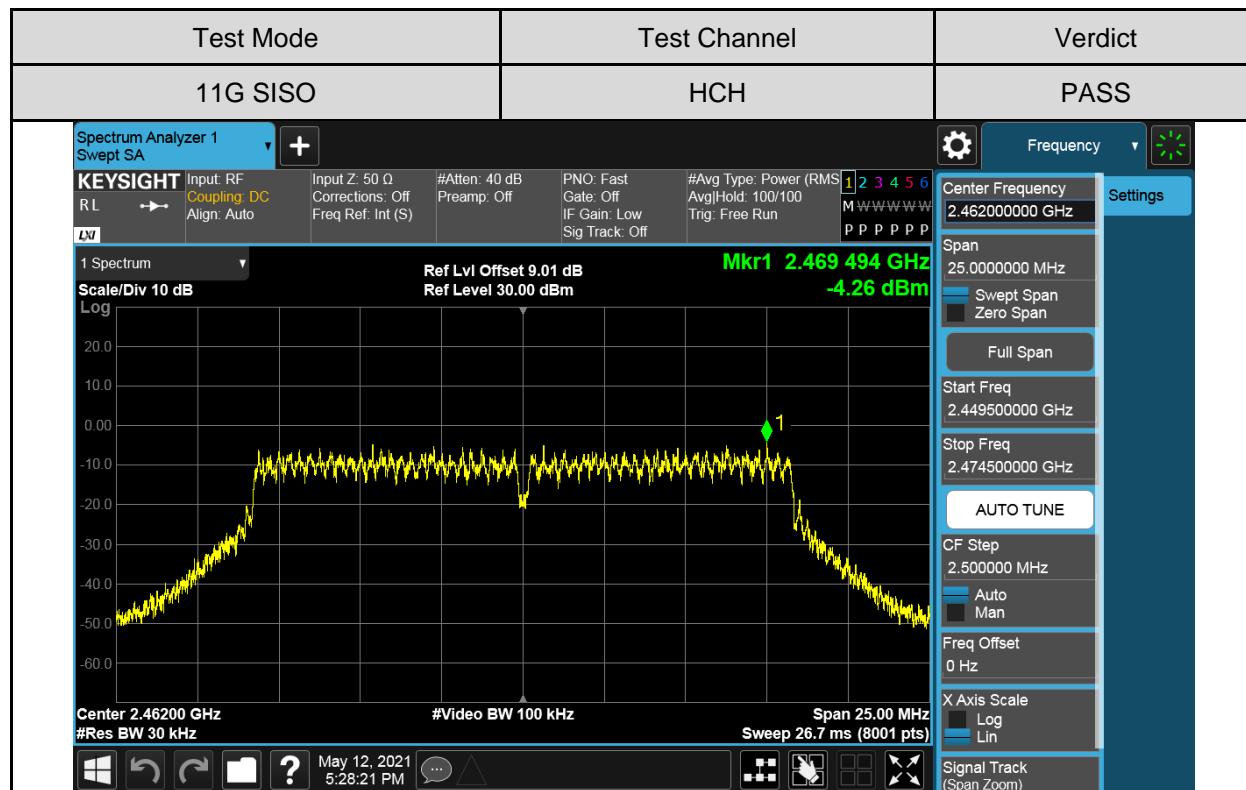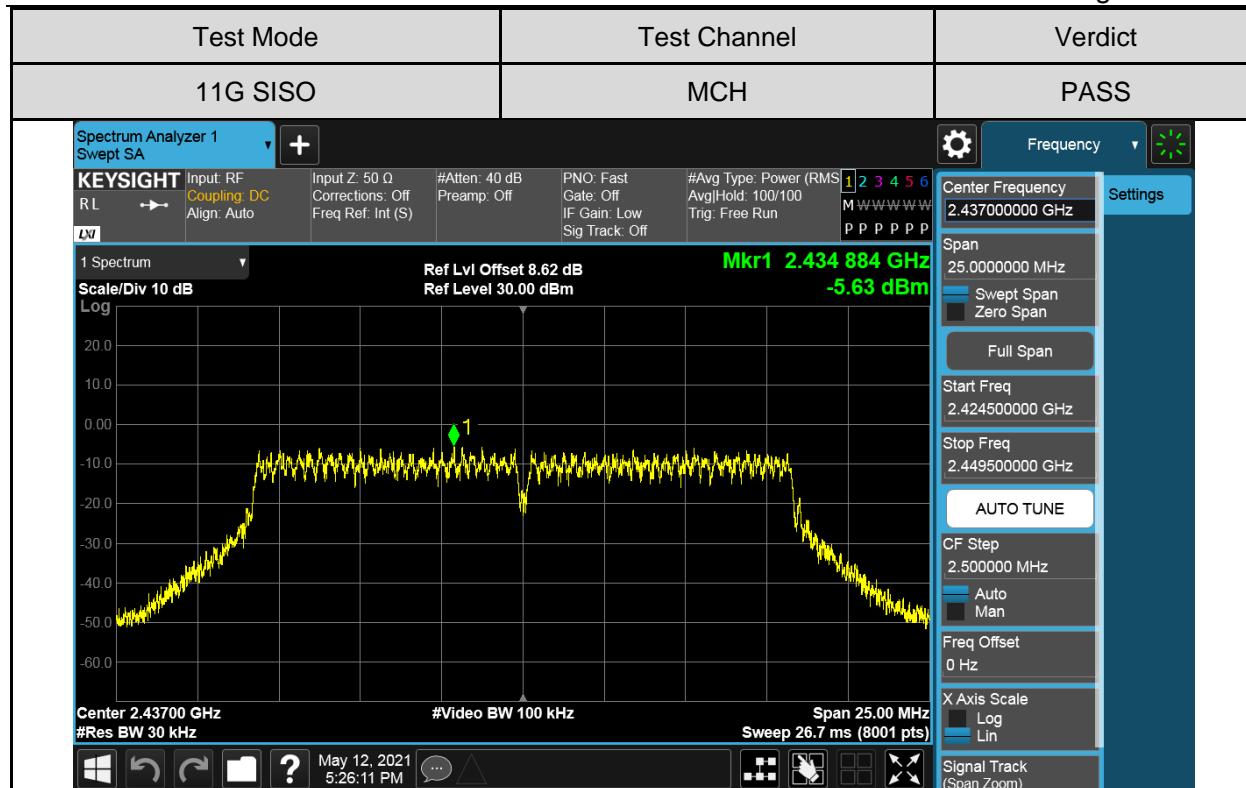

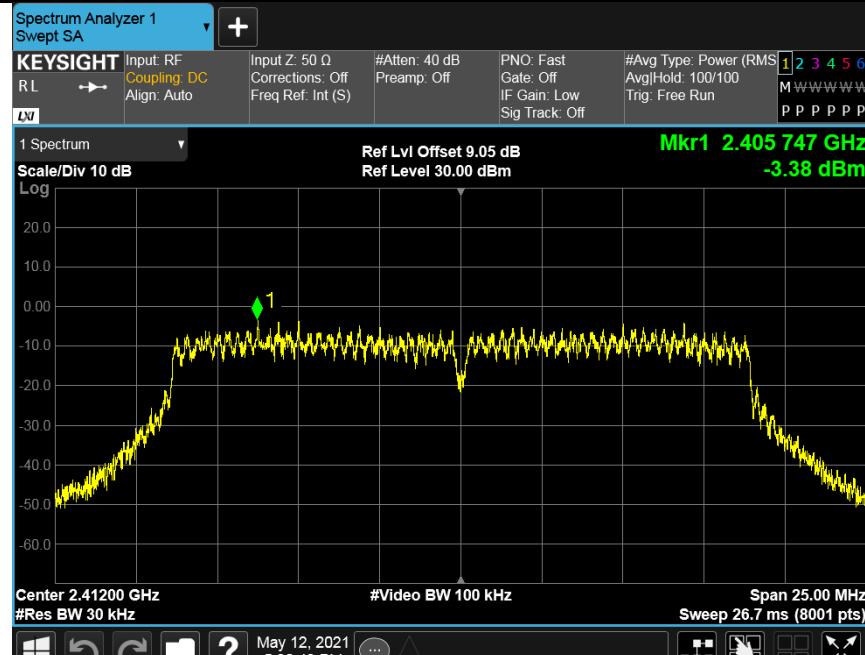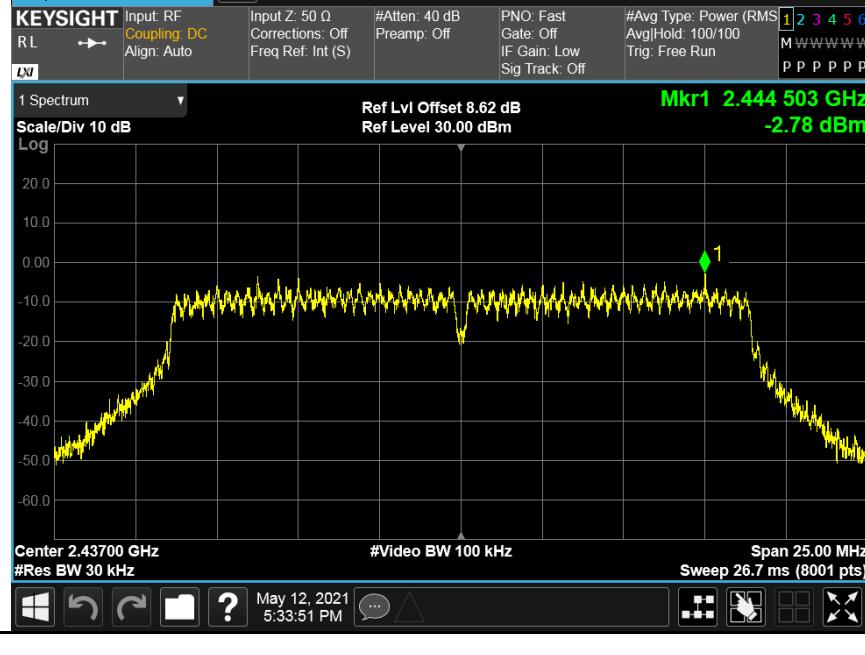Test Mode		Test Channel	Verdict
11N20 MIMO		LCH	PASS
	<p>Spectrum Analyzer 1 Swept SA</p> <p>KEYSIGHT Input: RF Coupling: DC RL: Align: Auto</p> <p>Input Z: 50 Ω Corrections: Off Freq Ref: Int (S)</p> <p>#Atten: 40 dB Preamp: Off PNO: Fast Gate: Off IF Gain: Low Sig Track: Off</p> <p>#Avg Type: Power (RMS) Avg/Hold: 100/100 Trig: Free Run</p> <p>1 Spectrum Ref Lvl Offset 9.05 dB Ref Level 30.00 dBm</p> <p>Mkr1 2.405 747 GHz -3.38 dBm</p> <p>Scale/Div 10 dB Log</p> <p>20.0 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0</p> <p>Center 2.41200 GHz #Res BW 30 kHz #Video BW 100 kHz Span 25.00 MHz Sweep 26.7 ms (8001 pts)</p> <p>May 12, 2021 5:30:43 PM</p> 	<p>Frequency</p> <p>Center Frequency 2.41200000 GHz</p> <p>Span 25.000000 MHz</p> <p>Settings</p> <p>Full Span</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.42450000 GHz</p> <p>AUTO TUNE</p> <p>CF Step 2.500000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> <p>X Axis Scale Log Lin</p> <p>Signal Track (Span Zoom)</p>	PASS
Test Mode		Test Channel	Verdict
11N20 MIMO		MCH	PASS
	<p>Spectrum Analyzer 1 Swept SA</p> <p>KEYSIGHT Input: RF Coupling: DC RL: Align: Auto</p> <p>Input Z: 50 Ω Corrections: Off Freq Ref: Int (S)</p> <p>#Atten: 40 dB Preamp: Off PNO: Fast Gate: Off IF Gain: Low Sig Track: Off</p> <p>#Avg Type: Power (RMS) Avg/Hold: 100/100 Trig: Free Run</p> <p>1 Spectrum Ref Lvl Offset 8.62 dB Ref Level 30.00 dBm</p> <p>Mkr1 2.444 503 GHz -2.78 dBm</p> <p>Scale/Div 10 dB Log</p> <p>20.0 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0</p> <p>Center 2.43700 GHz #Res BW 30 kHz #Video BW 100 kHz Span 25.00 MHz Sweep 26.7 ms (8001 pts)</p> <p>May 12, 2021 5:33:51 PM</p> 	<p>Frequency</p> <p>Center Frequency 2.43700000 GHz</p> <p>Span 25.000000 MHz</p> <p>Settings</p> <p>Full Span</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>AUTO TUNE</p> <p>CF Step 2.500000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> <p>X Axis Scale Log Lin</p> <p>Signal Track (Span Zoom)</p>	PASS

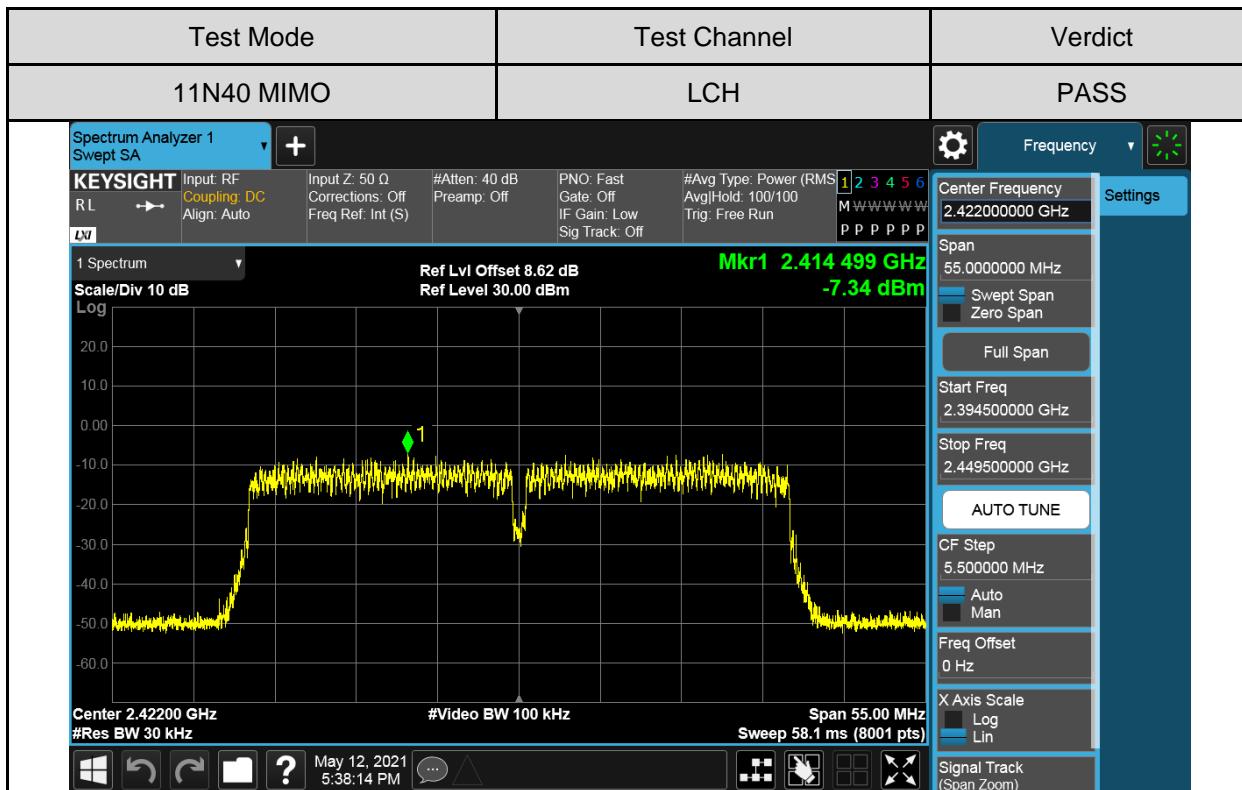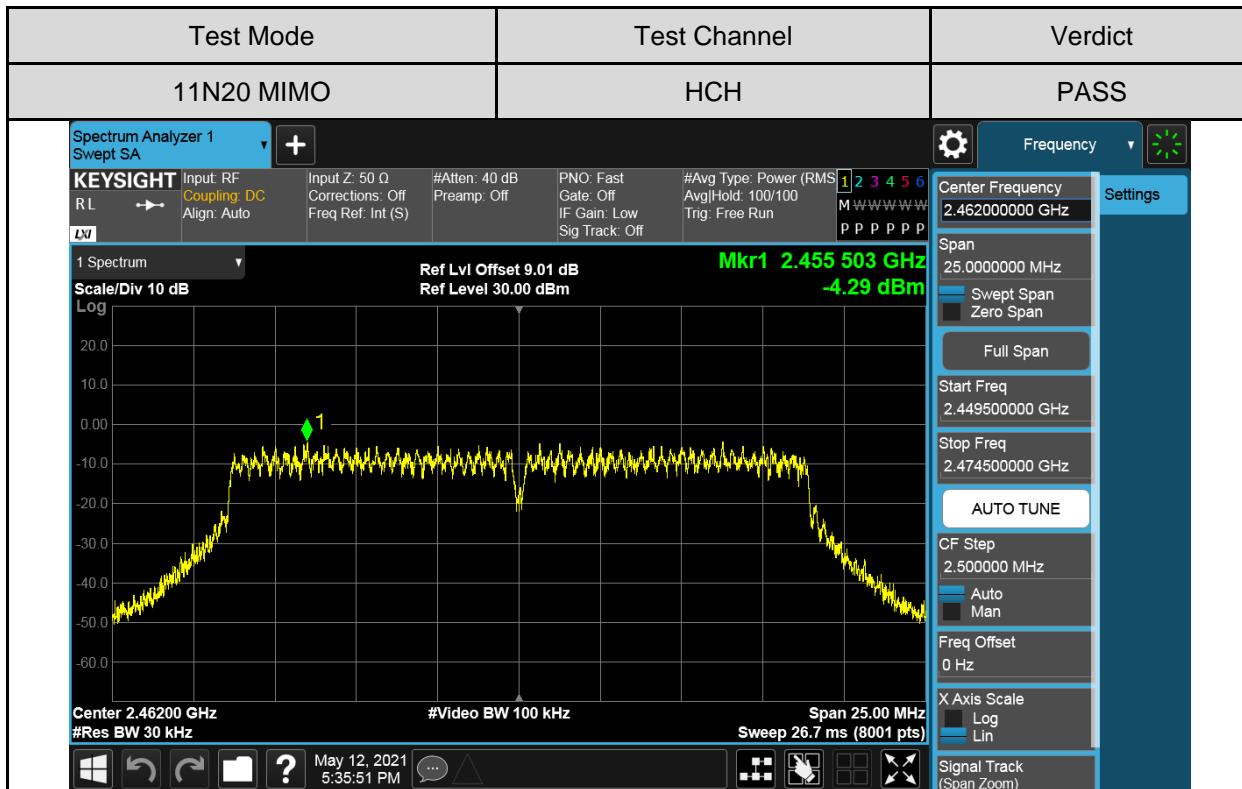

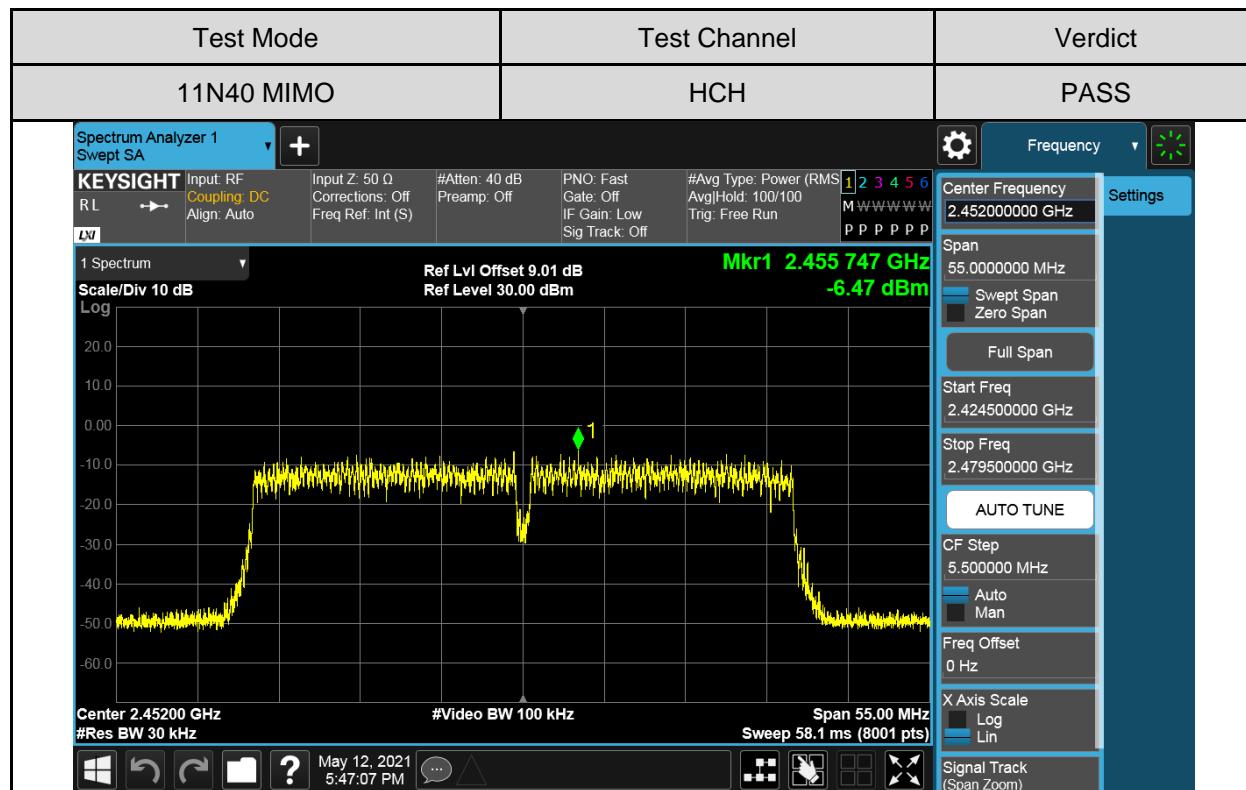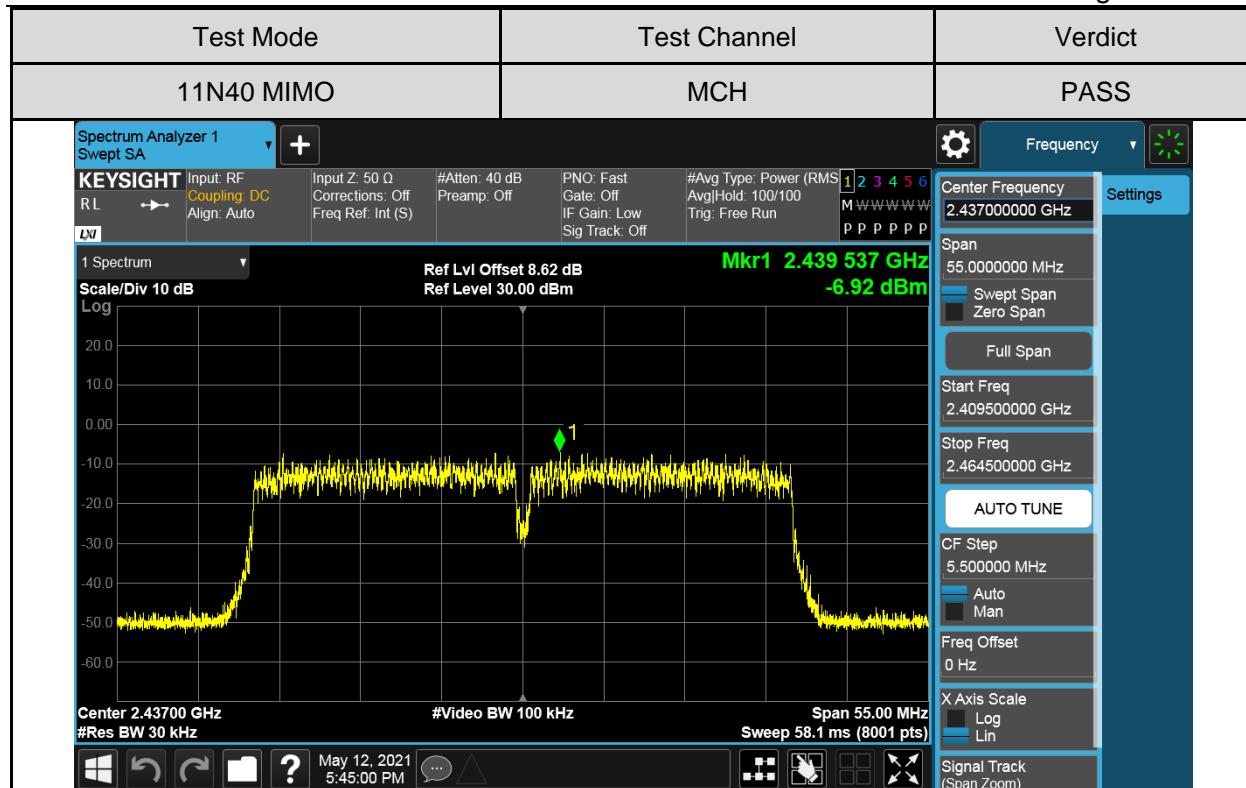

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	At least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


settings:

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times$ RBW
measurement points	\geq span/RBW
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP

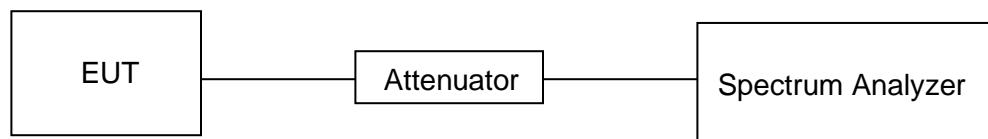



TEST ENVIRONMENT


Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

Part I :Conducted Bandedge
RESULTS TABLE



Test Mode	Test Antenna	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	Antenna 1	LCH	1.796	-40.62	-28.20	PASS
		HCH	1.423	-40.22	-28.58	PASS
	Antenna 2	LCH	0.8955	-40.69	-29.10	PASS
		HCH	-0.4212	-40.94	-30.42	PASS
11G	Antenna 1	LCH	1.299	-40.89	-28.70	PASS
		HCH	0.787	-40.87	-29.21	PASS
	Antenna 2	LCH	0.246	-41.16	-29.75	PASS
		HCH	-0.3398	-40.52	-30.34	PASS
11N20MIMO	Antenna 1	LCH	-0.4295	-40.68	-30.43	PASS
		HCH	2.239	-40.52	-27.76	PASS
	Antenna 2	LCH	0.7101	-40.78	-29.29	PASS
		HCH	0.9347	-41.06	-29.07	PASS
11N40MIMO	Antenna 1	LCH	-1.282	-41.40	-31.28	PASS
		HCH	-0.9393	-40.38	-30.94	PASS
	Antenna 2	LCH	-1.877	-41.02	-31.88	PASS
		HCH	-1.373	-40.46	-31.37	PASS

Remark:

- 1) For this product, it has two antennas, antenna1 and antenna2, but only the 802.11N HT20 and 802.11N HT40 modes can support both the SISO and MIMO technical.
- 2) Through pre-testing all the test modes of 11N 20 and 11N40, including SISO and MIMO, but only the data if worse case is included in this test report.

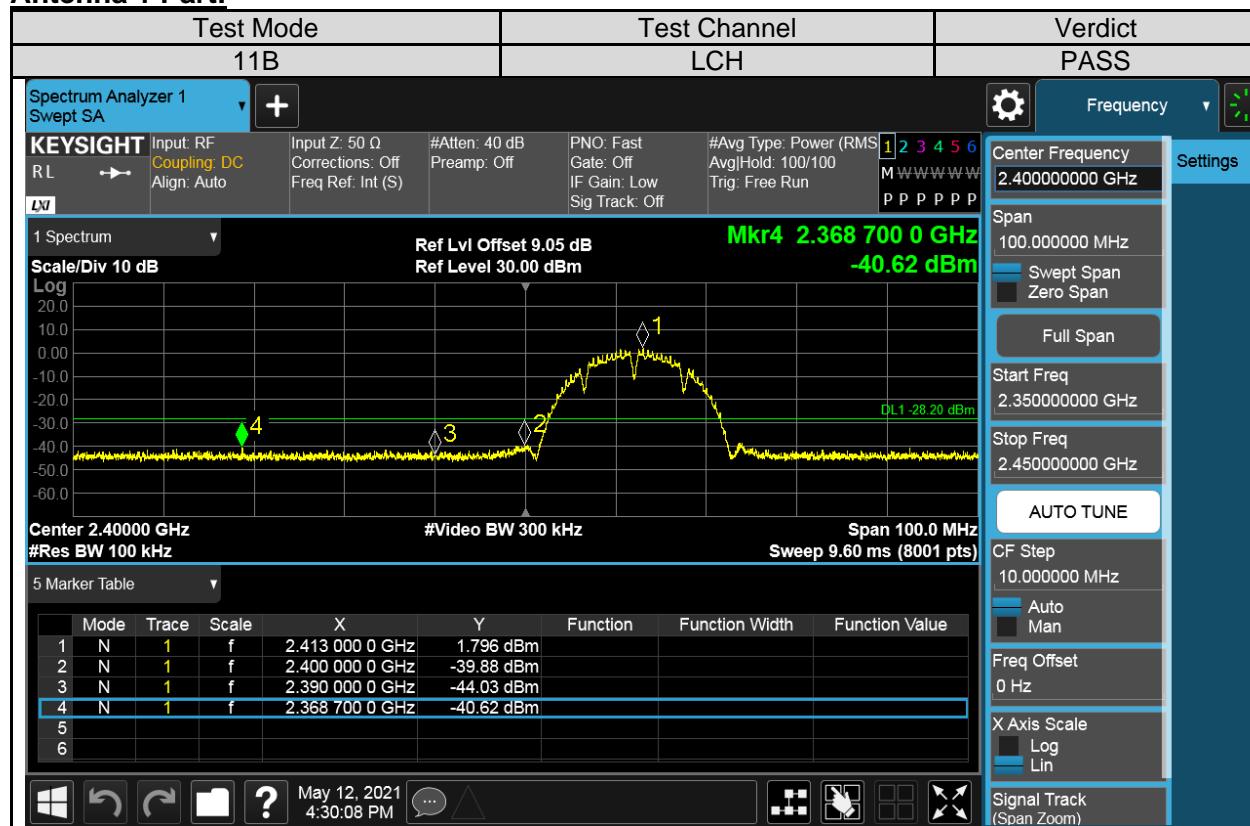TEST GRAPHS
Antenna 1 Part:


Test Mode		Test Channel		Verdict
11B		HCH		PASS

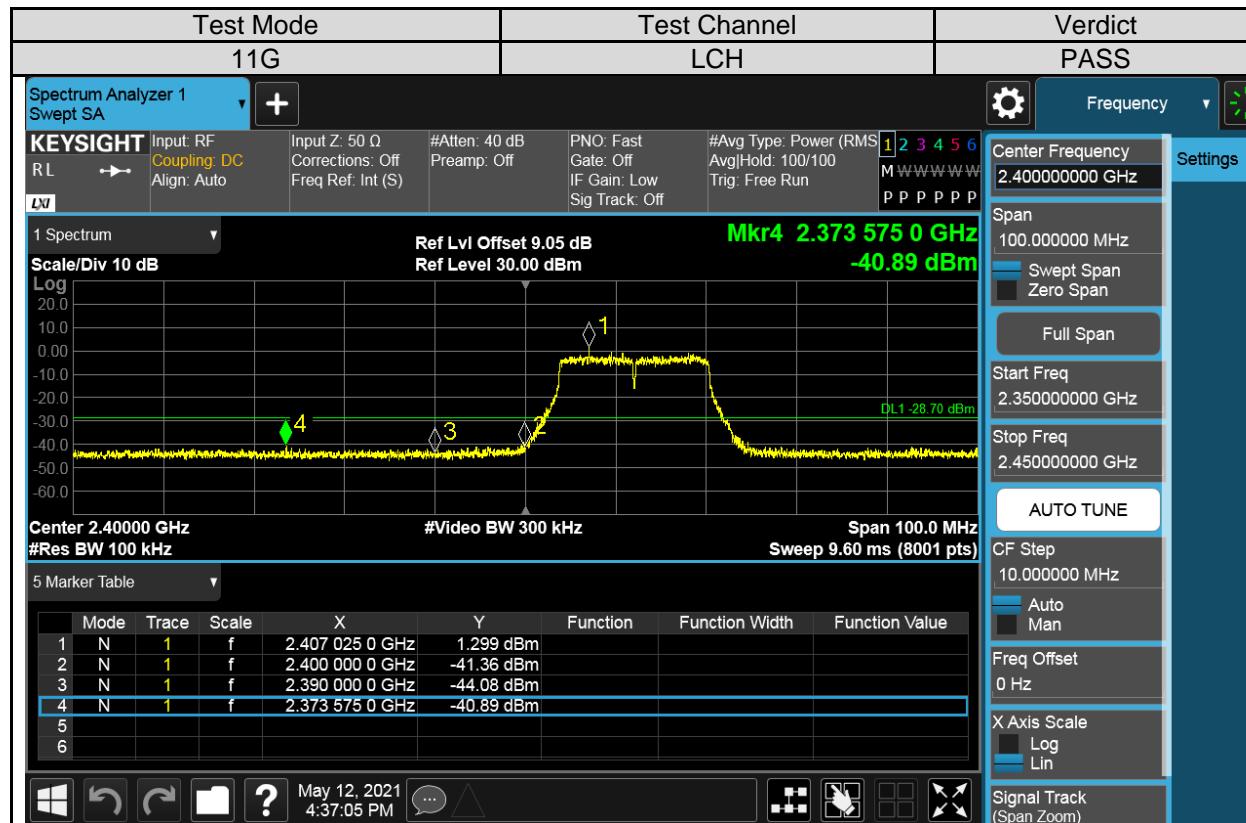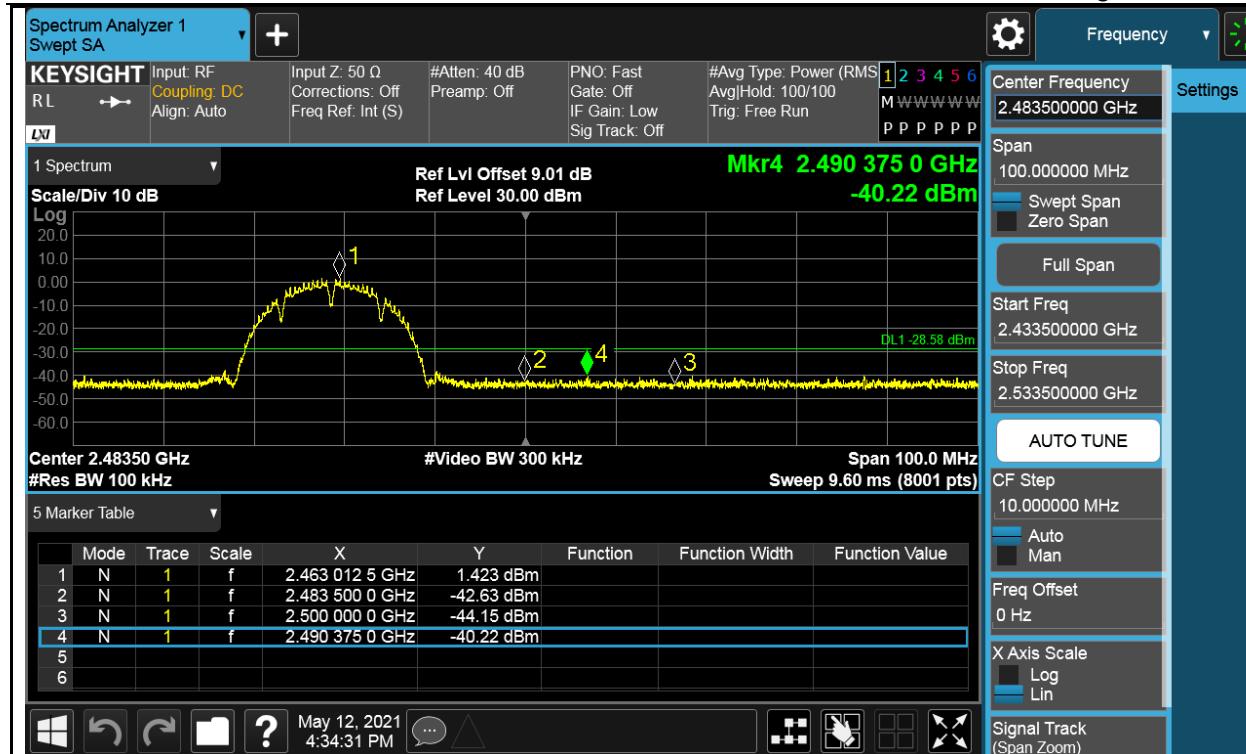

Test Mode	Test Channel	Verdict
-----------	--------------	---------

