



Test Report No.: RF171227N011



## TEST REPORT

Applicant	Hangzhou Hikvision Digital Technology Co., Ltd.
Address	No. 555, Qianmo Road, Binjiang District, Hangzhou

Manufacturer or Supplier	Hangzhou Hikvision Digital Technology Co., Ltd.
Address	No. 555, Qianmo Road, Binjiang District, Hangzhou
Product	Fingerprint Card Reader
Brand Name	HIKVISION
Model	DS-K1201MF
Additional Model & Model Difference	DS-K1201SF, DS-K1200MF, DS-K1200SF, DS-K12XXABC-XYZ, See items 3.1
Date of tests	Dec. 27, 2017 ~ Jan. 18, 2018

the tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.225

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Andy Zhu Project Engineer / EMC Department	Approved by Glyn He Supervisor / EMC Department
	 Date: Feb. 06, 2018

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD</b>	4
<b>1 SUMMARY OF TEST RESULTS</b>	5
<b>2 MEASUREMENT UNCERTAINTY</b>	5
<b>3 GENERAL INFORMATION</b>	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4 DESCRIPTION OF SUPPORT UNITS	9
<b>4 TEST TYPES AND RESULTS</b>	10
4.1. CONDUCTED EMISSION MEASUREMENT	10
4.1.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2. TEST INSTRUMENTS	10
4.1.3. TEST PROCEDURES	11
4.1.4. DEVIATION FROM TEST STANDARD	11
4.1.5. TEST SETUP	12
4.1.6. EUT OPERATING CONDITIONS	12
4.1.7. TEST RESULTS	13
4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT	15
4.2.1. LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	15
4.2.2. TEST INSTRUMENTS	16
4.2.3. TEST PROCEDURES	17
4.2.4. DEVIATION FROM TEST STANDARD	17
4.2.5. TEST SETUP	18
4.2.6. EUT OPERATING CONDITIONS	19
4.2.7. TEST RESULTS	19
4.3. FREQUENCY TOLERANCE	24
4.3.1. LIMIT OF FREQUENCY TOLERANCE	24
4.3.2. TEST INSTRUMENTS	24
4.3.3. TEST PROCEDURES	25
4.3.4. DEVIATION FROM TEST STANDARD	25
4.3.5. TEST SETUP	25
4.3.6. EUT OPERATING CONDITIONS	26



4.3.7. TEST RESULTS .....	26
4.4. 20DB BANDWIDTH.....	27
4.4.1 LIMITS OF 20DB BANDWIDTH .....	27
4.4.2 TEST INSTRUMENTS.....	27
4.4.3 TEST PROCEDURE.....	28
4.4.4 DEVIATION FROM TEST STANDARD.....	28
4.4.5 TEST SETUP .....	28
4.4.6 EUT OPERATING CONDITION .....	29
4.4.7 TEST RESULTS .....	29
5. PHOTOGRAPHS OF THE TEST CONFIGURATION .....	30
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	31



Test Report No.: RF171227N011

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF171227N011	Original release	Feb. 06, 2018



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit.
15.225 (b)	The field strength of any emissions within the band 13.410-13.553 MHz and 13.567-13.710 MHz	PASS	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the band 13.110-13.410 MHz and 13.710-14.010 MHz	PASS	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit.
15.225 (e)	Frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GHz	3.83dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Fingerprint Card Reader
MODEL NO.	DS-K1201MF
ADDITIONAL MODEL	DS-K1201SF, DS-K1200MF, DS-K1200SF, DS-K12XXABC-XYZ
FCC ID	2ADTD-K1201MF
POWER SUPPLY	DC 12V
MODULATION TYPE	ASK
OPERATING FREQUENCY	13.56MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Loop antenna
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Additional models DS-K1201SF, DS-K1200MF, DS-K1200SF, DS-K12XXABC-XYZ are identical with the test model DS-K1201MF except the model number for marketing purpose.

### 3.2 DESCRIPTION OF TEST MODES

The EUT only have one channel.

CHANNEL	FREQUENCY (MHz)
1	13.56

#### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

#### 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE	FT	PLC	BW	
A	√	√	√	√	Power by Adapter

Where  
**RE:** Radiated Emission  
**PLC:** Power Line Conducted Emission

**FT:** Frequency tolerance  
**BW:** 20dB Bandwidth

#### RADIATED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	TESTED FREQUENCY (MHz)	MODULATION TYPE	AXIS
A	1	13.56	ASK	X



**FREQUENCY TOLERANCE:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	TESTED FREQUENCY (MHZ)	MODULATION TYPE	AXIS
A	1	13.56	ASK	X

**POWER LINE CONDUCTED EMISSION TEST:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	TESTED FREQUENCY (MHZ)	MODULATION TYPE	AXIS
A	1	13.56	ASK	X

**20dB BANDWIDTH:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	TESTED FREQUENCY (MHZ)	MODULATION TYPE	AXIS
A	1	13.56	ASK	X



**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE	22deg. C, 54%RH	DC 12V From Adapter	Wang
FT	25deg. C, 60%RH	Power by DC source	Robert Cheng
PLC	22deg. C, 54%RH	DC 12V From Adapter	Dragon
BW	25deg. C, 60%RH	DC 12V From Adapter	Robert Cheng

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C. Section 15.225

#### ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:**

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (sDoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	AC adapter	CWT	KPL-040F-VI	N/A	N/A
2	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable , 1.4m. DC Line: Unshielded, Non-detachable , 1.2m.
2	DC Line: Unshielded, Detachable 1.0m



## 4 TEST TYPES AND RESULTS

### 4.1. CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

1. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,17	Apr. 04,18
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 06,17	Mar. 05,18
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,17	Apr. 04,18
Voltage probe	SCHWARZBEC K	TK 9421	TK 9421-176	Jan. 04,17	Jan. 03,18
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

**NOTE:**

1. The test was performed in shielded room 553.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

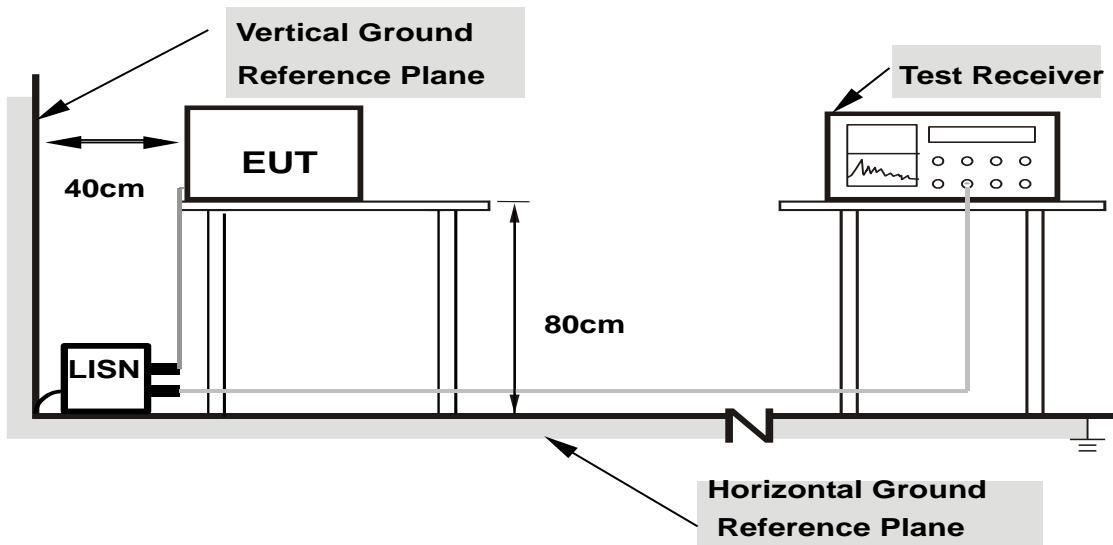

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

#### 4.1.7 TEST RESULTS


##### CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15225	9.83	27.54	8.39	37.37	18.22	65.88	55.88	-28.51	-37.66
2	0.42635	9.91	17.10	8.63	27.01	18.54	57.32	47.32	-30.31	-28.78
3	0.55275	10.00	22.31	13.58	32.31	23.58	56.00	46.00	-23.69	-22.42
4	0.92659	9.82	13.81	6.07	23.63	15.89	56.00	46.00	-32.37	-30.11
5	1.92539	9.86	8.29	1.52	18.15	11.38	56.00	46.00	-37.85	-34.62
6	24.00000	10.03	25.65	21.10	35.68	31.13	60.00	50.00	-24.32	-18.87

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

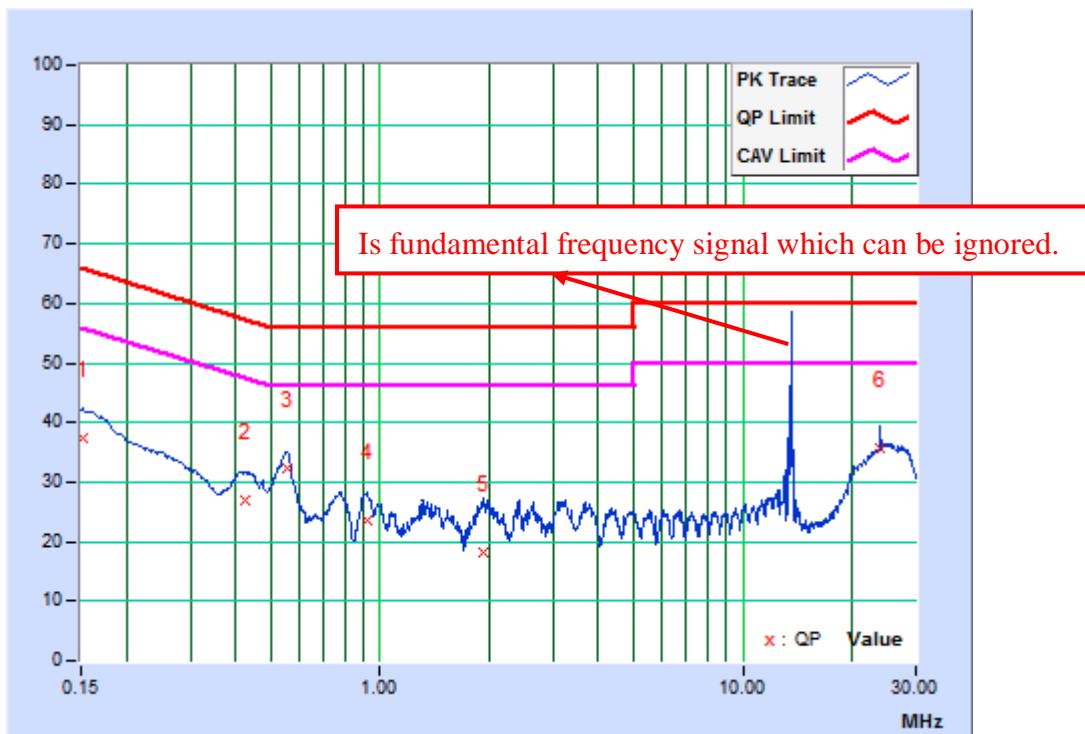


PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	27.64	9.29	37.30	18.95	66.00	56.00	-28.70	-37.05
2	0.16743	9.61	25.73	7.72	35.34	17.33	65.09	55.09	-29.75	-37.76
3	0.26925	9.75	16.92	7.09	26.67	16.84	61.14	51.14	-34.47	-34.30
4	0.55959	9.83	22.21	13.95	32.04	23.78	56.00	46.00	-23.96	-22.22
5	0.90150	9.69	13.96	6.23	23.65	15.92	56.00	46.00	-32.35	-30.08
6	24.00000	9.72	26.61	22.17	36.33	31.89	60.00	50.00	-23.67	-18.11

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

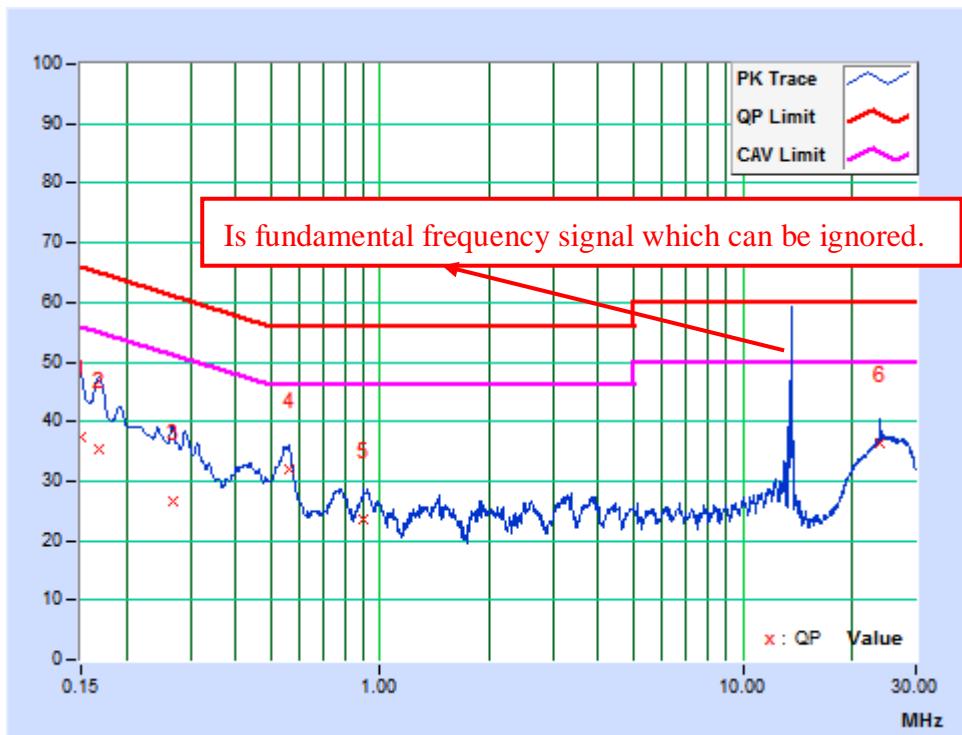



## 4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters

Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned} 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\ &= 84\text{dBuV/m} & 30\text{m} \\ &= 84+20\log(30/3)^2 & 3\text{m} \\ &= 124\text{dBuV/m} \end{aligned}$$



#### 4.2.2 TEST INSTRUMENTS

##### FREQUENCY 9KHz-30MHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Feb. 27,17	Feb. 26,18
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 31,17	May 30,18
Amplifier	Burgeon	BPA-530	100210	Apr. 05,17	Apr. 04,18
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A	N/A

**NOTES:** 1. The test was performed in 10m Chamber.

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
3. The FCC Site Registration No. is 749762.

##### FREQUENCY 30MHz-1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 11,17	Mar. 10,18
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 28, 17	Jul. 27, 18
Amplifier	Burgeon	BPA-530	100220	Apr. 05,17	Apr. 04,18
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 06,17	Mar. 05,18
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

**NOTES:** 1. The test was performed in 966 Chamber

2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
3. The FCC Site Registration No. is 749762.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.
- g. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.2.5 TEST SETUP

##### <Frequency Range below 30MHz>

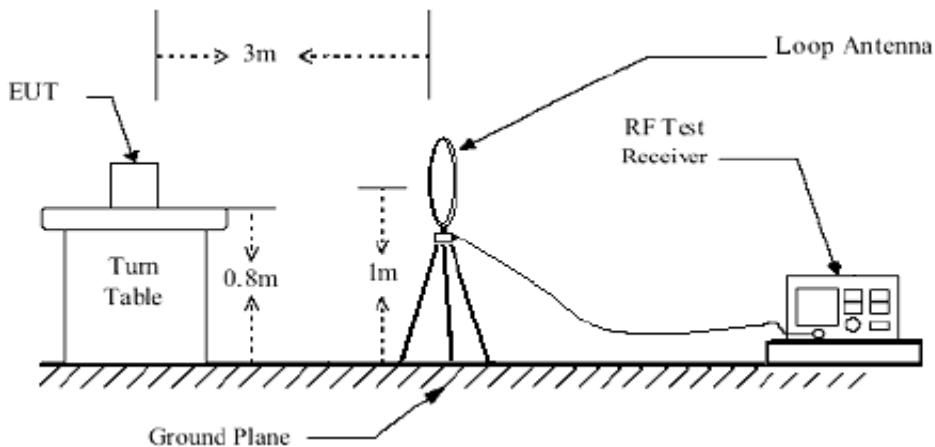

##### <Frequency Range 30MHz~1GHz >

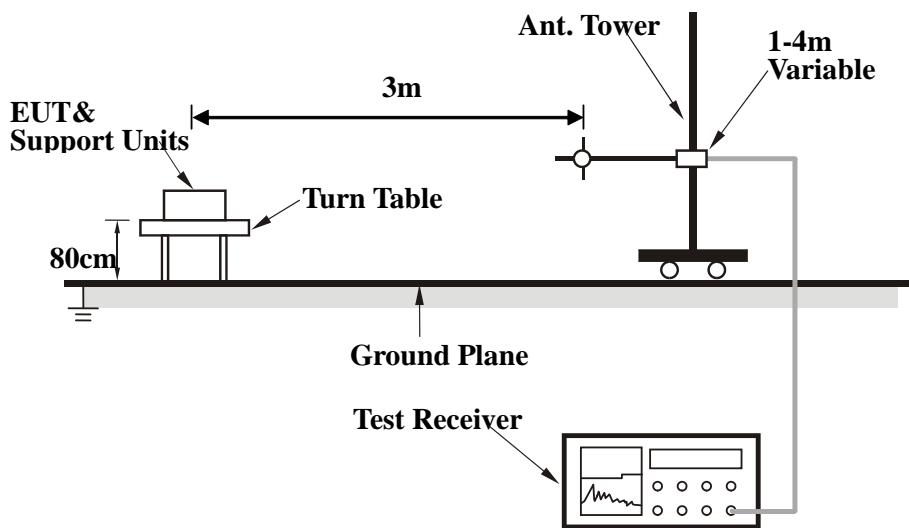

For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 TEST RESULTS

##### FIELD STRENGTH (FUNDAMENTAL FREQUENCY)

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Polarity (0° / 90°)	Limit (dBuV/m)	Margin (dB)
1	*13.56	23.55	45.71	69.26	0°	124.0	-54.74
2	*13.56	23.56	45.77	69.33	90°	124.0	-54.67

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Frequency range scanned: 13.110MHz~14.010 MHz

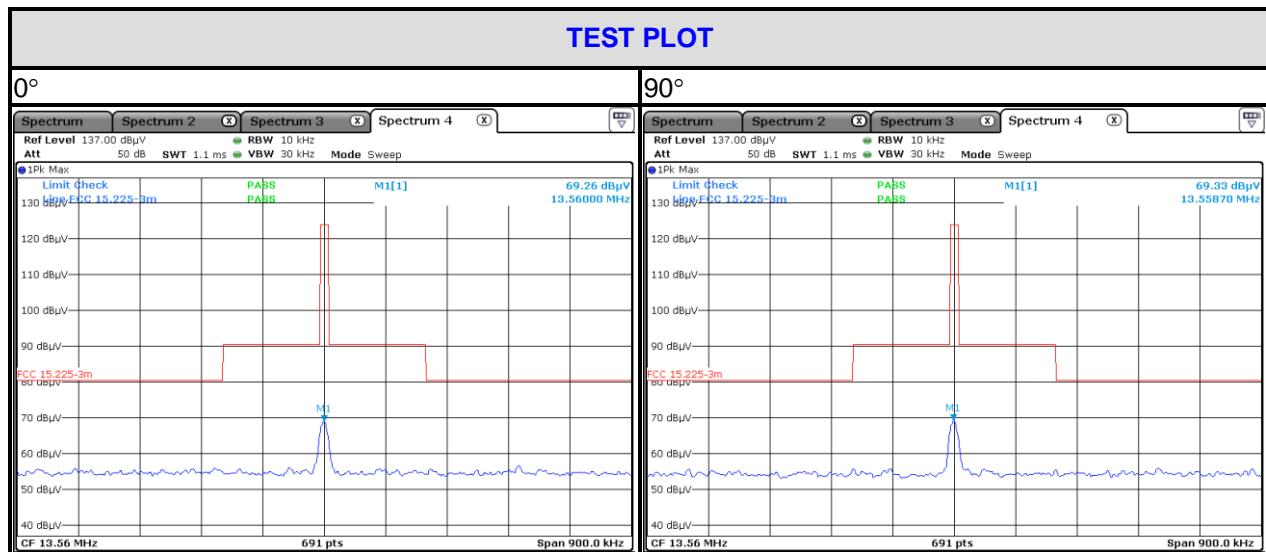



TEST MODE	TX	FREQUENCY RANGE	9K -150KHz
TEST VOLTAGE	DC 12V from Adapter	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 55% RH	TESTED BY: Tank	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01290	-9.64	39.79	30.15	125.39	-95.24	100	175
2	0.03530	-10.27	33.06	22.79	116.65	-93.86	100	28
3	0.06450	-10.38	30.39	20.01	111.41	-91.40	100	360
4	0.07690	-10.41	25.30	14.89	109.88	-94.99	100	75
5	0.11130	-10.33	21.65	11.32	106.67	-95.35	100	360
6	0.12660	-10.45	19.42	8.97	105.55	-96.58	100	360
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.00900	-9.50	36.48	26.98	128.52	-101.54	100	12
2	0.03510	-10.27	34.36	24.09	116.70	-92.61	100	1
3	0.04500	-10.29	23.85	13.56	114.54	-100.98	100	45
4	0.07080	-10.39	23.54	13.15	110.60	-97.45	100	25
5	0.08630	-10.41	21.54	11.13	108.88	-97.75	100	47
6	0.10190	-10.35	20.81	10.46	107.44	-96.98	100	360

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.

2. Negative sign (-) in the margin column signify levels below the limit.

3. Frequency range scanned: 9K -150KHz

4. Only emissions significantly above equipment noise floor are reported.



<b>TEST MODE</b>	TX	<b>FREQUENCY RANGE</b>	150KHz-30MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 55% RH	<b>TESTED BY:</b> Tank	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3M</b>								
No .	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.15750	-10.52	27.69	17.17	103.66	-86.49	100	12
2	5.09020	-10.34	16.76	6.42	69.54	-63.12	100	254
3	7.97820	-10.26	16.78	6.52	69.54	-63.02	100	224
4	17.31000	-10.15	16.03	5.88	69.54	-63.66	100	36
5	23.80610	-10.16	14.37	4.21	69.54	-65.33	100	360
6	26.79110	-10.27	15.98	5.71	69.54	-63.83	100	75
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3M</b>								
No .	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.18730	-10.53	29.61	19.08	102.15	-83.07	100	1
2	4.85140	-10.35	19.05	8.70	69.54	-60.84	100	25
3	9.30650	-10.18	18.27	8.09	69.54	-61.45	100	42
4	17.37720	-10.16	18.51	8.35	69.54	-61.19	100	253
5	23.26880	-10.21	17.11	6.90	69.54	-62.64	100	324
6	25.40680	-10.10	17.08	6.98	69.54	-62.56	100	225

**REMARKS:**


1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 150KHz-30MHz
4. Only emissions significantly above equipment noise floor are reported.



TEST mode	TX	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	DC 12V from Adapter	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 55% RH	TESTED BY: Tank	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-5.47	35.97	30.50	40.00	-9.50	200	0
2	173.01	-12.04	47.82	35.78	43.50	-7.72	200	0
3	351.78	-4.27	45.82	41.55	46.00	-4.45	200	0
4	379.76	-4.47	46.85	42.38	46.00	-3.62	200	0
5	434.17	-2.91	45.11	42.20	46.00	-3.80	200	0
6	651.79	3.15	39.82	42.97	46.00	-3.03	200	0

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.  
 2. Negative sign (-) in the margin column signify levels below the limit.  
 3. Frequency range scanned: 30MHz to 1000MHz.  
 4. Only emissions significantly above equipment noise floor are reported.

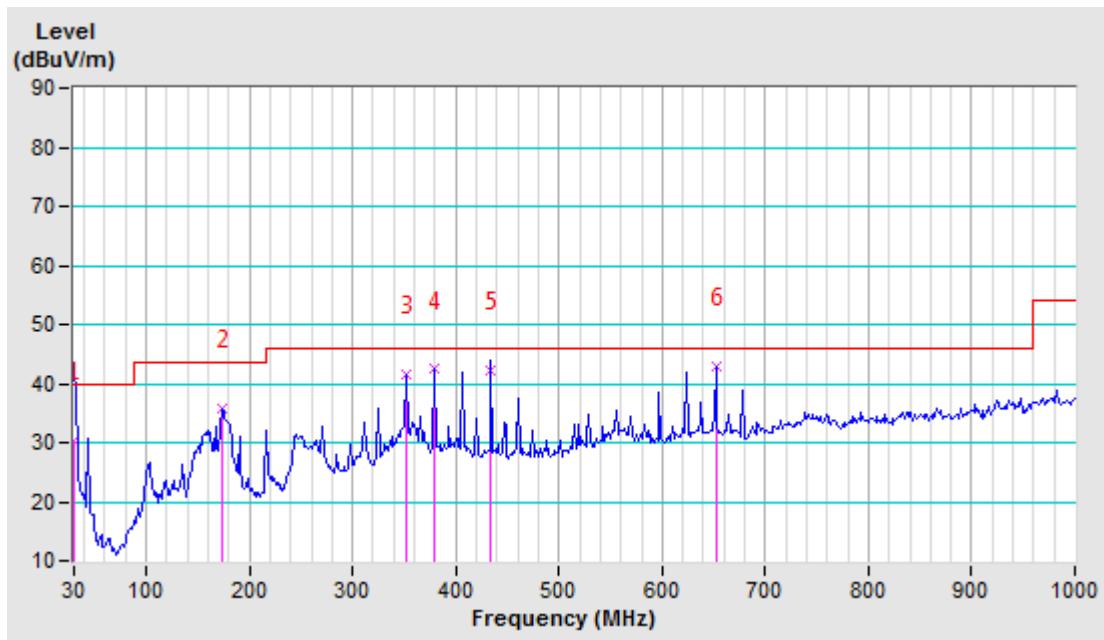




<b>TEST MODE</b>	TX	<b>FREQUENCY RANGE</b>	30-1000MHz
<b>TEST VOLTAGE</b>	DC 12V from Adapter	<b>DETECTOR FUNCTION &amp; RESOLUTION BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 55% RH	<b>TESTED BY:</b> Tank	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-5.47	42.67	37.20	40.00	-2.80	100	326
2	47.10	-14.78	51.76	36.98	40.00	-3.02	200	0
3	379.76	-4.47	43.38	38.91	46.00	-7.09	200	0
4	406.19	-2.12	41.80	39.68	46.00	-6.32	200	360
5	434.17	-2.91	44.61	41.70	46.00	-4.30	200	352
6	651.79	3.15	37.13	40.28	46.00	-5.72	200	0

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30MHz to 1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

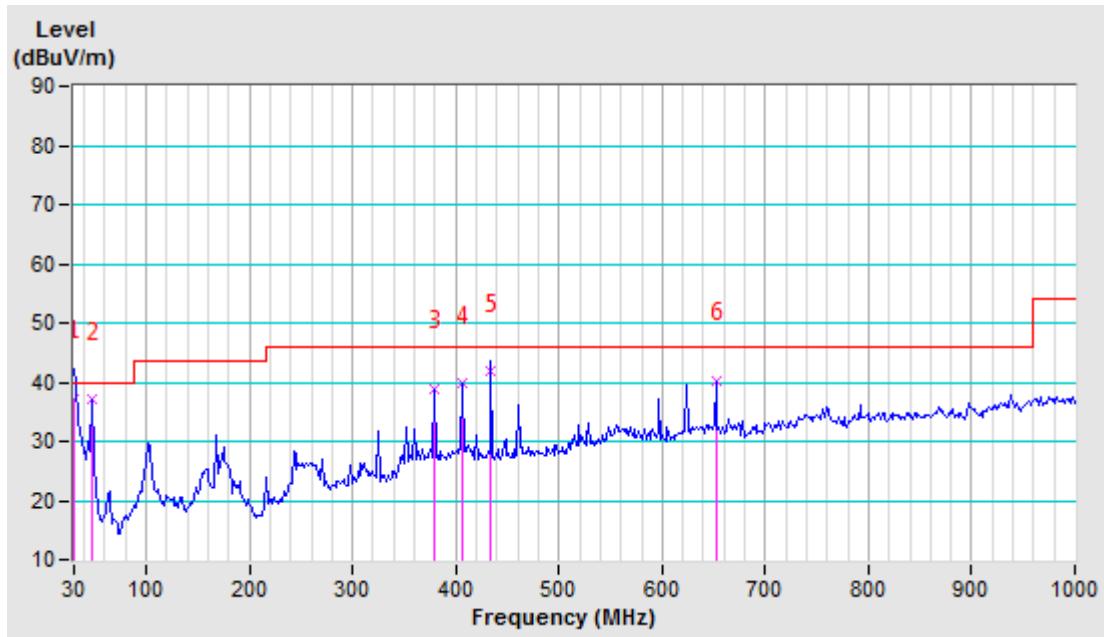



### 4.3. FREQUENCY TOLERANCE

#### 4.3.1. LIMIT OF FREQUENCY TOLERANCE

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 4.3.2. TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 19,17	May 18,18
Power Sensor	Keysight	U2021XA	MY55060018	May 19,17	May 18,18
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 17	Oct.20, 18
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,17	Sep. 04,18
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,17	Nov. 07,18
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,17	Nov. 03,18
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 17	Aug.31, 18
Spectrum Analyzer	Keysight	N9020A	MY55400499	Apr. 10,17	Apr. 09,18
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec.05, 17	Dec. 04, 18
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.10, 17	Aug.09, 18
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

#### NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


#### 4.3.3. TEST PROCEDURES

- a) The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b) Turn the EUT on and couple its output to a spectrum analyzer.
- c) Turn the EUT off and set the chamber to the highest temperature specified.
- d) Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e) Repeat step c) and d) with the temperature chamber set to the lowest temperature.
- f) The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.3.4. DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5. TEST SETUP

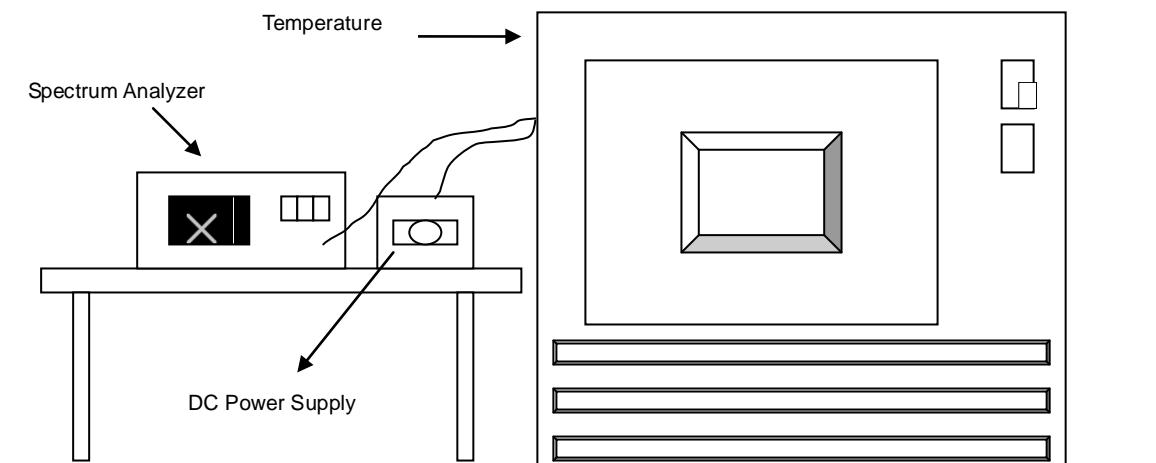



#### 4.3.6. EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.3.7. TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %
55	12	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
50	12	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015
40	12	13.56007	0.00052	13.56007	0.00052	13.56007	0.00052	13.56006	0.00044
30	12	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
20	12	13.56007	0.00052	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044
10	12	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044	13.56007	0.00052
0	12	13.55998	-0.00015	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015
-10	12	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
-20	12	13.56007	0.00052	13.56006	0.00044	13.56004	0.00029	13.56006	0.00044

FREQUEMCY STABILITY VERSUS VOLTAGE									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %	Measured Frequency (MHz)	Frequency Drift %
20	13.8	13.56007	0.00052	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044
	12	13.56007	0.00052	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044
	10.2	13.56007	0.00052	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044



#### 4.4. 20dB BANDWIDTH

##### 4.4.1 LIMITS OF 20dB BANDWIDTH

The 20dB bandwidth shall be specified in operating frequency band.(13.11MHz – 14.01MHz)

##### 4.4.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 19,17	May 18,18
Power Sensor	Keysight	U2021XA	MY55060018	May 19,17	May 18,18
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 17	Oct.20, 18
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,17	Sep. 04,18
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,17	Nov. 07,18
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,17	Nov. 03,18
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,17	Nov. 03,18
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 17	Aug.31, 18
Spectrum Analyzer	Keysight	N9020A	MY55400499	Apr. 10,17	Apr. 09,18
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec.05, 17	Dec. 04, 18
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.10, 17	Aug.09, 18
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

##### NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.




#### 4.4.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

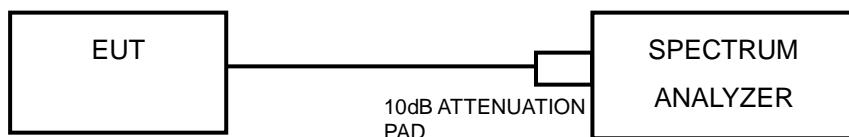


#### 4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously.

#### 4.4.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (KHz)
1	13.56	26.77

Lower & Upper Test Frequency Point (MHz)	Test Frequency (MHz)	P/F
Lower	13.54669	PASS
Upper	13.57346	PASS

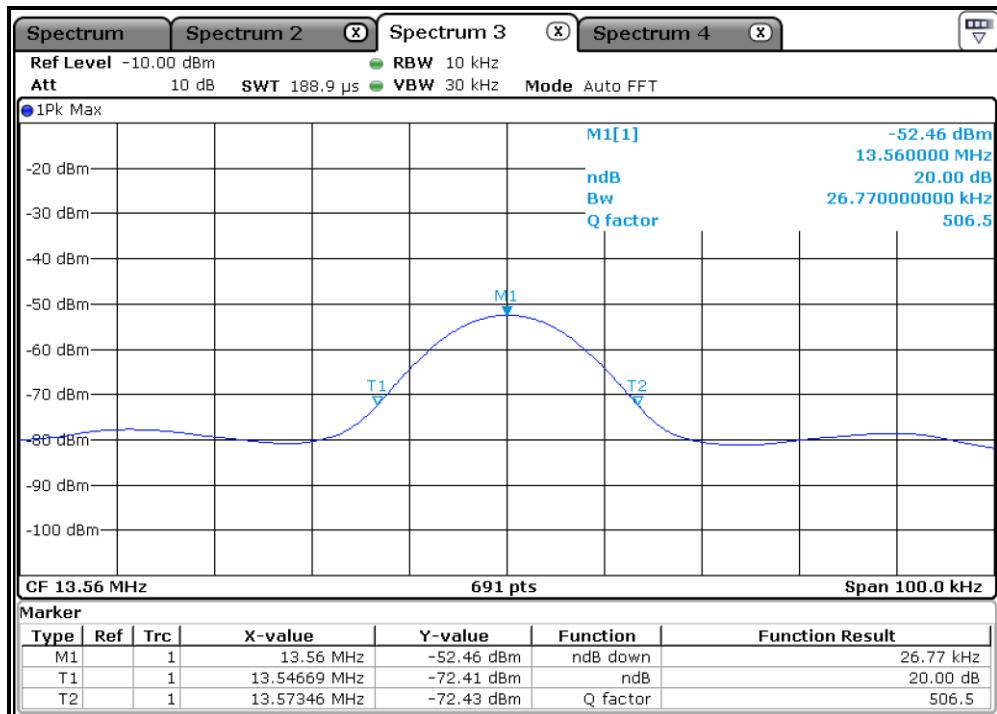



Test Report No.: RF171227N011

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF171227N011

## 6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---