



# FCC Radio Test Report

**For**

**Product Name: Smartee**

**Brand Name: N/A**

**Model No.: SM001**

**Series Model: N/A**

**FCC ID: 2ADUY1412D7BE**

**Test Report Number:  
C150105R02-RPW**

**Issued for**

**Webee LLC**

**80 SW 8th St. Suite 2062, Miami, FL 33130, United States.**

**Issued by**

**Compliance Certification Services Inc.**

**Kun shan Laboratory**

**No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China**

**TEL: 86-512-57355888**

**FAX: 86-512-57370818**



TESTING CERT #2541.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	January 15, 2015	C150105R02-RPW	ALL	N/A
01	January 20, 2015	C150105R02-RPW	P15	Update the 6dB BW result for 802.11n20 mode
02	January 23, 2015	C150105R02-RPW	P9	Add the detail how the antenna complies with the requirement.



## TABLE OF CONTENTS

<b>1.</b>	<b>TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2.</b>	<b>EUT DESCRIPTION.....</b>	<b>5</b>
<b>3.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
3.1.	EUT CONFIGURATION .....	6
3.2.	EUT EXERCISE .....	6
3.3.	GENERAL TEST PROCEDURES.....	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5.	DESCRIPTION OF TEST MODES.....	8
3.6.	ANTENNA DESCRIPTION .....	9
<b>4.</b>	<b>INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1.	MEASURING INSTRUMENT CALIBRATION .....	9
<b>5.</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
5.1.	FACILITIES .....	11
5.2.	EQUIPMENT.....	11
5.3.	LABORATORY ACCREDITATIONS AND LISTING .....	11
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS .....	12
<b>6.</b>	<b>SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>13</b>
6.1.	SETUP CONFIGURATION OF EUT.....	13
6.2.	SUPPORT EQUIPMENT.....	13
<b>7.</b>	<b>FCC PART 15.247 REQUIREMENTS.....</b>	<b>14</b>
7.1.	6DB BANDWIDTH MEASUREMENT.....	14
7.2.	PEAK POWER .....	21
7.3.	PEAK POWER SPECTRAL DENSITY .....	23
7.4.	SPURIOUS EMISSIONS .....	30
7.5.	RADIATED EMISSIONS.....	48
7.6.	POWERLINE CONDUCTED EMISSIONS .....	63



## 1. TEST RESULT CERTIFICATION

<b>Product Name:</b>	Smartee
<b>Brand Name:</b>	N/A
<b>Model Name.:</b>	SM001
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	Mobile Device
<b>Date of Test:</b>	January 06, 2015 to January 14, 2015
<b>Applicant:</b>	<b>Webee LLC</b> 80 SW 8th St. Suite 2062, Miami, FL 33130, United States.
<b>Manufacturer:</b>	<b>Webee LLC</b> 80 SW 8th St. Suite 2062, Miami, FL 33130, United States.
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

**Tested by:**

Jeff.Fang  
RF Manager  
Compliance Certification Service Inc.

James.Yan  
Test Engineer  
Compliance Certification Service Inc.



## 2. EUT DESCRIPTION

<b>Product Name:</b>	Smartee
<b>Brand Name:</b>	N/A
<b>Model Name:</b>	SM001
<b>Series Model:</b>	N/A
<b>Model Discrepancy:</b>	N/A
<b>Power Adapter Power Rating :</b>	Power supply and ADP(rating): Model No: FJ-SW0502000U Input: AC 100-240V 0.35A, 50/60Hz Output: DC 5.0V 2000mA
<b>Frequency Range:</b>	IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz
<b>Transmit Power:</b>	IEEE 802.11b mode: 16.05 dBm IEEE 802.11g mode: 14.54 dBm IEEE 802.11n HT20 mode: 13.69 dBm
<b>Modulation Technique:</b>	802.11b mode: DSSS (1,2,5.5 and 11 Mbps) 802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) 802.11n HT20 mode: OFDM (6.5,13,19.5,26,39,52,58.5 and 65 Mbps)
<b>Number of Channels:</b>	IEEE 802.11b/g/n HT20 mode: 11 Channels
<b>Antenna Specification:</b>	Dipole antennas for 2.4GHz Gain 2.0 dBi

**Remark:**

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: 2ADUY1412D7BE** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 2009 and FCC CFR 47 15.207, 15.209 and 15.247.

### 3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 3.3. GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 2009, conducted emissions from the EUT are measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. The EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of the receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 2009.



## 3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



## **3.5.DESRIPTION OF TEST MODES**

The EUT transmitting and receiving with one antennas simultaneously working at b/g/n mode, so 1x1 configuration was used for all testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSP across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 11Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 54Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 65Mbps data rate was chosen for full testing.






## 3.6.ANTENNA DESCRIPTION

### According to FCC 47 CFR 15.203

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

As the photo below the EUT use a unique coupling to the dipole antenna, so the EUT complies with the requirement of 15.203.

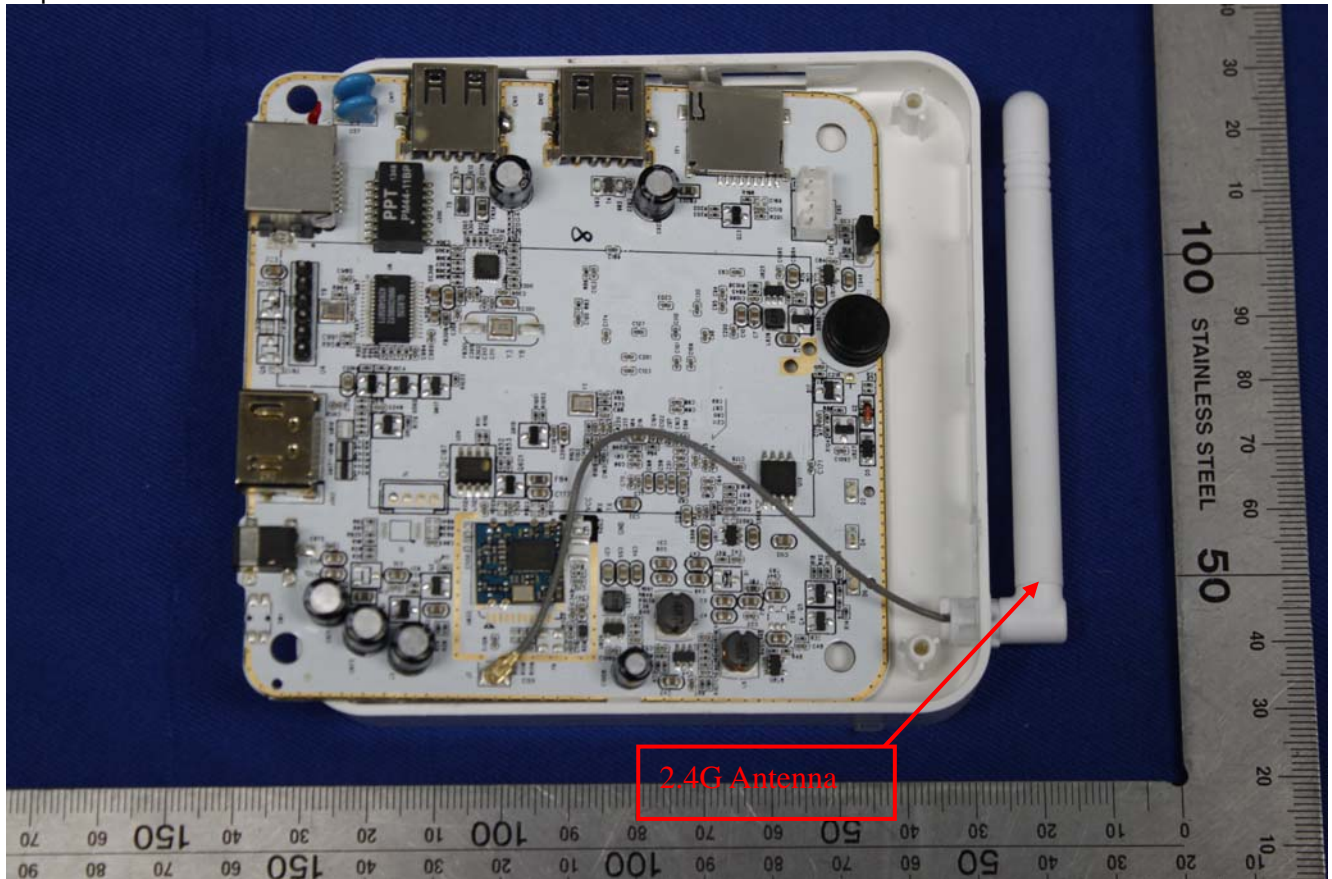

## 4. INSTRUMENT CALIBRATION

### 4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2015-3-16
Power meter	Anritsu	ML2495A	1445010	2015-11-30
Power sensor	Anritsu	MA2411B	1339220	2015-12-05
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2015-1-22
Test Software	EZ-EMC			

977 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9
EMI Test Receiver	R&S	ESCI	101378	2015-1-22
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2015-1-22
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2015-1-22
Bilog Antenna	Sunol	JB1	A062604	2015-3-6
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2015-3-7
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Test Software	EZ-EMC			

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-16
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	05012	2015-3-16
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24
Test Software	EZ-EMC			

**Remark:** The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1.FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 2009 and CISPR Publication 22.

### **5.2.EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.



All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3.LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 or 18 requirements. In addition, the test facilities are listed with Federal Communication Commission, Laboratory Division, 424105 for 10m chamber, 238958 for 3m chamber .



## 5.4.TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4 :2009); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	 TESTING CERT #2541.01
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707 G-216

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC DOC
1.	Notebook	DELL	E5430	CN8YYW1	N/A

**Remark:**

2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1. 6DB BANDWIDTH MEASUREMENT

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

#### Test Configuration



#### TEST PROCEDURE

1. The transmitter output is connected to the spectrum analyzer. Set RBW = 100 kHz. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Sweep = auto couple.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	10.122	0.5
Mid	2437	10.121	0.5
High	2462	10.113	0.5

#### **IEEE 802.11g mode**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	16.589	0.5
Mid	2437	16.588	0.5
High	2462	16.593	0.5

#### **IEEE 802.11n HT20 MHz Channel mode**

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	17.817	0.5
Mid	2437	17.812	0.5
High	2462	17.819	0.5




## Test Plot

### IEEE 802.11b MODE

#### 6dB Bandwidth (CH Low)

\* Agilent

R T

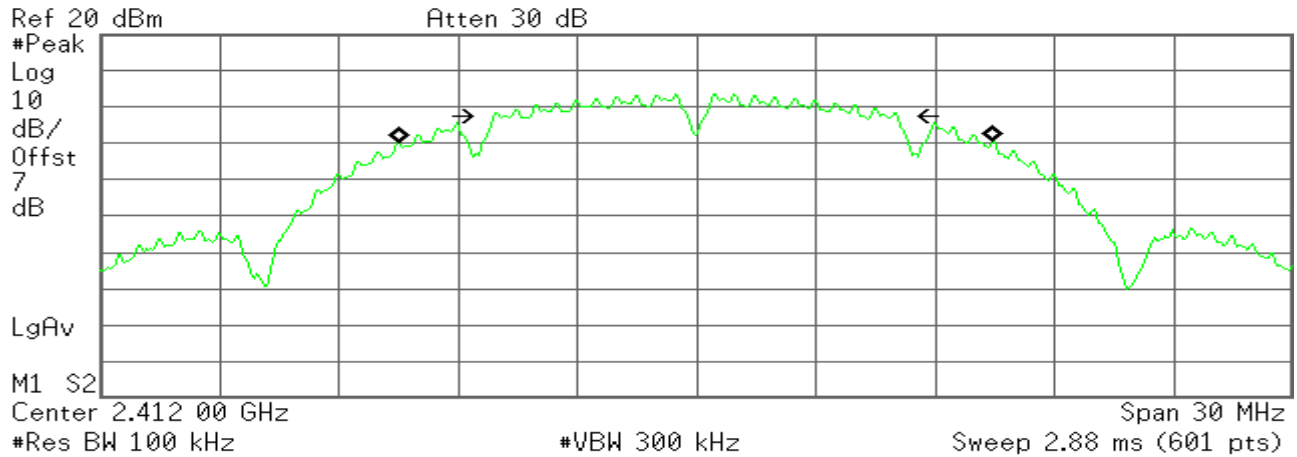

Occupied Bandwidth  
14.9570 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -11.686 kHz  
x dB Bandwidth 10.122 MHz

#### 6dB Bandwidth (CH Mid)

\* Agilent

R T

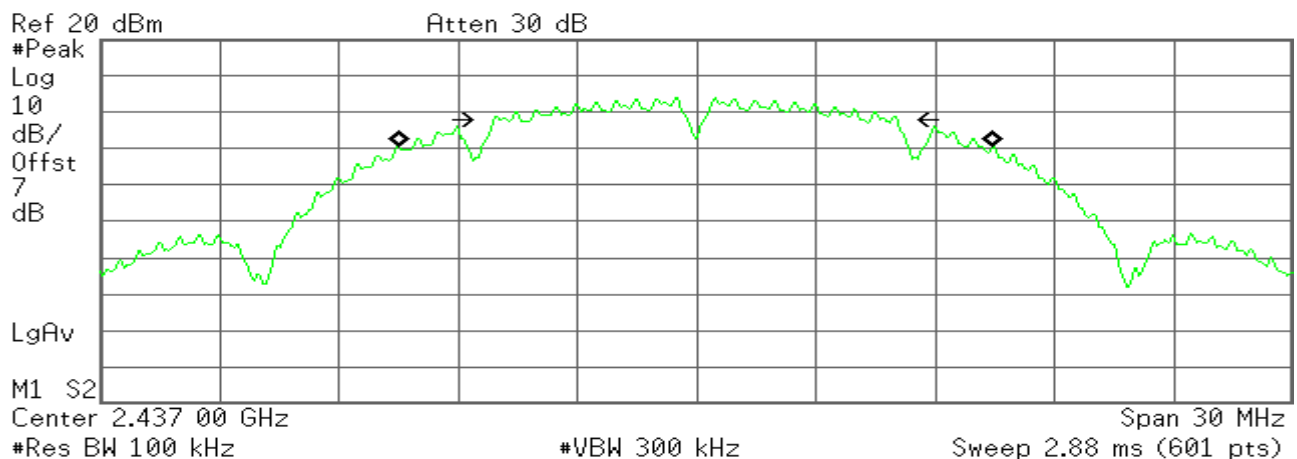

Occupied Bandwidth  
14.9735 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -25.434 kHz  
x dB Bandwidth 10.121 MHz





## 6dB Bandwidth (CH High)

\* Agilent

R T

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB

LgAv

M1 S2

Center 2.462 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 2.88 ms (601 pts)

Occupied Bandwidth

14.9488 MHz

Occ BW % Pwr 99.00 %

x dB -6.00 dB

Transmit Freq Error

-33.876 kHz

x dB Bandwidth

10.113 MHz

## IEEE 802.11g MODE

### 6dB Bandwidth (CH Low)

\* Agilent

R T

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB

LgAv

M1 S2

Center 2.412 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 2.88 ms (601 pts)

Occupied Bandwidth

16.4714 MHz

Occ BW % Pwr 99.00 %

x dB -6.00 dB

Transmit Freq Error

-42.195 kHz

x dB Bandwidth


16.589 MHz



## 6dB Bandwidth (CH Mid)

Agilent

R T

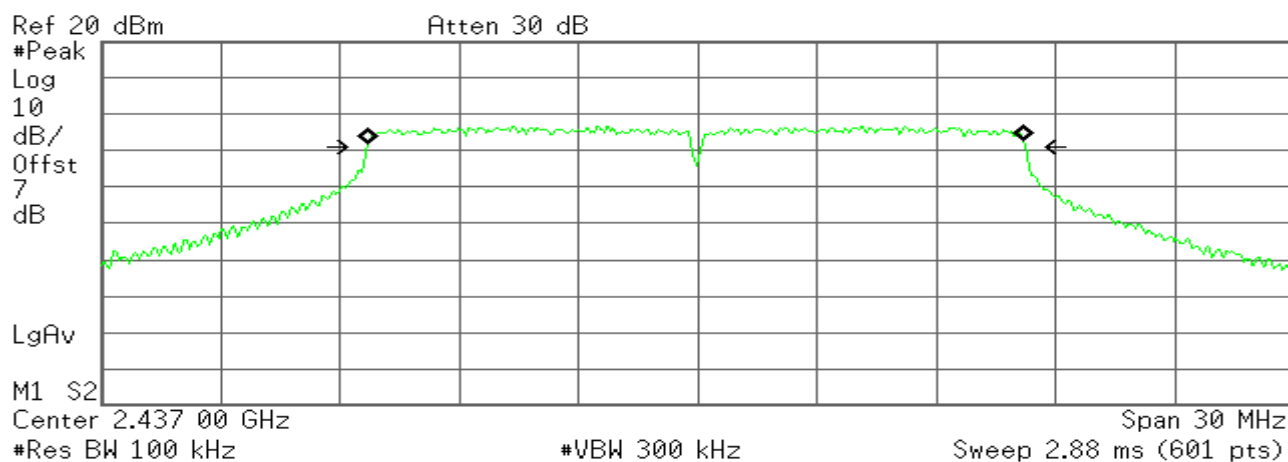

Occupied Bandwidth  
16.4691 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -45.066 kHz  
x dB Bandwidth 16.588 MHz

## 6dB Bandwidth (CH High)

Agilent

R T

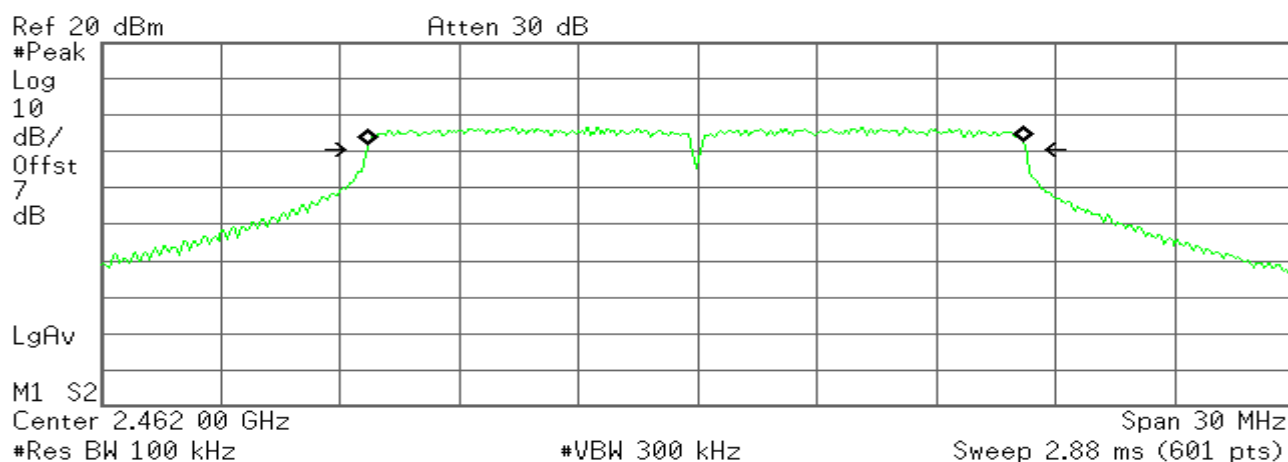

Occupied Bandwidth  
16.4714 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -48.740 kHz  
x dB Bandwidth 16.593 MHz




## 802.11n HT20 MHz Channel mode

### 6dB Bandwidth (CH Low)

Agilent

R T

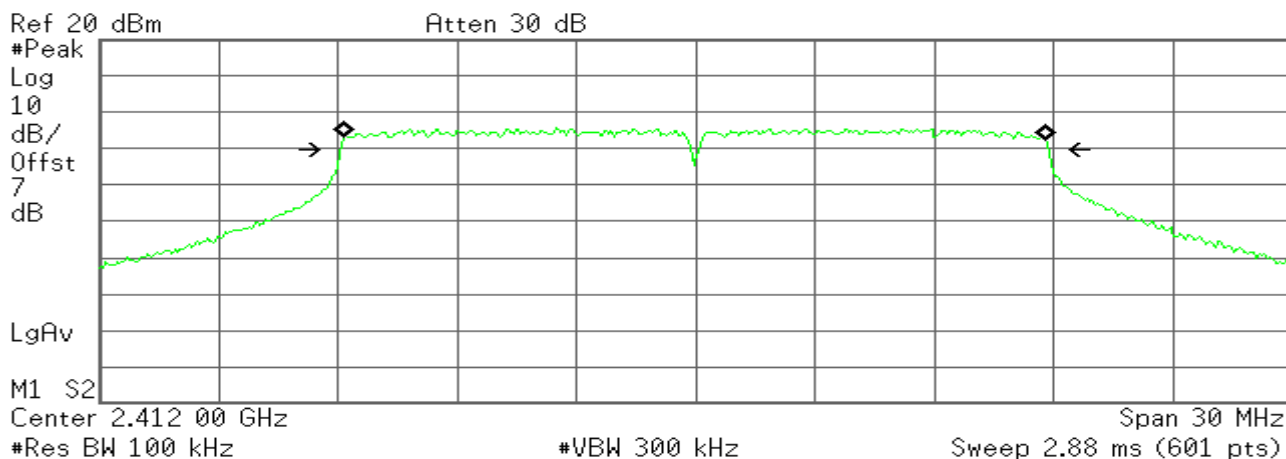

Occupied Bandwidth  
17.6601 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -19.754 kHz  
x dB Bandwidth 17.817 MHz

### 6dB Bandwidth (CH Mid)

Agilent

R T

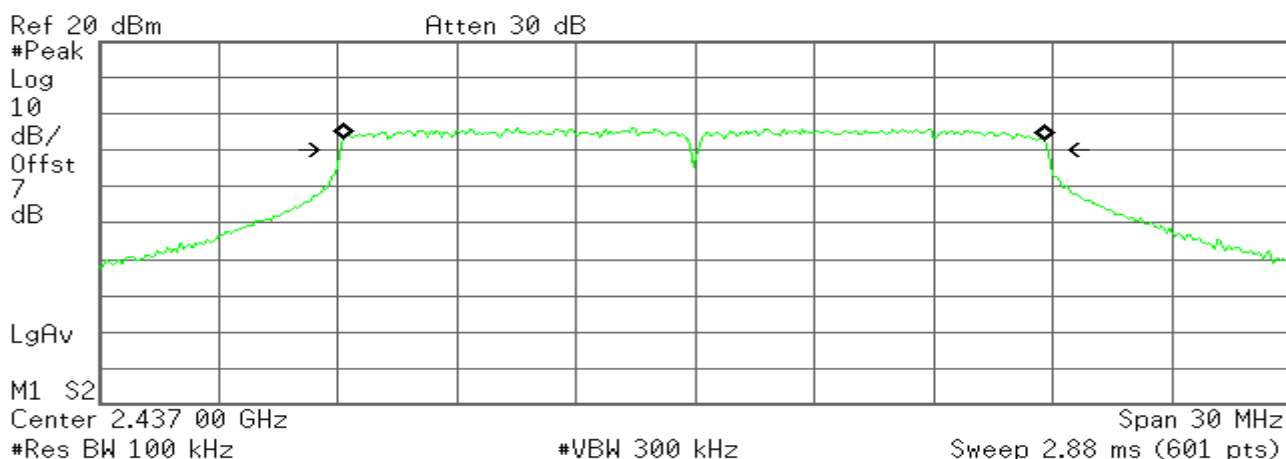

Occupied Bandwidth  
17.6611 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB


Transmit Freq Error -24.165 kHz  
x dB Bandwidth 17.812 MHz



## 6dB Bandwidth (CH High)

Agilent

R T

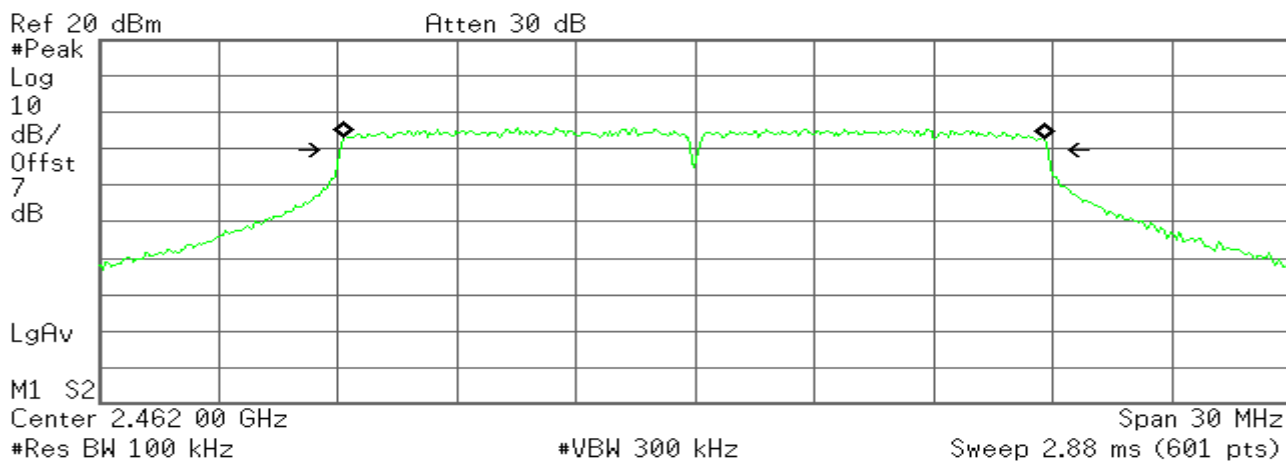

Occupied Bandwidth  
17.6595 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -23.575 kHz  
x dB Bandwidth 17.819 MHz



## 7.2. PEAK POWER


### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.

2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v03r02. 9.1.2 PKPM1 Peak power meter method.

### TEST RESULTS

*No non-compliance noted*



## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	15.19	30
Mid	2437	16.05	30
High	2462	15.99	30

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	14.32	30
Mid	2437	14.51	30
High	2462	14.54	30

### Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	13.55	30
Mid	2437	13.58	30
High	2462	13.69	30




## 7.3. PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto

3. Record the max reading.

4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*

### Test Data

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.48	8.00	PASS
Mid	2437	-15.65	8.00	PASS
High	2462	-15.68	8.00	PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.54	8.00	PASS
Mid	2437	-17.40	8.00	PASS
High	2462	-17.58	8.00	PASS

**Test mode: IEEE 802.11n HT20 mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.85	8.00	PASS
Mid	2437	-16.83	8.00	PASS
High	2462	-16.58	8.00	PASS







## Test Plot

### IEEE 802.11b mode

### PPSD (CH Low)

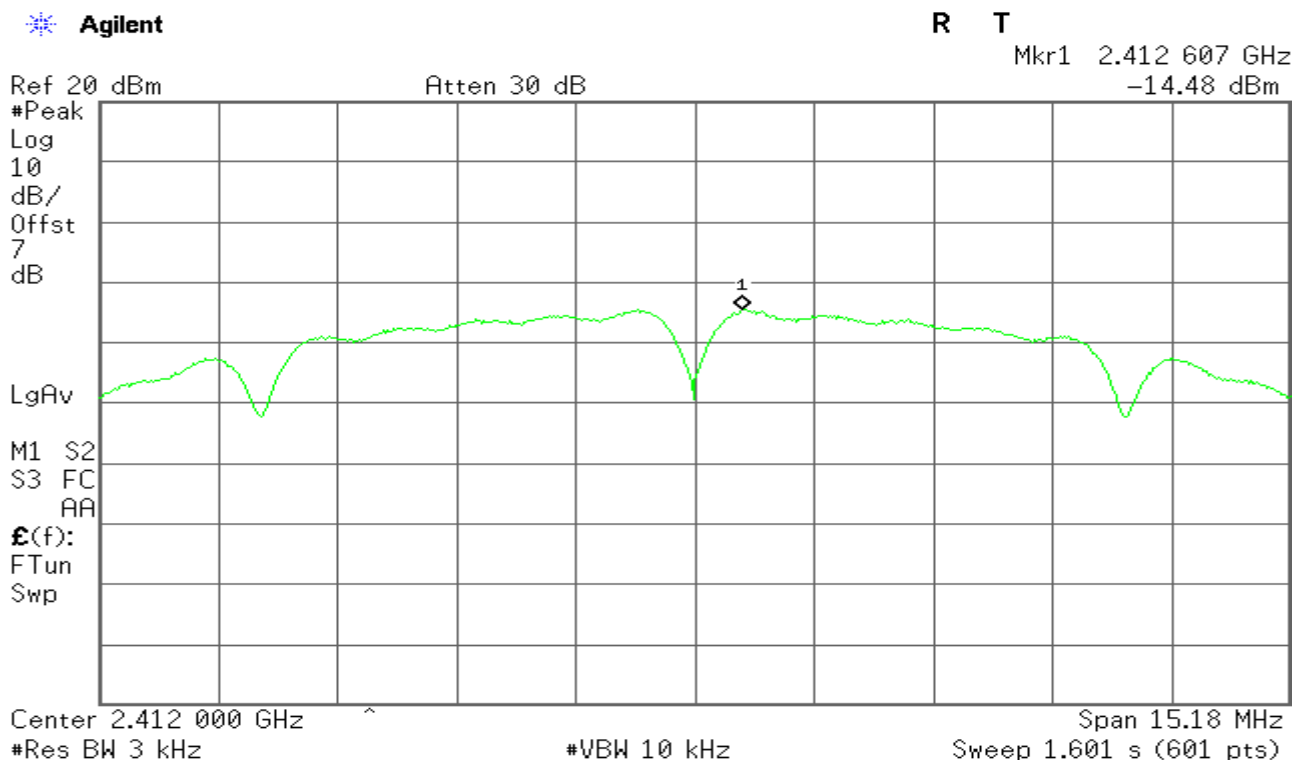

### PPSD (CH Mid)

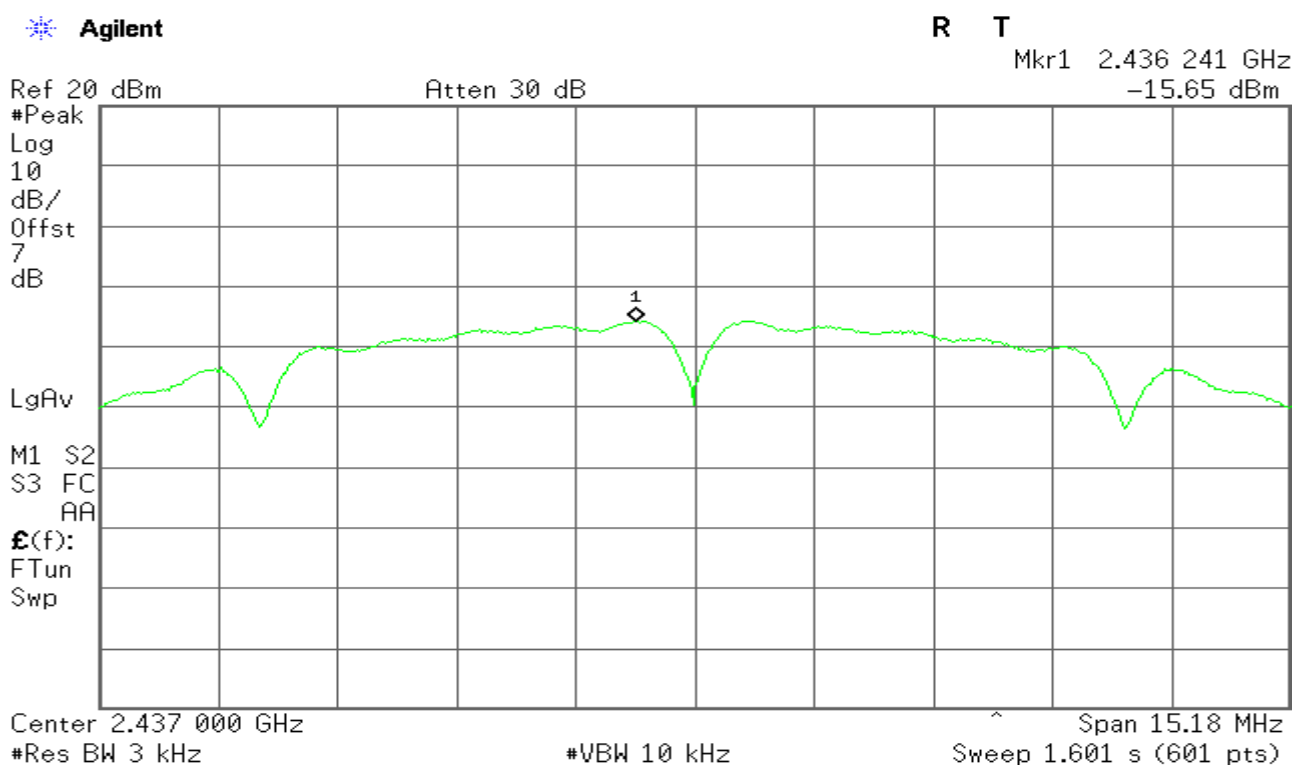




## PPSD (CH High)

Agilent

R T

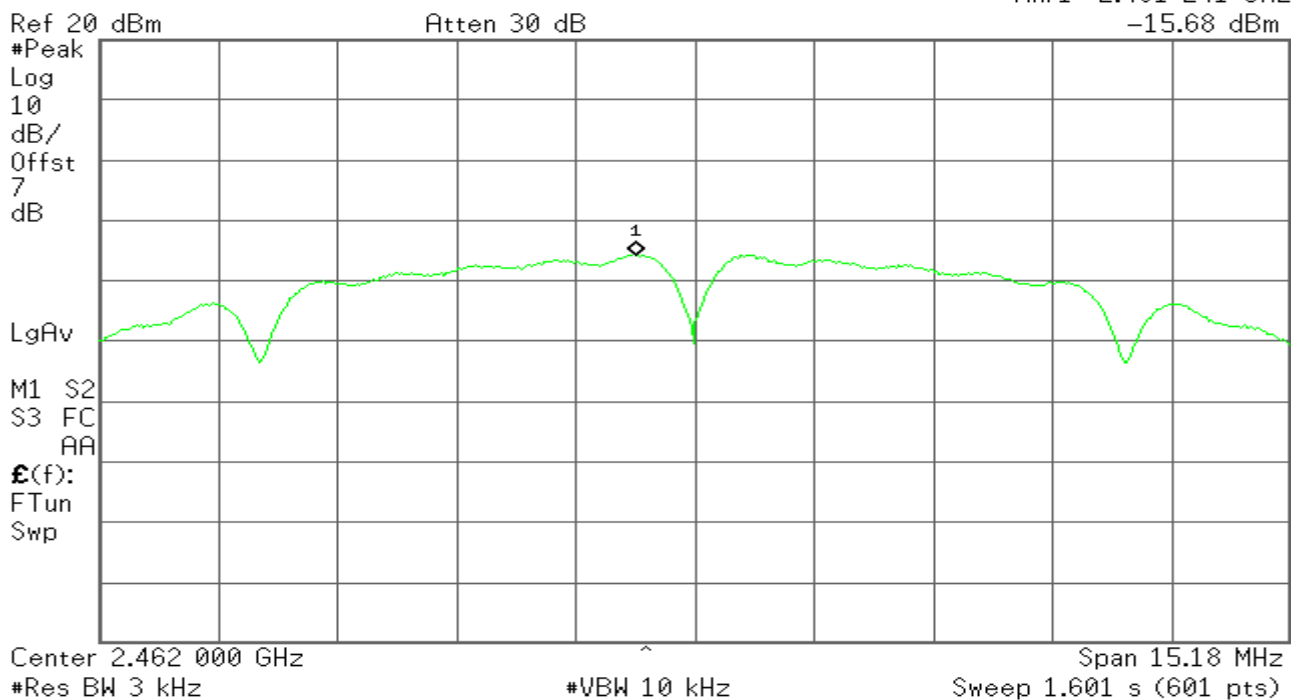
Mkr1 2.461 241 GHz  
-15.68 dBm

## IEEE 802.11g mode

### PPSD (CH Low)

Agilent

R T

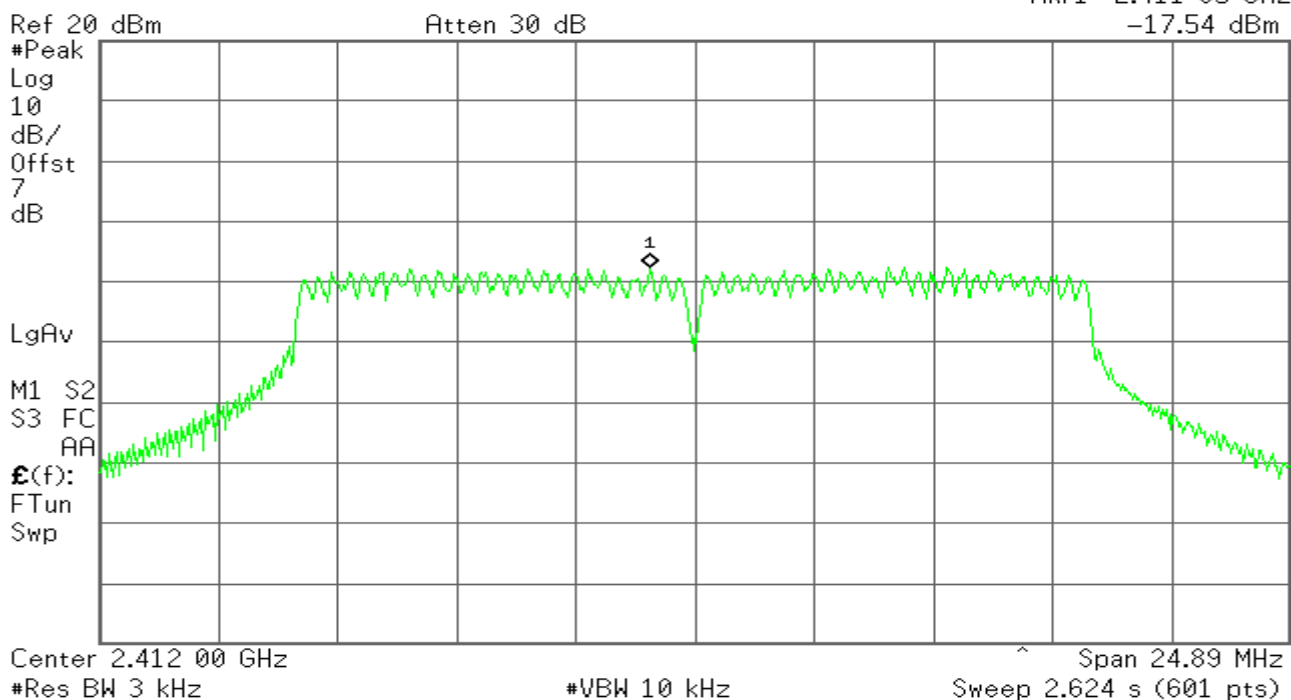Mkr1 2.411 05 GHz  
-17.54 dBm



## PPSD (CH Mid)

\* Agilent

R T


Mkr1 2.442 27 GHz  
-17.40 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB

LgAv

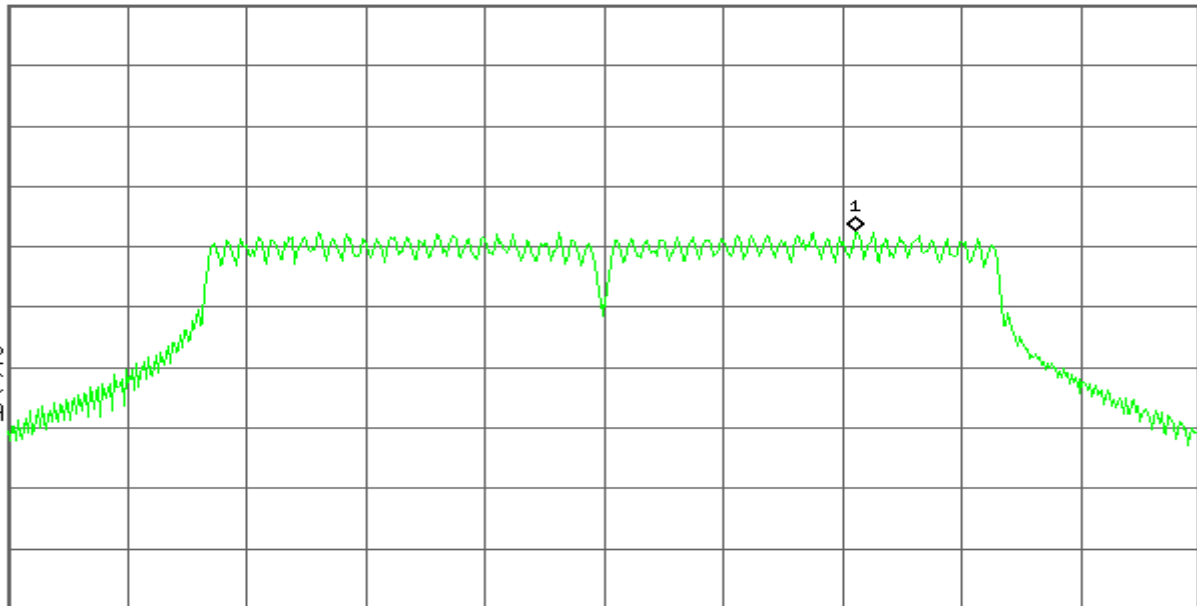M1 S2  
S3 FC  
AAE(f):  
FTun  
Swp

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.89 MHz

Sweep 2.624 s (601 pts)

## PPSD (CH High)

\* Agilent

R T


Mkr1 2.467 27 GHz  
-17.58 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB

LgAv

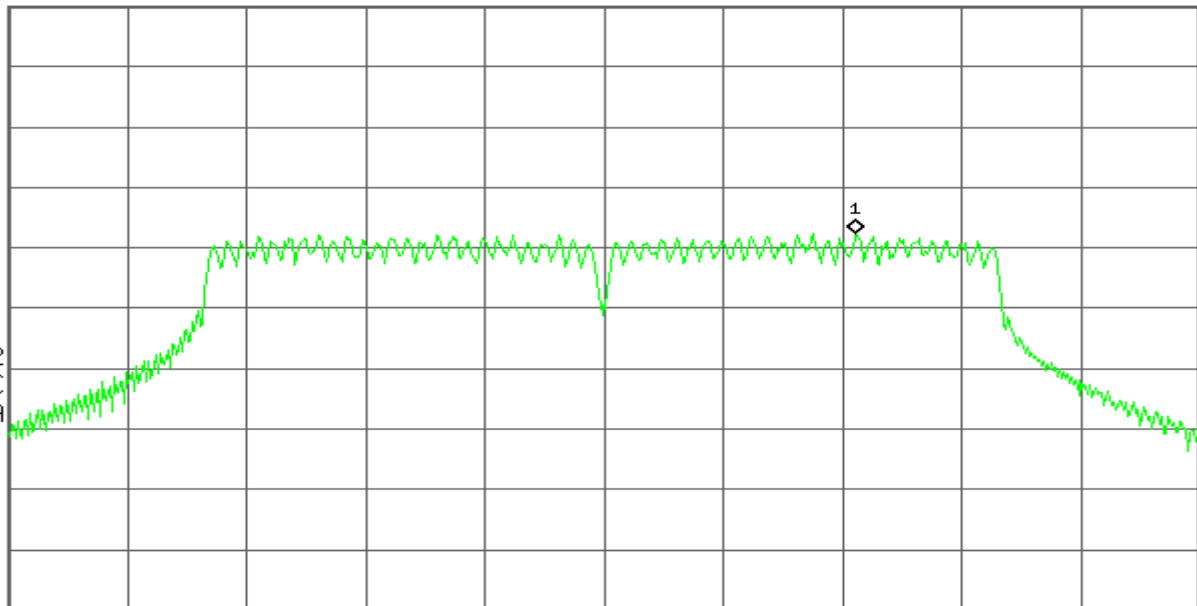M1 S2  
S3 FC  
AAE(f):  
FTun  
Swp

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz


Span 24.89 MHz

Sweep 2.624 s (601 pts)




## IEEE 802.11n HT20 mode

### PPSD (CH Low)

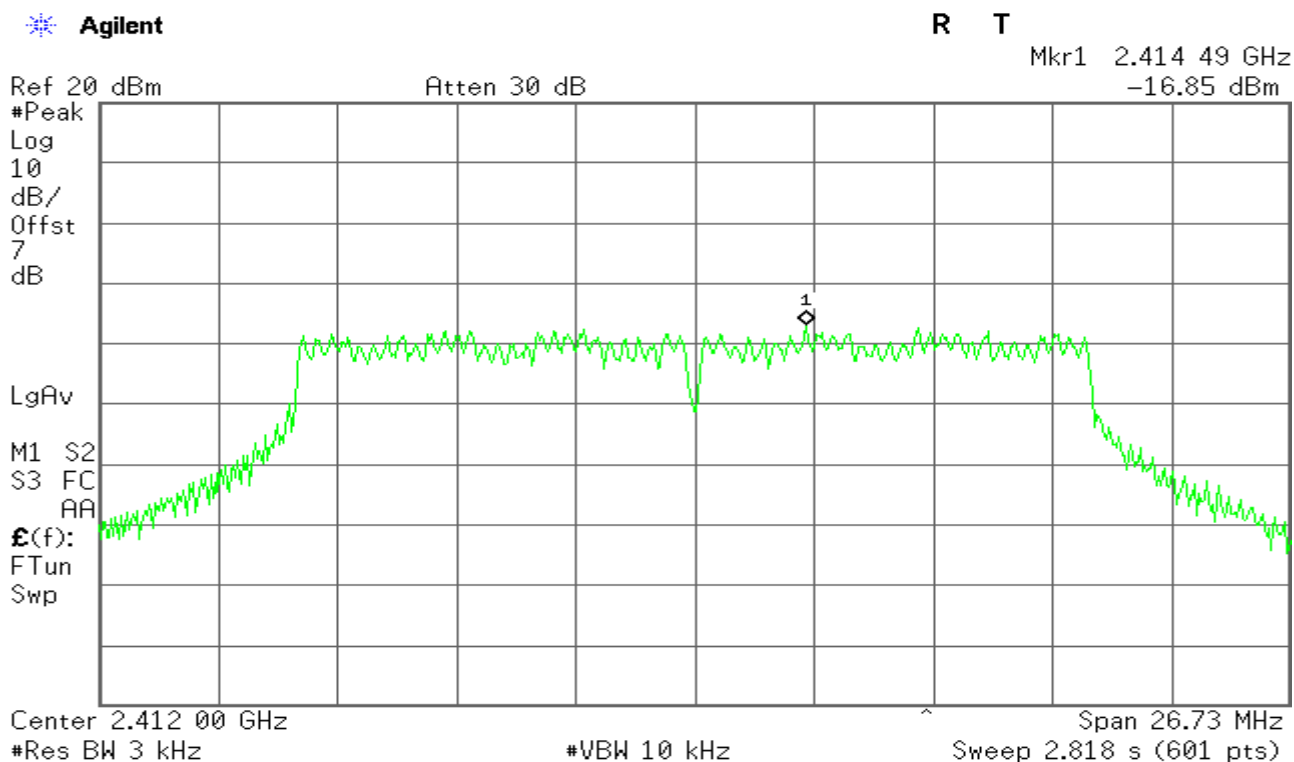

### PPSD (CH Mid)

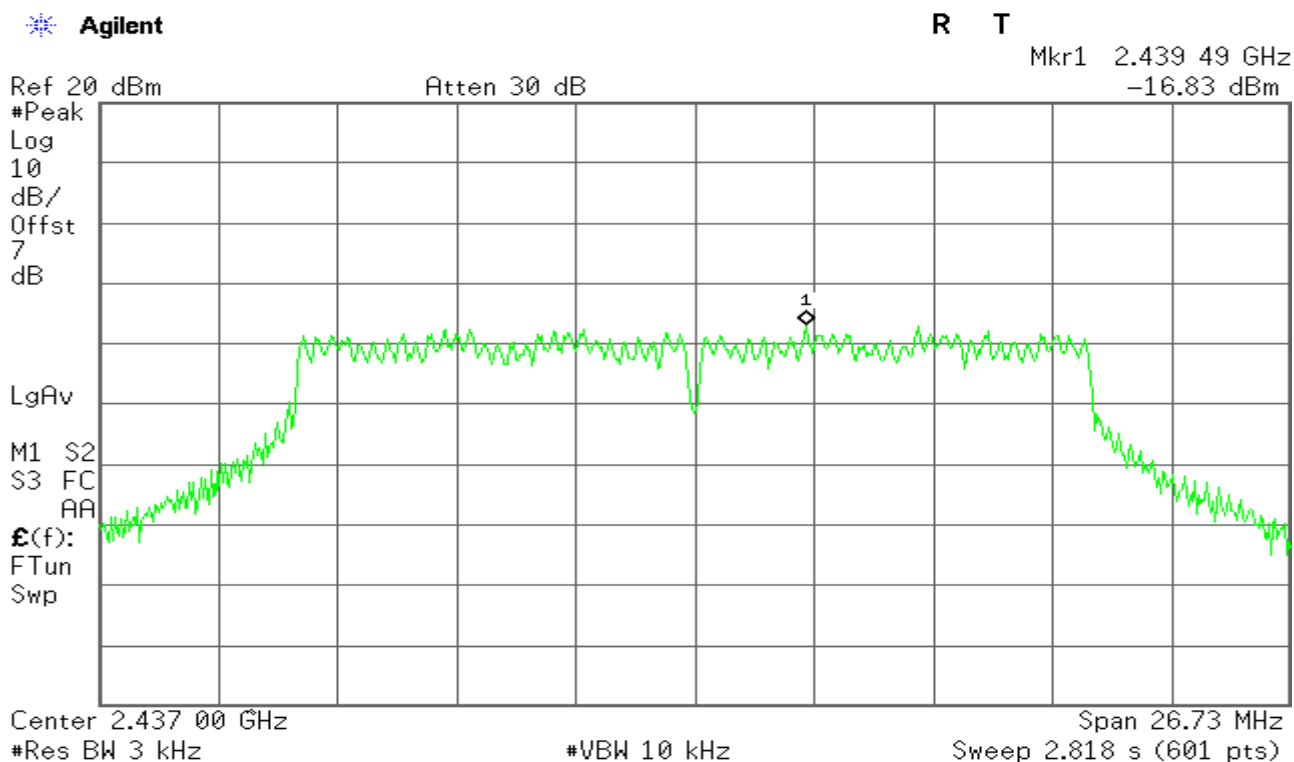



## PPSD (CH High)

Agilent

R T

Mkr1 2.464 49 GHz  
-16.58 dBm

Ref 20 dBm


Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB

LgAv

M1 S2  
S3 FC  
AA

E(f):  
FTun  
Swp

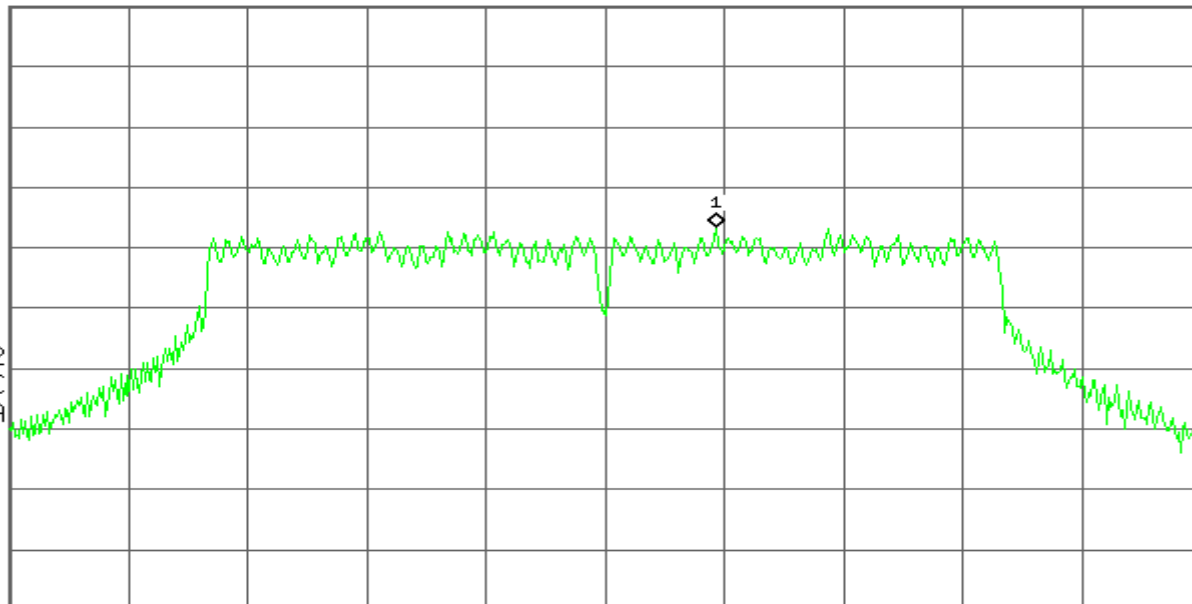

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 26.73 MHz

Sweep 2.818 s (601 pts)




## 7.4.SPURIOUS EMISSIONS

### Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*



## Test Plot

### OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

#### IEEE 802.11b mode

#### CH Low

Agilent


R T

Mkr1 2.412 481 GHz  
3.84 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.2  
dBm  
LgAv  
M1 S2  
S3 FC  
AA  
E(f):  
FTun  
Swp

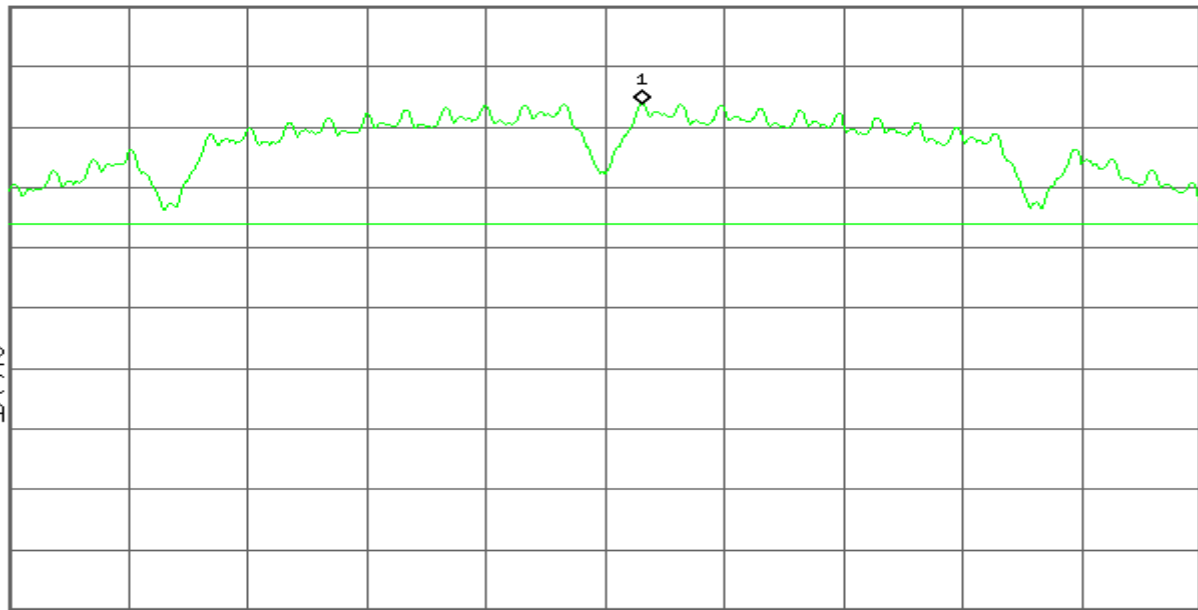

Center 2.412 000 GHz

Span 15.18 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.48 ms (601 pts)

Agilent


R T

Mkr1 2.399 478 GHz  
-33.63 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.2  
dBm  
LgAv

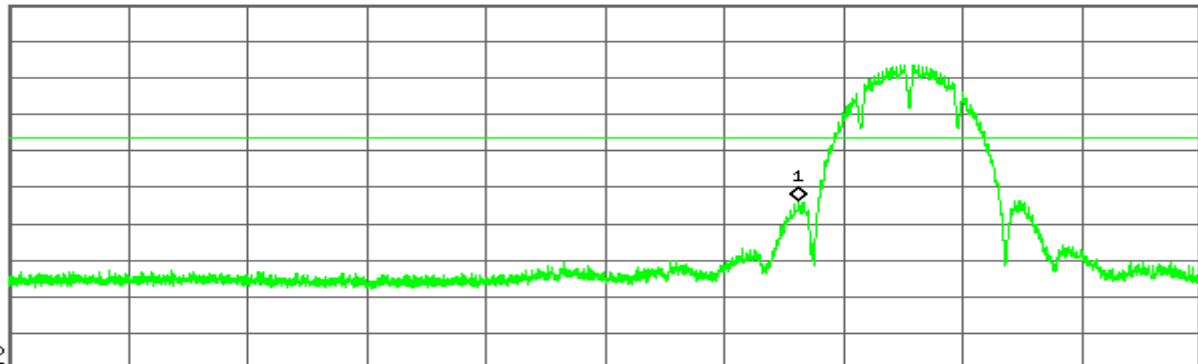

M1 S2

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.399 478 GHz	-33.63 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 903.5 MHz  
-49.46 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.2  
dBm  
LgAv

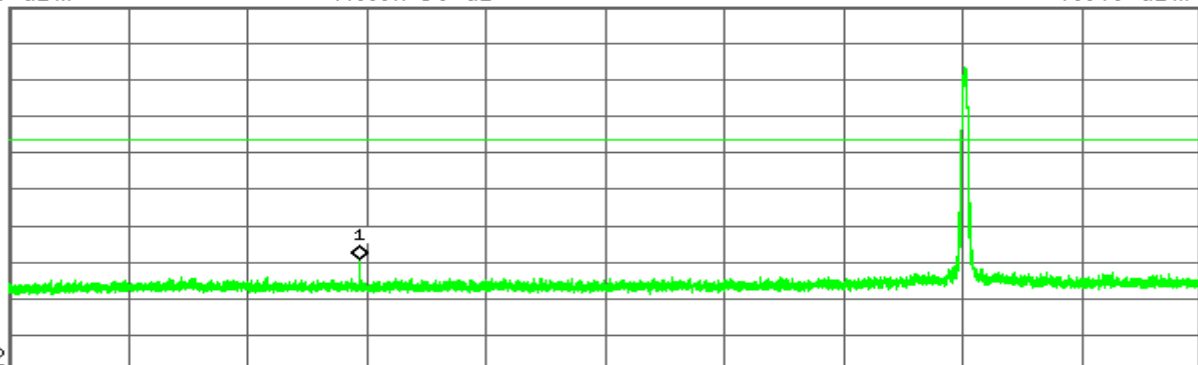

M1 S2

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	903.5 MHz	-49.46 dBm

Agilent


R T

Mkr1 24.123 9 GHz  
-43.63 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.2  
dBm  
LgAv

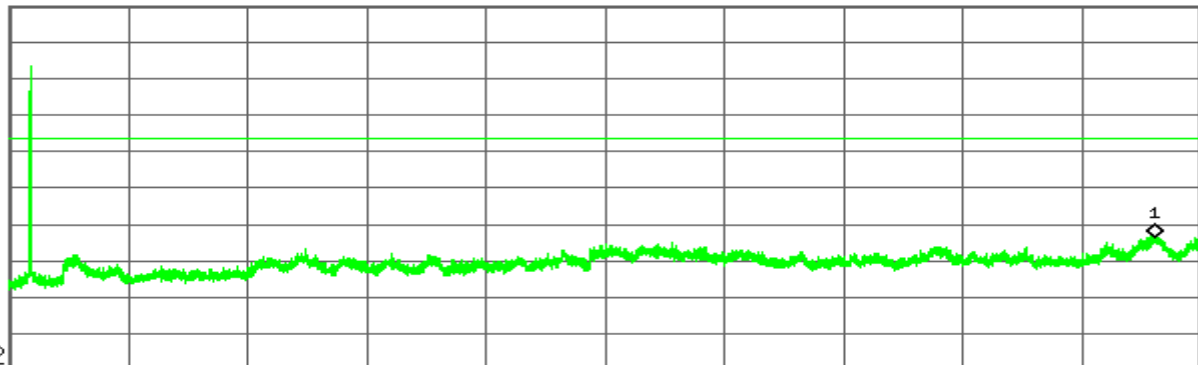

M1 S2

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.123 9 GHz	-43.63 dBm





# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

## CH Mid

Agilent


R T

Mkr1 2.436 469 GHz  
4.36 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-15.6  
dBm  
LgAv  
M1 S2  
S3 FC  
AA  
E(f):  
FTun  
Swp

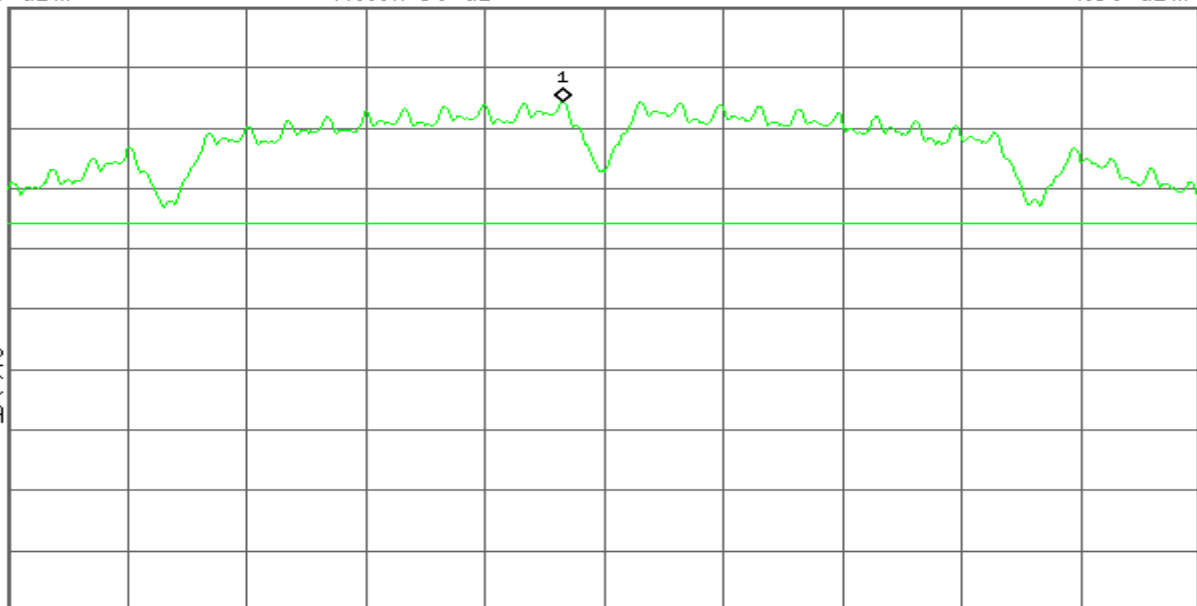

Center 2.437 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 15.18 MHz  
Sweep 1.48 ms (601 pts)

Agilent


R T

Mkr1 1.696 5 GHz  
-54.13 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-15.6  
dBm  
LgAv

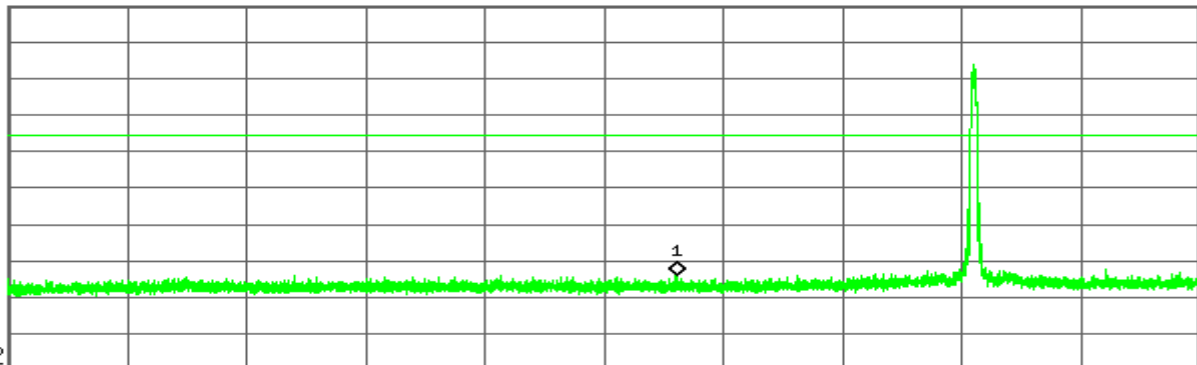

M1 S2

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 3.000 0 GHz  
Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.696 5 GHz	-54.13 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 24.123 9 GHz  
-43.44 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-15.6  
dBm  
LgAv

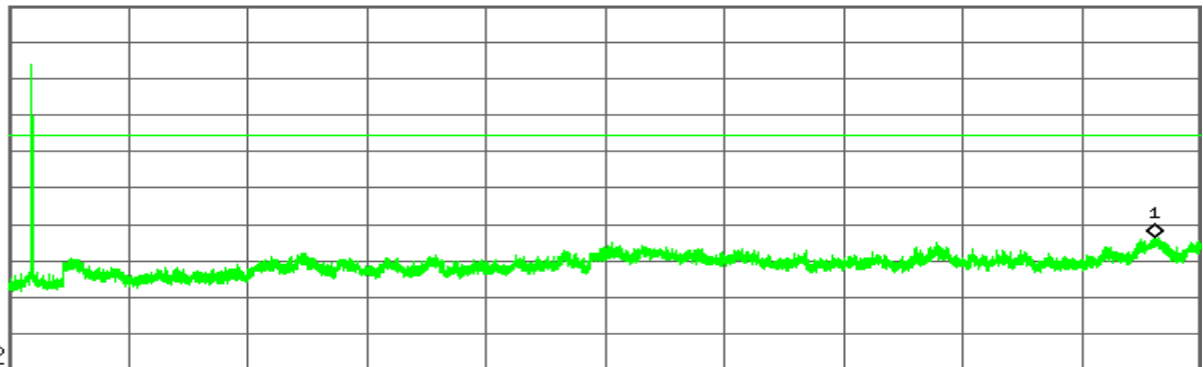

M1 S2  
Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.123 9 GHz	-43.44 dBm

## CH High

Agilent


R T

Mkr1 2.462 481 GHz  
3.96 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.0  
dBm  
LgAv

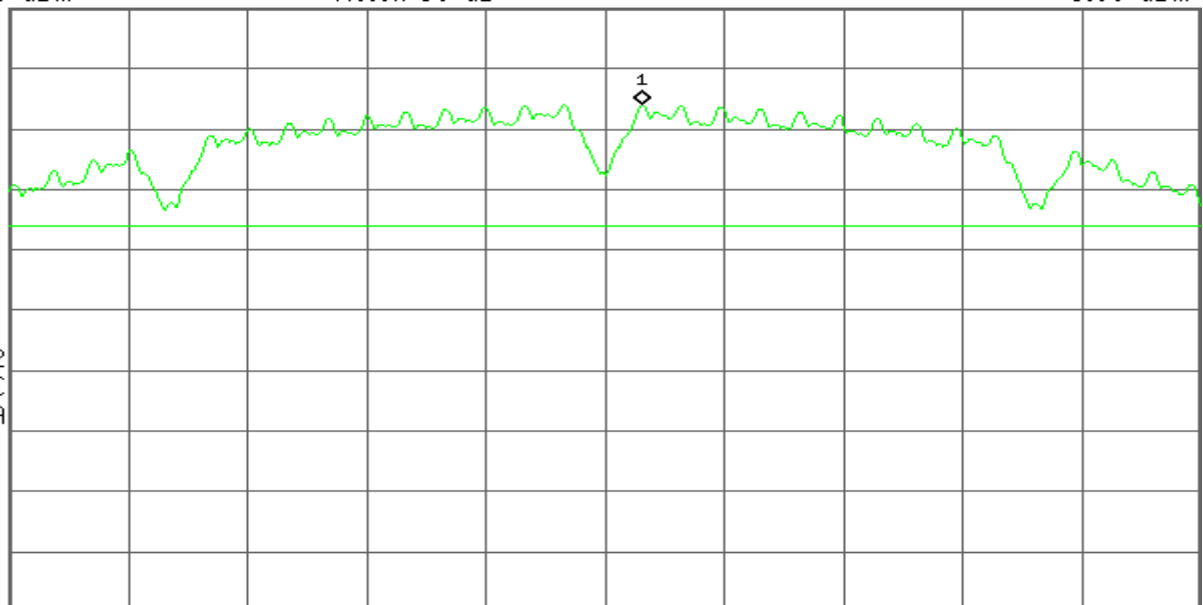

M1 S2  
S3 FC  
AA

£(f):  
FTun  
Swp

Center 2.462 000 GHz

Span 15.18 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.48 ms (601 pts)



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 2.487 258 GHz  
-50.09 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.0  
dBm  
LgAv

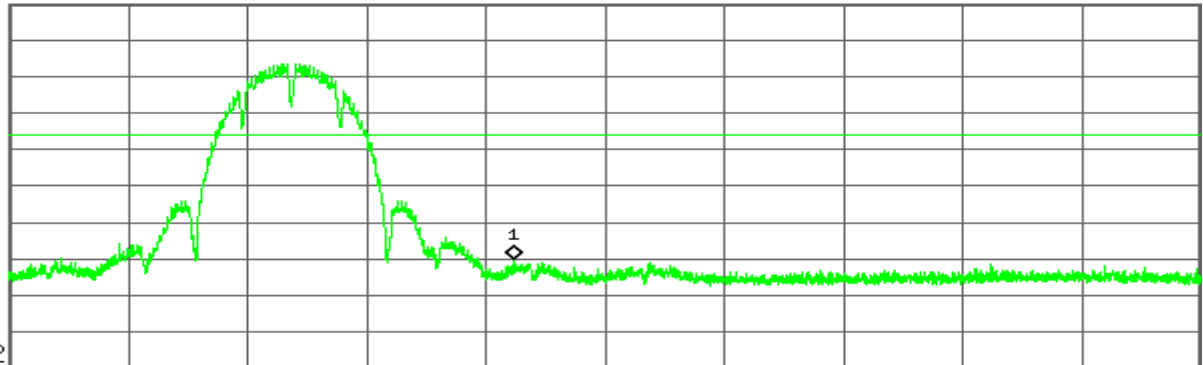

M1 S2  
Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.487 258 GHz	-50.09 dBm

Agilent


R T

Mkr1 1.142 8 GHz  
-53.90 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.0  
dBm  
LgAv

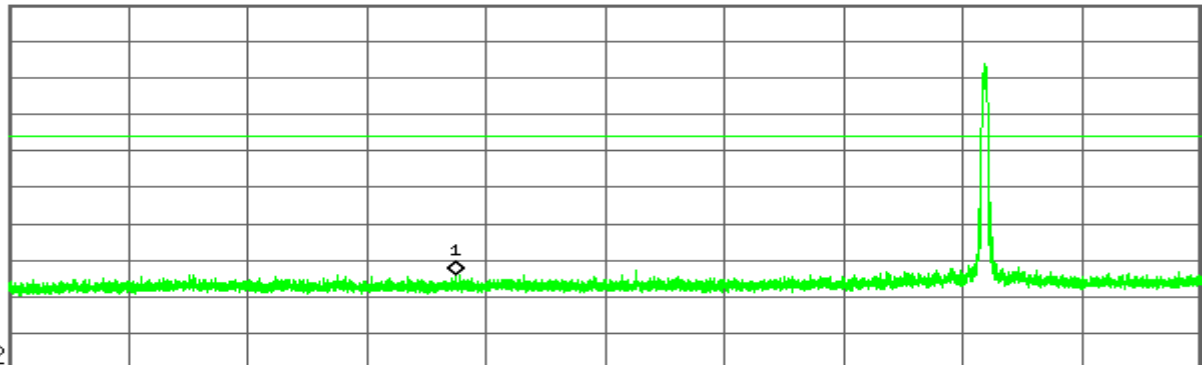

M1 S2  
Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.142 8 GHz	-53.90 dBm




Agilent

R T

Mkr1 24.129 5 GHz  
-43.30 dBm

Ref 20 dBm

Atten 30 dB
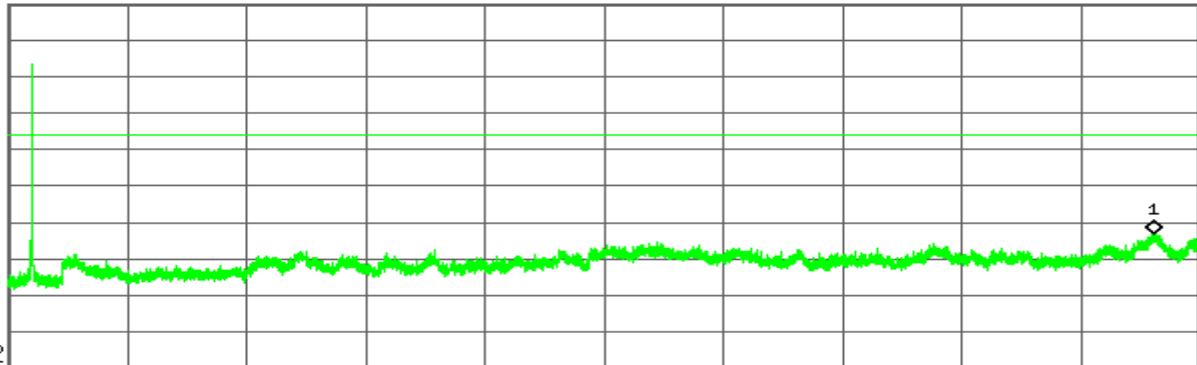
#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-16.0  
dBm  
LgAvM1 S2  
Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.129 5 GHz	-43.30 dBm

## IEEE 802.11g mode

### CH Low


Agilent

R T

Mkr1 2.416 11 GHz  
-2.11 dBm

Ref 20 dBm

Atten 30 dB
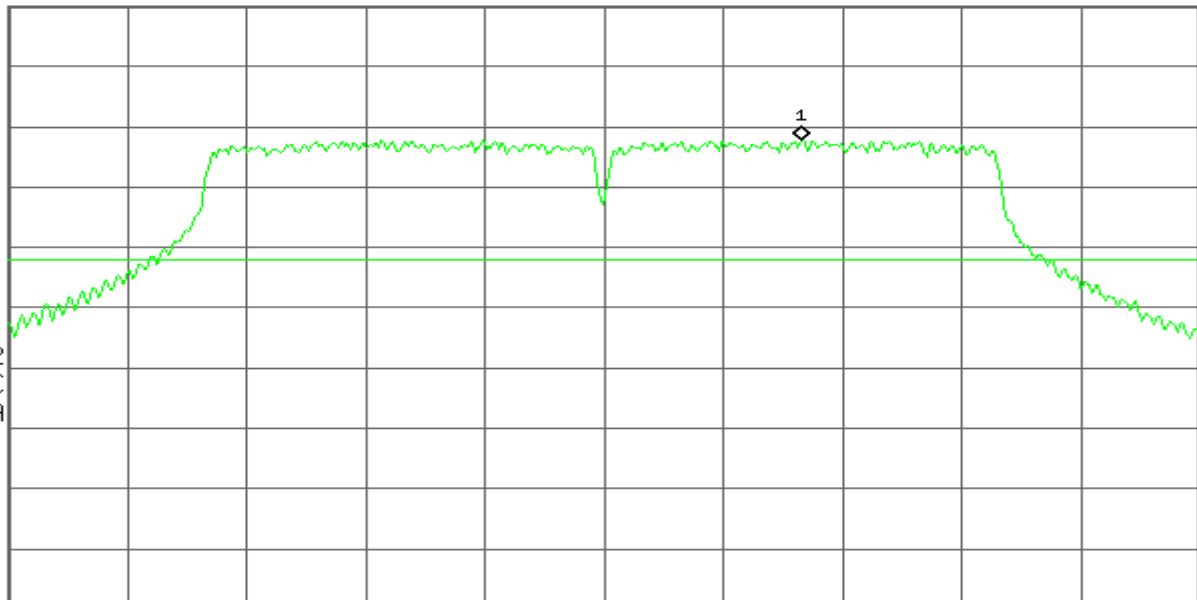
#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-22.1  
dBm  
LgAvM1 S2  
S3 FC  
AAE(f):  
FTun  
Swp

Center 2.412 00 GHz

Span 24.89 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.4 ms (601 pts)



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 2.399 835 GHz  
-32.81 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-22.1  
dBm  
LgAv

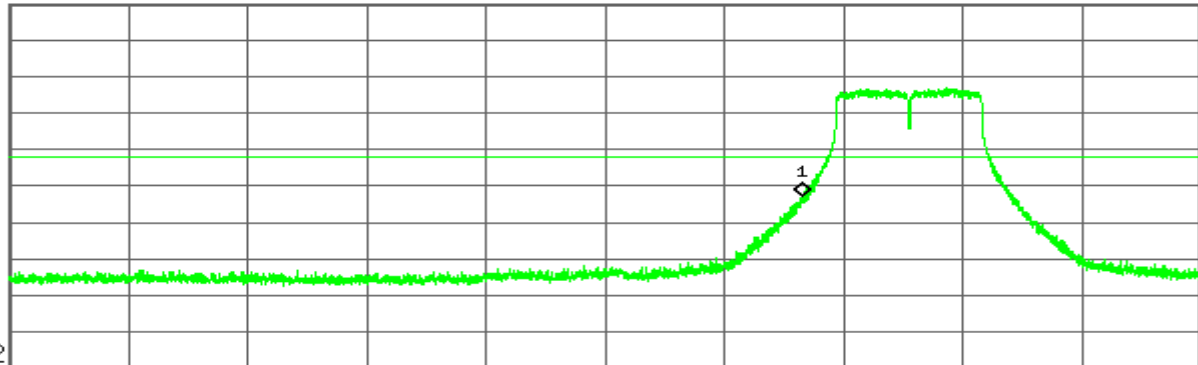

M1 S2

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.399 835 GHz	-32.81 dBm

Agilent


R T

Mkr1 490.9 MHz  
-30.03 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-22.1  
dBm  
LgAv

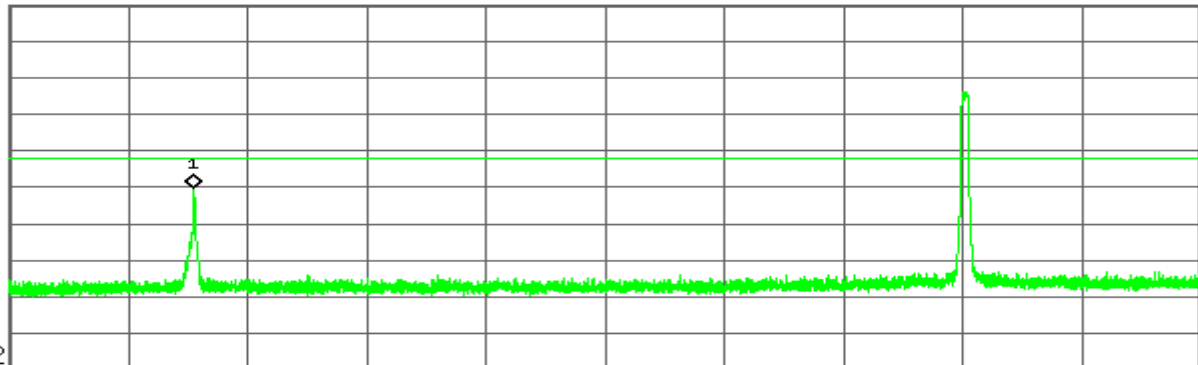

M1 S2

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	490.9 MHz	-30.03 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 24.000 4 GHz  
-42.04 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-22.1  
dBm  
LgAv

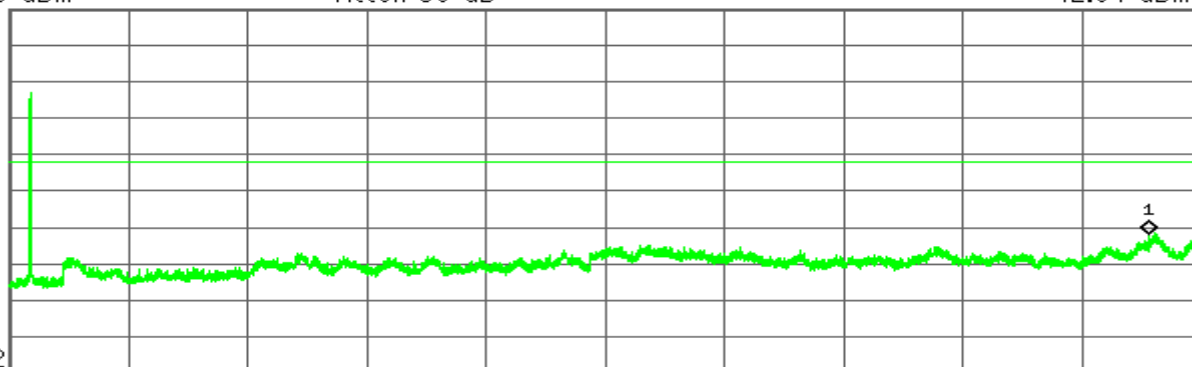

M1 S2

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.000 4 GHz	-42.04 dBm

## CH Mid

Agilent


R T

Mkr1 2.441 15 GHz  
-3.27 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-23.3  
dBm  
LgAv  
M1 S2  
S3 FC  
AA  
E(f):  
FTun  
Swp

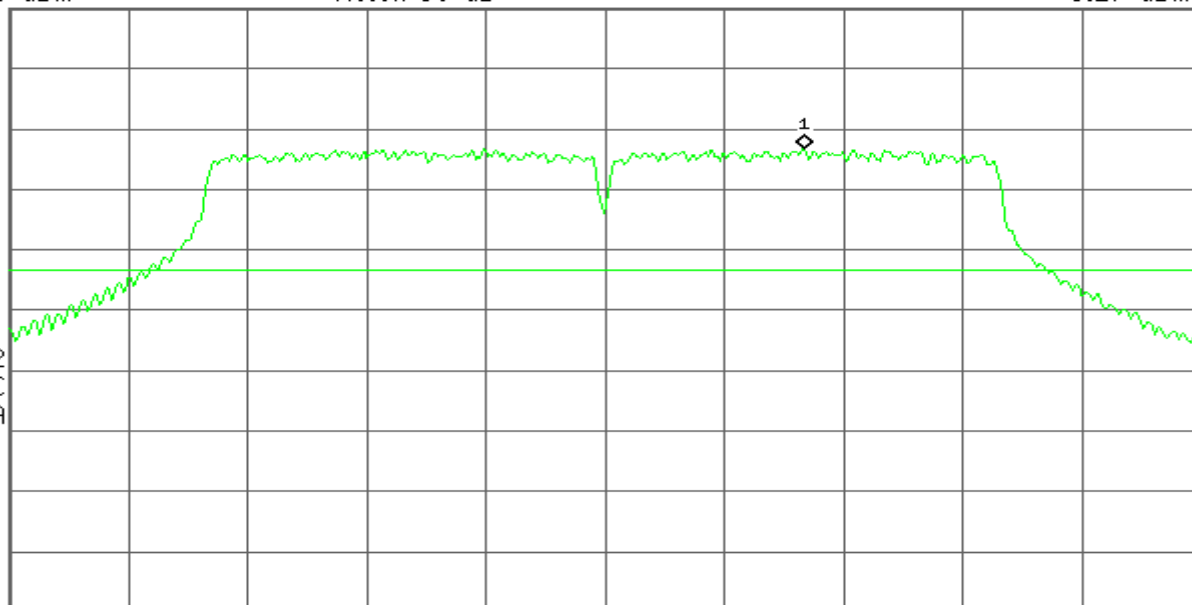

Center 2.437 00 GHz

Span 24.89 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.4 ms (601 pts)



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE


Date of Issue : January 15, 2015

Agilent

R T

Mkr1 491.2 MHz  
-34.28 dBm

Ref 20 dBm Atten 30 dB

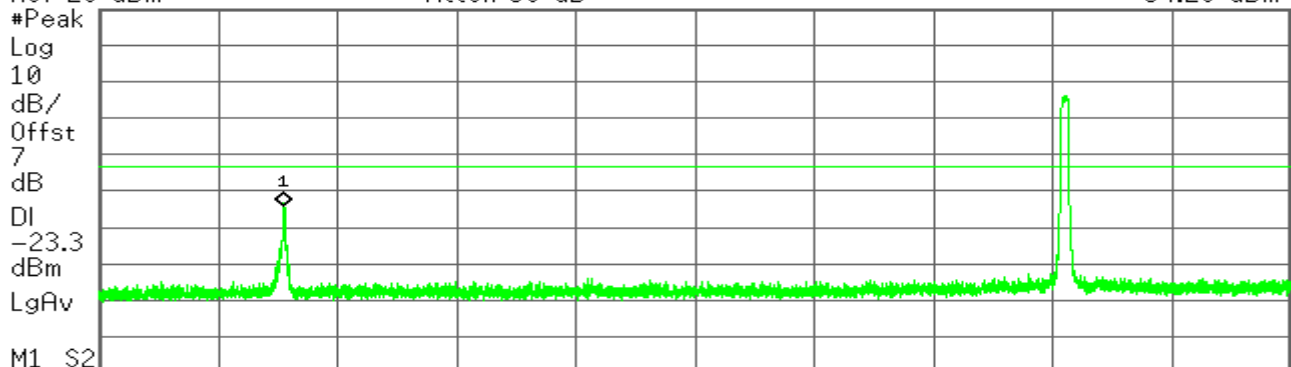

Start 30.0 MHz Stop 3.000 0 GHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	491.2 MHz	-34.28 dBm

Agilent

R T

Mkr1 24.095 8 GHz  
-41.55 dBm

Ref 20 dBm Atten 30 dB

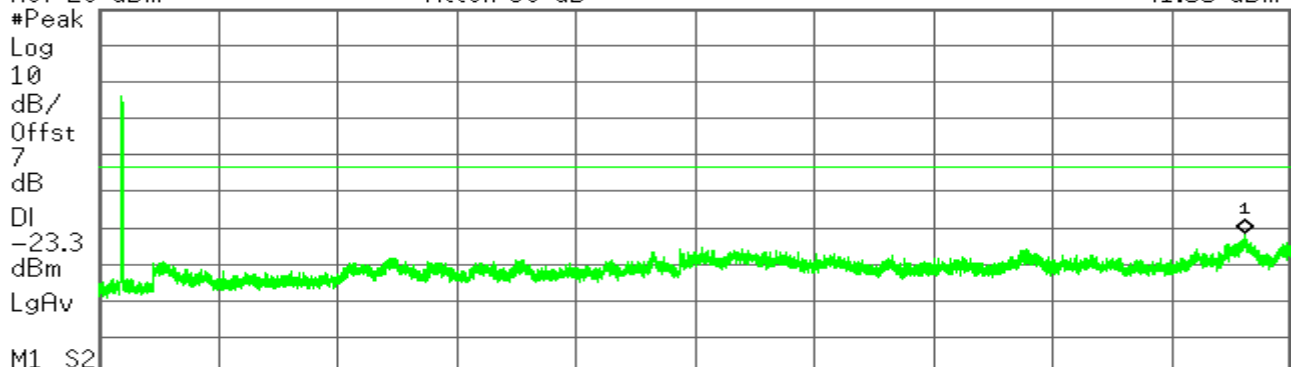

Start 2.000 0 GHz Stop 25.000 0 GHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.095 8 GHz	-41.55 dBm



## CH High

Agilent

R T

Mkr1 2.459 47 GHz  
-3.15 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-23.1

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

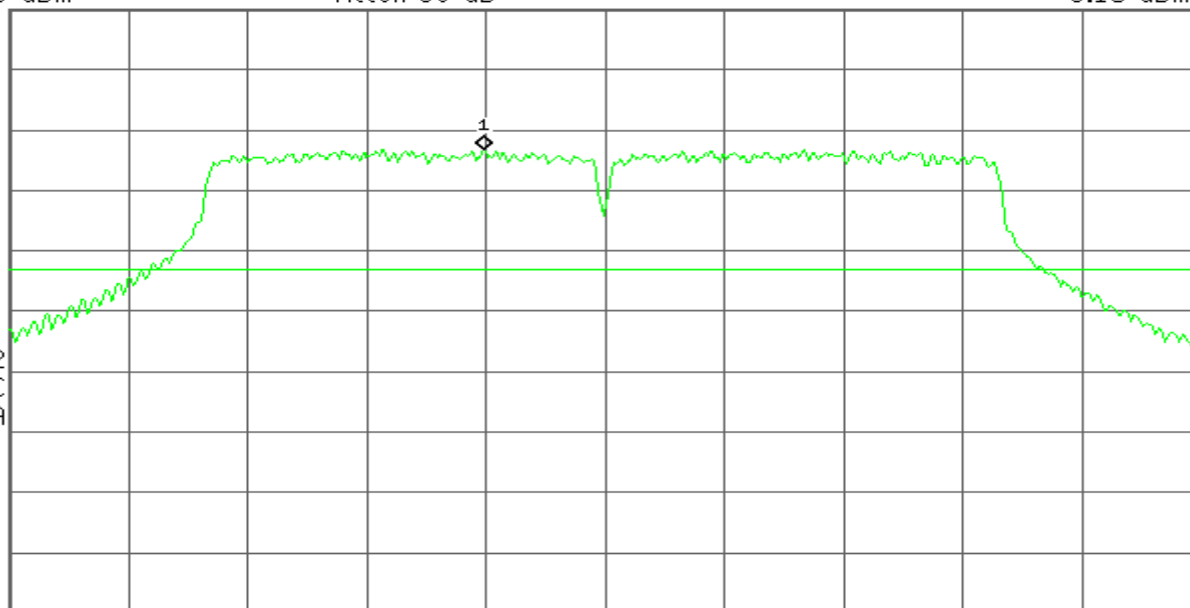

Center 2.462 00 GHz

Span 24.89 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.4 ms (601 pts)

Agilent

R T

Mkr1 2.483 500 GHz  
-50.51 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-23.1

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

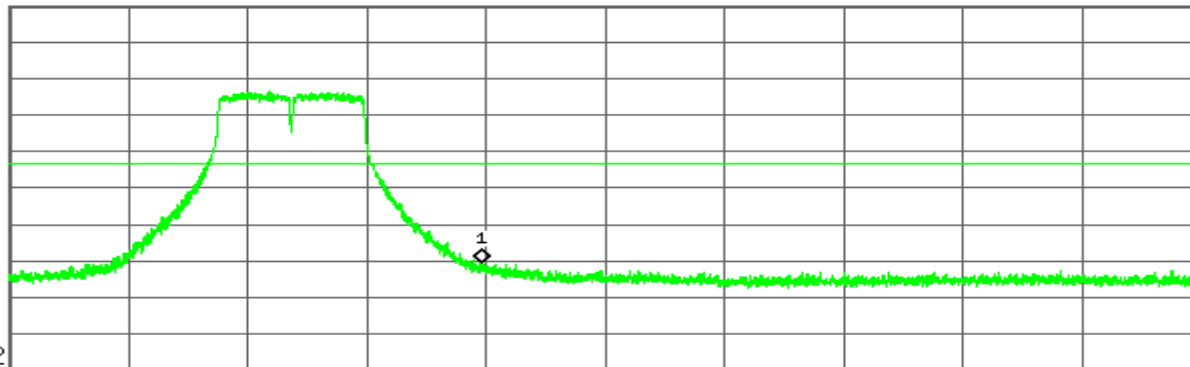

Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.483 500 GHz	-50.51 dBm





# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 490.5 MHz  
-30.77 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-23.1  
dBm  
LgAv

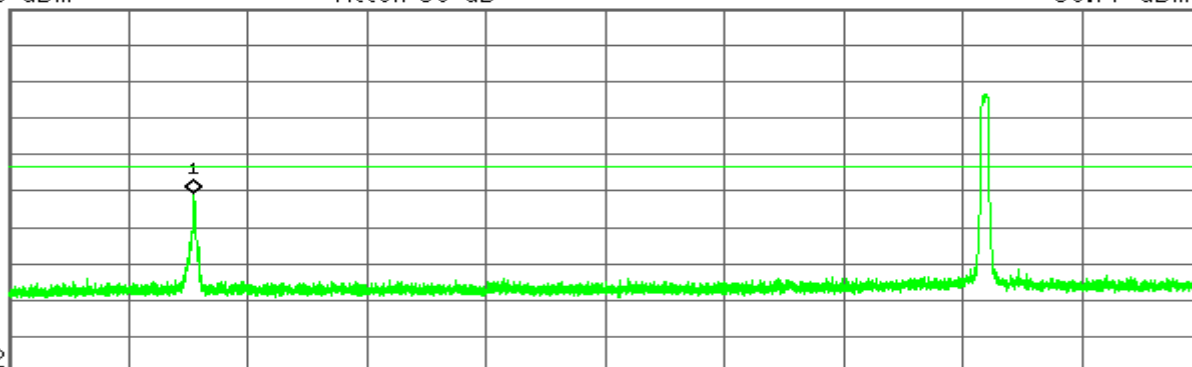

M1 S2

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	490.5 MHz	-30.77 dBm

Agilent


R T

Mkr1 24.107 1 GHz  
-43.14 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-23.1  
dBm  
LgAv

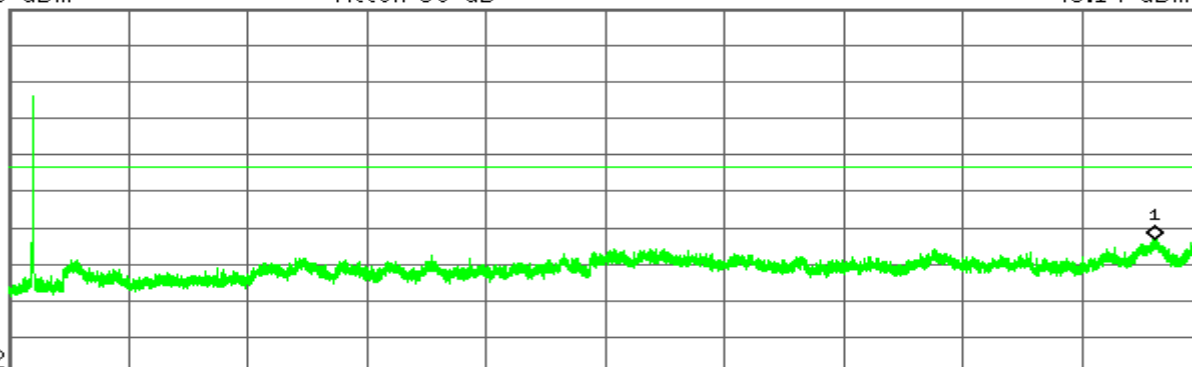

M1 S2

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz



Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.107 1 GHz	-43.14 dBm



## IEEE 802.11n HT20 mode

### CH Low

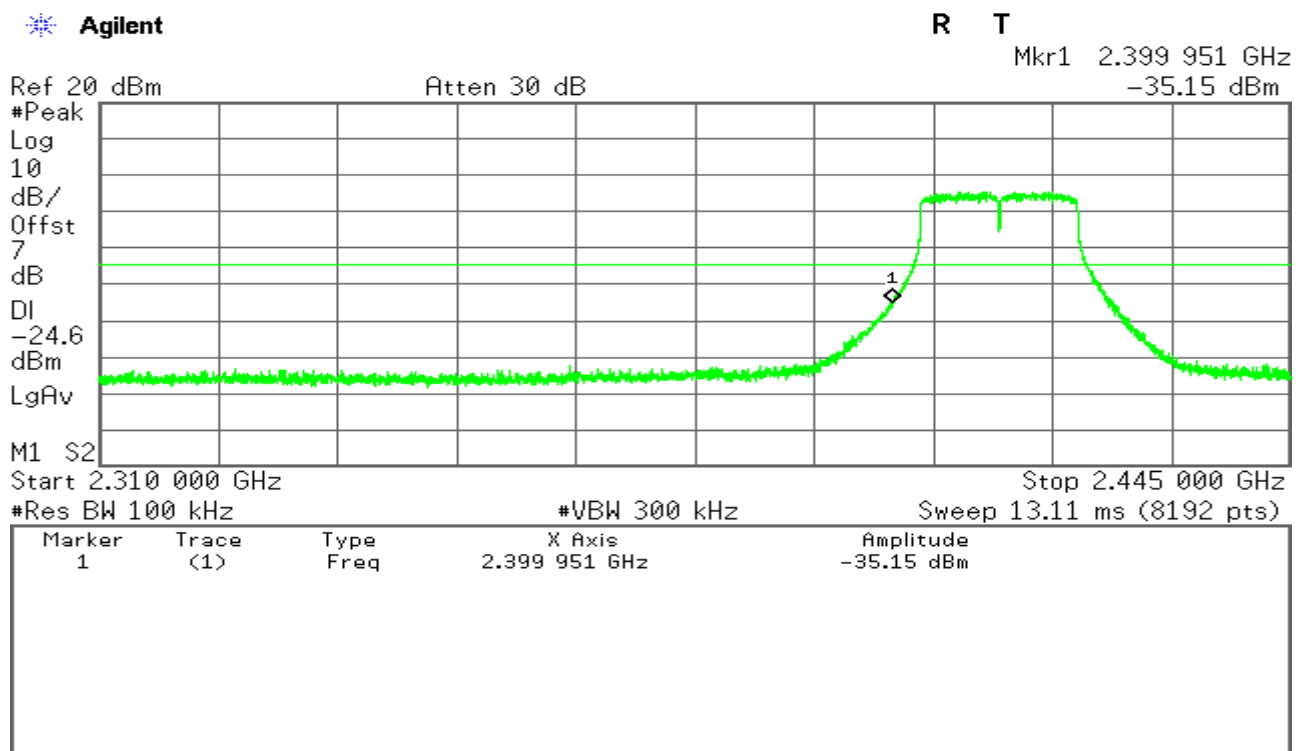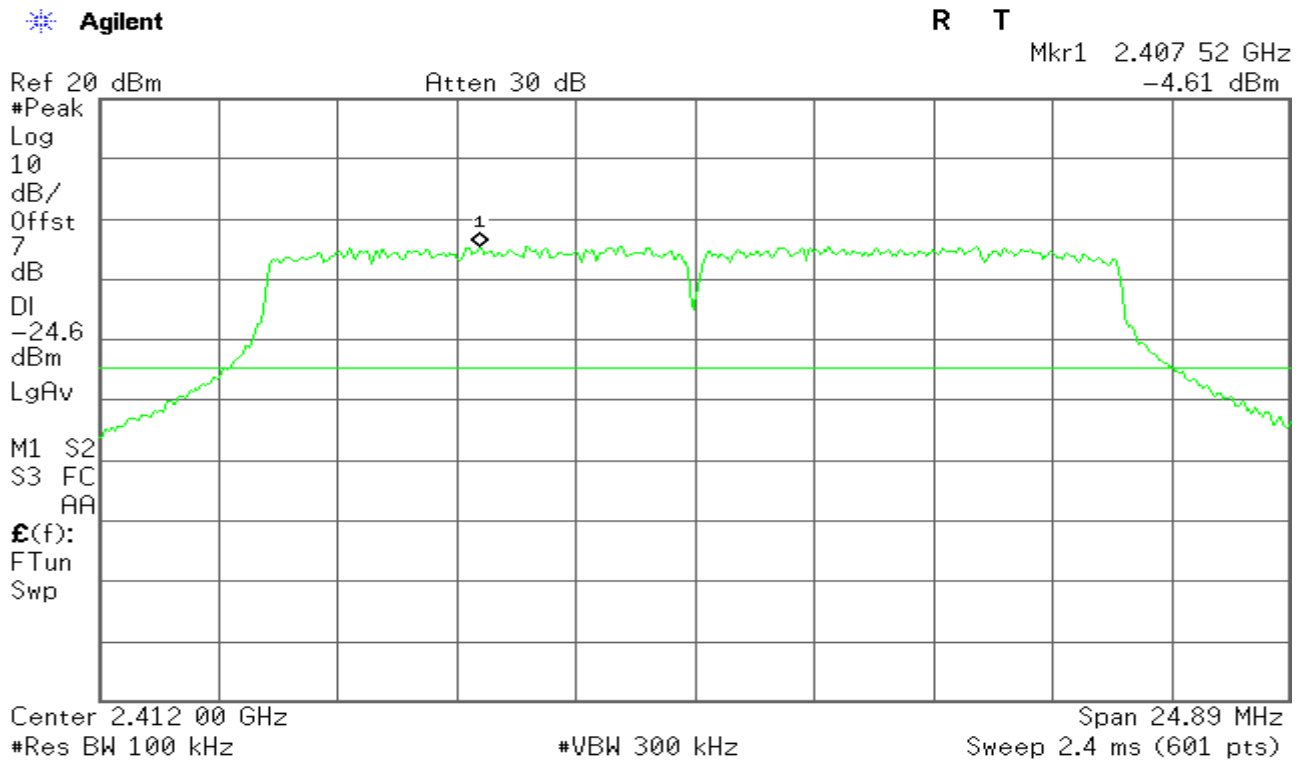



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 491.2 MHz  
-33.40 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.6  
dBm  
LgAv

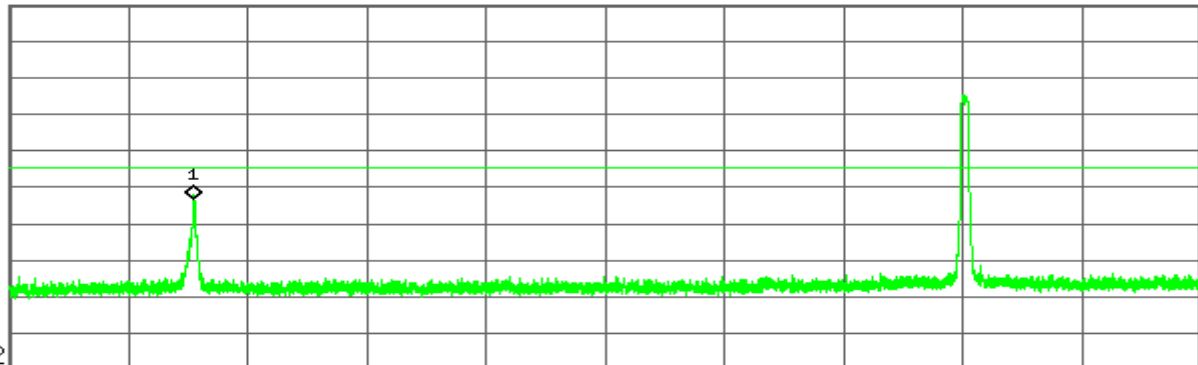

M1 S2

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	491.2 MHz	-33.40 dBm

Agilent


R T

Mkr1 24.115 5 GHz  
-42.71 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.6  
dBm  
LgAv

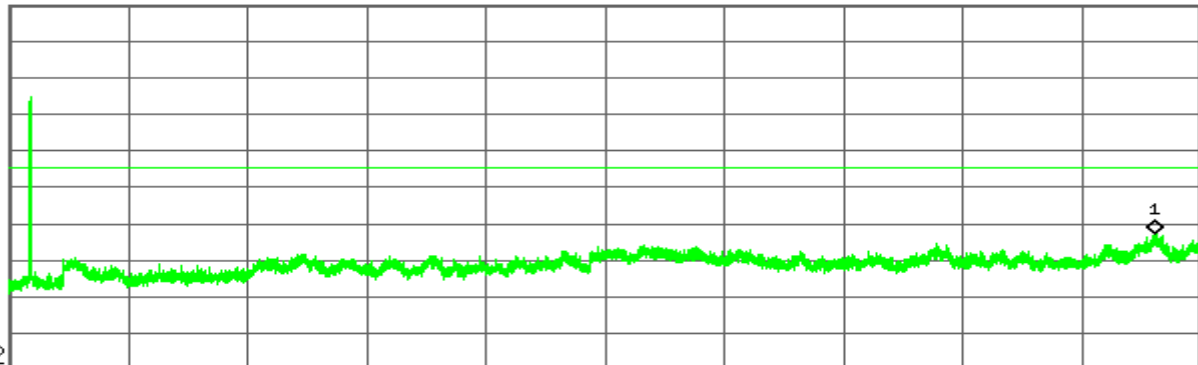

M1 S2

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.115 5 GHz	-42.71 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

## CH Mid

Agilent

R T

Mkr1 2.433 52 GHz  
-4.19 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-24.2

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

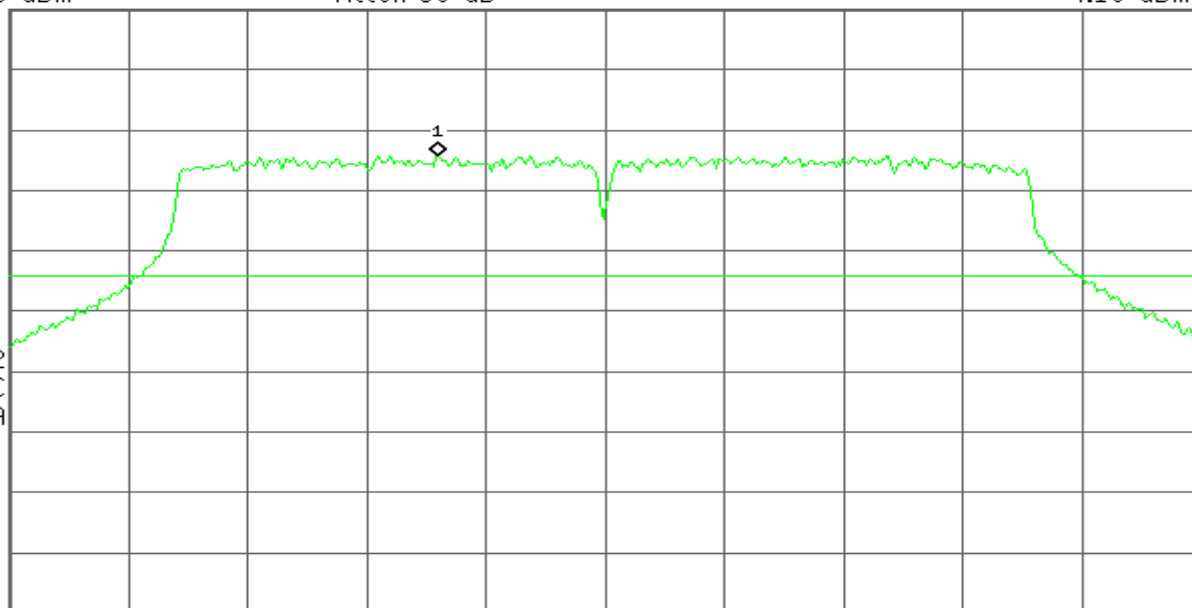

Center 2.437 00 GHz

\*Res BW 100 kHz

\*VBW 300 kHz

Span 24.89 MHz

Sweep 2.4 ms (601 pts)

Agilent

R T

Mkr1 490.5 MHz  
-33.59 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-24.2

dBm

LgAv

M1 S2


Start 30.0 MHz

\*Res BW 100 kHz

\*VBW 300 kHz

Stop 3.000 0 GHz

Sweep 284 ms (8192 pts)

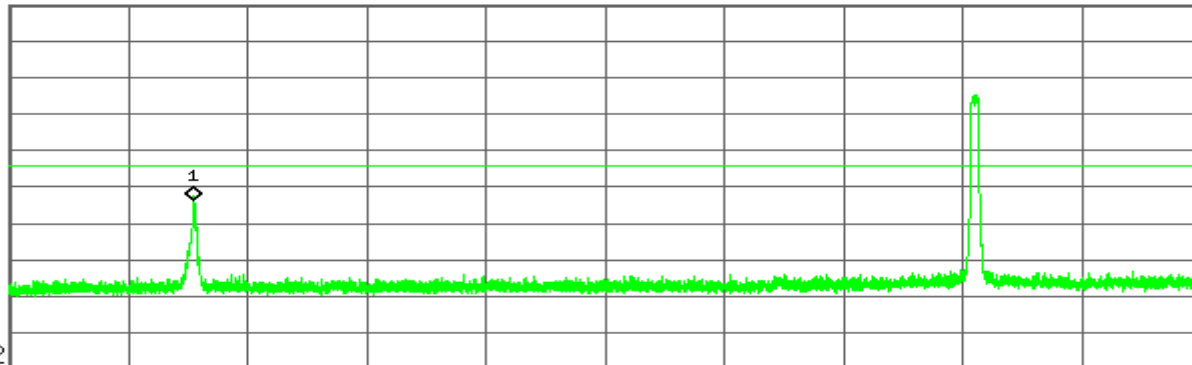

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	490.5 MHz	-33.59 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 24.081 8 GHz  
-43.31 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.2  
dBm  
LgAv

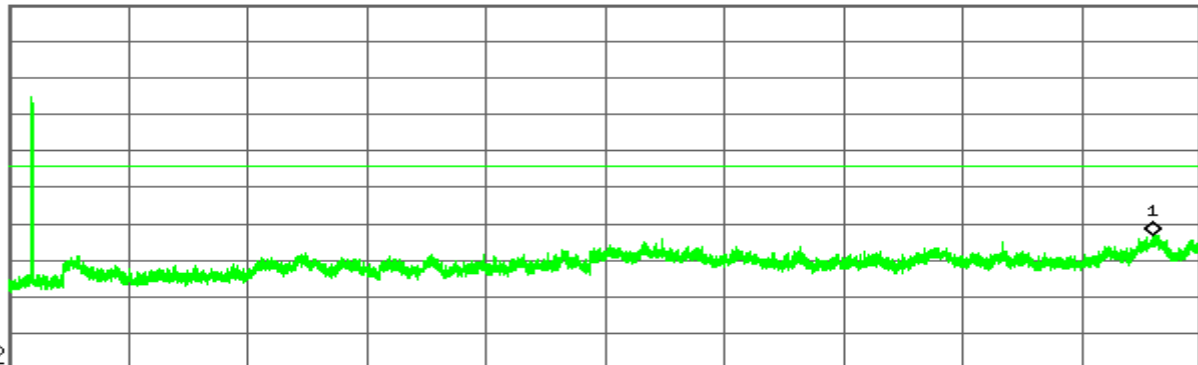

M1 S2

Start 2.000 0 GHz ^

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	24.081 8 GHz	-43.31 dBm

## CH High

Agilent


R T

Mkr1 2.458 47 GHz  
-4.32 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.3  
dBm  
LgAv  
M1 S2  
S3 FC  
AA  
£(f):  
FTun  
Swp

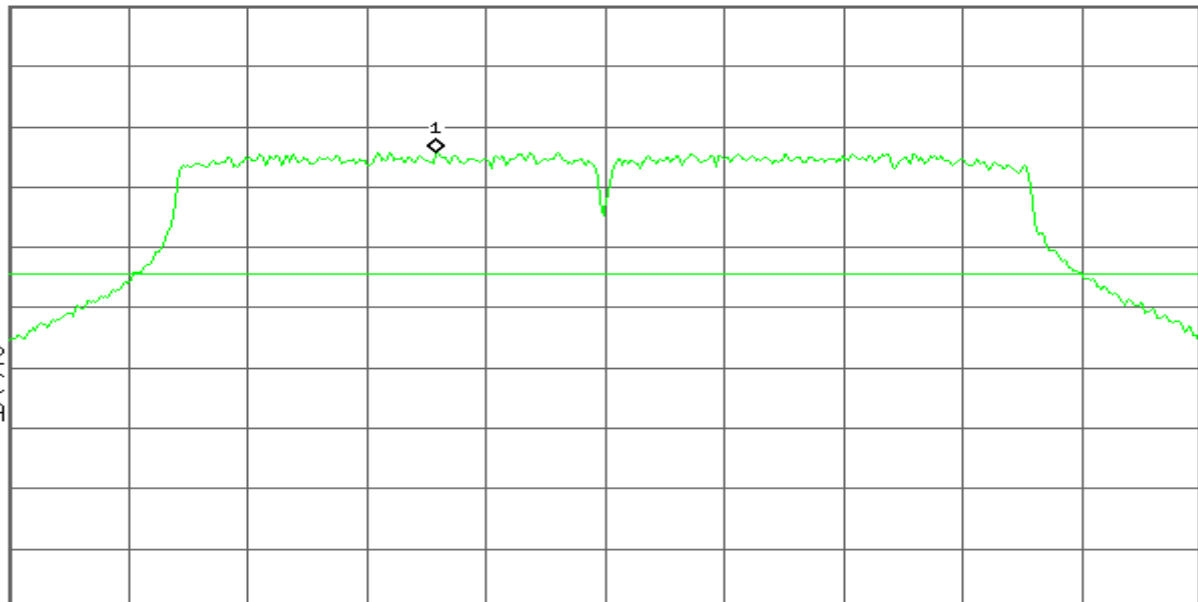

Center 2.462 00 GHz

Span 24.89 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.4 ms (601 pts)



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent


R T

Mkr1 2.484 851 GHz  
-50.32 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.3  
dBm  
LgAv

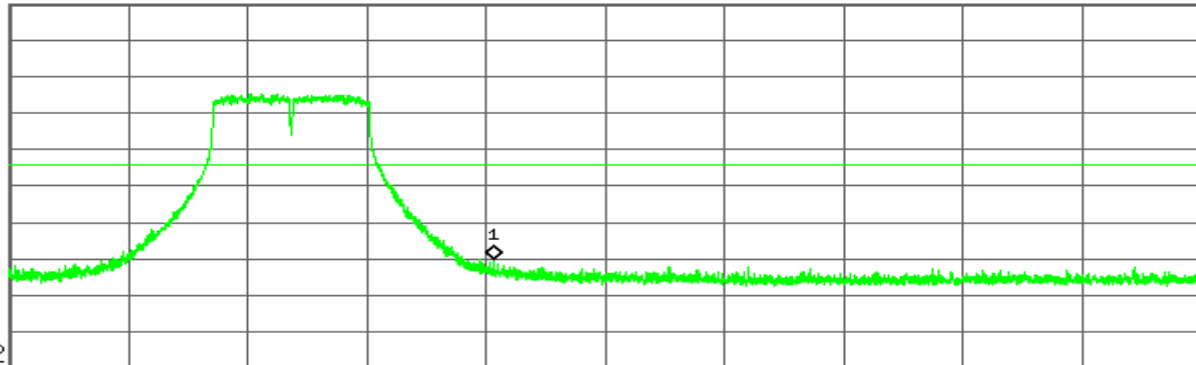

M1 S2

Start 2.430 000 GHz

Stop 2.565 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.484 851 GHz	-50.32 dBm

Agilent


R T

Mkr1 489.4 MHz  
-31.20 dBm

Ref 20 dBm

Atten 30 dB

#Peak  
Log  
10  
dB/  
Offst  
7  
dB  
DI  
-24.3  
dBm  
LgAv

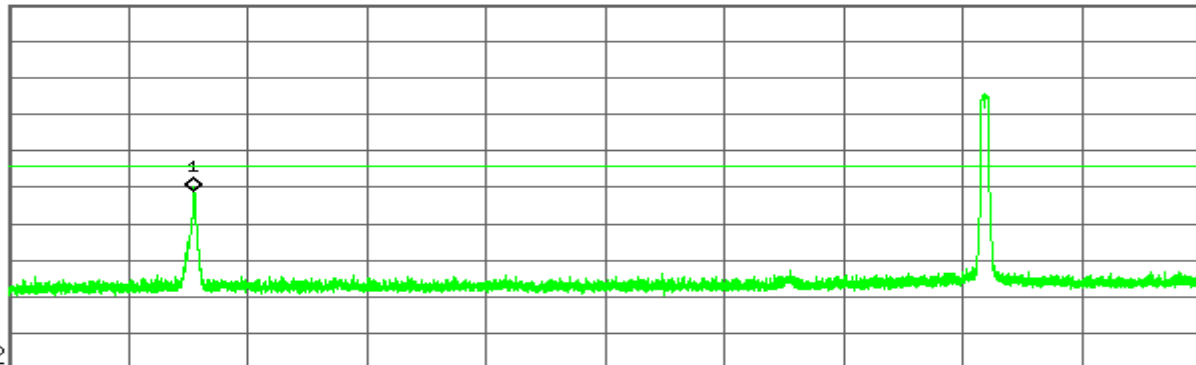

M1 S2

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 284 ms (8192 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	489.4 MHz	-31.20 dBm



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Agilent

R T

Mkr1 24.093 0 GHz  
-42.76 dBm

Ref 20 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7

dB

DI

-24.3

dBm

LgAv

M1 S2

Center 13.500 0 GHz

Span 23 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

Marker

Trace

Type

X Axis

Amplitude

1

(1)

Freq

24.093 0 GHz

-42.76 dBm



## 7.5.RADIATED EMISSIONS

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54






## Test Configuration

### **Below 30MHz**

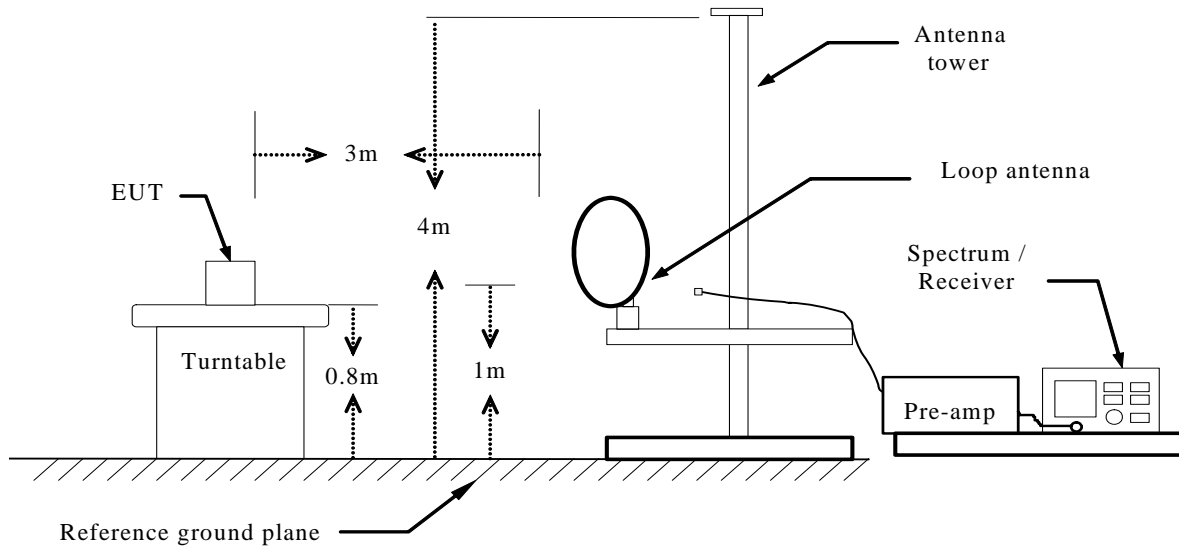


### **Below 1 GHz**

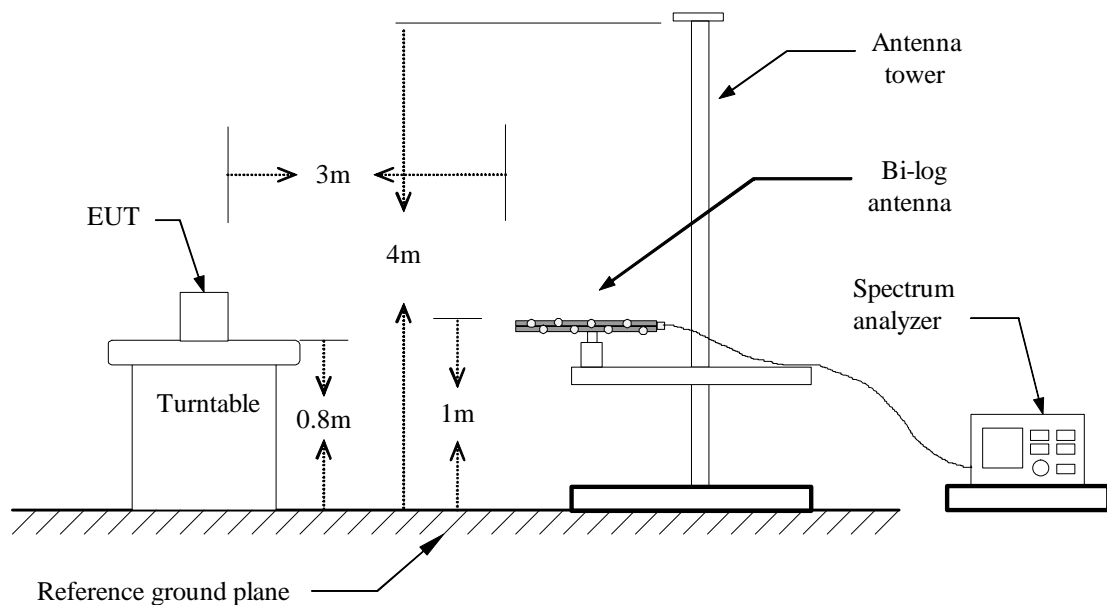



## Above 1 GHz

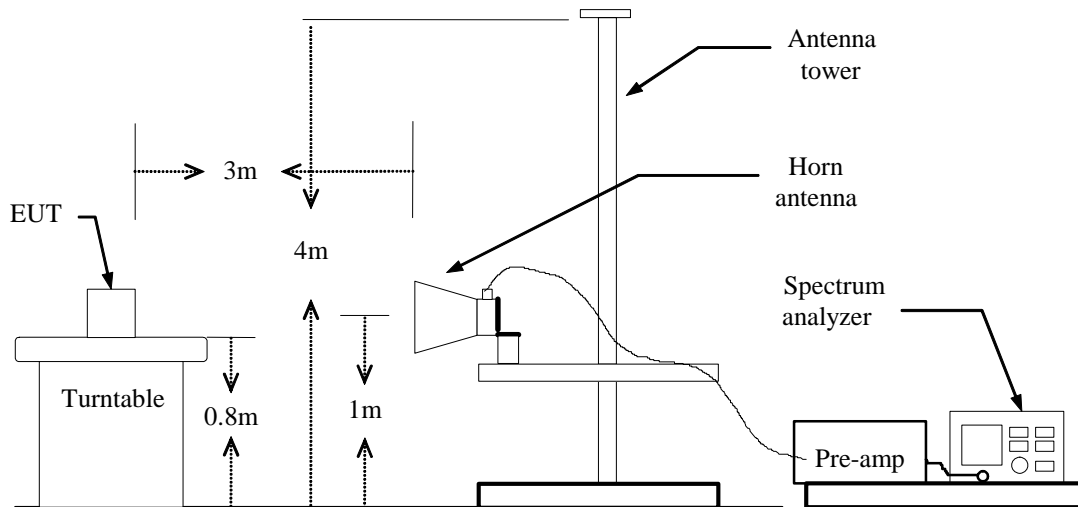

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO, PEAK DETECTOR

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO, PEAK DETECTOR


7. Repeat above procedures until the measurements for all frequencies are complete.

## TEST RESULTS



## RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)


110.0 dBuV/m

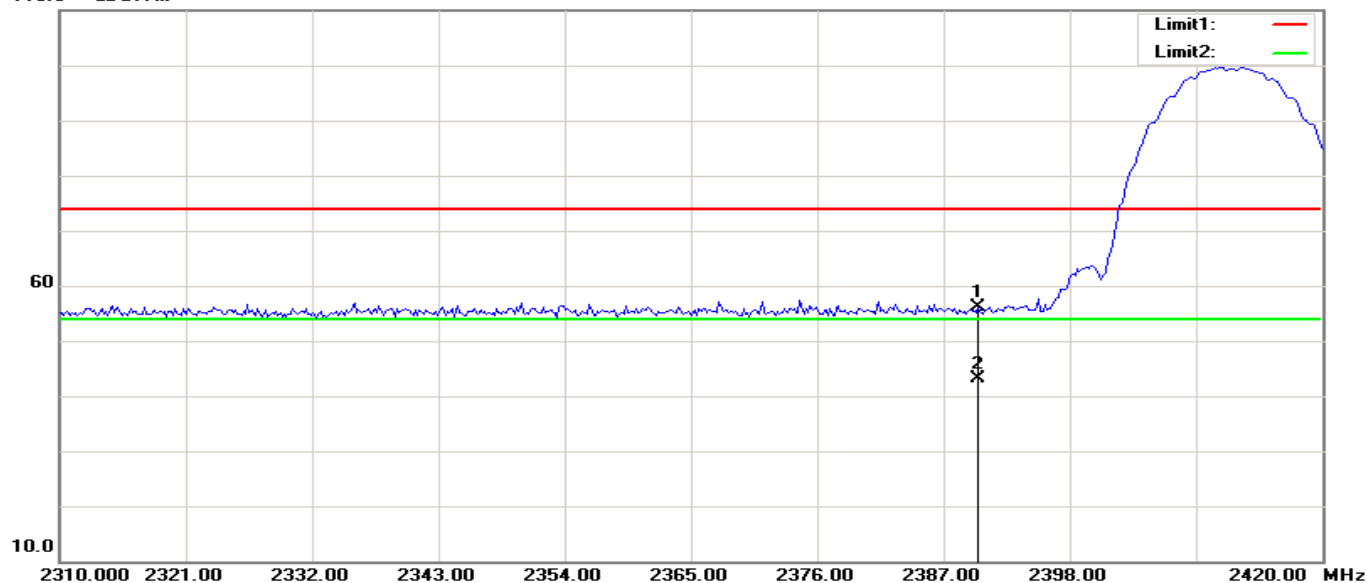

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.88	-12.69	56.19	74.00	-17.81	100	125	peak
2	2390.000	55.74	-12.69	43.05	54.00	-10.95	100	125	AVG

## RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)


110.0 dBuV/m

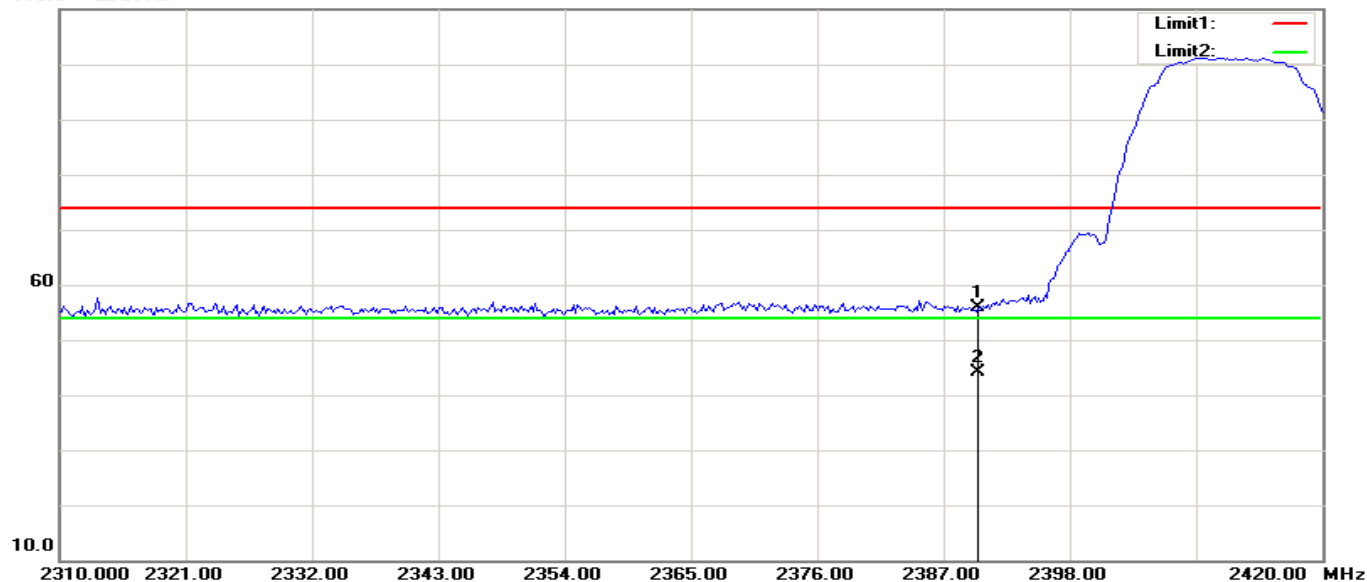

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.67	-12.69	55.98	74.00	-18.02	100	163	peak
2	2390.001	56.89	-12.69	44.20	54.00	-9.80	100	162	AVG




## RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

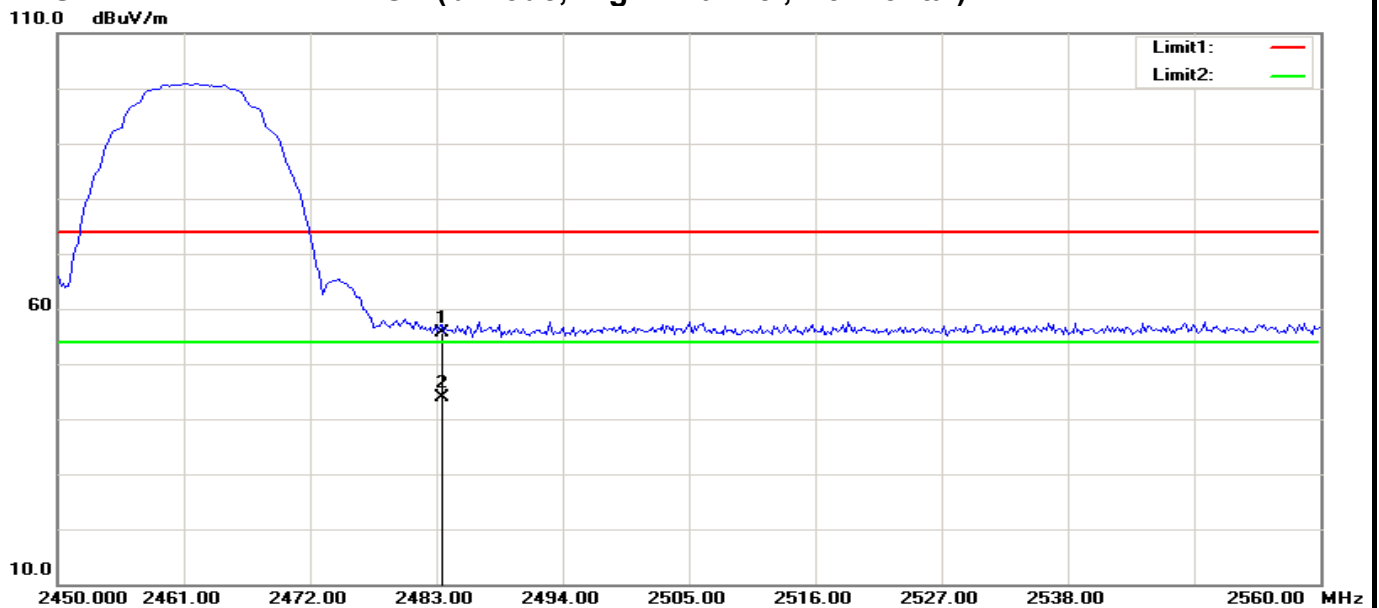

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	68.00	-12.27	55.73	74.00	-18.27	100	260	peak
2	2483.500	56.11	-12.27	43.84	54.00	-10.16	100	259	AVG

## RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

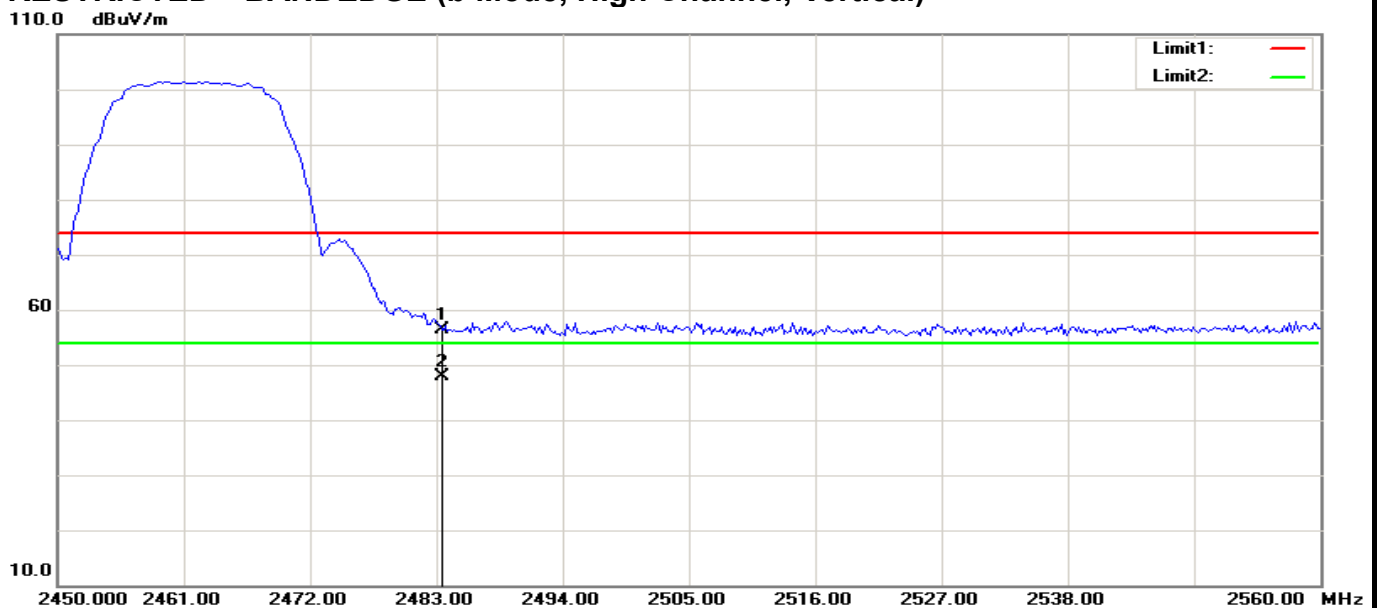


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	68.68	-12.27	56.41	74.00	-17.59	100	92	peak
2	2483.500	60.11	-12.27	47.84	54.00	-6.16	100	92	AVG



## RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)


110.0 dBuV/m

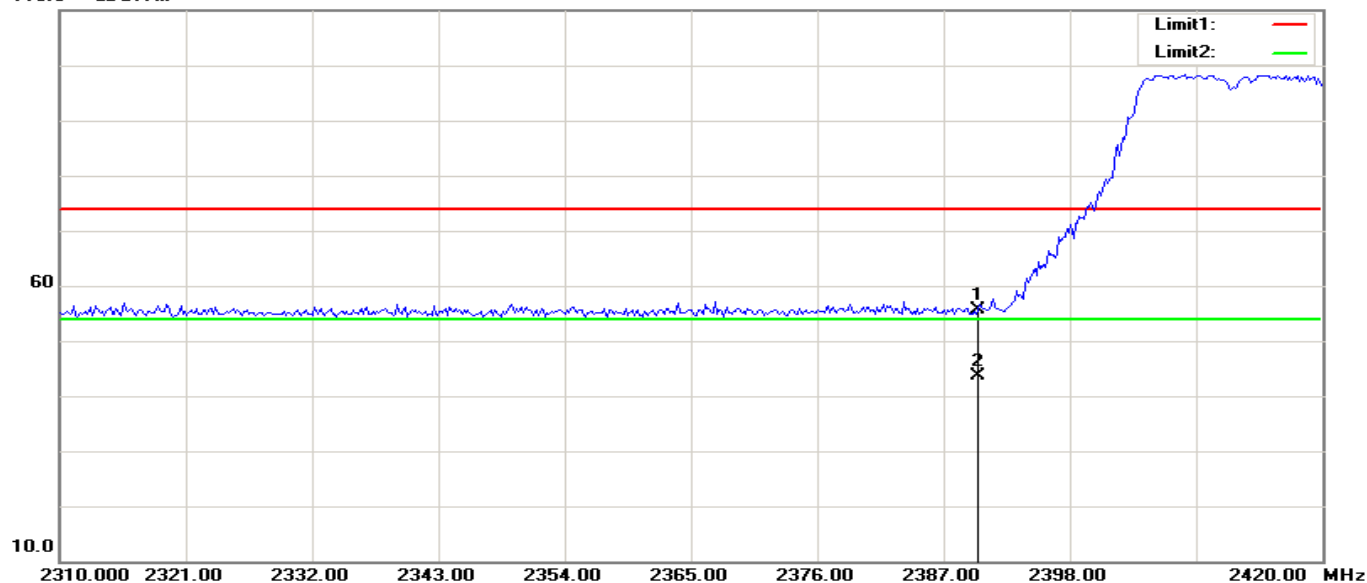

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.30	-12.69	55.61	74.00	-18.39	100	120	peak
2	2390.000	56.30	-12.69	43.61	54.00	-10.39	100	118	AVG

## RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)


110.0 dBuV/m

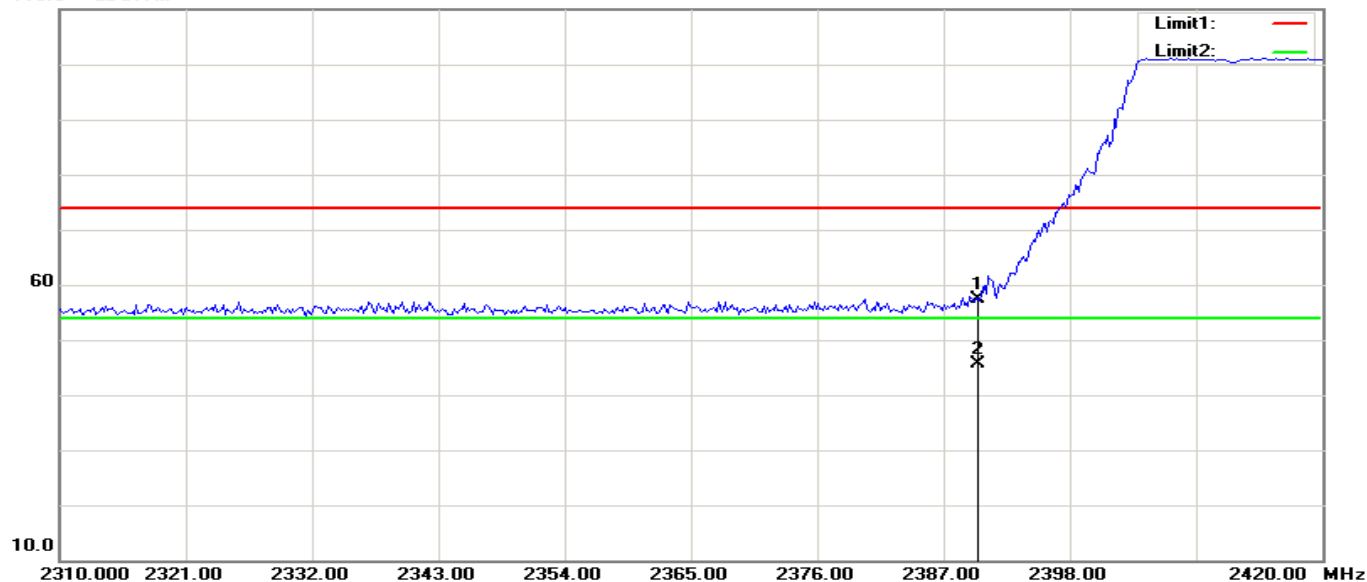

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	69.96	-12.69	57.27	74.00	-16.73	100	10	peak
2	2390.000	58.21	-12.69	45.52	54.00	-8.48	100	9	AVG




## RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

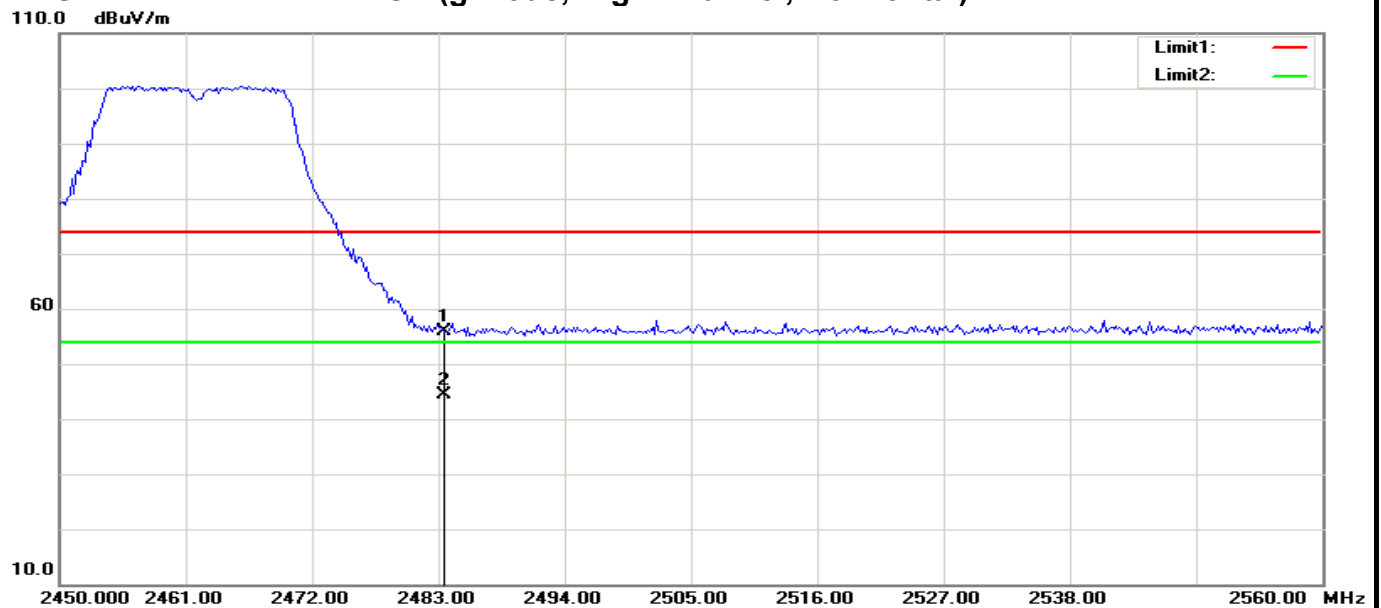

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	68.08	-12.27	55.81	74.00	-18.19	100	16	peak
2	2483.500	56.55	-12.27	44.28	54.00	-9.72	100	15	AVG


## RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

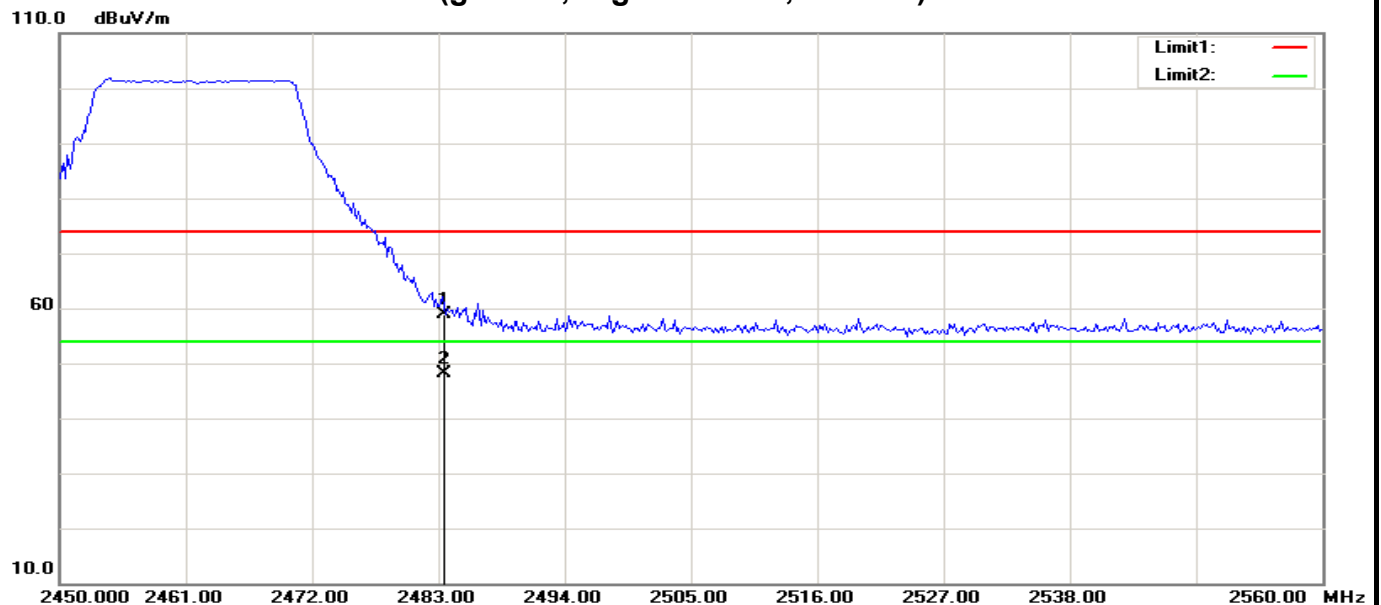

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	71.19	-12.27	58.92	74.00	-15.08	100	90	peak
2	2483.500	60.32	-12.27	48.05	54.00	-5.95	100	89	AVG




## RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, Horizontal)

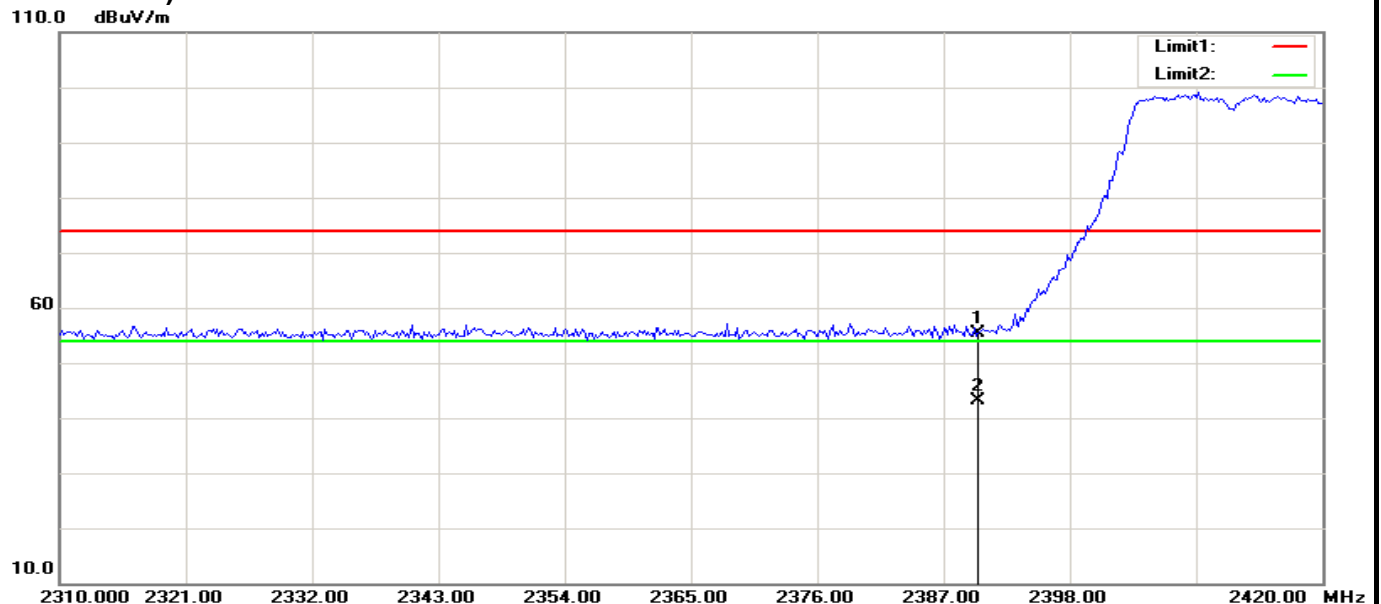

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.02	-12.69	55.33	74.00	-18.67	100	234	peak
2	2390.000	55.86	-12.69	43.17	54.00	-10.83	100	234	AVG

## RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, Vertical)

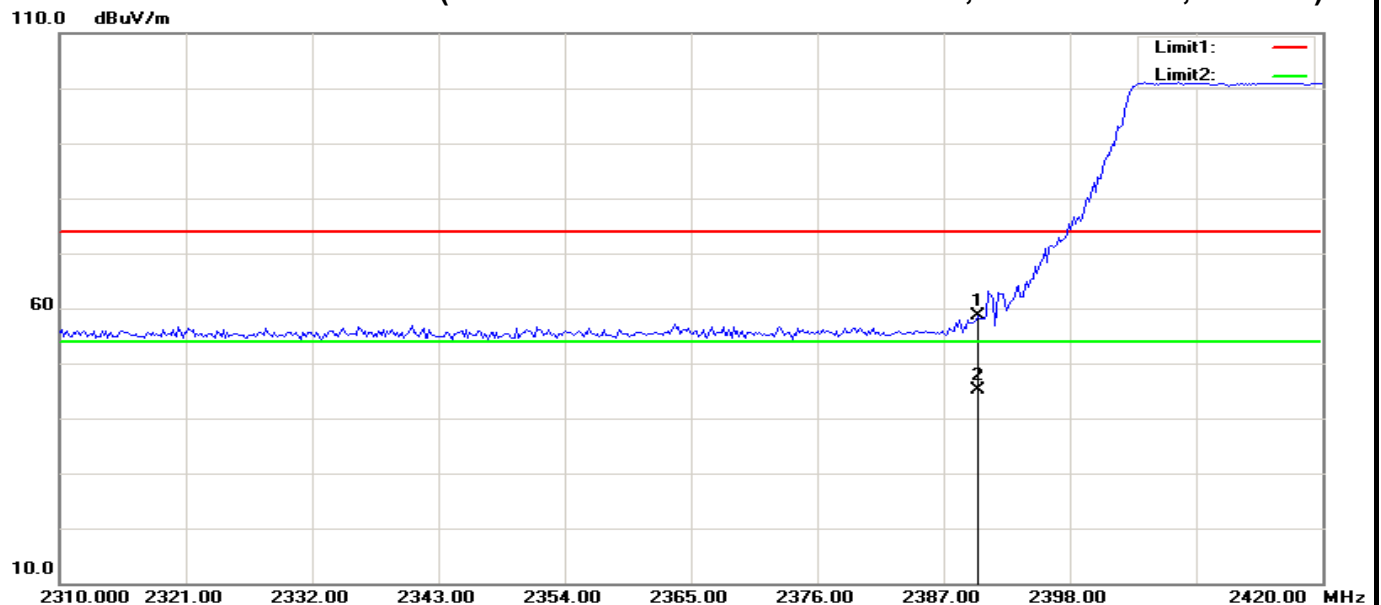


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	71.37	-12.69	58.68	74.00	-15.32	100	90	peak
2	2390.000	57.86	-12.69	45.17	54.00	-8.83	100	90	AVG



## RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, Horizontal)


110.0 dBuV/m

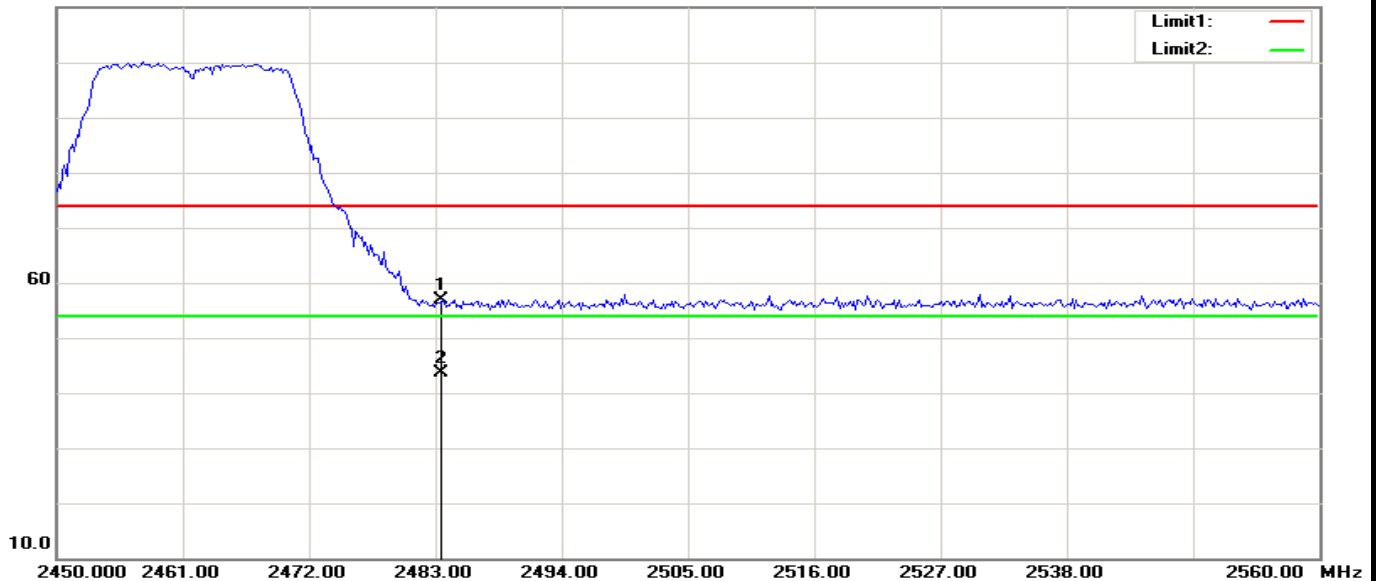

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	69.05	-12.27	56.78	74.00	-17.22	100	229	peak
2	2483.500	56.02	-12.27	43.75	54.00	-10.25	100	228	AVG

## RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, Vertical)

110.0 dBuV/m

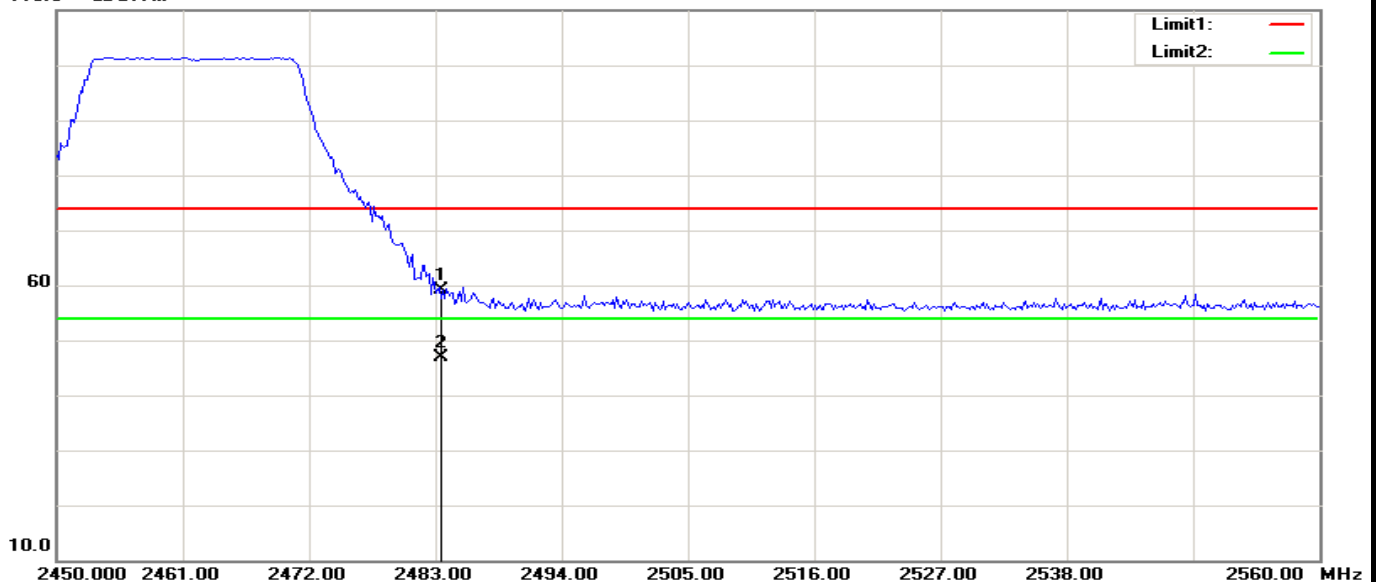

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	71.28	-12.27	59.01	74.00	-14.99	100	89	peak
2	2483.500	59.24	-12.27	46.97	54.00	-7.03	100	89	AVG





## Below 1GHz

**Operation Mode:** Keeping TX**Test Date:** 2015-01-13**Temperature:** 24°C**Tested by:** James.Yan**Humidity:** 48% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
101.7800	V	16.43	10.95	27.38	43.50	-16.12	Peak
186.1700	V	15.17	12.48	27.65	43.50	-15.85	Peak
445.1600	V	8.77	19.17	27.94	46.00	-18.06	Peak
691.5400	V	11.39	22.02	33.41	46.00	-12.59	Peak
815.7000	V	10.04	24.24	34.28	46.00	-11.72	Peak
901.0600	V	8.70	25.35	34.05	46.00	-11.95	Peak
108.5700	H	12.77	12.75	25.52	43.50	-17.98	Peak
206.5400	H	13.06	13.21	26.27	43.50	-17.23	Peak
408.3000	H	11.67	18.36	30.03	46.00	-15.97	Peak
581.9300	H	11.79	20.20	31.99	46.00	-14.01	Peak
779.8100	H	8.71	23.77	32.48	46.00	-13.52	Peak
892.3300	H	7.86	25.00	32.86	46.00	-13.14	Peak

### Remark:

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4.  $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$ .



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

## Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	54.07	-7.20	46.87	74.00	-27.13	100	36	peak
2	7129.808	47.70	0.17	47.87	74.00	-26.13	100	287	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	58.70	-7.20	51.50	74.00	-22.50	100	192	peak
2	9145.833	47.23	2.19	49.42	74.00	-24.58	100	251	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4875.235	53.09	-6.57	47.33	74.00	-26.67	100	243	peak
2	7523.226	45.84	1.47	47.31	74.00	-26.69	100	180	peak
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4875.185	51.37	-6.54	44.83	74.00	-29.17	100	206	peak
2	7639.418	44.52	1.46	45.98	74.00	-28.02	100	0	peak
N/A									



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	56.97	-6.80	50.17	74.00	-23.83	100	142	peak
2	7102.564	47.44	0.16	47.60	74.00	-26.40	100	229	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	60.85	-6.80	54.05	74.00	-19.95	100	119	peak
2	7375.000	49.10	0.24	49.34	74.00	-24.66	100	295	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	50.31	-7.20	43.11	74.00	-30.89	100	145	peak
2	7565.705	47.72	0.48	48.20	74.00	-25.80	100	26	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	53.73	-7.20	46.53	74.00	-27.47	100	175	peak
2	7783.654	46.91	1.17	48.08	74.00	-25.92	100	247	peak
N/A									



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4873.552	53.25	-6.57	48.68	74.00	-27.32	100	232	peak
2	7182.354	44.80	0.46	45.26	74.00	-28.74	100	256	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4875.386	52.03	-6.54	45.49	74.00	-28.51	100	207	peak
2	7746.339	45.33	1.50	46.83	74.00	-7.17	100	231	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: 2015-01-13

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	52.58	-6.80	45.78	74.00	-28.22	100	142	peak
2	7783.654	47.03	1.17	48.20	74.00	-25.80	100	244	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	55.67	-6.80	48.87	74.00	-25.13	100	120	peak
2	7974.359	47.10	1.77	48.87	74.00	-25.13	100	27	peak
N/A									



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Low**Test Date:** 2015-01-13**Temperature:** 24°C**Tested by:** James.Yan**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	49.25	-7.20	42.05	74.00	-31.95	100	144	peak
2	7048.077	47.55	0.14	47.69	74.00	-26.31	100	250	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	53.85	-7.20	46.65	74.00	-27.35	100	170	peak
2	7347.756	47.46	0.23	47.69	74.00	-26.31	100	268	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Mid**Test Date:** 2015-01-13**Temperature:** 24°C**Tested by:** James.Yan**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4874.058	53.09	-6.57	46.52	74.00	-27.48	100	232	peak
2	7752.216	45.92	1.51	47.43	74.00	-26.57	100	252	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4874.082	51.20	-6.53	44.67	74.00	-29.33	100	174	peak
2	7821.584	44.91	1.82	46.73	74.00	-27.27	100	168	peak
N/A									



# Compliance Certification Services Inc.

Report No: C150105R02-RPW

FCC ID: 2ADUY1412D7BE

Date of Issue : January 15, 2015

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2015-01-13

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	52.30	-6.80	45.50	74.00	-28.50	100	148	peak
2	7102.564	47.79	0.16	47.95	74.00	-26.05	100	101	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	56.57	-6.80	49.77	74.00	-24.23	100	119	peak
2	7701.923	45.67	0.91	46.58	74.00	-27.42	100	141	peak
N/A									



## 7.6.POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data



# Compliance Certification Services Inc.


Report No: C141029R03-RPW

FCC ID: 2ADI4H-918AW

Date of Issue : December 8, 2014

Job No.: C150105R02  
Model: SM001  
Standard: FCC Class B  
Test item: Conduction test  
Line: L1  
Model:

Date: 2015-01-13  
Time: 9:08:29  
Temp.(C)/Hum.(%): 22(C)/48%  
Test By: James.Yan  
Test Voltage: AC 120V/60Hz  
Description:

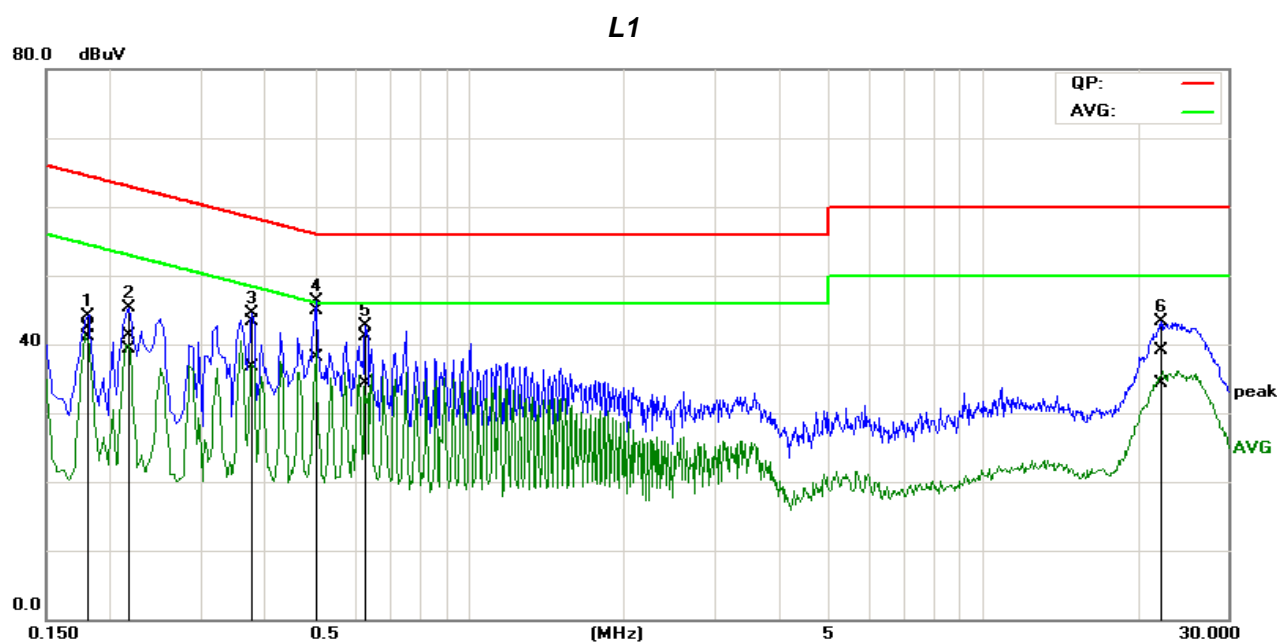

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1787	22.68	21.40	19.69	42.37	41.09	64.55	54.55	-22.18	-13.46	Pass
2	0.2173	21.66	19.68	19.61	41.27	39.29	62.92	52.92	-21.65	-13.63	Pass
3	0.3781	23.52	17.05	19.74	43.26	36.79	58.32	48.32	-15.06	-11.53	Pass
4	0.5024	25.10	18.36	19.83	44.93	38.19	56.00	46.00	-11.07	-7.81	Pass
5	0.6286	21.25	14.53	19.83	41.08	34.36	56.00	46.00	-14.92	-11.64	Pass
6	22.246	17.92	13.15	21.16	39.08	34.31	60.00	50.00	-20.92	-15.69	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).





# Compliance Certification Services Inc.


Report No: C141029R03-RPW

FCC ID: 2ADI4H-918AW

Date of Issue : December 8, 2014

Job No.: C150105R02  
Model: SM001  
Standard: FCC Class B  
Test item: Conduction test  
Line: L2  
Model:

Date: 2015-01-13  
Time: 9:14:51  
Temp.(C)/Hum.(%): 22(C)/48%  
Test By: James.Yan  
Test Voltage: AC 120V/60Hz  
Description:

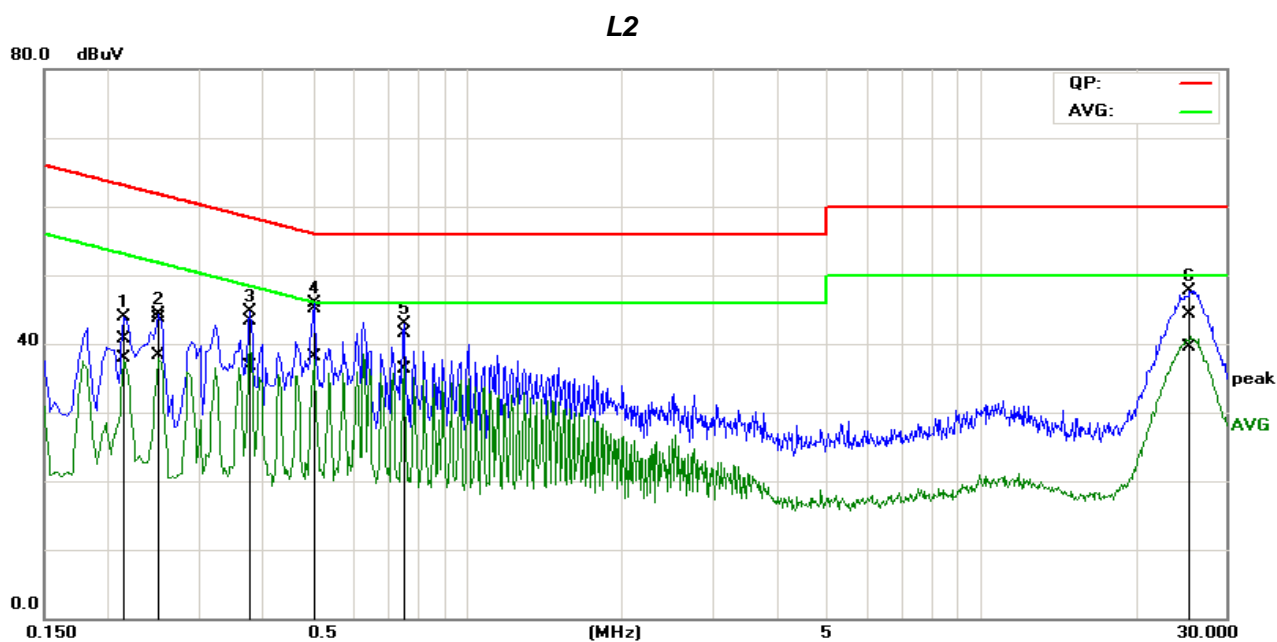

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remarks
1*	0.2150	21.08	18.20	19.65	40.73	37.85	63.01	53.01	-22.28	-15.16	Pass
2	0.2517	24.02	18.65	19.68	43.70	38.33	61.70	51.70	-18.00	-13.37	Pass
3	0.3778	23.45	17.02	19.76	43.21	36.78	58.33	48.33	-15.12	-11.55	Pass
4	0.5030	25.18	18.16	19.85	45.03	38.01	56.00	46.00	-10.97	-7.99	Pass
5	0.7549	21.64	16.38	19.83	41.47	36.21	56.00	46.00	-14.53	-9.79	Pass
6	25.585	23.04	18.27	21.23	44.27	39.50	60.00	50.00	-15.73	-10.50	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).