

TEST REPORT

FCC ID: 2ADYY-BD04**Product: TWS Earphone****Model No.: BD04****Trade Mark: TECNO****Report No.: WSCT-ANAB-R&E240800041A-BT****Issued Date: 05 September 2024****Issued for:****TECNO MOBILE LIMITED****FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET, FOTAN NT HONGKONG****Issued By:****World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen, Guangdong, China.****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	7
5. Facilities and Accreditations	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS	8
5.3. MEASUREMENT UNCERTAINTY	9
5.4. MEASUREMENT INSTRUMENTS	10
6. Test Results and Measurement Data	11
6.1. ANTENNA REQUIREMENT	11
6.2. CONDUCTED EMISSION	12
6.3. CONDUCTED OUTPUT POWER	14
6.4. 20dB OCCUPY BANDWIDTH	21
6.5. CARRIER FREQUENCIES SEPARATION	28
6.6. HOPPING CHANNEL NUMBER	35
6.7. DWELL TIME.....	38
6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	49
6.9. CONDUCTED BAND EDGE MEASUREMENT	50
6.10. RADIATED SPURIOUS EMISSION MEASUREMENT	65
7. Test Setup Photographs	76

Report No.: WSCT-ANAB-R&E240800041A-BT

1. Test Certification

Product:	TWS Earphone
Model No.:	BD04
Additional Model:	TECNO
Applicant:	TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	15 August 2024
Date of Test:	16 August 2024 ~ 04 September 2024
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

05 September 2024

Report No.: WSCT-ANAB-R&E240800041A-BT

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	N/A
Maximum conducted output power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1053, §2.1057	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

Report No.: WSCT-ANAB-R&E240800041A-BT

3. EUT Description

Product Name:	TWS Earphone
Model :	BD04
Trade Mark:	TECNO
Software version:	1.0.0
Hardware version:	V1
Operation Frequency:	2402MHz~2480MHz
Channel Separation:	1MHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Chip Antenna
Antenna Gain:	2.36dBi
Operating Voltage:	Li-ion Polymer Battery: 451012 Voltage: 3.7V Rated Capacity: 37mAh/0.1369Wh Charging Box: 851448 Input: 5V---1A output: 5.0V---0.12A Capacity: 500mAh/3.7V/1.85Wh
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. Antenna gain provided by the customer.

Report No.: WSCT-ANAB-R&E240800041A-BT

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
...	...	...	...	...	...	...	...
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
...	...	...	...	...	...	...	...
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	-	-

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.

Report No.: WSCT-ANAB-R&E240800041A-BT

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery
The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: WSCT-ANAB-R&E240800041A-BT

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen, Guangdong, China.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group (Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Designation Number: CN1303.

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

Report No.: WSCT-ANAB-R&E240800041A-BT

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Duty Cycle and Tx-Sequence and Tx-Gap	$\pm 1\%$
2	Dwell Time and Minimum Frequency Occupation	$\pm 1.2\%$
3	Medium Utilisation Factor	$\pm 1.3\%$
4	Occupied Channel Bandwidth	$\pm 2.4\%$
5	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
6	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
7	Receiver Spurious Emissions	$\pm 2.5\%$
8	Conducted Emission Test	$\pm 3.2\text{dB}$
9	RF power, conducted	$\pm 0.16\text{dB}$
10	Spurious emissions, conducted	$\pm 0.21\text{dB}$
11	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
12	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
13	Temperature	$\pm 0.5^{\circ}\text{C}$
14	Humidity	$\pm 2.0\%$

Report No.: WSCT-ANAB-R&E240800041A-BT

5.4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	-	EZ-EMC	CON-03A	-	-
Test software	-	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2023	11/04/2024
LISN	AFJ	LS16	16010222119	11/05/2023	11/04/2024
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2023	11/04/2024
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2023	11/04/2024
Coaxial cable	Megalon	LMR400	N/A	11/05/2023	11/04/2024
GPIO cable	Megalon	GPIO	N/A	11/05/2023	11/04/2024
Spectrum Analyzer	R&S	FSU	100114	11/05/2023	11/04/2024
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2023	11/04/2024
Pre-Amplifier	CDSI	PAP-1G18-38	-	11/05/2023	11/04/2024
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2024	7/28/2025
9*6*6 Anechoic	-	-	-	11/05/2023	11/04/2024
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	-	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2023	11/04/2024
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2023	11/04/2024
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2023	11/04/2024
Loop Antenna	EMCO	6502	00042960	11/05/2023	11/04/2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2023	11/04/2024
Power meter	Anritsu	ML2487A	6K00003613	11/05/2023	11/04/2024
Power sensor	Anritsu	MX248XD	-	11/05/2023	11/04/2024
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2023	11/04/2024

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The Bluetooth antenna is a Chip Antenna. it meets the standards, and the best case gain of the antenna is 2.36dBi.	

Report No.: WSCT-ANAB-R&E240800041A-BT

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Refer to item 4.1														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement.														
Test Result:	N/A														

Report No.: WSCT-ANAB-R&E240800041A-BT

6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test data

Note: EUT powered by battery not applicable

6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2014
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured $VBW \geq RBW$ Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

6.3.2. Test Data

GFSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	6.14	21	PASS
Middle	6.61	21	PASS
Highest	6.12	21	PASS

Pi/4DQPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	6.76	21	PASS
Middle	7.6	21	PASS
Highest	7.12	21	PASS


8DPSK mode			
Test channel	Maximum conducted output power (dBm)	Limit (dBm)	Result
Lowest	6.02	21	PASS
Middle	6.76	21	PASS
Highest	6.29	21	PASS

Test plots as follows:

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

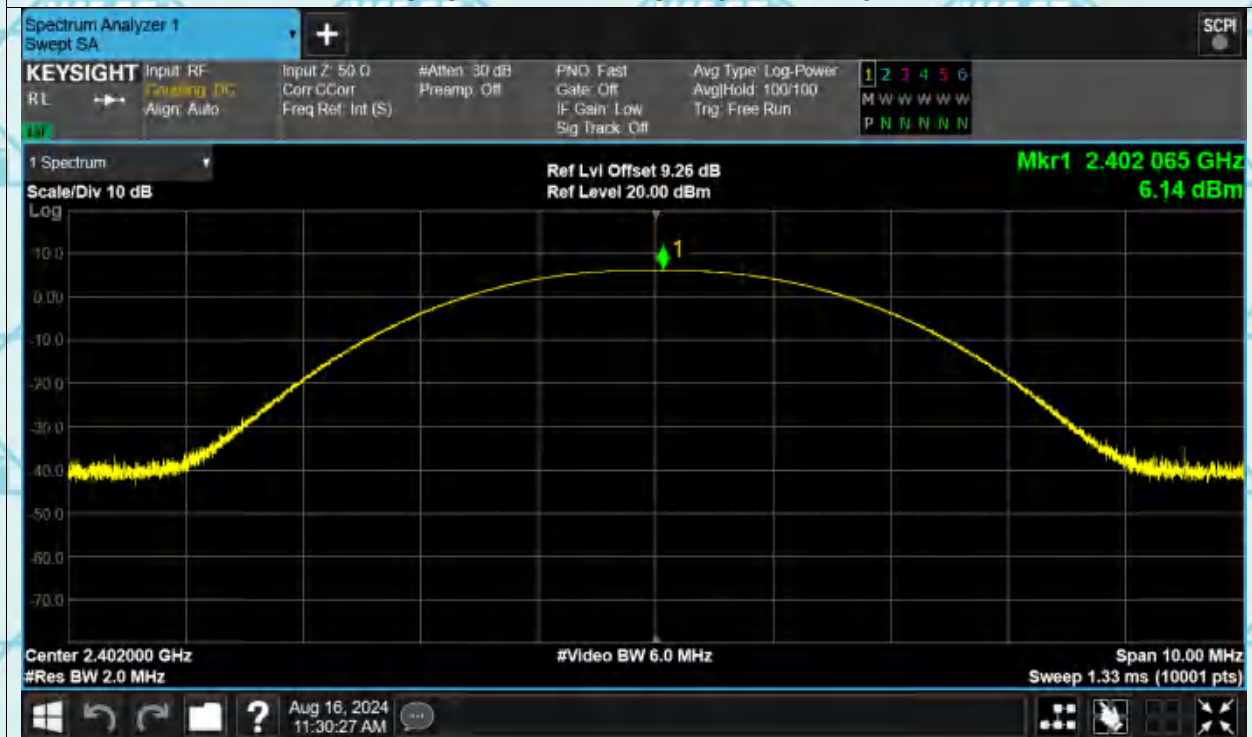

Power NVNT 1-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

Power NVNT 1-DH5 2480MHz Ant1




Power NVNT 2-DH5 2402MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

Power NVNT 2-DH5 2441MHz Ant1

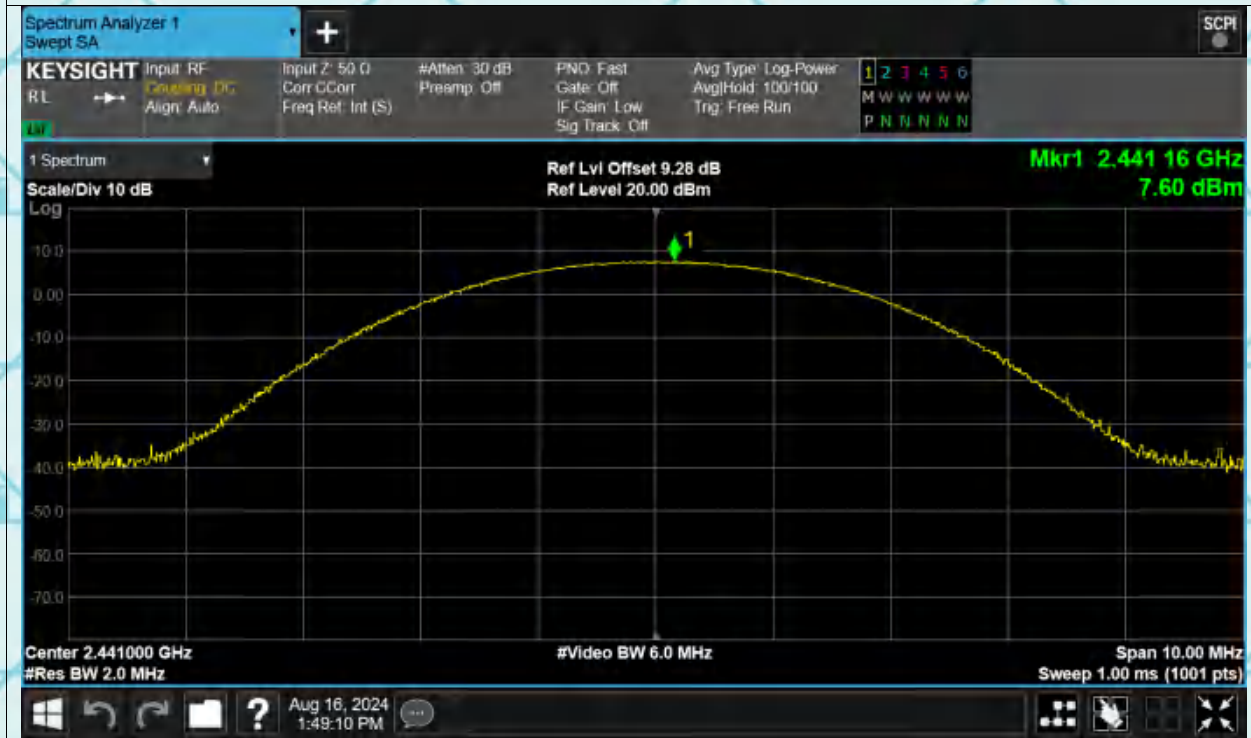

Power NVNT 2-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

Power NVNT 3-DH5 2402MHz Ant1



Power NVNT 3-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

Power NVNT 3-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	N/A
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

6.4.2. Test data

Test channel	20dB Occupy Bandwidth (MHz)			
	GFSK	$\pi/4$ -DQPSK	8DPSK	Conclusion
Lowest	1.032	1.307	1.292	PASS
Middle	1	1.312	1.315	PASS
Highest	1.016	1.301	1.277	PASS

Test plots as follows:

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

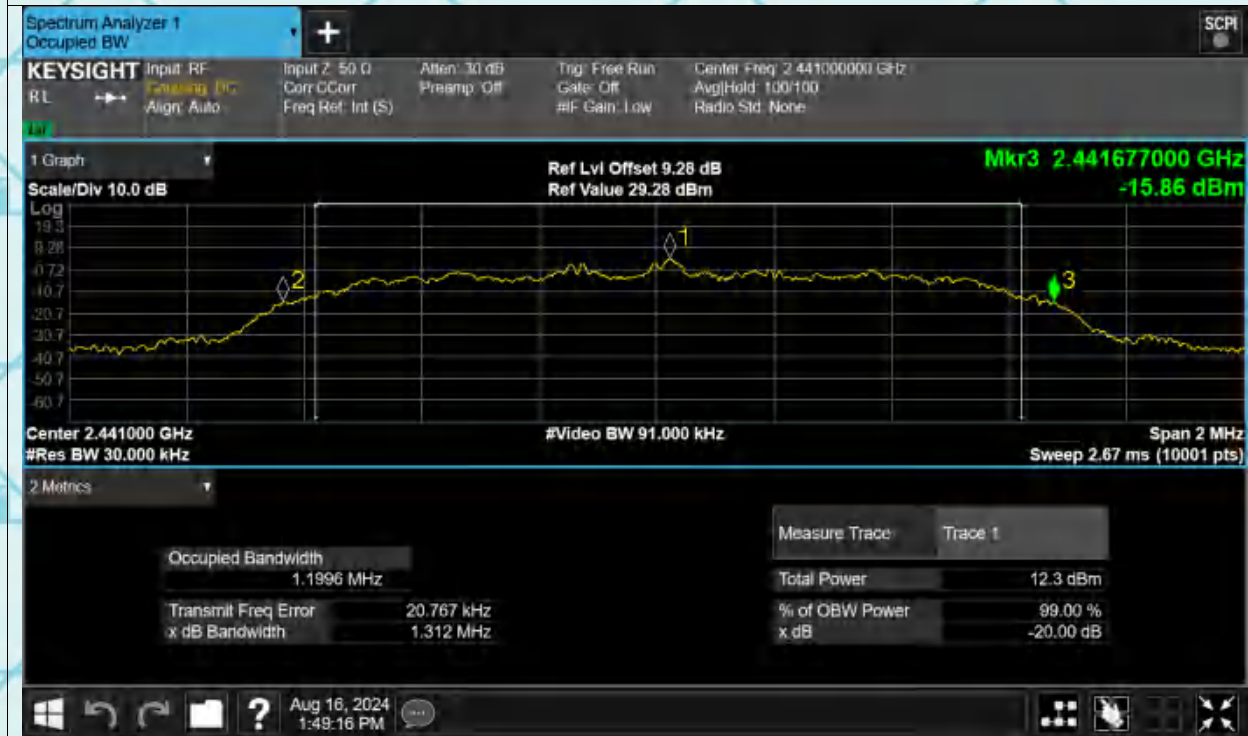

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1



Report No.: WSCT-ANAB-R&E240800041A-BT


-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

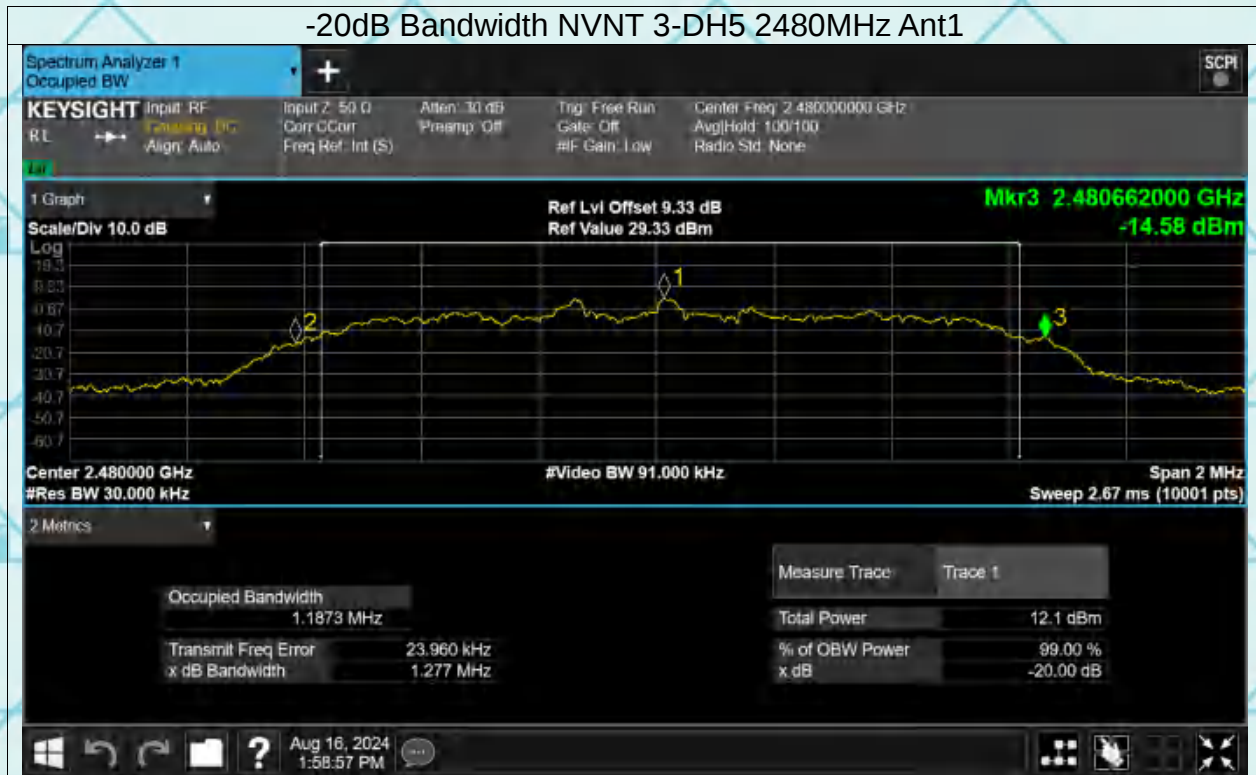

Report No.: WSCT-ANAB-R&E240800041A-BT

6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

6.5.2. Test data

GFSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	0.996	0.688	PASS
Middle	1.006	0.667	PASS
Highest	1	0.677	PASS

Pi/4 DQPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	0.996	0.871	PASS
Middle	0.998	0.875	PASS
Highest	1.002	0.867	PASS


8DPSK mode			
Test channel	Carrier Frequencies Separation (MHz)	Limit (2/3*20dB BW MHz)	Result
Lowest	0.998	0.861	PASS
Middle	1.008	0.877	PASS
Highest	0.928	0.851	PASS

Test plots as follows:

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

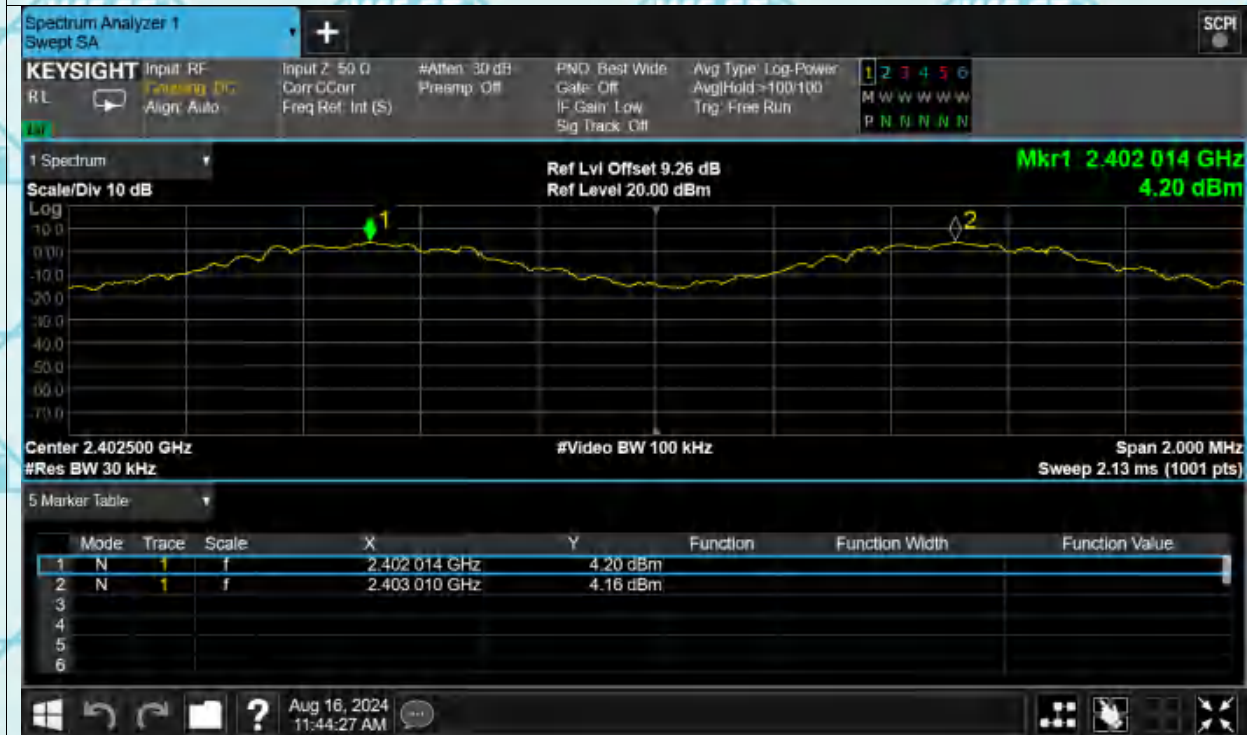


CFS NVNT 1-DH5 2441MHz Ant1




Report No.: WSCT-ANAB-R&E240800041A-BT

CFS NVNT 1-DH5 2480MHz Ant1

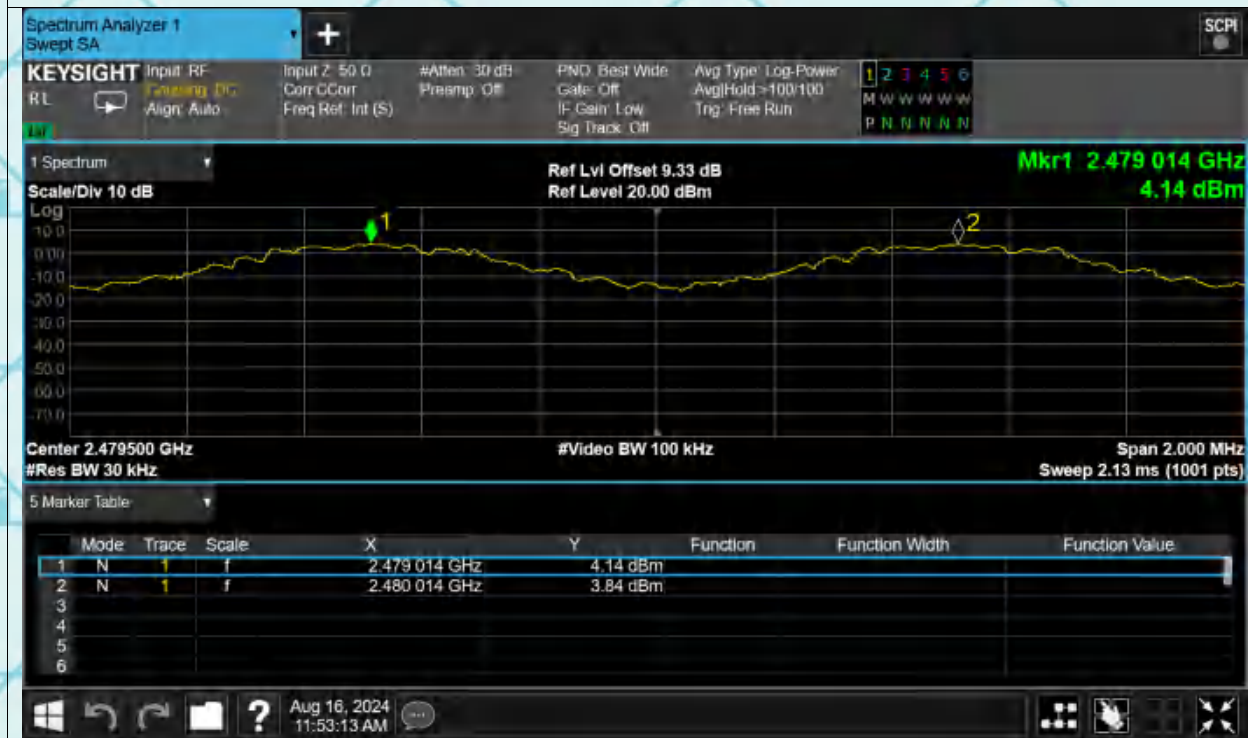


CFS NVNT 2-DH5 2402MHz Ant1

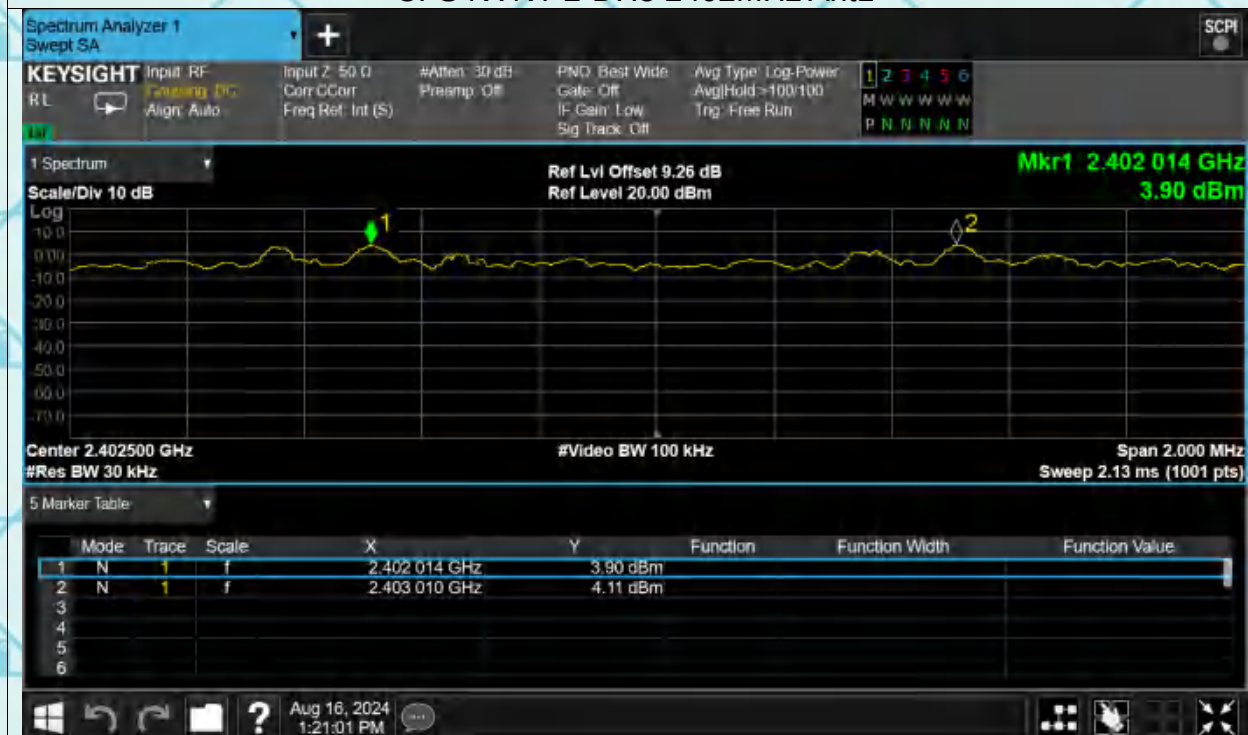


Report No.: WSCT-ANAB-R&E240800041A-BT

CFS NVNT 2-DH5 2441MHz Ant1

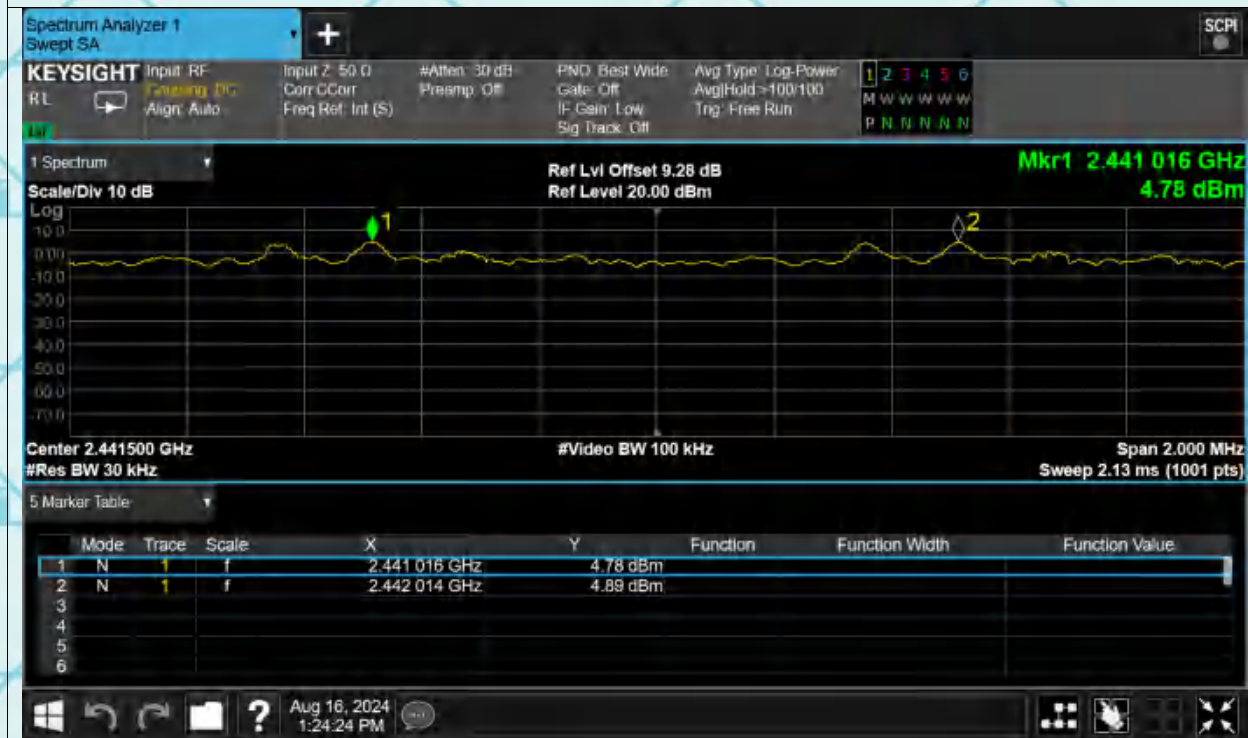


CFS NVNT 2-DH5 2480MHz Ant1

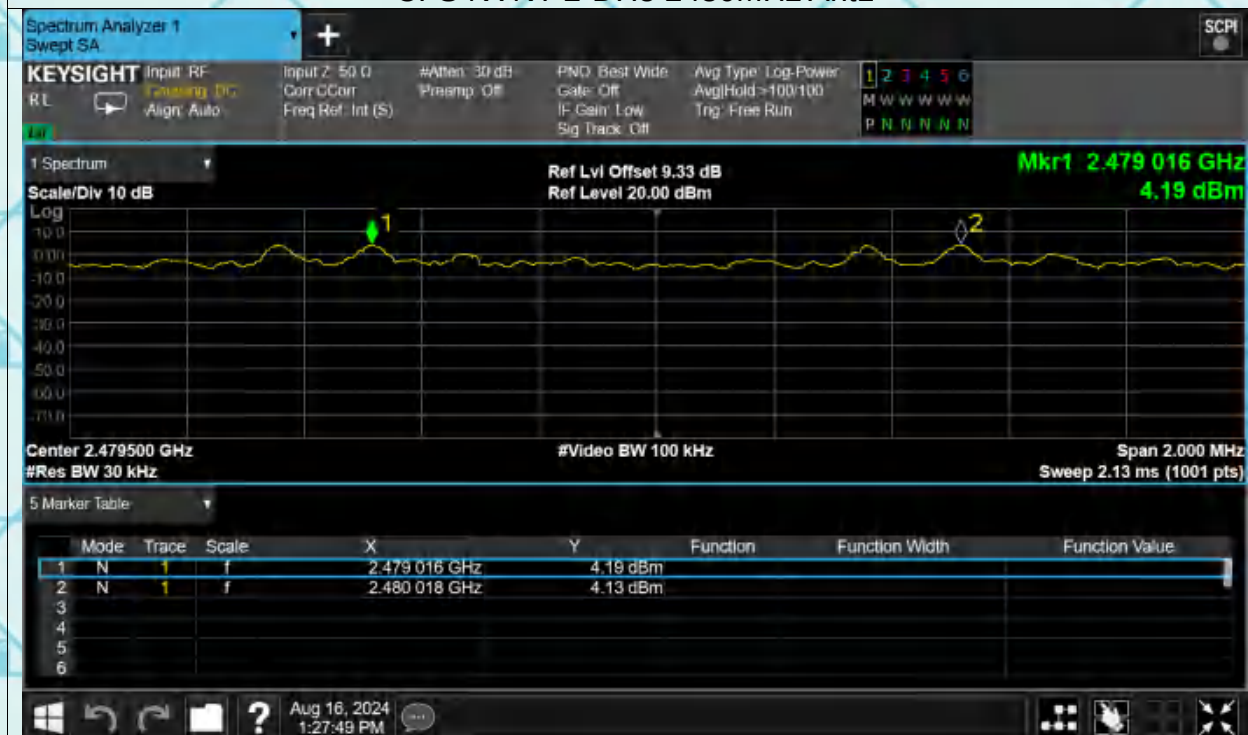


Report No.: WSCT-ANAB-R&E240800041A-BT

CFS NVNT 3-DH5 2402MHz Ant1

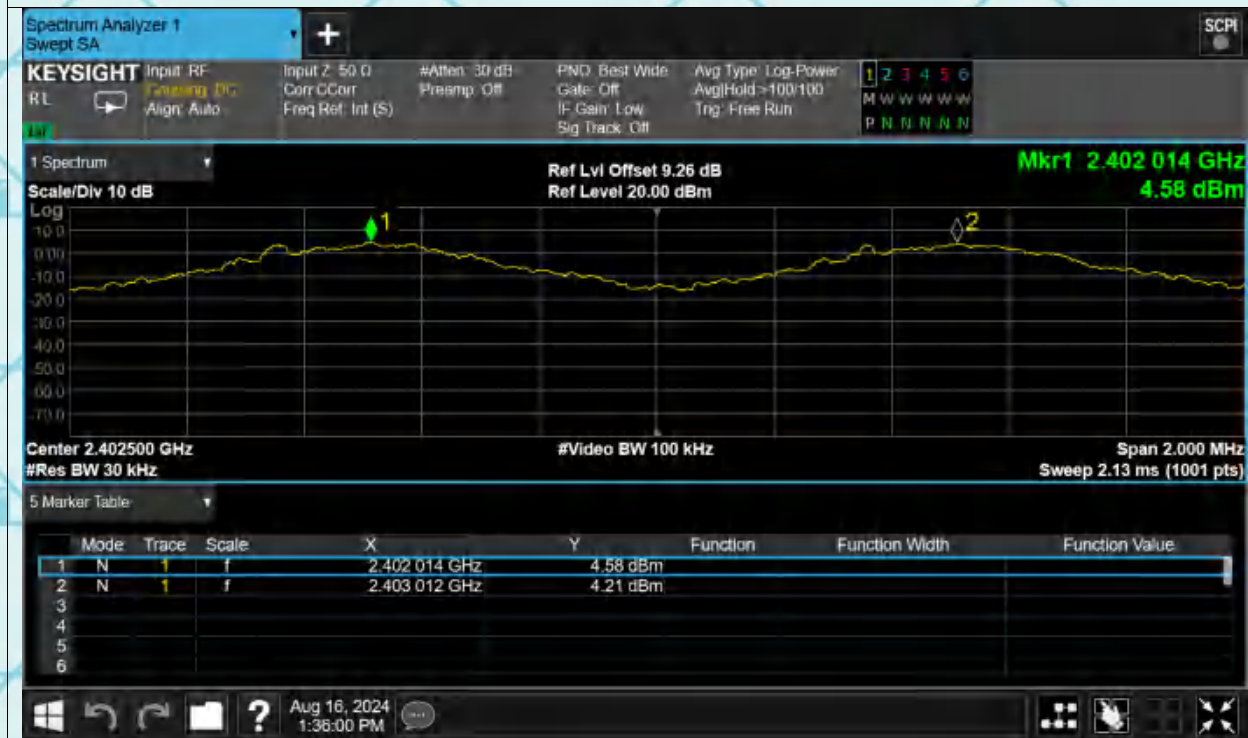


CFS NVNT 3-DH5 2441MHz Ant1

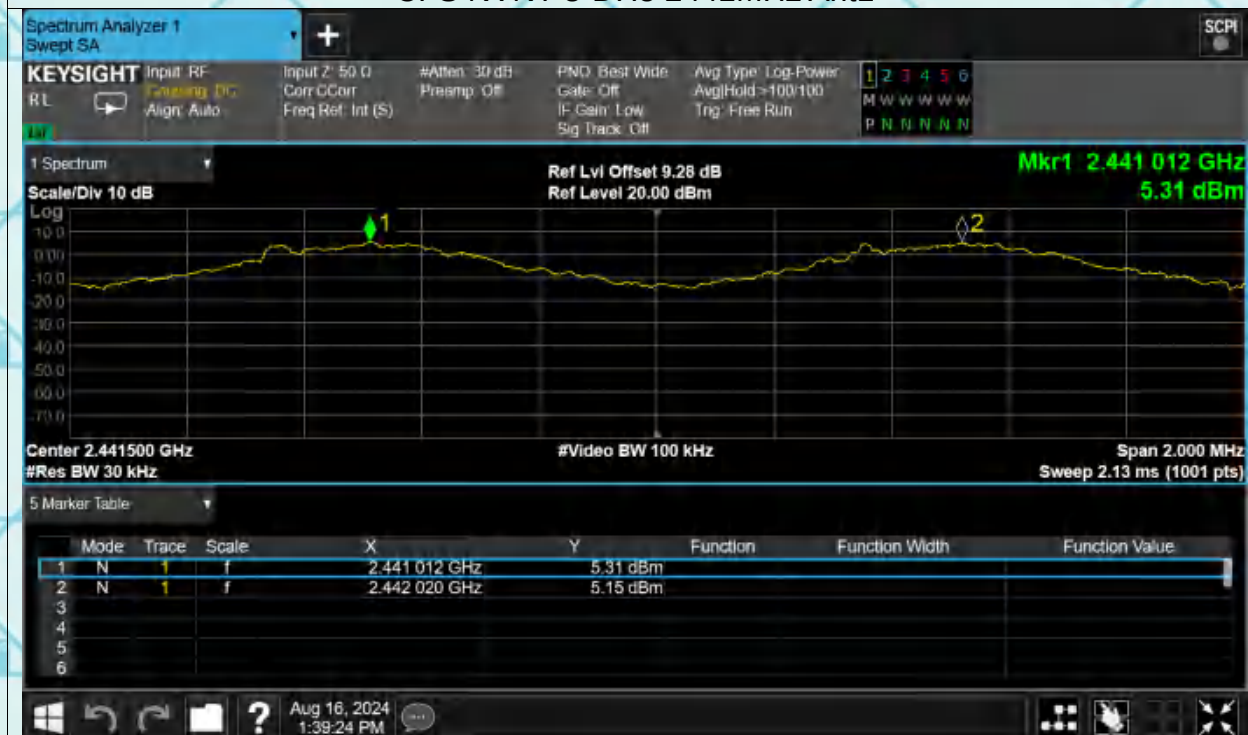


Report No.: WSCT-ANAB-R&E240800041A-BT

CFS NVNT 3-DH5 2480MHz Ant1

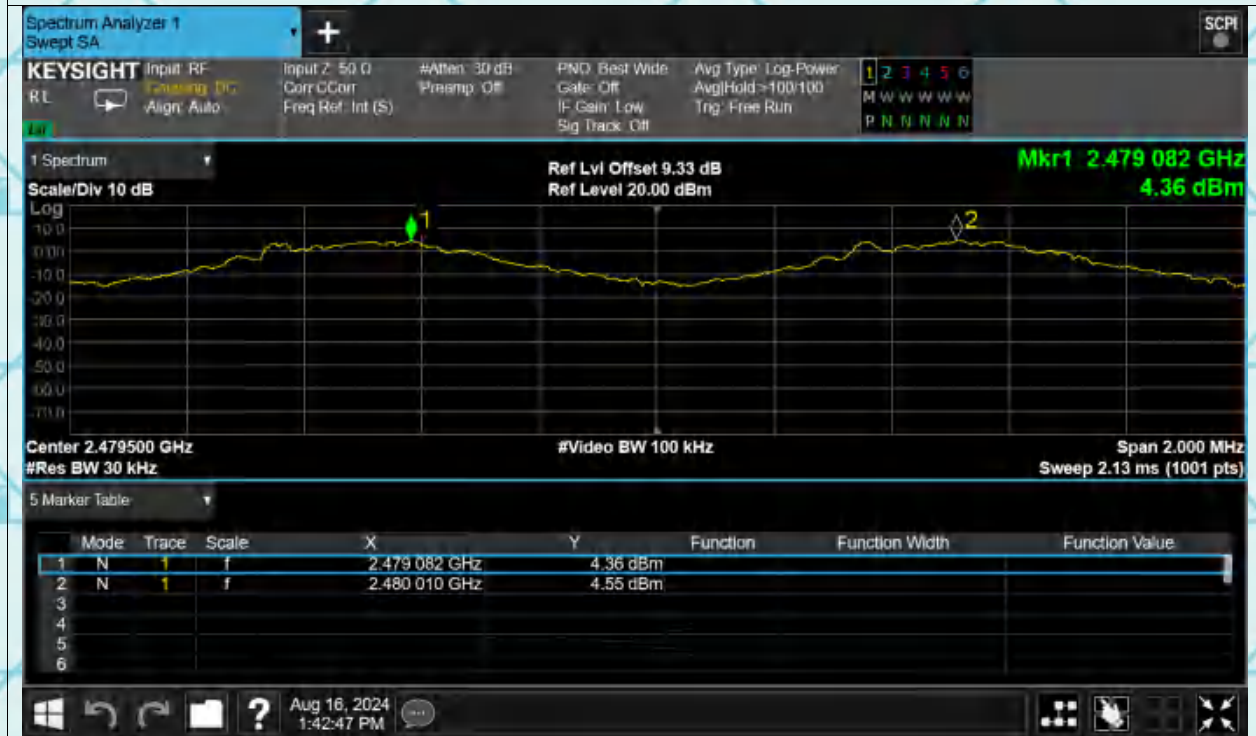

6.6. Hopping Channel Number

6.6.1. Test Specification



Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

6.6.2. Test data


Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK, 8DPSK	79	15	PASS

Test plots as follows:

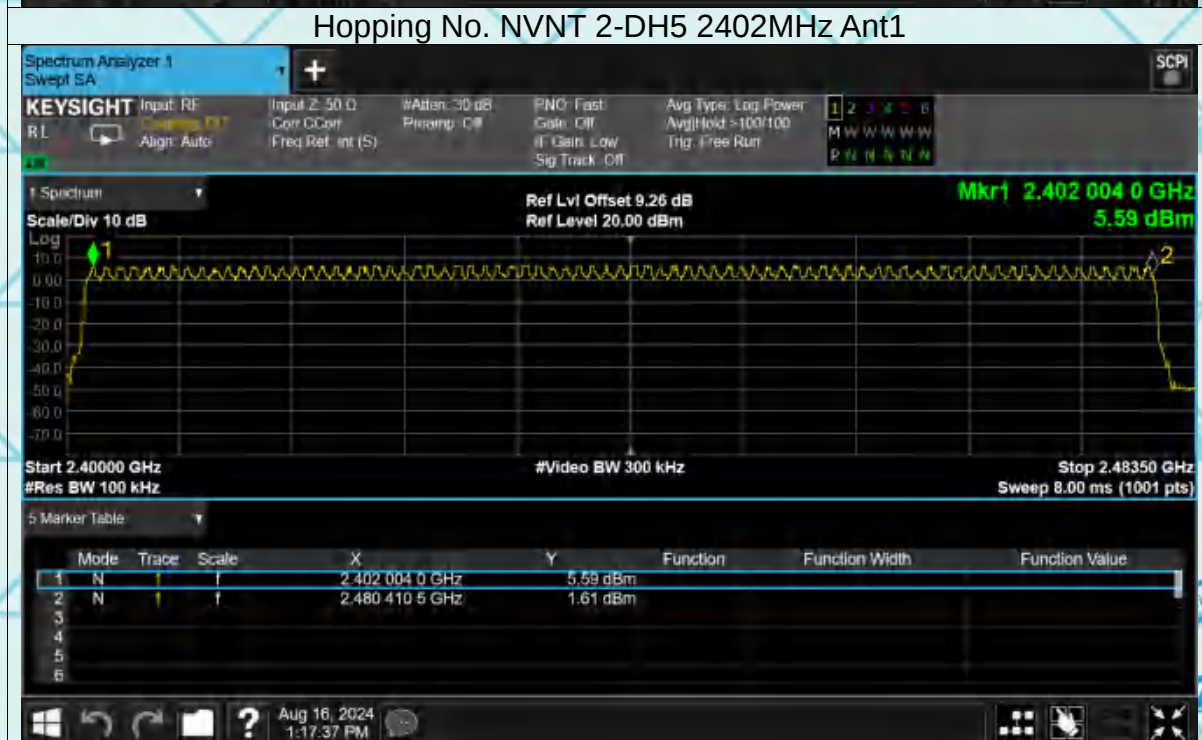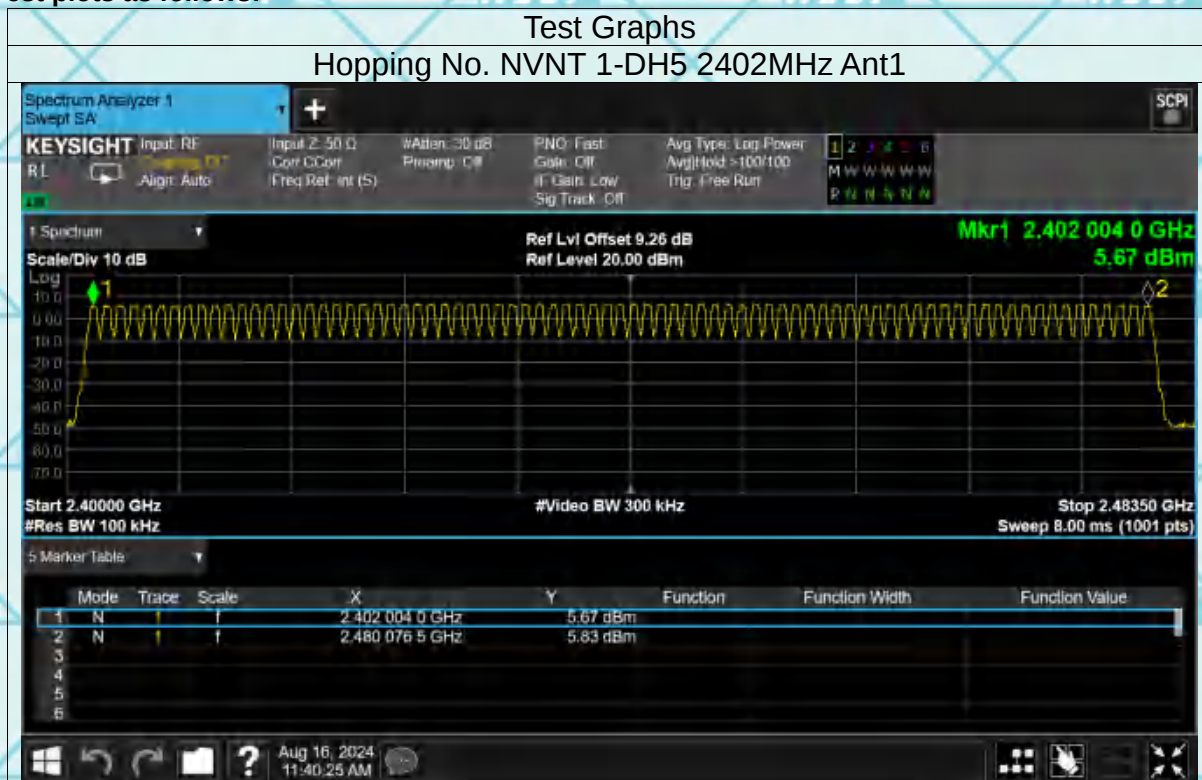

Report No.: WSCT-ANAB-R&E240800041A-BT

Hopping No. NVNT 3-DH5 2402MHz Ant1

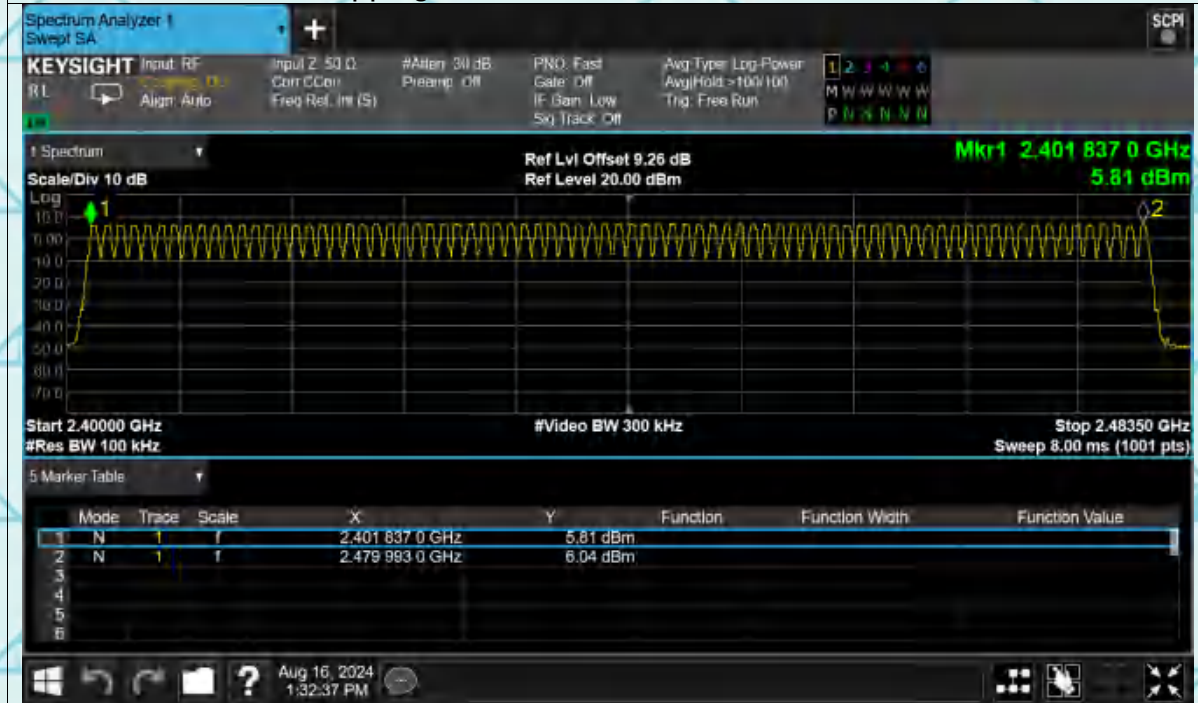

Report No.: WSCT-ANAB-R&E240800041A-BT

6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2014
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

6.7.2. Test Data

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2402	0.383	121.411	317	31600	400	Pass
1-DH1	2441	0.383	121.794	318	31600	400	Pass
1-DH1	2480	0.382	121.858	319	31600	400	Pass
1-DH3	2402	1.639	258.962	158	31600	400	Pass
1-DH3	2441	1.639	252.406	154	31600	400	Pass
1-DH3	2480	1.639	255.684	156	31600	400	Pass
1-DH5	2402	2.887	326.231	113	31600	400	Pass
1-DH5	2441	2.887	297.361	103	31600	400	Pass
1-DH5	2480	2.886	271.284	94	31600	400	Pass

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops

For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Graphs

Dwell NVNT 1-DH1 2402MHz Ant1 One Burst



Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst




Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH1 2480MHz Ant1 One Burst

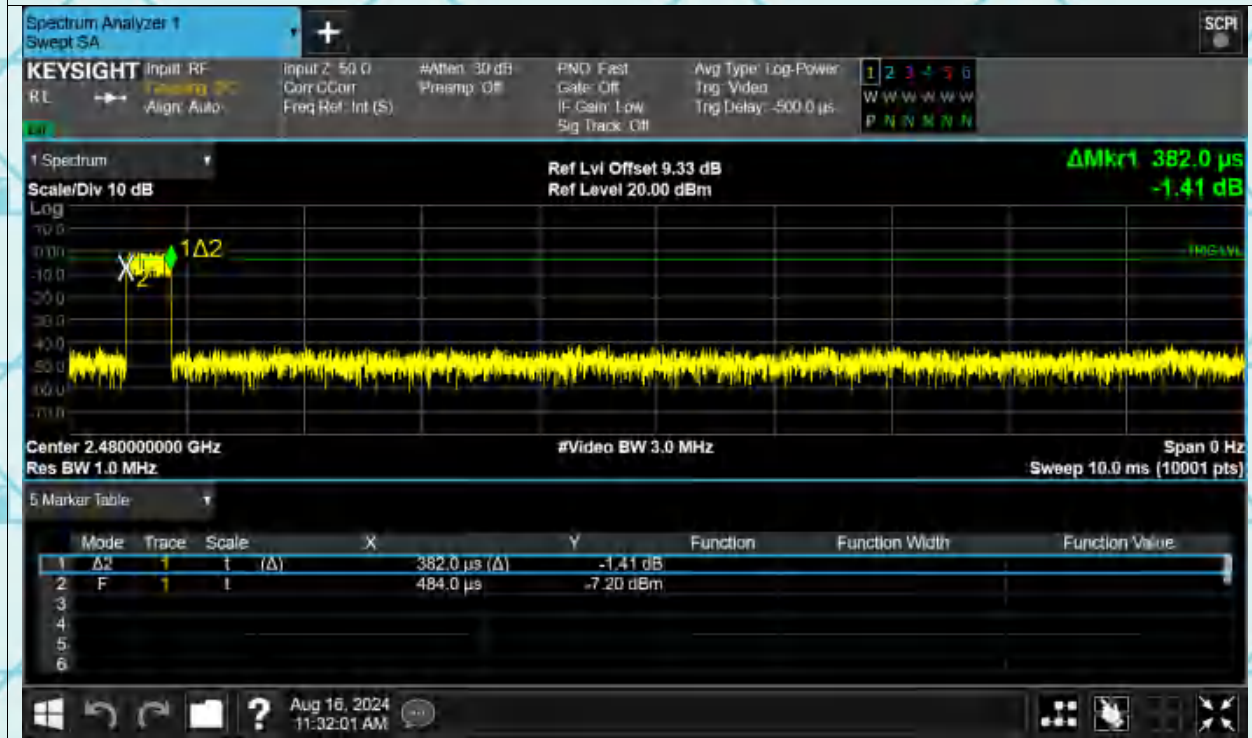

Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH3 2402MHz Ant1 One Burst



Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated




Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

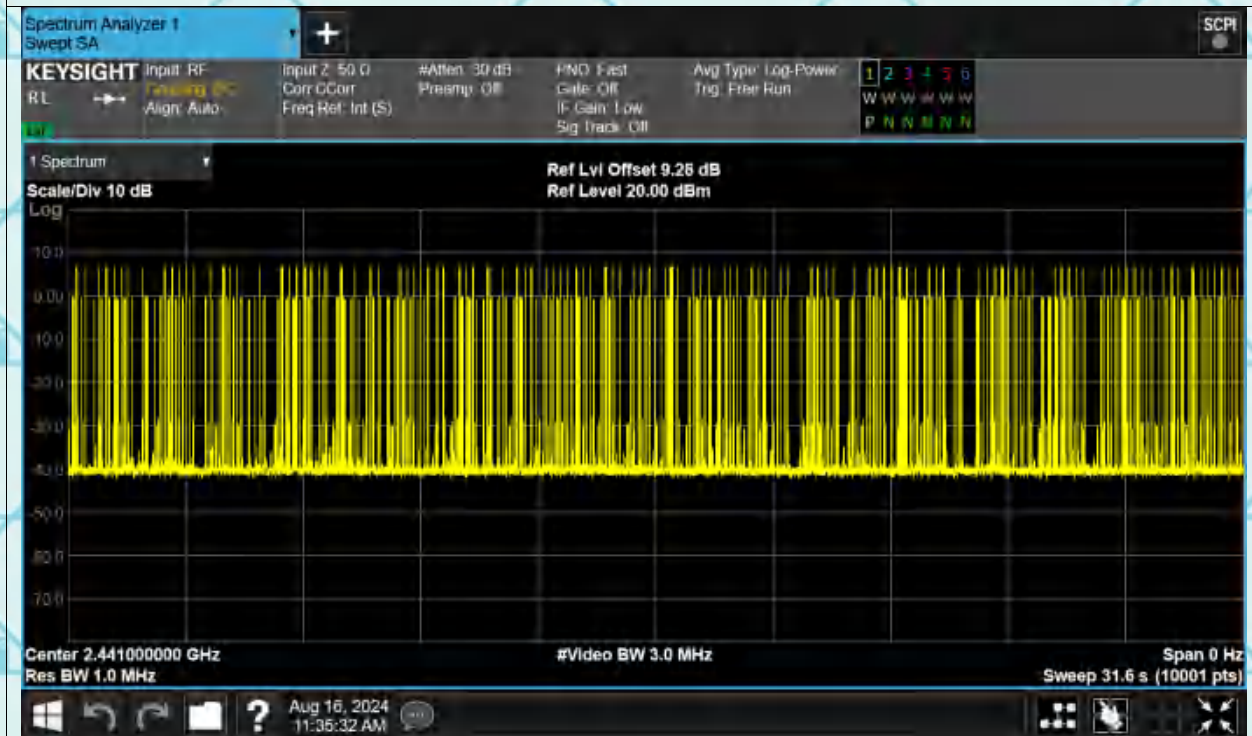

Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH3 2480MHz Ant1 One Burst

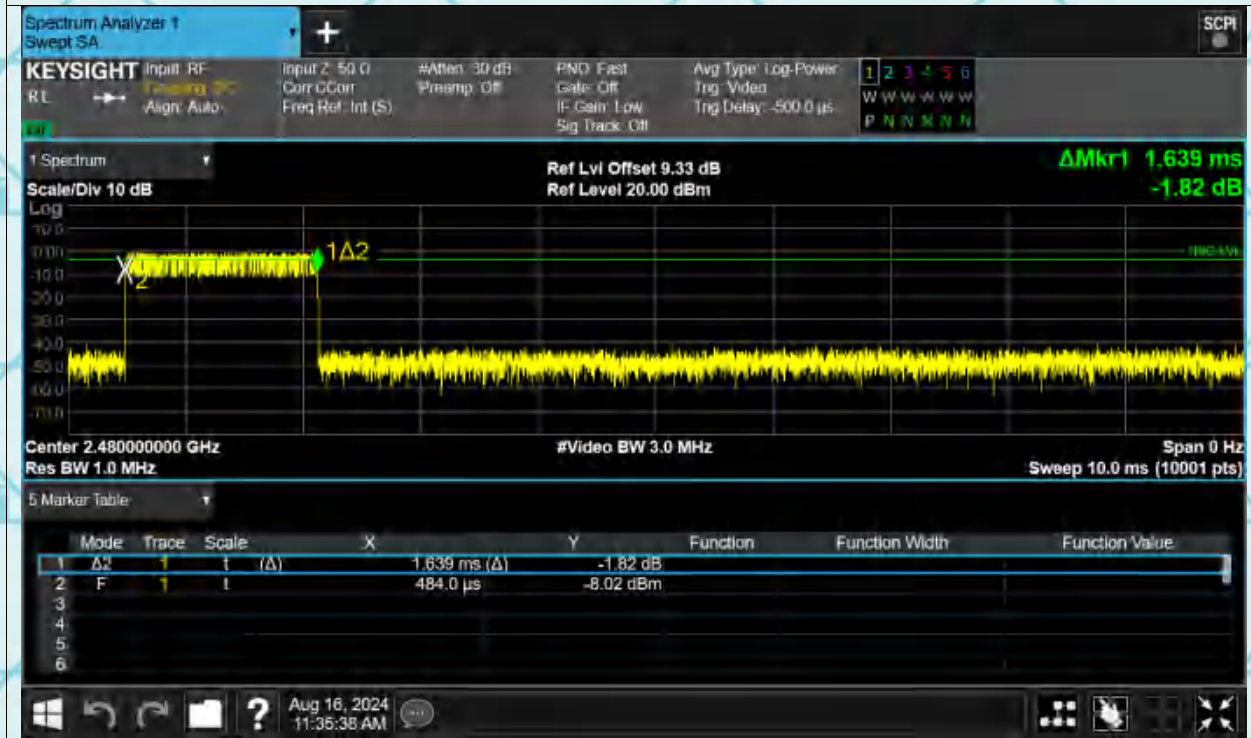


Dwell NVNT 1-DH3 2480MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

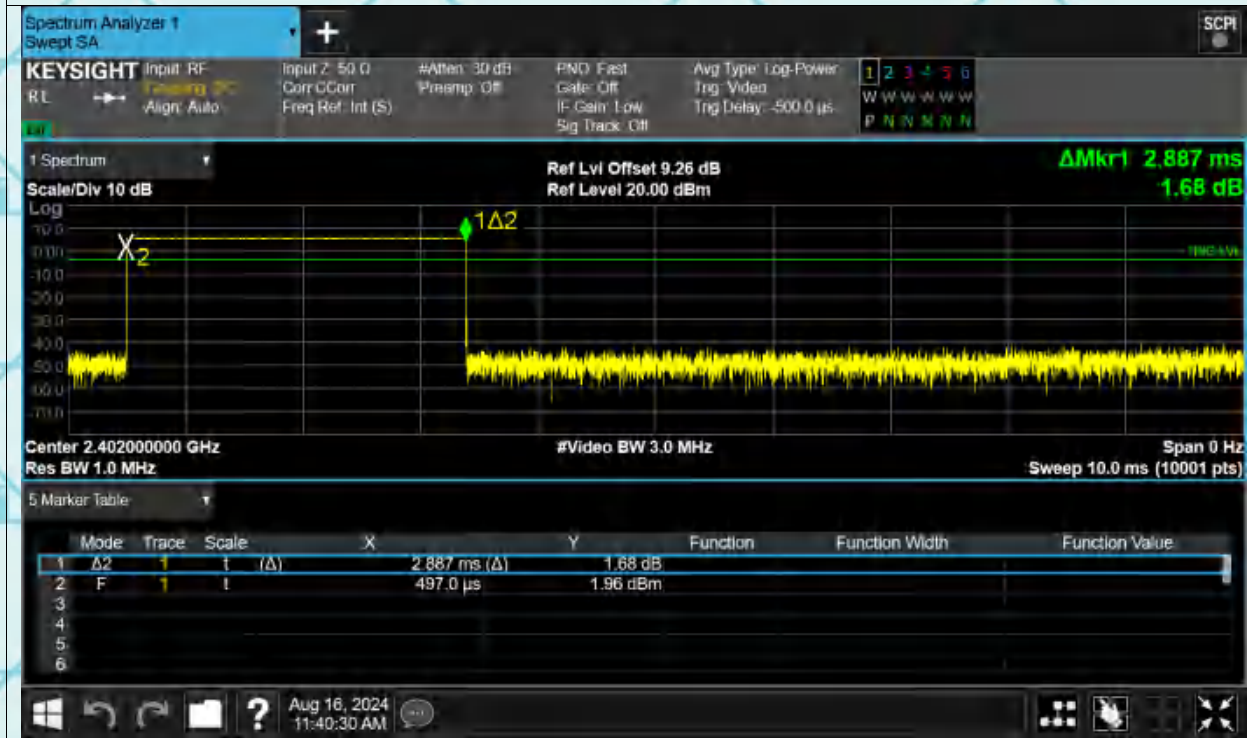


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

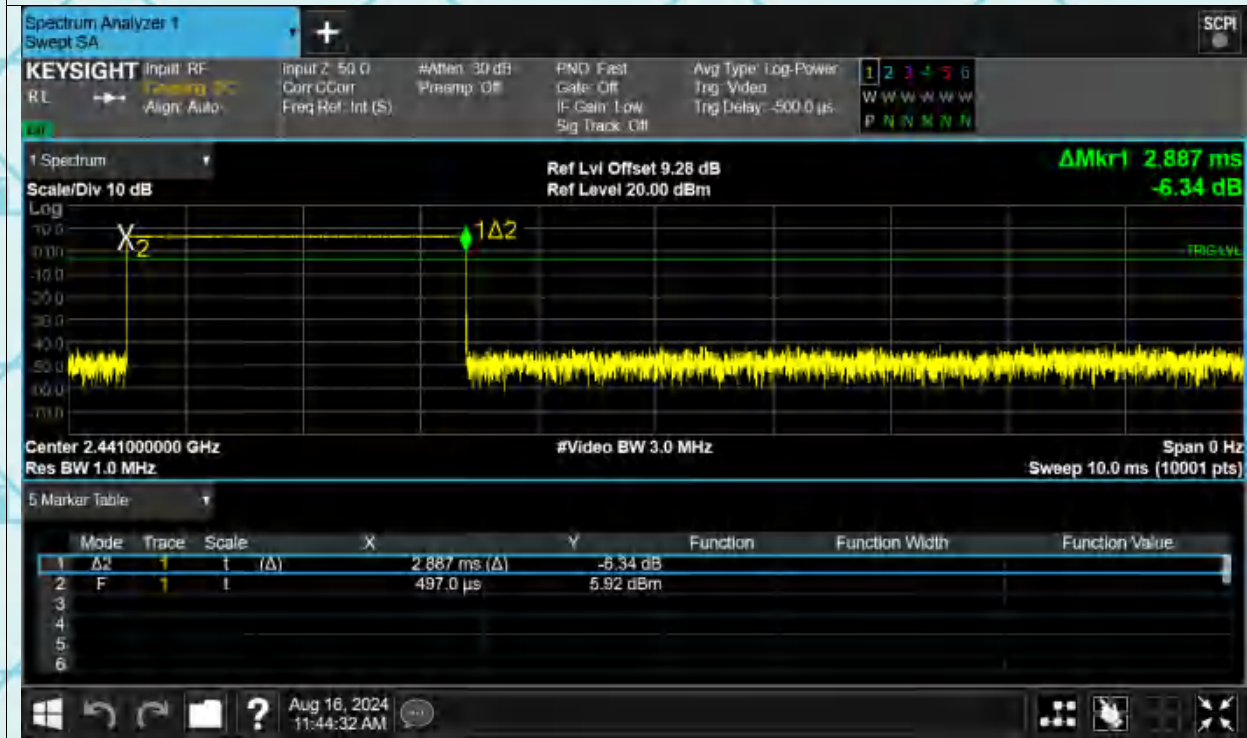

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated



Report No.: WSCT-ANAB-R&E240800041A-BT

Dwell NVNT 1-DH5 2480MHz Ant1 One Burst



Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

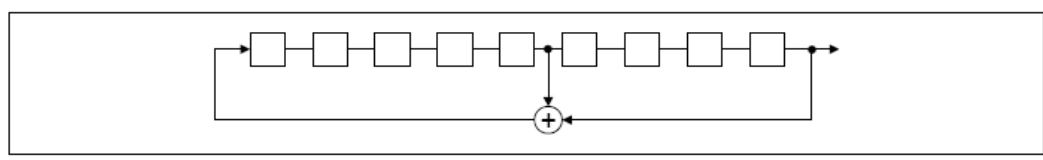

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

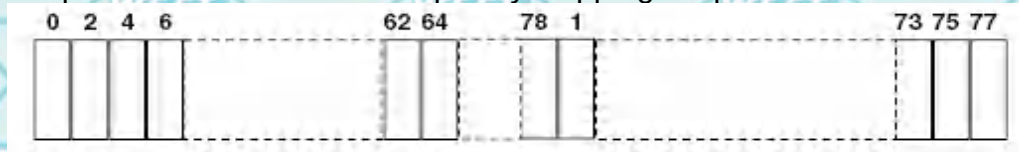

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

Report No.: WSCT-ANAB-R&E240800041A-BT

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Data


GFSK Modulation (the worst case)

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

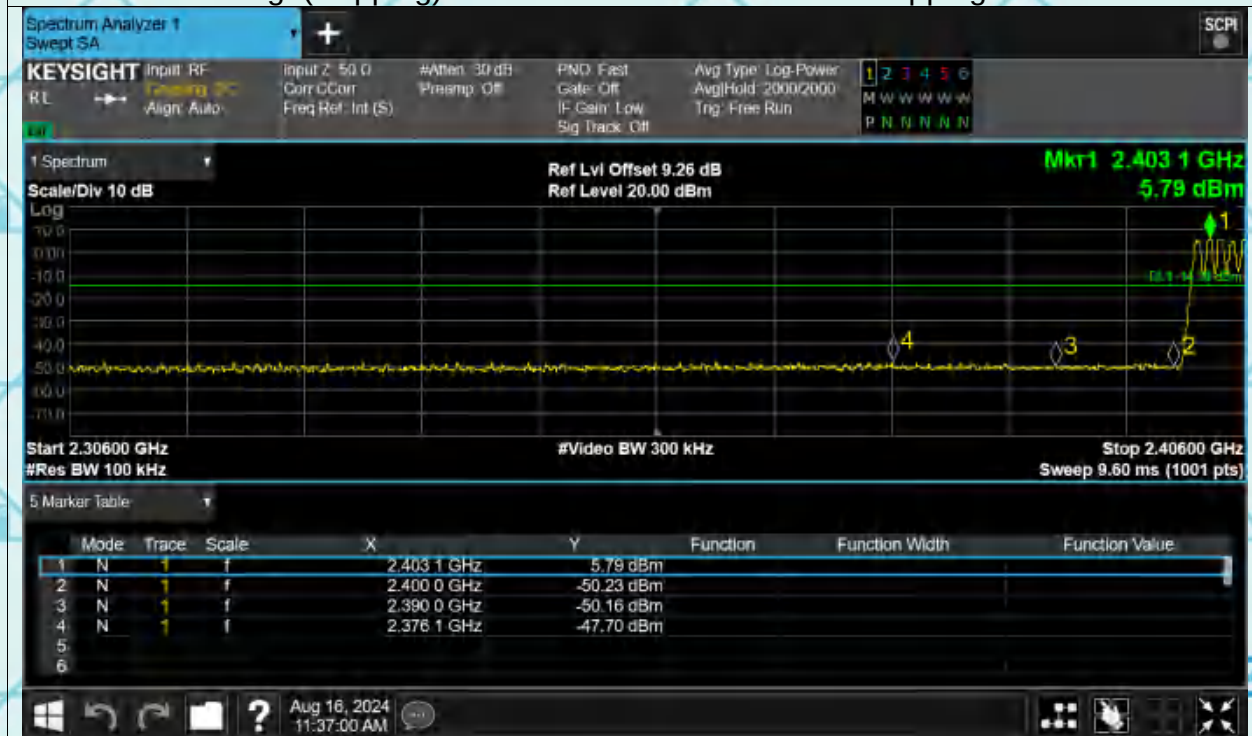


Report No.: WSCT-ANAB-R&E240800041A-BT

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

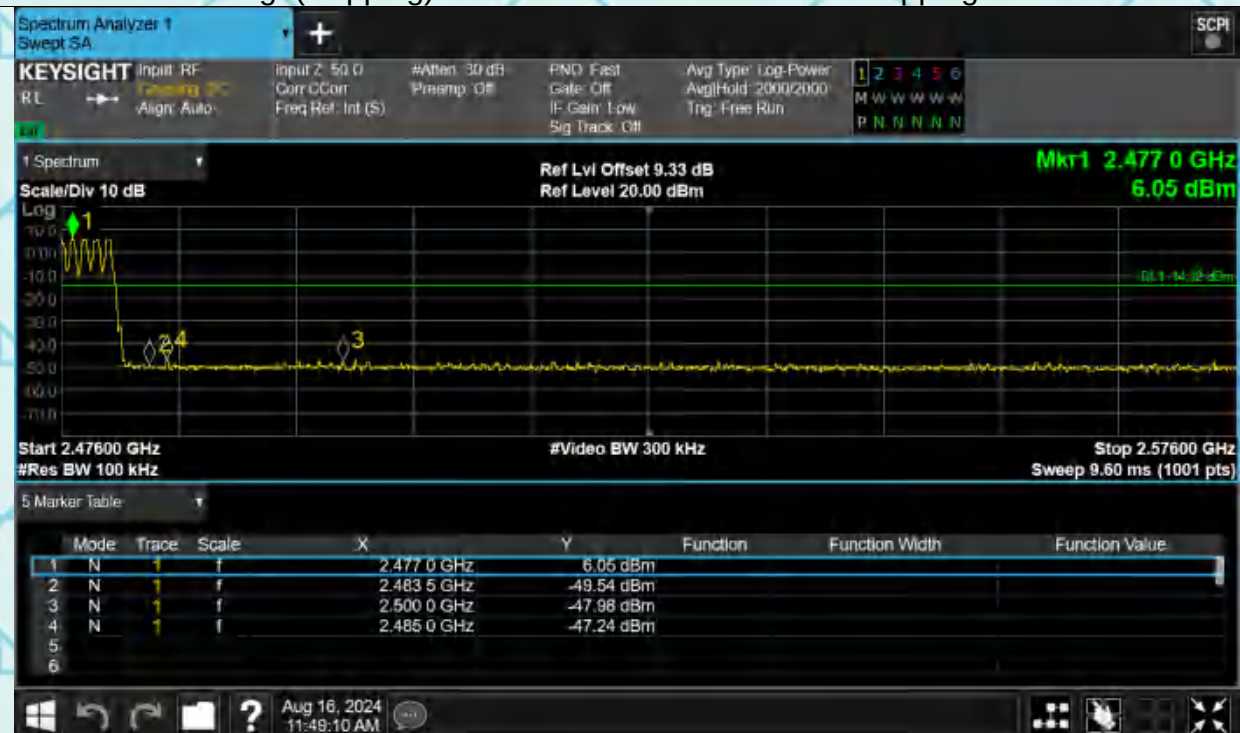

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

Report No.: WSCT-ANAB-R&E240800041A-BT



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission




Report No.: WSCT-ANAB-R&E240800041A-BT

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

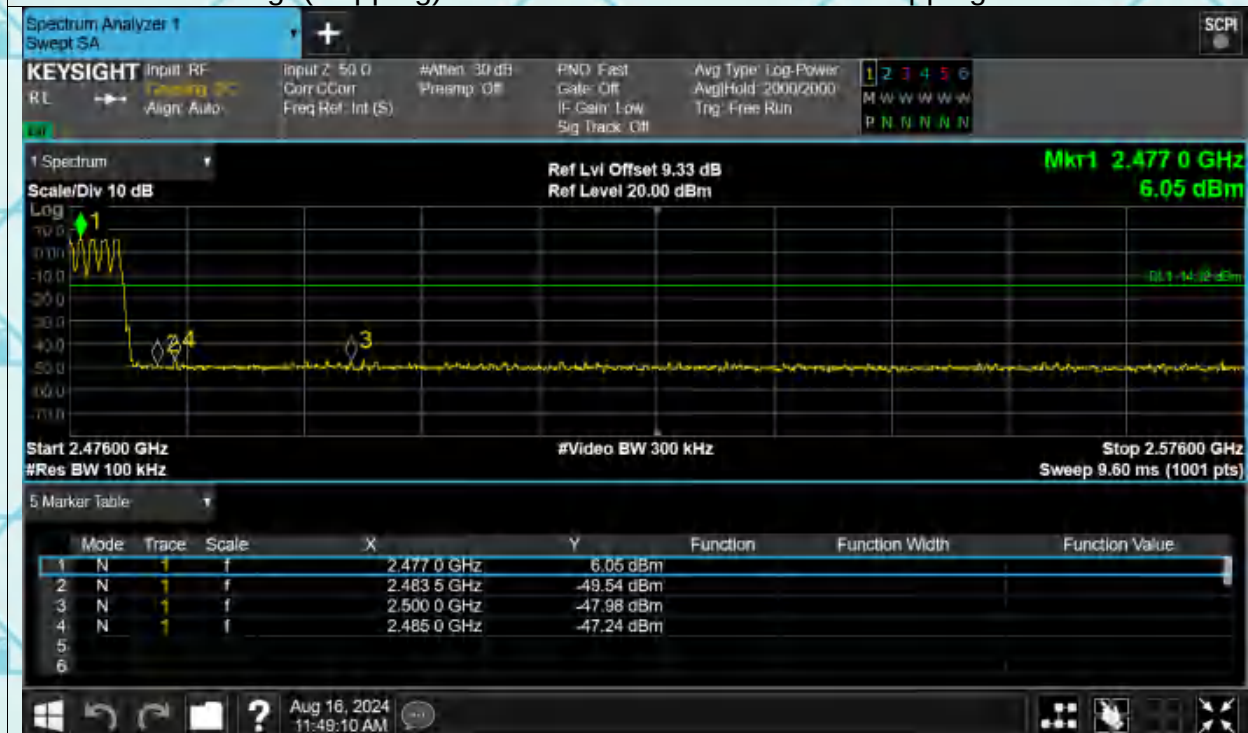

Report No.: WSCT-ANAB-R&E240800041A-BT

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-48.32	-20	Pass
NVNT	1-DH5	2441	Ant1	-49.21	-20	Pass
NVNT	1-DH5	2480	Ant1	-47.05	-20	Pass
NVNT	2-DH5	2402	Ant1	-46.44	-20	Pass
NVNT	2-DH5	2441	Ant1	-42.54	-20	Pass
NVNT	2-DH5	2480	Ant1	-31.67	-20	Pass
NVNT	3-DH5	2402	Ant1	-39.69	-20	Pass
NVNT	3-DH5	2441	Ant1	-52.46	-20	Pass
NVNT	3-DH5	2480	Ant1	-48.06	-20	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

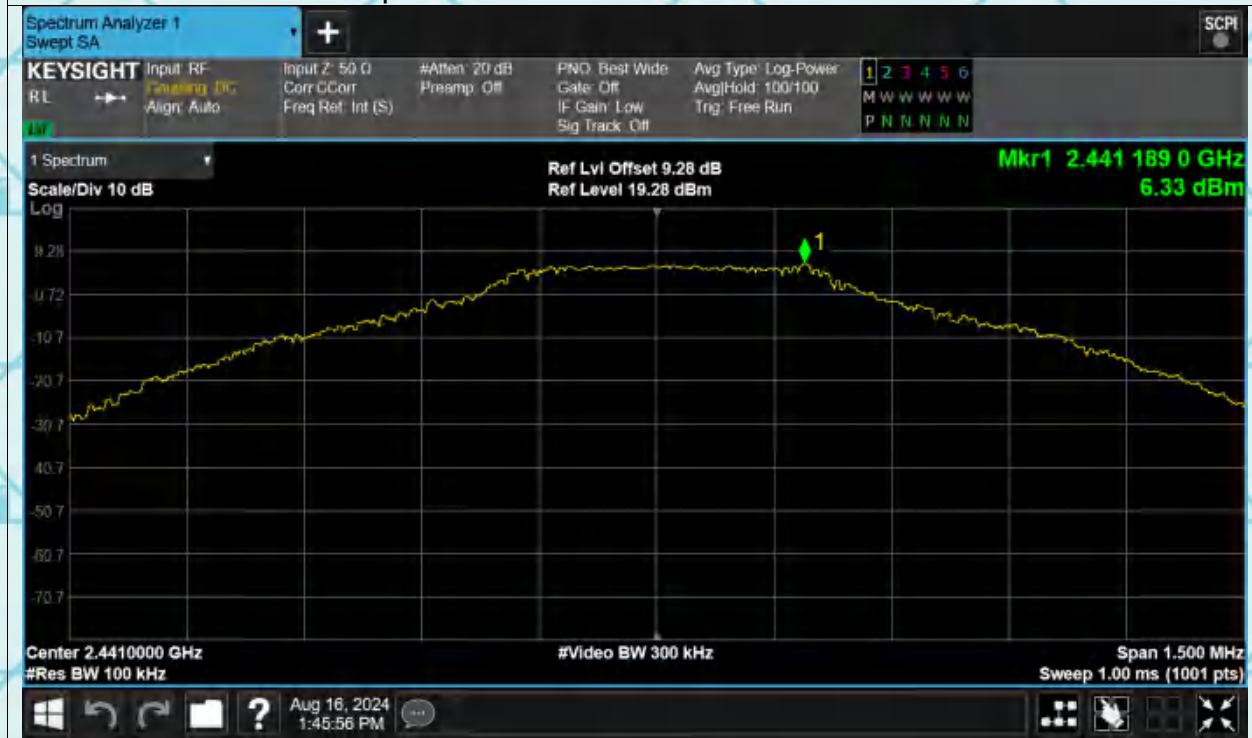


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

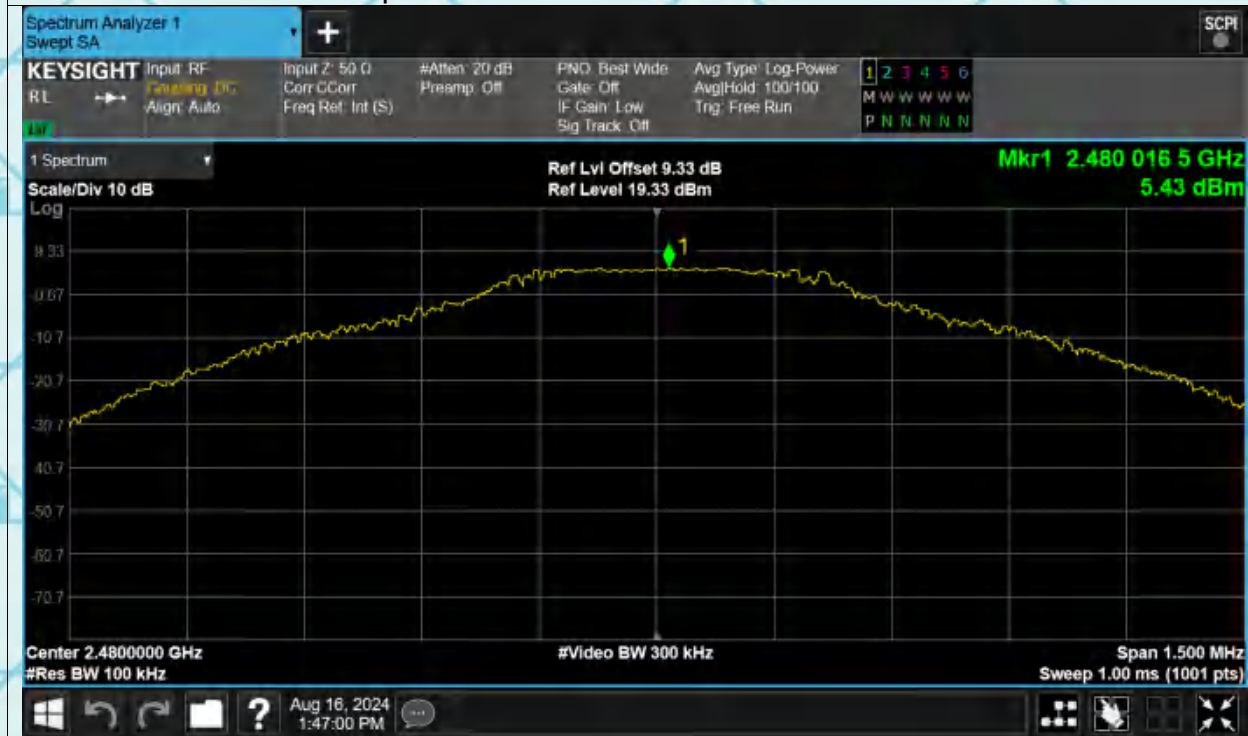


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

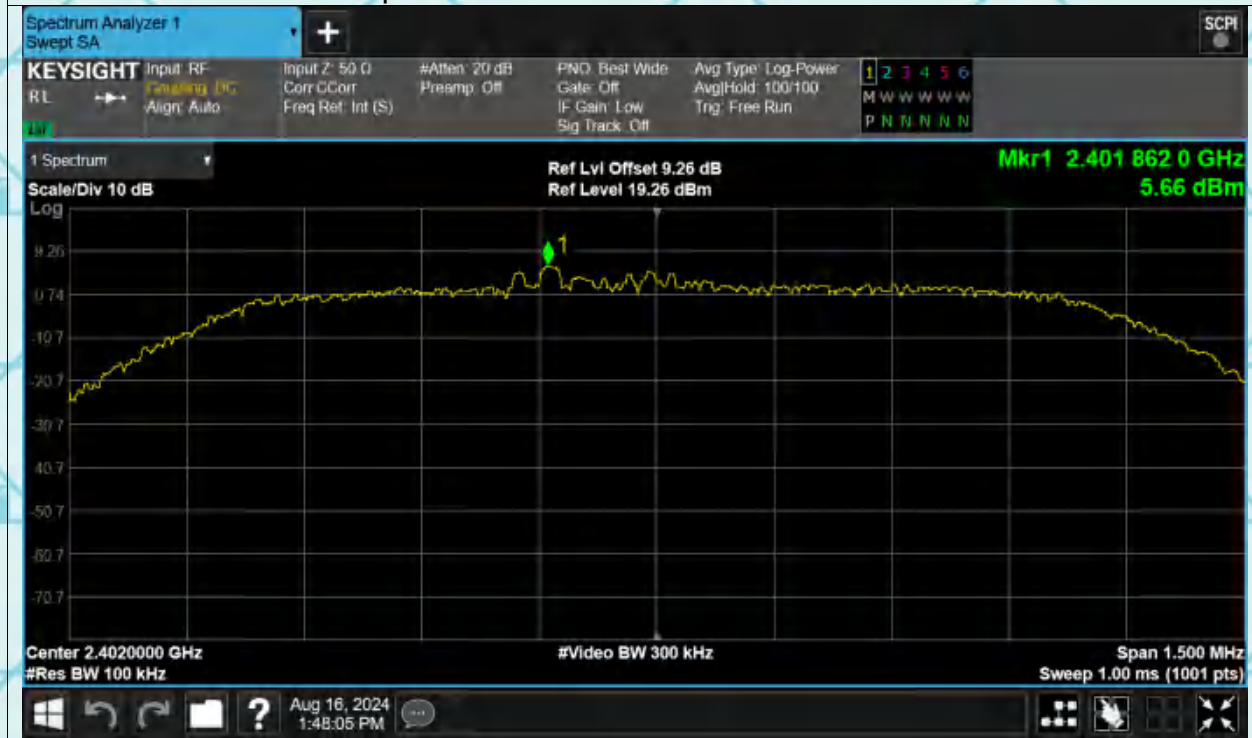


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

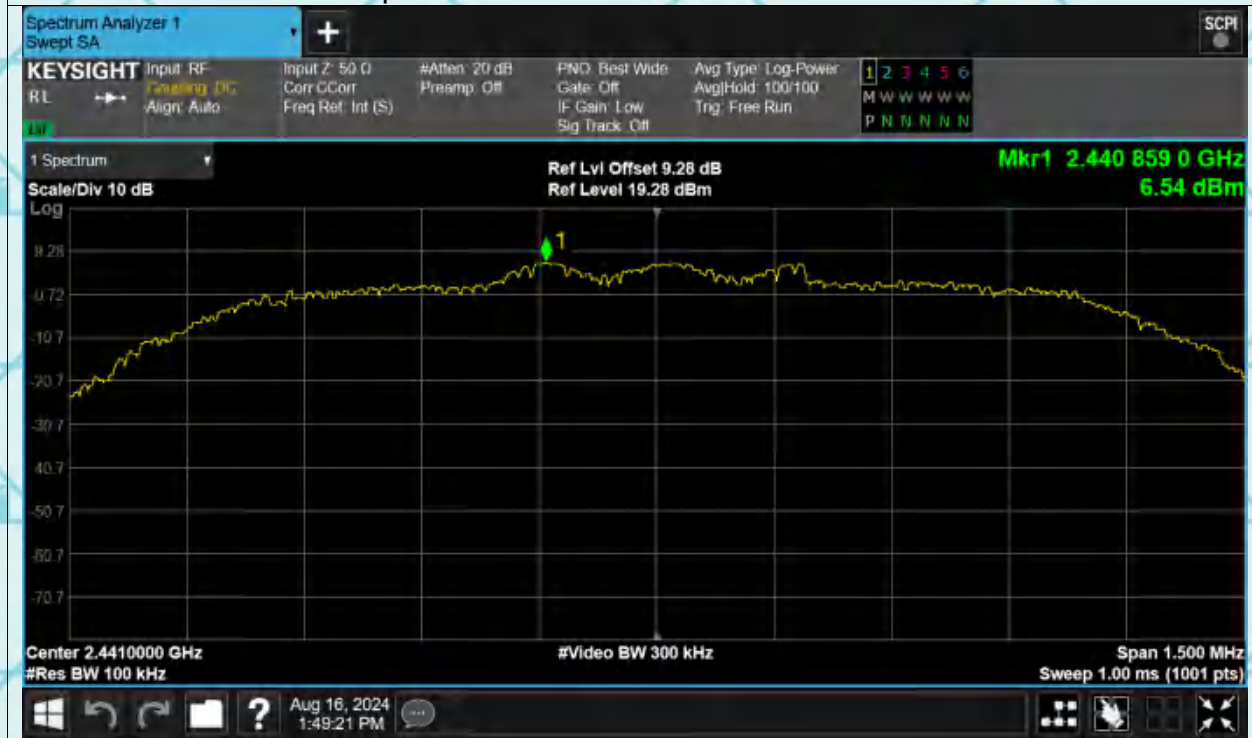

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission



Report No.: WSCT-ANAB-R&E240800041A-BT

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission





Report No.: WSCT-ANAB-R&E240800041A-BT

6.10. Radiated Spurious Emission Measurement

6.10.1. Test Specification

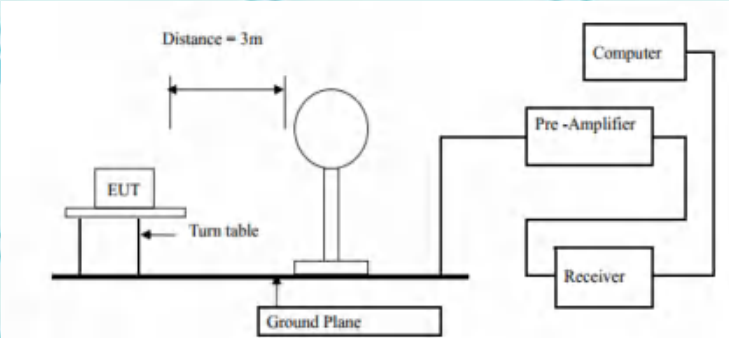Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2014				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	Above 1GHz		500		3
		5000		3	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

Report No.: WSCT-ANAB-R&E240800041A-BT

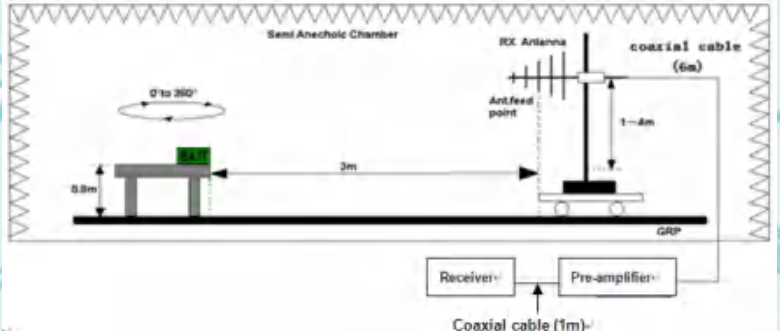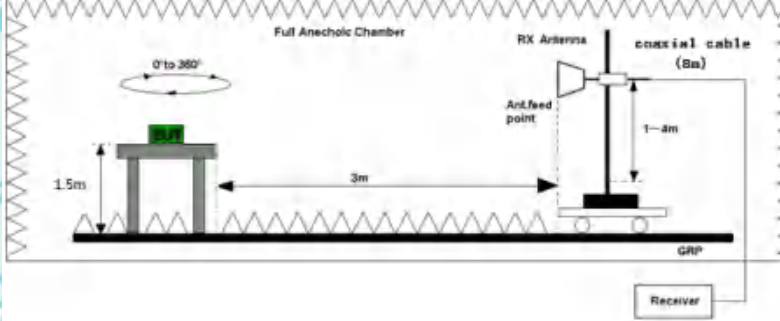	 Above 1GHz 
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level. For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

Report No.: WSCT-ANAB-R&E240800041A-BT

	measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N1 \cdot L1 + N2 \cdot L2 + \dots + Nn \cdot Ln$ Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle) Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

Note 1: The symbol of "-" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


Report No.: WSCT-ANAB-R&E240800041A-BT

6.10.2. Test Data

Please refer to following diagram for individual


Below 1GHz

Horizontal:

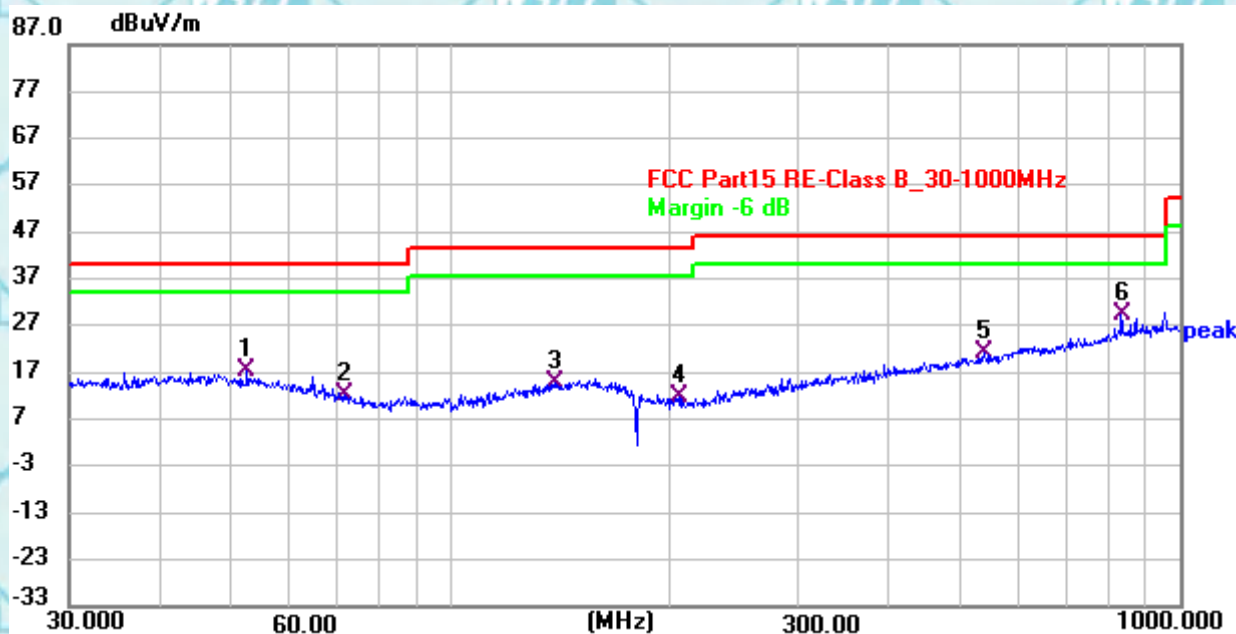

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.7138	36.13	-18.95	17.18	40.00	-22.82	QP
2	71.9581	34.74	-22.57	12.17	40.00	-27.83	QP
3	138.9343	34.86	-19.97	14.89	43.50	-28.61	QP
4	206.2167	35.79	-24.00	11.79	43.50	-31.71	QP
5	540.1874	36.19	-15.02	21.17	46.00	-24.83	QP
6	832.5869	39.73	-10.55	29.18	46.00	-16.82	QP

Report No.: WSCT-ANAB-R&E240800041A-BT
Vertical:

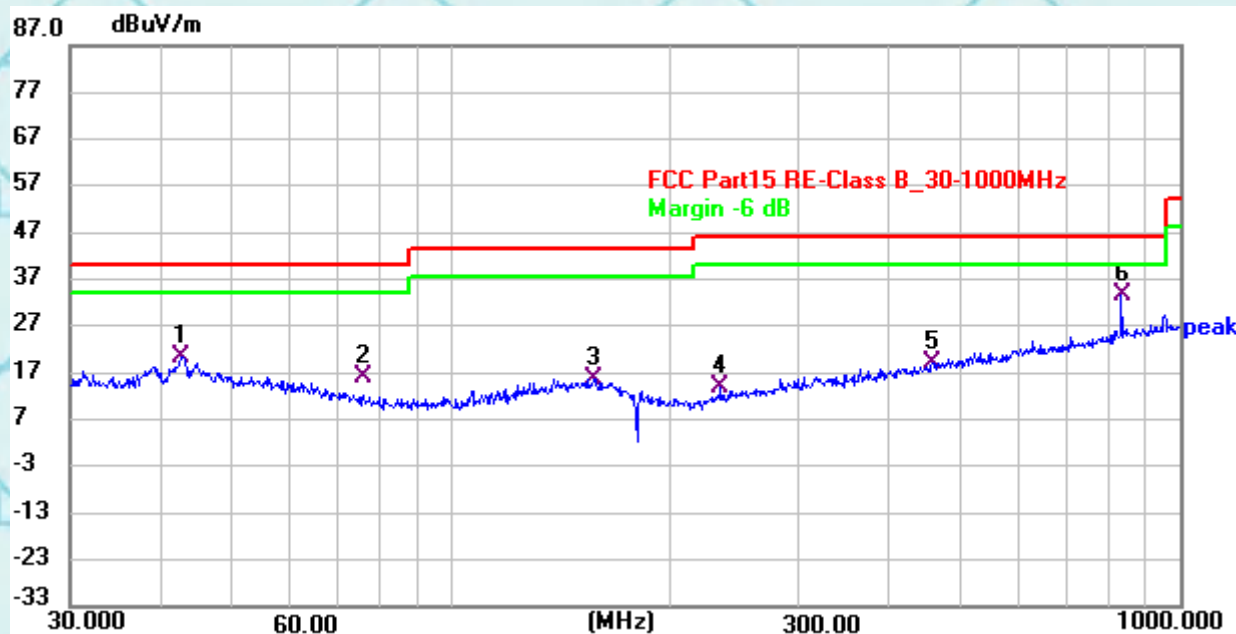

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.8434	39.28	-18.84	20.44	40.00	-19.56	QP
2	75.7448	39.59	-23.59	16.00	40.00	-24.00	QP
3	157.0762	35.20	-19.46	15.74	43.50	-27.76	QP
4	234.2710	36.82	-22.84	13.98	46.00	-32.02	QP
5	457.9088	35.53	-16.27	19.26	46.00	-26.74	QP
6	832.5869	44.05	-10.55	33.50	46.00	-12.50	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)

Report No.: WSCT-ANAB-R&E240800041A-BT

Above 1GHz


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

GFSK

Low channel: 2402MHz


Horizontal:

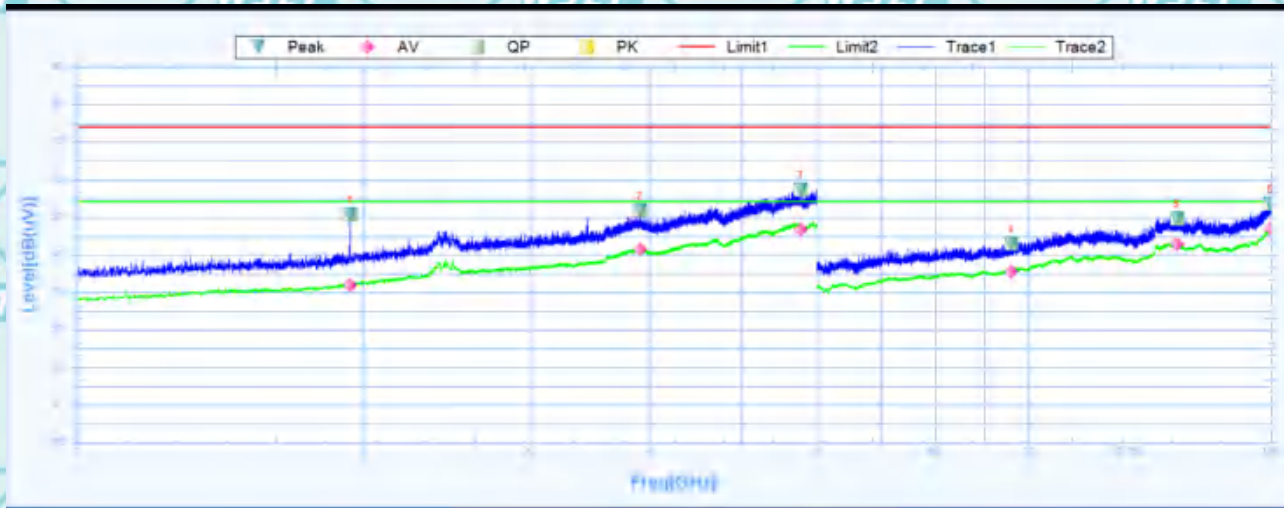

Suspected Data List										
NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1936.8750	50.83	25.62	25.21	74	-23.17	218.1	Horizontal	PK	Pass
1	1936.8750	32.05	25.62	6.43	54	-21.95	218.1	Horizontal	AV	Pass
2	3906.2500	51.86	29.48	22.38	74	-22.14	1.9	Horizontal	PK	Pass
2	3906.2500	41.38	29.48	11.9	54	-12.62	1.9	Horizontal	AV	Pass
3	5764.3750	57.3	32.42	24.88	74	-16.7	360.1	Horizontal	PK	Pass
3	5764.3750	46.81	32.42	14.39	54	-7.19	360.1	Horizontal	AV	Pass
4	9603.0000	43.09	11.38	31.71	74	-30.91	265.1	Horizontal	PK	Pass
4	9603.0000	35.41	11.38	24.03	54	-18.59	265.1	Horizontal	AV	Pass
5	14334.0000	49.72	18.79	30.93	74	-24.28	-0.1	Horizontal	PK	Pass
5	14334.0000	42.88	18.79	24.09	54	-11.12	-0.1	Horizontal	AV	Pass
6	17992.5000	53.61	23.88	29.73	74	-20.39	77.4	Horizontal	PK	Pass
6	17992.5000	46.93	23.88	23.05	54	-7.07	77.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

Vertical:

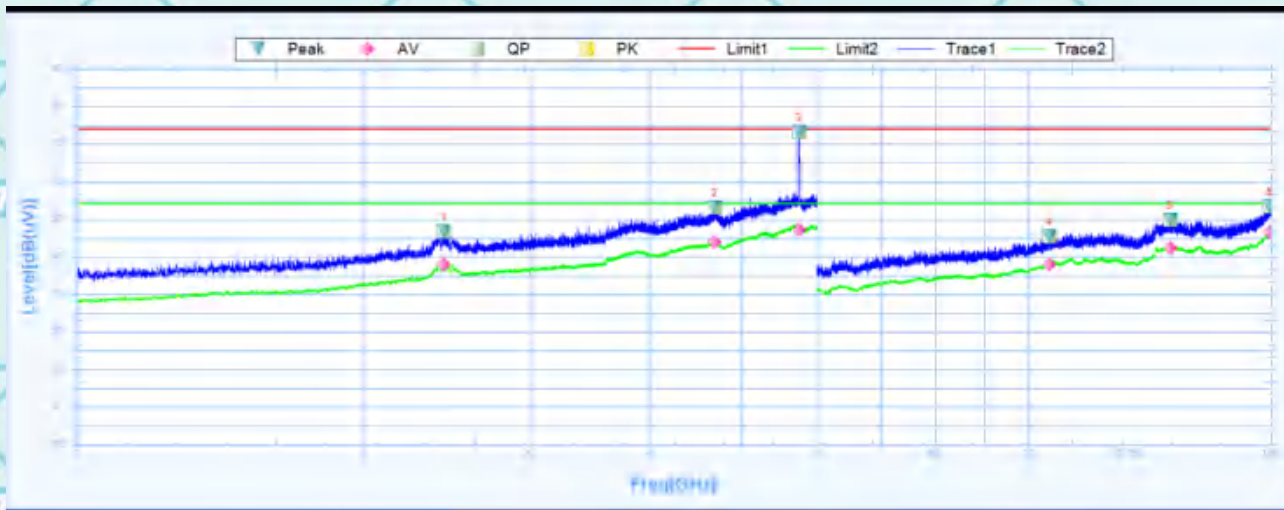


Suspected Data List										
NO.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg. [°]	Polarity	Trace	Verdict
1	2428.7500	46.71	27.36	19.35	74	-27.29	355.2	Vertical	PK	Pass
1	2428.7500	37.67	27.36	10.51	54	-16.13	355.2	Vertical	AV	Pass
2	4686.8750	53.21	30.97	22.24	74	-20.79	220.5	Vertical	PK	Pass
2	4686.8750	44.02	30.97	13.05	54	-9.98	220.5	Vertical	AV	Pass
3	5750.0000	73.2	32.4	40.8	74	-0.8	304.2	Vertical	PK	Pass
3	5750.0000	47.21	32.4	14.81	54	-6.79	304.2	Vertical	AV	Pass
4	10530.0000	45.48	14.05	31.43	74	-28.52	15.6	Vertical	PK	Pass
4	10530.0000	37.96	14.05	23.91	54	-16.04	15.6	Vertical	AV	Pass
5	14104.5000	49.87	19.02	30.85	74	-24.13	238	Vertical	PK	Pass
5	14104.5000	42.28	19.02	23.26	54	-11.72	238	Vertical	AV	Pass
6	17946.0000	53.33	23.55	29.78	74	-20.67	289.4	Vertical	PK	Pass
6	17946.0000	46.48	23.55	22.93	54	-7.52	289.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

Middle channel: 2441MHz


Horizontal:

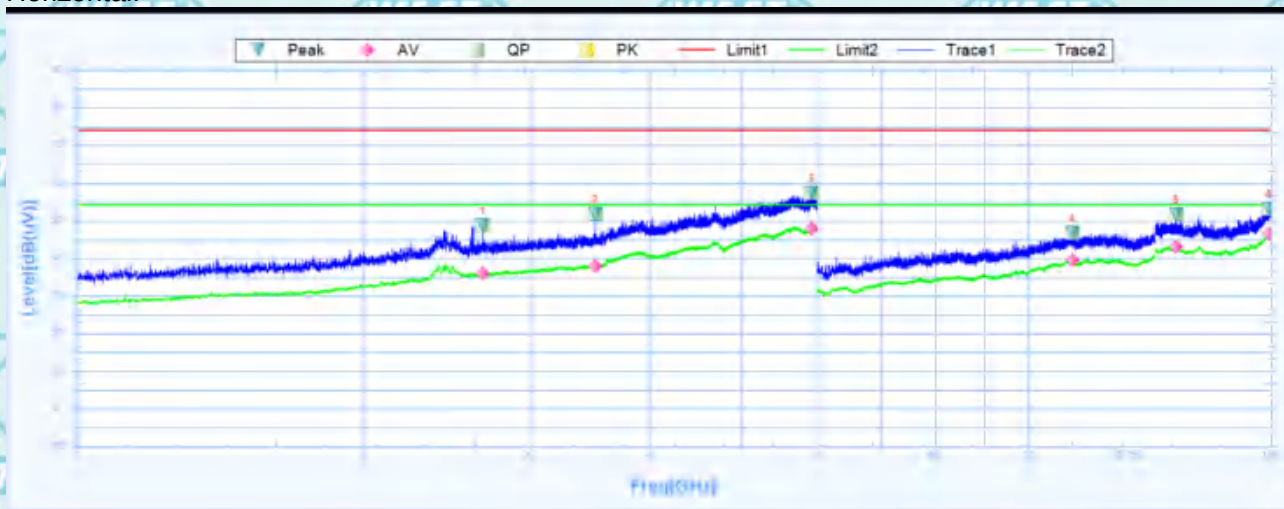

Suspected Data List										
No.	Freq. [MHz]	Reading [dB(uV)]	Factor [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2671.8750	48.67	27.81	20.86	74	-25.33	8.6	Horizontal	PK	Pass
1	2671.8750	36.04	27.81	8.23	54	-17.96	8.6	Horizontal	AV	Pass
2	3507.5000	51.91	28.52	23.39	74	-22.09	215.7	Horizontal	PK	Pass
2	3507.5000	37.99	28.52	9.47	54	-16.01	215.7	Horizontal	AV	Pass
3	5923.7500	57.29	32.68	24.61	74	-16.71	231.3	Horizontal	PK	Pass
3	5923.7500	47.91	32.68	15.23	54	-6.09	231.3	Horizontal	AV	Pass
4	11137.5000	46.78	15.83	30.95	74	-27.22	-0.1	Horizontal	PK	Pass
4	11137.5000	39.51	15.83	23.68	54	-14.49	-0.1	Horizontal	AV	Pass
5	14308.5000	51.69	18.81	32.88	74	-22.31	45	Horizontal	PK	Pass
5	14308.5000	42.94	18.81	24.13	54	-11.06	45	Horizontal	AV	Pass
6	17935.5000	53.28	23.49	29.79	74	-20.72	322.4	Horizontal	PK	Pass
6	17935.5000	46.65	23.49	23.16	54	-7.35	322.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

Vertical:

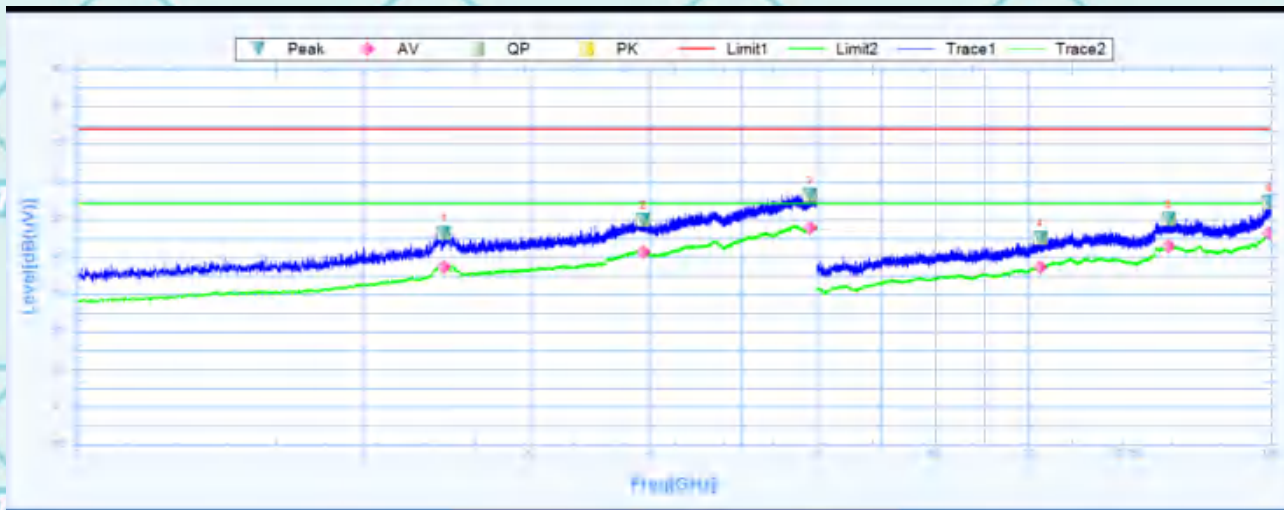


Suspected Data List										
NO.	Freq. [MHz]	Reading [dB(μV)]	Factor [dB]	Level [dB(μV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2428.7500	46.24	27.36	18.88	74	-27.76	152.2	Vertical	PK	Pass
1	2428.7500	37.33	27.36	9.97	54	-16.67	152.2	Vertical	AV	Pass
2	3938.1250	49.95	29.55	20.4	74	-24.05	289.8	Vertical	PK	Pass
2	3938.1250	41.22	29.55	11.67	54	-12.78	289.8	Vertical	AV	Pass
3	5898.1250	56.57	32.64	23.93	74	-17.43	314.9	Vertical	PK	Pass
3	5898.1250	47.75	32.64	15.11	54	-6.25	314.9	Vertical	AV	Pass
4	10291.5000	44.96	13.26	31.7	74	-29.04	358.8	Vertical	PK	Pass
4	10291.5000	37.33	13.26	24.07	54	-16.67	358.8	Vertical	AV	Pass
5	14050.5000	50.09	19.07	31.02	74	-23.91	142	Vertical	PK	Pass
5	14050.5000	42.71	19.07	23.64	54	-11.29	142	Vertical	AV	Pass
6	17928.0000	54.45	23.44	31.01	74	-19.55	0	Vertical	PK	Pass
6	17928.0000	46.4	23.44	22.96	54	-7.6	0	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

High channel: 2480MHz


Horizontal:

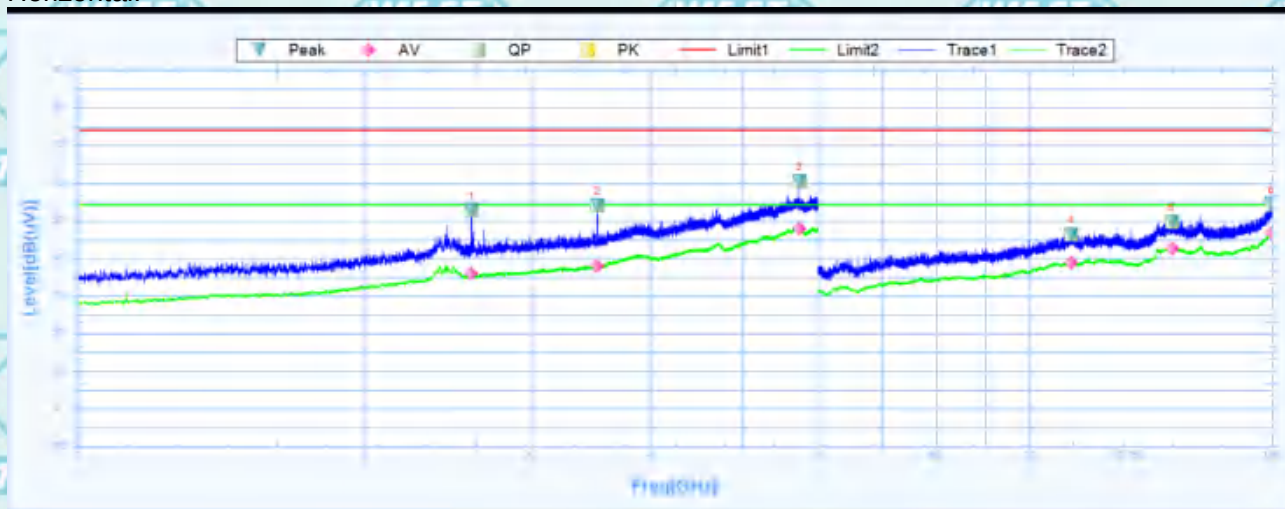

Suspected Data List										
NO.	Freq. [MHz]	Reading [dB(μV)]	Factor [dB]	Level [dB(μV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2594.3750	52.64	27.71	24.93	74	-21.36	276.6	Horizontal	PK	Pass
1	2594.3750	35.89	27.71	8.18	54	-18.11	276.6	Horizontal	AV	Pass
2	3518.7500	54.14	28.54	25.6	74	-19.86	360	Horizontal	PK	Pass
2	3518.7500	37.95	28.54	9.41	54	-16.05	360	Horizontal	AV	Pass
3	5739.3750	60.46	32.38	28.08	74	-13.54	270.6	Horizontal	PK	Pass
3	5739.3750	47.84	32.38	15.46	54	-6.16	270.6	Horizontal	AV	Pass
4	11073.0000	46.42	15.85	30.57	74	-27.58	200.6	Horizontal	PK	Pass
4	11073.0000	38.93	15.85	23.08	54	-15.07	200.6	Horizontal	AV	Pass
5	14130.0000	49.57	19	30.57	74	-24.43	216.1	Horizontal	PK	Pass
5	14130.0000	42.66	19	23.66	54	-11.34	216.1	Horizontal	AV	Pass
6	17973.0000	54.33	23.74	30.59	74	-19.67	185	Horizontal	PK	Pass
6	17973.0000	46.79	23.74	23.05	54	-7.21	185	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E240800041A-BT

Vertical:

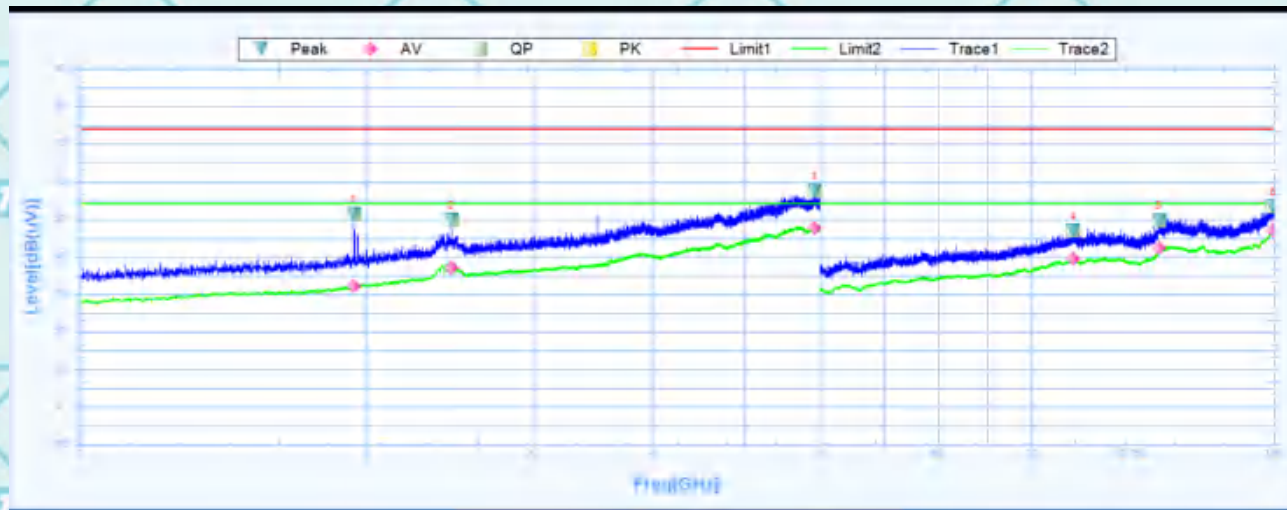

NO.	Freq. [MHz]	Reading [dB(uV)]	Facoon [dB]	Level [dB(uV)]	Limit [dB]	Margin [dB]	Dev [°]	Polarity	Trace	Verdict
1	1941.2500	51.48	25.64	25.84	74	-22.52	136.2	Vertical	PK	Pass
1	1941.2500	32.28	25.64	6.64	54	-21.72	136.2	Vertical	AV	Pass
2	2459.3750	49.88	27.46	22.42	74	-24.12	347.2	Vertical	PK	Pass
2	2459.3750	37.1	27.46	9.64	54	-16.9	347.2	Vertical	AV	Pass
3	5920.0000	57.7	32.67	25.03	74	-16.3	136.2	Vertical	PK	Pass
3	5920.0000	47.72	32.67	15.05	54	-6.28	136.2	Vertical	AV	Pass
4	11083.5000	46.94	15.88	31.06	74	-27.06	337.7	Vertical	PK	Pass
4	11083.5000	39.47	15.88	23.59	54	-14.53	337.7	Vertical	AV	Pass
5	13642.5000	49.76	18.09	31.67	74	-24.24	276.6	Vertical	PK	Pass
5	13642.5000	42.47	18.09	24.38	54	-11.53	276.6	Vertical	AV	Pass
6	17967.0000	53.4	23.7	29.7	74	-20.6	360.1	Vertical	PK	Pass
6	17967.0000	46.97	23.7	23.27	54	-7.03	360.1	Vertical	AV	Pass

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown “-“ in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
5. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Report No.: WSCT-ANAB-R&E240800041A-BT

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******