

TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35
SHAN MEI STREET FOTAN NT Hong Kong
Report Number : SZNS220126-03832E-RF-00D
FCC ID: 2ADYY-CI6N

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Mobile Phone
Model No.: CI6n
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2022/01/26
Date of Test: 2022/02/22~2022/02/25
Report Date: 2022/03/23

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Black Ding

Robert Li

Black Ding
EMC Engineer

Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
TRANSD FACTOR & MARGIN CALCULATION.....	15
TEST DATA	15
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.407(A),(E) – 26 DB & 6DB EMISSION BANDWIDTH.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	38

FCC §15.407(A) – CONDUCTED TRANSMITTER OUTPUT POWER.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	40
FCC §15.407(A) - POWER SPECTRAL DENSITY	41
TEST PROCEDURE	41
TEST DATA	42
APPENDIX	43
APPENDIXA1: EMISSION BANDWIDTH	43
APPENDIXA2: OCCUPIED CHANNEL BANDWIDTH.....	49
APPENDIXA3: MIN EMISSION BANDWIDTH.....	60
APPENDIXB: MAXIMUM CONDUCTED AVERAGE OUTPUT POWER	66
APPENDIXC: MAXIMUM POWER SPECTRAL DENSITY	67
APPENDIXD: DUTY CYCLE	78

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5150-5250MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	5150-5250 MHz: 11.66dBm 5725-5850 MHz: 8.32dBm
Modulation Technique	OFDM
Antenna Specification*	-0.9dBi (provided by the applicant)
Voltage Range	DC3.87V from battery or DC5V or 7.5V from adapter
Sample serial number	SZNS220126-03832E-RF-S2 for Conducted and Radiated Emissions SZNS220126-03832E-RF-S1 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: U180TSA Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or DC7.5V 2.4A 18.0W Max

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 5G Wi-Fi 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/n20/ac20 mode: channel 36, 40, 48 were tested;

For 802.11n40/ac40 mode: channel 38, 46 were tested;

For 802.11ac80 mode, channel 42 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/n20/ac20 mode: channel 149, 157, 165 were tested;

For 802.11n40/ac40 mode: channel 151, 159 were tested;

For 802.11ac80 mode, channel 155 was tested.

EUT Exercise Software

EUT was test in engineering mode.

The worst case was performed under:

U-NII	Mode	Data rate	Power Level*		
			Low Channel	Middle Channel	High Channel
5150 – 5250MHz	802.11a	6Mbps	16	16	16
	802.11n-HT20	MCS0	16	16	16
	802.11n-HT40	MCS0	16	/	16
	802.11ac20	MCS0	16	16	16
	802.11ac40	MCS0	16	/	16
	802.11ac80	MCS0	/	16	/
5725 – 5850MHz	802.11a	6Mbps	16	16	16
	802.11n-HT20	MCS0	16	16	16
	802.11n-HT40	MCS0	16	/	16
	802.11ac20	MCS0	16	16	16
	802.11ac40	MCS0	16	/	16
	802.11ac80	MCS0	/	16	/

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

The power level was provided by the applicant.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

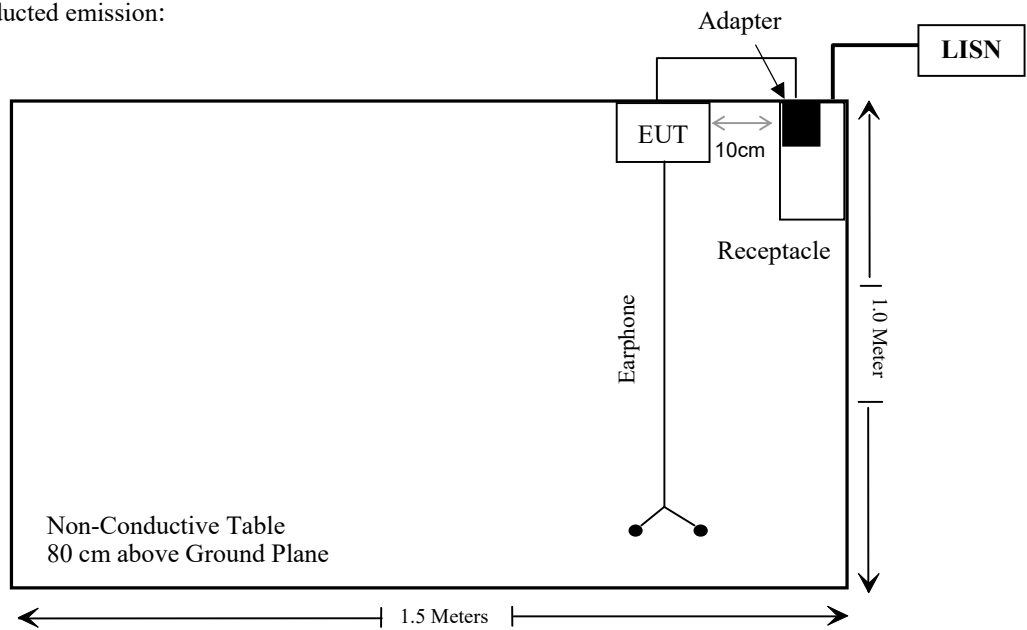

For Radiated Emissions:

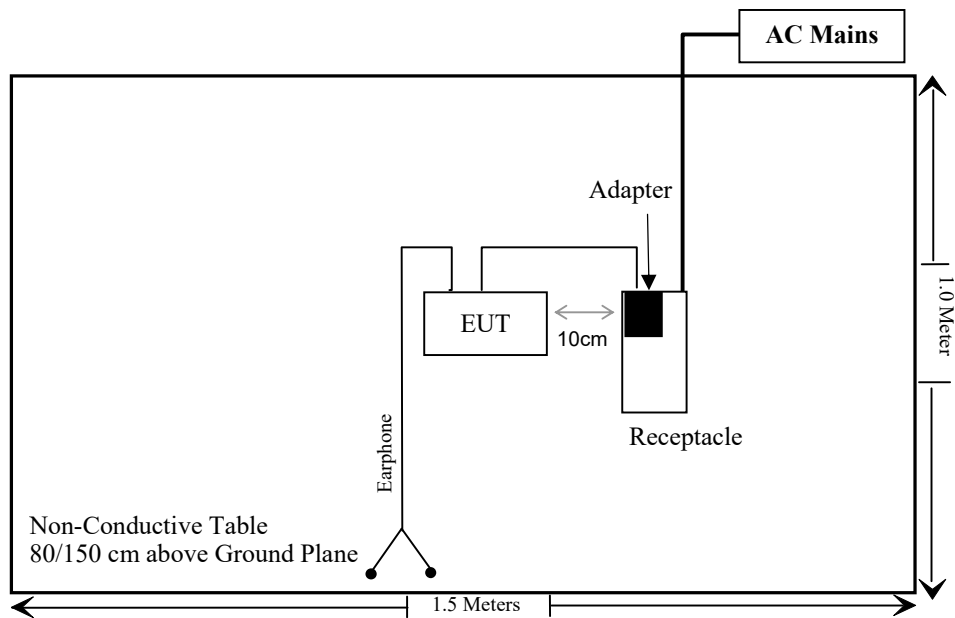

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Not Applicable*

Not Applicable: the EUT has no TPC function which was declared by the applicant.

Not Applicable*: the EUT not operating within frequency range of 5250-5350MHz&5470-5725MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.15/5.35g-45	075	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.725/5.875G-45	065	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05
Unknown	RF Cable	Unknown	Unknown	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Measurement Result

Please refer to SAR test report: SZNS220125-03682E-SA.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement for 5G Wi-Fi which were permanently attached. Please refer to the EUT photos.

Type	Antenna Gain	Impedance	Frequency Range
PIFA	-0.9dBi	50 Ω	5150-5850MHz


Result: Compliant.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

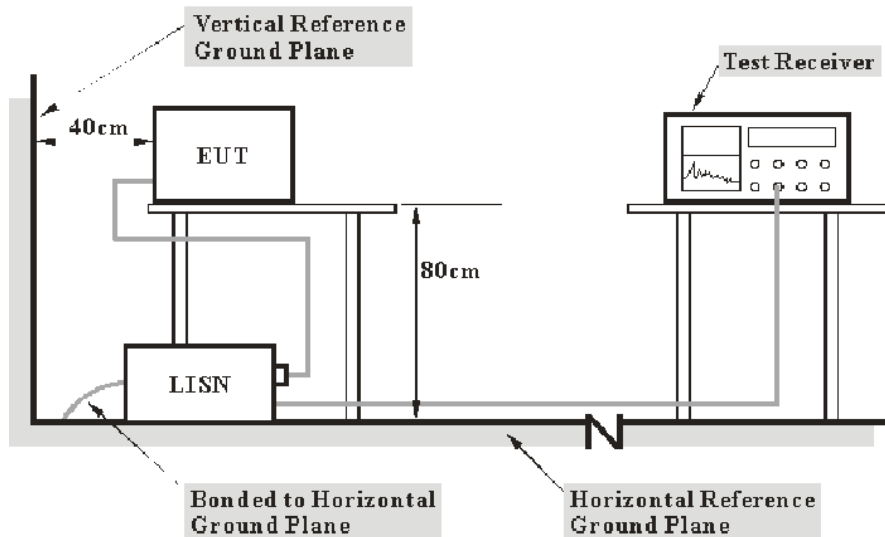

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2022-02-22.

EUT operation mode: Transmitting (worst case is 802.11a, 5200MHz)

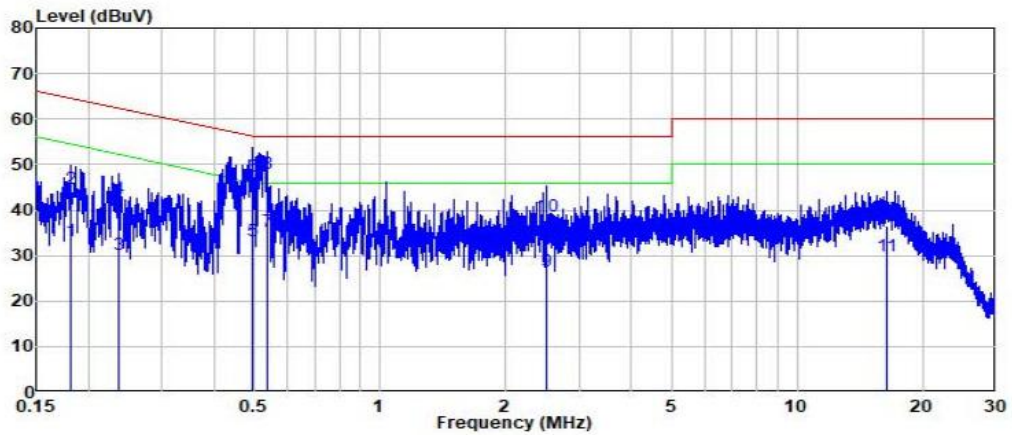AC 120V/60 Hz, Line:

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.182	9.80	23.42	33.22	54.42	-21.20	Average
2	0.182	9.80	34.78	44.58	64.42	-19.84	QP
3	0.237	9.80	20.45	30.25	52.19	-21.94	Average
4	0.237	9.80	32.64	42.44	62.19	-19.75	QP
5	0.495	9.80	23.38	33.18	46.08	-12.90	Average
6	0.495	9.80	37.58	47.38	56.08	-8.70	QP
7	0.538	9.81	25.55	35.36	46.00	-10.64	Average
8	0.538	9.81	38.32	48.13	56.00	-7.87	QP
9	2.518	9.83	16.87	26.70	46.00	-19.30	Average
10	2.518	9.83	28.76	38.59	56.00	-17.41	QP
11	16.409	9.96	19.78	29.74	50.00	-20.26	Average
12	16.409	9.96	26.61	36.57	60.00	-23.43	QP

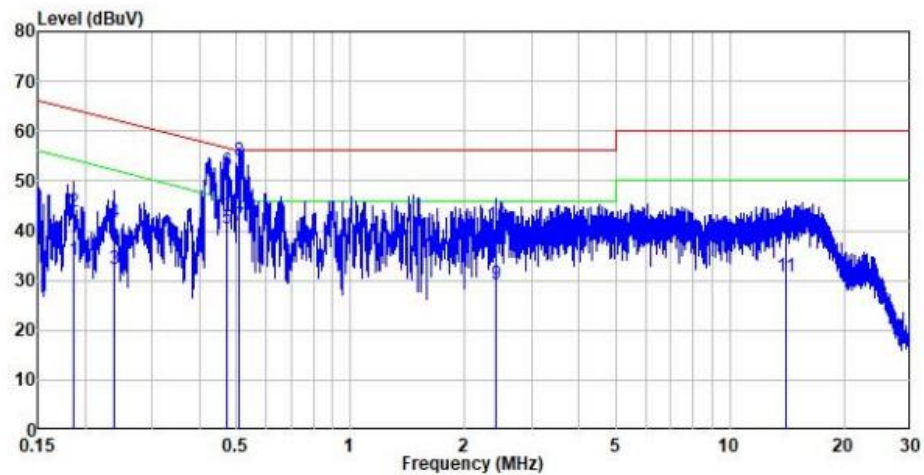AC 120V/60 Hz, Neutral:

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.187	9.80	24.41	34.21	54.18	-19.97	Average
2	0.187	9.80	33.83	43.63	64.18	-20.55	QP
3	0.238	9.80	22.65	32.45	52.15	-19.70	Average
4	0.238	9.80	31.87	41.67	62.15	-20.48	QP
5	0.474	9.80	30.65	40.45	46.45	-6.00	Average
6	0.474	9.80	42.23	52.03	56.45	-4.42	QP
7	0.510	9.81	31.28	41.09	46.00	-4.91	Average
8	0.510	9.81	44.26	54.07	56.00	-1.93	QP
9	2.427	9.82	19.43	29.25	46.00	-16.75	Average
10	2.427	9.82	31.17	40.99	56.00	-15.01	QP
11	14.035	10.04	20.61	30.65	50.00	-19.35	Average
12	14.035	10.04	28.61	38.65	60.00	-21.35	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

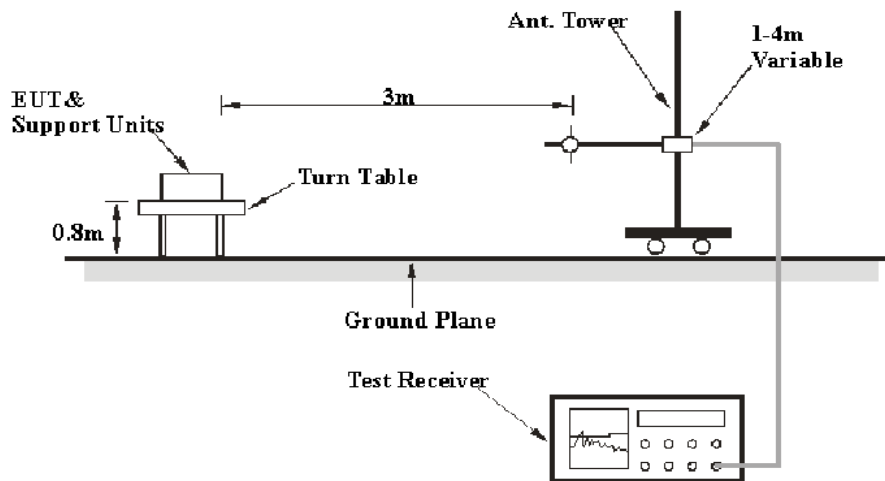

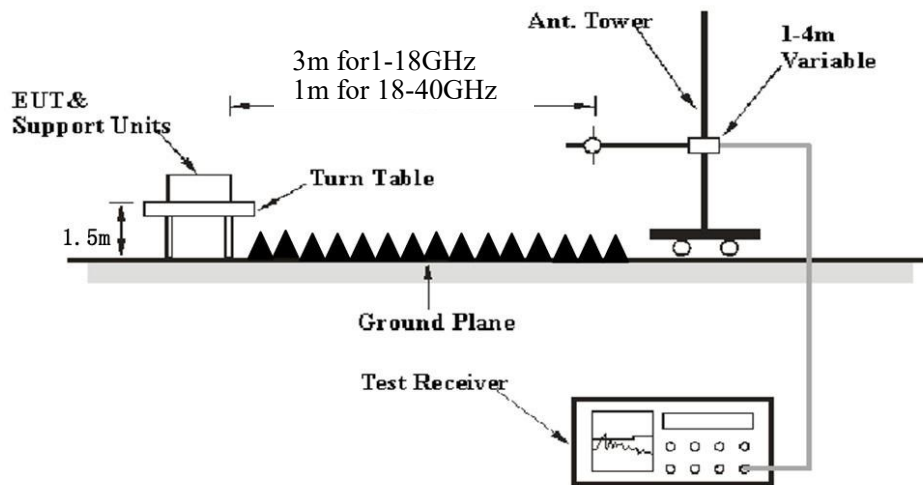Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	19~20 °C
Relative Humidity:	56~58 %
ATM Pressure:	101.0 kPa


The testing was performed by Chao Mo on 2022-02-23 for below 1GHz, Chao Mo on 2022-02-25 for above 1GHz.

EUT operation mode: Transmitting(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30 MHz – 1 GHz: (worst case is 802.11a, 5200MHz)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.


Horizontal

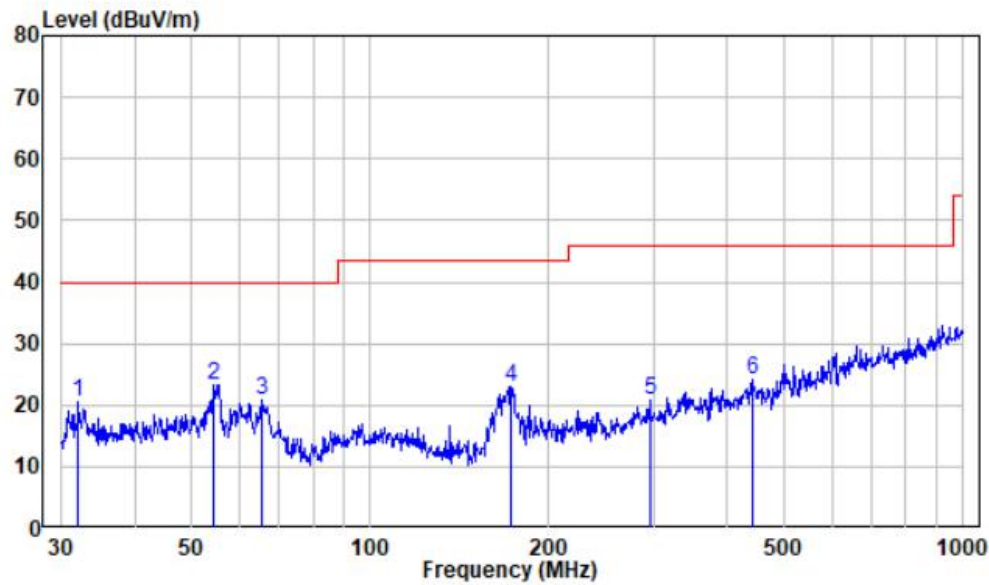

Site : chamber
Condition: 3m HORIZONTAL
Model : CI6n
Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.179	-12.14	32.69	20.55	40.00	-19.45	Peak
2	54.452	-10.32	33.65	23.33	40.00	-16.67	Peak
3	65.803	-12.80	33.63	20.83	40.00	-19.17	Peak
4	172.599	-13.31	36.35	23.04	43.50	-20.46	Peak
5	296.184	-9.26	29.99	20.73	46.00	-25.27	Peak
6	440.196	-5.64	29.92	24.28	46.00	-21.72	Peak

Vertical

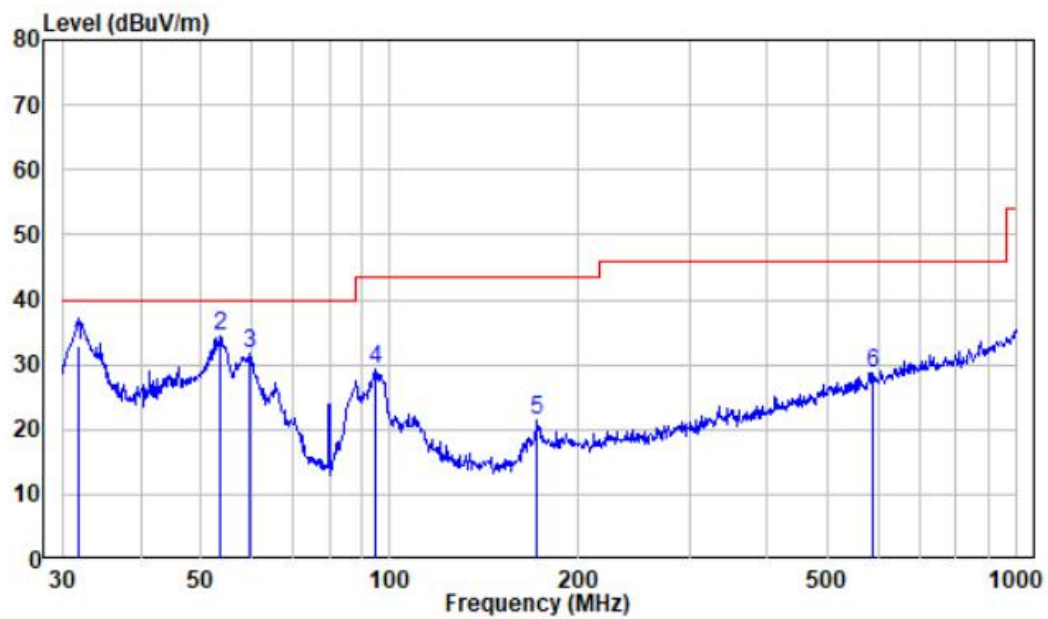

Site : chamber
Condition: 3m VERTICAL
Model : CI6n
Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.955	-12.17	45.19	33.02	40.00	-6.98	QP
2	53.693	-10.29	44.67	34.38	40.00	-5.62	QP
3	59.649	-10.49	42.04	31.55	40.00	-8.45	Peak
4	95.093	-12.46	41.70	29.24	43.50	-14.26	Peak
5	171.393	-13.44	34.76	21.32	43.50	-22.18	Peak
6	588.905	-2.80	31.45	28.65	46.00	-17.35	Peak

Above 1GHz:**5150-5250 MHz:**

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407	
	Reading (dBμV)	PK/QP/AV	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
4500	64.23	PK	204	1.8	H	-4.72	59.51	74	-14.49
4500	50.05	AV	204	1.8	H	-4.72	45.33	54	-8.67
4500	63.92	PK	62	1.5	V	-4.72	59.20	74	-14.80
4500	50.01	AV	62	1.5	V	-4.72	45.29	54	-8.71
5150	63.27	PK	124	2.1	H	-2.73	60.54	74	-13.46
5150	49.96	AV	124	2.1	H	-2.73	47.23	54	-6.77
5150	62.73	PK	29	2.1	V	-2.73	60.00	74	-14.00
5150	50.10	AV	29	2.1	V	-2.73	47.37	54	-6.63
10360	52.07	PK	253	1.7	H	8.12	60.19	68.2	-8.01
10360	49.78	PK	227	1.2	V	8.12	57.90	68.2	-10.30
5200 MHz									
10400	52.22	PK	356	2.3	H	8.24	60.46	68.2	-7.74
10400	49.50	PK	56	1.8	V	8.24	57.74	68.2	-10.46
5240 MHz									
5350	63.65	PK	252	2.1	H	-2.33	61.32	74	-12.68
5350	50.18	AV	252	2.1	H	-2.33	47.85	54	-6.15
5350	63.58	PK	63	1.3	V	-2.33	61.25	74	-12.75
5350	50.01	AV	63	1.3	V	-2.33	47.68	54	-6.32
5460	63.98	PK	317	1.9	H	-2.60	61.38	74	-12.62
5460	50.49	AV	317	1.9	H	-2.60	47.89	54	-6.11
5460	63.97	PK	214	2.4	V	-2.60	61.37	74	-12.63
5460	50.72	AV	214	2.4	V	-2.60	48.12	54	-5.88
10480	53.30	PK	92	1.1	H	8.56	61.86	68.2	-6.34
10480	50.51	PK	119	2.4	V	8.56	59.07	68.2	-9.13

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/AV	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5180 MHz									
4500	63.93	PK	334	2	H	-4.72	59.21	74	-14.79
4500	49.91	AV	334	2	H	-4.72	45.19	54	-8.81
4500	63.98	PK	169	1.8	V	-4.72	59.26	74	-14.74
4500	49.85	AV	169	1.8	V	-4.72	45.13	54	-8.87
5150	63.34	PK	297	1.9	H	-2.73	60.61	74	-13.39
5150	49.86	AV	297	1.9	H	-2.73	47.13	54	-6.87
5150	63.05	PK	101	1.6	V	-2.73	60.32	74	-13.68
5150	49.89	AV	101	1.6	V	-2.73	47.16	54	-6.84
10360	52.02	PK	66	1.8	H	8.12	60.14	68.2	-8.06
10360	49.01	PK	50	1.3	V	8.12	57.13	68.2	-11.07
5200 MHz									
10400	52.02	PK	171	1.5	H	8.24	60.26	68.2	-7.94
10400	49.02	PK	346	2.2	V	8.24	57.26	68.2	-10.94
5240 MHz									
5350	64.21	PK	201	2.3	H	-2.33	61.88	74	-12.12
5350	50.00	AV	201	2.3	H	-2.33	47.67	54	-6.33
5350	64.41	PK	334	1.8	V	-2.33	62.08	74	-11.92
5350	50.25	AV	334	1.8	V	-2.33	47.92	54	-6.08
5460	64.02	PK	150	2	H	-2.60	61.42	74	-12.58
5460	50.54	AV	150	2	H	-2.60	47.94	54	-6.06
5460	64.38	PK	0	1.5	V	-2.60	61.78	74	-12.22
5460	50.55	AV	0	1.5	V	-2.60	47.95	54	-6.05
10480	50.24	PK	20	1.6	H	8.56	58.80	68.2	-9.40
10480	48.64	PK	40	1.5	V	8.56	57.20	68.2	-11.00

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/AV	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5190 MHz									
4500	63.68	PK	333	1.2	H	-4.72	58.96	74	-15.04
4500	49.59	AV	333	1.2	H	-4.72	44.87	54	-9.13
4500	64.35	PK	83	1.8	V	-4.72	59.63	74	-14.37
4500	49.64	AV	83	1.8	V	-4.72	44.92	54	-9.08
5150	63.55	PK	22	2.4	H	-2.73	60.82	74	-13.18
5150	49.73	AV	22	2.4	H	-2.73	47.00	54	-7.00
5150	63.49	PK	284	1.4	V	-2.73	60.76	74	-13.24
5150	49.68	AV	284	1.4	V	-2.73	46.95	54	-7.05
10380	47.79	PK	212	1.7	H	8.18	55.97	68.2	-12.23
10380	46.75	PK	277	1.3	V	8.18	54.93	68.2	-13.27
5230 MHz									
5350	64.02	PK	284	1.7	H	-2.33	61.69	74	-12.31
5350	49.96	AV	284	1.7	H	-2.33	47.63	54	-6.37
5350	63.97	PK	310	1.2	V	-2.33	61.64	74	-12.36
5350	50.22	AV	310	1.2	V	-2.33	47.89	54	-6.11
5460	64.15	PK	218	2.2	H	-2.60	61.55	74	-12.45
5460	50.47	AV	218	2.2	H	-2.60	47.87	54	-6.13
5460	64.01	PK	286	1.3	V	-2.60	61.41	74	-12.59
5460	50.68	AV	286	1.3	V	-2.60	48.08	54	-5.92
10460	46.49	PK	78	1.2	H	8.47	54.96	68.2	-13.24
10460	45.29	PK	205	1	V	8.47	53.76	68.2	-14.44

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Correcte d Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/AV	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5180 MHz									
4500	63.70	PK	238	2.2	H	-4.72	58.98	74	-15.02
4500	49.72	AV	238	2.2	H	-4.72	45.00	54	-9.00
4500	63.73	PK	16	1.7	V	-4.72	59.01	74	-14.99
4500	49.76	AV	16	1.7	V	-4.72	45.04	54	-8.96
5150	63.15	PK	203	1.6	H	-2.73	60.42	74	-13.58
5150	49.67	AV	203	1.6	H	-2.73	46.94	54	-7.06
5150	63.30	PK	38	2	V	-2.73	60.57	74	-13.43
5150	50.03	AV	38	2	V	-2.73	47.30	54	-6.70
10360	51.08	PK	322	2	H	8.12	59.20	68.2	-9.00
10360	49.11	PK	294	1.4	V	8.12	57.23	68.2	-10.97
5200 MHz									
10400	51.18	PK	309	1.6	H	8.24	59.42	68.2	-8.78
10400	49.03	PK	73	2.3	V	8.24	57.27	68.2	-10.93
5240 MHz									
5350	64.41	PK	95	2.3	H	-2.33	62.08	74	-11.92
5350	50.41	AV	95	2.3	H	-2.33	48.08	54	-5.92
5350	64.23	PK	265	1.2	V	-2.33	61.90	74	-12.10
5350	50.13	AV	265	1.2	V	-2.33	47.80	54	-6.20
5460	64.32	PK	18	1.3	H	-2.60	61.72	74	-12.28
5460	50.62	AV	18	1.3	H	-2.60	48.02	54	-5.98
5460	64.14	PK	265	2.2	V	-2.60	61.54	74	-12.46
5460	50.56	AV	265	2.2	V	-2.60	47.96	54	-6.04
10480	50.34	PK	358	2.5	H	8.56	58.90	68.2	-9.30
10480	48.42	PK	25	1.9	V	8.56	56.98	68.2	-11.22

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Correcte d Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5190 MHz									
4500	63.62	PK	317	1.2	H	-4.72	58.90	74	-15.10
4500	49.73	AV	317	1.2	H	-4.72	45.01	54	-8.99
4500	64.29	PK	67	2.2	V	-4.72	59.57	74	-14.43
4500	49.83	AV	67	2.2	V	-4.72	45.11	54	-8.89
5150	63.41	PK	100	1.9	H	-2.73	60.68	74	-13.32
5150	49.93	AV	100	1.9	H	-2.73	47.20	54	-6.80
5150	63.24	PK	113	2.1	V	-2.73	60.51	74	-13.49
5150	49.82	AV	113	2.1	V	-2.73	47.09	54	-6.91
10380	49.23	PK	327	1.7	H	8.18	57.41	68.2	-10.79
10380	46.23	PK	42	2.4	V	8.18	54.41	68.2	-13.79
5230 MHz									
5350	64.09	PK	55	1.8	H	-2.33	61.76	74	-12.24
5350	50.04	AV	55	1.8	H	-2.33	47.71	54	-6.29
5350	64.35	PK	75	2	V	-2.33	62.02	74	-11.98
5350	50.31	AV	75	2	V	-2.33	47.98	54	-6.02
5460	64.10	PK	354	1.5	H	-2.60	61.50	74	-12.50
5460	50.94	AV	354	1.5	H	-2.60	48.34	54	-5.66
5460	64.34	PK	90	1.5	V	-2.60	61.74	74	-12.26
5460	50.70	AV	90	1.5	V	-2.60	48.10	54	-5.90
10460	46.61	PK	32	2.1	H	8.47	55.08	68.2	-13.12
10460	45.26	PK	255	2.4	V	8.47	53.73	68.2	-14.47

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Correcte d Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac80									
5210MHz									
4500	63.65	PK	55	1.2	H	-4.72	58.93	74	-15.07
4500	49.81	AV	55	1.2	H	-4.72	45.09	54	-8.91
4500	64.54	PK	304	1.3	V	-4.72	59.82	74	-14.18
4500	49.92	AV	304	1.3	V	-4.72	45.20	54	-8.80
5150	63.58	PK	107	2.3	H	-2.73	60.85	74	-13.15
5150	49.90	AV	107	2.3	H	-2.73	47.17	54	-6.83
5150	63.31	PK	135	1.9	V	-2.73	60.58	74	-13.42
5150	49.93	AV	135	1.9	V	-2.73	47.20	54	-6.80
5350	66.18	PK	344	1.1	H	-2.33	63.85	74	-10.15
5350	49.95	AV	344	1.1	H	-2.33	47.62	54	-6.38
5350	65.06	PK	309	2.1	V	-2.33	62.73	74	-11.27
5350	50.19	AV	309	2.1	V	-2.33	47.86	54	-6.14
5460	63.99	PK	249	1.7	H	-2.60	61.39	74	-12.61
5460	50.49	AV	249	1.7	H	-2.60	47.89	54	-6.11
5460	64.41	PK	195	1.6	V	-2.60	61.81	74	-12.19
5460	50.70	AV	195	1.6	V	-2.60	48.10	54	-5.90
10420	47.06	PK	17	2.4	H	8.32	55.38	68.2	-12.82
10420	44.74	PK	231	2.3	V	8.32	53.06	68.2	-15.14

5725-5850 MHz:

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5745 MHz									
5650	65.41	PK	293	2.2	H	-1.95	63.46	68.2	-4.74
5650	65.27	PK	160	1.8	V	-1.95	63.32	68.2	-4.88
5700	65.03	PK	278	1.1	H	-2.02	63.01	105.2	-42.19
5700	65.44	PK	190	2.4	V	-2.02	63.42	105.2	-41.78
5720	65.27	PK	25	1.6	H	-1.97	63.30	110.8	-47.50
5720	65.13	PK	286	1.9	V	-1.97	63.16	110.8	-47.64
5725	66.36	PK	209	2.1	H	-1.96	64.40	122.2	-57.80
5725	66.04	PK	317	1.7	V	-1.96	64.08	122.2	-58.12
11490	57.62	PK	153	1.9	H	6.63	64.25	74	-9.75
11490	41.75	AV	153	1.9	H	6.63	48.38	54	-5.62
11490	57.68	PK	232	1.9	V	6.63	64.31	74	-9.69
11490	41.65	AV	232	1.9	V	6.63	48.28	54	-5.72
5785 MHz									
11570	56.90	PK	20	2	H	6.59	63.49	74	-10.51
11570	40.56	AV	20	2	H	6.59	47.15	54	-6.85
11570	55.81	PK	107	1.5	V	6.59	62.40	74	-11.60
11570	39.90	AV	107	1.5	V	6.59	46.49	54	-7.51
5825 MHz									
5850	66.35	PK	97	2	H	-1.81	64.54	122.2	-57.66
5850	66.63	PK	26	1.4	V	-1.81	64.82	122.2	-57.38
5855	66.68	PK	348	2.2	H	-1.82	64.86	110.8	-45.94
5855	66.54	PK	215	1.2	V	-1.82	64.72	110.8	-46.08
5875	65.57	PK	208	1.5	H	-1.84	63.73	105.2	-41.47
5875	65.94	PK	236	1	V	-1.84	64.10	105.2	-41.10
5925	65.49	PK	215	1.1	H	-1.82	63.67	68.2	-4.53
5925	65.80	PK	34	1.1	V	-1.82	63.98	68.2	-4.22
11650	56.33	PK	133	1.7	H	6.77	63.10	74	-10.90
11650	40.15	AV	133	1.7	H	6.77	46.92	54	-7.08
11650	56.16	PK	41	1.5	V	6.77	62.93	74	-11.07
11650	39.40	AV	41	1.5	V	6.77	46.17	54	-7.83

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5745 MHz									
5650	65.28	PK	7	1.3	H	-1.95	63.33	68.2	-4.87
5650	65.22	PK	342	1.6	V	-1.95	63.27	68.2	-4.93
5700	65.46	PK	47	2.1	H	-2.02	63.44	105.2	-41.76
5700	65.39	PK	62	2.4	V	-2.02	63.37	105.2	-41.83
5720	65.26	PK	245	1.3	H	-1.97	63.29	110.8	-47.51
5720	65.29	PK	13	2	V	-1.97	63.32	110.8	-47.48
5725	66.34	PK	122	2.2	H	-1.96	64.38	122.2	-57.82
5725	66.43	PK	26	1.7	V	-1.96	64.47	122.2	-57.73
11490	54.47	PK	266	2.4	H	6.63	61.10	74	-12.90
11490	41.51	AV	266	2.4	H	6.63	48.14	54	-5.86
11490	55.82	PK	86	1.5	V	6.63	62.45	74	-11.55
11490	40.42	AV	86	1.5	V	6.63	47.05	54	-6.95
5785 MHz									
11570	54.78	PK	214	1.1	H	6.59	61.37	74	-12.63
11570	41.69	AV	214	1.1	H	6.59	48.28	54	-5.72
11570	54.87	PK	59	2.3	V	6.59	61.46	74	-12.54
11570	39.58	AV	59	2.3	V	6.59	46.17	54	-7.83
5825 MHz									
5850	66.48	PK	270	2.2	H	-1.81	64.67	122.2	-57.53
5850	66.37	PK	207	2	V	-1.81	64.56	122.2	-57.64
5855	66.25	PK	15	2.1	H	-1.82	64.43	110.8	-46.37
5855	66.38	PK	227	2.2	V	-1.82	64.56	110.8	-46.24
5875	65.42	PK	177	2.4	H	-1.84	63.58	105.2	-41.62
5875	65.92	PK	217	1.7	V	-1.84	64.08	105.2	-41.12
5925	65.55	PK	87	2.2	H	-1.82	63.73	68.2	-4.47
5925	65.93	PK	175	1.7	V	-1.82	64.11	68.2	-4.09
11650	53.92	PK	292	1.5	H	6.77	60.69	74	-13.31
11650	40.13	AV	292	1.5	H	6.77	46.90	54	-7.10
11650	54.05	PK	177	1.2	V	6.77	60.82	74	-13.18
11650	39.07	AV	177	1.2	V	6.77	45.84	54	-8.16

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5755 MHz									
5650	65.30	PK	168	1.3	H	-1.95	63.35	68.2	-4.85
5650	65.36	PK	29	2.1	V	-1.95	63.41	68.2	-4.79
5700	65.41	PK	219	2.2	H	-2.02	63.39	105.2	-41.81
5700	65.32	PK	210	1.8	V	-2.02	63.30	105.2	-41.90
5720	65.96	PK	272	1.1	H	-1.97	63.99	110.8	-46.81
5720	66.46	PK	279	2.1	V	-1.97	64.49	110.8	-46.31
5725	68.20	PK	354	2.4	H	-1.96	66.24	122.2	-55.96
5725	68.18	PK	324	2	V	-1.96	66.22	122.2	-55.98
11510	53.72	PK	23	1.4	H	6.59	60.31	74	-13.69
11510	38.81	AV	23	1.4	H	6.59	45.40	54	-8.60
11510	52.53	PK	122	1.6	V	6.59	59.12	74	-14.88
11510	37.61	AV	122	1.6	V	6.59	44.20	54	-9.80
5795 MHz									
5850	67.46	PK	249	1.9	H	-1.81	65.65	122.2	-56.55
5850	67.57	PK	51	2.3	V	-1.81	65.76	122.2	-56.44
5855	66.64	PK	310	1.1	H	-1.82	64.82	110.8	-45.98
5855	66.65	PK	158	1.1	V	-1.82	64.83	110.8	-45.97
5875	65.91	PK	248	2	H	-1.84	64.07	105.2	-41.13
5875	66.18	PK	148	1.1	V	-1.84	64.34	105.2	-40.86
5925	65.54	PK	144	1.5	H	-1.82	63.72	68.2	-4.48
5925	65.57	PK	292	1.3	V	-1.82	63.75	68.2	-4.45
11590	53.87	PK	257	2	H	6.57	60.44	74	-13.56
11590	39.65	AV	257	2	H	6.57	46.22	54	-7.78
11590	52.58	PK	280	2.2	V	6.57	59.15	74	-14.85
11590	37.66	AV	280	2.2	V	6.57	44.23	54	-9.77

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5745 MHz									
5650	64.95	PK	107	1.9	H	-1.95	63.00	68.2	-5.20
5650	65.17	PK	301	1.3	V	-1.95	63.22	68.2	-4.98
5700	65.43	PK	314	2.4	H	-2.02	63.41	105.2	-41.79
5700	65.46	PK	349	2.3	V	-2.02	63.44	105.2	-41.76
5720	66.45	PK	352	1	H	-1.97	64.48	110.8	-46.32
5720	65.96	PK	345	1.6	V	-1.97	63.99	110.8	-46.81
5725	67.27	PK	170	1.4	H	-1.96	65.31	122.2	-56.89
5725	67.09	PK	5	2.3	V	-1.96	65.13	122.2	-57.07
11490	54.42	PK	145	2.3	H	6.63	61.05	74	-12.95
11490	39.66	AV	145	2.3	H	6.63	46.29	54	-7.71
11490	55.44	PK	236	1.1	V	6.63	62.07	74	-11.93
11490	40.77	AV	236	1.1	V	6.63	47.40	54	-6.60
5785 MHz									
11570	54.89	PK	245	1.7	H	6.59	61.48	74	-12.52
11570	39.78	AV	245	1.7	H	6.59	46.37	54	-7.63
11570	55.55	PK	43	2.5	V	6.59	62.14	74	-11.86
11570	40.87	AV	43	2.5	V	6.59	47.46	54	-6.54
5825 MHz									
5850	67.28	PK	298	1.4	H	-1.81	65.47	122.2	-56.73
5850	66.82	PK	7	1.2	V	-1.81	65.01	122.2	-57.19
5855	66.44	PK	206	1.1	H	-1.82	64.62	110.8	-46.18
5855	66.25	PK	68	2.1	V	-1.82	64.43	110.8	-46.37
5875	65.72	PK	20	1.5	H	-1.84	63.88	105.2	-41.32
5875	65.96	PK	30	2.1	V	-1.84	64.12	105.2	-41.08
5925	65.64	PK	148	1.9	H	-1.82	63.82	68.2	-4.38
5925	65.88	PK	116	1.9	V	-1.82	64.06	68.2	-4.14
11650	54.12	PK	181	2	H	6.77	60.89	74	-13.11
11650	39.13	AV	181	2	H	6.77	45.90	54	-8.10
11650	54.35	PK	146	1.6	V	6.77	61.12	74	-12.88
11650	39.13	AV	146	1.6	V	6.77	45.90	54	-8.10

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5755 MHz									
5650	65.17	PK	80	2.4	H	-1.95	63.22	68.2	-4.98
5650	65.33	PK	22	1.7	V	-1.95	63.38	68.2	-4.82
5700	65.47	PK	360	1.1	H	-2.02	63.45	105.2	-41.75
5700	65.03	PK	70	2.5	V	-2.02	63.01	105.2	-42.19
5720	66.21	PK	257	1.6	H	-1.97	64.24	110.8	-46.56
5720	66.06	PK	315	2.3	V	-1.97	64.09	110.8	-46.71
5725	68.22	PK	110	2.4	H	-1.96	66.26	122.2	-55.94
5725	68.41	PK	124	2.2	V	-1.96	66.45	122.2	-55.75
11510	52.59	PK	117	1.4	H	6.59	59.18	74	-14.82
11510	35.65	AV	117	1.4	H	6.59	42.24	54	-11.76
11510	53.80	PK	280	1.1	V	6.59	60.39	74	-13.61
11510	36.46	AV	280	1.1	V	6.59	43.05	54	-10.95
5795 MHz									
5850	66.27	PK	281	1.6	H	-1.81	64.46	122.2	-57.74
5850	66.19	PK	163	1.4	V	-1.81	64.38	122.2	-57.82
5855	66.67	PK	206	1.3	H	-1.82	64.85	110.8	-45.95
5855	66.55	PK	54	2.4	V	-1.82	64.73	110.8	-46.07
5875	65.26	PK	284	1.2	H	-1.84	63.42	105.2	-41.78
5875	65.98	PK	78	1.4	V	-1.84	64.14	105.2	-41.06
5925	66.08	PK	353	2.3	H	-1.82	64.26	68.2	-3.94
5925	66.28	PK	211	1.8	V	-1.82	64.46	68.2	-3.74
11590	51.57	PK	305	1.2	H	6.57	58.14	74	-15.86
11590	35.50	AV	305	1.2	H	6.57	42.07	54	-11.93
11590	52.82	PK	164	1.8	V	6.57	59.39	74	-14.61
11590	36.83	AV	164	1.8	V	6.57	43.40	54	-10.60

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac80									
5775 MHz									
5650	65.22	PK	11	1.9	H	-1.95	63.27	68.2	-4.93
5650	64.96	PK	218	2.1	V	-1.95	63.01	68.2	-5.19
5700	65.37	PK	211	1.4	H	-2.02	63.35	105.2	-41.85
5700	65.02	PK	46	1.8	V	-2.02	63.00	105.2	-42.20
5720	66.98	PK	4	2.1	H	-1.97	65.01	110.8	-45.79
5720	67.16	PK	275	1.1	V	-1.97	65.19	110.8	-45.61
5725	68.42	PK	138	2.4	H	-1.96	66.46	122.2	-55.74
5725	68.31	PK	181	2.1	V	-1.96	66.35	122.2	-55.85
5850	67.47	PK	91	1.1	H	-1.81	65.66	122.2	-56.54
5850	67.24	PK	13	2	V	-1.81	65.43	122.2	-56.77
5855	66.22	PK	93	1.8	H	-1.82	64.40	110.8	-46.40
5855	66.59	PK	233	1.2	V	-1.82	64.77	110.8	-46.03
5875	65.81	PK	24	1.6	H	-1.84	63.97	105.2	-41.23
5875	66.03	PK	245	2.3	V	-1.84	64.19	105.2	-41.01
5925	65.81	PK	192	1.7	H	-1.82	63.99	68.2	-4.21
5925	65.92	PK	110	2.2	V	-1.82	64.10	68.2	-4.10
11550	46.90	PK	249	2.5	H	6.61	53.51	74	-20.49
11550	46.52	PK	67	2.1	V	6.61	53.13	74	-20.87

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is in the noise floor level was not recorded.

When the test result of peak was less than the limit of average, just peak value were recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

802.11 a, 5745MHz

Horizontal

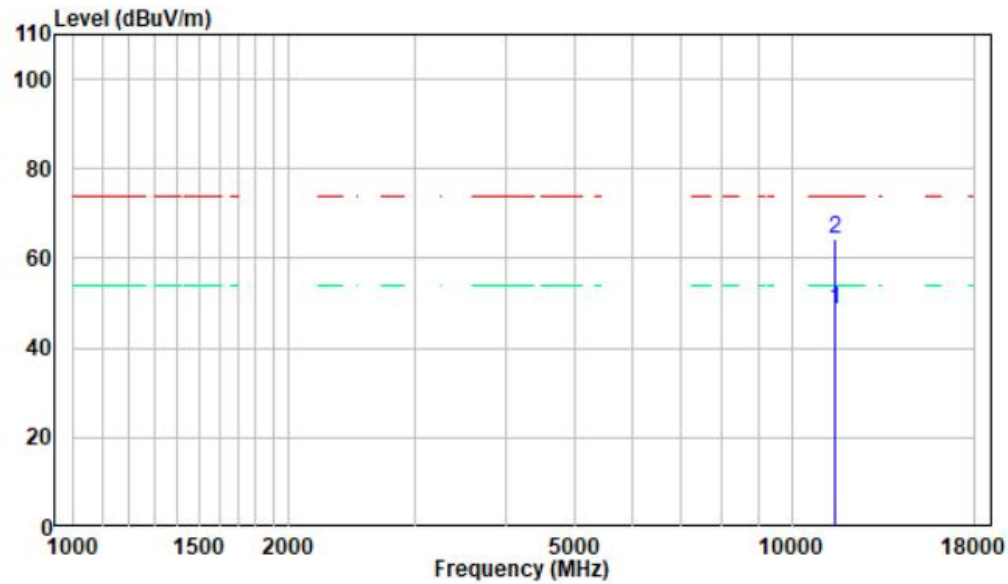


Vertical

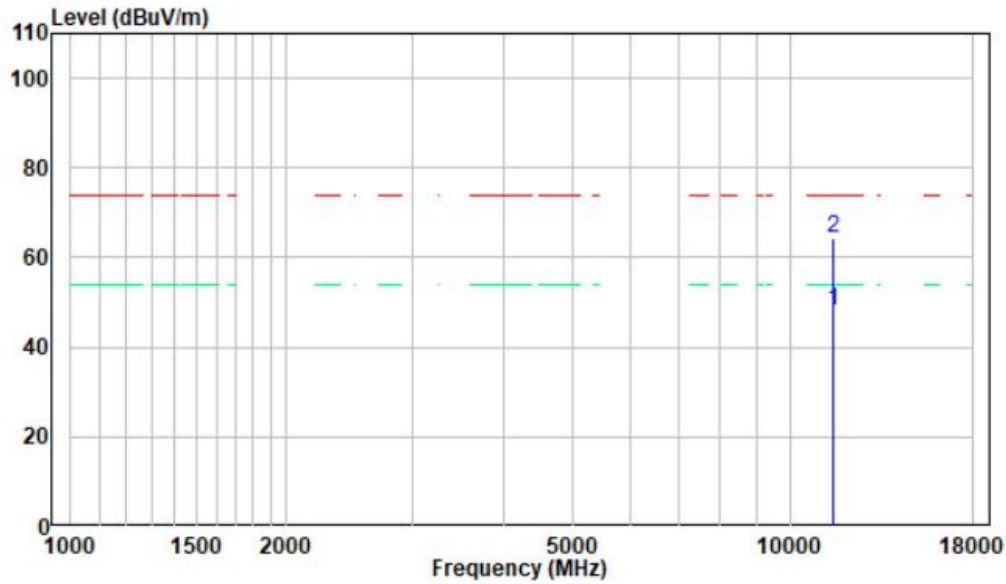


18-40GHz: (Pre-Scan plots)

802.11a, 5745MHz

Horizontal

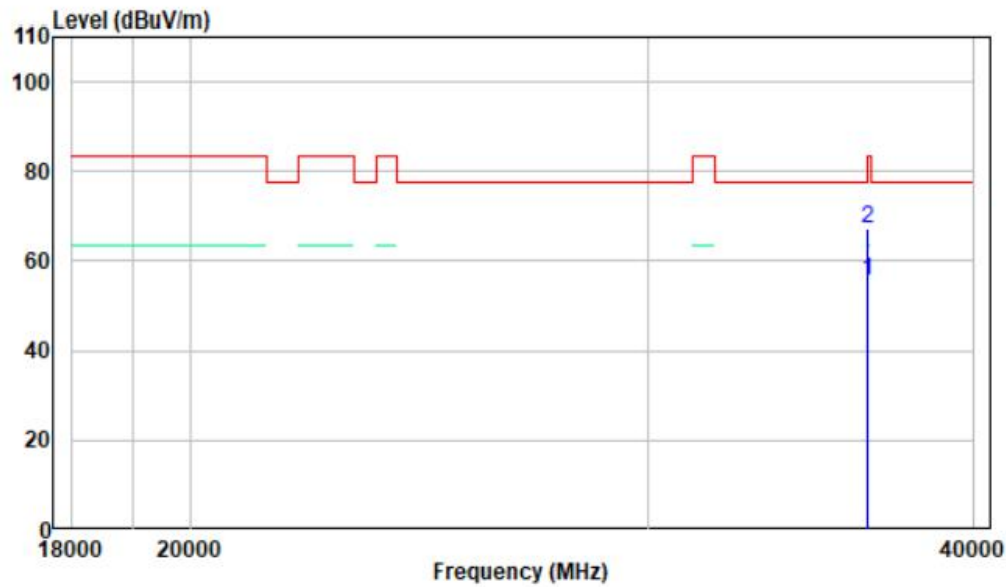

Vertical

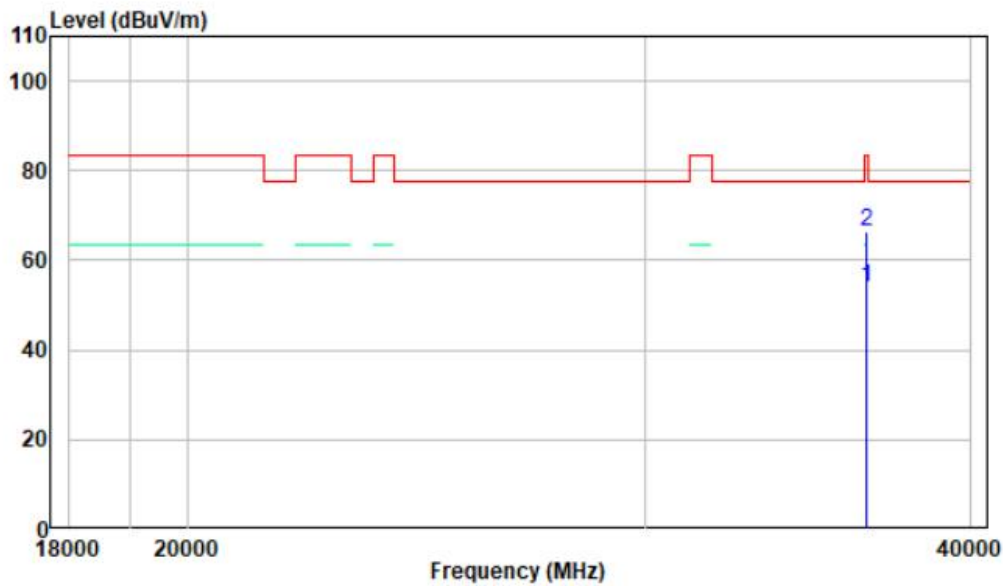

FCC §15.407(a),(e) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	23℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2022-02-24

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

- c. Place the EUT on a bench and set it in transmitting mode.
- d. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- e. Add a correction factor to the display.



Note: the RF Control Unit has a built-in power sensor.

Test Data**Environmental Conditions**

Temperature:	23℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2022-02-24

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) - POWER SPECTRAL DENSITY

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



Test Data**Environmental Conditions**

Temperature:	23℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2022-02-24

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.


APPENDIX

AppendixA1: Emission Bandwidth Test Result


Test Mode	Antenna	Channel	26db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.840	---	PASS
		5200	20.080	---	PASS
		5240	19.880	---	PASS
11N20SISO	Ant1	5180	20.440	---	PASS
		5200	20.160	---	PASS
		5240	20.280	---	PASS
11N40SISO	Ant1	5190	41.200	---	PASS
		5230	40.880	---	PASS
11AC20SISO	Ant1	5180	20.360	---	PASS
		5200	20.160	---	PASS
		5240	20.400	---	PASS
11AC40SISO	Ant1	5190	41.120	---	PASS
		5230	41.120	---	PASS
11AC80SISO	Ant1	5210	81.440	---	PASS

Test Graphs


11A Ant1 5180

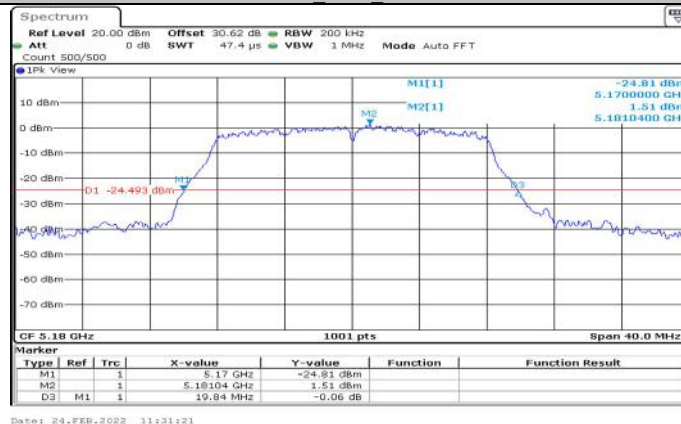


11A Ant1 5200

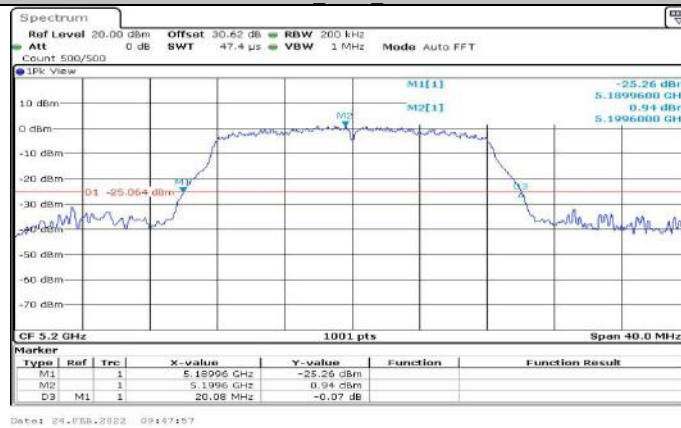

11A Ant1 5240

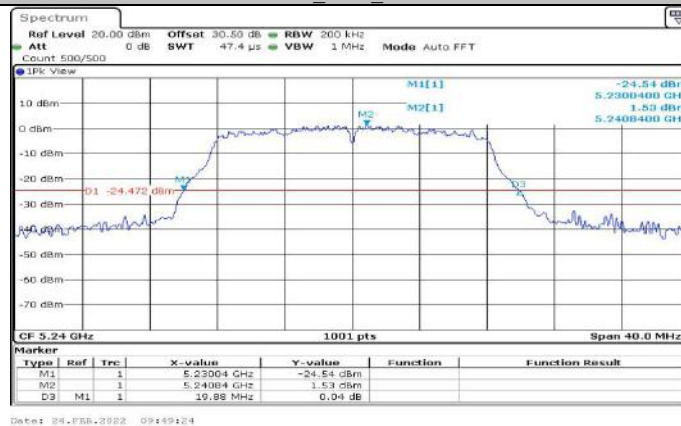

11N20SISO Ant1 5180

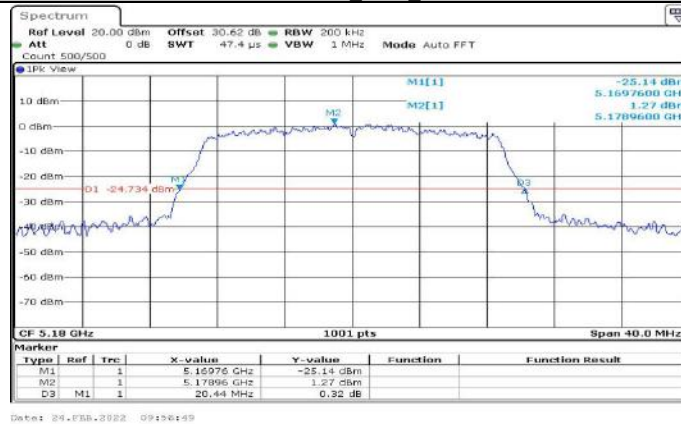


11N20SISO Ant1 5200



11N20SISO Ant1 5240




11N40SISO Ant1 5190

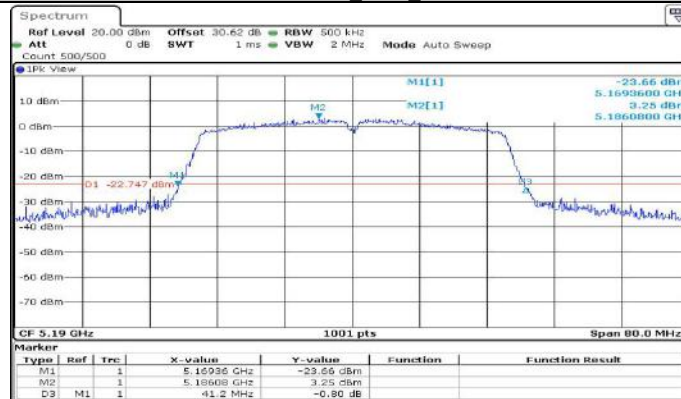


Date: 24.Feb.2022 10:09:47

11N40SISO Ant1 5230

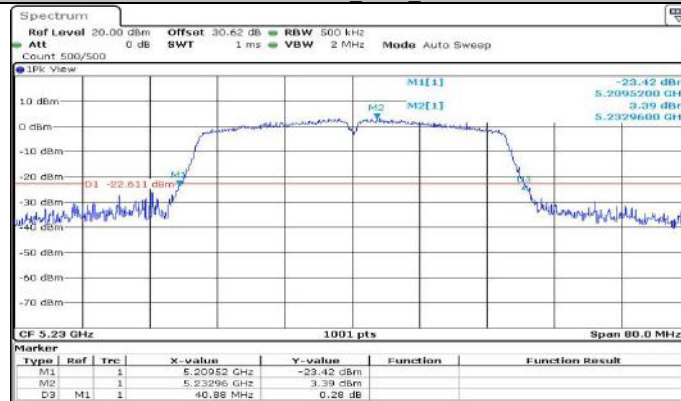

Date: 24.Feb.2022 10:11:18

11AC20SISO Ant1 5180

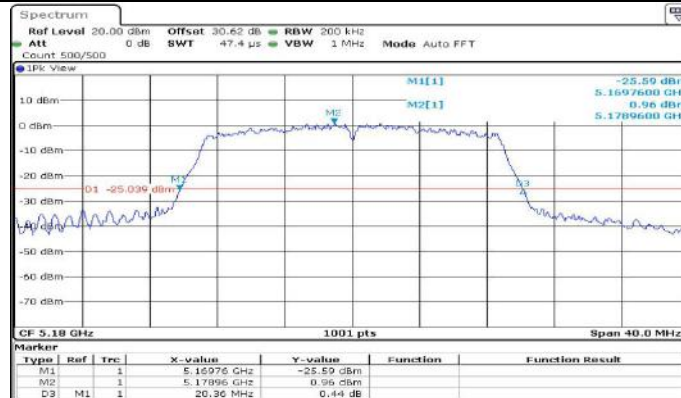


Date: 24.Feb.2022 10:18:28


11AC20SISO Ant1 5200




11AC20SISO Ant1 5240

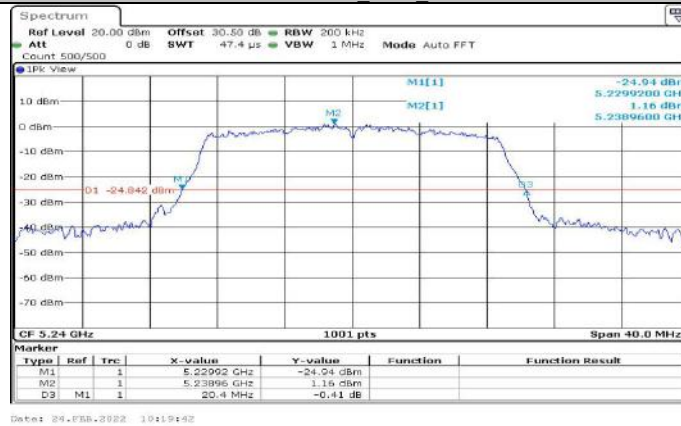

11AC40SISO Ant1 5190

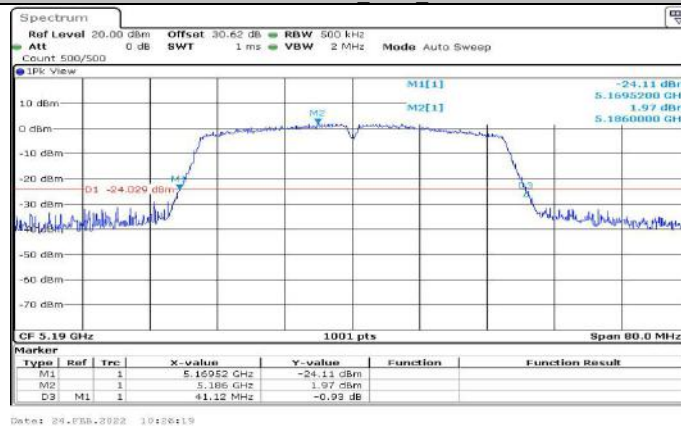

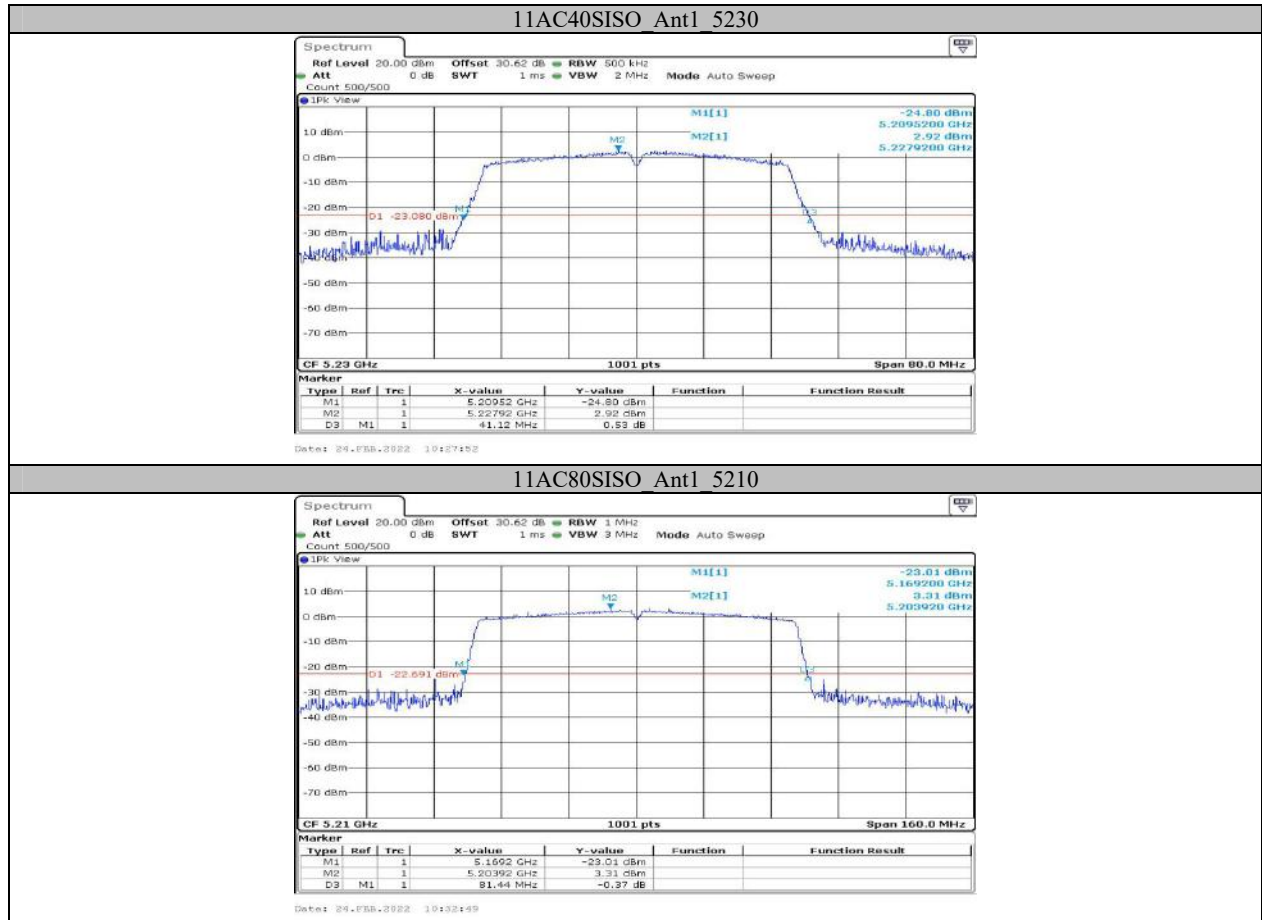


AppendixA2: Occupied channel bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.742	---	PASS
		5200	17.383	---	PASS
		5240	17.263	---	PASS
		5745	17.423	---	PASS
		5785	17.423	---	PASS
		5825	17.383	---	PASS
11N20SISO	Ant1	5180	18.102	---	PASS
		5200	18.142	---	PASS
		5240	18.102	---	PASS
		5745	18.262	---	PASS
		5785	18.222	---	PASS
		5825	18.302	---	PASS
11N40SISO	Ant1	5190	36.683	---	PASS
		5230	36.603	---	PASS
		5755	37.163	---	PASS
		5795	37.003	---	PASS
11AC20SISO	Ant1	5180	18.102	---	PASS
		5200	18.182	---	PASS
		5240	18.142	---	PASS
		5745	18.222	---	PASS
		5785	18.262	---	PASS
		5825	18.262	---	PASS
11AC40SISO	Ant1	5190	36.763	---	PASS
		5230	36.603	---	PASS
		5755	37.003	---	PASS
		5795	37.003	---	PASS
11AC80SISO	Ant1	5210	75.604	---	PASS
		5775	76.244	---	PASS

Note: the device not operating within frequency range of 52250-5350MHz and 5470-5725MHz

Test Graphs

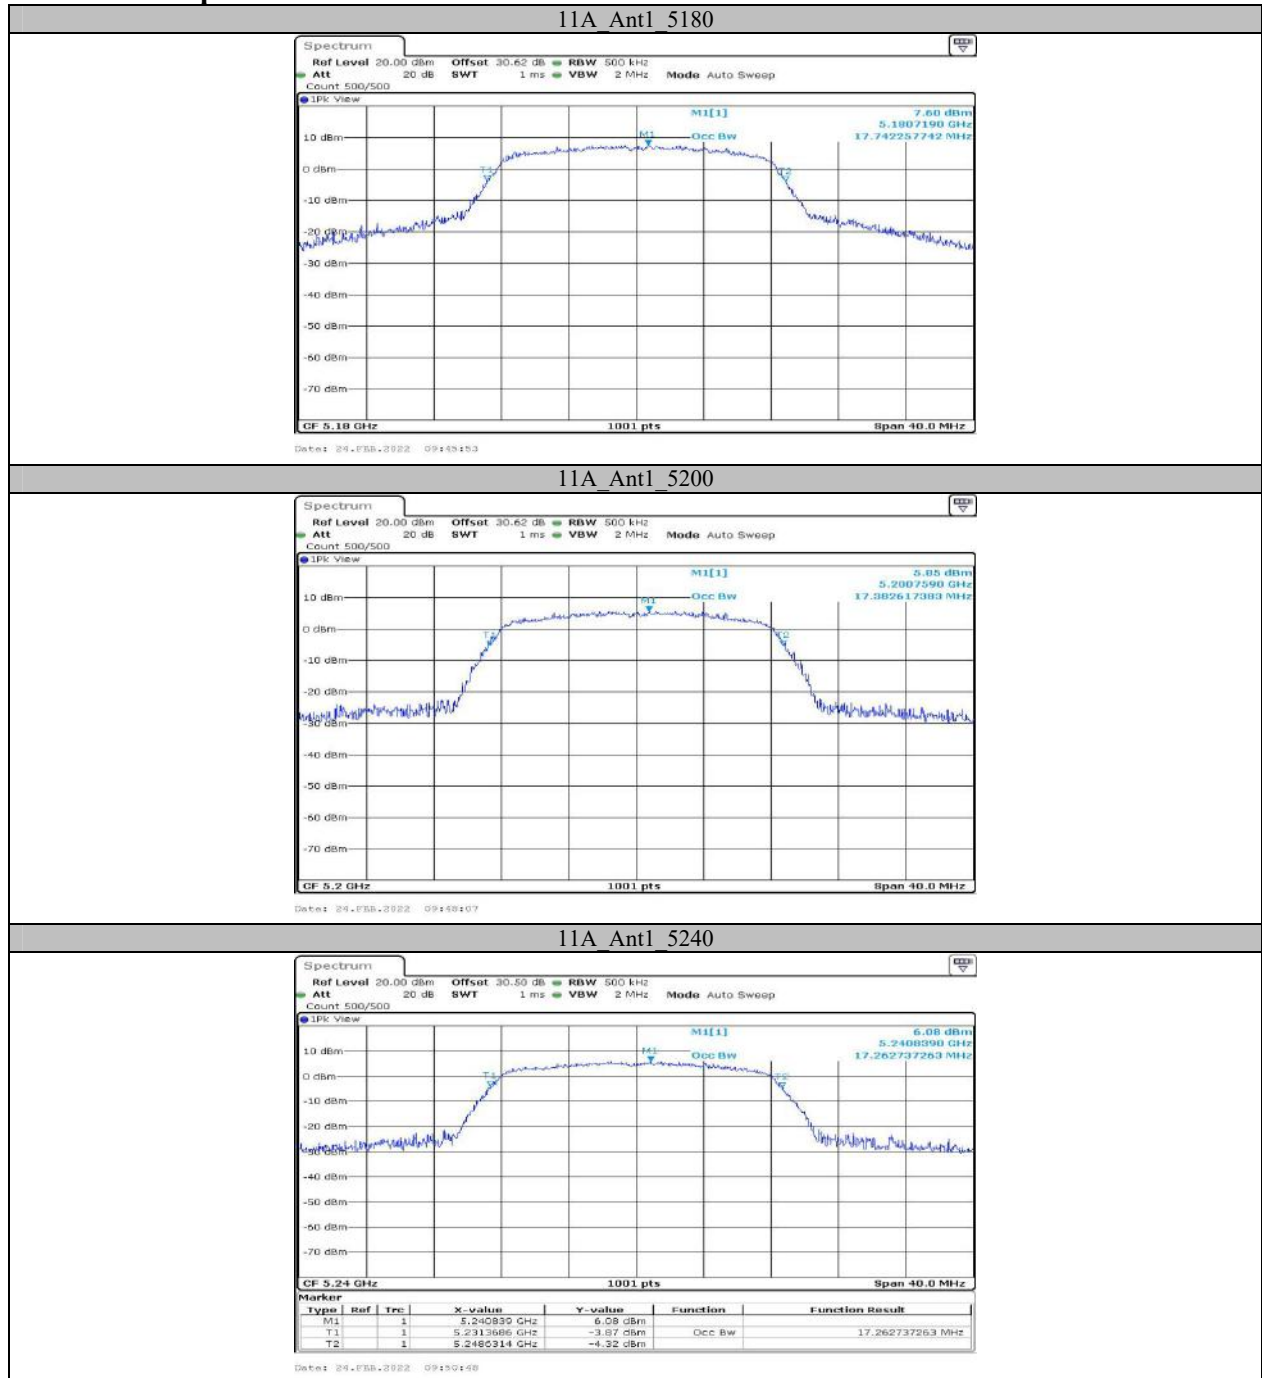

11A Ant1 5745



11A Ant1 5785



11A Ant1 5825



11N20SISO Ant1 5180



11N20SISO Ant1 5200



11N20SISO Ant1 5240



11N20SISO Ant1 5745



11N20SISO Ant1 5785



11N20SISO Ant1 5825



11N40SISO Ant1 5190



11N40SISO Ant1 5230



11N40SISO Ant1 5755



11N40SISO Ant1 5795




11AC20SISO Ant1 5180



11AC20SISO Ant1 5200



11AC20SISO Ant1 5240

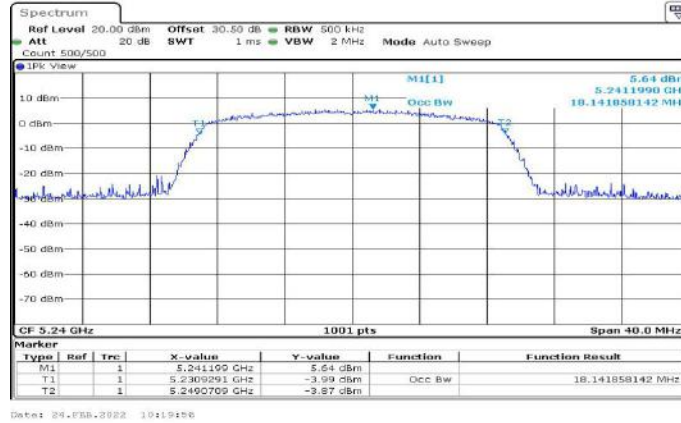

11AC20SISO Ant1 5745



11AC20SISO Ant1 5785



11AC20SISO Ant1 5825



11AC40SISO Ant1 5190



11AC40SISO Ant1 5230



11AC40SISO Ant1 5755




11AC40SISO Ant1 5795



11AC80SISO Ant1 5210



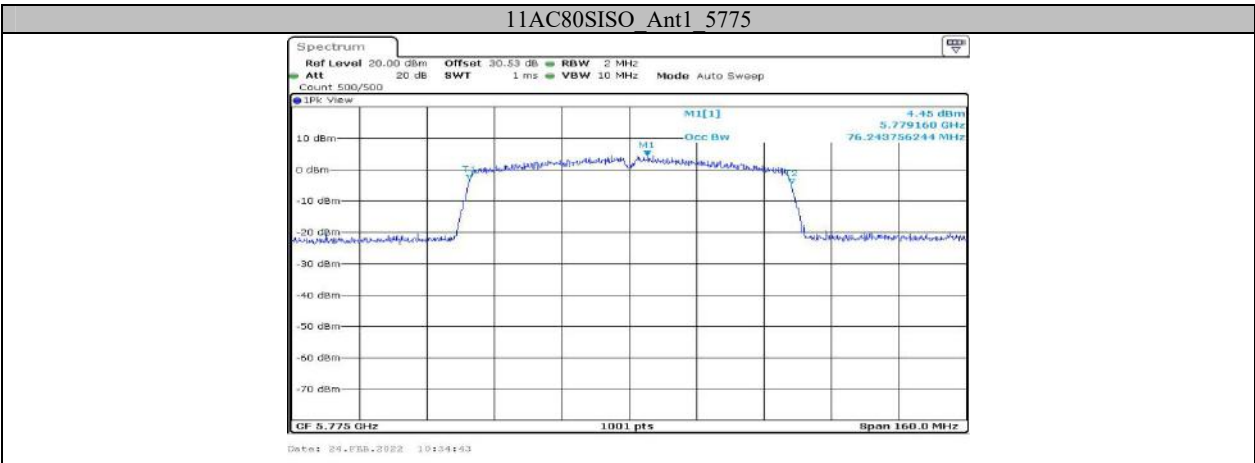


**AppendixA3: Min emission bandwidth
Test Result**


Test Mode	Antenna	Channel	6db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.400	0.5	PASS
		5785	16.400	0.5	PASS
		5825	16.400	0.5	PASS
11N20SISO	Ant1	5745	17.680	0.5	PASS
		5785	17.640	0.5	PASS
		5825	17.680	0.5	PASS
11N40SISO	Ant1	5755	36.480	0.5	PASS
		5795	36.000	0.5	PASS
11AC20SISO	Ant1	5745	17.680	0.5	PASS
		5785	17.680	0.5	PASS
		5825	17.680	0.5	PASS
11AC40SISO	Ant1	5755	36.480	0.5	PASS
		5795	36.240	0.5	PASS
11AC80SISO	Ant1	5775	76.800	0.5	PASS

Test Graphs


11A Ant1 5745

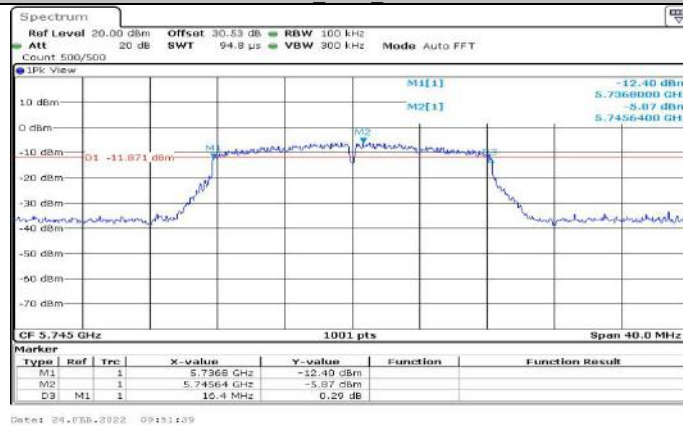


11A Ant1 5785

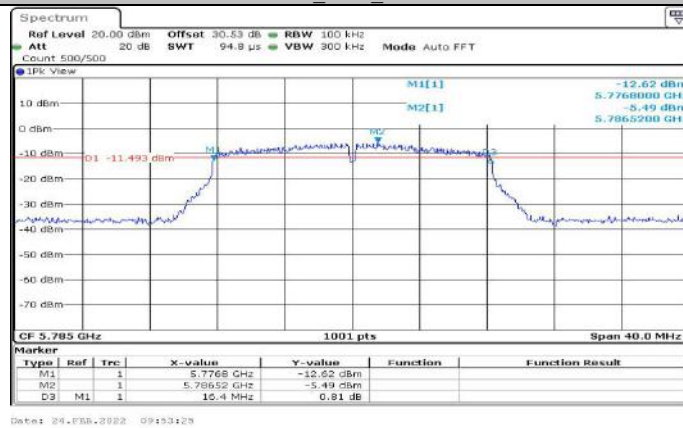


11A Ant1 5825

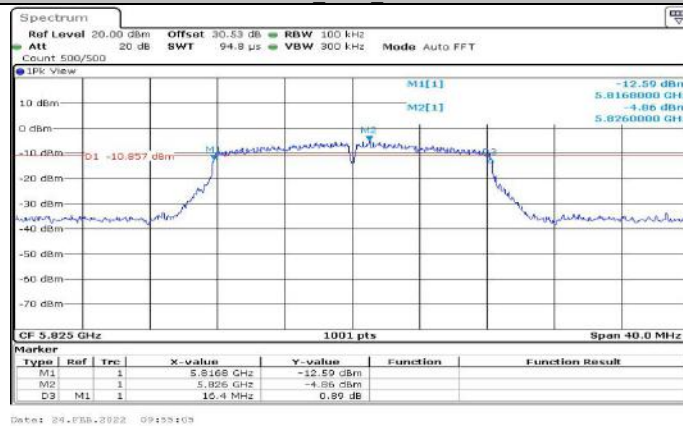

11N20SISO Ant1 5745

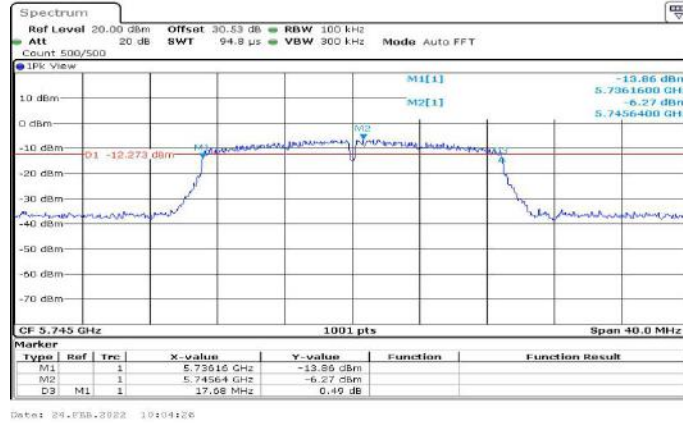


11N20SISO Ant1 5785

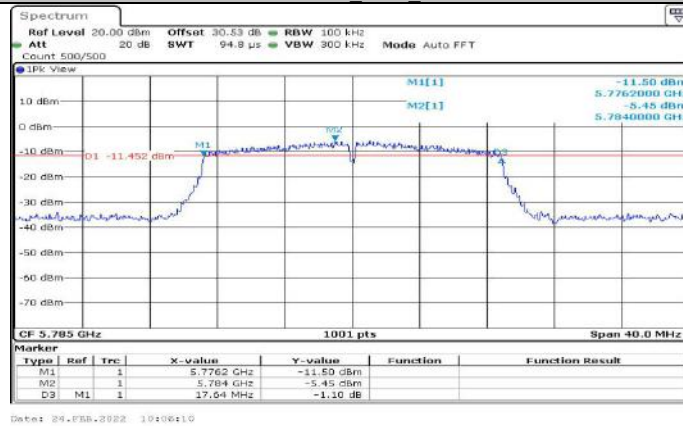

11N20SISO Ant1 5825




11N40SISO Ant1 5755

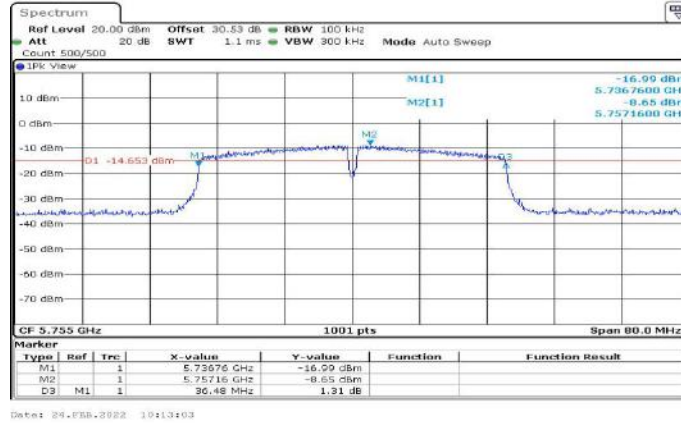


11N40SISO Ant1 5795



11AC20SISO Ant1 5745

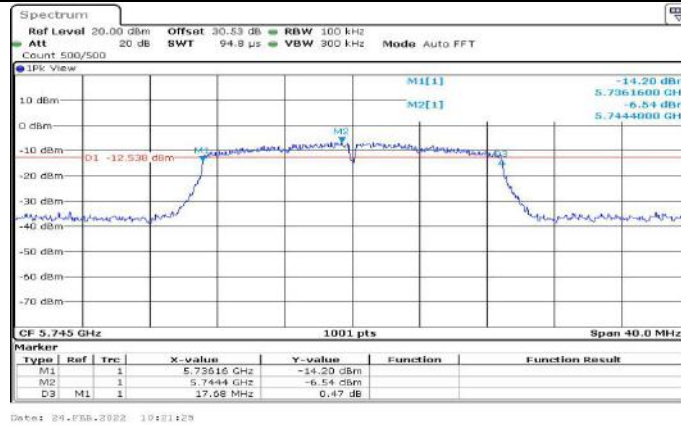


11AC20SISO Ant1 5785

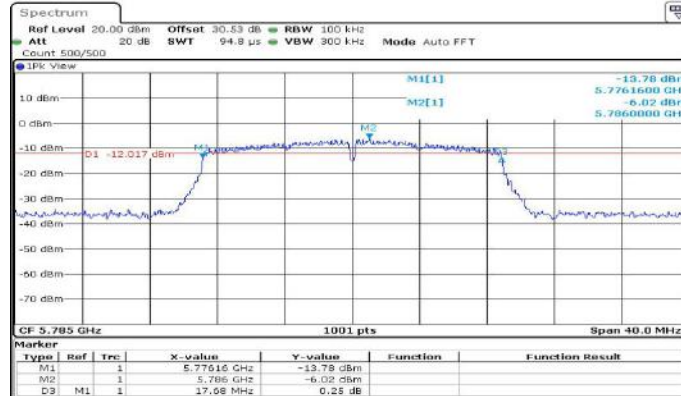


Date: 24.Feb.2022 10:24:04

11AC20SISO Ant1 5825

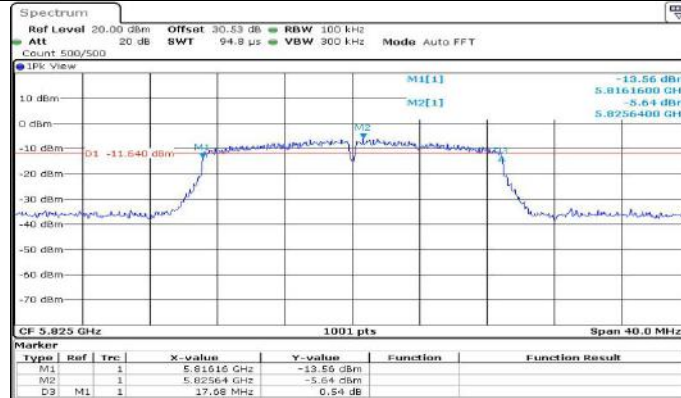


Date: 24.Feb.2022 10:24:43

11AC40SISO Ant1 5755

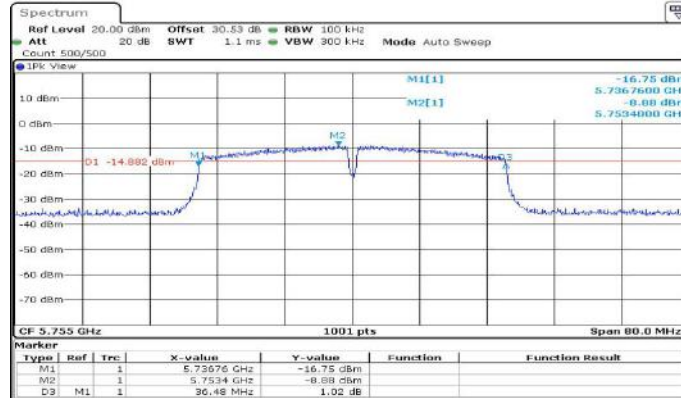

Date: 24.Feb.2022 10:29:43

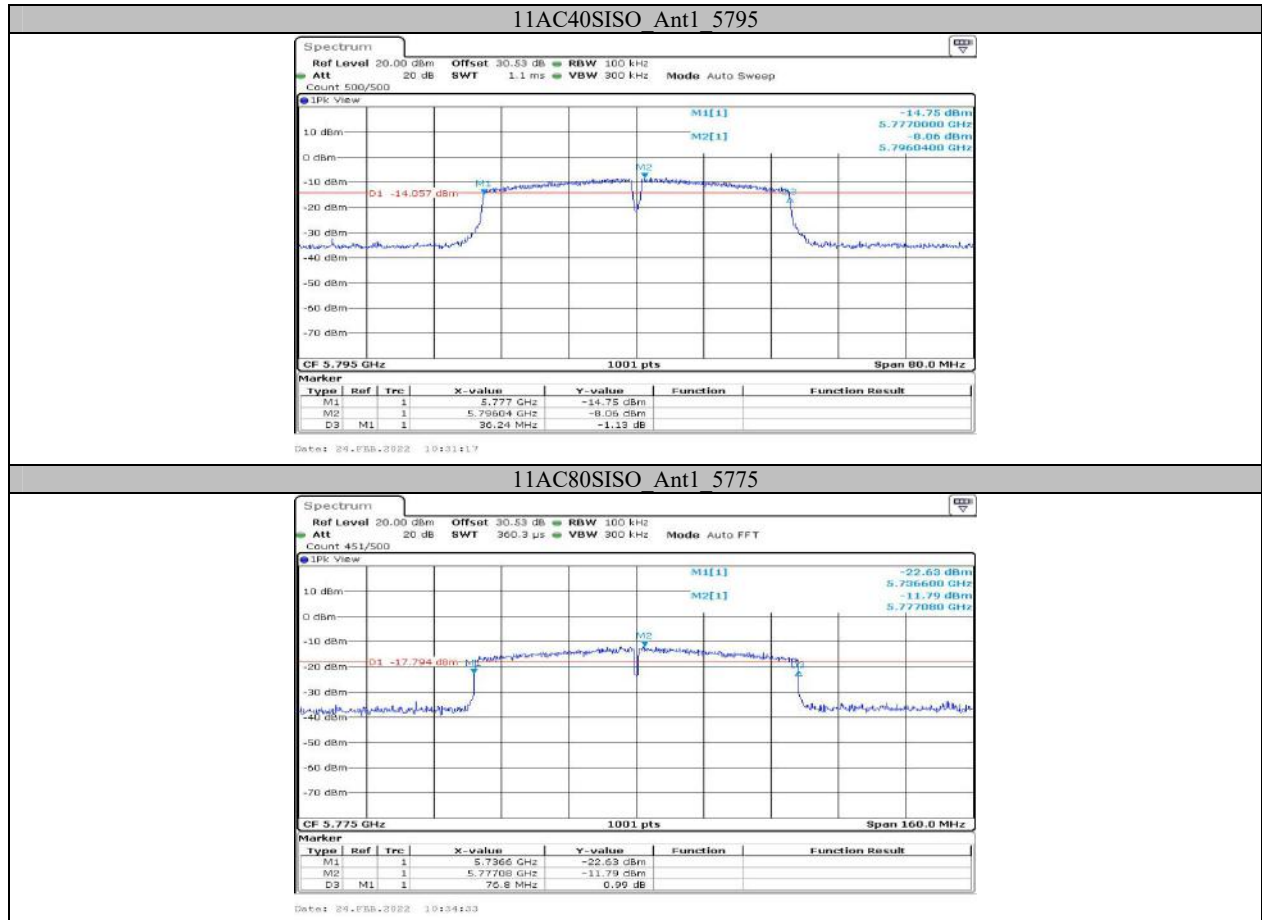


AppendixB: Maximum conducted average output power Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	11.46	≤23.98	PASS
		5200	11.66	≤23.98	PASS
		5240	11.47	≤23.98	PASS
		5745	7.92	≤30	PASS
		5785	8.13	≤30	PASS
		5825	8.29	≤30	PASS
11N20SISO	Ant1	5180	11.16	≤23.98	PASS
		5200	11.46	≤23.98	PASS
		5240	11.24	≤23.98	PASS
		5745	7.78	≤30	PASS
		5785	8.16	≤30	PASS
		5825	7.86	≤30	PASS
11N40SISO	Ant1	5190	11.33	≤23.98	PASS
		5230	11.30	≤23.98	PASS
		5755	7.89	≤30	PASS
		5795	8.25	≤30	PASS
11AC20SISO	Ant1	5180	11.42	≤23.98	PASS
		5200	11.63	≤23.98	PASS
		5240	11.21	≤23.98	PASS
		5745	7.50	≤30	PASS
		5785	7.66	≤30	PASS
		5825	7.69	≤30	PASS
11AC40SISO	Ant1	5190	10.67	≤23.98	PASS
		5230	10.88	≤23.98	PASS
		5755	7.93	≤30	PASS
		5795	8.32	≤30	PASS
11AC80SISO	Ant1	5210	11.34	≤23.98	PASS
		5775	8.14	≤30	PASS

AppendixC: Maximum power spectral density Test Result

Test Mode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	6.29	≤11	PASS
		5200	6.41	≤11	PASS
		5240	5.98	≤11	PASS
		5745	0.40	≤30	PASS
		5785	0.81	≤30	PASS
		5825	1.06	≤30	PASS
11N20SISO	Ant1	5180	5.85	≤11	PASS
		5200	5.77	≤11	PASS
		5240	5.95	≤11	PASS
		5745	-0.04	≤30	PASS
		5785	0.32	≤30	PASS
		5825	0.80	≤30	PASS
11N40SISO	Ant1	5190	2.68	≤11	PASS
		5230	2.91	≤11	PASS
		5755	-2.14	≤30	PASS
		5795	-2.16	≤30	PASS
11AC20SISO	Ant1	5180	6.19	≤11	PASS
		5200	6.30	≤11	PASS
		5240	5.73	≤11	PASS
		5745	0.25	≤30	PASS
		5785	0.13	≤30	PASS
		5825	0.36	≤30	PASS
11AC40SISO	Ant1	5190	2.13	≤11	PASS
		5230	2.34	≤11	PASS
		5755	-2.35	≤30	PASS
		5795	-2.26	≤30	PASS
11AC80SISO	Ant1	5210	-0.86	≤11	PASS
		5775	-5.68	≤30	PASS

Note: 1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2. The Duty Cycle Factor is compensated in the graph.

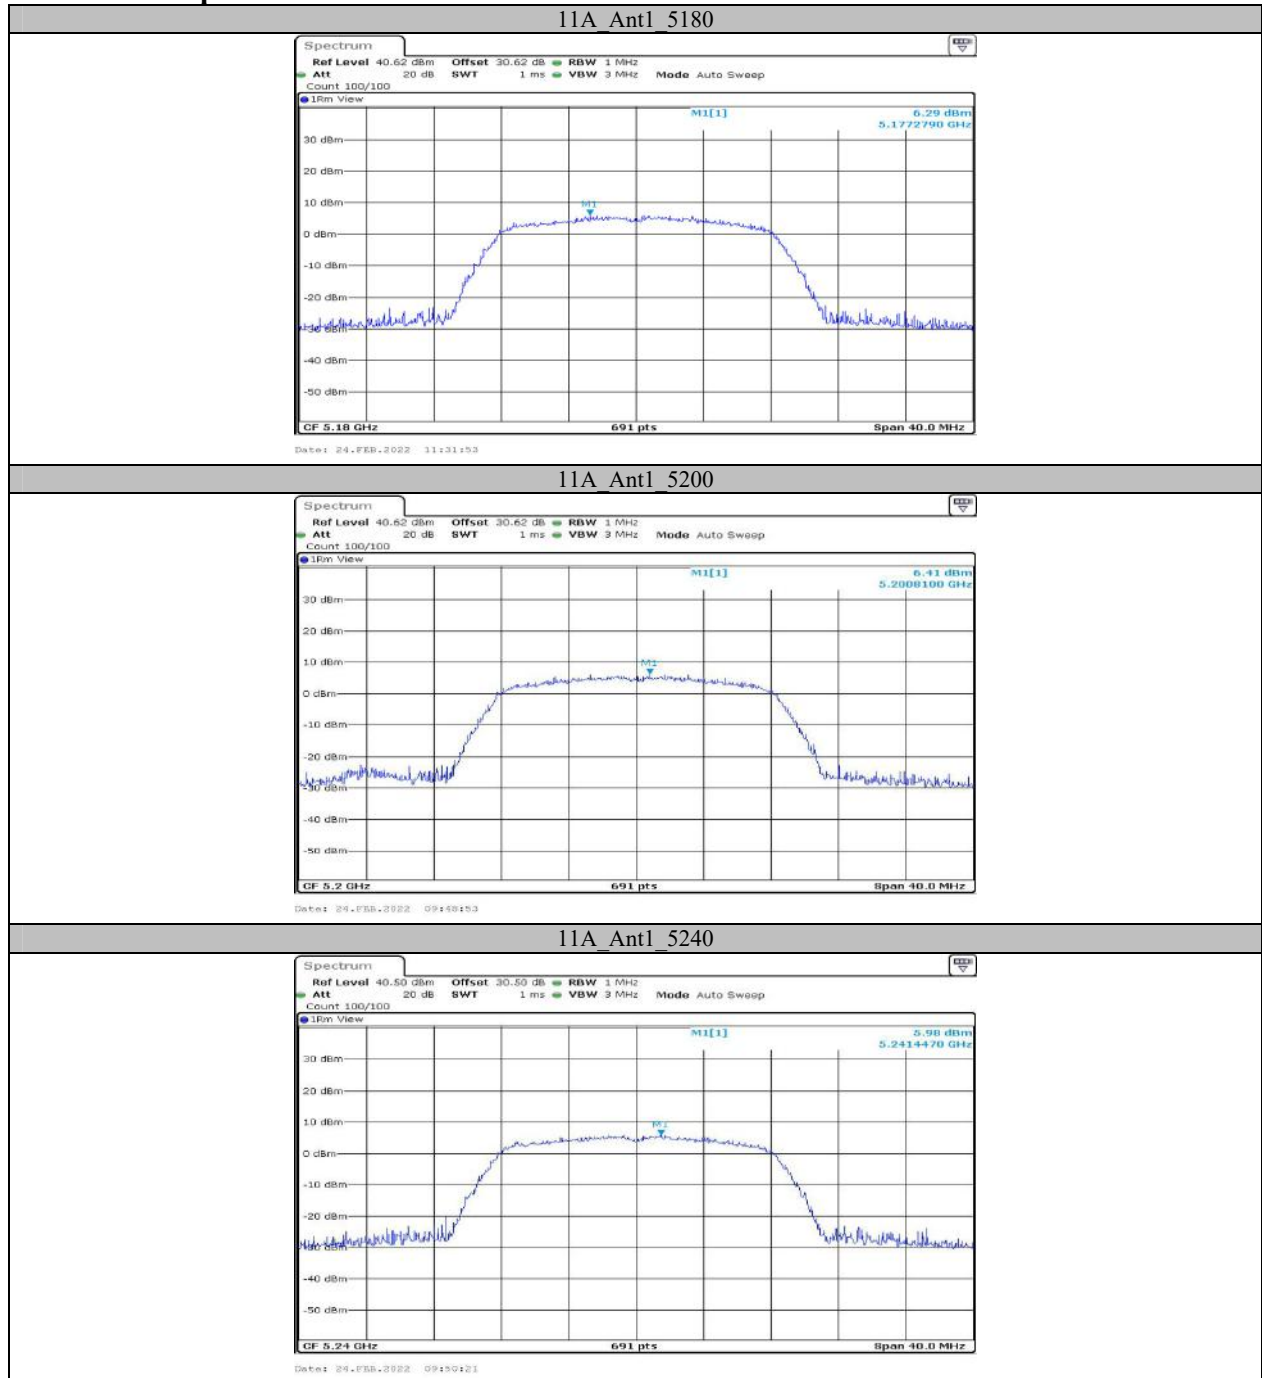Test Graphs

11A Ant1 5745




11A Ant1 5785



11A Ant1 5825



11N20SISO Ant1 5180

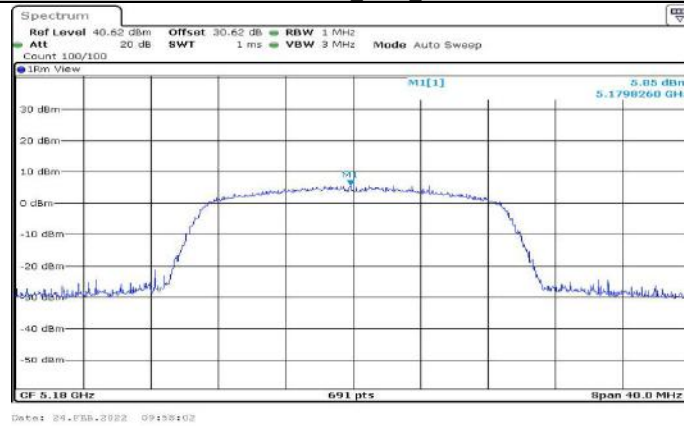

11N20SISO Ant1 5200



11N20SISO Ant1 5240



11N20SISO Ant1 5745



11N20SISO Ant1 5785



11N20SISO Ant1 5825



11N40SISO Ant1 5190




11N40SISO Ant1 5230



11N40SISO Ant1 5755



11N40SISO Ant1 5795

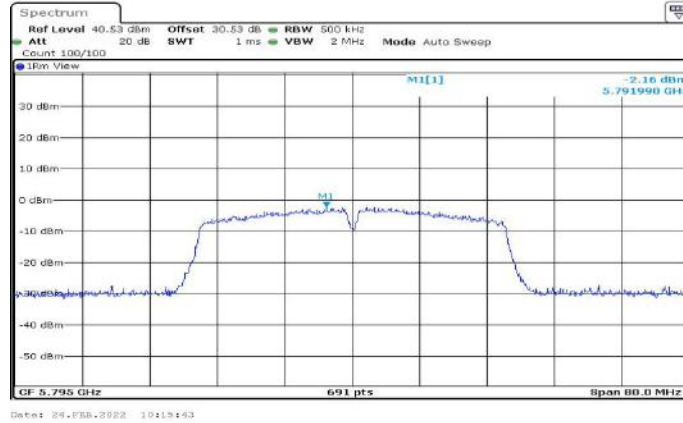


11AC20SISO Ant1 5180



11AC20SISO Ant1 5200



11AC20SISO Ant1 5240

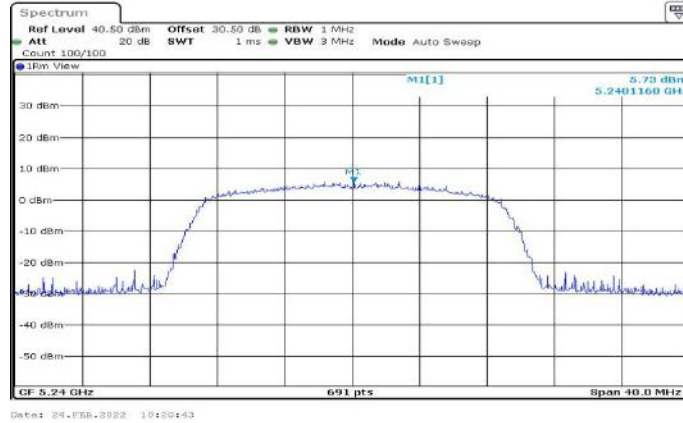

11AC20SISO Ant1 5745



11AC20SISO Ant1 5785



11AC20SISO Ant1 5825



11AC40SISO Ant1 5190



11AC40SISO Ant1 5230



11AC40SISO_Ant1_5755



11AC40SISO_Ant1_5795



11AC80SISO_Ant1_5210







AppendixD: Duty Cycle Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	30.00	30.00	100.00
		5200	30.00	30.00	100.00
		5240	30.00	30.00	100.00
		5745	30.00	30.00	100.00
		5785	30.00	30.00	100.00
		5825	30.00	30.00	100.00
11N20SISO	Ant1	5180	30.00	30.00	100.00
		5200	30.00	30.00	100.00
		5240	30.00	30.00	100.00
		5745	30.00	30.00	100.00
		5785	30.00	30.00	100.00
		5825	30.00	30.00	100.00
11N40SISO	Ant1	5190	30.00	30.00	100.00
		5230	30.00	30.00	100.00
		5755	30.00	30.00	100.00
		5795	30.00	30.00	100.00
11AC20SISO	Ant1	5180	30.00	30.00	100.00
		5200	30.00	30.00	100.00
		5240	30.00	30.00	100.00
		5745	30.00	30.00	100.00
		5785	30.00	30.00	100.00
		5825	30.00	30.00	100.00
11AC40SISO	Ant1	5190	30.00	30.00	100.00
		5230	30.00	30.00	100.00
		5755	30.00	30.00	100.00
		5795	30.00	30.00	100.00
11AC80SISO	Ant1	5210	30.00	30.00	100.00
		5775	30.00	30.00	100.00


Test Graphs

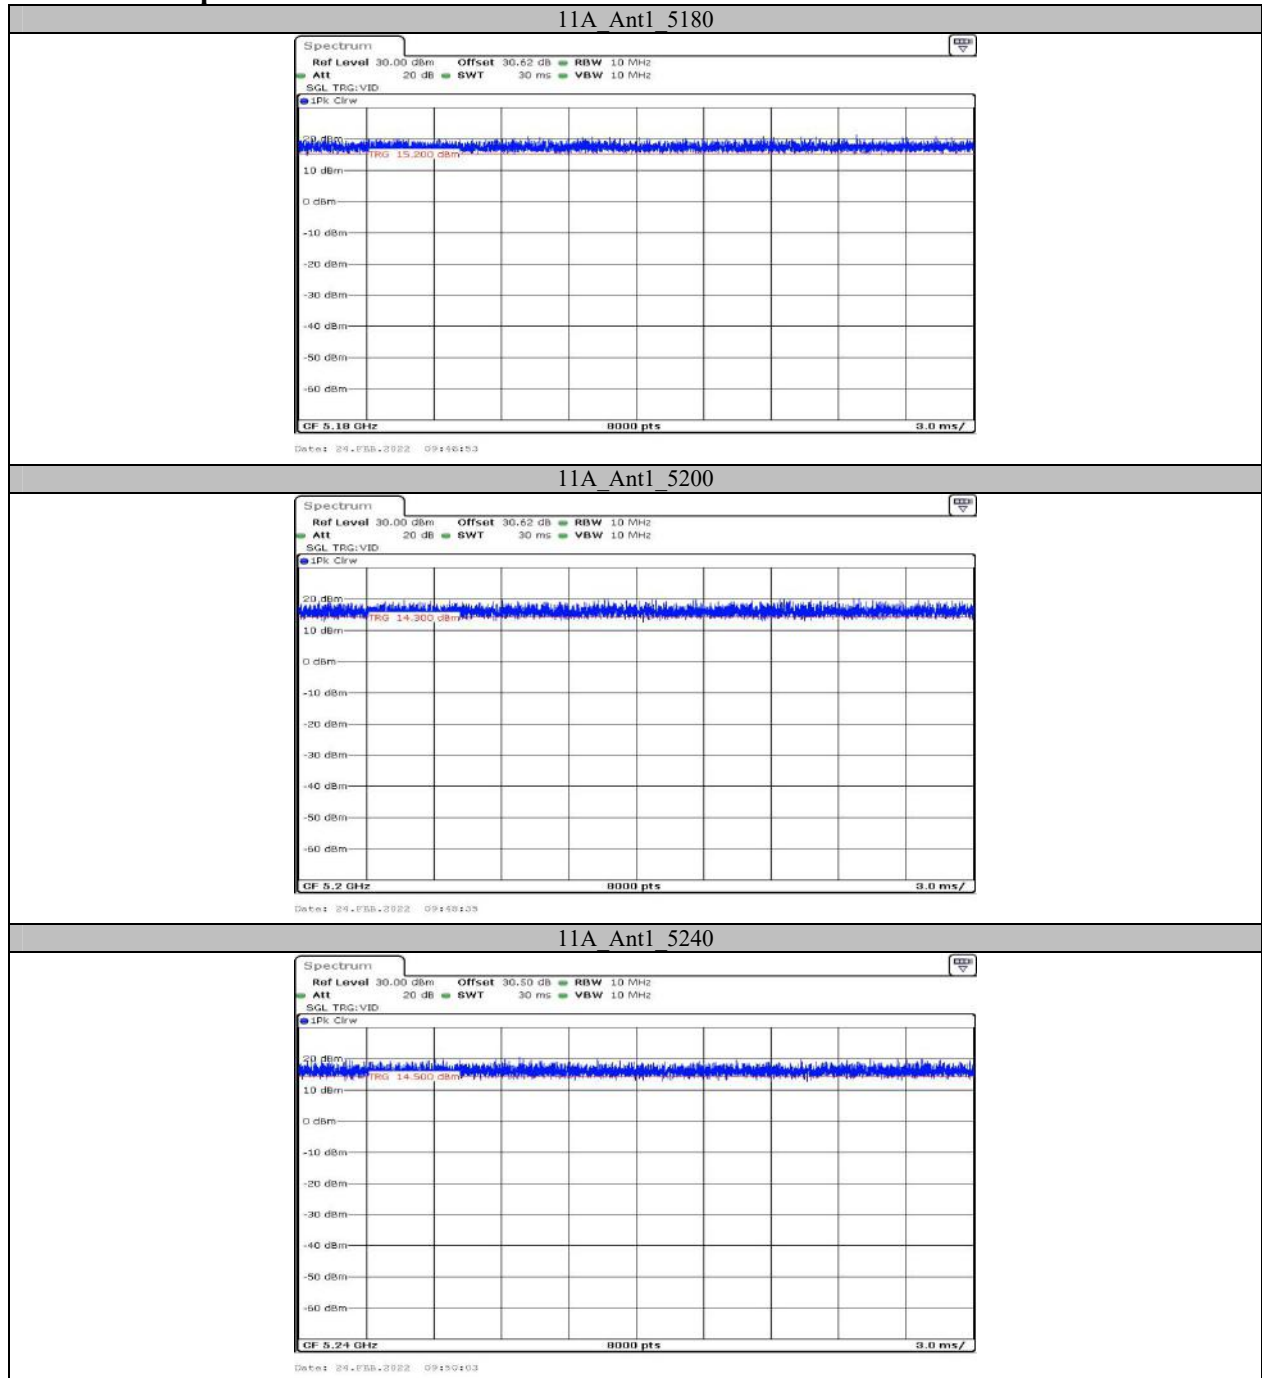


11A Ant1 5745

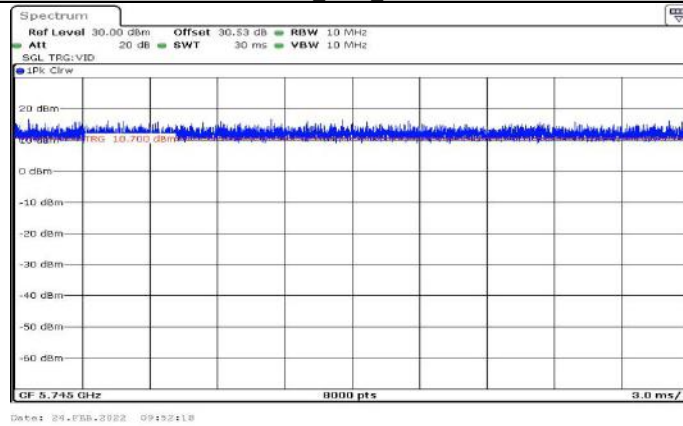


11A Ant1 5785

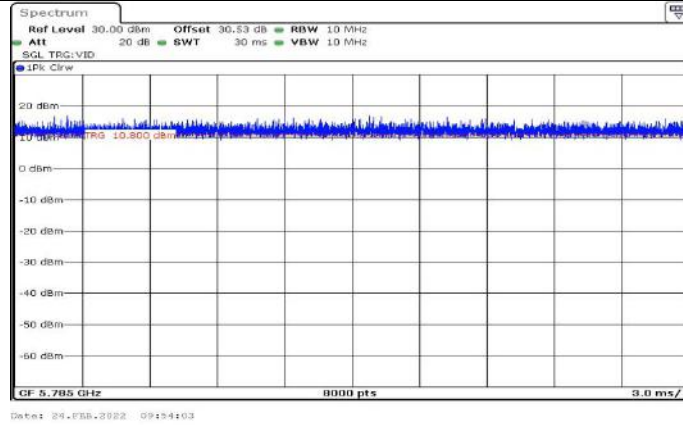

11A Ant1 5825

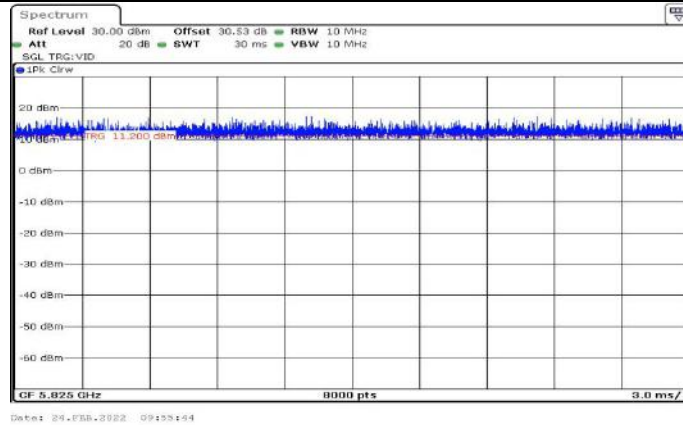


11N20SISO Ant1 5180

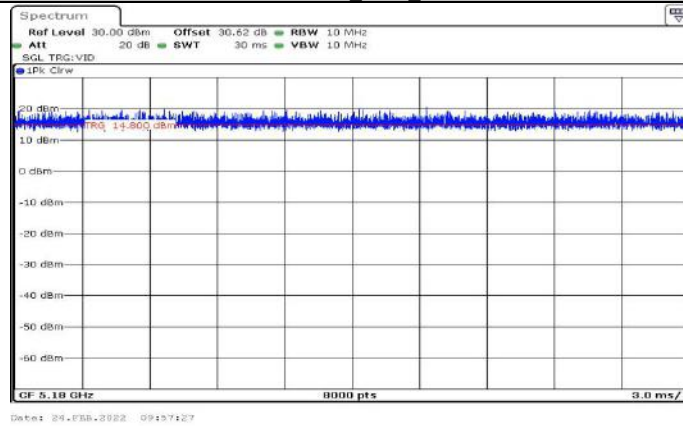


Date: 24.Feb.2022 09:15:27

11N20SISO Ant1 5200

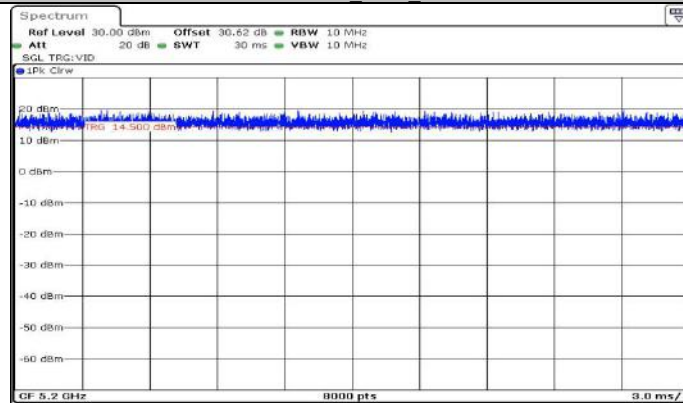


Date: 24.Feb.2022 09:15:12

11N20SISO Ant1 5240

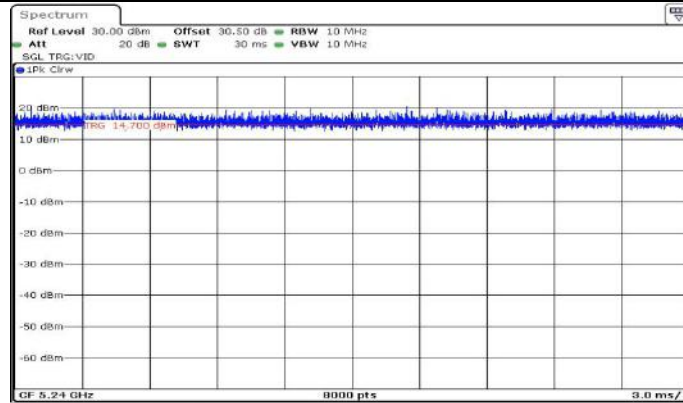


Date: 24.Feb.2022 10:01:03


11N20SISO Ant1 5745

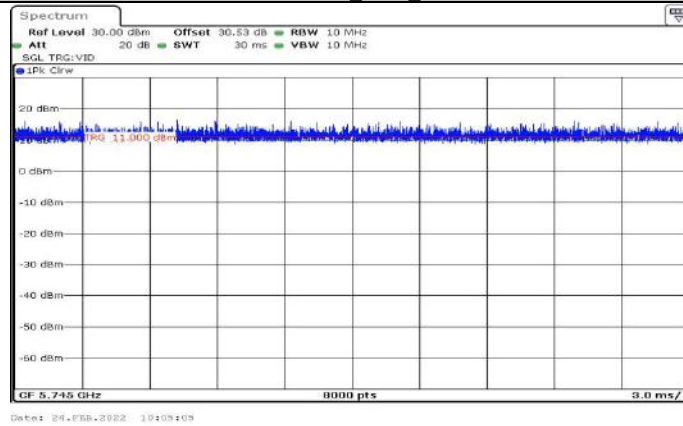


11N20SISO Ant1 5785

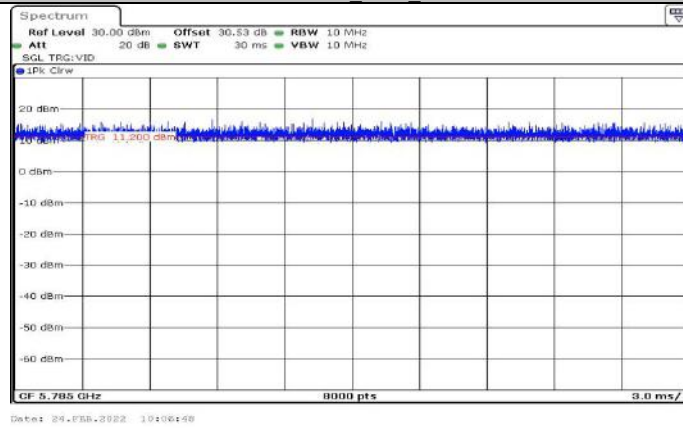


11N20SISO Ant1 5825

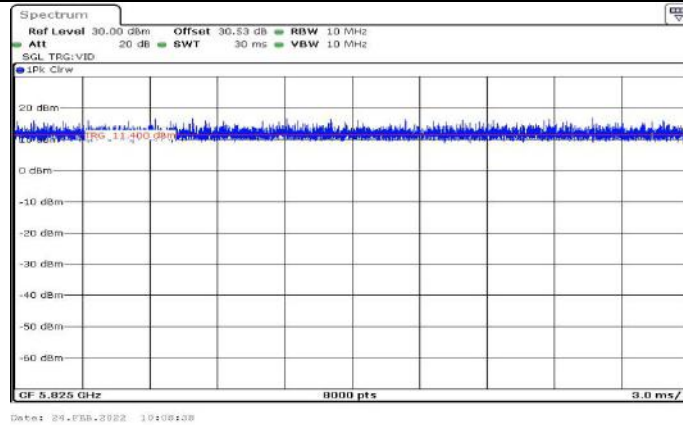


11N40SISO Ant1 5190

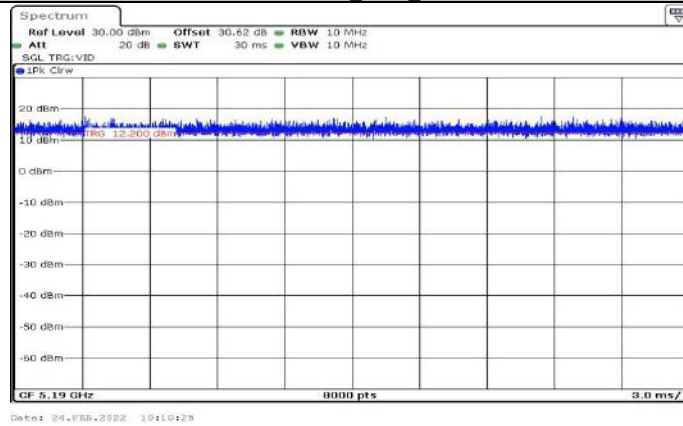


11N40SISO Ant1 5230

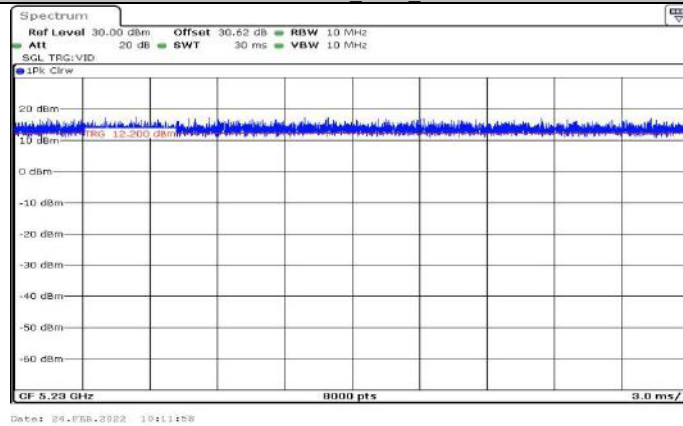


11N40SISO Ant1 5755

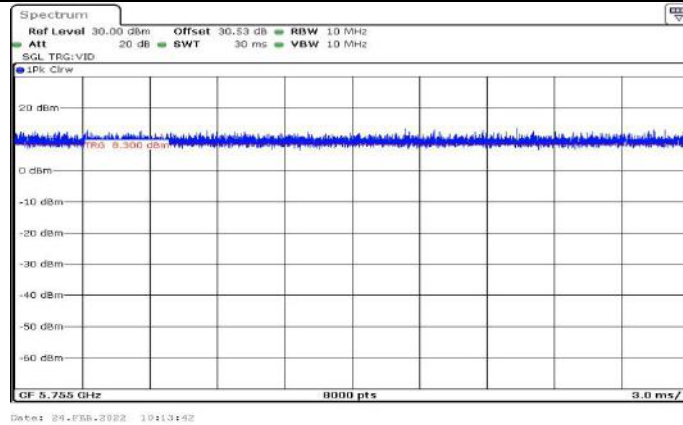


11N40SISO Ant1_5795

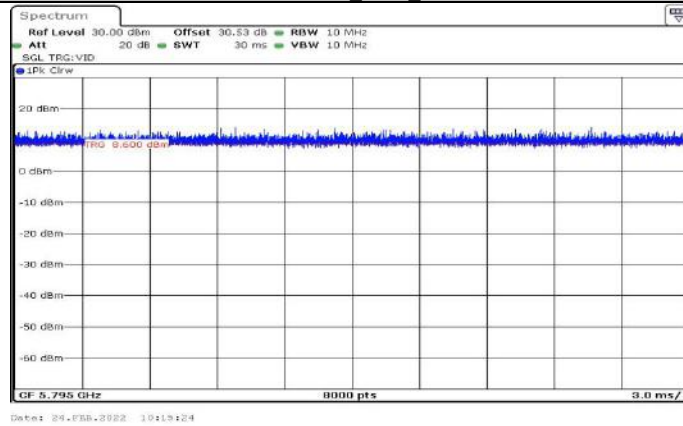


11AC20SISO Ant1_5180

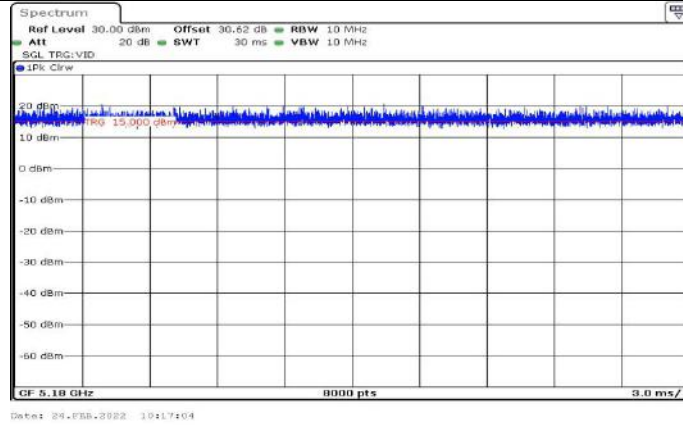


11AC20SISO Ant1_5200

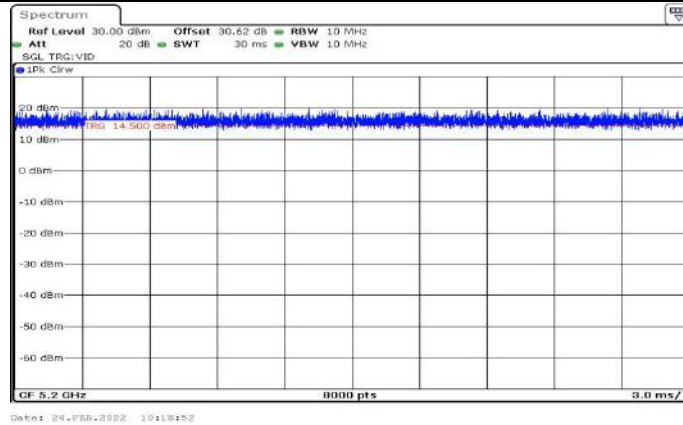


11AC20SISO Ant1 5240

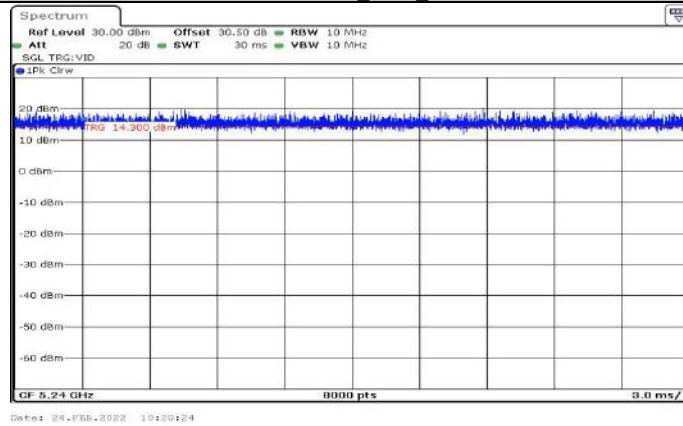


11AC20SISO Ant1 5745

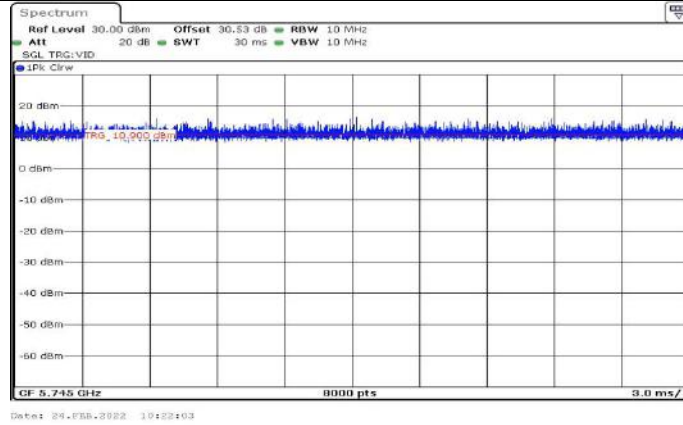

11AC20SISO Ant1 5785

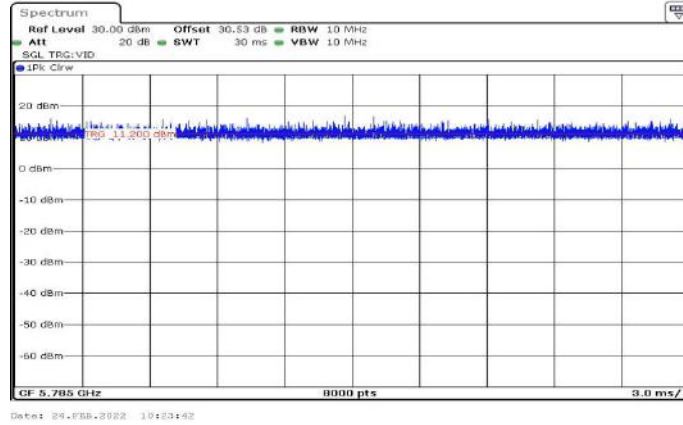


11AC20SISO Ant1 5825

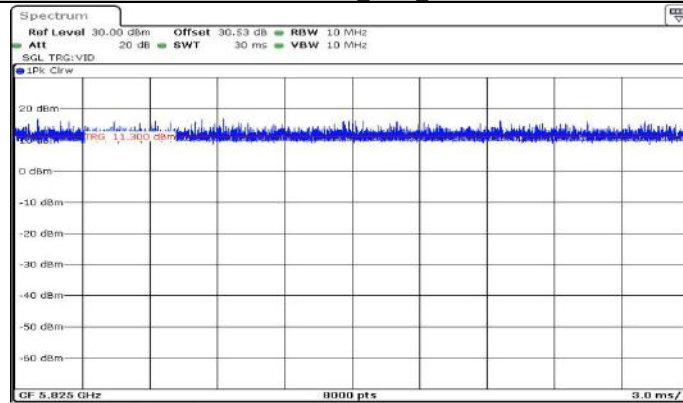


Date: 24.Feb.2022 10:29:03

11AC40SISO Ant1 5190

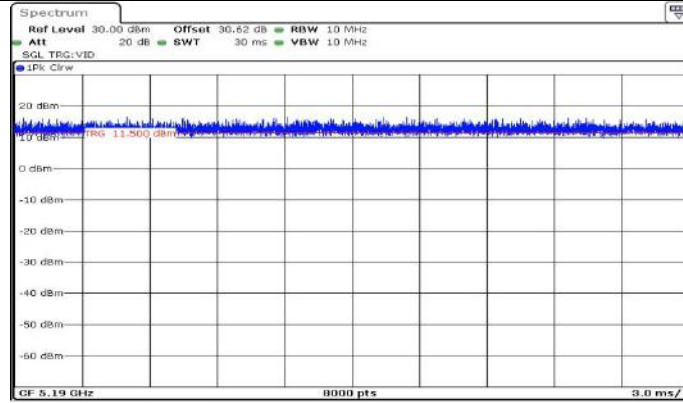


Date: 24.Feb.2022 10:28:58

11AC40SISO Ant1 5230

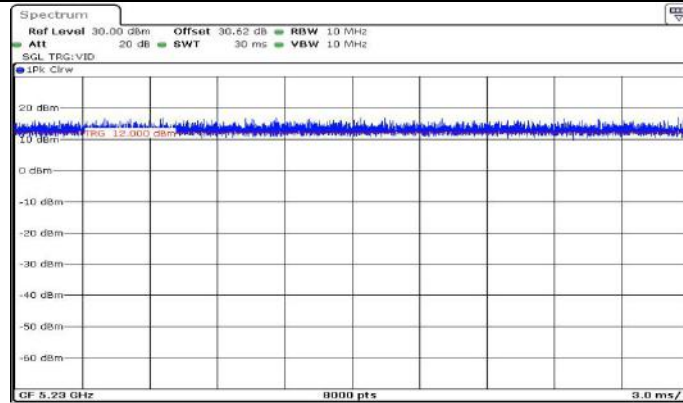


Date: 24.Feb.2022 10:28:33


11AC40SISO Ant1 5755

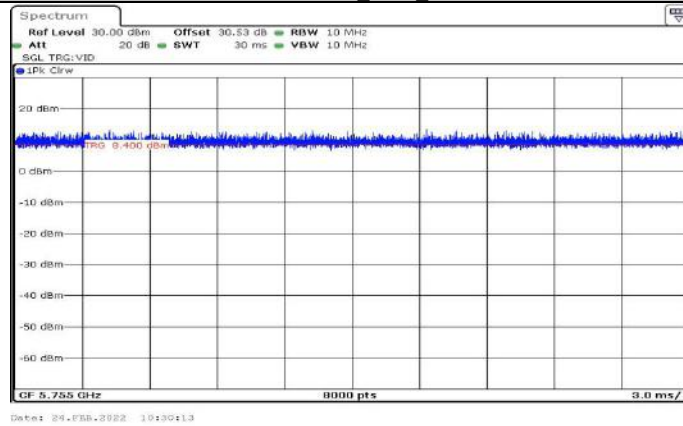


11AC40SISO Ant1 5795

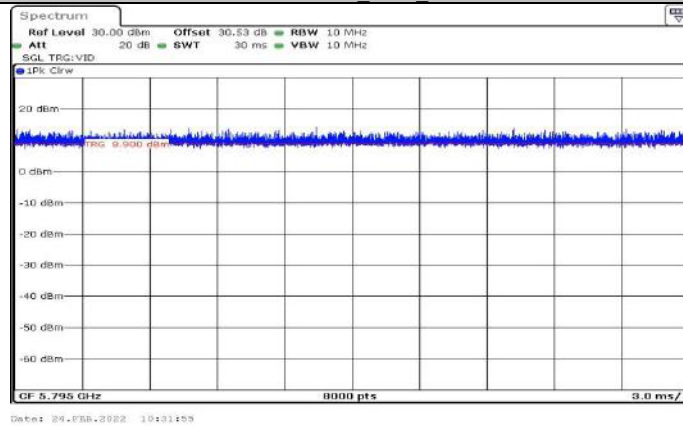

11AC80SISO Ant1 5210

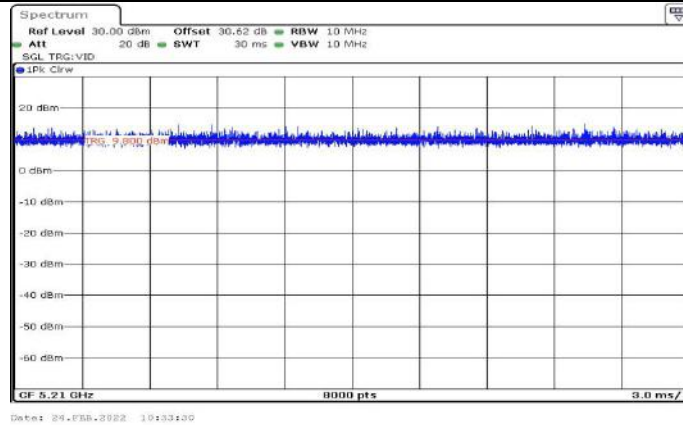

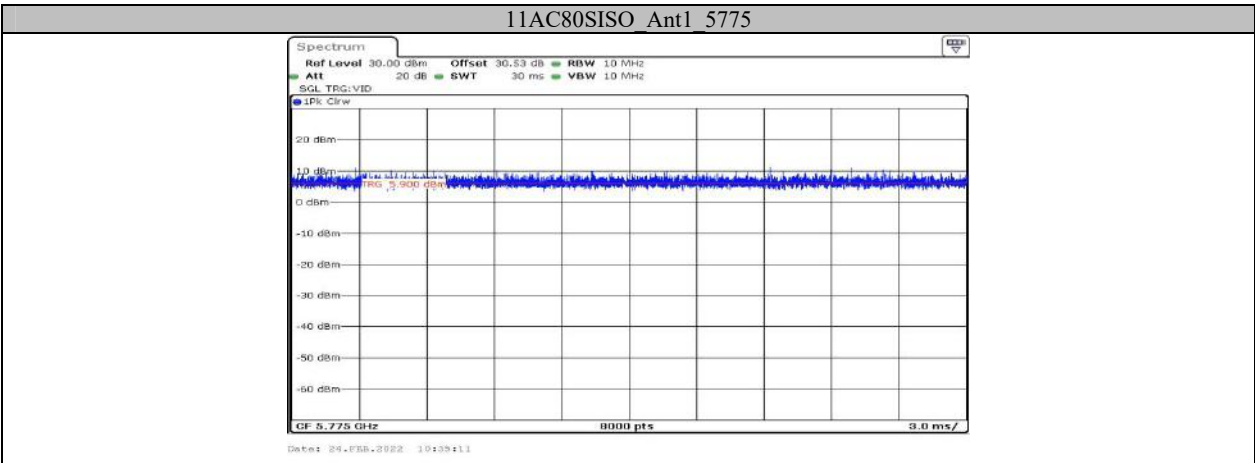

***** END OF REPORT *****