

TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG
Report Number : RA221229-64347E-RF-00A
FCC ID: 2ADYY-CK6N

Test Standard (s)

FCC PART 15.247

Sample Description


Product Type: Mobile Phone
Model No.: CK6n
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2022/12/29
Report Date: 2023/02/09

Test Result:	Pass*
--------------	-------


* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:



Andy Yu
EMC Engineer



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC§1.1307 (B) & §2.1093 – RF EXPOSURE.....	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
TRANSD FACTOR & MARGIN CALCULATION.....	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28

FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	30
FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
APPENDIX-ANT 1.....	35
APPENDIX A: 20dB EMISSION BANDWIDTH.....	35
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	39
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	43
APPENDIX D: CARRIER FREQUENCY SEPARATION	47
APPENDIX E: TIME OF OCCUPANCY	49
APPENDIX F: NUMBER OF HOPPING CHANNELS	59
APPENDIX G: BAND EDGE MEASUREMENTS	61
APPENDIX-ANT 2.....	66
APPENDIX A: 20dB EMISSION BANDWIDTH.....	66
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	70
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	74
APPENDIX D: CARRIER FREQUENCY SEPARATION	79
APPENDIX E: TIME OF OCCUPANCY	81
APPENDIX F: NUMBER OF HOPPING CHANNELS	91
APPENDIX G: BAND EDGE MEASUREMENTS	93

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221229-64347E-RF-00A	Original Report	2023-02-09

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 11.95dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	ANT 1: 0.3dBi, ANT 2: -1.2dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V/7.5V from adapter
Test Sample serial number	1WXS-2 for Conducted and Radiated Emissions Test 1WXP-1 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: U180TSA Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or DC 7.5V, 2.4A 18.0W Max

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Note: According to the manufacturer, for BT and 2.4G Wi-Fi, the EUT has two antennas, which will be switched through SW circuit according to environmental conditions during actual operation. Only one antenna is working at any moment in time.

EUT Exercise Software

EUT was test in the engineering mode and the power level is default *. The power level was provided by the manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For Conducted Emissions

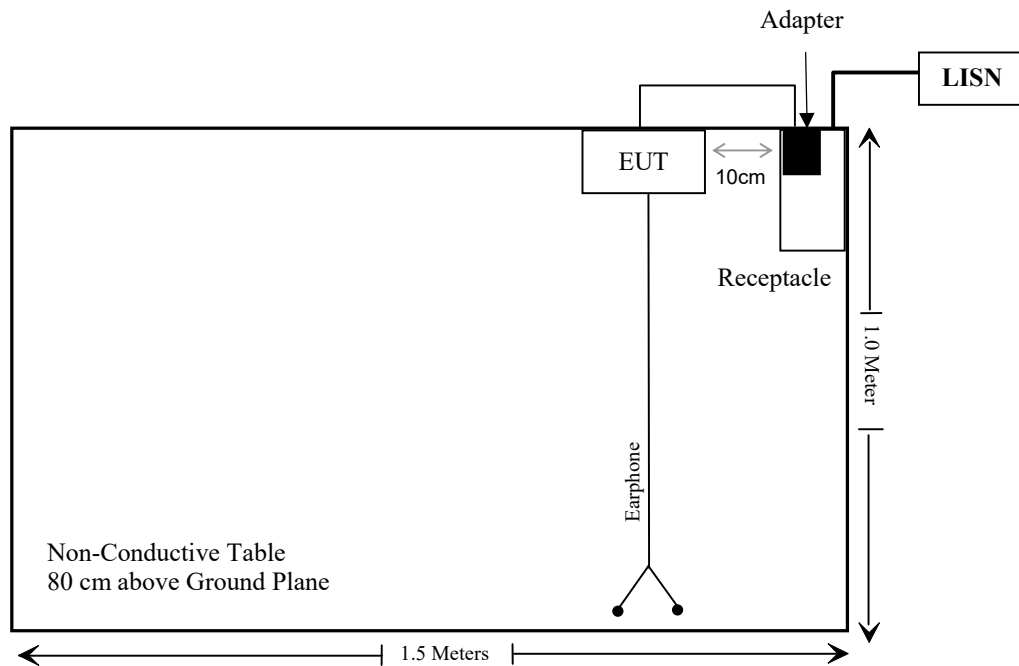

For Radiated Emissions:

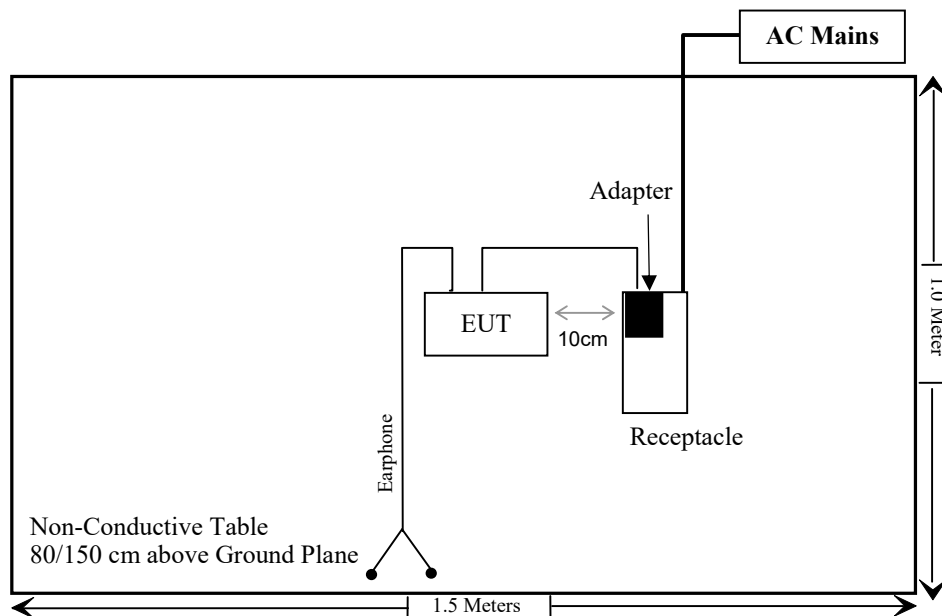

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§1.1307 (b) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Measurement Result

Please refer to SAR test report: CR221264348-SA.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has two internal antenna arrangement, which was permanently attached, the antenna gain for ANT1 is 0.3dBi and ANT 2 is -1.2dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Transd Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55 %
ATM Pressure:	101.2 kPa

The testing was performed by Jason Liu on 2023-01-29.

EUT operation mode: Transmitting (the worst case for ANT 1, GFSK Mode, Middle channel)


AC 120V/60 Hz, Line

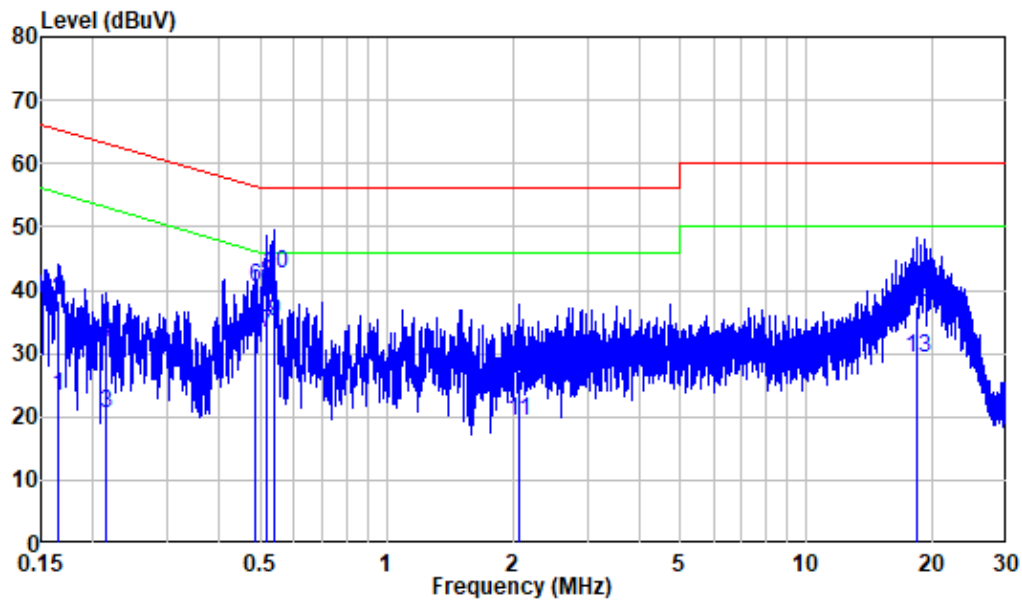

Site : Shielding Room
 Condition: Line
 Job No. : RA221229-64347E-RF
 Mode : BT
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.166	9.90	13.22	23.12	55.17	-32.05	Average
2	0.166	9.90	28.37	38.27	65.17	-26.90	QP
3	0.215	9.89	10.57	20.46	53.02	-32.56	Average
4	0.215	9.89	21.74	31.63	63.02	-31.39	QP
5	0.486	9.80	23.08	32.88	46.23	-13.35	Average
6	0.486	9.80	30.51	40.31	56.23	-15.92	QP
7	0.516	9.82	23.48	33.30	46.00	-12.70	Average
8	0.516	9.82	31.25	41.07	56.00	-14.93	QP
9	0.539	9.83	25.31	35.14	46.00	-10.86	Average
10	0.539	9.83	32.66	42.49	56.00	-13.51	QP
11	2.069	9.92	9.32	19.24	46.00	-26.76	Average
12	2.069	9.92	17.39	27.31	56.00	-28.69	QP
13	18.389	10.01	19.19	29.20	50.00	-20.80	Average
14	18.389	10.01	27.32	37.33	60.00	-22.67	QP

AC 120V/60 Hz, Neutral

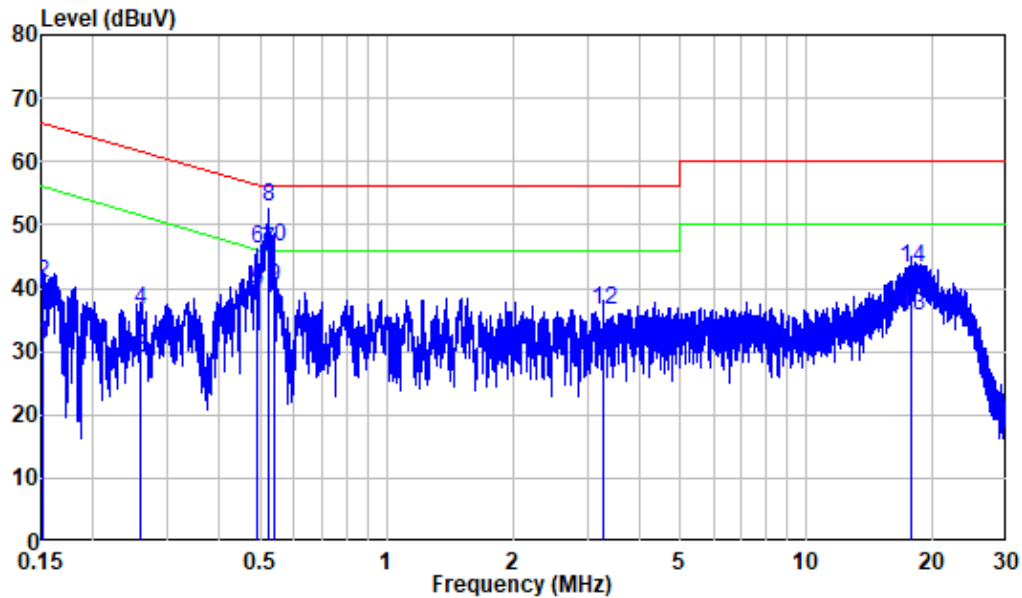

Site : Shielding Room
 Condition: Neutral
 Job No. : RA221229-64347E-RF
 Mode : BT
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.80	21.23	31.03	55.87	-24.84	Average
2	0.152	9.80	30.97	40.77	65.87	-25.10	QP
3	0.260	9.83	19.30	29.13	51.45	-22.32	Average
4	0.260	9.83	26.73	36.56	61.45	-24.89	QP
5	0.490	9.90	29.65	39.55	46.17	-6.62	Average
6	0.490	9.90	36.28	46.18	56.17	-9.99	QP
7	0.521	9.90	36.07	45.97	46.00	-0.03	Average
8	0.521	9.90	42.82	52.72	56.00	-3.28	QP
9	0.537	9.89	30.19	40.08	46.00	-5.92	Average
10	0.537	9.89	36.50	46.39	56.00	-9.61	QP
11	3.289	9.83	17.76	27.59	46.00	-18.41	Average
12	3.289	9.83	26.82	36.65	56.00	-19.35	QP
13	17.802	10.14	25.37	35.51	50.00	-14.49	Average
14	17.802	10.14	33.04	43.18	60.00	-16.82	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

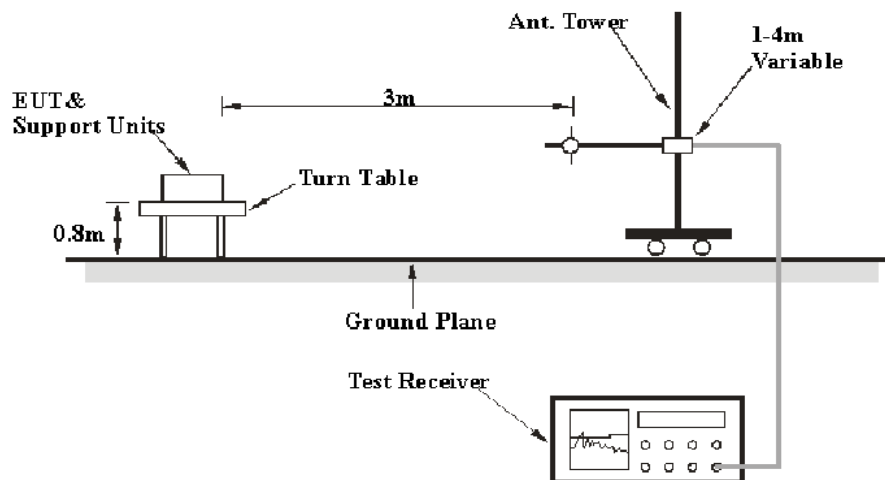

Above 1GHz:

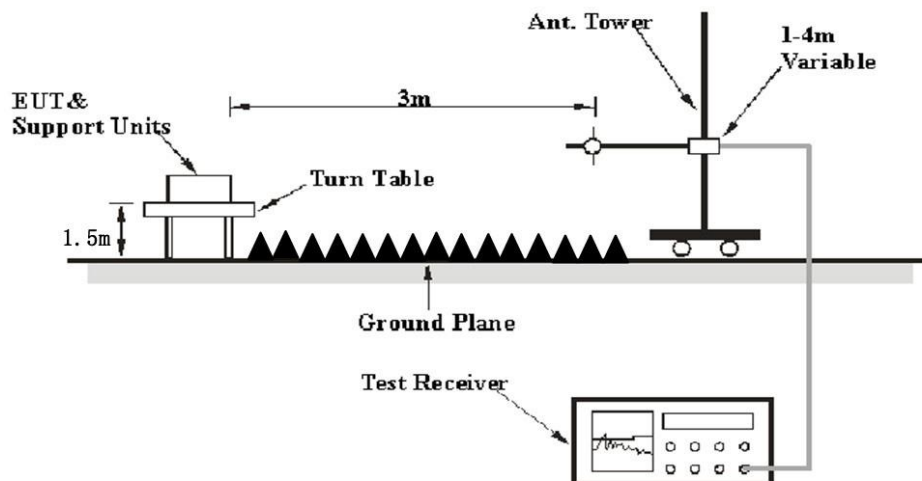

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1*L1+N2*L2+\dots+Nn-1*Ln-1+Nn*Ln$,

Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a overlimit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22.6~25 °C
Relative Humidity:	50~56 %
ATM Pressure:	101kPa


The testing was performed by Jimi Zheng on 2023-01-29 for below 1GHz and from 2022-12-31 to 2023-01-05 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30MHz-1GHz: (worst case is ANT 1, GFSK Mode, Middle channel)

Note: When the test result of Peak was more than 6dB below the limit of QP, just the Peak value was recorded.


Horizontal:

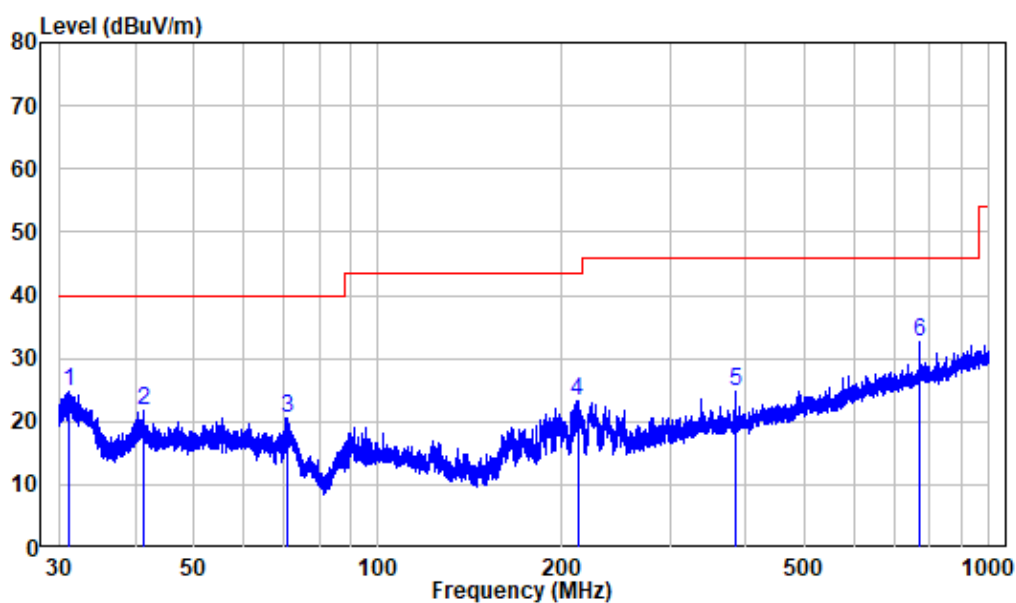

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA221229-64347E-RF
Test Mode: BT

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.098	-12.28	37.03	24.75	40.00	-15.25	Peak
2	41.367	-10.12	31.88	21.76	40.00	-18.24	Peak
3	70.863	-15.14	35.69	20.55	40.00	-19.45	Peak
4	212.084	-11.78	35.08	23.30	43.50	-20.20	Peak
5	383.932	-7.08	31.71	24.63	46.00	-21.37	Peak
6	767.738	-0.29	32.95	32.66	46.00	-13.34	Peak

Vertical

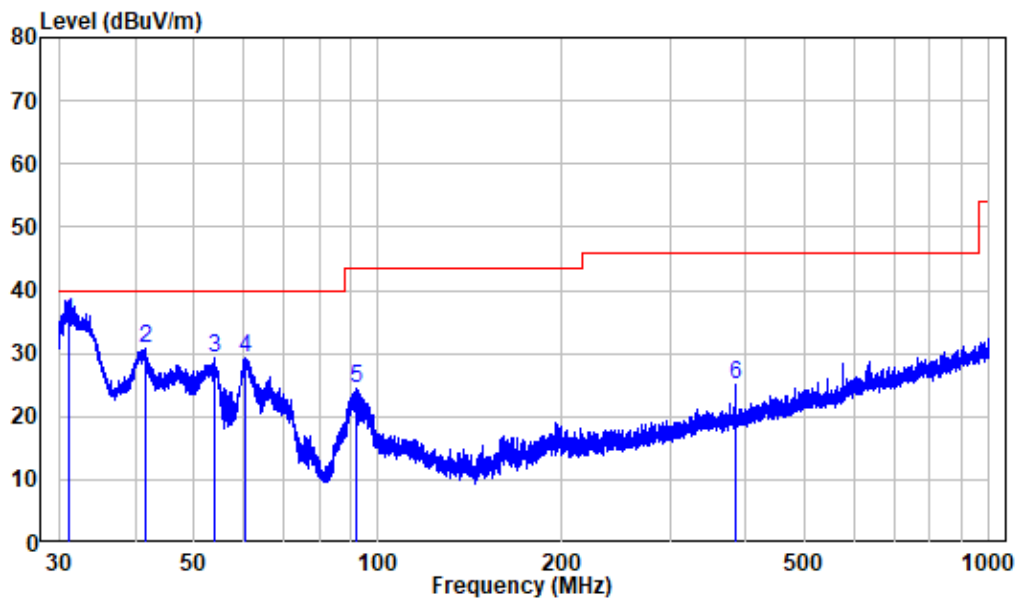

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA221229-64347E-RF
 Test Mode: BT

	Freq		Factor	Read Level	Level	Limit	Over	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.276	-12.26		47.30	35.04	40.00	-4.96	QP
2	41.622	-10.09		40.93	30.84	40.00	-9.16	Peak
3	53.835	-10.32		39.49	29.17	40.00	-10.83	Peak
4	60.598	-10.87		40.11	29.24	40.00	-10.76	Peak
5	92.381	-13.19		37.65	24.46	43.50	-19.04	Peak
6	384.100	-7.08		32.12	25.04	46.00	-20.96	Peak

Above 1GHz: (the worst case is GFSK Mode, DH5)

ANT 1:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	61.57	PK	104	2.3	H	-7.24	54.33	74	-19.67
2310	62.26	PK	244	2.4	V	-7.24	55.02	74	-18.98
2390	63.14	PK	180	1.6	H	-7.22	55.92	74	-18.08
2390	63.37	PK	45	1.7	V	-7.22	56.15	74	-17.85
4804	56.89	PK	136	2.5	H	-3.51	53.38	74	-20.62
4804	59.04	PK	338	2.5	V	-3.51	55.53	74	-18.47
Middle Channel(2441MHz)									
4882	56.52	PK	98	1.2	H	-3.37	53.15	74	-20.85
4882	58.23	PK	176	1.2	V	-3.37	54.86	74	-19.14
High Channel(2480 MHz)									
2483.5	63.51	PK	345	2.5	H	-7.20	56.31	74	-17.69
2483.5	63.39	PK	69	2	V	-7.20	56.19	74	-17.81
2500	63.56	PK	130	2.2	H	-7.18	56.38	74	-17.62
2500	63.14	PK	209	2.2	V	-7.18	55.96	74	-18.04
4960	55.67	PK	220	2	H	-3.01	52.66	74	-21.34
4960	58.69	PK	194	2	V	-3.01	55.68	74	-18.32

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected. Amplitude (dBμV/m)	FCC Part 15.247		
					Limit (dBμV/m)	Margin (dB)	Comment
Low Channel(2402MHz)							
2310	54.33	H	-24.81	29.52	54	-24.48	Band Edge
2310	55.02	V	-24.81	30.21	54	-23.79	Band Edge
2390	55.92	H	-24.81	31.11	54	-22.89	Band Edge
2390	56.15	V	-24.81	31.34	54	-22.66	Band Edge
4804	53.38	H	-24.81	28.57	54	-25.43	Harmonic
4804	55.53	V	-24.81	30.72	54	-23.28	Harmonic
Middle Channel(2441MHz)							
4882	53.15	H	-24.81	28.34	54	-25.66	Harmonic
4882	54.86	V	-24.81	30.05	54	-23.95	Harmonic
High Channel(2480MHz)							
2483.5	56.31	H	-24.81	31.50	54	-22.50	Band Edge
2483.5	56.19	V	-24.81	31.38	54	-22.62	Band Edge
2500	56.38	H	-24.81	31.57	54	-22.43	Band Edge
2500	55.96	V	-24.81	31.15	54	-22.85	Band Edge
4960	52.66	H	-24.81	27.85	54	-26.15	Harmonic
4960	55.68	V	-24.81	30.87	54	-23.13	Harmonic

Note:

Corrected. Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:

Duty cycle = $T_{on}/100ms = 2.875*2/100=0.0575$

Duty Cycle Corrected Factor = $20lg(\text{Duty cycle}) = 20lg0.0575 = -24.81$

Duty cycle 1

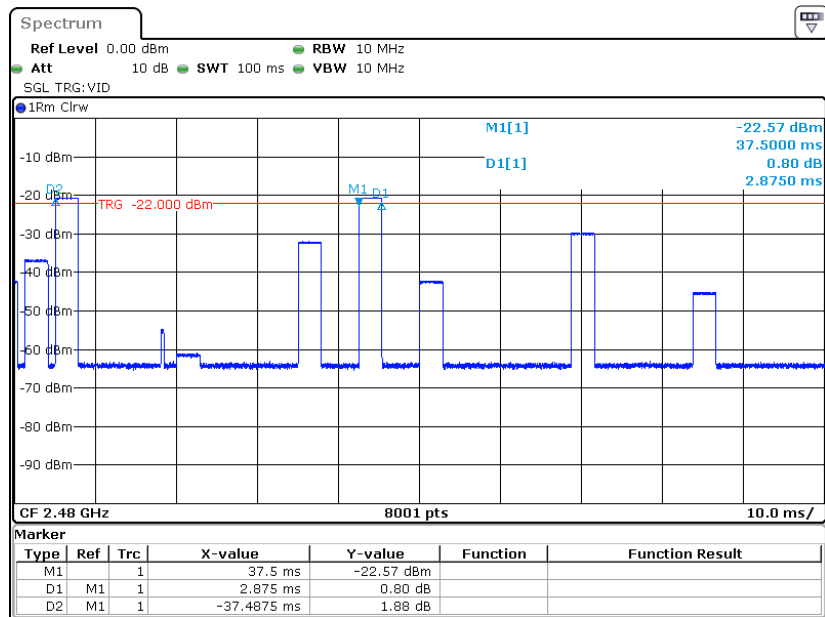

Date: 31.DEC.2022 14:31:31

ANT 2:


Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	61.81	PK	93	1.7	H	-7.24	54.57	74	-19.43
2310	61.94	PK	111	1.6	V	-7.24	54.70	74	-19.30
2390	64.23	PK	82	2.2	H	-7.22	57.01	74	-16.99
2390	64.42	PK	116	1.1	V	-7.22	57.20	74	-16.80
4804	56.93	PK	58	1.3	H	-3.51	53.42	74	-20.58
4804	58.80	PK	72	1.3	V	-3.51	55.29	74	-18.71
Middle Channel(2441MHz)									
4882	56.88	PK	238	1.6	H	-3.37	53.51	74	-20.49
4882	58.79	PK	271	1.6	V	-3.37	55.42	74	-18.58
High Channel(2480 MHz)									
2483.5	64.90	PK	60	1.6	H	-7.20	57.70	74	-16.30
2483.5	65.09	PK	328	2.2	V	-7.20	57.89	74	-16.11
2500	63.30	PK	161	1	H	-7.18	56.12	74	-17.88
2500	63.49	PK	154	1.9	V	-7.18	56.31	74	-17.69
4960	56.50	PK	50	1.2	H	-3.01	53.49	74	-20.51
4960	58.37	PK	204	1.2	V	-3.01	55.36	74	-18.64



Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected. Amplitude (dBμV/m)	FCC Part 15.247		
					Limit (dBμV/m)	Margin (dB)	Comment
Low Channel(2402MHz)							
2310	54.57	H	-24.81	29.76	54	-24.24	Band Edge
2310	54.70	V	-24.81	29.89	54	-24.11	Band Edge
2390	57.01	H	-24.81	32.20	54	-21.80	Band Edge
2390	57.20	V	-24.81	32.39	54	-21.61	Band Edge
4804	53.42	H	-24.81	28.61	54	-25.39	Harmonic
4804	55.29	V	-24.81	30.48	54	-23.52	Harmonic
Middle Channel(2441MHz)							
4882	53.51	H	-24.81	28.70	54	-25.30	Harmonic
4882	55.42	V	-24.81	30.61	54	-23.39	Harmonic
High Channel(2480MHz)							
2483.5	57.70	H	-24.81	32.89	54	-21.11	Band Edge
2483.5	57.89	V	-24.81	33.08	54	-20.92	Band Edge
2500	56.12	H	-24.81	31.31	54	-22.69	Band Edge
2500	56.31	V	-24.81	31.50	54	-22.50	Band Edge
4960	53.49	H	-24.81	28.68	54	-25.32	Harmonic
4960	55.36	V	-24.81	30.55	54	-23.45	Harmonic

Note:
Corrected. Amplitude = Factor + Reading
Margin = Corrected. Amplitude - Limit
Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:
Duty cycle = Ton/100ms = 2.875*2/100=0.0575
Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.0575= -24.81

Duty Cycle

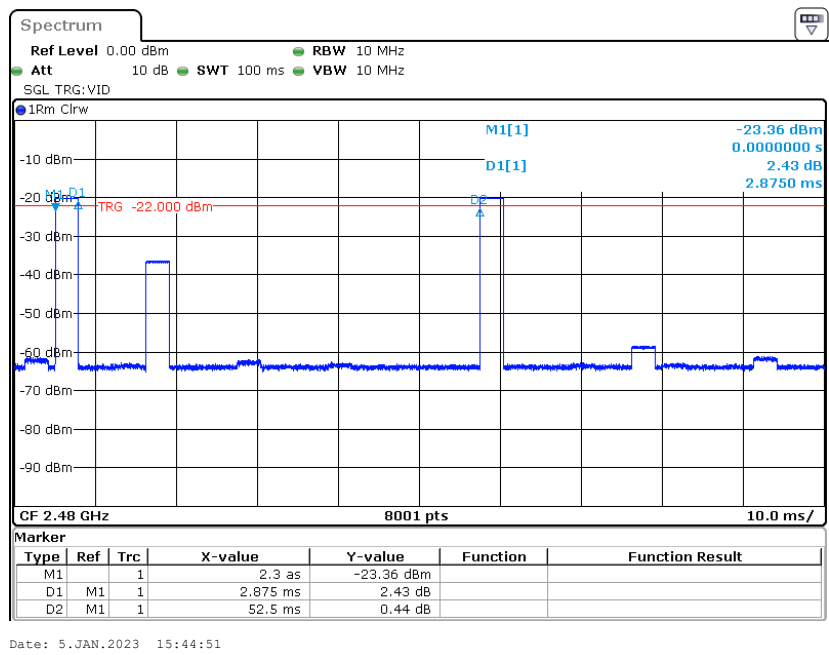


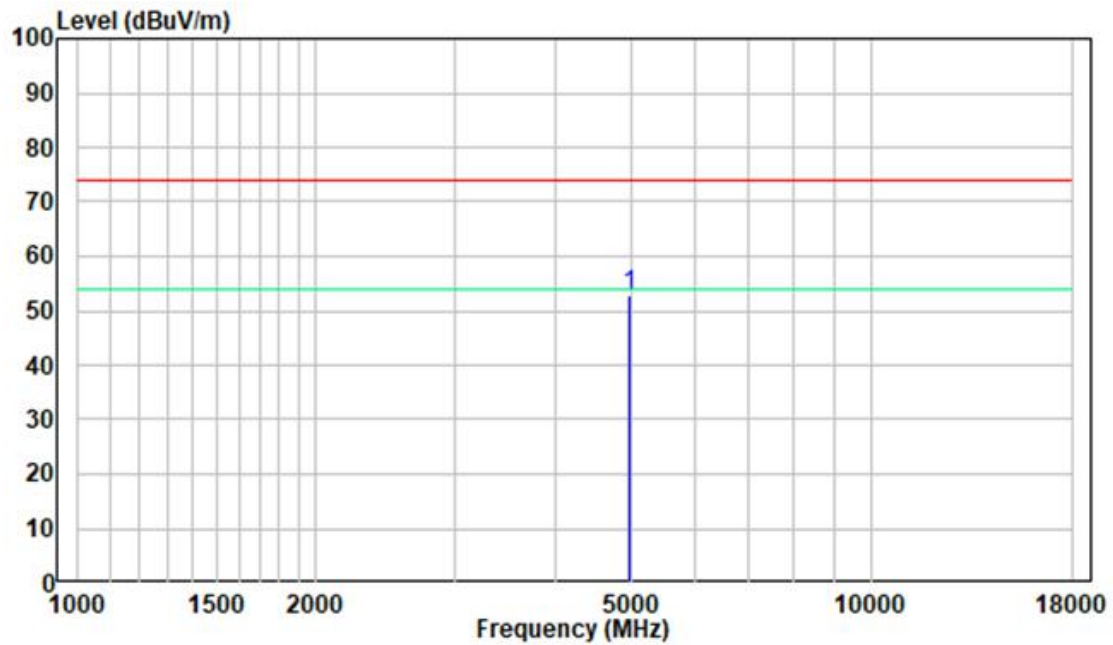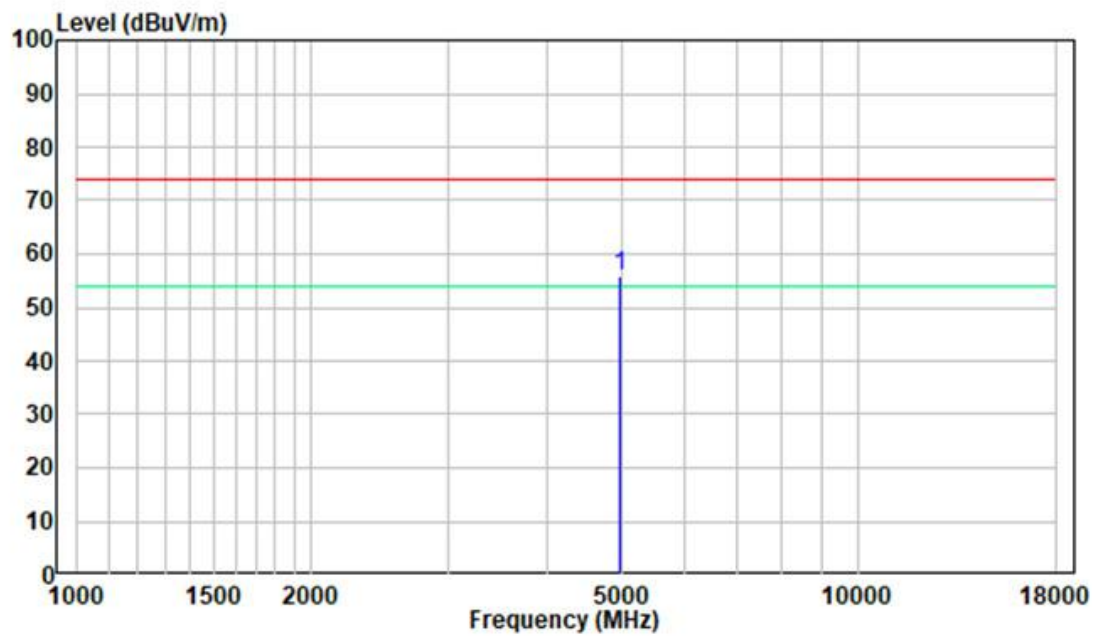1-18GHz**Pre-scan for ANT 1, High Channel (worst case)****Horizontal:****Vertical:**


18-25GHz

Pre-scan for ANT 1, High Channel (worst case)

Horizontal:

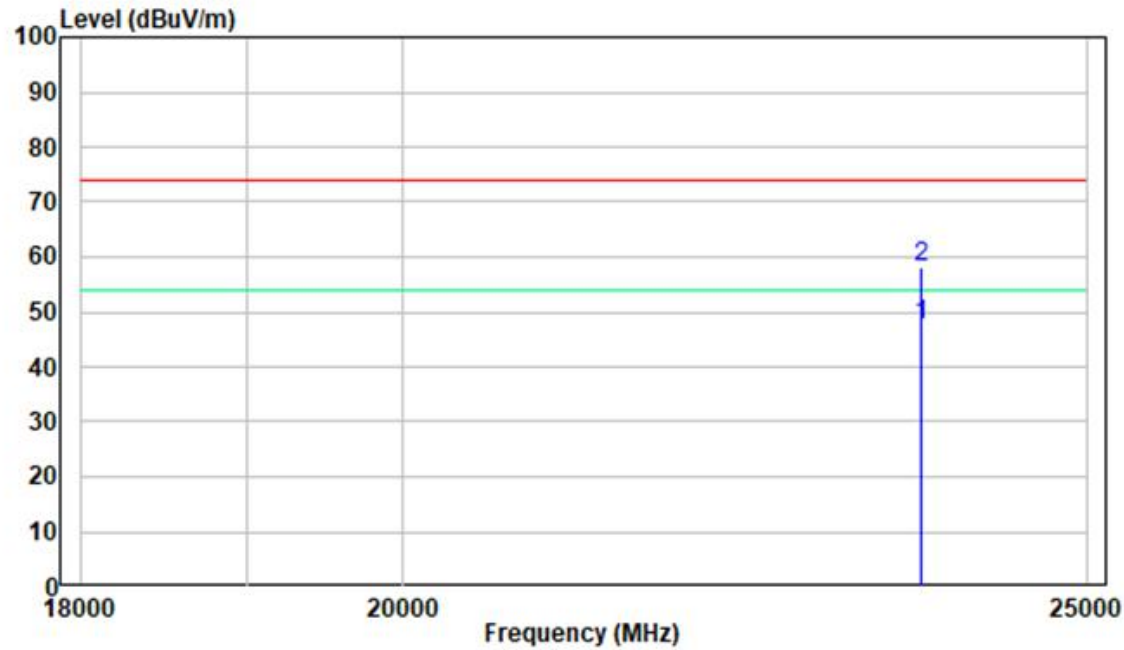

Vertical:

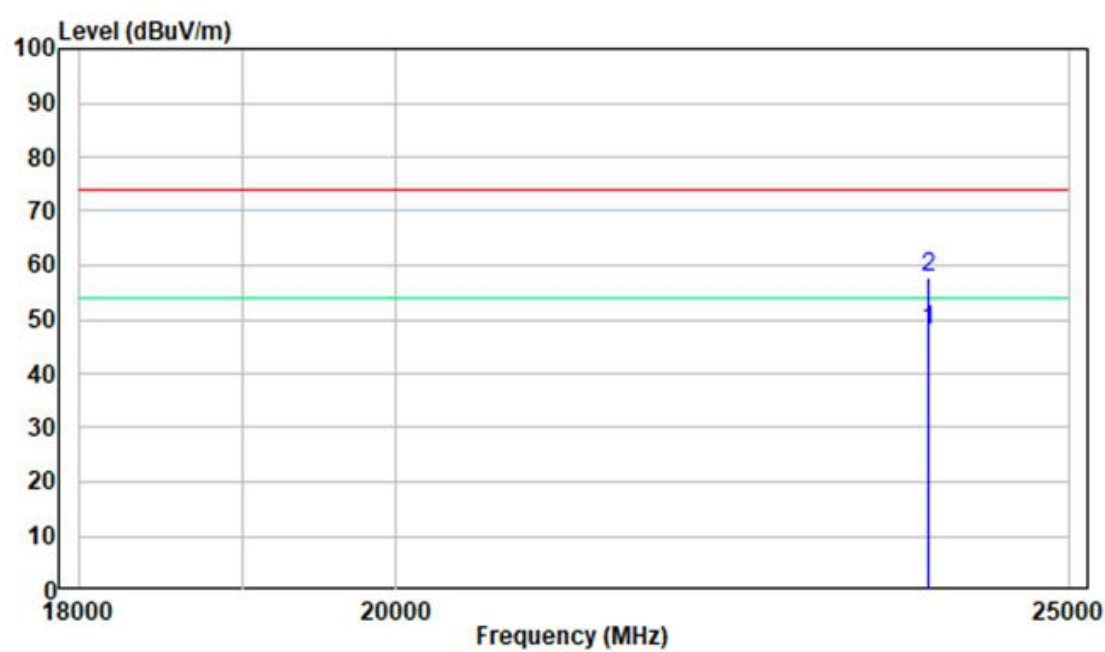


FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

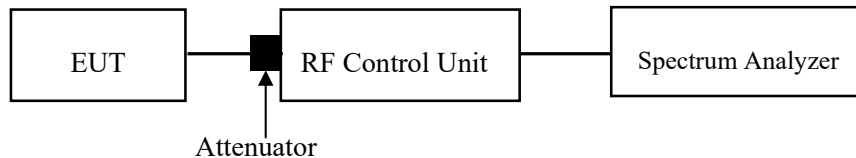

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

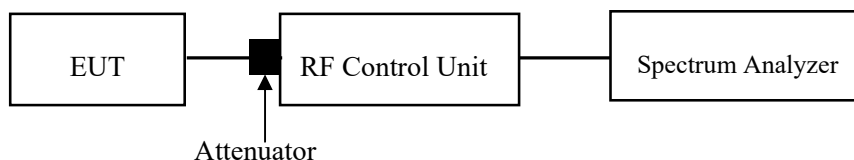

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

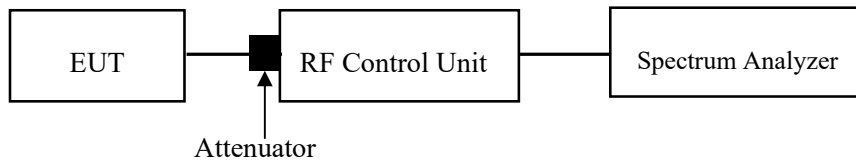**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

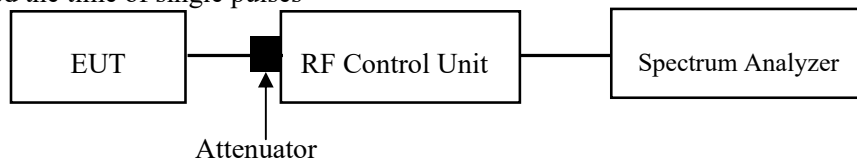**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

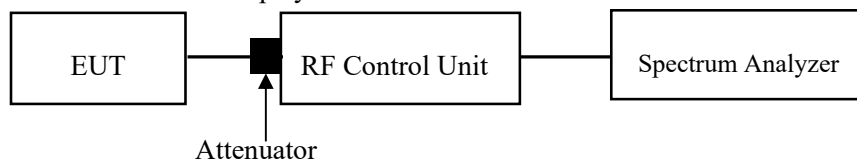

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

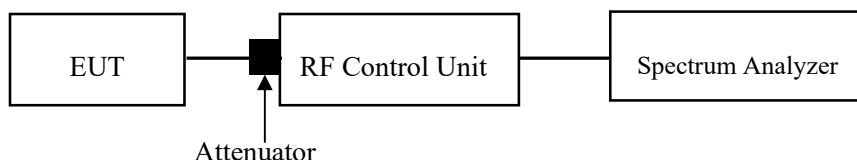

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling on 2023-02-03.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

APPENDIX-ANT 1


Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]
DH1	Ant1	2402	0.78	2401.61	2402.39
		2441	0.78	2440.61	2441.39
		2480	0.78	2479.61	2480.39
2DH1	Ant1	2402	1.24	2401.38	2402.62
		2441	1.22	2440.38	2441.59
		2480	1.22	2479.38	2480.59
3DH1	Ant1	2402	1.25	2401.38	2402.63
		2441	1.22	2440.40	2441.62
		2480	1.22	2479.40	2480.62

Test Graphs

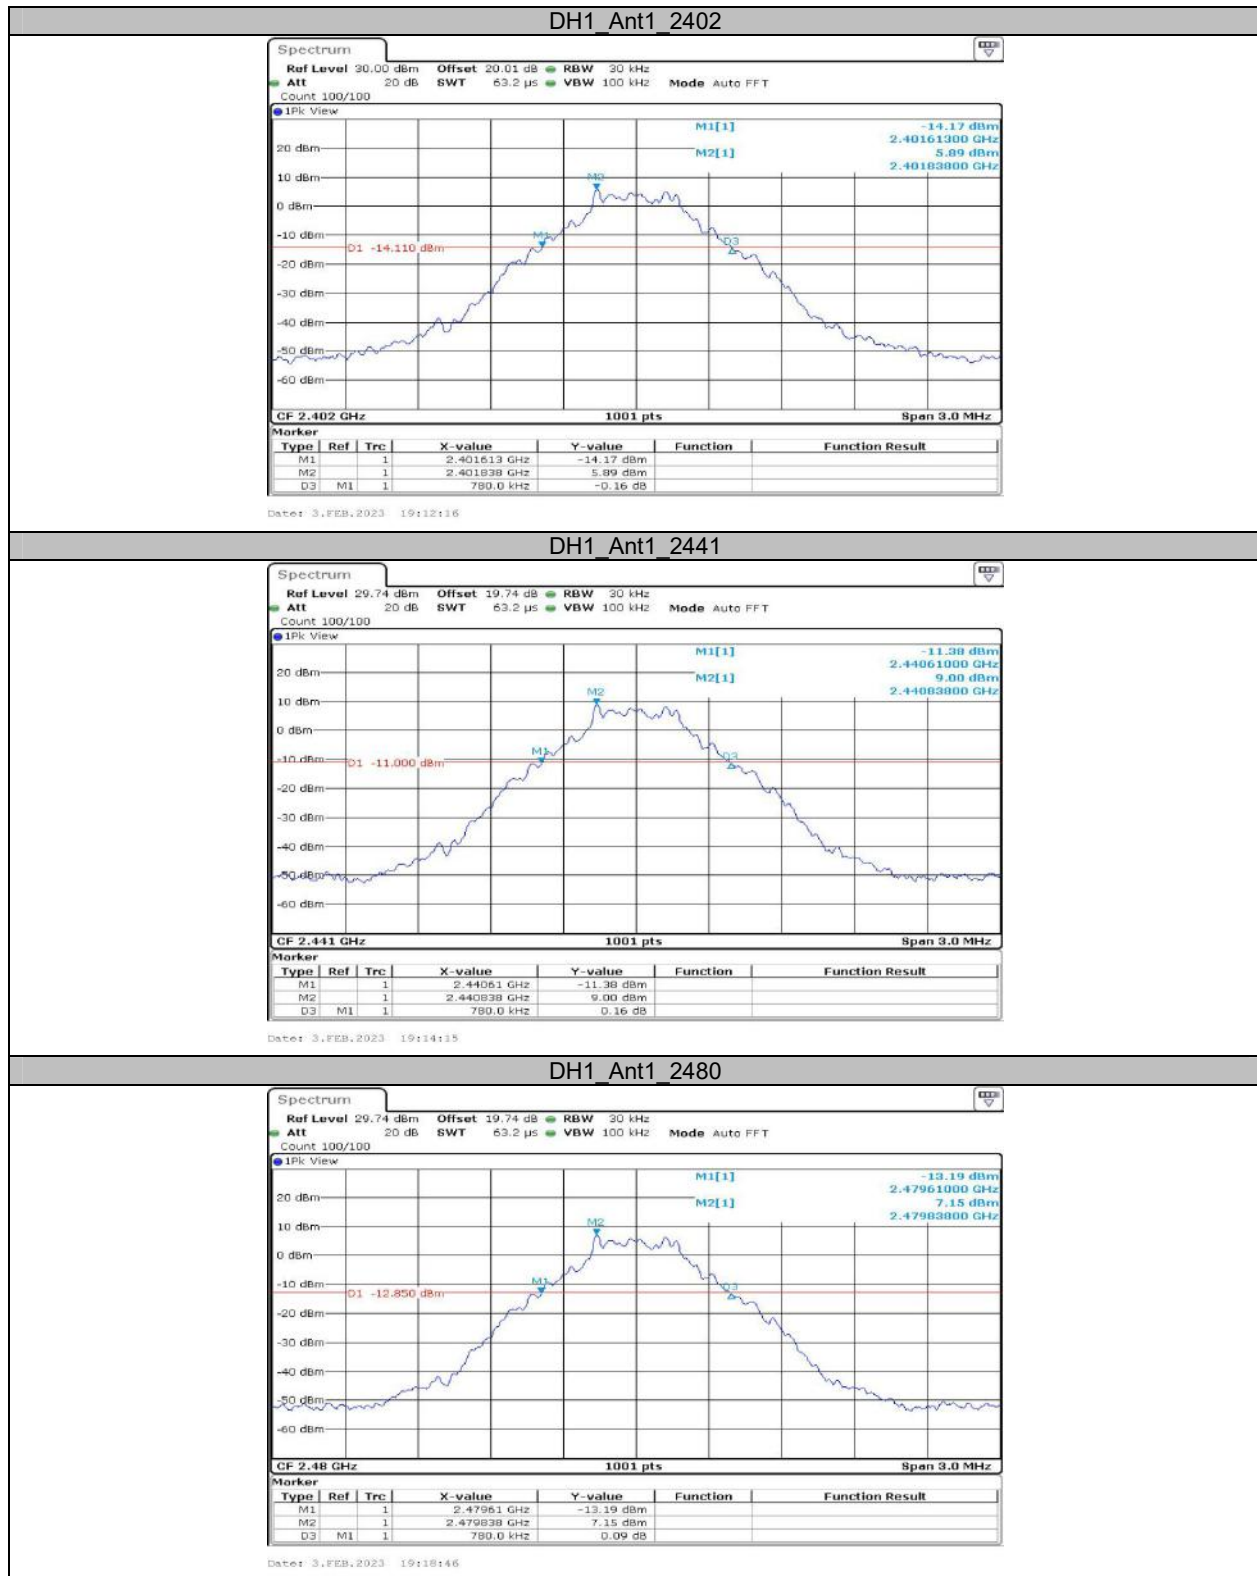


2DH1_Ant1_2402

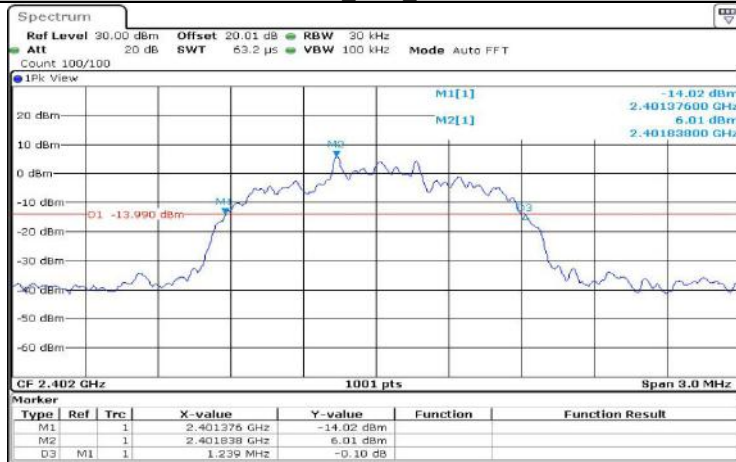


Date: 3.FEB.2023 19:21:25

2DH1_Ant1_2441

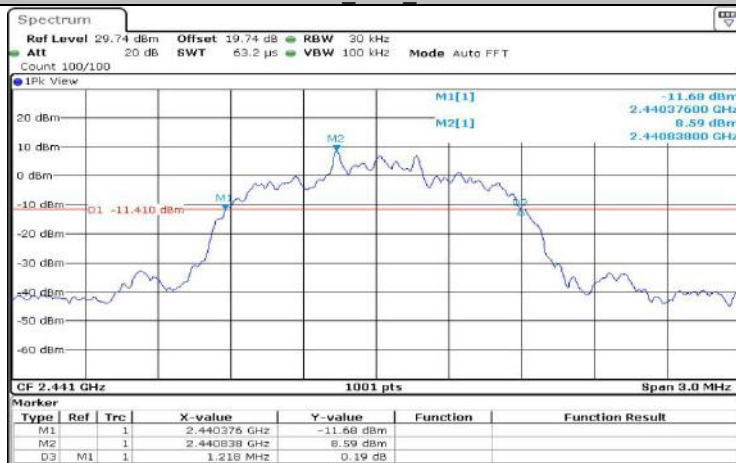


Date: 3.FEB.2023 19:23:51

2DH1_Ant1_2480

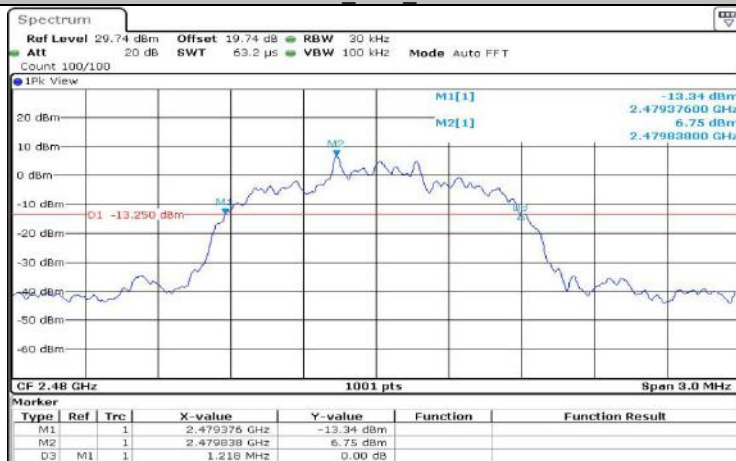

Date: 3.FEB.2023 19:25:00

3DH1_Ant1_2402

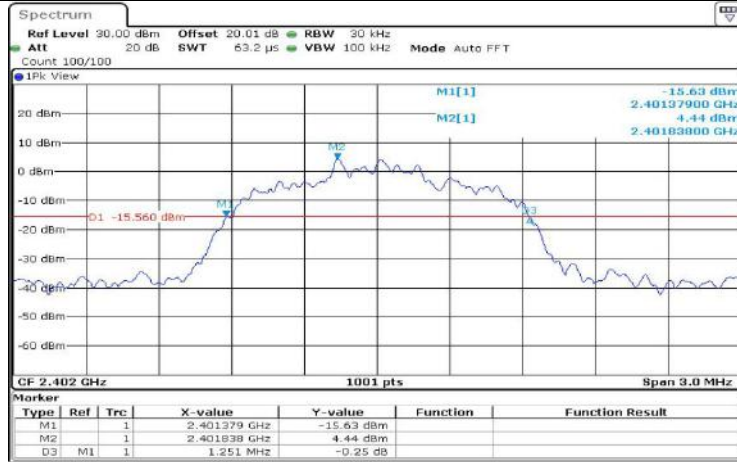


Date: 3.FEB.2023 19:26:26

3DH1_Ant1_2441



Date: 3.FEB.2023 19:27:36

3DH1_Ant1_2480

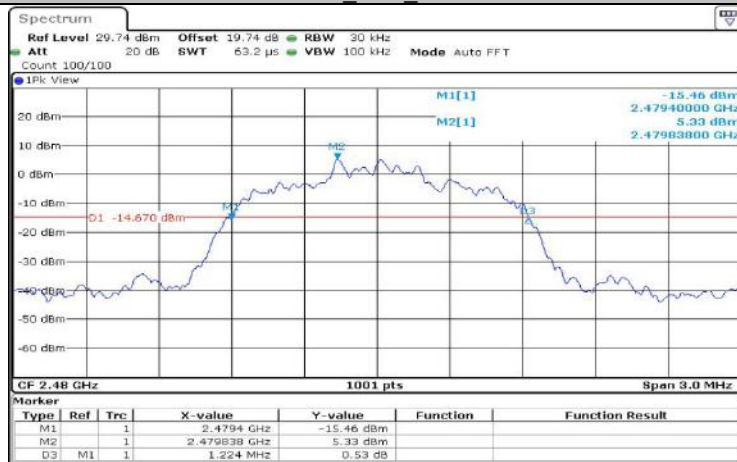

Date: 3.FEB.2023 19:28:32


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.734	---	---
		2441	0.722	---	---
		2480	0.725	---	---
2DH1	Ant1	2402	1.145	---	---
		2441	1.139	---	---
		2480	1.142	---	---
3DH1	Ant1	2402	1.142	---	---
		2441	1.133	---	---
		2480	1.136	---	---

Test Graphs




2DH1_Ant1_2402

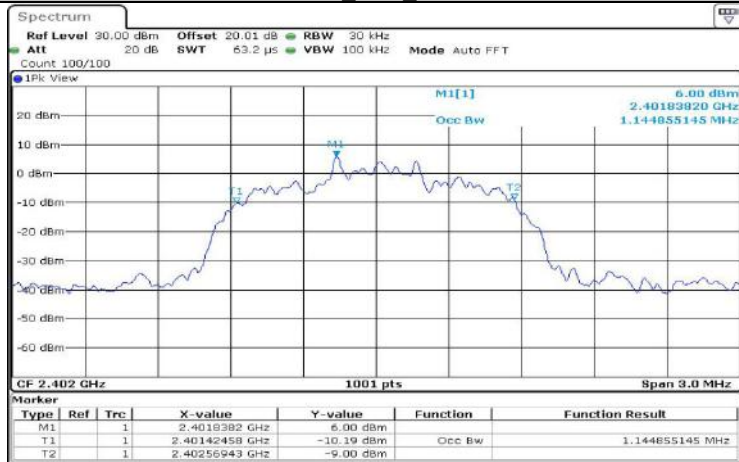


Date: 3.FEB.2023 19:21:37

2DH1_Ant1_2441

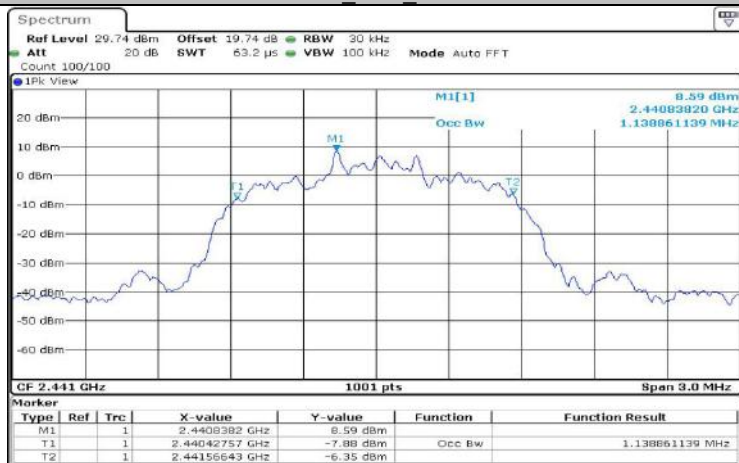


Date: 3.FEB.2023 19:24:03

2DH1_Ant1_2480

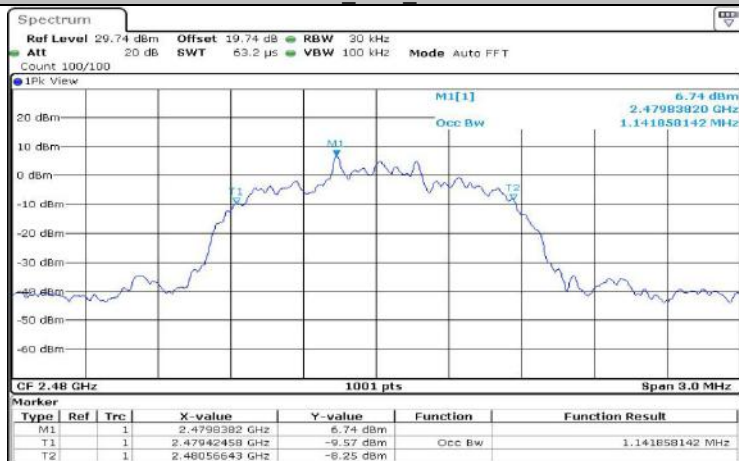


Date: 3.FEB.2023 19:25:12

3DH1_Ant1_2402

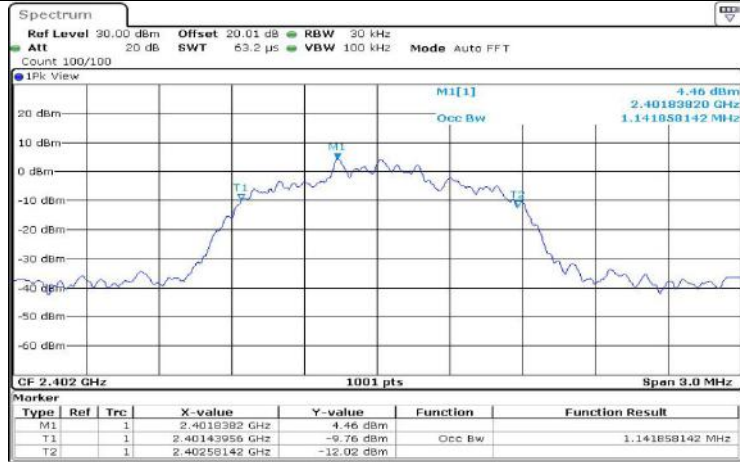


Date: 3.FEB.2023 19:26:38

3DH1_Ant1_2441

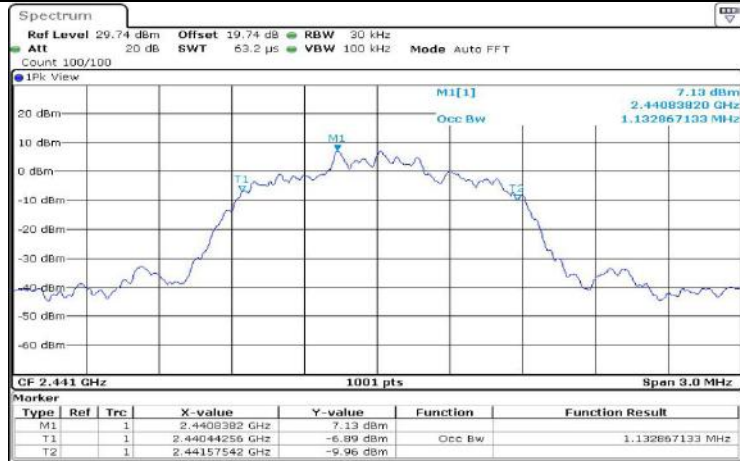

Date: 3.FEB.2023 19:27:48

3DH1_Ant1_2480

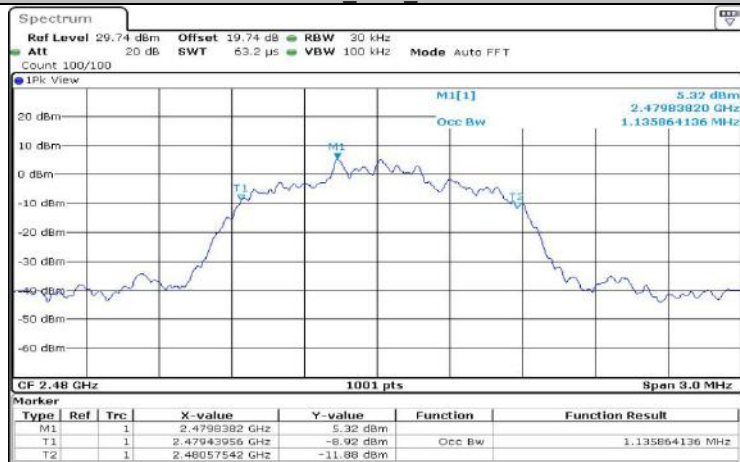


Date: 3.FEB.2023 19:28:44

**Appendix C: Maximum conducted output power
Test Result**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH1	Ant1	2402	8.82	≤20.97	PASS
		2441	11.95	≤20.97	PASS
		2480	10.24	≤20.97	PASS
2DH1	Ant1	2402	8.78	≤20.97	PASS
		2441	11.26	≤20.97	PASS
		2480	9.60	≤20.97	PASS
3DH1	Ant1	2402	8.79	≤20.97	PASS
		2441	11.36	≤20.97	PASS
		2480	9.70	≤20.97	PASS

Test Graphs

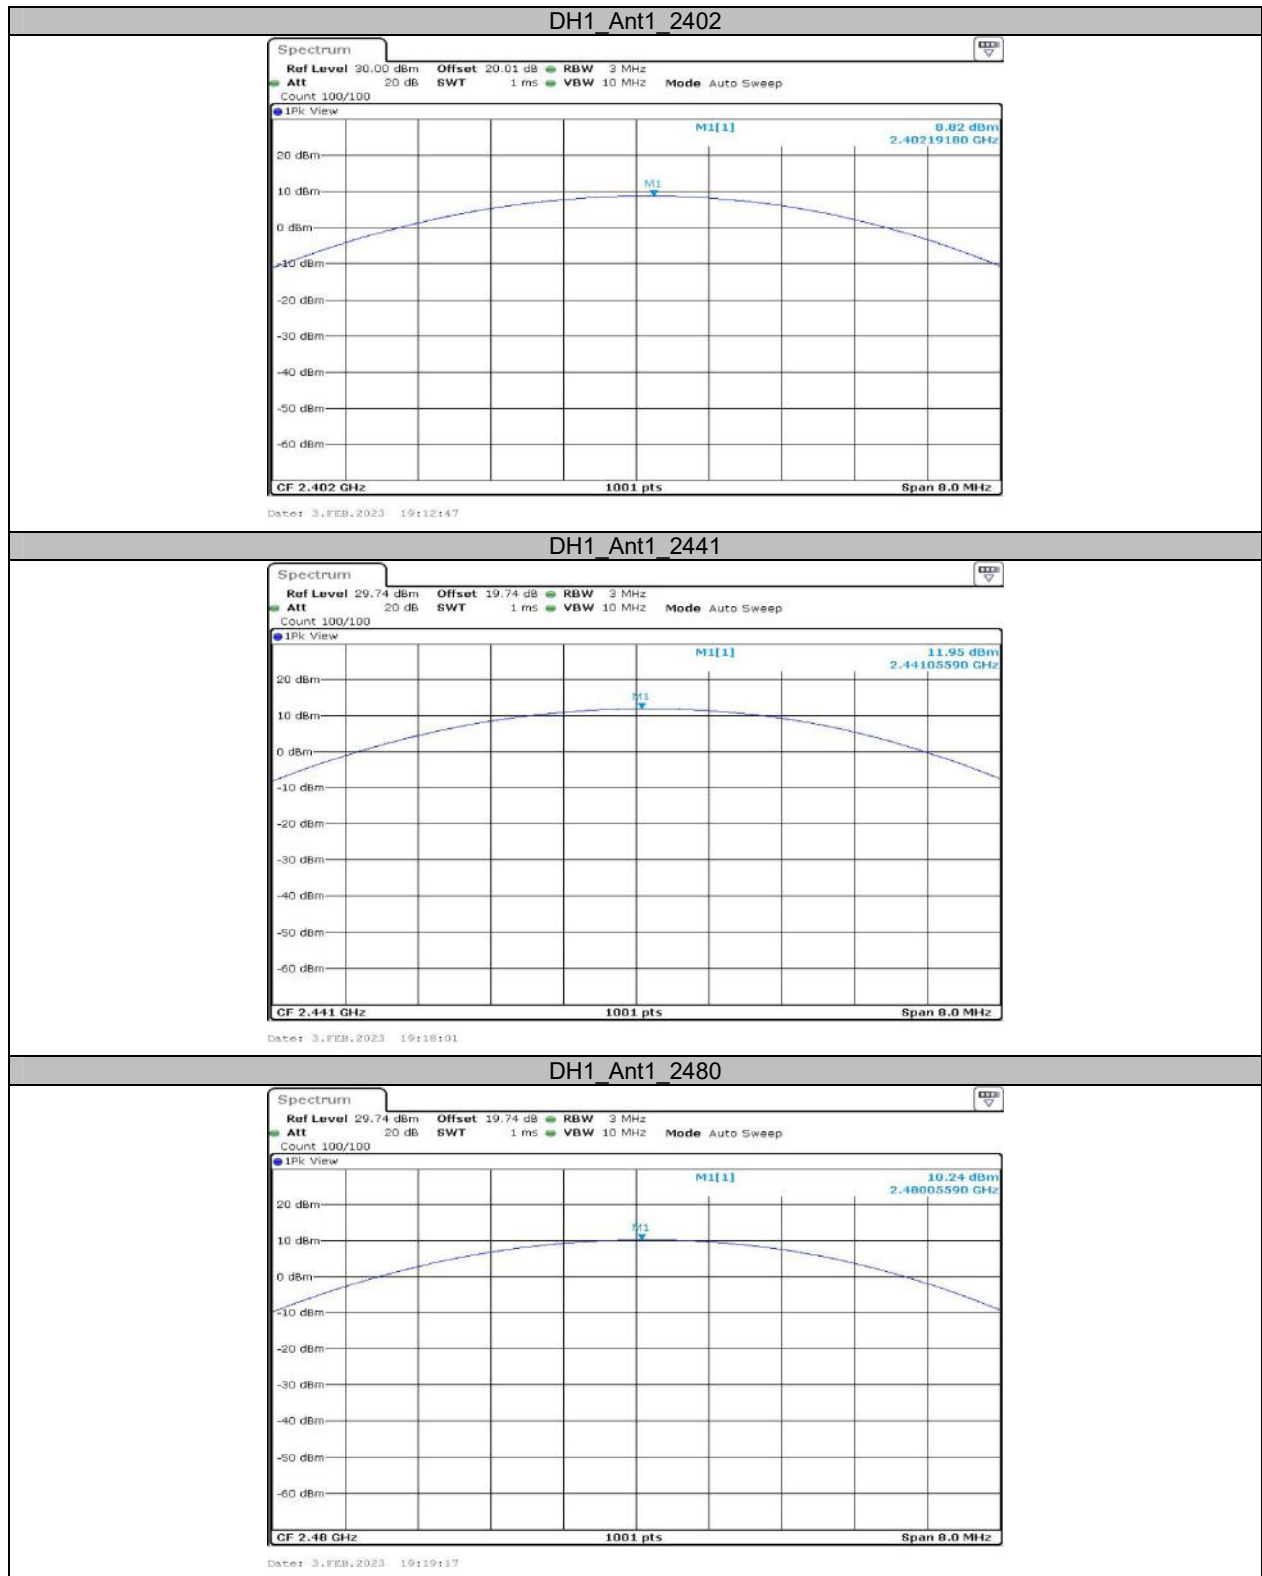


2DH1_Ant1_2402




Date: 3.FEB.2023 19:21:56

2DH1_Ant1_2441

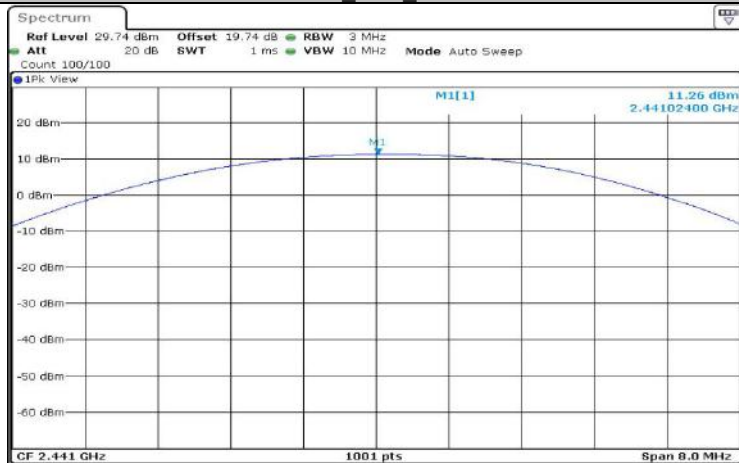

Date: 3.FEB.2023 19:24:12

2DH1_Ant1_2480

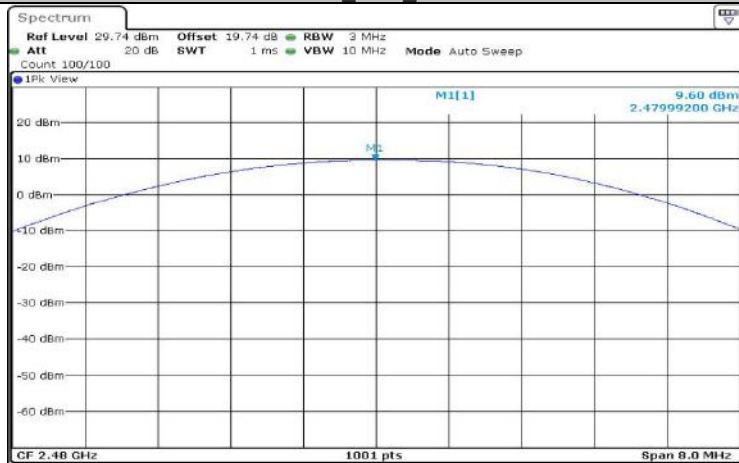

Date: 3.FEB.2023 19:25:33

3DH1_Ant1_2402




Date: 3.FEB.2023 19:26:59

3DH1_Ant1_2441



Date: 3.FEB.2023 19:28:00

3DH1_Ant1_2480

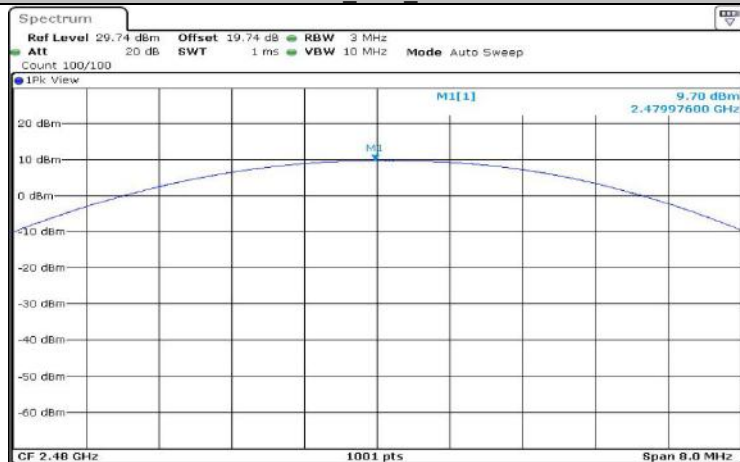

Date: 3.FEB.2023 19:29:13

**Appendix D: Carrier frequency separation
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	≥ 0.520	PASS
2DH1	Ant1	Hop	1.003	≥ 0.827	PASS
3DH1	Ant1	Hop	1.003	≥ 0.833	PASS

Test Graphs



**Appendix E: Time of occupancy
Test Result**


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.62	170	0.275	≤0.4	PASS
DH5	Ant1	Hop	2.86	110	0.315	≤0.4	PASS
2DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.87	120	0.344	≤0.4	PASS
3DH1	Ant1	Hop	0.38	330	0.125	≤0.4	PASS
3DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
3DH5	Ant1	Hop	2.87	130	0.373	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(S)$, Result=BurstWidth*Totalhops


Note 2: Totalhops=Hopping Number in $3.16s \times 10$


Note 3: Hopping Number in $3.16s$ =Total of highest signals in $3.16s$ (Second high signals were other channel)


Test Graphs

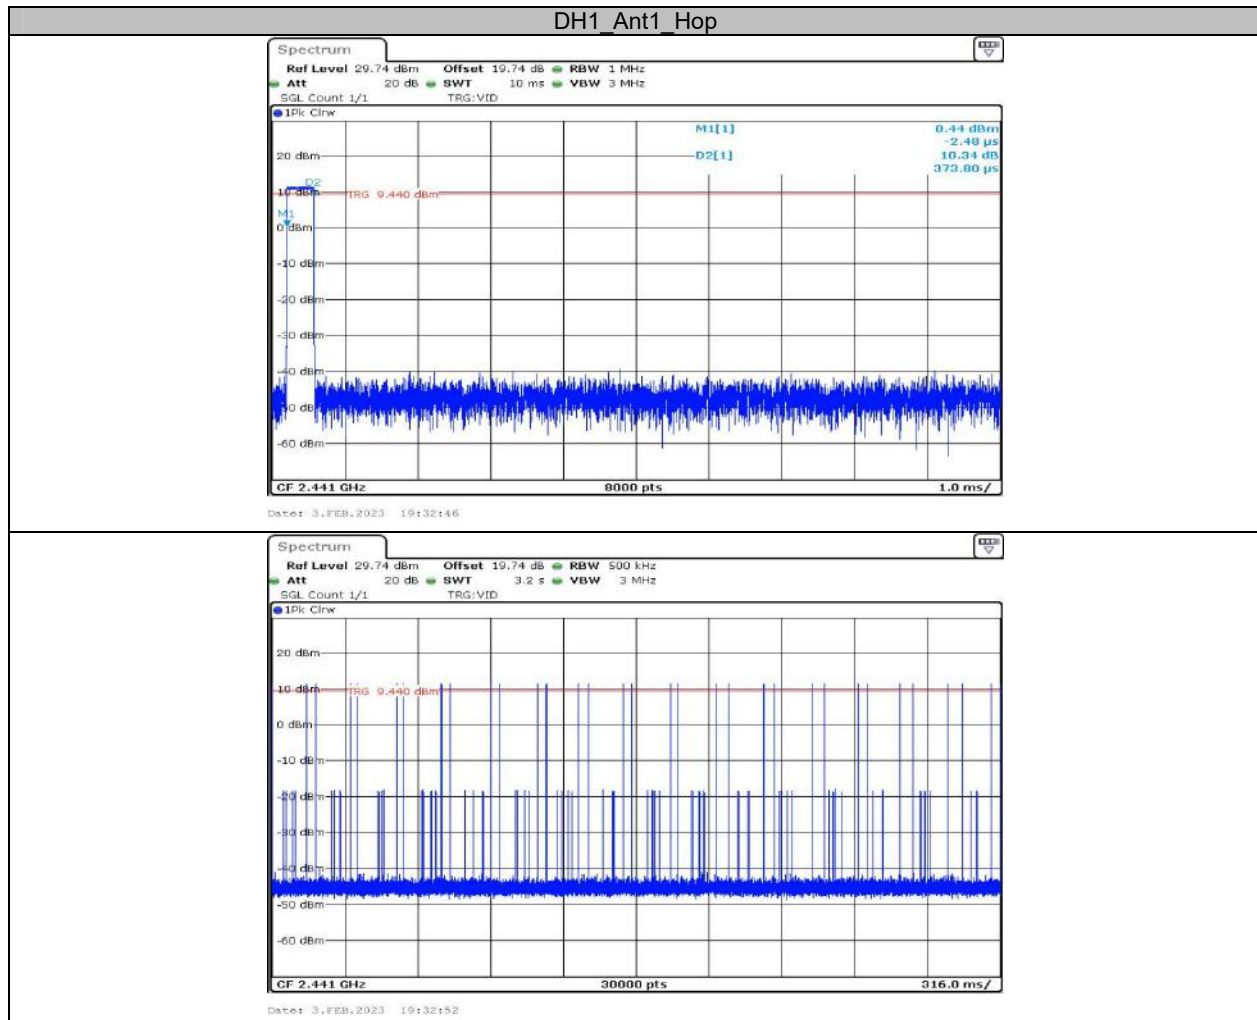


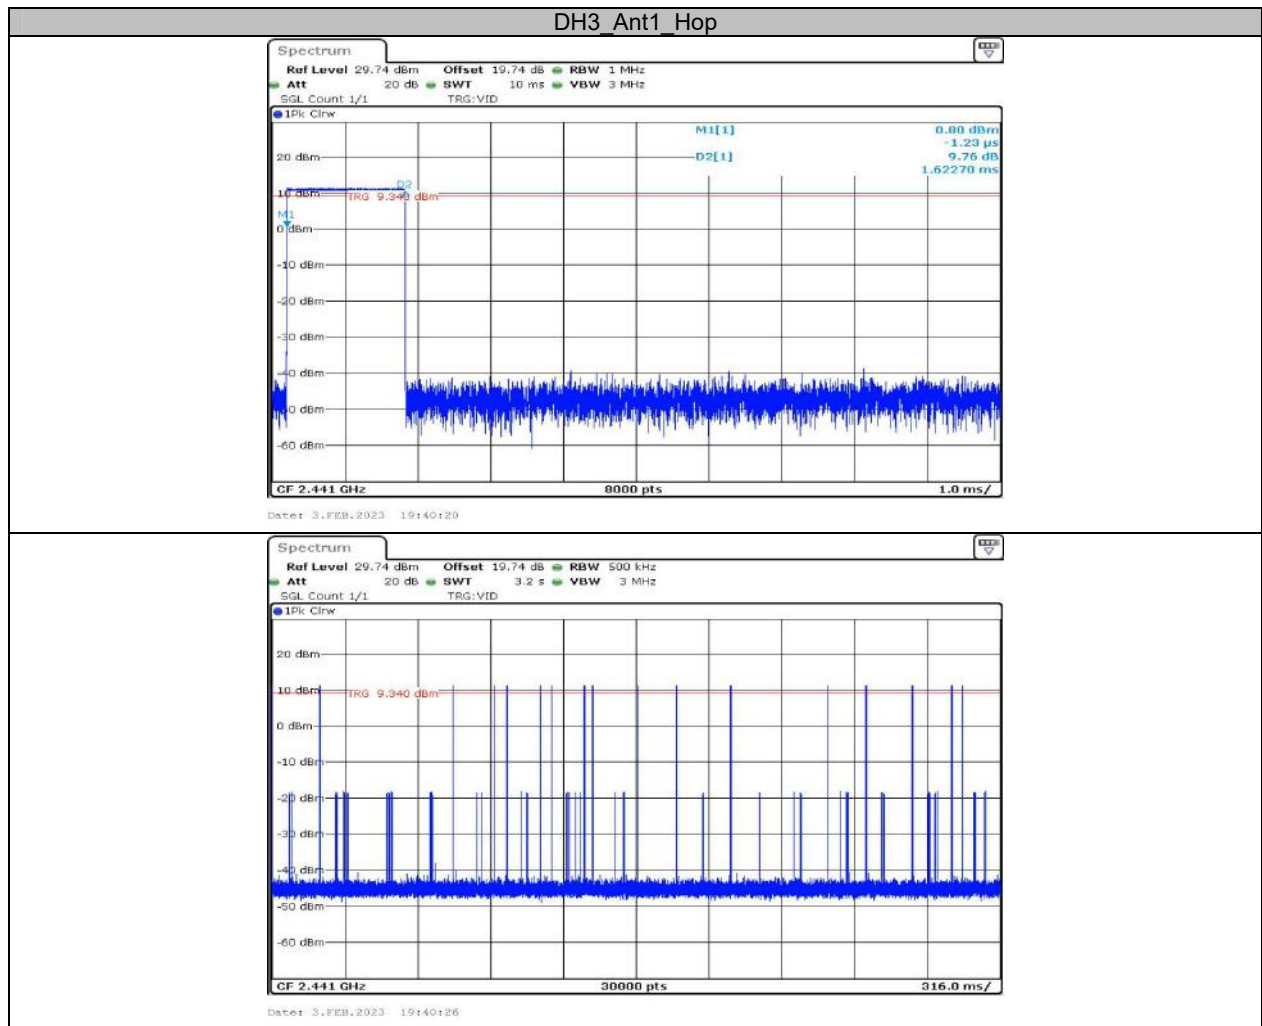


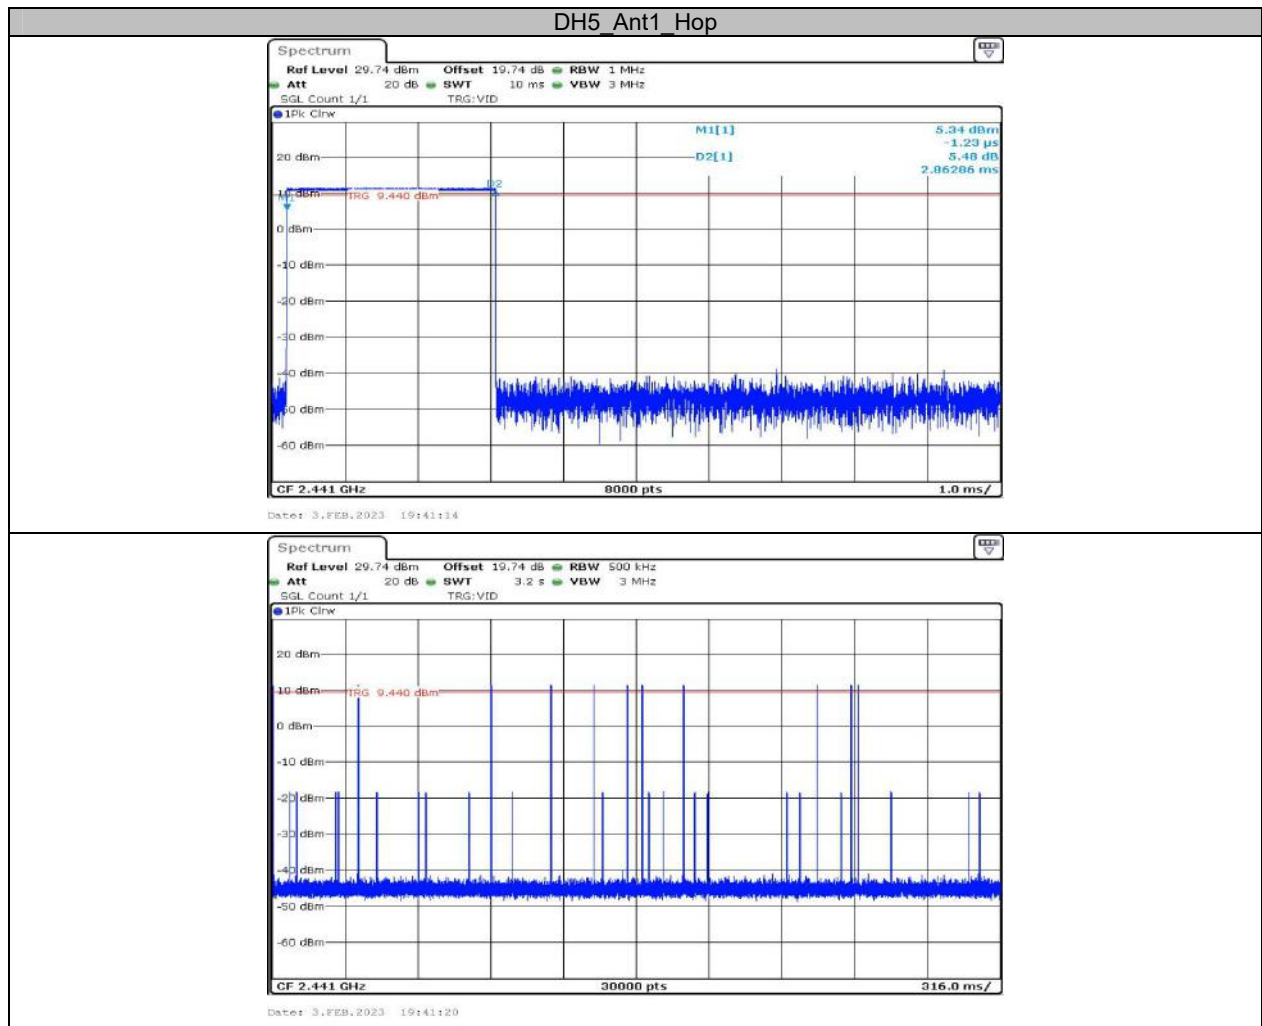


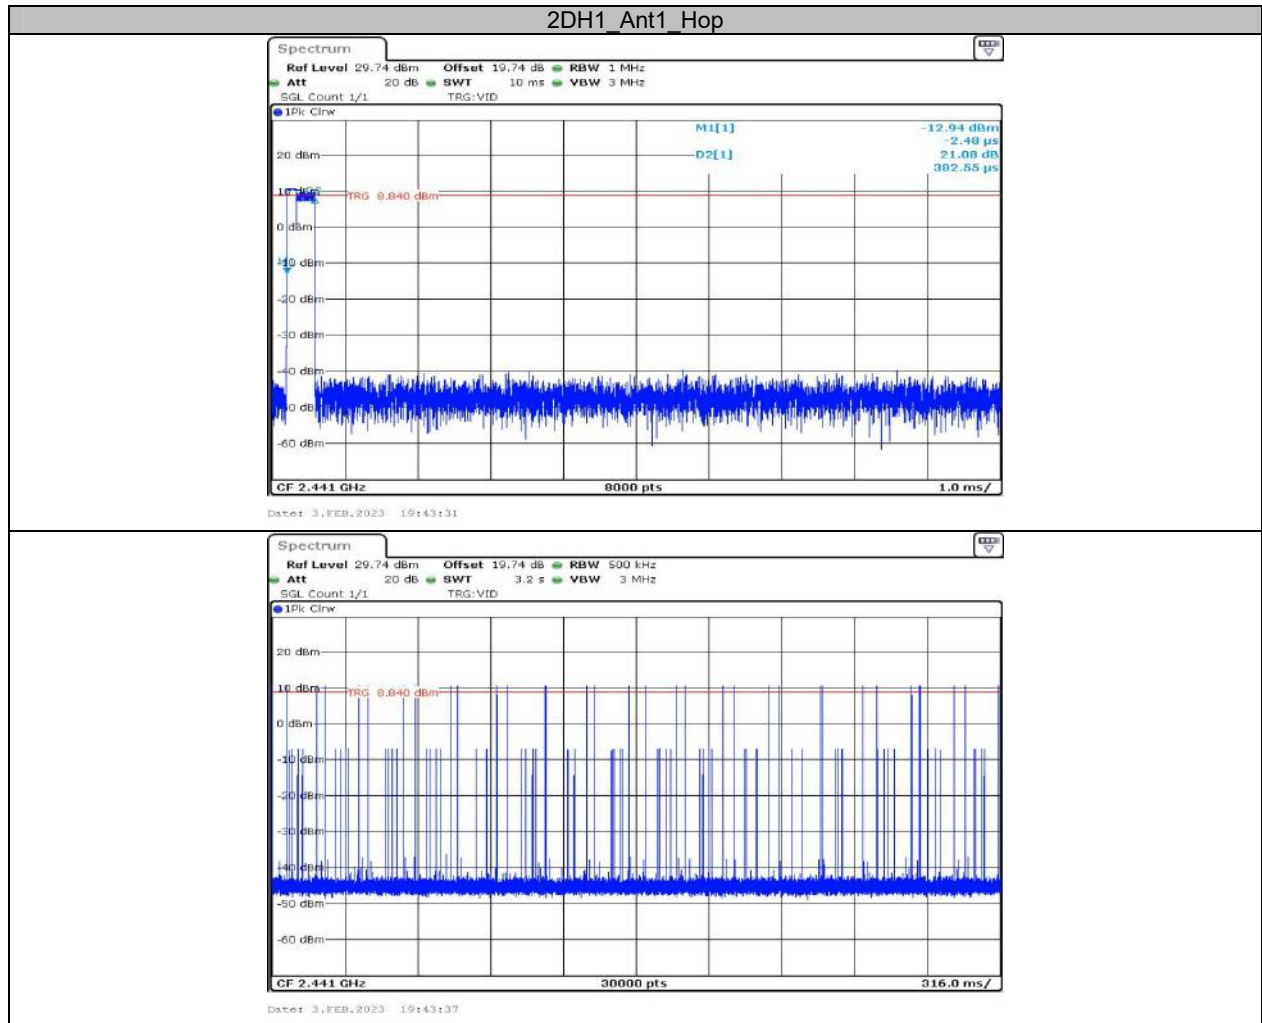


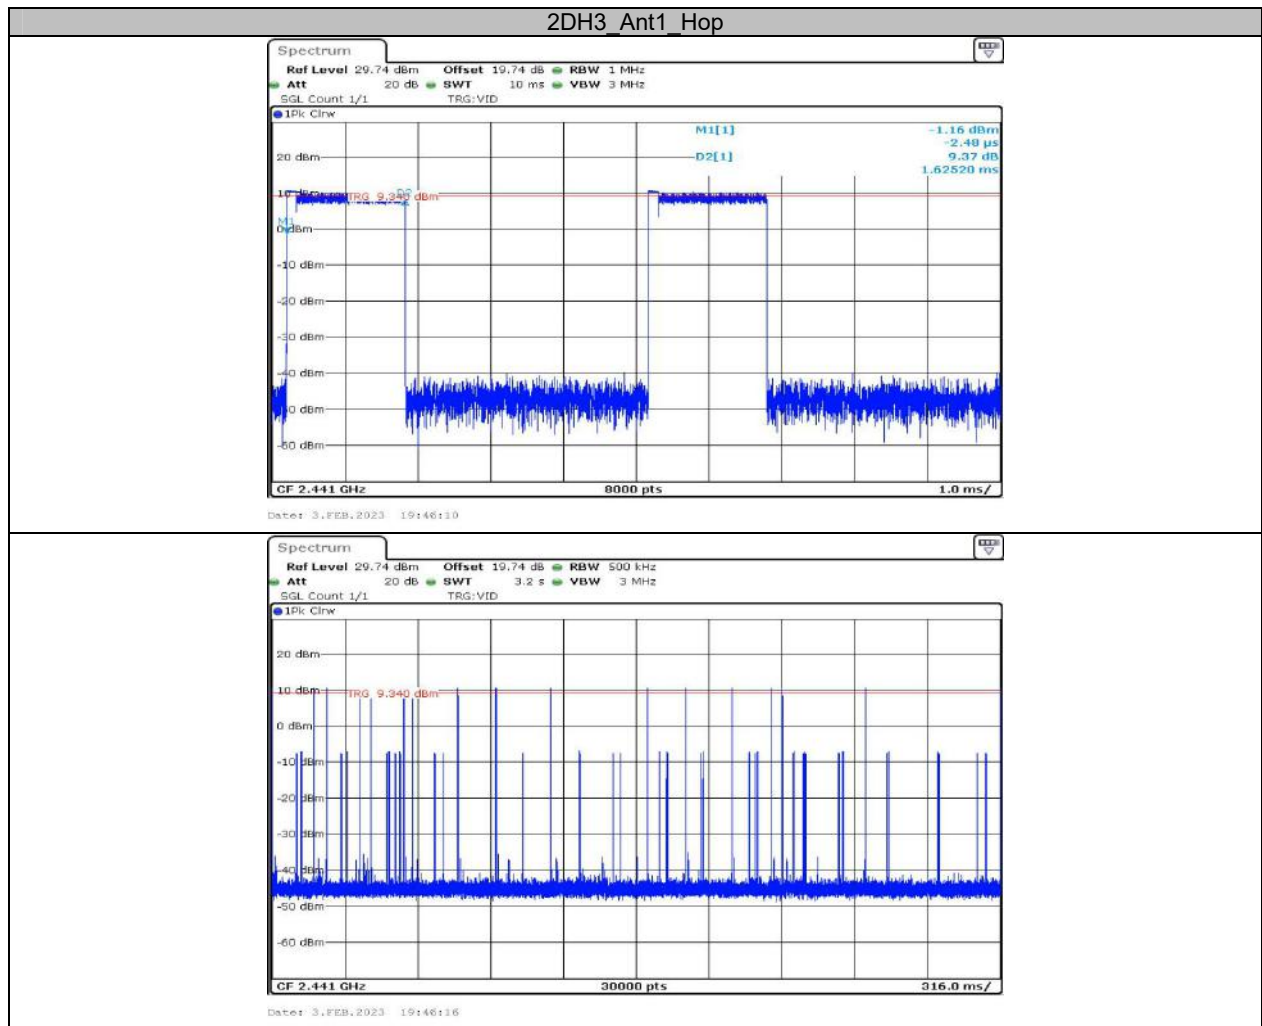

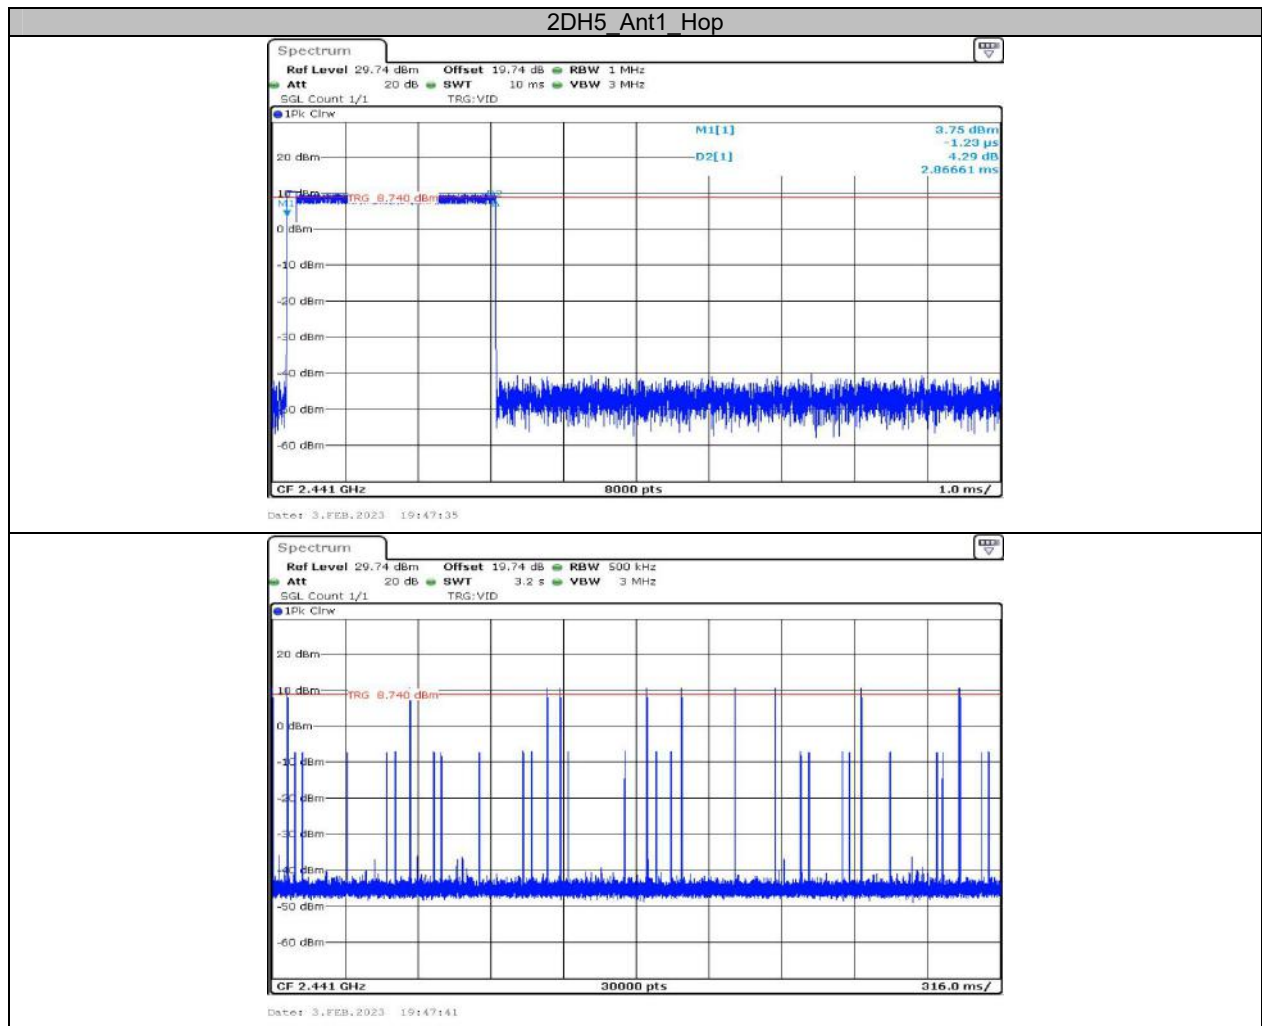

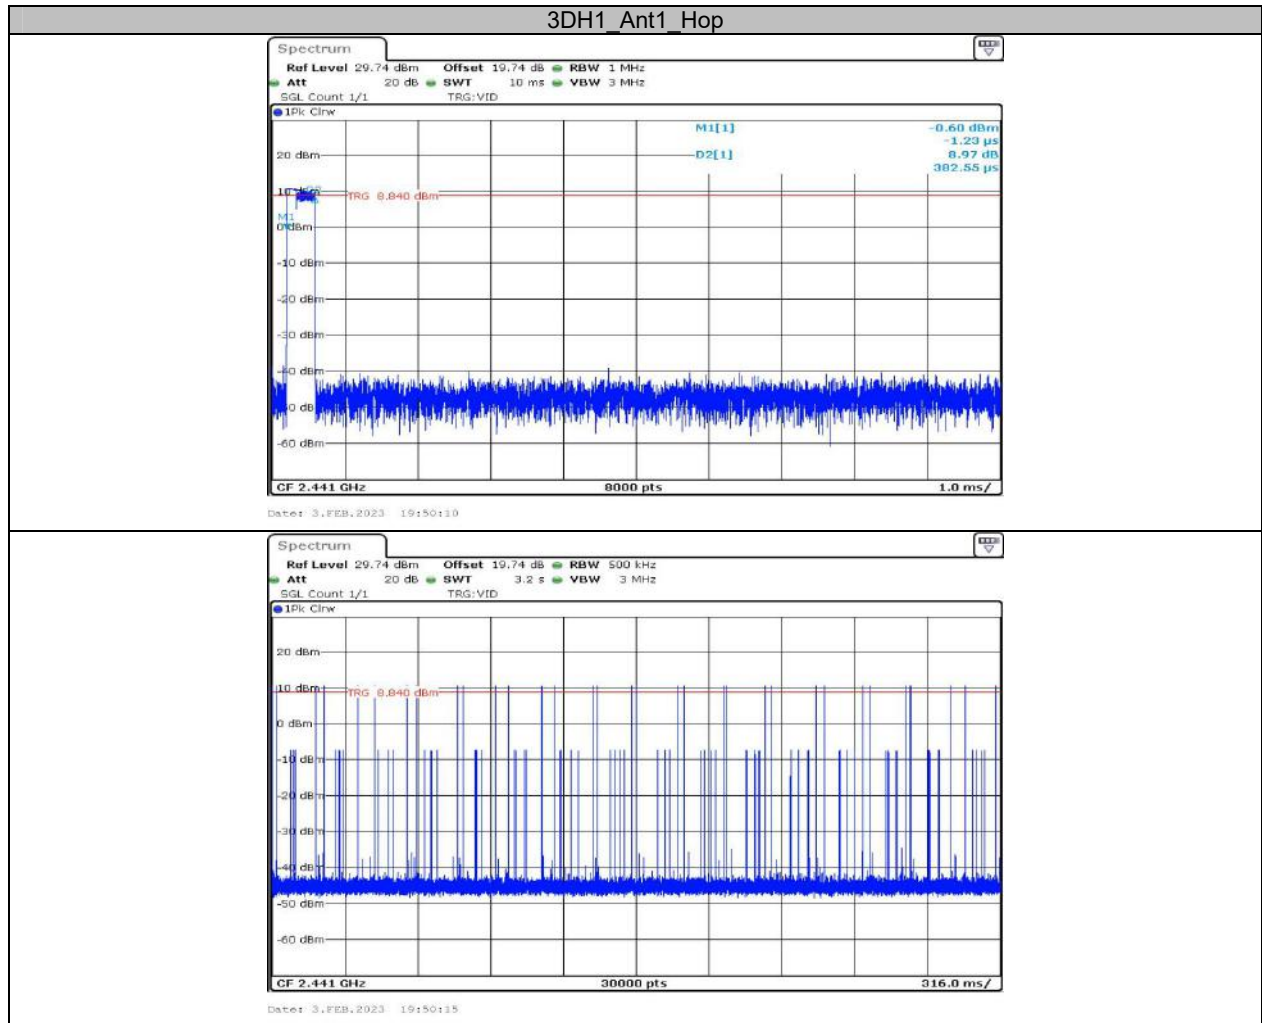

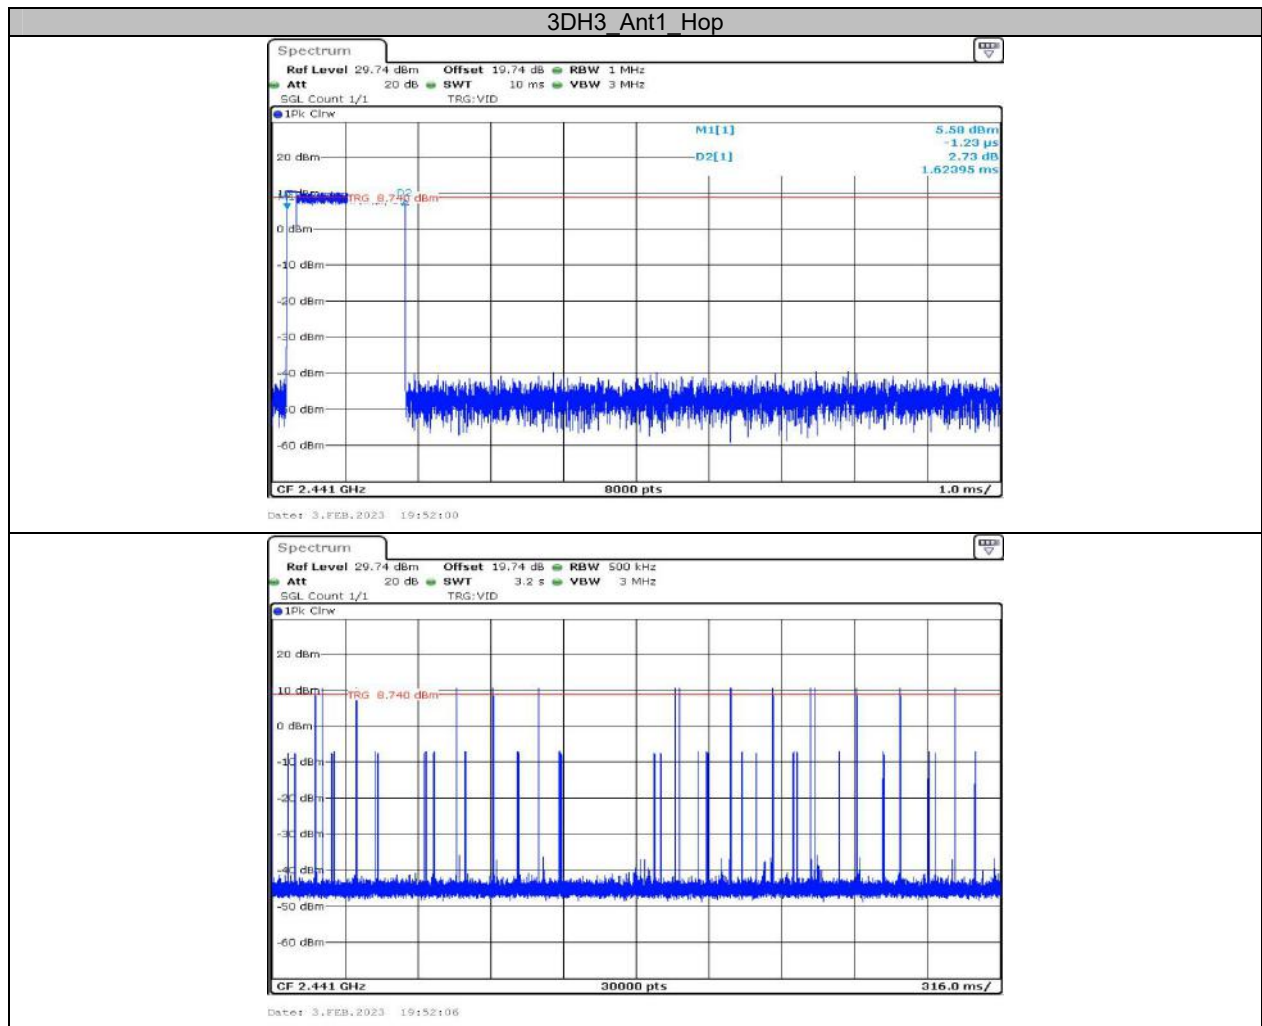


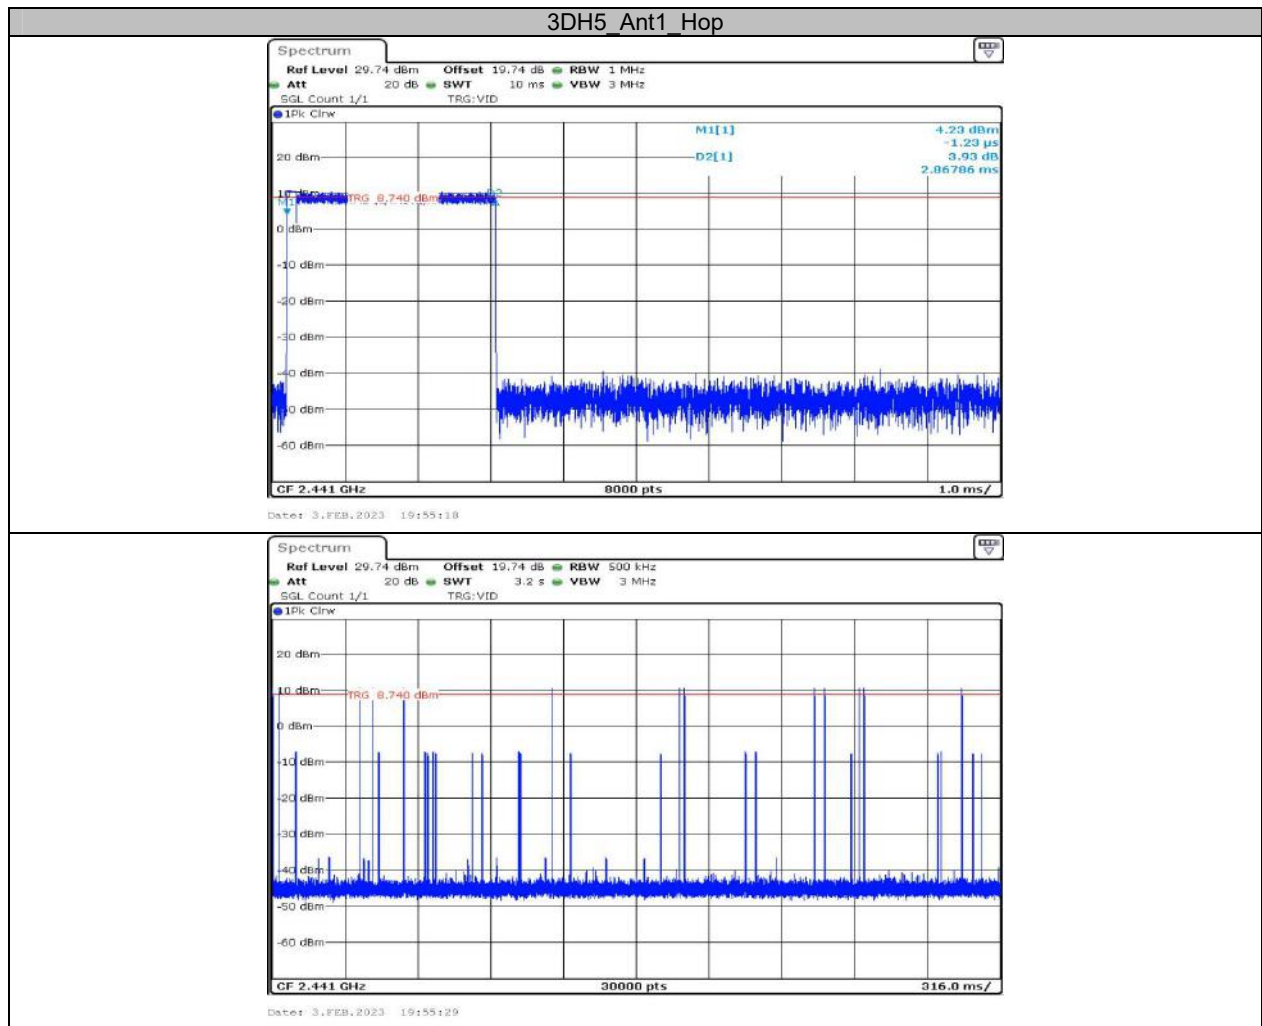

**Appendix F: Number of hopping channels
Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS

Test Graphs

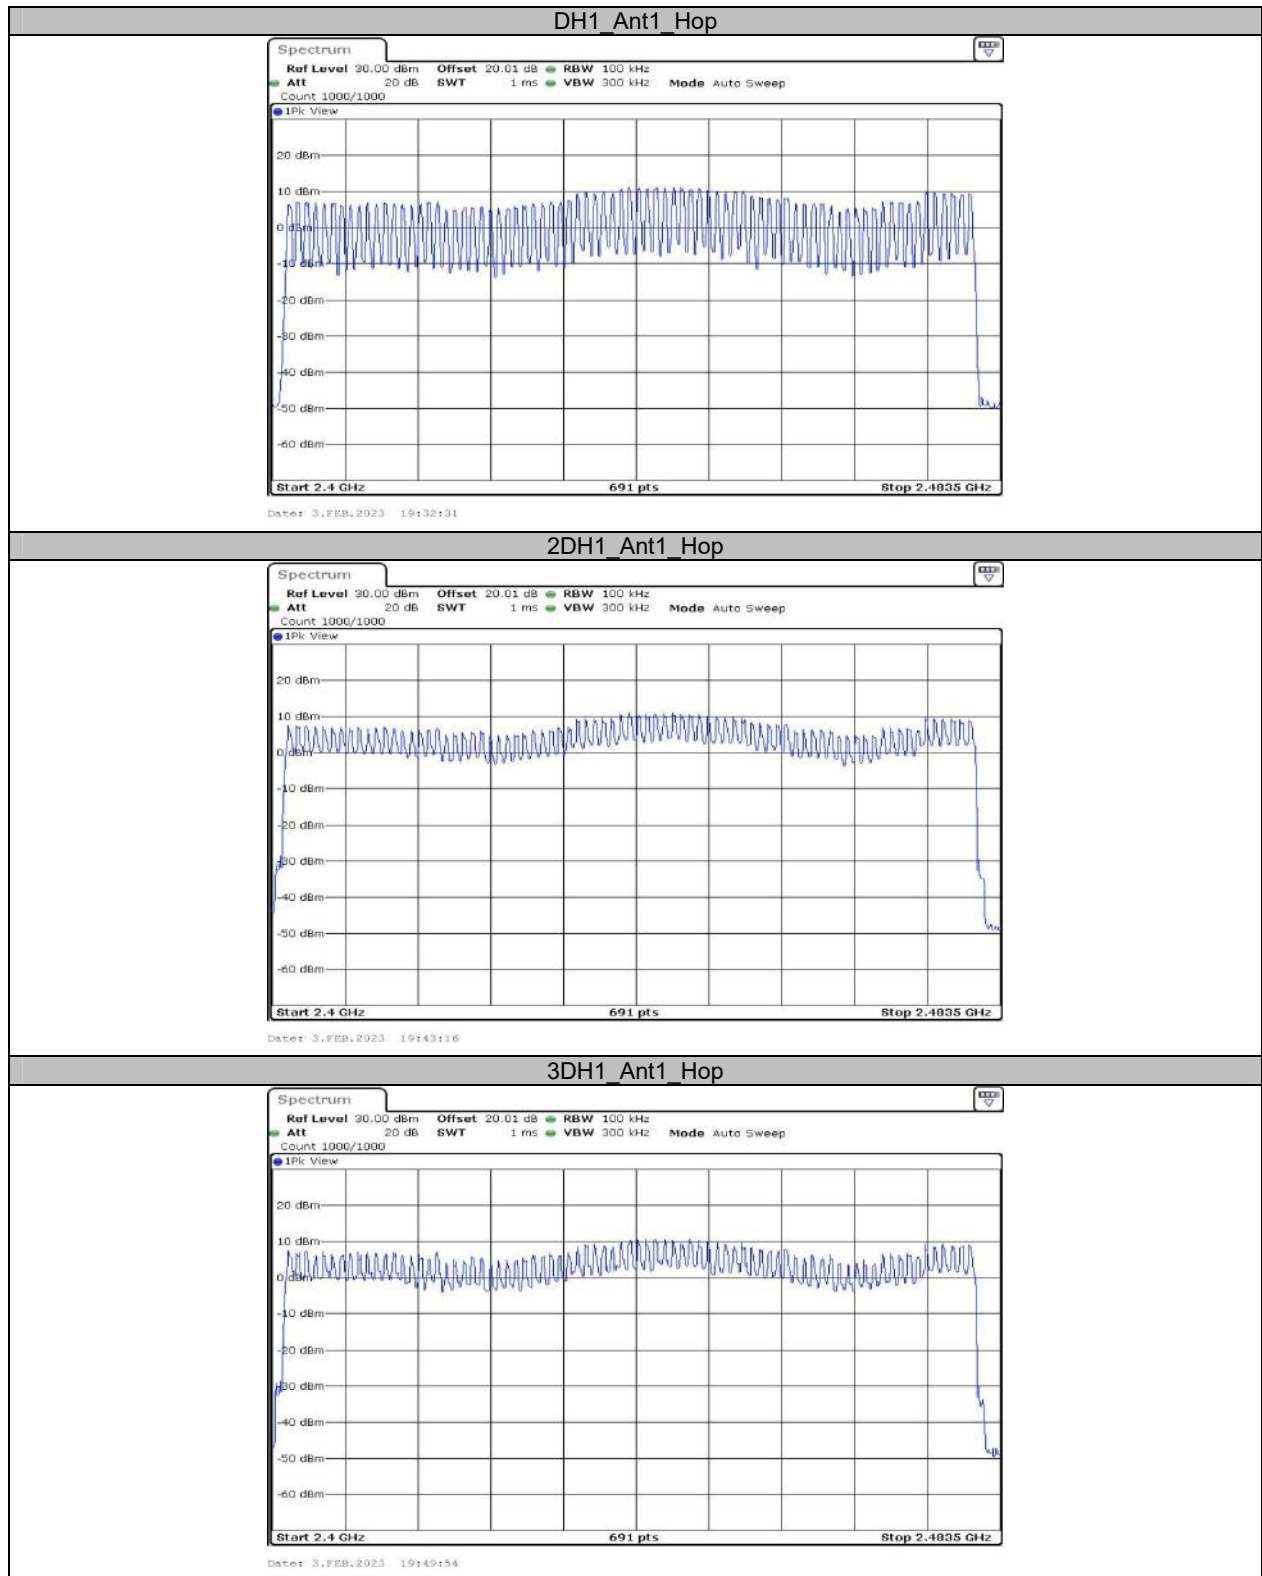


Appendix G: Band edge measurements


Test Graphs

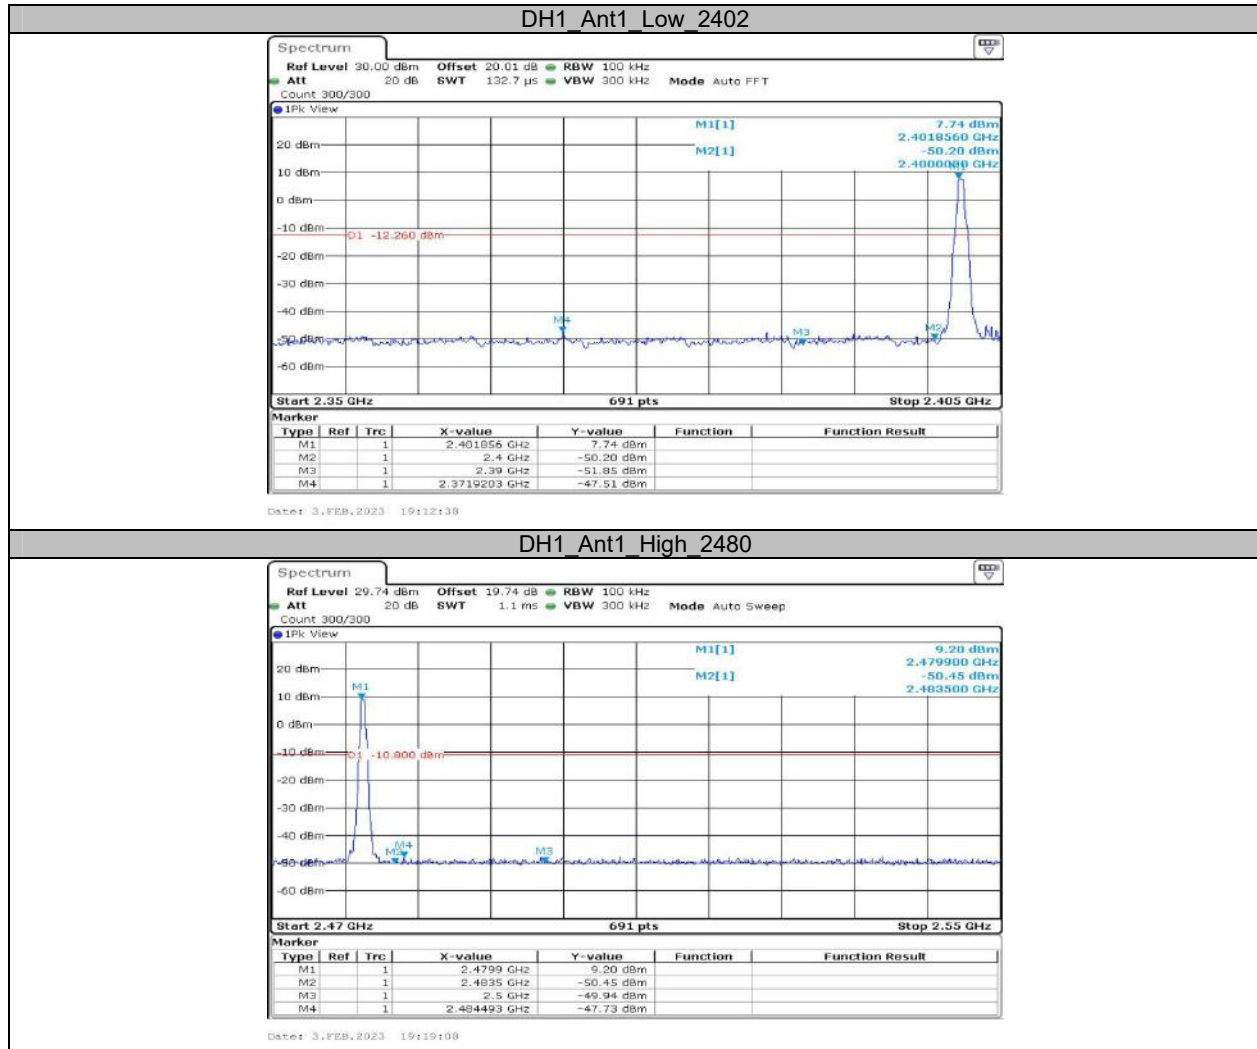


DH1_Ant1_Low_Hop_2402

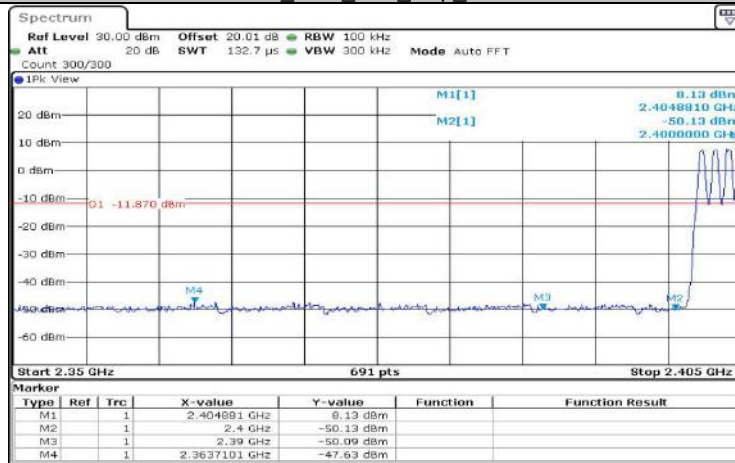


DH1_Ant1_High_Hop_2480

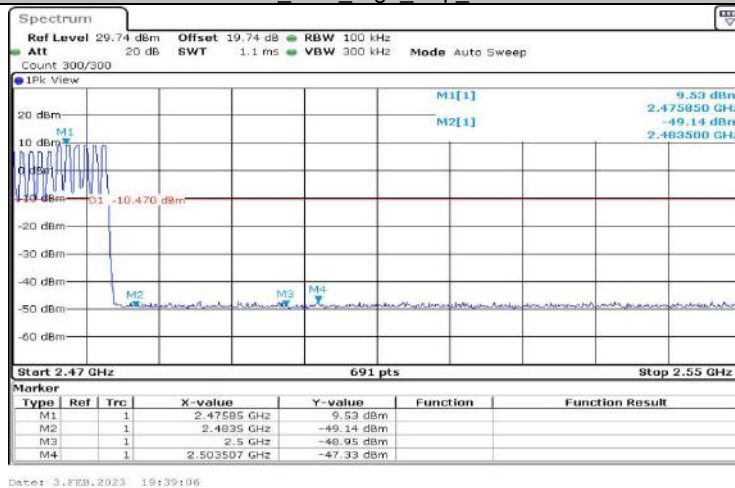

2DH1_Ant1_Low_2402

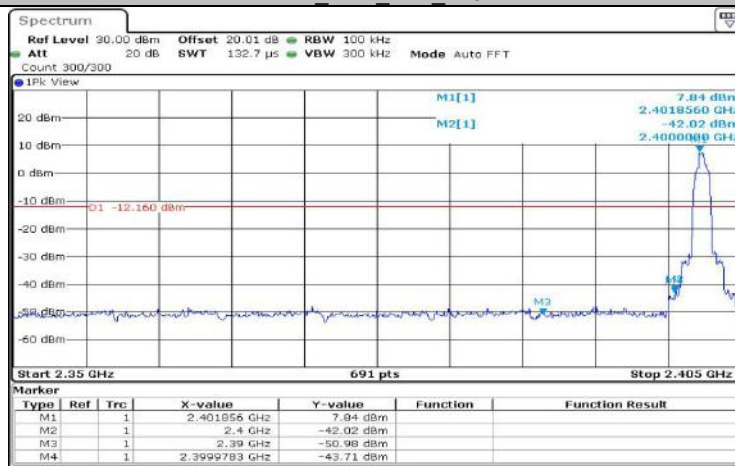


2DH1_Ant1_High_2480

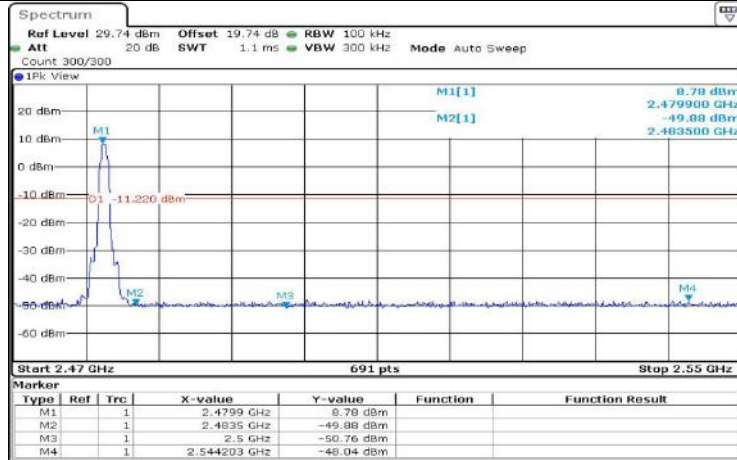


Date: 3.FEB.2023 19:25:22

2DH1_Ant1_Low_Hop_2402

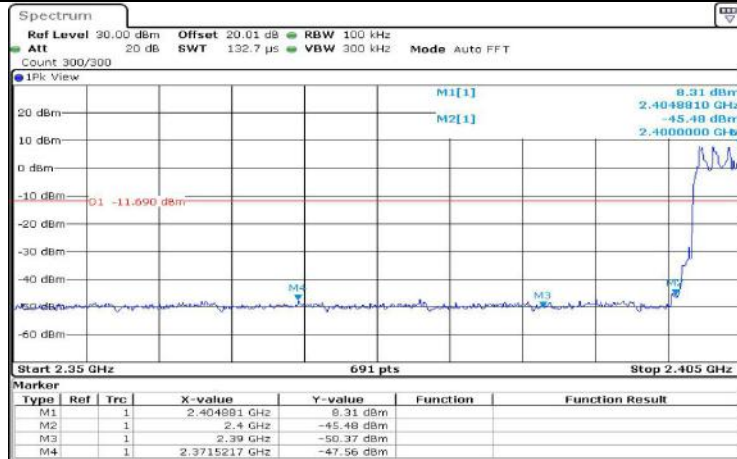


Date: 3.FEB.2023 19:45:29

2DH1_Ant1_High_Hop_2480

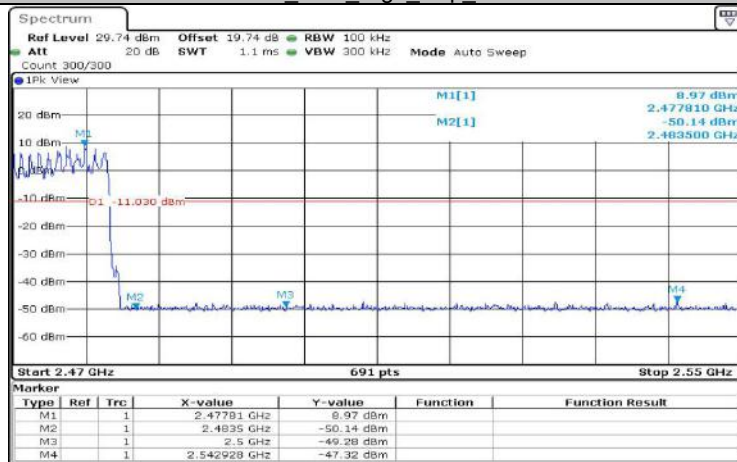


Date: 3.FEB.2023 19:43:55

3DH1 Ant1 Low 2402

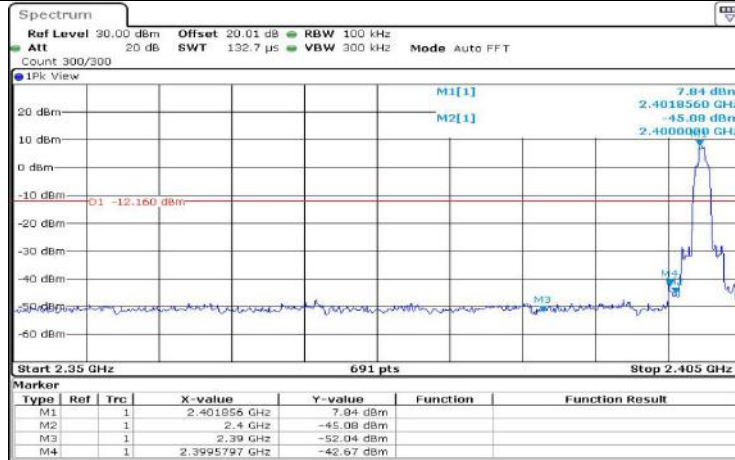


Date: 3.FEB.2023 19:26:48

3DH1 Ant1 High 2480

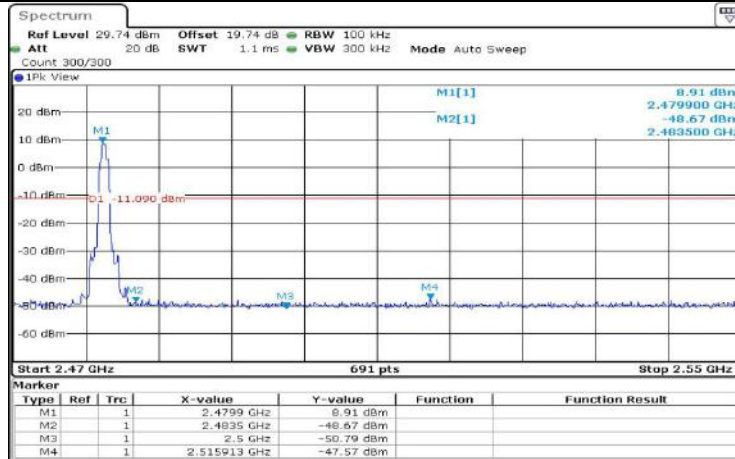


Date: 3.FEB.2023 19:28:54

3DH1 Ant1 Low Hop 2402

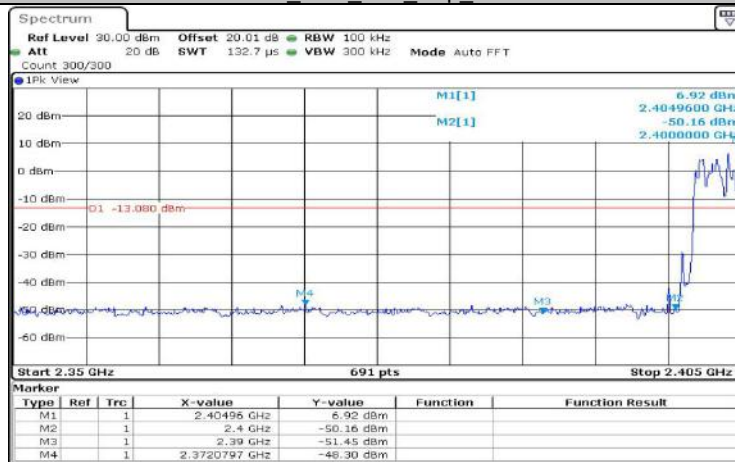

Date: 3.FEB.2023 19:49:06

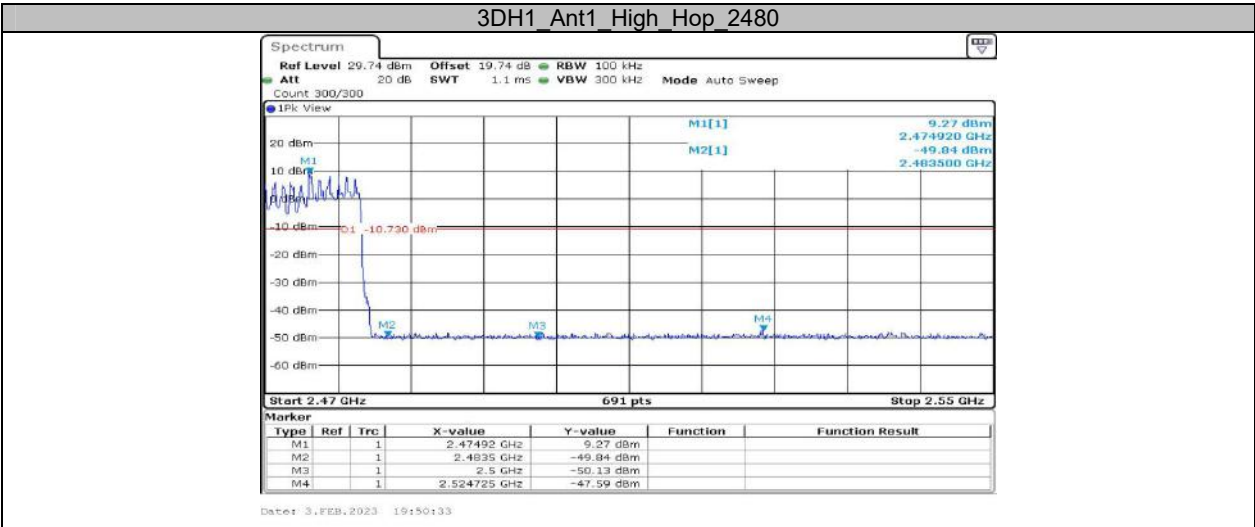


APPENDIX-ANT 2


Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant2	2402	0.78	---	---
		2441	0.78	---	---
		2480	0.78	---	---
2DH1	Ant2	2402	1.24	---	---
		2441	1.22	---	---
		2480	1.24	---	---
3DH1	Ant2	2402	1.23	---	---
		2441	1.22	---	---
		2480	1.26	---	---

Test Graphs

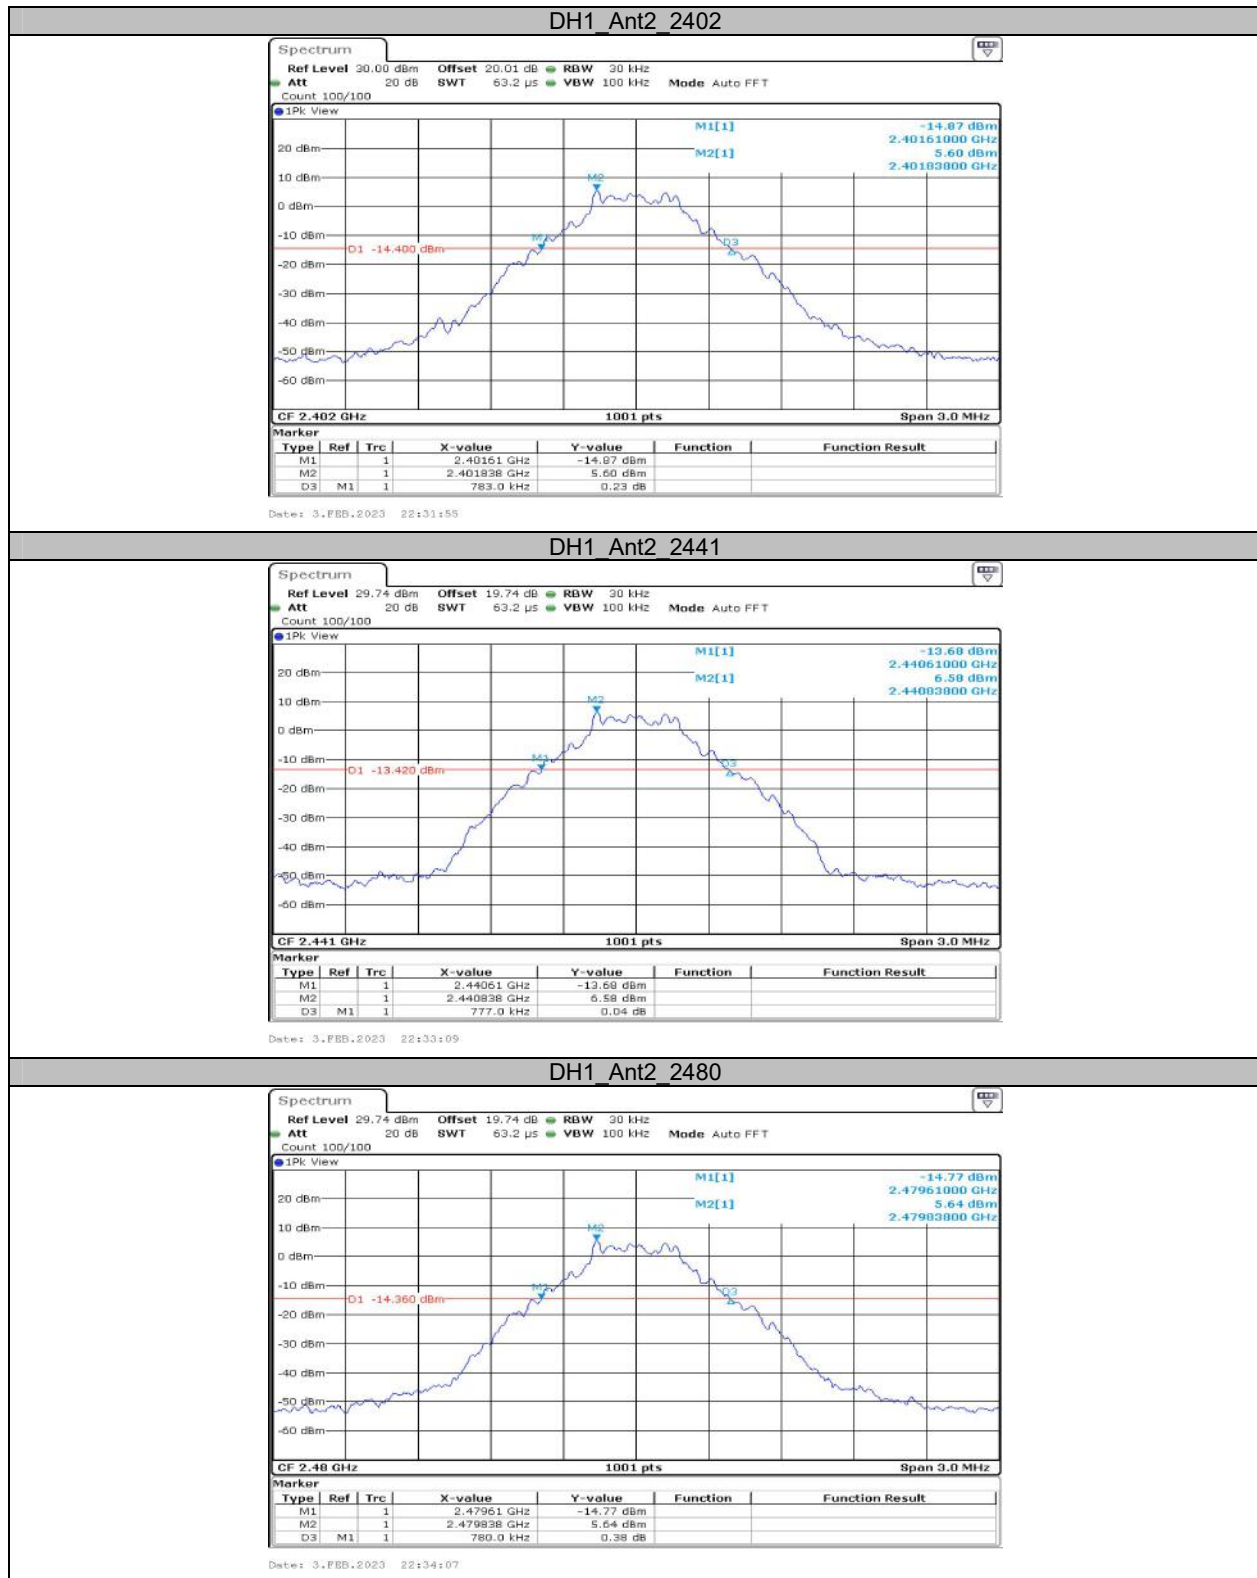


2DH1_Ant2_2402

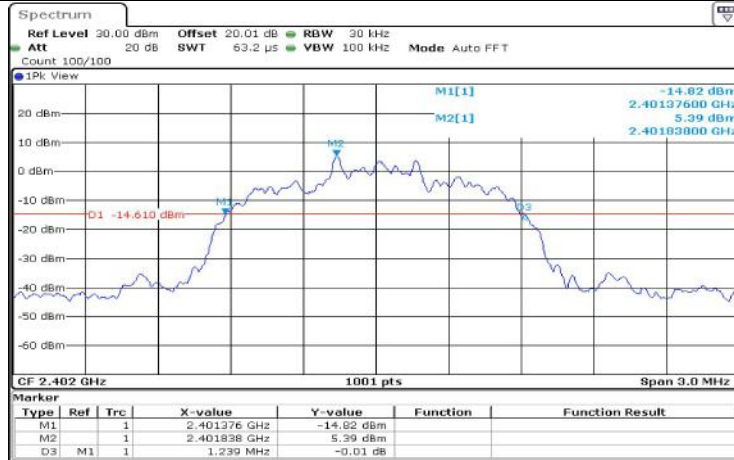


Date: 3.FEB.2023 22:35:39

2DH1_Ant2_2441

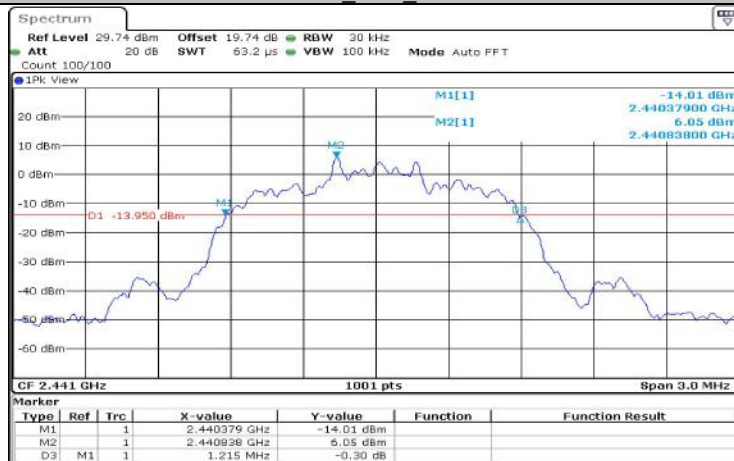


Date: 3.FEB.2023 22:36:45

2DH1_Ant2_2480

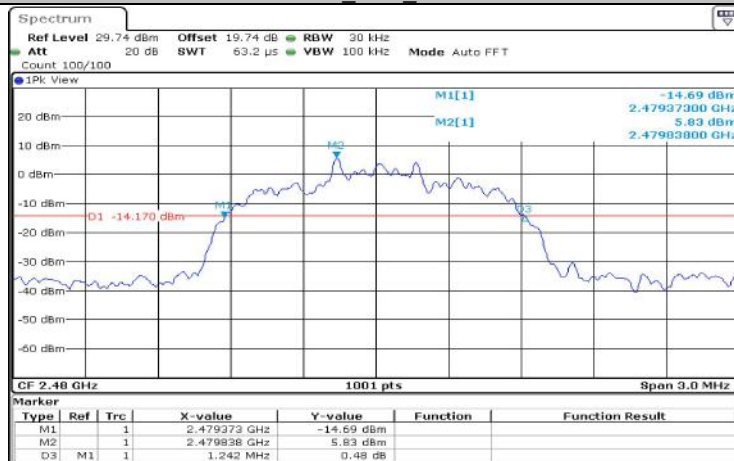


Date: 3.FEB.2023 22:37:50

3DH1_Ant2_2402

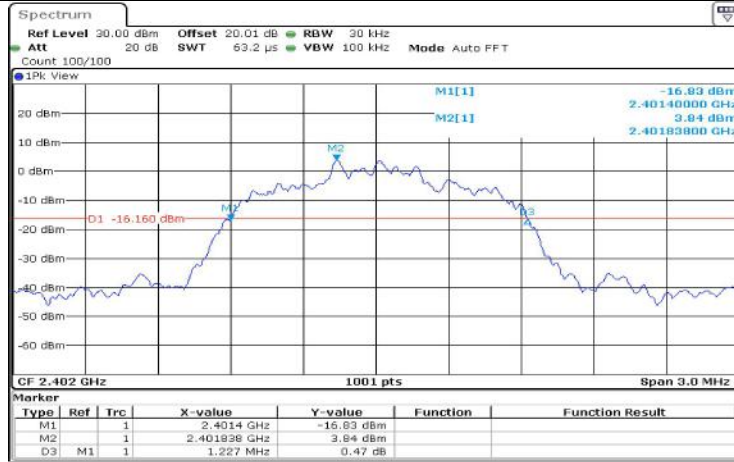


Date: 3.FEB.2023 22:39:10

3DH1_Ant2_2441

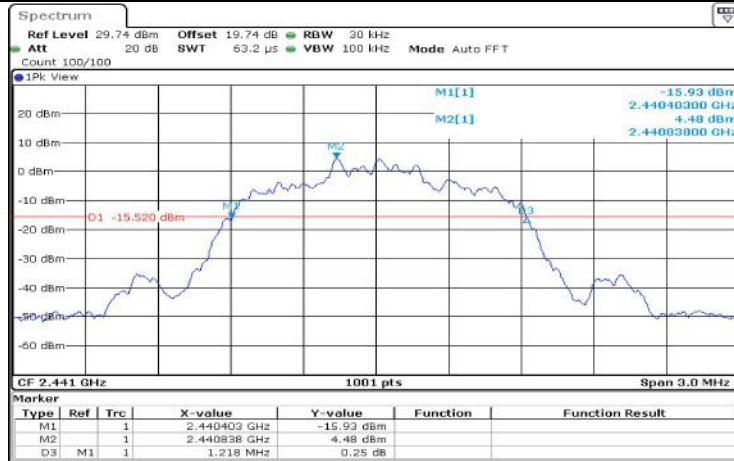

Date: 3.FEB.2023 22:40:14

3DH1_Ant2_2480

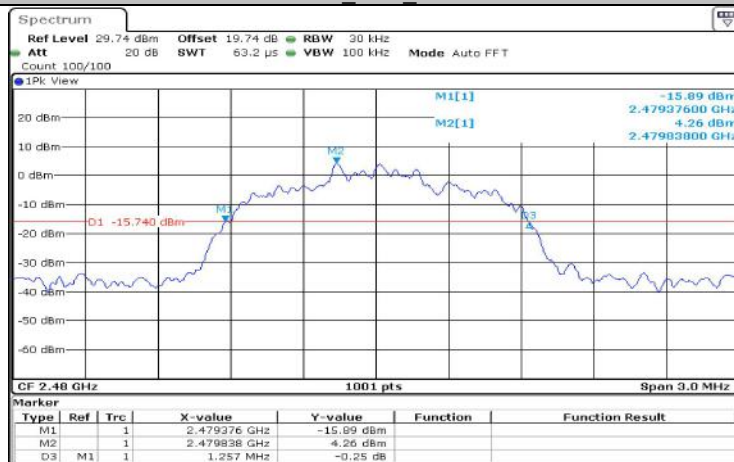


Date: 3.FEB.2023 22:41:06


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant2	2402	0.728	---	---
		2441	0.725	---	---
		2480	0.731	---	---
2DH1	Ant2	2402	1.139	---	---
		2441	1.133	---	---
		2480	1.151	---	---
3DH1	Ant2	2402	1.136	---	---
		2441	1.130	---	---
		2480	1.151	---	---


Test Graphs

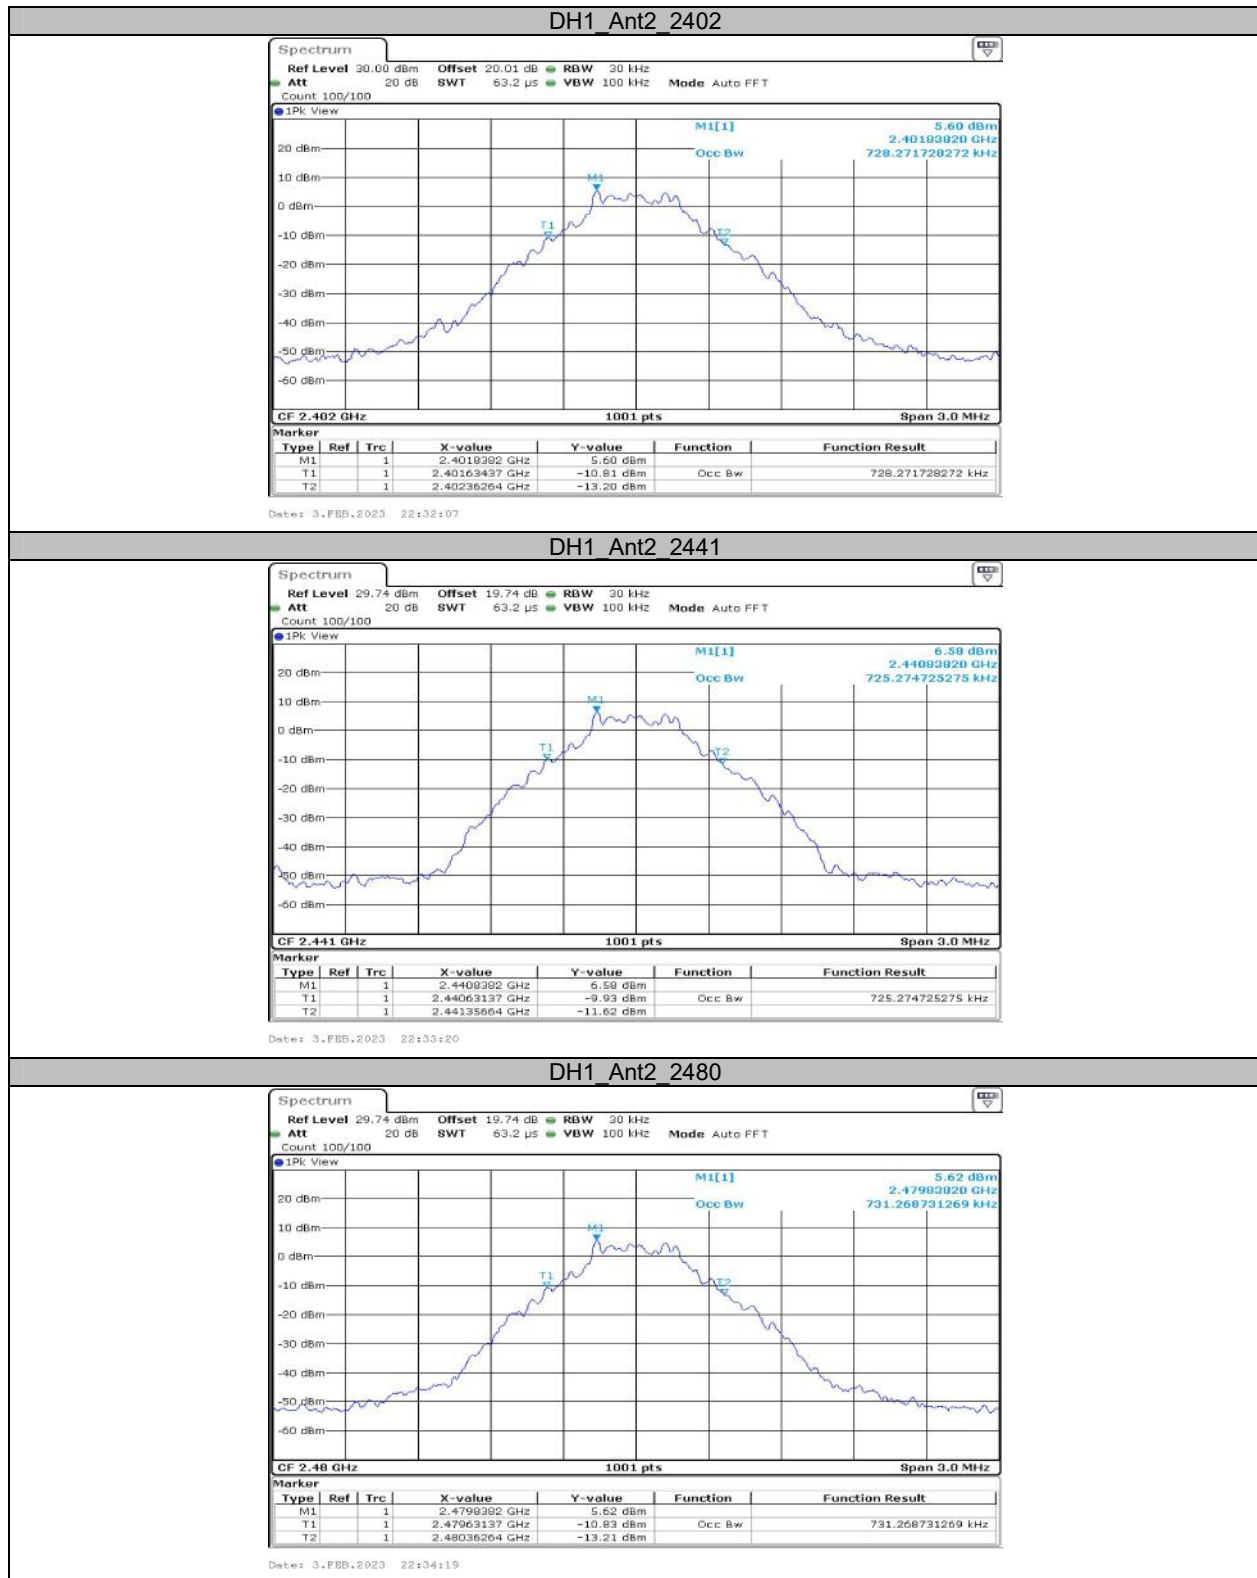


2DH1_Ant2_2402

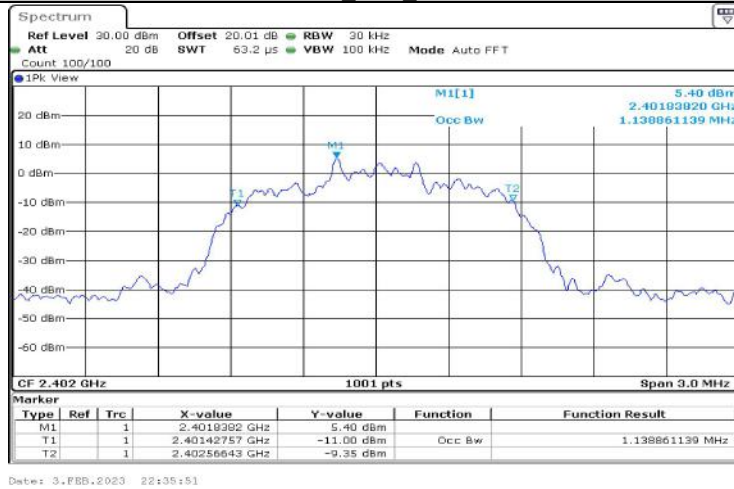


2DH1_Ant2_2441

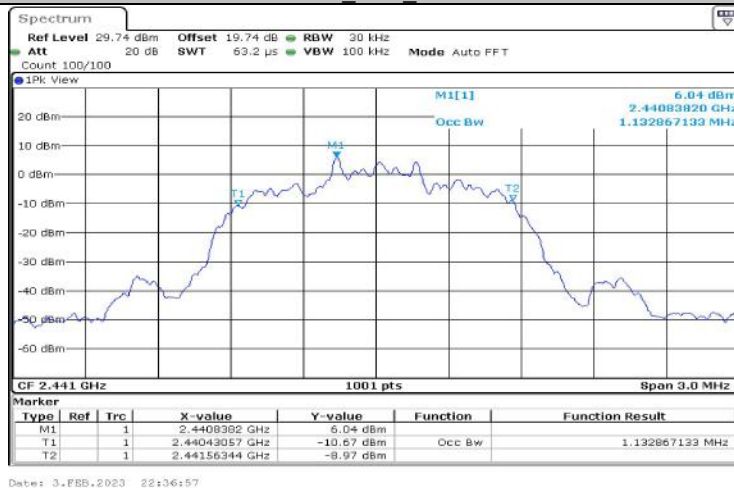

2DH1_Ant2_2480

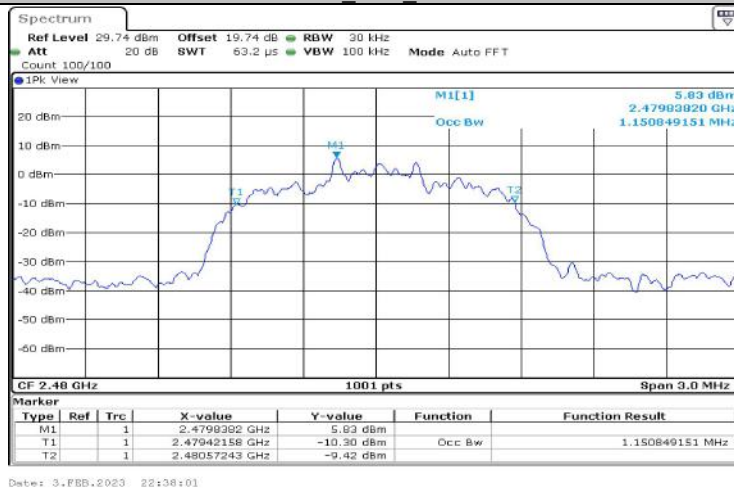


3DH1_Ant2_2402

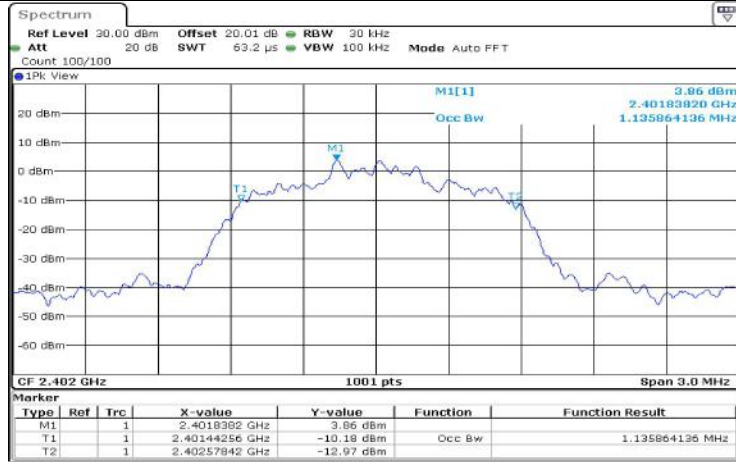


Date: 3.FEB.2023 22:39:22

3DH1_Ant2_2441

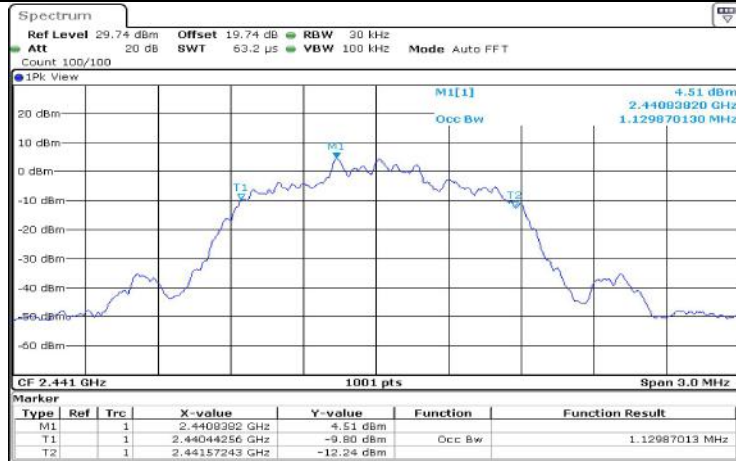

Date: 3.FEB.2023 22:40:26

3DH1_Ant2_2480

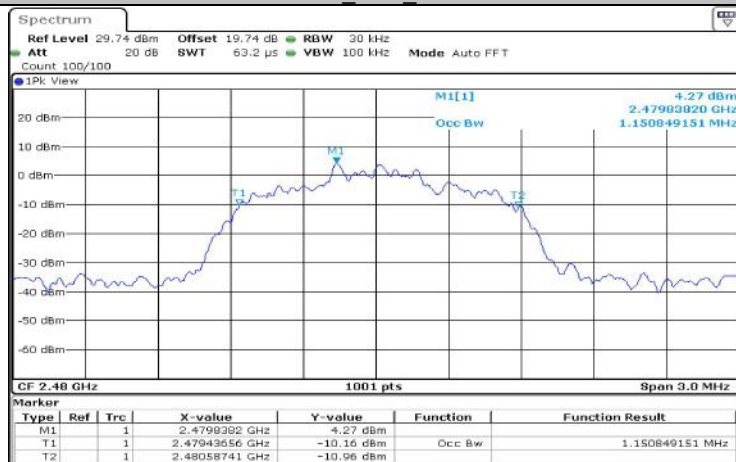


Date: 3.FEB.2023 22:41:18

**Appendix C: Maximum conducted output power
Test Result**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH1	Ant2	2402	8.55	≤20.97	PASS
		2423	11.84	≤20.97	PASS
		2441	9.48	≤20.97	PASS
		2480	8.84	≤20.97	PASS
2DH1	Ant2	2402	8.09	≤20.97	PASS
		2425	11.71	≤20.97	PASS
		2441	8.62	≤20.97	PASS
		2480	8.9	≤20.97	PASS
3DH1	Ant2	2402	8.08	≤20.97	PASS
		2425	11.69	≤20.97	PASS
		2441	8.79	≤20.97	PASS
		2480	8.89	≤20.97	PASS


Test Graphs

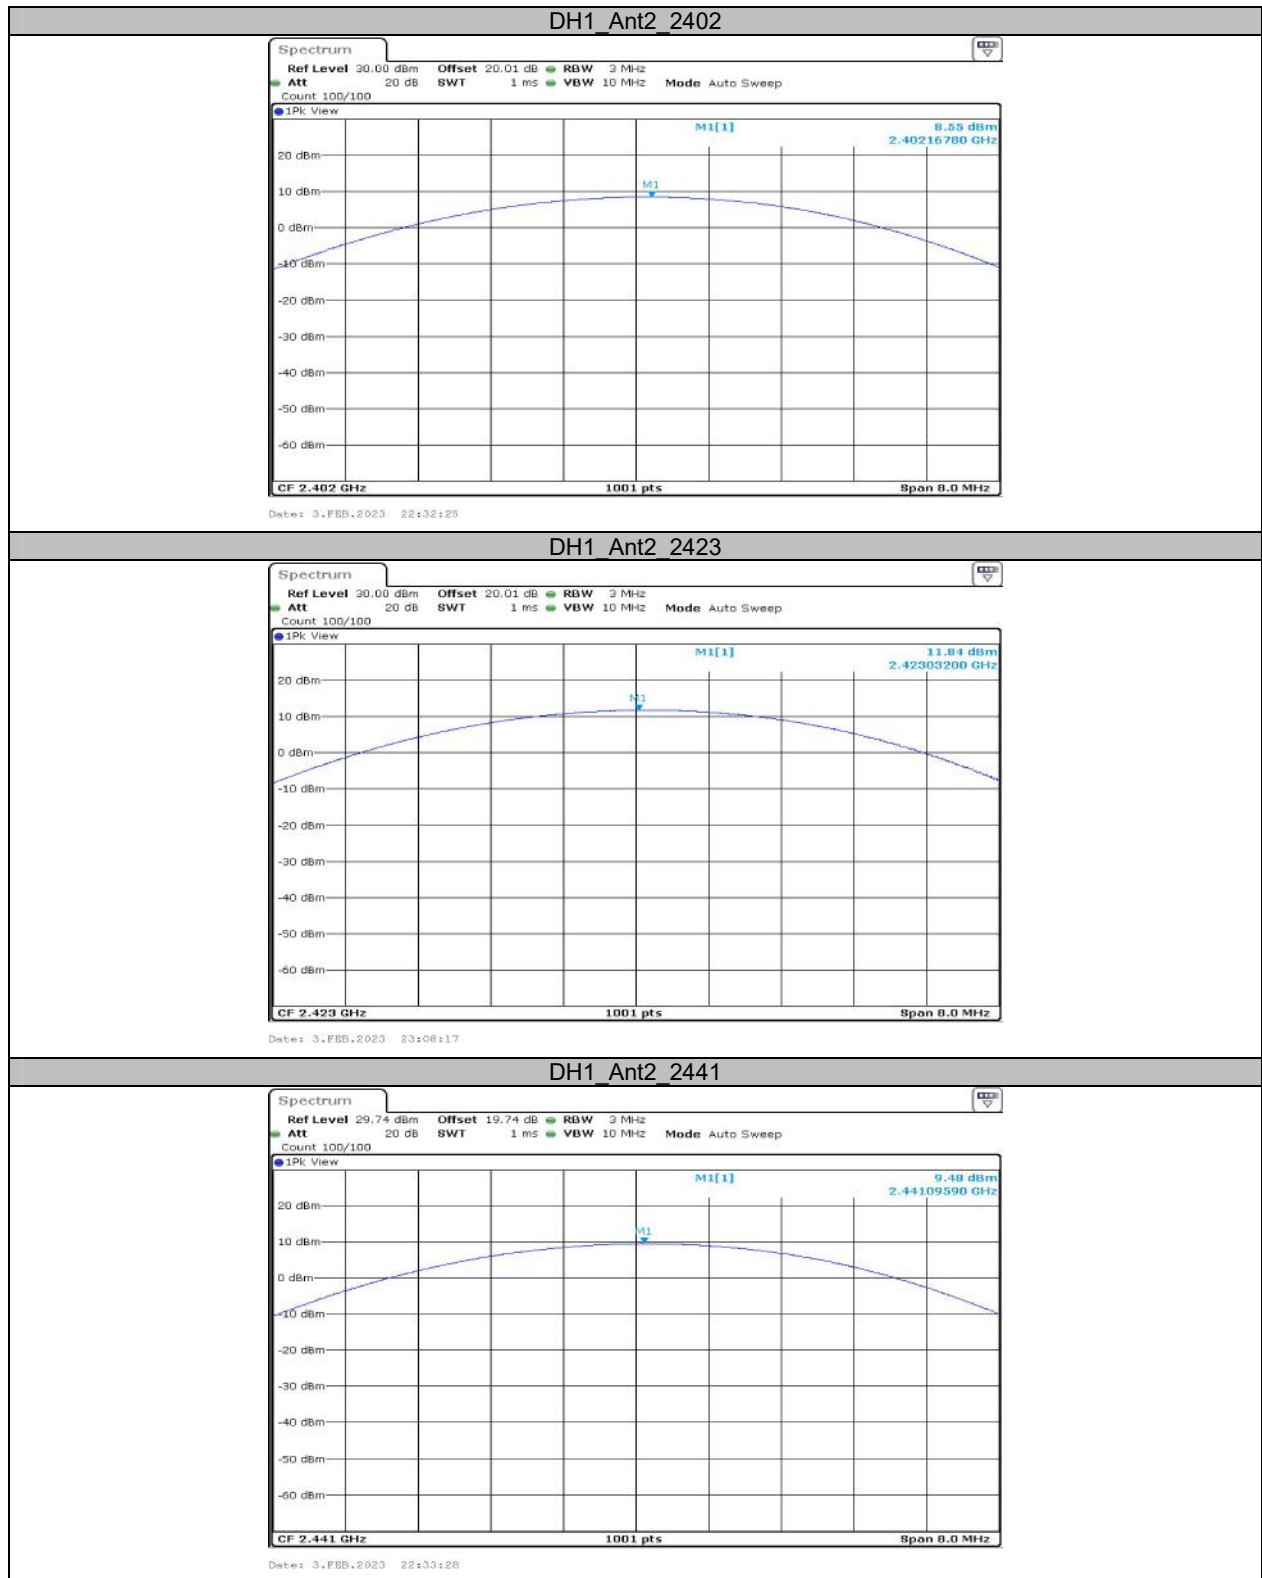

DH1_Ant2_2480



2DH1_Ant2_2402

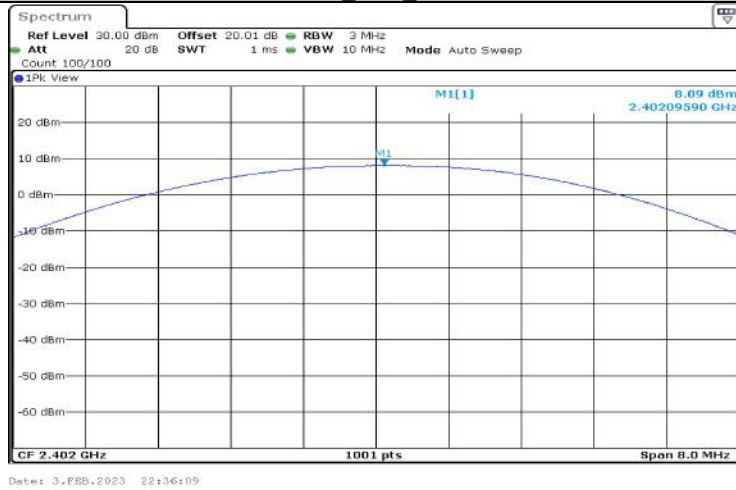

2DH1_Ant2_2425



2DH1_Ant2_2441




2DH1_Ant2_2480



3DH1_Ant2_2402



3DH1_Ant2_2425

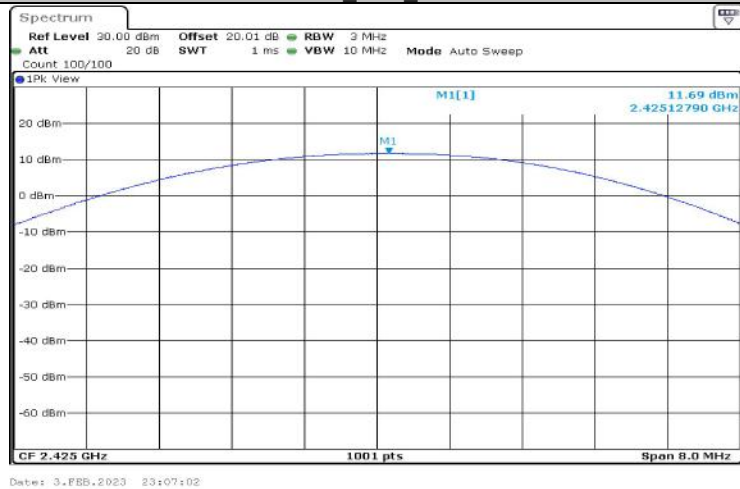

3DH1_Ant2_2441



3DH1_Ant2_2480



**Appendix D: Carrier frequency separation
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant2	Hop	1.003	≥ 0.520	PASS
2DH1	Ant2	Hop	1.000	≥ 0.827	PASS
3DH1	Ant2	Hop	1.003	≥ 0.840	PASS

Test Graphs



**Appendix E: Time of occupancy
Test Result**


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant2	Hop	0.37	320	0.118	≤0.4	PASS
DH3	Ant2	Hop	1.62	160	0.259	≤0.4	PASS
DH5	Ant2	Hop	2.86	120	0.343	≤0.4	PASS
2DH1	Ant2	Hop	0.38	320	0.122	≤0.4	PASS
2DH3	Ant2	Hop	1.63	150	0.245	≤0.4	PASS
2DH5	Ant2	Hop	2.87	120	0.344	≤0.4	PASS
3DH1	Ant2	Hop	0.38	320	0.122	≤0.4	PASS
3DH3	Ant2	Hop	1.63	170	0.277	≤0.4	PASS
3DH5	Ant2	Hop	2.87	130	0.373	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(S)$, Result=BurstWidth*Totalhops


Note 2: Totalhops=Hopping Number in $3.16s \times 10$


Note 3: Hopping Number in $3.16s$ =Total of highest signals in $3.16s$ (Second high signals were other channel)


Test Graphs

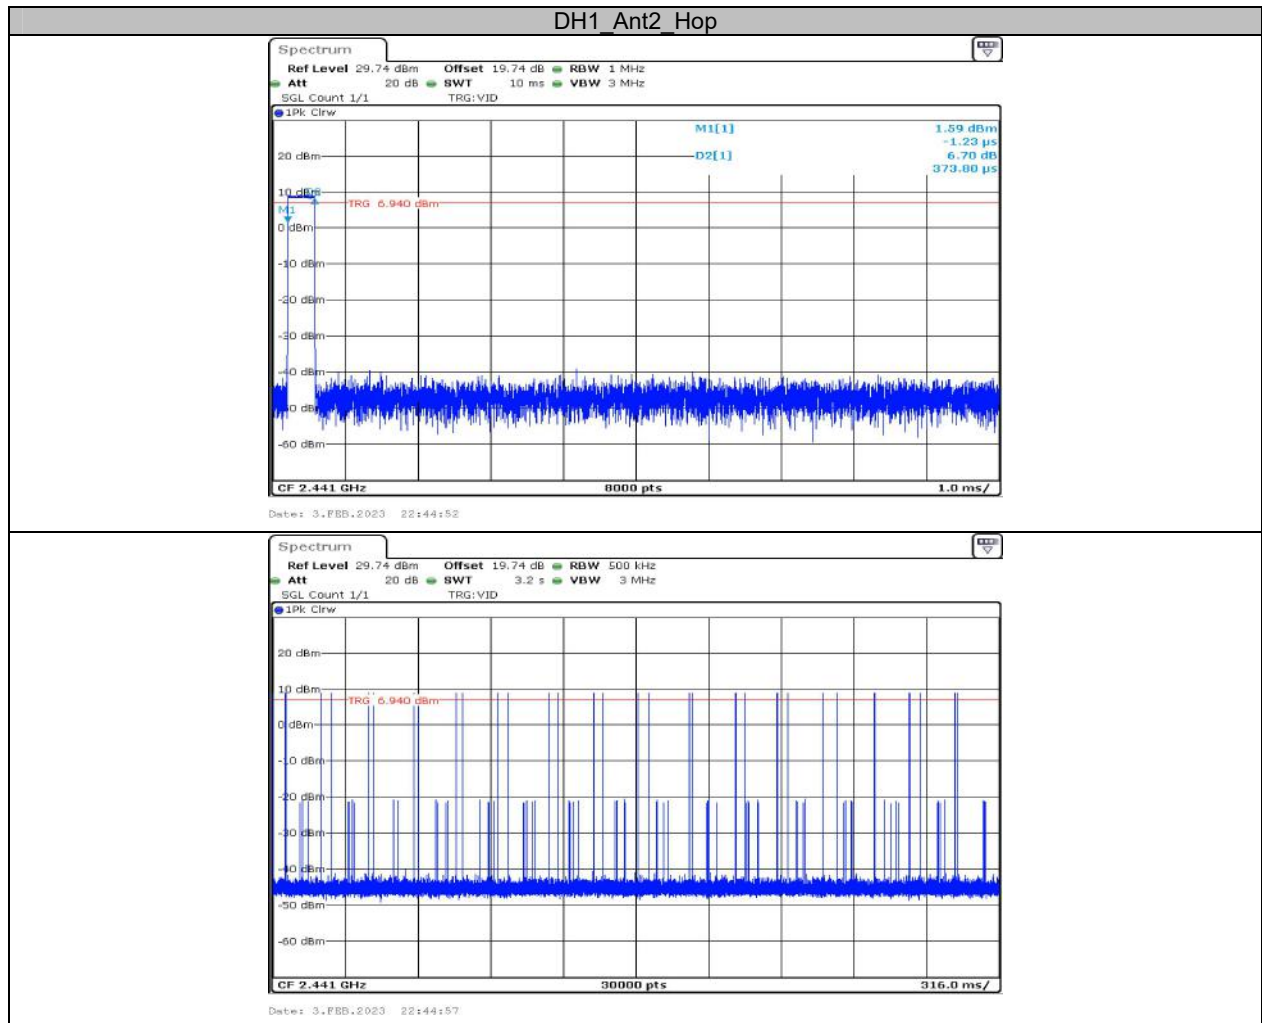


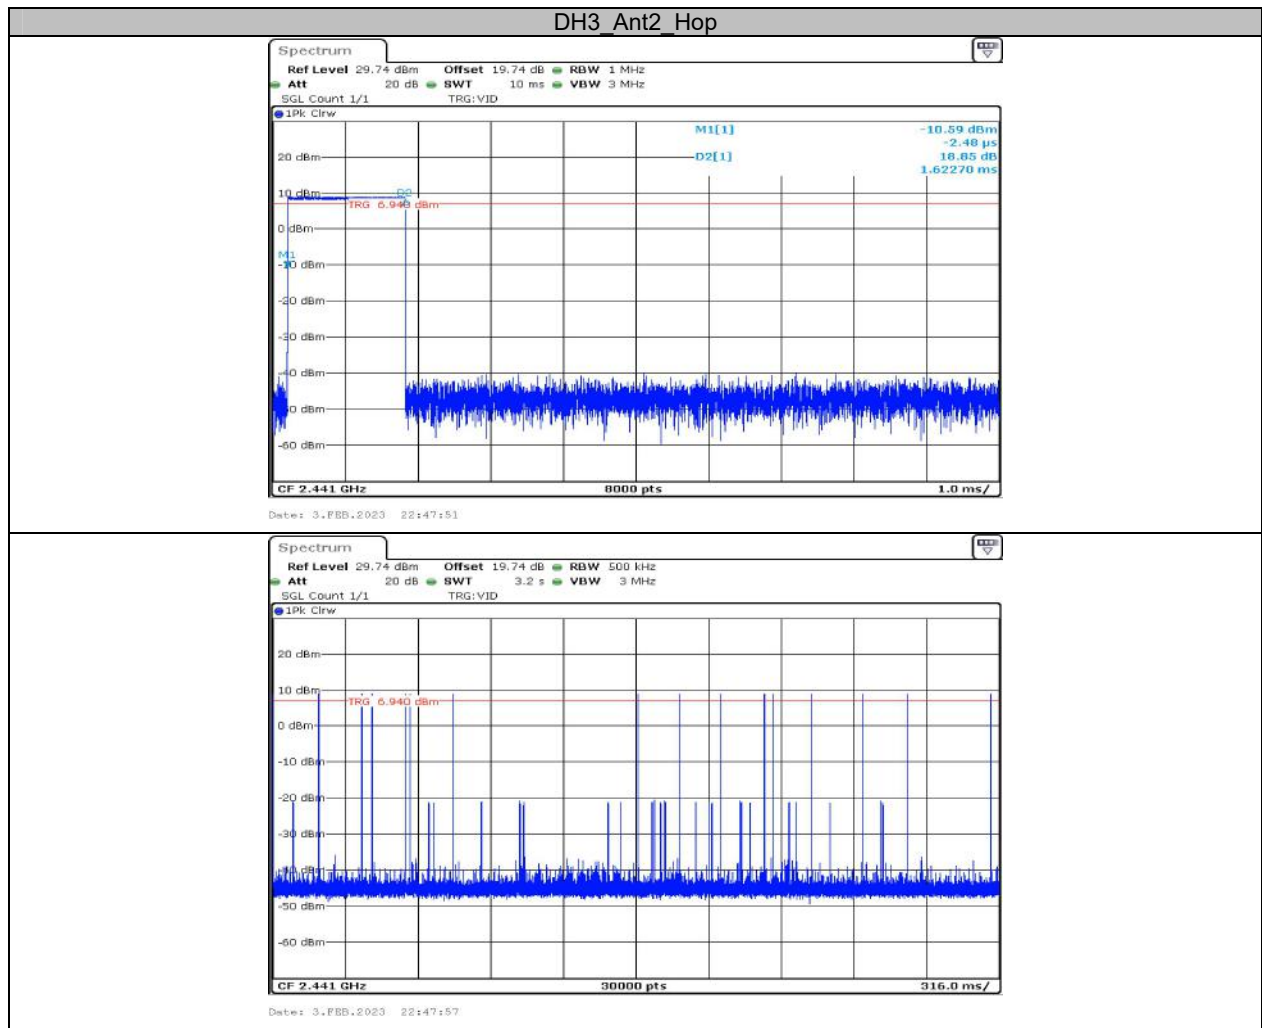


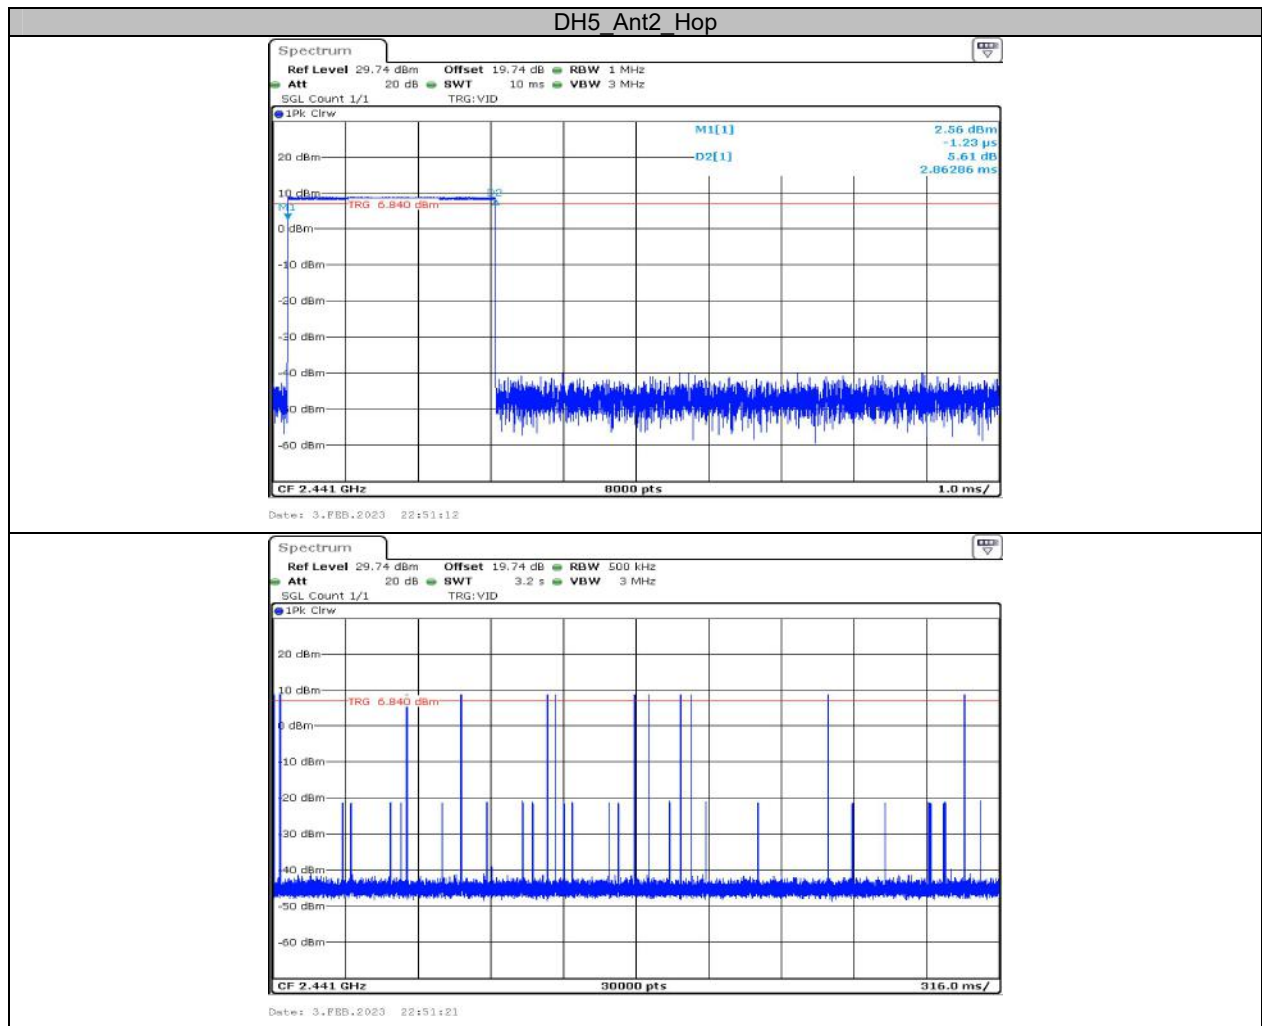


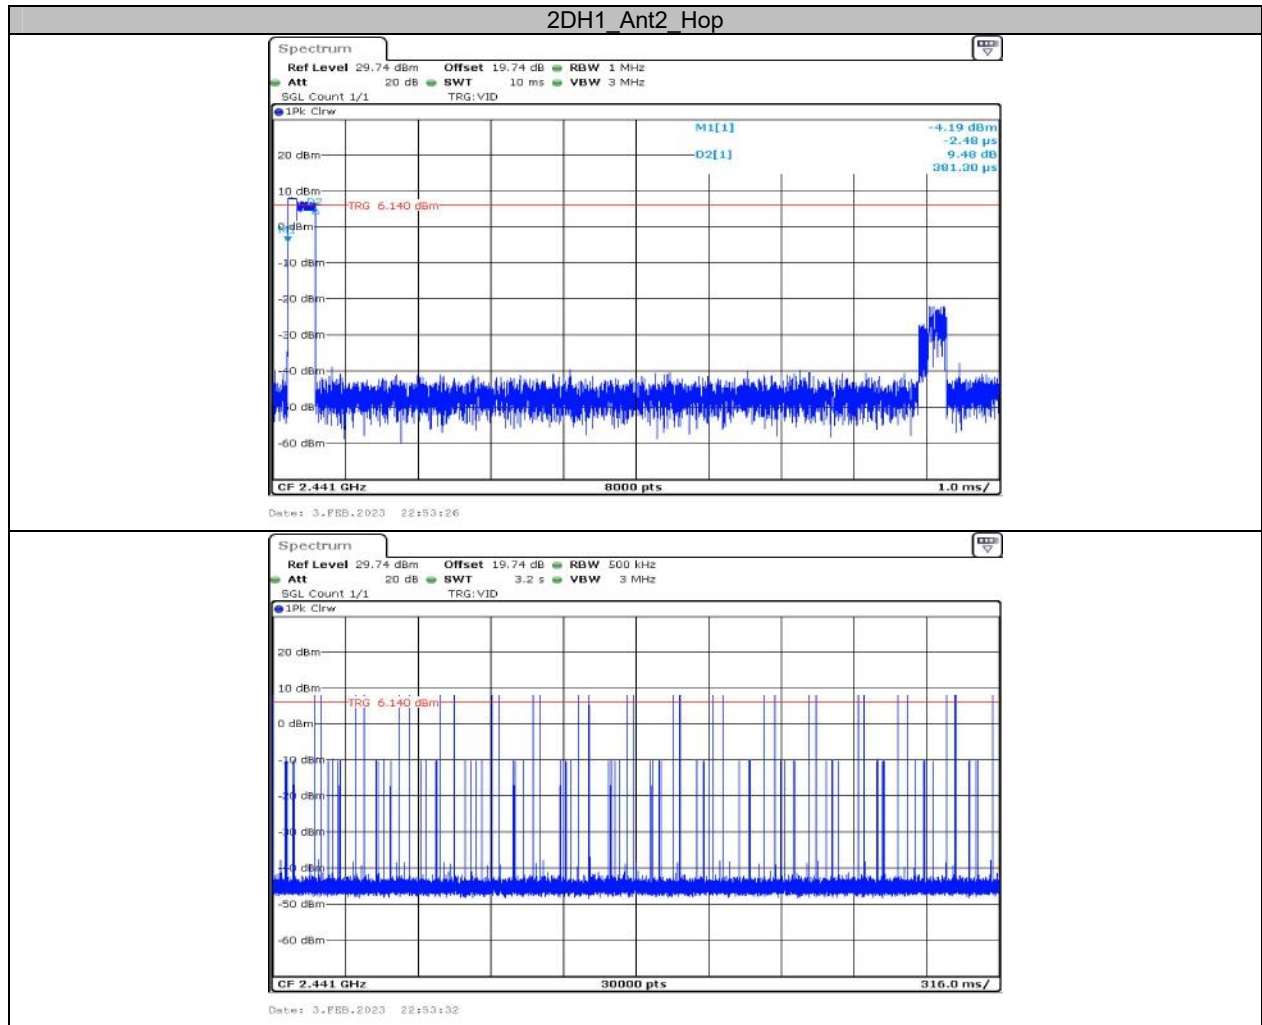


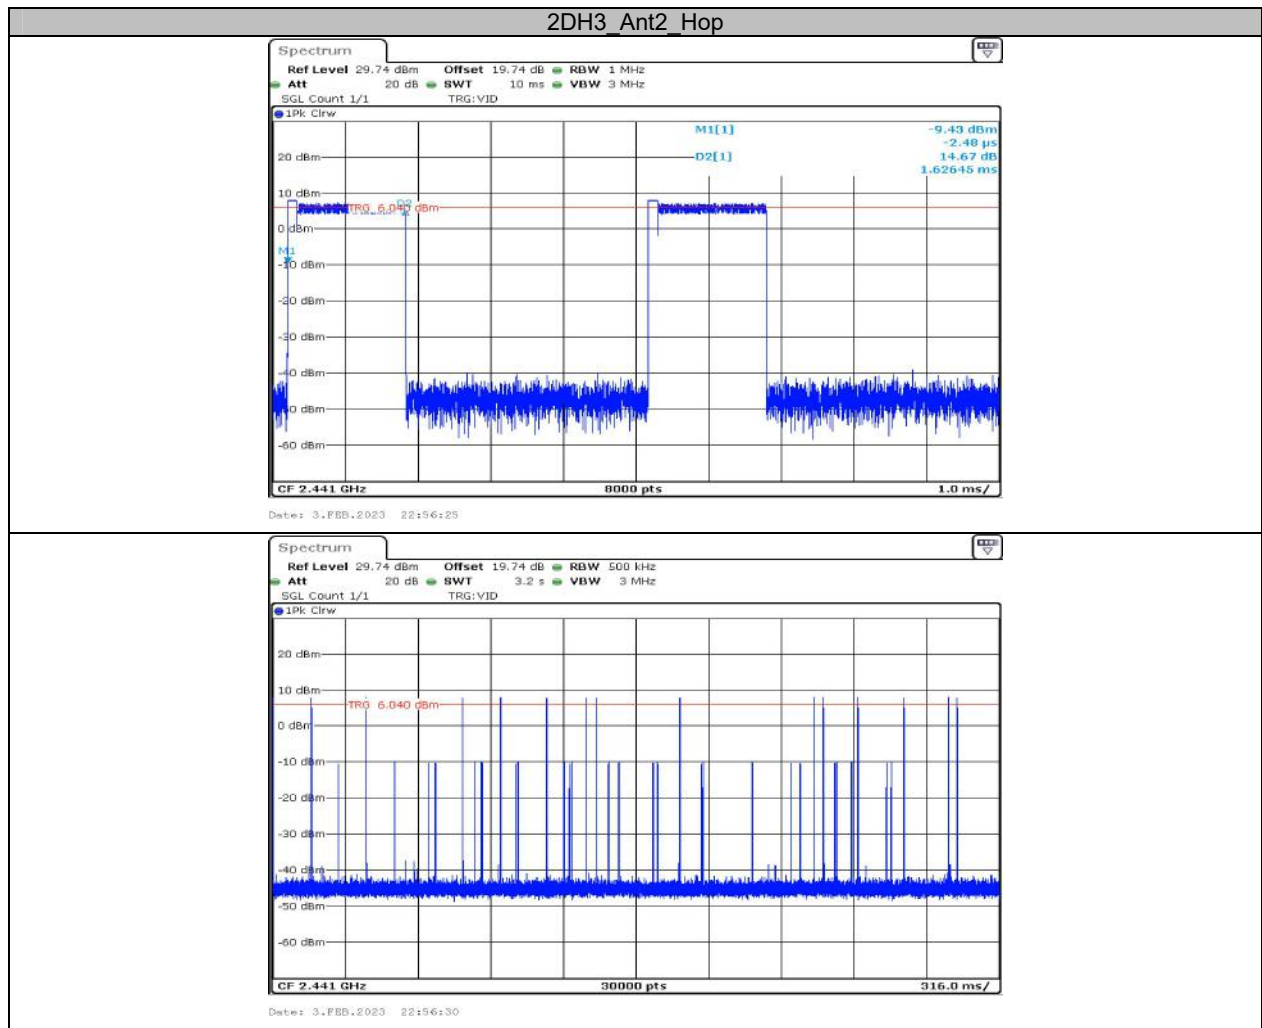

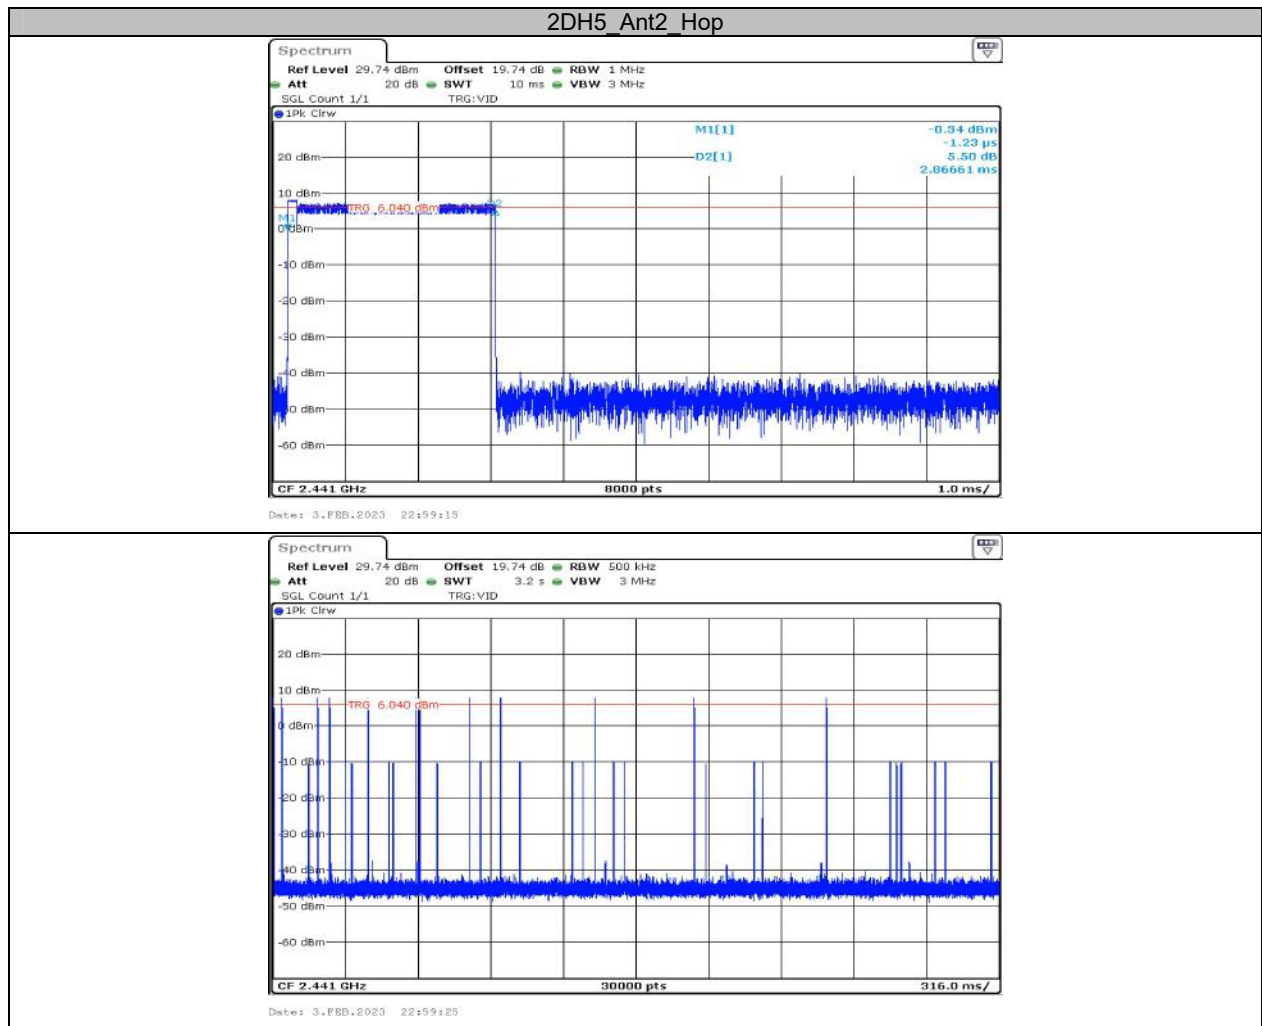

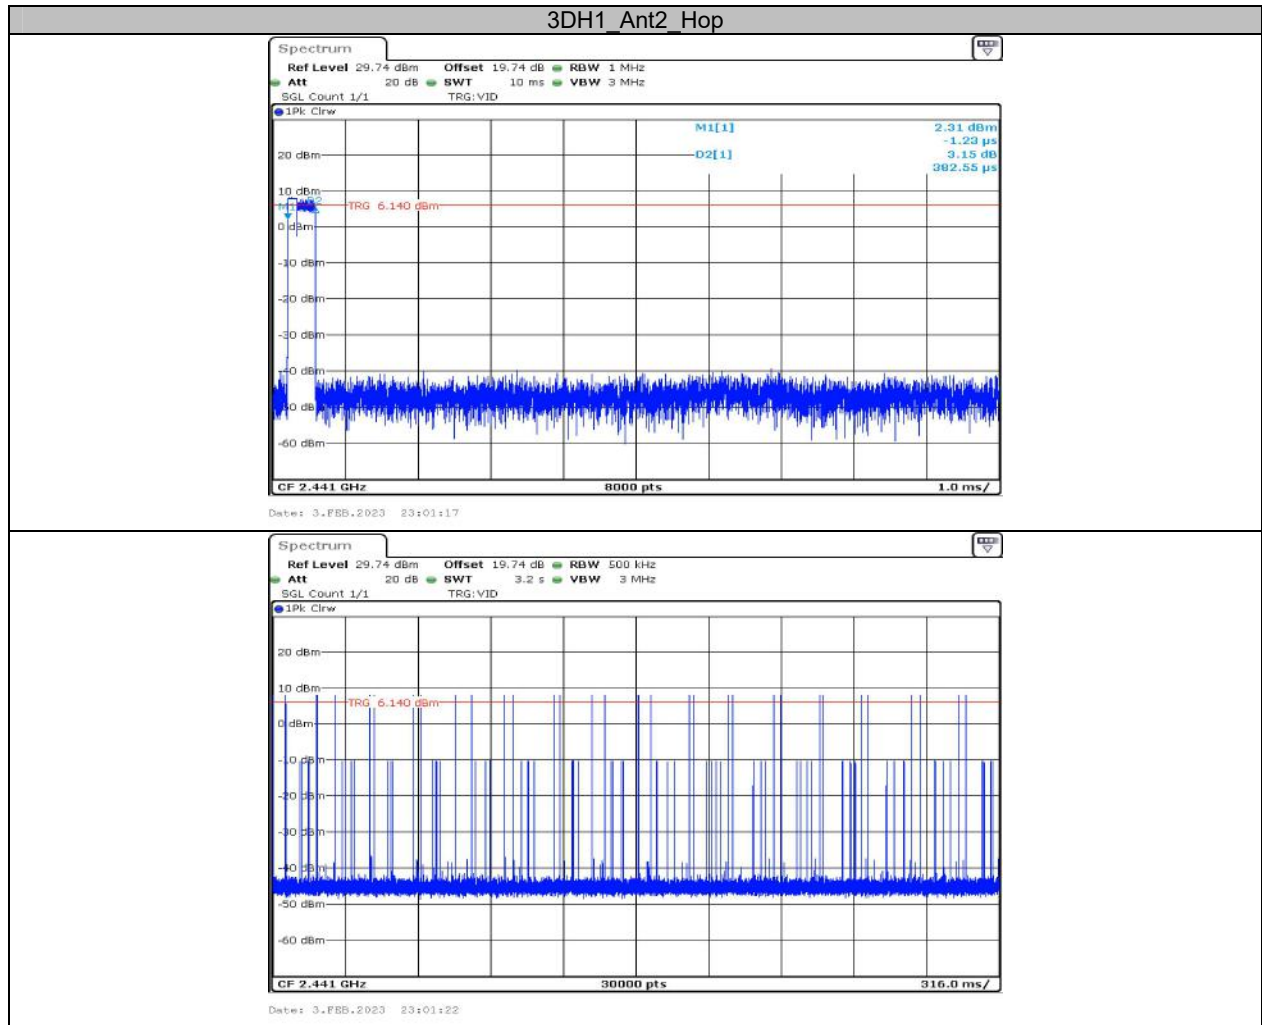

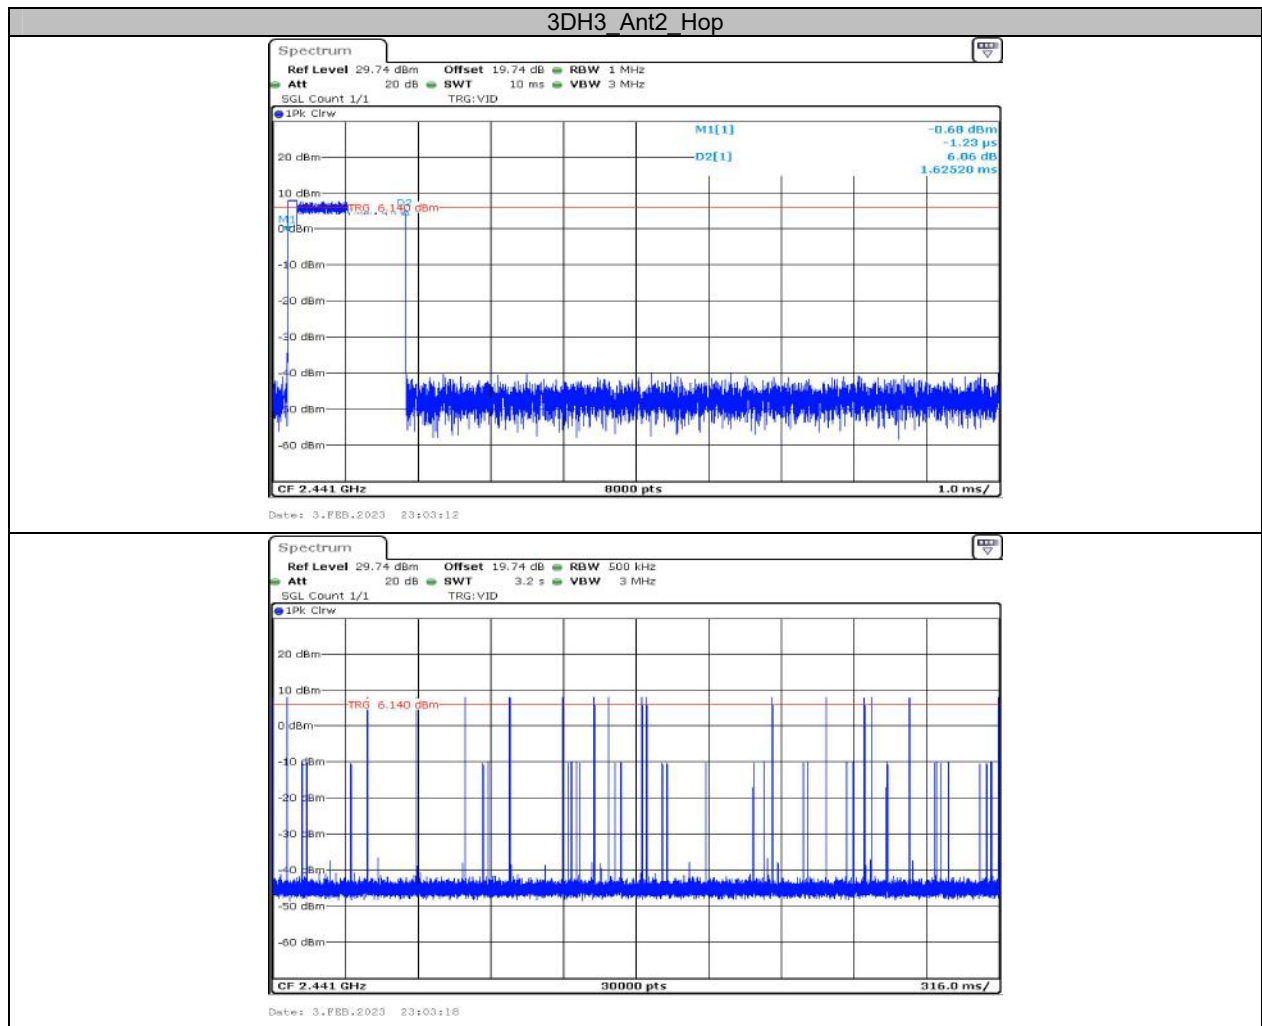


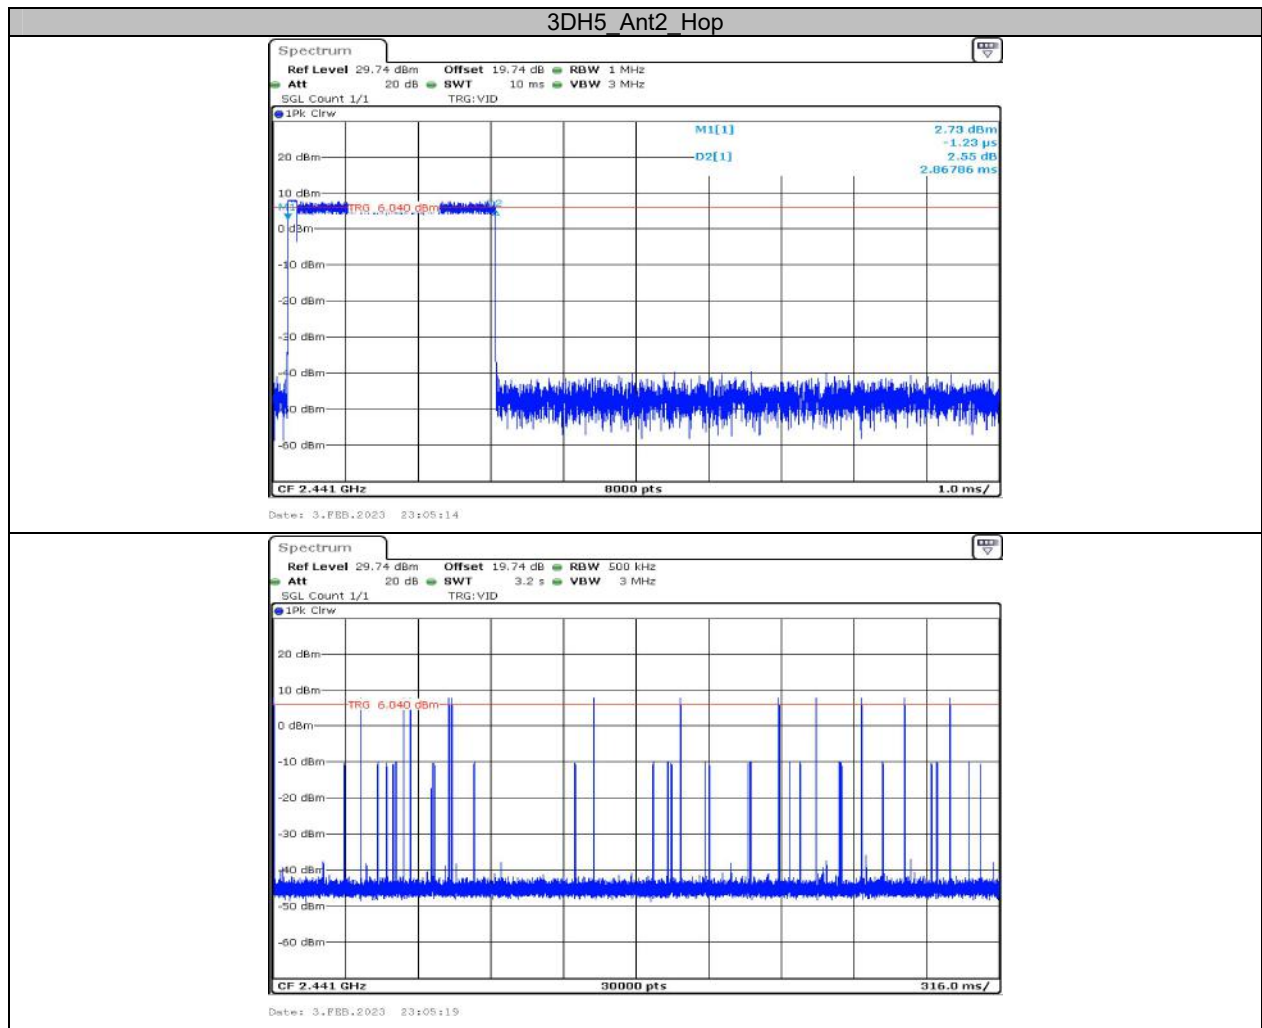

**Appendix F: Number of hopping channels
Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant2	Hop	79	≥15	PASS
2DH1	Ant2	Hop	79	≥15	PASS
3DH1	Ant2	Hop	79	≥15	PASS

Test Graphs

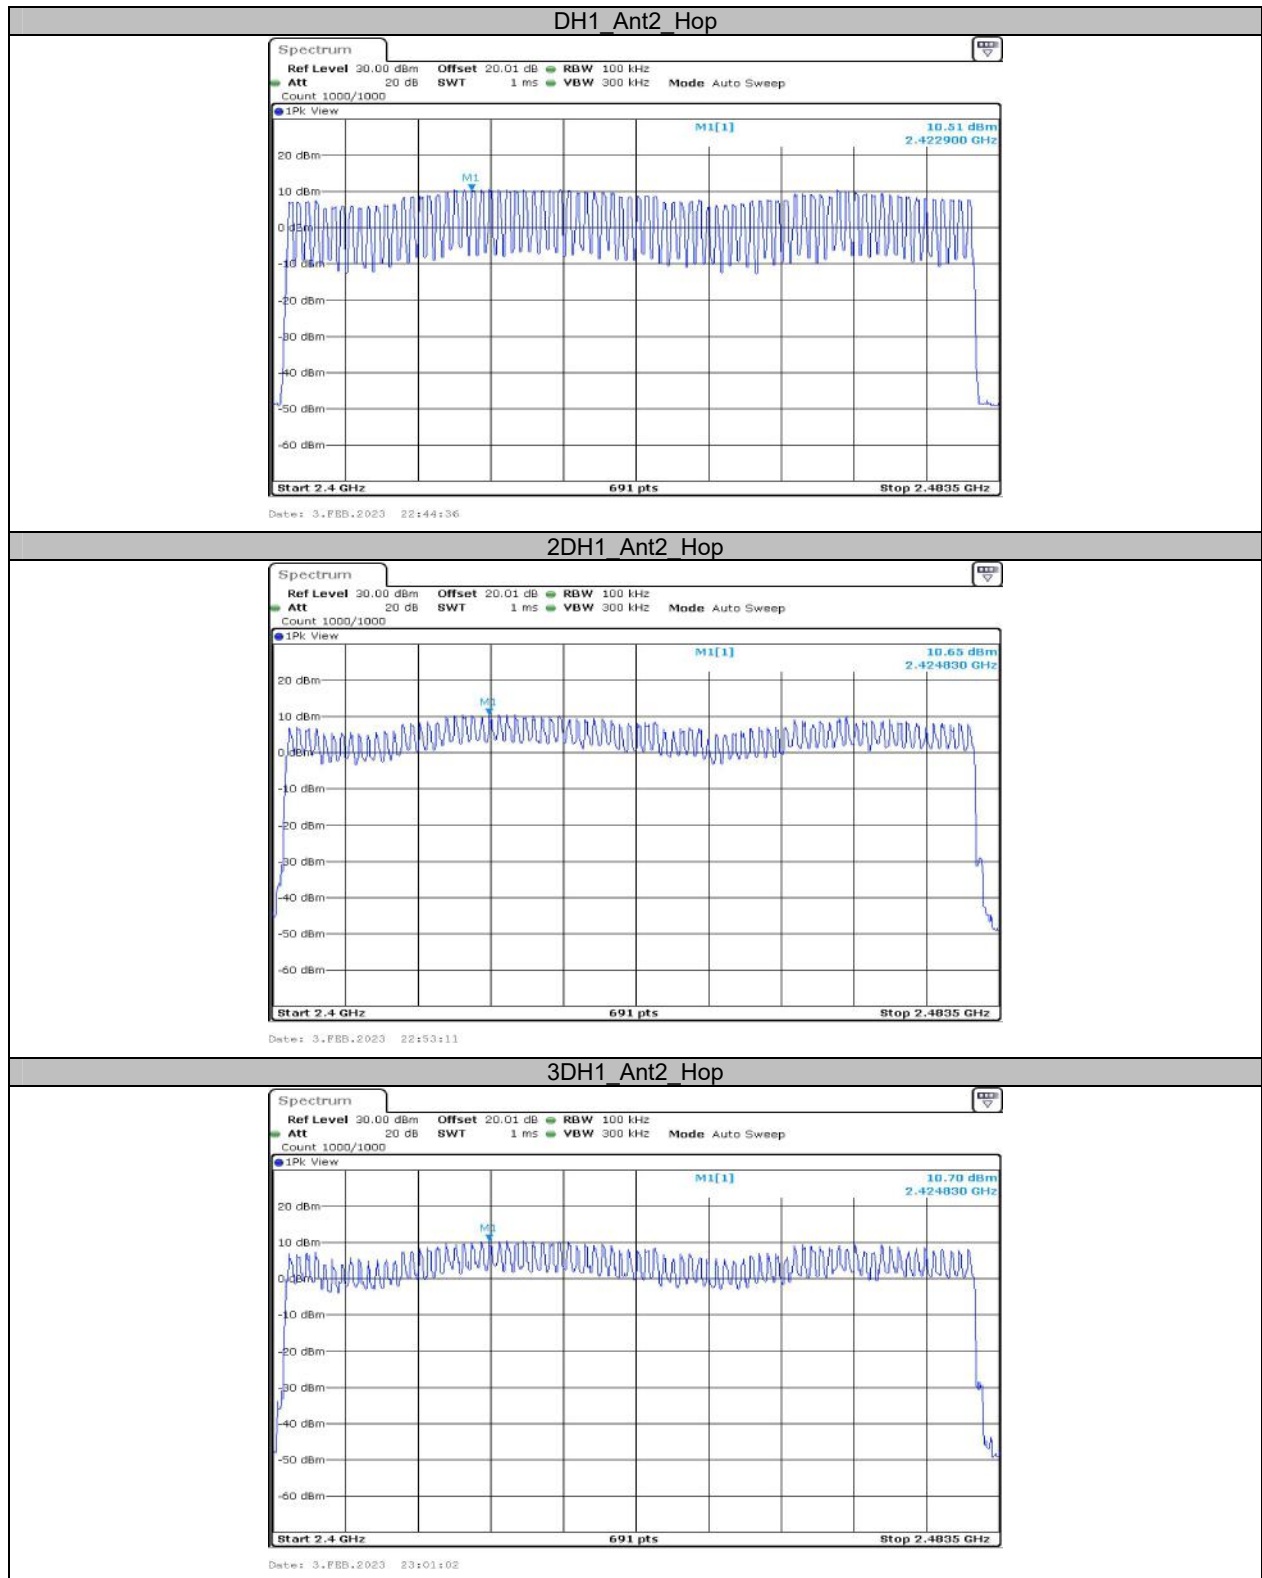


Appendix G: Band edge measurements

Test Graphs

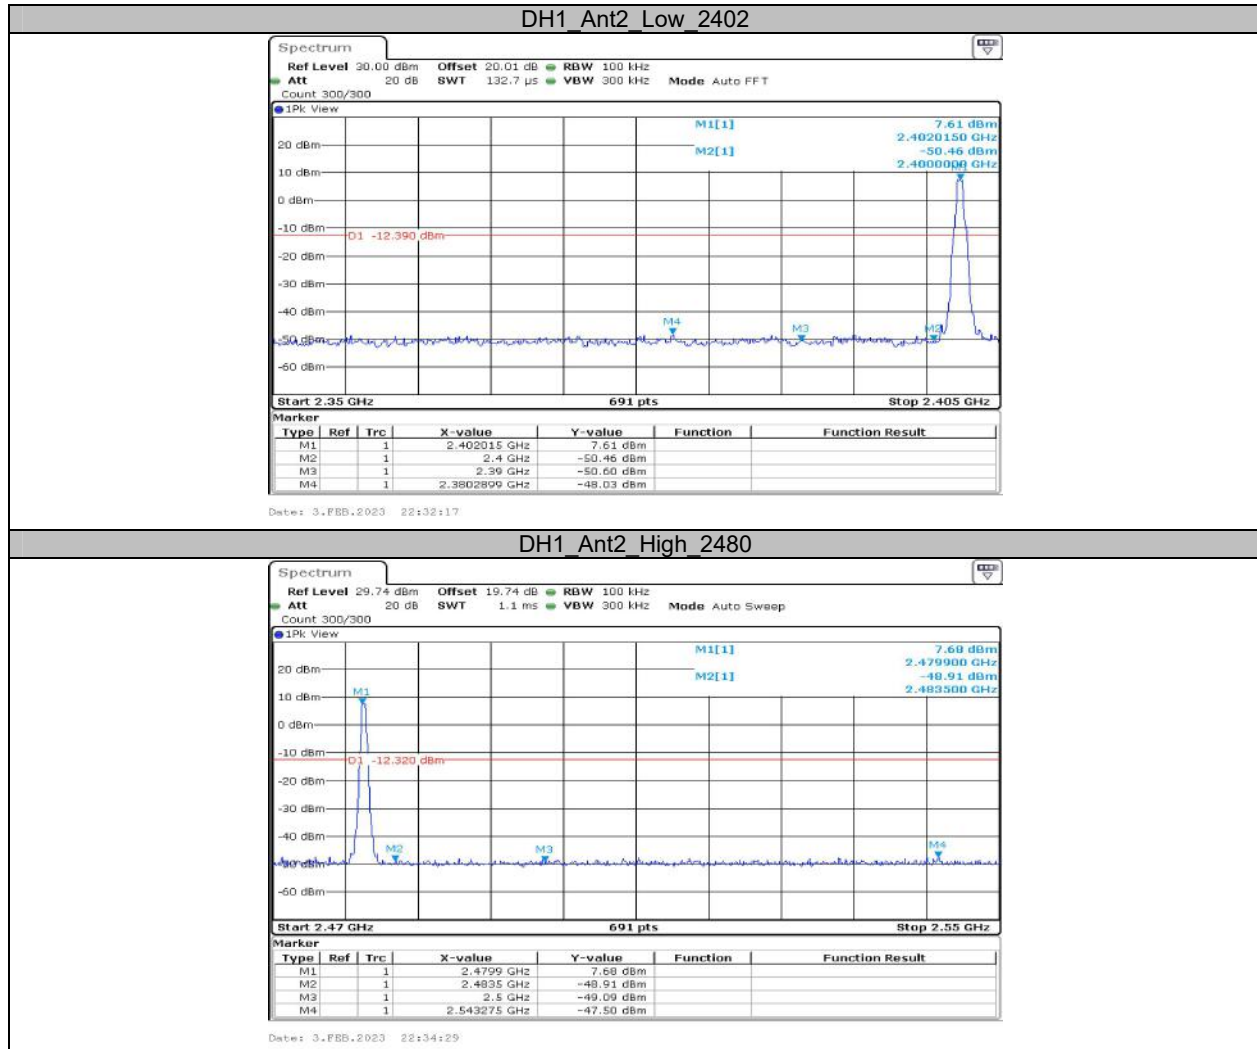


DH1_Ant2_Low_Hop_2402

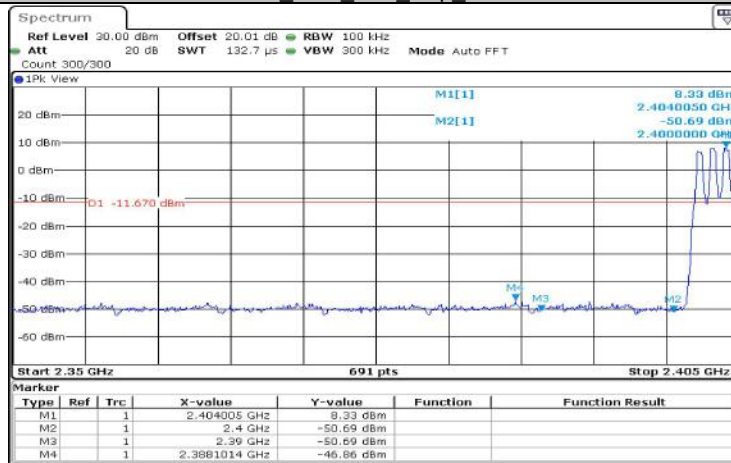


Date: 3.FEB.2023 22:43:18

DH1_Ant2_High_Hop_2480

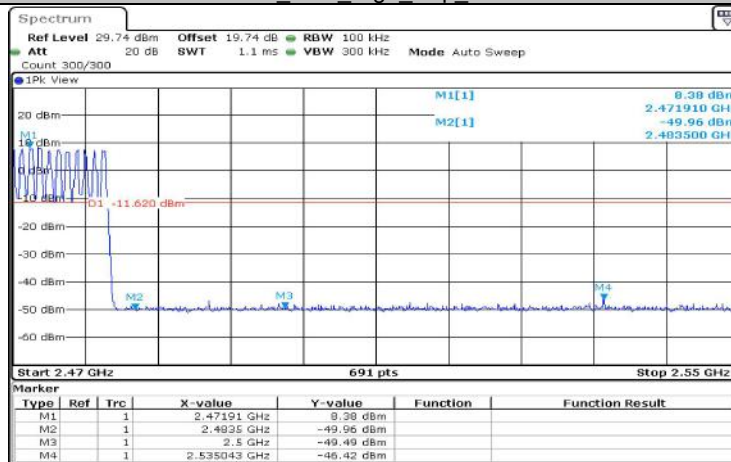


Date: 3.FEB.2023 22:45:12

2DH1_Ant2_Low_2402

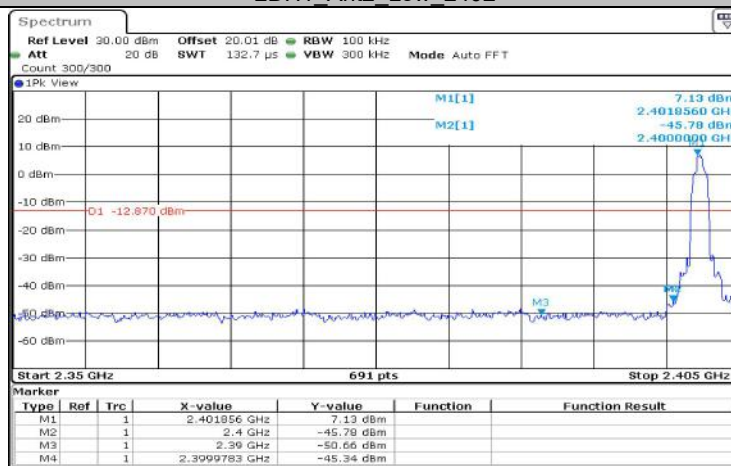


Date: 3.FEB.2023 22:36:01

2DH1_Ant2_High_2480

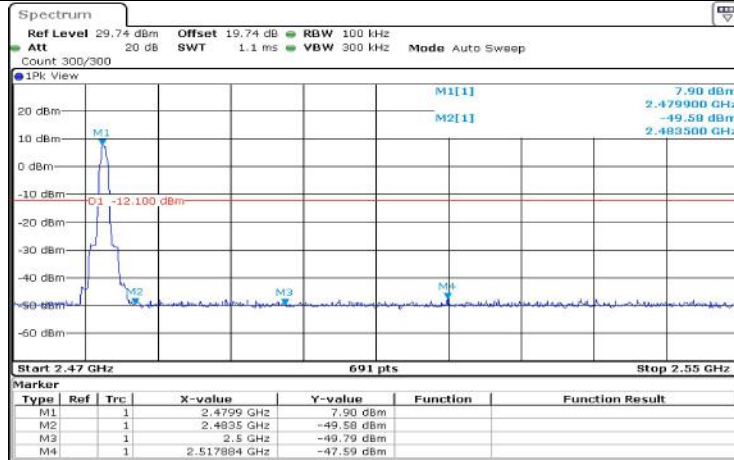


Date: 3.FEB.2023 20:16:22

2DH1_Ant2_Low_Hop_2402

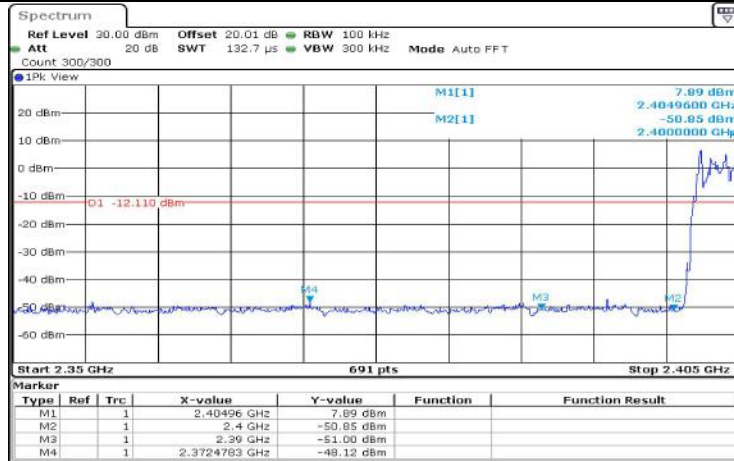


Date: 3.FEB.2023 22:55:40

2DH1_Ant2_High_Hop_2480

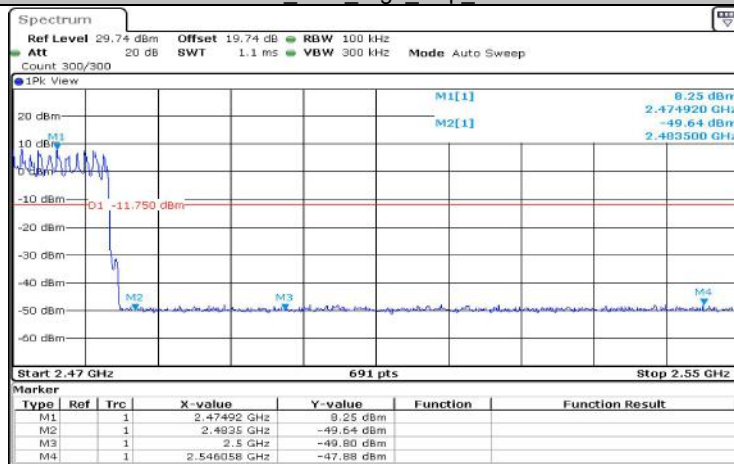


Date: 3.FEB.2023 22:53:44


3DH1_Ant2_Low_2402

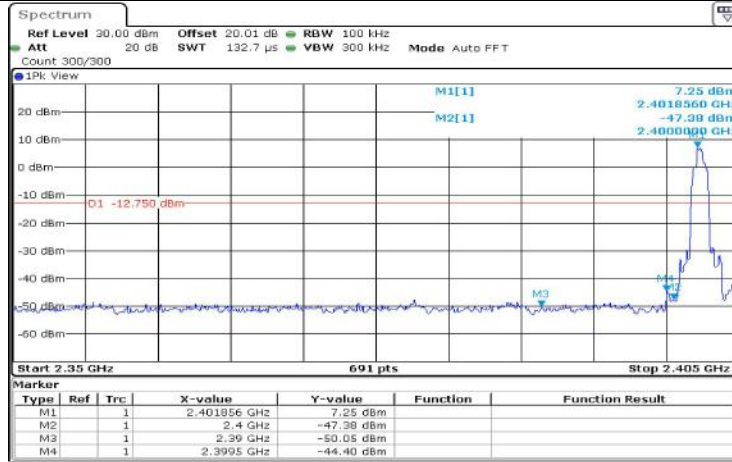


3DH1_Ant2_High_2480

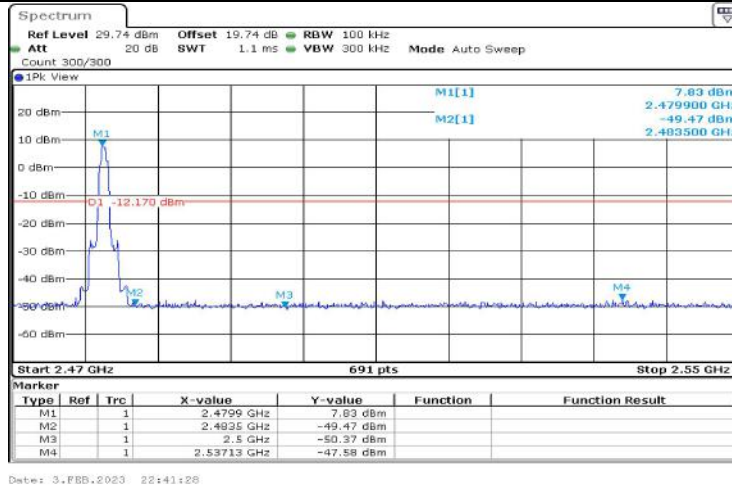

3DH1_Ant2_Low_Hop_2402

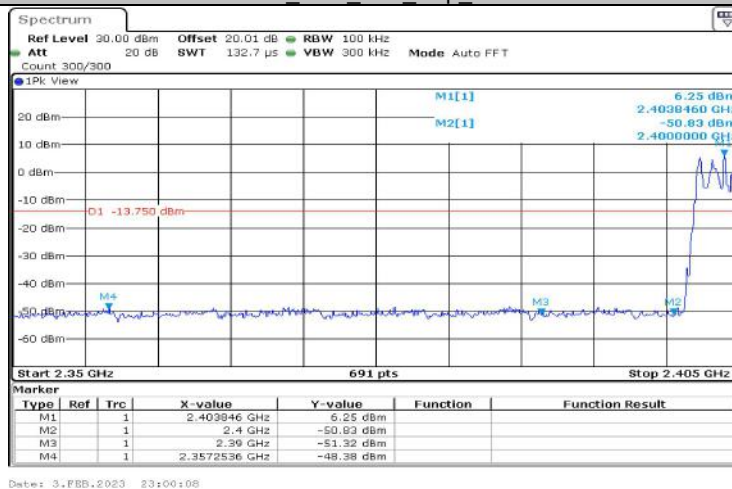

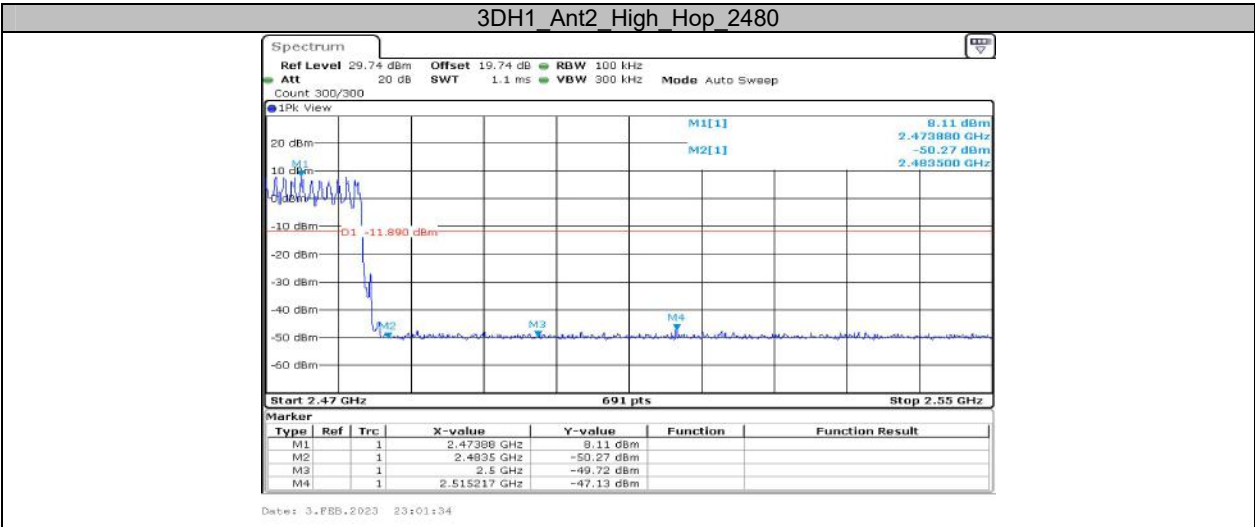

***** END OF REPORT *****