



TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG
Report Number : RA230324-14521E-RF-00B
FCC ID: 2ADYY-CK6NS

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Mobile Phone
Model No.: CK6ns
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2023/03/24
Report Date: 2023/04/28

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Nick Fang
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE	13
APPLICABLE STANDARD	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	43
APPENDIX WI-FI- AUX ANTENNA	44
APPENDIX A: DTS BANDWIDTH	44
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	51
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	58
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	59
APPENDIX E: BAND EDGE MEASUREMENTS.....	66
APPENDIX F: DUTY CYCLE	70
APPENDIX BLE- AUX ANTENNA.....	72
APPENDIX A: DTS BANDWIDTH	72
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	76
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	80
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	83
APPENDIX E: BAND EDGE MEASUREMENTS.....	87
APPENDIX F: DUTY CYCLE	89
APPENDIX WI-FI- MAIN ANTENNA.....	90
APPENDIX A: DTS BANDWIDTH	90
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	97
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	104
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	105
APPENDIX E: BAND EDGE MEASUREMENTS.....	112
APPENDIX F: DUTY CYCLE	116
APPENDIX BLE- MAIN ANTENNA.....	118
APPENDIX A: DTS BANDWIDTH	118
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	122
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	126
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	129
APPENDIX E: BAND EDGE MEASUREMENTS.....	133
APPENDIX F: DUTY CYCLE	135

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230324-14521E-RF-00B	Original Report	2023-04-28

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	BLE 1M/2M: 2402-2480MHz Wi-Fi: 2412-2472MHz
Maximum Conducted Output Power	BLE: -2.17dBm (peak) Wi-Fi: 12.97dBm(802.11b), 9.92dBm(802.11g) 8.82dBm(802.11n20), 11.62dBm(802.11n40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	Main:0.3dBi;Aux:-1.2dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V or 7.5V from adapter
Test Sample serial number	23MJ_1 for Conducted and Radiated Emissions Test 23MJ_5 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: U180TSA Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.4A or DC 7.5V, 2.4A 18.0W Max

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

802.11n-HT40 mode was tested with Channel 3, 7 and 11.

For BLE 1M/2M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Note: According to the manufacturer, for BT and 2.4G Wi-Fi, the EUT has two antennas, which will be switched through SW circuit according to environmental conditions during actual operation. Only one antenna is working at any moment in time.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

EUT was testing in engineering mode.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level* (ANT 1 & ANT 2)		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	13	13	13
802.11n-HT20	MCS0	12	13	12
802.11n-HT40	MCS0	14	14	14
BLE	1Mbps/2Mbps	Default	Default	Default

Note: the power level was provided by applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	earphone	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

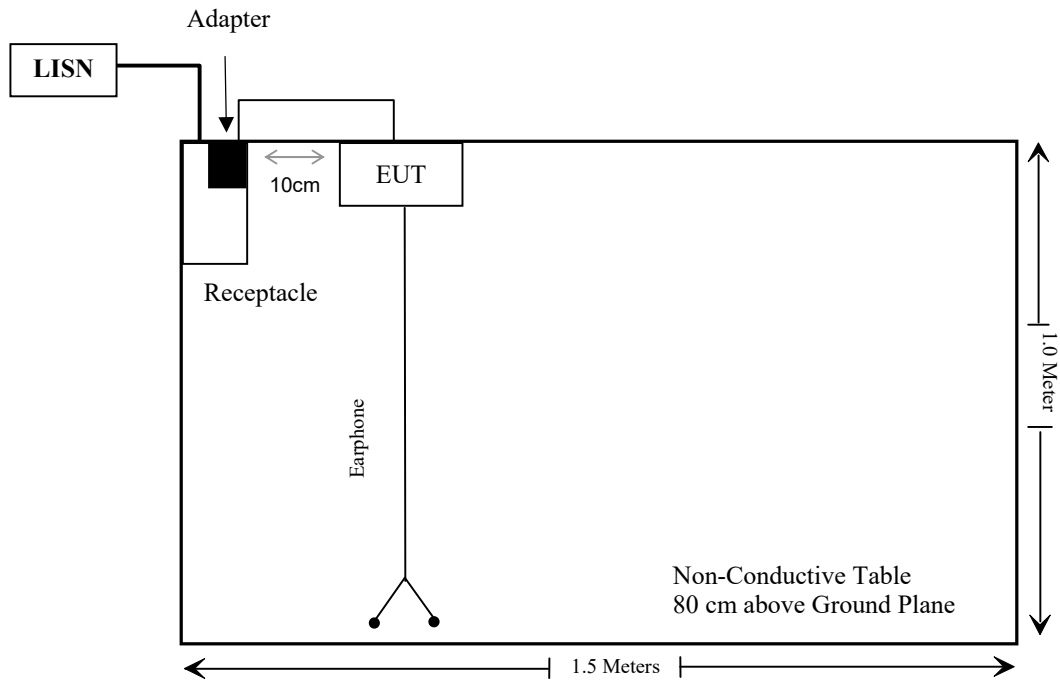

For Radiated Emissions:

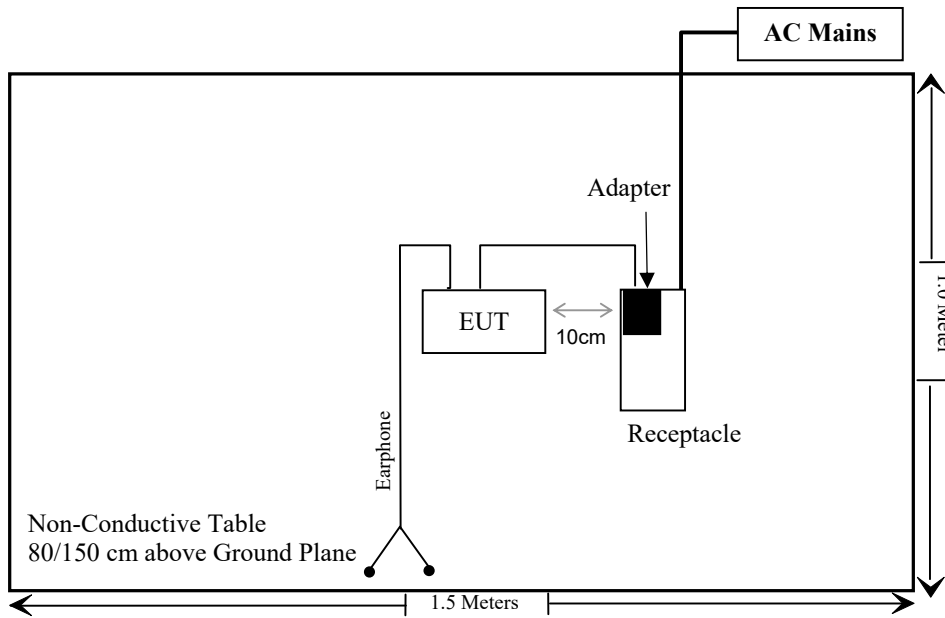

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ESH3-Z5	100305	2022/12/01	2023/11/30
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.18	N0850	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/6/27	2023/6/26

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

- a) According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

For BLE:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2402-2480	-2.0	0.63	5	0.2	3.0	Yes

Result: No Standalone SAR test is required

For Wi-Fi mode, please refer to SAR report: Please refer to SAR test report: RA230324-14521E-SA.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antenna arrangement, which was permanently attached, the antenna gain for MAIN ANT is 0.3dBi and AUX ANT is -1.2dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	22°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Jerry on 2023-04-21


EUT operation mode: Transmitting (Worst case is MAIN ANT, 802.11b, low channel)

AC 120V/60 Hz, Line

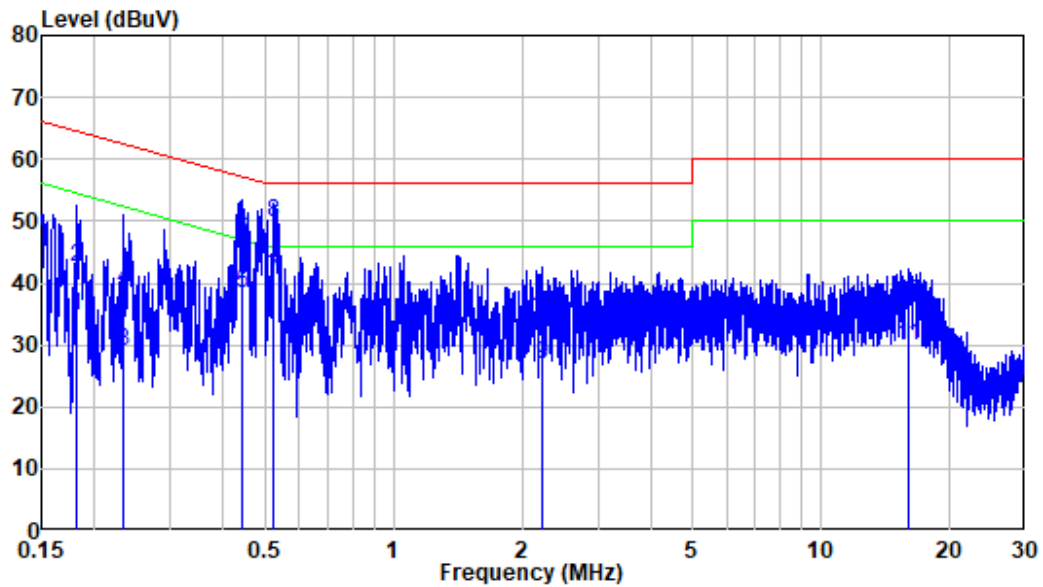

Site : Shielding Room
 Condition: Line
 Job No. : RA230324-14521E-RF
 Mode : Charging+2.4G Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.182	10.27	24.55	34.82	54.40	-19.58	Average
2	0.182	10.27	32.25	42.52	64.40	-21.88	QP
3	0.233	10.30	18.59	28.89	52.34	-23.45	Average
4	0.233	10.30	28.76	39.06	62.34	-23.28	QP
5	0.442	10.30	28.02	38.32	47.03	-8.71	Average
6	0.442	10.30	36.78	47.08	57.03	-9.95	QP
7	0.522	10.32	30.30	40.62	46.00	-5.38	Average
8	0.522	10.32	39.38	49.70	56.00	-6.30	QP
9	2.215	10.42	16.35	26.77	46.00	-19.23	Average
10	2.215	10.42	23.93	34.35	56.00	-21.65	QP
11	15.938	10.22	19.64	29.86	50.00	-20.14	Average
12	15.938	10.22	26.54	36.76	60.00	-23.24	QP

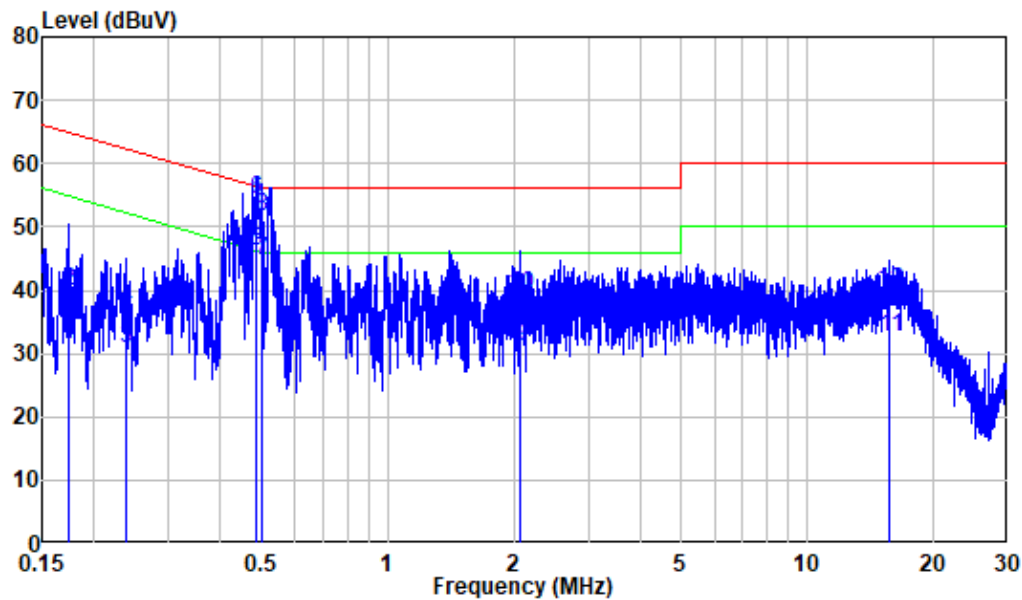AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : RA230324-14521E-RF
 Mode : Charging+2.4G Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.173	9.80	21.67	31.47	54.80	-23.33	Average
2	0.173	9.80	30.15	39.95	64.80	-24.85	QP
3	0.238	9.80	20.98	30.78	52.18	-21.40	Average
4	0.238	9.80	27.33	37.13	62.18	-25.05	QP
5	0.488	9.80	36.35	46.15	46.20	-0.05	Average
6	0.488	9.80	44.56	54.36	56.20	-1.84	QP
7	0.500	9.80	34.95	44.75	46.00	-1.25	Average
8	0.500	9.80	41.76	51.56	56.00	-4.44	QP
9	2.060	9.82	21.41	31.23	46.00	-14.77	Average
10	2.060	9.82	29.57	39.39	56.00	-16.61	QP
11	15.708	9.96	22.79	32.75	50.00	-17.25	Average
12	15.708	9.96	29.88	39.84	60.00	-20.16	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

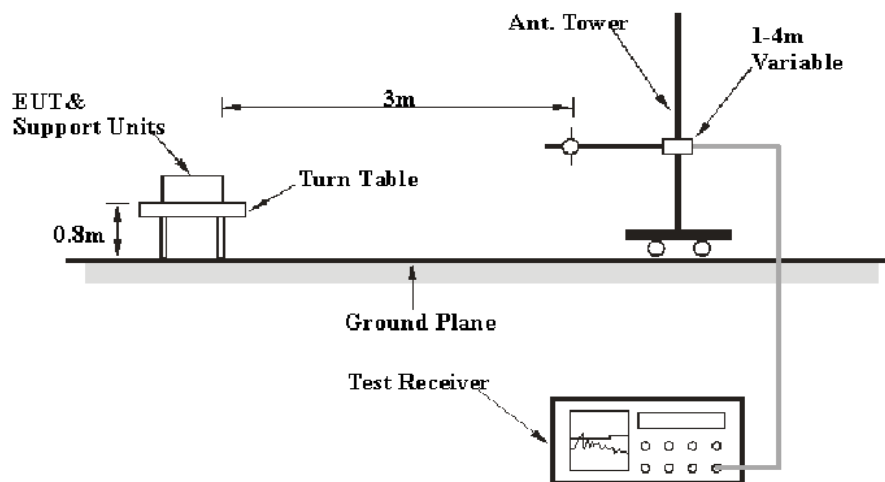

Above 1GHz:

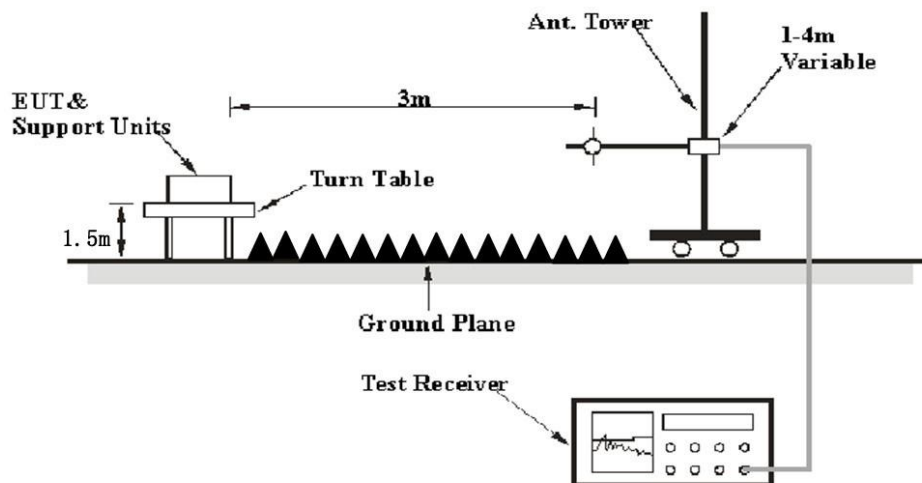

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.5℃
Relative Humidity:	50~57%
ATM Pressure:	101kPa


The testing was performed by Jimi Zheng on 2023-04-20 for below 1GHz and on 2023-04-09 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30MHz-1GHz: (Worst case is MAIN ANT, 802.11b, low channel)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.


Horizontal:

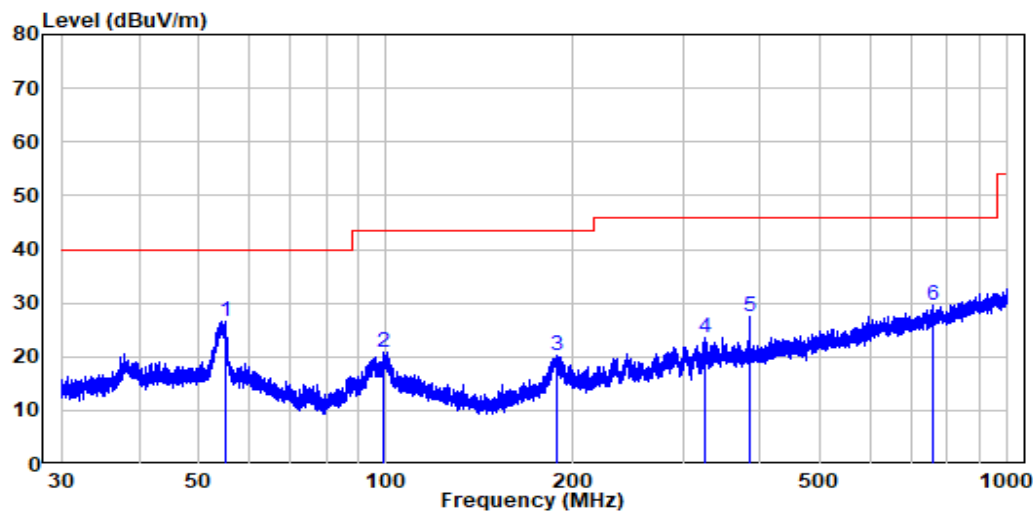

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230324-14521E-RF
Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.979	-10.34	36.90	26.56	40.00	-13.44	Peak
2	98.963	-12.03	32.92	20.89	43.50	-22.61	Peak
3	187.589	-11.85	32.15	20.30	43.50	-23.20	Peak
4	325.596	-8.31	31.99	23.68	46.00	-22.32	Peak
5	384.100	-6.79	34.25	27.46	46.00	-18.54	Peak
6	758.373	-0.48	29.99	29.51	46.00	-16.49	Peak

Vertical

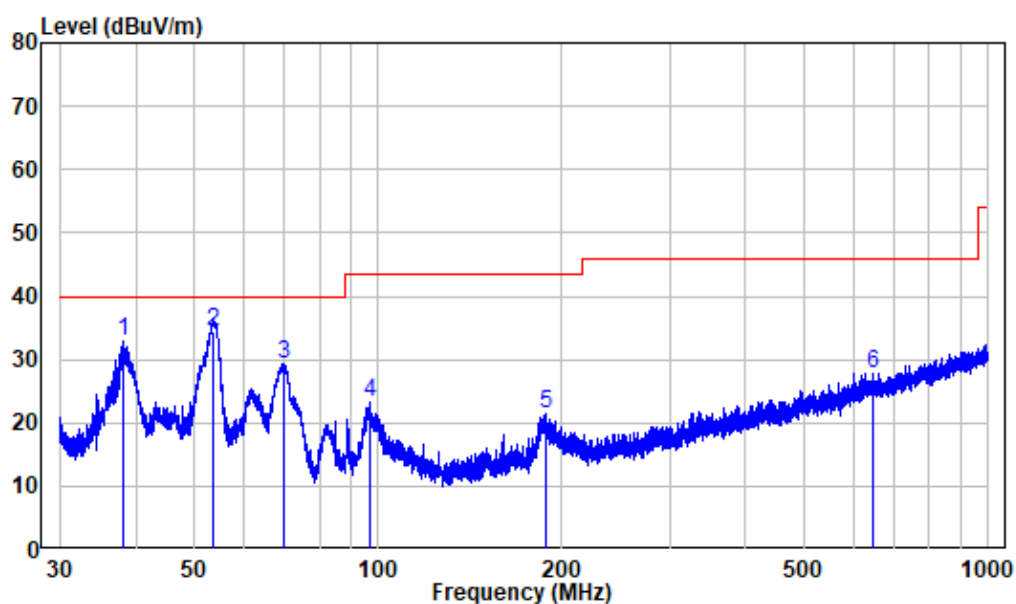

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230324-14521E-RF
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	38.062	-10.90	43.67	32.77	40.00	-7.23	Peak
2	53.693	-10.34	44.87	34.53	40.00	-5.47	QP
3	69.998	-14.73	44.04	29.31	40.00	-10.69	Peak
4	96.648	-12.35	35.47	23.12	43.50	-20.38	Peak
5	188.330	-11.78	33.19	21.41	43.50	-22.09	Peak
6	648.522	-1.77	29.62	27.85	46.00	-18.15	Peak

1-25 GHz:

Aux Antenna

BLE 1M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2359.63	67.09	PK	72	2	H	-10.77	56.32	74	-17.68
2359.63	52.88	AV	72	2	H	-10.77	42.11	54	-11.89
2387.84	66.99	PK	120	1.5	V	-10.71	56.28	74	-17.72
2387.84	52.81	AV	120	1.5	V	-10.71	42.10	54	-11.90
2390	66.19	PK	32	1.2	H	-10.70	55.49	74	-18.51
2390	52.55	AV	32	1.2	H	-10.70	41.85	54	-12.15
2390	66.06	PK	323	2.3	V	-10.70	55.36	74	-18.64
2390	52.43	AV	323	2.3	V	-10.70	41.73	54	-12.27
4804	59.33	PK	180	2	H	-6.11	53.22	74	-20.78
4804	45.58	AV	180	2	H	-6.11	39.47	54	-14.53
4804	59.14	PK	181	2.4	V	-6.11	53.03	74	-20.97
4804	45.42	AV	181	2.4	V	-6.11	39.31	54	-14.69
Middle Channel 2440MHz									
4880	59.31	PK	30	1.8	H	-5.91	53.4	74	-20.60
4880	45.45	AV	30	1.8	H	-5.91	39.54	54	-14.46
4880	59.13	PK	89	2.3	V	-5.91	53.22	74	-20.78
4880	45.24	AV	89	2.3	V	-5.91	39.33	54	-14.67
High Channel 2480MHz									
2483.5	65.74	PK	189	1.1	H	-10.55	55.19	74	-18.81
2483.5	53.09	AV	189	1.1	H	-10.55	42.54	54	-11.46
2483.5	65.61	PK	214	2.3	V	-10.55	55.06	74	-18.94
2483.5	52.96	AV	214	2.3	V	-10.55	42.41	54	-11.59
2487.38	68.15	PK	169	1.9	H	-10.52	57.63	74	-16.37
2487.38	53.64	AV	169	1.9	H	-10.52	43.12	54	-10.88
2484.87	68.01	PK	202	2	V	-10.54	57.47	74	-16.53
2484.87	53.54	AV	202	2	V	-10.54	43	54	-11.00
4960	58.83	PK	33	1.5	H	-5.47	53.36	74	-20.64
4960	44.52	AV	33	1.5	H	-5.47	39.05	54	-14.95
4960	58.67	PK	133	1	V	-5.47	53.20	74	-20.80
4960	44.35	AV	133	1	V	-5.47	38.88	54	-15.12

BLE 2M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2385.54	67.50	PK	216	1.5	H	-10.71	56.79	74	-17.21
2385.54	53.18	AV	216	1.5	H	-10.71	42.47	54	-11.53
2378.93	67.34	PK	120	1.9	V	-10.73	56.61	74	-17.39
2378.93	53.08	AV	120	1.9	V	-10.73	42.35	54	-11.65
2390	66.02	PK	124	1.4	H	-10.70	55.32	74	-18.68
2390	52.78	AV	124	1.4	H	-10.70	42.08	54	-11.92
2390	65.89	PK	6	2.4	V	-10.70	55.19	74	-18.81
2390	52.66	AV	6	2.4	V	-10.70	41.96	54	-12.04
4804	59.71	PK	274	1.2	H	-6.11	53.60	74	-20.40
4804	45.79	AV	274	1.2	H	-6.11	39.68	54	-14.32
4804	59.53	PK	266	1.2	V	-6.11	53.42	74	-20.58
4804	45.60	AV	266	1.2	V	-6.11	39.49	54	-14.51
Middle Channel 2440MHz									
4880	59.61	PK	329	2	H	-5.91	53.7	74	-20.30
4880	45.69	AV	329	2	H	-5.91	39.78	54	-14.22
4880	59.42	PK	351	2.5	V	-5.91	53.51	74	-20.49
4880	45.50	AV	351	2.5	V	-5.91	39.59	54	-14.41
High Channel 2480MHz									
2483.5	65.68	PK	354	1.7	H	-10.55	55.13	74	-18.87
2483.5	53.22	AV	354	1.7	H	-10.55	42.67	54	-11.33
2483.5	65.53	PK	162	2	V	-10.55	54.98	74	-19.02
2483.5	53.11	AV	162	2	V	-10.55	42.56	54	-11.44
2486.64	68.26	PK	212	1.5	H	-10.52	57.74	74	-16.26
2486.64	53.72	AV	212	1.5	H	-10.52	43.2	54	-10.80
2485.57	68.12	PK	178	1.3	V	-10.53	57.59	74	-16.41
2485.57	53.60	AV	178	1.3	V	-10.53	43.07	54	-10.93
4960	59.07	PK	206	1.2	H	-5.47	53.60	74	-20.40
4960	45.14	AV	206	1.2	H	-5.47	39.67	54	-14.33
4960	58.88	PK	89	1	V	-5.47	53.41	74	-20.59
4960	44.96	AV	89	1	V	-5.47	39.49	54	-14.51

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11b									
Low Channel 2412MHz									
2379.75	67.18	PK	56	1.3	H	-10.72	56.46	74	-17.54
2379.75	52.31	AV	56	1.3	H	-10.72	41.59	54	-12.41
2384.19	67.04	PK	311	2.2	V	-10.71	56.33	74	-17.67
2384.19	52.18	AV	311	2.2	V	-10.71	41.47	54	-12.53
2390	65.58	PK	38	1.2	H	-10.70	54.88	74	-19.12
2390	51.91	AV	38	1.2	H	-10.70	41.21	54	-12.79
2390	65.45	PK	273	1.4	V	-10.70	54.75	74	-19.25
2390	51.80	AV	273	1.4	V	-10.70	41.10	54	-12.90
4824	61.12	PK	81	2.4	H	-6.10	55.02	74	-18.98
4824	47.71	AV	81	2.4	H	-6.10	41.61	54	-12.39
4824	64.19	PK	264	1.2	V	-6.10	58.09	74	-15.91
4824	57.88	AV	264	1.2	V	-6.10	51.78	54	-2.22
Middle Channel 2442MHz									
4884	60.08	PK	115	1.1	H	-5.89	54.19	74	-19.81
4884	45.47	AV	115	1.1	H	-5.89	39.58	54	-14.42
4884	62.23	PK	45	1.2	V	-5.89	56.34	74	-17.66
4884	50.82	AV	45	1.2	V	-5.89	44.93	54	-9.07
High Channel 2472MHz									
2483.5	66.54	PK	242	1.5	H	-10.55	55.99	74	-18.01
2483.5	54.29	AV	242	1.5	H	-10.55	43.74	54	-10.26
2483.5	66.41	PK	309	1	V	-10.55	55.86	74	-18.14
2483.5	54.17	AV	309	1	V	-10.55	43.62	54	-10.38
2491.89	68.56	PK	82	2.1	H	-10.48	58.08	74	-15.92
2491.89	54.85	AV	82	2.1	H	-10.48	44.37	54	-9.63
2485.72	68.46	PK	44	2	V	-10.53	57.93	74	-16.07
2485.72	54.78	AV	44	2	V	-10.53	44.25	54	-9.75
4944	59.67	PK	76	2.3	H	-5.57	54.10	74	-19.90
4944	45.28	AV	76	2.3	H	-5.57	39.71	54	-14.29
4944	62.56	PK	48	1.8	V	-5.57	56.99	74	-17.01
4944	51.35	AV	48	1.8	V	-5.57	45.78	54	-8.22

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11g									
Low Channel 2412MHz									
2382.49	67.61	PK	213	1.6	H	-10.72	56.89	74	-17.11
2382.49	53.44	AV	213	1.6	H	-10.72	42.72	54	-11.28
2387.64	67.46	PK	79	1.1	V	-10.71	56.75	74	-17.25
2387.64	53.31	AV	79	1.1	V	-10.71	42.60	54	-11.40
2390	65.98	PK	86	1.1	H	-10.70	55.28	74	-18.72
2390	52.83	AV	86	1.1	H	-10.70	42.13	54	-11.87
2390	65.87	PK	31	2.3	V	-10.70	55.17	74	-18.83
2390	52.71	AV	31	2.3	V	-10.70	42.01	54	-11.99
4824	60.60	PK	321	1.3	H	-6.10	54.50	74	-19.50
4824	45.96	AV	321	1.3	H	-6.10	39.86	54	-14.14
4824	61.49	PK	232	1.2	V	-6.10	55.39	74	-18.61
4824	46.37	AV	232	1.2	V	-6.10	40.27	54	-13.73
Middle Channel 2442MHz									
4884	60.04	PK	126	2.1	H	-5.89	54.15	74	-19.85
4884	45.56	AV	126	2.1	H	-5.89	39.67	54	-14.33
4884	60.40	PK	260	2.4	V	-5.89	54.51	74	-19.49
4884	45.93	AV	260	2.4	V	-5.89	40.04	54	-13.96
High Channel 2472MHz									
2483.5	80.65	PK	17	1.3	H	-10.55	70.1	74	-3.90
2483.5	60.59	AV	17	1.3	H	-10.55	50.04	54	-3.96
2483.5	79.81	PK	216	2.1	V	-10.55	69.26	74	-4.74
2483.5	60.12	AV	216	2.1	V	-10.55	49.57	54	-4.43
2483.95	82.53	PK	133	2	H	-10.55	71.98	74	-2.02
2483.95	61.94	AV	133	2	H	-10.55	51.39	54	-2.61
2484.16	82.26	PK	262	1.8	V	-10.54	71.72	74	-2.28
2484.16	61.57	AV	262	1.8	V	-10.54	51.03	54	-2.97
4944	59.79	PK	272	2.4	H	-5.57	54.22	74	-19.78
4944	45.16	AV	272	2.4	H	-5.57	39.59	54	-14.41
4944	60.07	PK	116	1.7	V	-5.57	54.50	74	-19.50
4944	45.58	AV	116	1.7	V	-5.57	40.01	54	-13.99

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
Low Channel 2412MHz									
2358.19	67.65	PK	198	1	H	-10.77	56.88	74	-17.12
2358.19	53.50	AV	198	1	H	-10.77	42.73	54	-11.27
2386.68	67.56	PK	254	1	V	-10.71	56.85	74	-17.15
2386.68	53.43	AV	254	1	V	-10.71	42.72	54	-11.28
2390	66.19	PK	286	1.3	H	-10.70	55.49	74	-18.51
2390	53.01	AV	286	1.3	H	-10.70	42.31	54	-11.69
2390	66.07	PK	159	2.1	V	-10.70	55.37	74	-18.63
2390	52.90	AV	159	2.1	V	-10.70	42.20	54	-11.80
4824	61.11	PK	119	1.9	H	-6.10	55.01	74	-18.99
4824	45.92	AV	119	1.9	H	-6.10	39.82	54	-14.18
4824	61.69	PK	264	1.6	V	-6.10	55.59	74	-18.41
4824	46.35	AV	264	1.6	V	-6.10	40.25	54	-13.75
Middle Channel 2442MHz									
4884	60.59	PK	198	1.8	H	-5.89	54.7	74	-19.30
4884	45.52	AV	198	1.8	H	-5.89	39.63	54	-14.37
4884	61.03	PK	138	2.4	V	-5.89	55.14	74	-18.86
4884	45.84	AV	138	2.4	V	-5.89	39.95	54	-14.05
High Channel 2472MHz									
2483.5	81.54	PK	85	1.1	H	-10.55	70.99	74	-3.01
2483.5	61.22	AV	85	1.1	H	-10.55	50.67	54	-3.33
2483.5	81.17	PK	251	1.4	V	-10.55	70.62	74	-3.38
2483.5	61.09	AV	251	1.4	V	-10.55	50.54	54	-3.46
2484.49	83.24	PK	47	1.9	H	-10.54	72.7	74	-1.30
2484.49	62.87	AV	47	1.9	H	-10.54	52.33	54	-1.67
2483.96	83.01	PK	167	1.5	V	-10.55	72.46	74	-1.54
2483.96	62.63	AV	167	1.5	V	-10.55	52.08	54	-1.92
4944	60.08	PK	146	1.6	H	-5.57	54.51	74	-19.49
4944	45.15	AV	146	1.6	H	-5.57	39.58	54	-14.42
4944	60.56	PK	205	1.9	V	-5.57	54.99	74	-19.01
4944	45.51	AV	205	1.9	V	-5.57	39.94	54	-14.06

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
Low Channel 2422MHz									
2387.52	68.20	PK	238	1.9	H	-10.71	57.49	74	-16.51
2387.52	53.88	AV	238	1.9	H	-10.71	43.17	54	-10.83
2388.69	68.06	PK	94	1.1	V	-10.70	57.36	74	-16.64
2388.69	53.75	AV	94	1.1	V	-10.70	43.05	54	-10.95
2390	66.52	PK	156	1	H	-10.70	55.82	74	-18.18
2390	53.38	AV	156	1	H	-10.70	42.68	54	-11.32
2390	66.40	PK	203	1.6	V	-10.70	55.70	74	-18.30
2390	53.27	AV	203	1.6	V	-10.70	42.57	54	-11.43
4844	60.32	PK	310	2.5	H	-6.09	54.23	74	-19.77
4844	46.09	AV	310	2.5	H	-6.09	40.00	54	-14.00
4844	60.81	PK	37	2.2	V	-6.09	54.72	74	-19.28
4844	46.38	AV	37	2.2	V	-6.09	40.29	54	-13.71
Middle Channel 2442MHz									
4884	60.18	PK	58	1.9	H	-5.89	54.29	74	-19.71
4884	45.89	AV	58	1.9	H	-5.89	40	54	-14.00
4884	60.64	PK	168	1.5	V	-5.89	54.75	74	-19.25
4884	46.26	AV	168	1.5	V	-5.89	40.37	54	-13.63
High Channel 2462MHz									
2483.5	82.22	PK	2	2.4	H	-10.55	71.67	74	-2.33
2483.5	61.87	AV	2	2.4	H	-10.55	51.32	54	-2.68
2483.5	82.03	PK	183	1.7	V	-10.55	71.48	74	-2.52
2483.5	61.66	AV	183	1.7	V	-10.55	51.11	54	-2.89
2484.42	83.34	PK	80	2	H	-10.54	72.8	74	-1.20
2484.42	63.25	AV	80	2	H	-10.54	52.71	54	-1.29
2483.97	83.08	PK	197	1.1	V	-10.55	72.53	74	-1.47
2483.97	62.79	AV	197	1.1	V	-10.55	52.24	54	-1.76
4924	60.05	PK	117	2.3	H	-5.67	54.38	74	-19.62
4924	45.80	AV	117	2.3	H	-5.67	40.13	54	-13.87
4924	60.49	PK	17	1.6	V	-5.67	54.82	74	-19.18
4924	46.17	AV	17	1.6	V	-5.67	40.50	54	-13.50

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


1-18 GHz:

Pre-scan for 802.11b, Low Channel

Horizontal

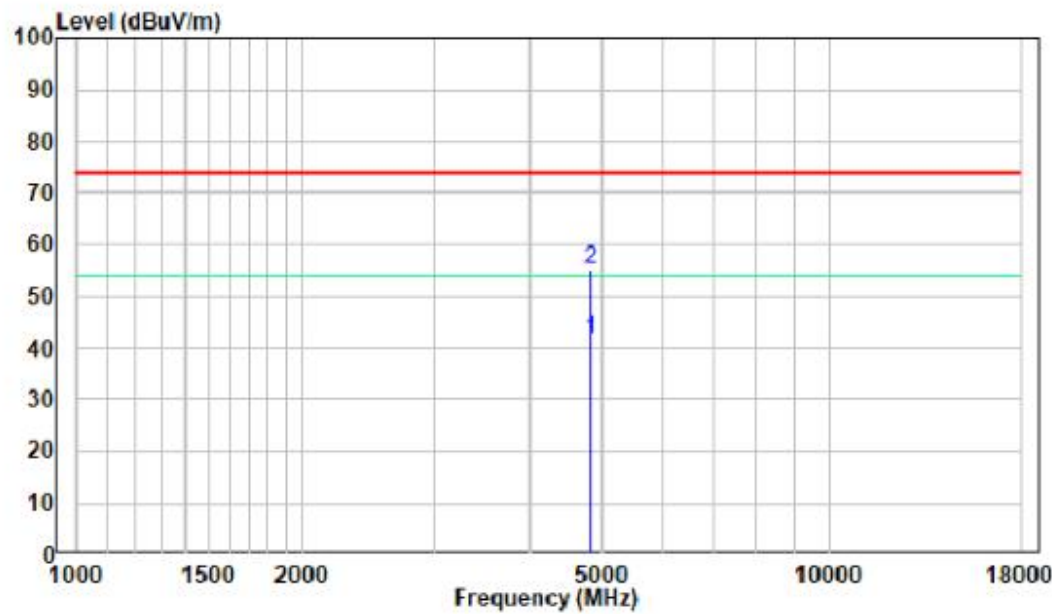


Vertical

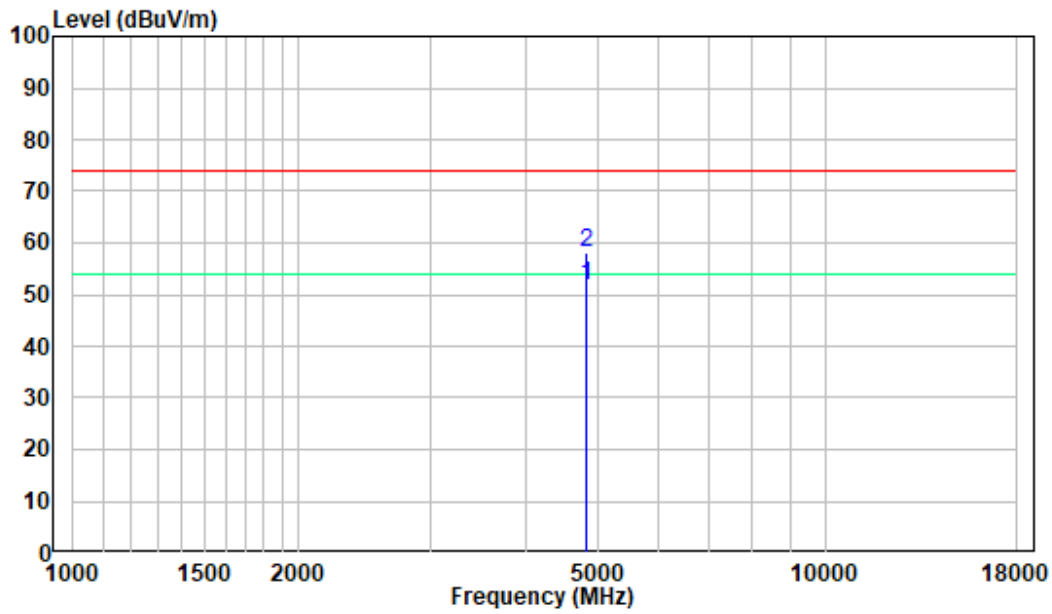


18 -25GHz:

Pre-scan for 802.11b, Low Channel

Horizontal

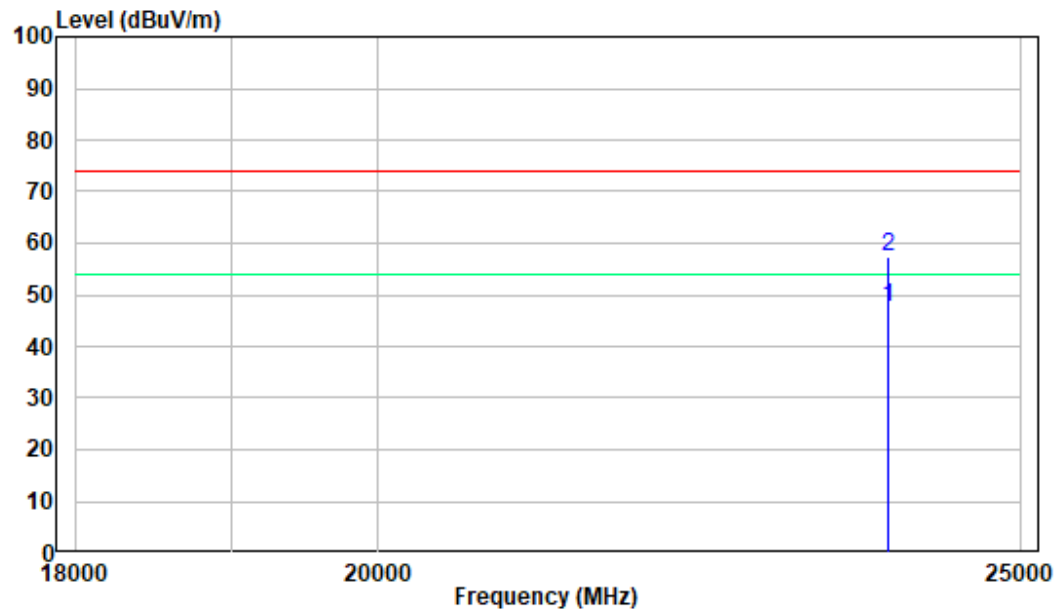

Vertical

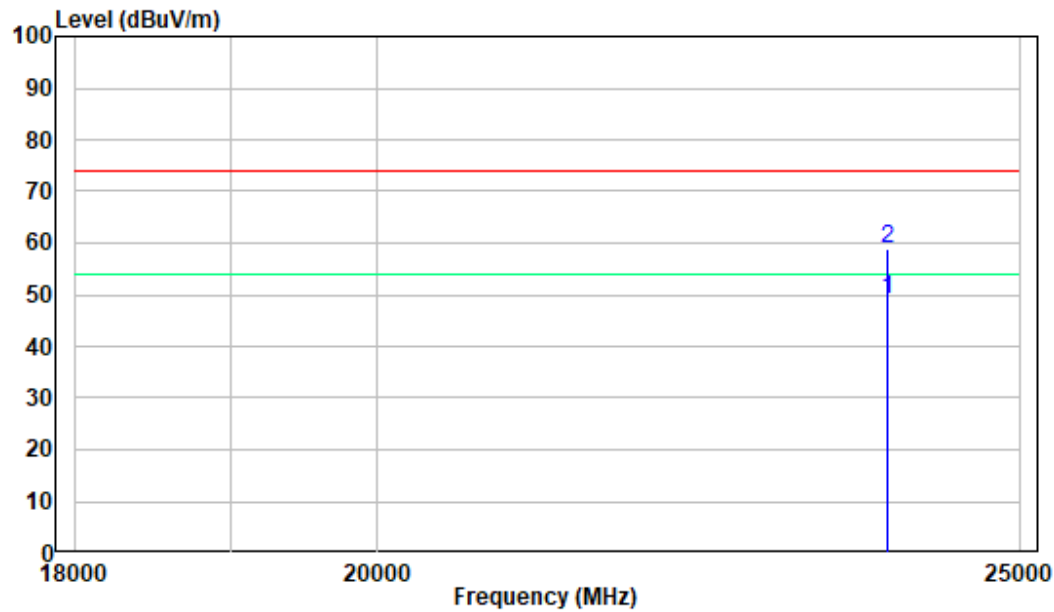

1-25 GHz:

Main Antenna

BLE 1M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
BLE1M									
Low Channel 2402MHz									
2358.2	67.13	PK	29	2.1	H	-10.77	56.36	74	-17.64
2358.2	53.36	AV	29	2.1	H	-10.77	42.59	54	-11.41
2366.5	67.04	PK	5	1.9	V	-10.75	56.29	74	-17.71
2366.5	53.31	AV	5	1.9	V	-10.75	42.56	54	-11.44
2390	65.48	PK	98	1.7	H	-10.70	54.78	74	-19.22
2390	53.08	AV	98	1.7	H	-10.70	42.38	54	-11.62
2390	66.15	PK	320	1.2	V	-10.70	55.45	74	-18.55
2390	53.20	AV	320	1.2	V	-10.70	42.50	54	-11.50
4804	59.36	PK	330	2.4	H	-6.11	53.25	74	-20.75
4804	59.30	PK	280	2.4	V	-6.11	53.19	74	-20.81
Middle Channel 2440MHz									
4880	59.31	PK	341	1.3	H	-5.91	53.40	74	-20.60
4880	59.18	PK	146	1.3	V	-5.91	53.27	74	-20.73
High Channel 2480MHz									
2483.5	65.85	PK	96	1.8	H	-10.55	55.3	74	-18.70
2483.5	53.47	AV	96	1.8	H	-10.55	42.92	54	-11.08
2483.5	65.74	PK	78	2.2	V	-10.55	55.19	74	-18.81
2483.5	53.35	AV	78	2.2	V	-10.55	42.8	54	-11.20
2491.51	67.51	PK	238	1.2	H	-10.49	57.02	74	-16.98
2491.51	53.79	AV	238	1.2	H	-10.49	43.3	54	-10.70
2489.32	68.69	PK	170	2.3	V	-10.50	58.19	74	-15.81
2489.32	53.82	AV	170	2.3	V	-10.50	43.32	54	-10.68
4960	58.70	PK	164	1.1	H	-5.47	53.23	74	-20.77
4960	58.81	PK	5	1.1	V	-5.47	53.34	74	-20.66

BLE 2M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
BLE2M									
Low Channel 2402MHz									
2367.6	67.22	PK	313	1.2	H	-10.75	56.47	74	-17.53
2367.6	53.47	AV	313	1.2	H	-10.75	42.72	54	-11.28
2340.9	66.55	PK	274	2.1	V	-10.69	55.86	74	-18.14
2340.9	52.82	AV	274	2.1	V	-10.69	42.13	54	-11.87
2390	65.56	PK	250	2.4	H	-10.70	54.86	74	-19.14
2390	53.18	AV	250	2.4	H	-10.70	42.48	54	-11.52
2390	65.13	PK	76	1.3	V	-10.70	54.43	74	-19.57
2390	53.25	AV	76	1.3	V	-10.70	42.55	54	-11.45
4804	59.79	PK	254	1.2	H	-6.11	53.68	74	-20.32
4804	59.48	PK	218	1.2	V	-6.11	53.37	74	-20.63
Middle Channel 2440MHz									
4880	59.55	PK	291	2	H	-5.91	53.64	74	-20.36
4880	59.39	PK	148	2	V	-5.91	53.48	74	-20.52
High Channel 2480MHz									
2483.5	65.77	PK	315	1	H	-10.55	55.22	74	-18.78
2483.5	53.66	AV	315	1	H	-10.55	43.11	54	-10.89
2483.5	66.01	PK	235	2	V	-10.55	55.46	74	-18.54
2483.5	53.66	AV	235	2	V	-10.55	43.11	54	-10.89
2483.83	67.87	PK	254	2.2	H	-10.55	57.32	74	-16.68
2483.83	53.89	AV	254	2.2	H	-10.55	43.34	54	-10.66
2484.64	67.75	PK	87	1.5	V	-10.54	57.21	74	-16.79
2484.64	54.04	AV	87	1.5	V	-10.54	43.5	54	-10.50
4960	58.98	PK	275	2	H	-5.47	53.51	74	-20.49
4960	58.86	PK	57	2	V	-5.47	53.39	74	-20.61

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11b									
Low Channel 2412MHz									
2365.32	67.09	PK	346	2.1	H	-10.76	56.33	74	-17.67
2365.32	53.04	AV	346	2.1	H	-10.76	42.28	54	-11.72
2382.6	67.13	PK	291	1.7	V	-10.72	56.41	74	-17.59
2382.6	53.11	AV	291	1.7	V	-10.72	42.39	54	-11.61
2390	65.74	PK	244	1.4	H	-10.70	55.04	74	-18.96
2390	53.04	AV	244	1.4	H	-10.70	42.34	54	-11.66
2390	64.98	PK	290	1.9	V	-10.70	54.28	74	-19.72
2390	53.06	AV	290	1.9	V	-10.70	42.36	54	-11.64
4824	60.17	PK	202	2.1	H	-6.10	54.07	74	-19.93
4824	48.69	AV	202	2.1	H	-6.10	42.59	54	-11.41
4824	63.55	PK	69	1.6	V	-6.10	57.45	74	-16.55
4824	56.09	AV	69	1.6	V	-6.10	49.99	54	-4.01
Middle Channel 2442MHz									
4884	60.80	PK	220	2.4	H	-5.89	54.91	74	-19.09
4884	49.28	AV	220	2.4	H	-5.89	43.39	54	-10.61
4884	63.86	PK	67	2	V	-5.89	57.97	74	-16.03
4884	57.94	AV	67	2	V	-5.89	52.05	54	-1.95
High Channel 2472MHz									
2483.5	70.09	PK	92	1.2	H	-10.55	59.54	74	-14.46
2483.5	59.39	AV	92	1.2	H	-10.55	48.84	54	-5.16
2483.5	68.68	PK	237	1.2	V	-10.55	58.13	74	-15.87
2483.5	57.55	AV	237	1.2	V	-10.55	47	54	-7.00
2485.65	71.26	PK	157	2.1	H	-10.53	60.73	74	-13.27
2485.65	60.10	AV	157	2.1	H	-10.53	49.57	54	-4.43
2484.85	70.37	PK	119	2.2	V	-10.54	59.83	74	-14.17
2484.85	58.41	AV	119	2.2	V	-10.54	47.87	54	-6.13
4944	60.39	PK	113	1.5	H	-5.57	54.82	74	-19.18
4944	48.98	AV	113	1.5	H	-5.57	43.41	54	-10.59
4944	64.66	PK	279	2.5	V	-5.57	59.09	74	-14.91
4944	58.89	AV	279	2.5	V	-5.57	53.32	54	-0.68

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11g									
Low Channel 2412MHz									
2328.48	66.14	PK	1	2.1	H	-10.56	55.58	74	-18.42
2328.48	52.58	AV	1	2.1	H	-10.56	42.02	54	-11.98
2355.48	67.36	PK	238	1.4	V	-10.78	56.58	74	-17.42
2355.48	53.40	AV	238	1.4	V	-10.78	42.62	54	-11.38
2390	65.39	PK	283	2.2	H	-10.70	54.69	74	-19.31
2390	53.18	AV	283	2.2	H	-10.70	42.48	54	-11.52
2390	65.35	PK	53	2.3	V	-10.70	54.65	74	-19.35
2390	53.17	AV	53	2.3	V	-10.70	42.47	54	-11.53
4824	59.36	PK	144	2.1	H	-6.10	53.26	74	-20.74
4824	59.54	PK	309	2.1	V	-6.10	53.44	74	-20.56
Middle Channel 2442MHz									
4884	59.53	PK	157	1.5	H	-5.89	53.64	74	-20.36
4884	59.31	PK	164	1.5	V	-5.89	53.42	74	-20.58
High Channel 2472MHz									
2483.5	83.91	PK	132	1.5	H	-10.55	73.36	74	-0.64
2483.5	63.26	AV	132	1.5	H	-10.55	52.71	54	-1.29
2483.5	80.86	PK	304	1.8	V	-10.55	70.31	74	-3.69
2483.5	61.12	AV	304	1.8	V	-10.55	50.57	54	-3.43
2484.05	83.66	PK	227	2.1	H	-10.54	73.12	74	-0.88
2484.05	64.20	AV	227	2.1	H	-10.54	53.66	54	-0.34
2484.75	82.66	PK	262	2.3	V	-10.54	72.12	74	-1.88
2484.75	62.12	AV	262	2.3	V	-10.54	51.58	54	-2.42
4944	59.57	PK	7	2.3	H	-5.57	54.00	74	-20.00
4944	59.25	PK	69	2.3	V	-5.57	53.68	74	-20.32

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
Low Channel 2412MHz									
2346.84	66.36	PK	97	2	H	-10.76	55.60	74	-18.40
2346.84	52.82	AV	97	2	H	-10.76	42.06	54	-11.94
2346.84	66.85	PK	360	1.6	V	-10.76	56.09	74	-17.91
2346.84	53.01	AV	360	1.6	V	-10.76	42.25	54	-11.75
2390	65.20	PK	309	2.1	H	-10.70	54.50	74	-19.50
2390	53.20	AV	309	2.1	H	-10.70	42.50	54	-11.50
2390	65.75	PK	167	1.2	V	-10.70	55.05	74	-18.95
2390	53.27	AV	167	1.2	V	-10.70	42.57	54	-11.43
4824	59.51	PK	258	1.1	H	-6.10	53.41	74	-20.59
4824	59.66	PK	147	1.1	V	-6.10	53.56	74	-20.44
Middle Channel 2442MHz									
4884	59.20	PK	231	2.5	H	-5.89	53.31	74	-20.69
4884	59.59	PK	12	2.5	V	-5.89	53.70	74	-20.30
High Channel 2472MHz									
2483.5	82.92	PK	66	1.3	H	-10.55	72.37	74	-1.63
2483.5	63.12	AV	66	1.3	H	-10.55	52.57	54	-1.43
2483.5	81.68	PK	106	1.3	V	-10.55	71.13	74	-2.87
2483.5	61.96	AV	106	1.3	V	-10.55	51.41	54	-2.59
2483.55	83.05	PK	165	1.1	H	-10.55	72.5	74	-1.50
2483.55	62.98	AV	165	1.1	H	-10.55	52.43	54	-1.57
2486.3	82.34	PK	356	2.3	V	-10.53	71.81	74	-2.19
2486.3	61.64	AV	356	2.3	V	-10.53	51.11	54	-2.89
4944	59.21	PK	197	2.3	H	-5.57	53.64	74	-20.36
4944	59.01	PK	35	2.3	V	-5.57	53.44	74	-20.56

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
Low Channel 2422MHz									
2389.95	70.18	PK	349	1.9	H	-10.70	59.48	74	-14.52
2389.95	54.19	AV	349	1.9	H	-10.70	43.49	54	-10.51
2389.69	69.66	PK	9	1.2	V	-10.70	58.96	74	-15.04
2389.69	53.98	AV	9	1.2	V	-10.70	43.28	54	-10.72
2390	70.11	PK	205	1.9	H	-10.70	59.41	74	-14.59
2390	54.02	AV	205	1.9	H	-10.70	43.32	54	-10.68
2390	69.39	PK	4	2.4	V	-10.70	58.69	74	-15.31
2390	53.86	AV	4	2.4	V	-10.70	43.16	54	-10.84
4844	59.09	PK	162	2.2	H	-6.09	53.00	74	-21.00
4844	59.93	PK	47	2.2	V	-6.09	53.84	74	-20.16
Middle Channel 2442MHz									
4884	59.33	PK	152	2.4	H	-5.89	53.44	74	-20.56
4884	59.23	PK	30	2.4	V	-5.89	53.34	74	-20.66
High Channel 2462MHz									
2483.5	81.57	PK	133	1.2	H	-10.55	71.02	74	-2.98
2483.5	62.98	AV	133	1.2	H	-10.55	52.43	54	-1.57
2483.5	81.86	PK	97	2.1	V	-10.55	71.31	74	-2.69
2483.5	61.72	AV	97	2.1	V	-10.55	51.17	54	-2.83
2484.25	84.09	PK	326	2.1	H	-10.54	73.55	74	-0.45
2484.25	63.69	AV	326	2.1	H	-10.54	53.15	54	-0.85
2485.35	80.62	PK	172	1.6	V	-10.53	70.09	74	-3.91
2485.35	61.88	AV	172	1.6	V	-10.53	51.35	54	-2.65
4924	59.43	PK	20	1.4	H	-5.67	53.76	74	-20.24
4924	59.28	PK	339	1.4	V	-5.67	53.61	74	-20.39

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


1-18 GHz:

Pre-scan for 802.11b, High Channel

Horizontal

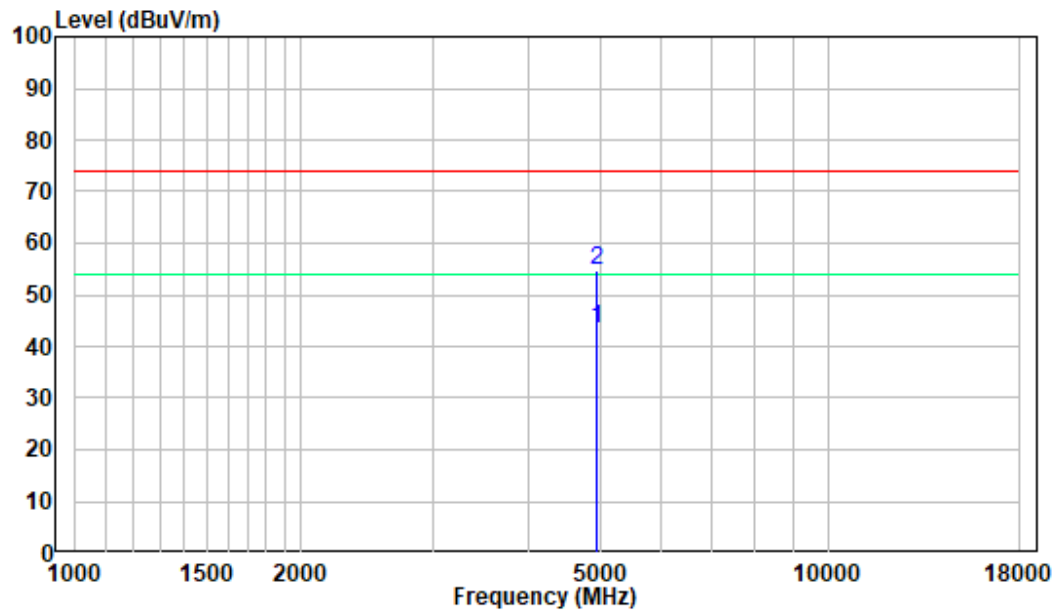


Vertical

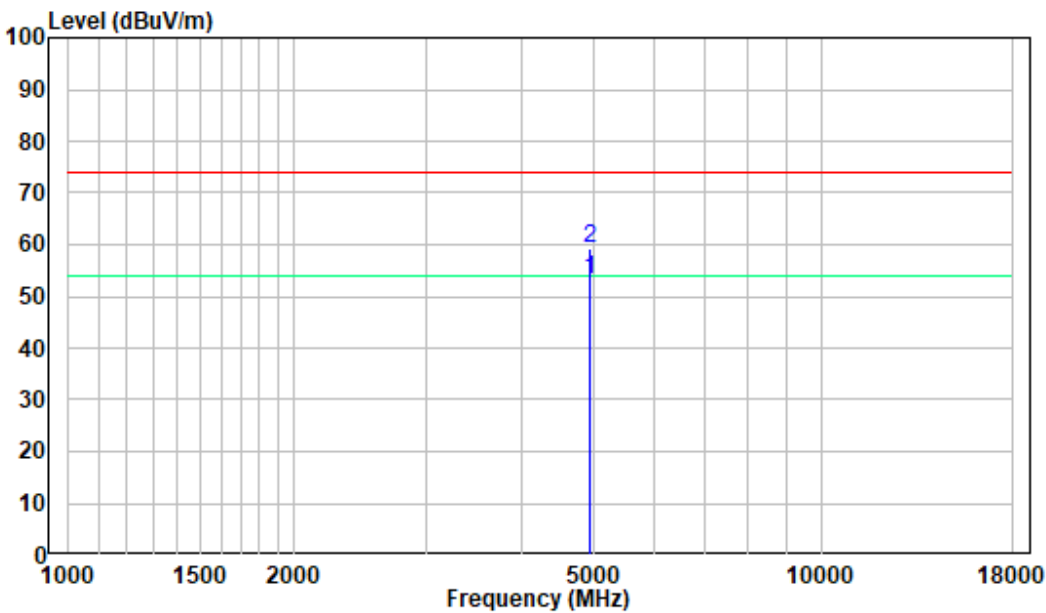


18 -25GHz:

Pre-scan for 802.11b, High Channel

Horizontal

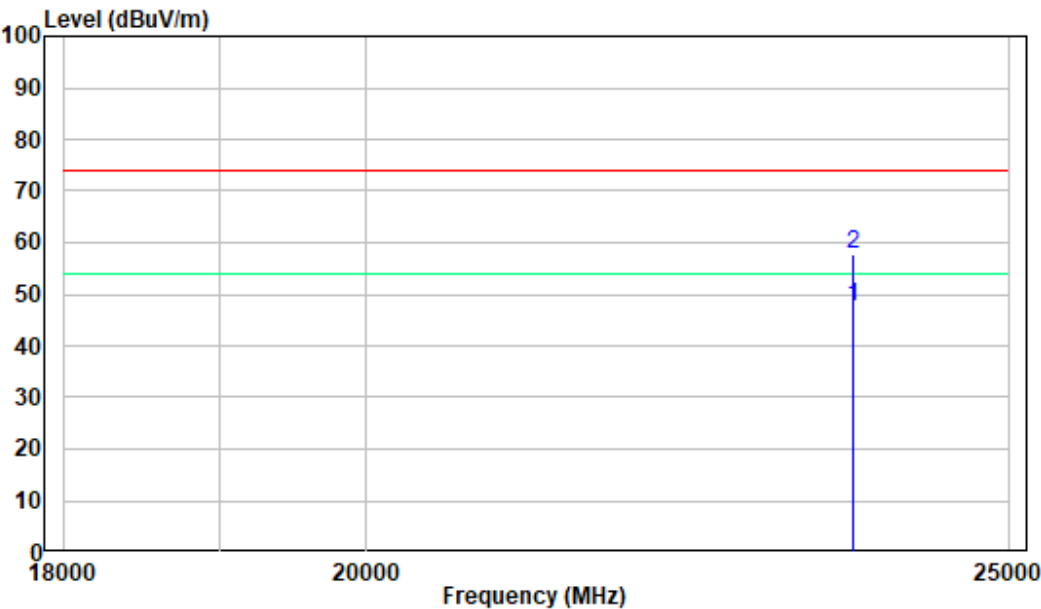

Vertical

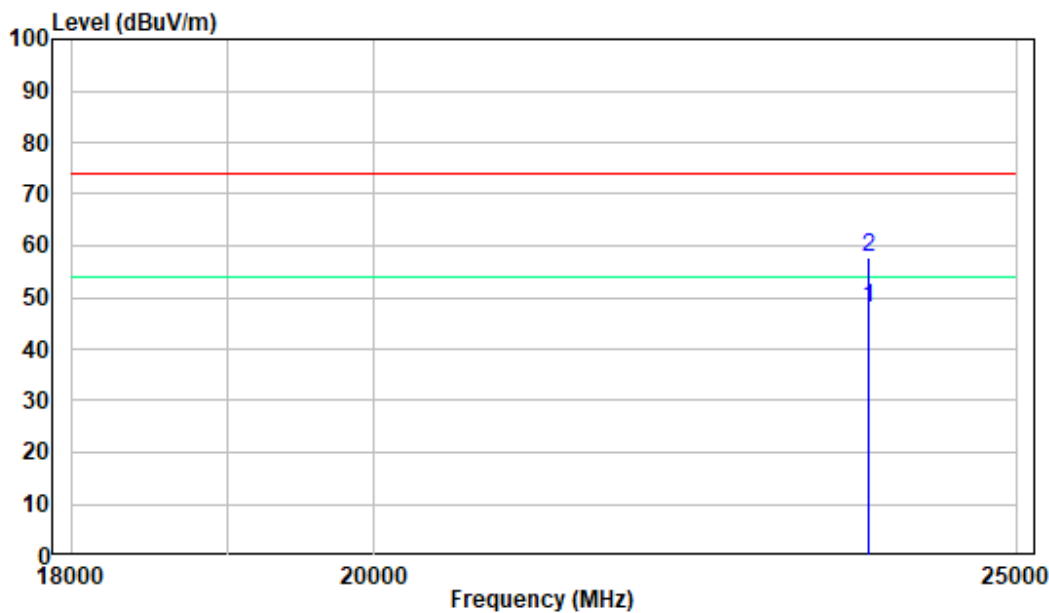

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

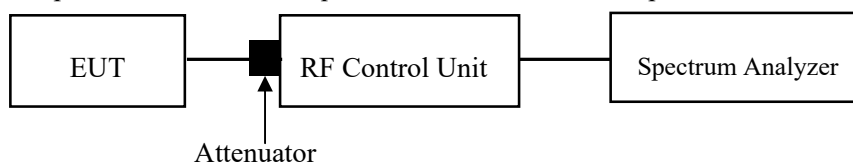

Test Data

Environmental Conditions

Temperature:	24.5~25.4°C
Relative Humidity:	51~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Bob Liao on 2023-04-12 and 2023-04-26.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.2.3.2 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

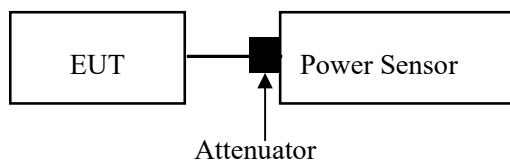

For BLE mode:

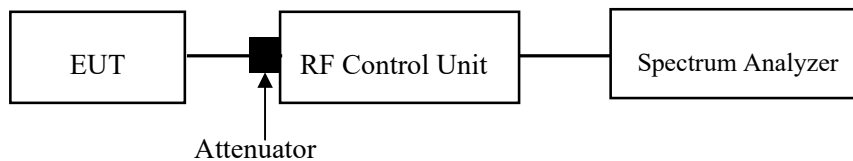

Test Data

Environmental Conditions

Temperature:	24.5~25.4°C
Relative Humidity:	51~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Bob Liao on 2023-04-12 and 2023-04-26.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

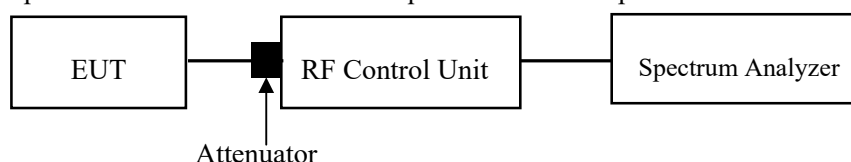**Test Data****Environmental Conditions**

Temperature:	24.5~25.4℃
Relative Humidity:	51~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Bob Liao on 2023-04-12 and 2023-04-26.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Method: ANSI C63.10-2013 Clause 11.10.3 Method AVGPSD-1


The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

1. Set instrument center frequency to DTS channel center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{BW}$.
5. Detector = power averaging (rms) or sample detector (when rms not available)
6. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
7. Sweep time = auto couple.
8. Employ trace averaging (rms) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level.
10. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Method: ANSI C63.10-2013 Clause 11.10.5 Method AVGPSD-2

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

1. Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{BW}$.
6. Detector = power averaging (rms) or sample detector (when rms not available)
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Do not use sweep triggering; allow sweep to “free run.”
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

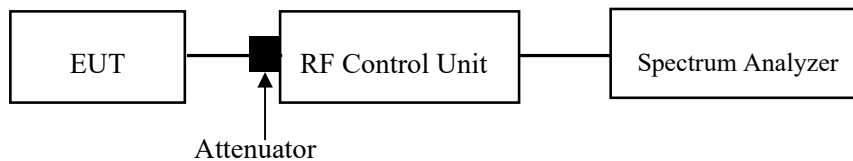

Test Data

Environmental Conditions

Temperature:	24.5~25.4°C
Relative Humidity:	51~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Bob Liao on 2023-04-12 and 2023-04-28.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi- Aux Antenna


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.08	2408.48	2415.56	0.5	PASS
		2442	6.80	2438.96	2445.76	0.5	PASS
		2472	8.12	2467.44	2475.56	0.5	PASS
11G	Ant1	2412	13.88	2405.68	2419.56	0.5	PASS
		2442	14.48	2435.68	2450.16	0.5	PASS
		2472	15.72	2463.84	2479.56	0.5	PASS
11N20SISO	Ant1	2412	13.88	2405.68	2419.56	0.5	PASS
		2442	15.12	2435.68	2450.80	0.5	PASS
		2472	16.68	2463.20	2479.88	0.5	PASS
11N40SISO	Ant1	2422	33.84	2405.76	2439.60	0.5	PASS
		2442	22.64	2436.96	2459.60	0.5	PASS
		2462	20.08	2446.96	2467.04	0.5	PASS

Test Graphs

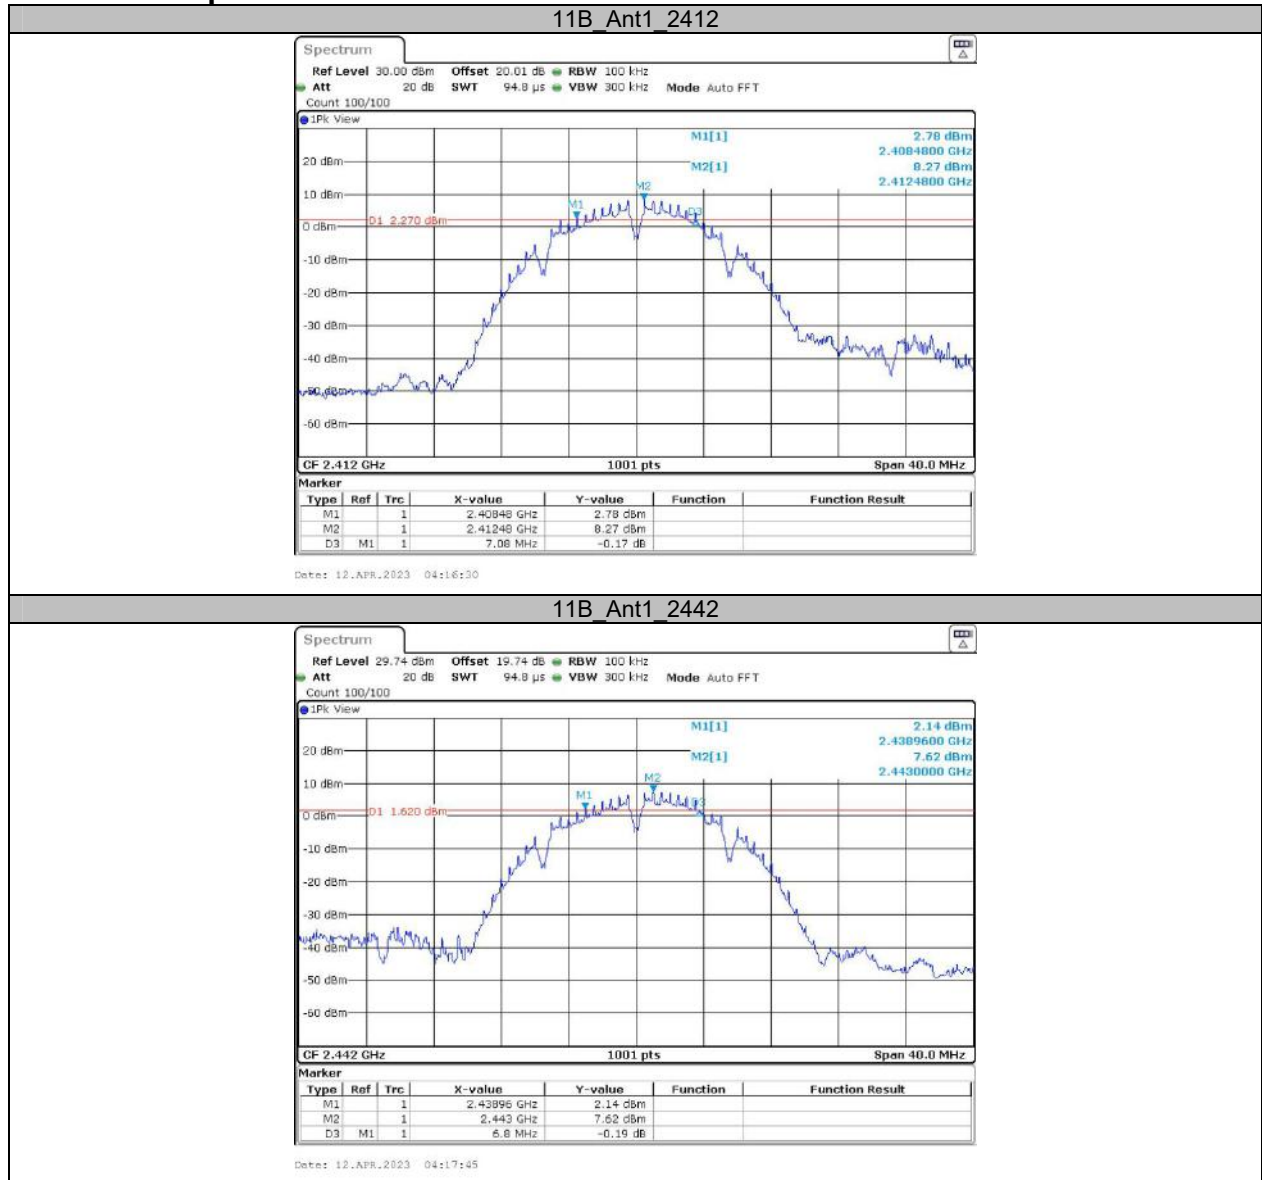


11B_Ant1_2472

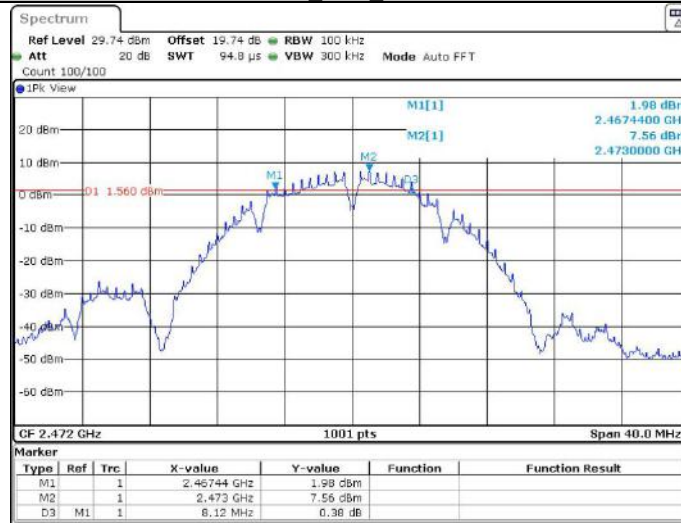


Date: 12.APR.2023 04:18:50

11G_Ant1_2412

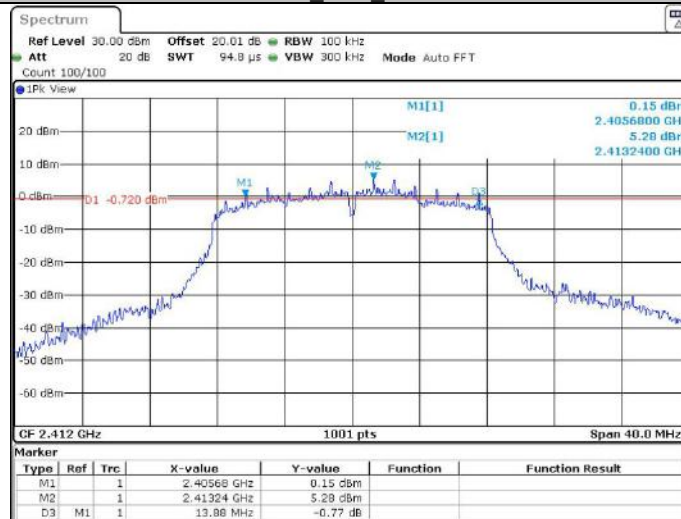


Date: 12.APR.2023 04:20:02

11G_Ant1_2442

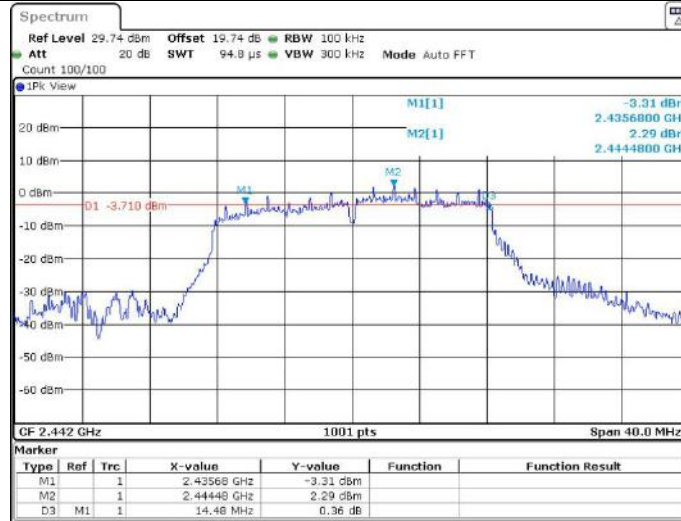



Date: 12.APR.2023 04:45:03


11G_Ant1_2472

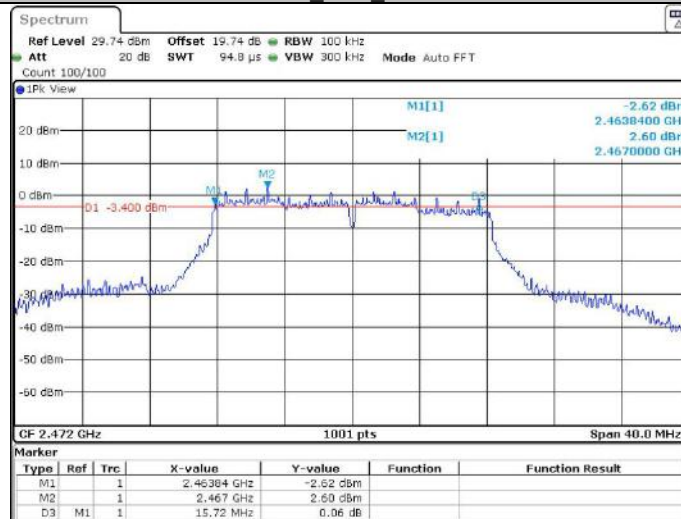

Date: 12.APR.2023 04:46:03

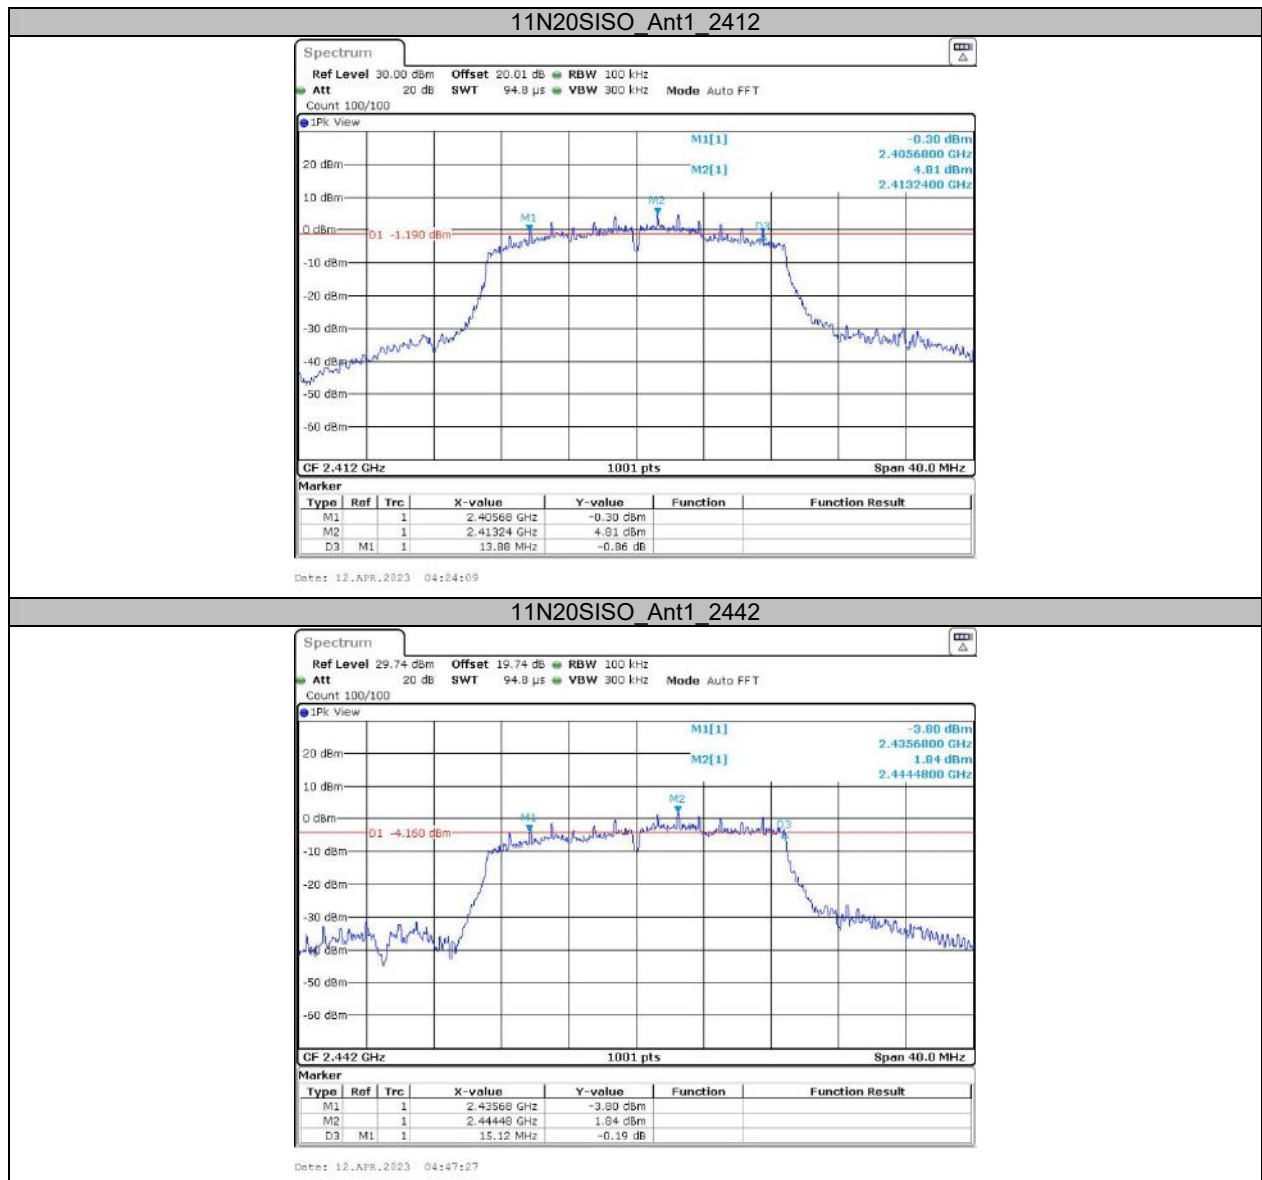

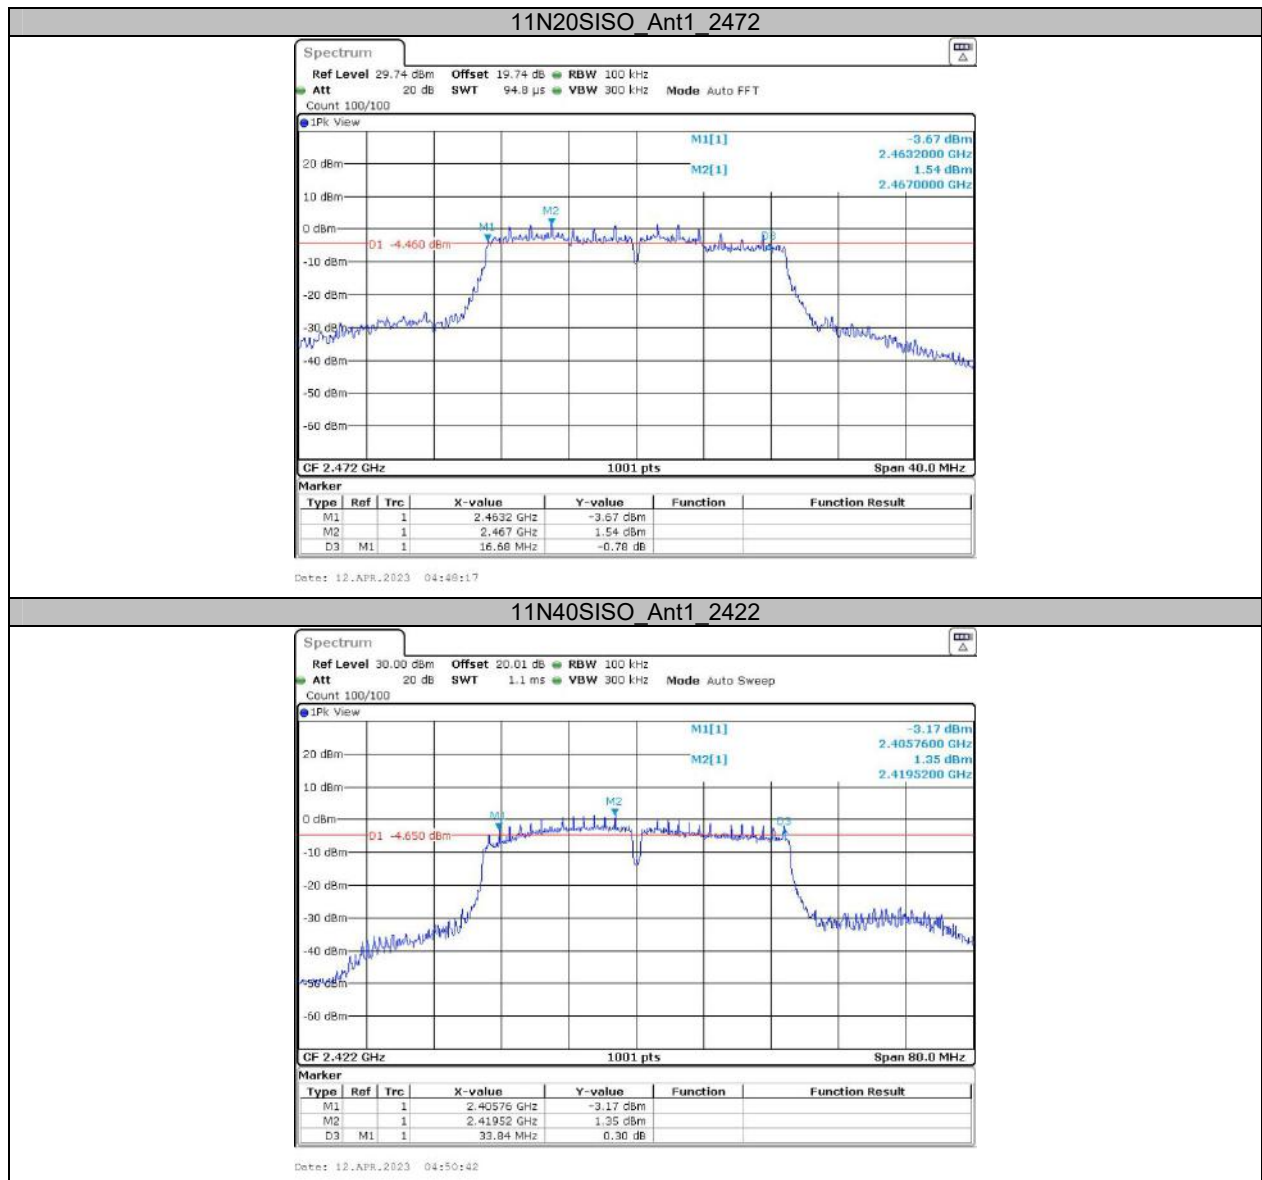


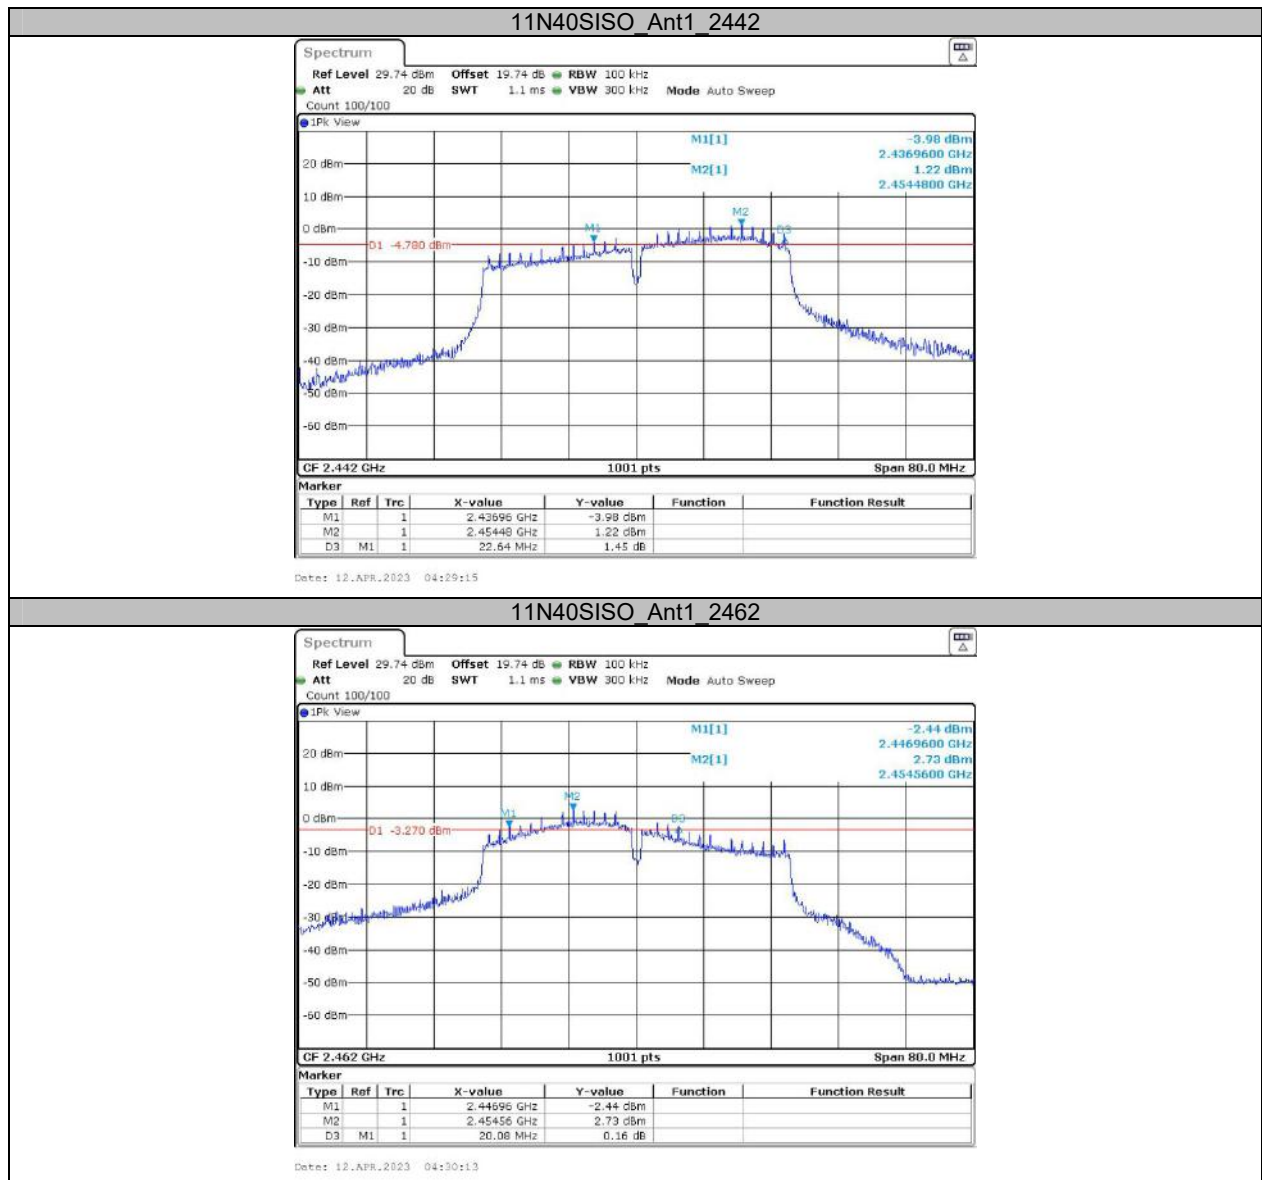


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.468	2405.966	2418.434	---	---
		2442	12.907	2435.926	2448.833	---	---
		2472	13.946	2464.807	2478.753	---	---
11G	Ant1	2412	17.023	2403.648	2420.671	---	---
		2442	17.782	2433.688	2451.471	---	---
		2472	18.342	2462.529	2480.871	---	---
11N20SISO	Ant1	2412	17.942	2403.169	2421.111	---	---
		2442	18.422	2433.249	2451.670	---	---
		2472	19.221	2462.050	2481.271	---	---
11N40SISO	Ant1	2422	37.003	2404.018	2441.021	---	---
		2442	36.603	2424.418	2461.021	---	---
		2462	36.923	2442.979	2479.902	---	---

Test Graphs

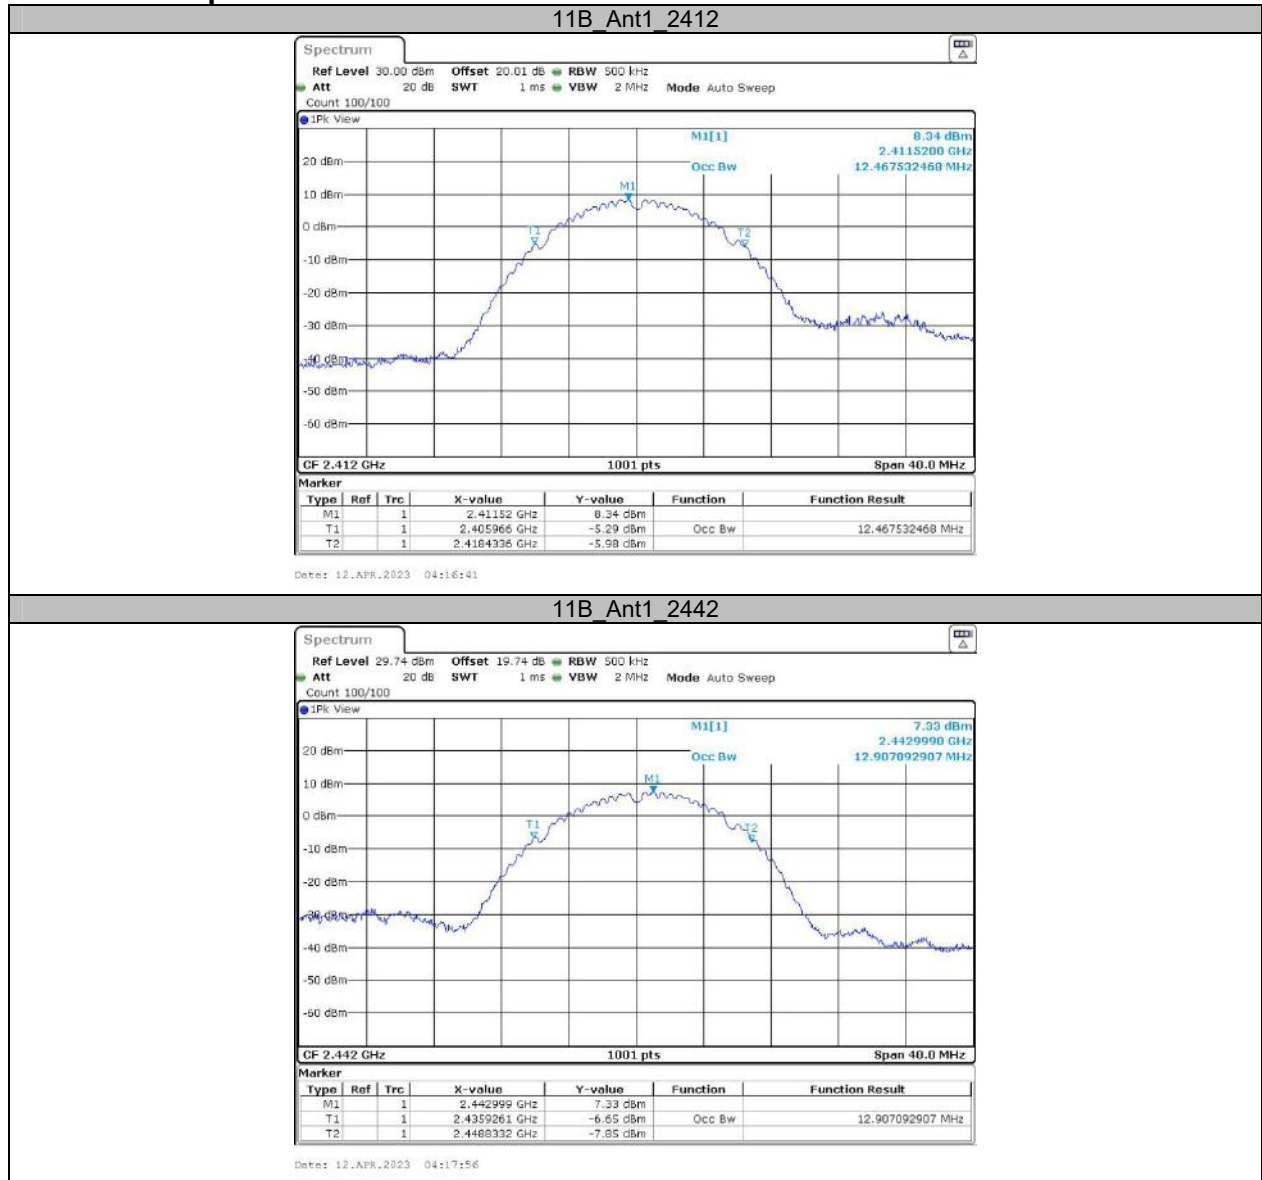


11B_Ant1_2472

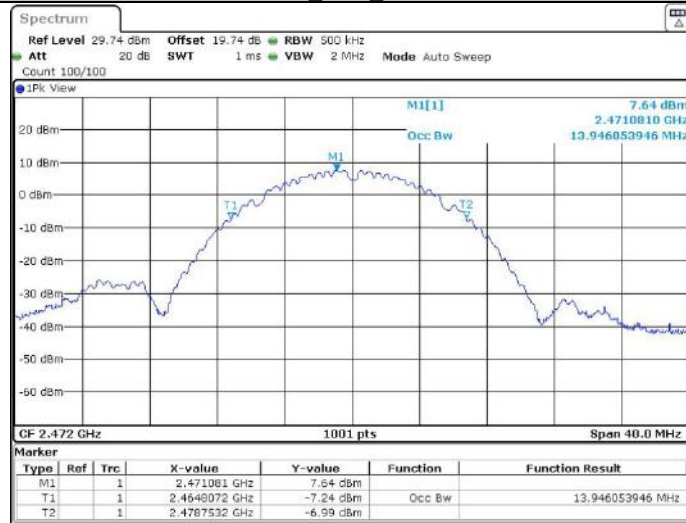



Date: 12.APR.2023 04:19:01


11G_Ant1_2412

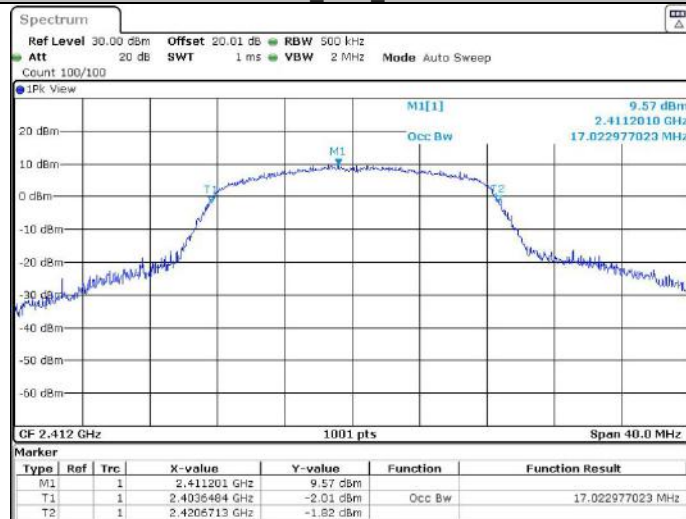


Date: 12.APR.2023 04:20:13

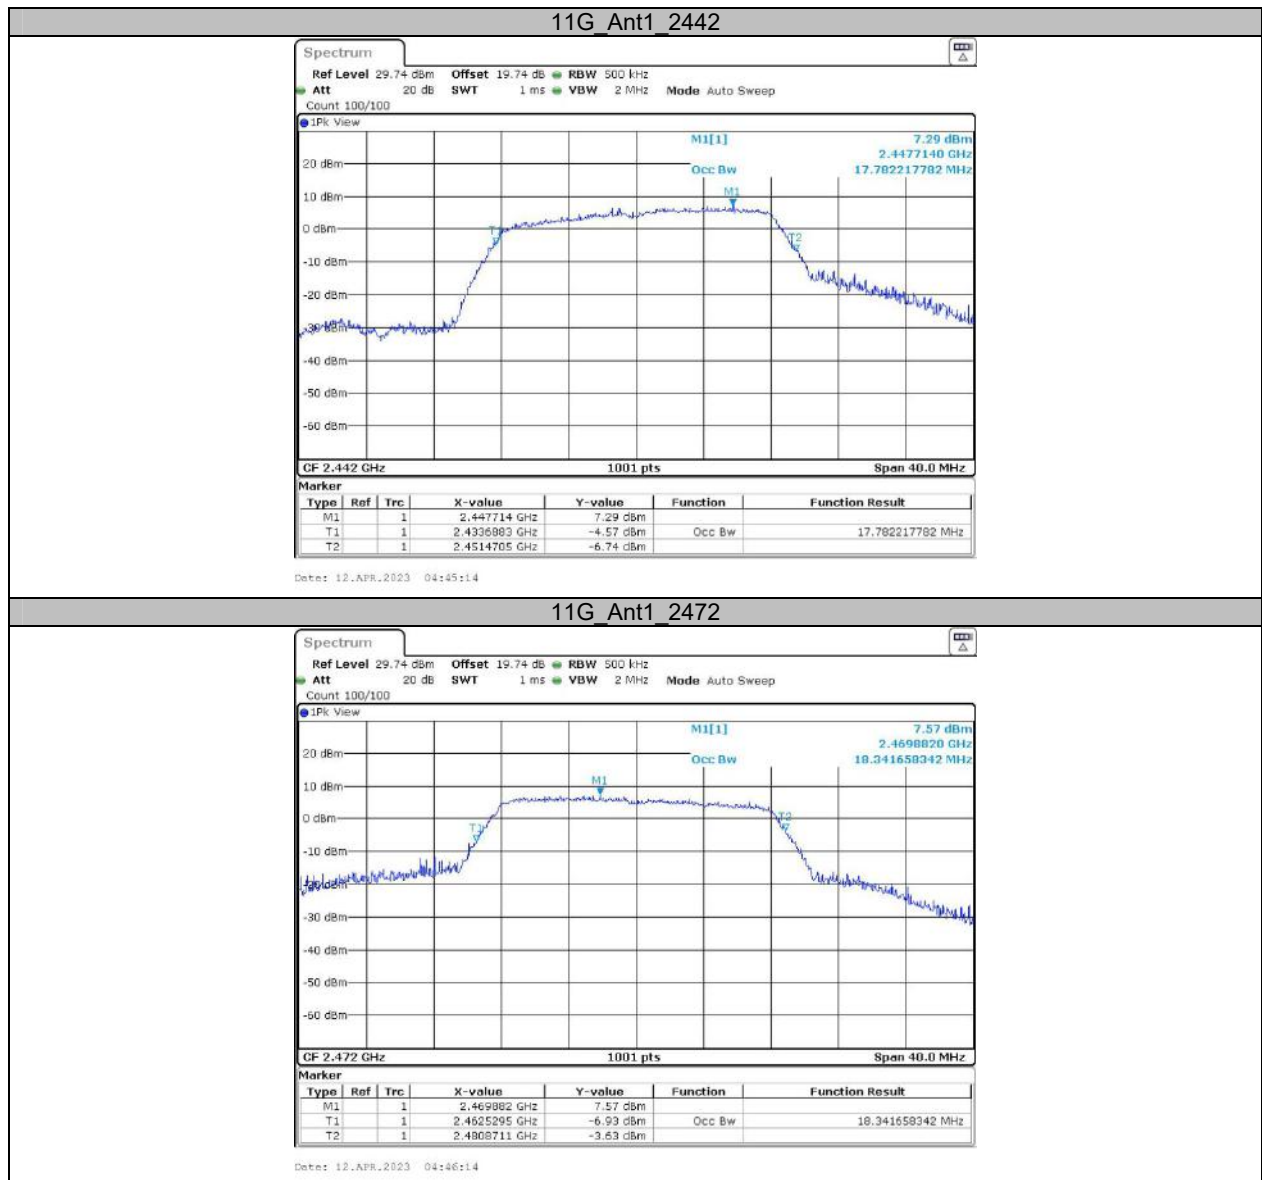

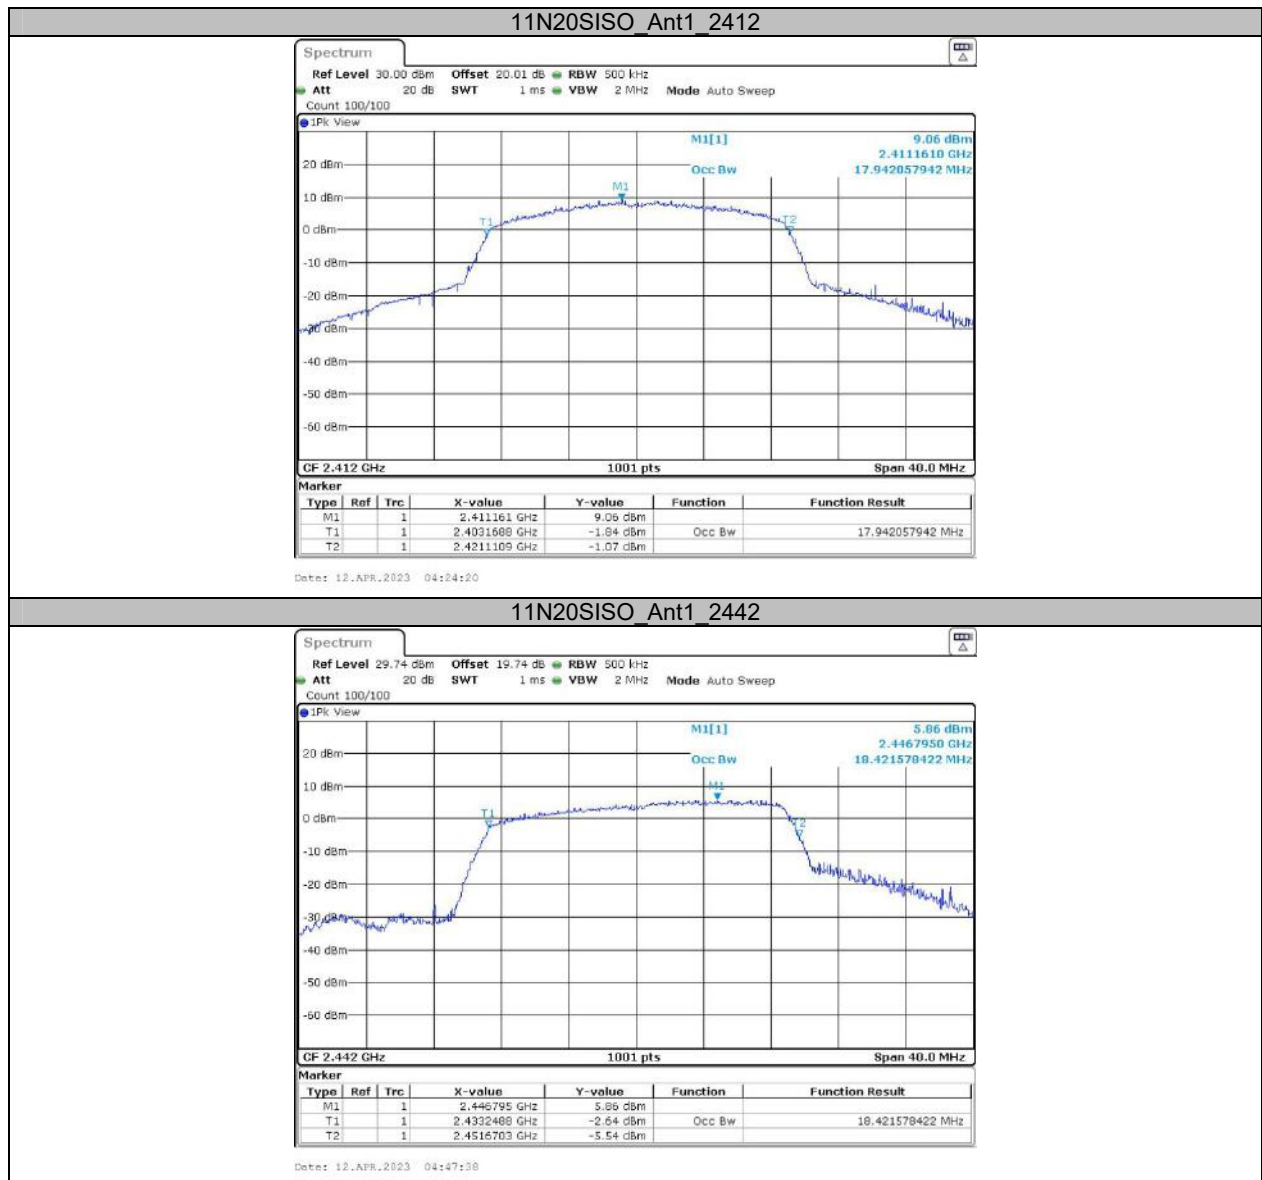

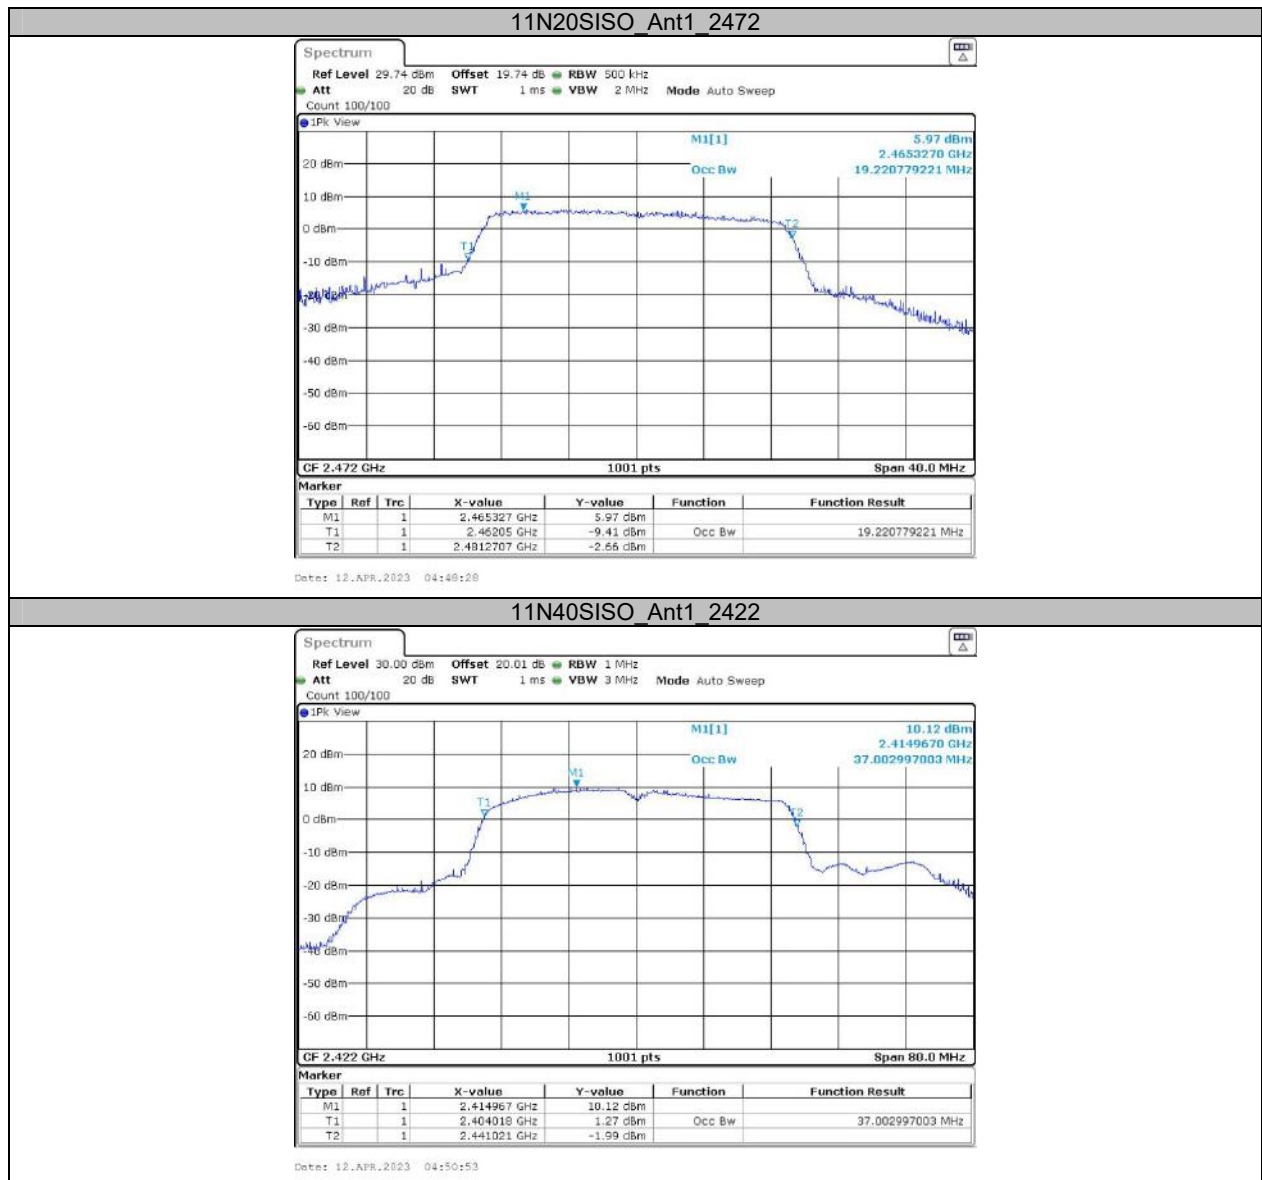

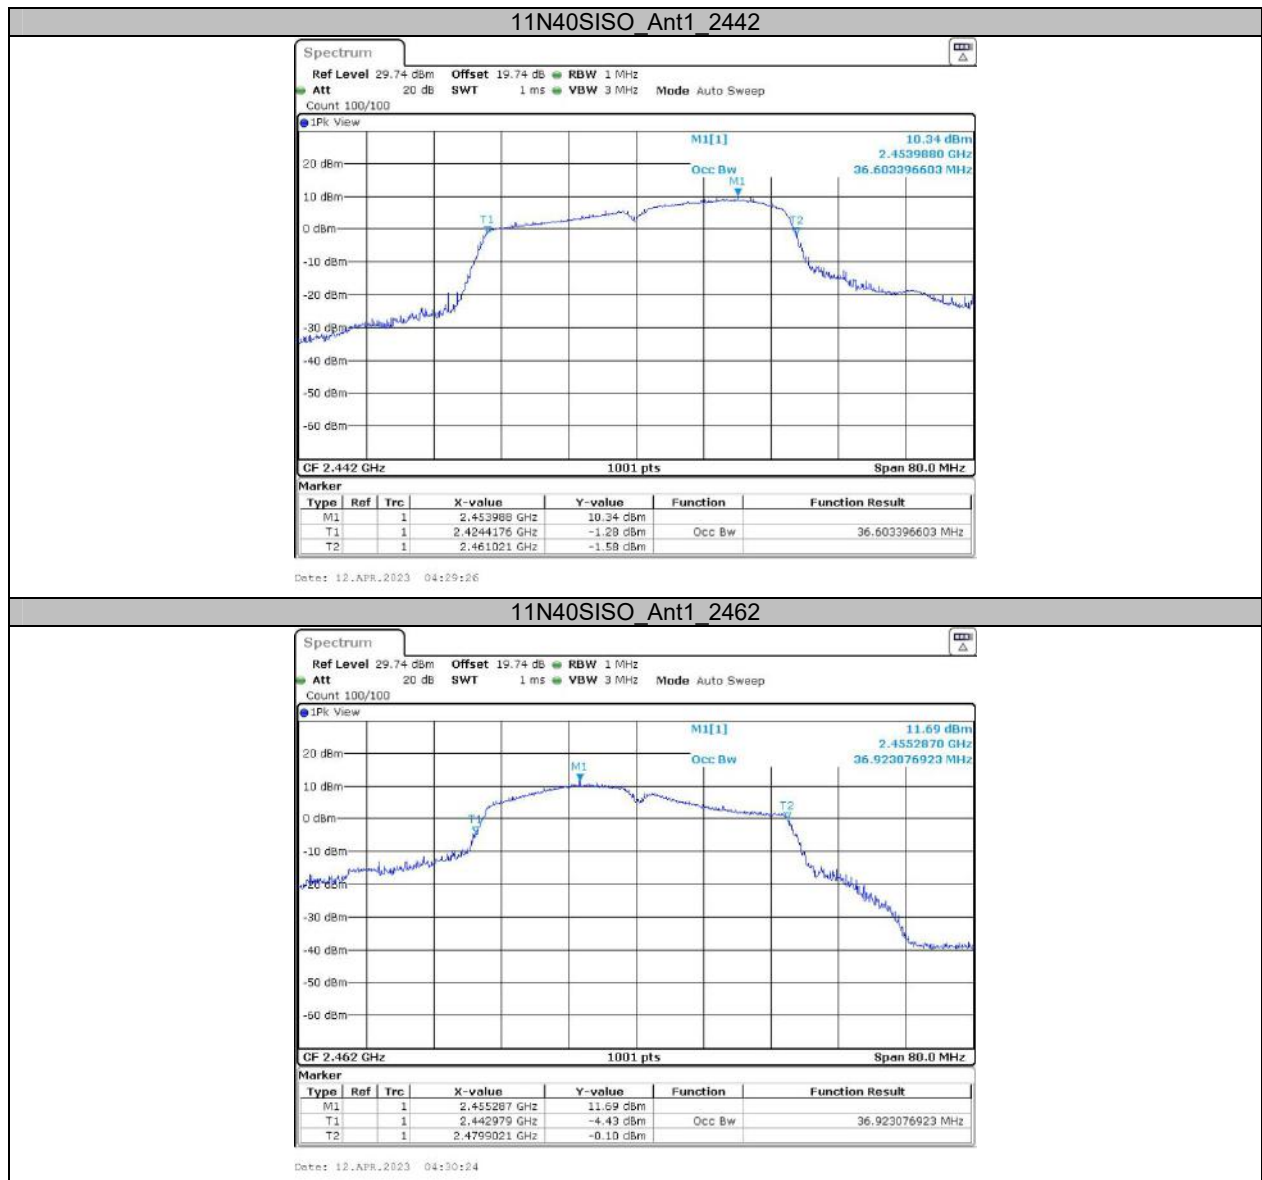


Appendix C: Maximum conducted output power**Test Result Average**


Test Mode	Antenna	Frequency[MHz]	AveragePower[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	11.83	≤30.00	PASS
		2442	11.05	≤30.00	PASS
		2472	11.89	≤30.00	PASS
11G	Ant1	2412	8.68	≤30.00	PASS
		2442	7.87	≤30.00	PASS
		2472	8.61	≤30.00	PASS
11N20SISO	Ant1	2412	8.51	≤30.00	PASS
		2442	7.83	≤30.00	PASS
		2472	8.61	≤30.00	PASS
11N40SISO	Ant1	2422	10.09	≤30.00	PASS
		2442	9.01	≤30.00	PASS
		2462	9.88	≤30.00	PASS


**Appendix D: Maximum power spectral density
Test Result**


Test Mode	Antenna	Frequency[MHz]	Reading [dBm/10kHz]	Duty Cycle Factor(dB)	Result [dBm/10kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.99	-	-13.99	≤8.00	PASS
		2442	-14.59	-	-14.59	≤8.00	PASS
		2472	-14.51	-	-14.51	≤8.00	PASS
11G	Ant1	2412	-18.6	0.15	-18.45	≤8.00	PASS
		2442	-20.02	0.15	-19.87	≤8.00	PASS
		2472	-19.52	0.15	-19.37	≤8.00	PASS
11N20SISO	Ant1	2412	-18.22	0.16	-18.06	≤8.00	PASS
		2442	-20.18	0.16	-20.02	≤8.00	PASS
		2472	-19.73	0.16	-19.57	≤8.00	PASS
11N40SISO	Ant1	2422	-19.6	0.33	-19.27	≤8.00	PASS
		2442	-19.16	0.33	-18.83	≤8.00	PASS
		2462	-17.9	0.33	-17.57	≤8.00	PASS


Test Graphs

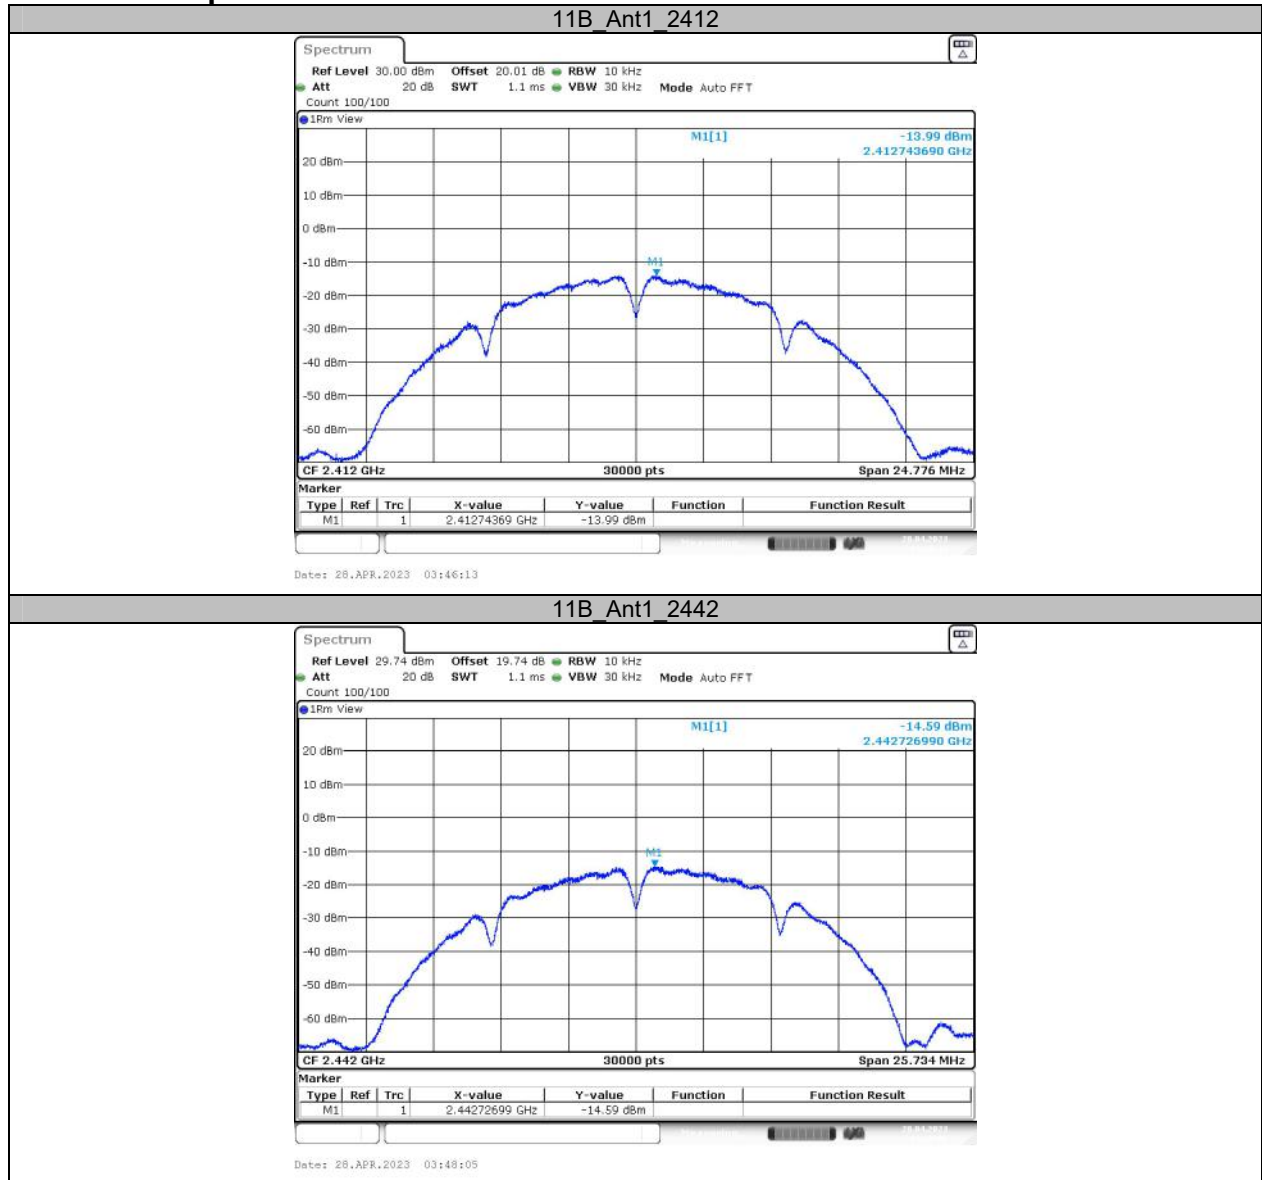


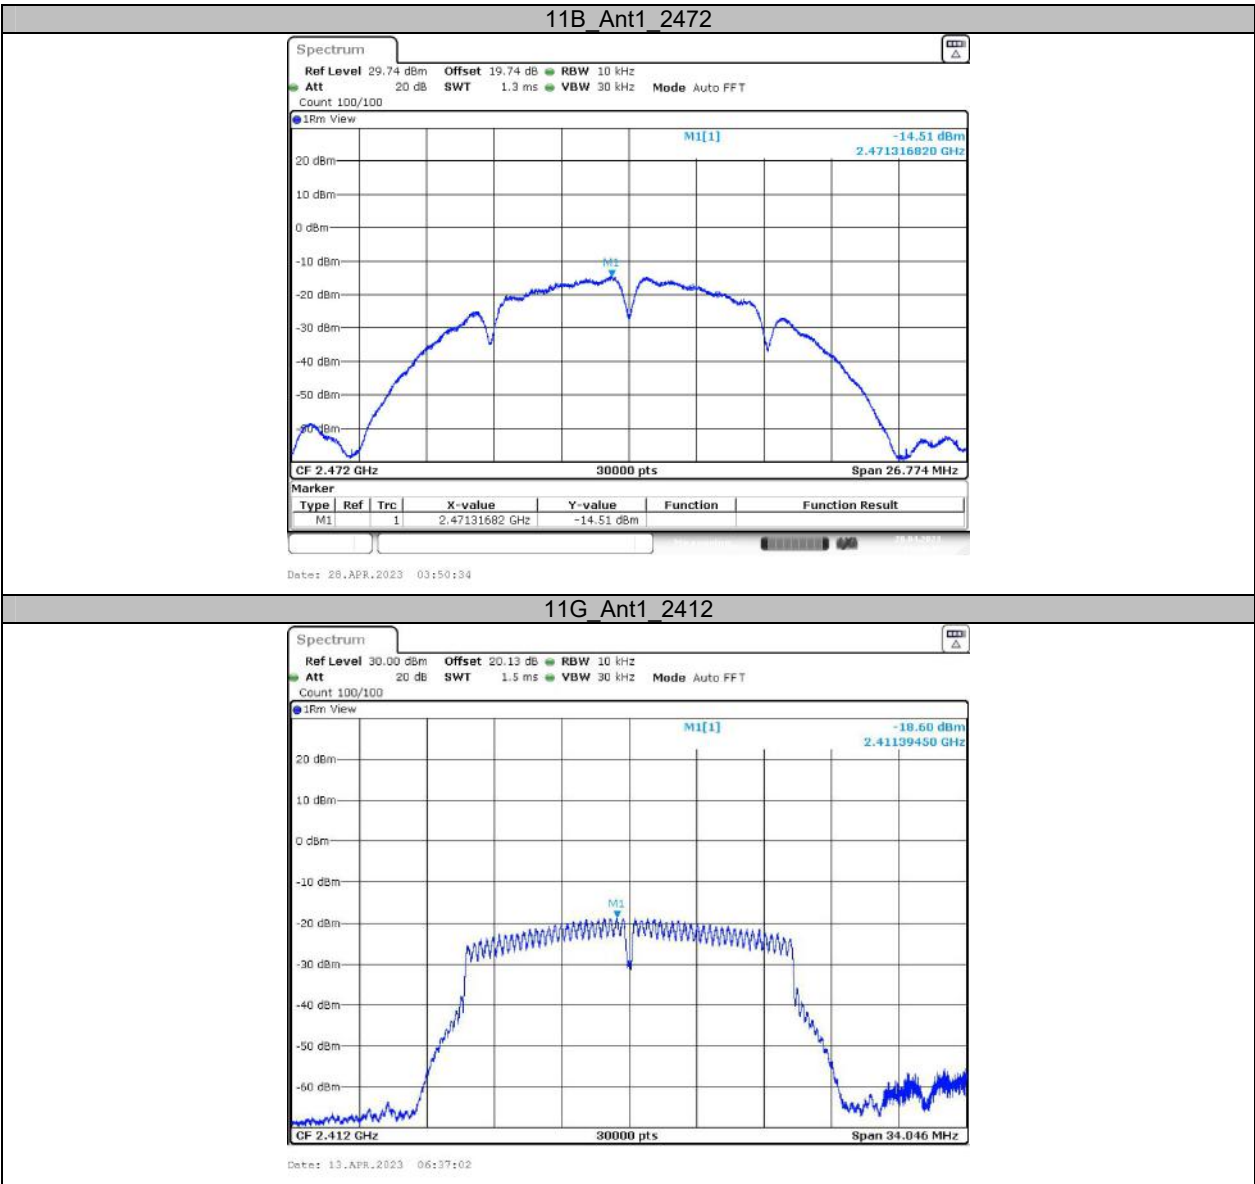

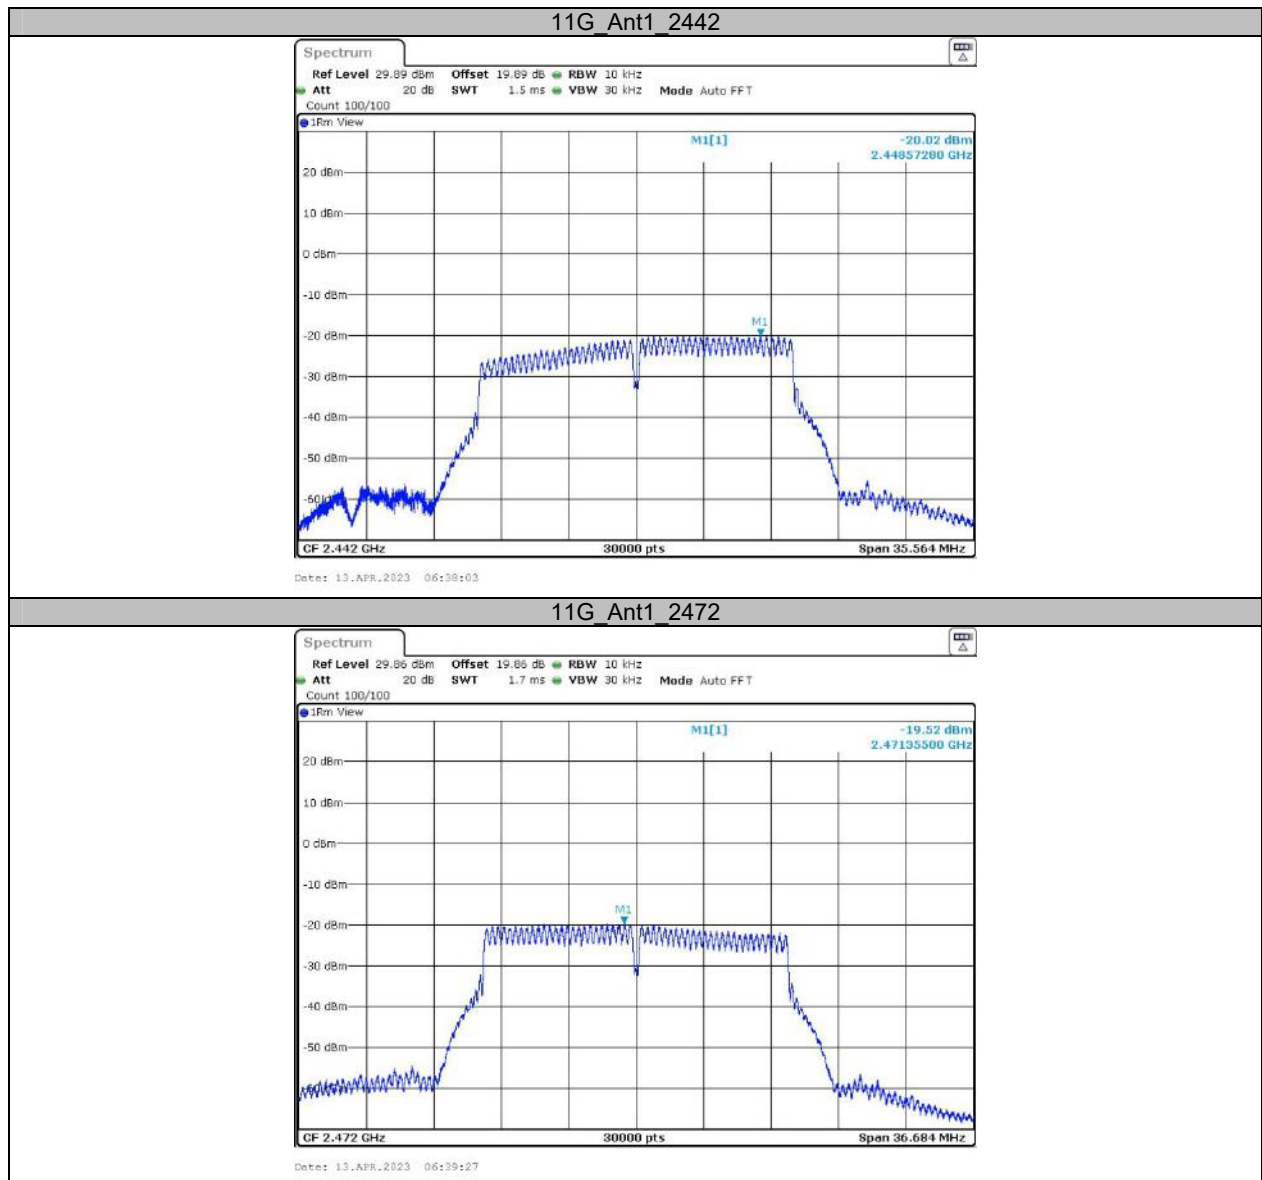

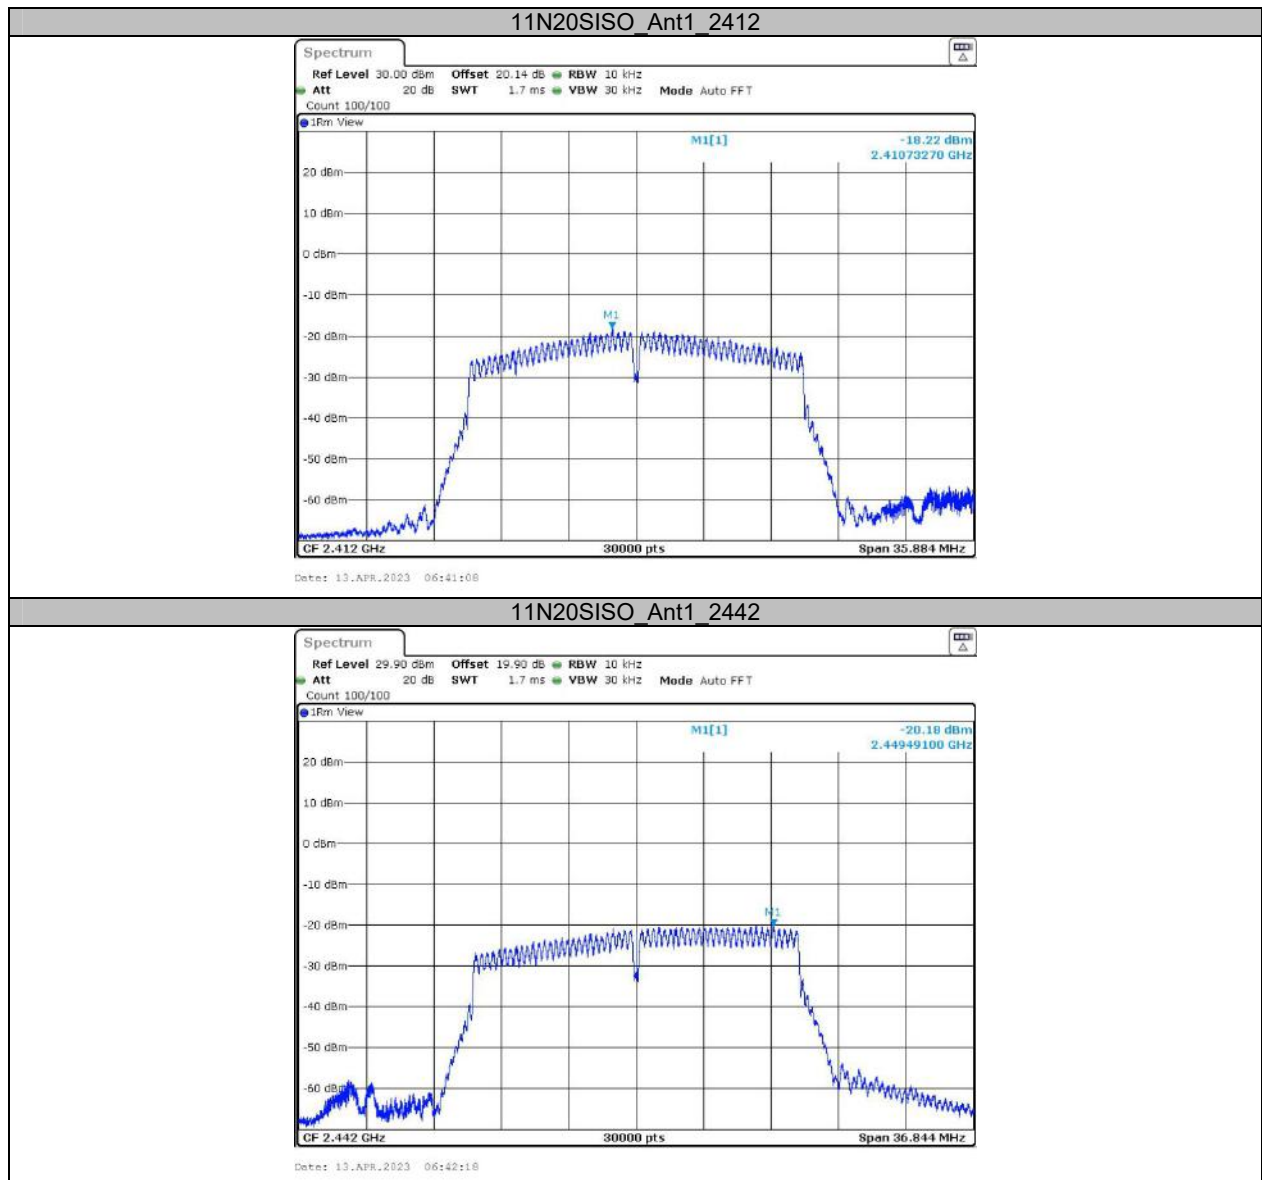


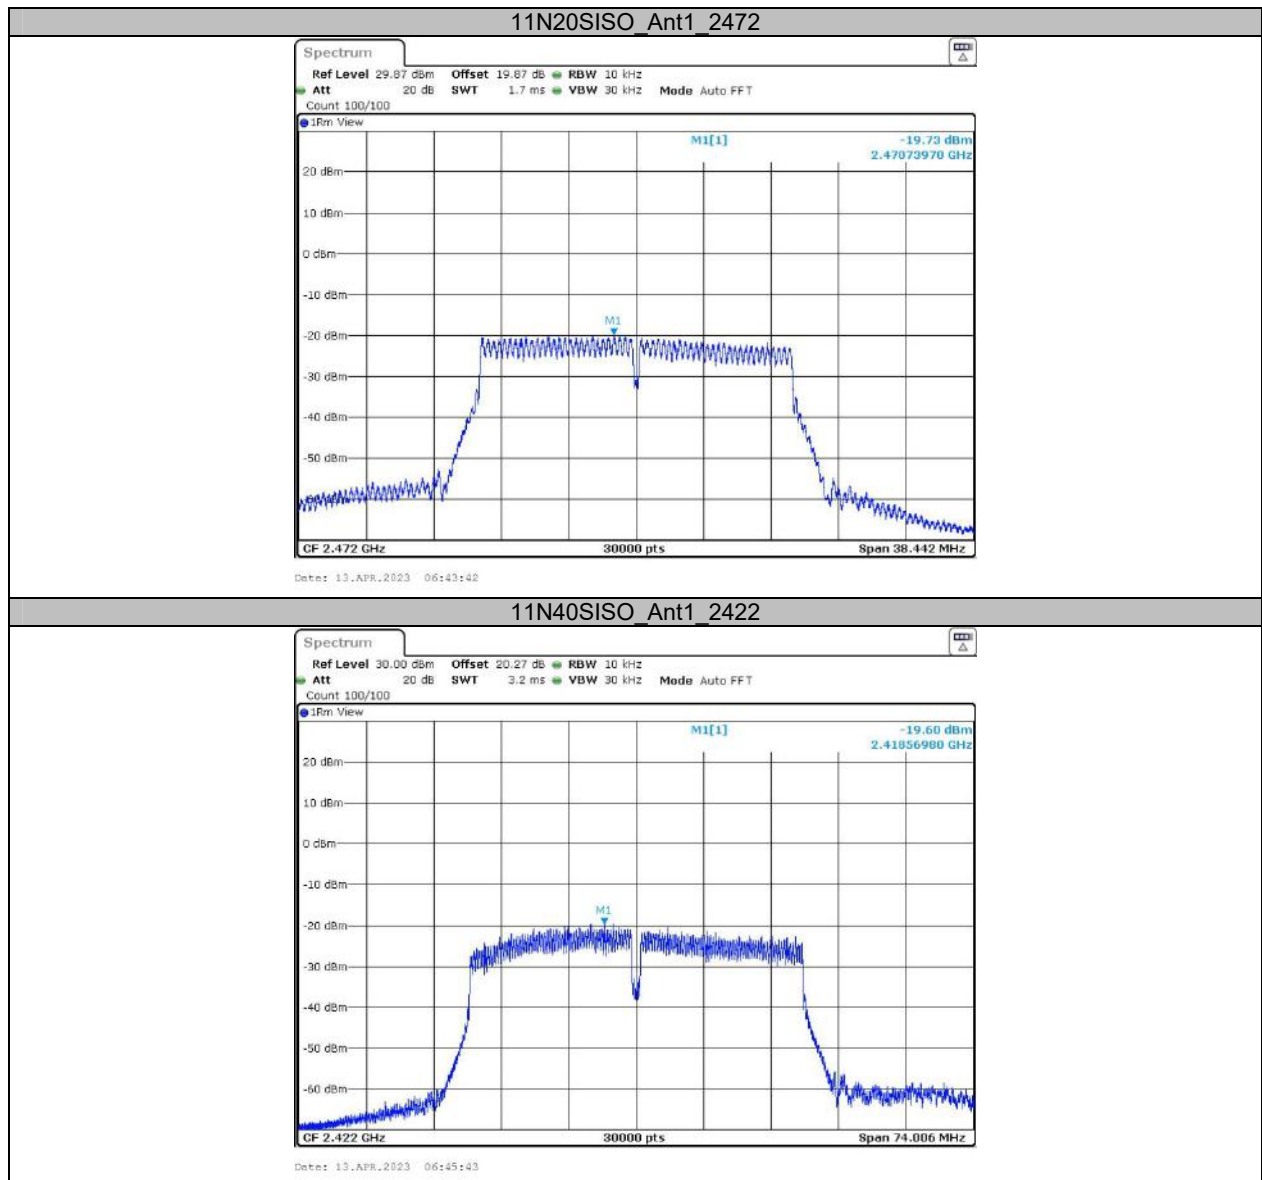

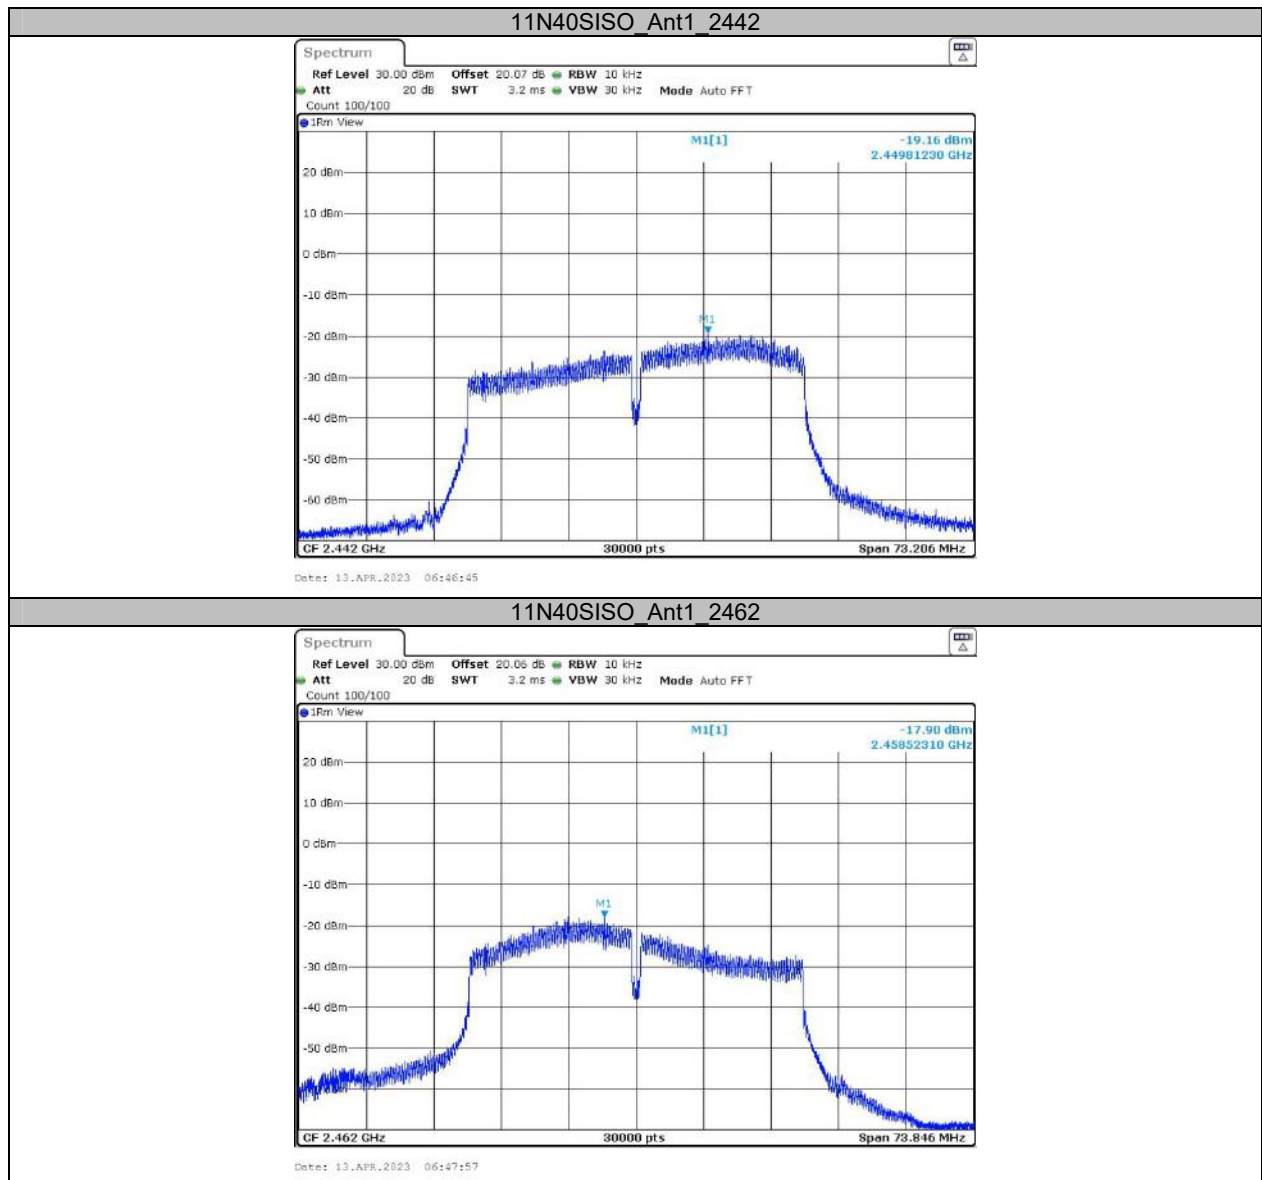


Appendix E: Band edge measurements

Test Graphs

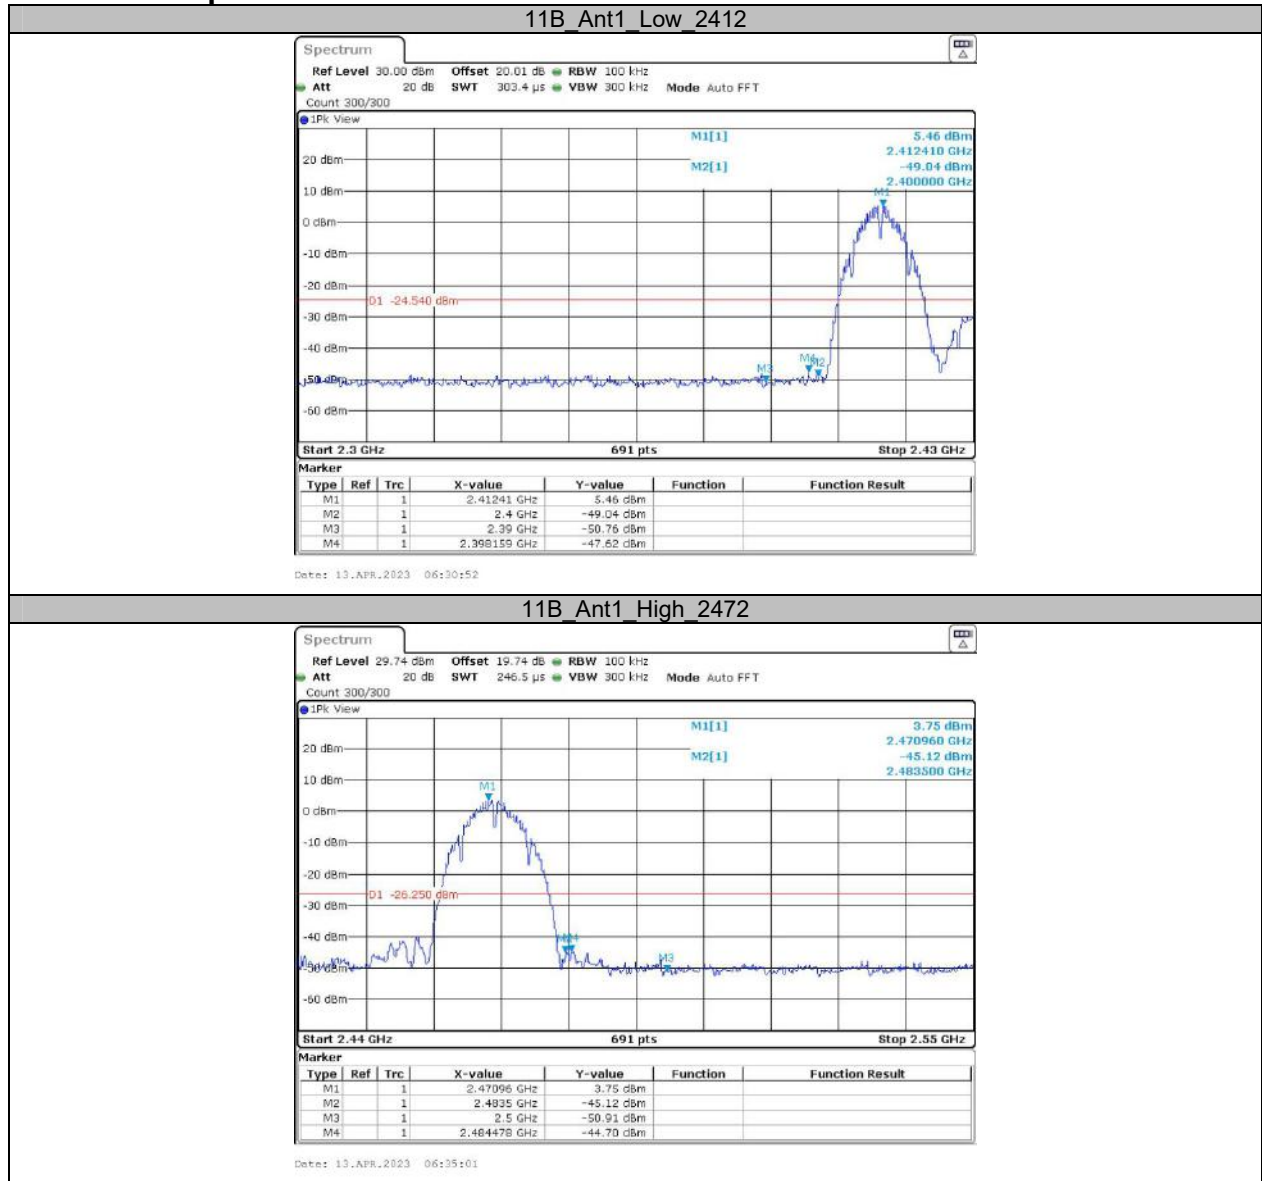

11G Ant1 Low 2412

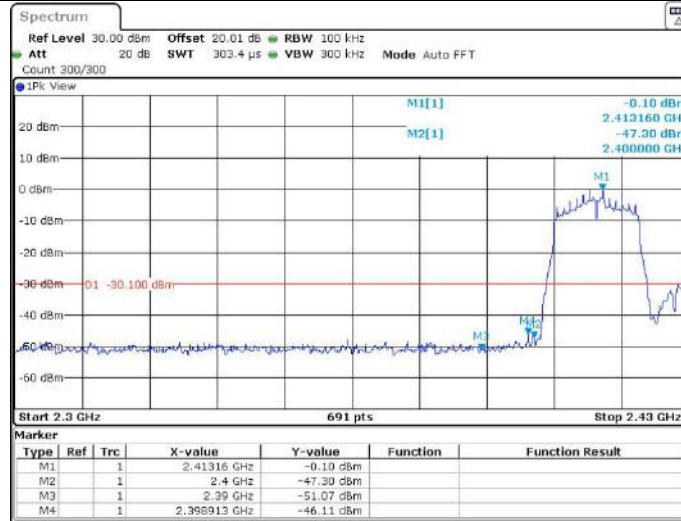



Date: 13.APR.2023 06:37:11

11G Ant1 High 2472



Date: 13.APR.2023 06:39:36

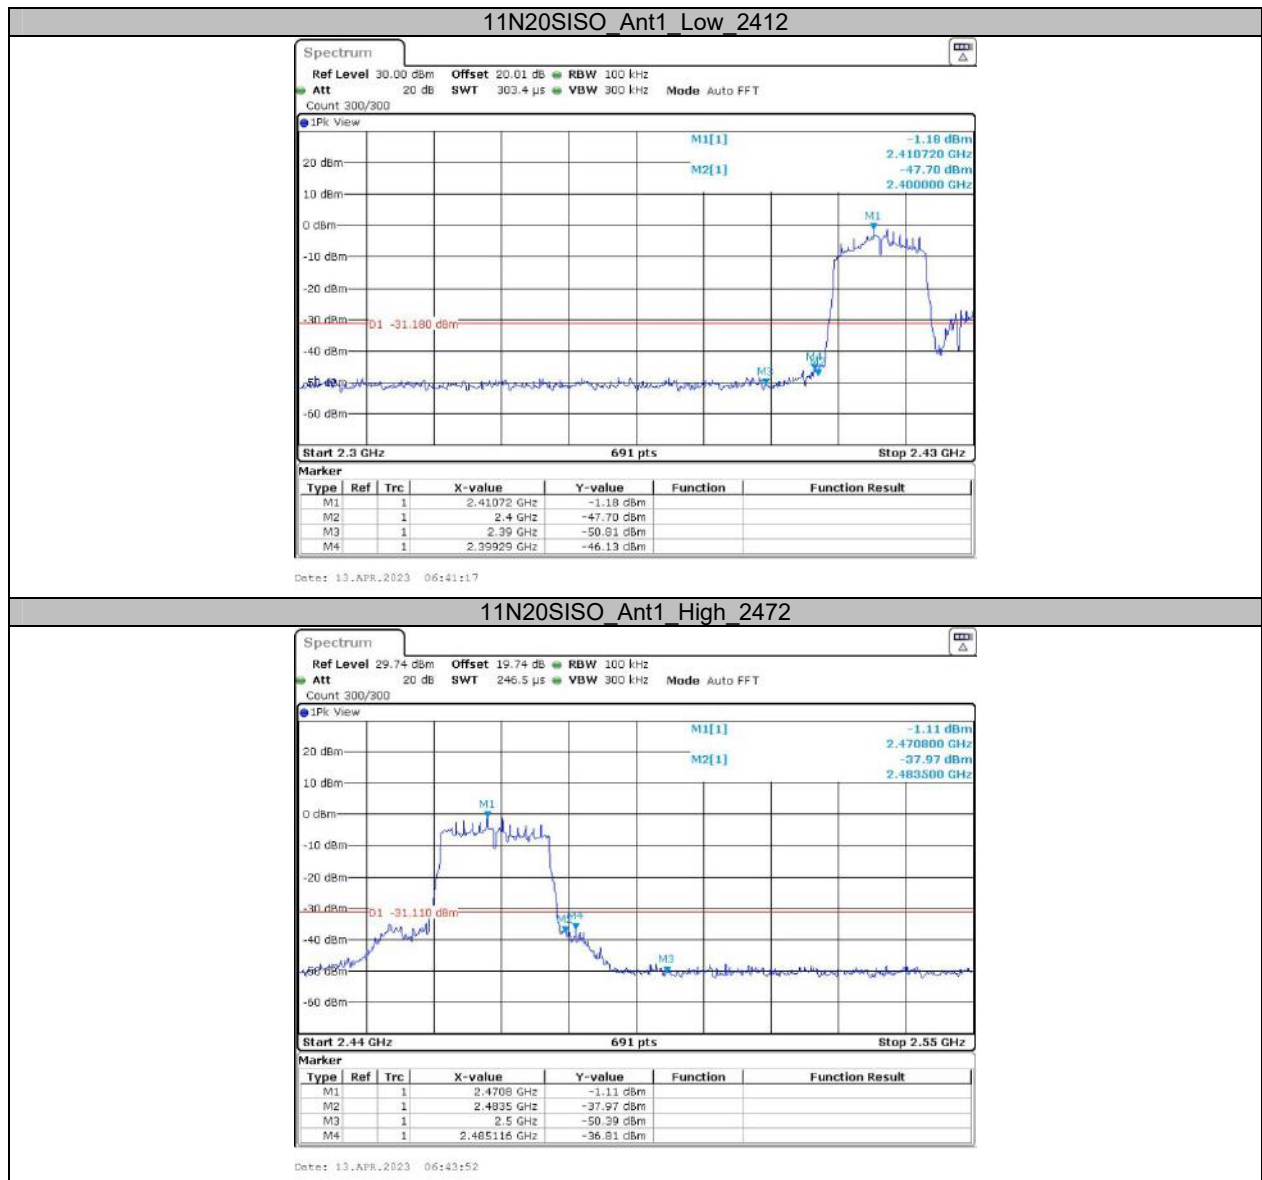

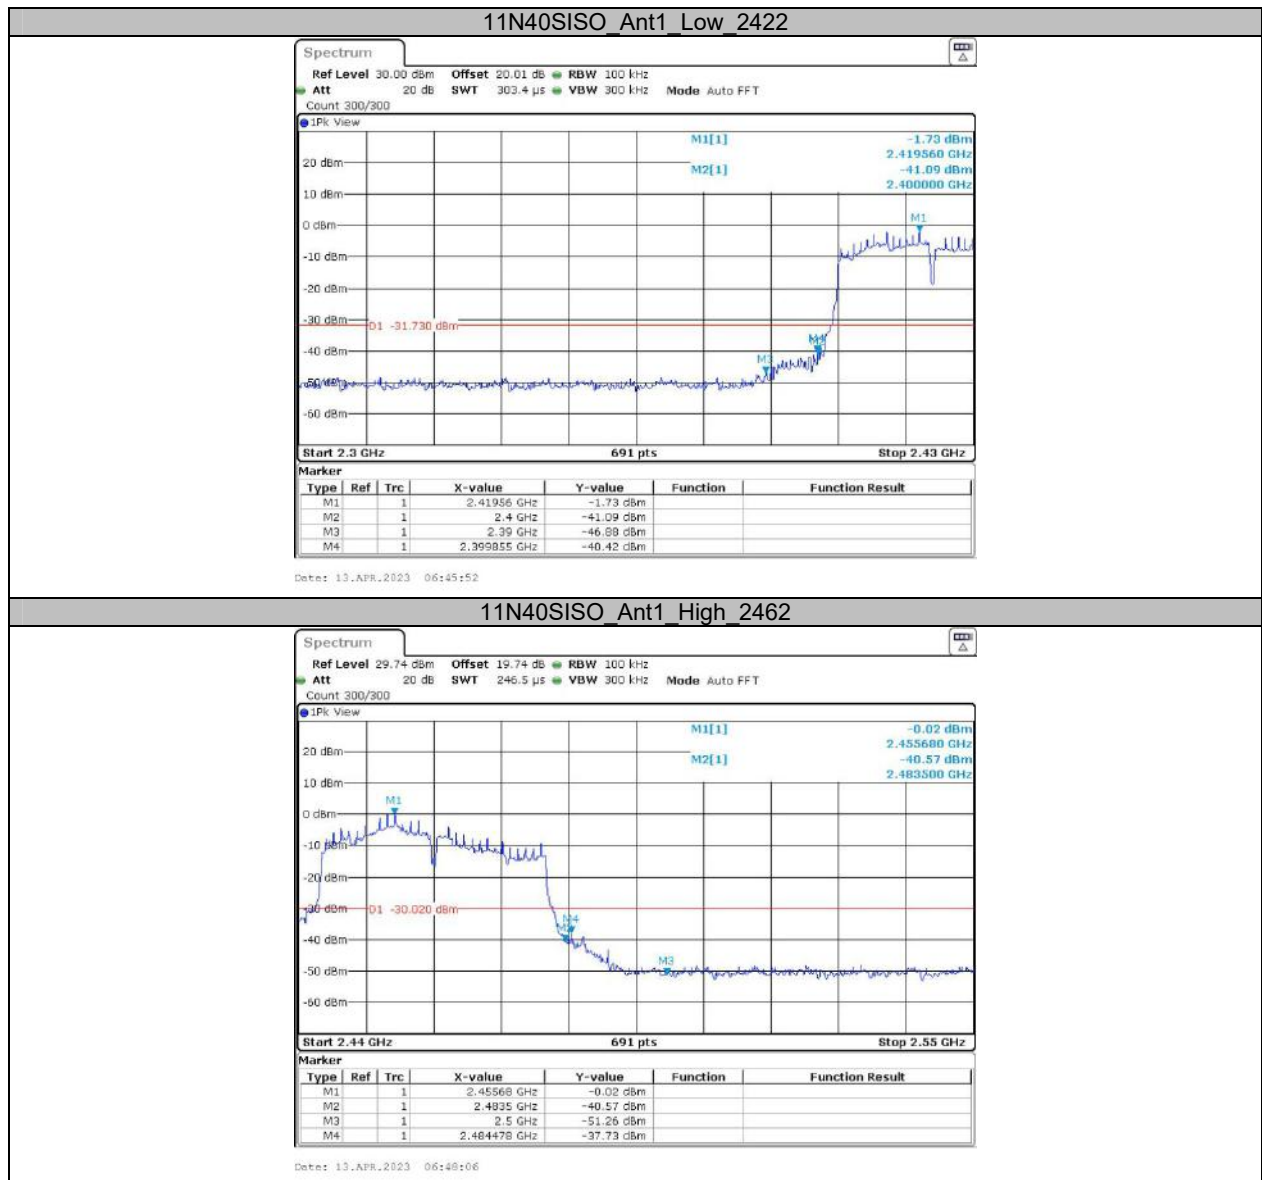

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
11B	Ant1	2442	8.39	8.43	99.53	/	/
11G	Ant1	2442	1.39	1.44	96.53	0.15	0.72
11N20SISO	Ant1	2442	1.30	1.35	96.30	0.16	0.77
11N40SISO	Ant1	2442	0.64	0.69	92.75	0.33	1.56

Test Graphs







APPENDIX BLE- Aux Antenna


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.67	2402.33	0.5	PASS
		2440	0.66	2439.67	2440.33	0.5	PASS
		2480	0.66	2479.67	2480.33	0.5	PASS
BLE_2M	Ant1	2402	1.16	2401.42	2402.58	0.5	PASS
		2440	1.17	2439.42	2440.58	0.5	PASS
		2480	1.16	2479.42	2480.58	0.5	PASS

Test Graphs

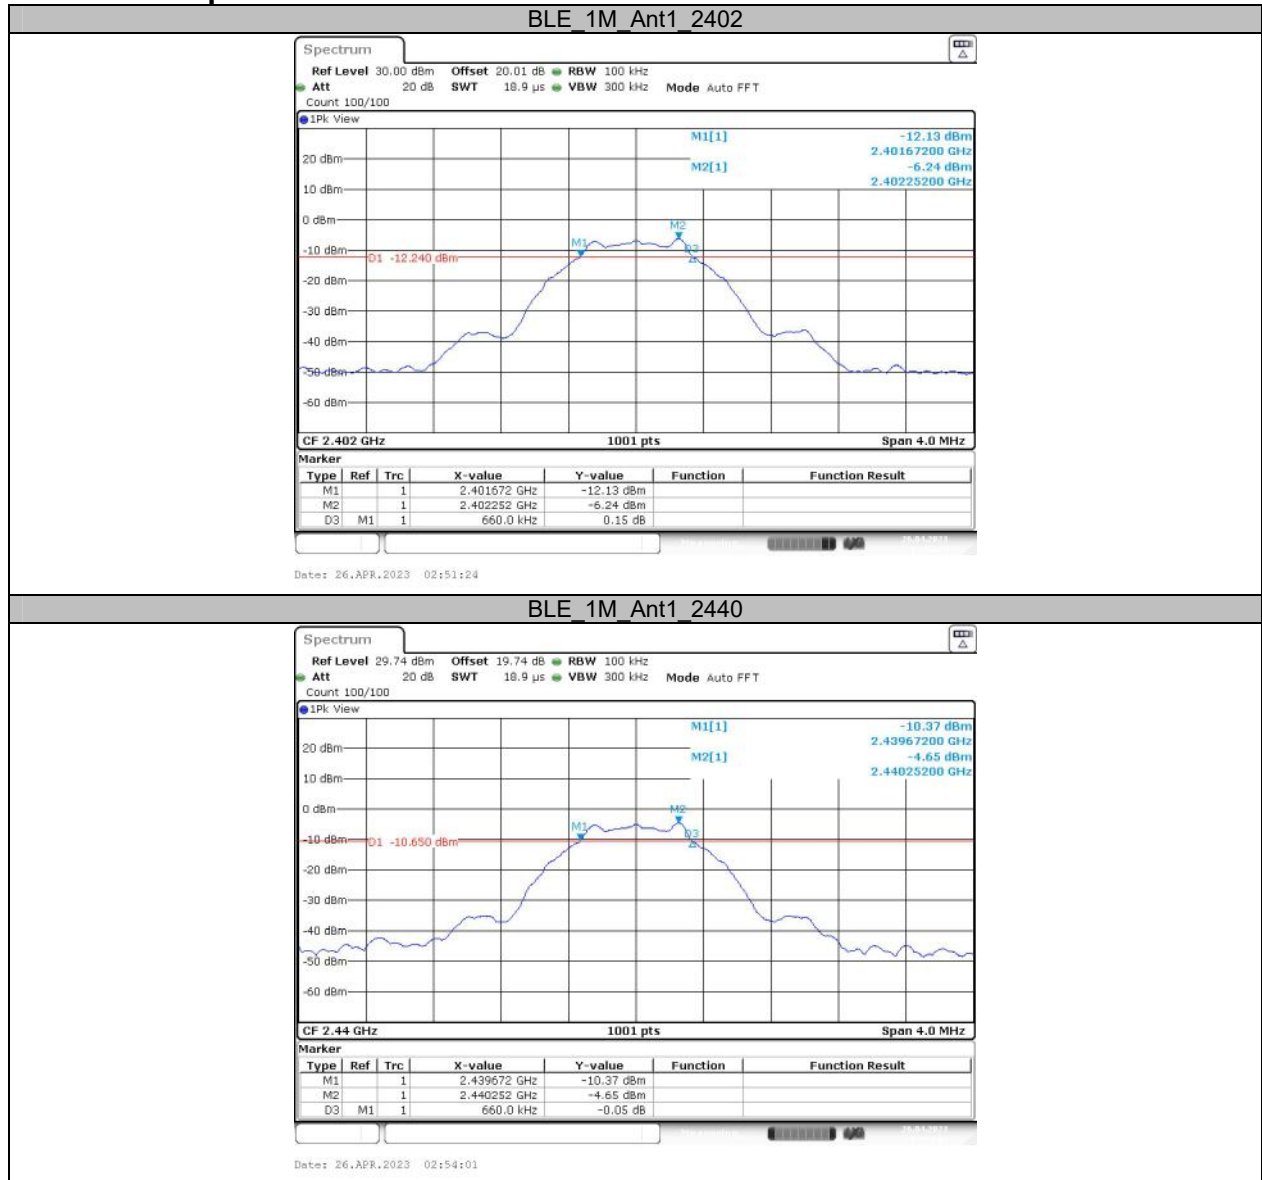

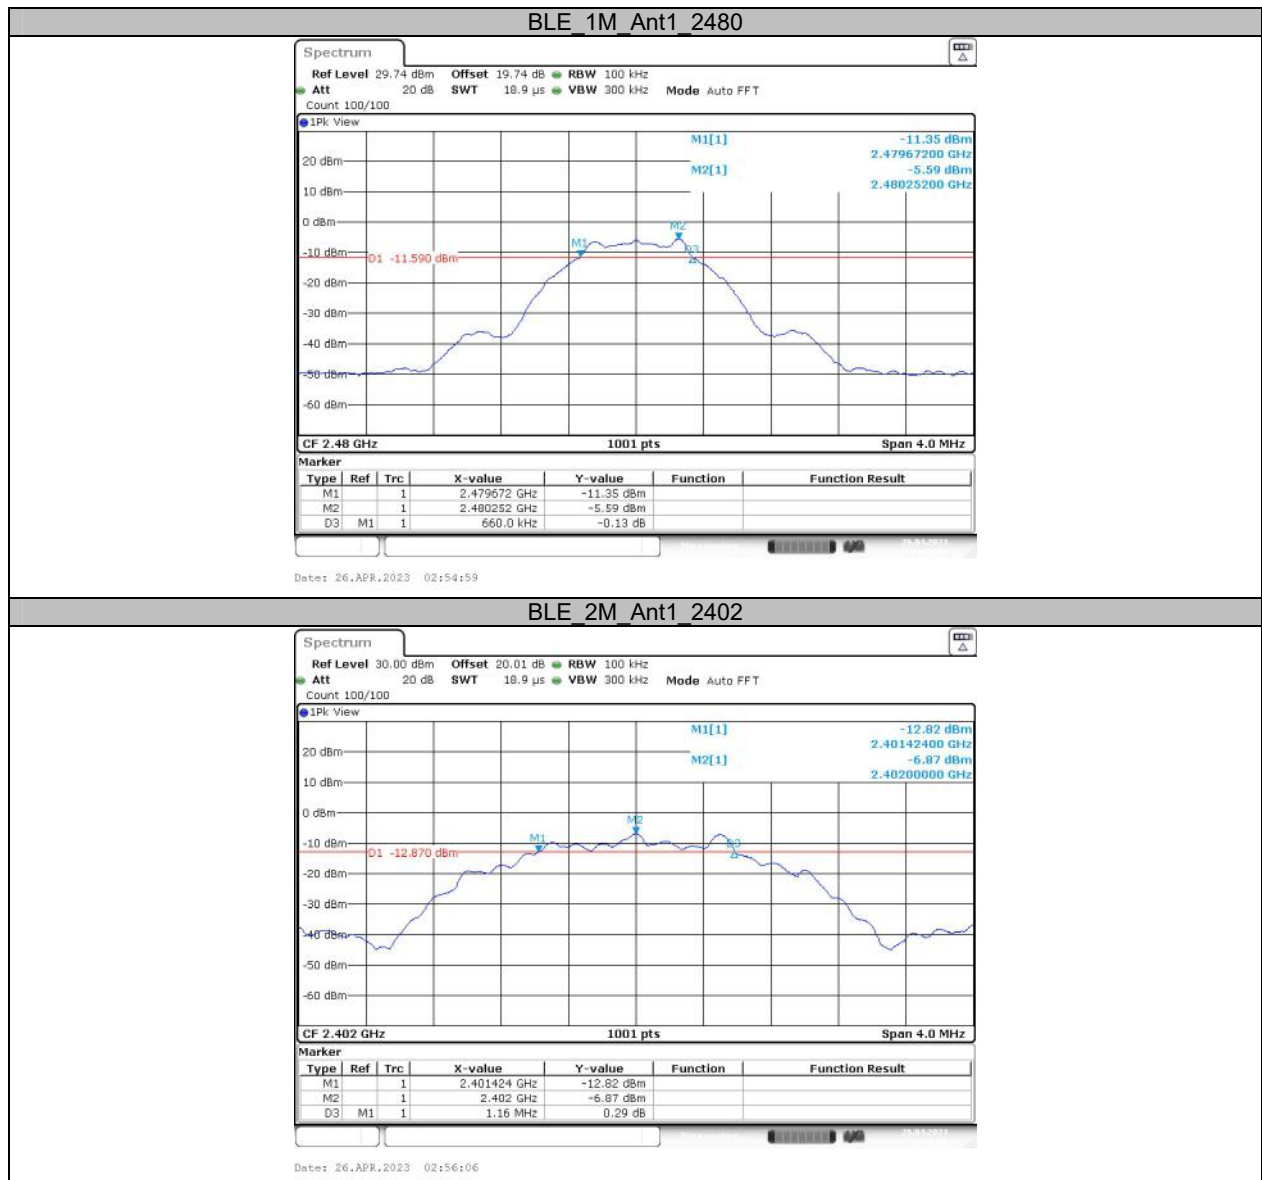


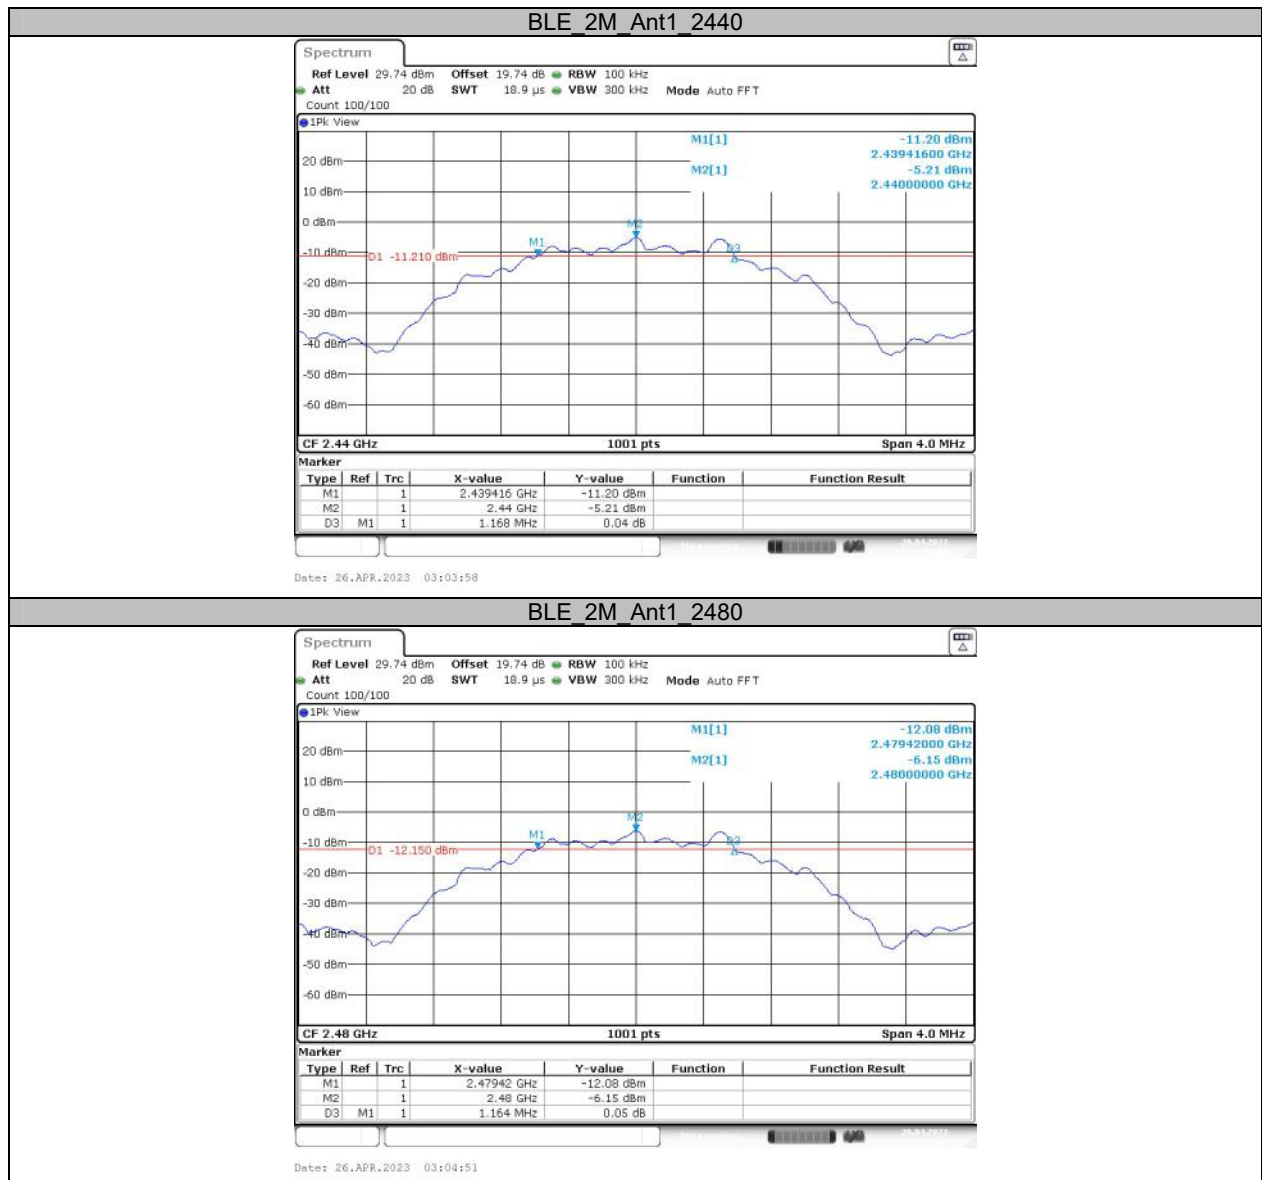



**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	2401.493	2402.531	---	---
		2440	1.039	2439.489	2440.527	---	---
		2480	1.039	2479.489	2480.527	---	---
BLE_2M	Ant1	2402	2.078	2400.981	2403.059	---	---
		2440	2.074	2438.977	2441.051	---	---
		2480	2.074	2478.977	2481.051	---	---

Test Graphs

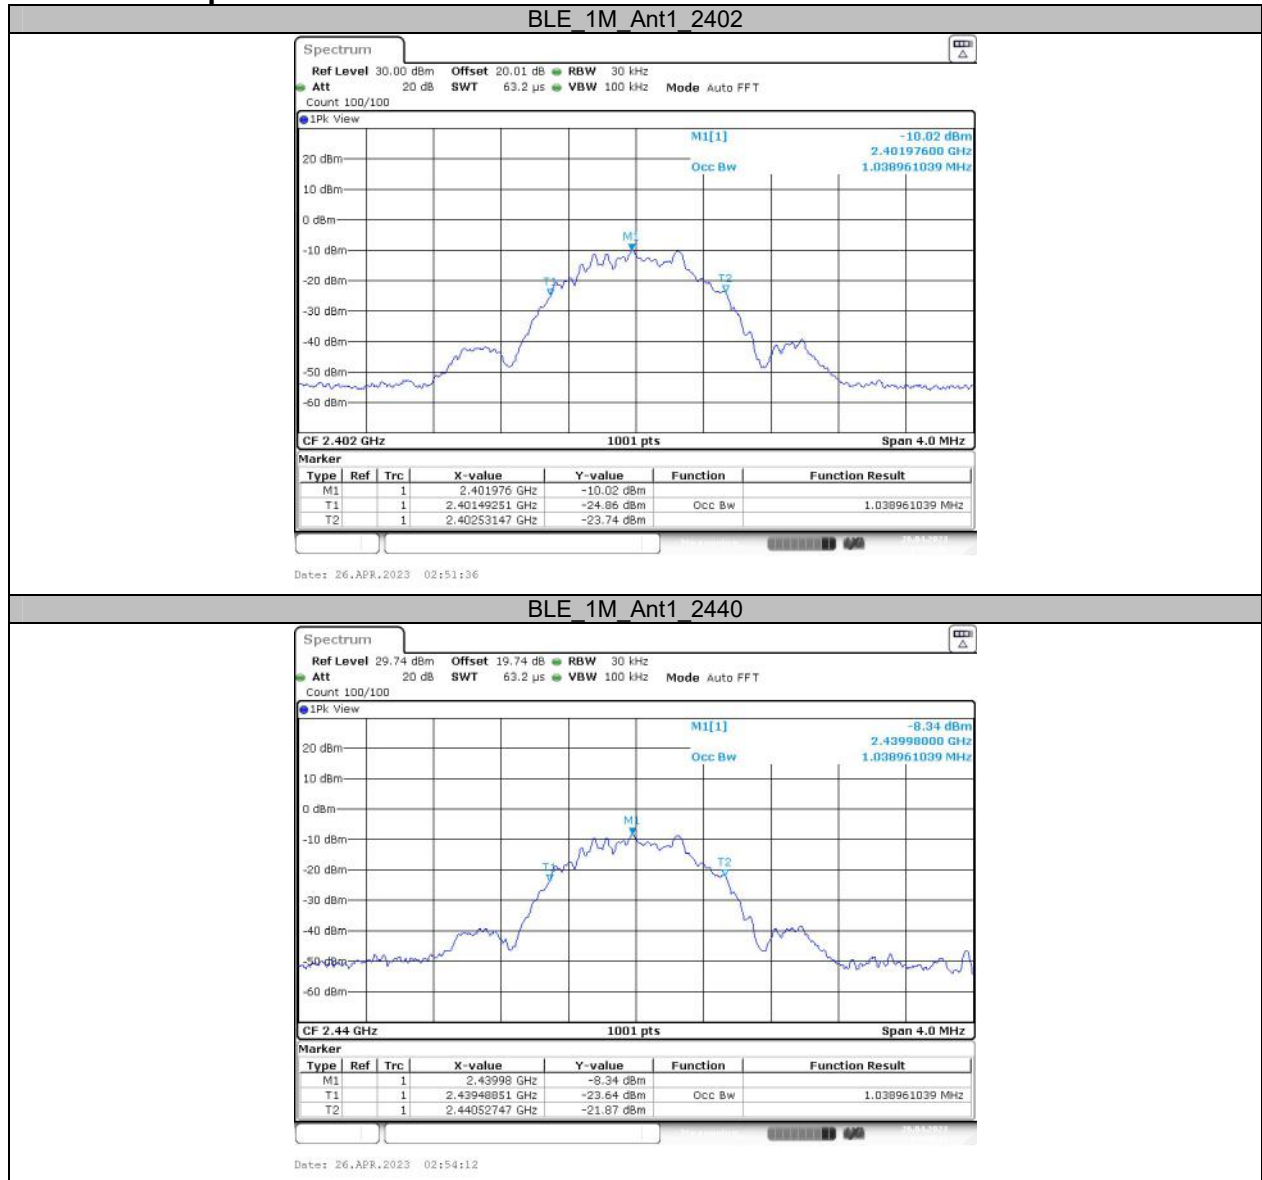

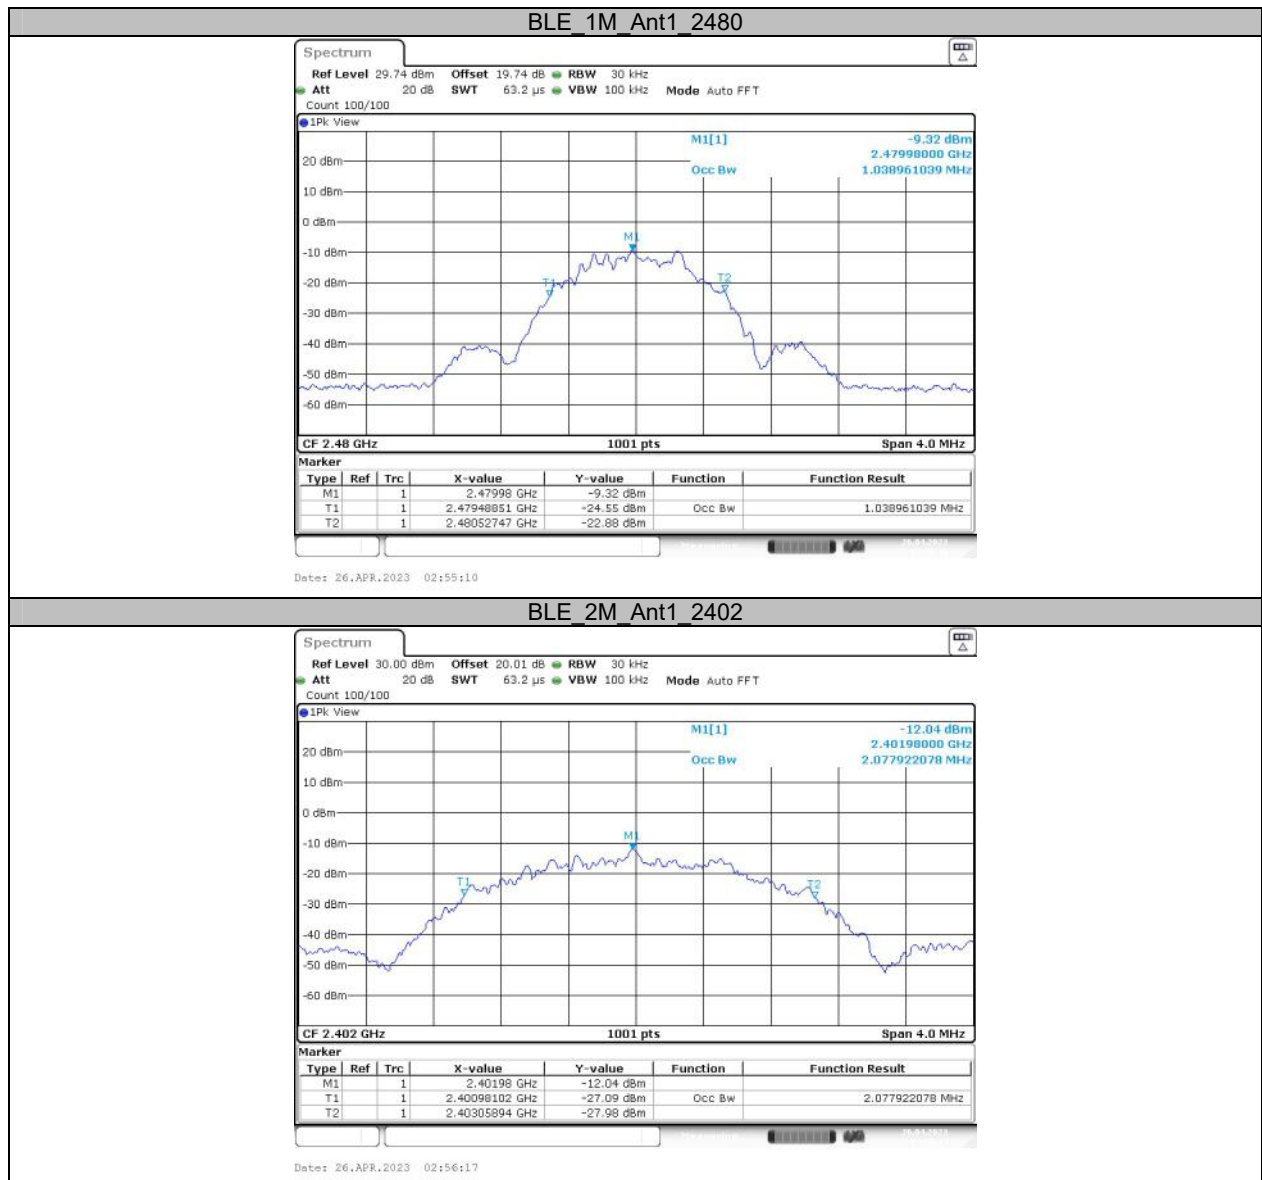


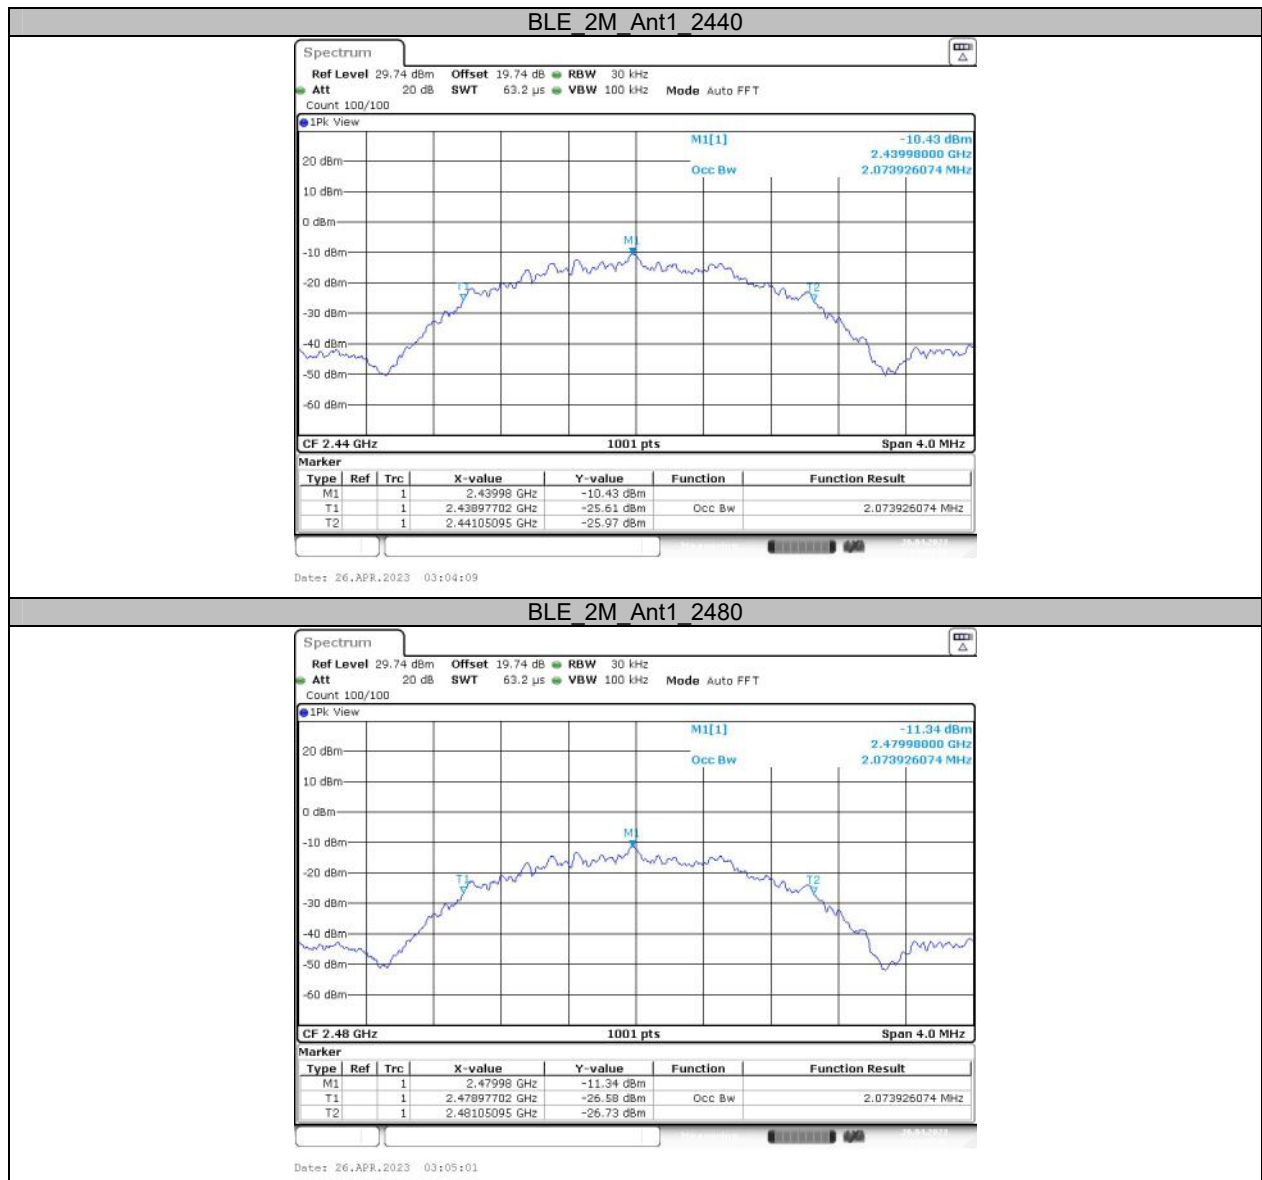

Appendix C: Maximum conducted output power Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-6.15	≤30	PASS
		2440	-4.35	≤30	PASS
		2480	-5.34	≤30	PASS
BLE_2M	Ant1	2402	-6.09	≤30	PASS
		2440	-4.33	≤30	PASS
		2480	-5.29	≤30	PASS

Test Graphs Peak

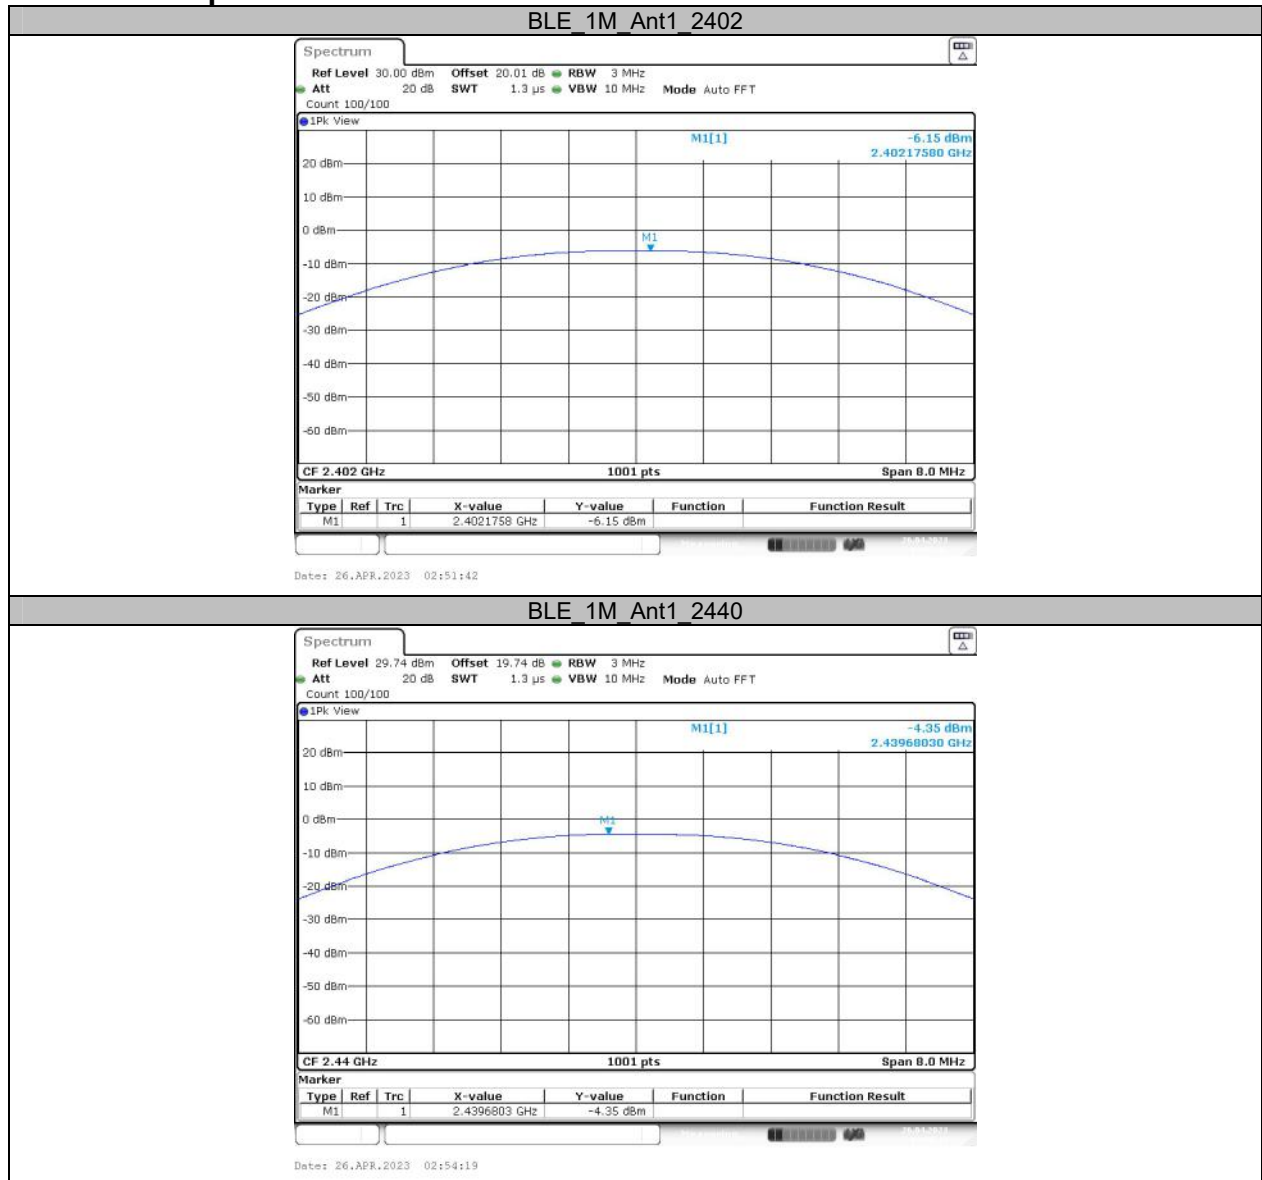








**Appendix D: Maximum power spectral density
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-22.89	≤8.00	PASS
		2440	-21.14	≤8.00	PASS
		2480	-22.13	≤8.00	PASS
BLE_2M	Ant1	2402	-25.02	≤8.00	PASS
		2440	-23.31	≤8.00	PASS
		2480	-24.26	≤8.00	PASS

Test Graphs

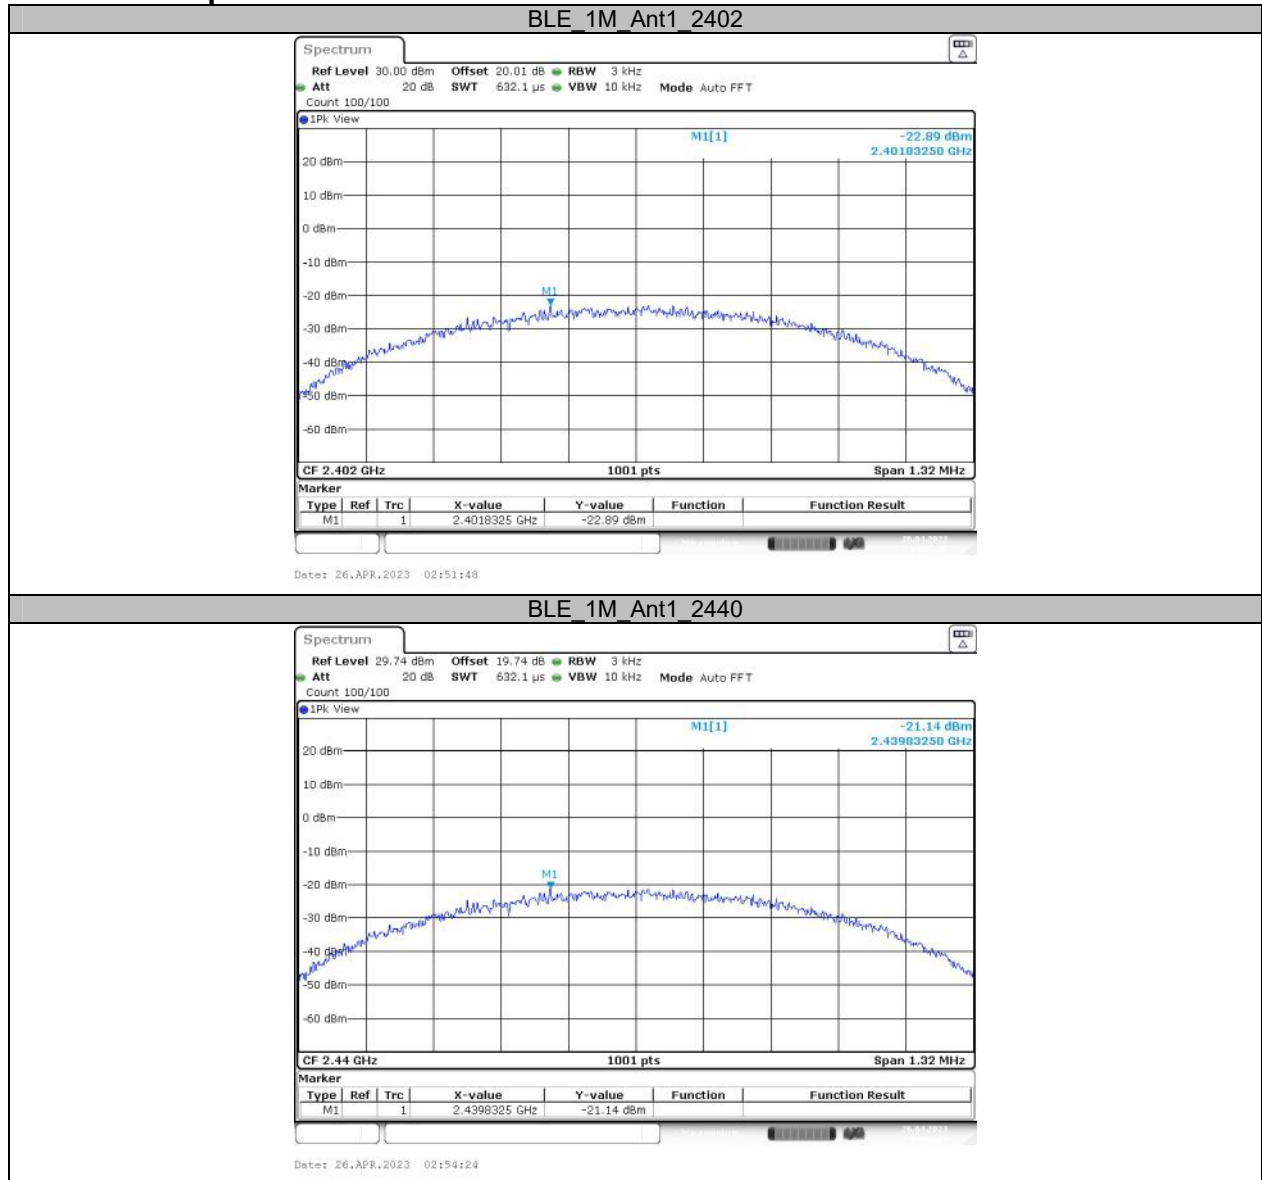


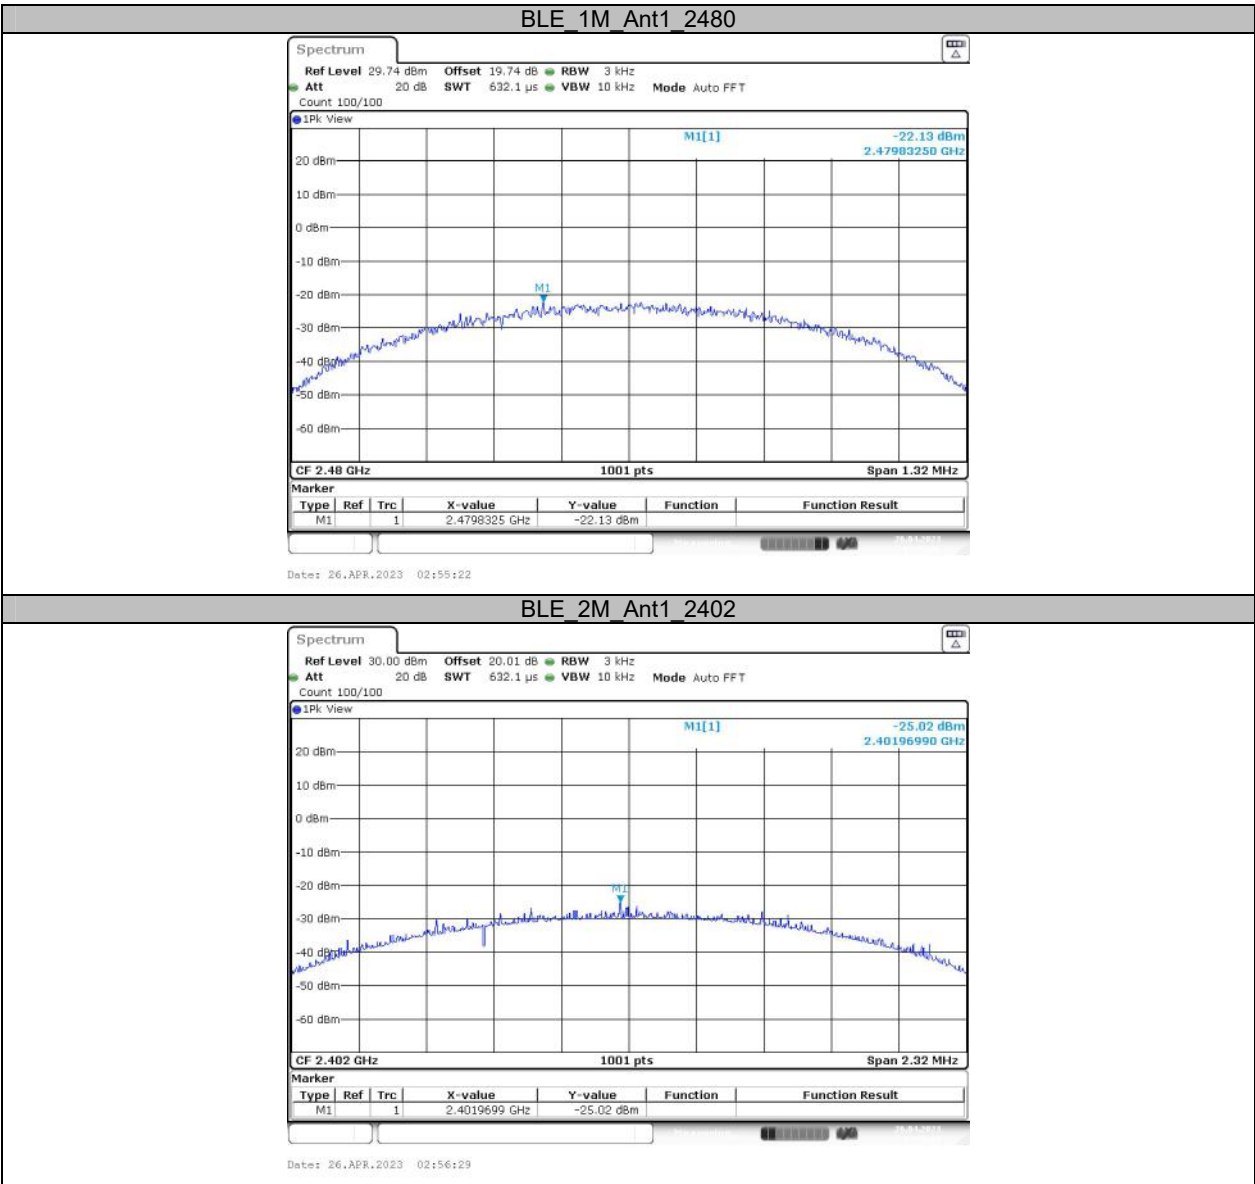


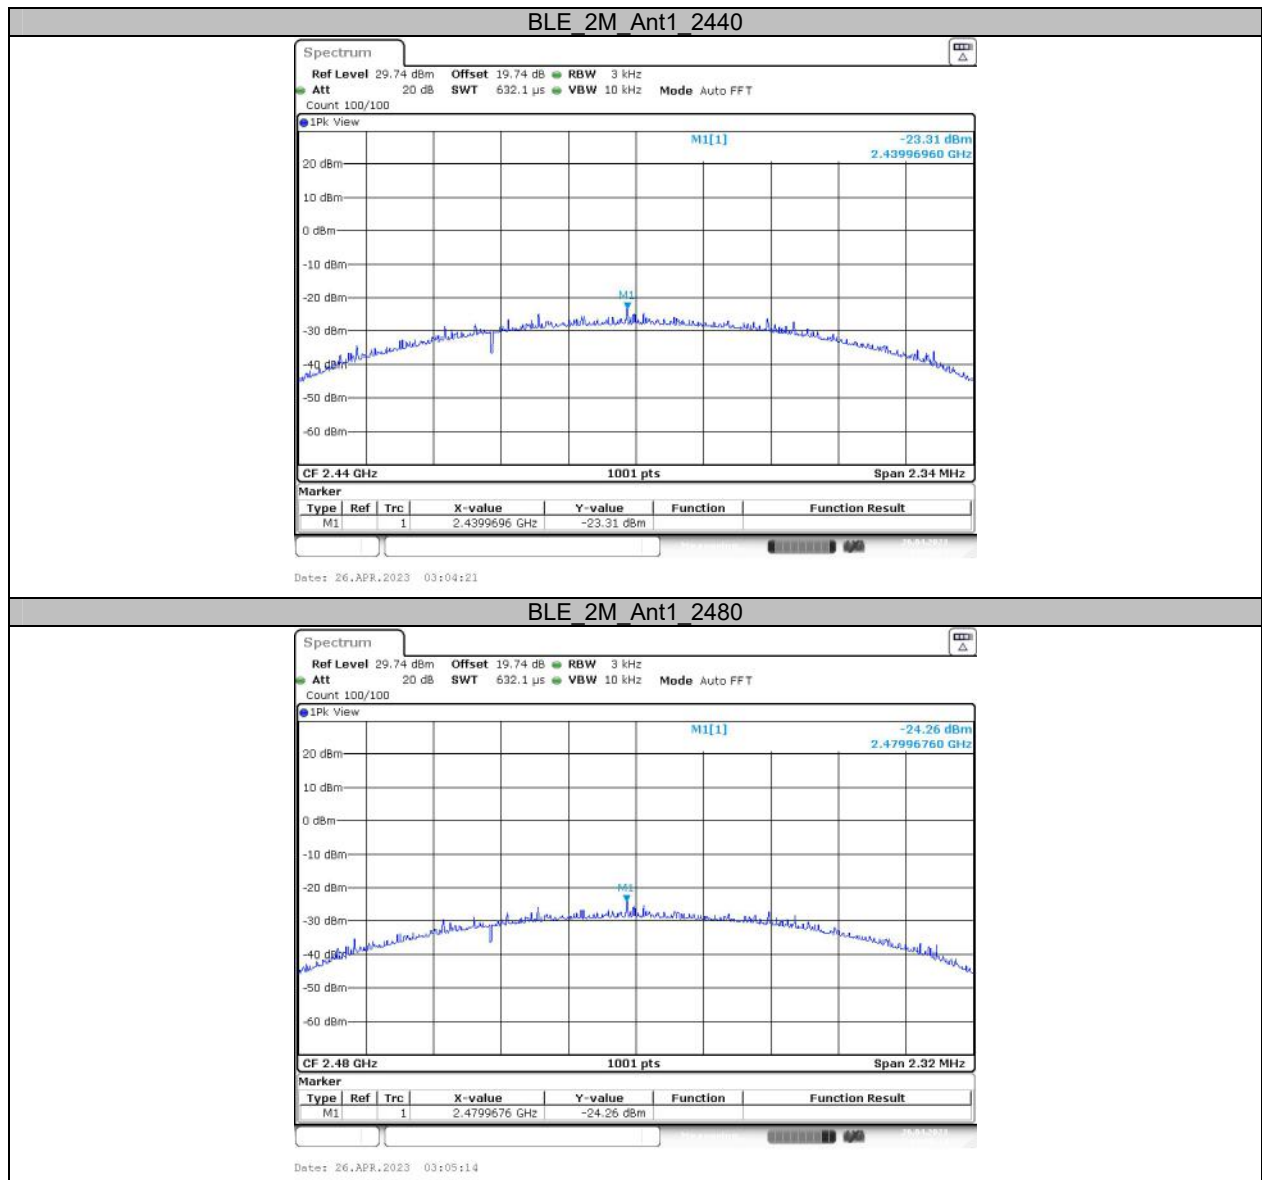

Appendix E: Band edge measurements

Test Graphs

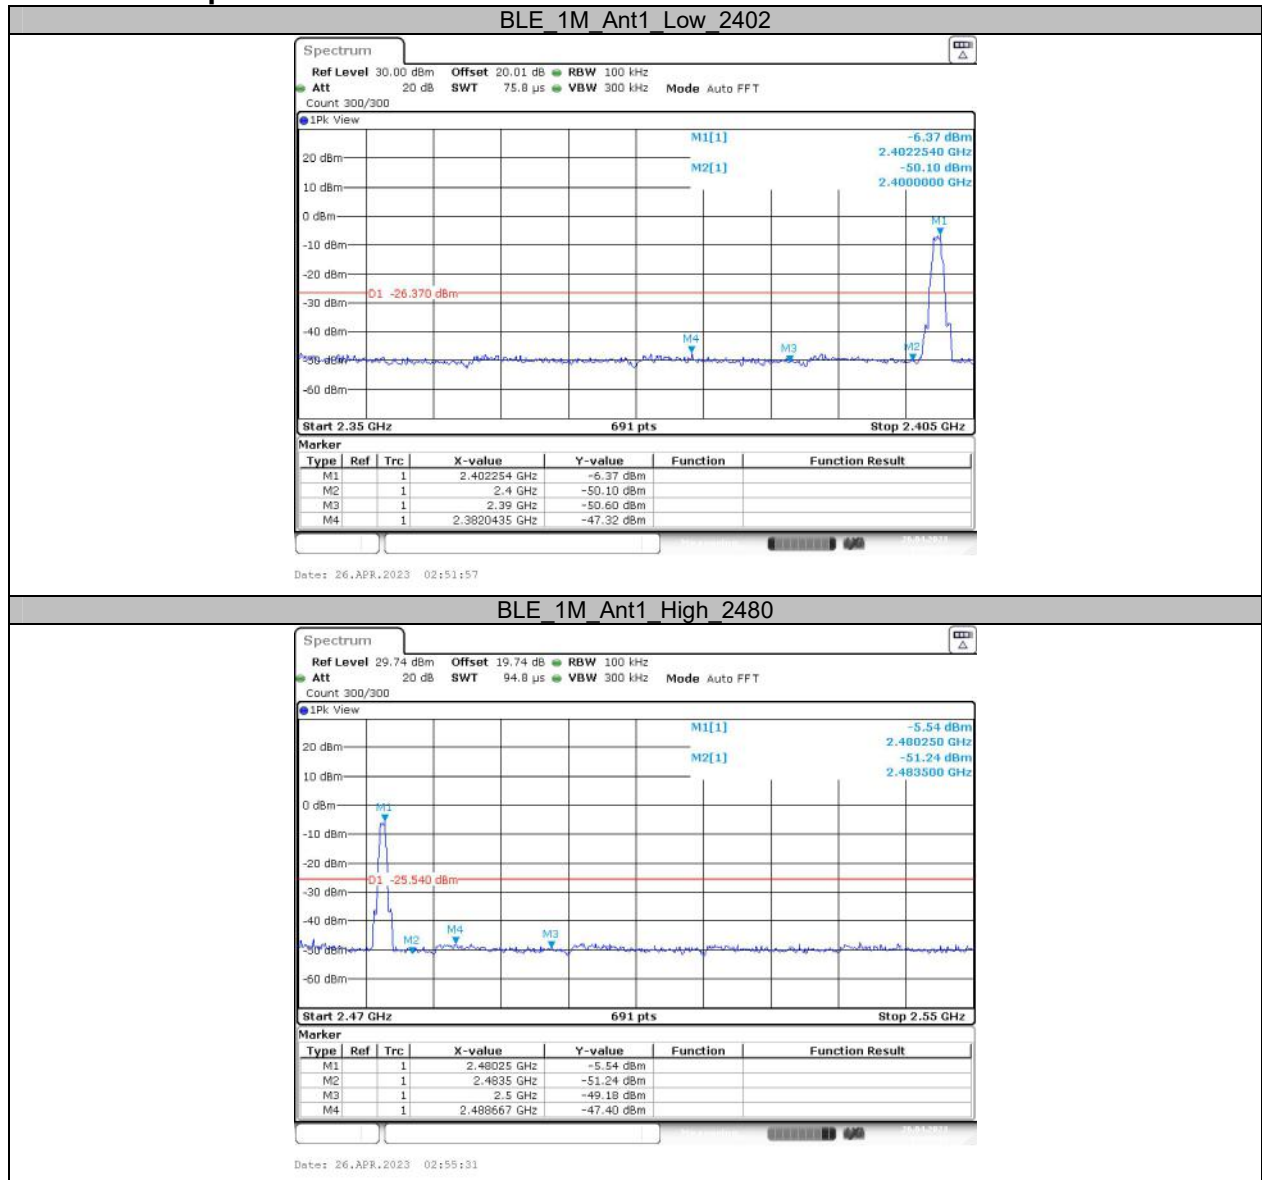


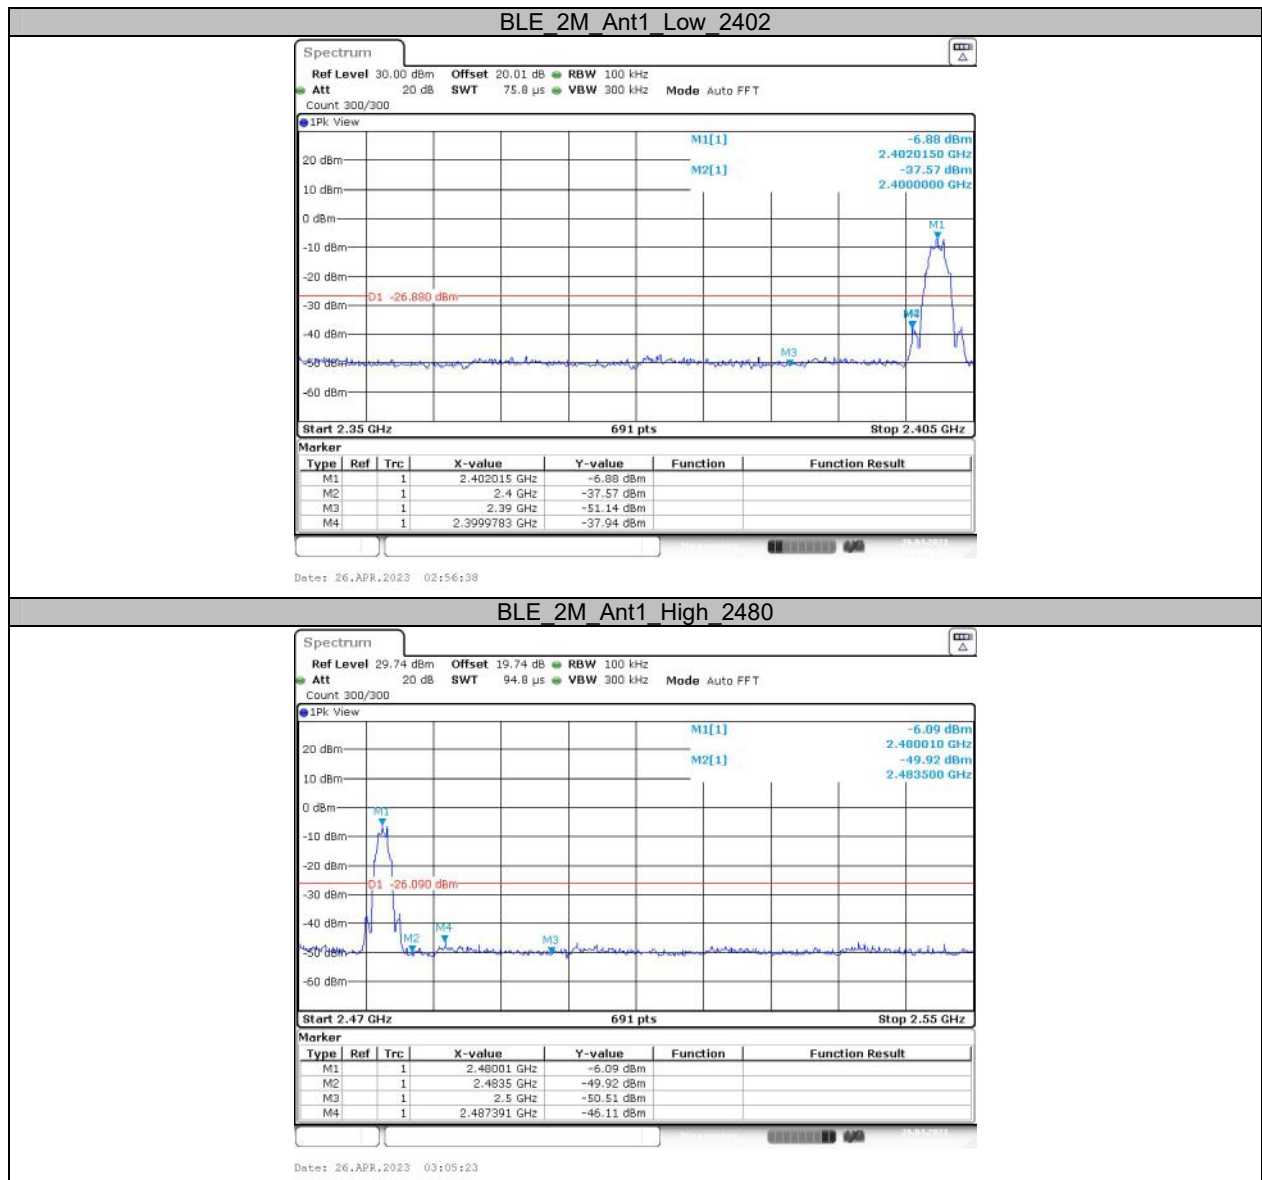

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Minimum VBW (kHz)
BLE_1M	Ant1	2440	2.13	2.50	85.20	0.70	0.47
BLE_2M	Ant1	2440	1.07	1.88	56.91	2.45	0.93

Test Graphs

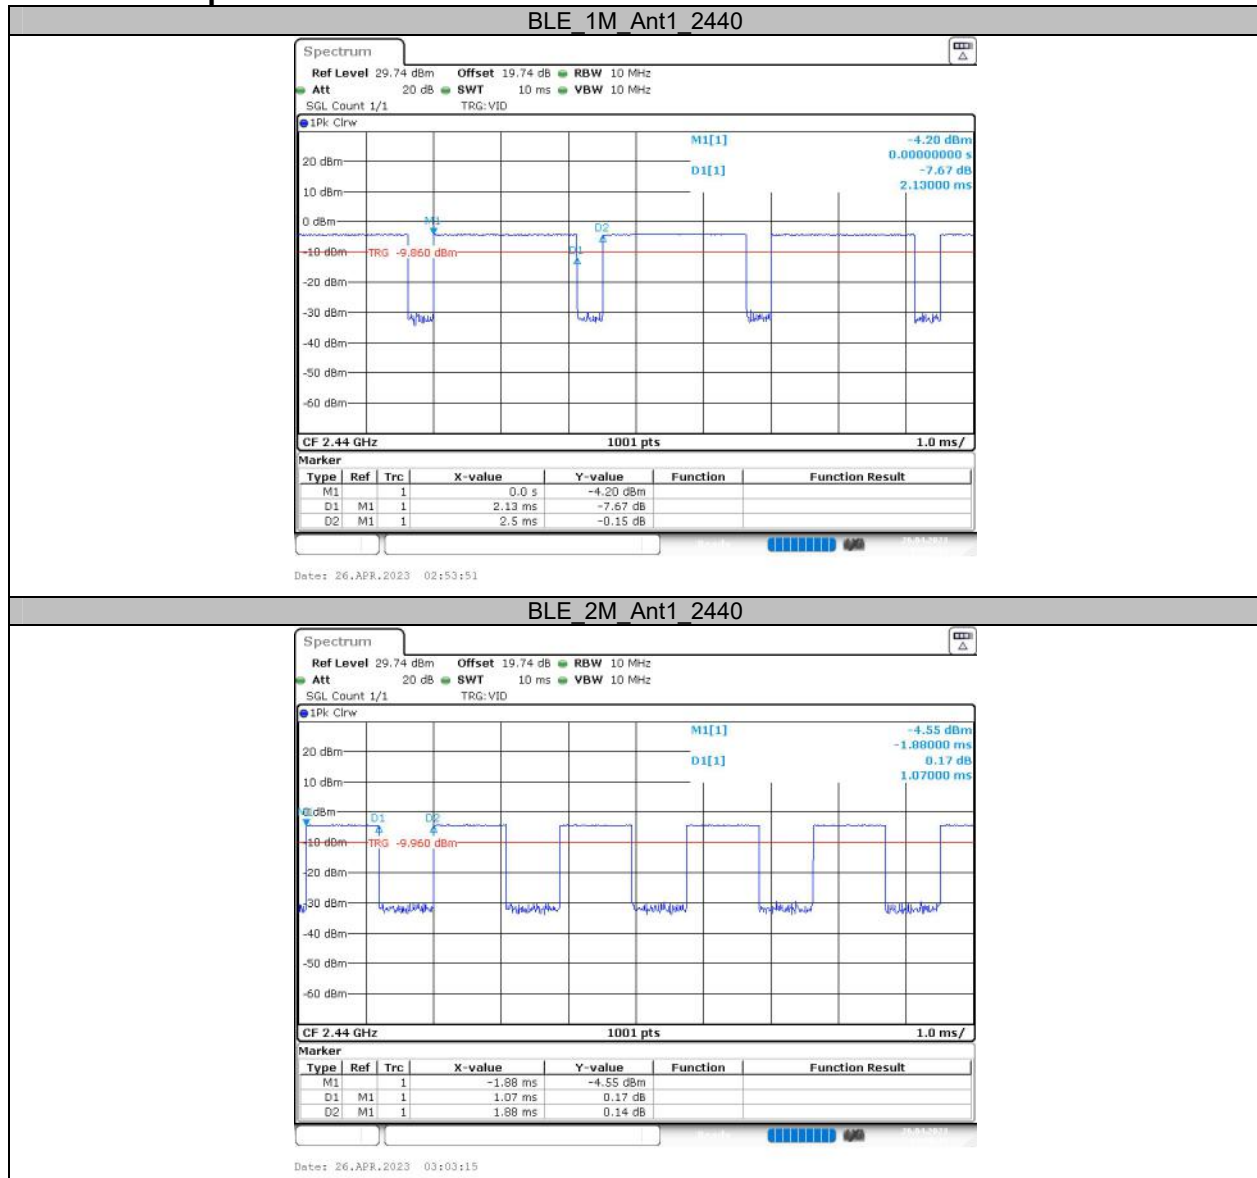


APPENDIX Wi-Fi- Main Antenna


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.08	2408.48	2415.56	0.5	PASS
		2442	8.08	2437.48	2445.56	0.5	PASS
		2472	8.08	2467.48	2475.56	0.5	PASS
11G	Ant1	2412	15.68	2404.44	2420.12	0.5	PASS
		2442	15.48	2434.08	2449.56	0.5	PASS
		2472	15.08	2464.44	2479.52	0.5	PASS
11N20SISO	Ant1	2412	16.08	2404.44	2420.52	0.5	PASS
		2442	15.12	2434.44	2449.56	0.5	PASS
		2472	15.08	2464.44	2479.52	0.5	PASS
11N40SISO	Ant1	2422	26.64	2413.28	2439.92	0.5	PASS
		2442	33.84	2425.76	2459.60	0.5	PASS
		2462	35.04	2444.48	2479.52	0.5	PASS

Test Graphs

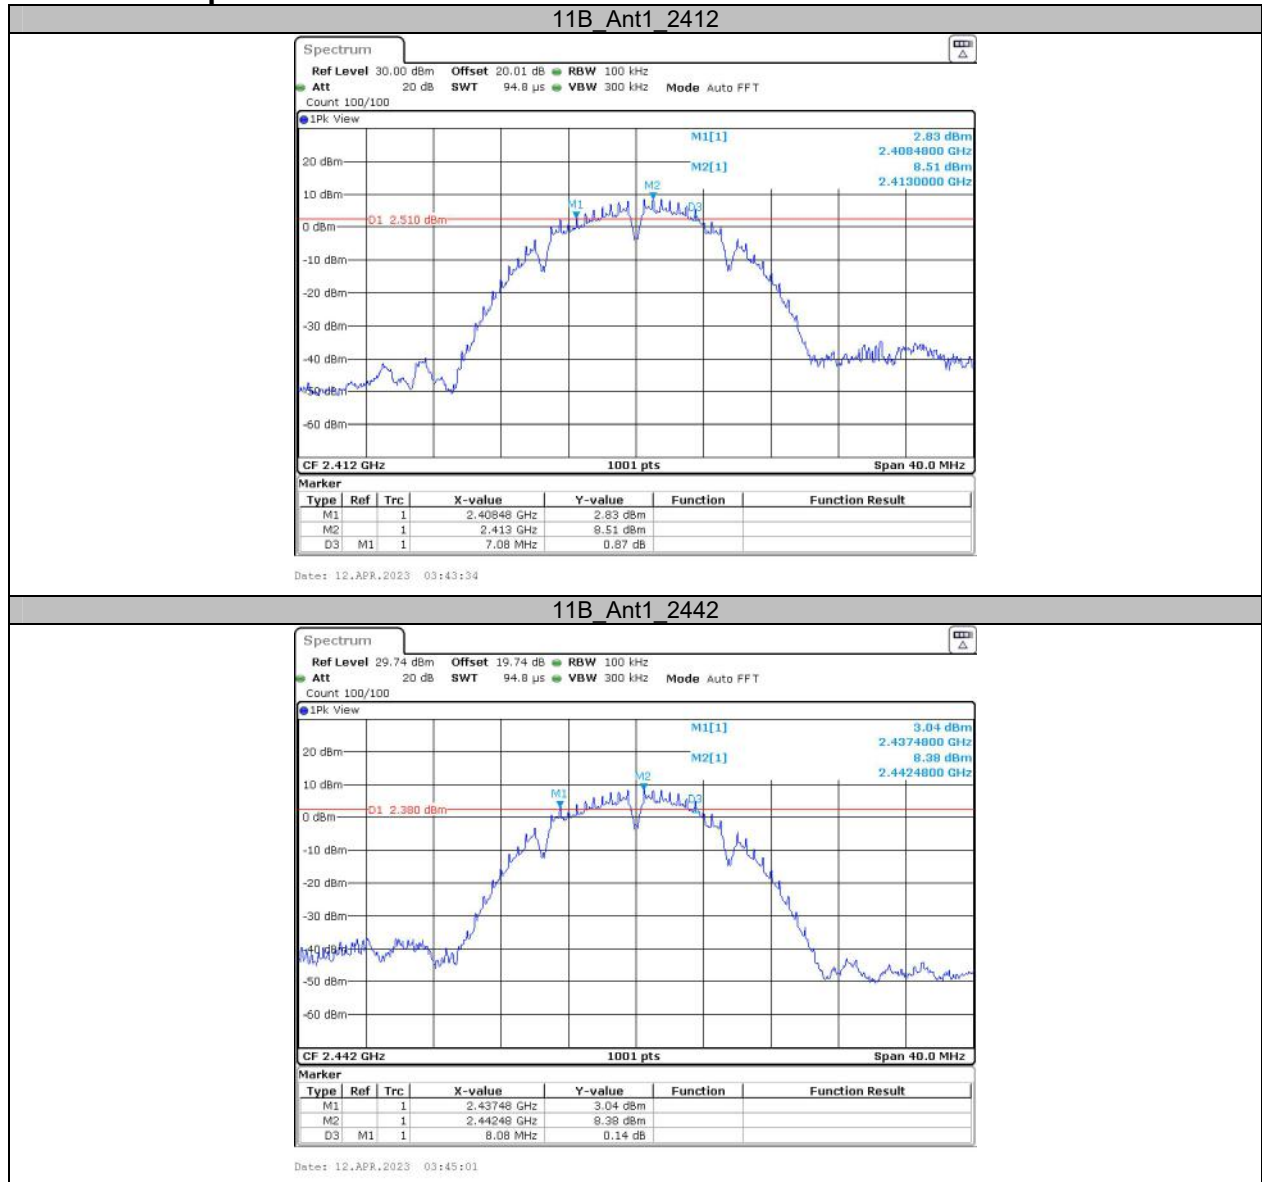


11B_Ant1_2472

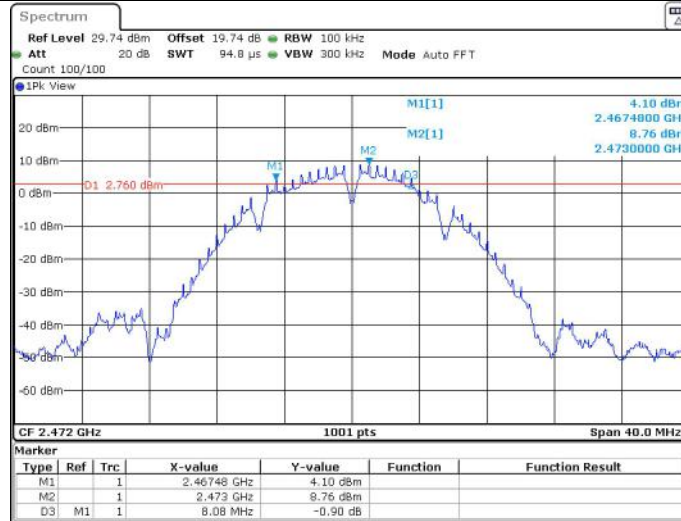


Date: 12.APR.2023 03:45:57

11G_Ant1_2412

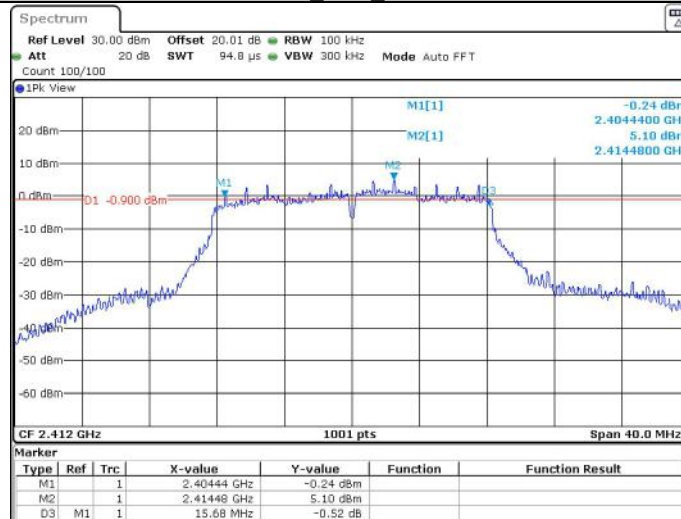


Date: 12.APR.2023 03:47:15

11G_Ant1_2442

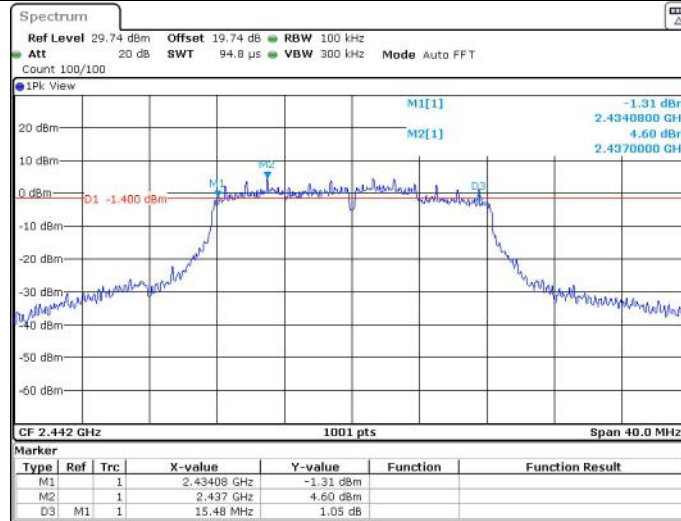


Date: 12.APR.2023 03:48:28

11G_Ant1_2472

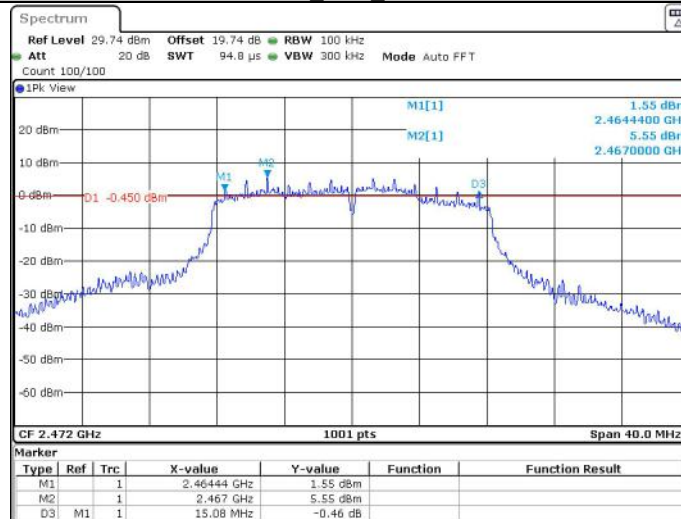


Date: 12.APR.2023 03:49:24

11N20SISO_Ant1_2412

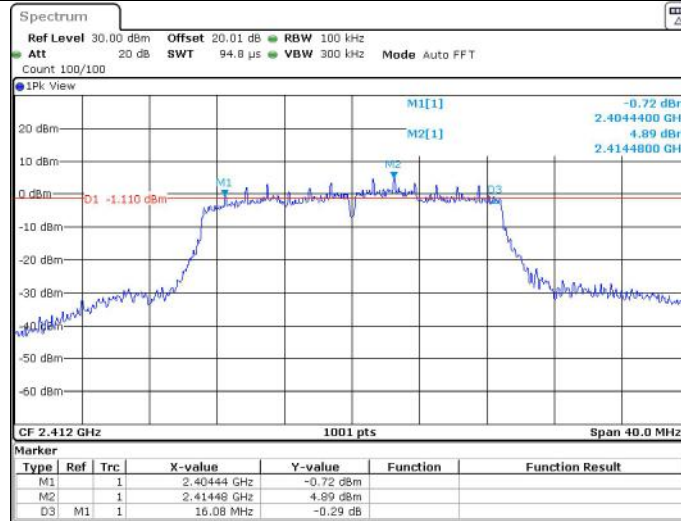



Date: 12.APR.2023 03:50:38

11N20SISO_Ant1_2442

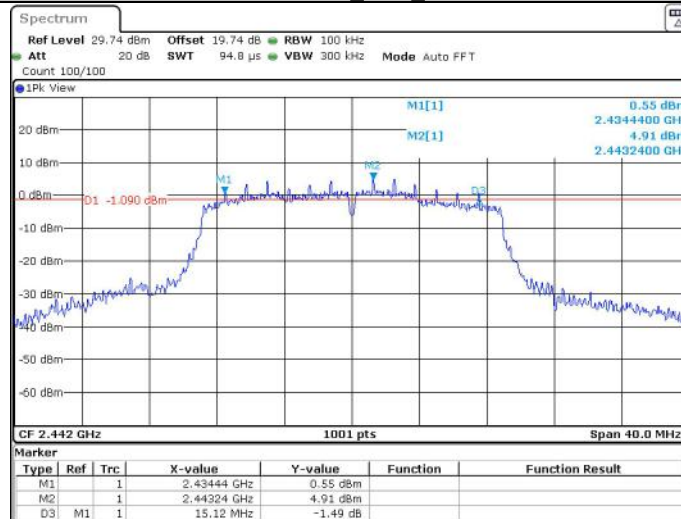

Date: 12.APR.2023 03:51:57

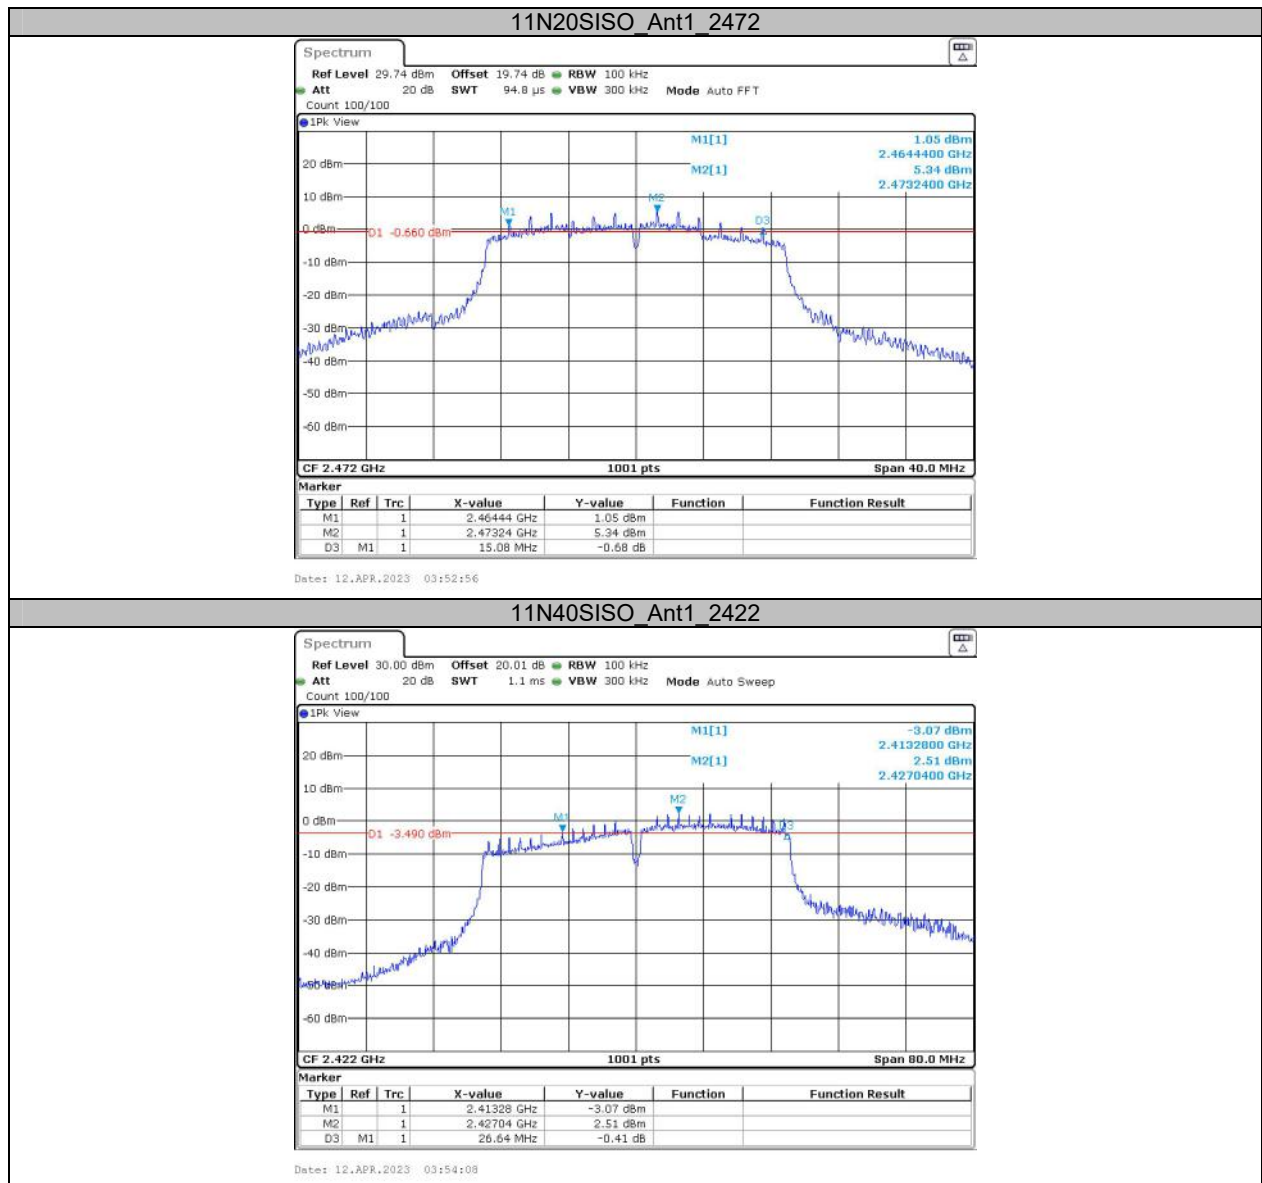


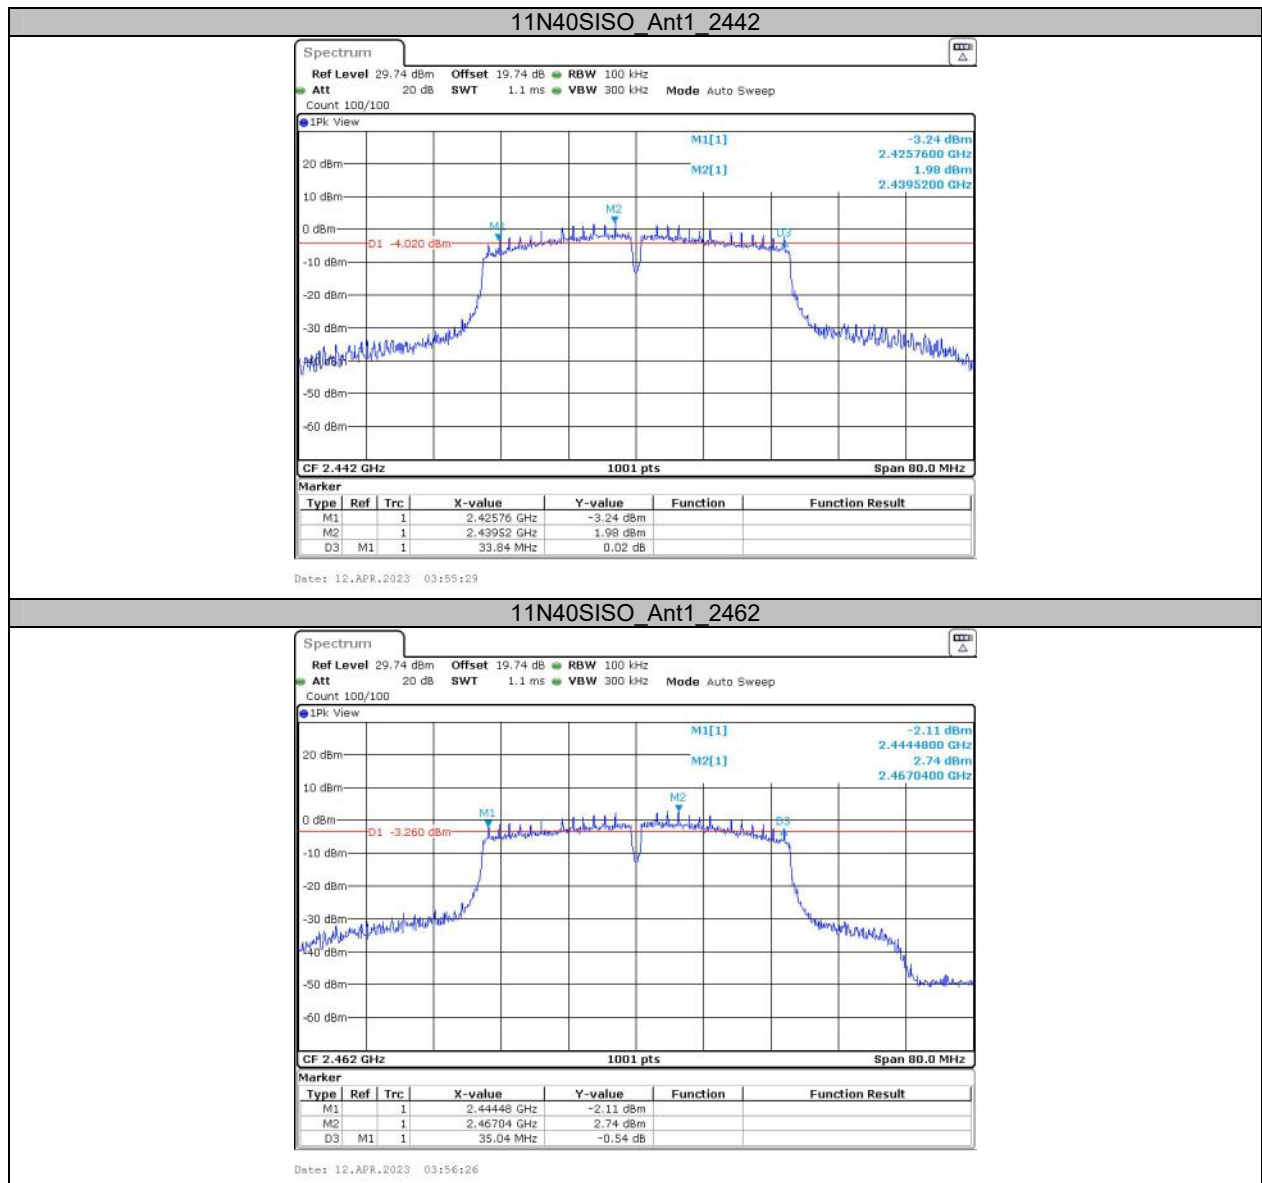


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.107	2405.646	2418.753	---	---
		2442	12.867	2435.526	2448.394	---	---
		2472	13.107	2465.367	2478.474	---	---
11G	Ant1	2412	17.702	2403.409	2421.111	---	---
		2442	17.423	2433.249	2450.671	---	---
		2472	17.463	2463.129	2480.591	---	---
11N20SISO	Ant1	2412	18.541	2402.929	2421.471	---	---
		2442	18.342	2432.769	2451.111	---	---
		2472	18.262	2462.729	2480.991	---	---
11N40SISO	Ant1	2422	36.763	2404.498	2441.261	---	---
		2442	36.603	2424.018	2460.621	---	---
		2462	36.523	2443.618	2480.142	---	---


Test Graphs

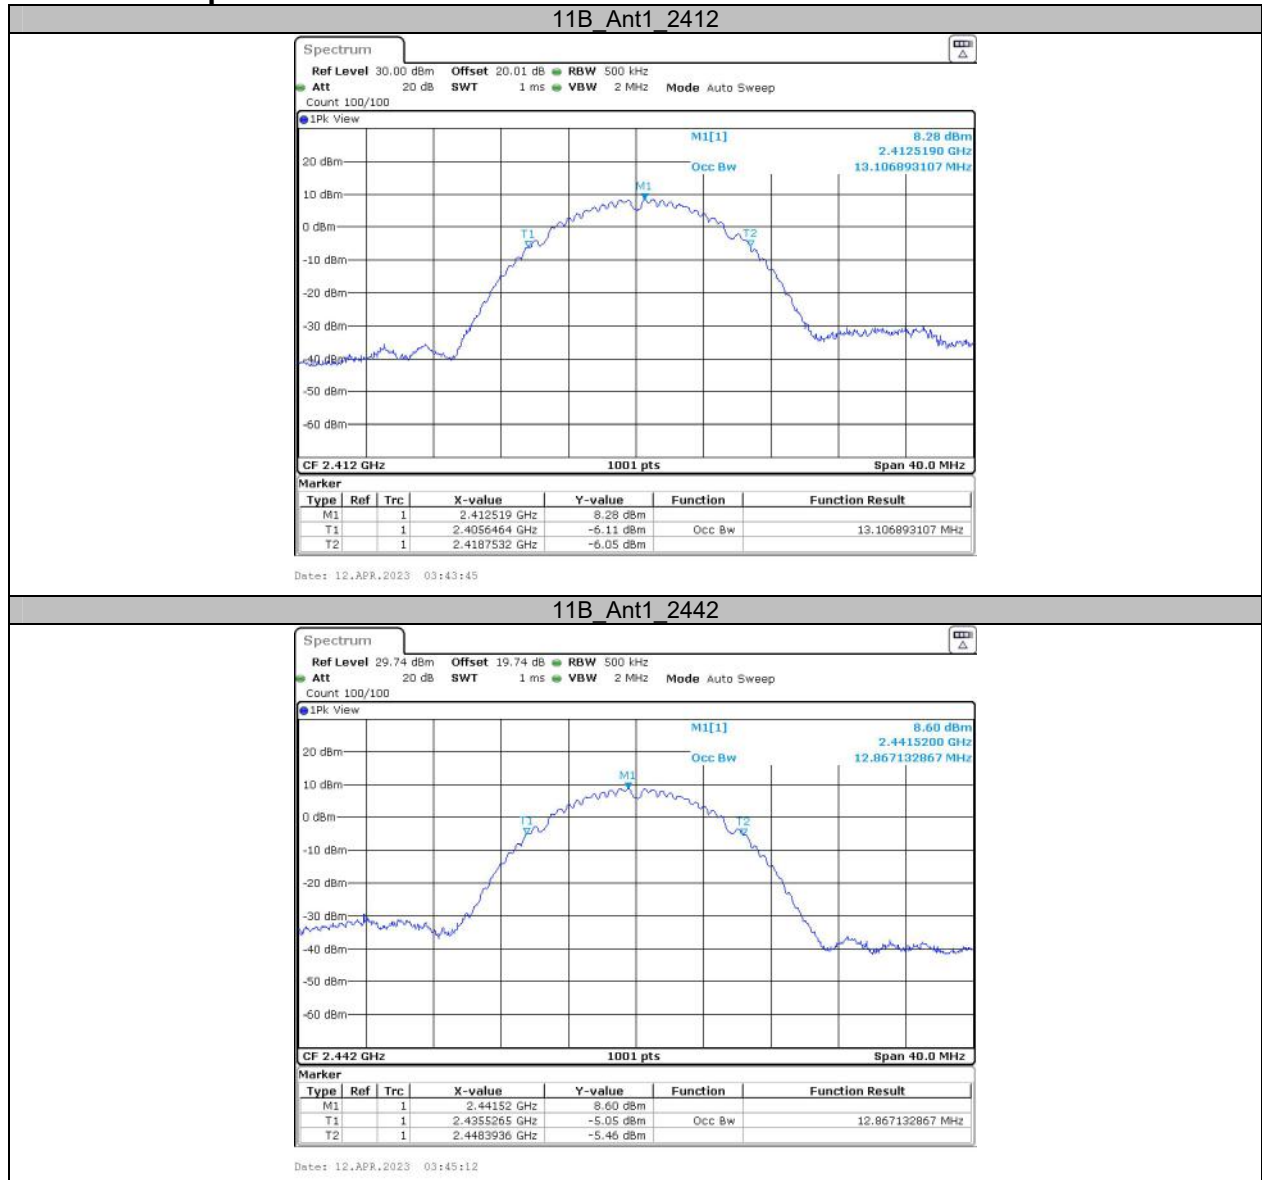



11B_Ant1_2472

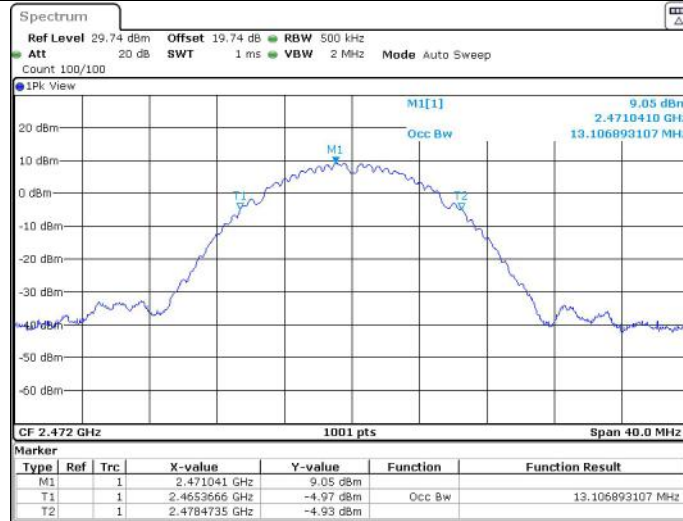



11G_Ant1_2412

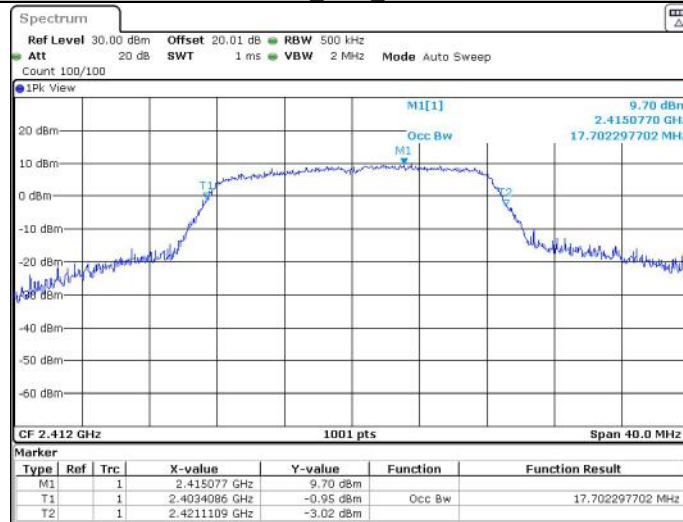

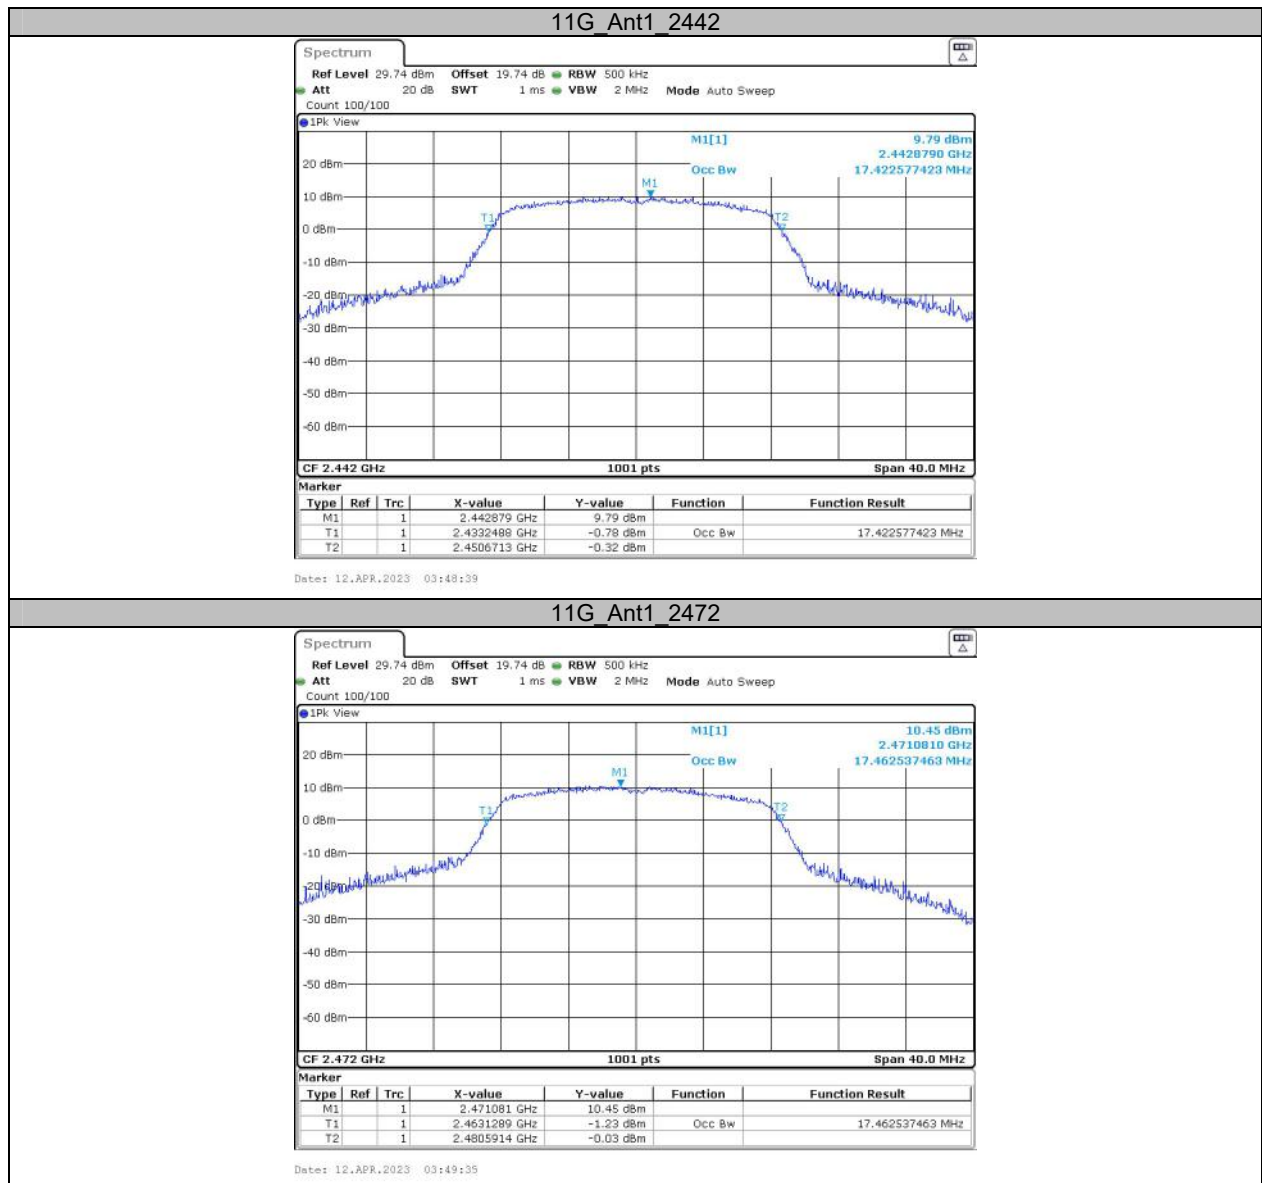

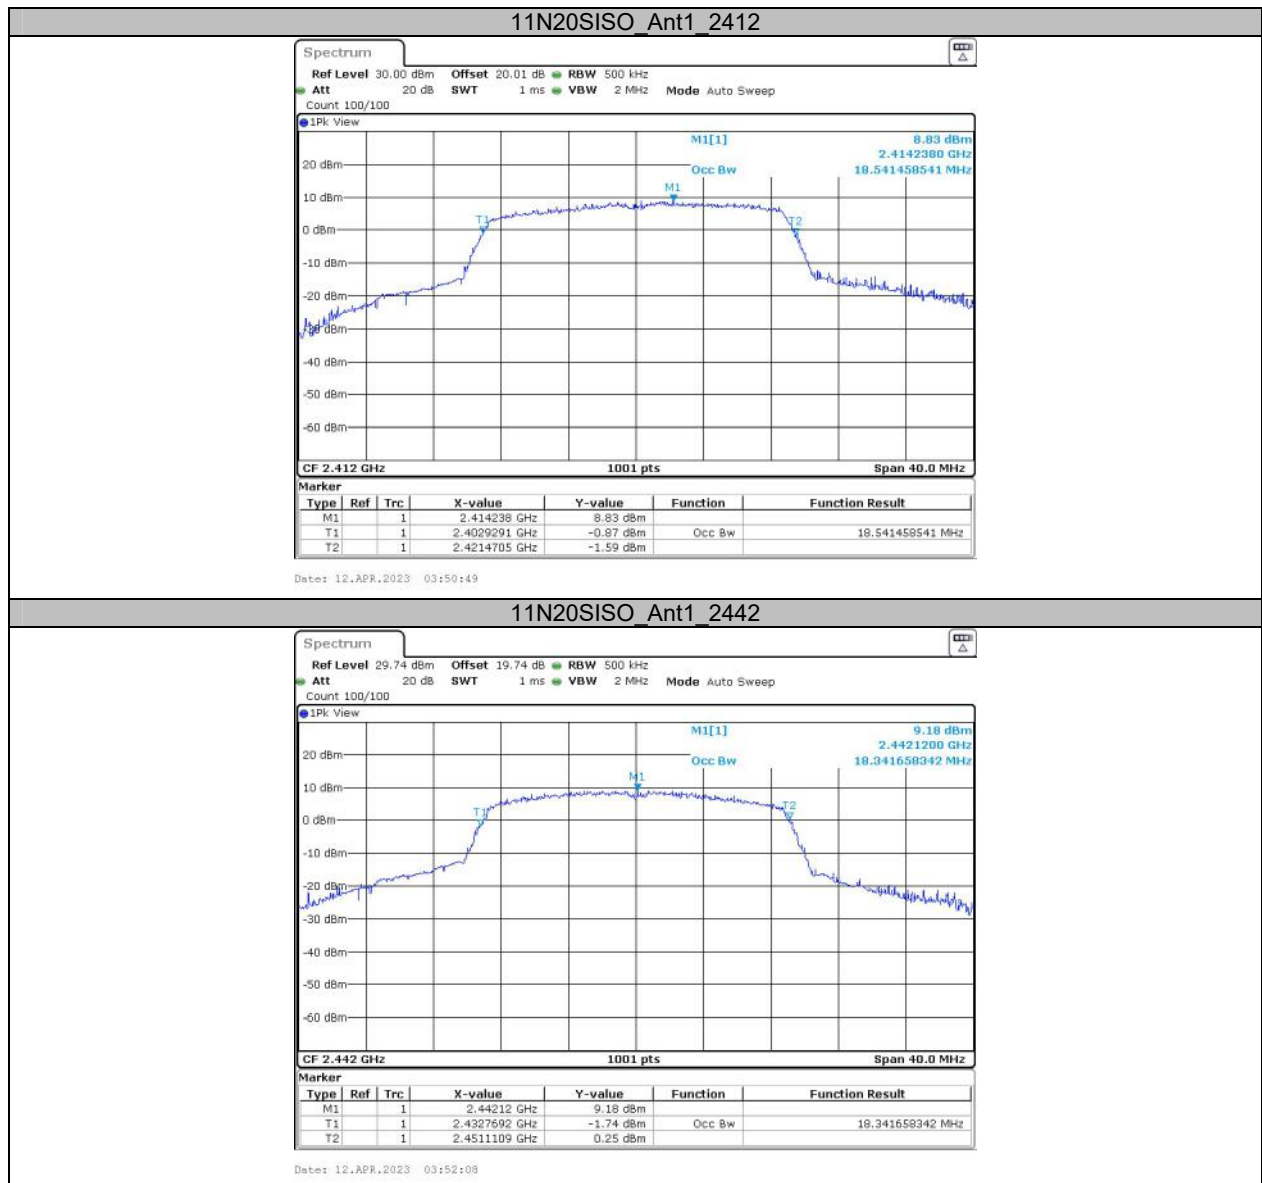

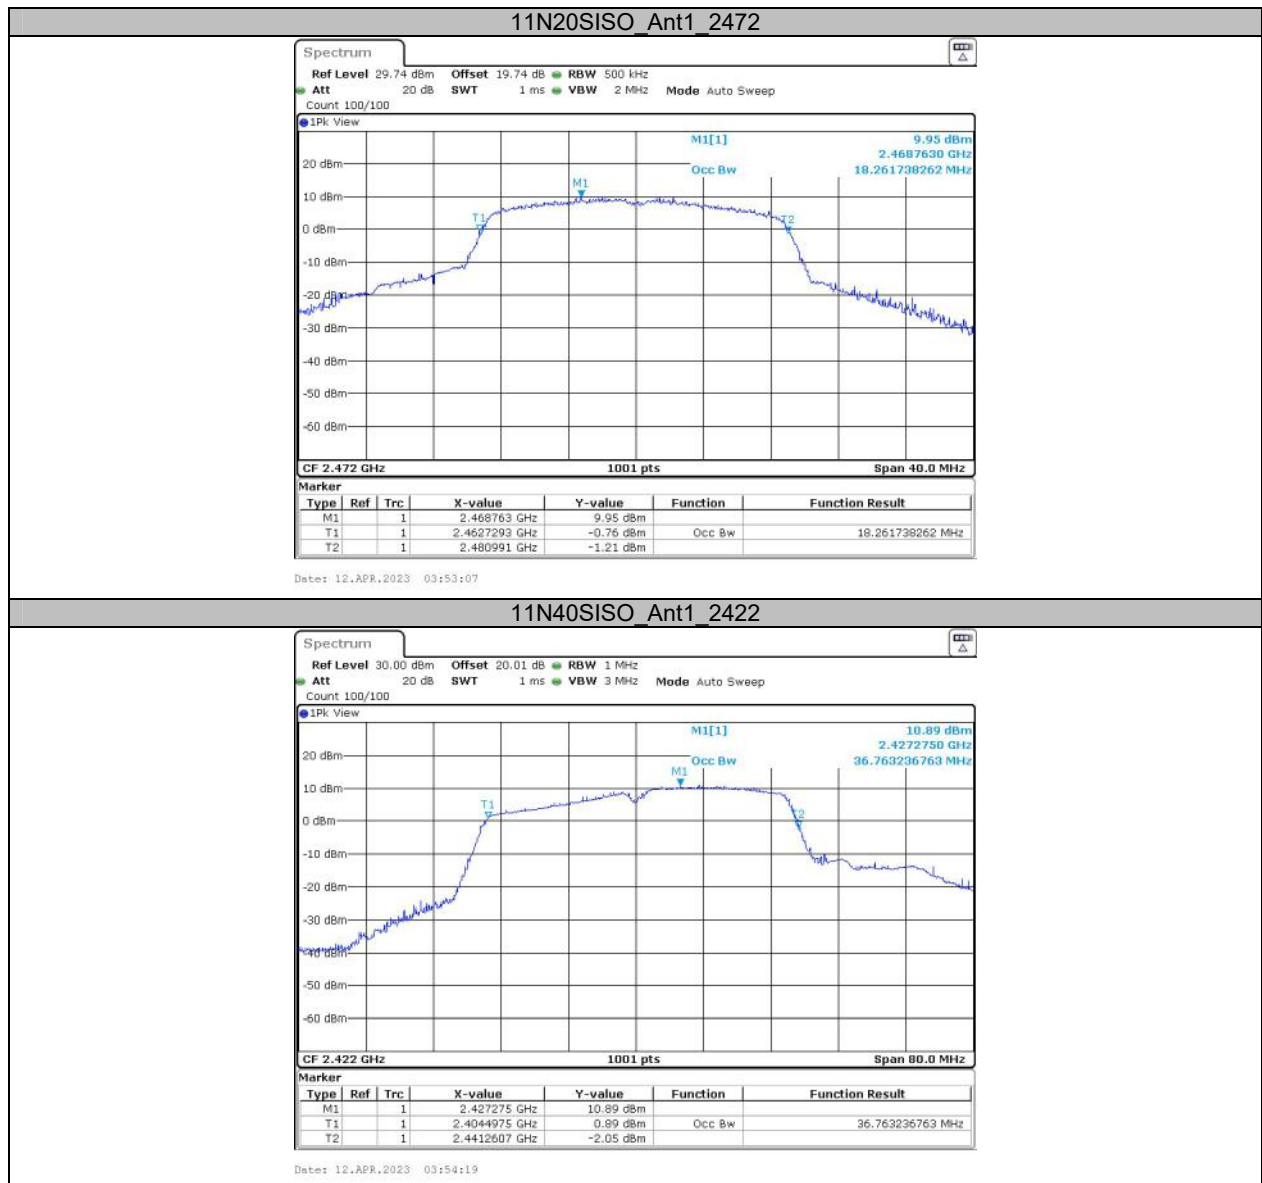

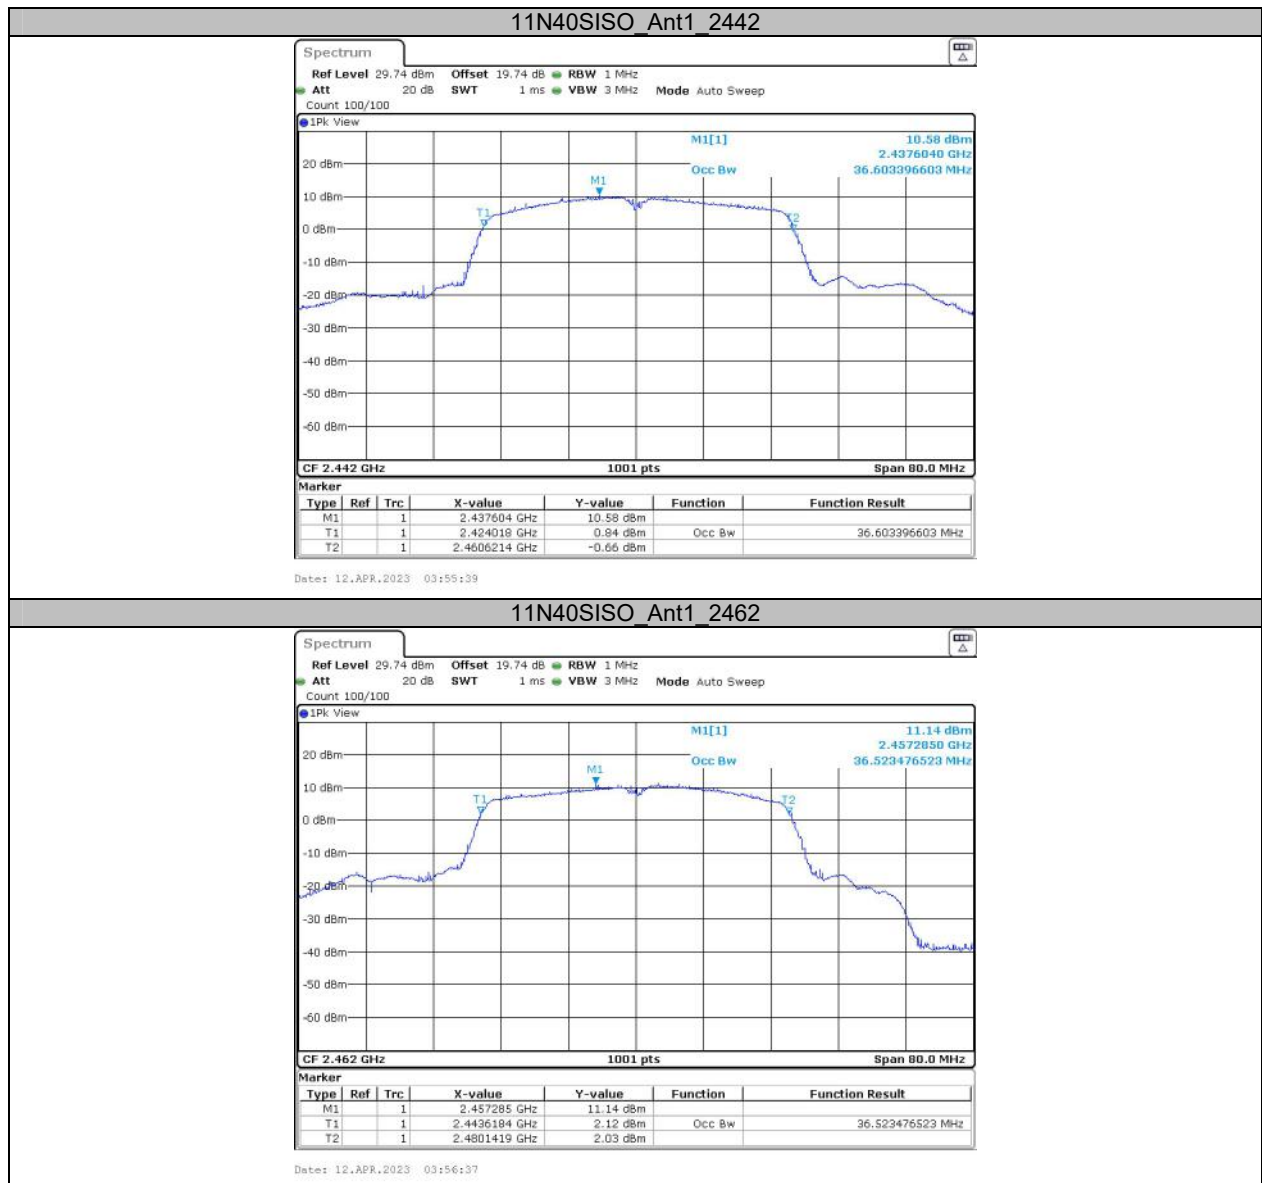


Appendix C: Maximum conducted output power**Test Result Average**


Test Mode	Antenna	Frequency[MHz]	AveragePower[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	12.19	≤30.00	PASS
		2442	12.68	≤30.00	PASS
		2472	12.97	≤30.00	PASS
11G	Ant1	2412	9.02	≤30.00	PASS
		2442	9.66	≤30.00	PASS
		2472	9.92	≤30.00	PASS
11N20SISO	Ant1	2412	7.95	≤30.00	PASS
		2442	8.51	≤30.00	PASS
		2472	8.82	≤30.00	PASS
11N40SISO	Ant1	2422	10.66	≤30.00	PASS
		2442	10.75	≤30.00	PASS
		2462	11.62	≤30.00	PASS


Appendix D: Maximum power spectral density Test Result


Test Mode	Antenna	Frequency[MHz]	Reading [dBm/10kHz]	Duty Cycle Factor(dB)	Result [dBm/10kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.82	-	-13.82	≤8.00	PASS
		2442	-13.26	-	-13.26	≤8.00	PASS
		2472	-12.97	-	-12.97	≤8.00	PASS
11G	Ant1	2412	-18.87	0.15	-18.72	≤8.00	PASS
		2442	-18.01	0.15	-17.86	≤8.00	PASS
		2472	-18.02	0.15	-17.87	≤8.00	PASS
11N20SISO	Ant1	2412	-19.38	0.16	-19.22	≤8.00	PASS
		2442	-18.63	0.16	-18.47	≤8.00	PASS
		2472	-18.46	0.16	-18.3	≤8.00	PASS
11N40SISO	Ant1	2422	-17.28	0.33	-16.95	≤8.00	PASS
		2442	-18.79	0.33	-18.46	≤8.00	PASS
		2462	-18.17	0.33	-17.84	≤8.00	PASS


Test Graphs

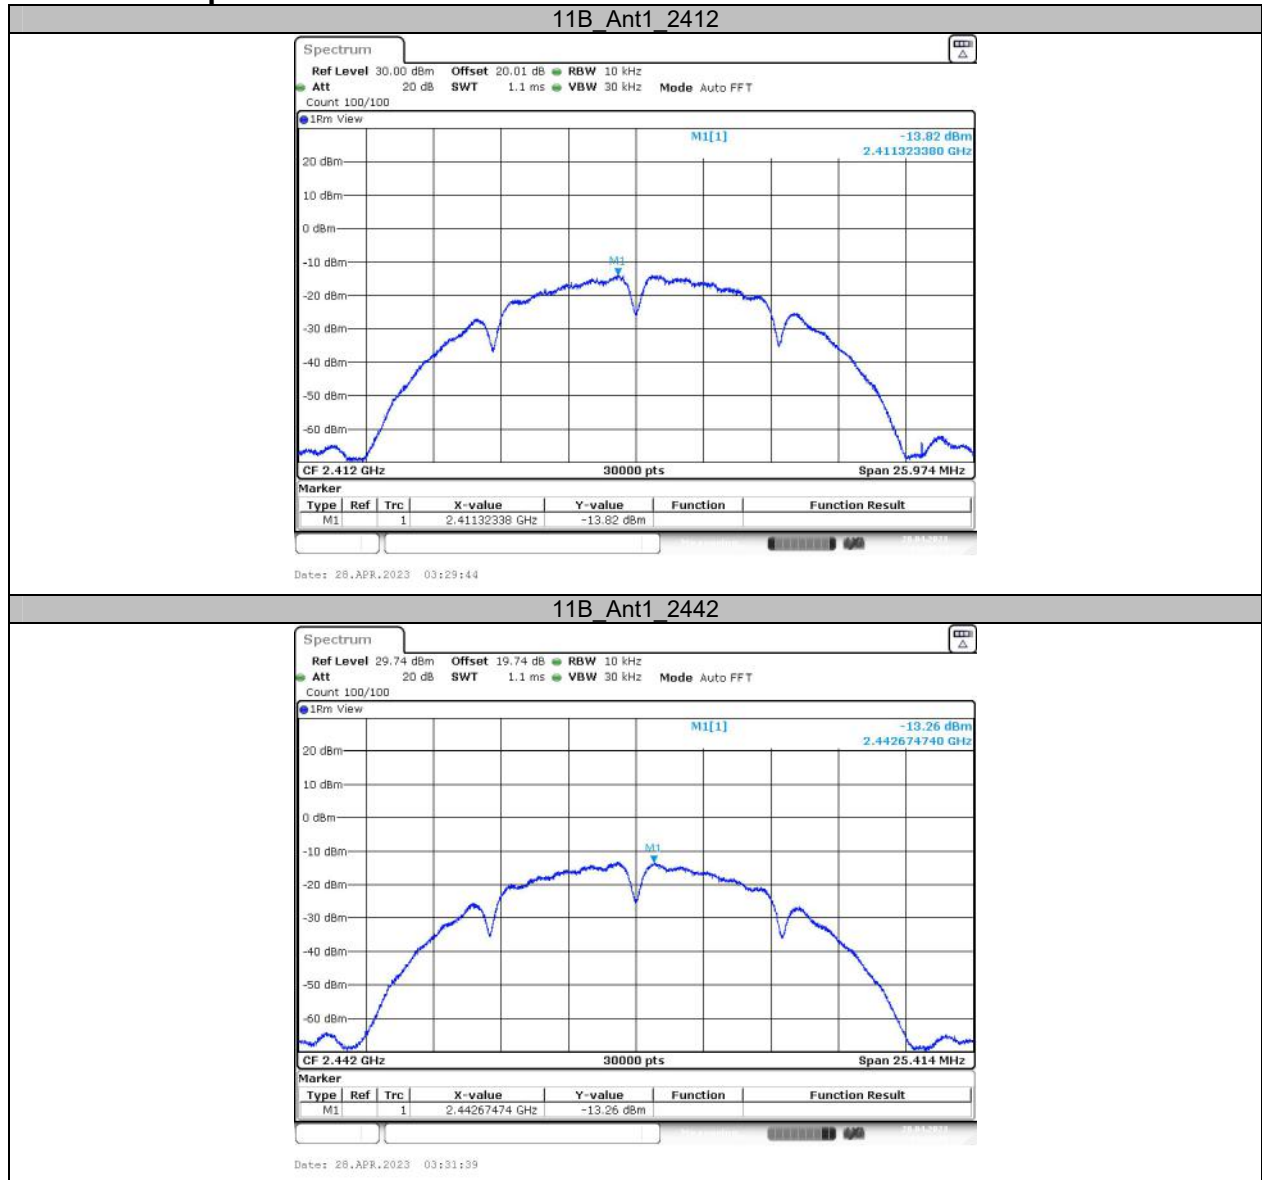


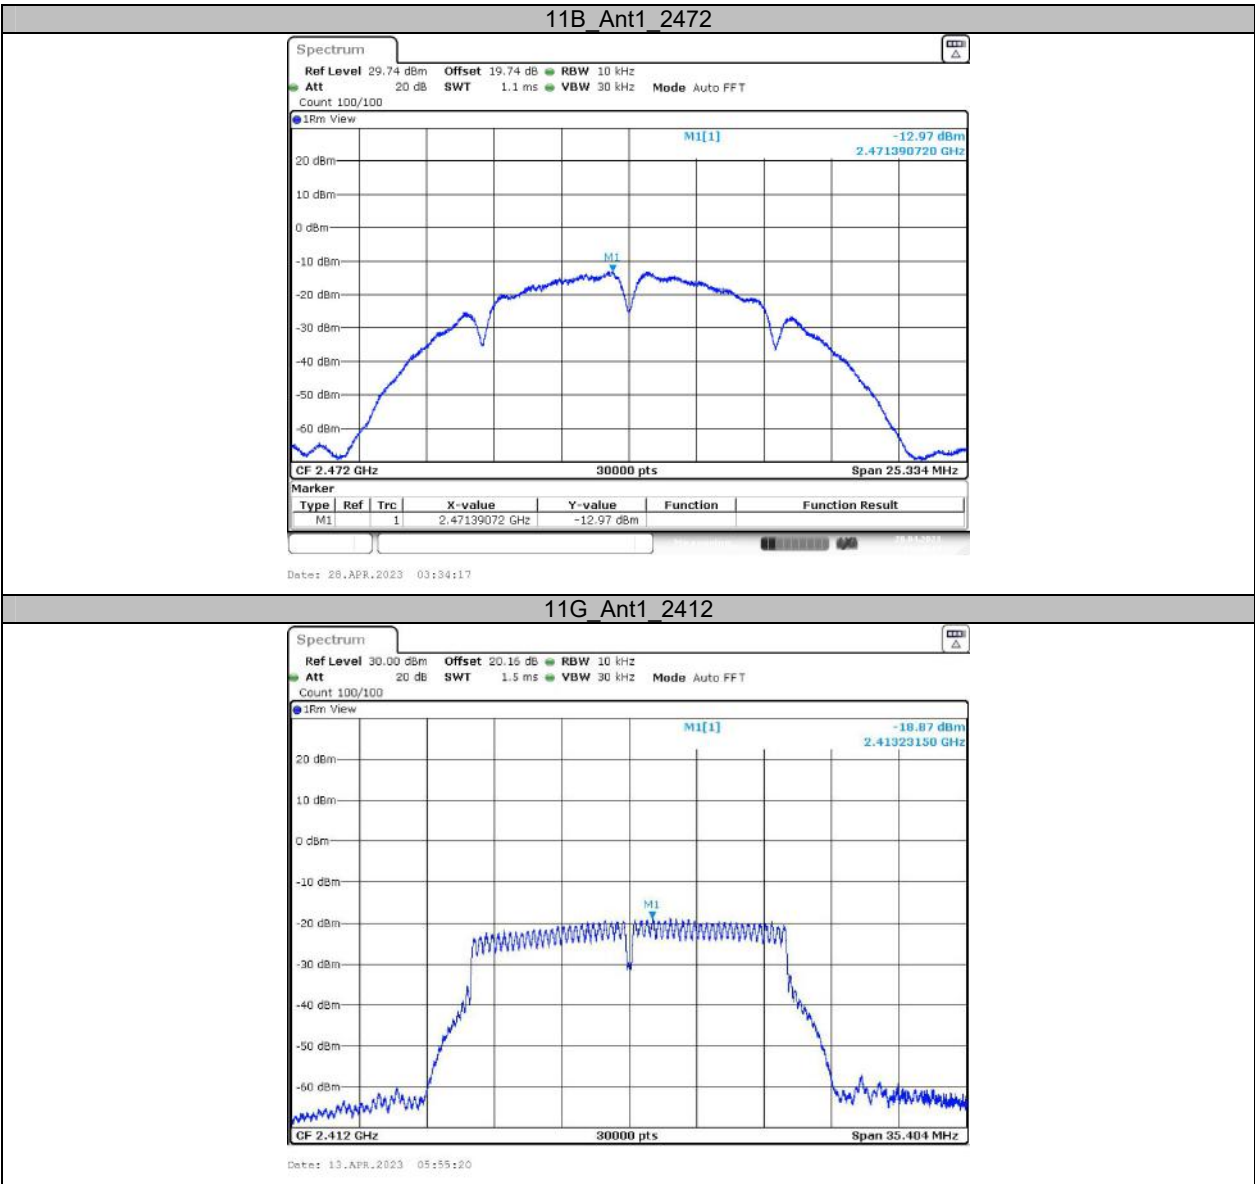

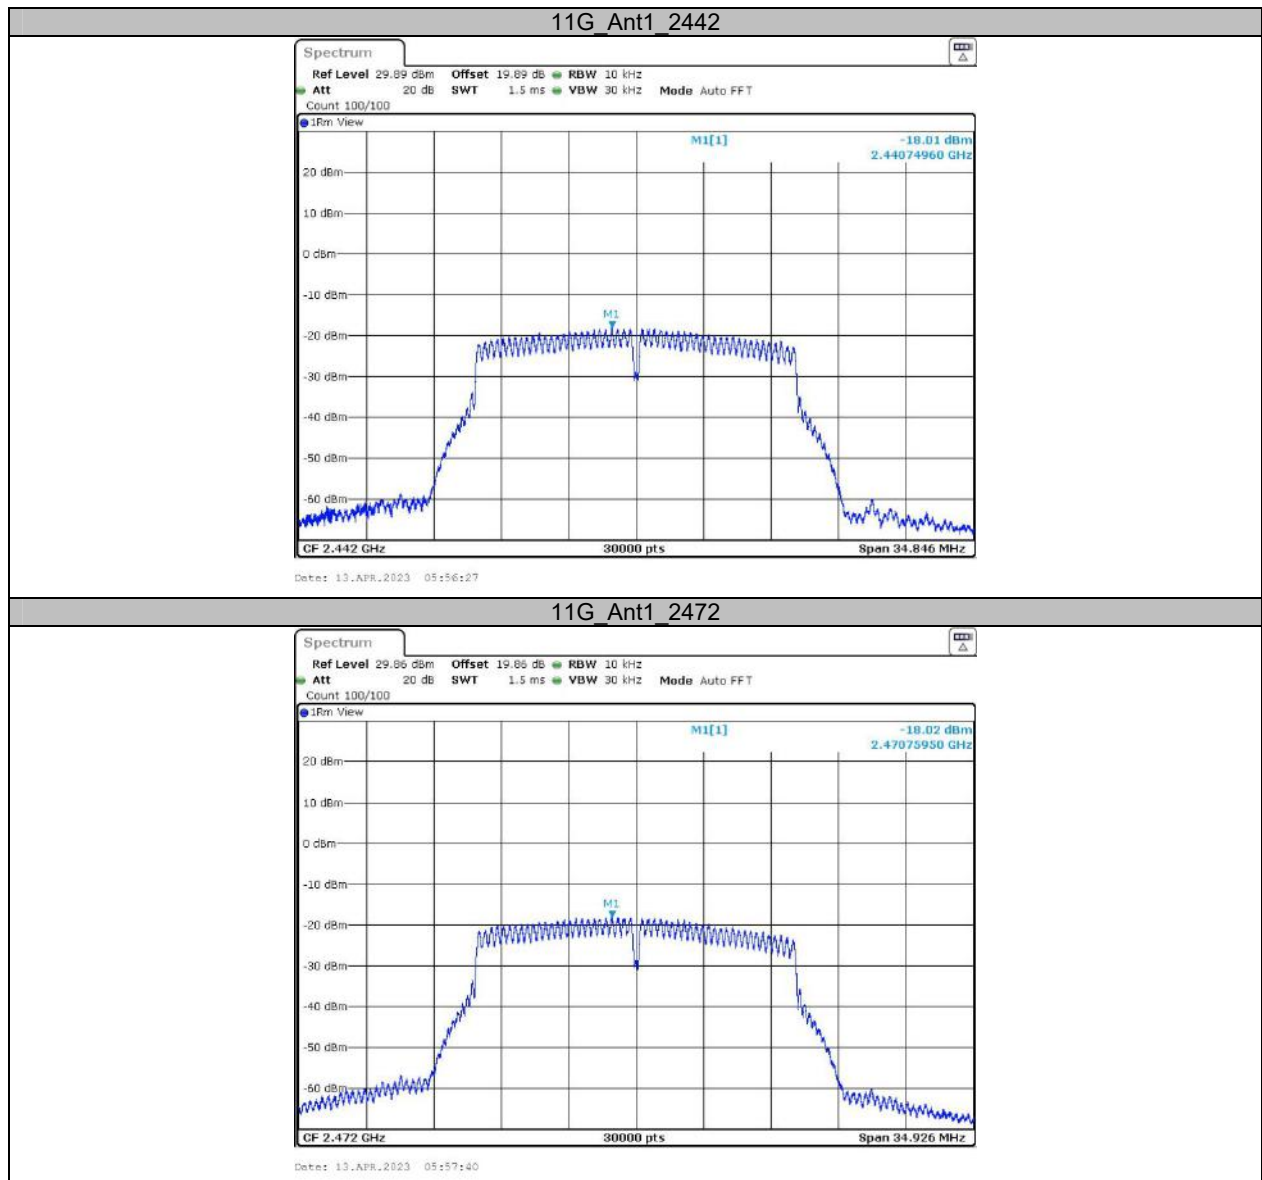

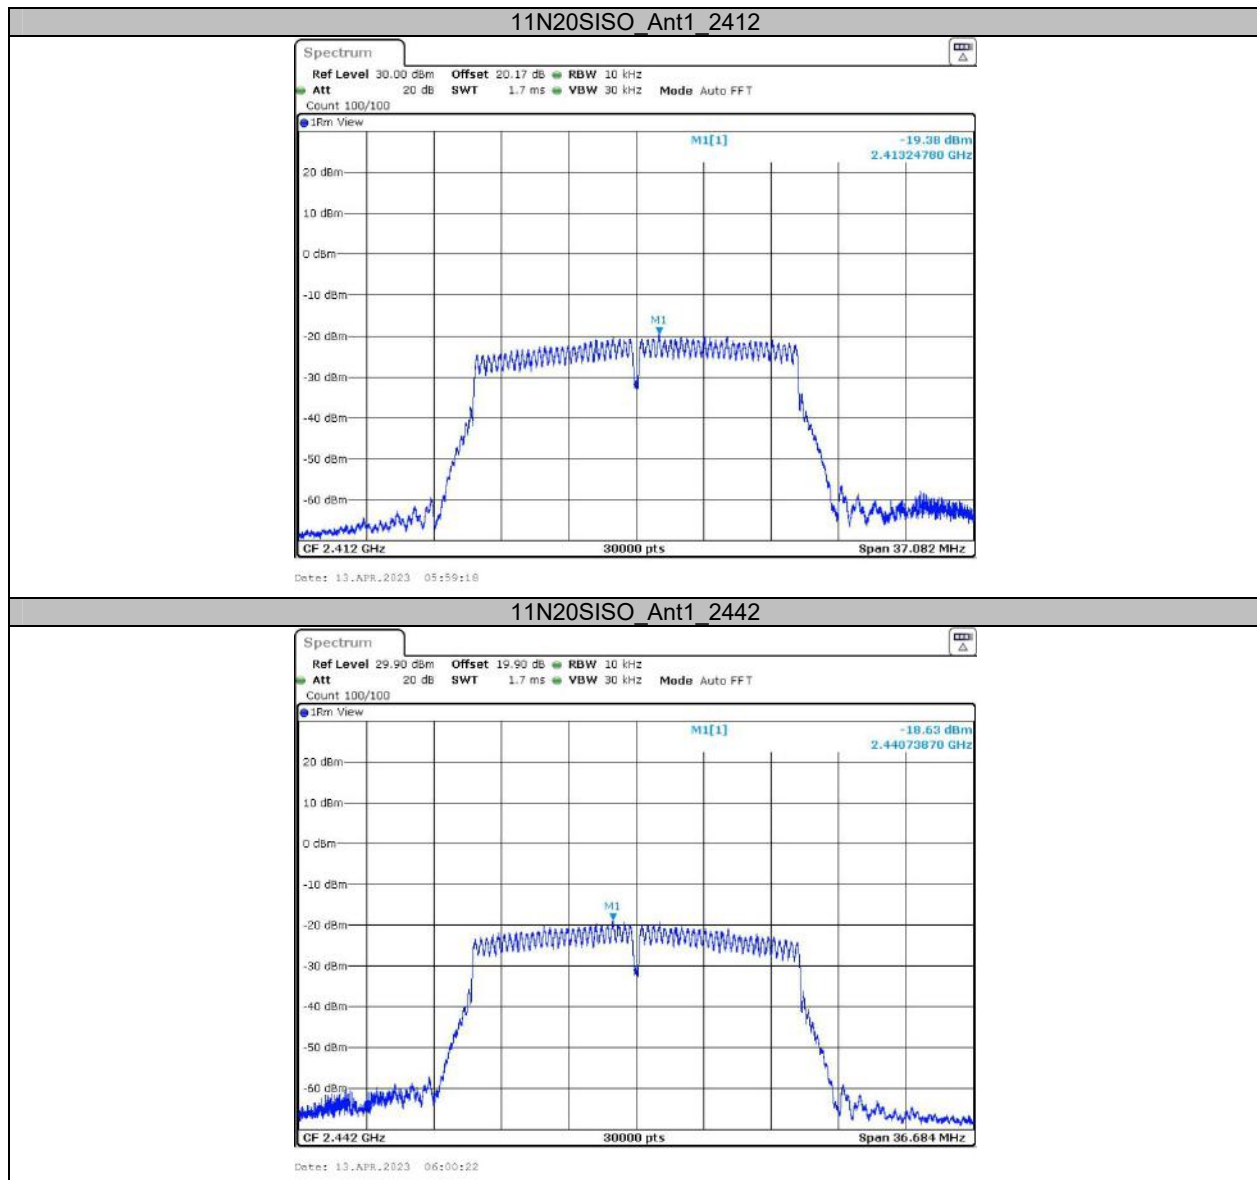


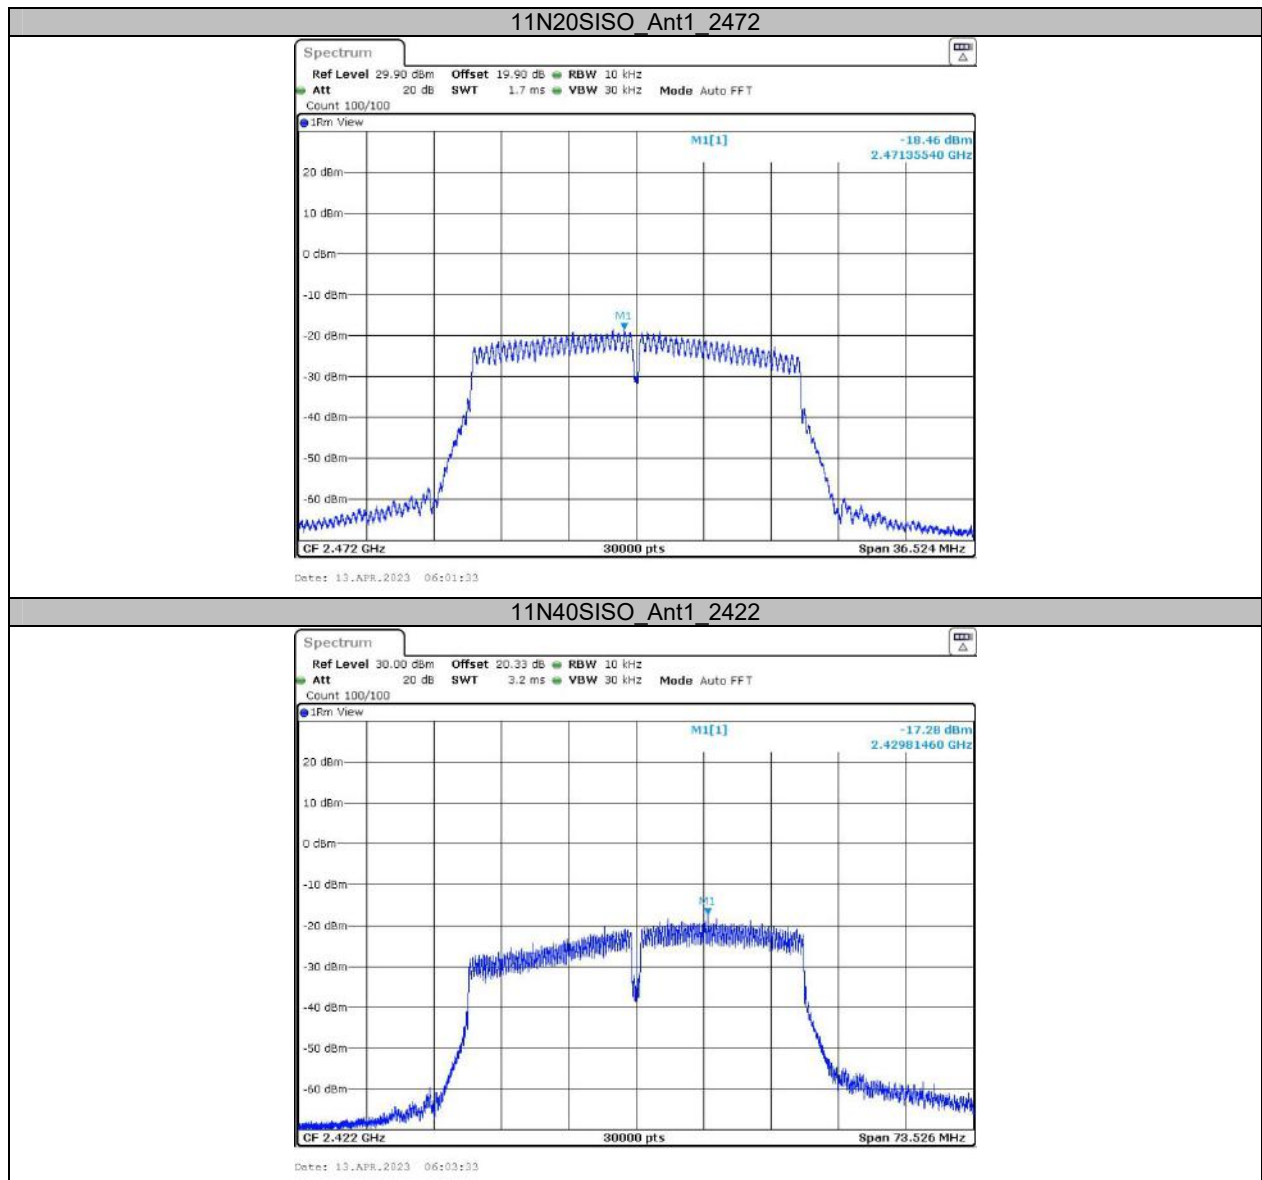

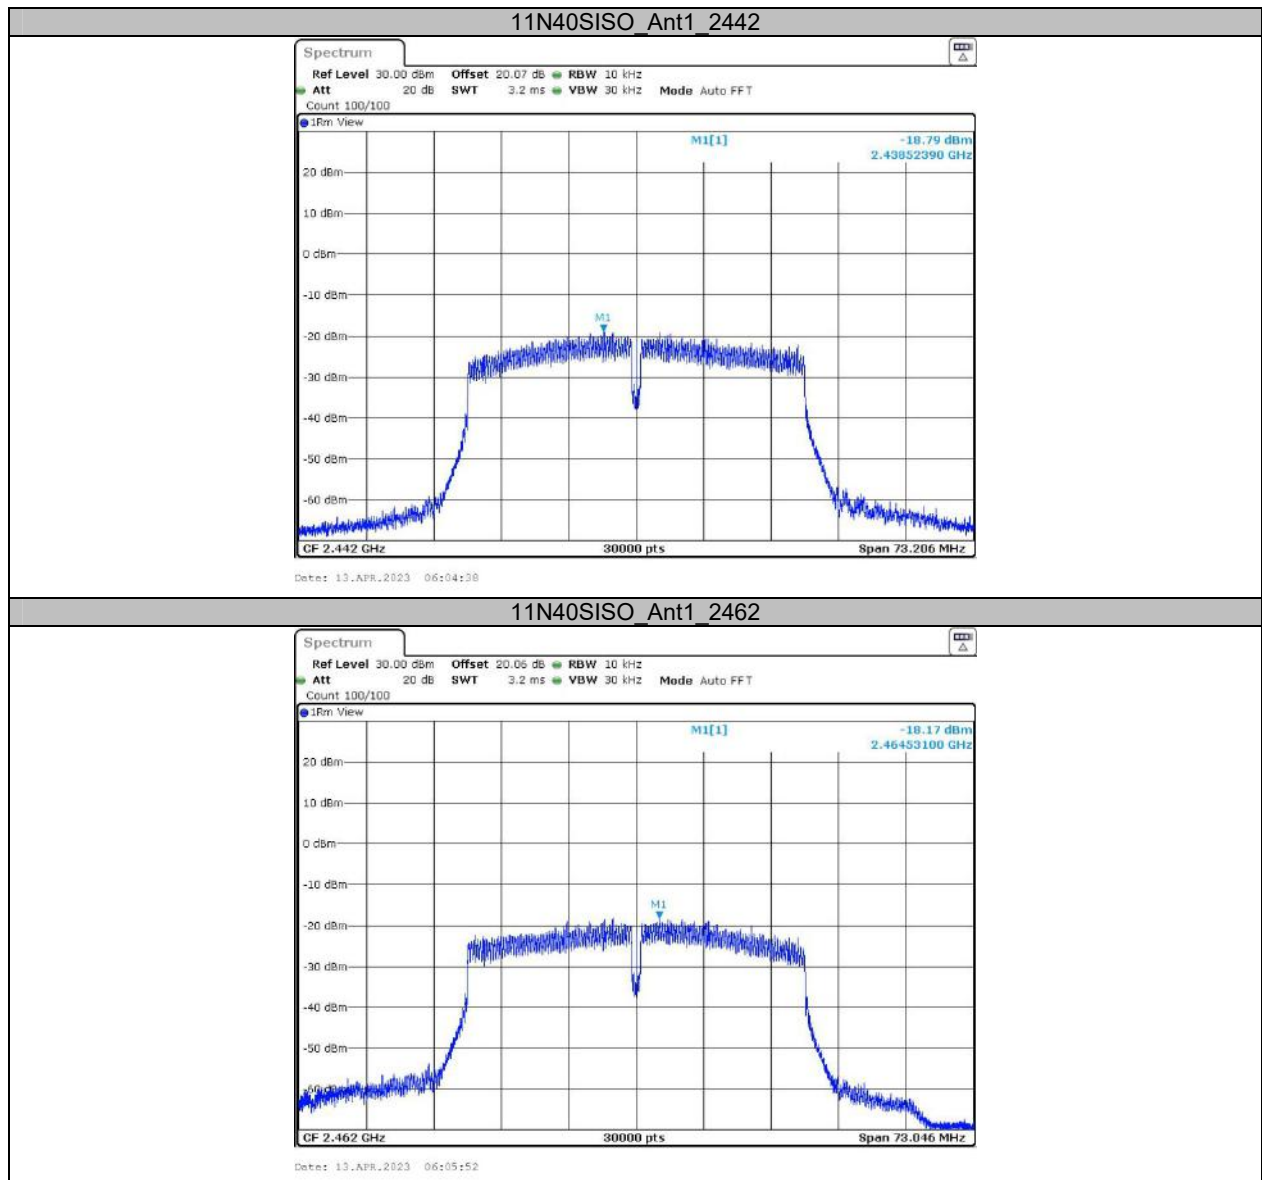


Appendix E: Band edge measurements

Test Graphs

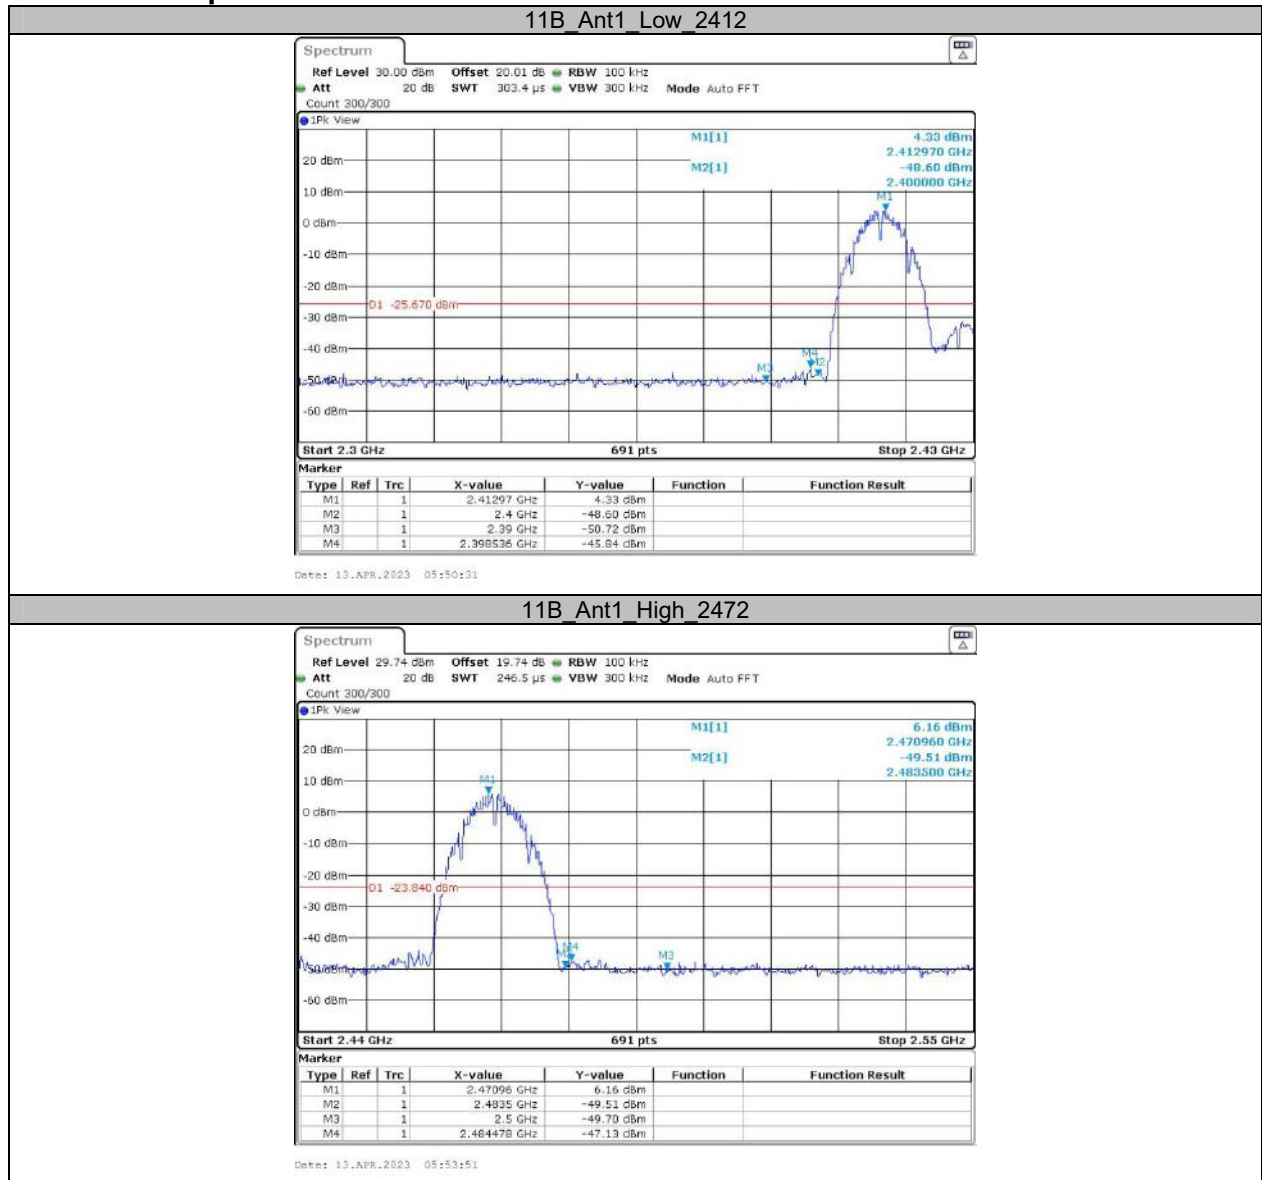


11G Ant1 Low 2412

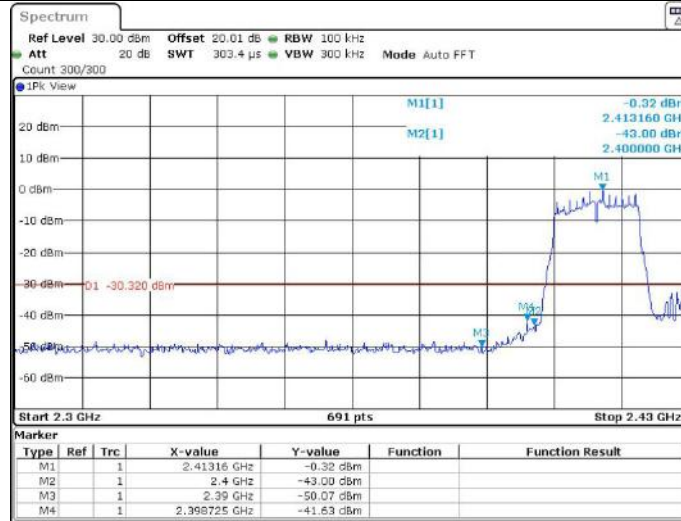



Date: 13.APR.2023 05:55:30

11G Ant1 High 2472

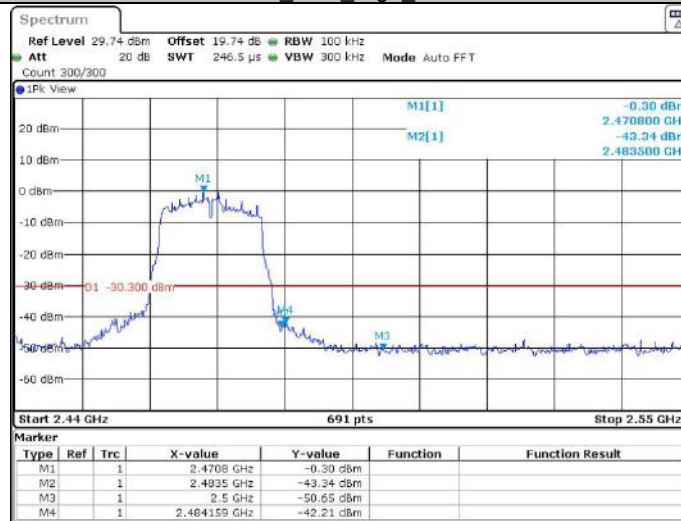

Date: 13.APR.2023 05:57:50

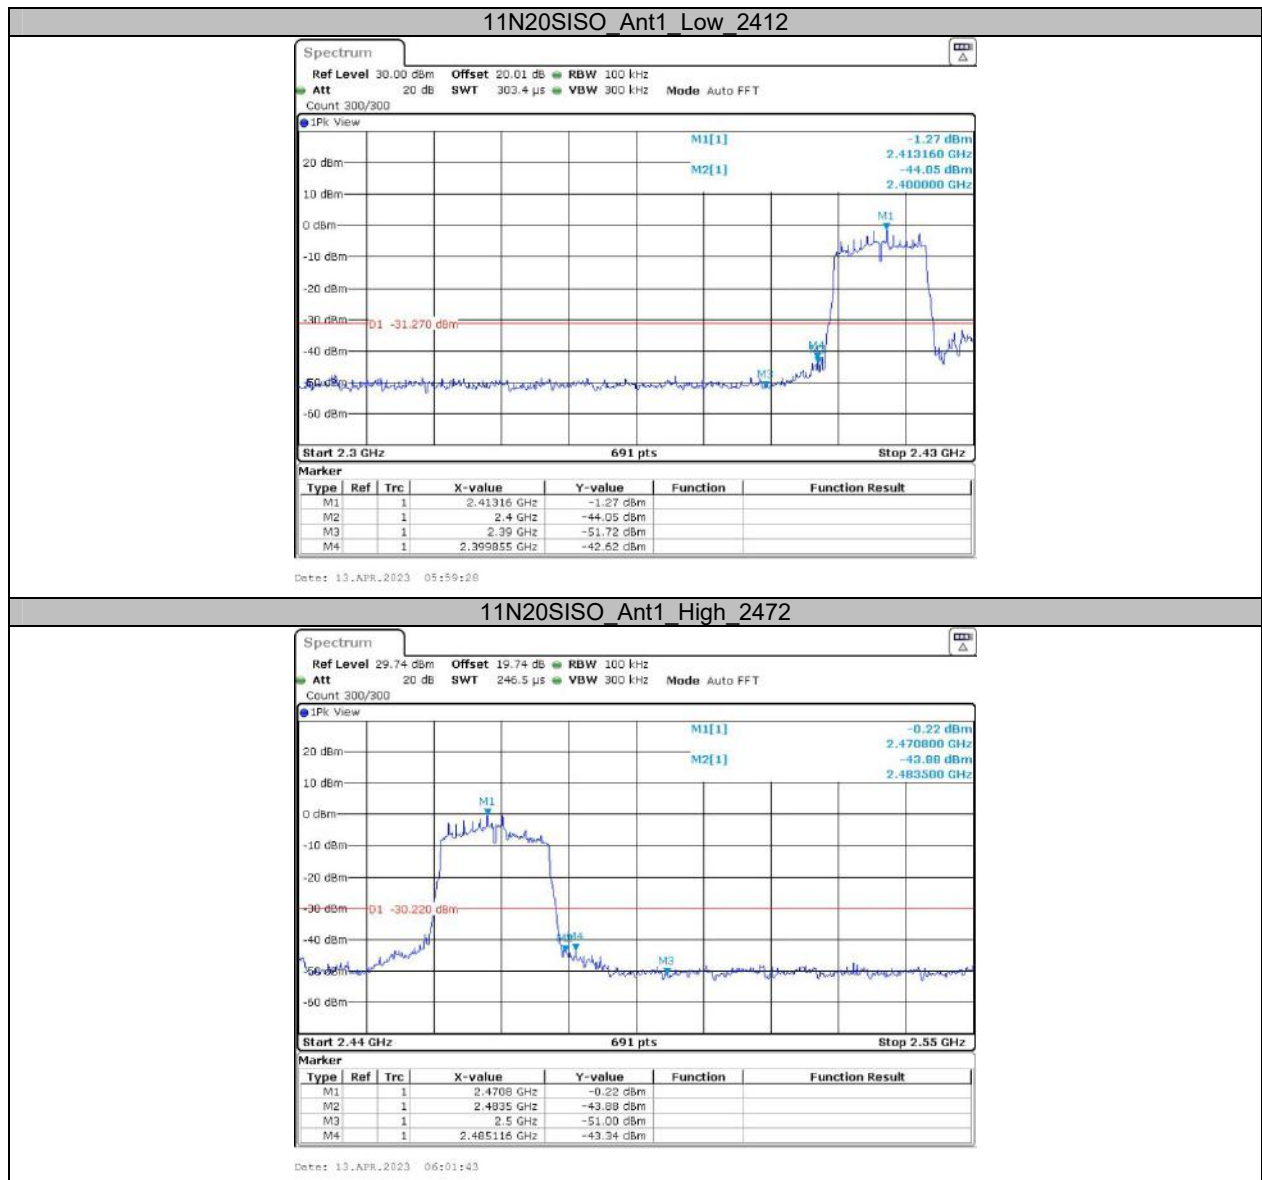

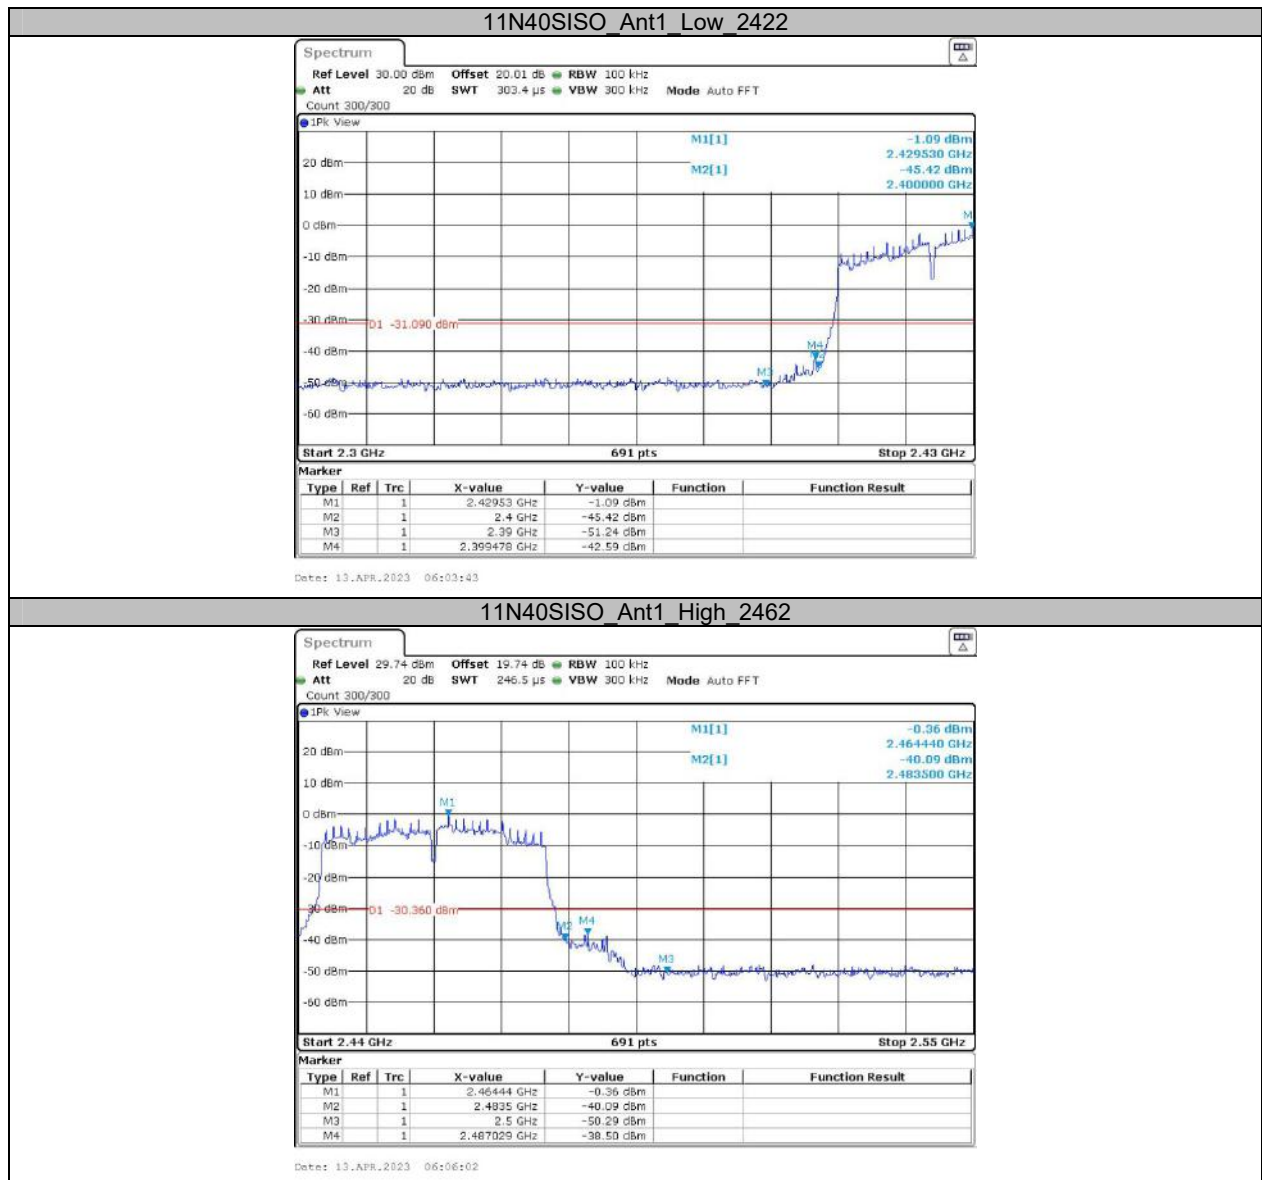

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
11B	Ant1	2442	8.39	8.43	99.53	/	/
11G	Ant1	2442	1.39	1.44	96.53	0.15	0.72
11N20SISO	Ant1	2442	1.30	1.35	96.30	0.16	0.77
11N40SISO	Ant1	2442	0.64	0.69	92.75	0.33	1.56

Test Graphs








APPENDIX BLE- Main Antenna**Appendix A: DTS Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.67	2402.33	0.5	PASS
		2440	0.66	2439.67	2440.33	0.5	PASS
		2480	0.66	2479.67	2480.33	0.5	PASS
BLE_2M	Ant1	2402	1.16	2401.43	2402.58	0.5	PASS
		2440	1.16	2439.42	2440.58	0.5	PASS
		2480	1.16	2479.42	2480.58	0.5	PASS

Test Graphs

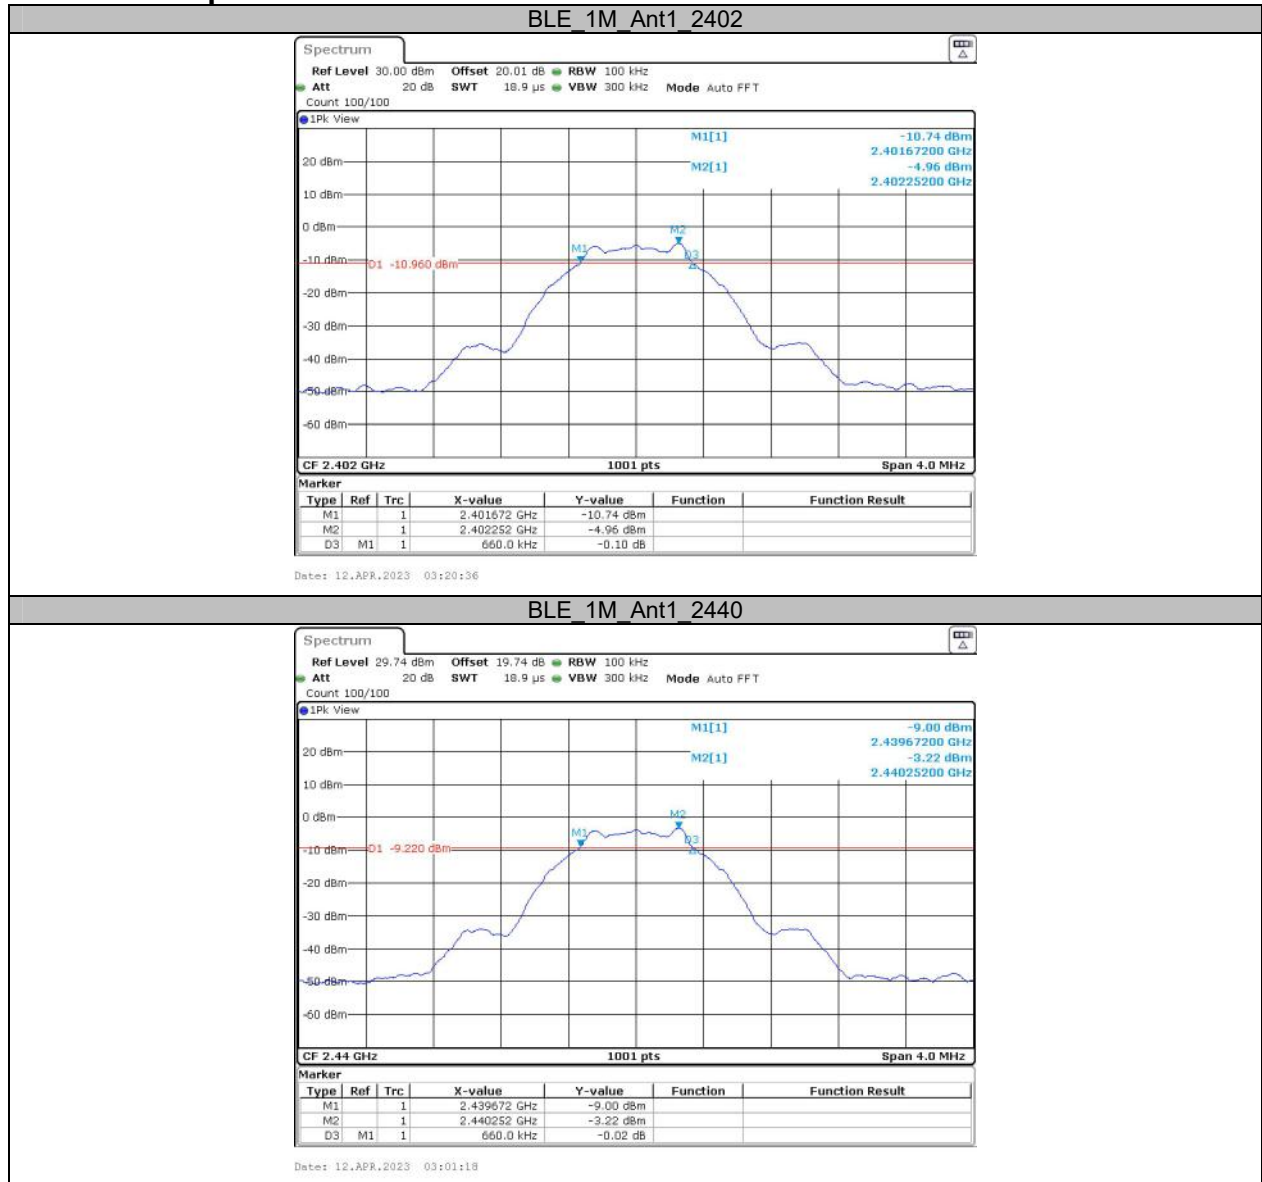

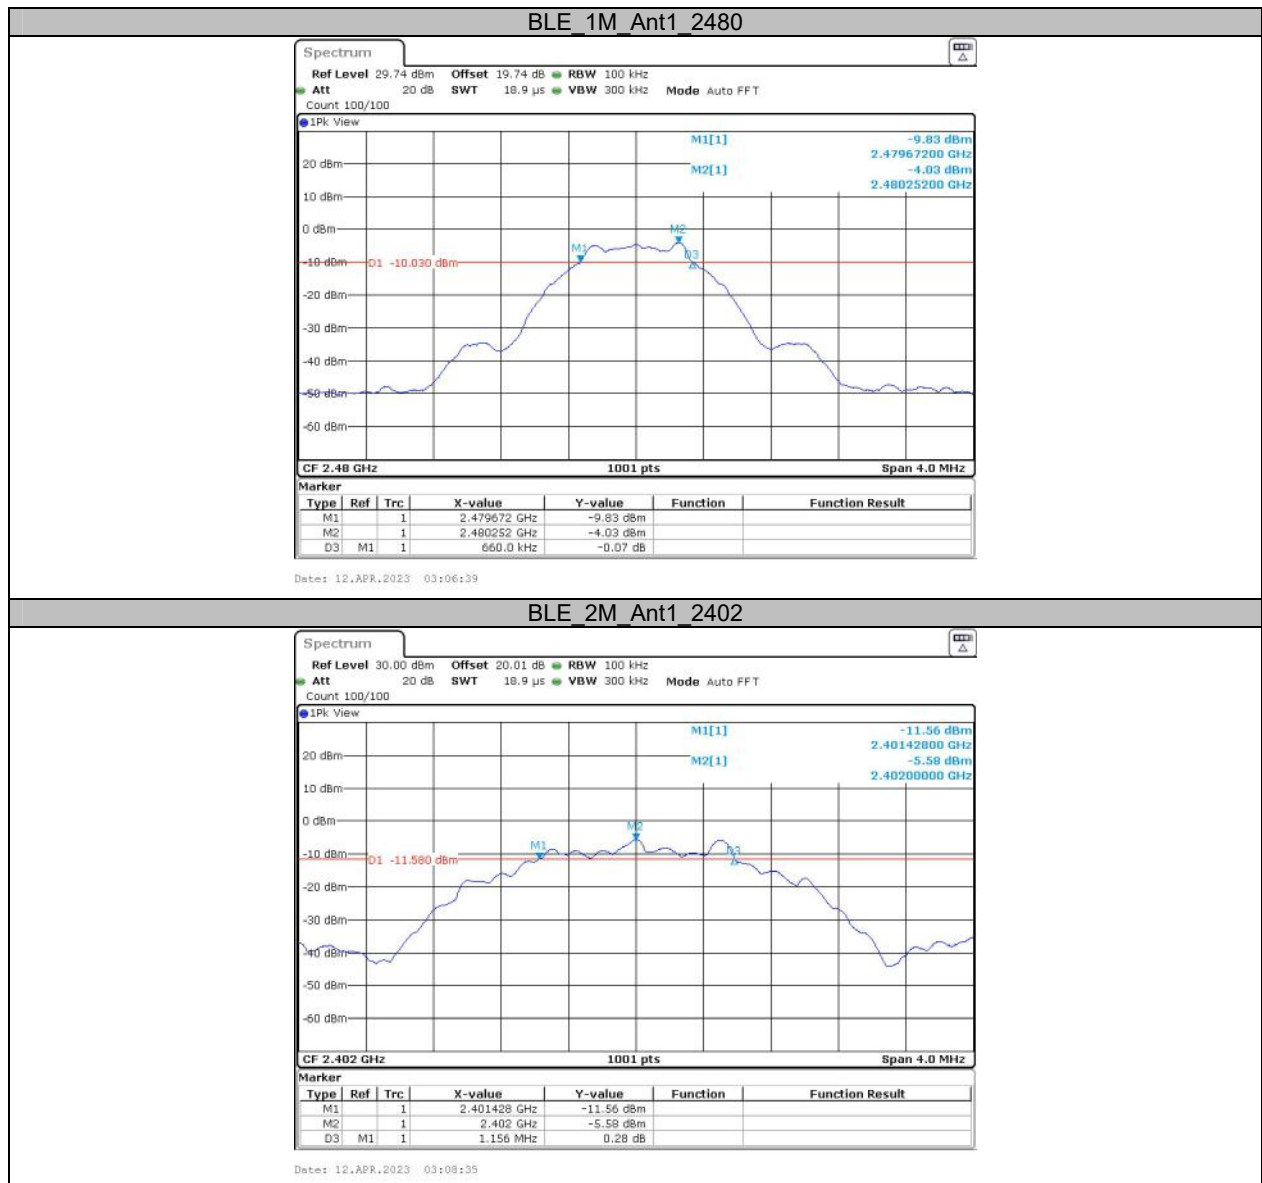


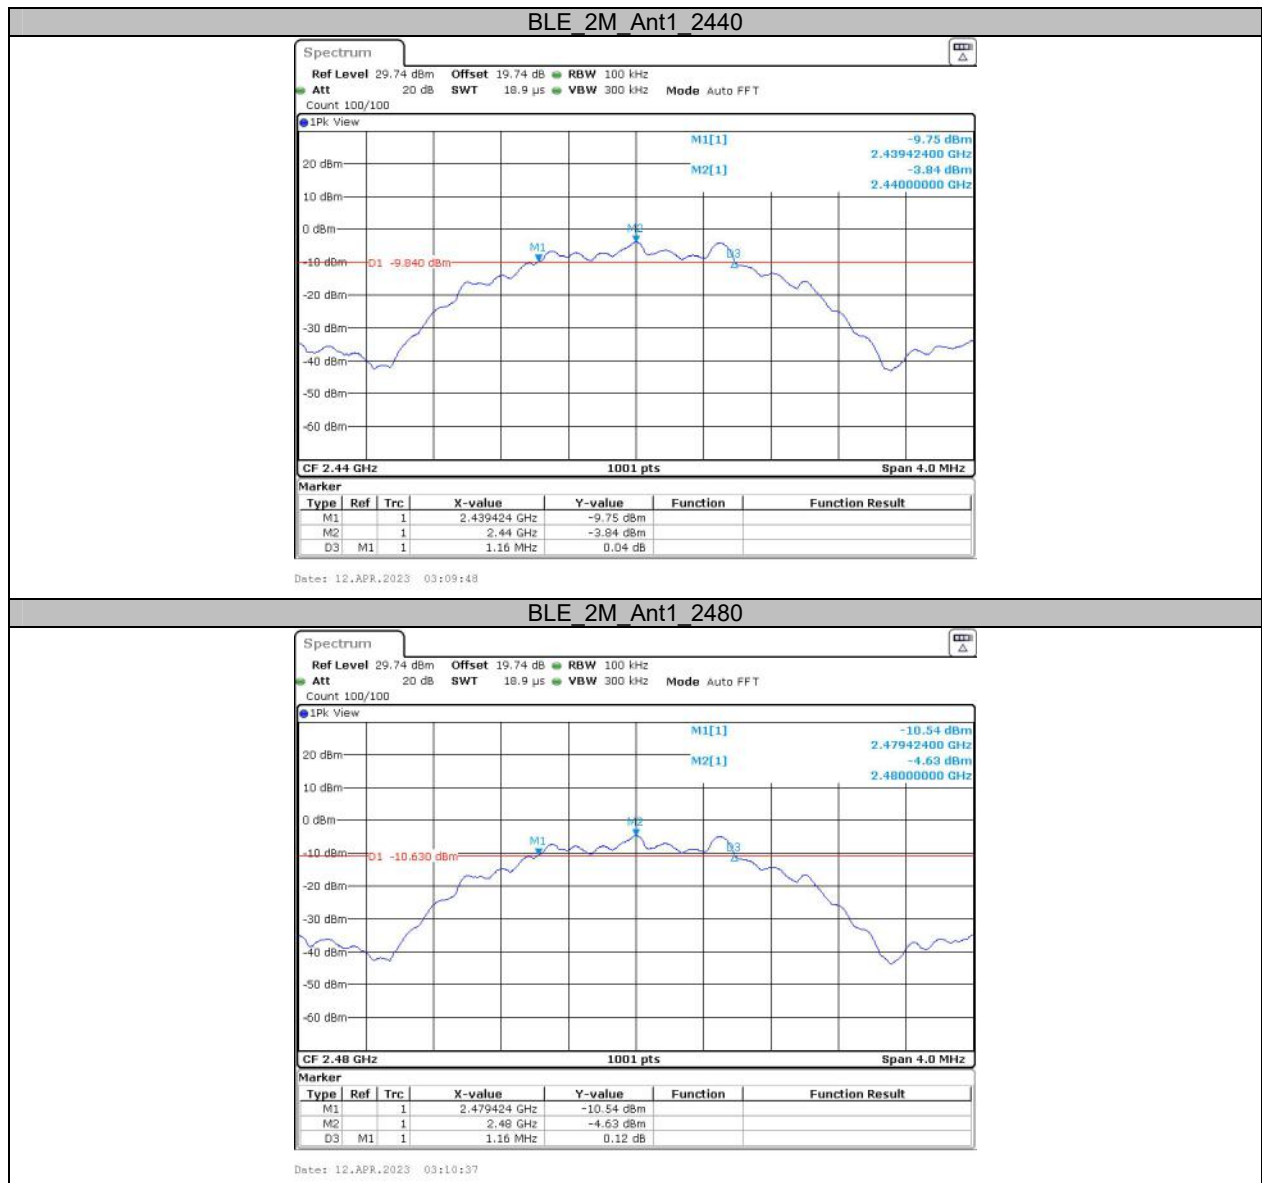



**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	2401.493	2402.531	---	---
		2440	1.035	2439.493	2440.527	---	---
		2480	1.035	2479.493	2480.527	---	---
BLE_2M	Ant1	2402	2.074	2400.985	2403.059	---	---
		2440	2.074	2438.981	2441.055	---	---
		2480	2.074	2478.981	2481.055	---	---

Test Graphs

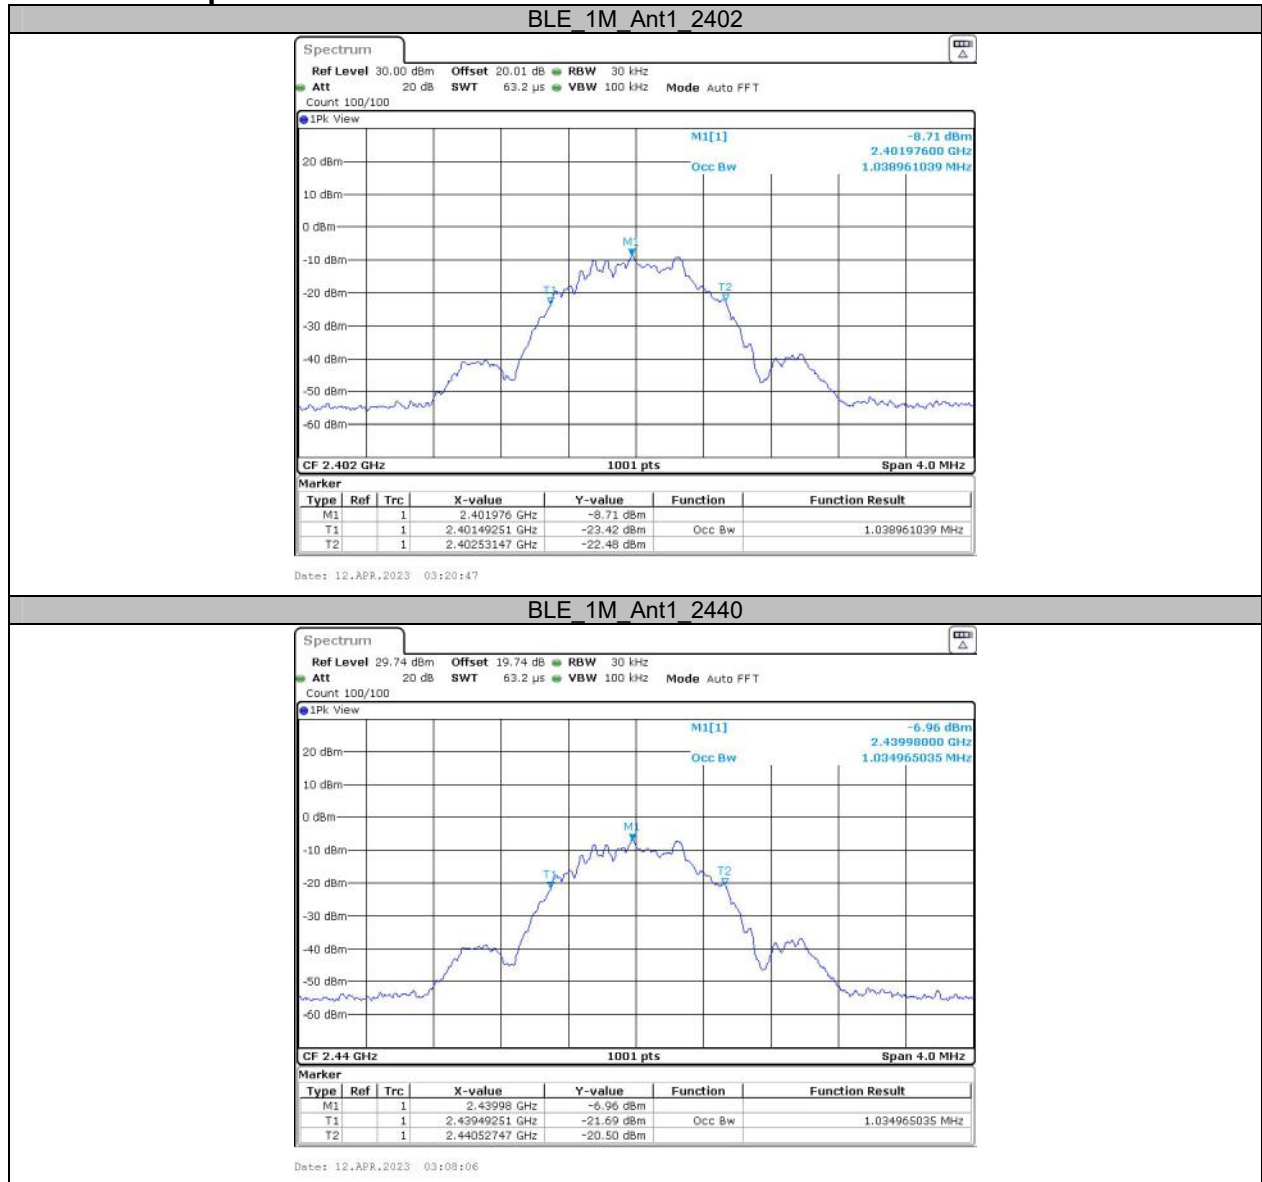

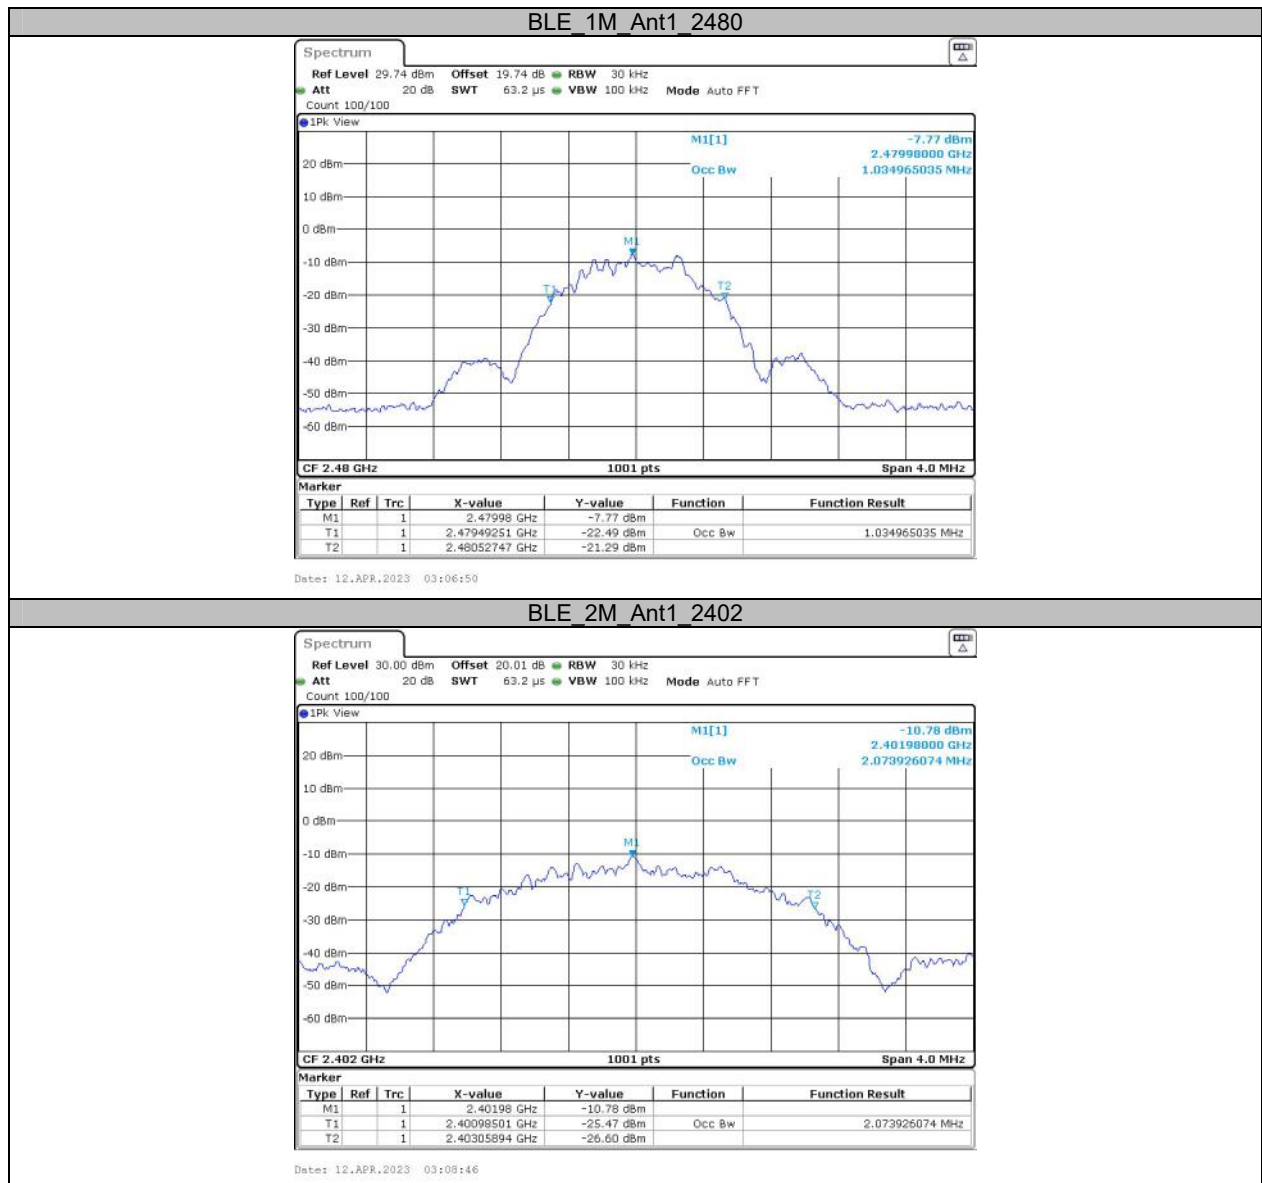


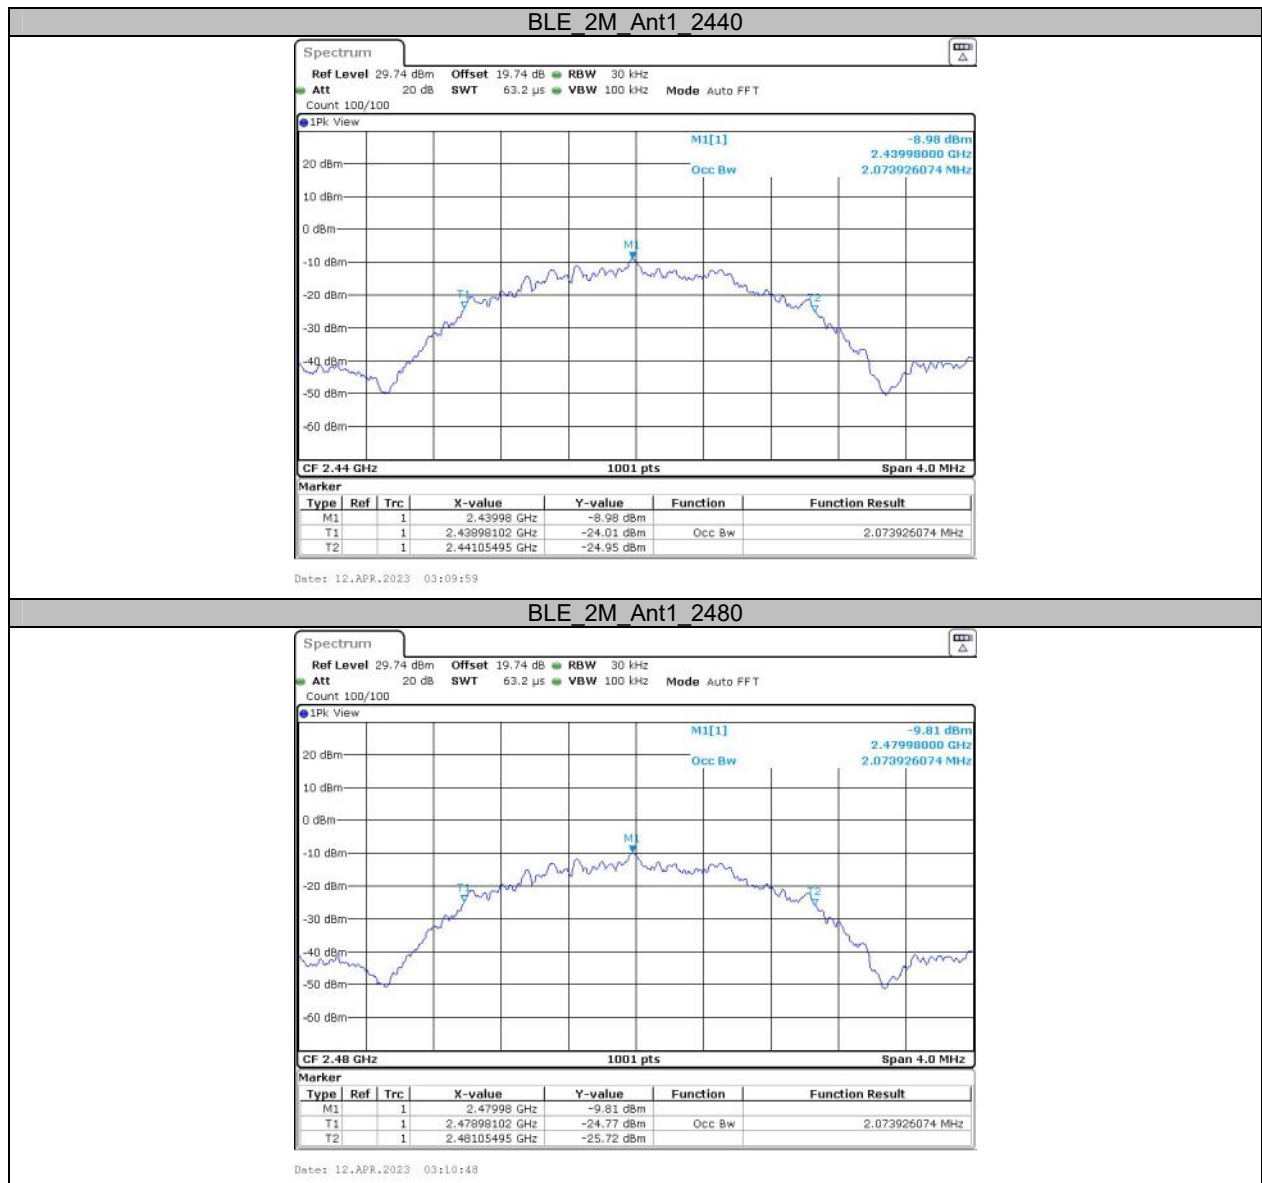



Appendix C: Maximum conducted output power Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-4.28	≤30	PASS
		2440	-2.17	≤30	PASS
		2480	-3.05	≤30	PASS
BLE_2M	Ant1	2402	-4.34	≤30	PASS
		2440	-2.2	≤30	PASS
		2480	-3.04	≤30	PASS

Test Graphs Peak

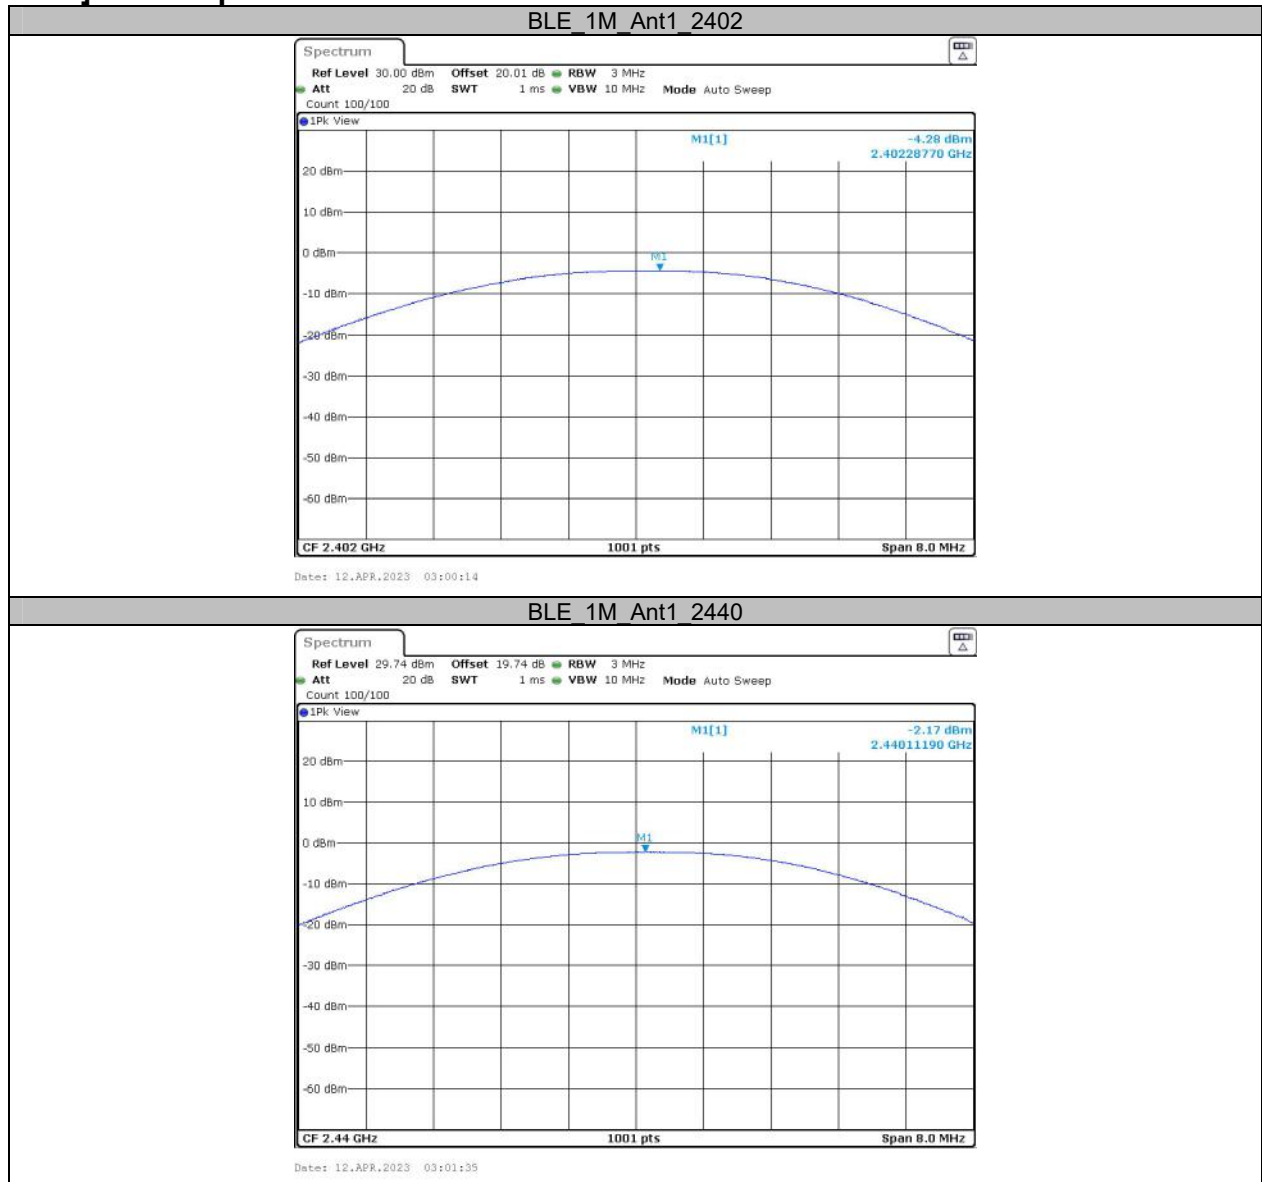


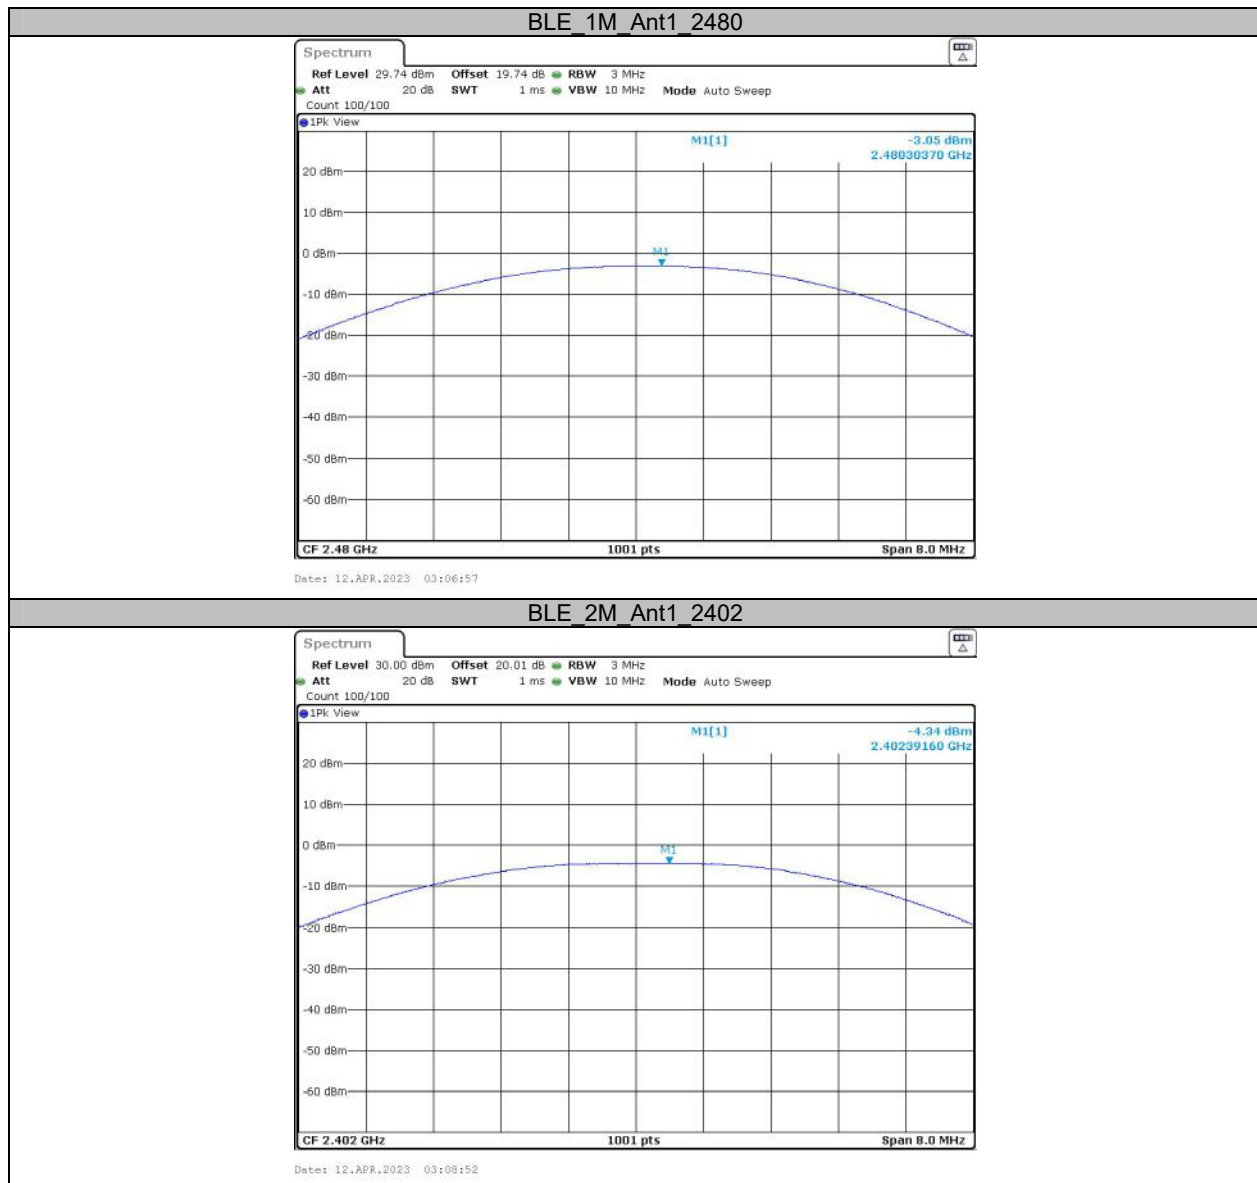


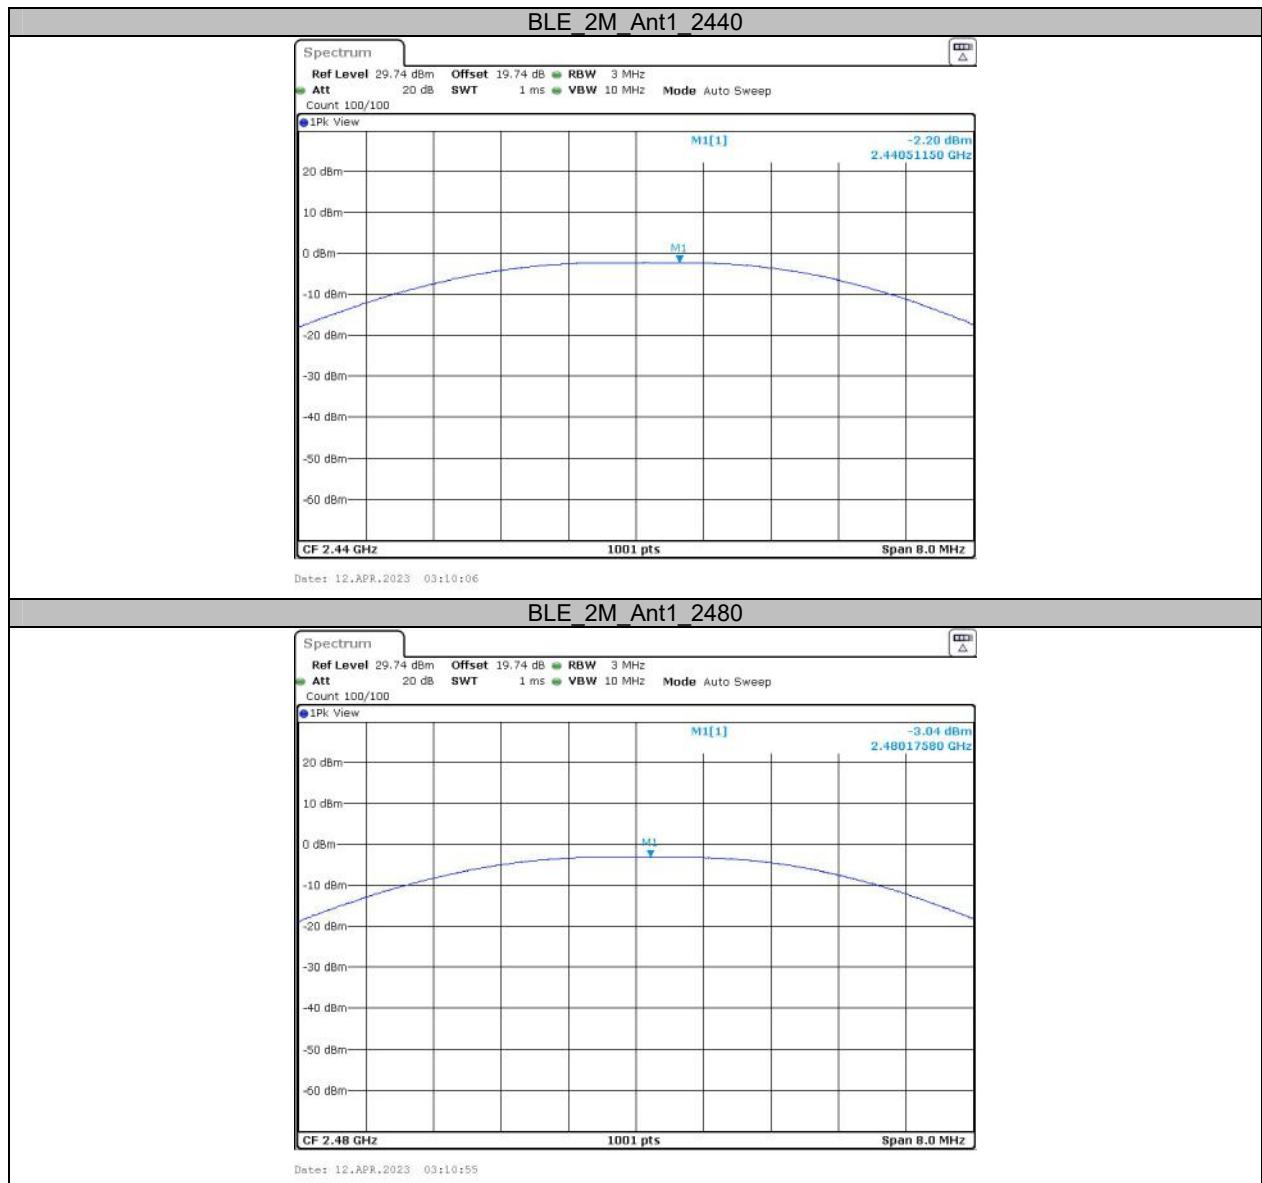


**Appendix D: Maximum power spectral density
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-21.7	≤8.00	PASS
		2440	-19.51	≤8.00	PASS
		2480	-20.33	≤8.00	PASS
BLE_2M	Ant1	2402	-23.96	≤8.00	PASS
		2440	-21.71	≤8.00	PASS
		2480	-22.61	≤8.00	PASS

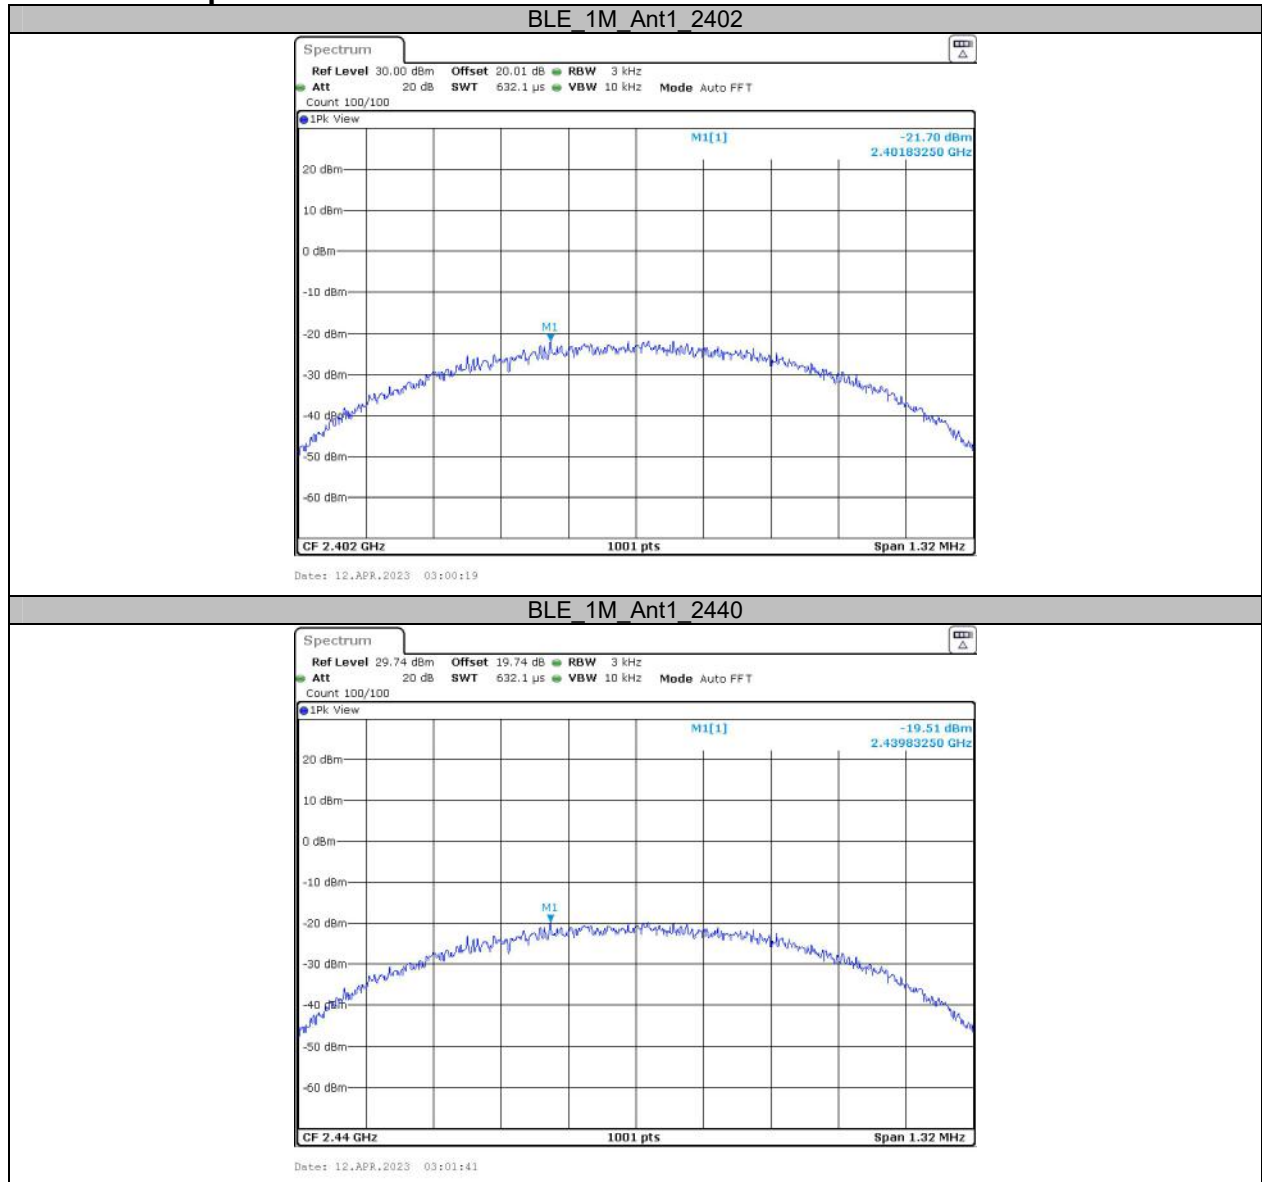
Test Graphs

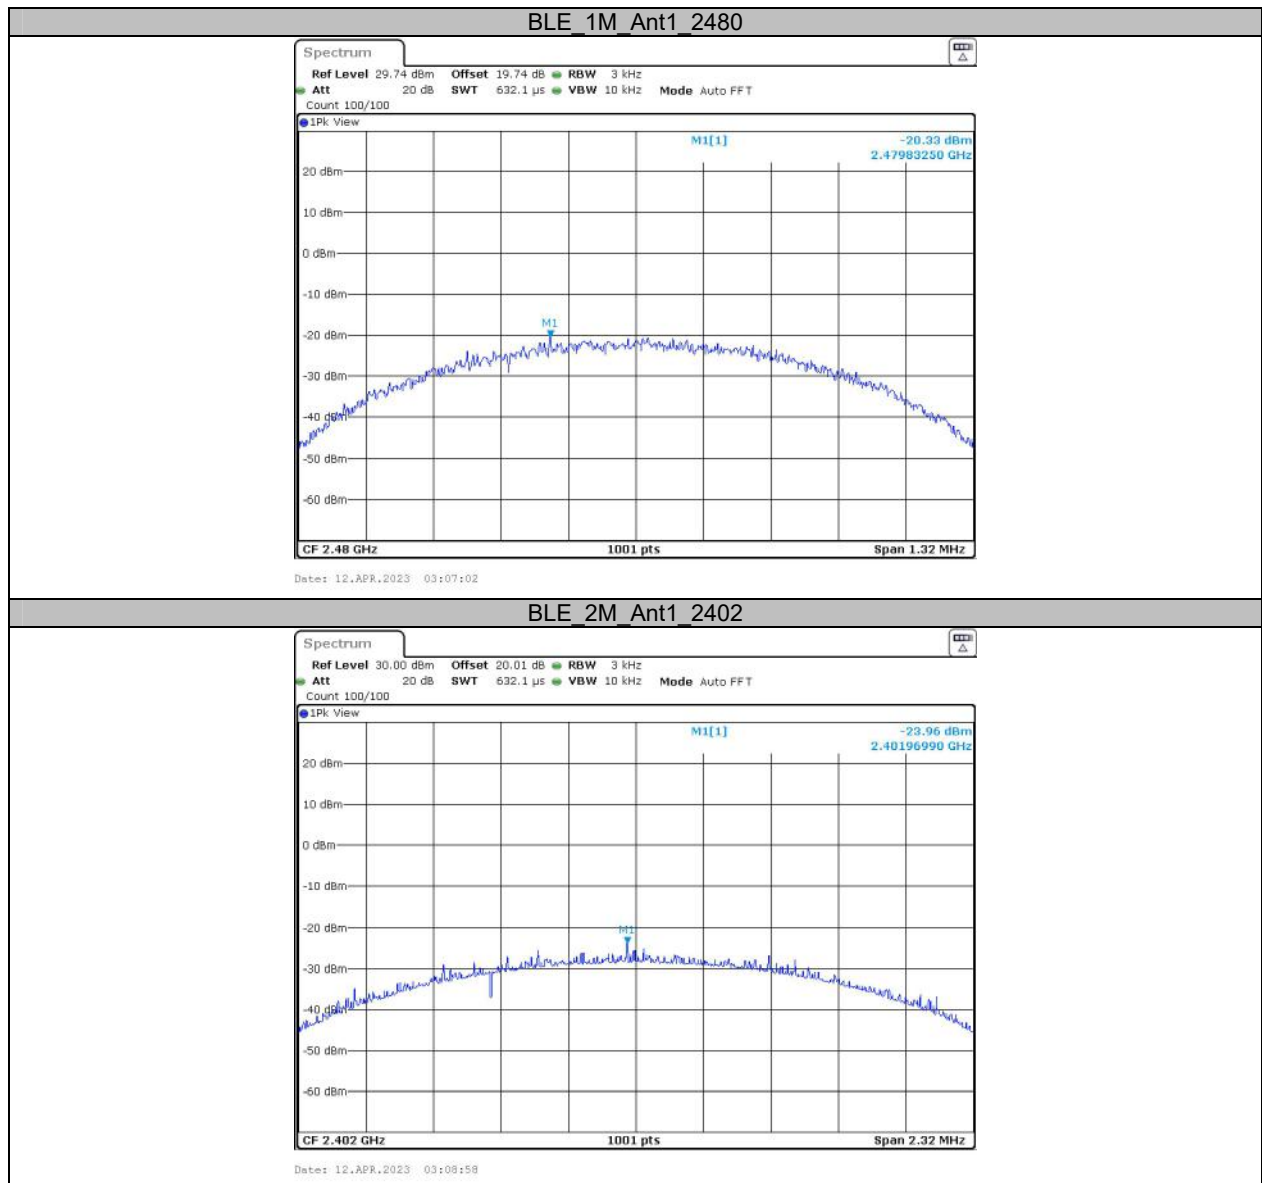


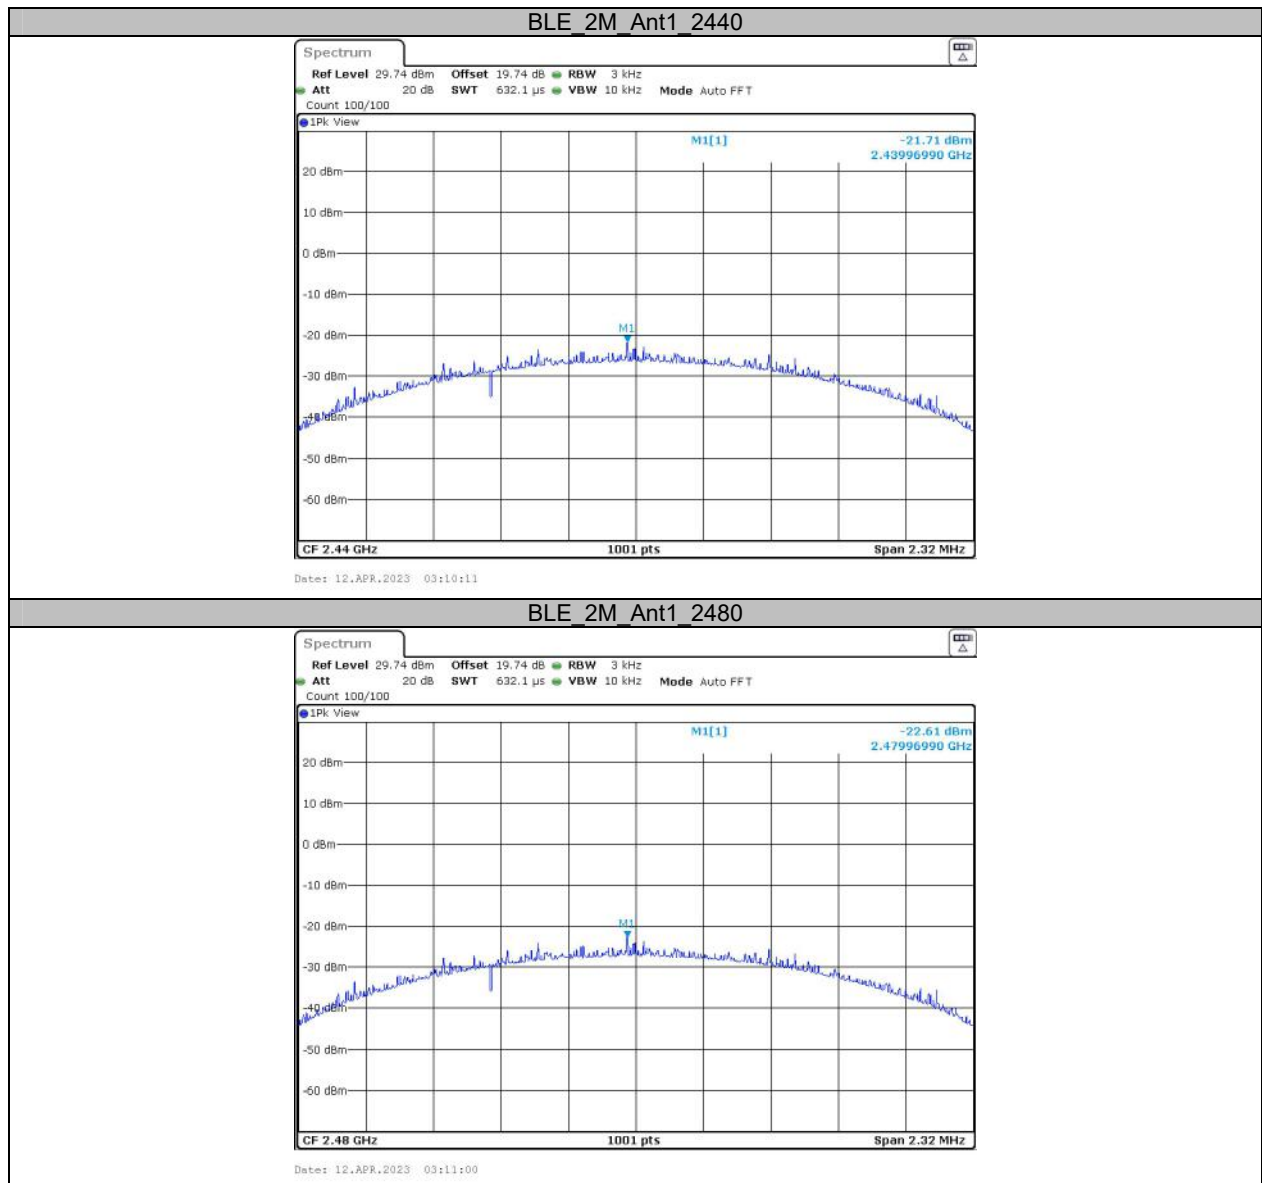

Appendix E: Band edge measurements

Test Graphs

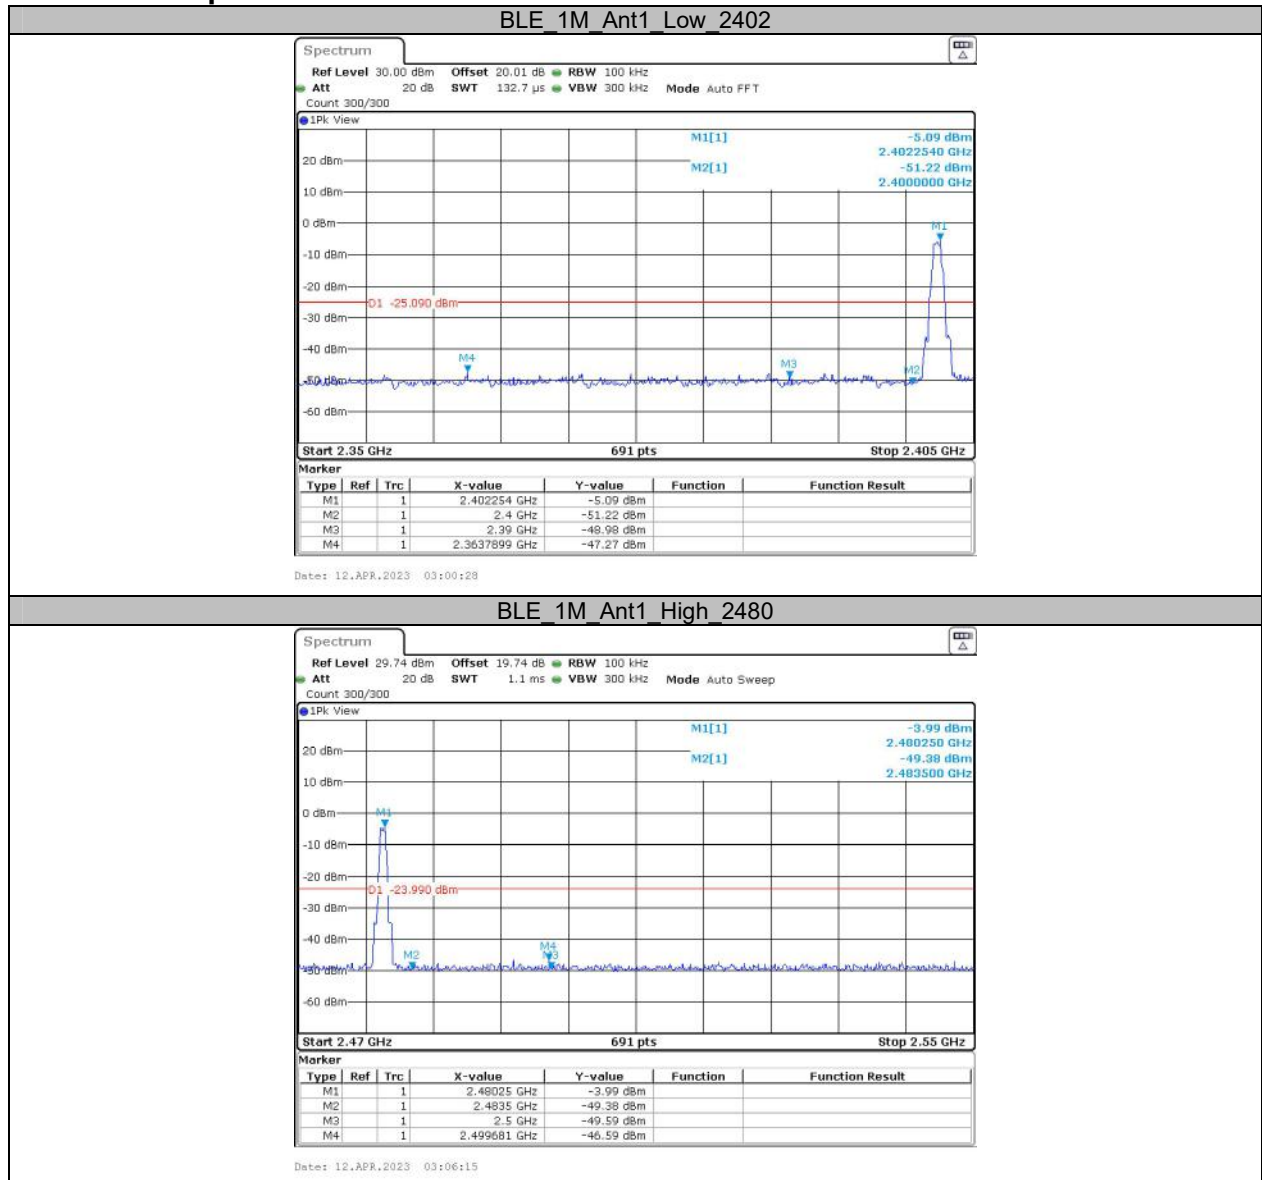


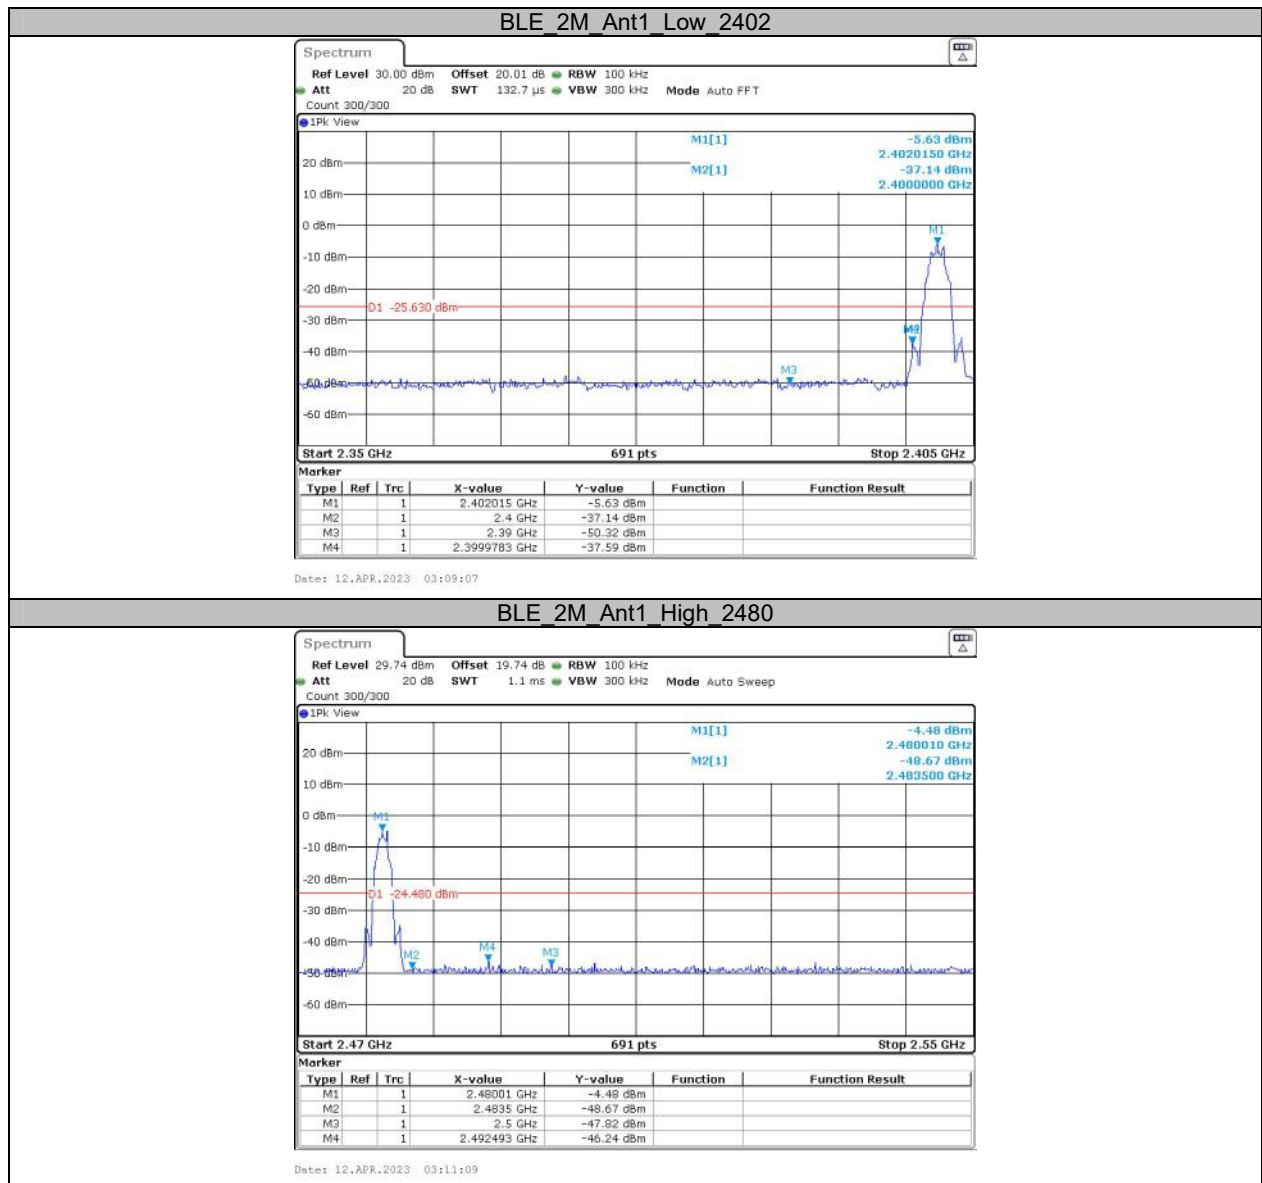

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Minimum VBW (kHz)
BLE_1M	Ant1	2440	2.13	2.51	84.86	0.71	0.47
BLE_2M	Ant1	2440	1.07	1.88	56.91	2.45	0.93

Test Graphs

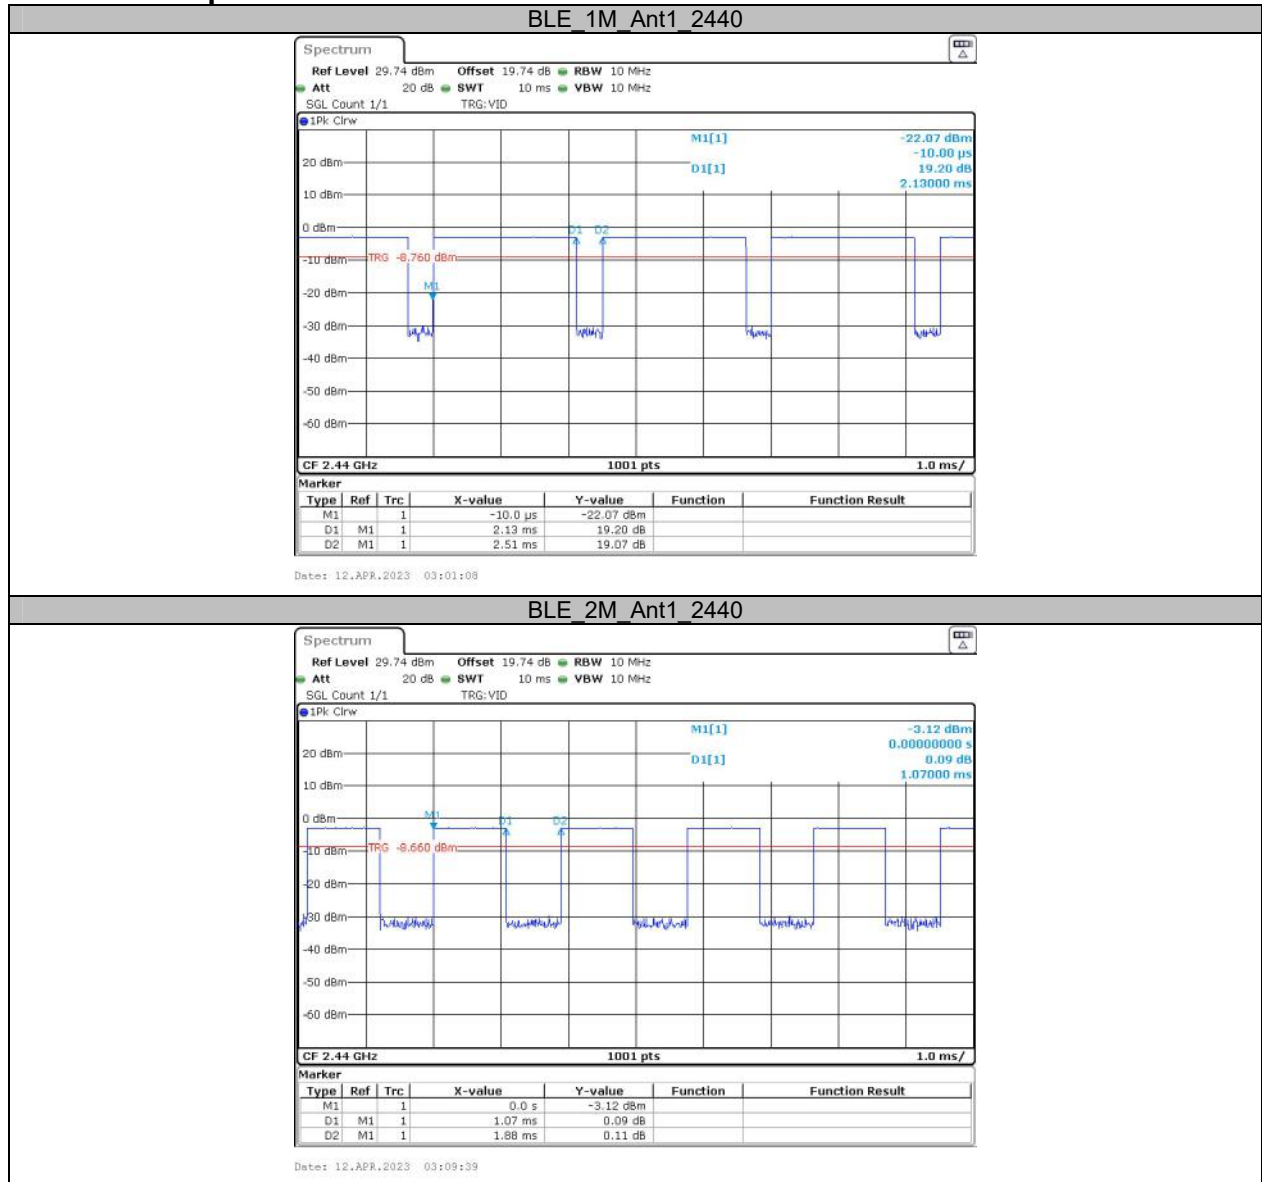

***** END OF REPORT *****