

Plot: 1#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.871$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant0 LTE Band 42 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.107 W/kg


Head Left Tilt/Ant0 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.284 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

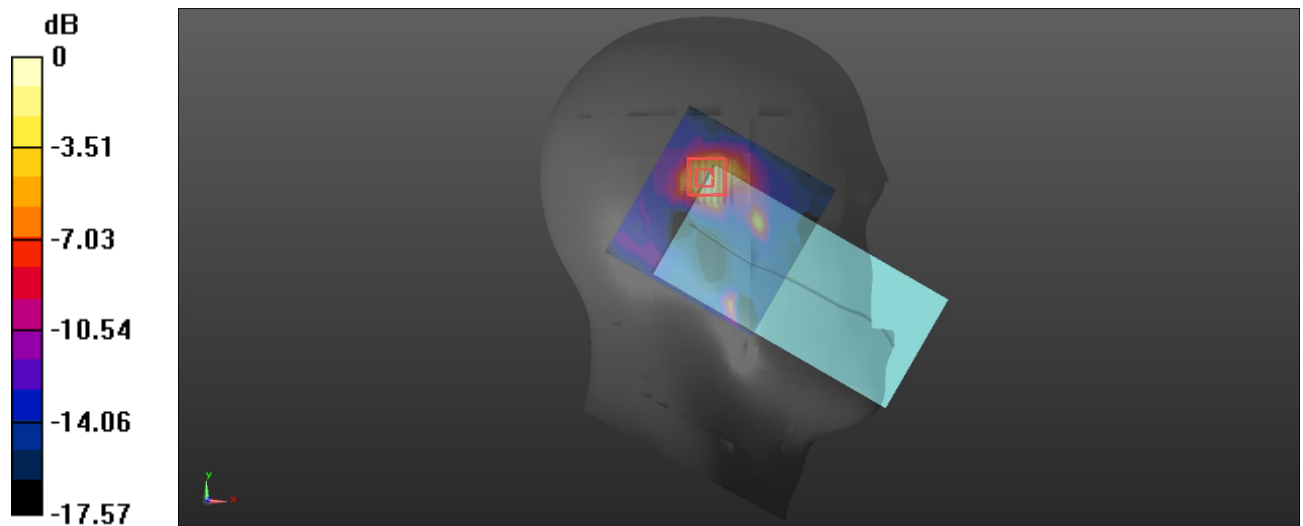

0 dB = 0.107 W/kg = -9.71 dBW/kg

Plot: 2#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.871$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant0 LTE Band 42 1RB Mid/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0296 W/kg


Body Back/Ant0 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.389 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00386 W/kg

Maximum value of SAR (measured) = 0.0327 W/kg

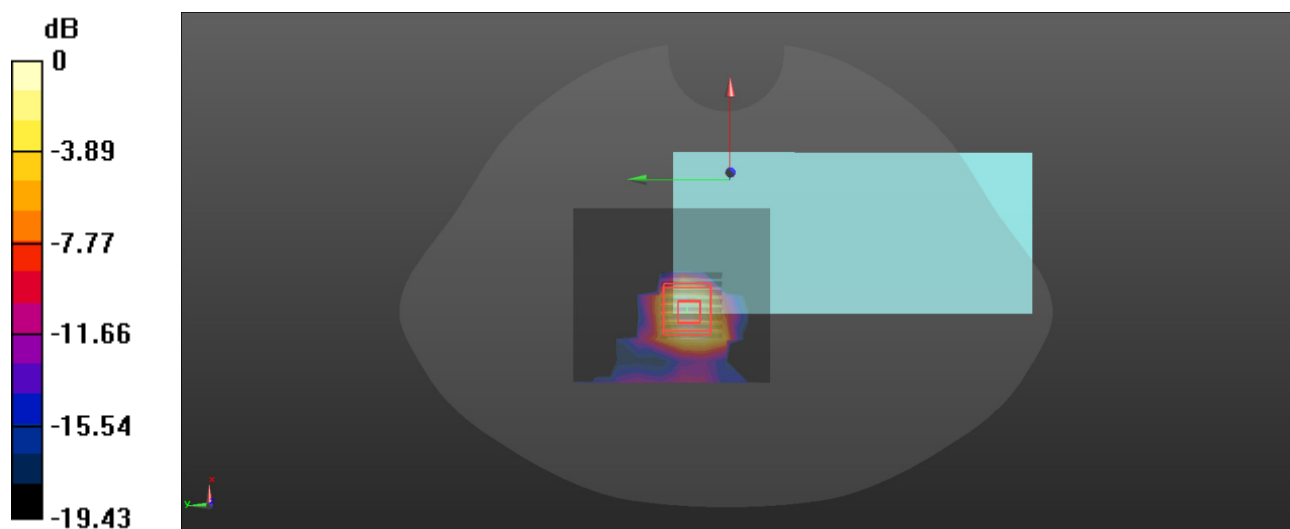

0 dB = 0.0327 W/kg = -14.85 dBW/kg

Plot: 3#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.871$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant 6 LTE Band 42 1RB Mid/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.168 W/kg


Head Right Tilt/Ant 6 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.583 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

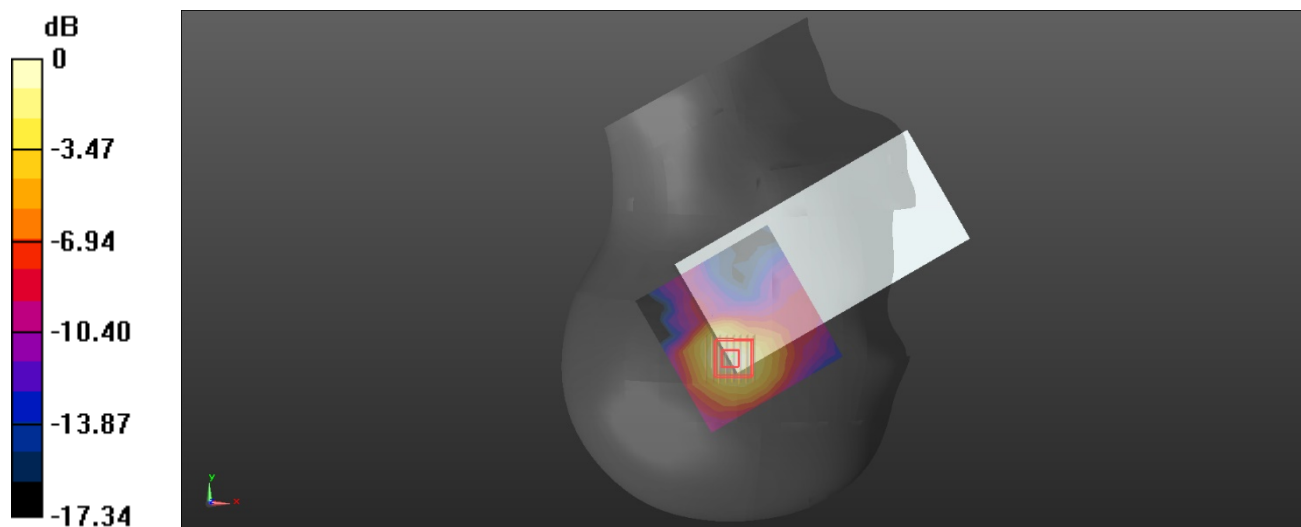

0 dB = 0.159 W/kg = -7.99 dBW/kg

Plot: 4#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.871$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant 6 LTE Band 42 1RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.174 W/kg


Body Back/Ant 6 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.287 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

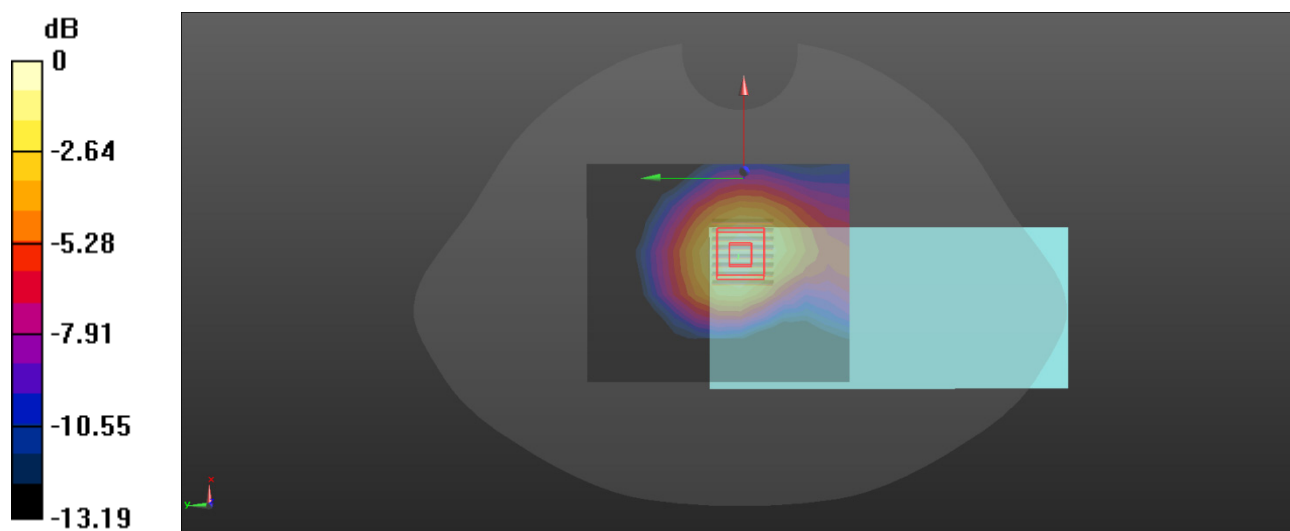

Plot: 5#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.877$ S/m; $\epsilon_r = 36.866$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.356 W/kg


Head Right Tilt/Ant7 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.464 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

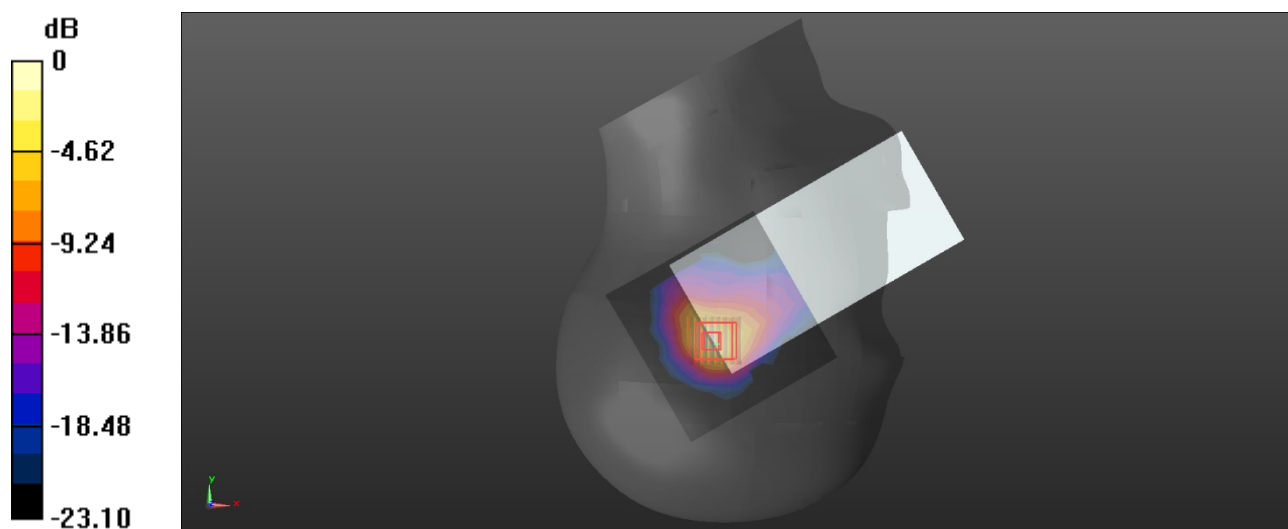

0 dB = 0.375 W/kg = -4.26 dBW/kg

Plot: 6#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.877$ S/m; $\epsilon_r = 36.866$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant7 LTE Band 42 50%RB Mid/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.111 W/kg


Body Back/Ant7 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.052 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

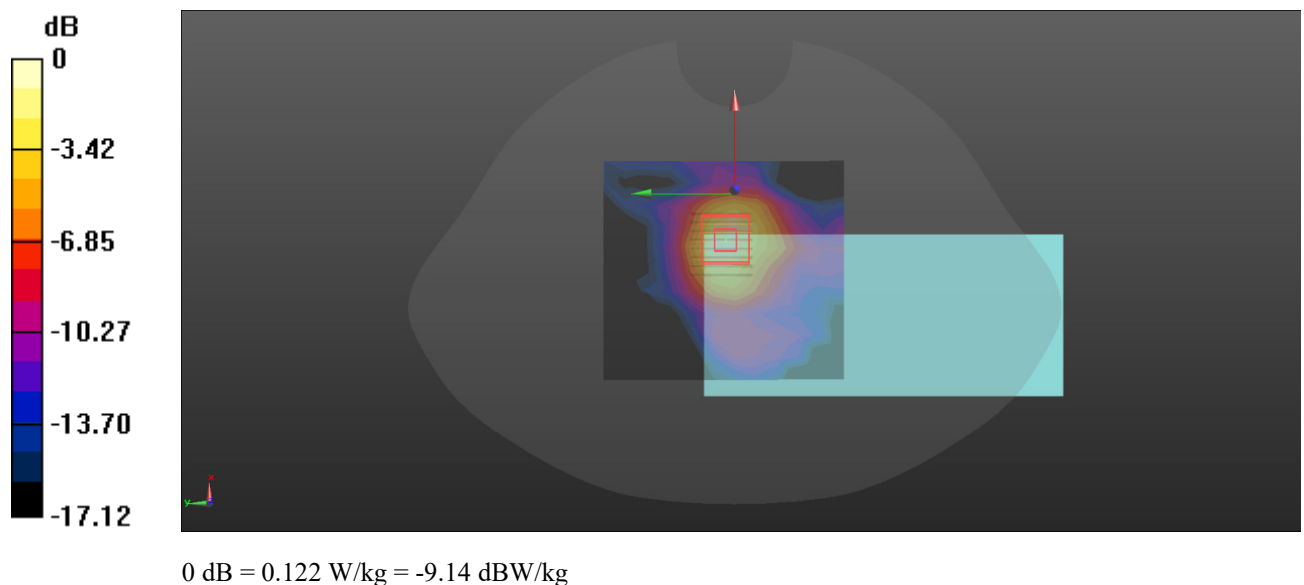

Plot: 7#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.877$ S/m; $\epsilon_r = 36.866$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant8 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.116 W/kg


Head Right Cheek/Ant8 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.800 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.116 W/kg

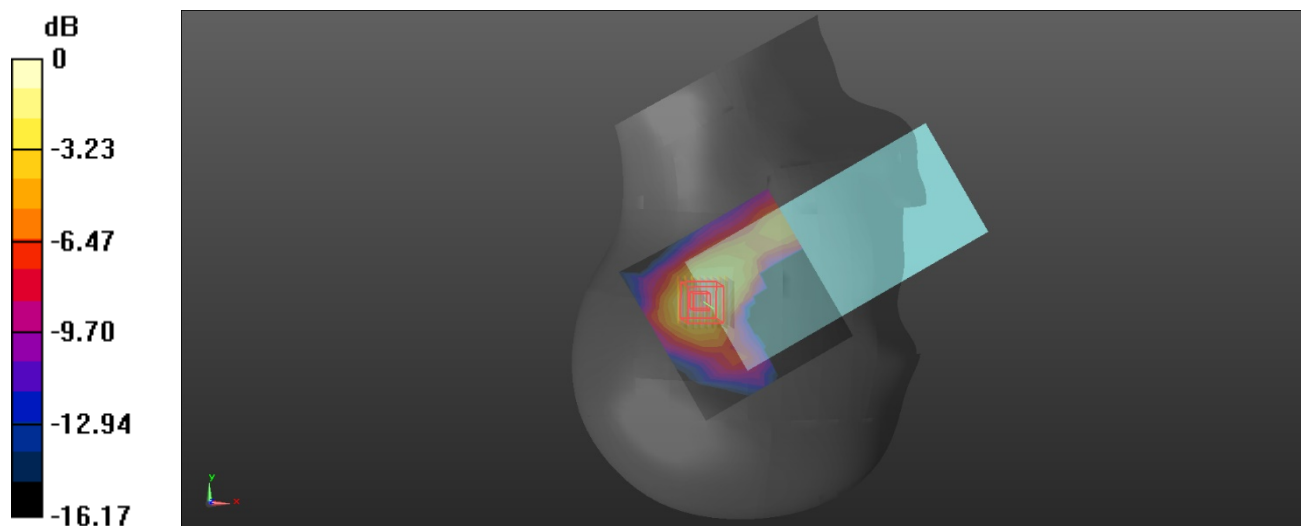

0 dB = 0.116 W/kg = -9.36 dBW/kg

Plot: 8#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.877$ S/m; $\epsilon_r = 36.866$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant8 LTE Band 42 1RB Mid/Area Scan (11x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0409 W/kg


Body Back/Ant8 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.386 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.00911 W/kg; SAR(10 g) = 0.00285 W/kg

Maximum value of SAR (measured) = 0.0254 W/kg

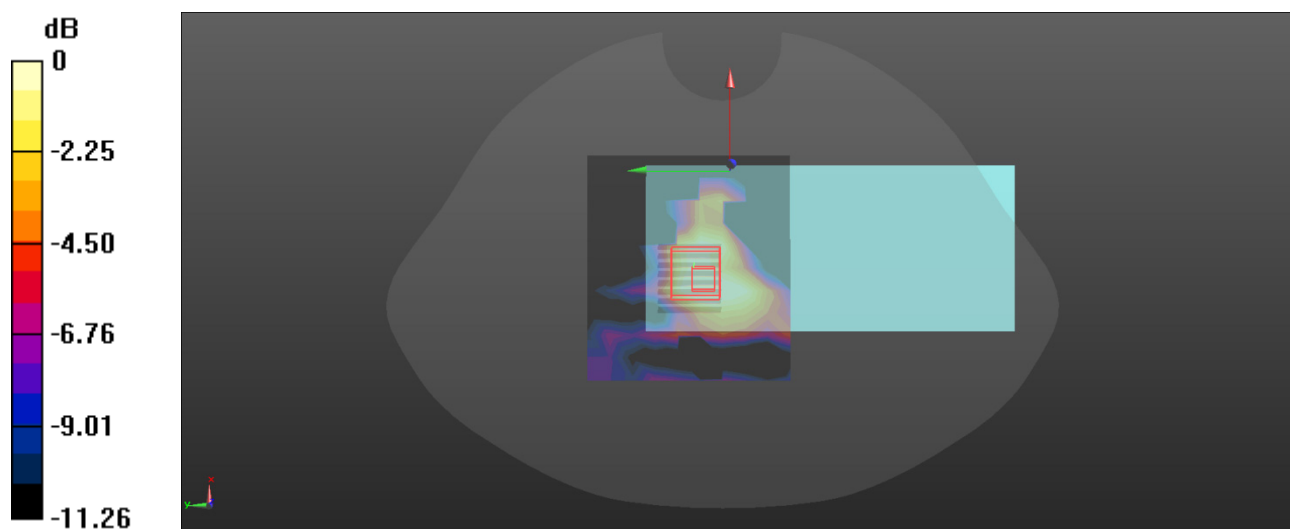

0 dB = 0.0254 W/kg = -15.95 dBW/kg

Plot: 9#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.821$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant2 FR1 n 5 50%RB Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0279 W/kg


Head Left Cheek/Ant2 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.187 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0238 W/kg

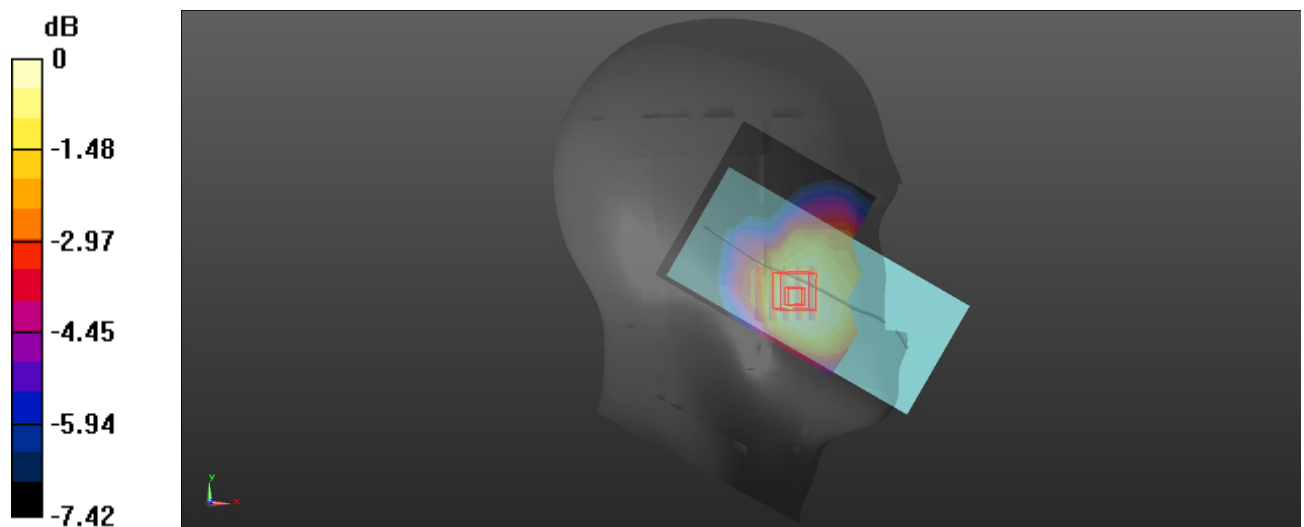

0 dB = 0.0238 W/kg = -16.23 dBW/kg

Plot: 10#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant2 FR1 n 5 50%RB Mid/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0499 W/kg


Body Back/Ant2 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.947 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0514 W/kg

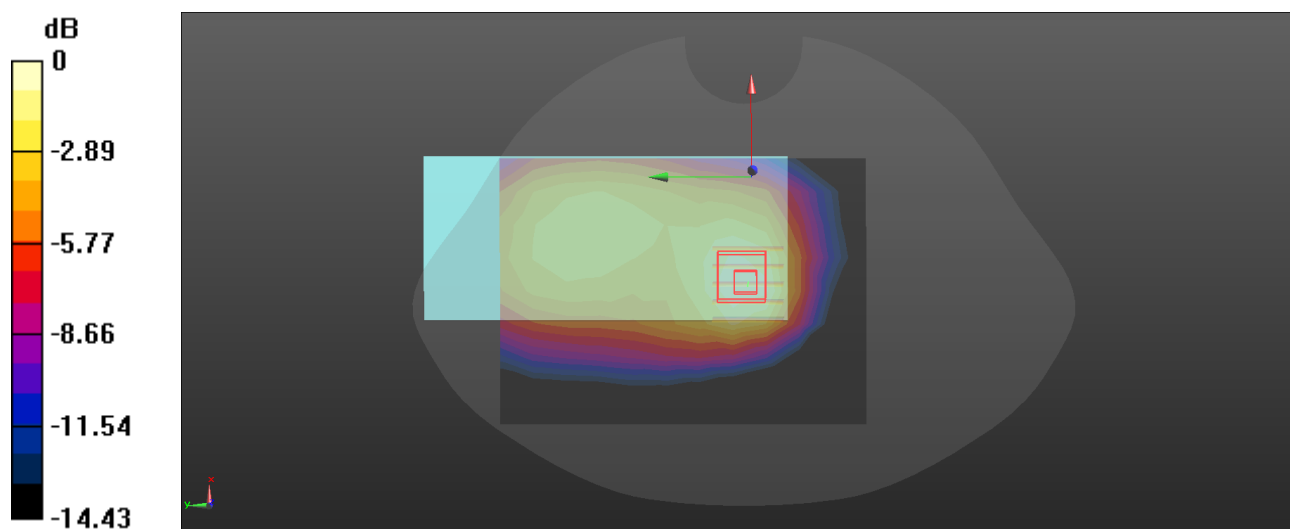

0 dB = 0.0514 W/kg = -12.89 dBW/kg

Plot: 11#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.821$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant4 FR1 n 5 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0876 W/kg


Head Left Cheek/Ant4 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.656 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0978 W/kg

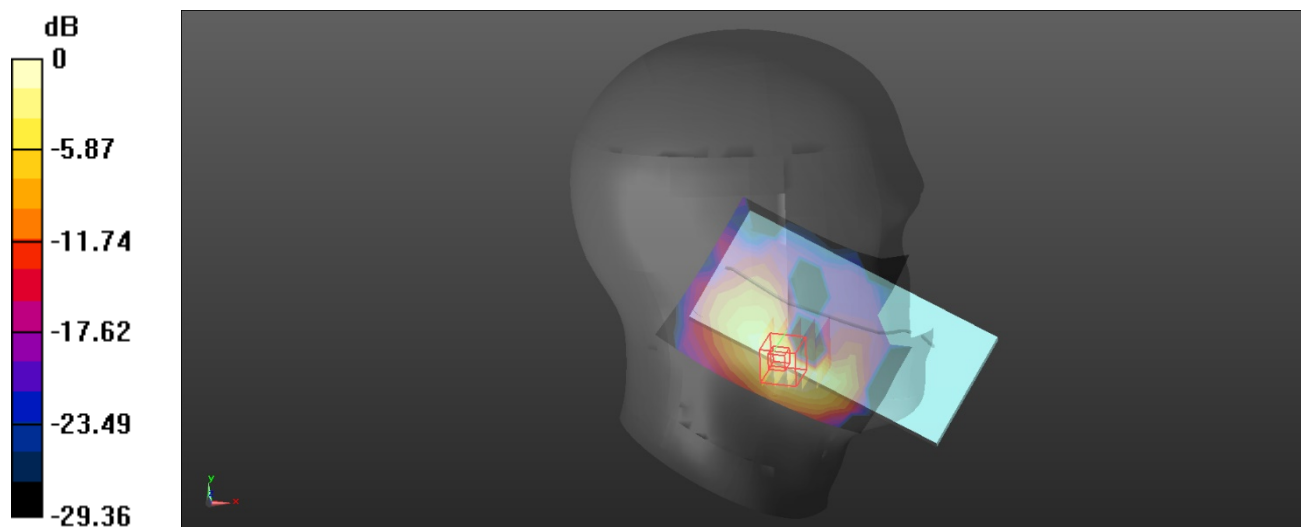

0 dB = 0.0978 W/kg = -10.10 dBW/kg

Plot: 12#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant4 FR1 n 5 50%RB Mid/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


Body Left/Ant4 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.658 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

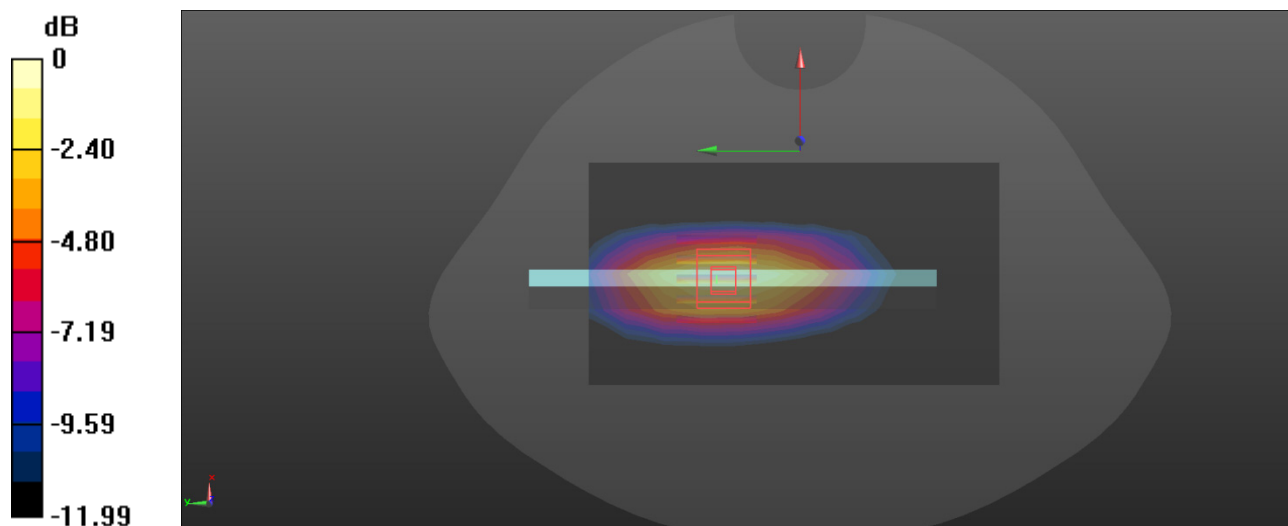

0 dB = 0.111 W/kg = -9.55 dBW/kg

Plot: 13#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 38.689$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 7 50%RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0284 W/kg


Head Left Cheek/Ant3 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.951 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00751 W/kg

Maximum value of SAR (measured) = 0.0242 W/kg

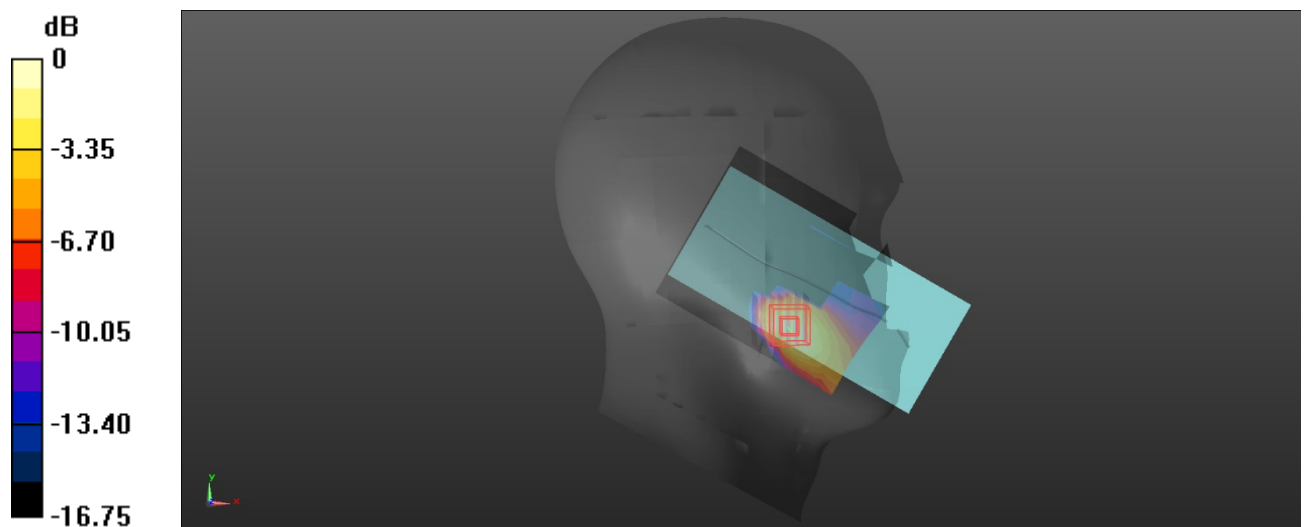

0 dB = 0.0242 W/kg = -16.16 dBW/kg

Plot: 14#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 38.689$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 7 50%RB Mid/Area Scan (9x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0849 W/kg


Body Bottom/Ant3 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.652 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0863 W/kg

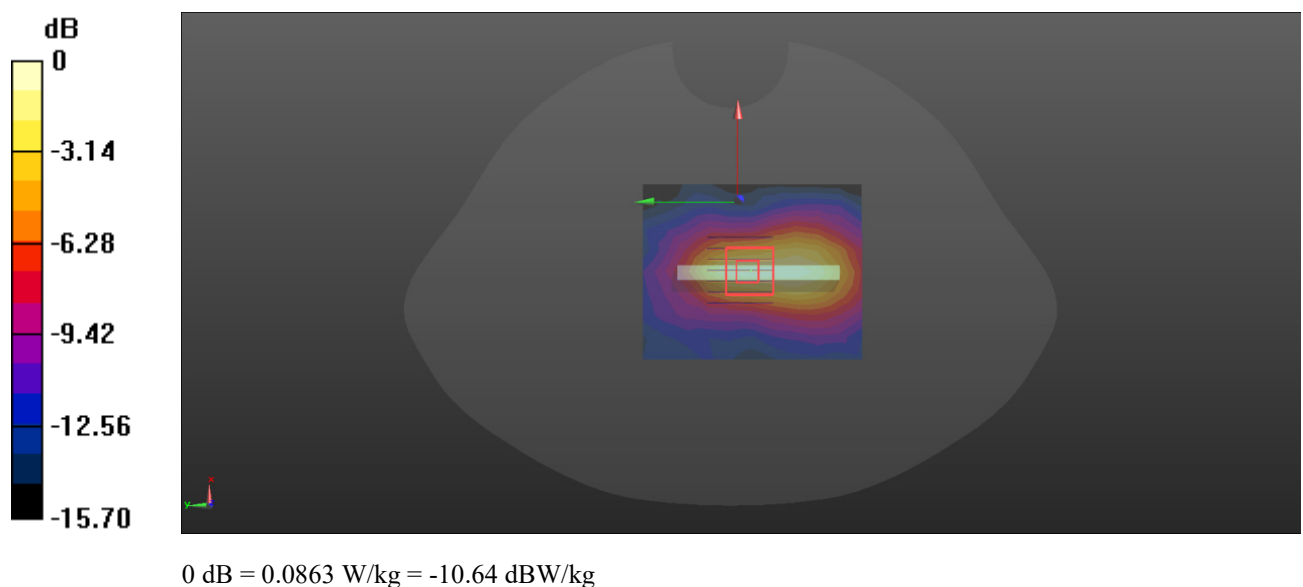

Plot: 15#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 38.689$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 FR1 n 7 50%RB Mid/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.359 W/kg


Head Right Tilt/Ant7 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.669 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

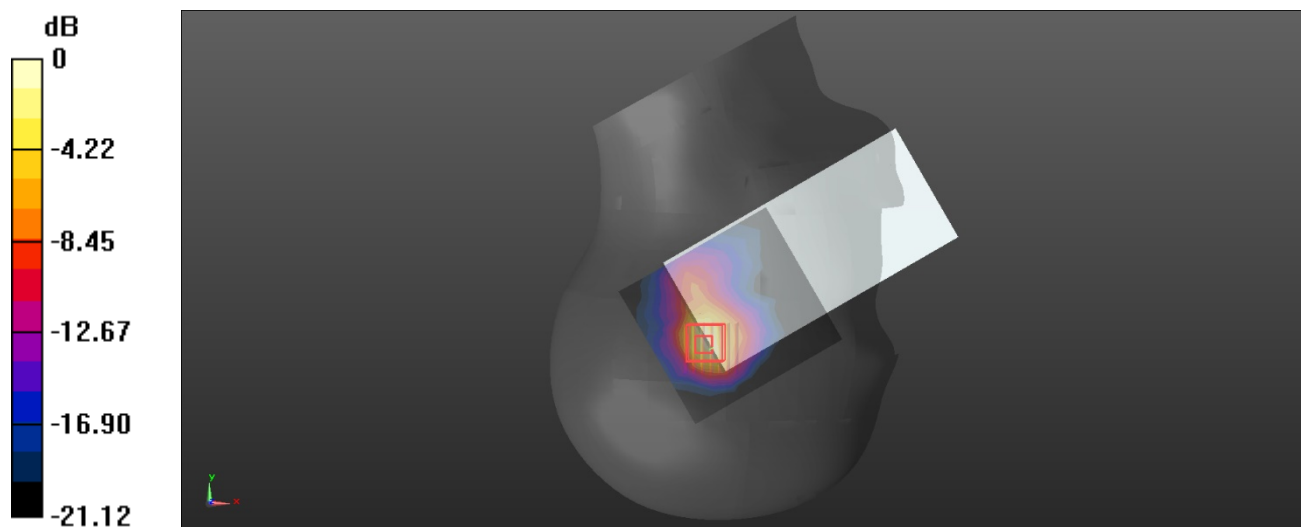

0 dB = 0.377 W/kg = -4.24 dBW/kg

Plot: 16#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 38.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant7 FR1 n 7 50%RB Mid/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0663 W/kg


Body Top/Ant7 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.772 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0602 W/kg

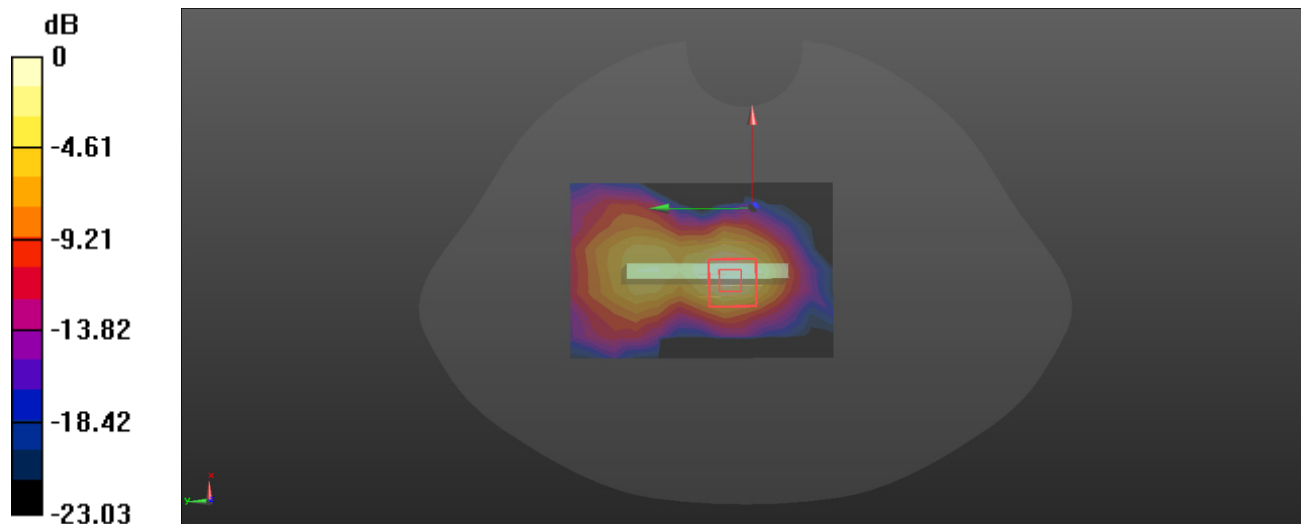

0 dB = 0.0602 W/kg = -12.20 dBW/kg

Plot: 17#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.973$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant2 FR1 n 12 50%RB Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0167 W/kg


Head Right Cheek/Ant2 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.715 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00931 W/kg

Maximum value of SAR (measured) = 0.0114 W/kg

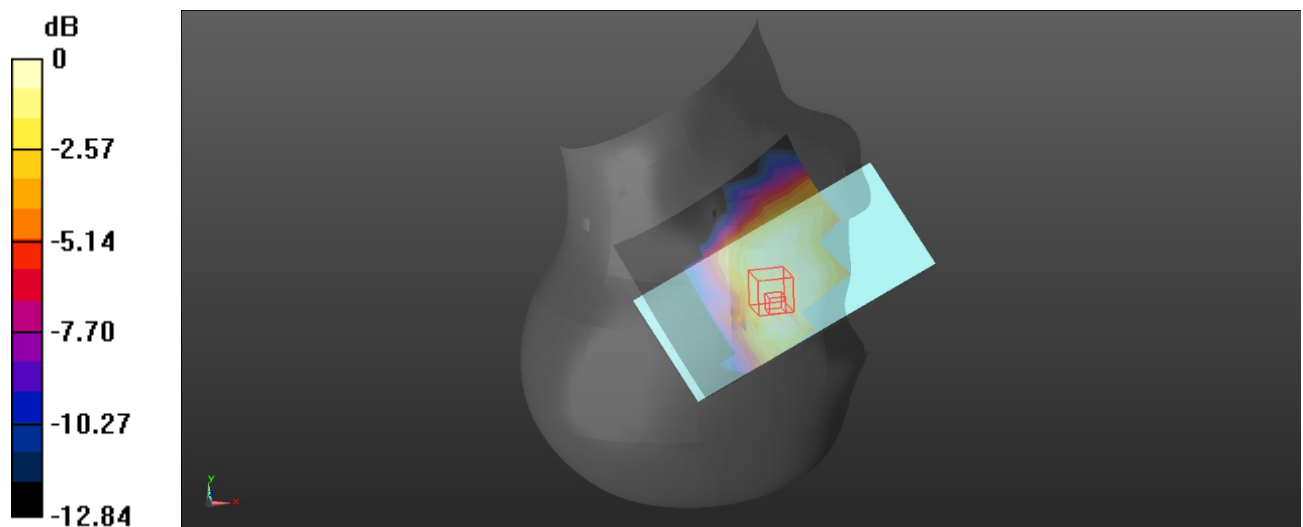

0 dB = 0.0114 W/kg = -19.43 dBW/kg

Plot: 18#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.973$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant2 FR1 n 12 50%RB Mid/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0659 W/kg


Body Back/Ant2 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.716 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0663 W/kg

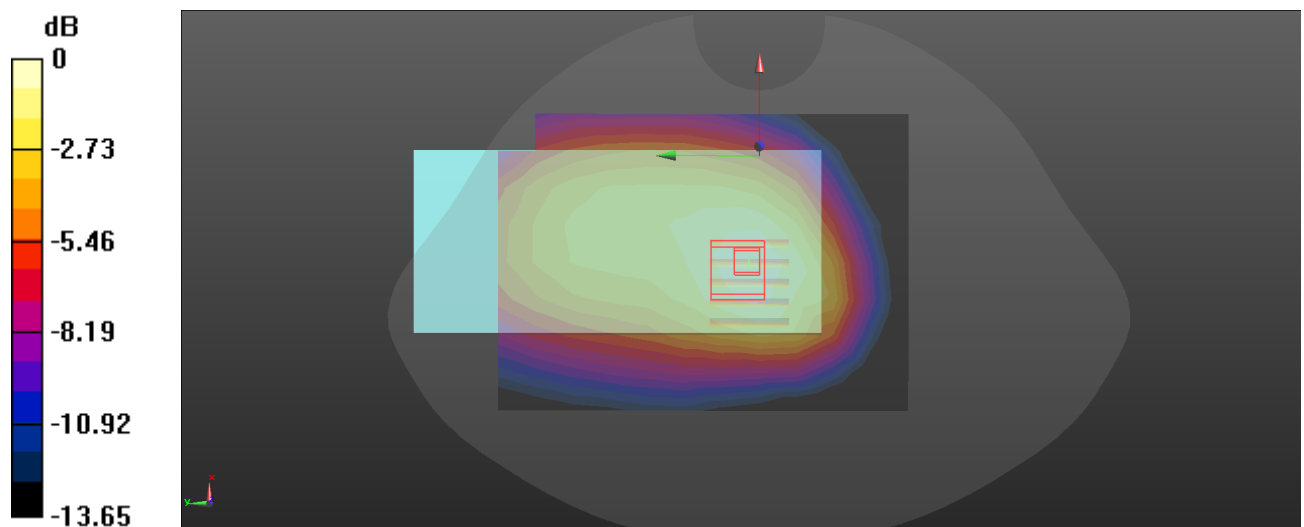

Plot: 19#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.973$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant4 FR1 n 12 50%RB Mid/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 W/kg


Head Left Cheek/Ant4 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.300 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

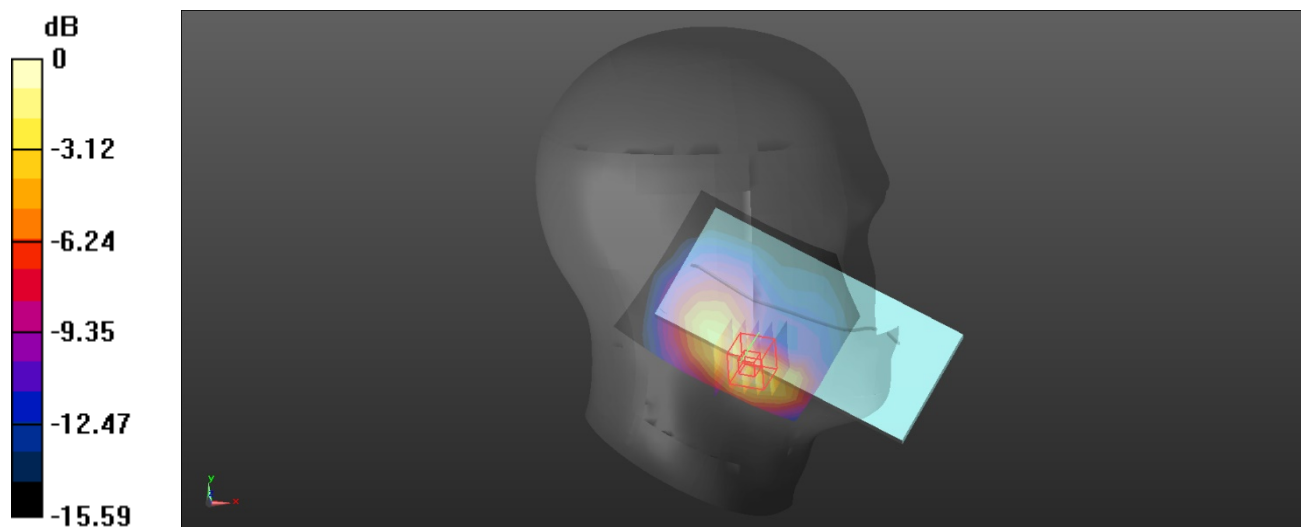

0 dB = 0.229 W/kg = -6.40 dBW/kg

Plot: 20#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.973$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant4 FR1 n 12 50%RB Mid/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.249 W/kg


Body Left/Ant4 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.91 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

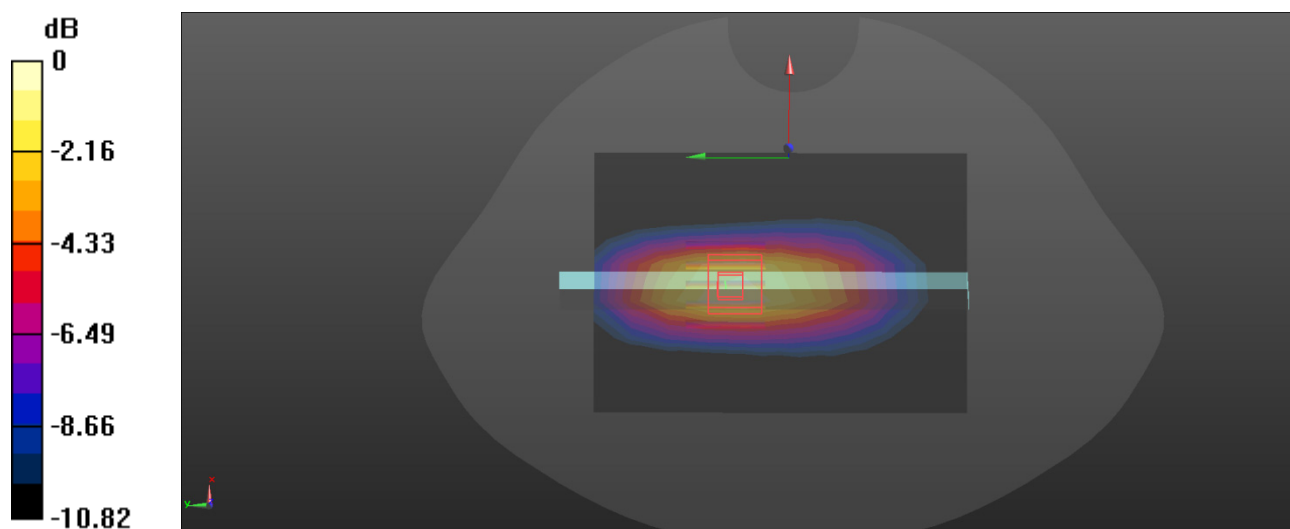

0 dB = 0.304 W/kg = -5.17 dBW/kg

Plot: 21#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 37.84$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 38 50%RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0156 W/kg


Head Left Cheek/Ant3 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.656 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.00947 W/kg; SAR(10 g) = 0.00528 W/kg

Maximum value of SAR (measured) = 0.0150 W/kg

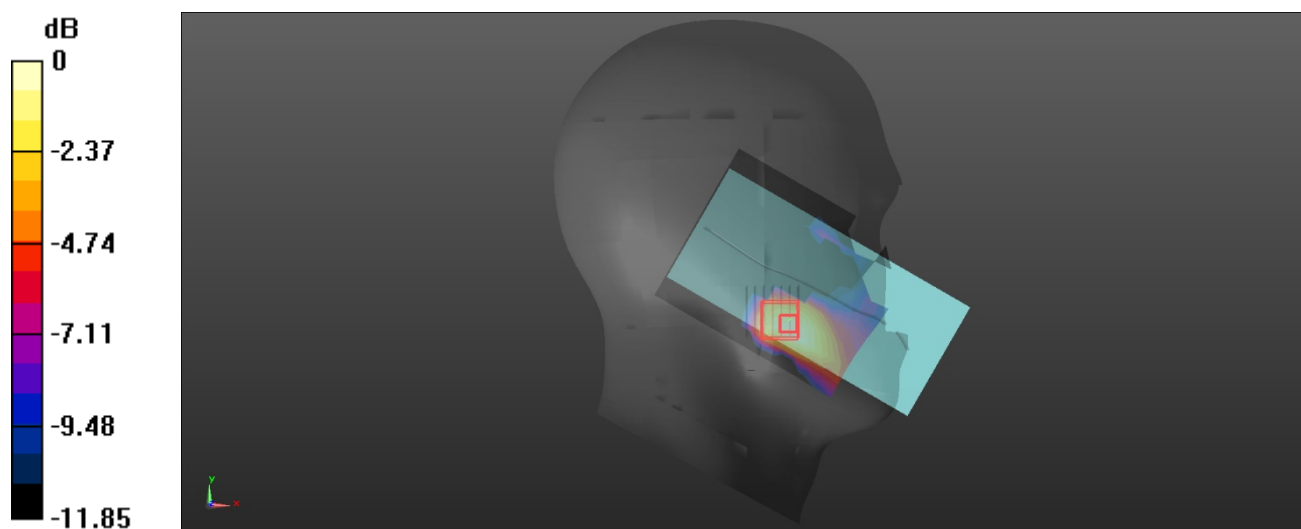

0 dB = 0.0150 W/kg = -18.24 dBW/kg

Plot: 22#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 37.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 38 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0862 W/kg


Body Bottom/Ant3 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.531 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0849 W/kg

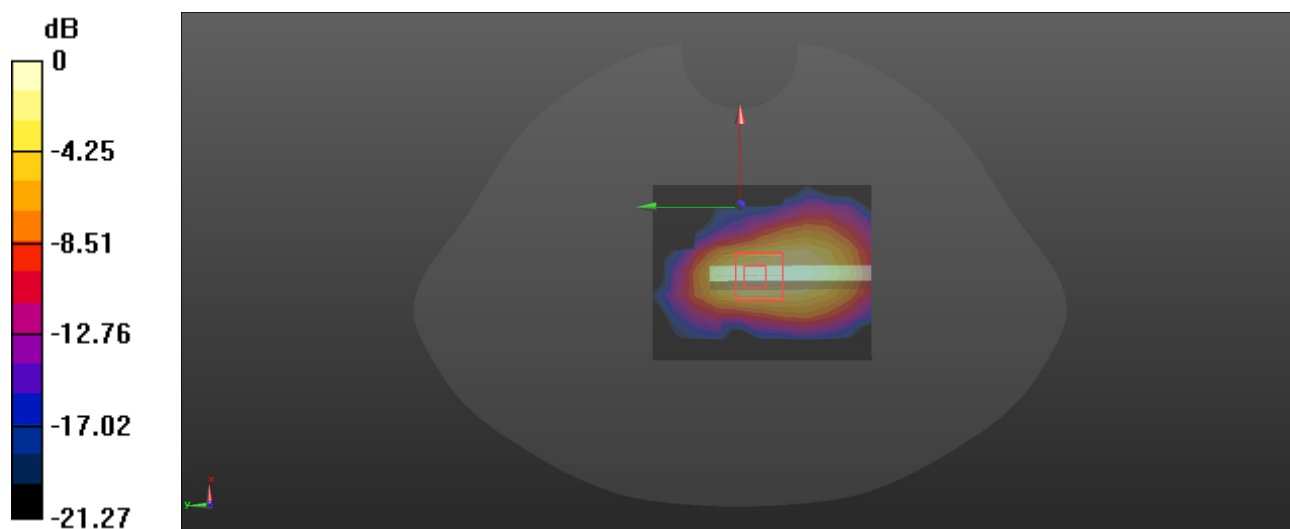

0 dB = 0.0849 W/kg = -10.71 dBW/kg

Plot: 23#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 37.84$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 FR1 n 38 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.408 W/kg


Head Right Tilt/Ant7 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.168 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

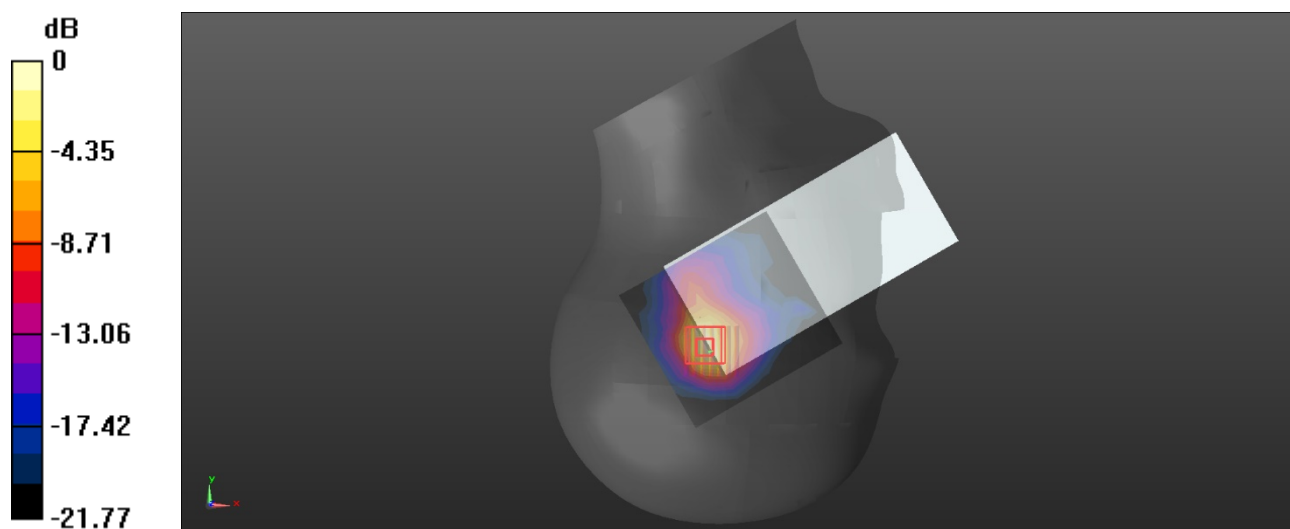

0 dB = 0.429 W/kg = -3.68 dBW/kg

Plot: 24#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 37.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant7 FR1 n 38 50%RB Mid/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0538 W/kg


Body Top/Ant7 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.482 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0497 W/kg

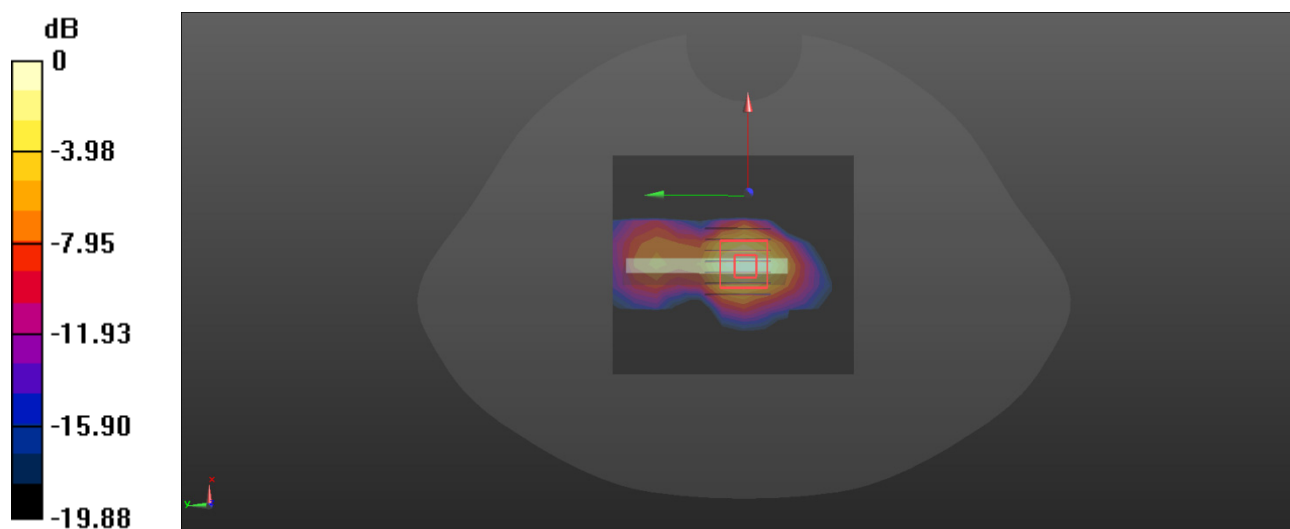

Plot: 25#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 41 50%RB Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0361 W/kg


Head Left Cheek/Ant3 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.706 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00952 W/kg

Maximum value of SAR (measured) = 0.0344 W/kg

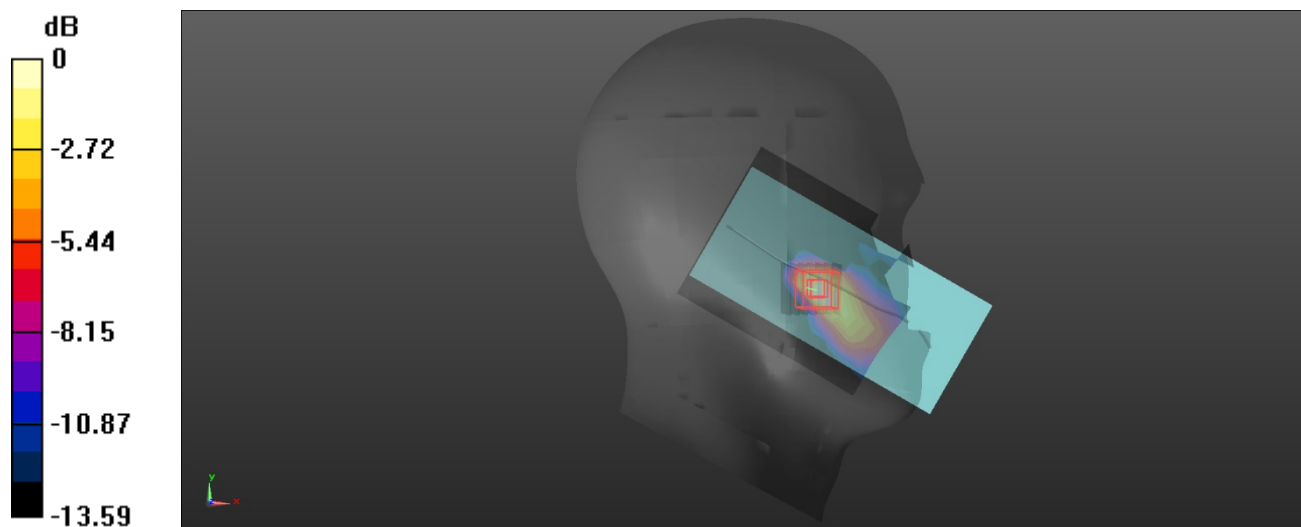

0 dB = 0.0344 W/kg = -14.63 dBW/kg

Plot: 26#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 41 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.111 W/kg


Body Bottom/Ant3 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.548 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

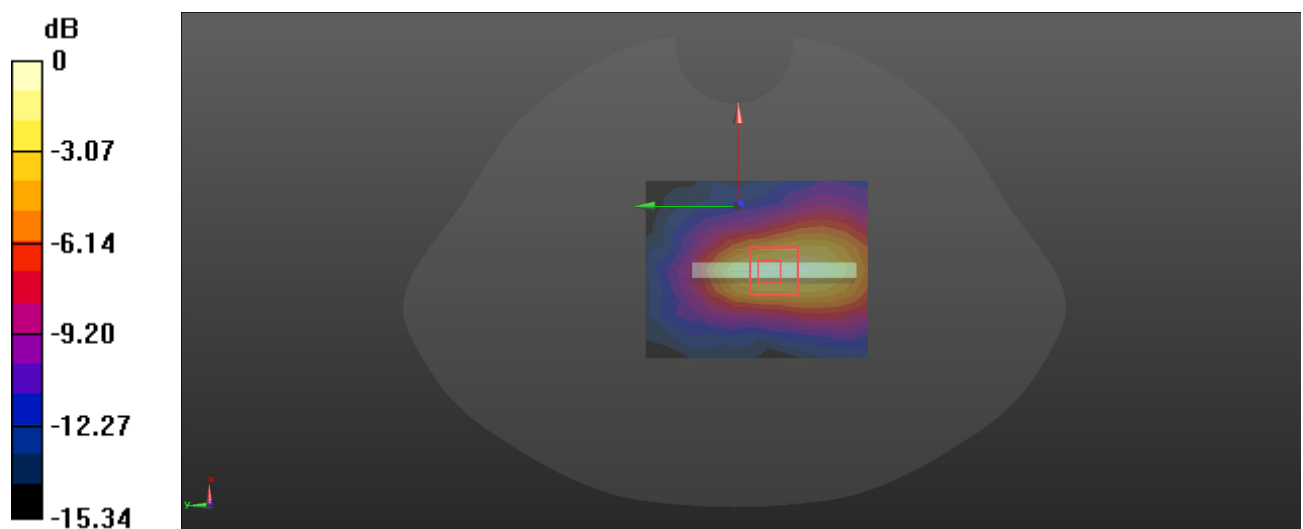

0 dB = 0.119 W/kg = -9.24 dBW/kg

Plot: 27#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 FR1 n 41 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.471 W/kg


Head Right Tilt/Ant7 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.582 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

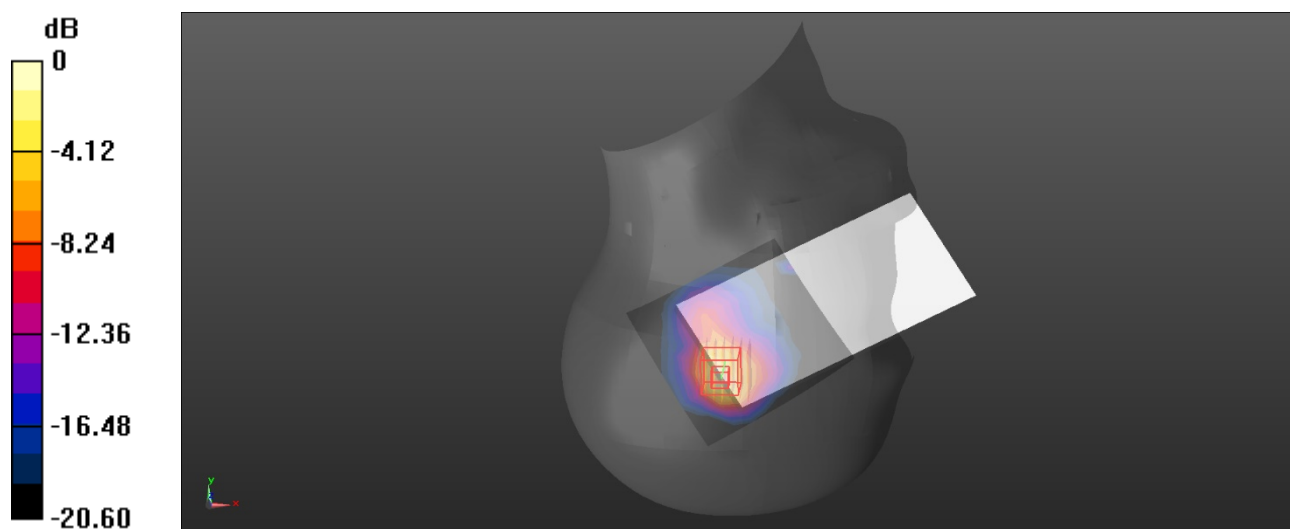

0 dB = 0.492 W/kg = -3.08 dBW/kg

Plot: 28#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant7 FR1 n 41 50%RB Mid/Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.362 W/kg


Body Top/Ant7 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.41 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

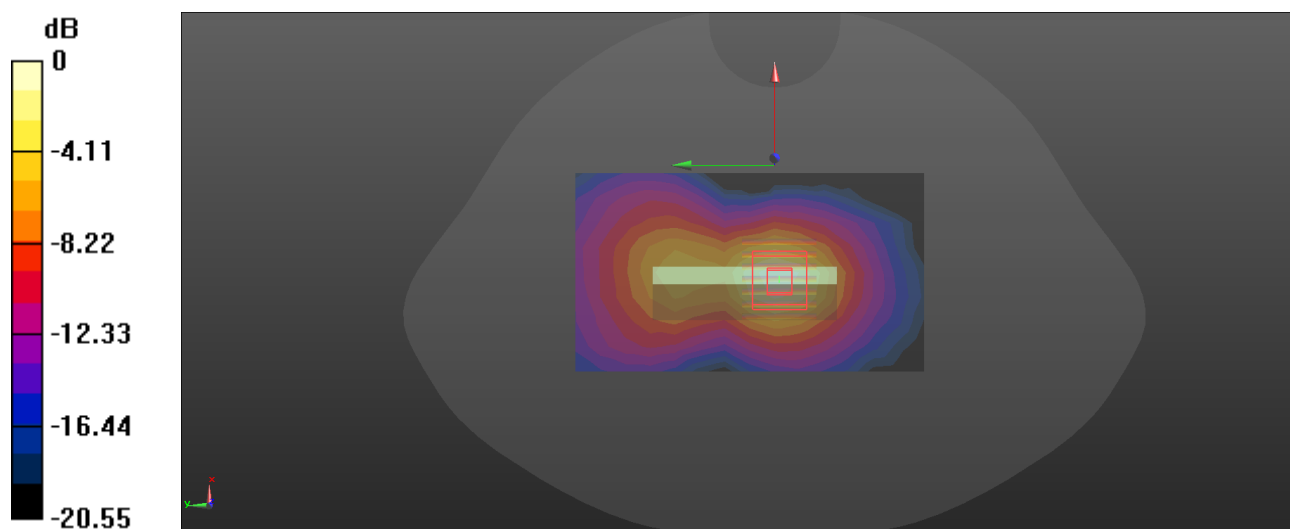

0 dB = 0.395 W/kg = -4.03 dBW/kg

Plot: 29#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 40.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 66 50%RB Mid/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0396 W/kg


Head Left Cheek/Ant3 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.301 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0448 W/kg

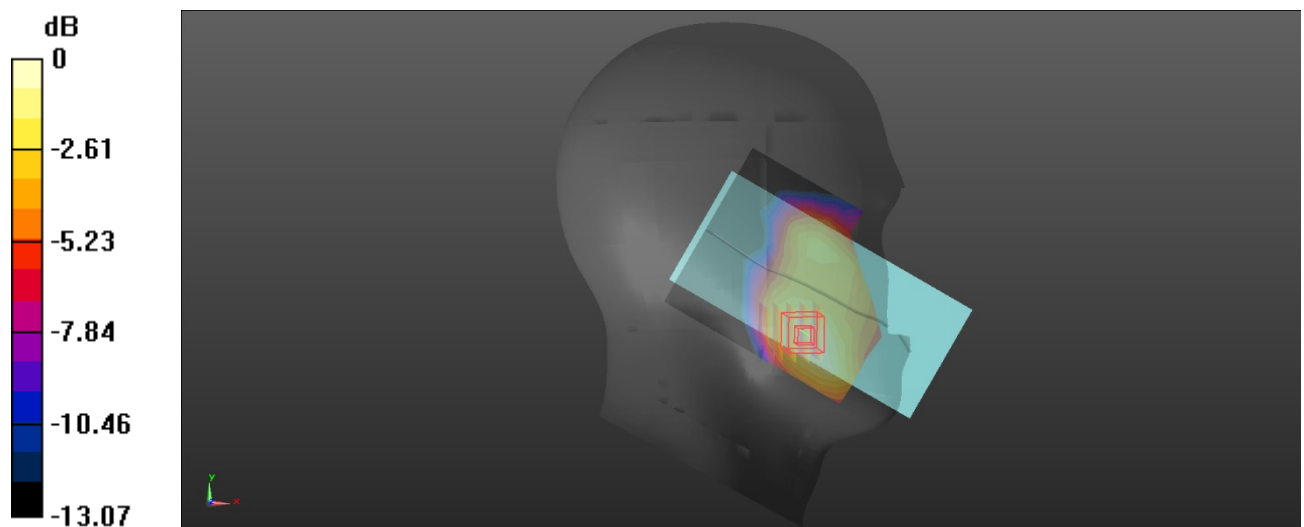

0 dB = 0.0448 W/kg = -13.49 dBW/kg

Plot: 30#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 66 50%RB Mid/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg


Body Bottom/Ant3 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.429 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

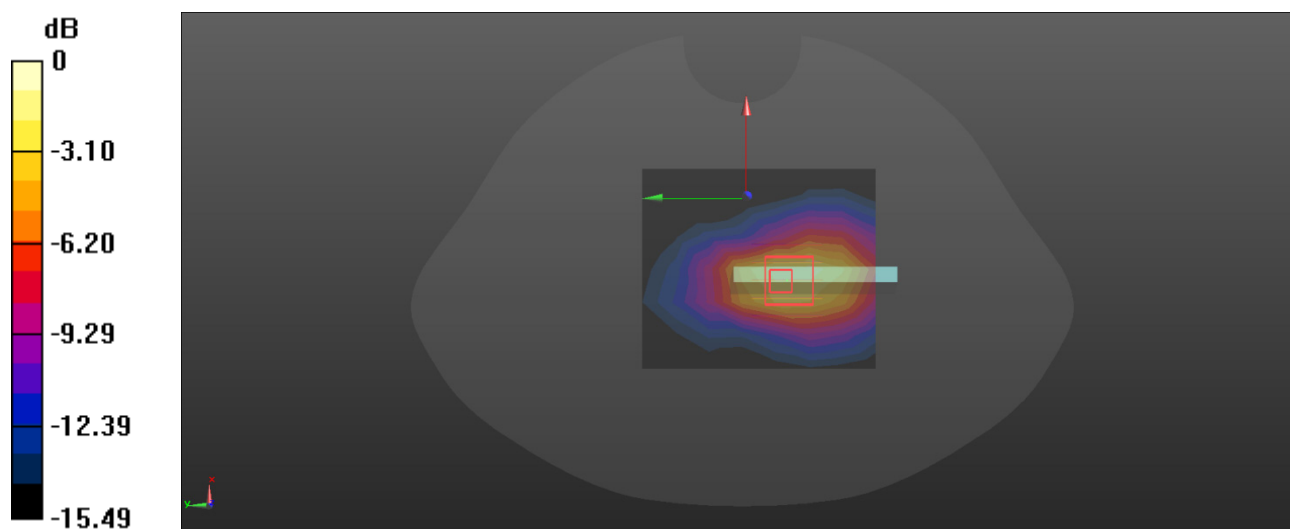

0 dB = 0.201 W/kg = -6.97 dBW/kg

Plot: 31#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.896$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant7 FR1 n 66 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 W/kg


Head Right Cheek/Ant7 FR1 n 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.138 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

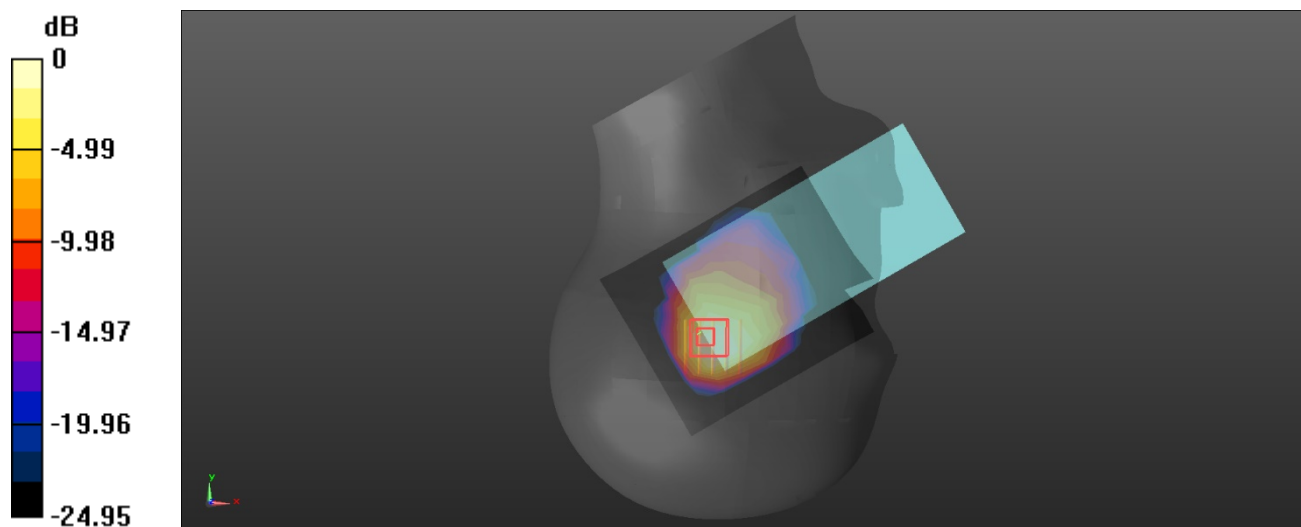

0 dB = 0.237 W/kg = -6.25 dBW/kg

Plot: 32#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 40.896$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant7 FR1 n 66 50%RB Mid/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0532 W/kg


Body Back/Ant7 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.807 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0567 W/kg

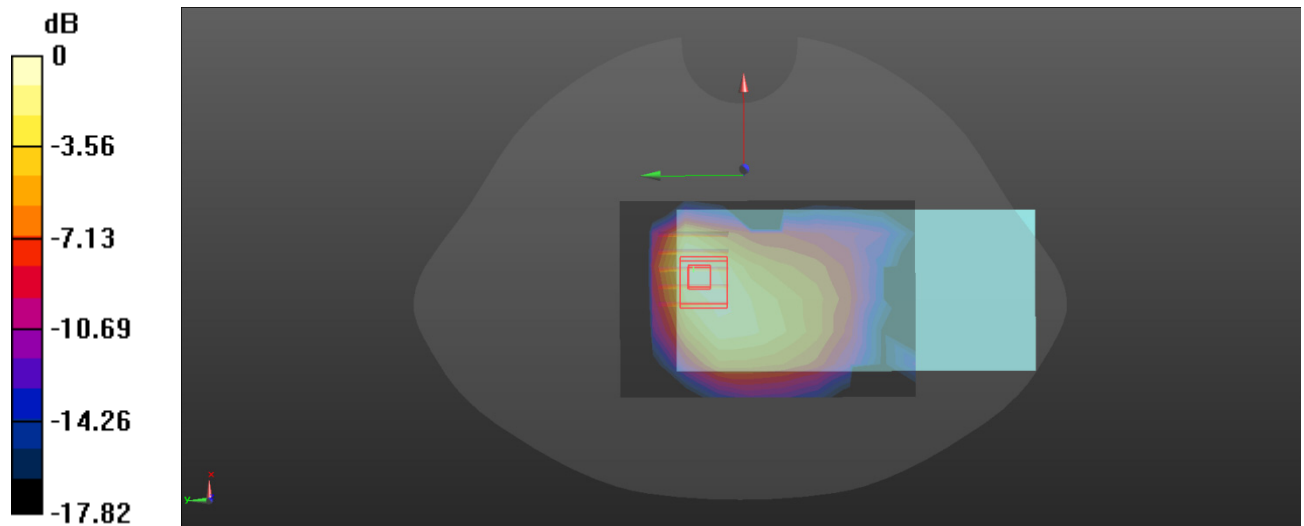

0 dB = 0.0567 W/kg = -12.46 dBW/kg

Plot: 33#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.879$ S/m; $\epsilon_r = 36.895$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant0 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.464 W/kg


Head Left Tilt/Ant0 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.378 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.552 W/kg

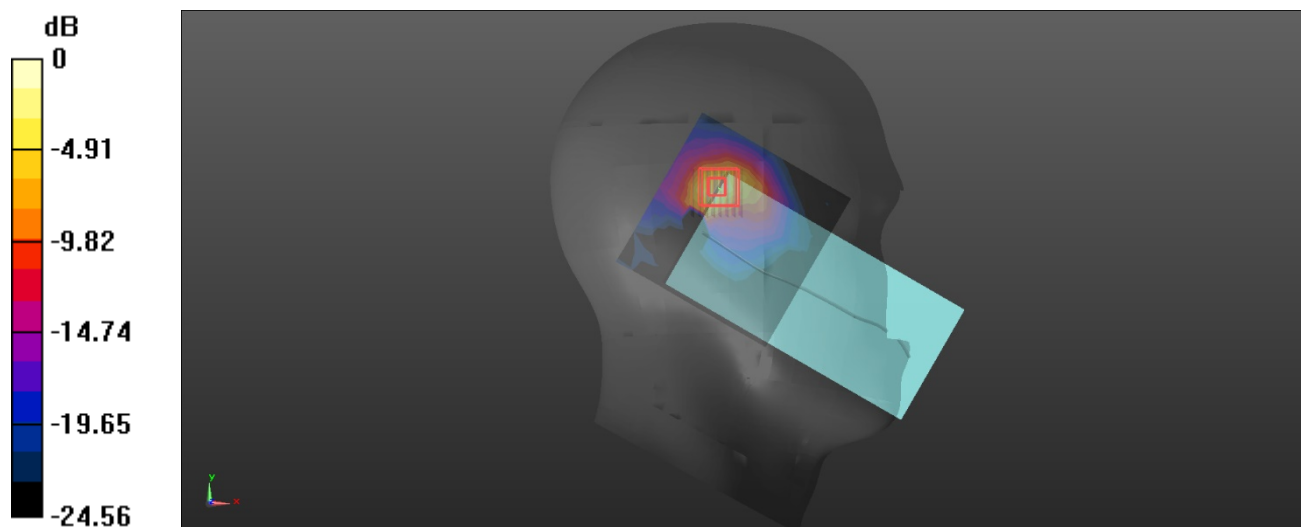

0 dB = 0.552 W/kg = -2.58 dBW/kg

Plot: 34#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.879$ S/m; $\epsilon_r = 36.895$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant0 FR1 n77 Lower 50%RB Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.137 W/kg


Body Top/Ant0 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.698 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

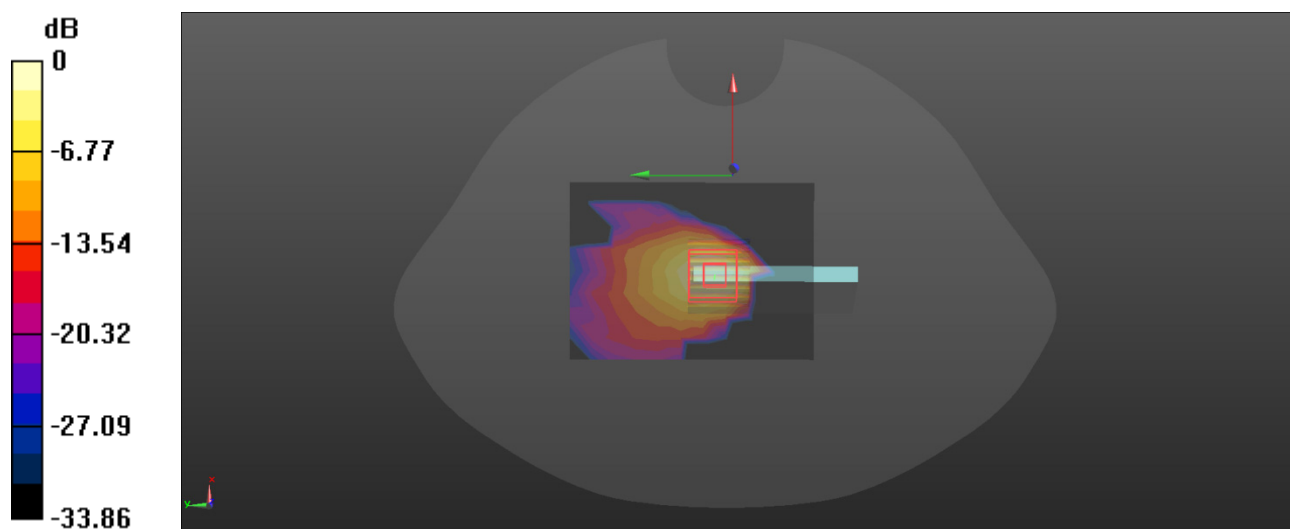

0 dB = 0.149 W/kg = -8.27 dBW/kg

Plot: 35#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.879$ S/m; $\epsilon_r = 36.895$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.471 W/kg


Head Right Cheek/Ant6 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.977 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.516 W/kg

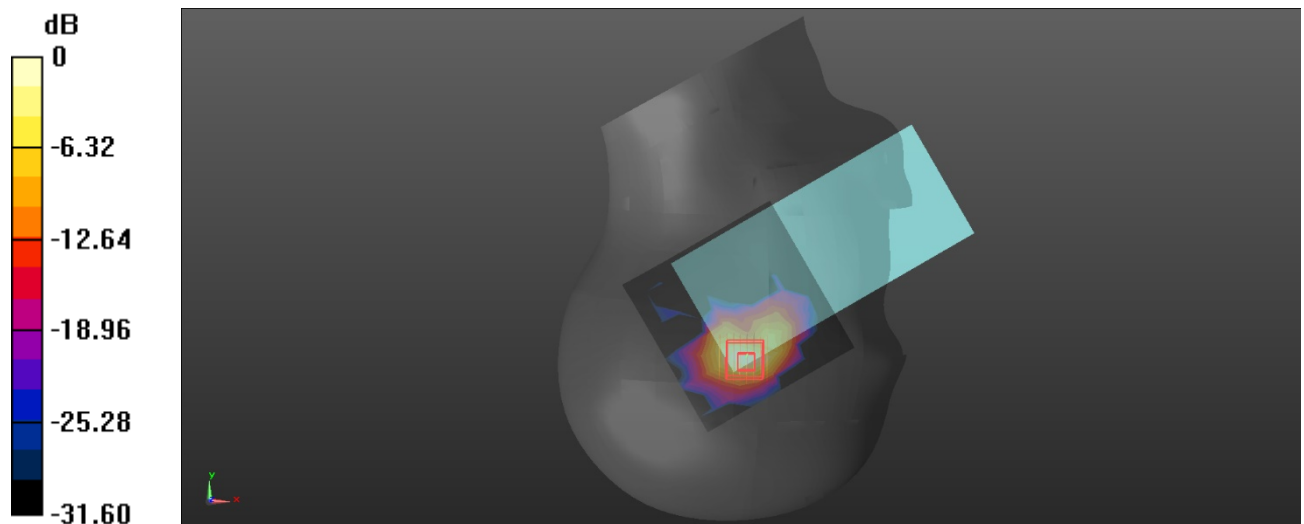

0 dB = 0.516 W/kg = -2.87 dBW/kg

Plot: 36#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.879$ S/m; $\epsilon_r = 36.895$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant6 FR1 n77 Lower 50%RB Mid/Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.272 W/kg


Body Top/Ant6 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.874 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

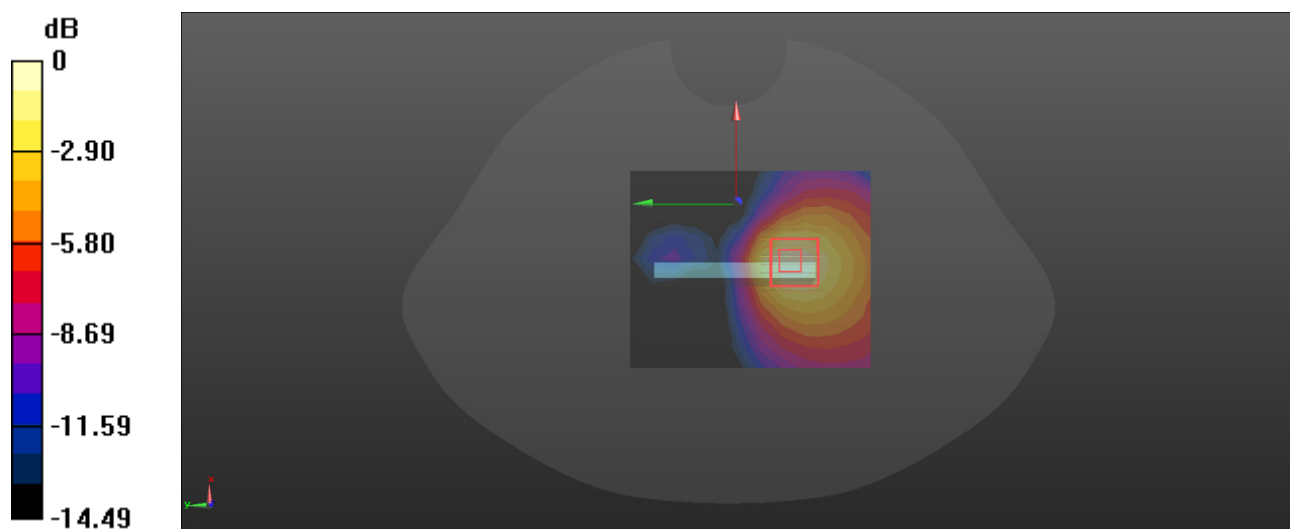

0 dB = 0.258 W/kg = -5.88 dBW/kg

Plot: 37#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.844$ S/m; $\epsilon_r = 38.164$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant7 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.513 W/kg


Head Right Cheek/Ant7 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.273 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.541 W/kg

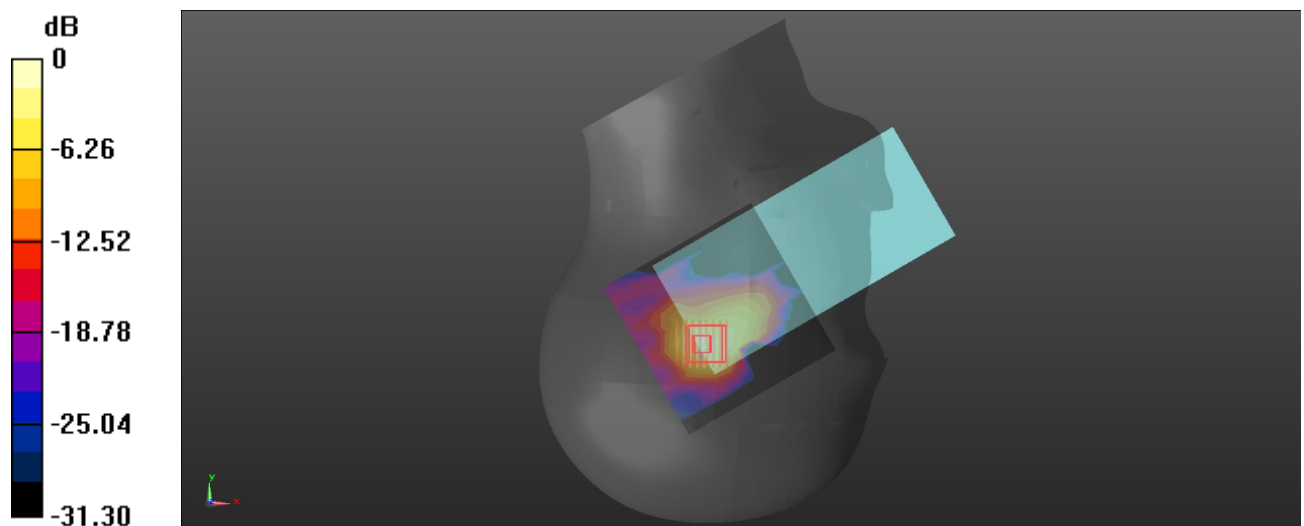

0 dB = 0.541 W/kg = -2.67 dBW/kg

Plot: 38#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.844$ S/m; $\epsilon_r = 38.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant7 FR1 n77 Lower 50%RB Mid/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.109 W/kg


Body Back/Ant7 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.172 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

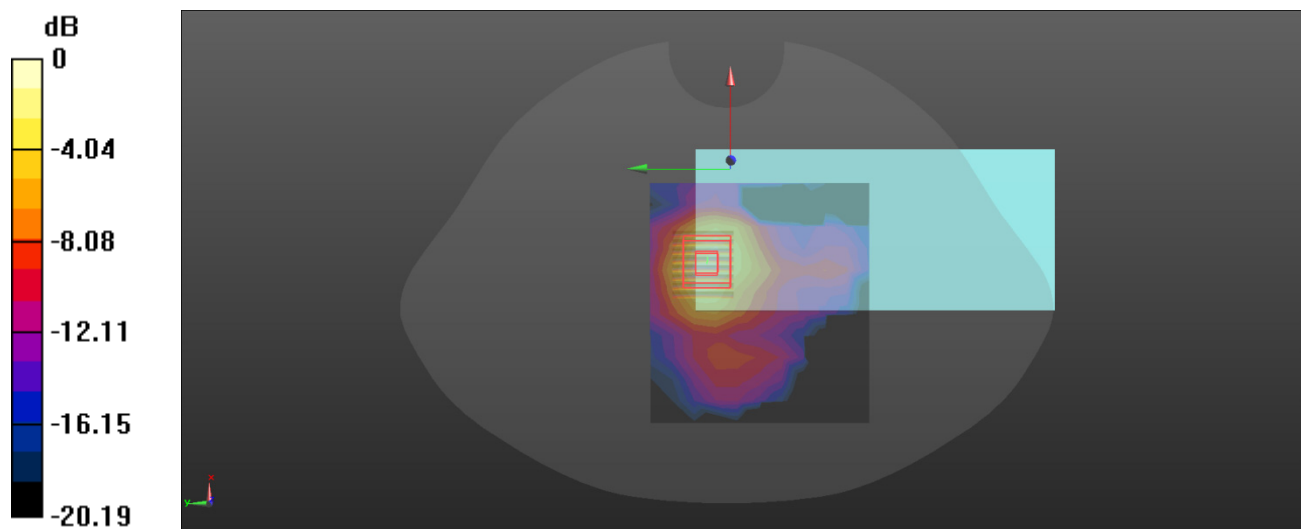

0 dB = 0.127 W/kg = -8.96 dBW/kg

Plot: 39#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.844$ S/m; $\epsilon_r = 38.164$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant8 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.422 W/kg


Head Left Tilt/Ant8 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.964 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.499 W/kg

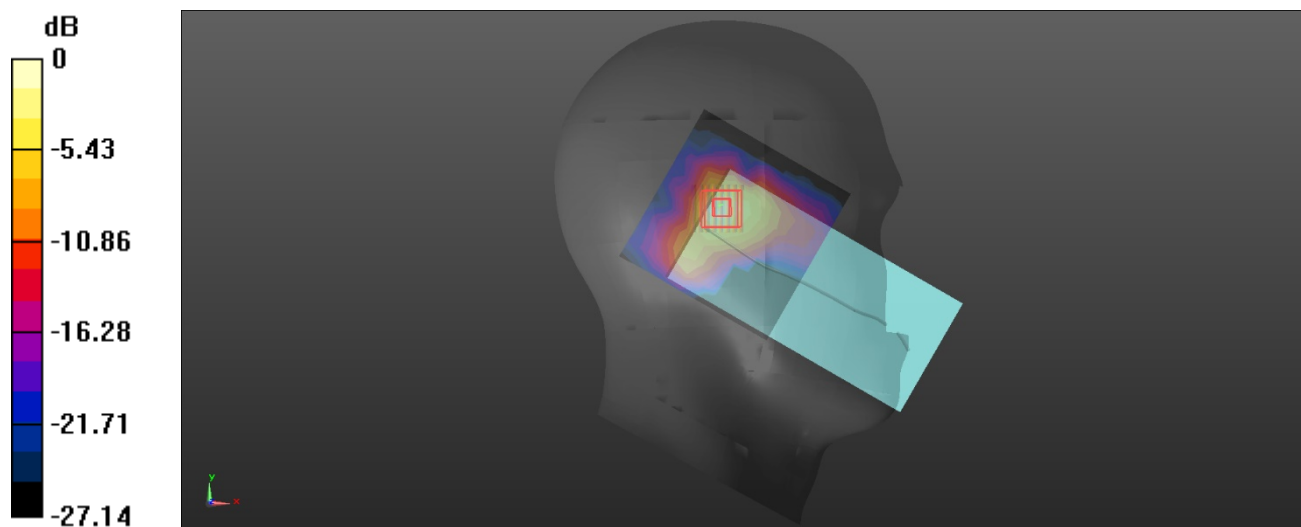

0 dB = 0.499 W/kg = -3.02 dBW/kg

Plot: 40#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.844$ S/m; $\epsilon_r = 38.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant8 FR1 n77 Lower 50%RB Mid/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0821 W/kg


Body Back/Ant8 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.366 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0834 W/kg

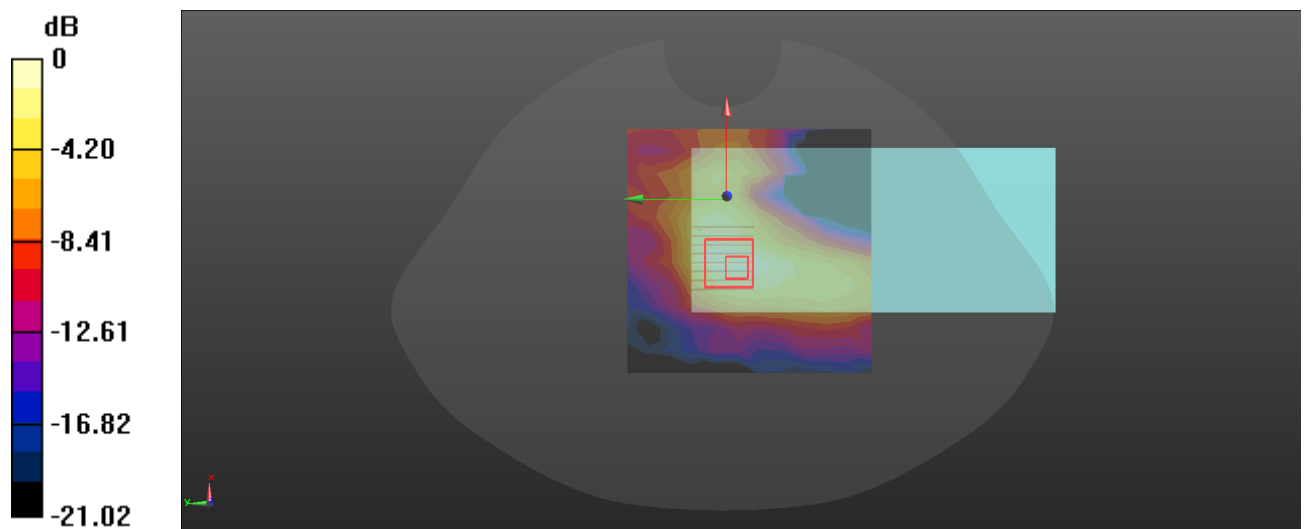

0 dB = 0.0834 W/kg = -10.79 dBW/kg

Plot: 41#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.017$ S/m; $\epsilon_r = 37.015$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant0 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.359 W/kg


Head Left Tilt/Ant0 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6830 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

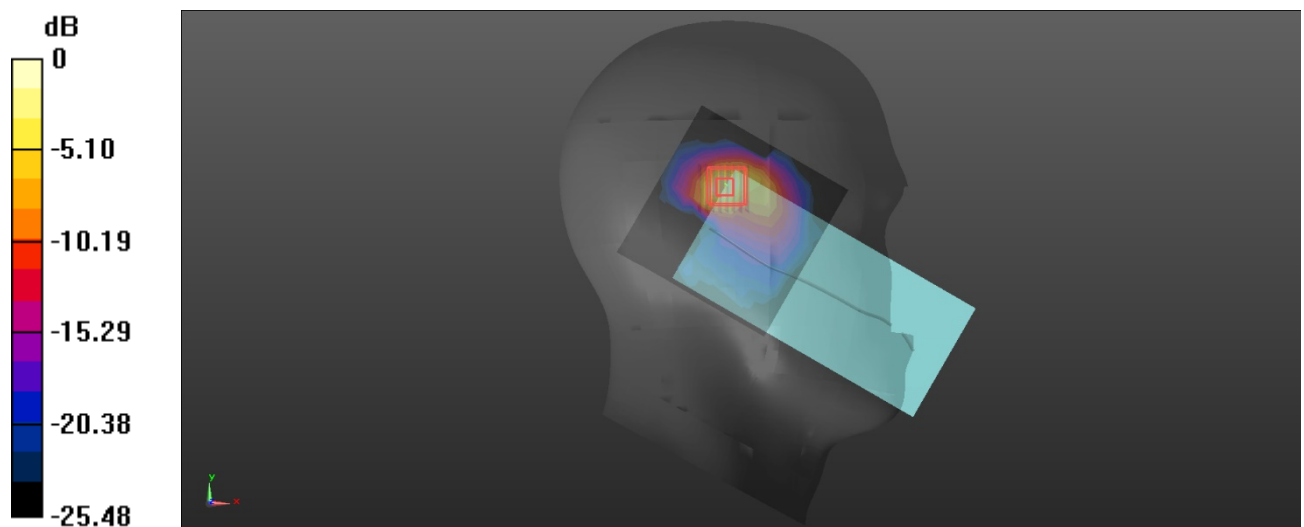

0 dB = 0.450 W/kg = -3.47 dBW/kg

Plot: 42#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.017$ S/m; $\epsilon_r = 37.015$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant0 FR1 n77 Mid 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.131 W/kg


Body Top/Ant0 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.313 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

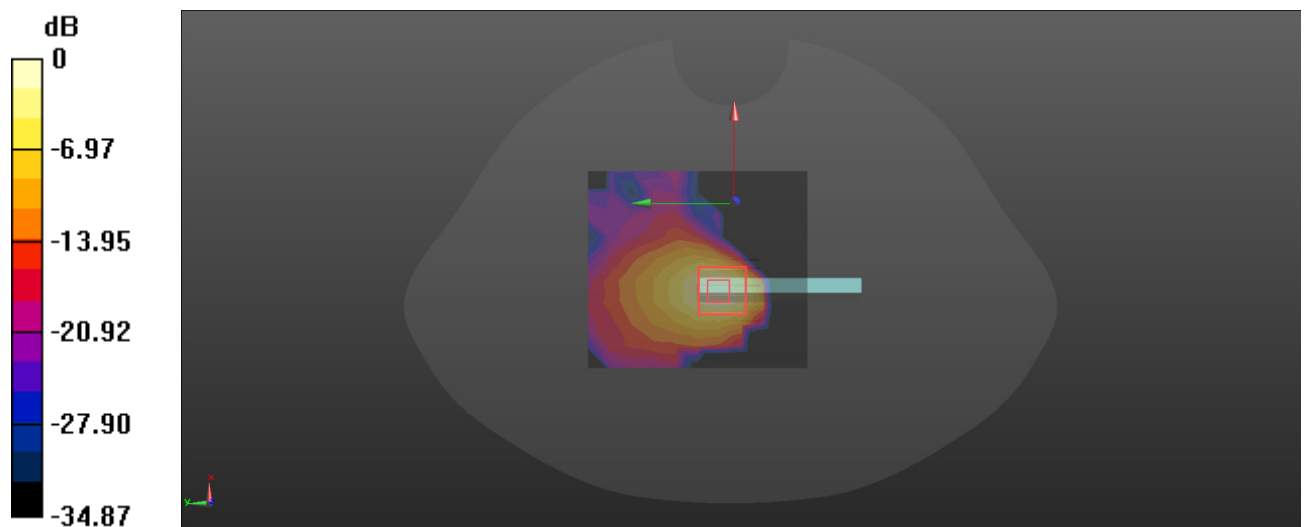

0 dB = 0.148 W/kg = -8.30 dBW/kg

Plot: 43#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.017$ S/m; $\epsilon_r = 37.015$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.313 W/kg


Head Right Cheek/Ant6 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.565 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

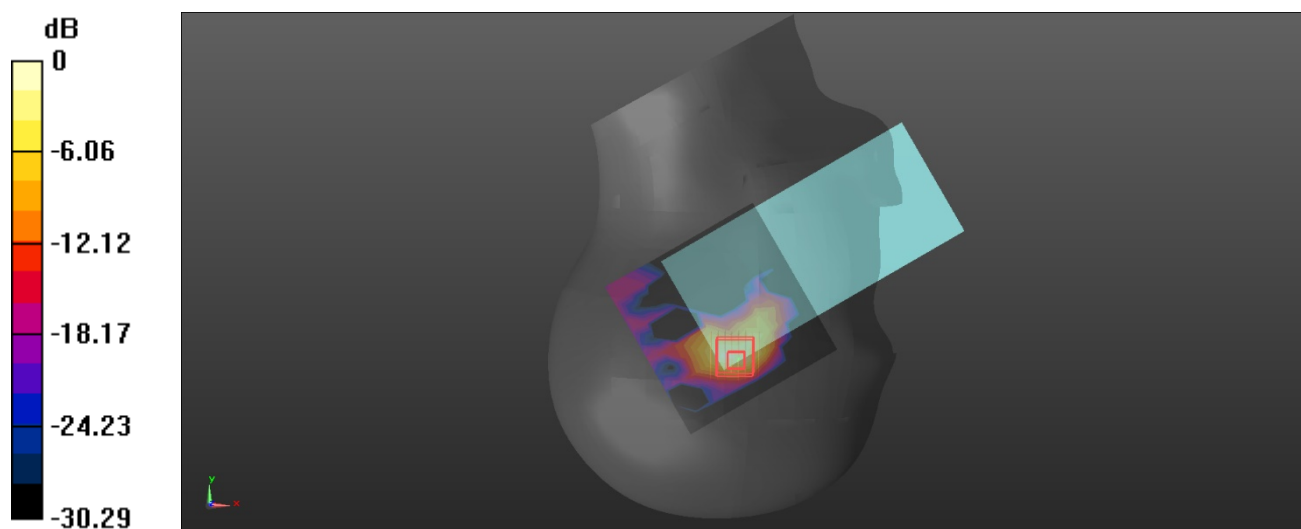

0 dB = 0.388 W/kg = -4.11 dBW/kg

Plot: 44#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.017$ S/m; $\epsilon_r = 37.015$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 FR1 n77 Mid 50%RB Mid/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.137 W/kg


Body Left/Ant6 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.309 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

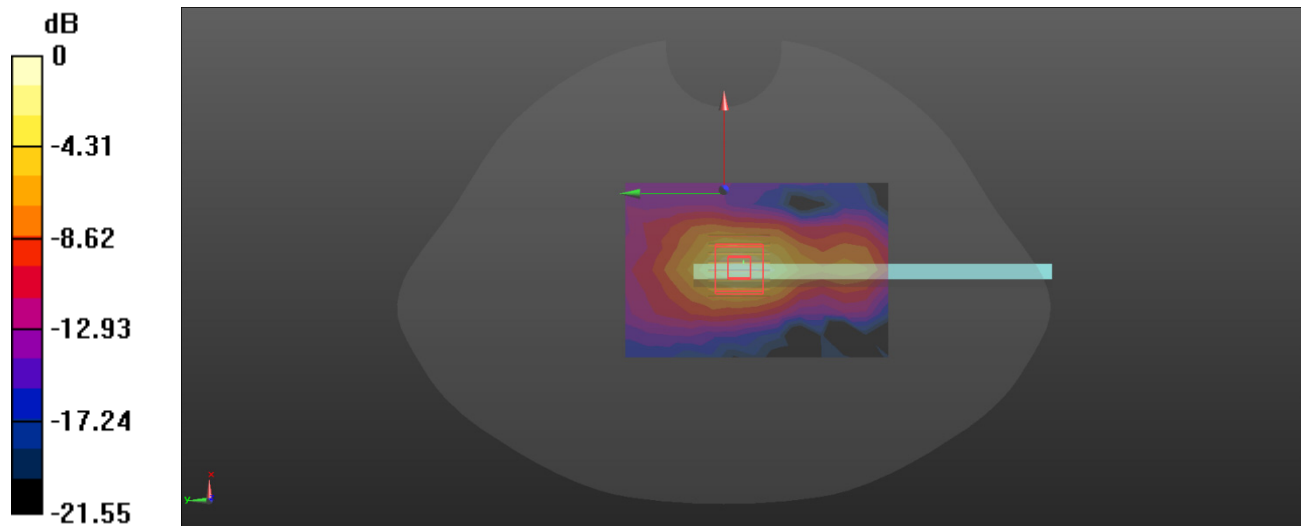

0 dB = 0.155 W/kg = -8.10 dBW/kg

Plot: 45#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.115$ S/m; $\epsilon_r = 36.865$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 FR1 n77 Mid 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.512 W/kg


Head Right Tilt/Ant7 FR1 n77 Mid 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.275 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

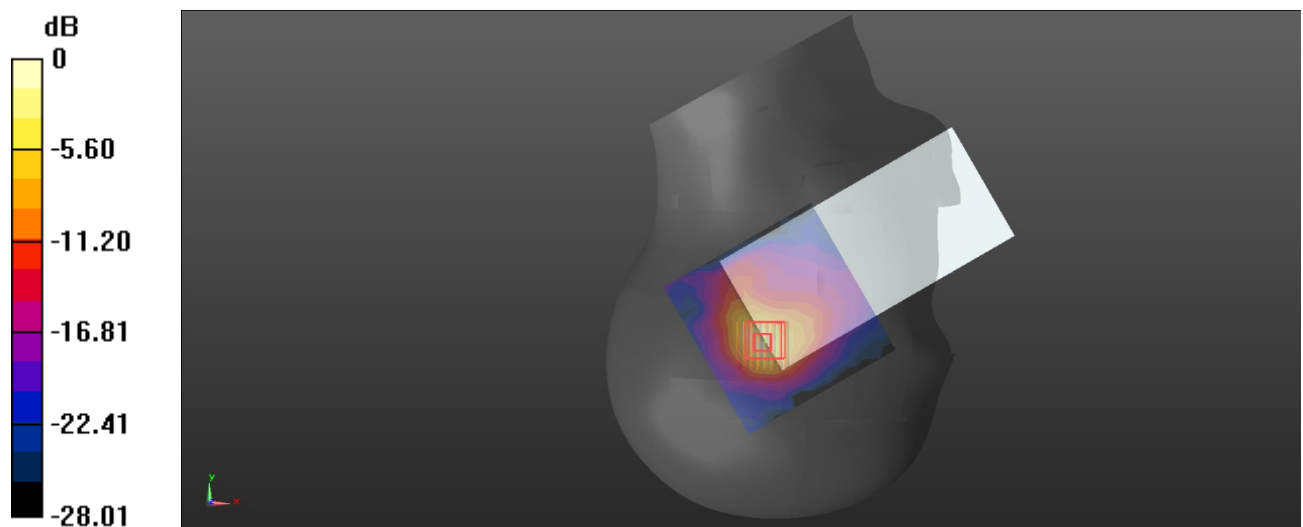

Plot: 46#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.115$ S/m; $\epsilon_r = 36.865$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant7 FR1 n77 Mid 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.112 W/kg


Body Top/Ant7 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.917 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

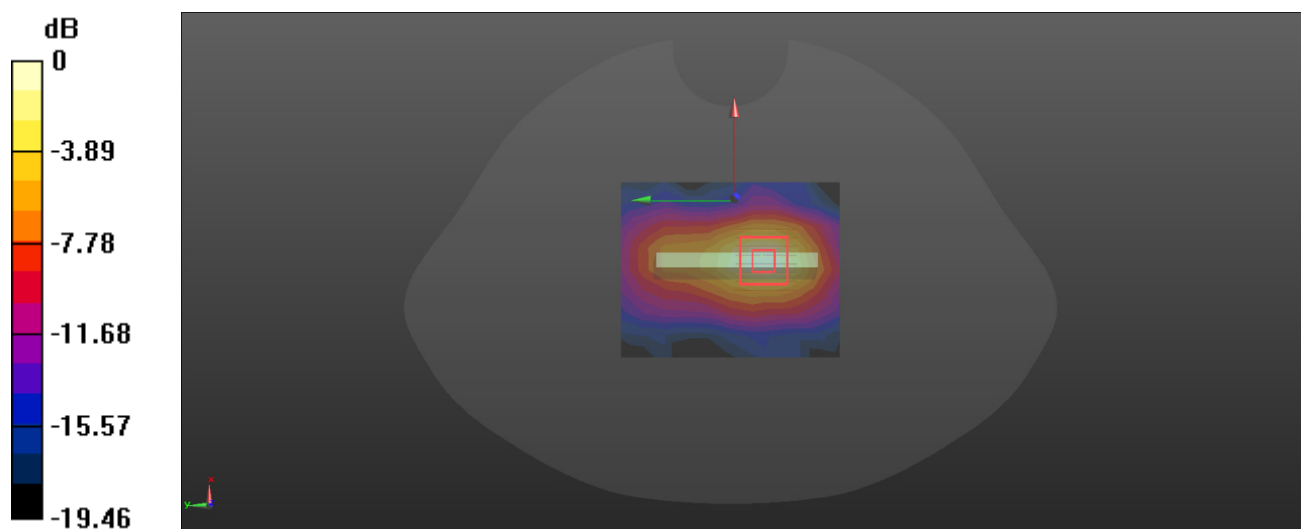

Plot: 47#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.115$ S/m; $\epsilon_r = 36.865$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant8 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.193 W/kg


Head Left Cheek/Ant8 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.588 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

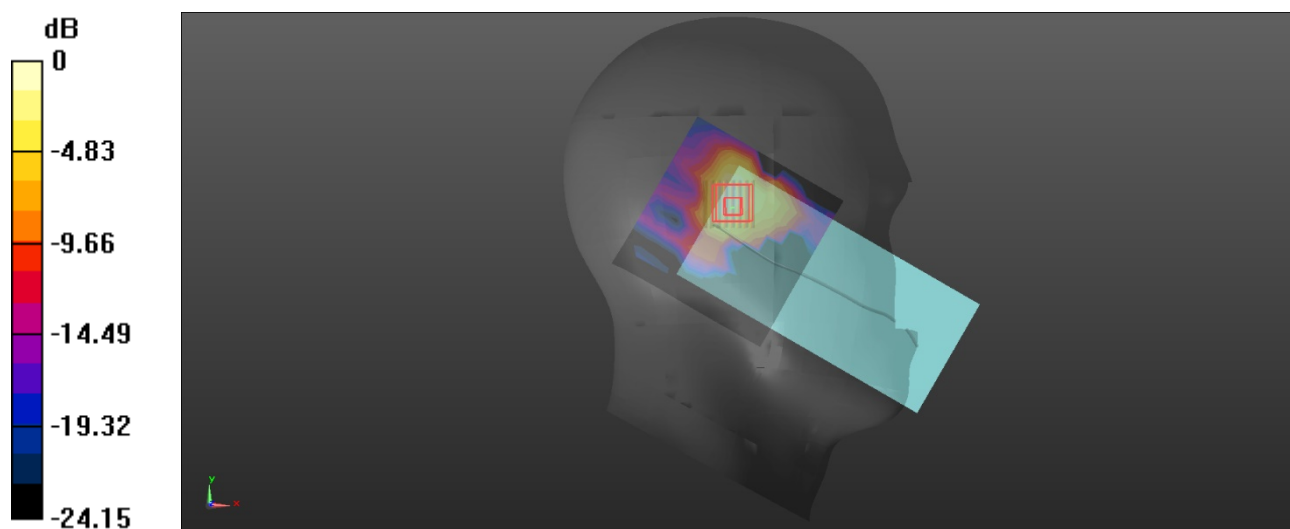

0 dB = 0.195 W/kg = -7.10 dBW/kg

Plot: 48#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.115$ S/m; $\epsilon_r = 36.865$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant8 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0926 W/kg


Body Back/Ant8 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.618 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0999 W/kg

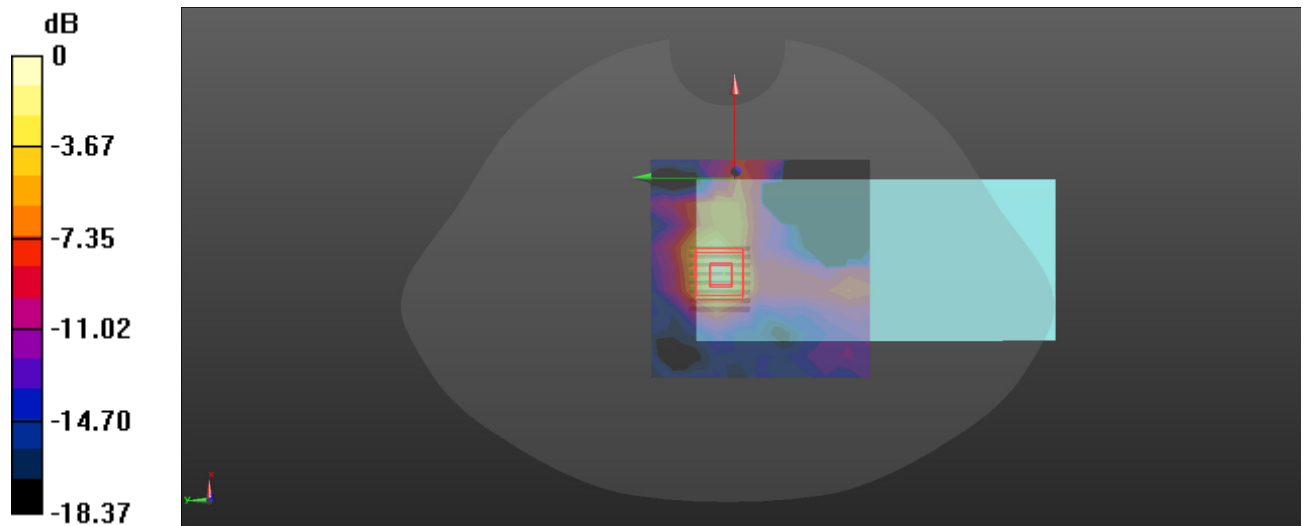

0 dB = 0.0999 W/kg = -10.00 dBW/kg

Plot: 49#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840 \text{ MHz}$; $\sigma = 3.2 \text{ S/m}$; $\epsilon_r = 36.652$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant0 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.242 W/kg


Head Left Tilt/Ant0 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.8890 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

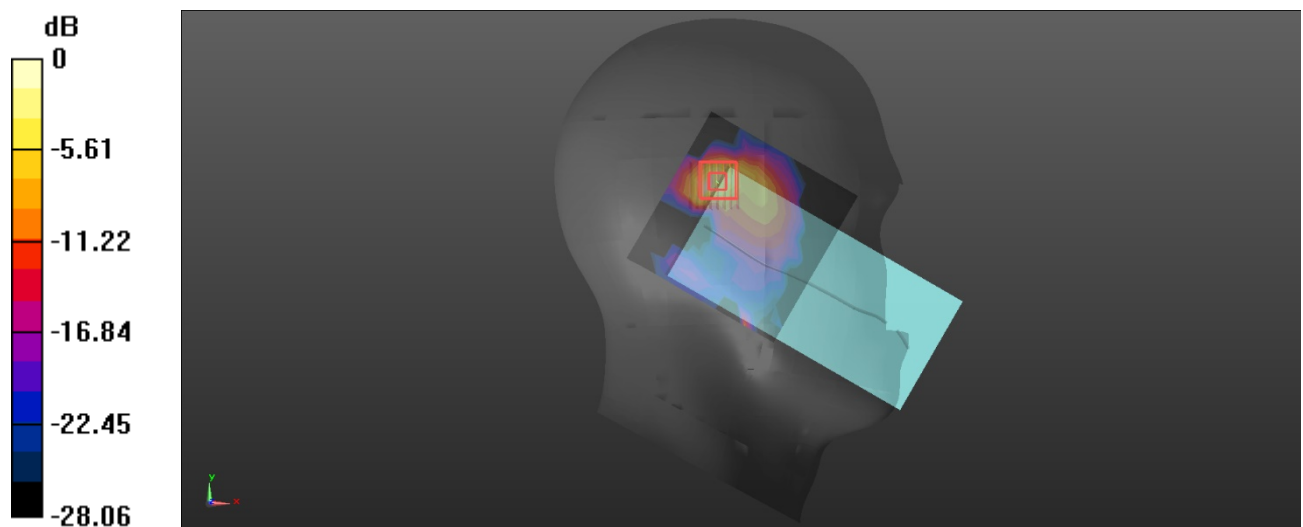

0 dB = 0.248 W/kg = -6.06 dBW/kg

Plot: 50#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.2$ S/m; $\epsilon_r = 36.652$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant0 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0517 W/kg


Body Back/Ant0 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.011 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0594 W/kg

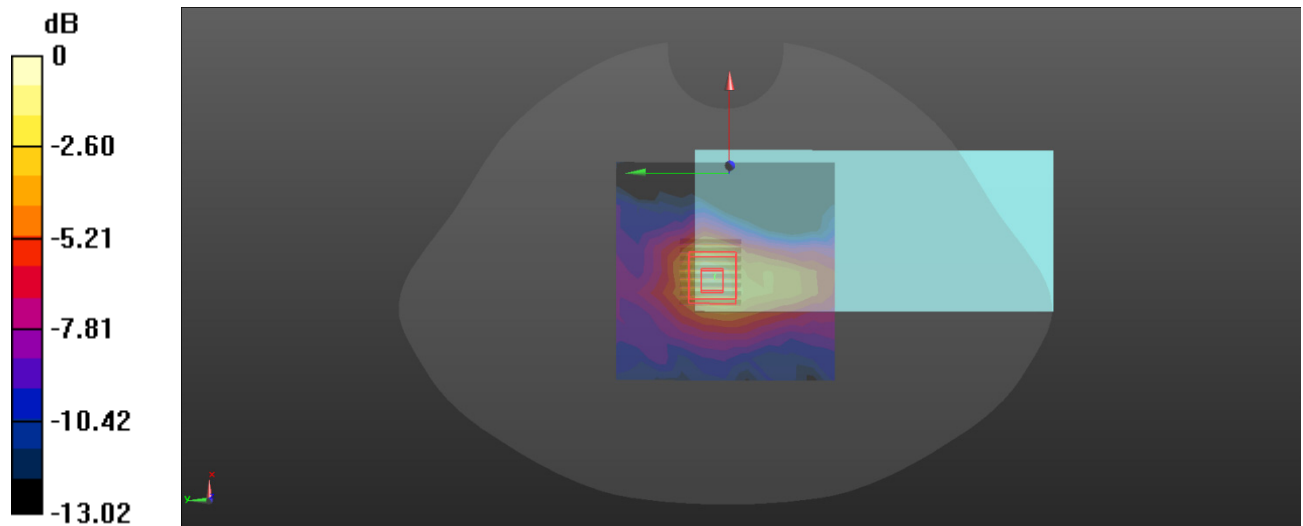

0 dB = 0.0594 W/kg = -12.26 dBW/kg

Plot: 51#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.2$ S/m; $\epsilon_r = 36.652$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.248 W/kg


Head Right Cheek/Ant6 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4300 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

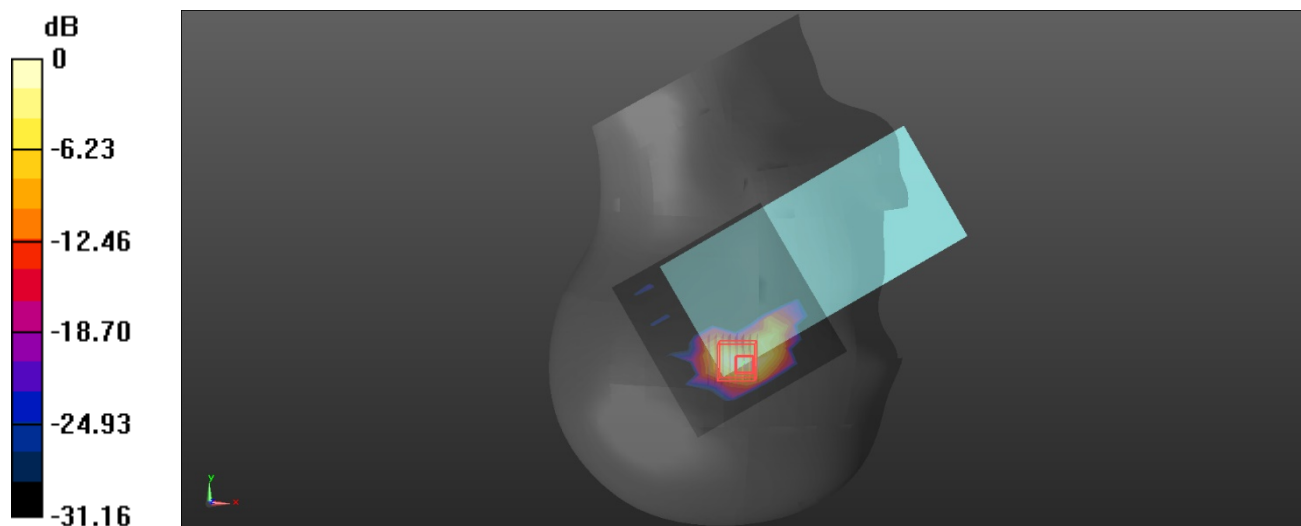

0 dB = 0.273 W/kg = -5.64 dBW/kg

Plot: 52#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.2$ S/m; $\epsilon_r = 36.652$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 FR1 n77 Upper 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0767 W/kg


Body Left/Ant6 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.933 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0859 W/kg

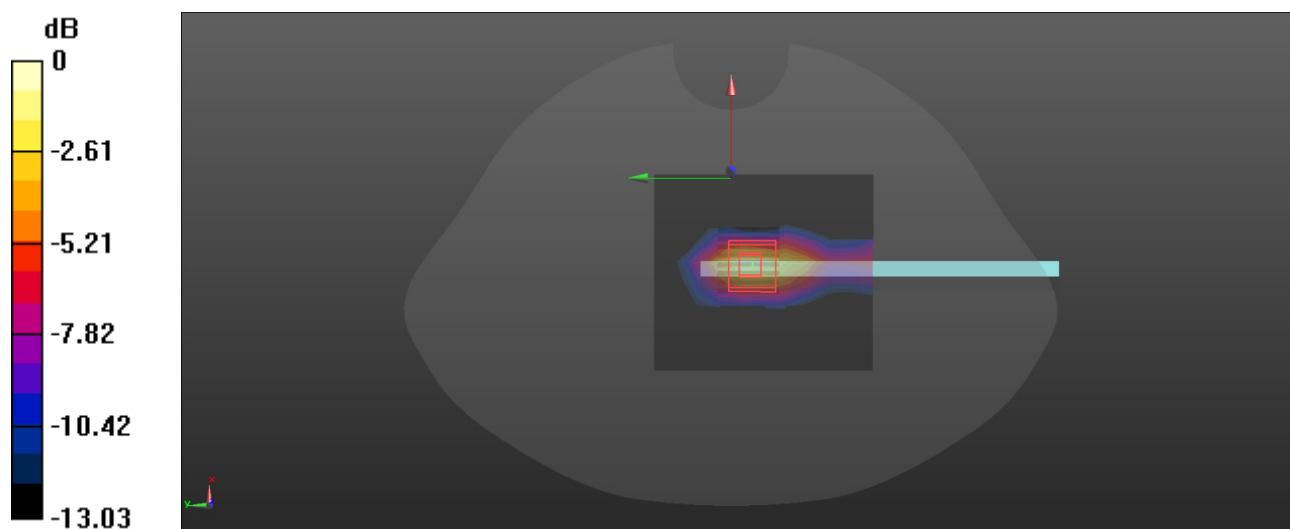

Plot: 53#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.339$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant7 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.628 W/kg


Head Right Tilt/Ant7 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.804 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

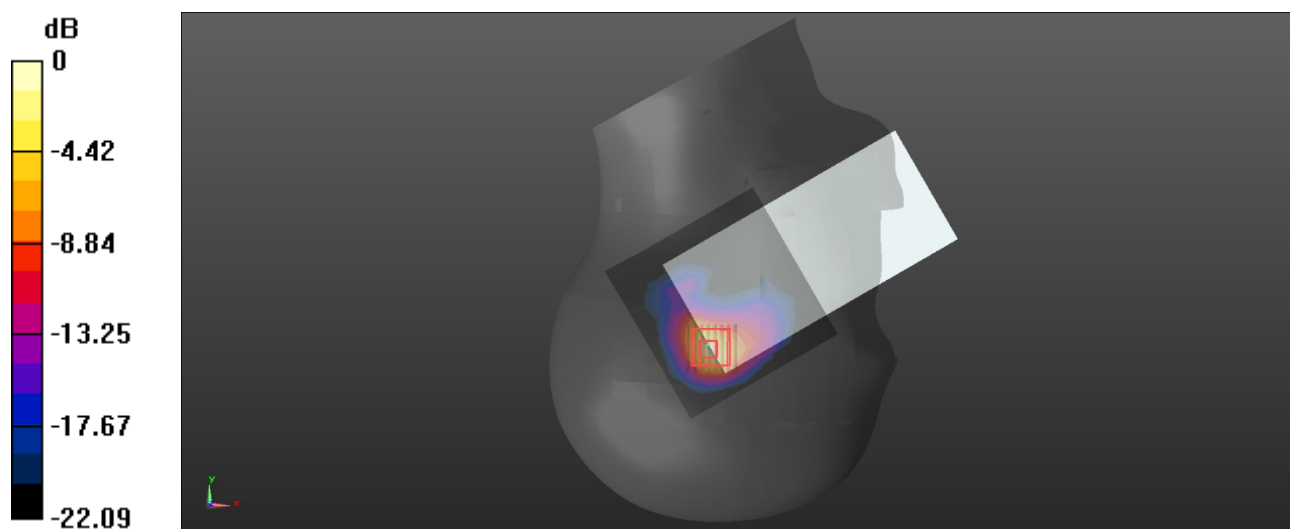

0 dB = 0.602 W/kg = -2.20 dBW/kg

Plot: 54#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.339$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant7 FR1 n77 Upper 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.104 W/kg


Body Top/Ant7 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.674 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

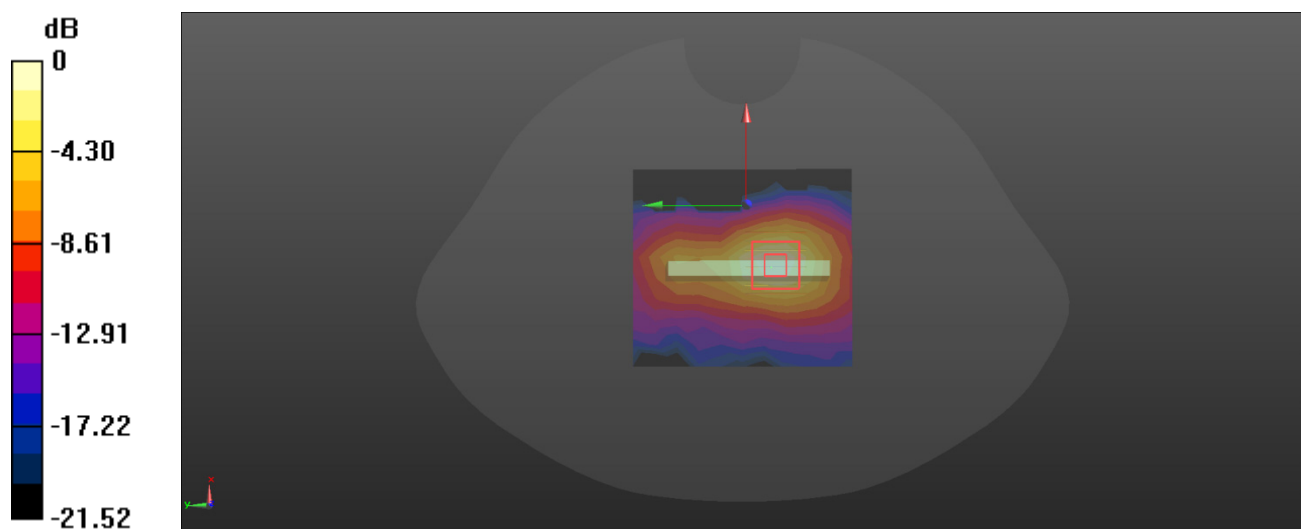

0 dB = 0.112 W/kg = -9.51 dBW/kg

Plot: 55#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.339$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant8 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.293 W/kg


Head Left Tilt/Ant8 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.350 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

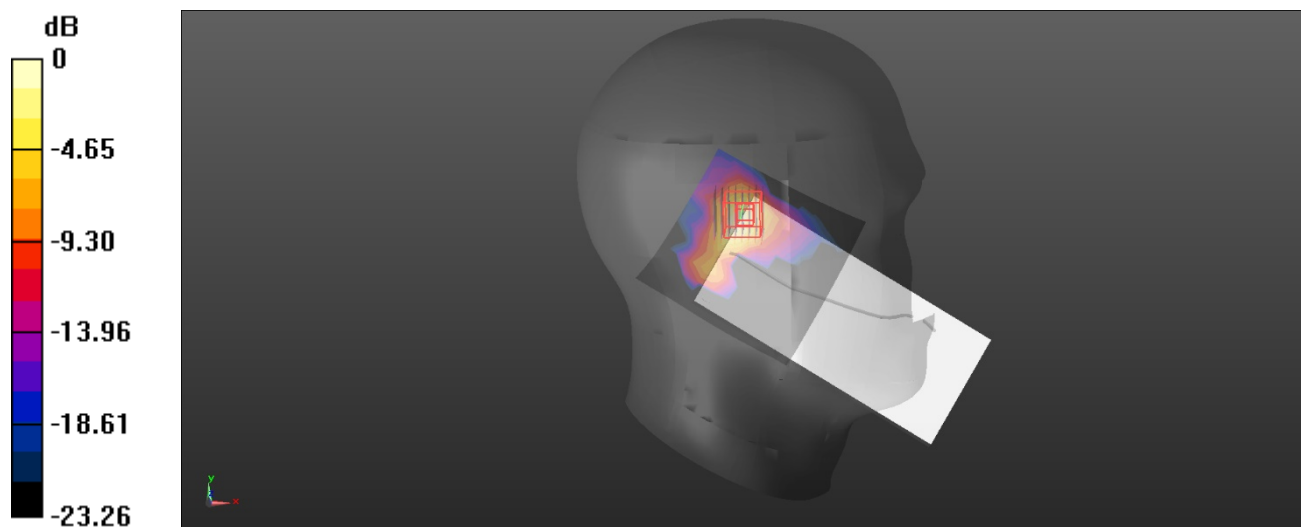

0 dB = 0.277 W/kg = -5.58 dBW/kg

Plot: 56#**DUT: Mobile Phone; Type: CM7; Serial: 2VG1-3**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.339$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant8 FR1 n77 Upper 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0431 W/kg


Body Top/Ant8 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.001 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0559 W/kg

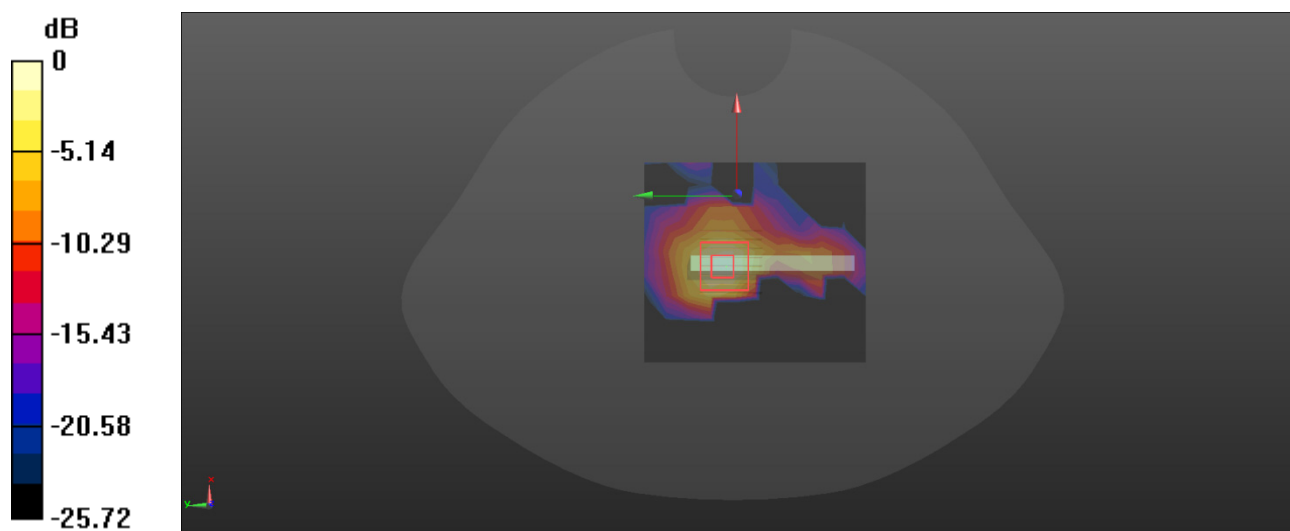

0 dB = 0.0559 W/kg = -12.53 dBW/kg