Explosion diagram specification

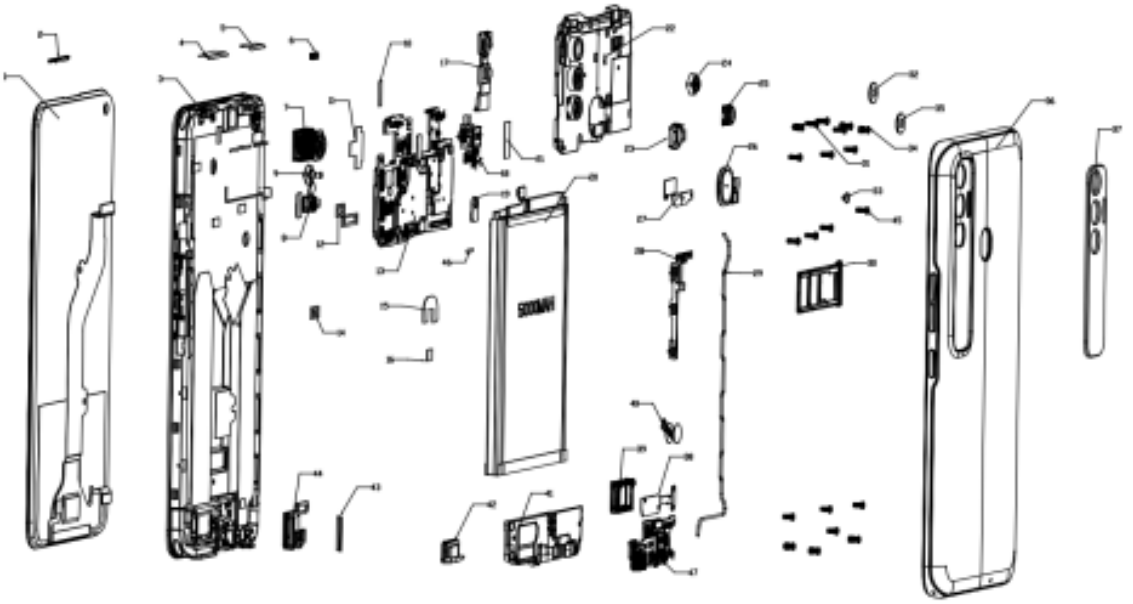

1	FL(CTP+LCM) 6.55HD+ H KF8 Black TM V1.0	2	REC Deco part KF8 Black
3	F hsg asm KF8 Black PC+ 20%GF+Al-Tialloy	4	DistanceSensorSeal Mylar10.5*5.5*0.05KF8
5	F LED-Flash Seal Mylar 13.6*5.5*0.05 KF8	6	LT sensor Rubber KF8 Black
7	CAM AF 48M OV48B2Q A MOB 6P B SY V1.0	8	CAM FF 2M GC02M1B YM P 3P+IR B SJ V1.0
9	CAM FF 8M OV8856 A B 4PBG B TXD V1.0	10	REC con fb 9*2.2*0.05 KF8
11	48M R CAM Con Foams 15*11.9*0.15 KF8	12	LCM FPC con Rubber 18.4*8.2 *0.75 KF8 Black
13	PCBA MB H696 A1 64GB+4GB V1.0	14	Bat FPC con Rubber 6.2*4.0 *0.65 KF8 Black
15	FM con Foams 13.3*9 *0.4 KF8	16	FM con Foams 13.3*9*0.4 KF8
17	MAIN CAM frame asm KF8 Black PC+20%GF	18	CAM FF 8W GC6153 B P 1P B 10P XCG V1.0
19	FP BTB Imp Frame KF7	20	Bat TECNO BL 49FT 4900mAH FH IN

21	F CAM Cop foil 13*4.9*0.05 KF8	22	UP frame asm KF8 Black PC+20%GF
23	F CAM Location Frame KF8 Black PC	24	8W R CAM Rubber KF8 Black
25	2M R CAM Rubber KF8 BlackBC	26	FM <ICNF7332AL> 06 Midnight Black Sunwin
27	FPC REC KF8	28	FPC Side Key KF8
29	Coaxial cable KA7 RoHS	30	Card Holder asm KF8 Magnet Black
31	mc screw M1.4*L3.5*D2.5 *H0.5 silver	32	R CAM Lens 2M KF8 Glass 0.5mm Black
33	mc Screw M1.4*L1.2*D3.5 *H0.4 Black Glue	34	mc Screw M1.4*L3.0*D2.5 *H0.5 black glue
35	R CAM Lens 16M KF8 Glass 0.5mm Black	36	Bat cover asm KF8 Magnet Black PC
37	CAM Deco KF8 Black PC	38	FPC SPK KF8
39	SPK 1115 SPR H2.5 1.0W HS	40	Motor FPC 0827 L4.8 H JX Con ads
41	DOWN frame asm KF8 Black PC+20%GF	42	USB Rubber KF8 Black
43	Motor Seal Mylar 12*5.5 *0.05 KF8	44	EarPhone Rubber KF8 Black
45	mc screw M1.4*L2.5*D2.5 *H0.5 silver glue	46	FP BTB Imp Foam 3.3*4*0.2 KF7
47	PCBA SUB H696 1 A V1.0		

Know your phone

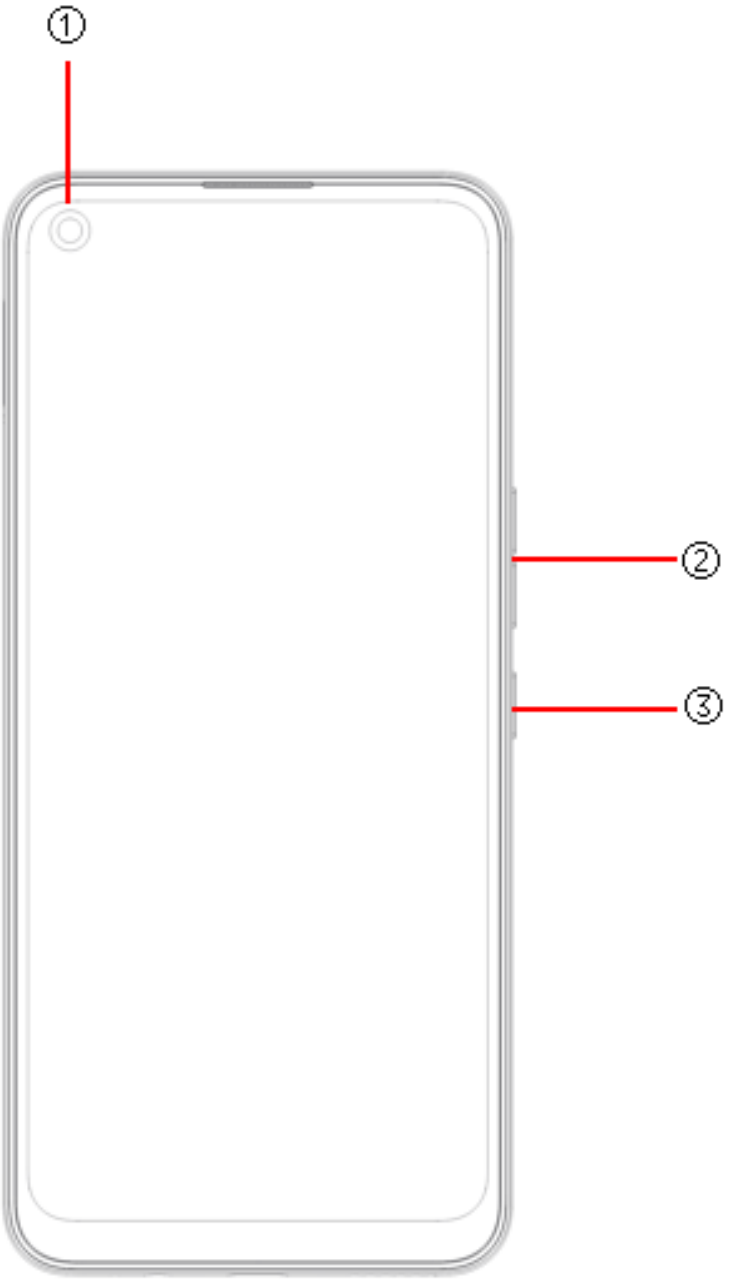

1. Front camera
2. Volume key
3. Power key

SIM/SD card installation

1. Power off mobile.
2. Refer to the following picture for SIM / SD card installation.

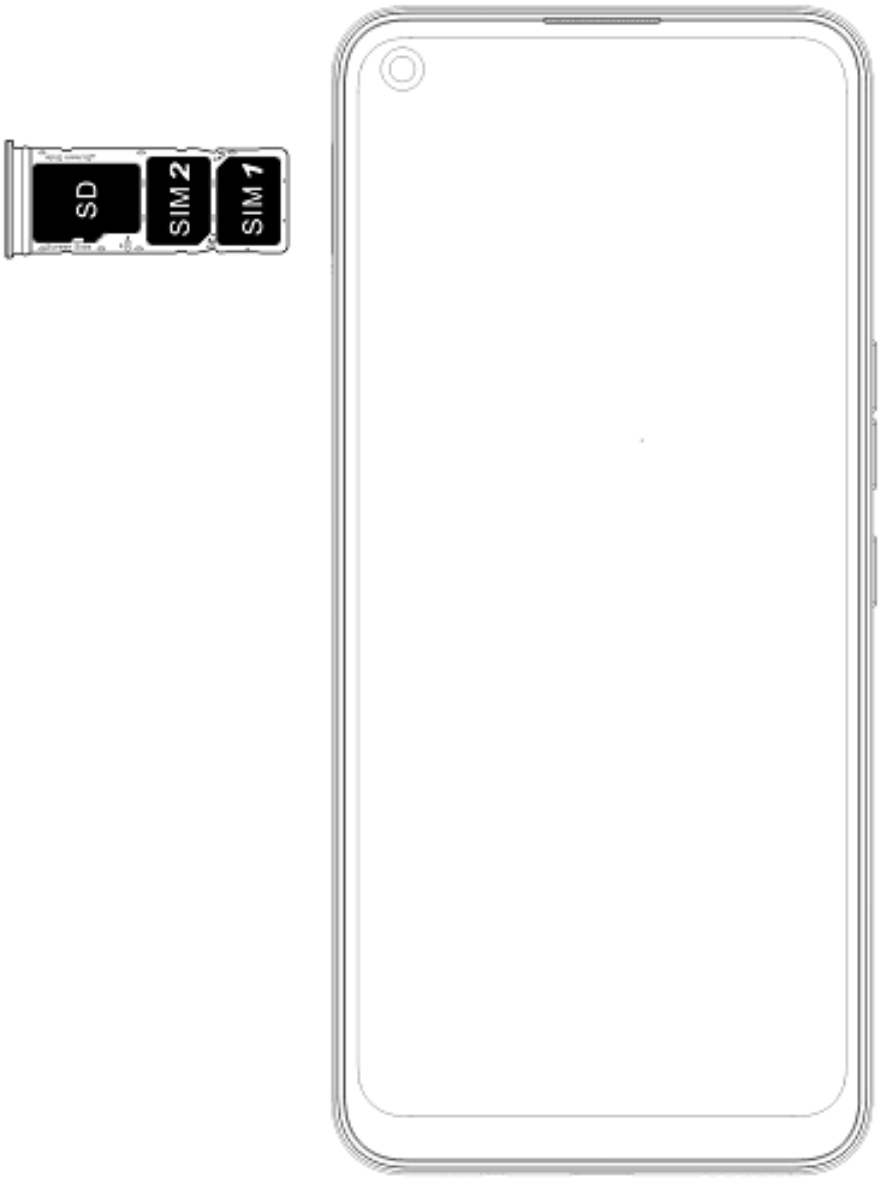

Charging the phone

You can charge your device using a charger or by connecting it

to the computer using a USB cable (comes with the phone).

1. Please remind the front and back of the plug.
2. Use only TECNO charger and cables. Other chargers or cables may damage the device. This will invalidate your phone warranty.

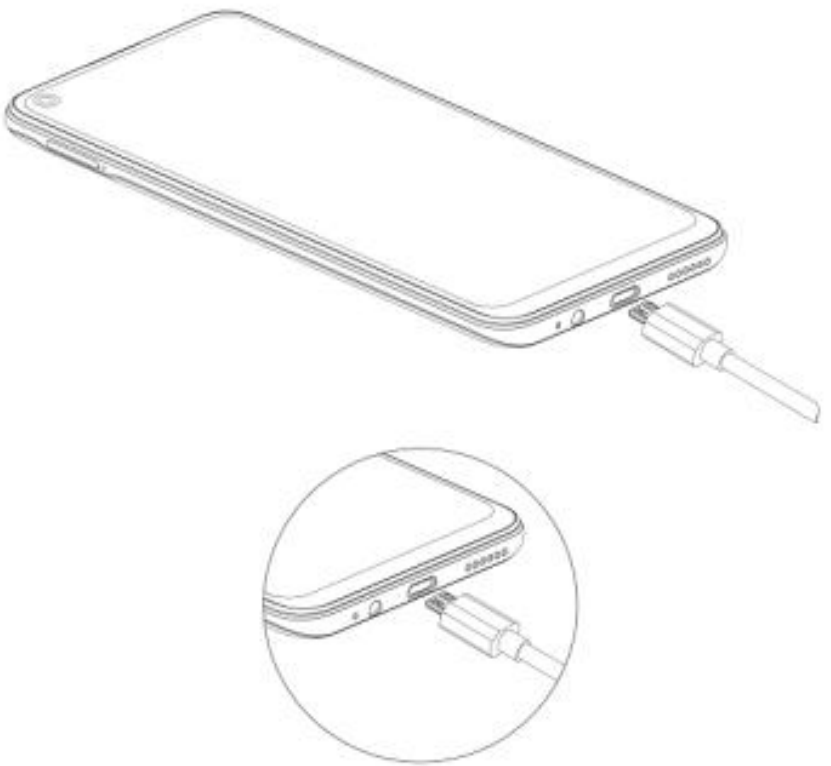

FCC Statement

1.This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2.Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.`

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

SAR Information Statement

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. * Tests for SAR are conducted with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the

limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone when tested for use at the ear is 1.329W/Kg and when worn on the body, as described in this user guide, is 0.519W/Kg(Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements). The maximum scaled SAR in hotspot mode is 0.519W/Kg. While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement for safe exposure. The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RFexposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of http://www.fcc.gov/ oet/fccid after searching on

FCC ID: 2ADYY-KF8 Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Asso-ciation (CTIA) web-site at http://www.wow-com.com. * In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a sub-stantial margin of safety to give additional protection for the public and to account for any variations in measurements.

Body-worn Operation

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance

of 10mm must be maintained between the user’s body and the handset, including the antenna. Third-party belt-clips, holsters,

and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved

-

TECNO