



TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG
Report Number : RA230417-19978E-RF-00A
FCC ID: 2ADYY-SC01P

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: True Wireless Earbuds
Model No.: SC01P
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2023/04/17
Report Date: 2023/05/06

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Dave Liang
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC§15.247 (I), §1.1307 (B) (3) & §2.1093 – RF EXPOSURE	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
FACTOR & MARGIN CALCULATION	15
TEST DATA	15
FCC §15.247(A) (I)-CHANNEL SEPARATION TEST	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	32
FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33

FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(D) - BAND EDGES TESTING.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
APPENDIX-LEFT SIDE.....	37
APPENDIX A: 20dB EMISSION BANDWIDTH.....	37
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	43
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	49
APPENDIX D: CARRIER FREQUENCY SEPARATION	55
APPENDIX E: TIME OF OCCUPANCY	58
APPENDIX F: NUMBER OF HOPPING CHANNELS	68
APPENDIX G: BAND EDGE MEASUREMENTS	71
APPENDIX-RIGHT SIDE.....	77
APPENDIX A: 20dB EMISSION BANDWIDTH.....	77
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	83
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	89
APPENDIX D: CARRIER FREQUENCY SEPARATION	94
APPENDIX E: TIME OF OCCUPANCY	97
APPENDIX F: NUMBER OF HOPPING CHANNELS	107
APPENDIX G: BAND EDGE MEASUREMENTS	110

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230417-19978E-RF-00A	Original Report	2023/05/06

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 9.52dBm(Left Side Ear),7.52dBm(Right Side Ear)
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	Left: 3.26 dBi Right: 3.59 dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery
Sample serial number	24RO_4 for Radiated Emissions Test 24RO_3 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Audio Frequency Response		0.1dB
Low Pass Filter Response		1.2dB
Modulation Limiting		1%
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...	...	...	...
...	...	...	...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

“BQB.exe *” exercise software was used and the power level is 2 for left side and 1 for right side *. The software and power level was provided by the manufacturer.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions:

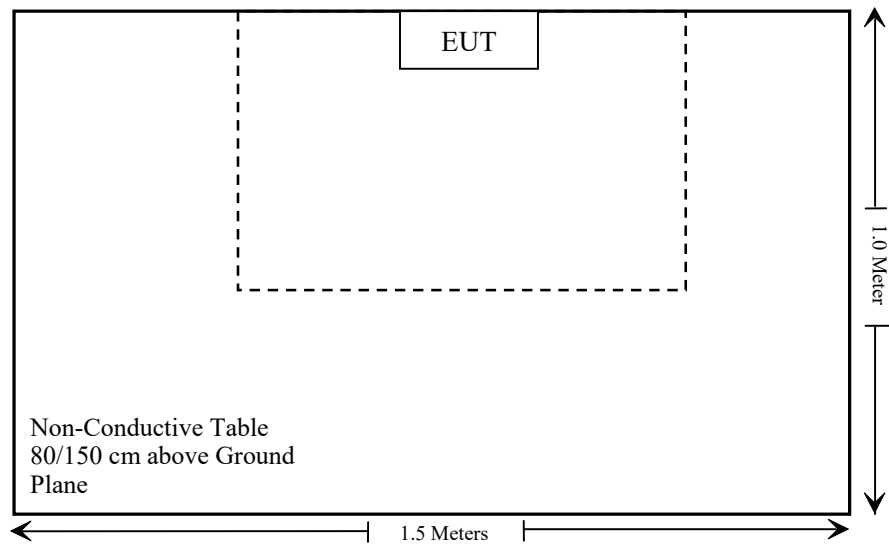

Note: The EUT is placed at the position directly above the center of the turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (3) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Not Applicable:Bluetooth cannot work when charging

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF conducted test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101948	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (3) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up conducted power* (dBm)	Max tune-up conducted power* (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE(Left)	2402-2480	9.7	9.33	5	2.9	3.0	Yes
BLE(Right)	2402-2480	8.0	6.31	5	2.0	3.0	Yes

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 3.26 dBi for left side ear part , and 3.59 dBi for right isde ear part, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

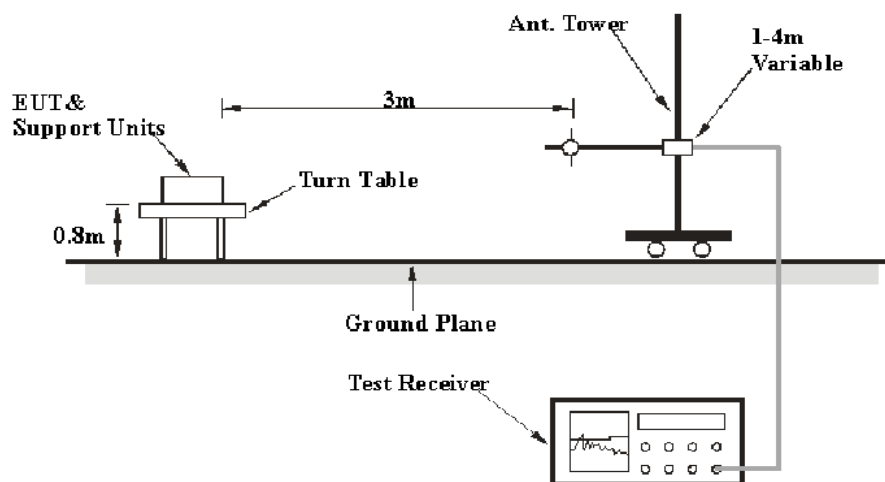

Above 1GHz:

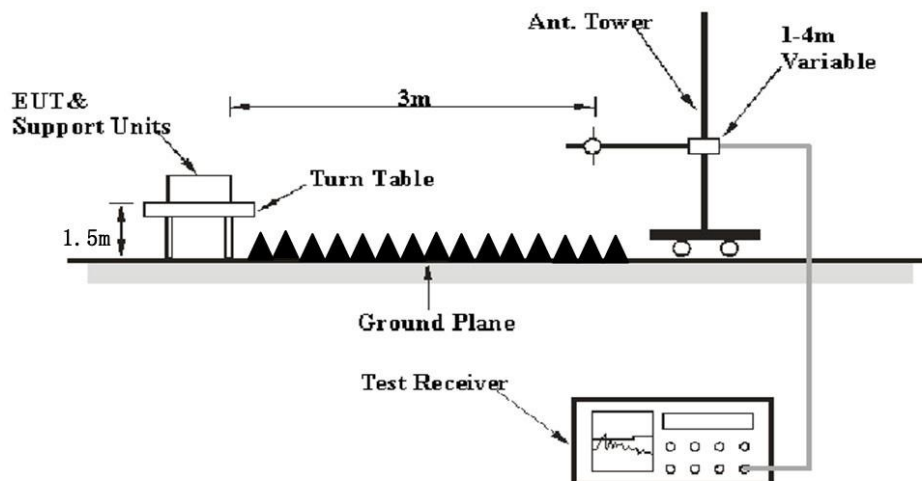

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1*L1+N2*L2+\dots Nn-1*Ln-1+Nn*Ln$,

where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.2 °C
Relative Humidity:	51~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Jimi Zheng on 2023-04-26 for below 1GHz and Jimi Zheng on 2023-05-04 for above 1GHz

EUT operation mode: Transmitting


Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded

For Left side

30MHz-1GHz: (worst case is GFSK Mode, high channel)

Note: When the test result of Peak was less than the limit of QP, just the peak value was recorded.


Horizontal:

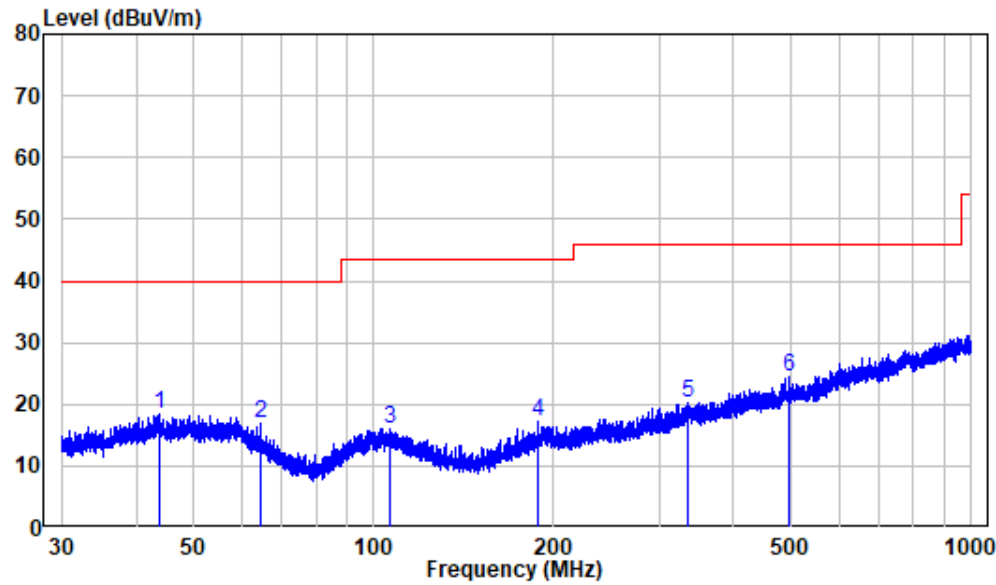

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230417-19978E-RF
Test Mode: BT
Note : L

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.774	-9.91	28.42	18.51	40.00	-21.49	Peak
2	64.603	-12.37	29.33	16.96	40.00	-23.04	Peak
3	106.478	-11.94	28.07	16.13	43.50	-27.37	Peak
4	188.743	-11.74	29.05	17.31	43.50	-26.19	Peak
5	336.477	-7.56	27.67	20.11	46.00	-25.89	Peak
6	496.152	-4.41	28.75	24.34	46.00	-21.66	Peak

Vertical

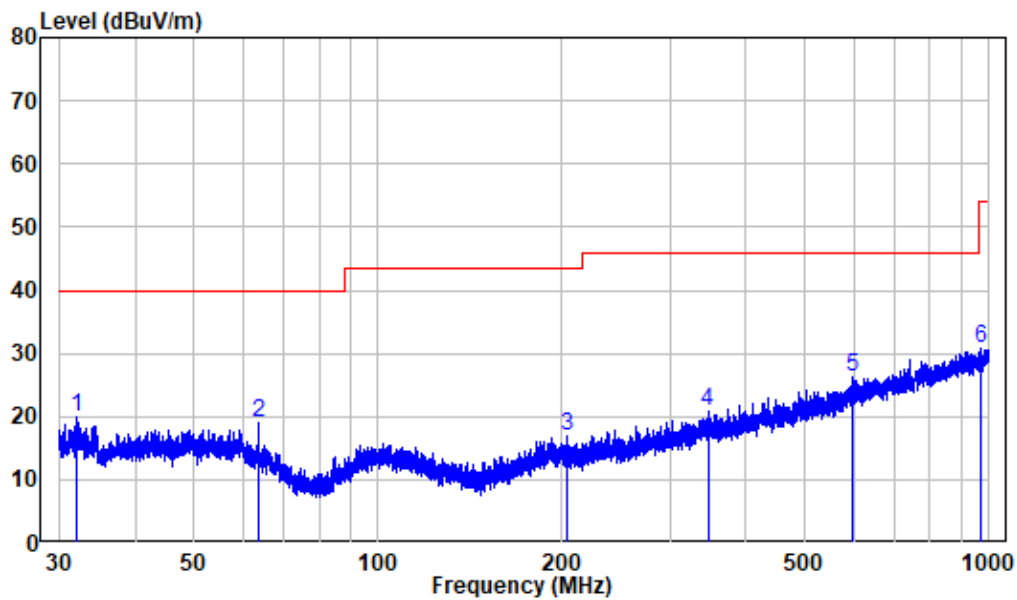

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230417-19978E-RF
 Test Mode: BT
 Note : L

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.123	-12.15	32.00	19.85	40.00	-20.15	Peak
2	63.731	-12.06	31.01	18.95	40.00	-21.05	Peak
3	203.791	-11.73	28.65	16.92	43.50	-26.58	Peak
4	346.505	-7.24	28.09	20.85	46.00	-25.15	Peak
5	597.747	-2.55	28.70	26.15	46.00	-19.85	Peak
6	970.634	2.46	28.42	30.88	54.00	-23.12	Peak

Above 1GHz: (worst case is 8DPSK Mode, 3DH5)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2389.48	69.09	PK	129	2.1	H	-10.70	58.39	74	-15.61
2352.08	70.09	PK	318	1.6	V	-10.79	59.30	74	-14.70
2390	68.43	PK	29	1.2	H	-10.70	57.73	74	-16.27
2390	68.78	PK	188	2.4	V	-10.70	58.08	74	-15.92
4804	67.06	PK	201	2.5	H	-6.11	60.95	74	-13.05
4804	66.42	PK	227	2.5	V	-6.11	60.31	74	-13.69
Middle Channel(2441MHz)									
4882	67.02	PK	335	1.4	H	-5.90	61.12	74	-12.88
4882	66.35	PK	202	1.4	V	-5.90	60.45	74	-13.55
High Channel(2480 MHz)									
2483.5	76.04	PK	45	2.3	H	-10.55	65.49	74	-8.51
2483.5	74.92	PK	211	2.2	V	-10.55	64.37	74	-9.63
2483.82	76.63	PK	172	2.1	H	-10.55	66.08	74	-7.92
2483.71	75.75	PK	323	1.8	V	-10.55	65.20	74	-8.80
4960	66.47	PK	301	1.5	H	-5.47	61.00	74	-13.00
4960	64.88	PK	187	1.5	V	-5.47	59.41	74	-14.59

Field Strength of Average						
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247	
					Limit (dBμV/m)	Margin (dB)
Low Channel(2402MHz)						
2389.48	58.39	H	-24.81	33.58	54	-20.42
2352.08	59.30	V	-24.81	34.49	54	-19.51
2390	57.73	H	-24.81	32.92	54	-21.08
2390	58.08	V	-24.81	33.27	54	-20.73
4804	60.95	H	-24.81	36.14	54	-17.86
4804	60.31	V	-24.81	35.50	54	-18.50
Middle Channel(2441MHz)						
4882	61.12	H	-24.81	36.31	54	-17.69
4882	60.45	V	-24.81	35.64	54	-18.36
High Channel(2480MHz)						
2483.5	65.49	H	-24.81	40.68	54	-13.32
2483.5	64.37	V	-24.81	39.56	54	-14.44
2483.82	66.08	H	-24.81	41.27	54	-12.73
2483.71	65.20	V	-24.81	40.39	54	-13.61
4960	61.00	H	-24.81	36.19	54	-17.81
4960	59.41	V	-24.81	34.60	54	-19.40

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

For fundamental, the peak value compliance with the limit of Average.


Duty cycle = Ton/100ms = 2.8750*2/100=0.0575

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.0575 = -24.81

Duty cycle

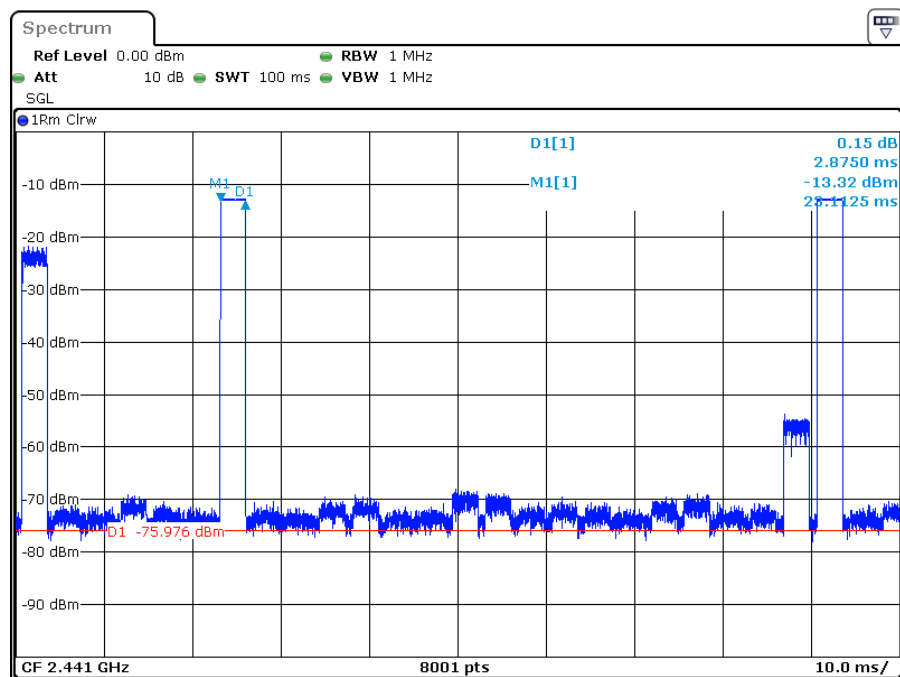


Date: 4.MAY.2023 21:41:54

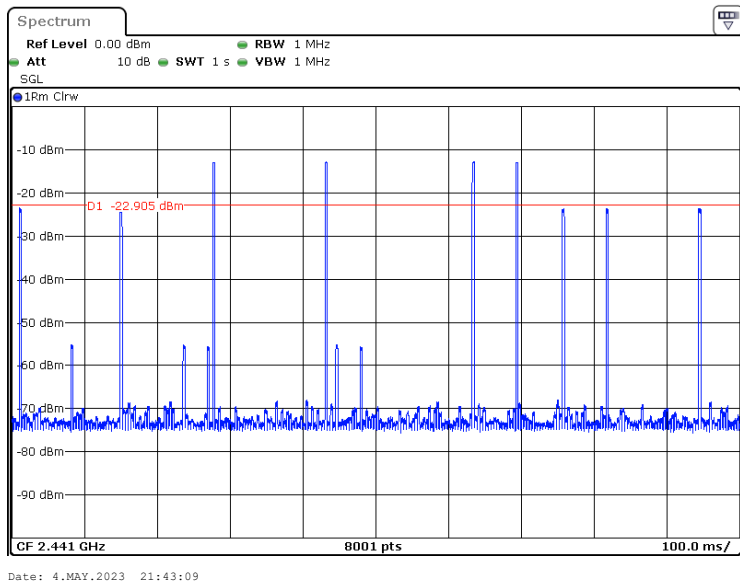


1-18GHz

Pre-scan for Middle Channel

Horizontal:

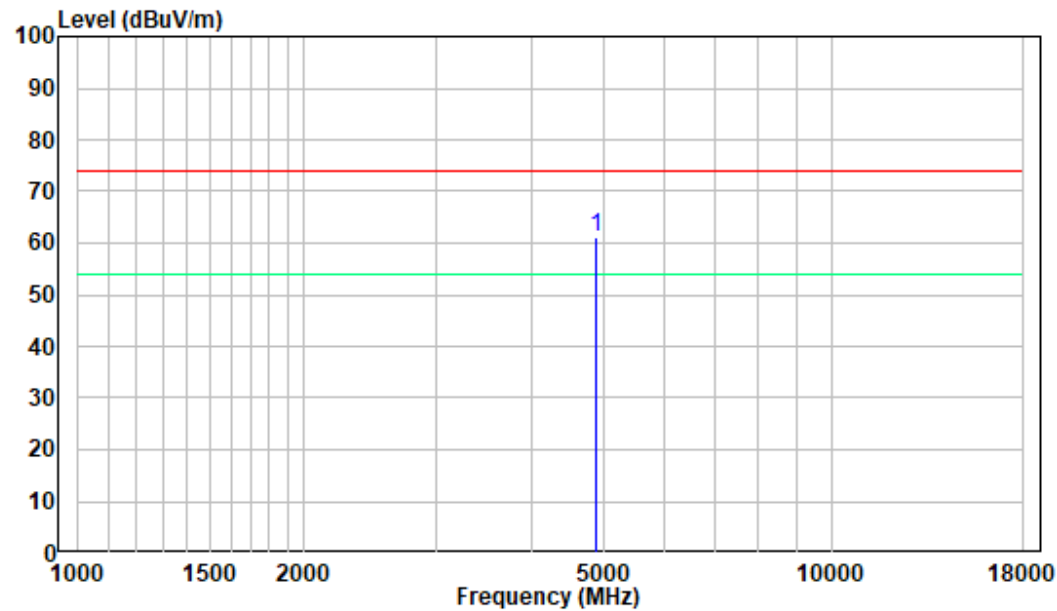


Vertical:

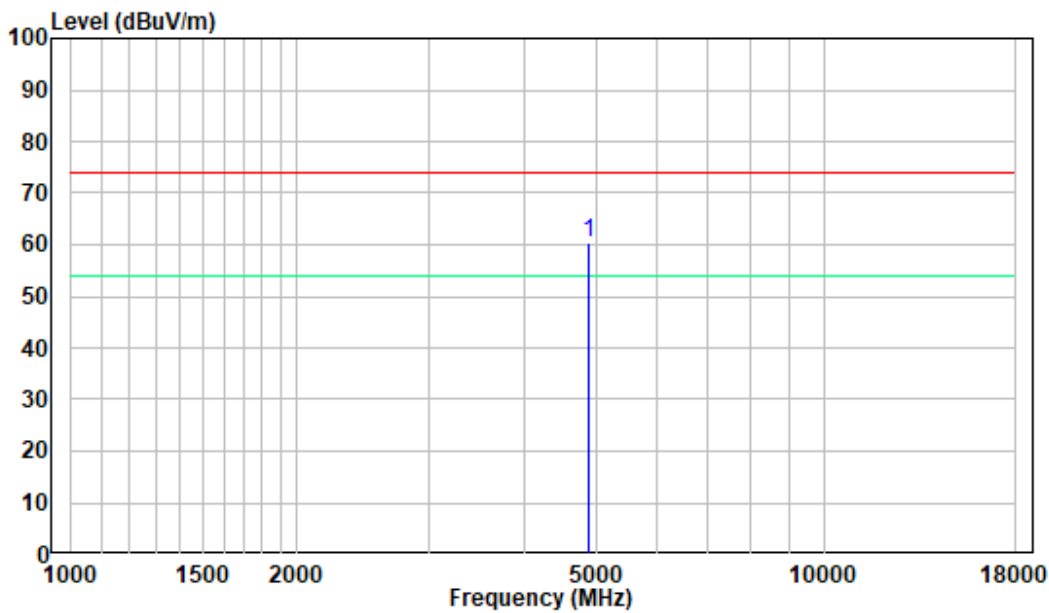


18-25GHz

Pre-scan for Middle Channel

Horizontal:

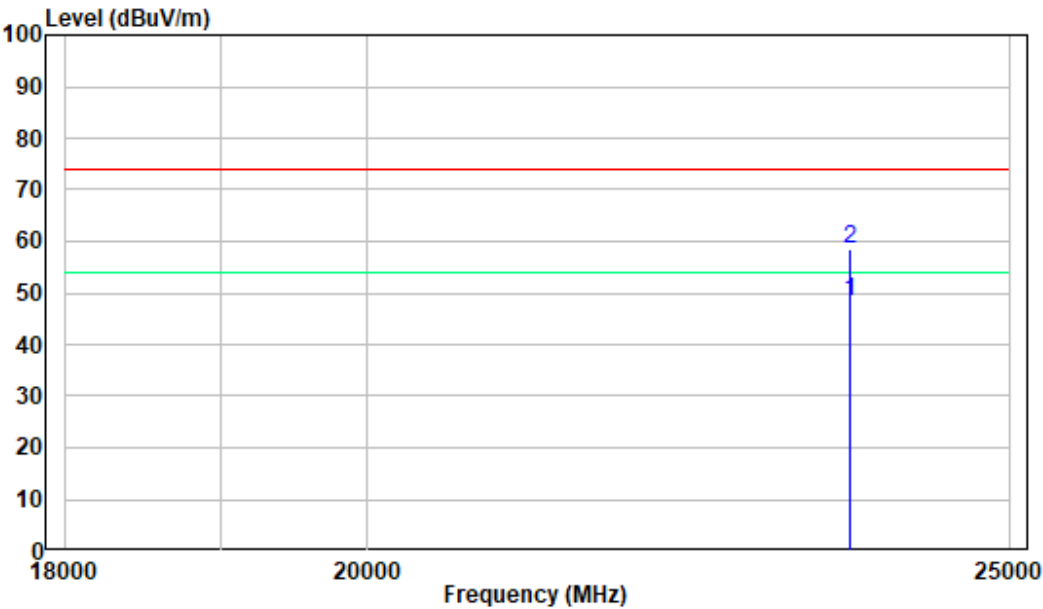

Vertical:

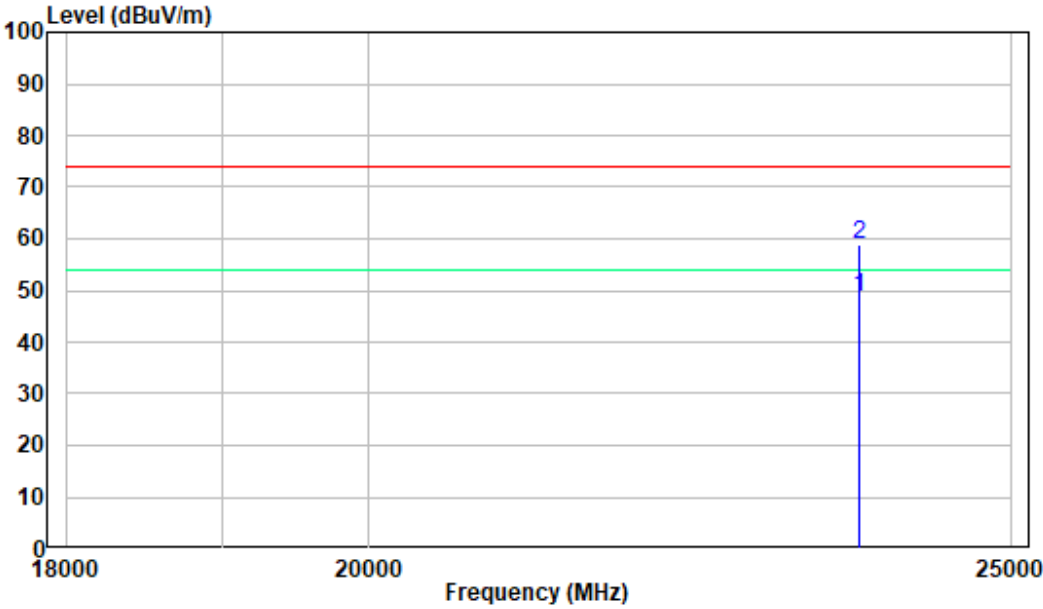


For Right side

30MHz-1GHz: (worst case is GFSK Mode, high channel)

Note: When the test result of Peak was less than the limit of QP, just the peak value was recorded.


Horizontal:

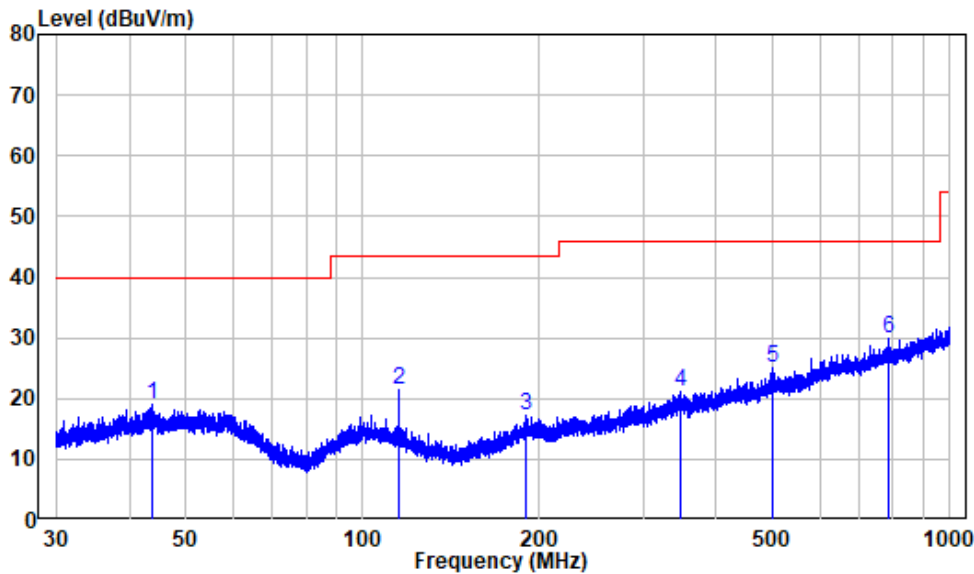

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230417-19978E-RF
Test Mode: BT
Note : R

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	43.889	-9.91	28.97	19.06	40.00	-20.94	Peak
2	114.917	-12.68	34.22	21.54	43.50	-21.96	Peak
3	189.323	-11.67	28.75	17.08	43.50	-26.42	Peak
4	348.791	-7.29	28.56	21.27	46.00	-24.73	Peak
5	498.331	-4.33	29.24	24.91	46.00	-21.09	Peak
6	787.506	-0.08	29.92	29.84	46.00	-16.16	Peak

Vertical

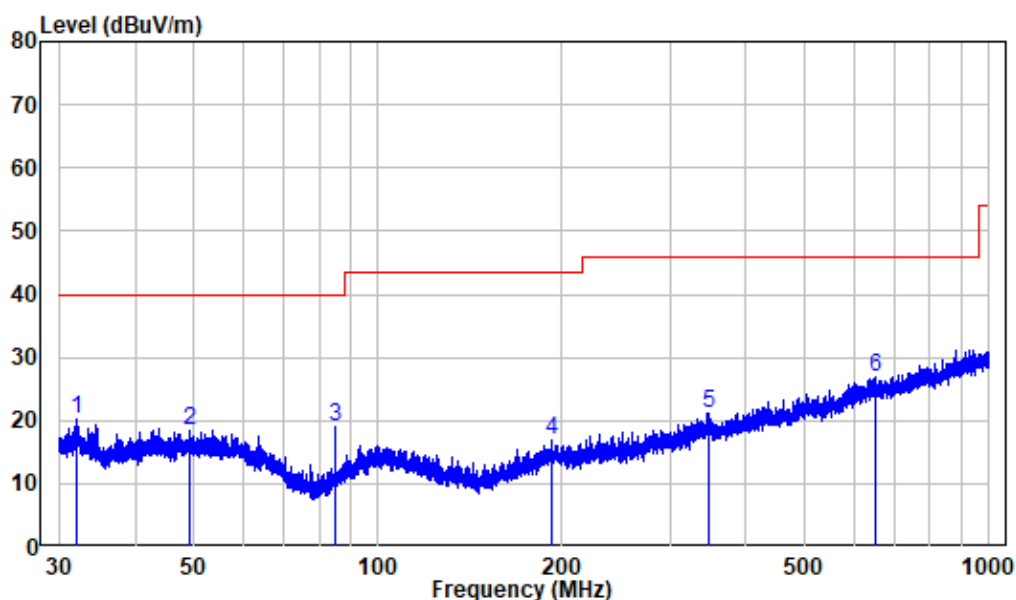

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230417-19978E-RF
Test Mode: BT
Note : R

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.067	-12.16	32.30	20.14	40.00	-19.86	Peak
2	49.273	-9.95	28.30	18.35	40.00	-21.65	Peak
3	84.813	-15.70	34.71	19.01	40.00	-20.99	Peak
4	192.503	-11.27	28.17	16.90	43.50	-26.60	Peak
5	348.944	-7.29	28.54	21.25	46.00	-24.75	Peak
6	652.800	-1.64	28.66	27.02	46.00	-18.98	Peak

Above 1GHz: (worst case is 8DPSK Mode, 3DH5)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2350.02	72.65	PK	313	1.3	H	-10.79	61.86	74	-12.14
2389.13	71.19	PK	23	2.2	V	-10.70	60.49	74	-13.51
2390	71.57	PK	232	1.3	H	-10.70	60.87	74	-13.13
2390	70.50	PK	101	2.3	V	-10.70	59.80	74	-14.20
4804	68.50	PK	17	2	H	-6.11	62.39	74	-11.61
4804	67.22	PK	326	2	V	-6.11	61.11	74	-12.89
Middle Channel(2441MHz)									
4882	66.25	PK	100	2.3	H	-5.90	60.35	74	-13.65
4882	65.71	PK	240	2.3	V	-5.90	59.81	74	-14.19
High Channel(2480 MHz)									
2483.5	72.76	PK	143	1.2	H	-10.55	62.21	74	-11.79
2483.5	71.22	PK	325	2	V	-10.55	60.67	74	-13.33
2483.79	73.09	PK	83	2.1	H	-10.55	62.54	74	-11.46
2484.32	71.64	PK	234	1.1	V	-10.54	61.10	74	-12.90
4960	64.23	PK	174	1.7	H	-5.47	58.76	74	-15.24
4960	62.71	PK	121	1.7	V	-5.47	57.24	74	-16.76

Field Strength of Average						
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247	
					Limit (dBμV/m)	Margin (dB)
Low Channel(2402MHz)						
2350.02	61.86	H	-24.84	37.02	54	-16.98
2389.13	60.49	V	-24.84	35.65	54	-18.35
2390	60.87	H	-24.84	36.03	54	-17.97
2390	59.80	V	-24.84	34.96	54	-19.04
4804	62.39	H	-24.84	37.55	54	-16.45
4804	61.11	V	-24.84	36.27	54	-17.73
Middle Channel(2441MHz)						
4882	60.35	H	-24.84	35.51	54	-18.49
4882	59.81	V	-24.84	34.97	54	-19.03
High Channel(2480MHz)						
2483.5	62.21	H	-24.84	37.37	54	-16.63
2483.5	60.67	V	-24.84	35.83	54	-18.17
2483.79	62.54	H	-24.84	37.70	54	-16.30
2484.32	61.10	V	-24.84	36.26	54	-17.74
4960	58.76	H	-24.84	33.92	54	-20.08
4960	57.24	V	-24.84	32.40	54	-21.60

Note:

Absolute Level = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

For fundamental, the peak value compliance with the limit of Average.

Duty cycle = Ton/100ms = 2.8625*2/100=0.05725

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20 lg0.05725 = -24.84

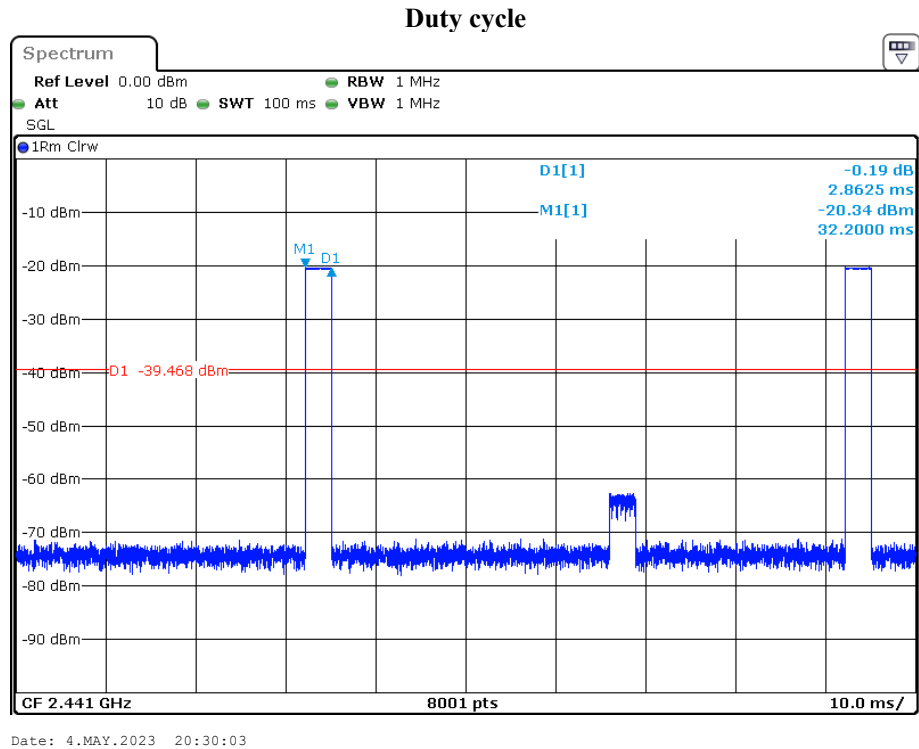

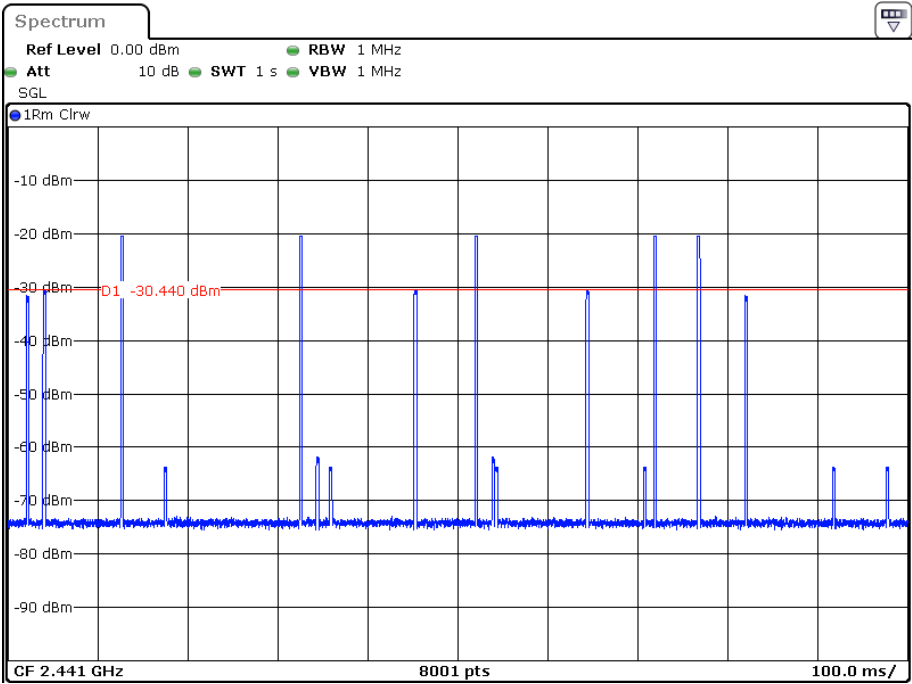


Date: 4.MAY.2023 20:32:14


1-18GHz

Pre-scan for Middle Channel

Horizontal:

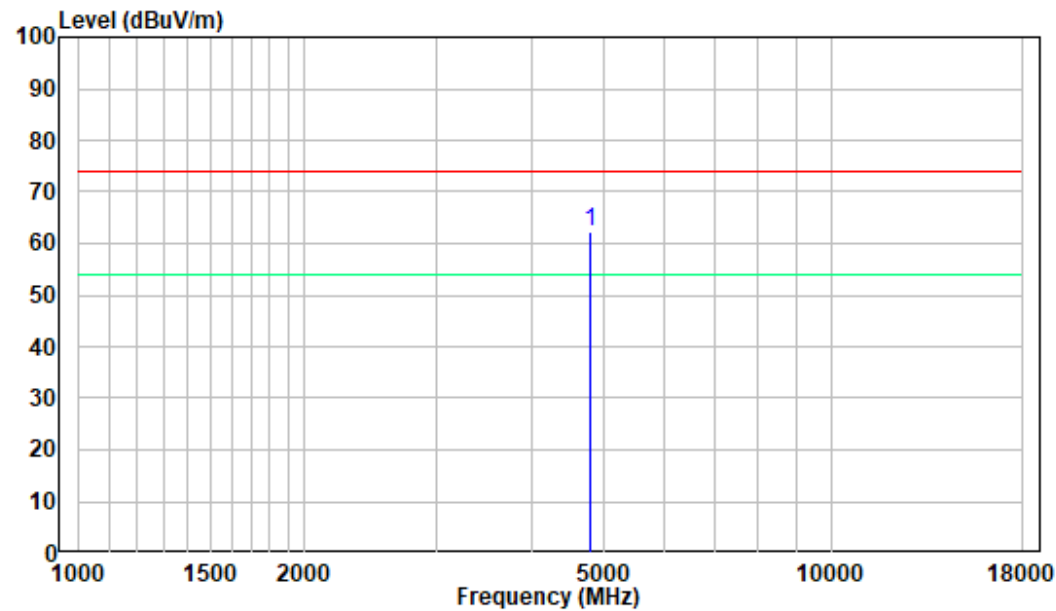


Vertical:

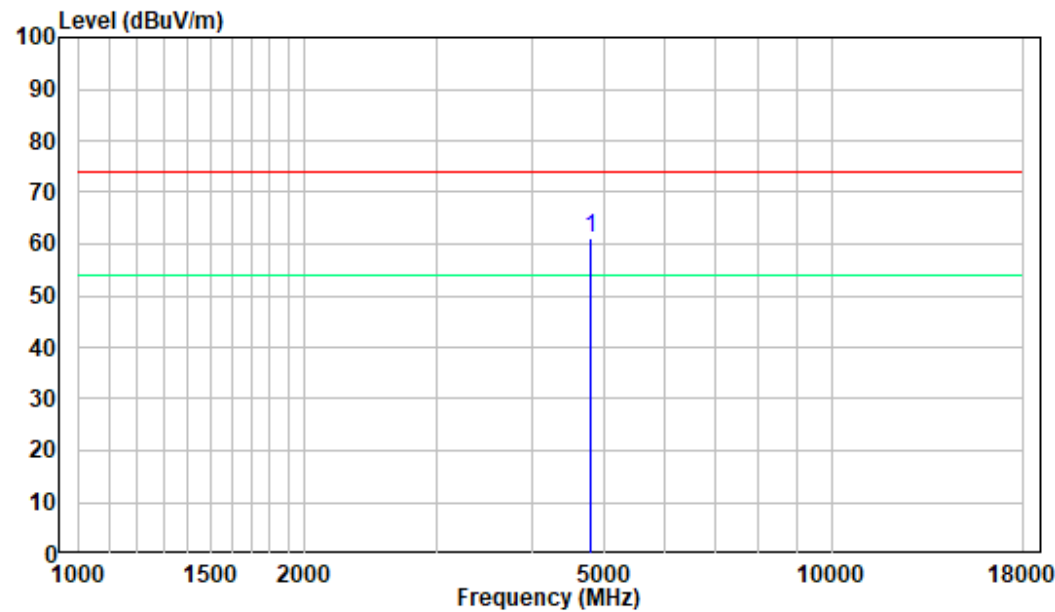


18-25GHz

Pre-scan for Middle Channel

Horizontal:

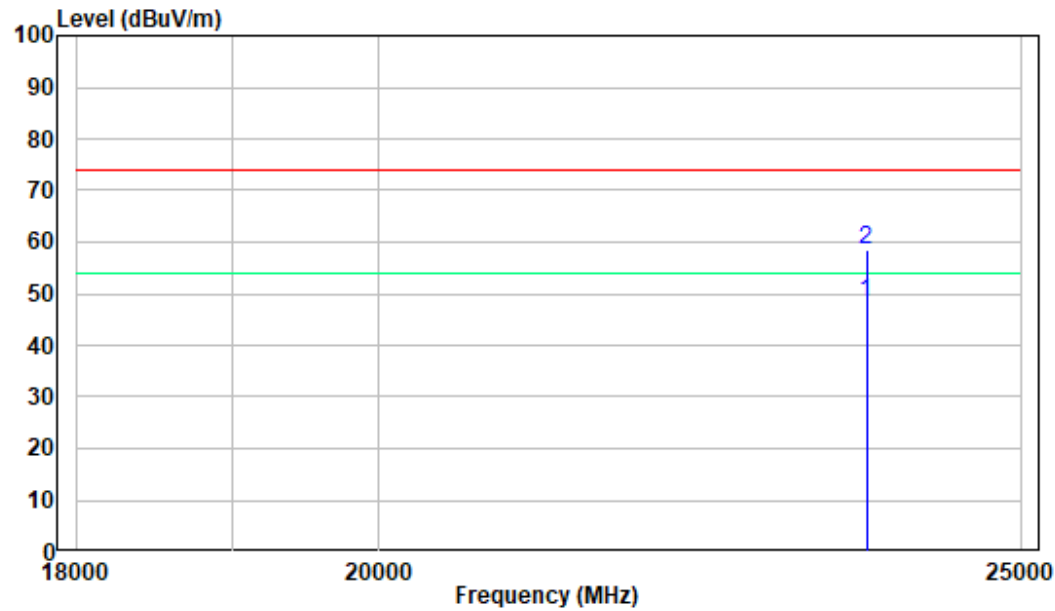

Vertical:

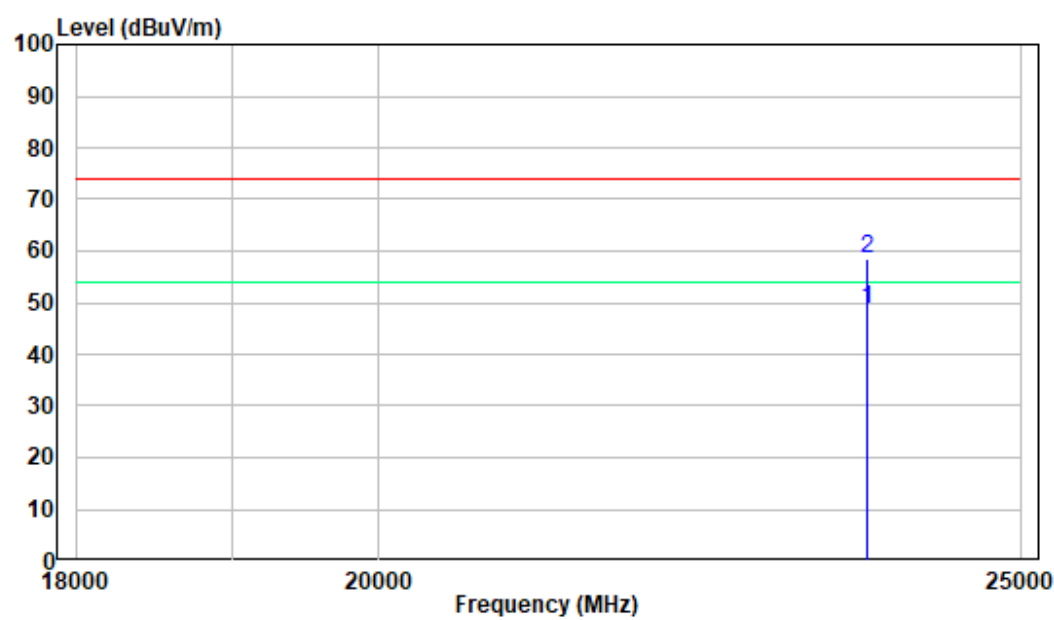

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

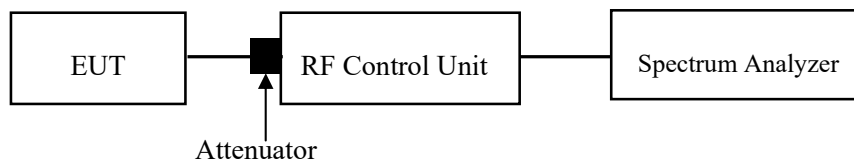

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

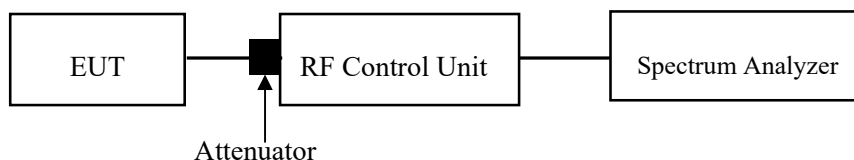

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

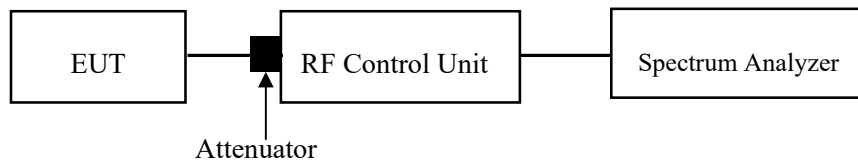**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

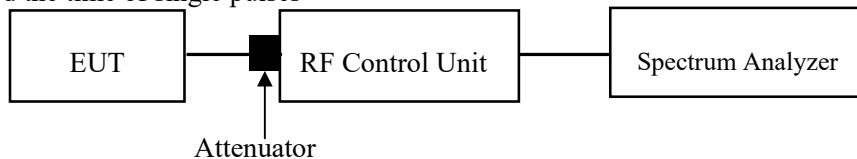**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

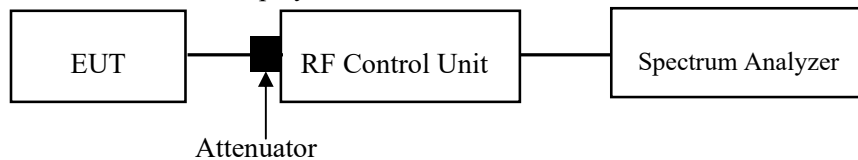

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

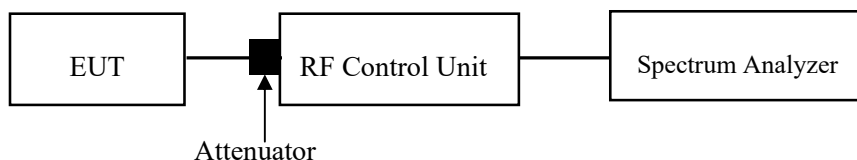

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Gleen Jiang on 2023-05-03.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


APPENDIX-Left side**Appendix A: 20dB Emission Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.04	---	---
		2441	1.04	---	---
		2480	1.04	---	---
2DH1	Ant1	2402	1.18	---	---
		2441	1.18	---	---
		2480	1.18	---	---
3DH1	Ant1	2402	1.17	---	---
		2441	1.17	---	---
		2480	1.17	---	---


Test Graphs

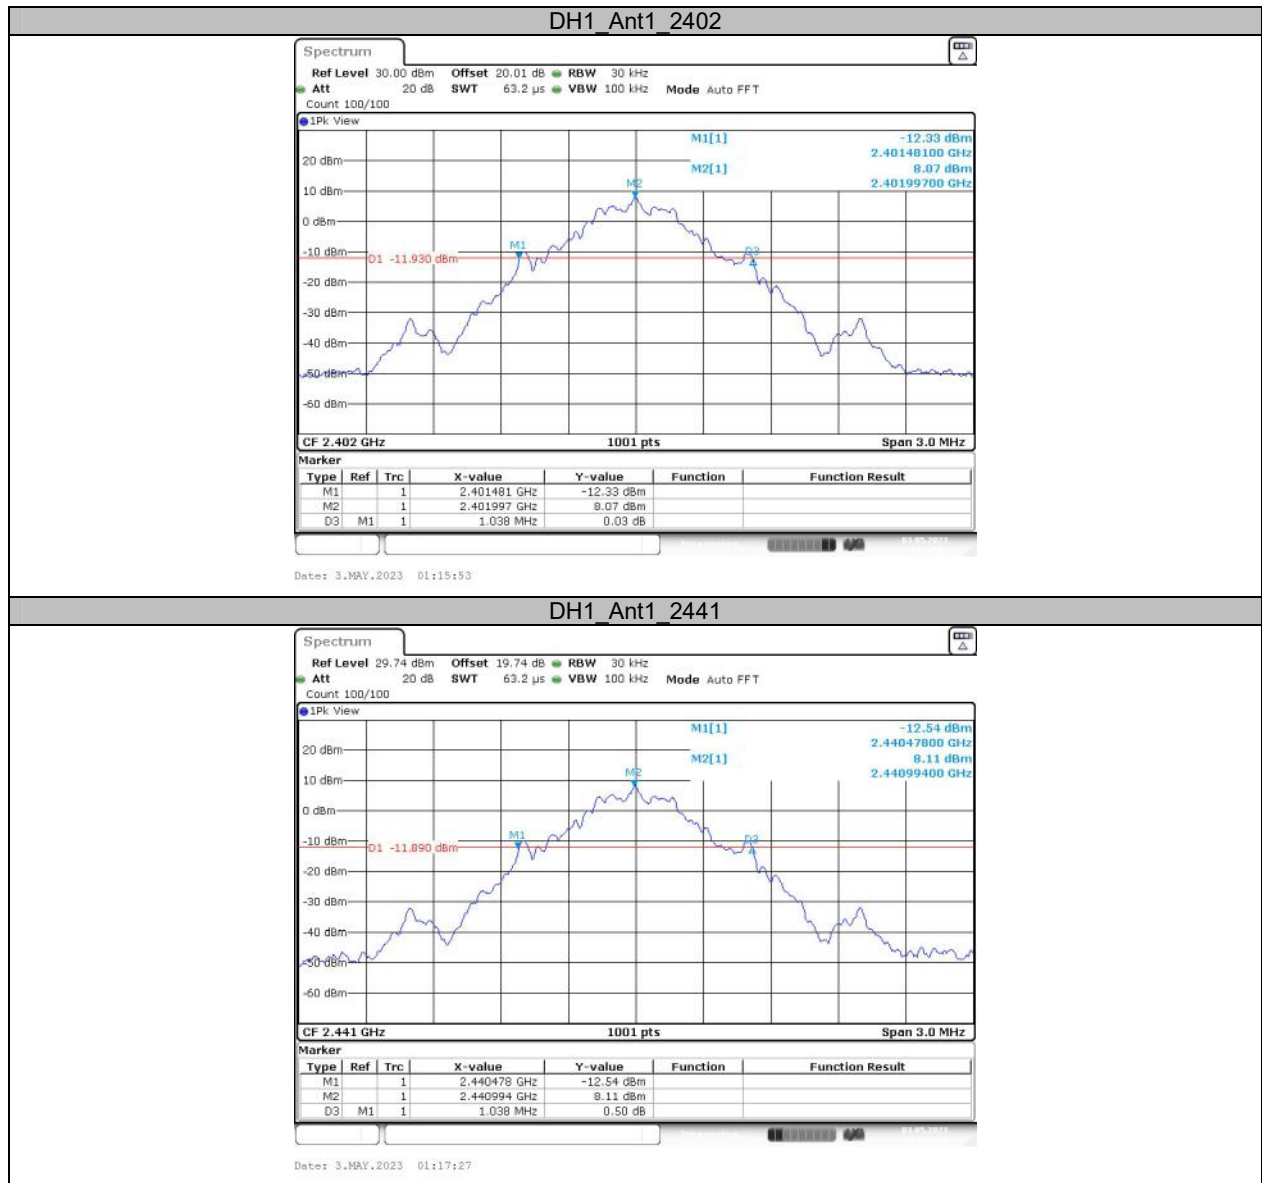


DH1 Ant1 2480

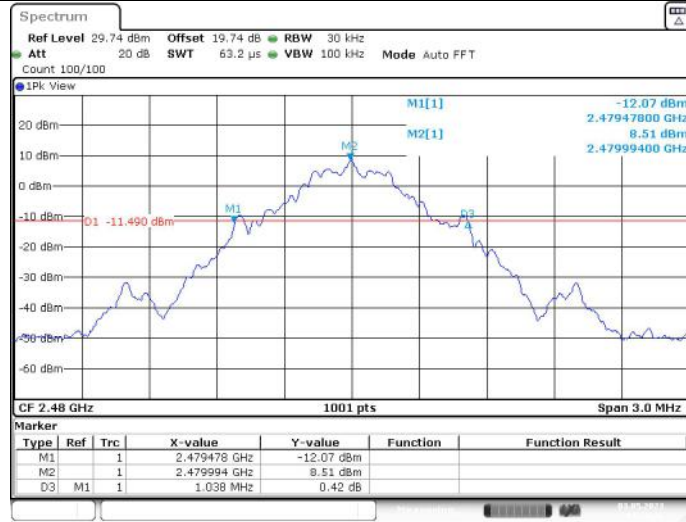


2DH1 Ant1 2402

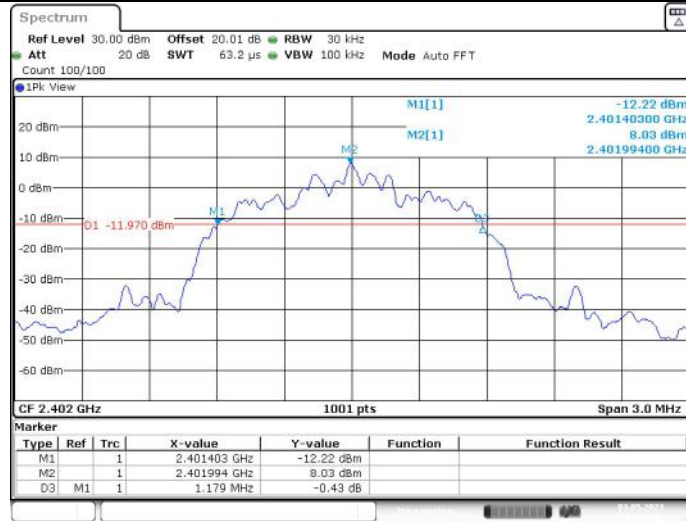


2DH1_Ant1_2441

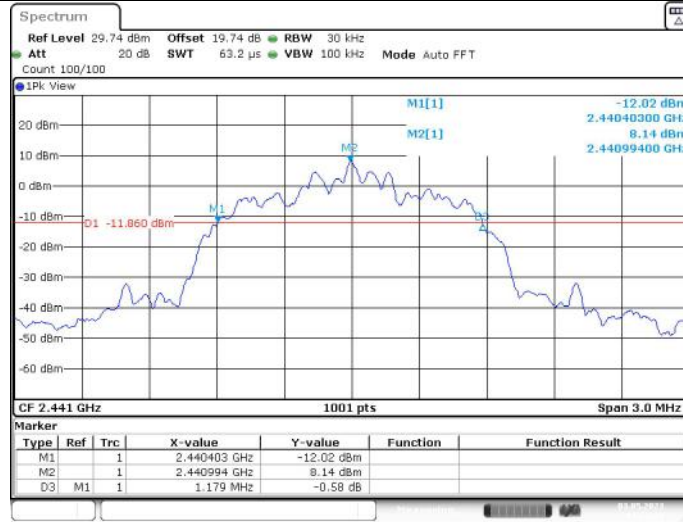


2DH1_Ant1_2480

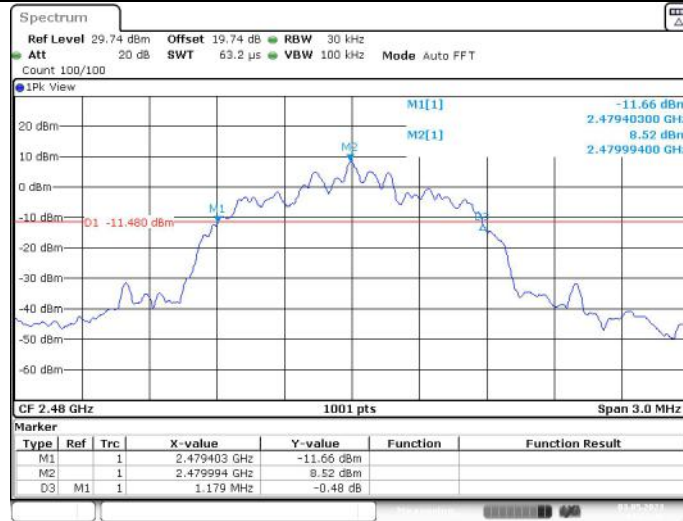


3DH1_Ant1_2402

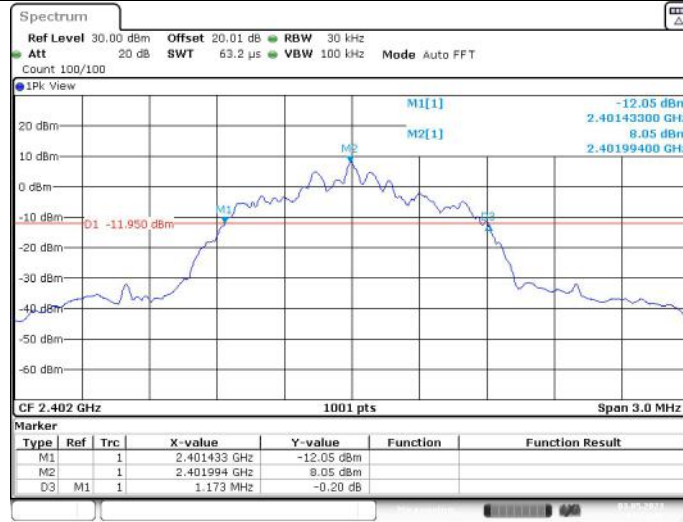

3DH1_Ant1_2441

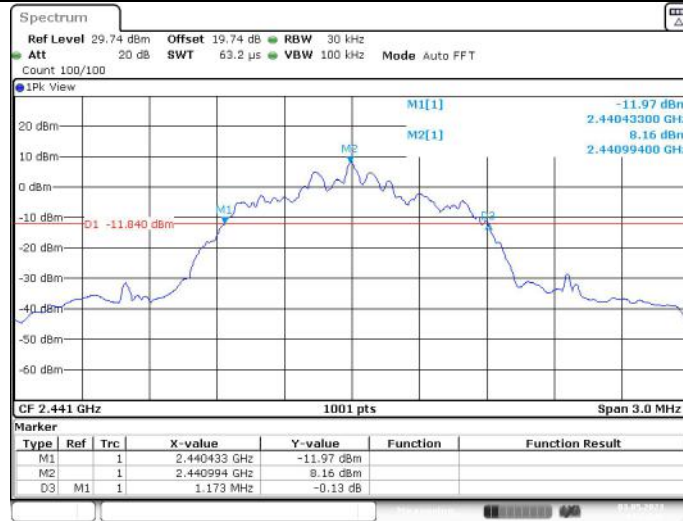


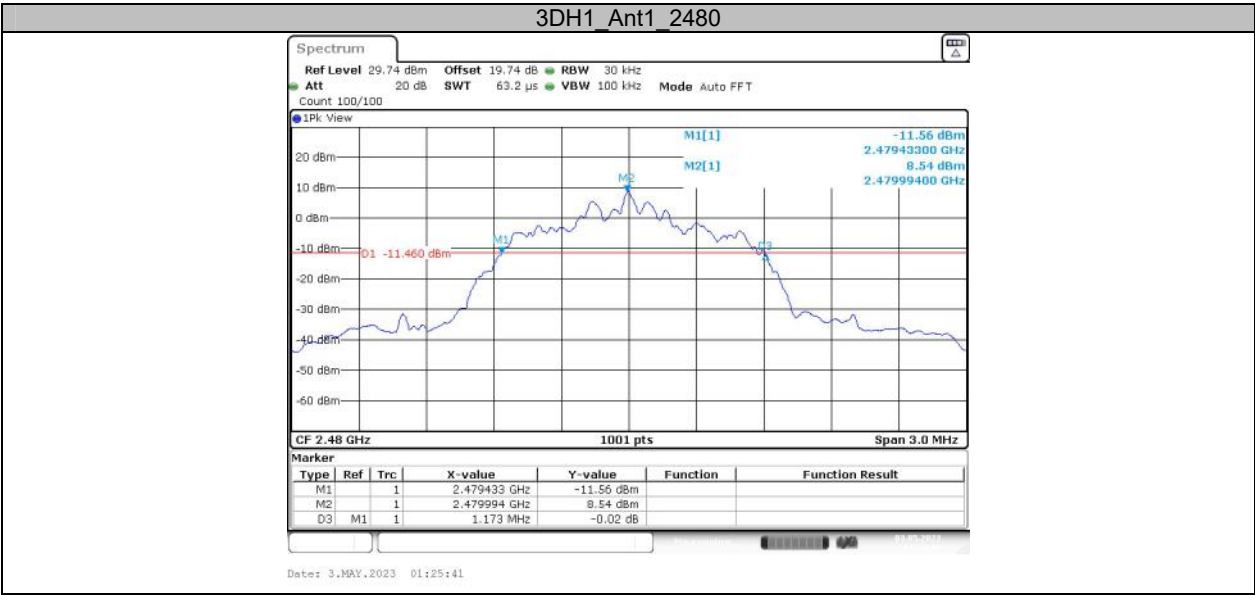


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.929	---	---
		2441	0.926	---	---
		2480	0.926	---	---
2DH1	Ant1	2402	1.118	---	---
		2441	1.118	---	---
		2480	1.121	---	---
3DH1	Ant1	2402	1.097	---	---
		2441	1.097	---	---
		2480	1.097	---	---


Test Graphs

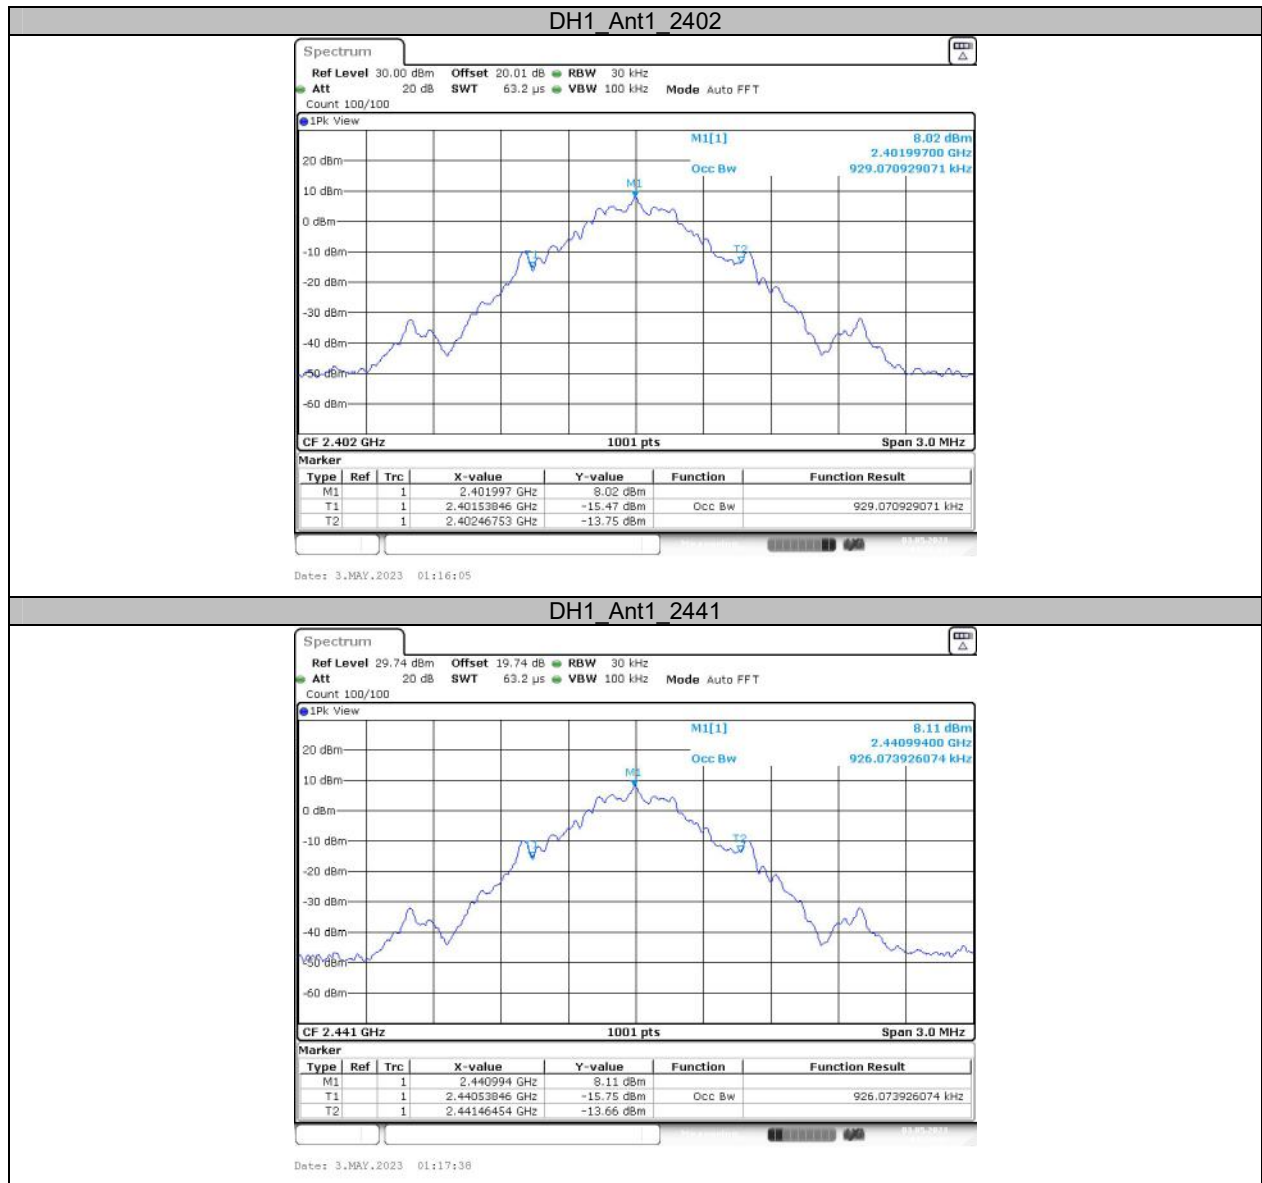


DH1 Ant1 2480

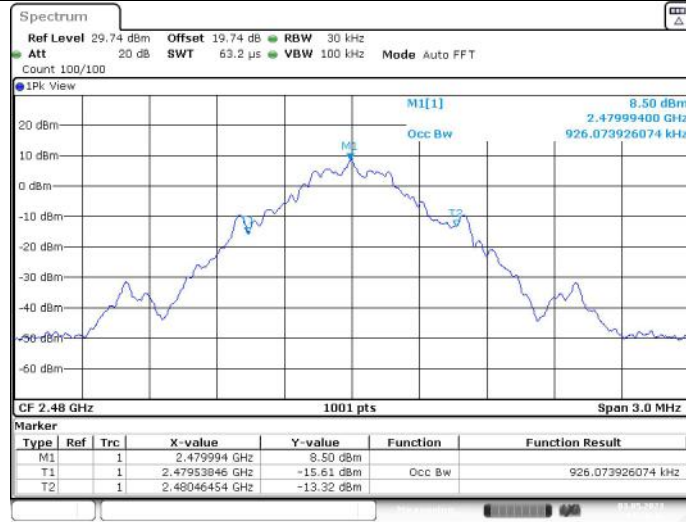

2DH1 Ant1 2402

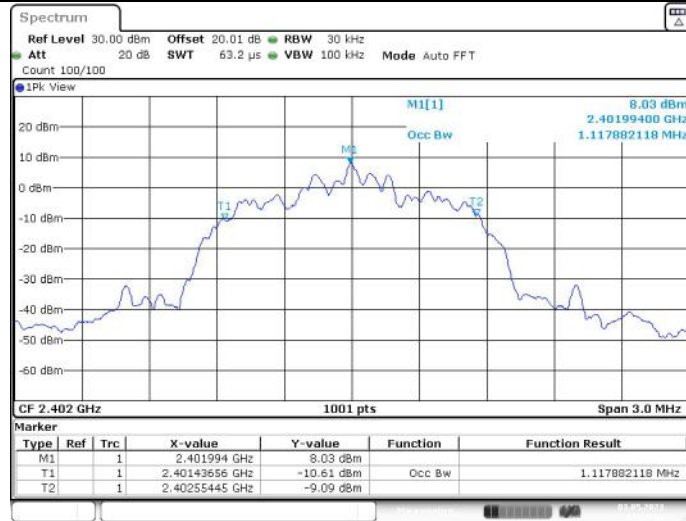


2DH1_Ant1_2441

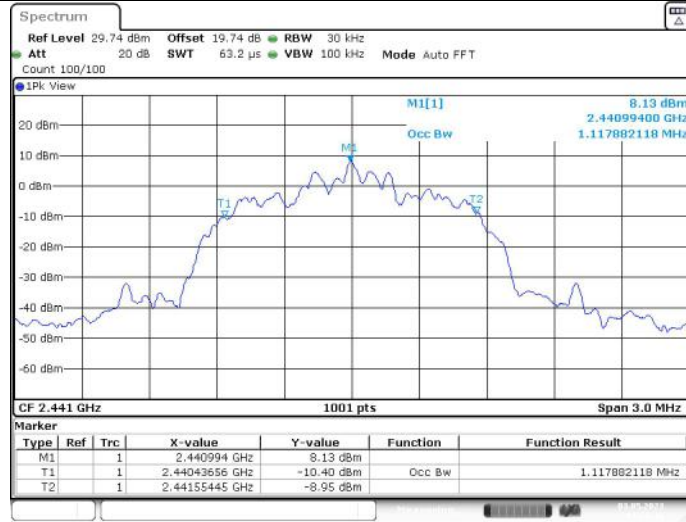


2DH1_Ant1_2480




3DH1_Ant1_2402

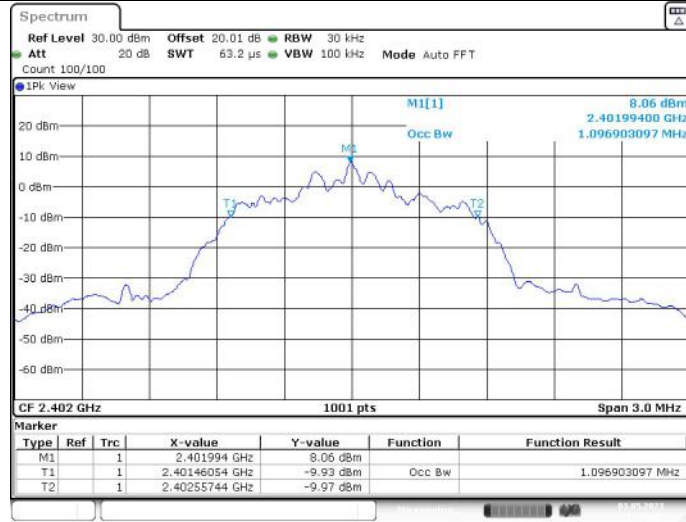

3DH1_Ant1_2441

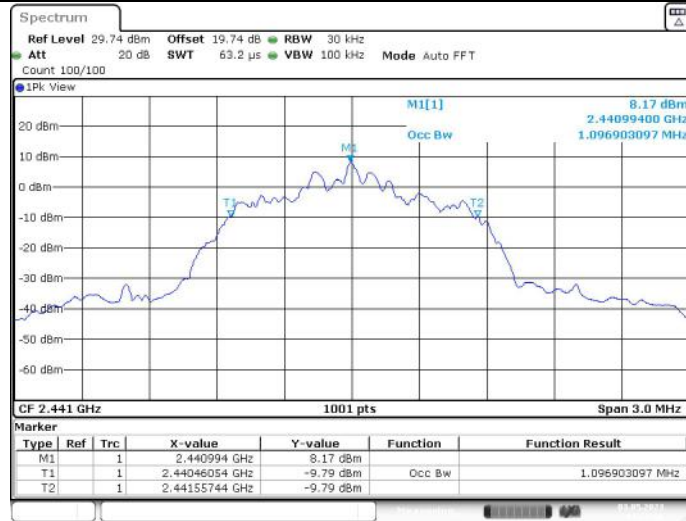


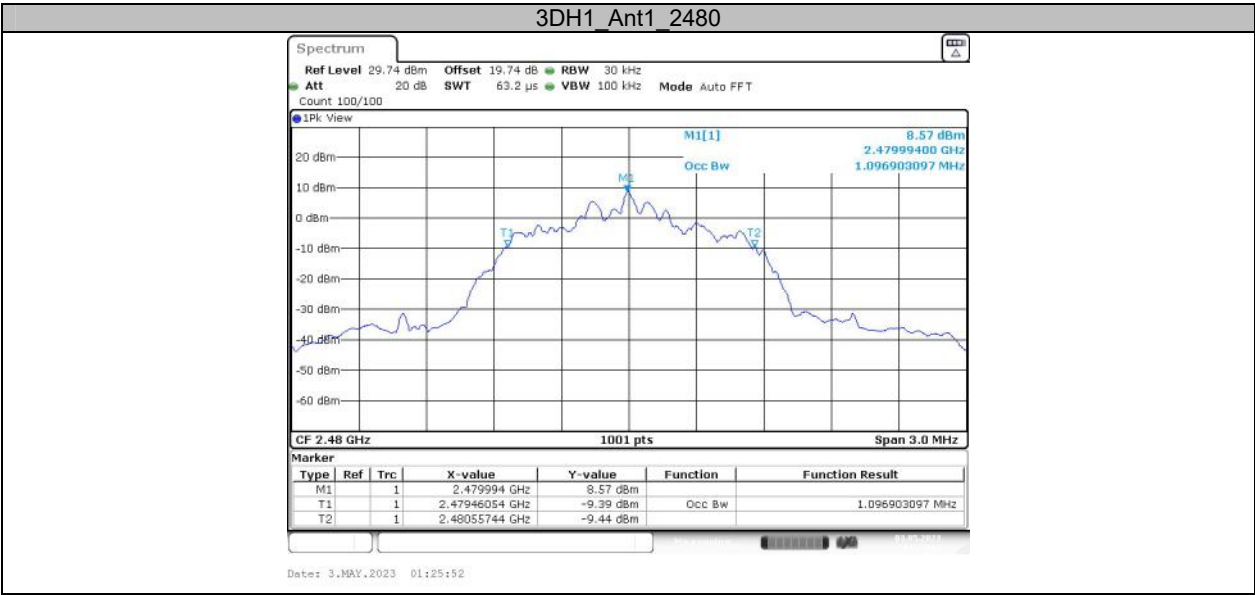


**Appendix C: Maximum conducted output power
Test Result Peak**


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH1	Ant1	2402	8.96	≤20.97	PASS
		2441	9.14	≤20.97	PASS
		2480	9.52	≤20.97	PASS
2DH1	Ant1	2402	8.97	≤20.97	PASS
		2441	9.08	≤20.97	PASS
		2480	9.48	≤20.97	PASS
3DH1	Ant1	2402	8.95	≤20.97	PASS
		2441	9.12	≤20.97	PASS
		2480	9.51	≤20.97	PASS

Test Graphs

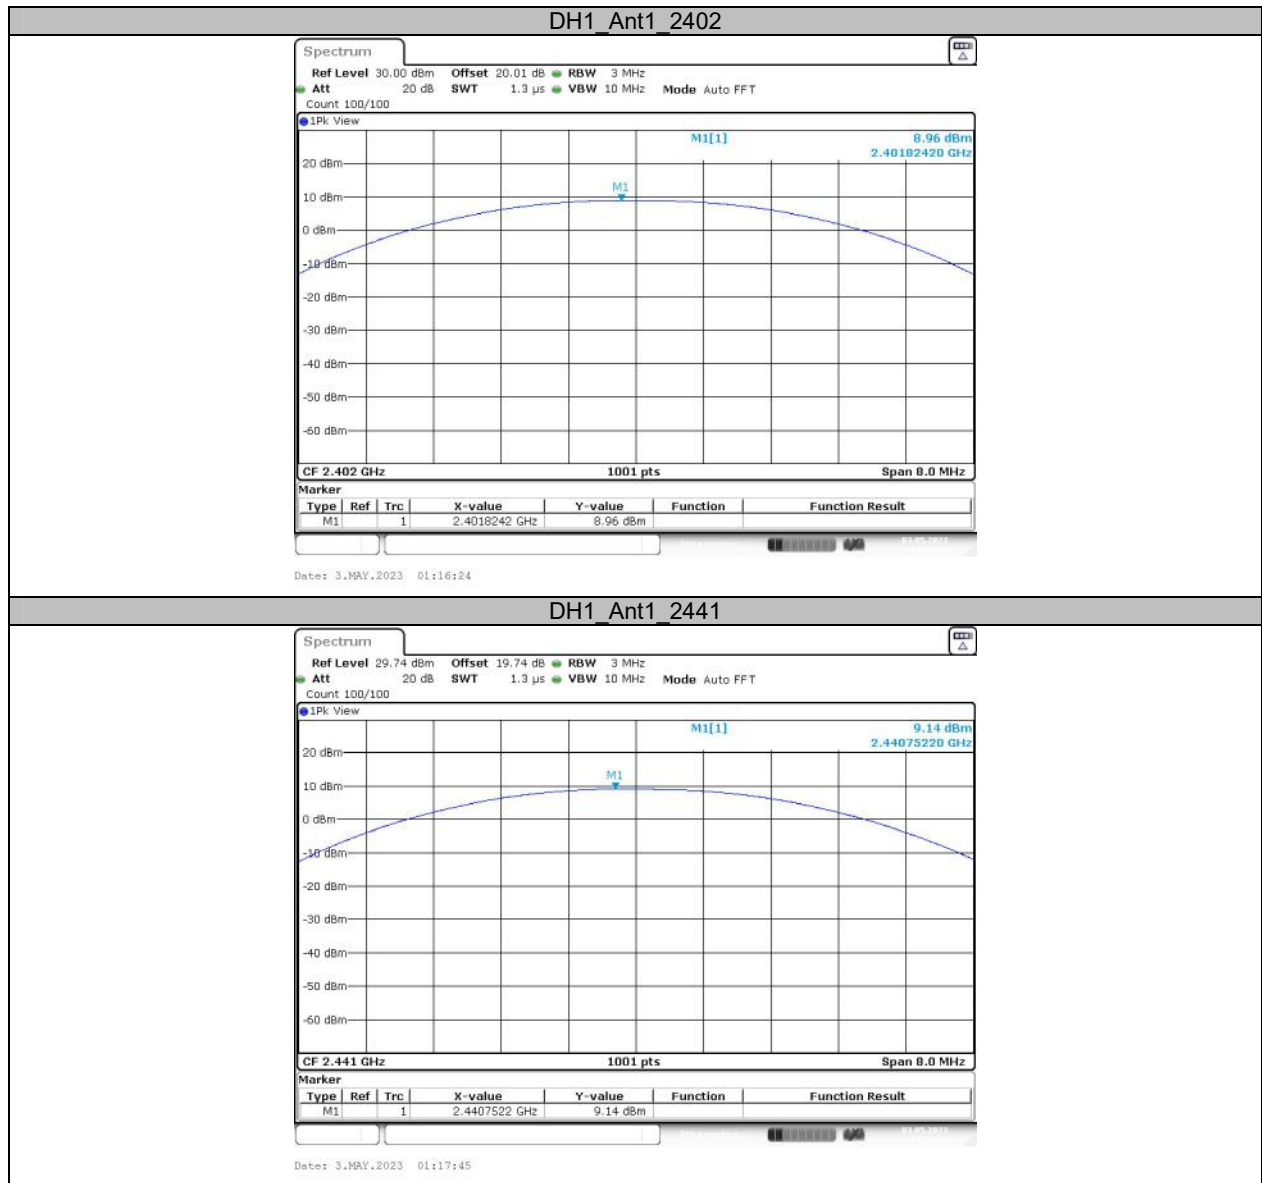


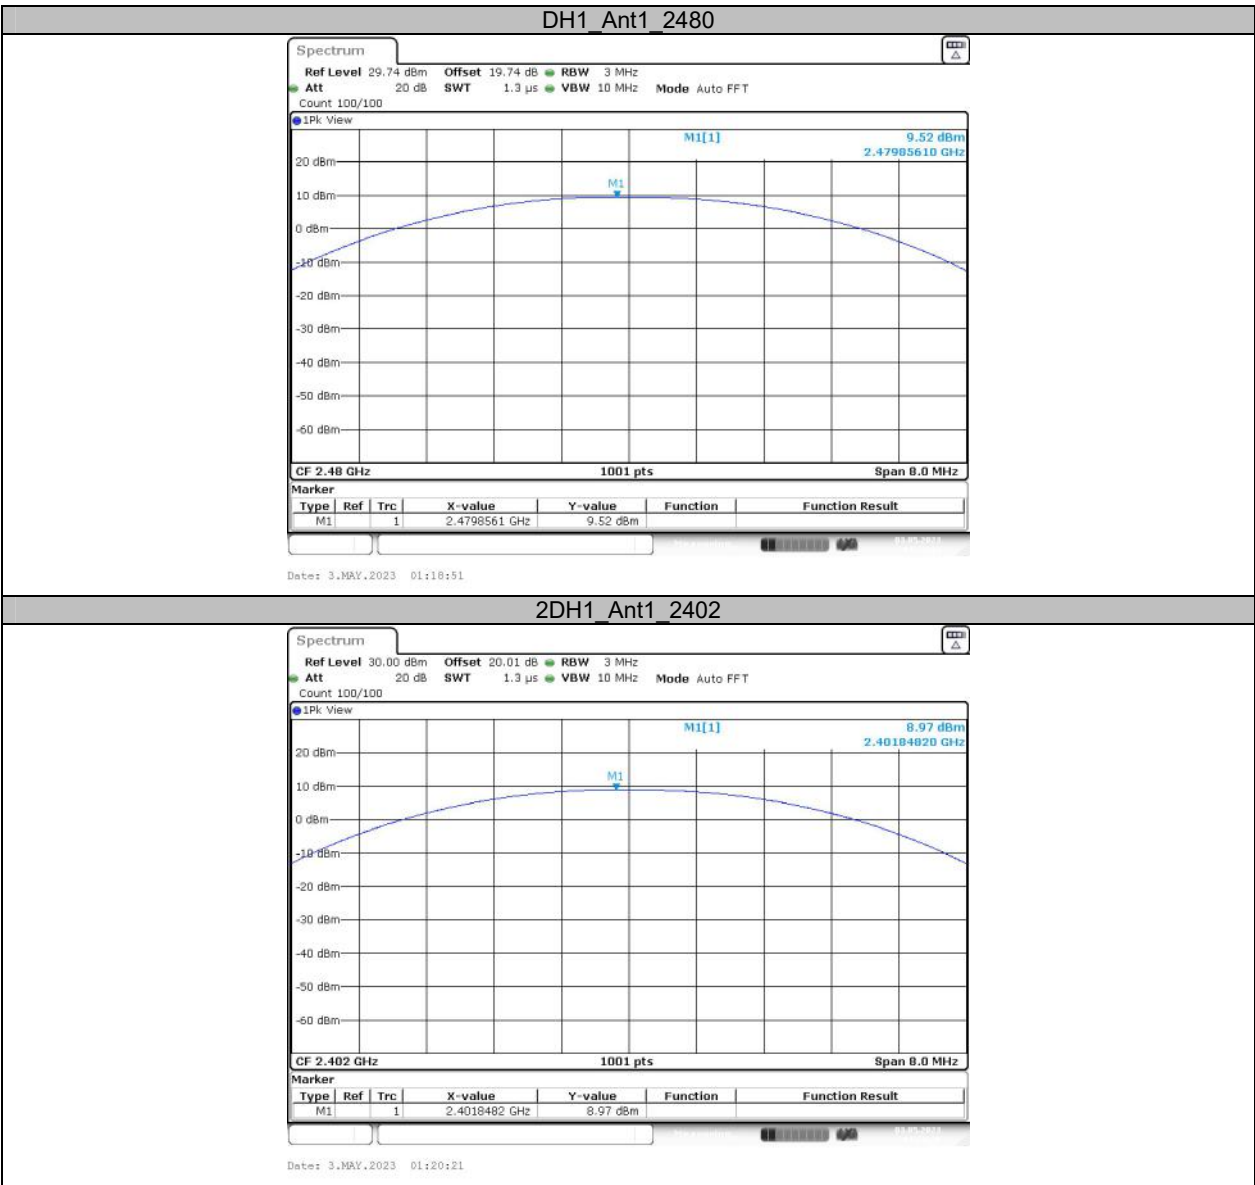


2DH1_Ant1_2441

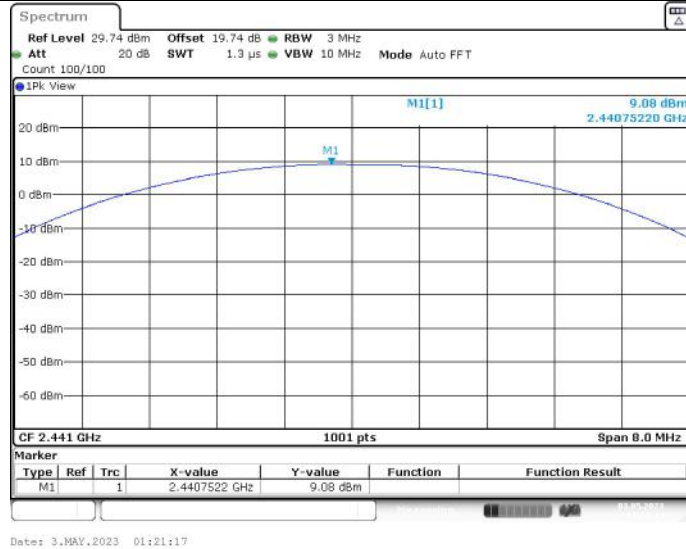

2DH1_Ant1_2480

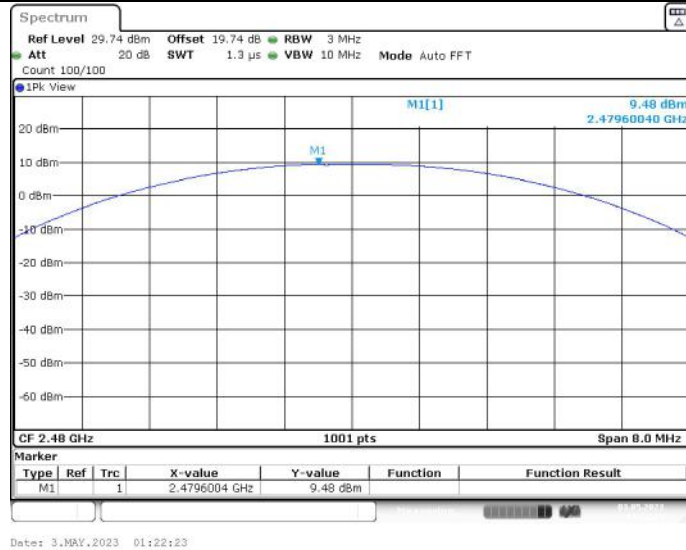



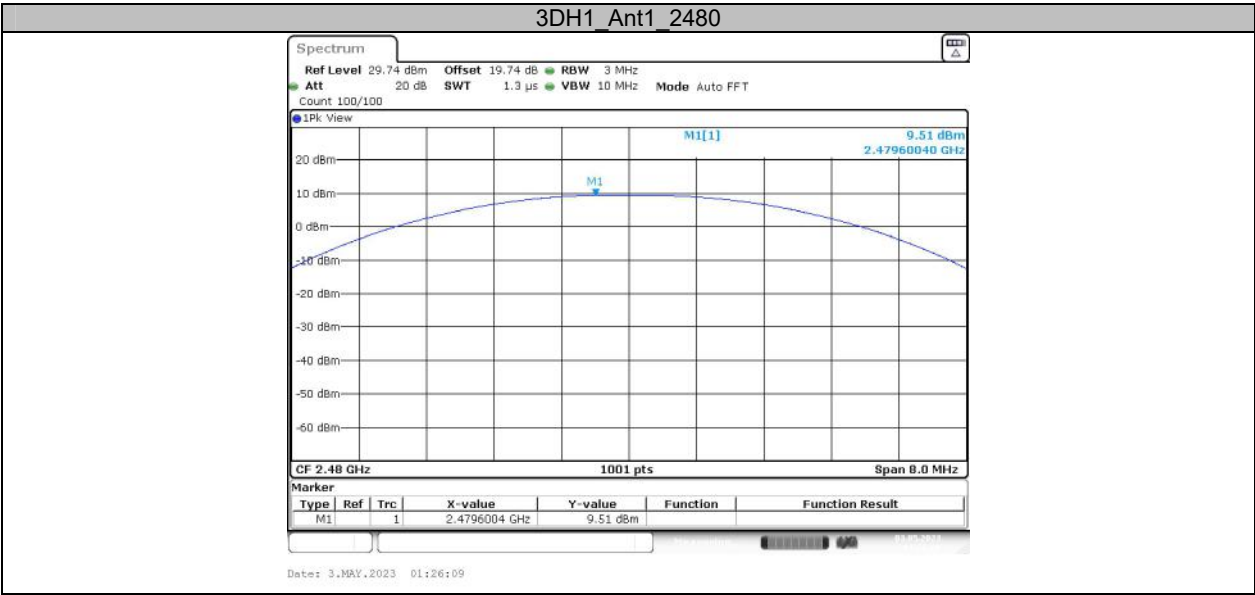


**Appendix D: Carrier frequency separation
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	≥ 0.693	PASS
2DH1	Ant1	Hop	1.003	≥ 0.787	PASS
3DH1	Ant1	Hop	1.003	≥ 0.780	PASS

Test Graphs



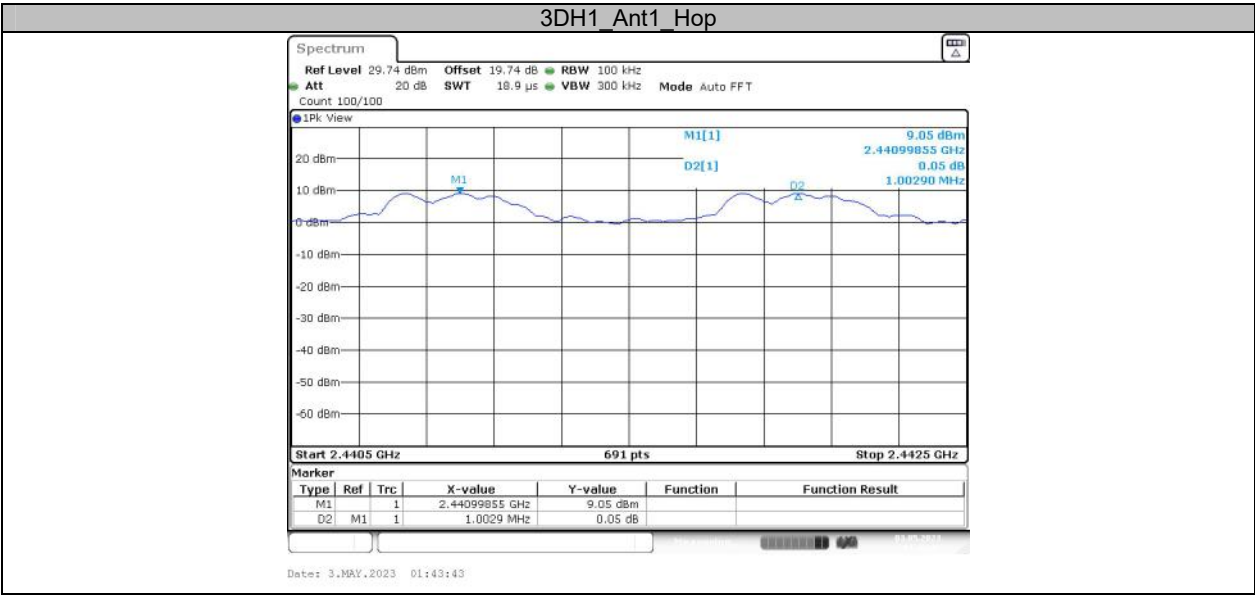

**Appendix E: Time of occupancy
Test Result**


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	330	0.127	≤0.4	PASS
DH3	Ant1	Hop	1.64	150	0.247	≤0.4	PASS
DH5	Ant1	Hop	2.89	110	0.318	≤0.4	PASS
2DH1	Ant1	Hop	0.40	330	0.131	≤0.4	PASS
2DH3	Ant1	Hop	1.65	150	0.247	≤0.4	PASS
2DH5	Ant1	Hop	2.90	130	0.377	≤0.4	PASS
3DH1	Ant1	Hop	0.40	320	0.127	≤0.4	PASS
3DH3	Ant1	Hop	1.65	150	0.247	≤0.4	PASS
3DH5	Ant1	Hop	2.90	130	0.377	≤0.4	PASS


Note 1: A period time=0.4*79=31.6(S), Result=BurstWidth*Totalhops


Note 2: Totalhops=Hopping Number in 3.16s*10


Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)


Test Graphs

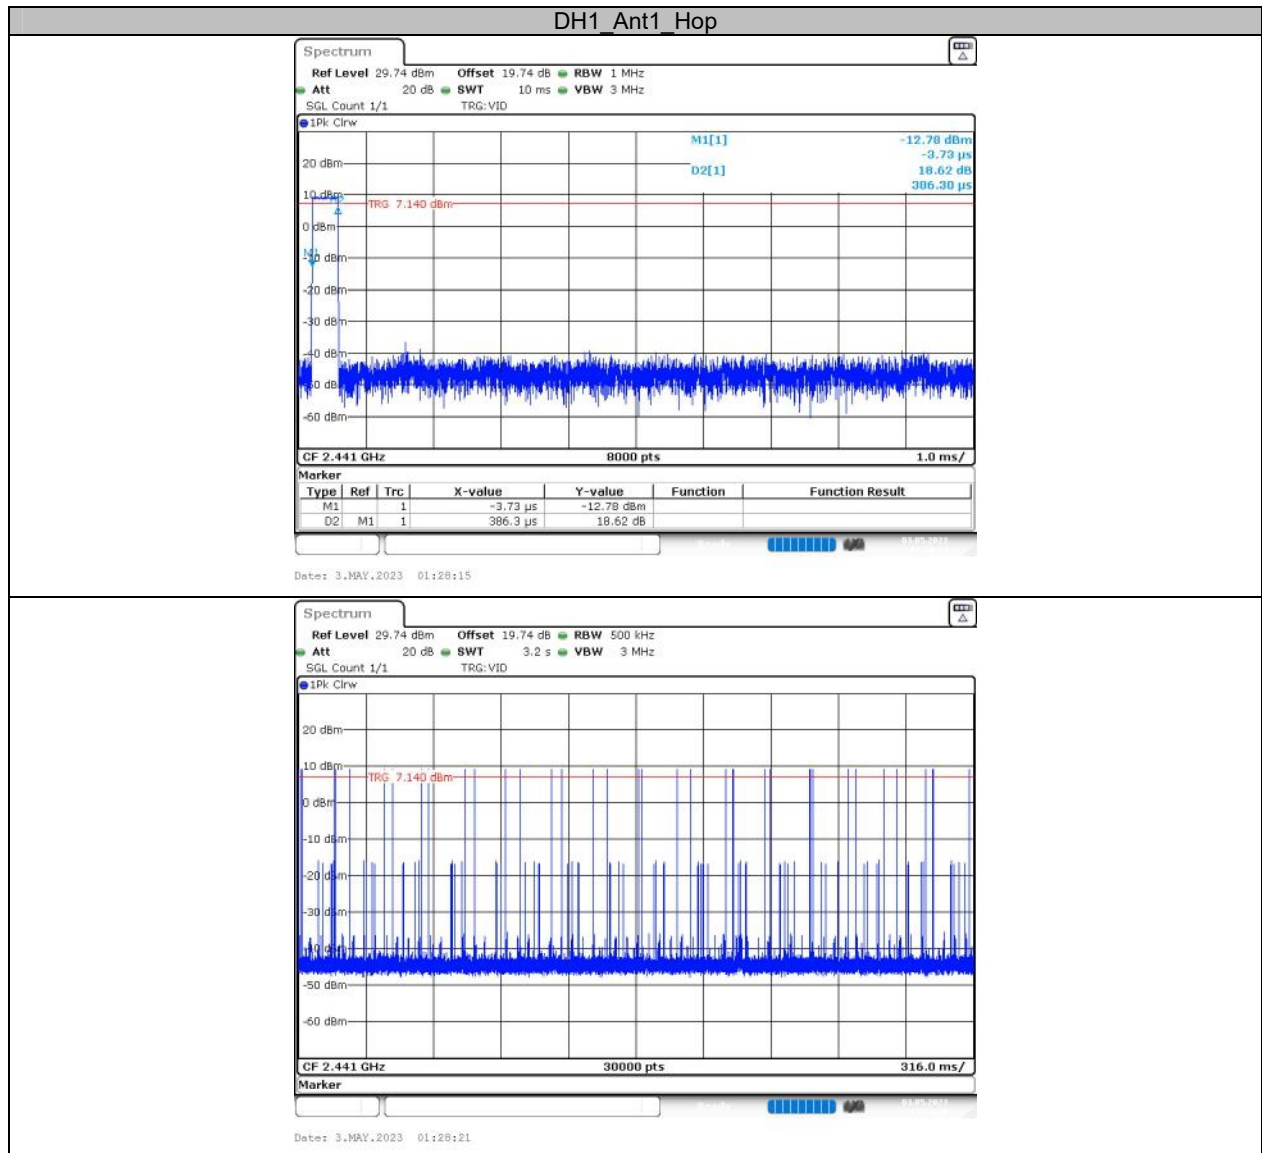


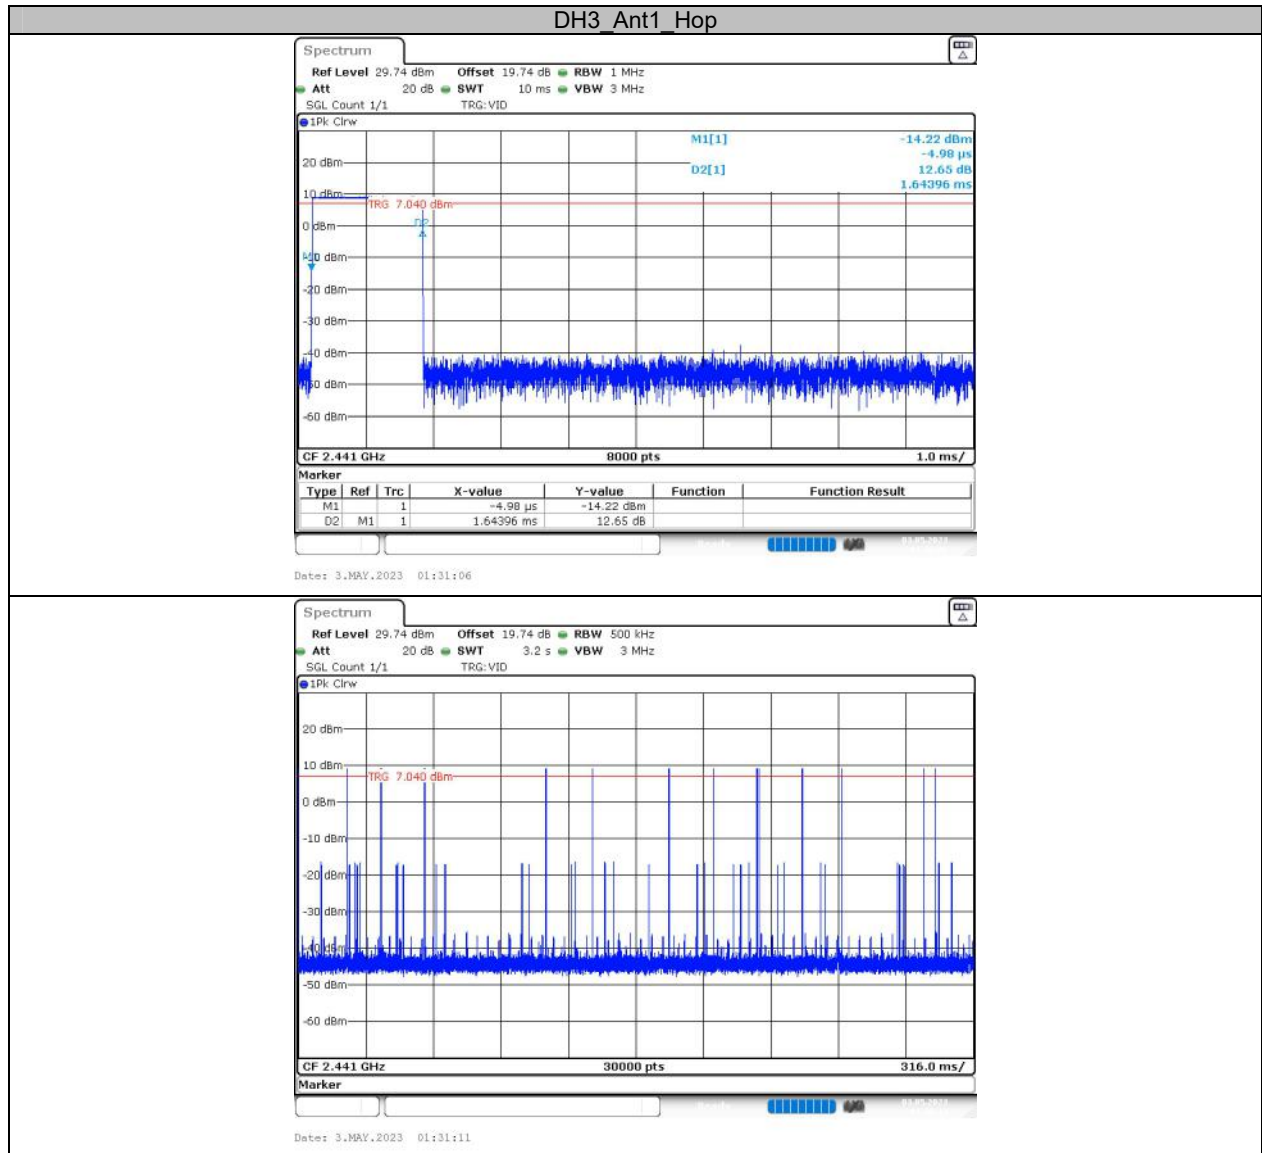


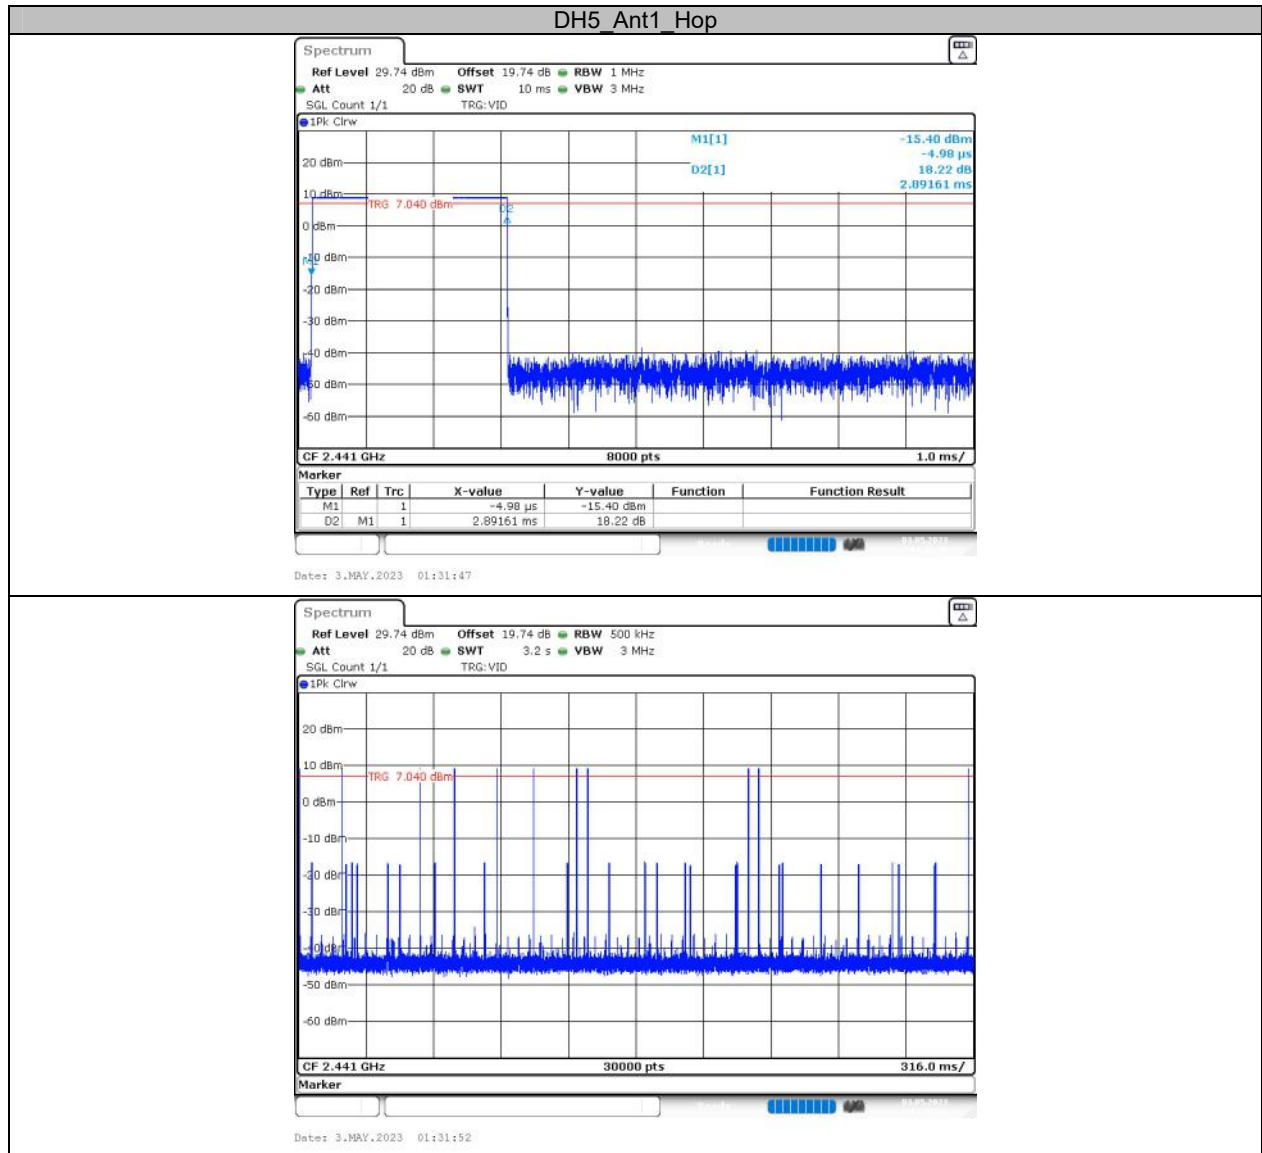


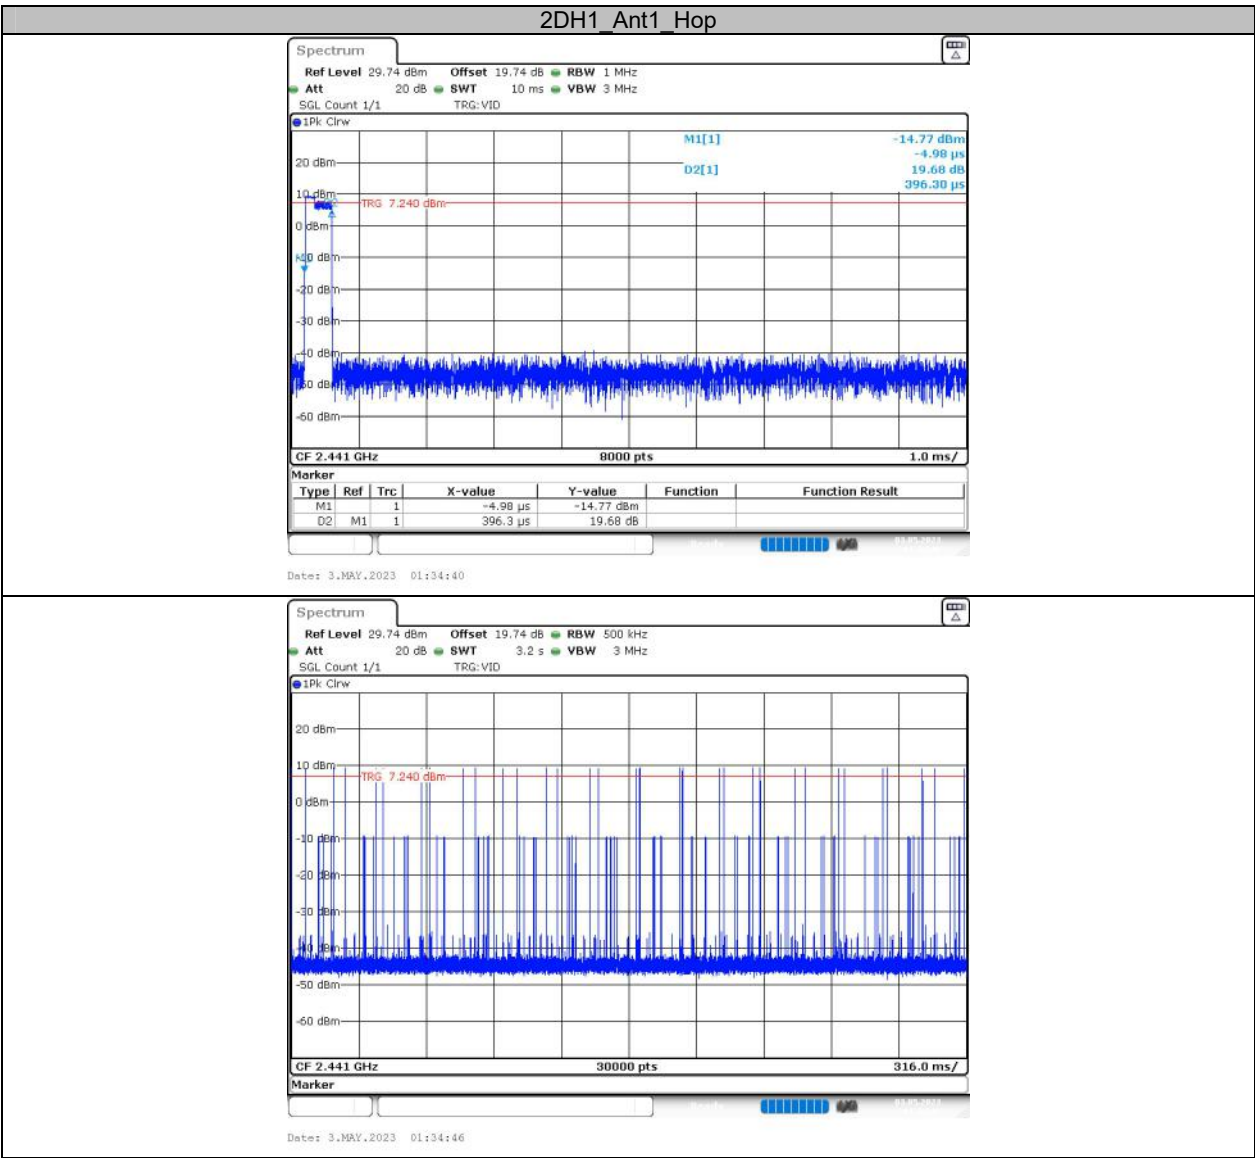


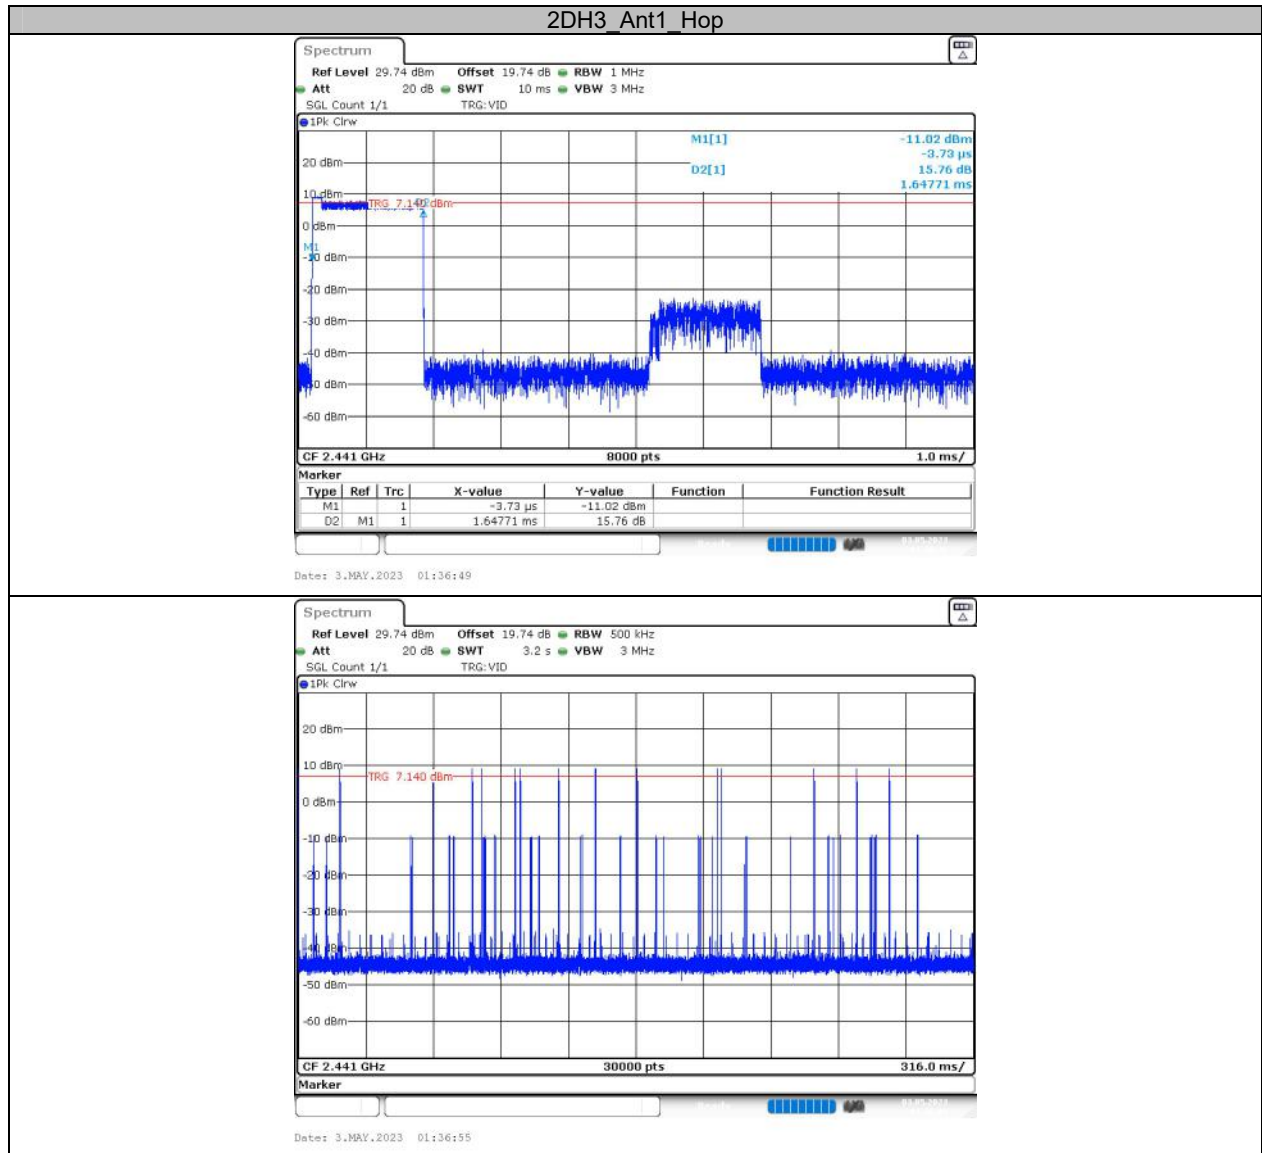

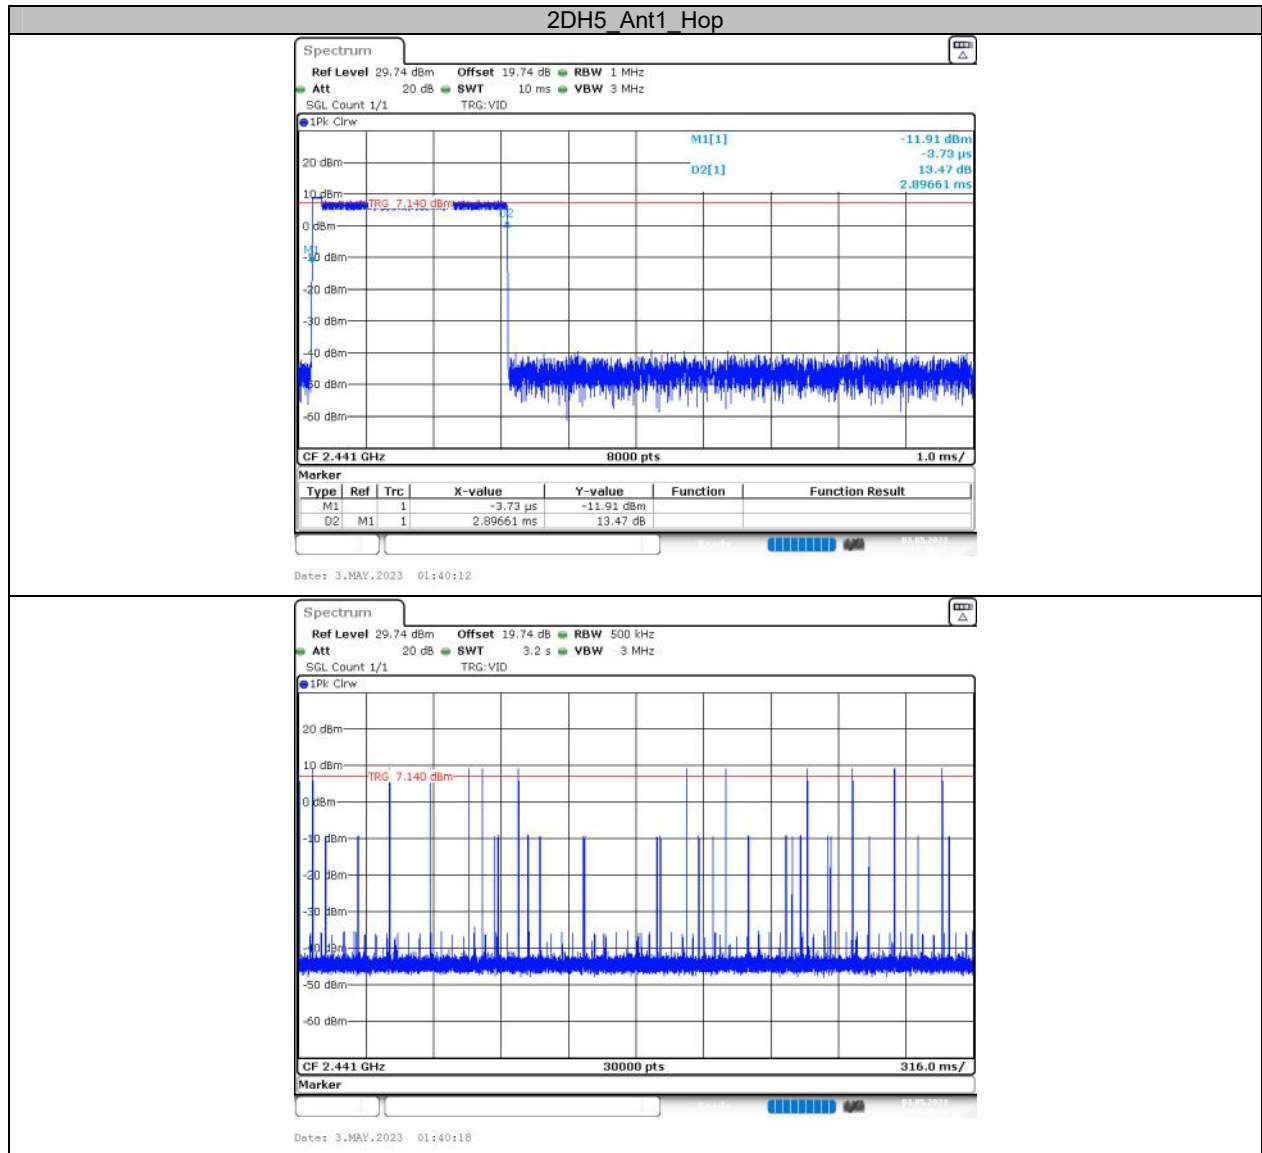

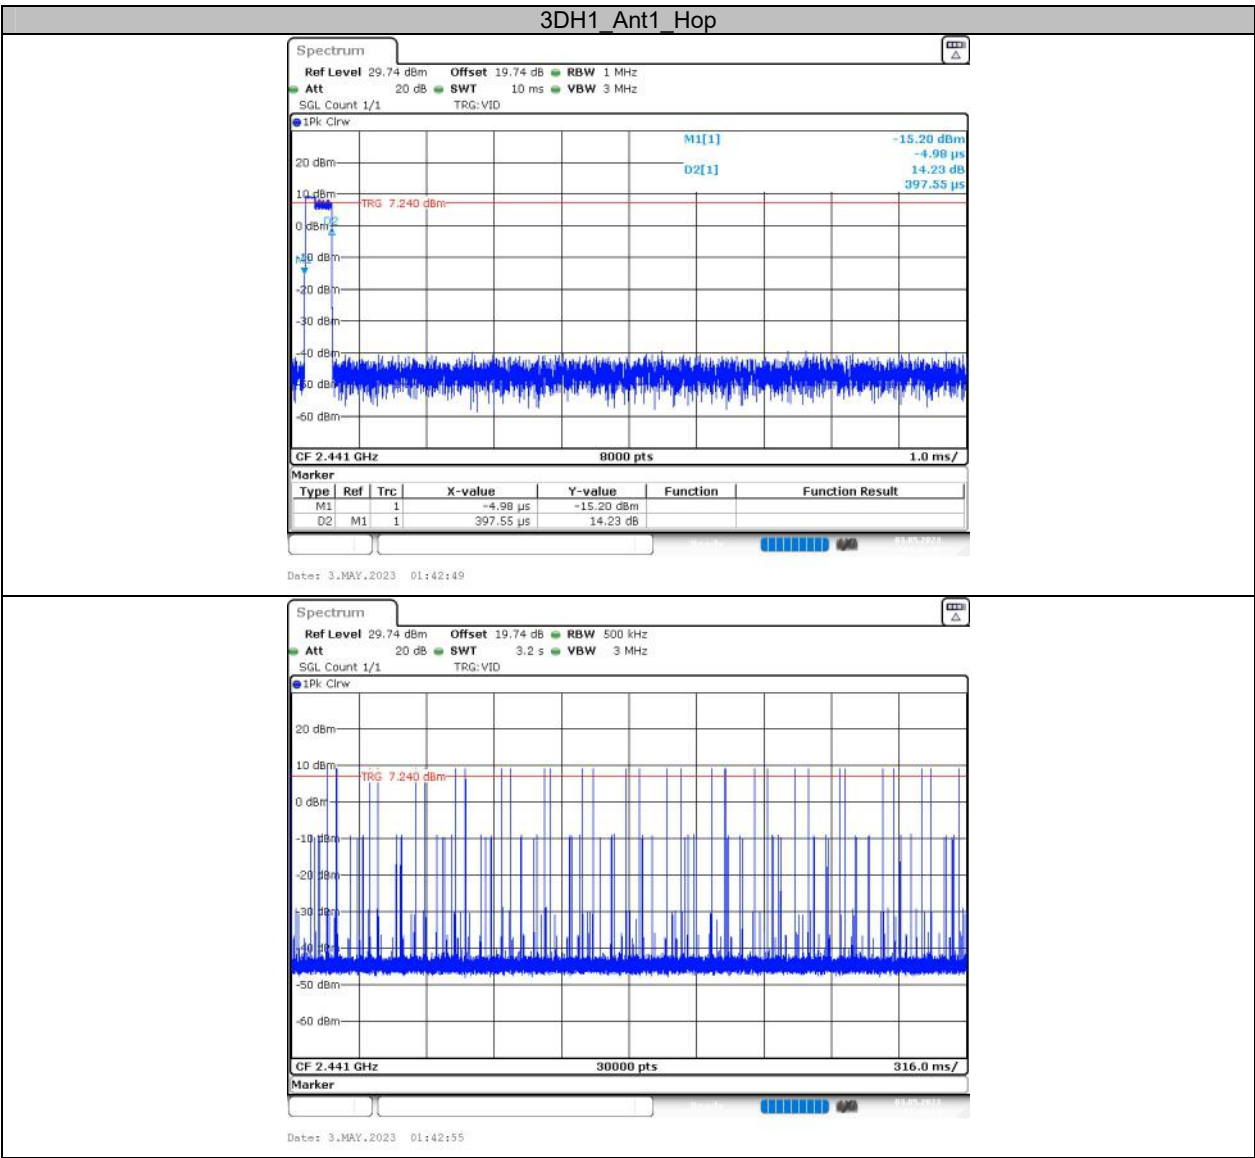

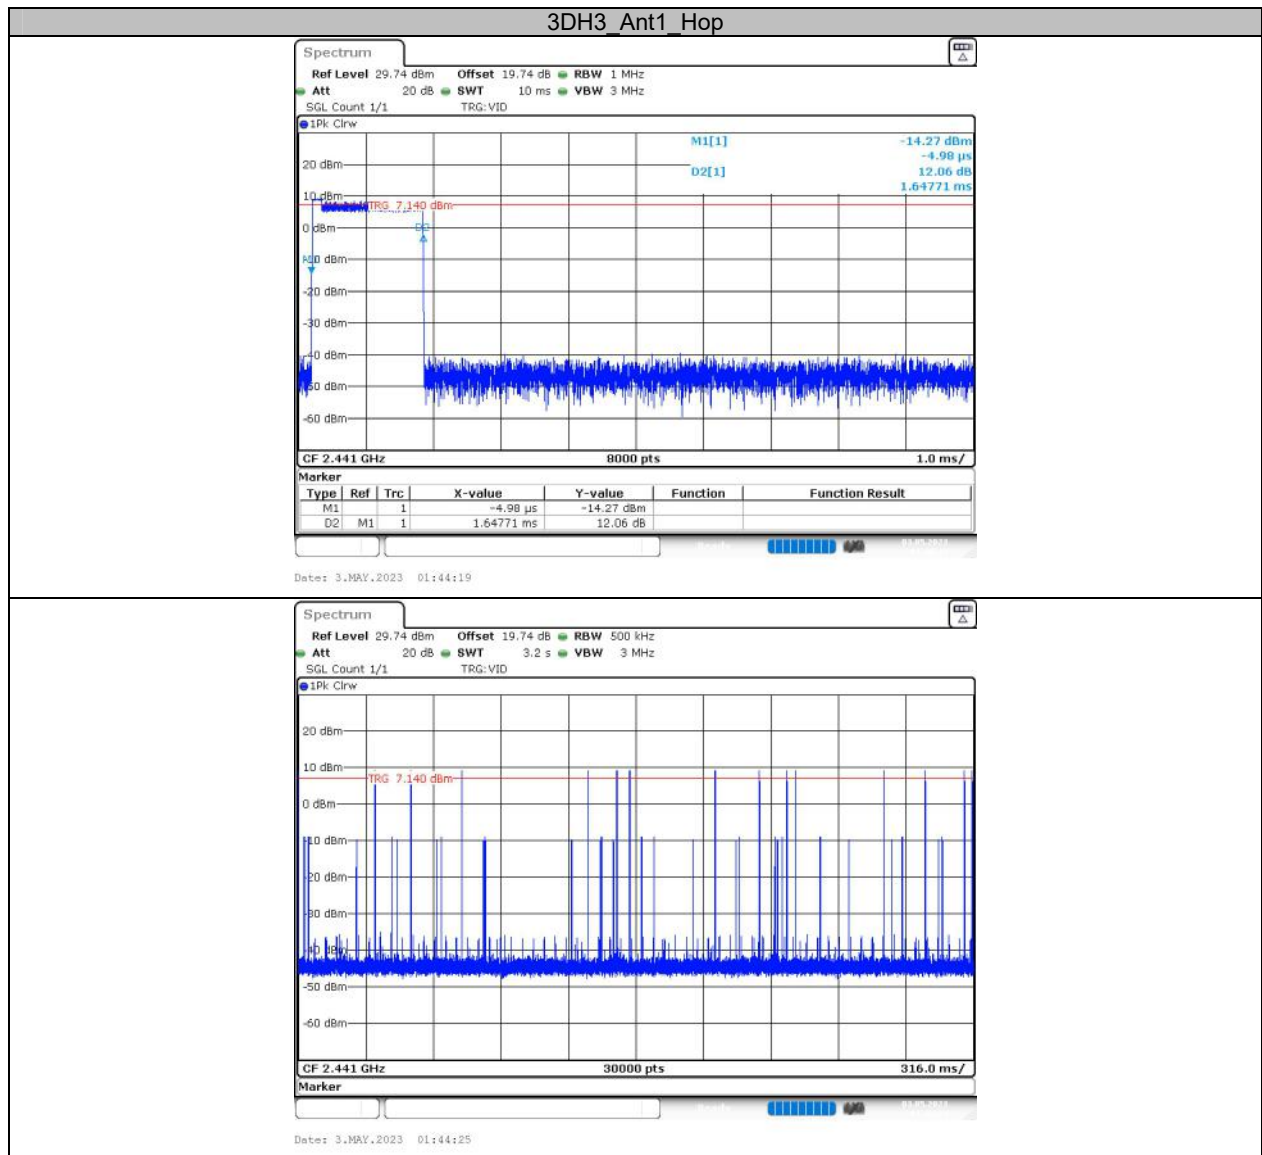


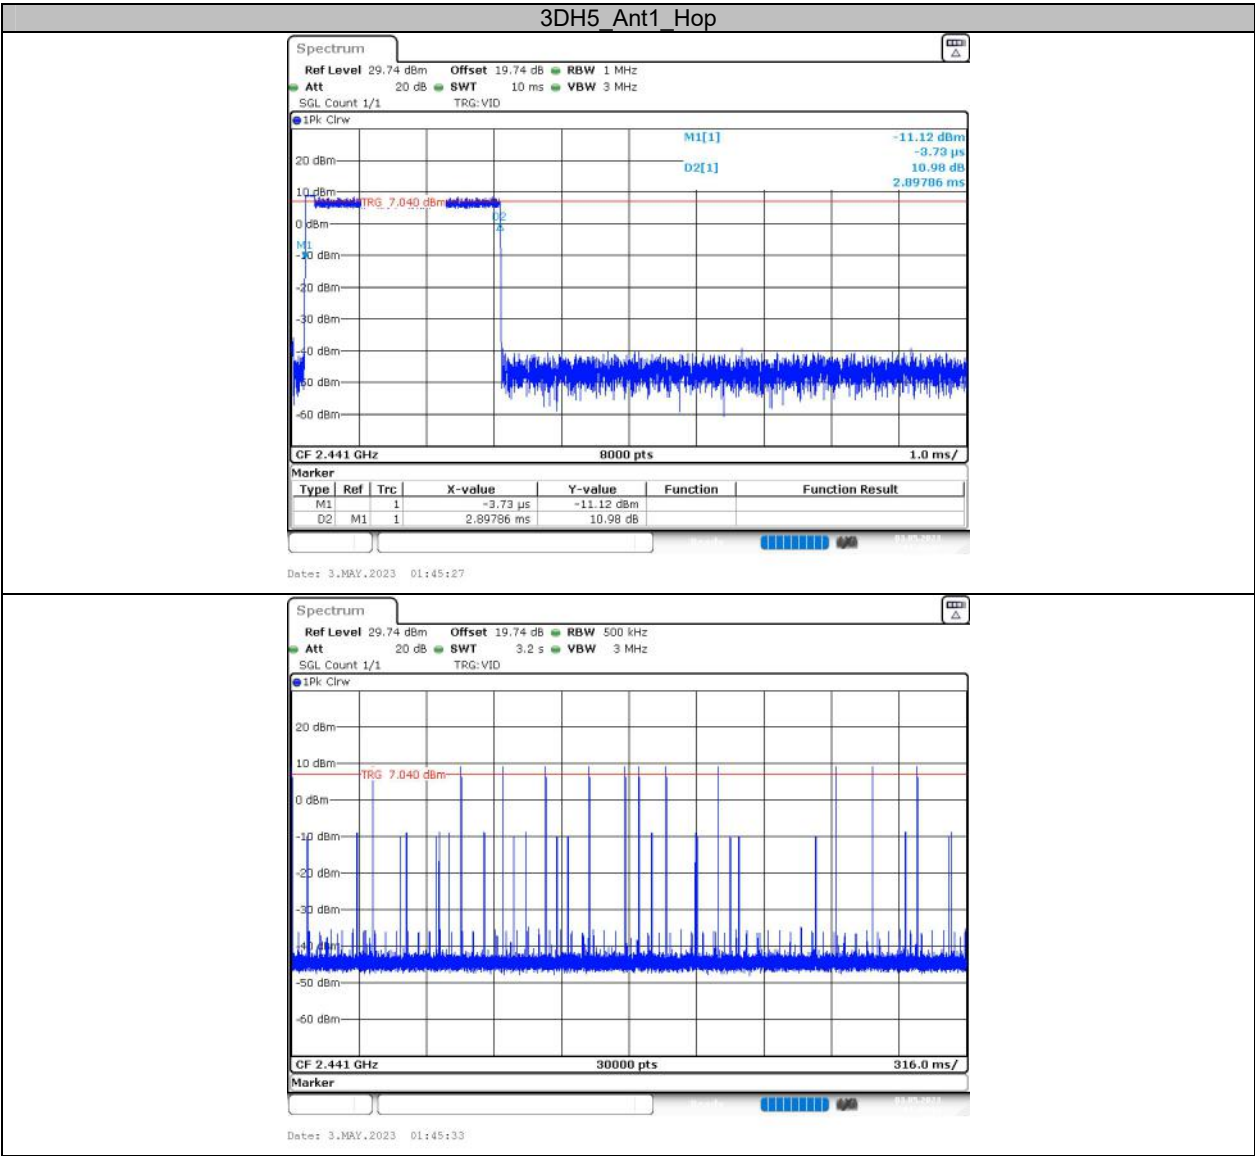


**Appendix F: Number of hopping channels
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs

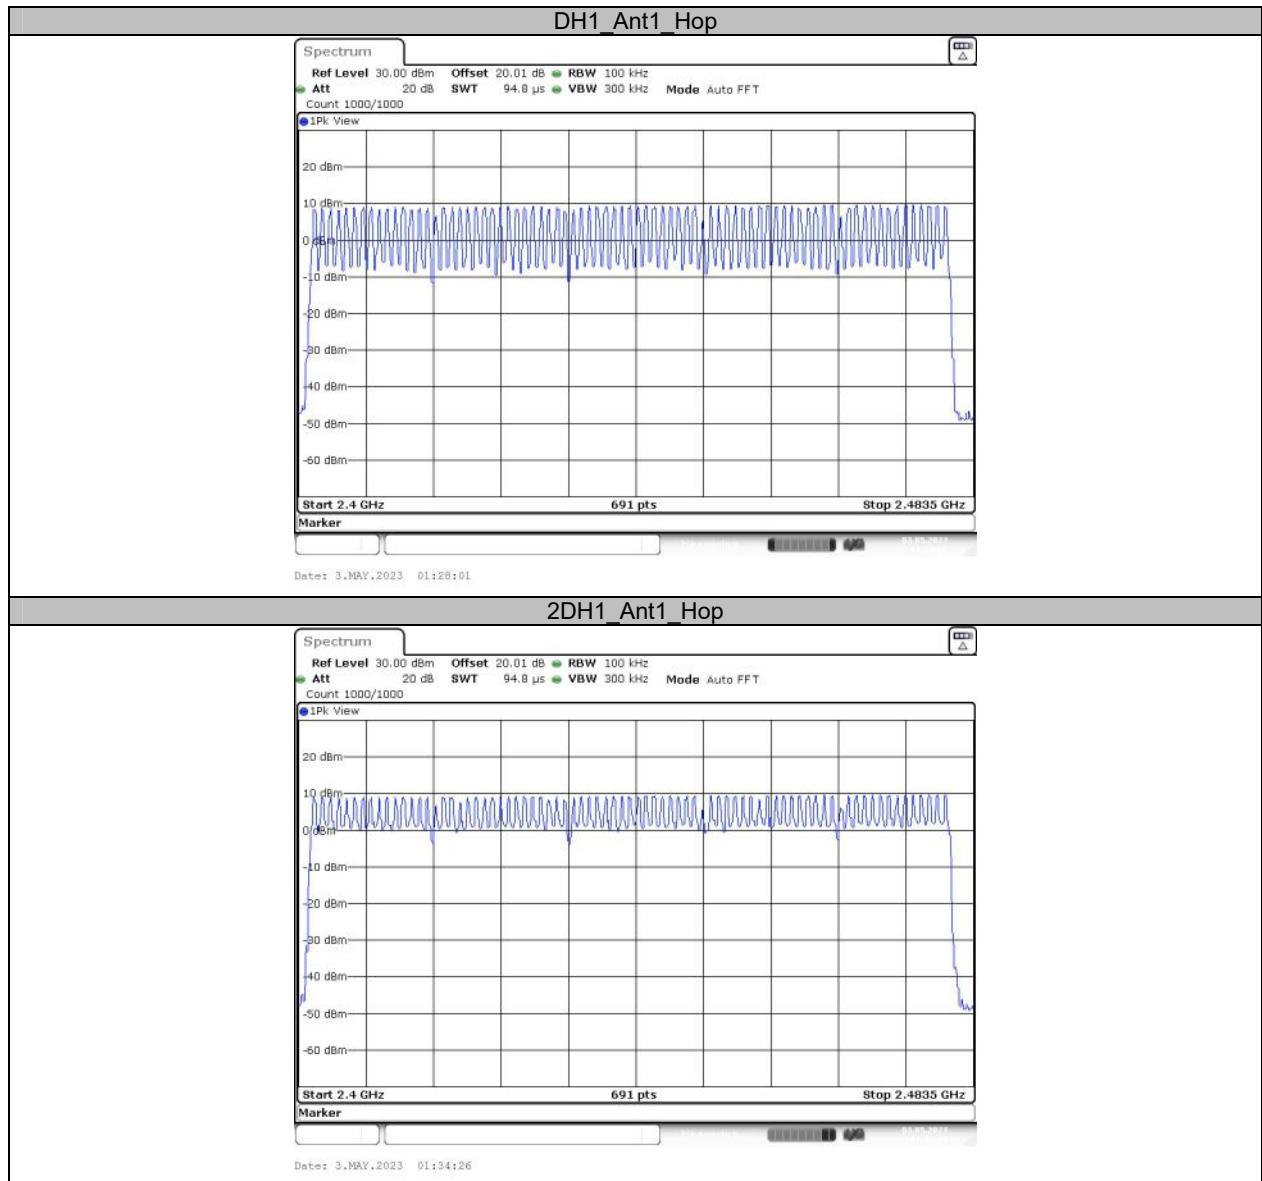

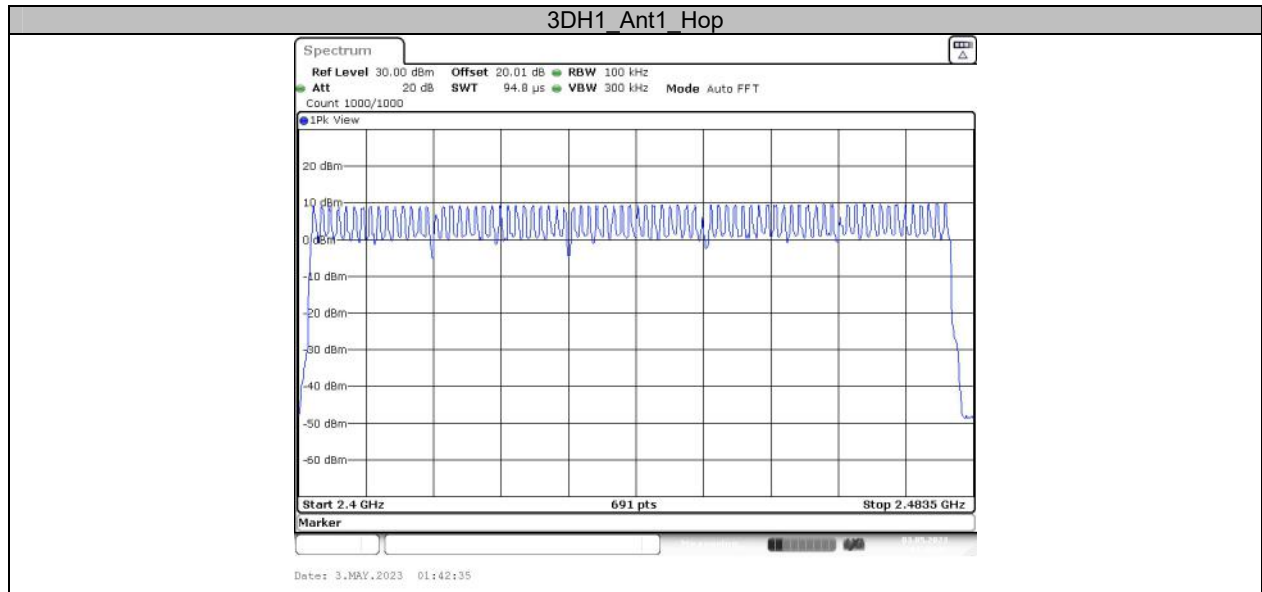


Appendix G: Band edge measurements


Test Graphs

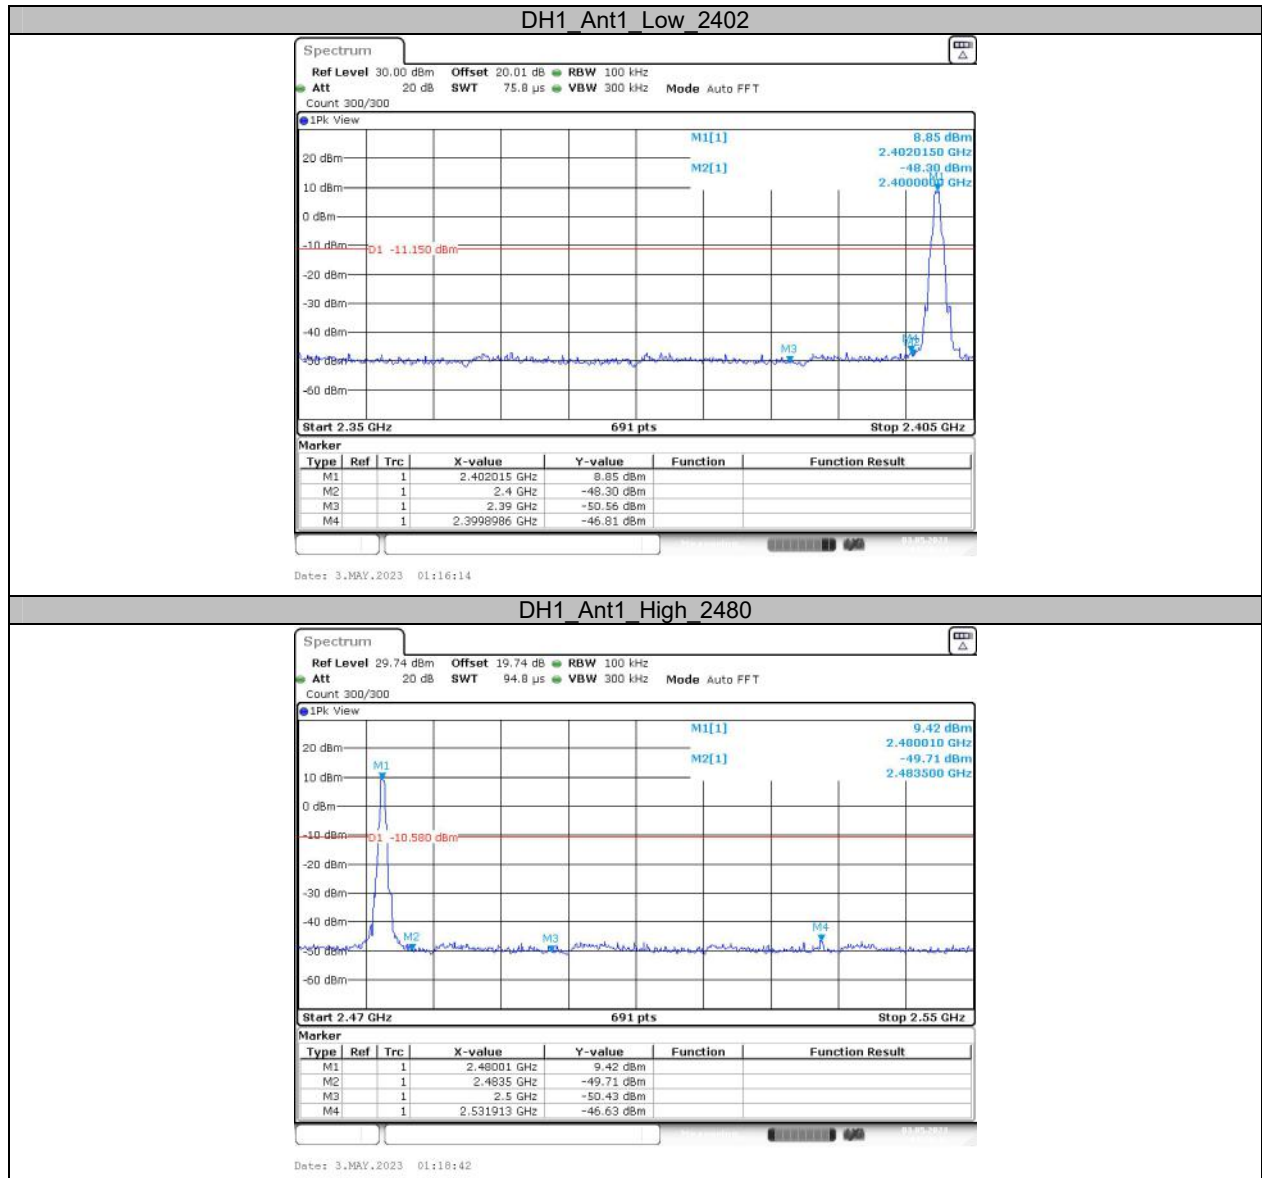


DH1_Ant1_Low_Hop_2402

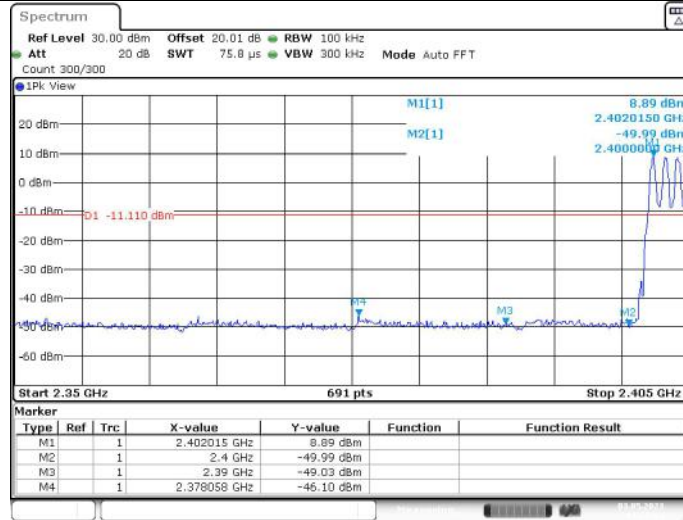


DH1_Ant1_High_Hop_2480

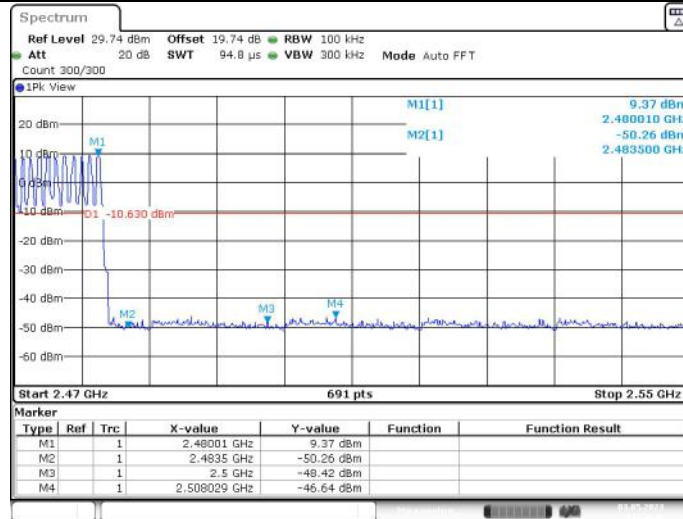


2DH1 Ant1 Low 2402

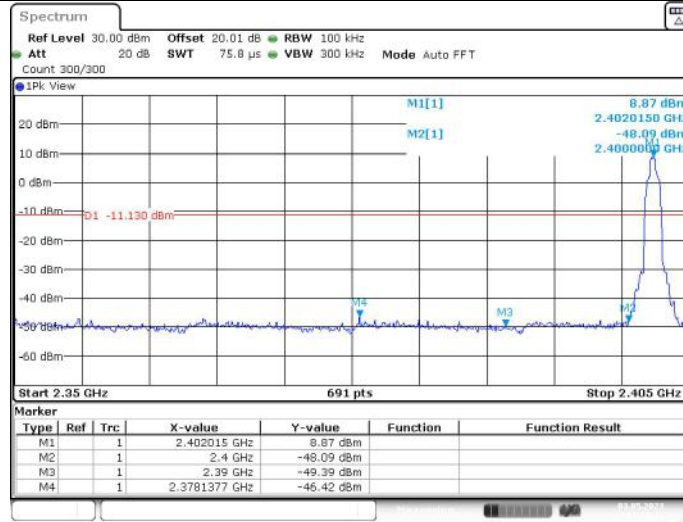


2DH1 Ant1 High 2480

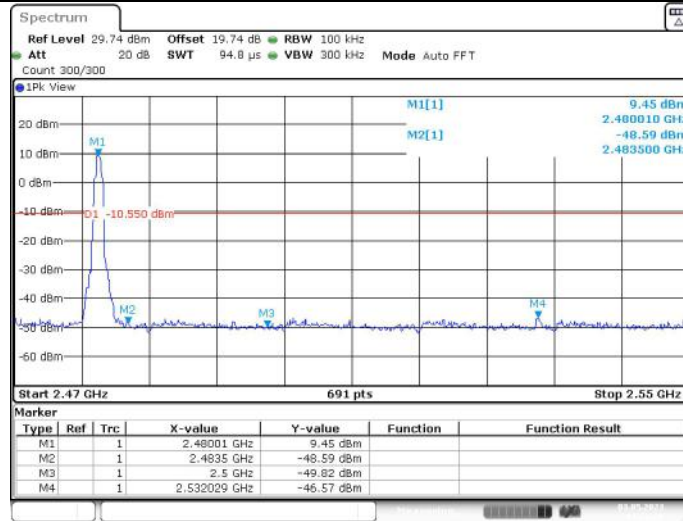


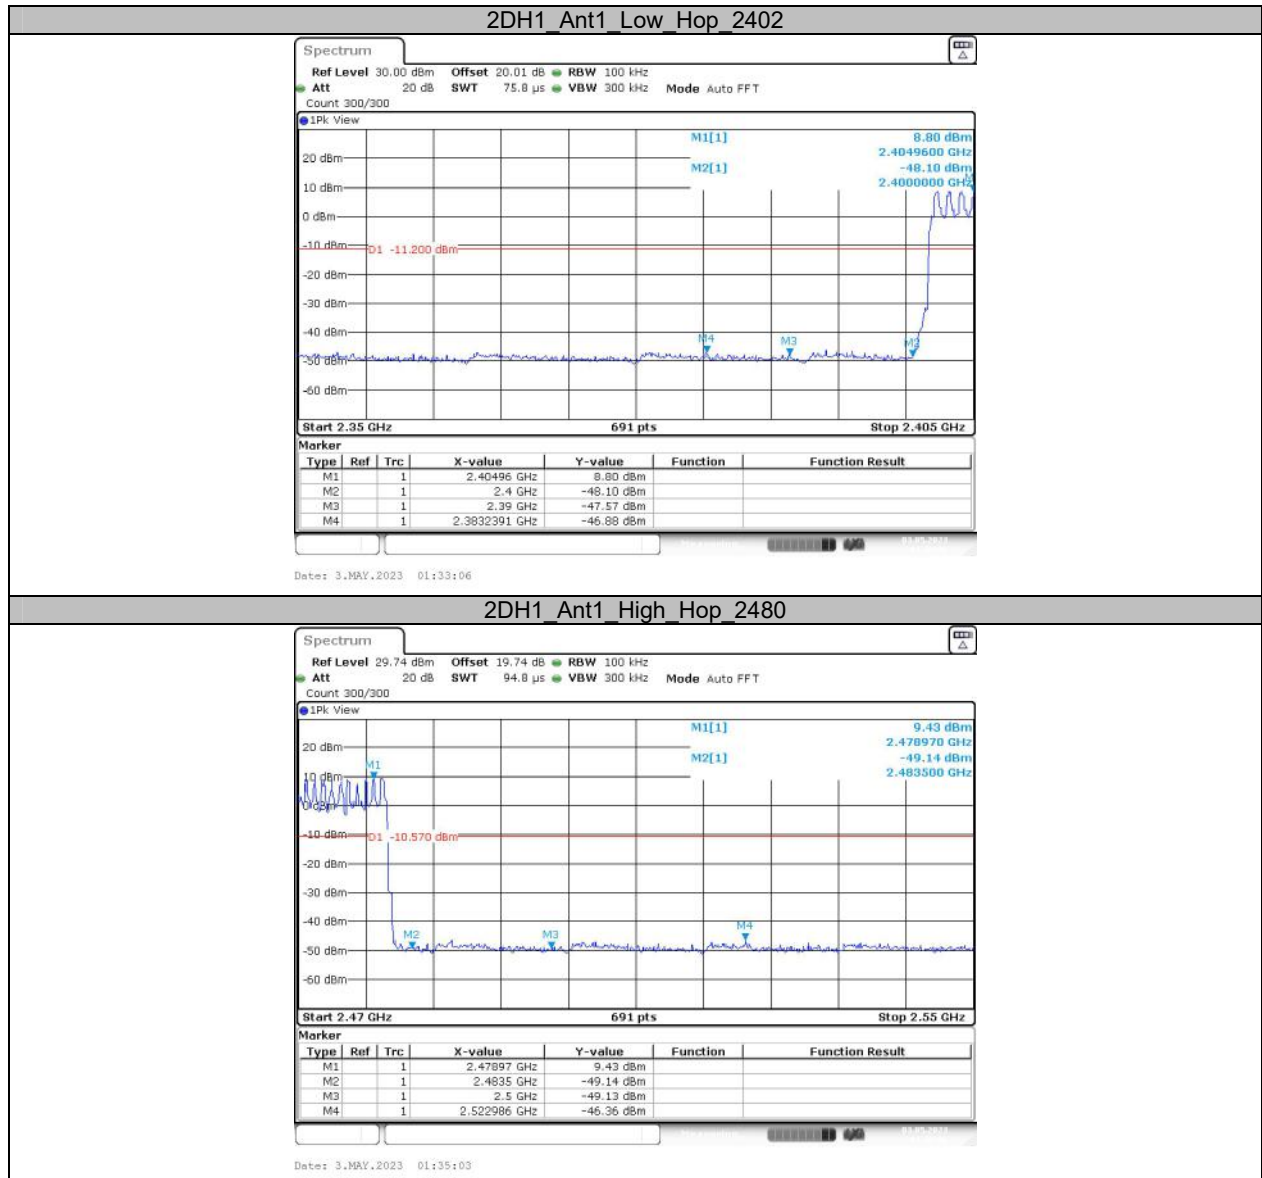


3DH1_Ant1_Low_2402

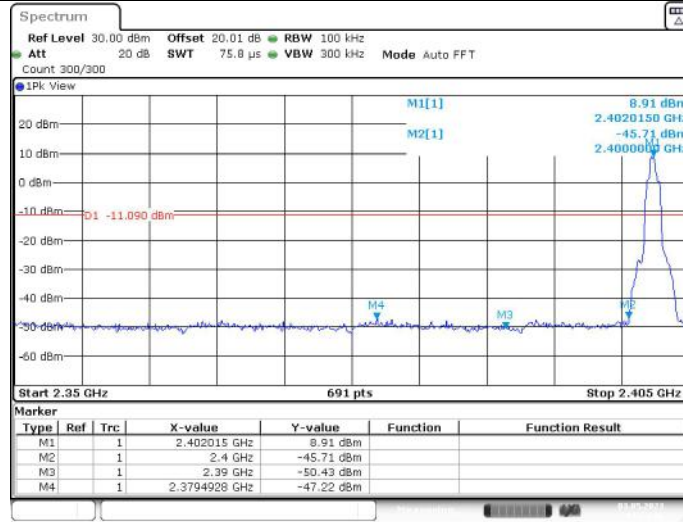

3DH1_Ant1_High_2480

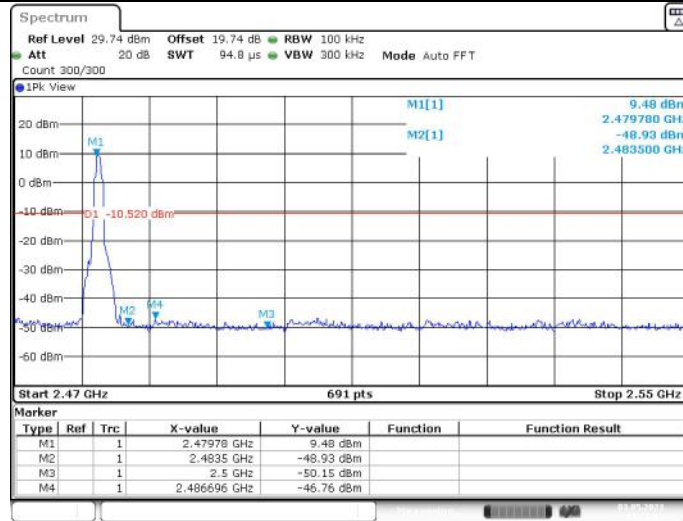

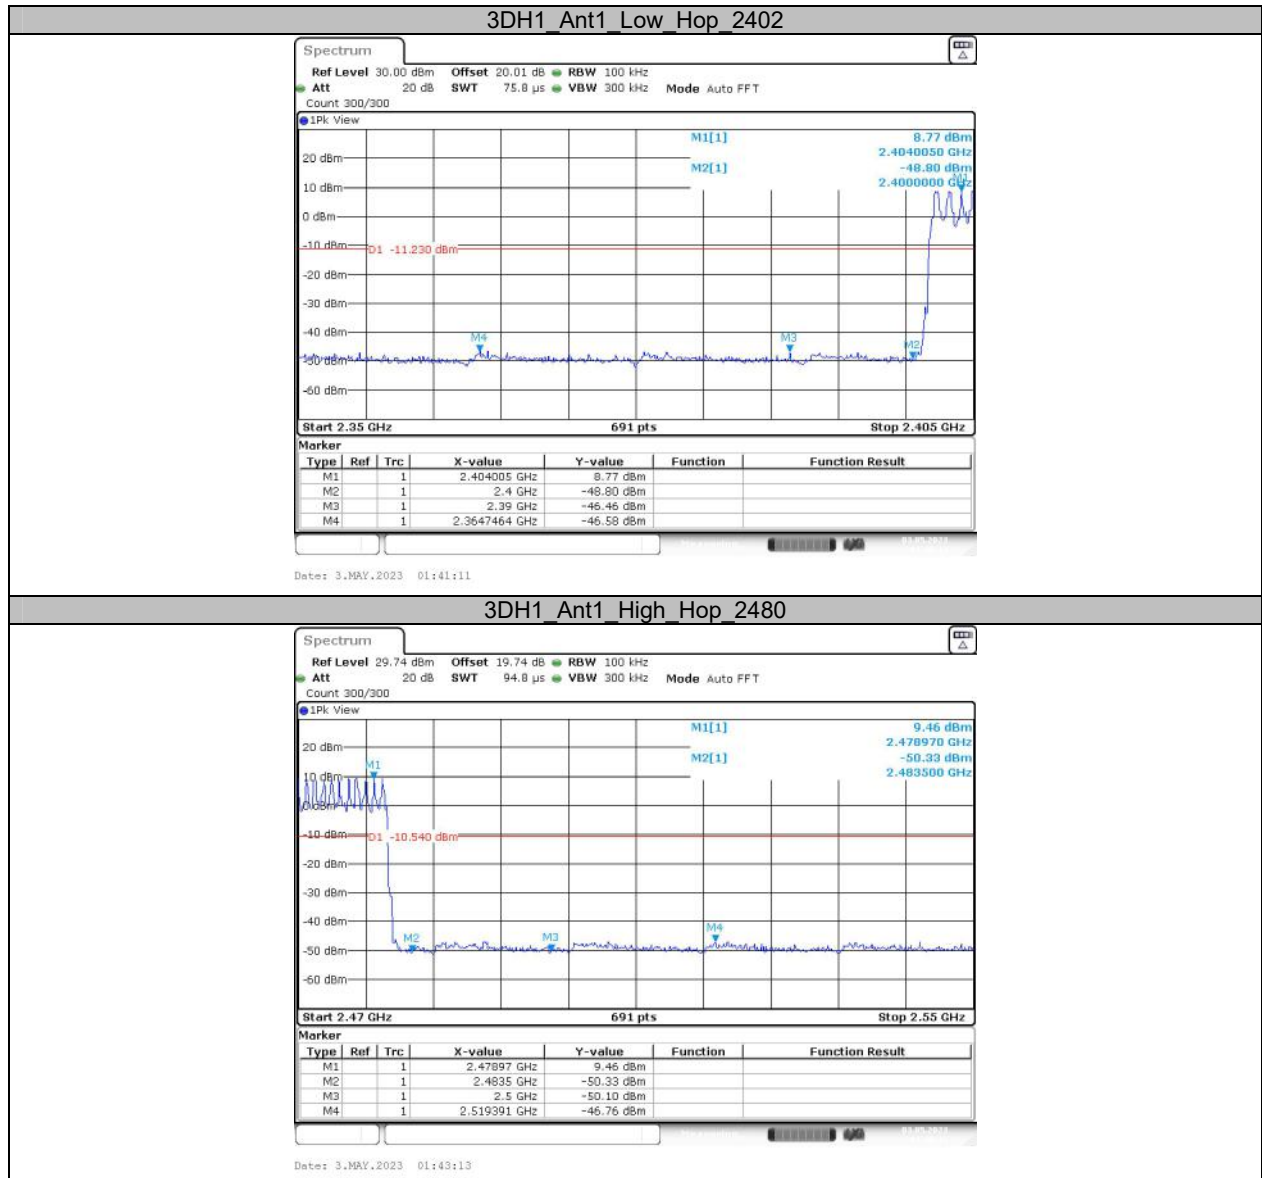


APPENDIX-Right side**Appendix A: 20dB Emission Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.04	---	---
		2441	1.04	---	---
		2480	1.04	---	---
2DH1	Ant1	2402	1.18	---	---
		2441	1.18	---	---
		2480	1.18	---	---
3DH1	Ant1	2402	1.17	---	---
		2441	1.17	---	---
		2480	1.18	---	---


Test Graphs



DH1 Ant1 2480

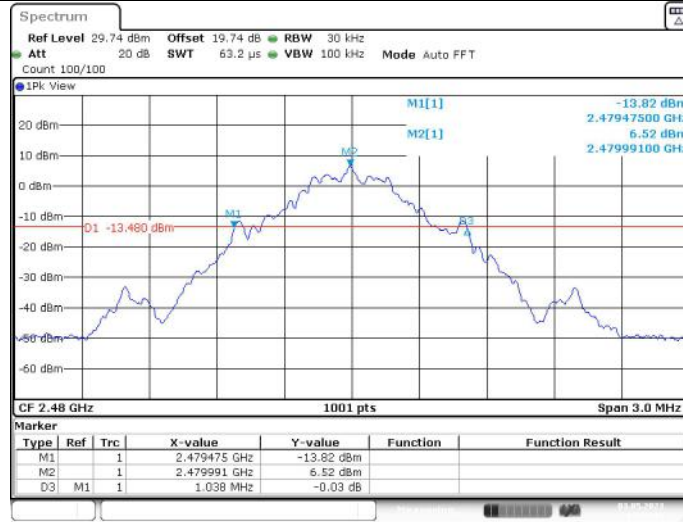

2DH1 Ant1 2402

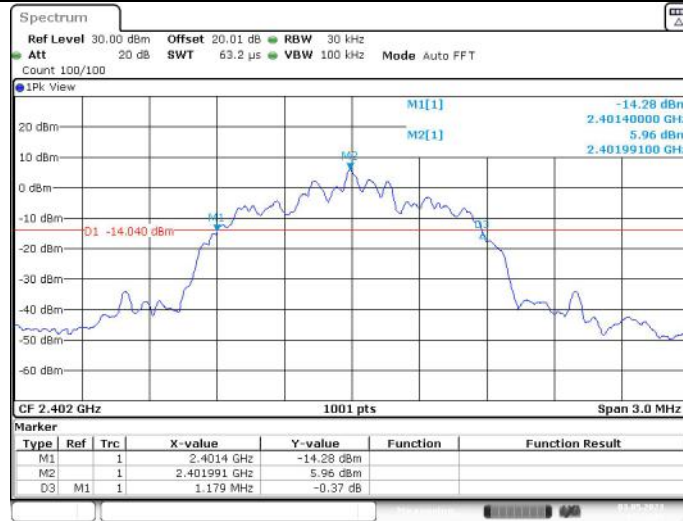


2DH1_Ant1_2441




2DH1_Ant1_2480




3DH1_Ant1_2402

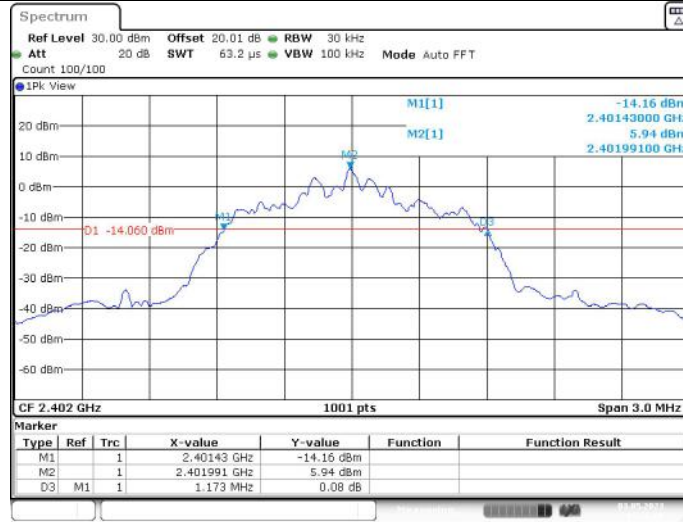

3DH1_Ant1_2441

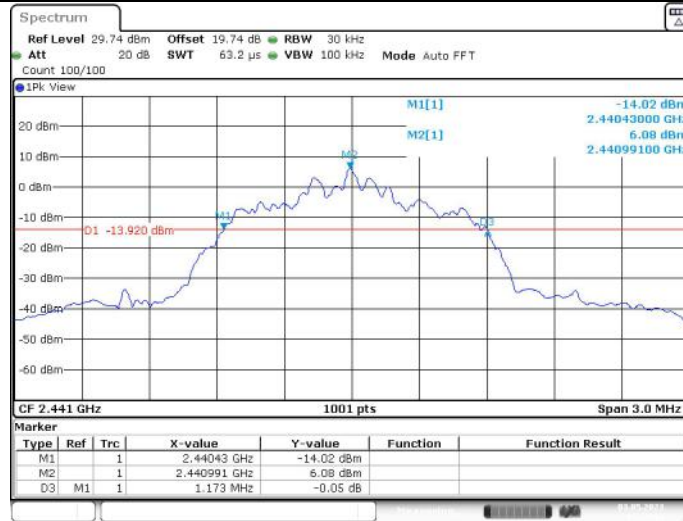

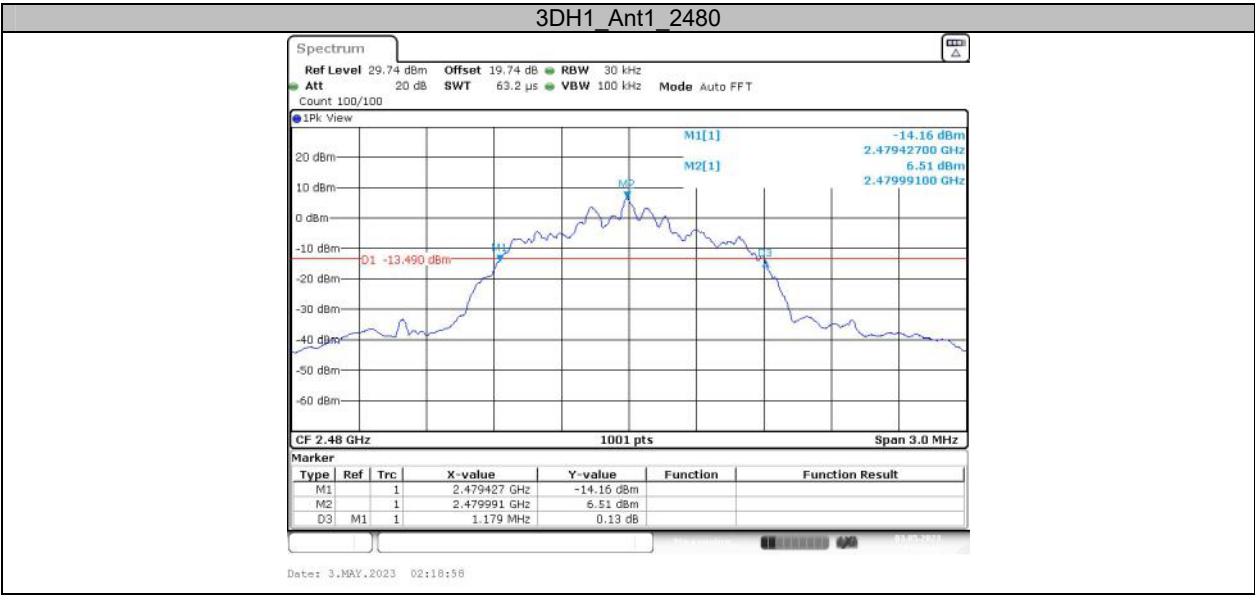


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.92	---	---
		2441	0.923	---	---
		2480	0.923	---	---
2DH1	Ant1	2402	1.118	---	---
		2441	1.121	---	---
		2480	1.121	---	---
3DH1	Ant1	2402	1.097	---	---
		2441	1.097	---	---
		2480	1.097	---	---


Test Graphs




DH1 Ant1 2480

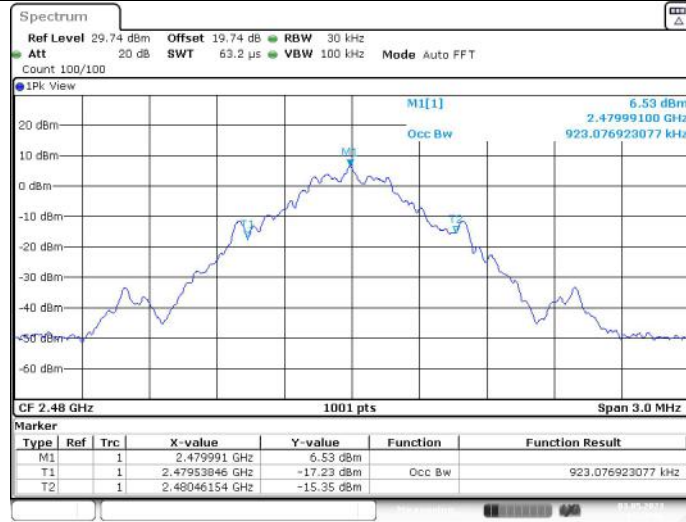


2DH1 Ant1 2402

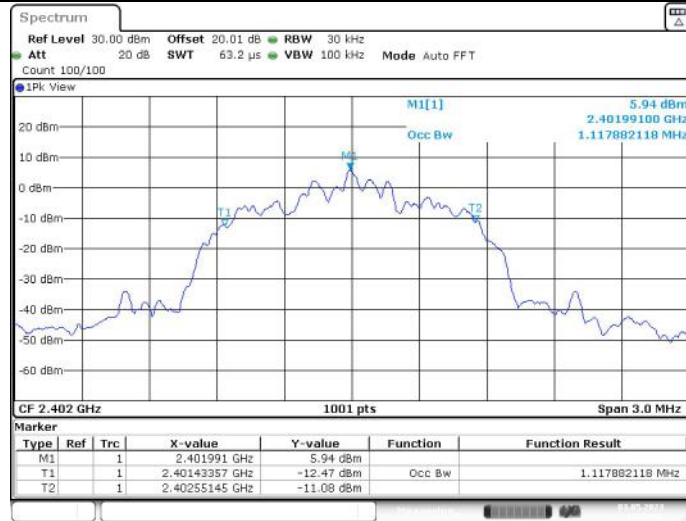


2DH1_Ant1_2441

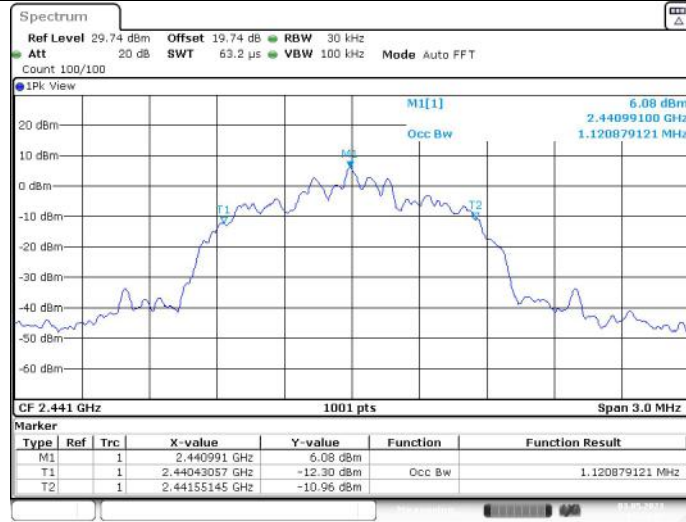


2DH1_Ant1_2480

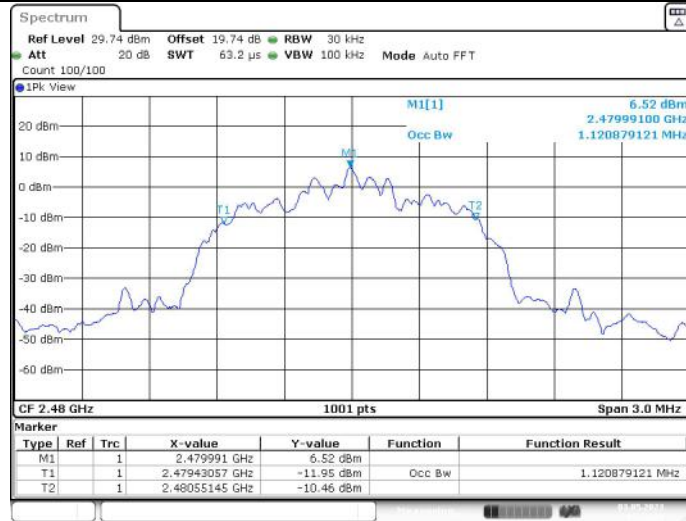


3DH1_Ant1_2402

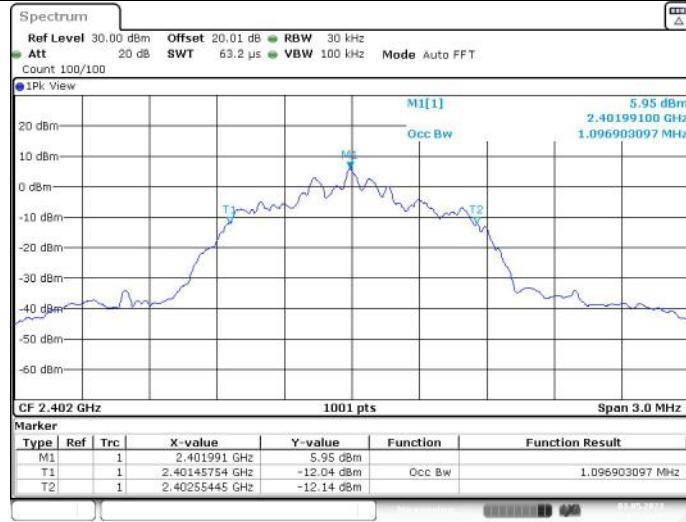

3DH1_Ant1_2441

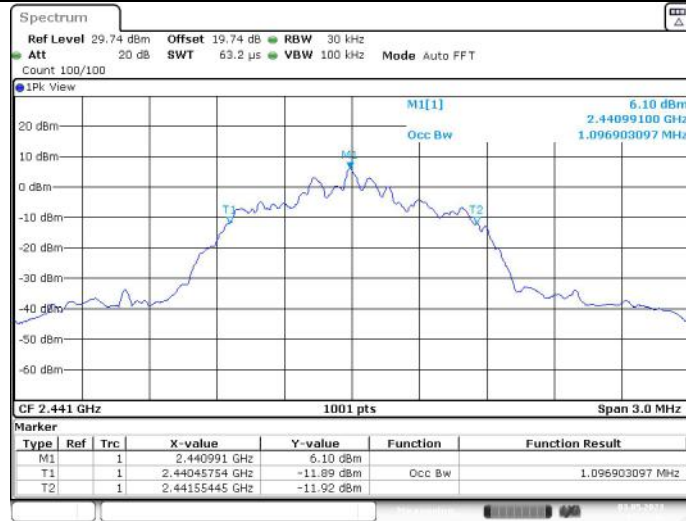

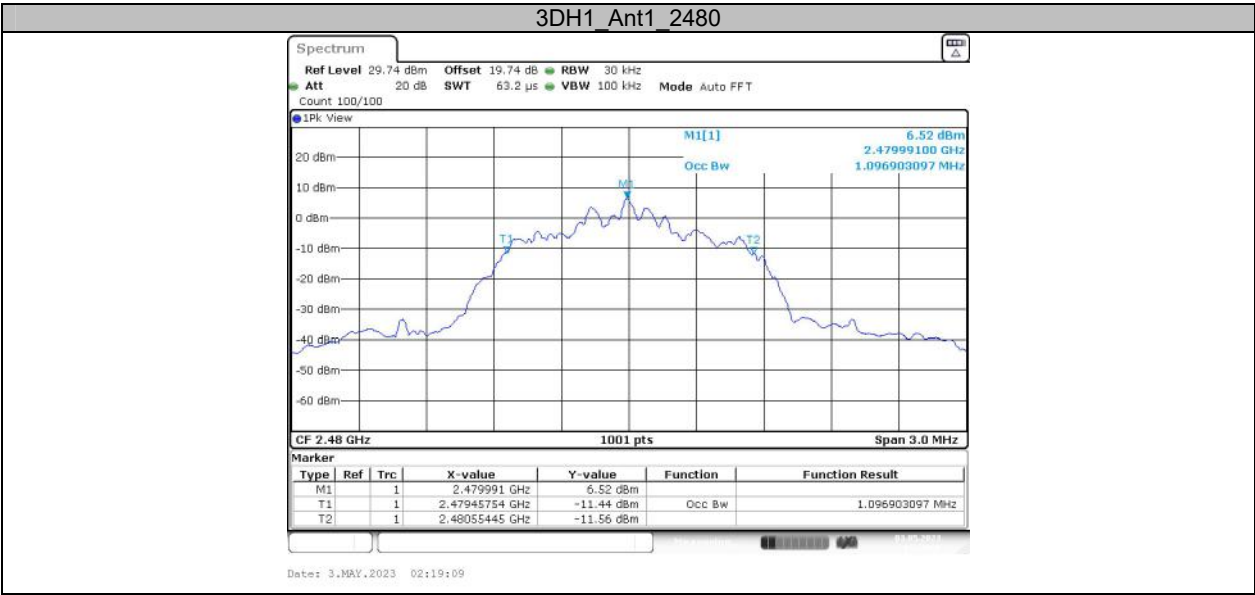


Appendix C: Maximum conducted output power


Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH1	Ant1	2402	6.91	≤20.97	PASS
		2441	7.1	≤20.97	PASS
		2480	7.52	≤20.97	PASS
2DH1	Ant1	2402	6.86	≤20.97	PASS
		2441	7.07	≤20.97	PASS
		2480	7.49	≤20.97	PASS
3DH1	Ant1	2402	6.86	≤20.97	PASS
		2441	7.04	≤20.97	PASS
		2480	7.46	≤20.97	PASS


Test Graphs

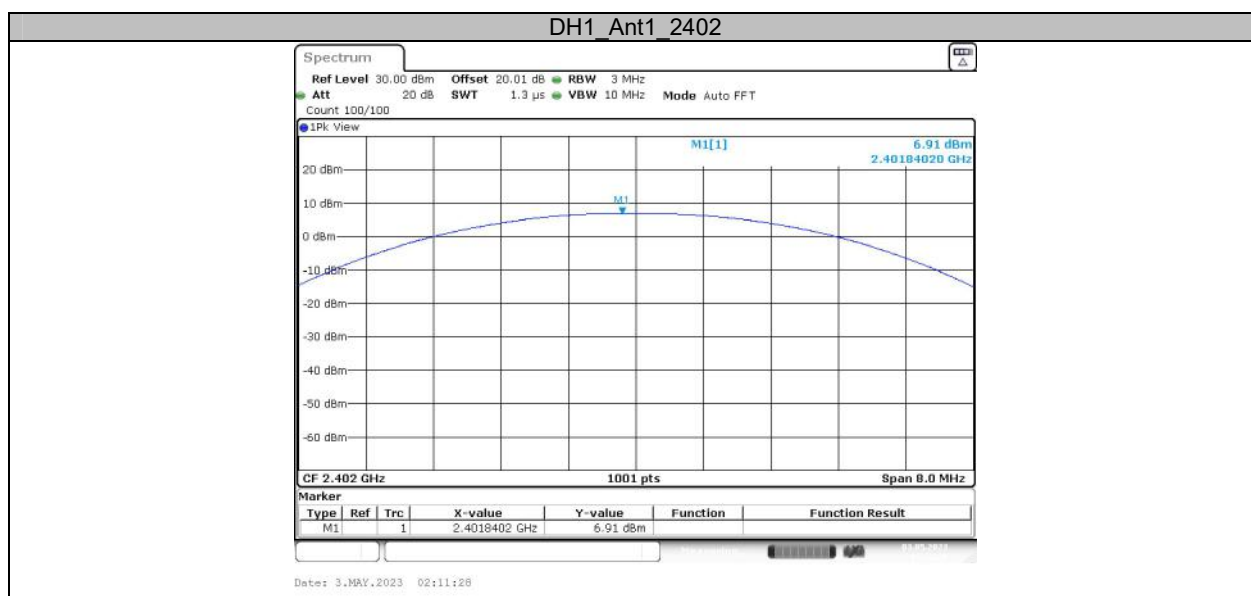


DH1 Ant1 2441

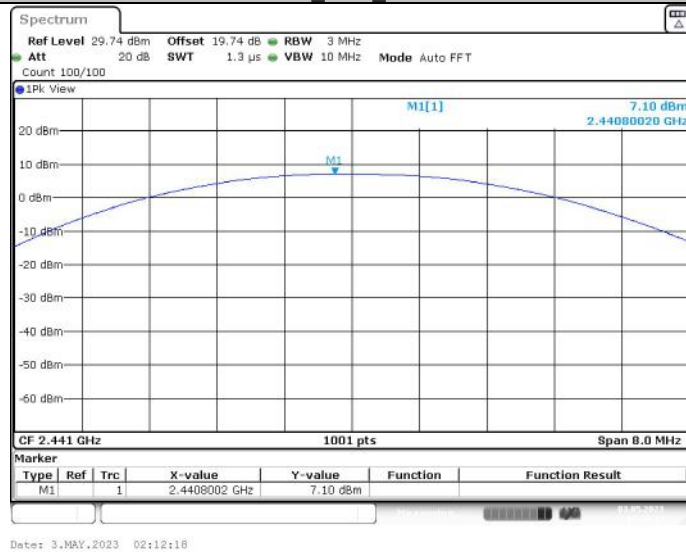


DH1 Ant1 2480

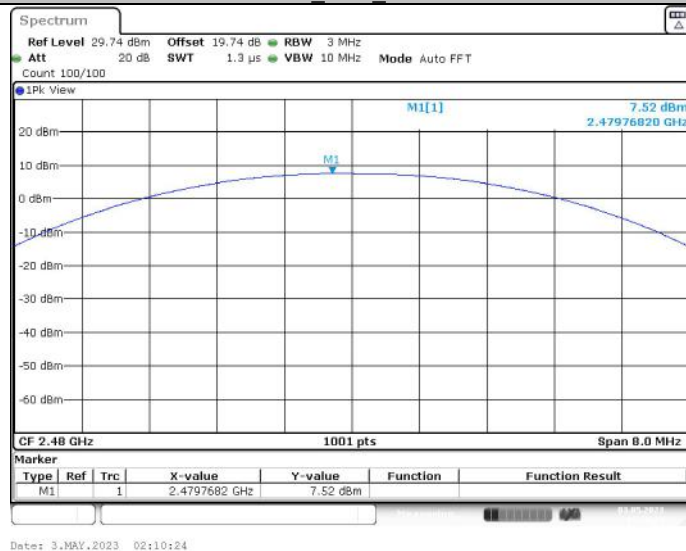


2DH1_Ant1_2402

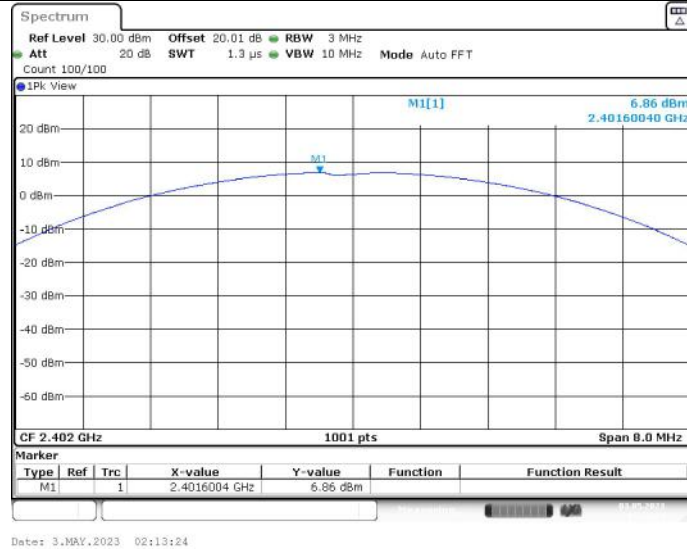


2DH1_Ant1_2441

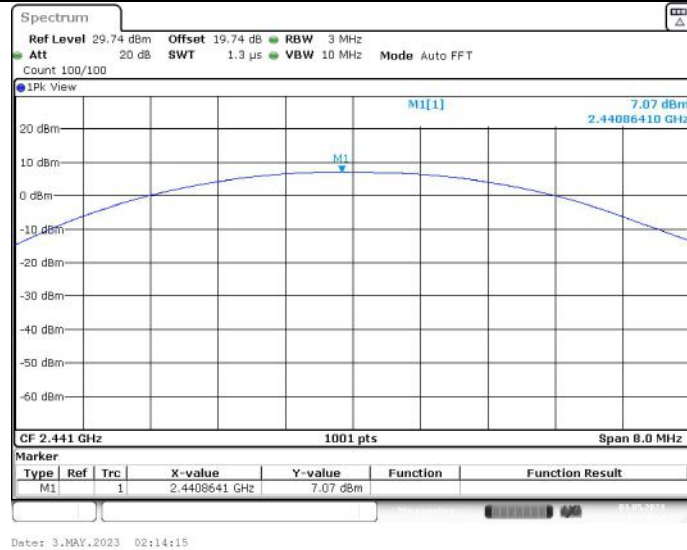


2DH1_Ant1_2480

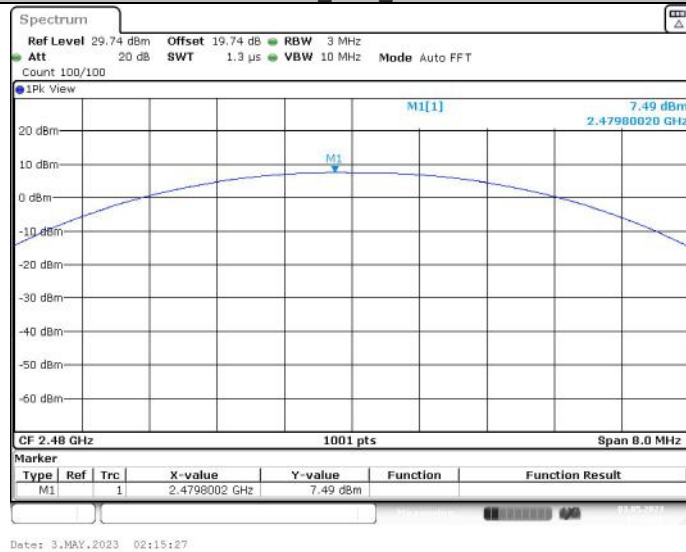


3DH1_Ant1_2402

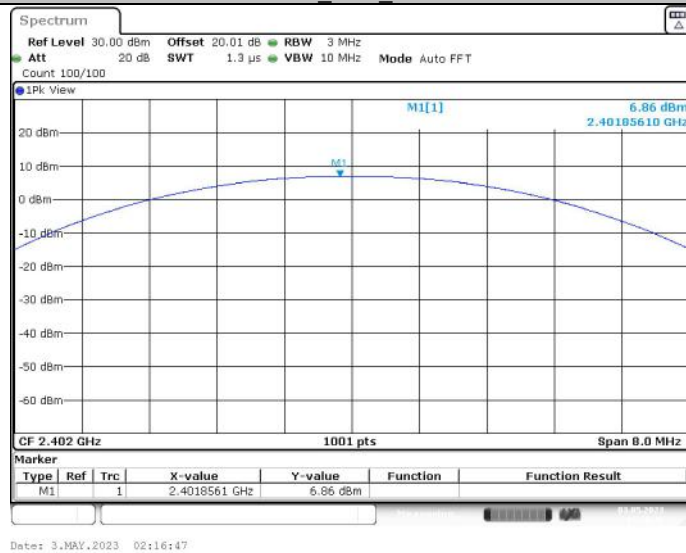

3DH1_Ant1_2441

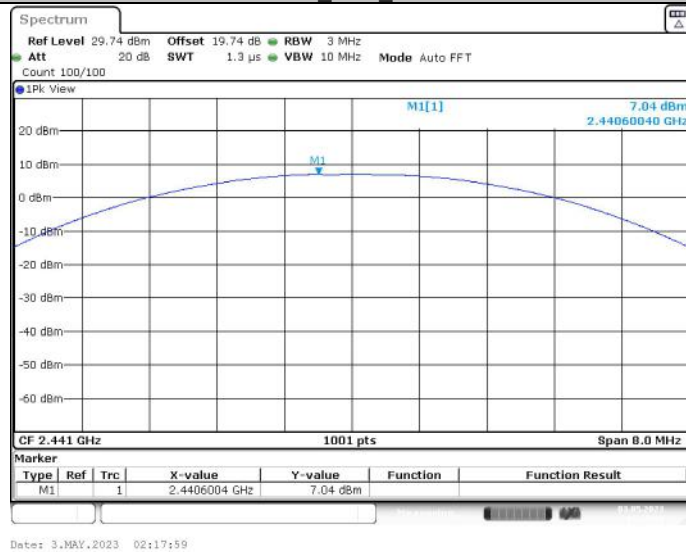

3DH1_Ant1_2480

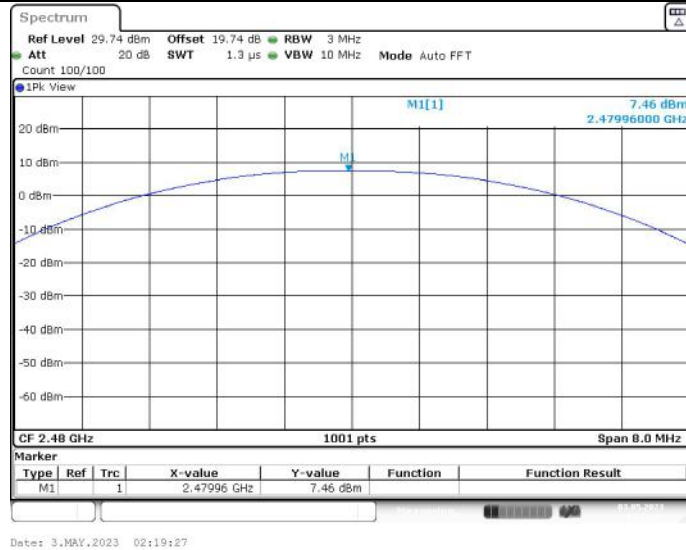


**Appendix D: Carrier frequency separation
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	≥ 0.693	PASS
2DH1	Ant1	Hop	1.003	≥ 0.787	PASS
3DH1	Ant1	Hop	1.000	≥ 0.787	PASS

Test Graphs



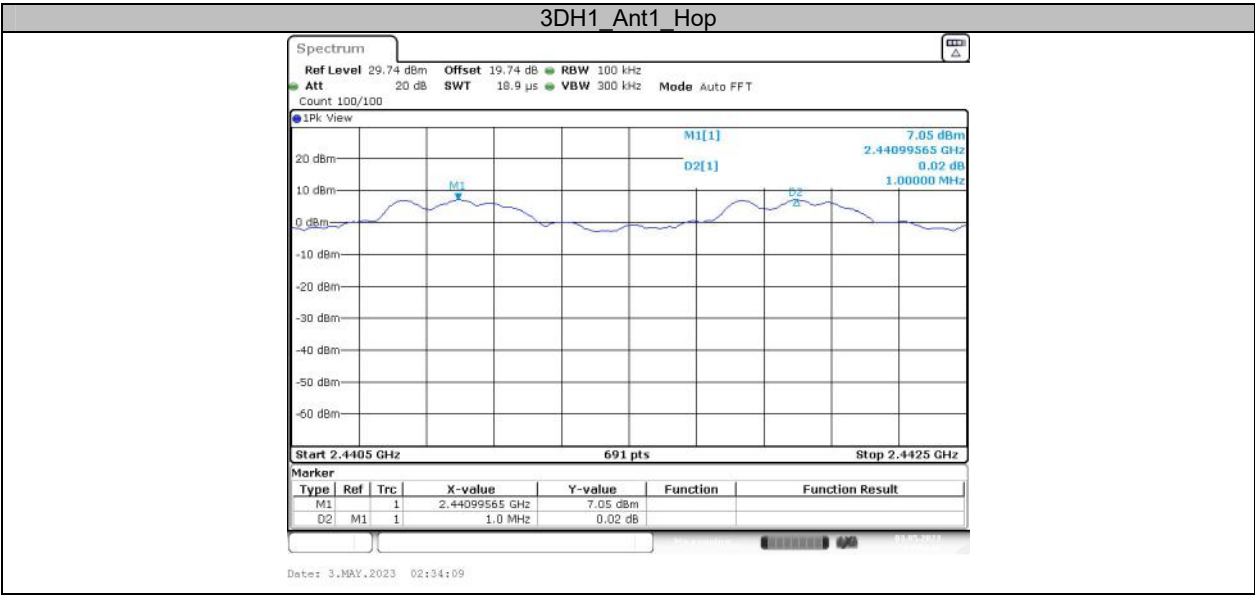

**Appendix E: Time of occupancy
Test Result**


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	320	0.124	≤0.4	PASS
DH3	Ant1	Hop	1.64	160	0.263	≤0.4	PASS
DH5	Ant1	Hop	2.89	120	0.347	≤0.4	PASS
2DH1	Ant1	Hop	0.40	330	0.131	≤0.4	PASS
2DH3	Ant1	Hop	1.65	170	0.28	≤0.4	PASS
2DH5	Ant1	Hop	2.90	110	0.319	≤0.4	PASS
3DH1	Ant1	Hop	0.40	330	0.132	≤0.4	PASS
3DH3	Ant1	Hop	1.65	150	0.247	≤0.4	PASS
3DH5	Ant1	Hop	2.90	110	0.319	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result=BurstWidth*Totalhops


Note 2: Totalhops=Hopping Number in 3.16s*10


Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)


Test Graphs

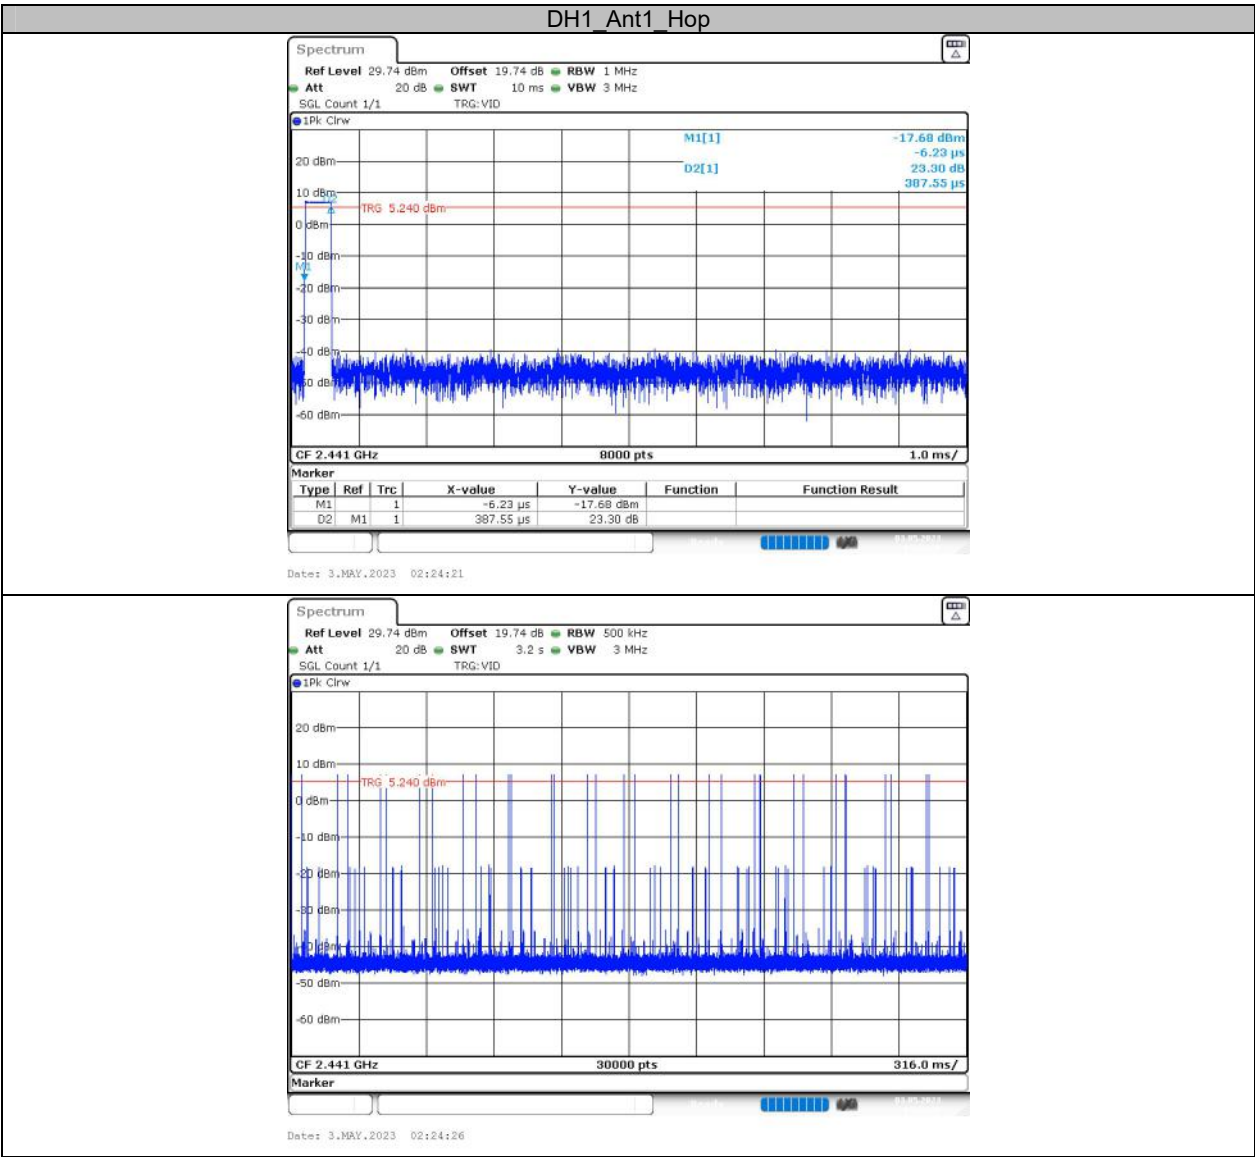


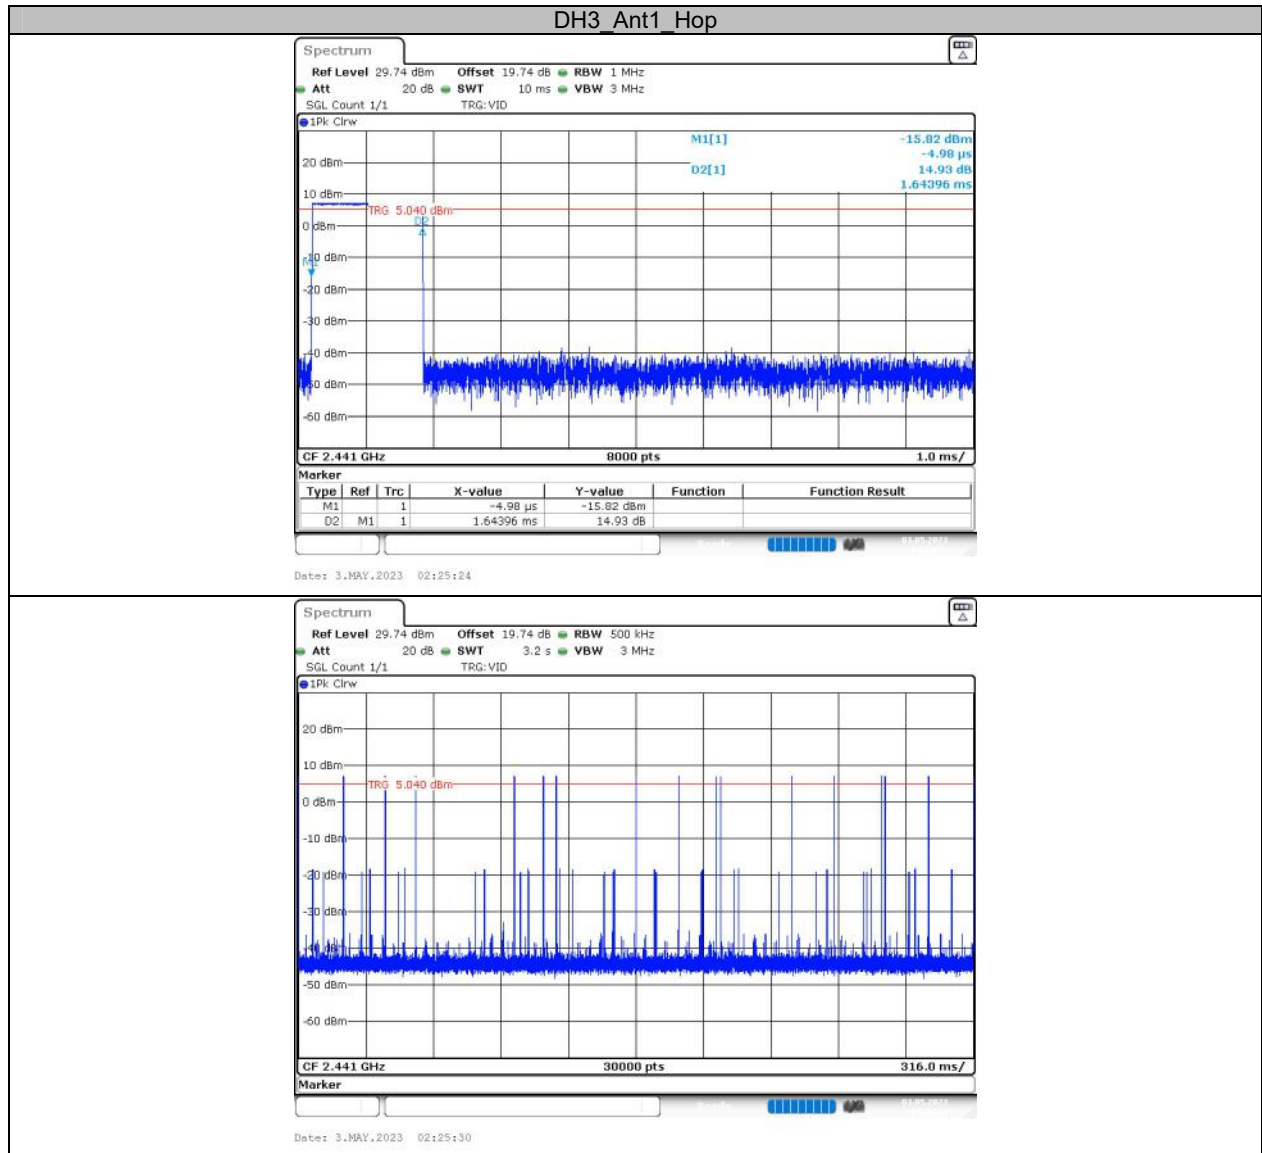


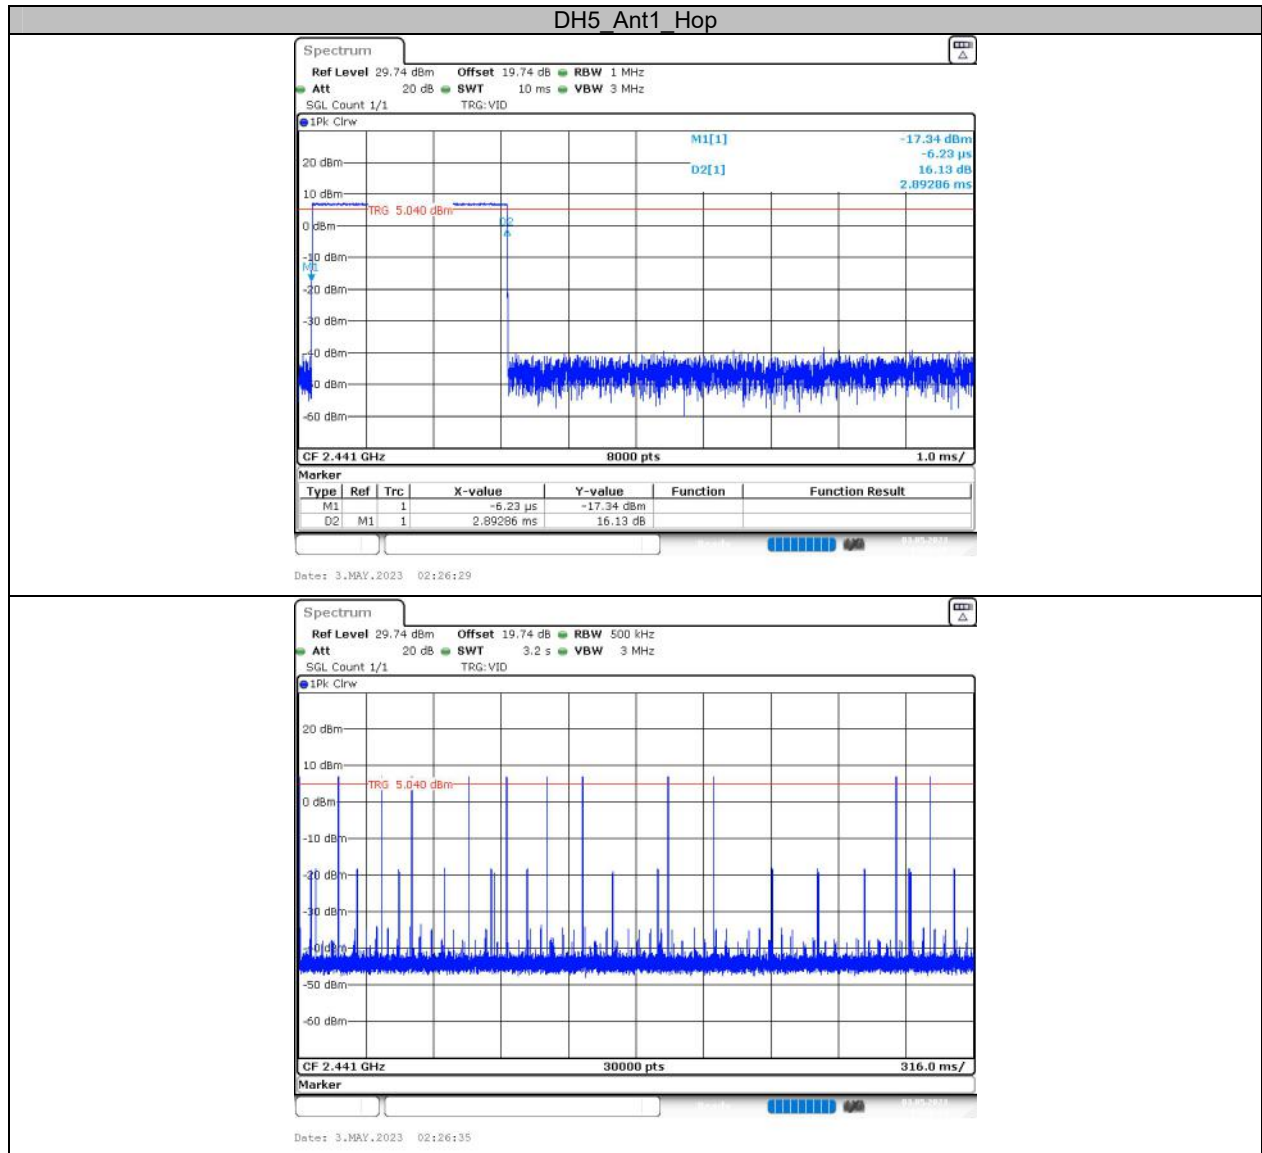


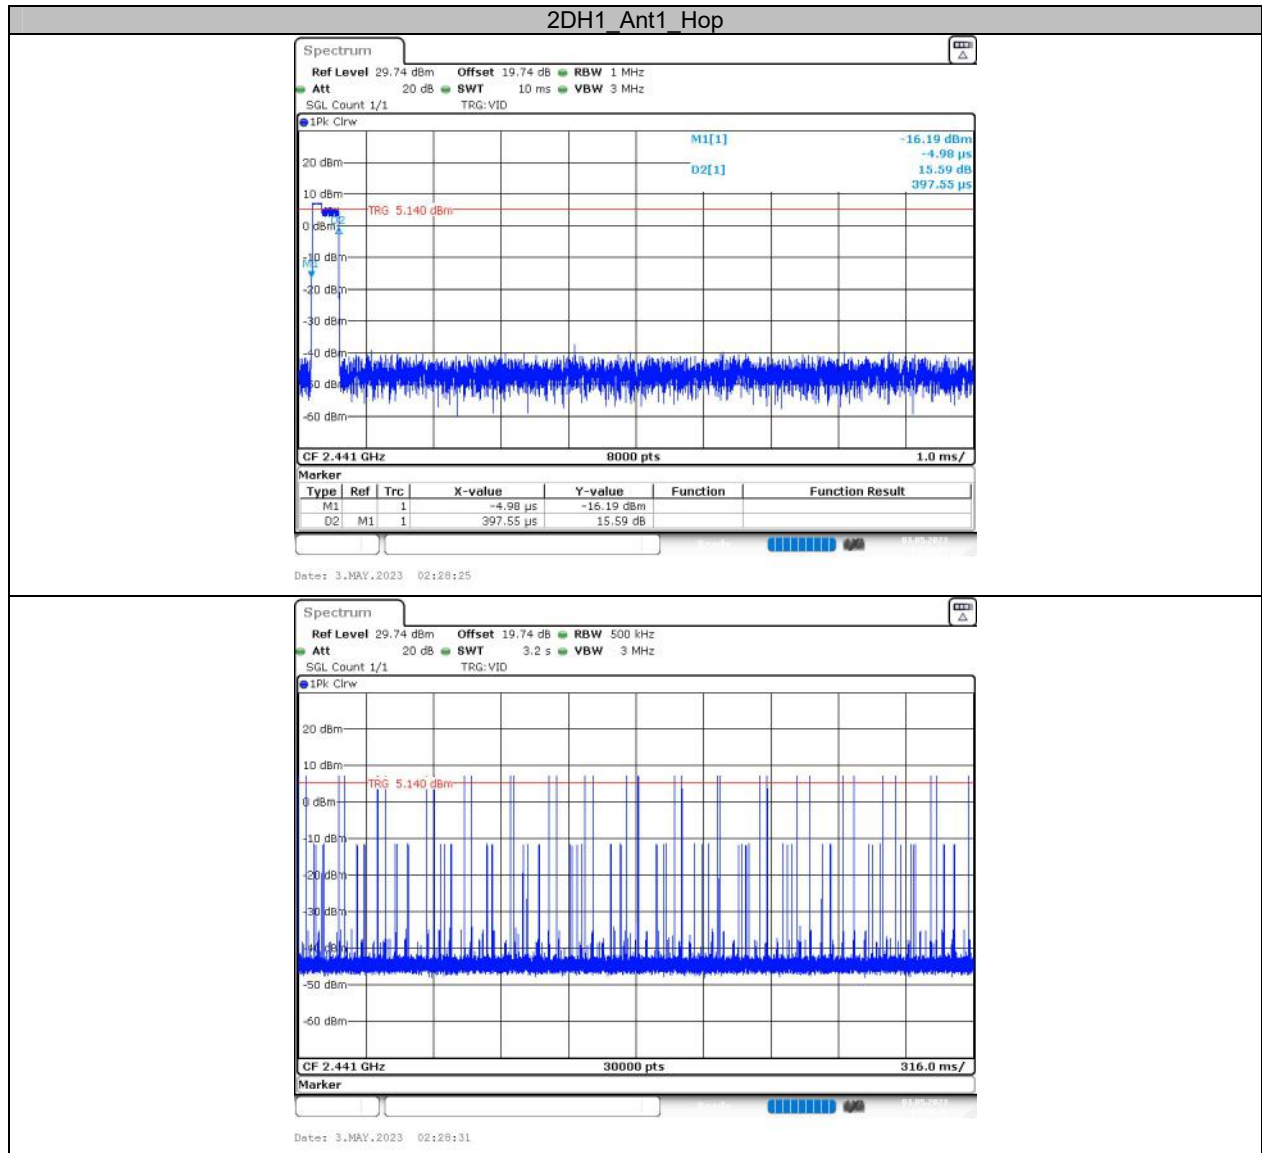


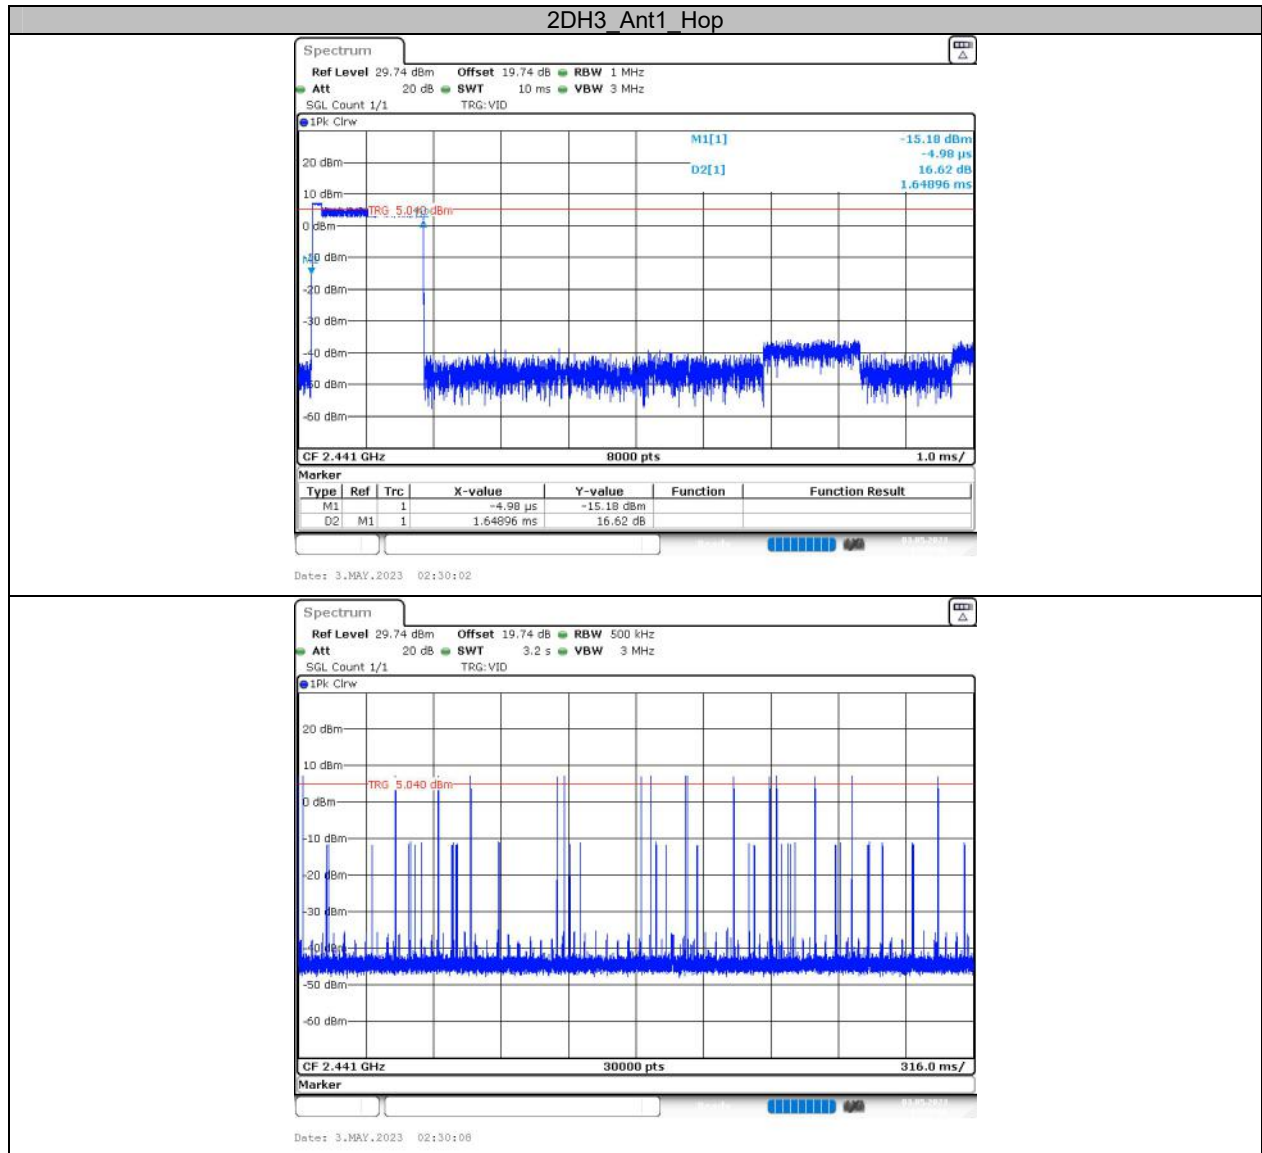

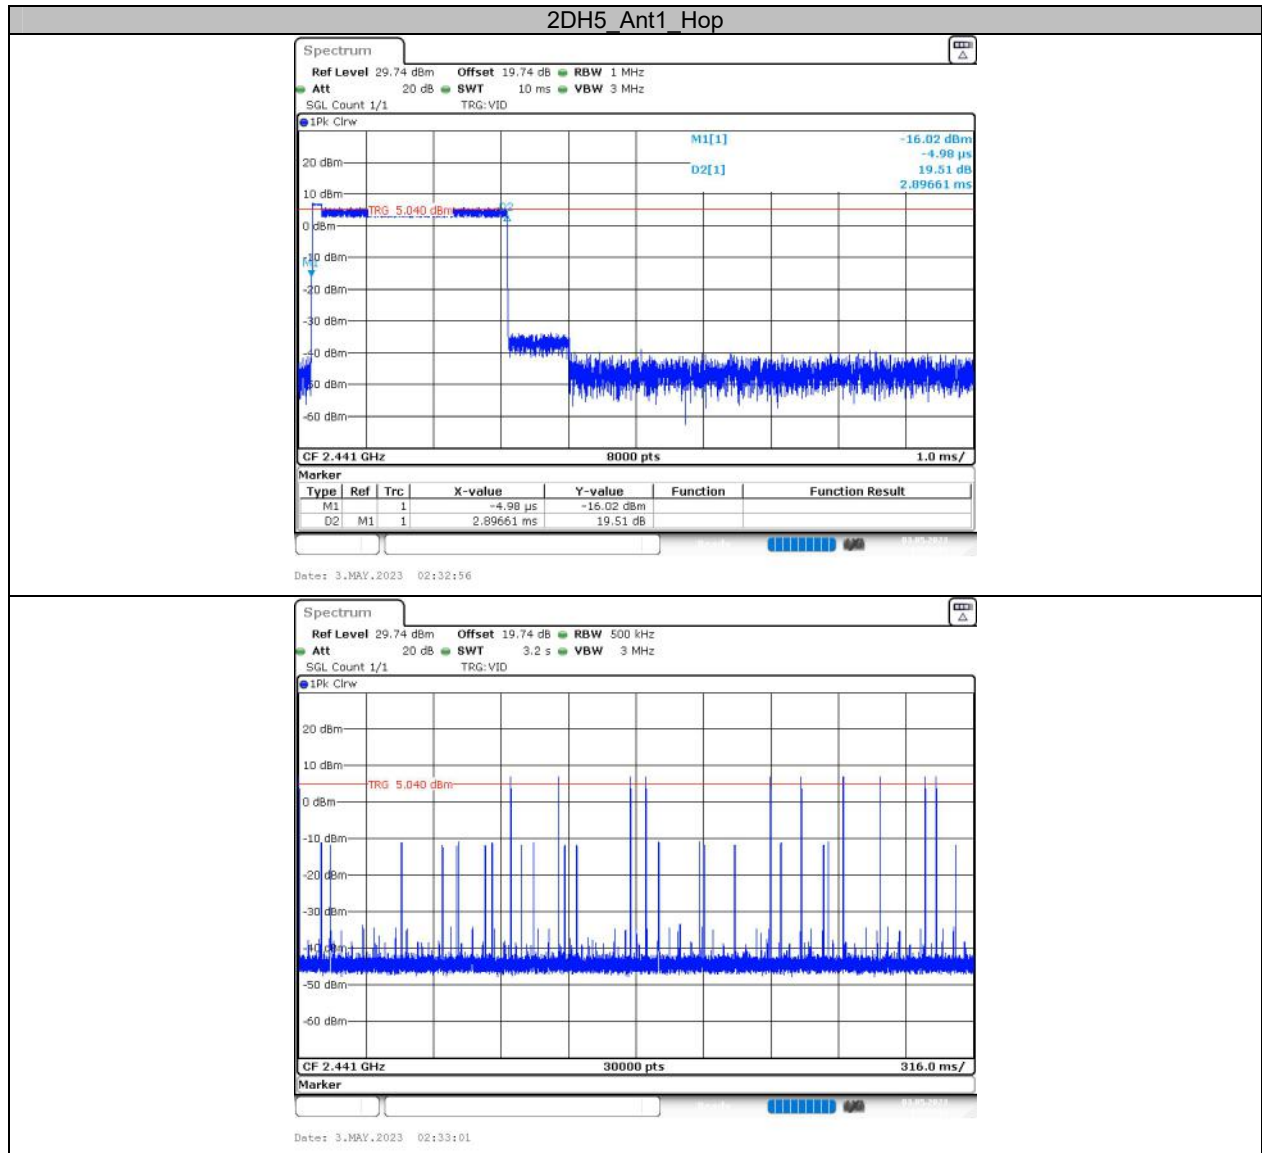

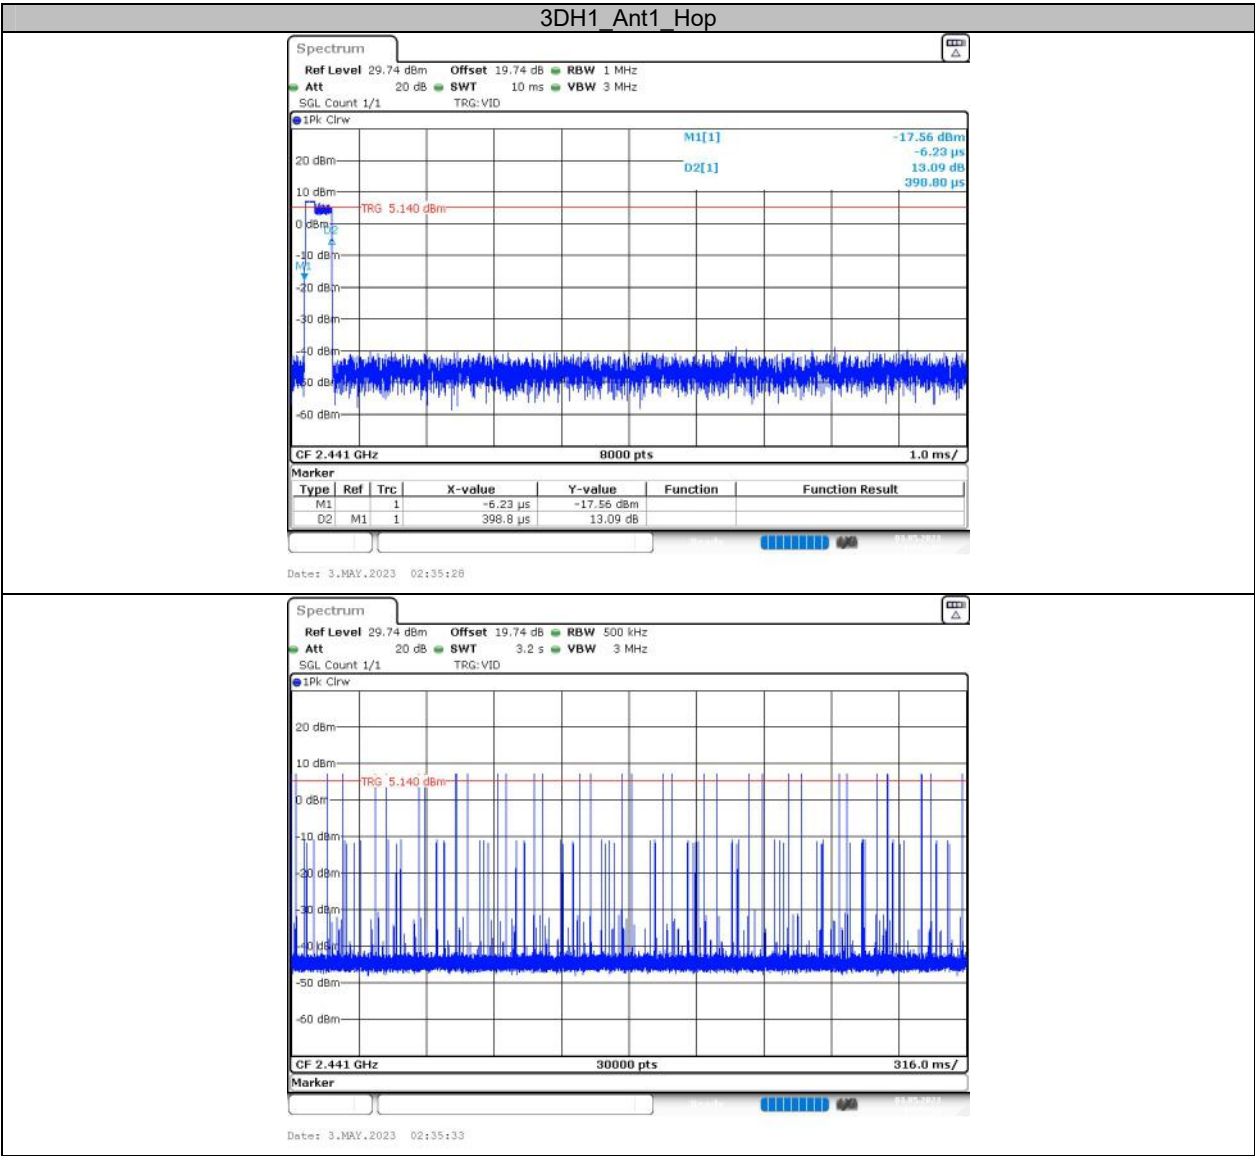

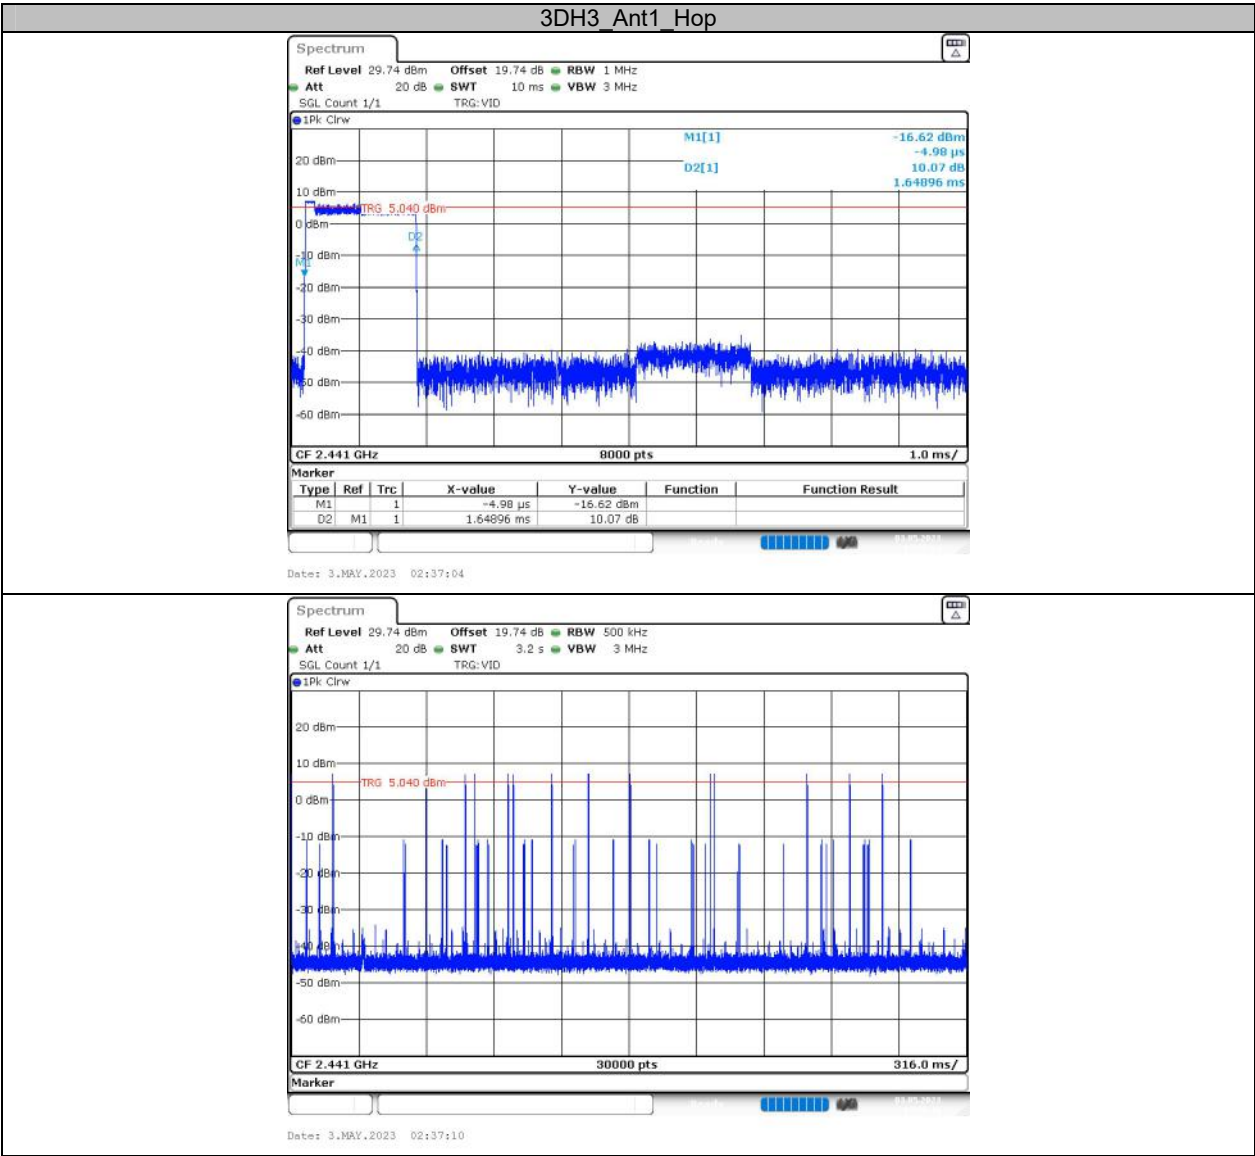

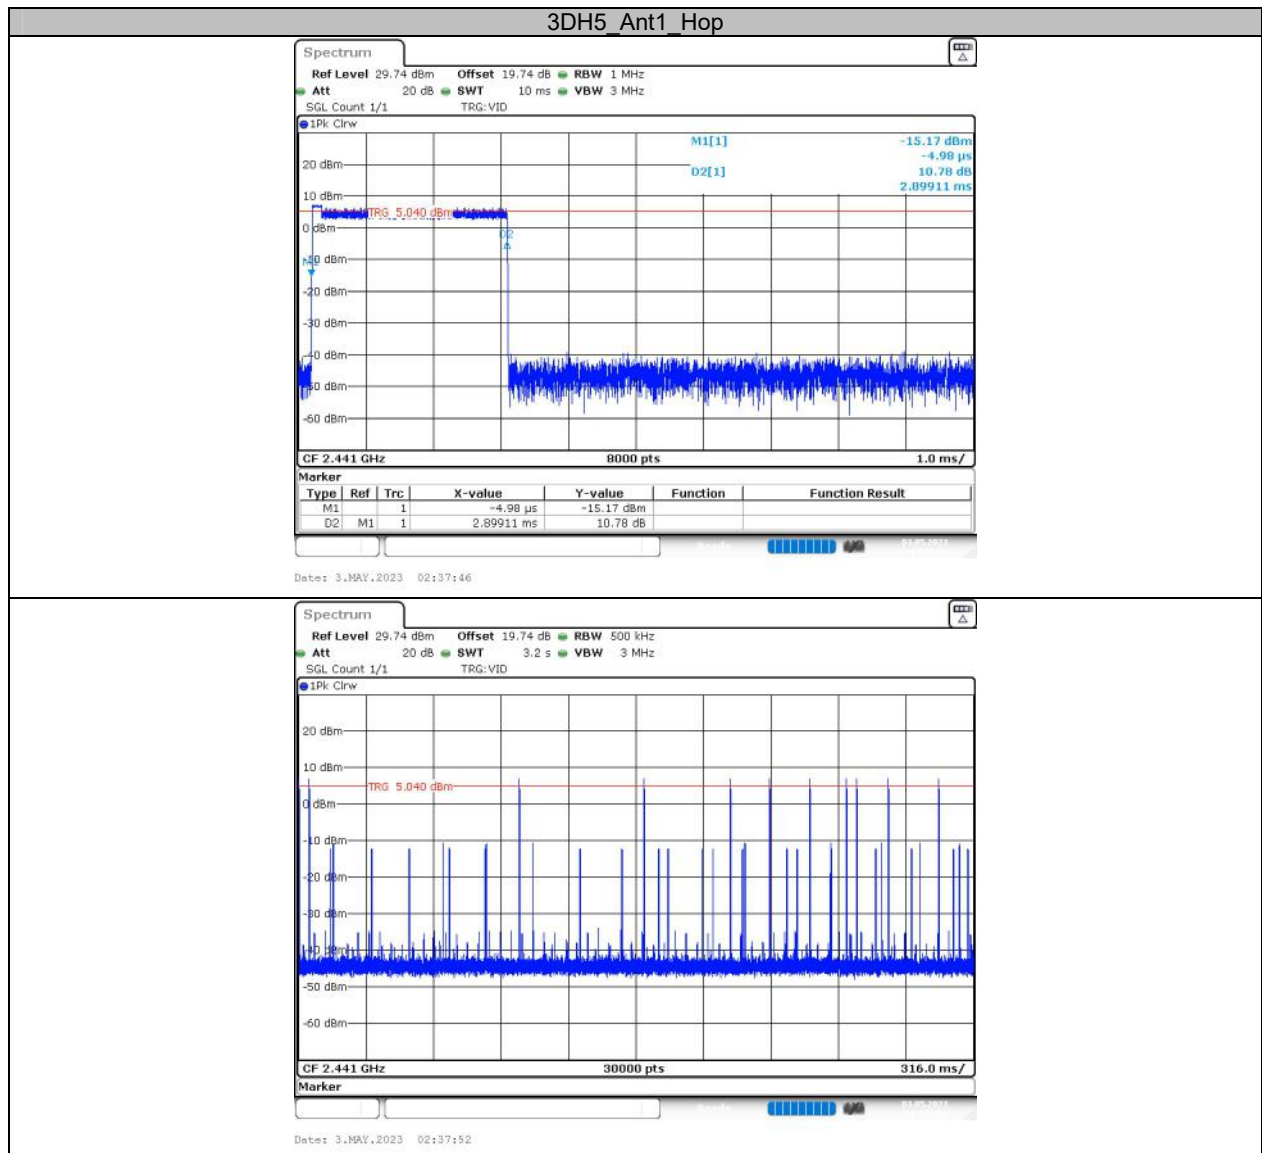

**Appendix F: Number of hopping channels
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS

DH1_Ant1_Hop

Spectrum

Ref Level 30.00 dBm Offset 20.01 dB RBW 100 kHz
Att 20 dB SWT 94.8 μ s VBW 300 kHz Mode Auto FFT
Count 1000/1000

1Pk View

Start 2.4 GHz 691 pts Stop 2.4835 GHz

Marker

Date: 3.MAY.2023 02:23:19

2DH1_Ant1_Hop

Spectrum


Ref Level 30.00 dBm Offset 20.01 dB RBW 100 kHz
Att 20 dB SWT 94.8 μ s VBW 300 kHz Mode Auto FFT
Count 1000/1000

1Pk View

Start 2.4 GHz 691 pts Stop 2.4835 GHz


Marker

Date: 3.MAY.2023 02:28:11

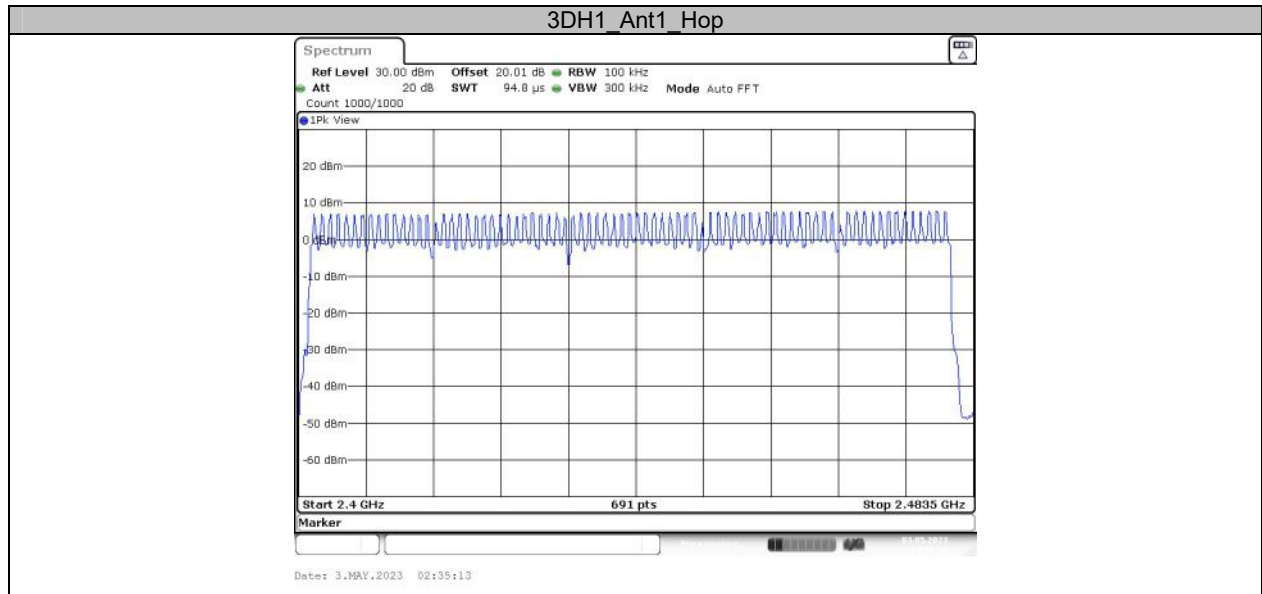


Appendix G: Band edge measurements

Test Graphs

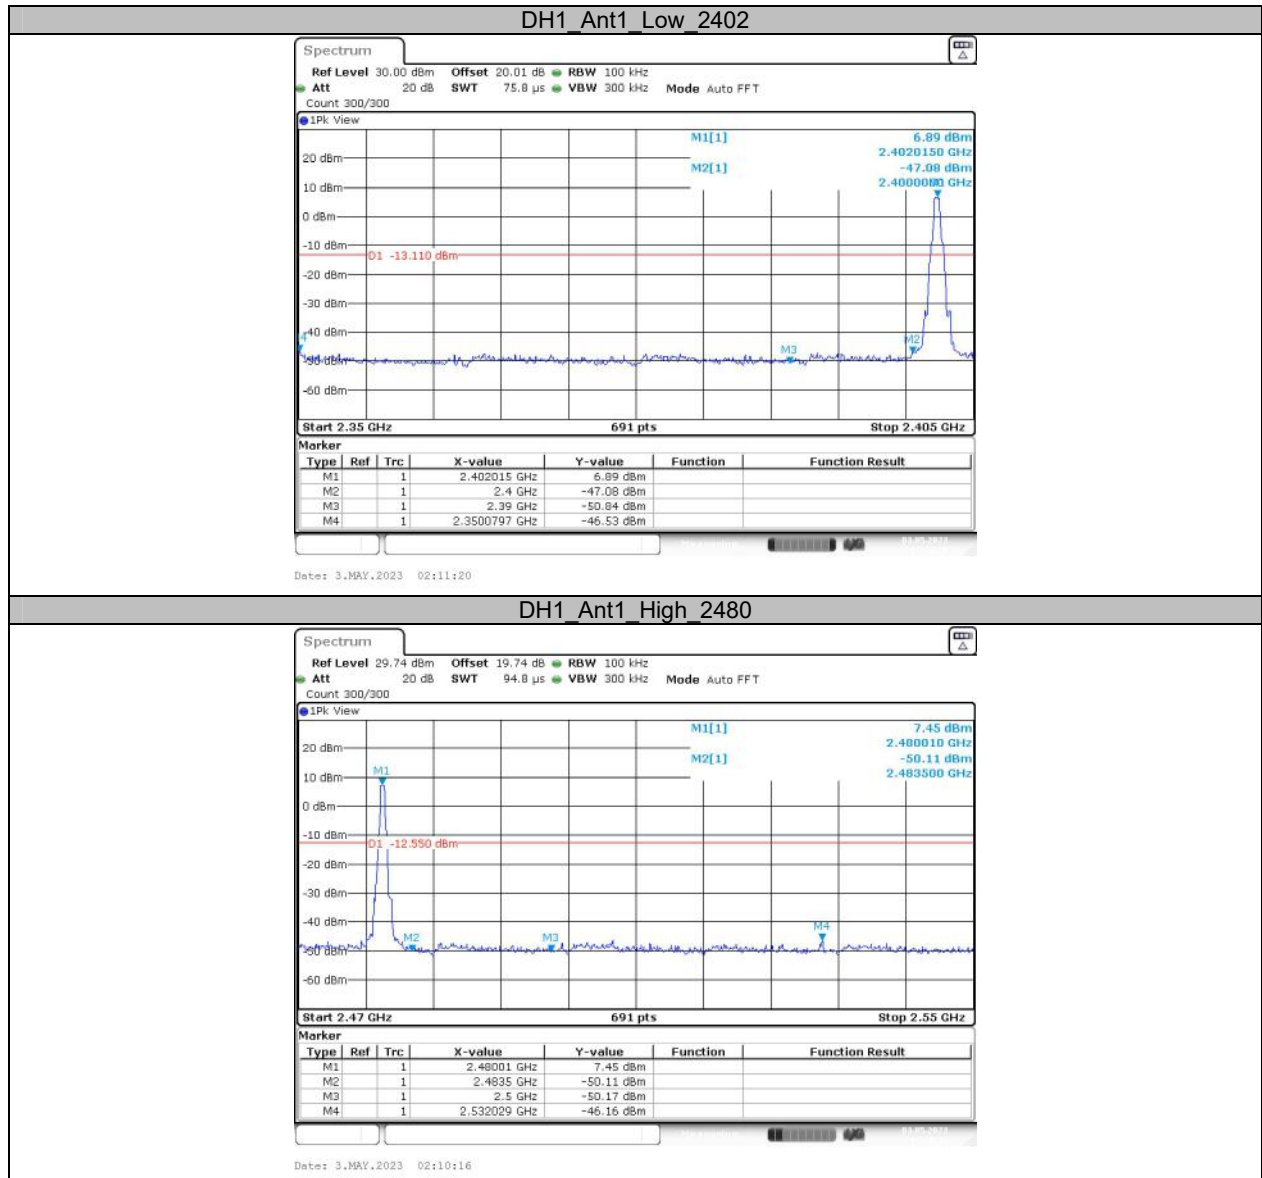


DH1_Ant1_Low_Hop_2402

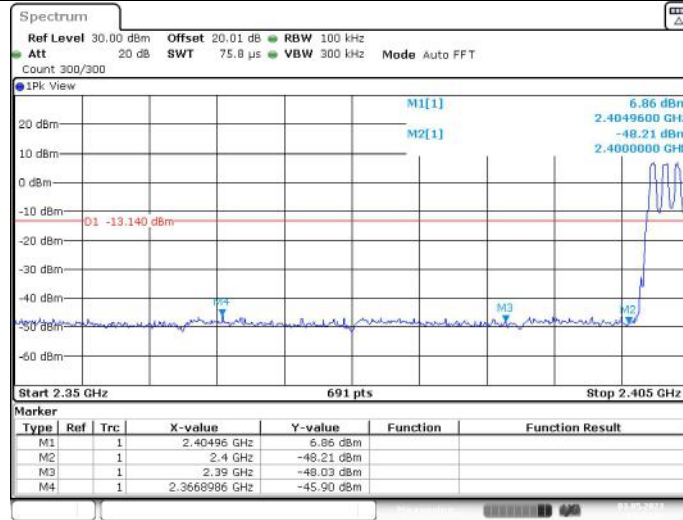


Date: 3.MAY.2023 02:22:27

DH1_Ant1_High_Hop_2480

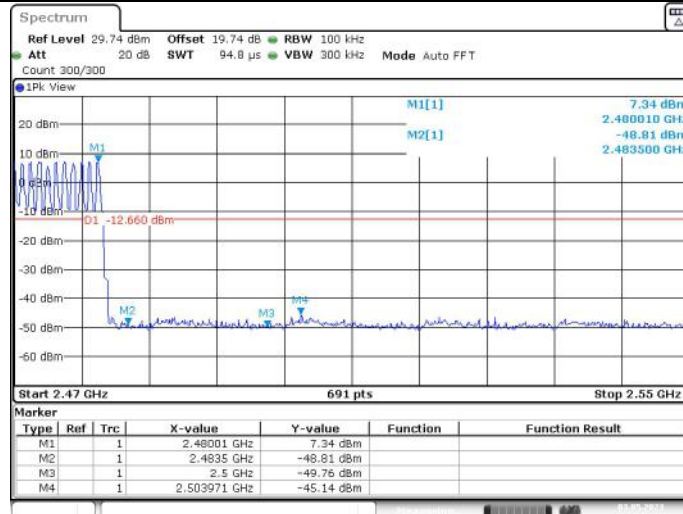


Date: 3.MAY.2023 02:23:59

2DH1 Ant1 Low 2402

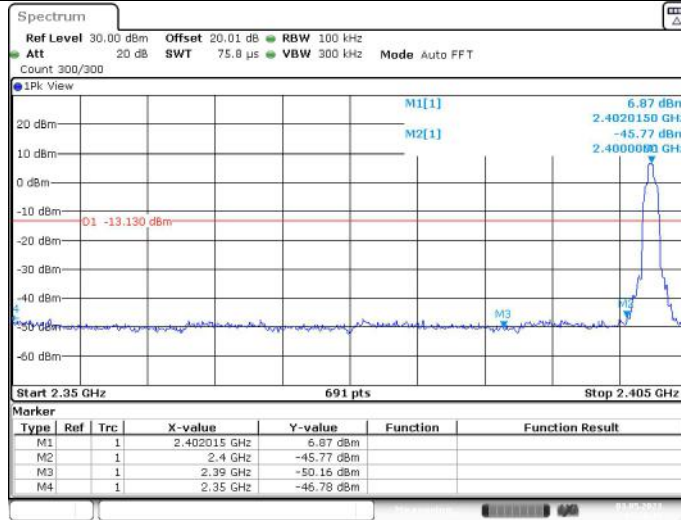


Date: 3.MAY.2023 02:13:16

2DH1 Ant1 High 2480

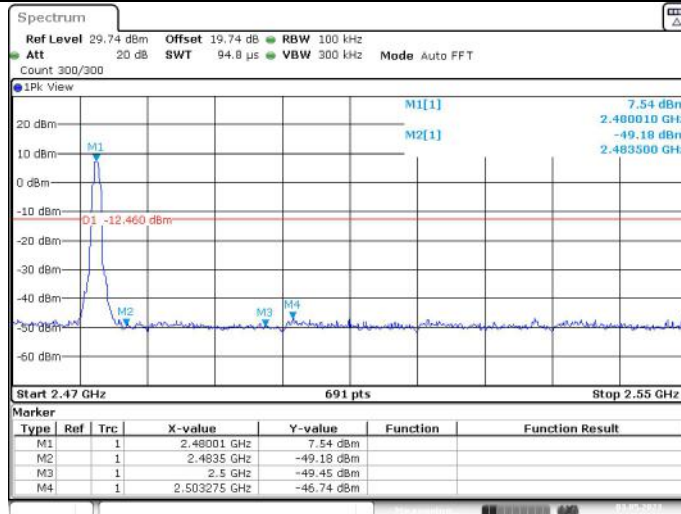


Date: 3.MAY.2023 02:15:09


2DH1 Ant1 Low Hop 2402

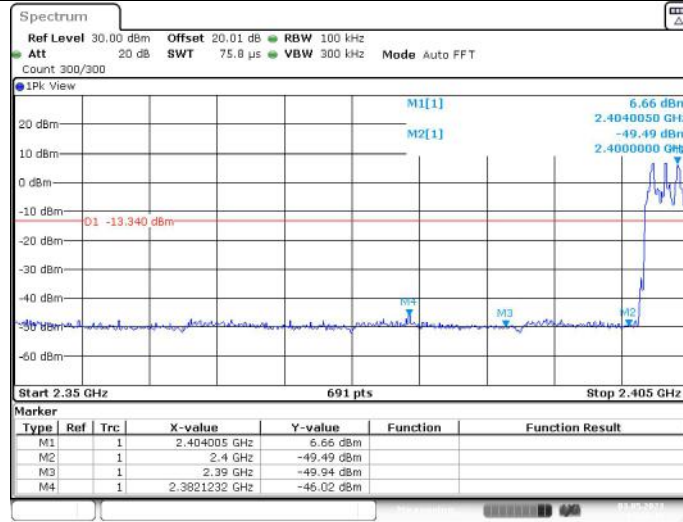

2DH1 Ant1 High Hop 2480

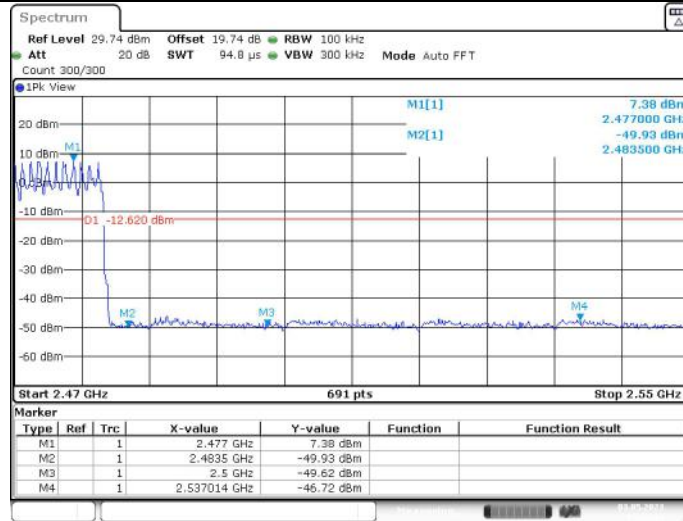


3DH1_Ant1_Low_2402

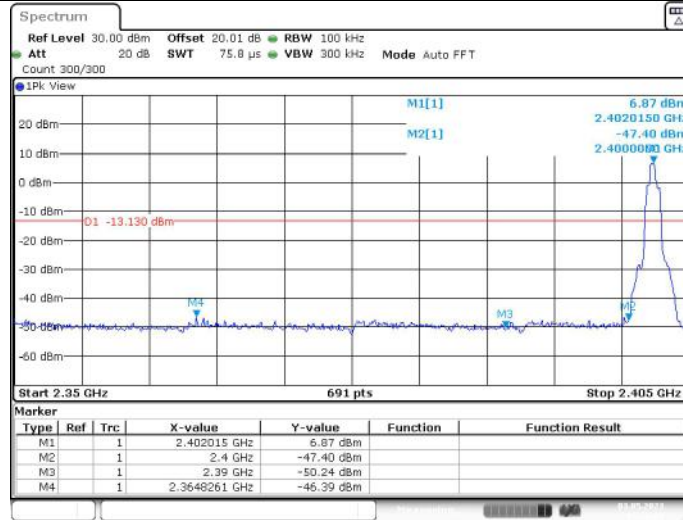


Date: 3.MAY.2023 02:16:30

3DH1_Ant1_High_2480

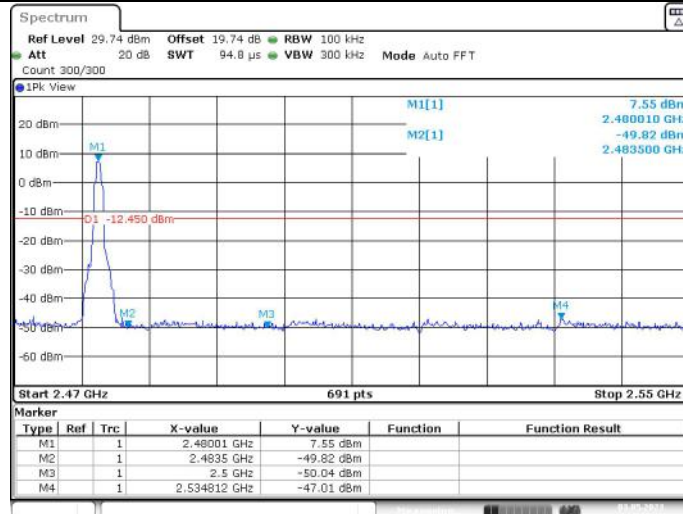

Date: 3.MAY.2023 02:19:19

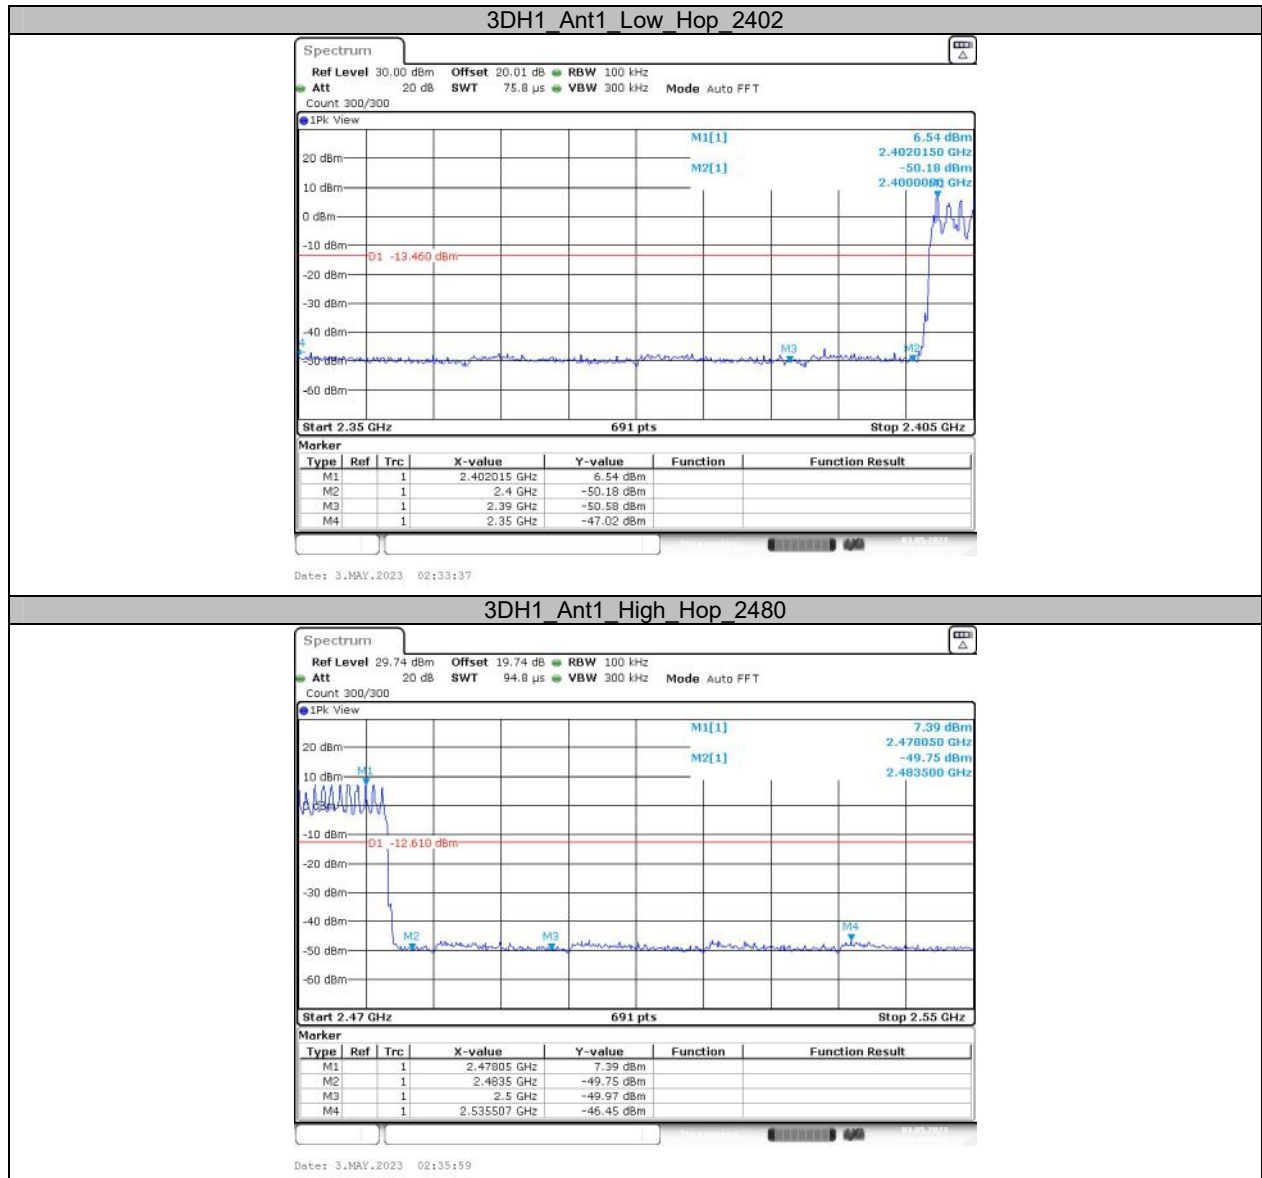

***** END OF REPORT *****