



# TEST REPORT

FCC ID: 2ADYY-T1

Product: Megabook

Model No.: T1

Additional Model No: N/A

Trade Mark: TECNO

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Issued Date: 01 August 2022

Issued for:

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT  
HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.

Building A-B, Baoshi Science & Technology Park, Baoshi Road,  
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



**Note:** The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## Table of Contents

|                                      |    |
|--------------------------------------|----|
| 1. GENERAL INFORMATION               | 3  |
| 2. TEST DESCRIPTION                  | 5  |
| 3. SUMMARY OF TEST RESULTS           | 9  |
| 4. MEASUREMENT INSTRUMENTS           | 10 |
| 5. EMC EMISSION TEST                 | 12 |
| 6. ANTENNA APPLICATION               | 23 |
| 7 FCC PART 15.407 REQUIREMENTS       | 24 |
| 9. DYNAMIC FREQUENCY SELECTION (DFS) | 94 |





Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

## 1. GENERAL INFORMATION

|                       |                                                                                         |
|-----------------------|-----------------------------------------------------------------------------------------|
| Product:              | Megabook                                                                                |
| Model No.:            | T1                                                                                      |
| Additional Model No.: | N/A                                                                                     |
| Trade Mark:           | TECNO                                                                                   |
| Applicant:            | TECNO MOBILE LIMITED                                                                    |
| Address:              | FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG |
| Manufacturer:         | TECNO MOBILE LIMITED                                                                    |
| Address:              | FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG |
| Date of Test:         | February 10, 2018 to February 25, 2018                                                  |
| Applicable Standards: | FCC CFR Title 47 FCC Part 15 Subpart E                                                  |

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang  
(Wang Xiang)

Checked By:

Li Huaibi  
(Li Huaibi)



Approved By:

Wang Fengbing  
(Wang Fengbing)

Date:

01 August 2018





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 1.1 EUT DESCRIPTION

|                              |                                                                                                                                                                            |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product:</b>              | Megabook                                                                                                                                                                   |
| <b>Model No.:</b>            | T1                                                                                                                                                                         |
| <b>Additional Model No.:</b> | N/A                                                                                                                                                                        |
| <b>Trade Mark:</b>           | TECNO                                                                                                                                                                      |
| <b>Operation Frequency:</b>  | Band1:5180-5240MHz<br>Band2:5260-5320MHz<br>Band3:5500-5700MHz<br>Band4:5745-5825MHz                                                                                       |
| <b>Modulation type:</b>      | IEEE 802.11a/n/ac/ax: OFDM/OFDMA<br>(BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)                                                                                                 |
| <b>Antenna Type:</b>         | Integral Antenna                                                                                                                                                           |
| <b>Antenna Gain</b>          | 4.69dBi                                                                                                                                                                    |
| <b>Power supply:</b>         | Rechargeable Li-ion Polymer Battery: 156<br>Rated Voltage: 11.55V<br>Rated Capacity: 6060mAh/69.99Wh<br>Typical Capacity: 6160mAh/71.14Wh<br>Limited Charge Voltage: 13.2V |
| <b>Adapter:</b>              | Adapter: TCW-A61S-65W<br>Input: 100-240V~50/60Hz 1.5A Max<br>Output: 5.0V---3.0A/9.0V---3.0A/12.0V---3.0A/15.0V---3.0A/20.0V3.25A                                          |
| <b>Remark:</b>               | N/A.                                                                                                                                                                       |





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 2. TEST DESCRIPTION

### 2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                           | Uncertainty             |
|-----|--------------------------------|-------------------------|
| 1   | Conducted Emission Test        | $\pm 3.2\text{dB}$      |
| 2   | RF power, conducted            | $\pm 0.16\text{dB}$     |
| 3   | Spurious emissions, conducted  | $\pm 0.21\text{dB}$     |
| 4   | All emissions, radiated(<1GHz) | $\pm 4.7\text{dB}$      |
| 5   | All emissions, radiated(>1GHz) | $\pm 4.7\text{dB}$      |
| 6   | Temperature                    | $\pm 0.5^\circ\text{C}$ |
| 7   | Humidity                       | $\pm 2\%$               |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 2.2 TEST ENVIRONMENT AND MODE

### Operating Environment:

|                       |           |
|-----------------------|-----------|
| Temperature:          | 25.0 °C   |
| Humidity:             | 56 % RH   |
| Atmospheric Pressure: | 1010 mbar |

### Test Mode:

|                   |                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------|
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) |
|-------------------|--------------------------------------------------------------------------------------------------------------|

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Test Mode | Description |
|-----------|-------------|
| Mode 1    | 802.11a     |
| Mode 2    | 802.11n20   |
| Mode 3    | 802.11n40   |
| Mode 4    | 802.11ac20  |
| Mode 5    | 802.11ac40  |
| Mode 6    | 802.11ac80  |
| Mode 7    | 802.11ax20  |
| Mode 8    | 802.11ax40  |
| Mode 9    | 802.11ax80  |

Note:

(1) The measurements are performed at the highest, lowest available channels.

(2) The EUT use new battery.

(3) Record the worst case of each test item in this report.



Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2


### 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

| Test program                                                                                                                                                                                                                                                                                                                 | *#9646633#*          |          |          |          |          |          |          |          |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------|----------|----------|----------|----------|----------|----------|--|--|
| Mode                                                                                                                                                                                                                                                                                                                         | Test Frequency (MHz) |          |          |          |          |          |          |          |  |  |
|                                                                                                                                                                                                                                                                                                                              | NCB: 20MHz           |          |          |          |          |          |          |          |  |  |
| 802.11a                                                                                                                                                                                                                                                                                                                      | 5180 MHz             | 5240 MHz | 5260 MHz | 5320 MHz | 5500 MHz | 5700 MHz | 5745 MHz | 5825 MHz |  |  |
| 802.11n                                                                                                                                                                                                                                                                                                                      | 5180 MHz             | 5240 MHz | 5260 MHz | 5320 MHz | 5500 MHz | 5700 MHz | 5745 MHz | 5825 MHz |  |  |
| 802.11ac                                                                                                                                                                                                                                                                                                                     | 5180 MHz             | 5240 MHz | 5260 MHz | 5320 MHz | 5500 MHz | 5700 MHz | 5745 MHz | 5825 MHz |  |  |
| 802.11ax                                                                                                                                                                                                                                                                                                                     | 5180 MHz             | 5240 MHz | 5260 MHz | 5320 MHz | 5500 MHz | 5700 MHz | 5745 MHz | 5825 MHz |  |  |
|                                                                                                                                                                                                                                                                                                                              | NCB: 40MHz           |          |          |          |          |          |          |          |  |  |
| 802.11n                                                                                                                                                                                                                                                                                                                      | 5190 MHz             | 5230 MHz | 5270 MHz | 5310 MHz | 5510 MHz | 5670 MHz | 5755 MHz | 5795 MHz |  |  |
| 802.11ac                                                                                                                                                                                                                                                                                                                     | 5190 MHz             | 5230 MHz | 5270 MHz | 5310 MHz | 5510 MHz | 5670 MHz | 5755 MHz | 5795 MHz |  |  |
| 802.11ax                                                                                                                                                                                                                                                                                                                     | 5190 MHz             | 5230 MHz | 5270 MHz | 5310 MHz | 5510 MHz | 5670 MHz | 5755 MHz | 5795 MHz |  |  |
|                                                                                                                                                                                                                                                                                                                              | NCB: 80MHz           |          |          |          |          |          |          |          |  |  |
| 802.11ac                                                                                                                                                                                                                                                                                                                     | 5210 MHz             | 5290 MHz | 5530 MHz | 5610 MHz | 5775 MHz |          |          |          |  |  |
| 802.11ax                                                                                                                                                                                                                                                                                                                     | 5210 MHz             | 5290 MHz | 5530 MHz | 5610 MHz | 5775 MHz |          |          |          |  |  |
| During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product. |                      |          |          |          |          |          |          |          |  |  |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 2.4 CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Megabook)

## 2.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| 1    | Adapter   | /         | CQ-18KX        | /          | /    |
| 2    | Earphone  | /         | N/A            | /          | /    |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 Subpart C&E |                                                                       |          |          |
|------------------------|-----------------------------------------------------------------------|----------|----------|
| Standard Section       | Test Item                                                             | Judgment | Remark   |
| 2.1049<br>15.403(i)    | 26dB & 99% Bandwidth                                                  | PASS     | Complies |
| 15.407(e)              | 6dB Spectrum Bandwidth                                                | PASS     | Complies |
| 15.407(a)              | Maximum Conducted Output Power                                        | PASS     | Complies |
| 15.407(a)              | Power Spectral Density                                                | PASS     | Complies |
| 15.407(b)              | Unwanted Emissions                                                    | PASS     | Complies |
| 15.207                 | AC Conducted Emission                                                 | PASS     | Complies |
| 15.407(g)              | Frequency Stability                                                   | PASS     | Complies |
| 15.407(c)              | Automatically Discontinue Transmission                                | PASS     | Complies |
| 15.203 &<br>15.407(a)  | Antenna Requirement                                                   | PASS     | Complies |
| 15.407(h)              | Transmit Power Control (TPC) and<br>Dynamic Frequency Selection (DFS) | PASS     | Complies |

NOTE:

(1) "N/A" denotes test is not applicable in this test report.





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

#### 4. MEASUREMENT INSTRUMENTS

| NAME OF EQUIPMENT                    | MANUFACTURER           | MODEL        | SERIAL NUMBER | Calibration Date | Calibration Due. |
|--------------------------------------|------------------------|--------------|---------------|------------------|------------------|
| Test software                        | --                     | EZ-EMC       | CON-03A       | -                | -                |
| Test software                        | --                     | MTS8310      | -             | -                | -                |
| EMI Test Receiver                    | R&S                    | ESCI         | 100005        | 11/05/2021       | 11/04/2022       |
| LISN                                 | AFJ                    | LS16         | 16010222119   | 11/05/2021       | 11/04/2022       |
| LISN(EUT)                            | Mestec                 | AN3016       | 04/10040      | 11/05/2021       | 11/04/2022       |
| Universal Radio Communication Tester | R&S                    | CMU 200      | 1100.0008.02  | 11/05/2021       | 11/04/2022       |
| Coaxial cable                        | Megalon                | LMR400       | N/A           | 11/05/2021       | 11/04/2022       |
| GPIB cable                           | Megalon                | GPIB         | N/A           | 11/05/2021       | 11/04/2022       |
| Spectrum Analyzer                    | R&S                    | FSU          | 100114        | 11/05/2021       | 11/04/2022       |
| Pre Amplifier                        | H.P.                   | HP8447E      | 2945A02715    | 11/05/2021       | 11/04/2022       |
| Pre-Amplifier                        | CDSI                   | PAP-1G18-38  | --            | 11/05/2021       | 11/04/2022       |
| Bi-log Antenna                       | SUNOL Sciences         | JB3          | A021907       | 11/05/2021       | 11/04/2022       |
| 9*6*6 Anechoic                       | --                     | --           | --            | 11/05/2021       | 11/04/2022       |
| Horn Antenna                         | COMPLIANCE ENGINEERING | CE18000      | --            | 11/05/2021       | 11/04/2022       |
| Horn Antenna                         | SCHWARZBECK            | BBHA9120D    | 9120D-631     | 11/05/2021       | 11/04/2022       |
| Cable                                | TIME MICROWAVE         | LMR-400      | N-TYPE04      | 11/05/2021       | 11/04/2022       |
| System-Controller                    | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| Turn Table                           | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| Antenna Tower                        | CCS                    | N/A          | N/A           | N.C.R            | N.C.R            |
| RF cable                             | Murata                 | MXHQ87WA3000 | -             | 11/05/2021       | 11/04/2022       |
| Loop Antenna                         | EMCO                   | 6502         | 00042960      | 11/05/2021       | 11/04/2022       |
| Horn Antenna                         | SCHWARZBECK            | BBHA 9170    | 1123          | 11/05/2021       | 11/04/2022       |
| Power meter                          | Anritsu                | ML2487A      | 6K00003613    | 11/05/2021       | 11/04/2022       |
| Power sensor                         | Anritsu                | MX248XD      | --            | 11/05/2021       | 11/04/2022       |
| Spectrum Analyzer                    | Keysight               | N9010B       | MY60241089    | 11/05/2021       | 11/04/2022       |





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 4.1 FACILITIES AND ACCREDITATIONS

### 4.1.1 FACILITIES

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group(Shenzhen) CO., LTD**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 4.1.2 ACCREDITATIONS

**China National Accreditation Service for Conformity Assessment (CNAS)**  
Registration number NO: L3732

**American Association for Laboratory Accreditation(A2LA)**

Registration NO : 5768.01

Copies of granted accreditation certificates are available for downloading from our web site,  
<http://www.wsct-cert.com>





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 5. EMC EMISSION TEST

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBUV) |         | Class B (dBUV) |           | Standard |
|-----------------|----------------|---------|----------------|-----------|----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |          |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * | FCC      |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     | FCC      |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


### 5.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 5.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.4 TEST SETUP

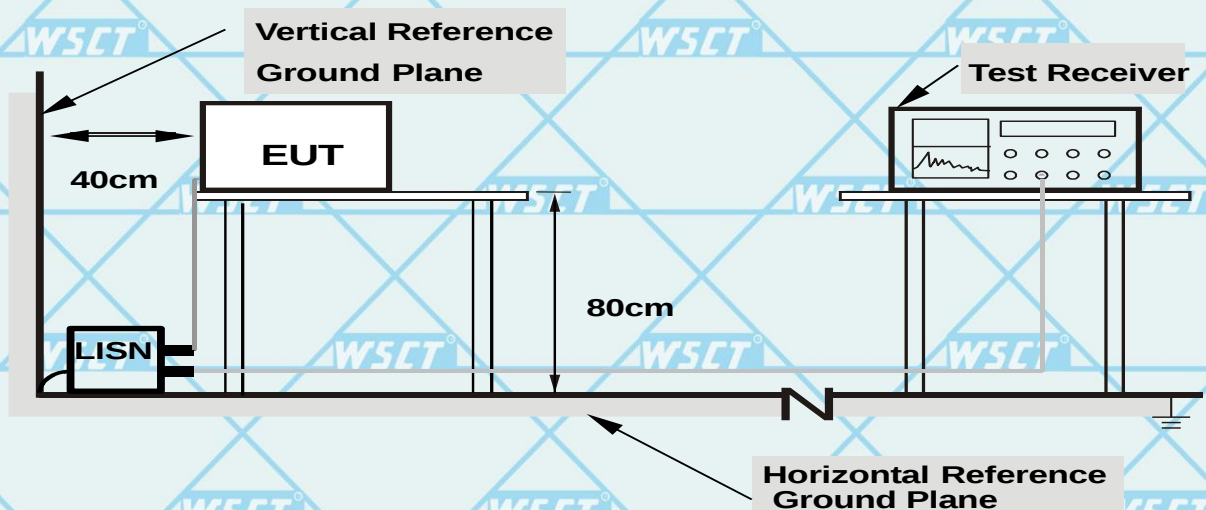

**Note: 1.**Support units were connected to second LISN.

**2.**Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 5.1.6 TEST RESULTS

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)-worst

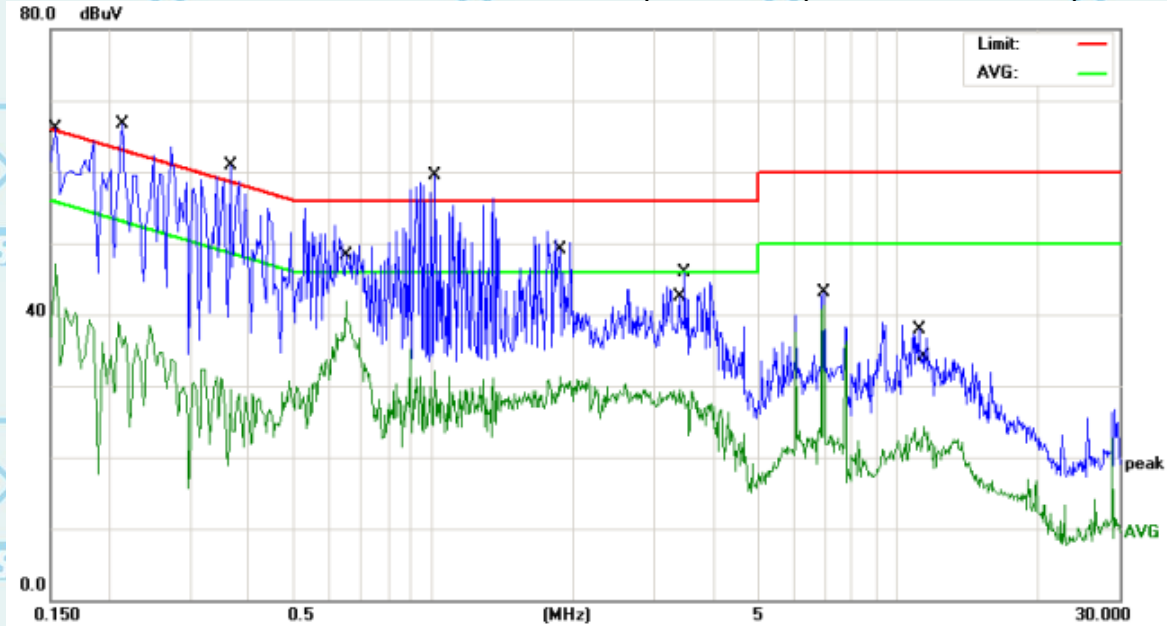

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1539       | 36.62                    | 10.41                   | 47.03                    | 55.78         | -8.75      | AVG      |
| 2   |     | 0.2140       | 36.97                    | 10.41                   | 47.38                    | 63.04         | -15.66     | QP       |
| 3   |     | 0.3660       | 26.93                    | 10.44                   | 37.37                    | 58.59         | -21.22     | QP       |
| 4   | *   | 0.6500       | 31.33                    | 10.48                   | 41.81                    | 46.00         | -4.19      | AVG      |
| 5   |     | 1.0060       | 23.96                    | 10.51                   | 34.47                    | 56.00         | -21.53     | QP       |
| 6   |     | 1.8740       | 20.75                    | 10.64                   | 31.39                    | 46.00         | -14.61     | AVG      |
| 7   |     | 3.3860       | 18.83                    | 10.67                   | 29.50                    | 46.00         | -16.50     | AVG      |
| 8   |     | 3.4780       | 35.15                    | 10.67                   | 45.82                    | 56.00         | -10.18     | QP       |
| 9   |     | 6.9260       | 32.32                    | 10.73                   | 43.05                    | 60.00         | -16.95     | QP       |
| 10  |     | 6.9260       | 30.55                    | 10.73                   | 41.28                    | 50.00         | -8.72      | AVG      |
| 11  |     | 11.1140      | 26.99                    | 10.85                   | 37.84                    | 60.00         | -22.16     | QP       |
| 12  |     | 11.3460      | 13.35                    | 10.86                   | 24.21                    | 50.00         | -25.79     | AVG      |

Remark: All the modes have been investigated, and only worst mode is presented in this report.






For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

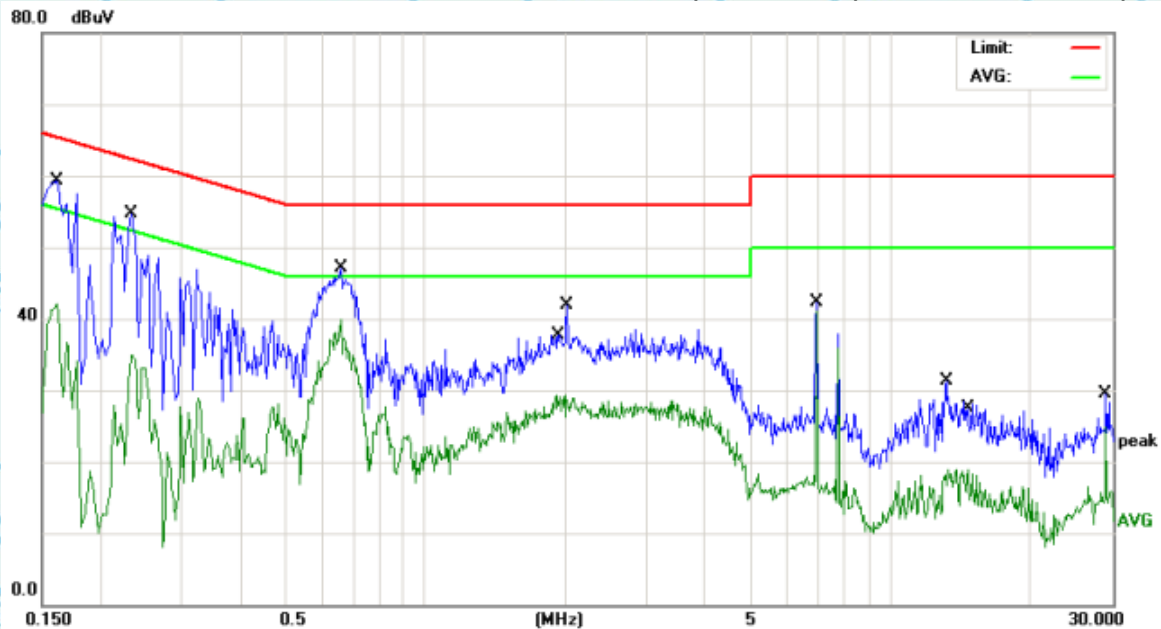

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.1620       | 48.94                    | 10.41                   | 59.35                    | 65.36         | -6.01      | QP       |
| 2   |     | 0.1620       | 31.70                    | 10.41                   | 42.11                    | 55.36         | -13.25     | AVG      |
| 3   |     | 0.2340       | 24.50                    | 10.42                   | 34.92                    | 52.30         | -17.38     | AVG      |
| 4   |     | 0.6580       | 36.64                    | 10.48                   | 47.12                    | 56.00         | -8.88      | QP       |
| 5   |     | 0.6580       | 29.38                    | 10.48                   | 39.86                    | 46.00         | -6.14      | AVG      |
| 6   |     | 1.9100       | 18.71                    | 10.65                   | 29.36                    | 46.00         | -16.64     | AVG      |
| 7   |     | 2.0140       | 31.17                    | 10.66                   | 41.83                    | 56.00         | -14.17     | QP       |
| 8   |     | 6.9260       | 31.65                    | 10.73                   | 42.38                    | 60.00         | -17.62     | QP       |
| 9   |     | 6.9260       | 30.43                    | 10.73                   | 41.16                    | 50.00         | -8.84      | AVG      |
| 10  |     | 13.1700      | 20.32                    | 10.96                   | 31.28                    | 60.00         | -28.72     | QP       |
| 11  |     | 14.6700      | 7.96                     | 11.04                   | 19.00                    | 50.00         | -31.00     | AVG      |
| 12  |     | 28.9580      | 18.56                    | 10.96                   | 29.52                    | 60.00         | -30.48     | QP       |

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 5.2 RADIATED EMISSION MEASUREMENT

### 5.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microrvolts/meter) | Measurement Distance (meters) |
|-------------------|------------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                        | 300                           |
| 0.490~1.705       | 24000/F(KHz)                       | 30                            |
| 1.705~30.0        | 30                                 | 30                            |
| 30~88             | 100                                | 3                             |
| 88~216            | 150                                | 3                             |
| 216~960           | 200                                | 3                             |
| Above 960         | 500                                | 3                             |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                         |
|---------------------------------------|-------------------------------------------------|
| Attenuation                           | Auto                                            |
| Start Frequency                       | 1000 MHz                                        |
| Stop Frequency                        | 10th carrier harmonic                           |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 5.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

***Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported***

## 5.2.3 DEVIATION FROM TEST STANDARD


No deviation




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 5.2.4 TEST SETUP


### (A) Radiated Emission Test-Up Frequency Below 30MHz

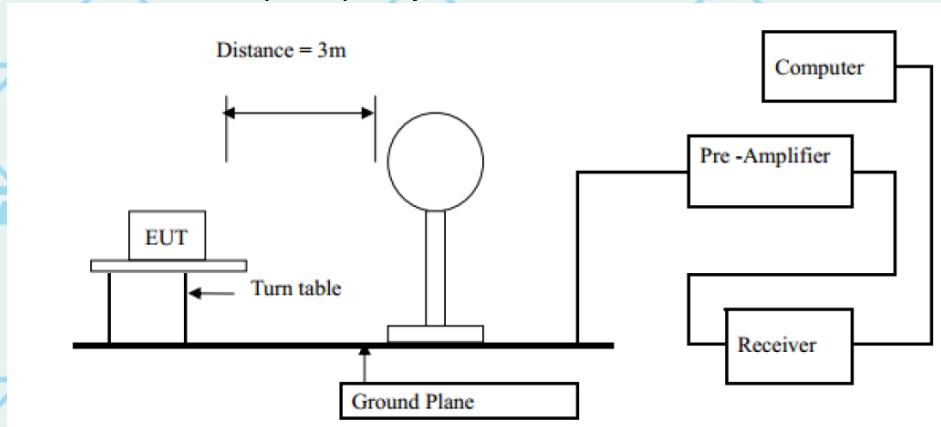

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

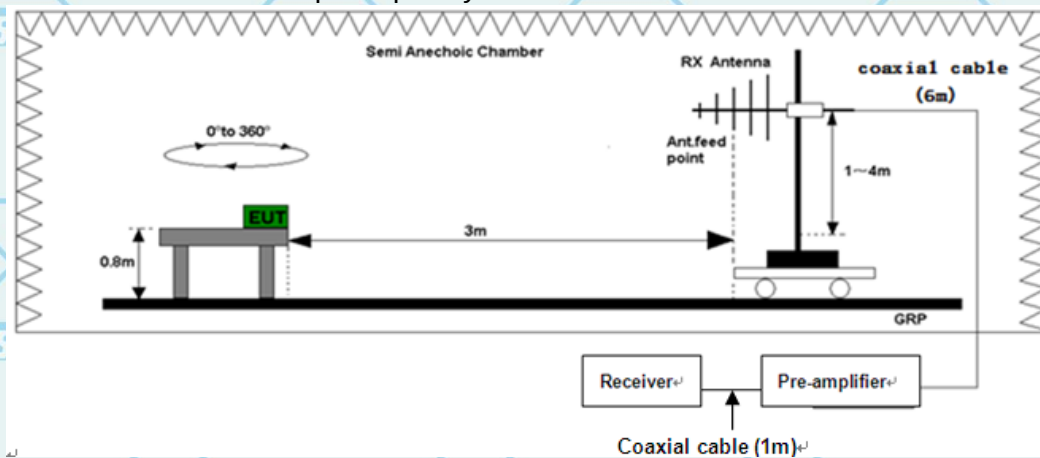

### (C) Radiated Emission Test-Up Frequency Above 1GHz

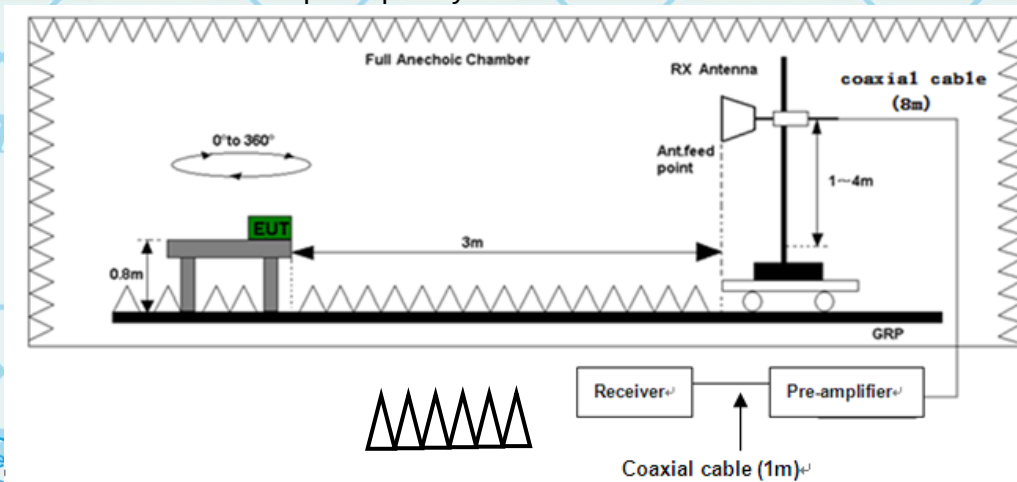



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 5.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.2.5.1 RESULTS (BELOW 30 MHZ)

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | P     |
| --    | --       | --       | --     | P     |

**NOTE:**

No result in this part for margin above 20dB.

Distance extrapolation factor =  $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.



For Question,  
Please Contact with WSCT  
www.wsct-cert.com


Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

Please refer to following diagram for individual

Below 1GHz

Horizontal:

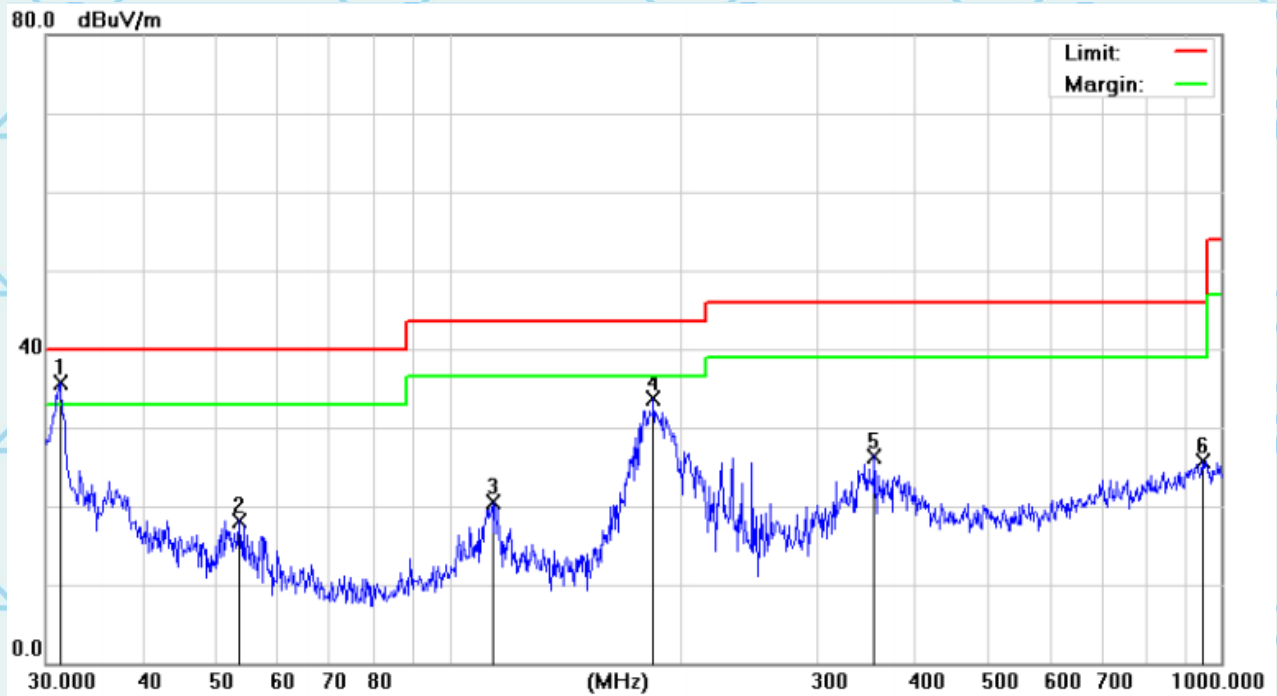

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 31.2893      | 31.41                    | 4.29                    | 35.70                      | 40.00           | -4.30      | QP       |
| 2   |     | 53.3179      | 23.61                    | -5.41                   | 18.20                      | 40.00           | -21.80     | QP       |
| 3   |     | 113.7143     | 22.82                    | -2.23                   | 20.59                      | 43.50           | -22.91     | QP       |
| 4   |     | 183.8440     | 40.78                    | -7.09                   | 33.69                      | 43.50           | -9.81      | QP       |
| 5   |     | 355.4273     | 27.91                    | -1.51                   | 26.40                      | 46.00           | -19.60     | QP       |
| 6   |     | 945.4399     | 19.29                    | 6.33                    | 25.62                      | 46.00           | -20.38     | QP       |


Remark: All the modes have been investigated, and only worst mode is presented in this report.



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Vertical:

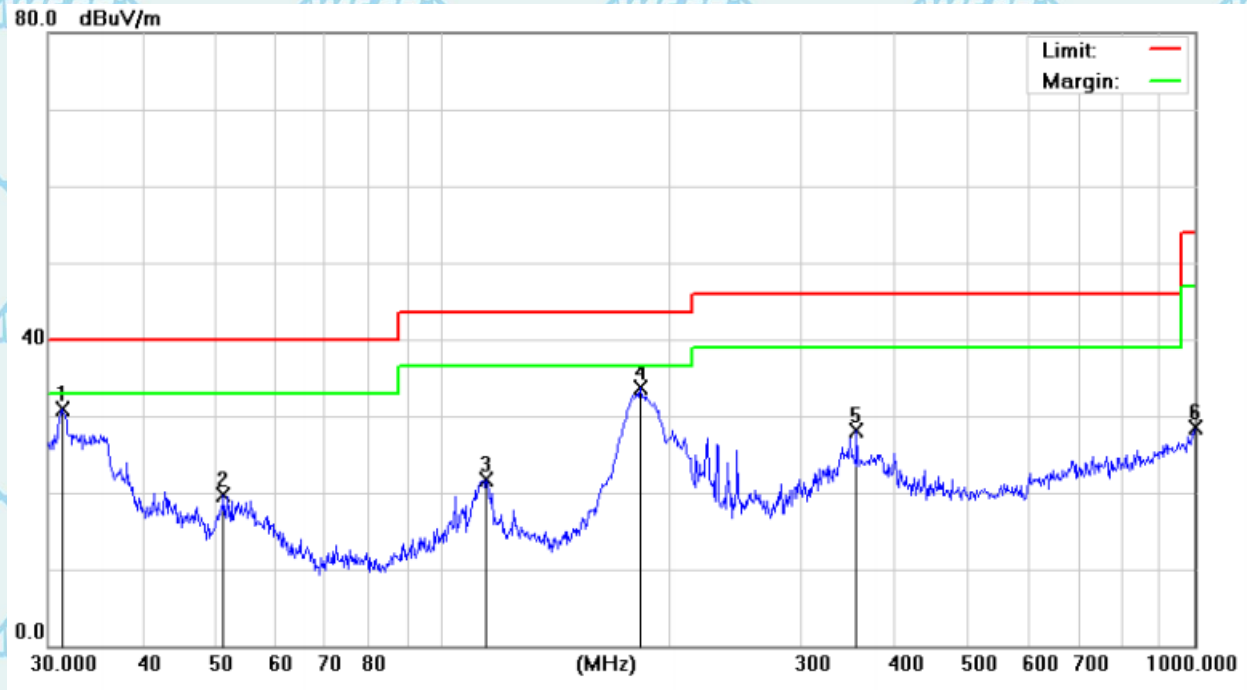

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 31.2893      | 26.54                    | 4.29                    | 30.83                      | 40.00           | -9.17      | QP       |
| 2   |     | 51.3005      | 24.82                    | -5.17                   | 19.65                      | 40.00           | -20.35     | QP       |
| 3   |     | 114.5146     | 23.97                    | -2.30                   | 21.67                      | 43.50           | -21.83     | QP       |
| 4   |     | 183.8440     | 40.78                    | -7.09                   | 33.69                      | 43.50           | -9.81      | QP       |
| 5   |     | 355.4273     | 29.54                    | -1.51                   | 28.03                      | 46.00           | -17.97     | QP       |
| 6   |     | 1000.000     | 21.28                    | 7.32                    | 28.60                      | 54.00           | -25.40     | QP       |

Remark: All the modes have been investigated, and only worst mode is presented in this report.



Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

### 5.2.5.3 TEST RESULTS (ABOVE 1GHZ)

#### Above 1GHz

| Freq.<br>(MHz) | Low channel: 2402MHz |                      |       |                  |    |          |        |
|----------------|----------------------|----------------------|-------|------------------|----|----------|--------|
|                | Ant.Pol              | Emission Level(dBuV) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|                | H/V                  | PK                   | AV    | PK               | AV | PK       | AV     |
| 10360          | V                    | 58.97                | 40.63 | 74               | 54 | -15.03   | -13.37 |
| 15540          | V                    | 58.25                | 40.66 | 74               | 54 | -15.75   | -13.34 |
| 10360          | H                    | 59.28                | 40.65 | 74               | 54 | -14.72   | -13.35 |
| 15540          | H                    | 58.81                | 39.81 | 74               | 54 | -15.19   | -14.19 |

| Freq.<br>(MHz) | Low channel: 2402MHz |                      |       |                  |    |          |        |
|----------------|----------------------|----------------------|-------|------------------|----|----------|--------|
|                | Ant.Pol              | Emission Level(dBuV) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|                | H/V                  | PK                   | AV    | PK               | AV | PK       | AV     |
| 10360          | V                    | 58.87                | 39.96 | 74               | 54 | -15.13   | -14.04 |
| 15540          | V                    | 59.99                | 39.15 | 74               | 54 | -14.01   | -14.85 |
| 10360          | H                    | 59.18                | 39.91 | 74               | 54 | -14.82   | -14.09 |
| 15540          | H                    | 58.06                | 39.06 | 74               | 54 | -15.94   | -14.94 |

| Freq.<br>(MHz) | Low channel: 2402MHz |                      |       |                  |    |          |        |
|----------------|----------------------|----------------------|-------|------------------|----|----------|--------|
|                | Ant.Pol              | Emission Level(dBuV) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|                | H/V                  | PK                   | AV    | PK               | AV | PK       | AV     |
| 10360          | V                    | 58.16                | 39.06 | 74               | 54 | -15.84   | -14.94 |
| 15540          | V                    | 59.98                | 39.94 | 74               | 54 | -14.02   | -14.06 |
| 10360          | H                    | 58.61                | 40.51 | 74               | 54 | -15.39   | -13.49 |
| 15540          | H                    | 59.09                | 40.09 | 74               | 54 | -14.91   | -13.91 |

| Freq.<br>(MHz) | Low channel: 2402MHz |                      |       |                  |    |          |        |
|----------------|----------------------|----------------------|-------|------------------|----|----------|--------|
|                | Ant.Pol              | Emission Level(dBuV) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|                | H/V                  | PK                   | AV    | PK               | AV | PK       | AV     |
| 10360          | V                    | 59.55                | 39.46 | 74               | 54 | -14.45   | -14.54 |
| 15540          | V                    | 58.79                | 40.74 | 74               | 54 | -15.21   | -13.26 |
| 10360          | H                    | 58.61                | 40.09 | 74               | 54 | -15.39   | -13.91 |
| 15540          | H                    | 59.96                | 40.96 | 74               | 54 | -14.04   | -13.04 |

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 6. ANTENNA APPLICATION

### 6.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and FCC part 15C section 15.407.

FCC part 15C section 15.203 and FCC part 15C section 15.407 requirements: Systems operating in the 5150~5850MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 6.2 Result

The EUT's antenna is a Integral Antenna., The antenna's gain is 4.69dBi and meets the requirement.



Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

## 7 FCC PART 15.407 REQUIREMENTS

### 7.1 Test Equipment

Please refer to Section 4 this report.

### 7.2 Test Procedure

|                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>26dB Bandwidth and 99% Occupied Bandwidth:</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:                                       | a)The transmitter was radiated to the spectrum analyzer in peak hold mode.<br>b)Measure the maximum width of the emission that is 26 dB down from the peak of the emission Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test Equipment Setting – 26dB Bandwidth:           | Test Equipment Setting – 99%% Bandwidth:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| a)Attenuation: Auto                                | a)Span: 1.5 times to 5.0 times the OBW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| b)Span Frequency: > 26dB Bandwidth                 | b)RBW: 1 % to 5 % of the OBW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| c)RBW: Approximately 1% of the emission bandwidth  | c)VBW: $\geq 3 \times \text{RBW}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| d)VBW: VBW > RBW                                   | d)Detector: Peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| e)Detector: Peak                                   | e)Trace: Max Hold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| f)Trace: Max Hold                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| g)Sweep Time: Auto                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>6 dB Bandwidth:</b>                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:                                       | a)The transmitter was radiated to the spectrum analyzer in peak hold mode.<br>b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.<br>c)Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.<br>d)Measured the spectrum width with power higher than 6dB below carrier.                                                                                                                                                                                                                                                                                                    |
| Test Equipment Setting:                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| a)Attenuation: Auto                                | e)Detector: Peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| b)Span Frequency: > 6dB Bandwidth                  | f)Trace: Max Hold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| c)RBW: 100kHz                                      | g)Sweep Time: Auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| d)VBW: $\geq 3 \times \text{RBW}$                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Maximum Conducted Output Power Measurement:</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:                                       | a)The transmitter output (antenna port) was connected to the power meter.<br>b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).<br>c)Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.<br>d)When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.                                                                                                             |
| Test Equipment Setting: Detector - Average         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Power Spectral Density:</b>                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:                                       | a)The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.<br>b)Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).<br>c)Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.<br>d)When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other |




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

|                                                                                                                                                                                                                                                                |                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| frequency bins is computed in the same way.<br>e) For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should $\leq 30 \text{ dBm}$ .                                                         |                                                                                             |
| Test Equipment Setting:                                                                                                                                                                                                                                        |                                                                                             |
| a) Attenuation: Auto<br>b) Span Frequency: Encompass the entire emissions bandwidth (EBW) of the signal<br>c) RBW: 1000 kHz<br>d) VBW: 3000 kHz                                                                                                                | e) Detector: RMS<br>f) Trace: AVERAGE<br>g) Sweep Time: Auto<br>h) Trace Average: 100 times |
| Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW ( $< 500 \text{ kHz}$ ) is the reduced resolution bandwidth of the spectrum analyzer set during measurement. |                                                                                             |

|                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency Stability Measurement:</b>                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Method:                                                                                                                    | a) The transmitter output (antenna port) was connected to the spectrum analyzer.<br>b) EUT have transmitted absence of modulation signal and fixed channelize.<br>c) Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.<br>d) Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.<br>e) $f_c$ is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20 \text{ ppm}$ (IEEE 802.11n specification).<br>f) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value<br>g) Extreme temperature is $0^\circ\text{C} - 40^\circ\text{C}$ |
| Test Equipment Setting:                                                                                                         | e) Sweep Time: Auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| a) Attenuation: Auto<br>b) Span Frequency: Entire absence of modulation emissions bandwidth<br>c) RBW: 10 kHz<br>d) VBW: 10 kHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

### 7.3 Test Setup



### 7.4 Configuration of the EUT

Same as section 2.4 of this report

### 7.5 EUT Operating Condition

Same as section 2.2 of this report.



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 7. 6 Limit

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>26dB Bandwidth and 99% Occupied Bandwidth:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Limit:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | No restriction limits.                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>6 dB Bandwidth:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Limit:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.                                                                                                                                                                                                                                                                                                                                   |
| Test Equipment Setting:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| a) Attenuation: Auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | e) Detector: Peak                                                                                                                                                                                                                                                                                                                                                                                                      |
| b) Span Frequency: > 6dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | f) Trace: Max Hold                                                                                                                                                                                                                                                                                                                                                                                                     |
| c) RBW: 100kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | g) Sweep Time: Auto                                                                                                                                                                                                                                                                                                                                                                                                    |
| d) VBW: $\geq 3 \times$ RBW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Maximum Conducted Output Power Measurement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input checked="" type="checkbox"/> 5.15~5.25 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> Limit of Outdoor access point:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> Limit of Indoor access point:                                                                                                                                                                                                                                                                                                                                                                 |
| The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).                               | The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.    |
| <input type="checkbox"/> Limit of Fixed point-to-point access points:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> Limit of Mobile and portable client devices:                                                                                                                                                                                                                                                                                                                                       |
| The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.          | The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |
| <input checked="" type="checkbox"/> 5.25-5.35 GHz & <input checked="" type="checkbox"/> 5.470-5.725 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input checked="" type="checkbox"/> 5.725~5.85 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Power Spectral Density</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input checked="" type="checkbox"/> 5.15~5.25 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> Limit of Outdoor access point: 17 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <input type="checkbox"/> Limit of Indoor access point: 17 dBm/MHz                                                                                                                                                                                                                                                                                                                                                      |
| <input type="checkbox"/> Limit of Fixed point-to-point access points: 17 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Limit of Mobile and portable client devices: 11 dBm/MHz                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/> 5.25-5.35 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 11 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/> 5.470-5.725 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 11 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> 5.725~5.85 GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 30 dBm/500kHz                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Frequency Stability Measurement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Limit:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.<br>The transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band                                                                                                                                                                                 |



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

(IEEE  
802.11n specification).

## 7. 7 Test Result

### A. 26dB Bandwidth and 99% Occupied Bandwidth

|              |                                             |             |                   |
|--------------|---------------------------------------------|-------------|-------------------|
| Product      | : EUT-Sample                                | Test Mode   | : See section 2.2 |
| Test Item    | : 26dB Bandwidth and 99% Occupied Bandwidth | Temperature | : 25 °C           |
| Test Voltage | : DC 11.55V                                 | Humidity    | : 56%RH           |
| Test Result  | : <b>PASS</b>                               |             |                   |

#### 26dB Bandwidth

20MHz(IEEE 802.11a/n/ac/ax)

##### Band1

| Channel | Frequency (MHz) | 26dBBandwidth (MHz) | FCC Limit (kHz) | Result      |
|---------|-----------------|---------------------|-----------------|-------------|
| Low     | 5180            | 25.288              | --              | <b>PASS</b> |
| High    | 5240            | 25.481              |                 | <b>PASS</b> |

##### Band2

| Channel | Frequency (MHz) | 26dBBandwidth (MHz) | FCC Limit (kHz) | Result      |
|---------|-----------------|---------------------|-----------------|-------------|
| Low     | 5260            | 25.481              | --              | <b>PASS</b> |
| High    | 5320            | 25.192              |                 | <b>PASS</b> |

##### Band3

| Channel | Frequency (MHz) | 26dBBandwidth (MHz) | FCC Limit (kHz) | Result      |
|---------|-----------------|---------------------|-----------------|-------------|
| Low     | 5500            | 25.192              | --              | <b>PASS</b> |
| High    | 5700            | 25.385              |                 | <b>PASS</b> |

##### Band4

| Channel | Frequency (MHz) | 26dBBandwidth (MHz) | FCC Limit (kHz) | Result      |
|---------|-----------------|---------------------|-----------------|-------------|
| Low     | 5745            | 24.615              | --              | <b>PASS</b> |
| High    | 5825            | 24.904              |                 | <b>PASS</b> |





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

40MHz(IEEE 802.11n/ac/ax)

IEEE 802.11n 5G 40MHz

Band1

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5190            | 44.519               | --              | PASS   |
| High    | 5230            | 44.327               |                 | PASS   |

Band2

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5270            | 44.904               | --              | PASS   |
| High    | 5310            | 44.904               |                 | PASS   |

Band3

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5510            | 47.115               | --              | PASS   |
| High    | 5670            | 45.865               |                 | PASS   |

Band4

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5755            | 45.353               | --              | PASS   |
| High    | 5795            | 56.731               |                 | PASS   |

80MHz(IEEE 802.11n/ac/ax)

Band1

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5210            | 86.410               | --              | PASS   |
| High    |                 |                      |                 |        |

Band2

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5290            | 87.179               | --              | PASS   |
| High    |                 |                      |                 |        |

Band3

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5530            | 84.103               | --              | PASS   |
| High    | 5610            | 86.154               |                 |        |

Band4

| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|----------------------|-----------------|--------|
| Low     | 5775            | 85.897               | --              | PASS   |
| High    |                 |                      |                 |        |



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### 99% Occupied Bandwidth

20MHz(IEEE 802.11a/n/ac/ax)-the worst  
Band1

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5180            | 17.308                       | --              | PASS   |
| High    | 5240            | 17.308                       |                 | PASS   |

#### Band2

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5260            | 17.308                       | --              | PASS   |
| High    | 5320            | 17.308                       |                 | PASS   |

#### Band3

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5500            | 17.404                       | --              | PASS   |
| High    | 5700            | 17.404                       |                 | PASS   |

#### Band4

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5745            | 17.404                       | --              | PASS   |
| High    | 5825            | 17.308                       |                 | PASS   |

### 40MHz(IEEE 802.11n/ac/ax)

#### Band1

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5190            | 36.442                       | --              | PASS   |
| High    | 5230            | 36.442                       |                 | PASS   |

#### Band2

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5270            | 36.442                       | --              | PASS   |
| High    | 5310            | 36.442                       |                 | PASS   |

#### Band3

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5510            | 36.538                       | --              | PASS   |
| High    | 5670            | 36.442                       |                 | PASS   |

#### Band4

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5755            | 36.838                       | --              | PASS   |
| High    | 5795            | 36.218                       |                 | PASS   |





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

80MHz(IEEE 802.11/ac/ax)-worst

**Band1**

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5210            | 75.385                       | --              | PASS   |

**Band2**

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5290            | 75.128                       | --              | PASS   |

**Band3**

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5530            | 76.667                       | --              | PASS   |
| High    | 5610            | 75.128                       | --              | PASS   |

**Band4**


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | FCC Limit (kHz) | Result |
|---------|-----------------|------------------------------|-----------------|--------|
| Low     | 5775            | 75.385                       | --              | PASS   |




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

20MHz(IEEE 802.11a/n/ac/ax)  
Band1

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

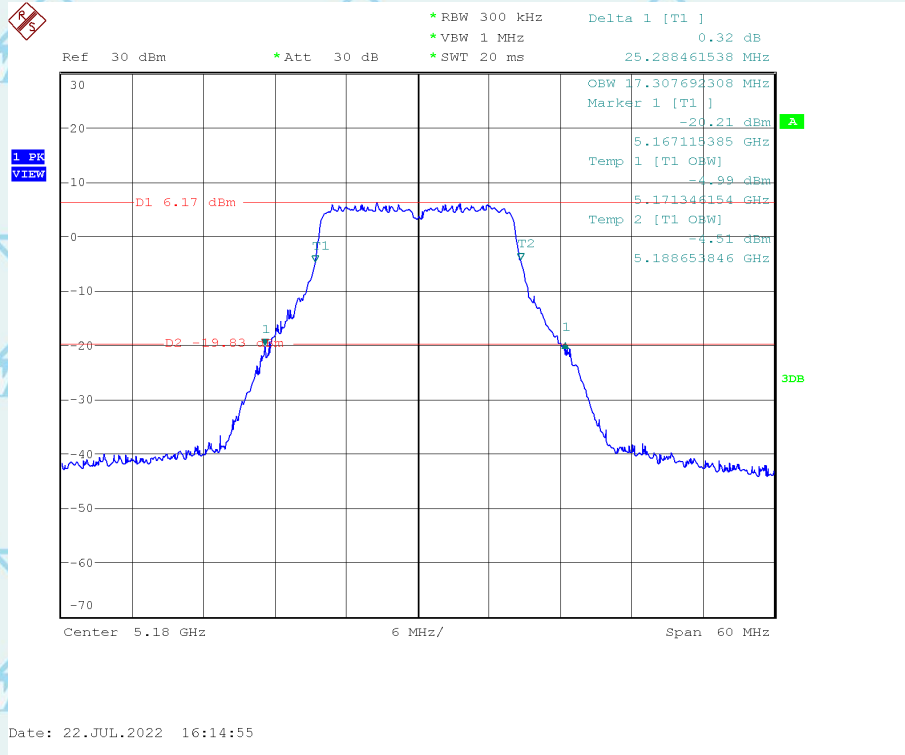

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

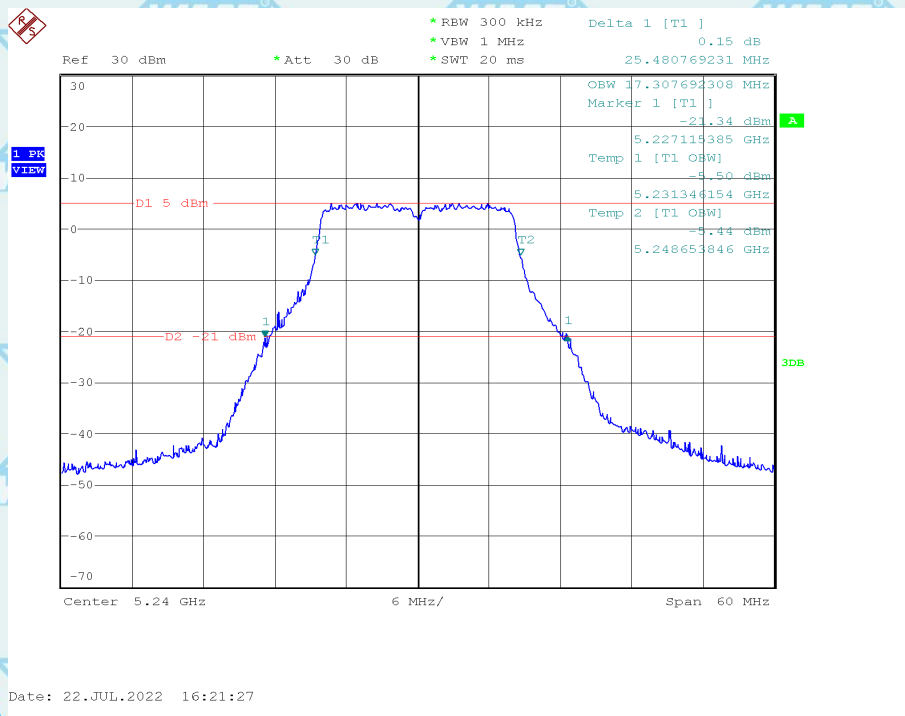




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Band2

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

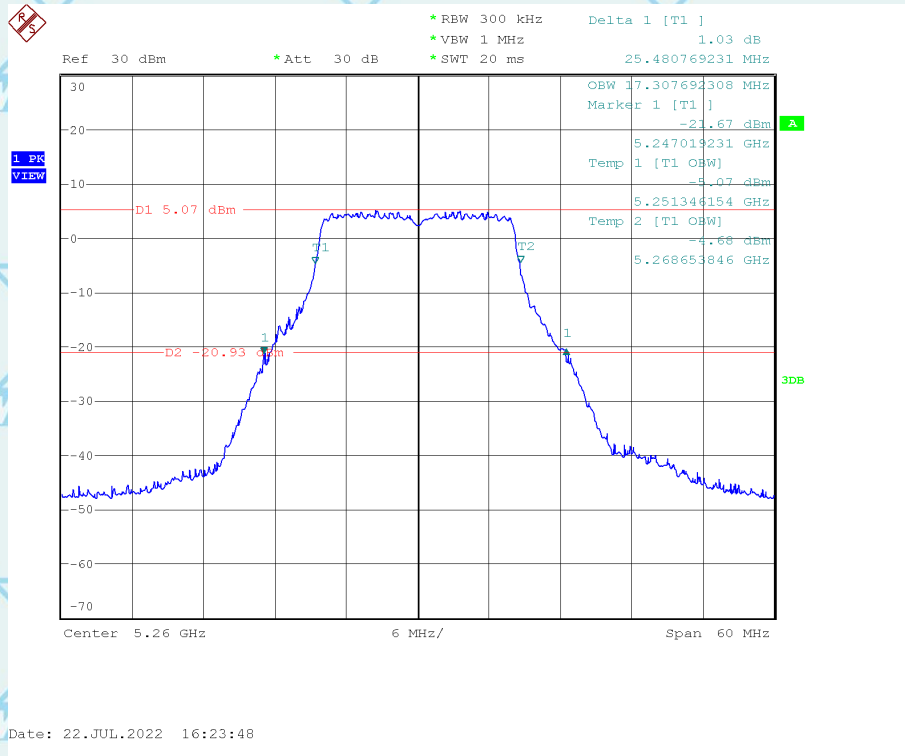

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

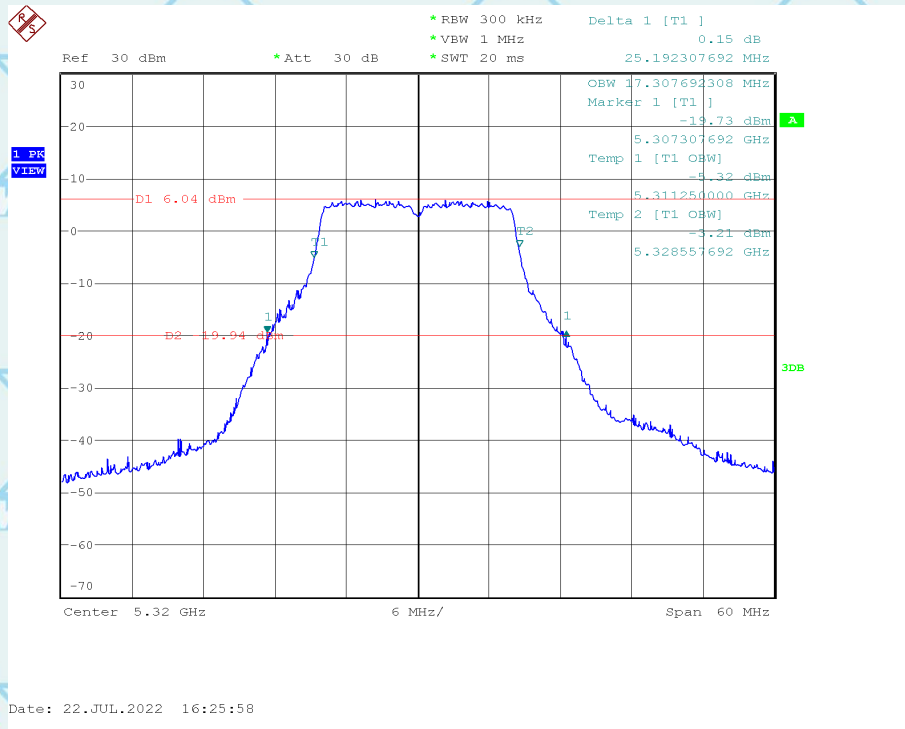





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band3

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

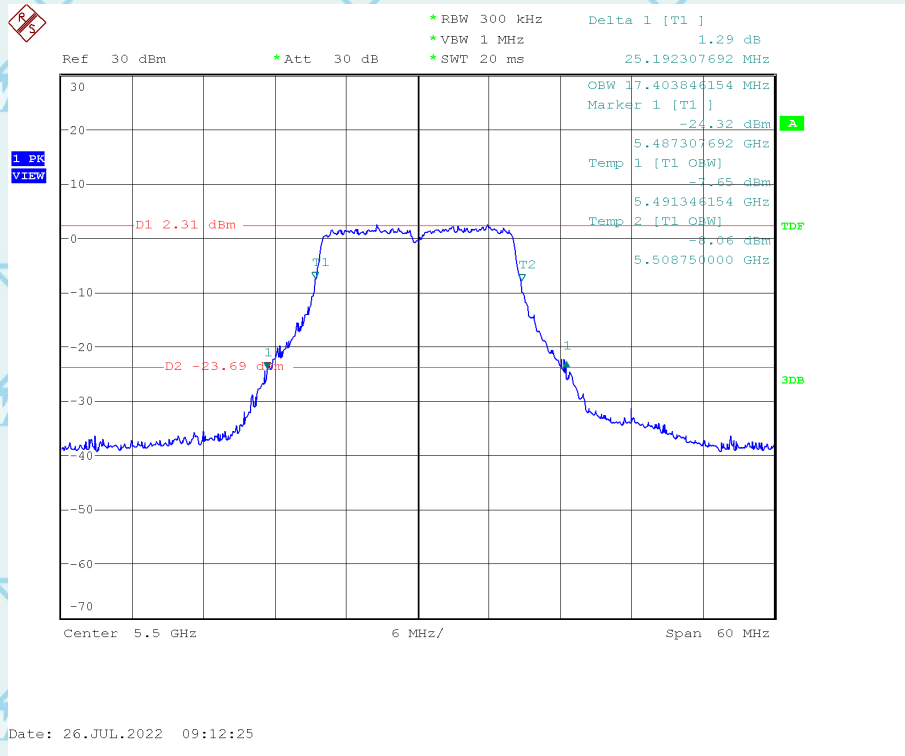

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

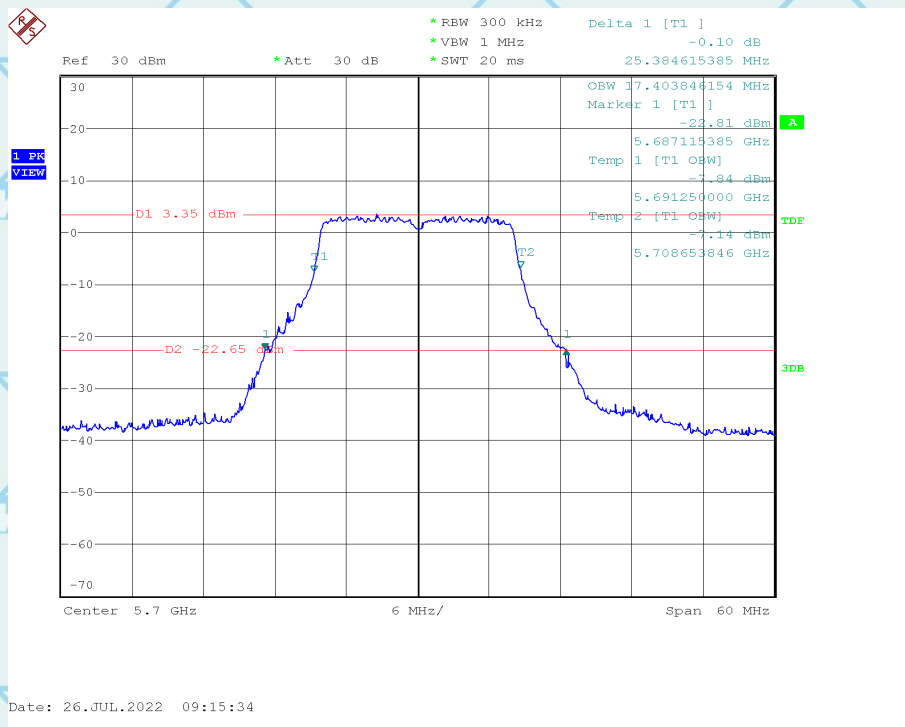




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band4

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

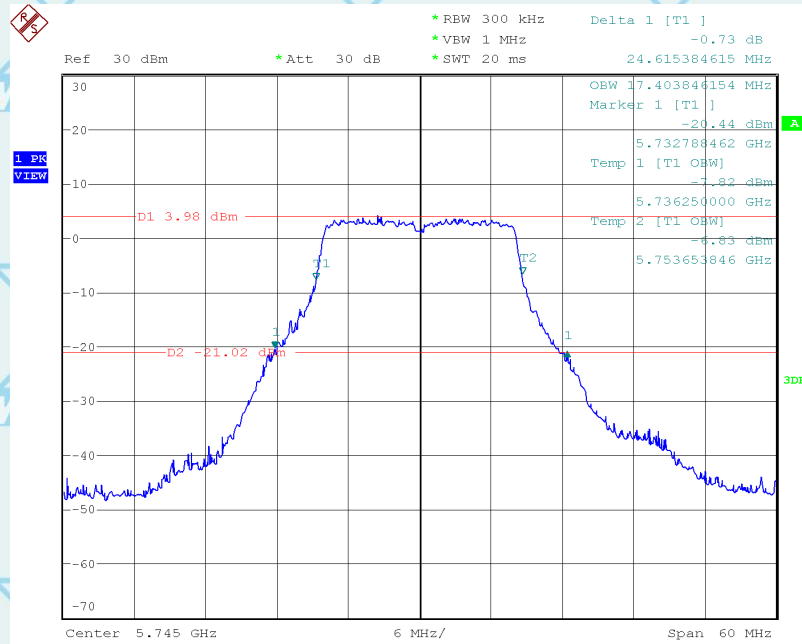

Date: 22.JUL.2022 16:30:04

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

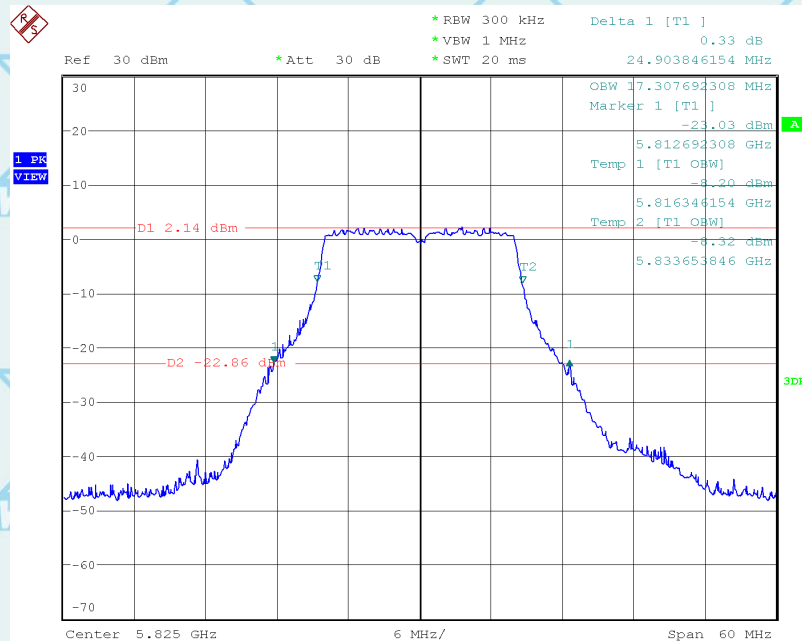


Date: 22.JUL.2022 16:32:16




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

40MHz(IEEE 802.11a/n/ac/ax)  
Band1

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

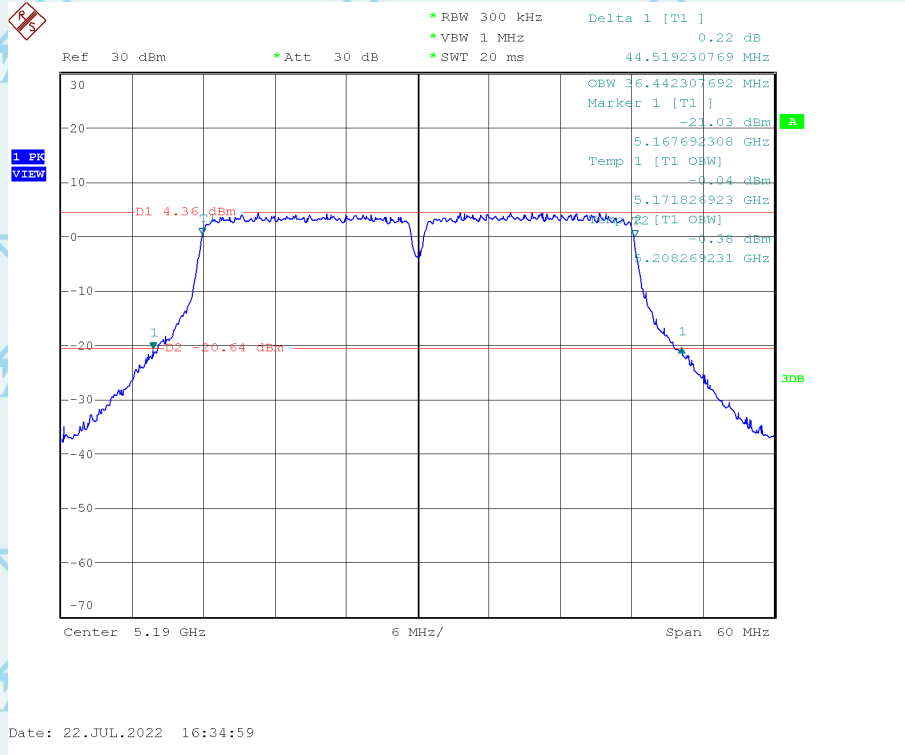

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

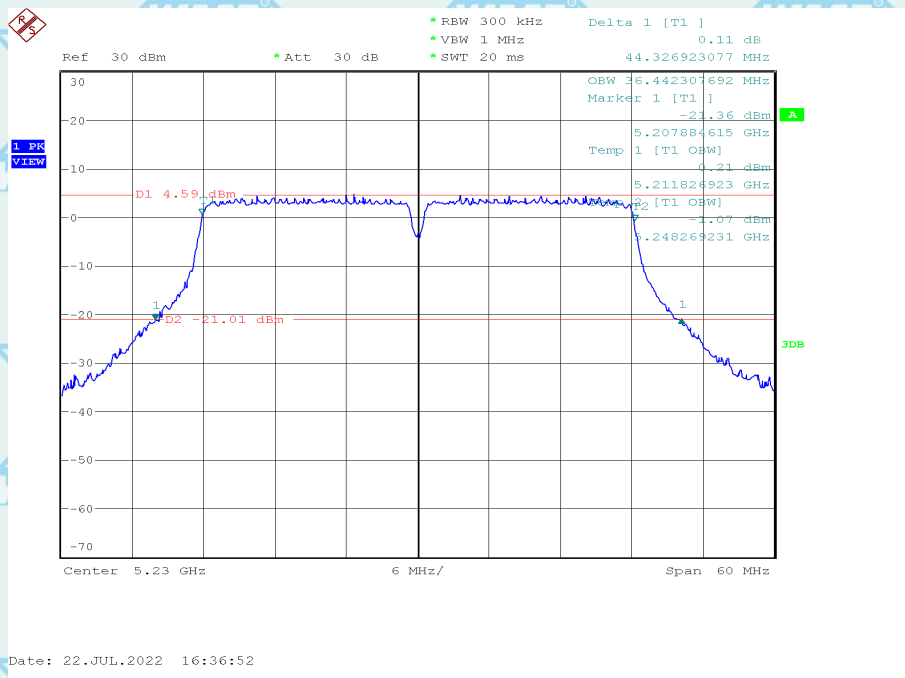




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Band2

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

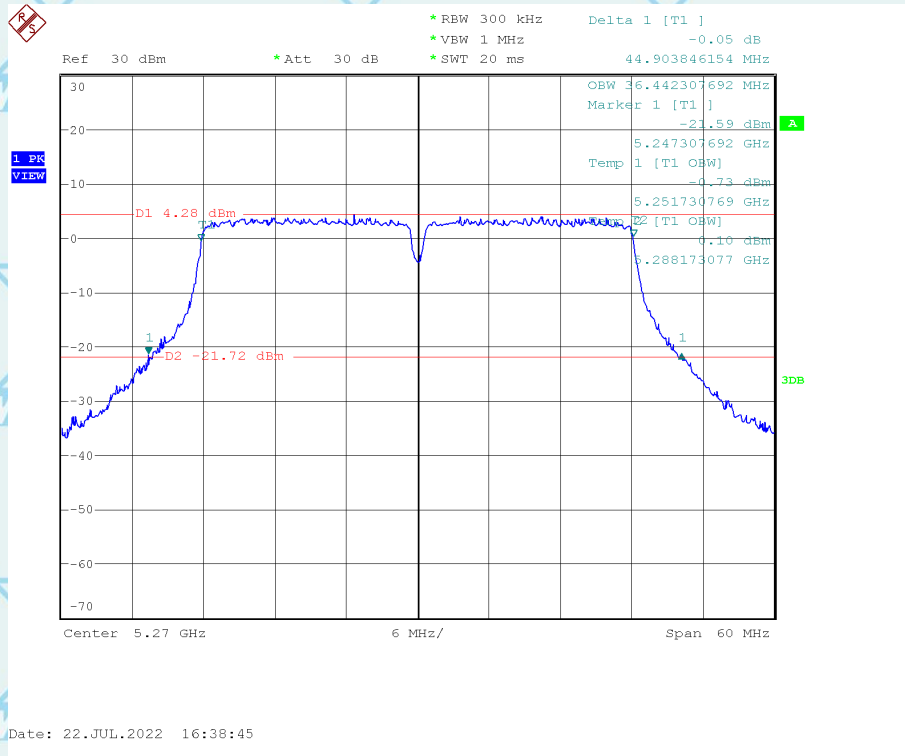

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

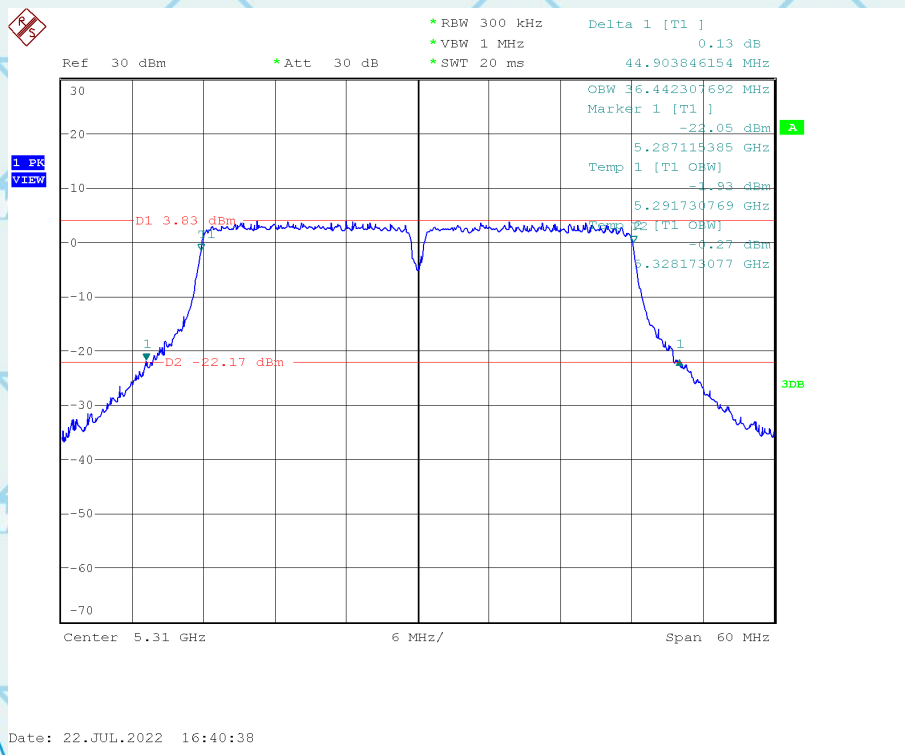





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band3

**26dB Bandwidth and 99% Occupied Bandwidth (CH Low)**

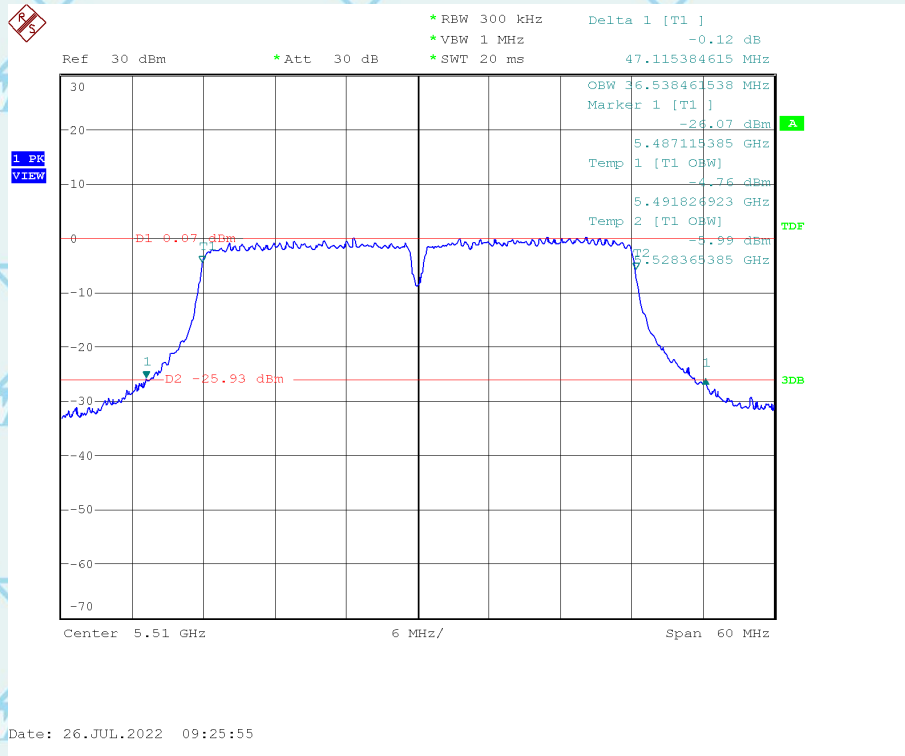

**26dB Bandwidth and 99% Occupied Bandwidth (CH High)**

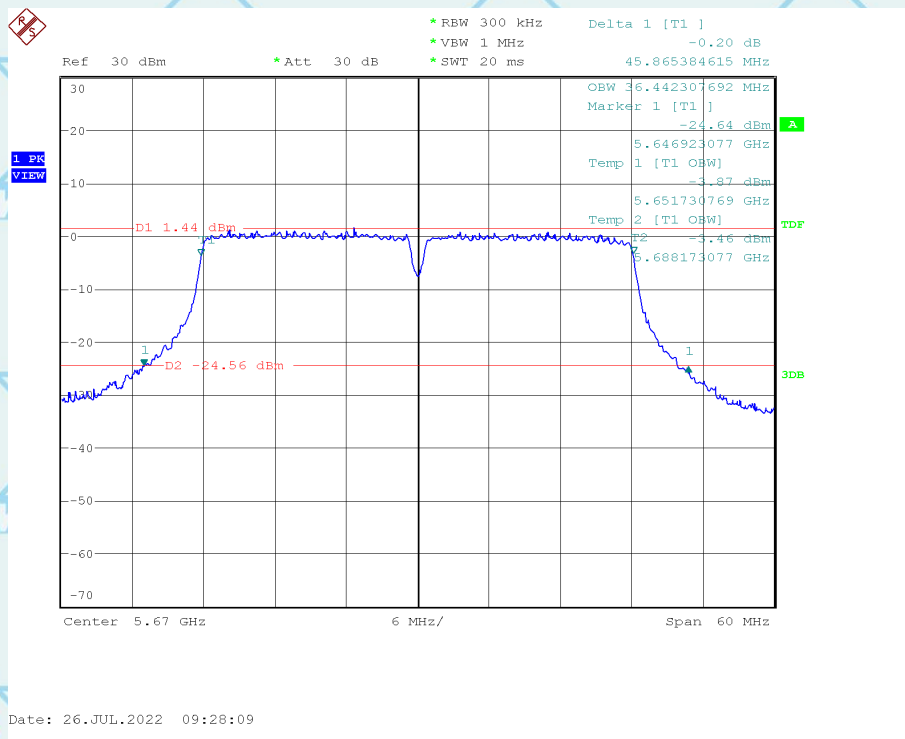




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Band4

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

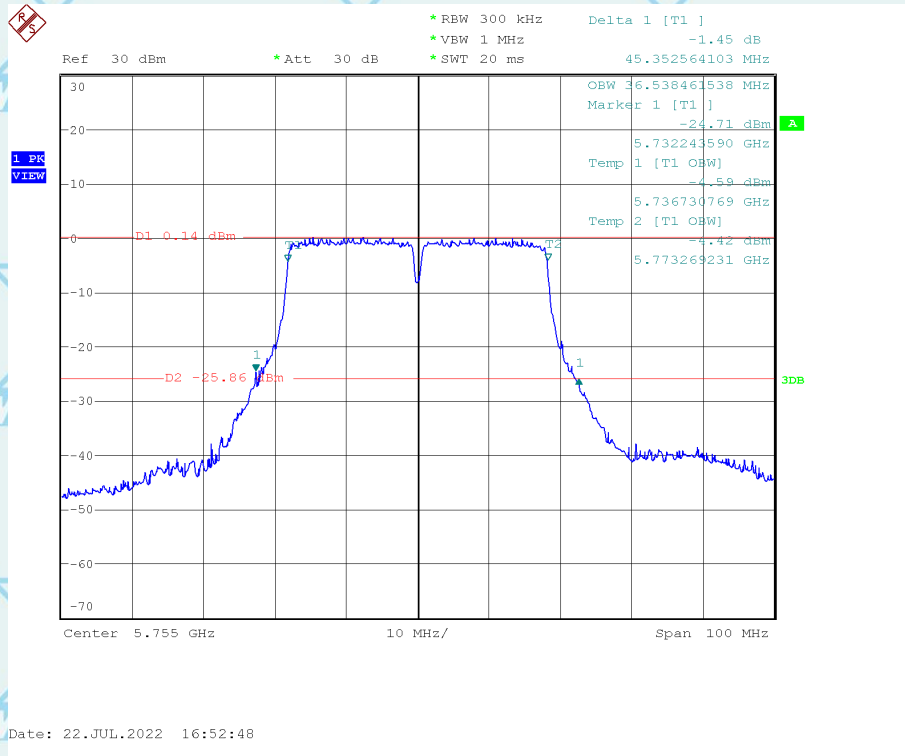

### 26dB Bandwidth and 99% Occupied Bandwidth (CH High)

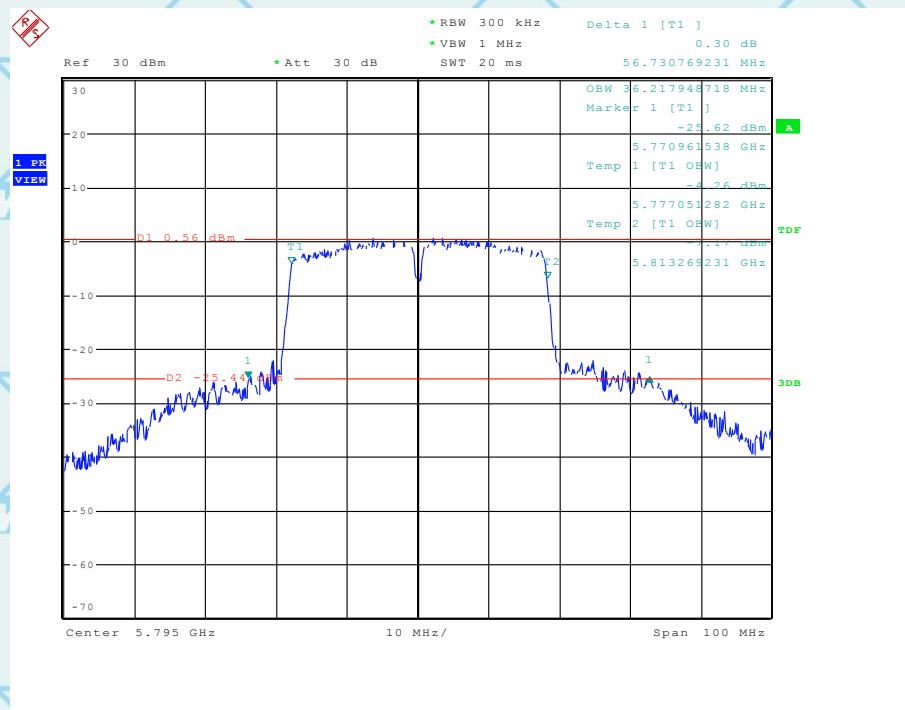




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


80MHz(IEEE 802.11ac/ax)  
Band1

26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

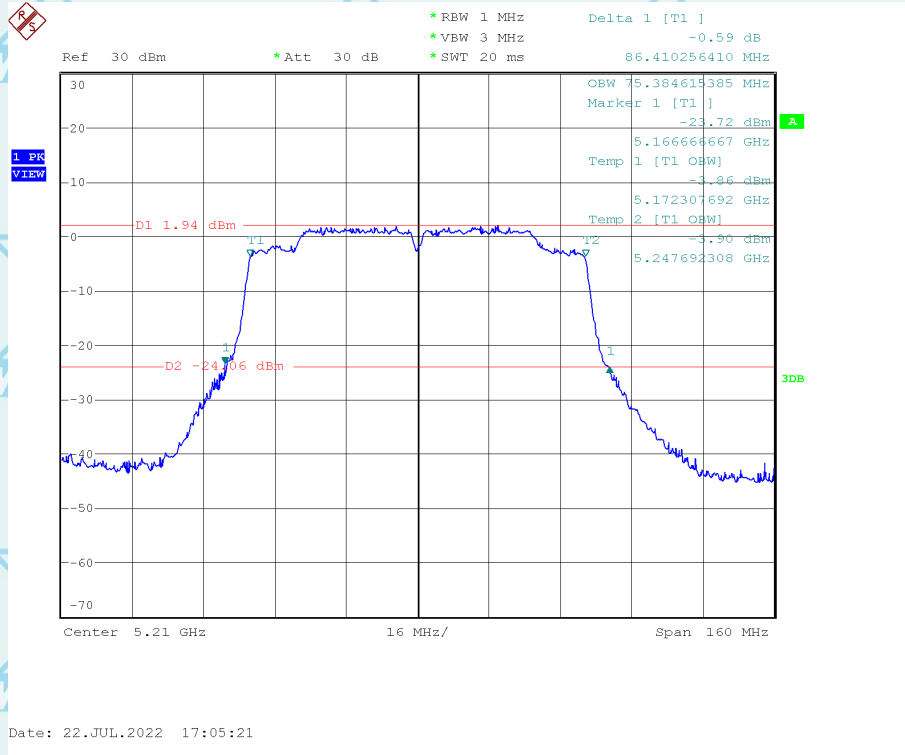

Band2

26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

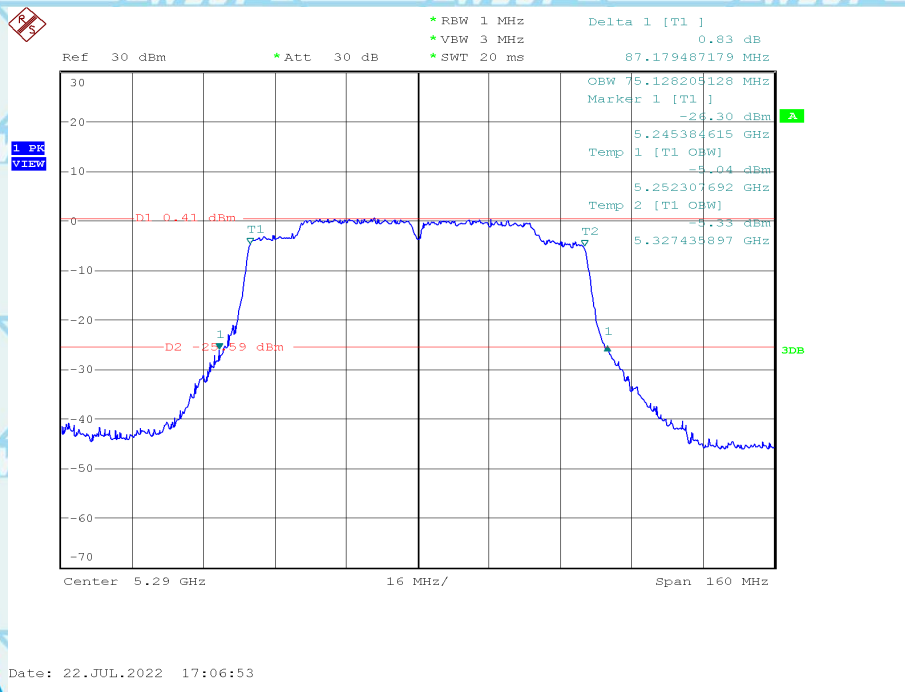




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

For Question,  
Please Contact with WSCT  
www.wsct-cert.com


Band3

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

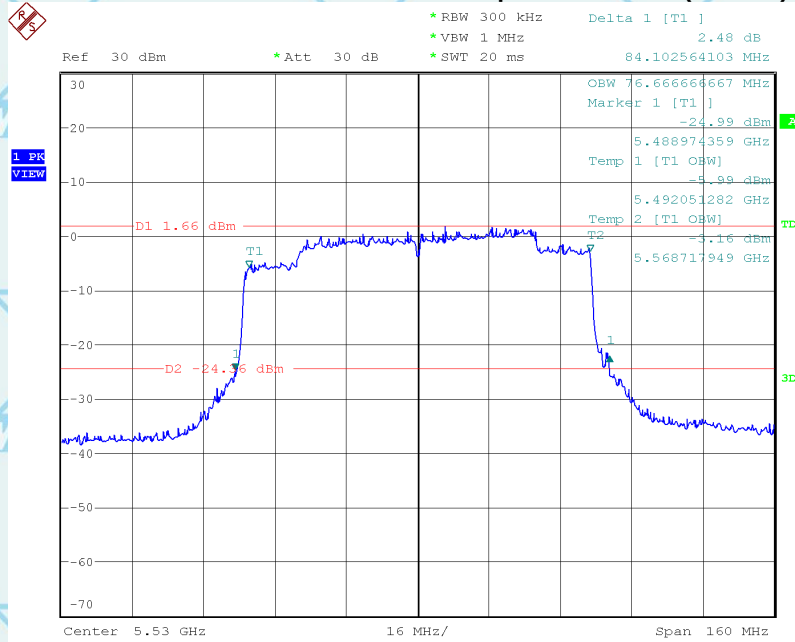

Date: 26.JUL.2022 10:03:04

### 26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

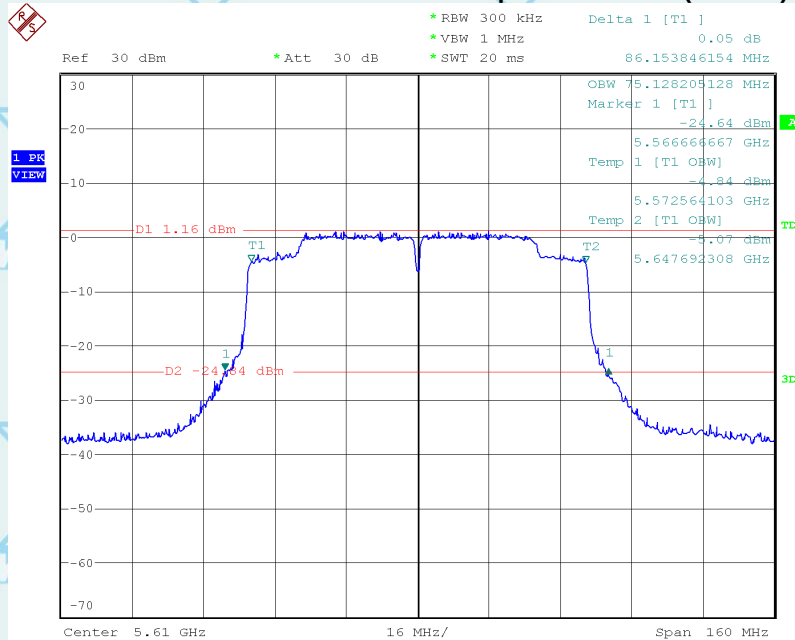


Date: 26.JUL.2022 09:31:36



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band4

26dB Bandwidth and 99% Occupied Bandwidth (CH Low)

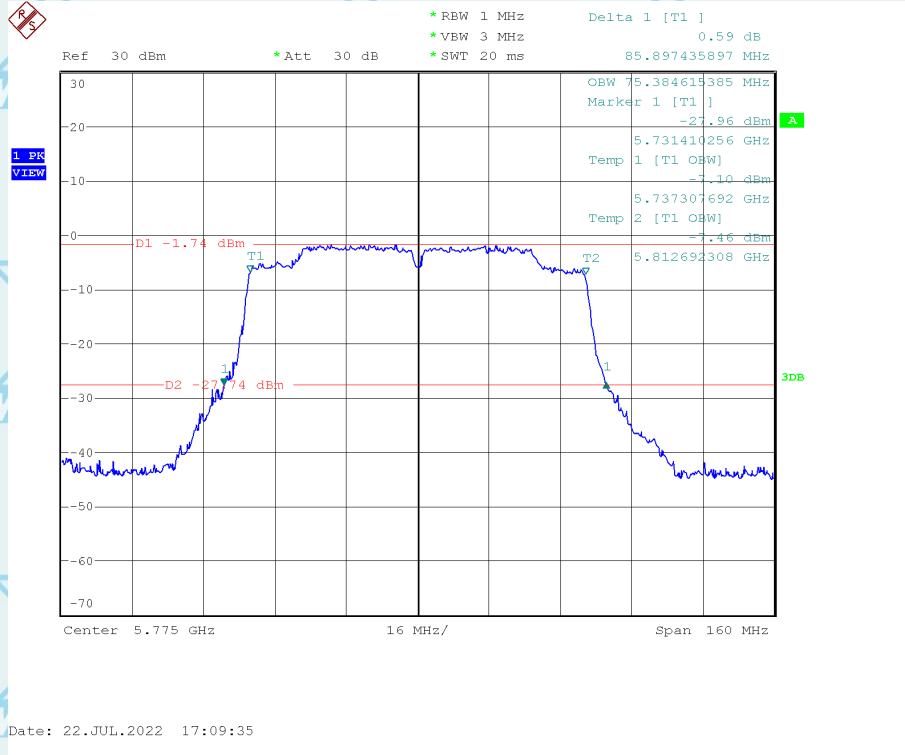



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


## B. 6 dB Bandwidth

|              |               |             |                   |
|--------------|---------------|-------------|-------------------|
| Product      | : EUT-Sample  | Test Mode   | : See Section 2.2 |
| Test Item    | : 6 dB BW     | Temperature | : 25 °C           |
| Test Voltage | : DC 11.55V   | Humidity    | : 56%RH           |
| Test Result  | : <b>PASS</b> |             |                   |

20MHz(IEEE 802.11a/n/ac/ax)

| Channel | Measured Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit    |
|---------|--------------------------|----------------------|----------|
| Low     | 5180                     | 16.378               | > 0.5MHz |
| High    | 5240                     | 16.378               | > 0.5MHz |

Channel Low

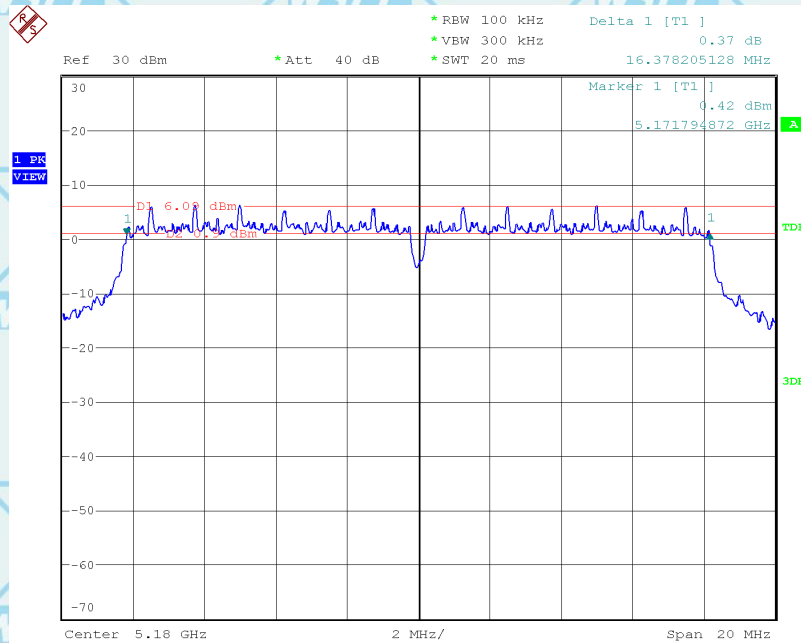


Date: 25.JUL.2022 10:40:25



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

**Channel High**

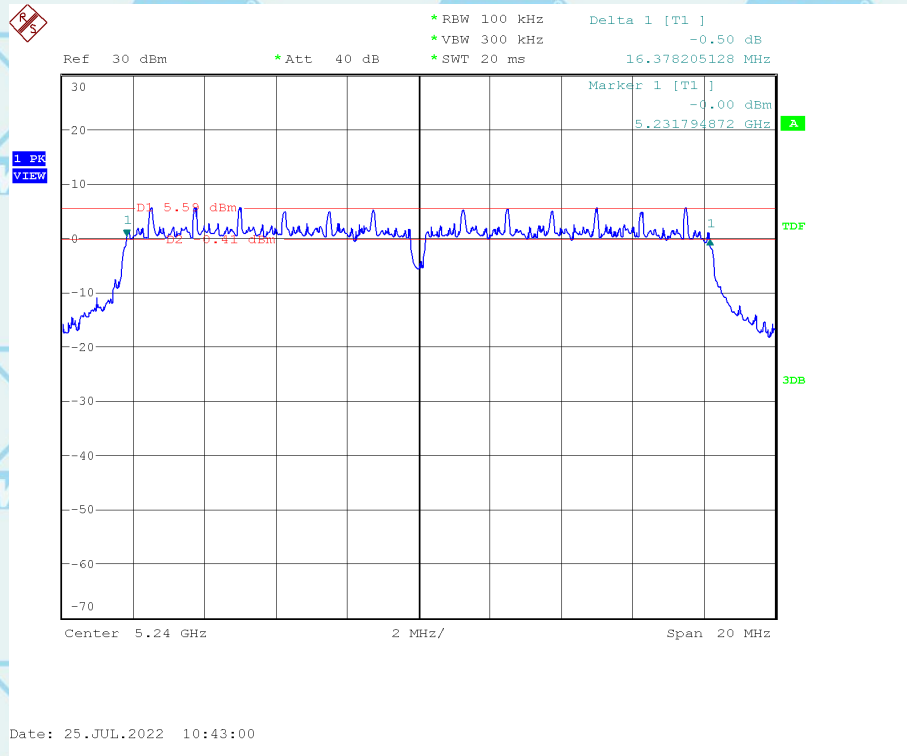




Certificate Number 5768.01

For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

**Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2**

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5260                        | 16.378                  | > 0.5MHz |
| High    | 5320                        | 16.378                  | > 0.5MHz |

Channel Low

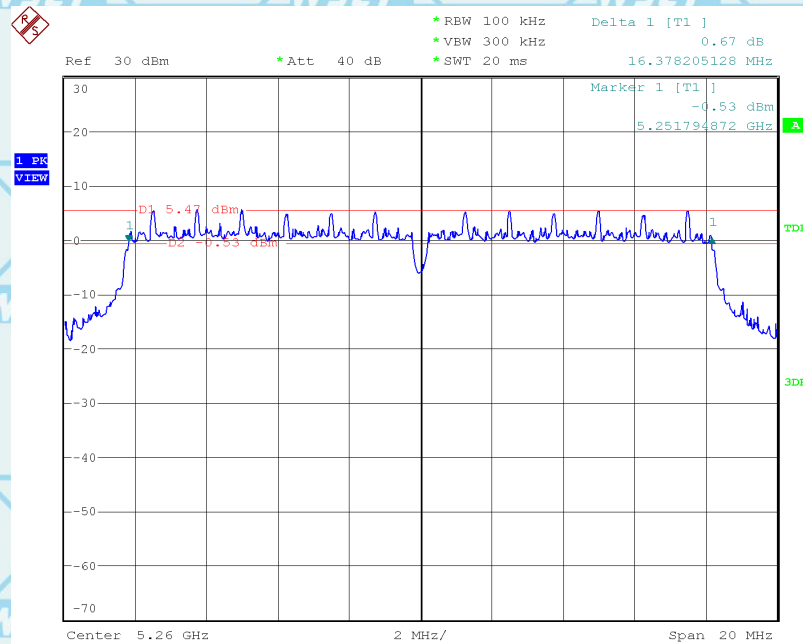


Date: 25.JUL.2022 10:46:20



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Channel High

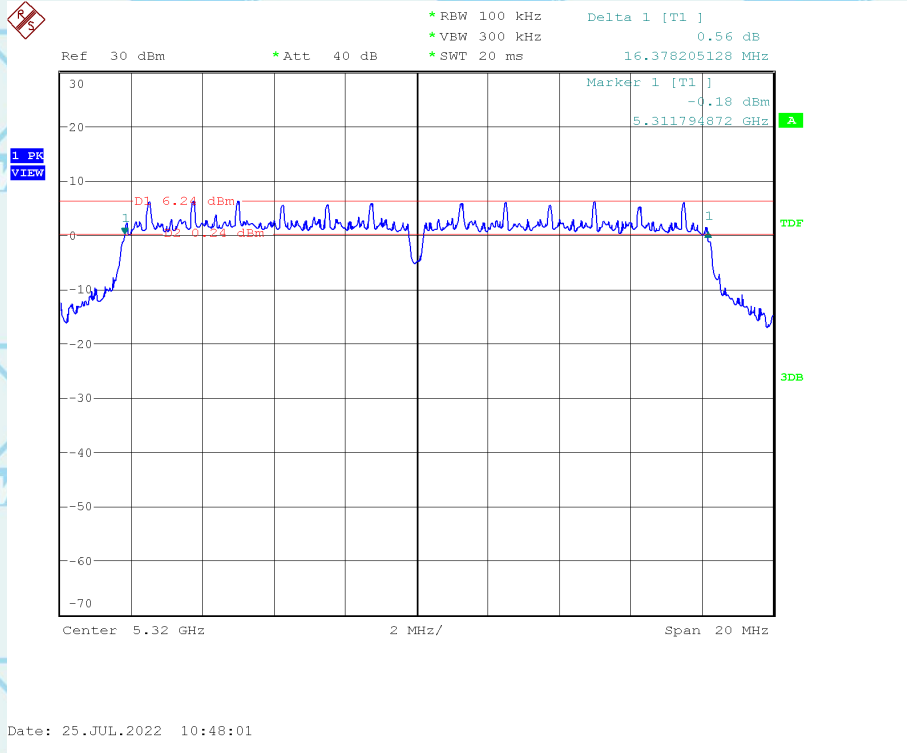





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5500                        | 17.628                  | > 0.5MHz |
| High    | 5700                        | 17.628                  | > 0.5MHz |

Channel Low

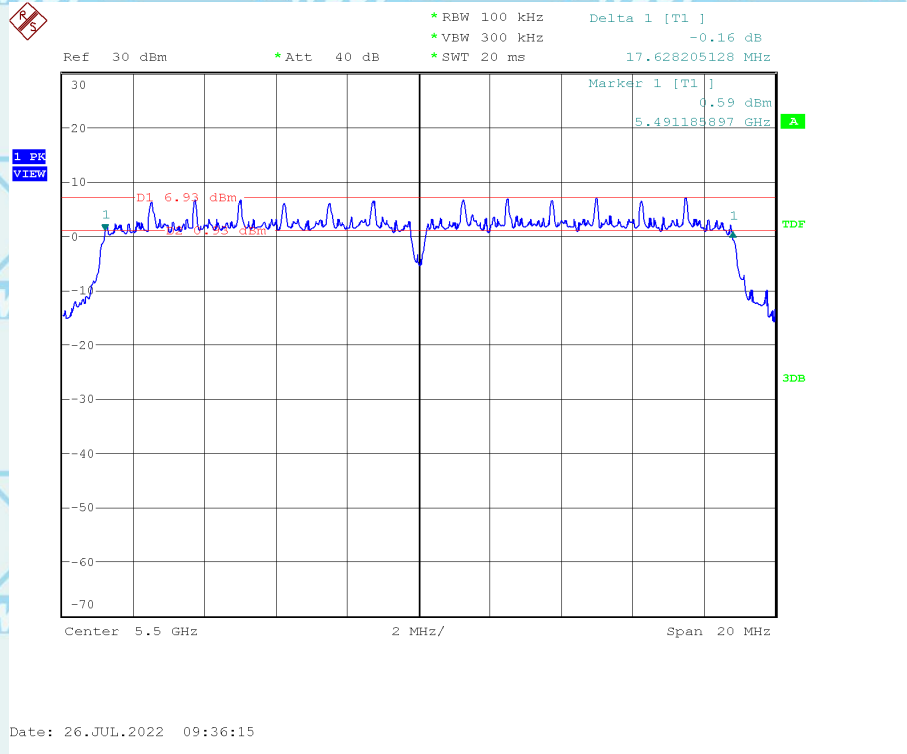

Channel High

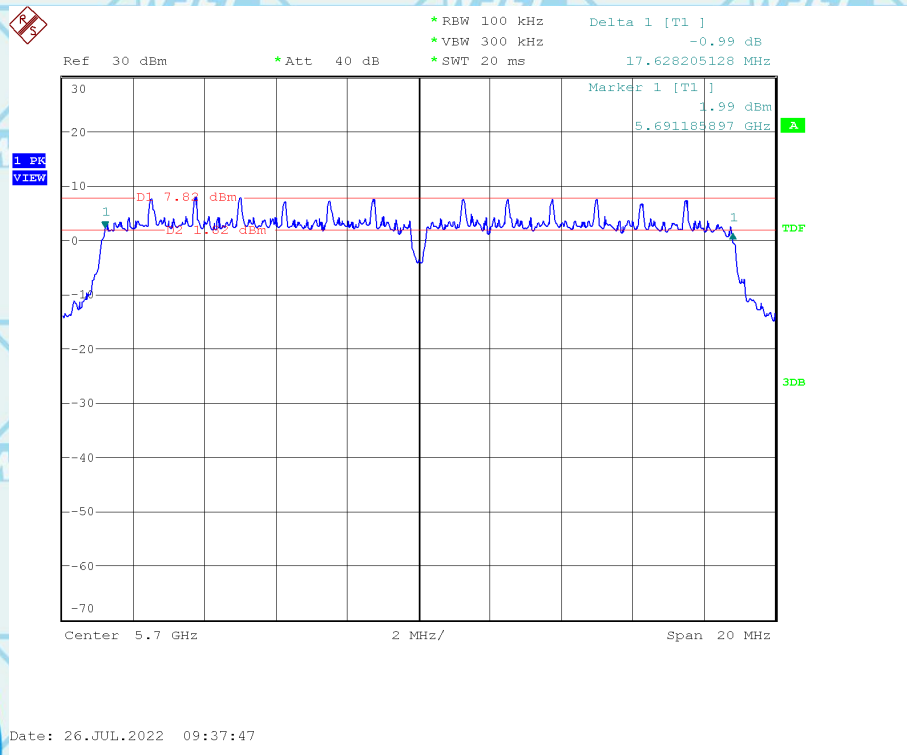





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5745                        | 16.378                  | > 0.5MHz |
| High    | 5825                        | 16.378                  | > 0.5MHz |

Channel Low

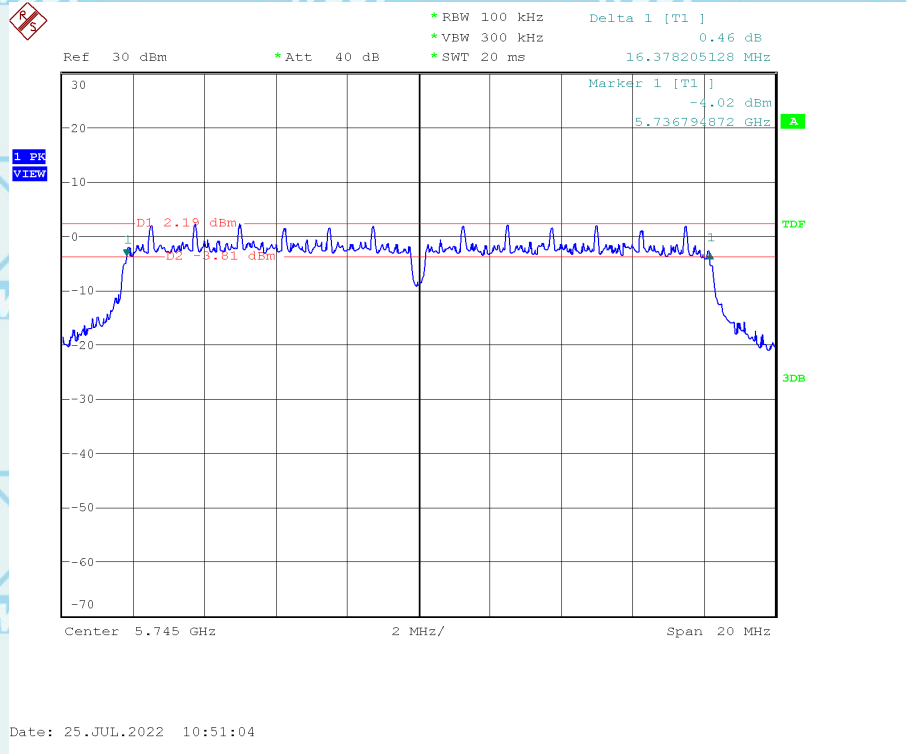

Channel High

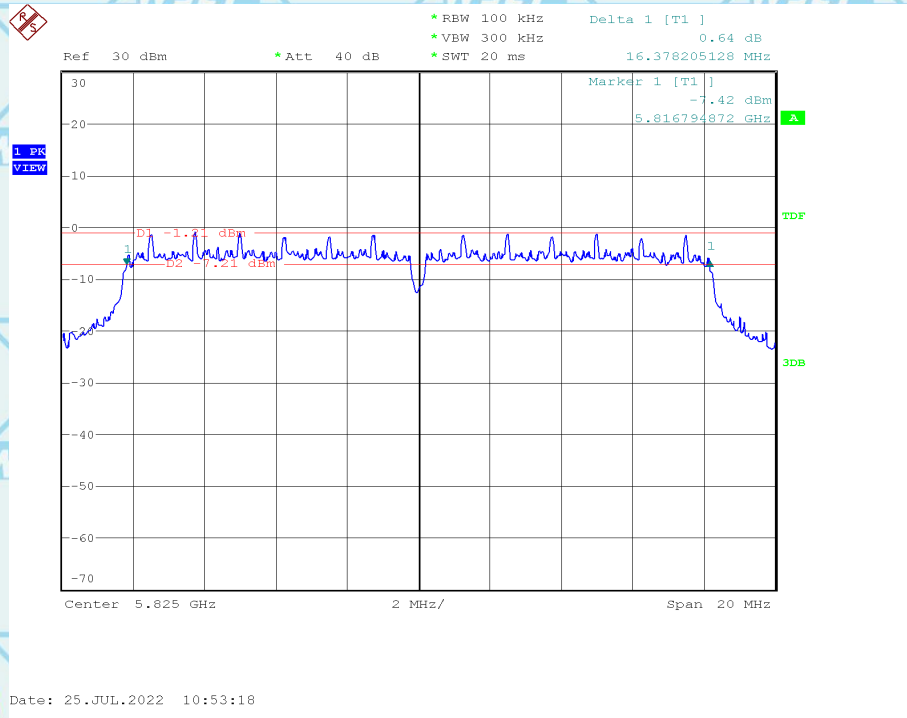




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


40MHz(IEEE 802.11n/ac/ax)

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5190                        | 36.346                  | > 0.5MHz |
| High    | 5230                        | 36.346                  | > 0.5MHz |

Channel Low

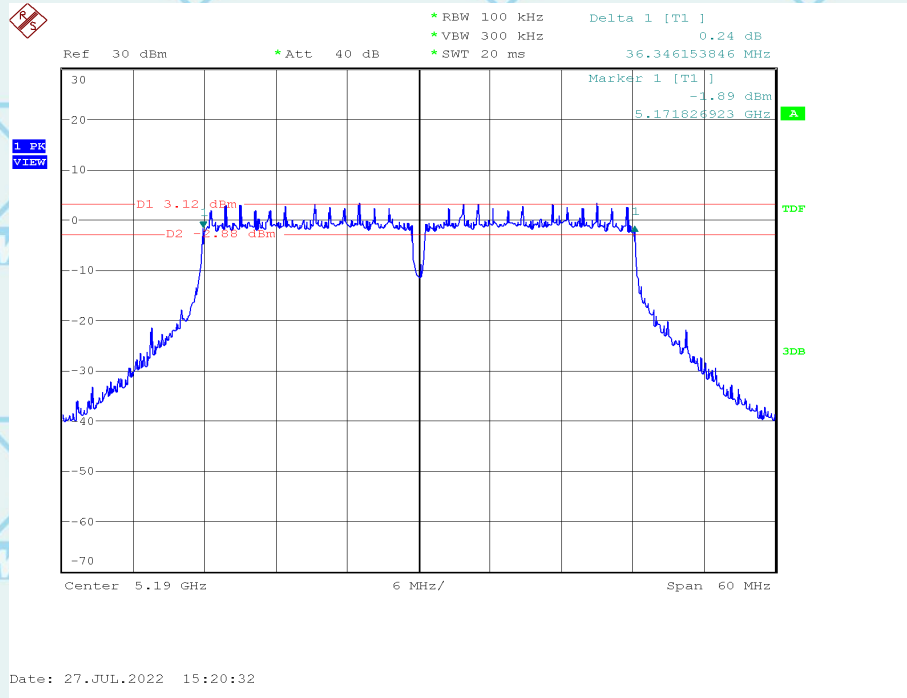

Channel High

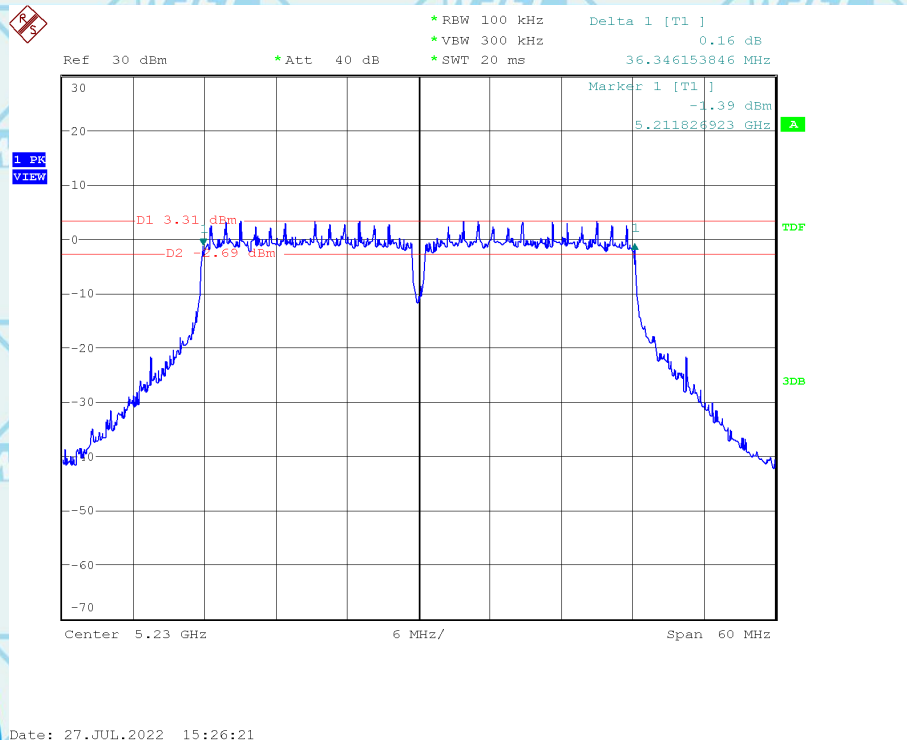





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5270                        | 36.346                  | > 0.5MHz |
| High    | 5310                        | 36.346                  | > 0.5MHz |

Channel Low

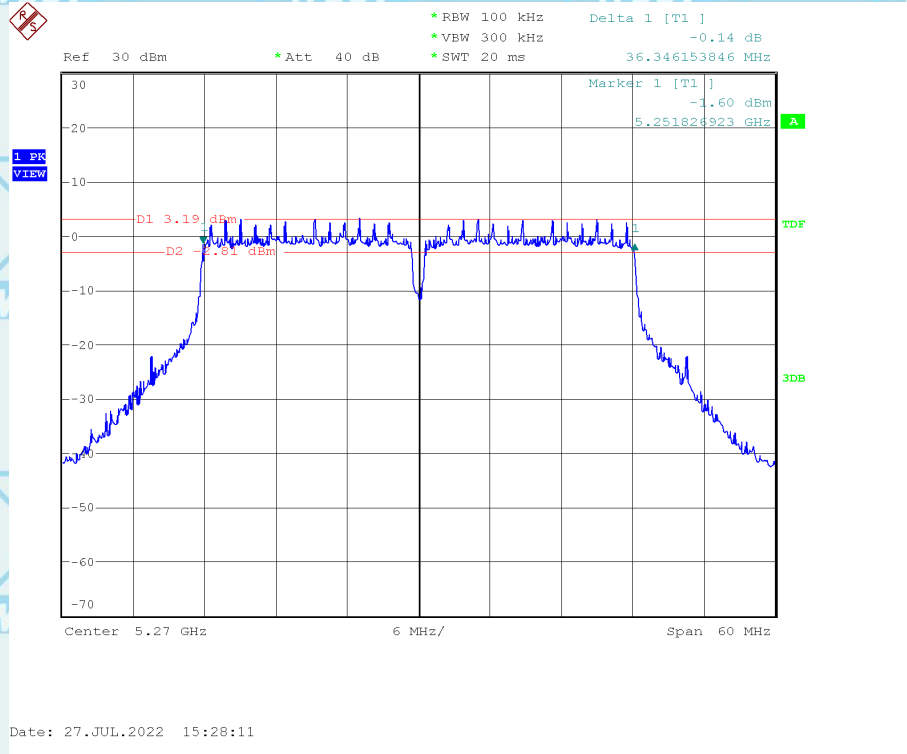

Channel High

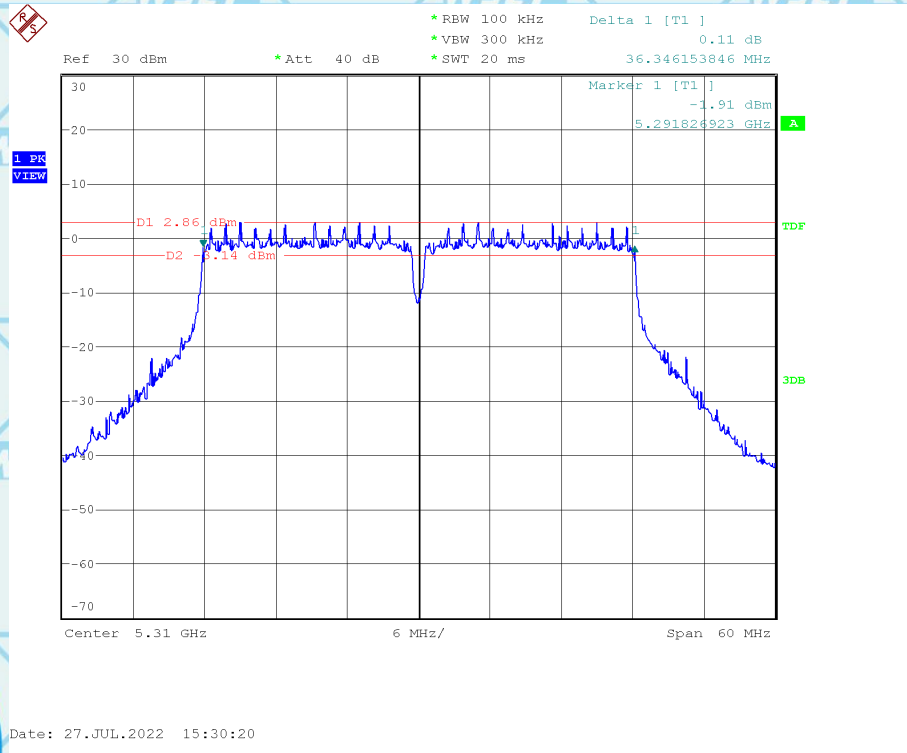





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5510                        | 36.346                  | > 0.5MHz |
| High    | 5670                        | 36.346                  | > 0.5MHz |

Channel Low

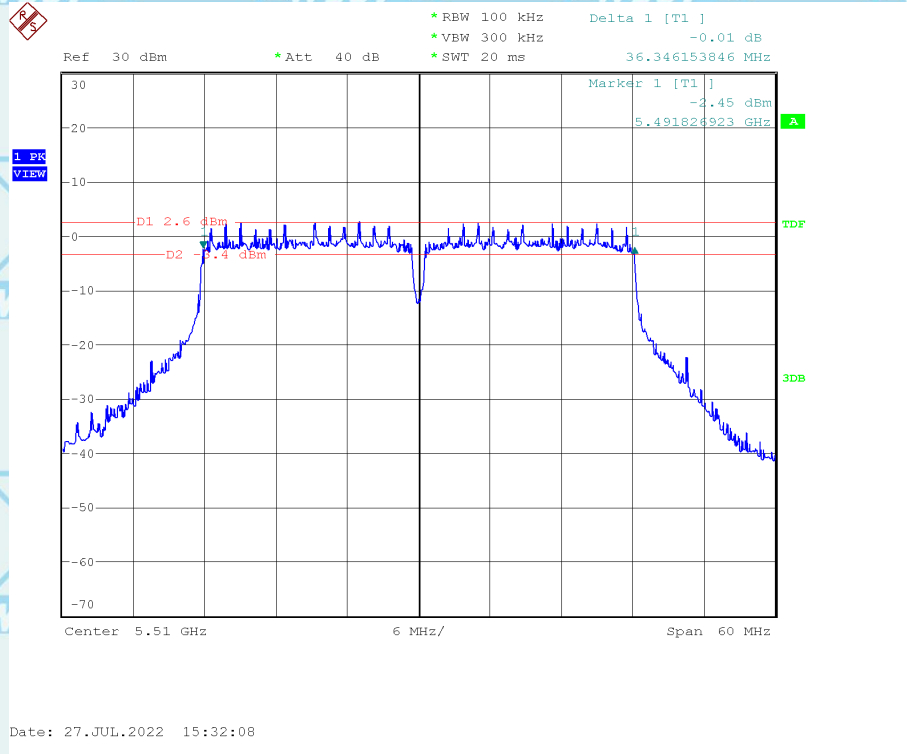

Channel High

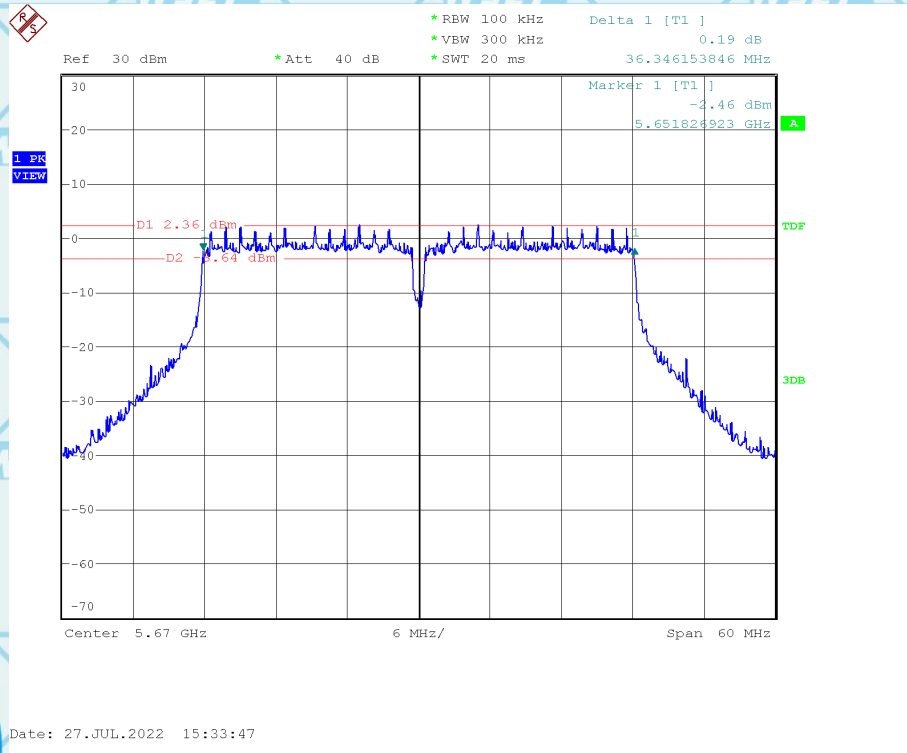





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5755                        | 36.346                  | > 0.5MHz |
| High    | 5795                        | 36.346                  | > 0.5MHz |

Channel Low

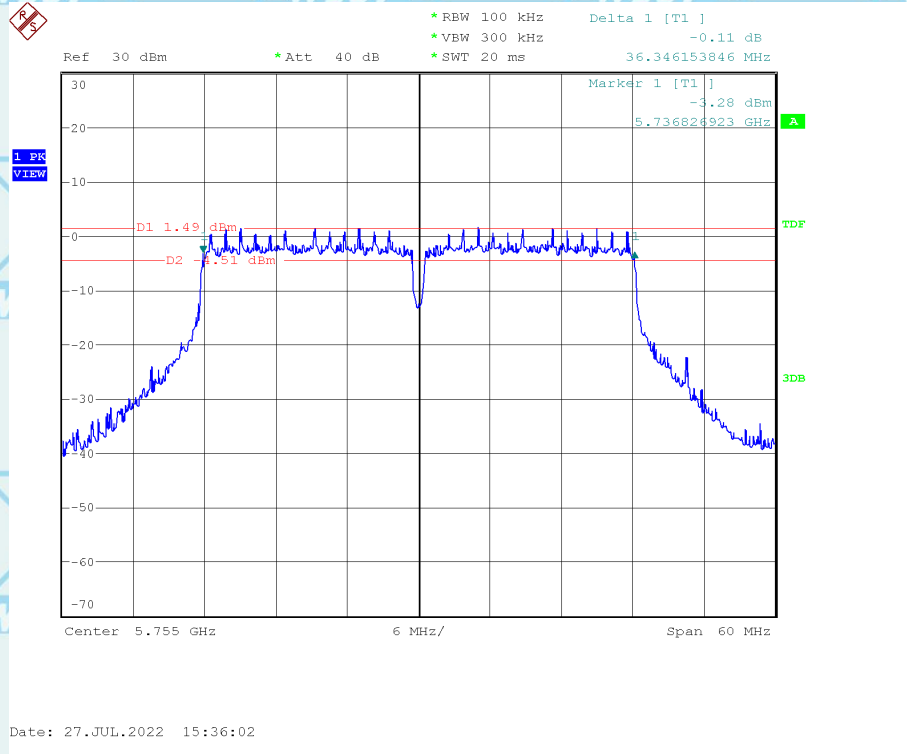

Channel High

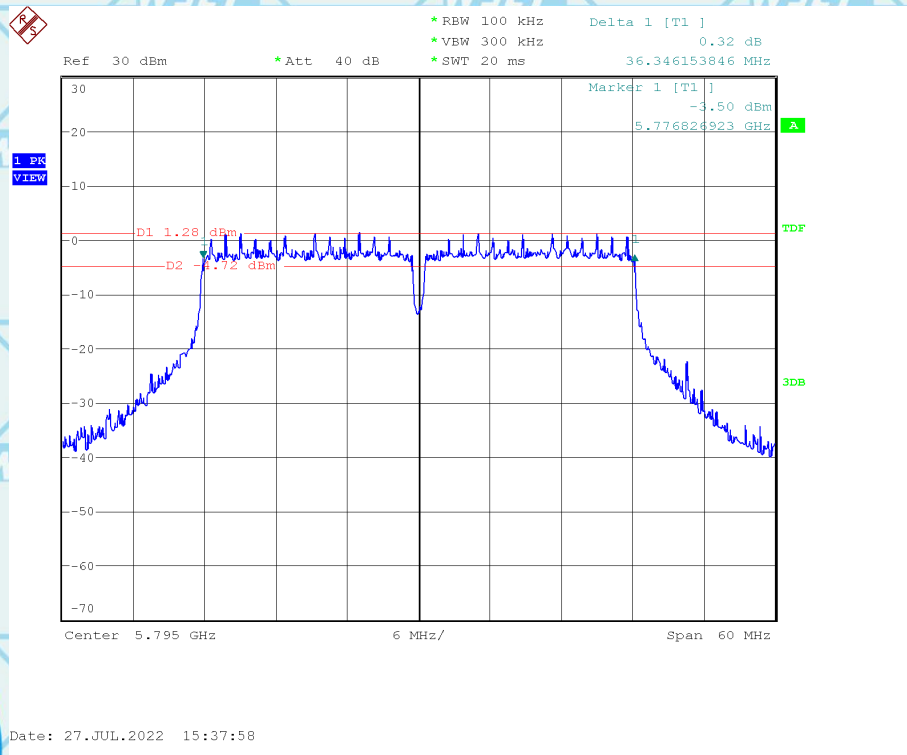




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

80MMHz(IEEE 802.11/ac/ax)

| Channel | Measured Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit    |
|---------|--------------------------|----------------------|----------|
| Low     | 5210                     | 78.462               | > 0.5MHz |

Channel Low

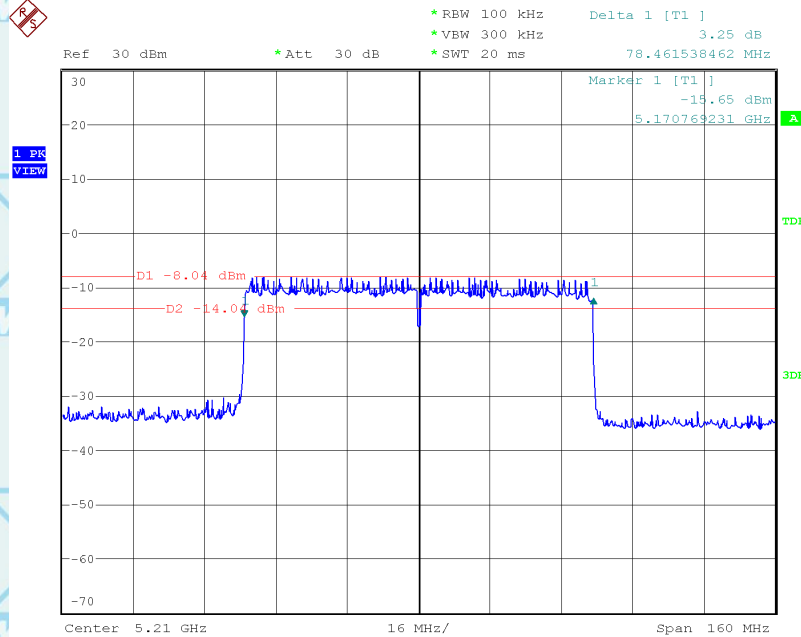

Date: 25.JUL.2022 13:35:36






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5290                        | 78.205                  | > 0.5MHz |

Channel Low

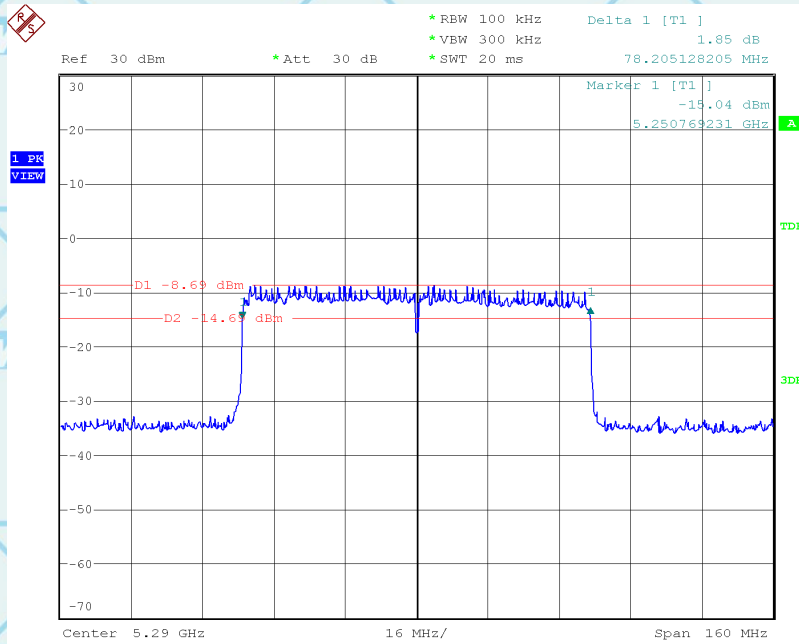


Date: 25.JUL.2022 13:39:31




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5530                        | 78.205                  | > 0.5MHz |
| High    | 5610                        | 78.462                  |          |

Channel Low

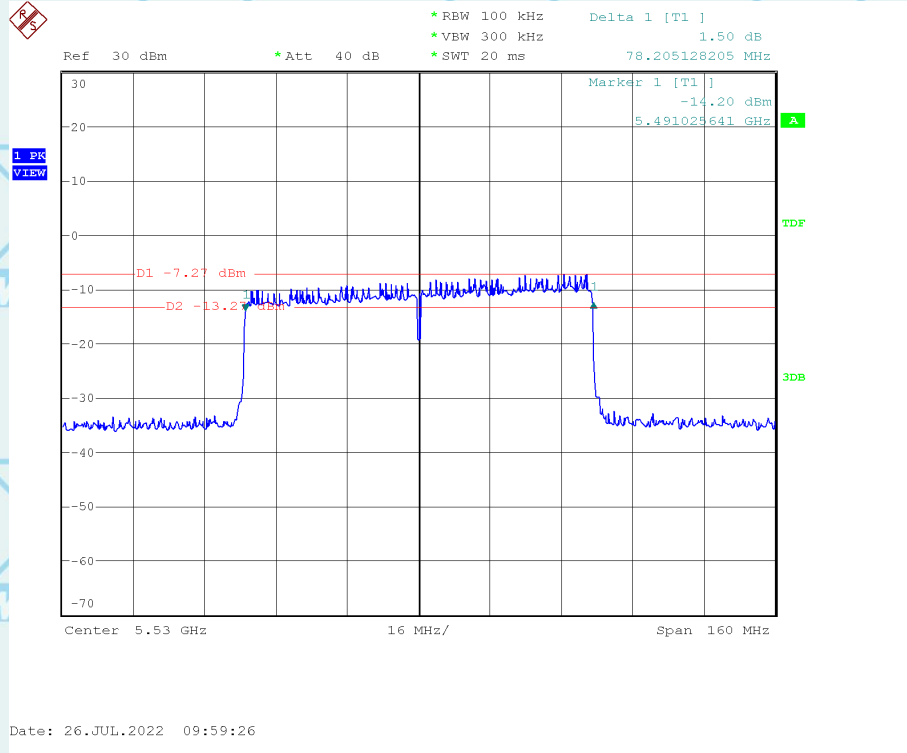

Channel Low

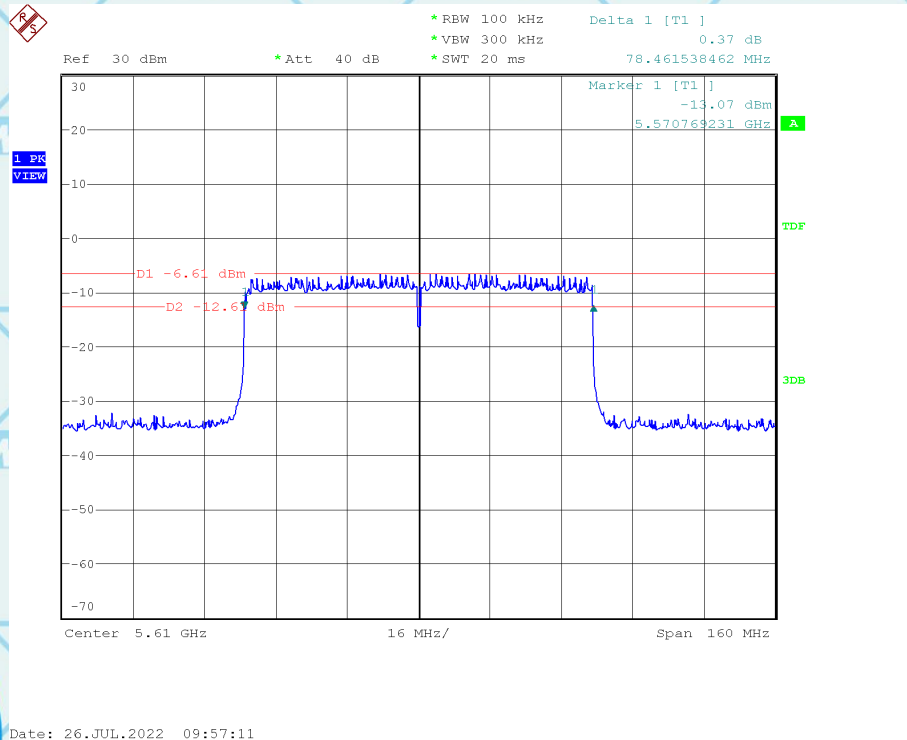




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

| Channel | Measured Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Limit    |
|---------|-----------------------------|-------------------------|----------|
| Low     | 5775                        | 78.462                  | > 0.5MHz |

Channel Low

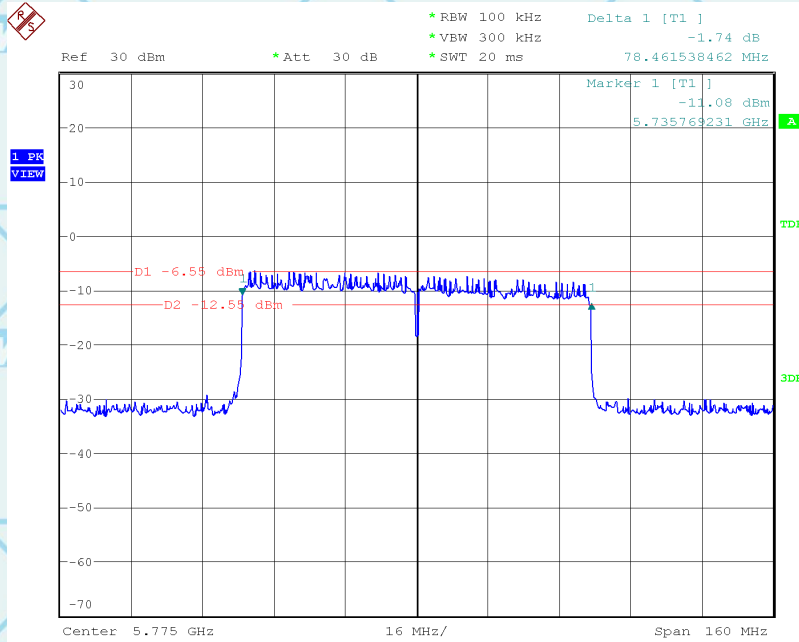

Date: 25.JUL.2022 13:42:47



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### C. Peak Power

|              |               |             |                   |
|--------------|---------------|-------------|-------------------|
| Product      | : EUT-Sample  | Test Mode   | : See Section 2.2 |
| Test Item    | : Peak Power  | Temperature | : 25 °C           |
| Test Voltage | : DC 11.55V   | Humidity    | : 56%RH           |
| Test Result  | : <b>PASS</b> |             |                   |

#### 20MHz(IEEE 802.11a/n/ac/ax)-worst

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result      |
|---------|-----------------|--------------------|-------------------|-------------|
| Low     | 5180            | 15.44              | 0.25/24.00        | <b>PASS</b> |
| High    | 5240            | 15.92              |                   | <b>PASS</b> |

#### Band2

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result      |
|---------|-----------------|--------------------|-------------------|-------------|
| Low     | 5260            | 15.73              | 0.25/24.00        | <b>PASS</b> |
| High    | 5320            | 13.94              |                   | <b>PASS</b> |

#### Band3

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result      |
|---------|-----------------|--------------------|-------------------|-------------|
| Low     | 5500            | 13.20              | 0.25/24.00        | <b>PASS</b> |
| High    | 5700            | 14.22              |                   | <b>PASS</b> |

#### Band4

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result      |
|---------|-----------------|--------------------|-------------------|-------------|
| Low     | 5745            | 12.37              | 1.00/30.00        | <b>PASS</b> |
| High    | 5825            | 9.32               |                   | <b>PASS</b> |



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

#### 40MHz(IEEE 802.11n/ac/ax)-worst Band1

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5190            | 13.16              | 0.25/24.00        | PASS   |
| High    | 5230            | 12.08              |                   | PASS   |

#### Band2

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5270            | 11.65              | 0.25/24.00        | PASS   |
| High    | 5310            | 11.99              |                   | PASS   |

#### Band3

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5510            | 12.64              | 0.25/24.00        | PASS   |
| High    | 5670            | 13.44              |                   | PASS   |

#### Band4

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5755            | 10.90              | 1.00/30.00        | PASS   |
| High    | 5795            | 10.49              |                   | PASS   |

#### 80MHz(IEEE 802.11ac/ax)-worst Band1

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5210            | 13.05              | 0.25/24.00        | PASS   |
| High    | 5250            | 12.08              |                   | PASS   |

#### Band2

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5290            | 13.81              | 0.25/24.00        | PASS   |
| High    | 5330            | 12.08              |                   | PASS   |

#### Band3

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5530            | 11.05              | 0.25/24.00        | PASS   |
| High    | 5610            | 12.42              |                   | PASS   |


#### Band4

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|--------|
| Low     | 5775            | 11.37              | 1.00/30.00        | PASS   |
| High    | 5815            | 10.49              |                   | PASS   |




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

20MHz(IEEE 802.11a/n/ac/ax)-worst

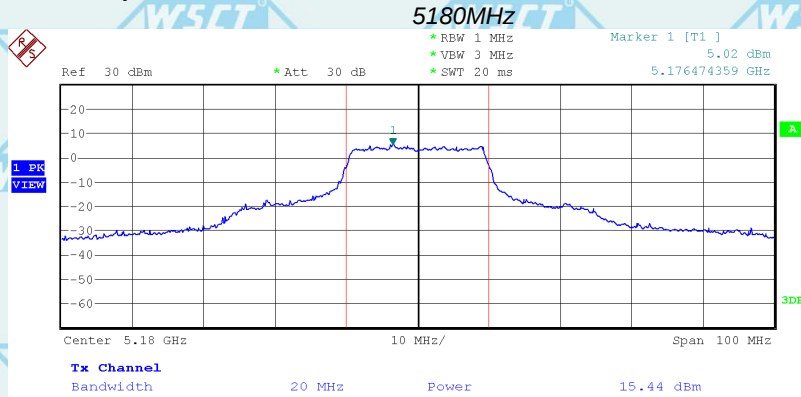

Date: 25.JUL.2022 13:51:15


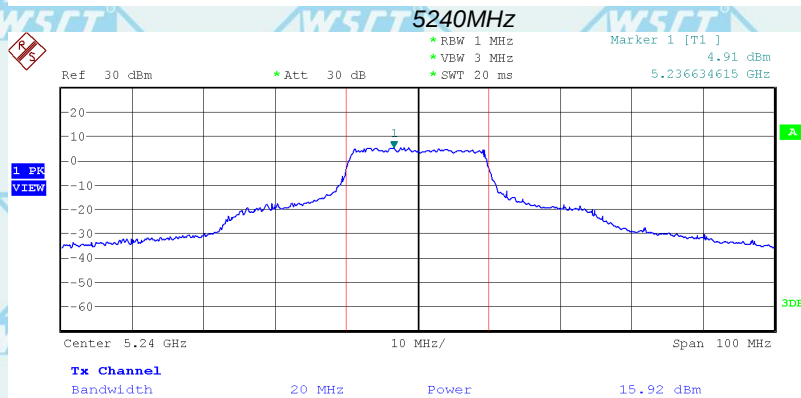


Date: 25.JUL.2022 13:53:00







Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

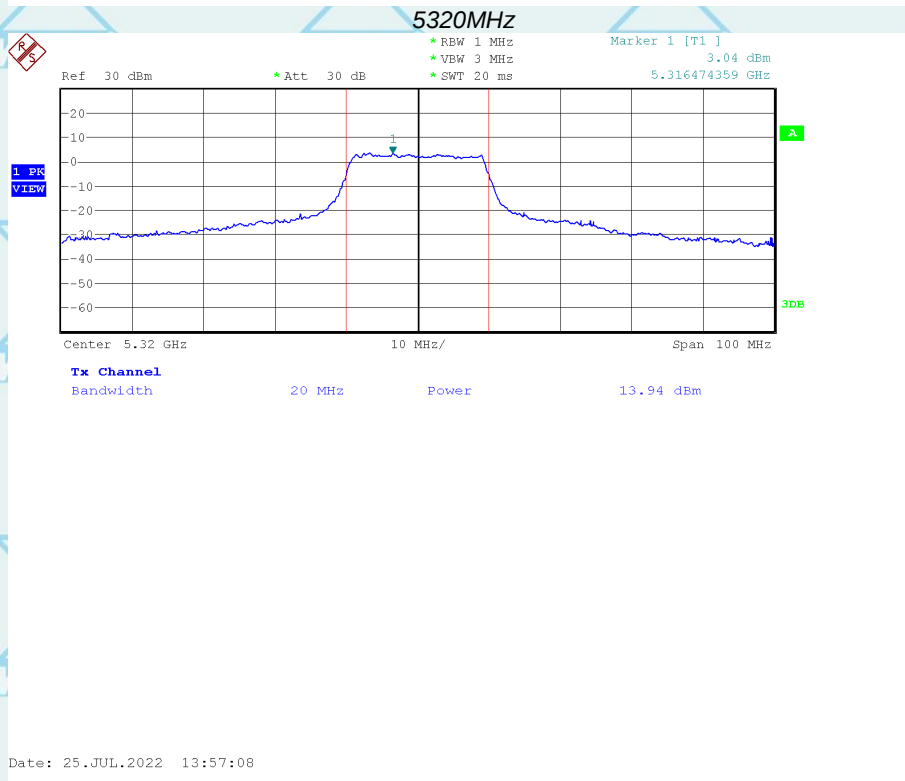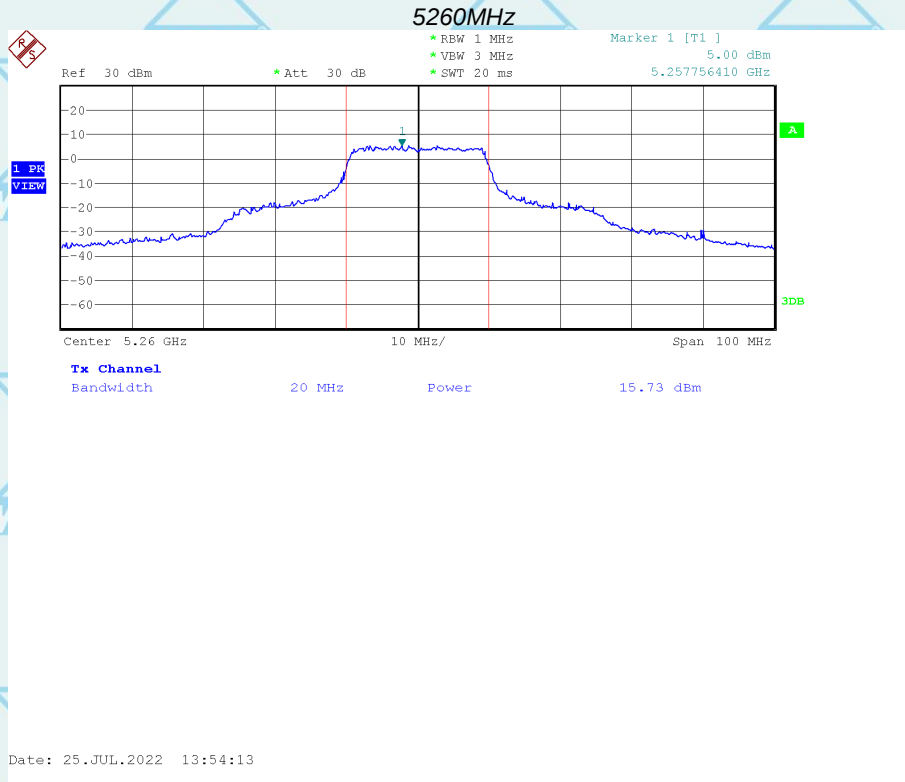





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

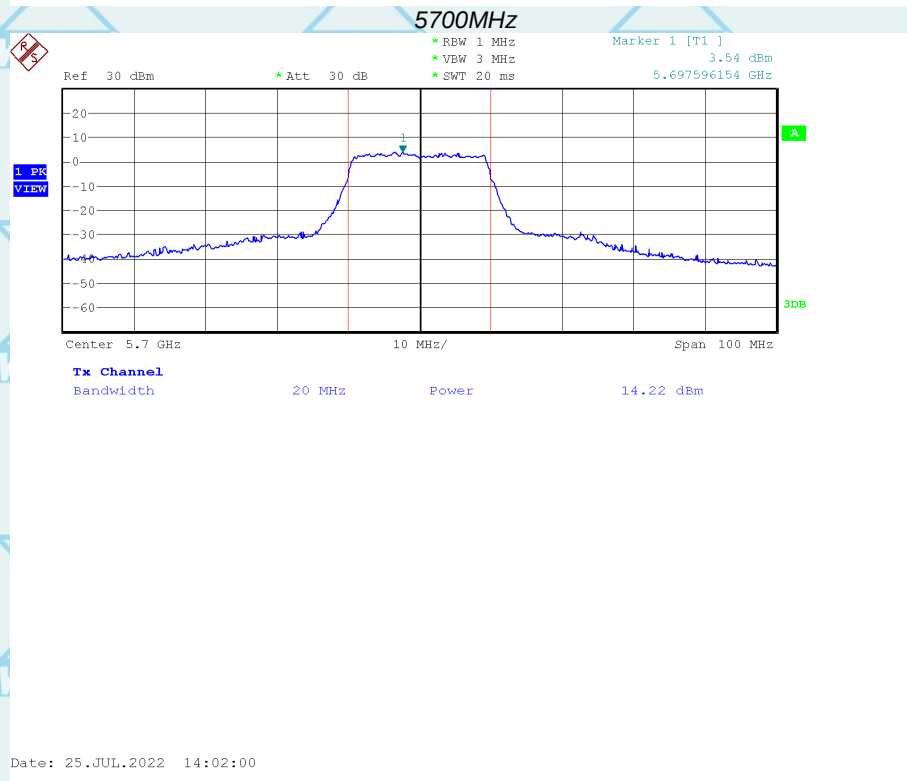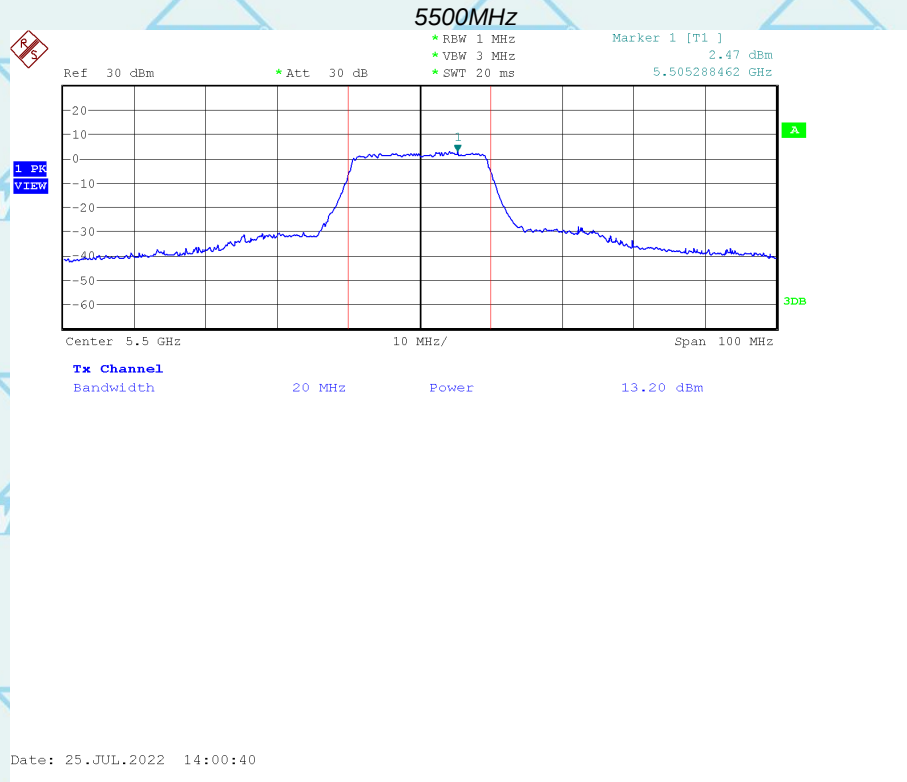



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

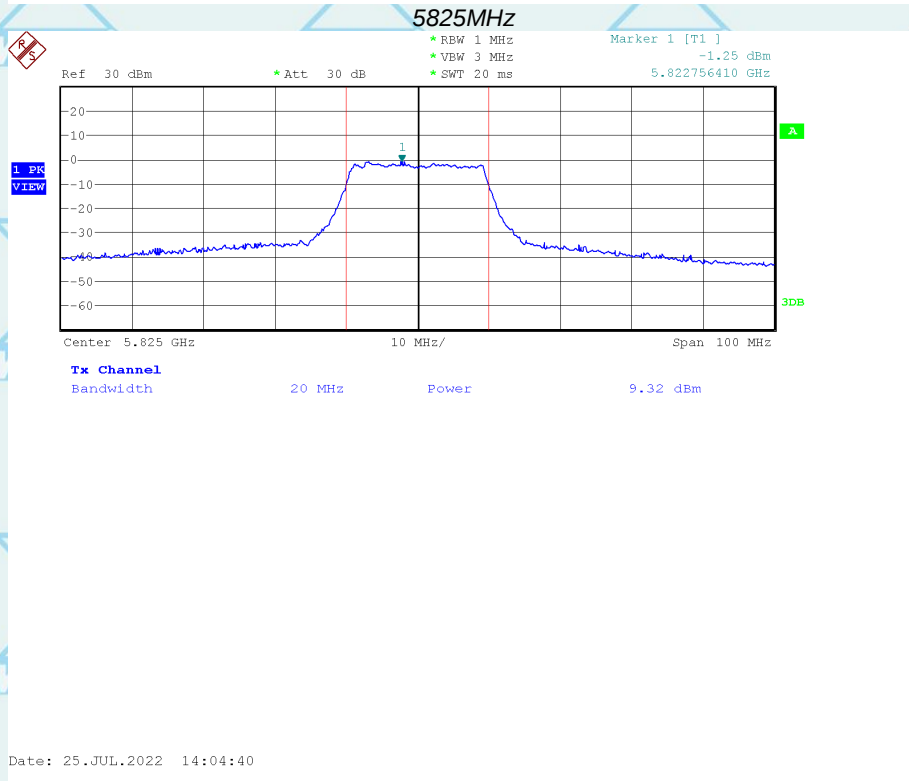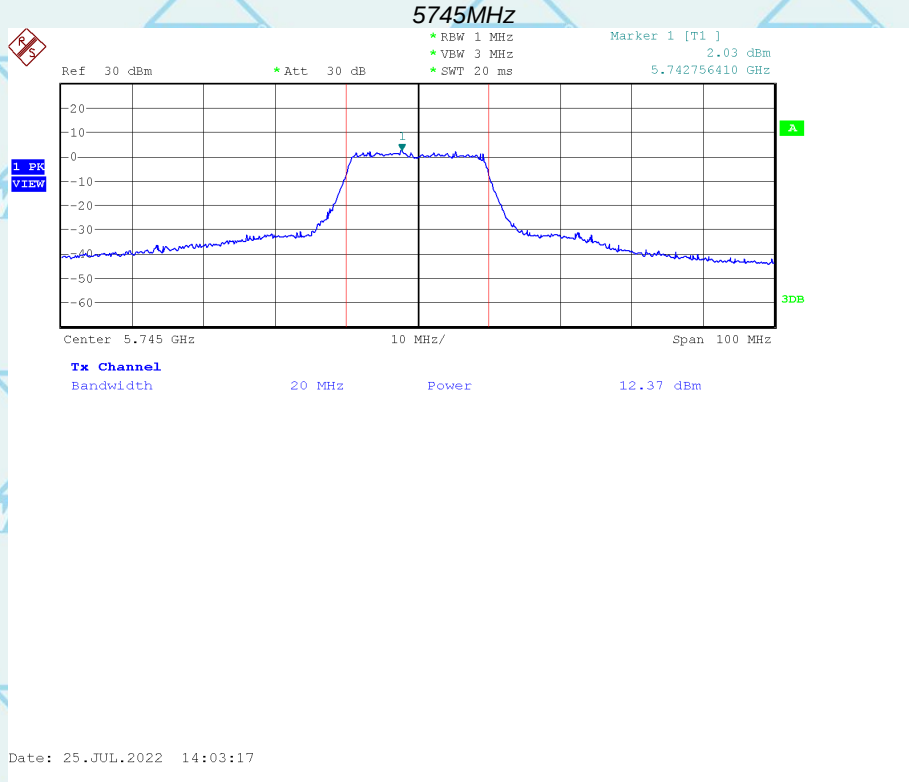




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

40MMHz(IEEE 802.11n/ac/ax)-worst

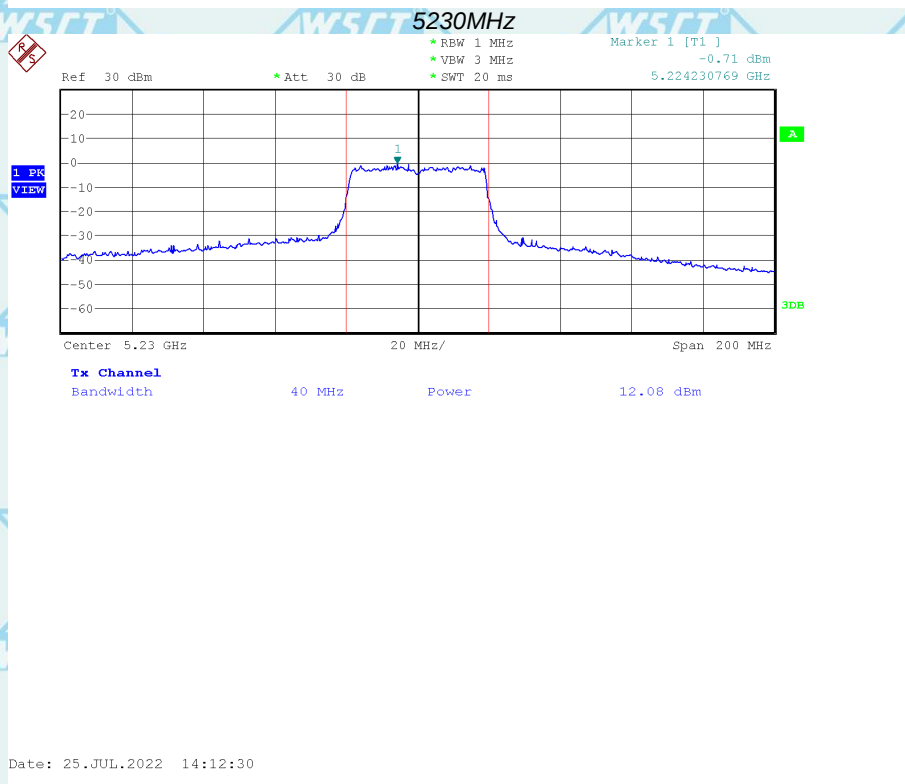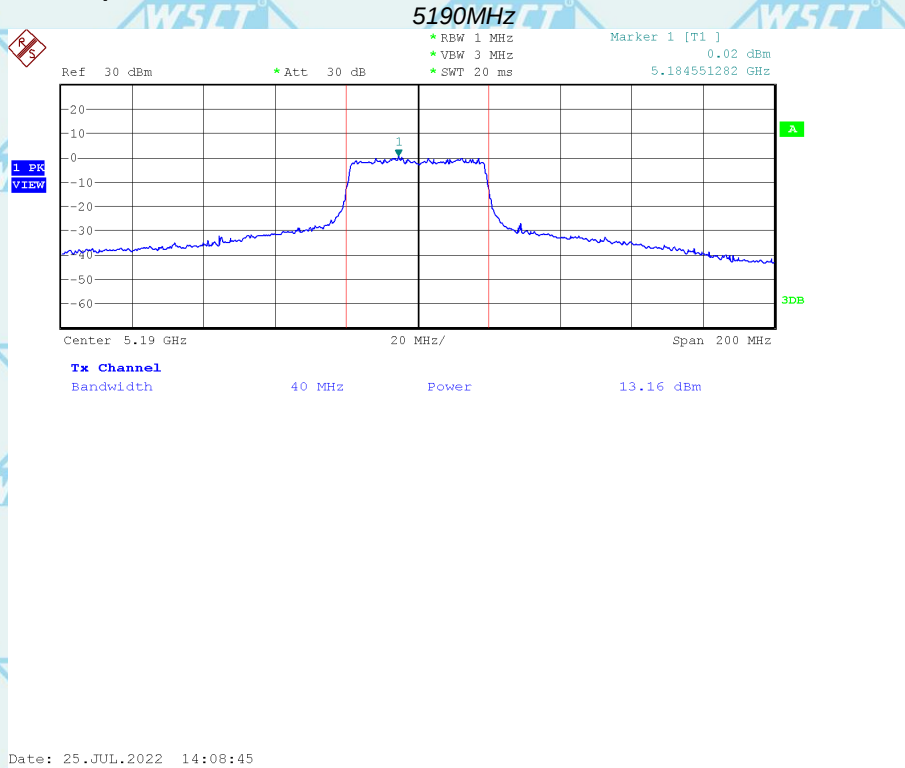


**Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2**

For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

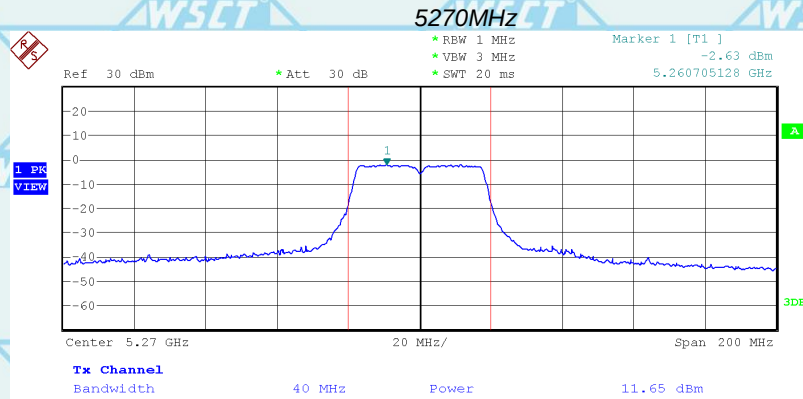

Date: 25.JUL.2022 14:14:23

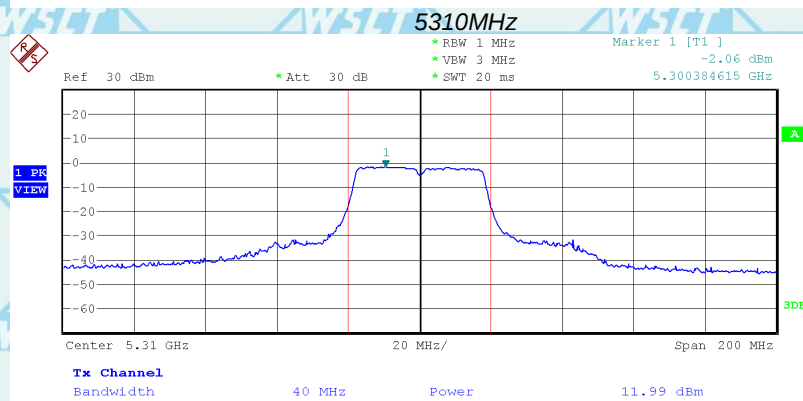

Date: 25.JUL.2022 14:25:55







Certificate Number 5768.01

For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

**Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2**

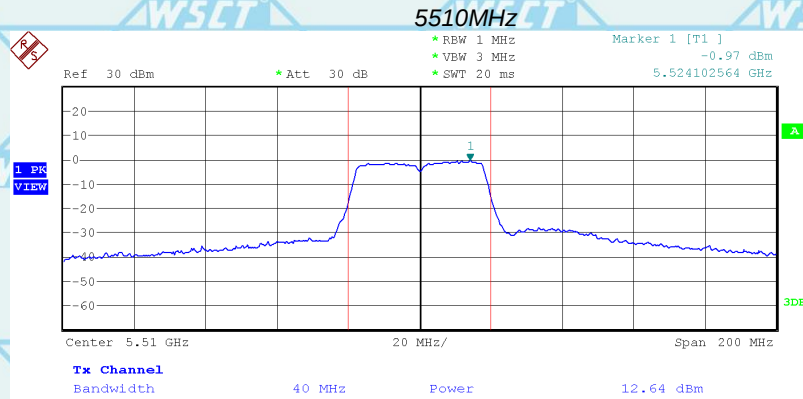

Date: 25.JUL.2022 14:38:59

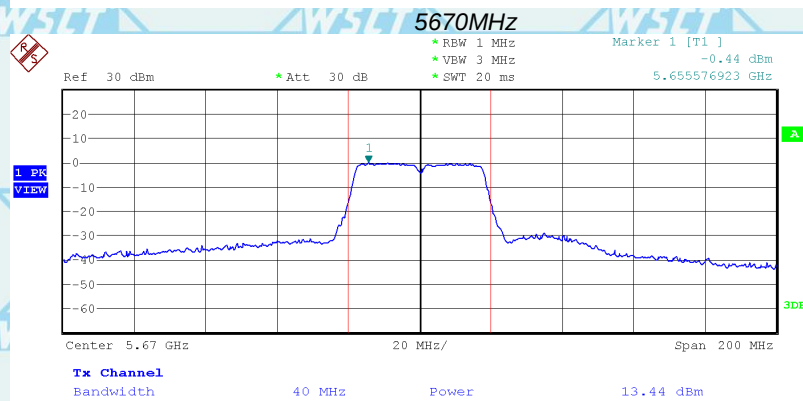


Date: 25.JUL.2022 14:40:15






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

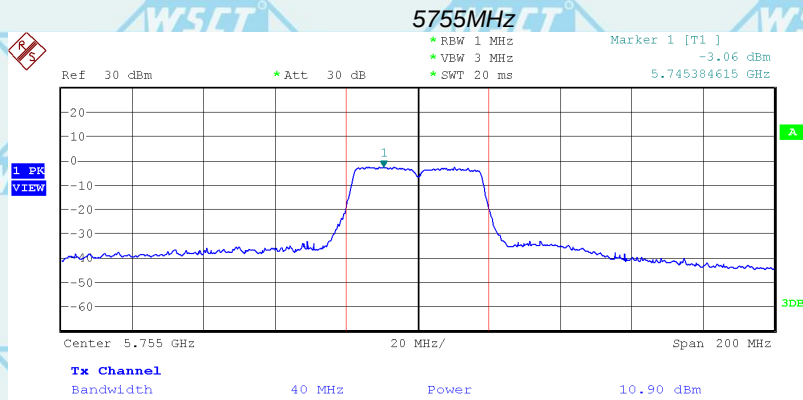

Date: 25.JUL.2022 14:41:27

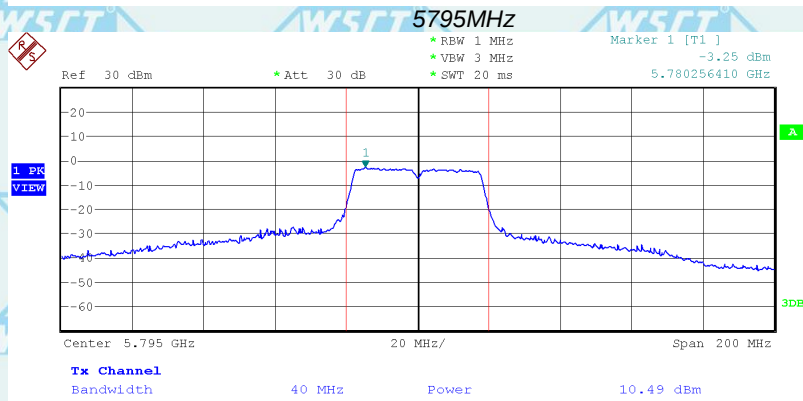


Date: 25.JUL.2022 14:42:27






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

80MHz(IEEE 802.11ac/ax)-worst

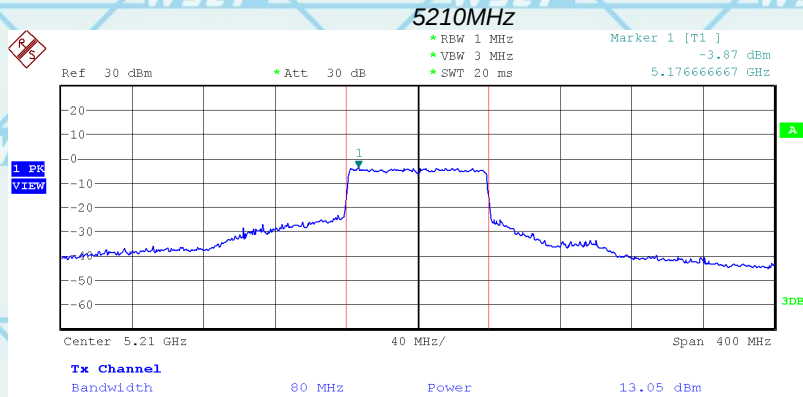

Date: 25.JUL.2022 15:24:30


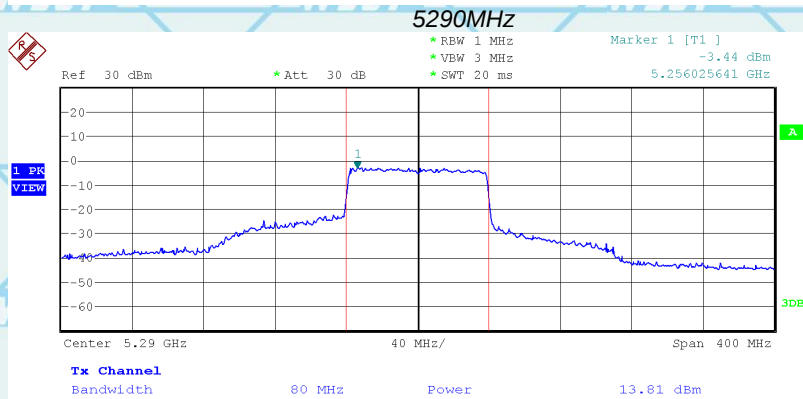


Date: 25.JUL.2022 15:25:59



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


For Question,  
Please Contact with WSCT  
www.wsct-cert.com

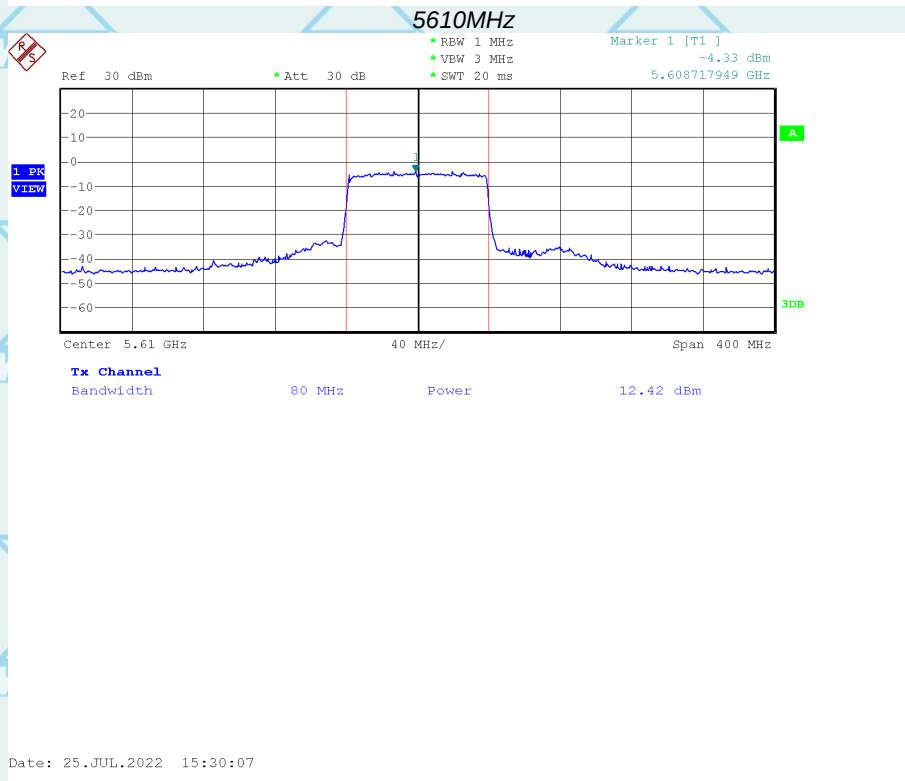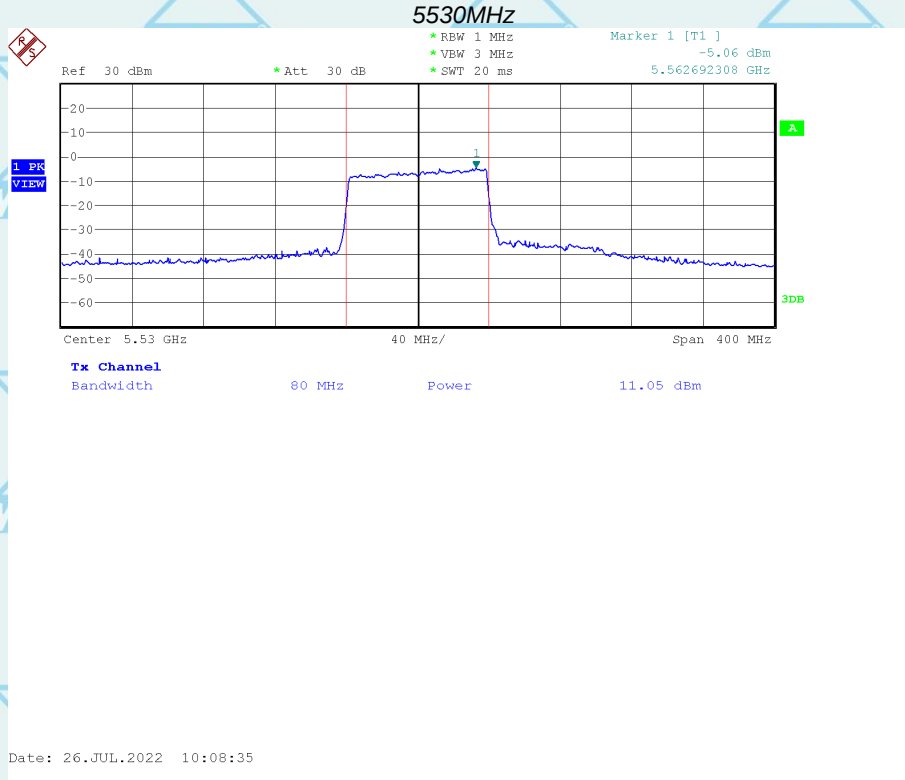



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

For Question,  
Please Contact with WSCT  
www.wsct-cert.com

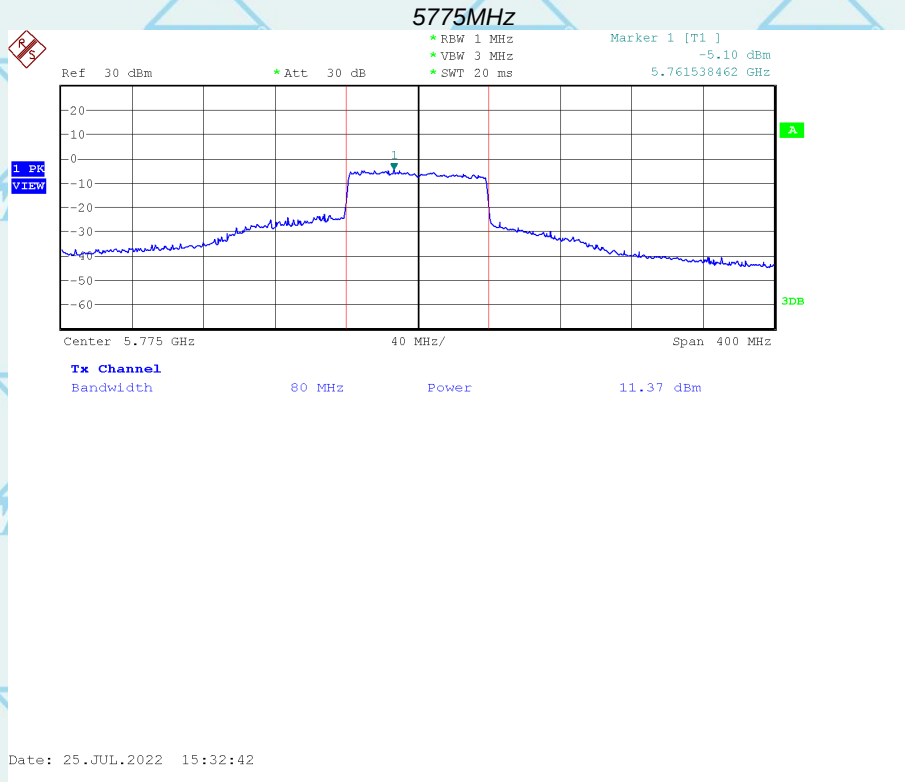



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## D. Peak Power Spectral Density

|              |                               |             |                   |
|--------------|-------------------------------|-------------|-------------------|
| Product      | : EUT-Sample                  | Test Mode   | : See Section 2.2 |
| Test Item    | : Peak Power Spectral Density | Temperature | : 25 °C           |
| Test Voltage | : DC 11.55V                   | Humidity    | : 56%RH           |
| Test Result  | : <b>PASS</b>                 |             |                   |

### 20MHz(IEEE 802.11a/n/ac/ax)

#### Band1

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result      |
|---------|-----------------|------------|-----------------|-------------|
| Low     | 5180            | 2.65       | 11dBm/MHz       | <b>PASS</b> |
| High    | 5240            | 2.36       |                 | <b>PASS</b> |

#### Band2

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result      |
|---------|-----------------|------------|-----------------|-------------|
| Low     | 5260            | 2.20       | 11dBm/MHz       | <b>PASS</b> |
| High    | 5320            | 2.45       |                 | <b>PASS</b> |

#### Band3

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result      |
|---------|-----------------|------------|-----------------|-------------|
| Low     | 5500            | -0.20      | 11dBm/MHz       | <b>PASS</b> |
| High    | 5700            | 0.95       |                 | <b>PASS</b> |

#### Band4

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz)                 | Result      |
|---------|-----------------|------------|---------------------------------|-------------|
| Low     | 5745            | -0.65      | 30dBm/500 kHz<br>(26.99dBm/MHz) | <b>PASS</b> |
| High    | 5825            | -4.05      |                                 | <b>PASS</b> |





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

40MHz(IEEE 802.11n/ac/ax)

Band1

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5190            | -3.54      | 11dBm/MHz       | PASS   |
| High    | 5230            | -3.05      |                 | PASS   |

Band2

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5270            | -3.65      | 11dBm/MHz       | PASS   |
| High    | 5310            | -3.53      |                 | PASS   |

Band3

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5510            | -6.29      | 11dBm/MHz       | PASS   |
| High    | 5670            | -5.31      |                 | PASS   |

Band4

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz)                 | Result |
|---------|-----------------|------------|---------------------------------|--------|
| Low     | 5755            | -8.03      | 30dBm/500 kHz<br>(26.99dBm/MHz) | PASS   |
| High    | 5795            | -8.07      |                                 | PASS   |

80MHz(IEEE 802.11ac/ax)

Band1

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5210            | -5.49      | 11dBm/MHz       | PASS   |
| High    |                 |            |                 |        |

Band2

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5290            | -4.51      | 11dBm/MHz       | PASS   |
| High    |                 |            |                 |        |

Band3

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low     | 5530            | -3.16      | 11dBm/MHz       | PASS   |
| High    | 5610            | -4.30      |                 |        |

Band4

| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (kHz)                 | Result |
|---------|-----------------|------------|---------------------------------|--------|
| Low     | 5775            | -9.59      | 30dBm/500 kHz<br>(26.99dBm/MHz) | PASS   |
| High    |                 |            |                                 |        |


Note: For 5.725~5.85GHz (Band4): Power Density (dBm/500kHz)= Power Density (dBm/MHz)- 10log(500kHz/RBW) (dB)




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

20MHz(IEEE 802.11a/n/ac/ax)  
Band1

### PPSD (CH Low)

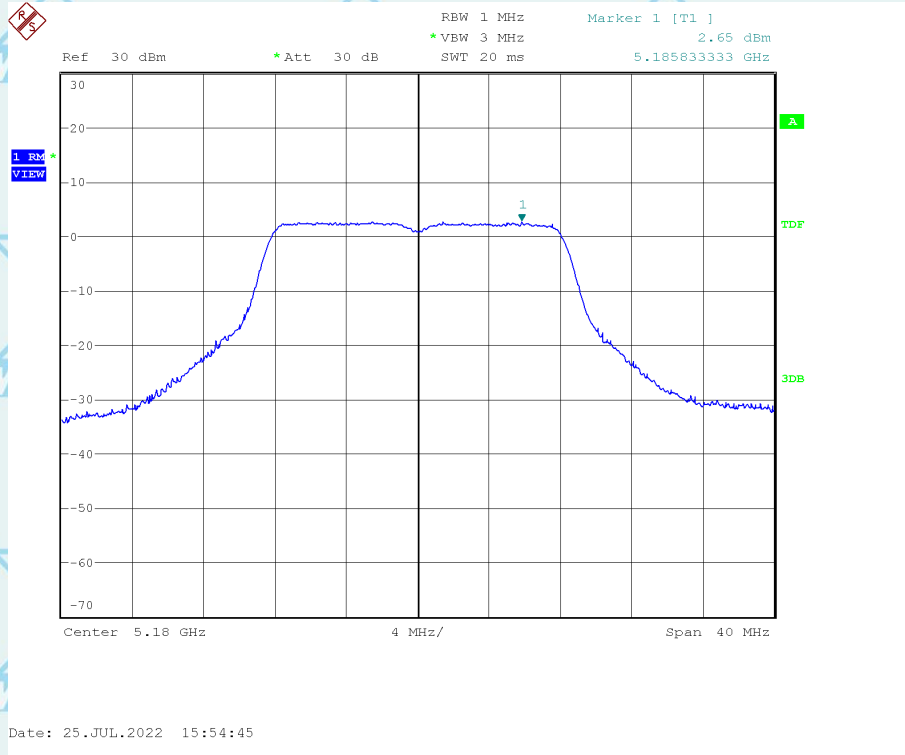

### PPSD (CH High)

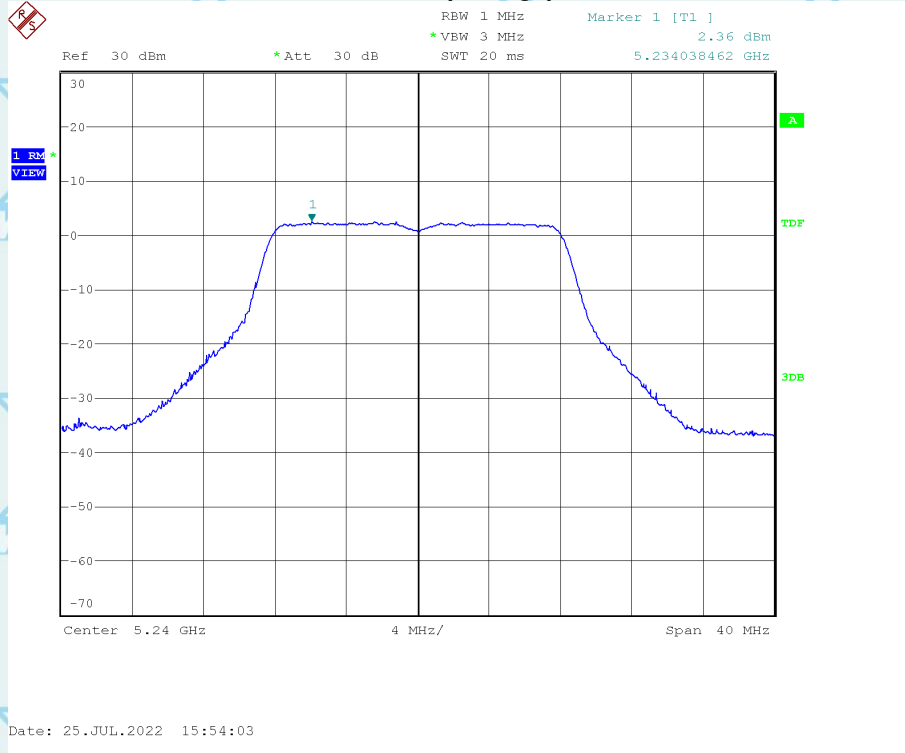





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band2

### PPSD (CH Low)

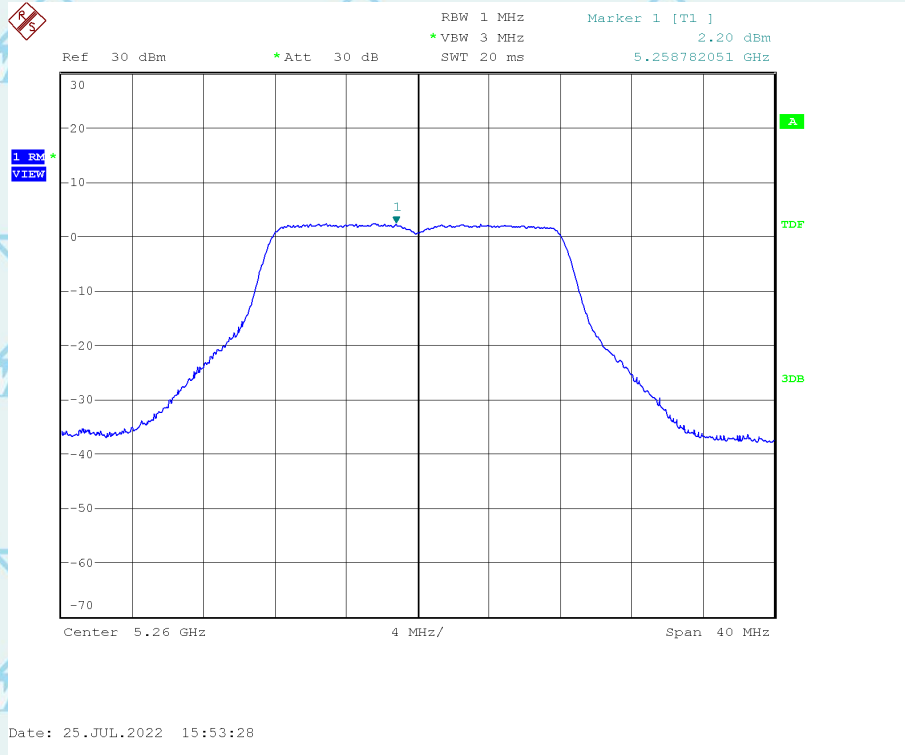

### PPSD (CH High)

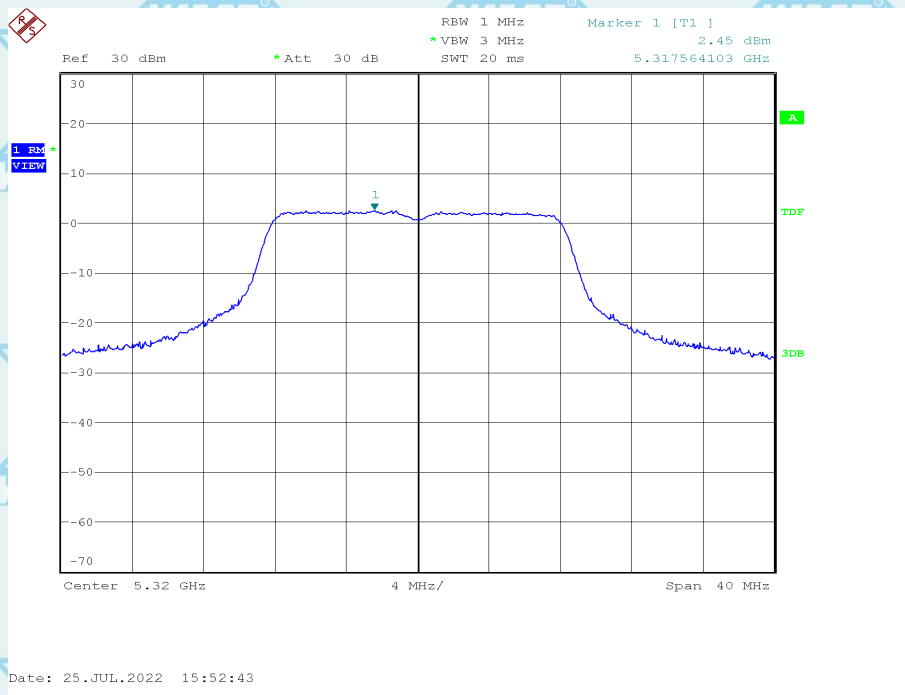





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band3

PPSD (CH Low)

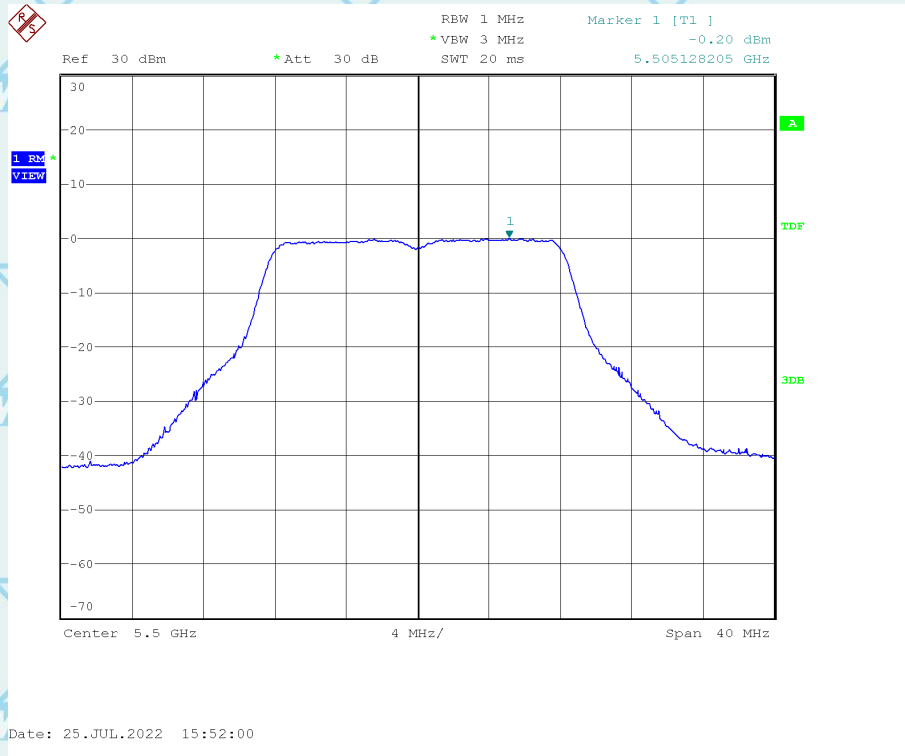

PPSD (CH High)

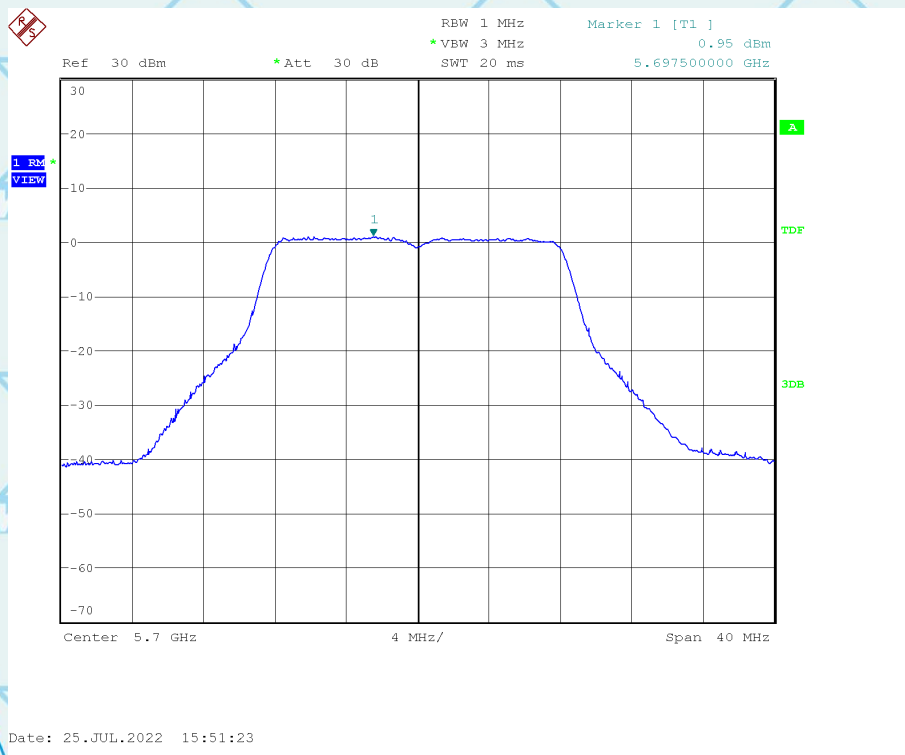




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band4

PPSD (CH Low)

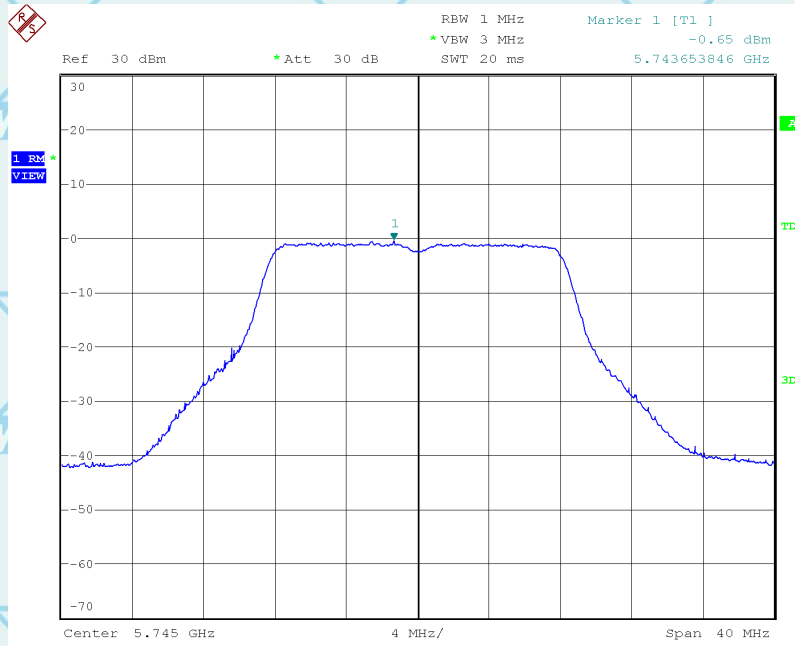

Date: 25.JUL.2022 15:50:50

PPSD (CH High)

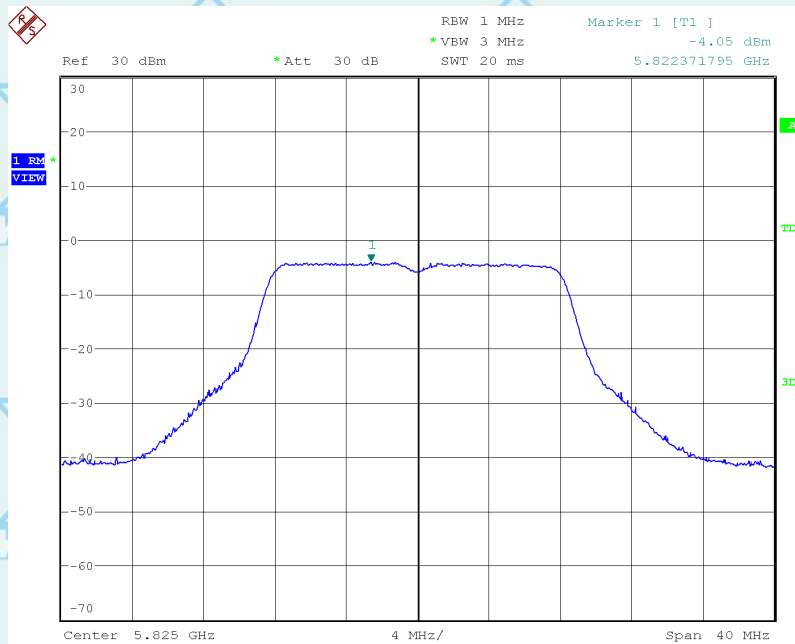


Date: 25.JUL.2022 15:50:12



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


40MHz(IEEE 802.11n/ac/ax)  
Band1

### PPSD (CH Low)

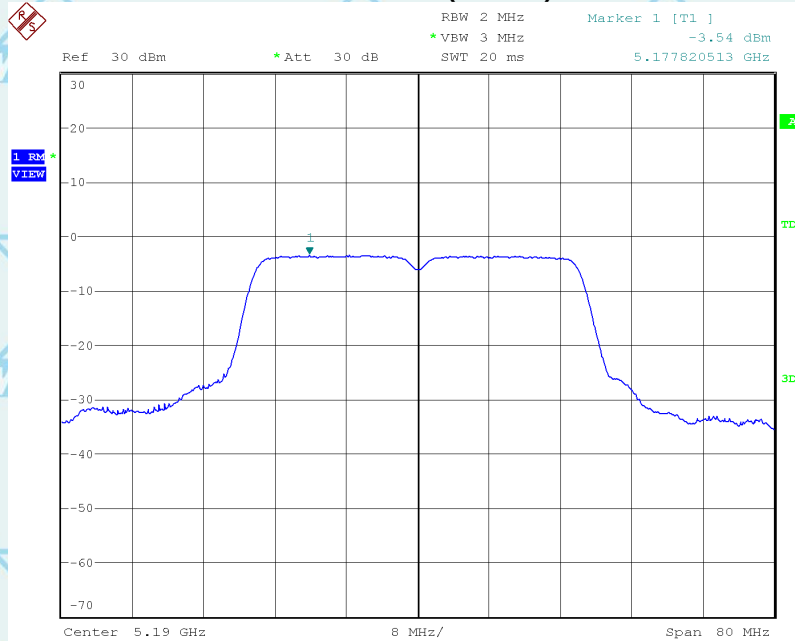

Date: 25.JUL.2022 15:57:06

### PPSD (CH High)

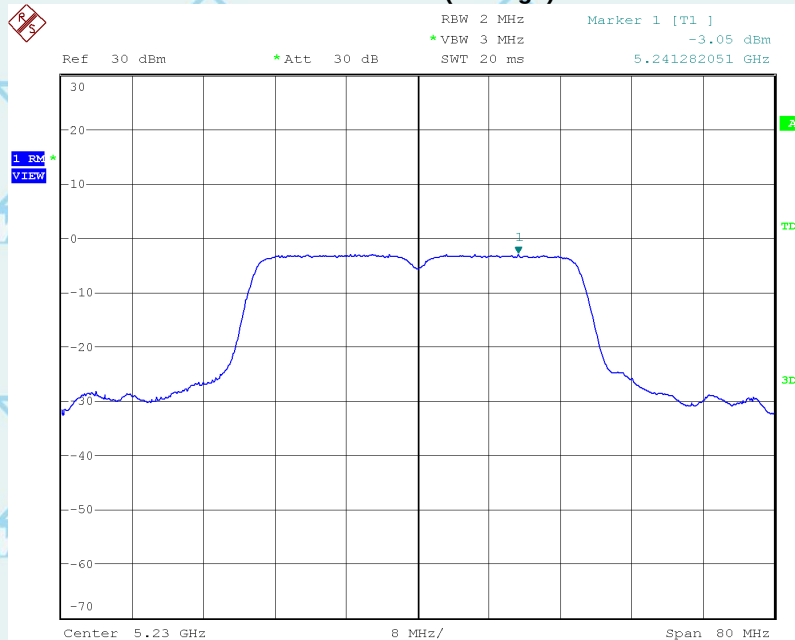


Date: 25.JUL.2022 15:58:45



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band2

PPSD (CH Low)

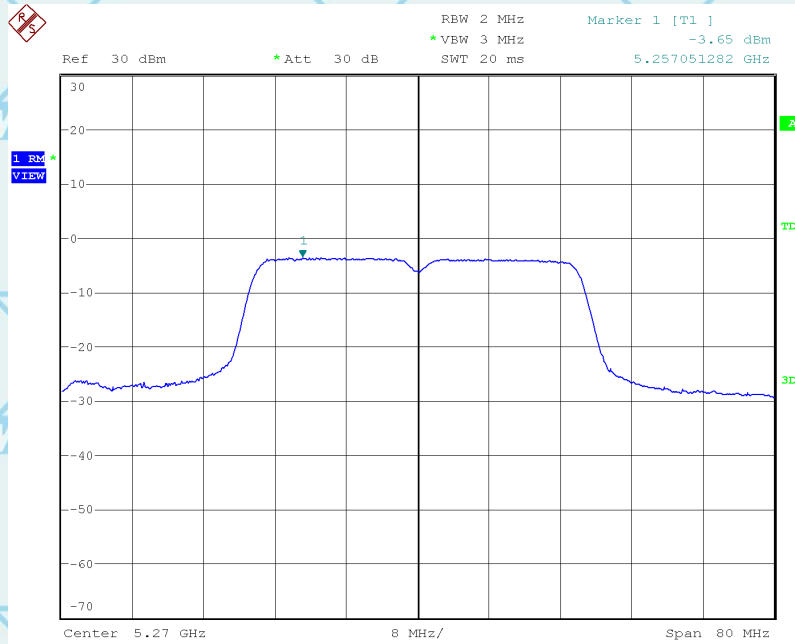

Date: 25.JUL.2022 15:59:19

PPSD (CH High)

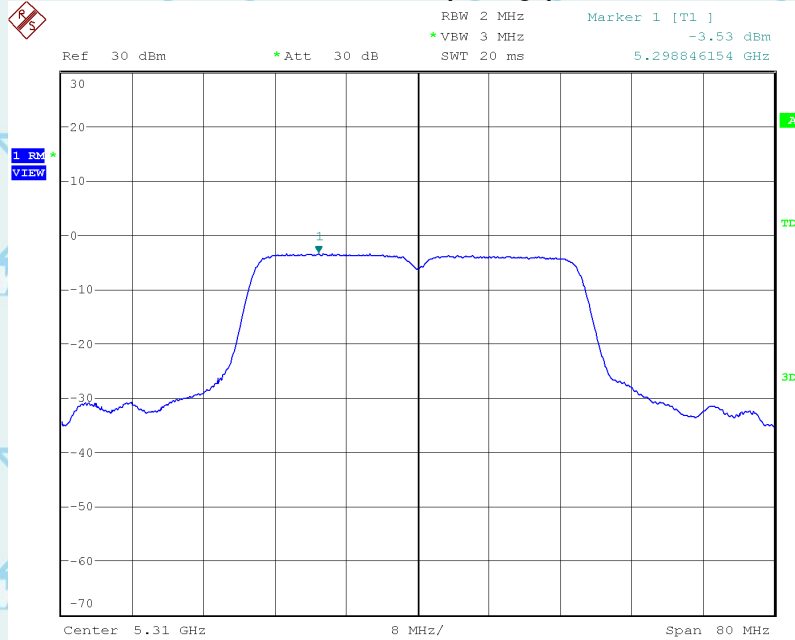

Date: 25.JUL.2022 16:00:12






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band3

PPSD (CH Low)

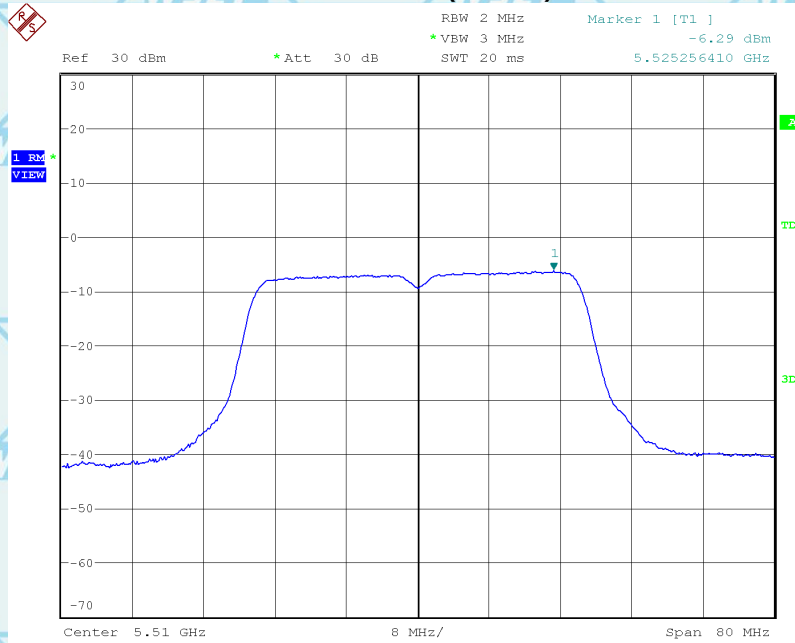

Date: 25.JUL.2022 16:01:20

PPSD (CH High)

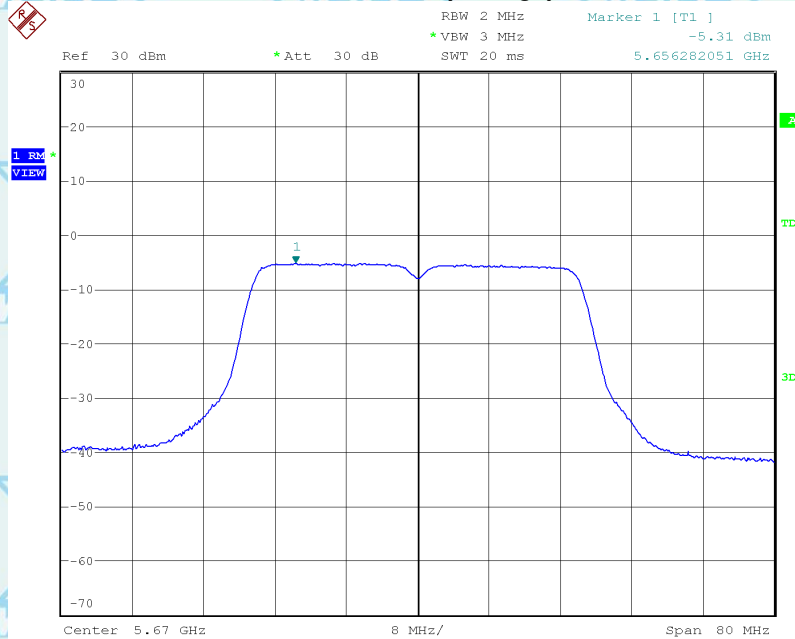

Date: 25.JUL.2022 16:02:08






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band4

PPSD (CH Low)

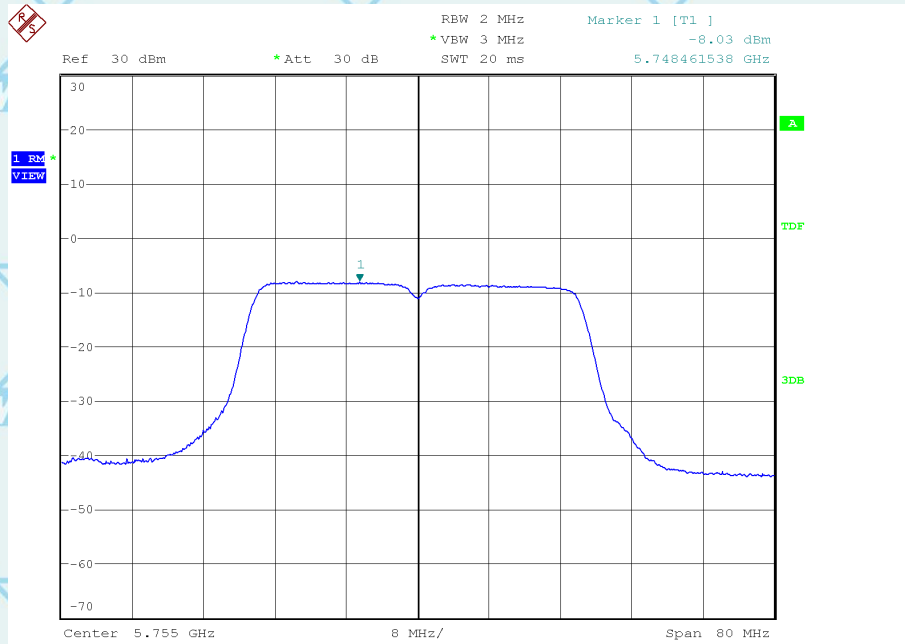

Date: 25.JUL.2022 16:02:46

PPSD (CH High)

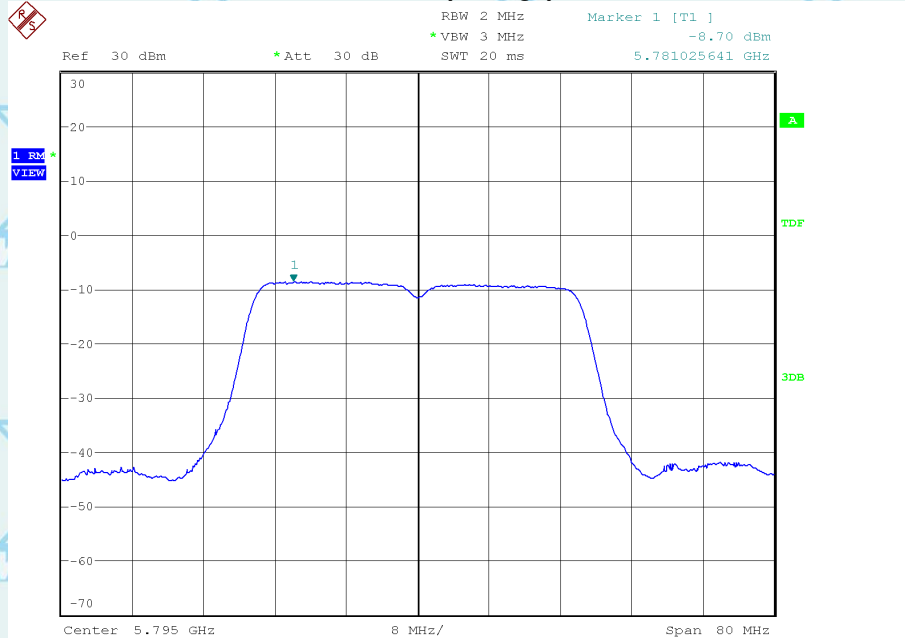

Date: 25.JUL.2022 16:03:31






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


80MHz(IEEE 802.11ac/ax)  
Band1

PPSD (CH Low)

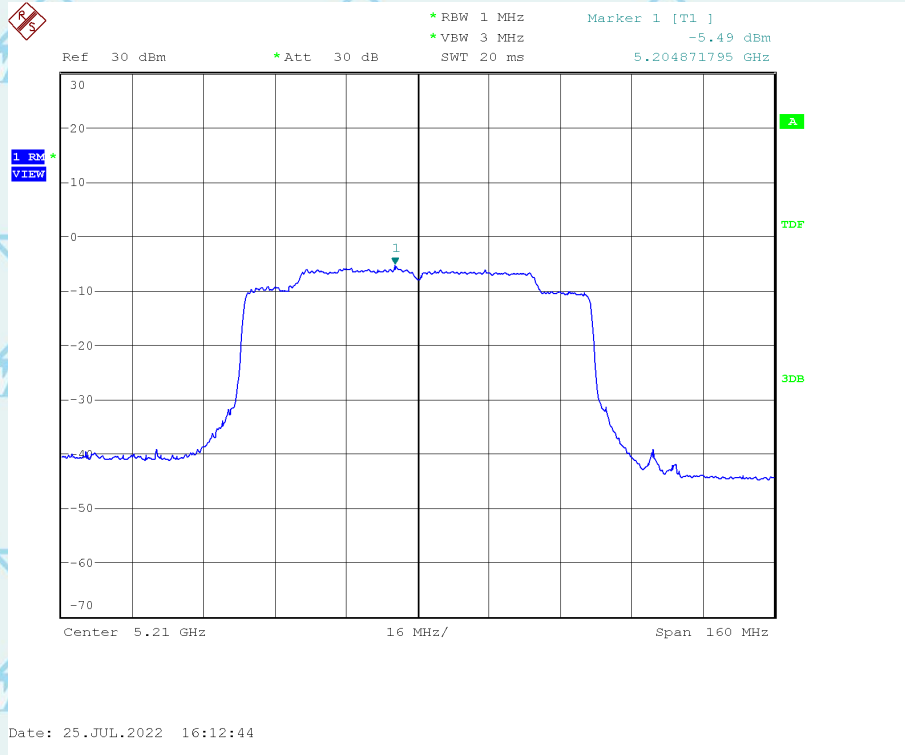

Band2

PPSD (CH Low)

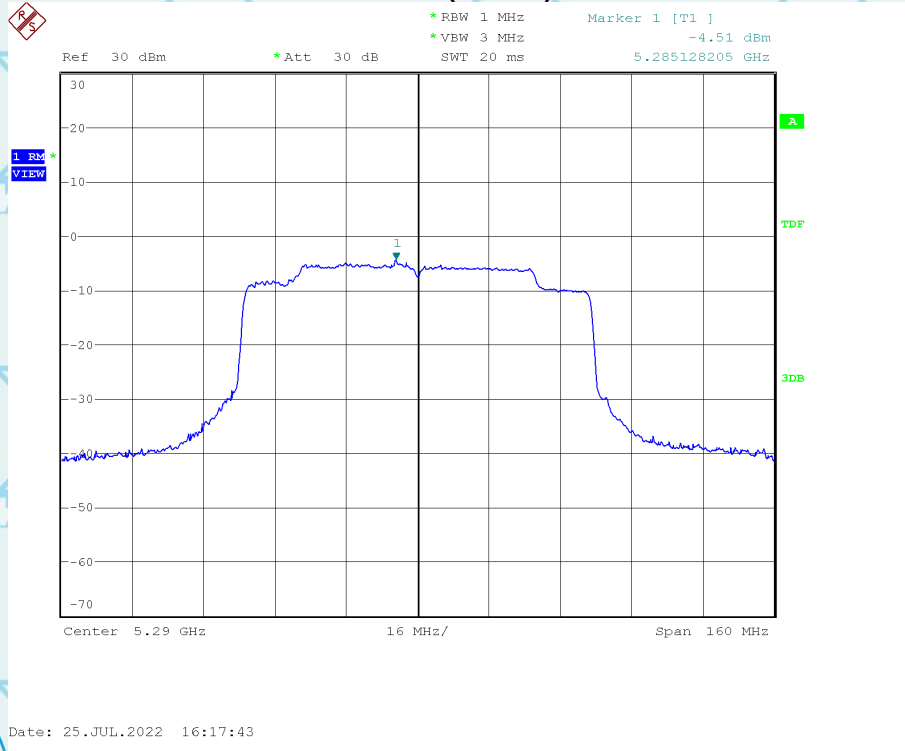




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


Band3

**PPSD (CH Low)**

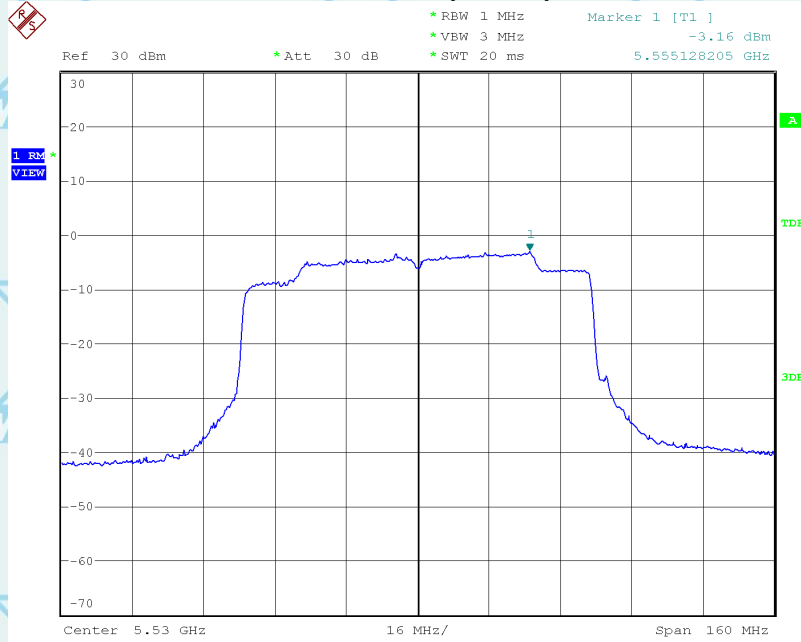

Date: 26.JUL.2022 10:11:38

**PPSD (CH High)**

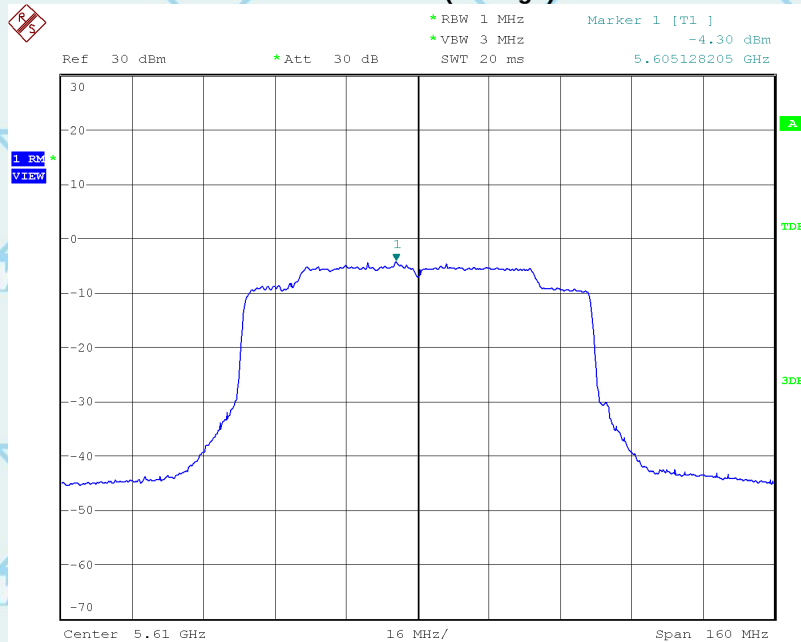

Date: 25.JUL.2022 16:18:34






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Band4

PPSD (CH Low)

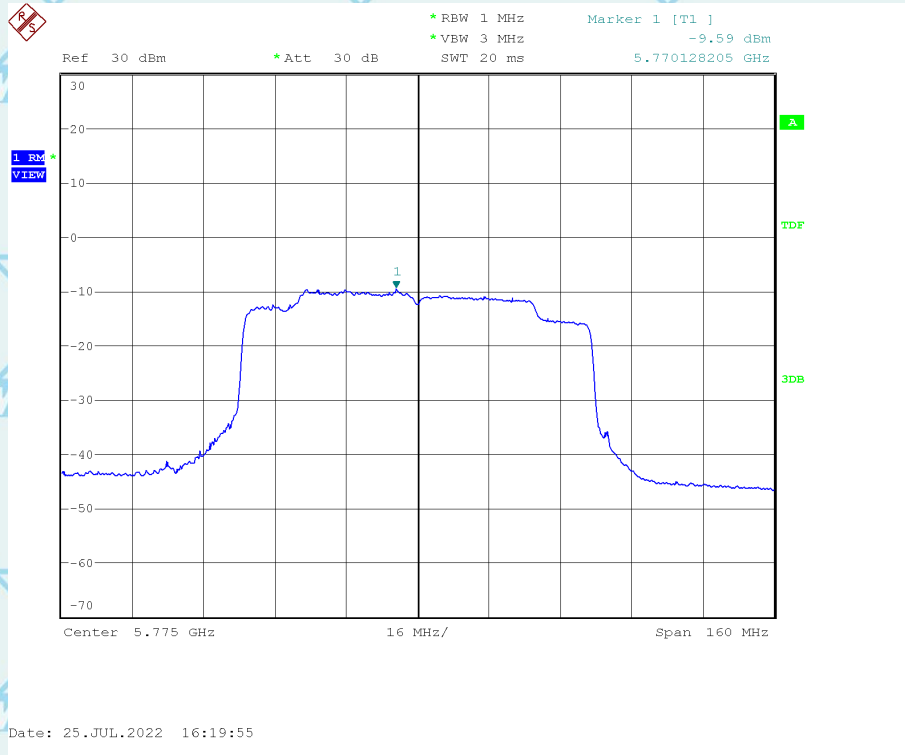



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

### E. Frequency Stability

|               |                     |              |                                   |
|---------------|---------------------|--------------|-----------------------------------|
| Product:      | Megabook            | Test Mode:   | Mode: 20MHz(IEEE 802.11a/n/ac/ax) |
| Test Item:    | Frequency Stability | Temperature: | 25 °C                             |
| Test Voltage: | DC 11.55V           | Humidity:    | 56%RH                             |
| Test Result:  | PASS                |              |                                   |

#### Voltage vs. Frequency Stability

| Voltage (V)          | Measurement Frequency (MHz) |           |           |           |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                      | 5180 MHz                    | 5240 MHz  | 5260 MHz  | 5320 MHz  | 5500 MHz  | 5700 MHz  | 5745 MHz  | 5825 MHz  |
| 126.50               | 5179.9364                   | 5239.9516 | 5259.9343 | 5319.9636 | 5499.9327 | 5699.933  | 5744.9102 | 5824.9614 |
| 110.00               | 5179.9333                   | 5239.9206 | 5259.9372 | 5319.9658 | 5499.9326 | 5699.935  | 5744.9132 | 5824.9628 |
| 93.50                | 5179.9309                   | 5239.9206 | 5259.9356 | 5319.9654 | 5499.9385 | 5699.9351 | 5744.9193 | 5824.9608 |
| Max. Deviation (MHz) | 0.0691                      | 0.0794    | 0.0657    | 0.0364    | 0.0674    | 0.067     | 0.0898    | 0.0392    |
| Max. Deviation (ppm) | 12.01                       | 13.8      | 11.42     | 6.32      | 11.71     | 11.64     | 15.6      | 6.81      |

#### Temperature vs. Frequency Stability

| Temperature (°C)     | Measurement Frequency (MHz) |           |           |           |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                      | 5180 MHz                    | 5240 MHz  | 5260 MHz  | 5320 MHz  | 5500 MHz  | 5700 MHz  | 5745 MHz  | 5825 MHz  |
| 0                    | 5179.9333                   | 5239.9598 | 5259.9345 | 5319.9681 | 5499.9371 | 5699.9398 | 5744.9125 | 5824.9649 |
| 10                   | 5179.9379                   | 5239.9512 | 5259.9311 | 5319.9639 | 5499.9356 | 5699.9334 | 5744.9105 | 5824.9645 |
| 20                   | 5179.9337                   | 5239.9542 | 5259.9348 | 5319.9642 | 5499.9308 | 5699.9381 | 5744.9144 | 5824.9641 |
| 30                   | 5179.9394                   | 5239.957  | 5259.938  | 5319.9669 | 5499.9307 | 5699.9309 | 5744.9179 | 5824.9700 |
| 40                   | 5179.9361                   | 5239.9539 | 5259.9336 | 5319.9699 | 5499.9326 | 5699.9339 | 5744.9196 | 5824.9628 |
| Max. Deviation (MHz) | 0.0667                      | 0.0488    | 0.0689    | 0.0361    | 0.0693    | 0.0691    | 0.0895    | 0.0372    |
| Max. Deviation (ppm) | 11.59                       | 8.48      | 11.97     | 6.27      | 12.04     | 12.01     | 15.55     | 6.46      |



Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

|               |                     |              |                                 |
|---------------|---------------------|--------------|---------------------------------|
| Product:      | Megabook            | Test Mode:   | Mode: 40MHz(IEEE 802.11n/ac/ax) |
| Test Item:    | Frequency Stability | Temperature: | 25 °C                           |
| Test Voltage: | DC 11.55V           | Humidity:    | 56%RH                           |
| Test Result:  | PASS                |              |                                 |

## Voltage vs. Frequency Stability

| Voltage (V)          | Measurement Frequency (MHz) |           |           |           |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                      | 5190 MHz                    | 5230 MHz  | 5270 MHz  | 5310 MHz  | 5510 MHz  | 5670 MHz  | 5755 MHz  | 5795 MHz  |
| 126.50               | 5189.9374                   | 5229.9575 | 5269.9332 | 5309.9647 | 5509.9382 | 5669.9324 | 5754.9138 | 5794.962  |
| 110.00               | 5189.9325                   | 5229.9587 | 5269.9318 | 5309.9651 | 5509.9332 | 5669.9347 | 5754.9174 | 5794.9603 |
| 93.50                | 5189.9372                   | 5229.957  | 5269.9323 | 5309.9687 | 5509.9398 | 5669.9336 | 5754.9116 | 5794.9617 |
| Max. Deviation (MHz) | 0.0675                      | 0.043     | 0.0682    | 0.0353    | 0.0668    | 0.0676    | 0.0884    | 0.0397    |
| Max. Deviation (ppm) | 13.01                       | 7.47      | 11.85     | 6.13      | 11.61     | 11.75     | 15.36     | 6.9       |

## Temperature vs. Frequency Stability

| Temperature (°C)     | Measurement Frequency (MHz) |           |           |           |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                      | 5190 MHz                    | 5230 MHz  | 5270 MHz  | 5310 MHz  | 5510 MHz  | 5670 MHz  | 5755 MHz  | 5795 MHz  |
| 0                    | 5189.9354                   | 5229.9526 | 5269.9373 | 5309.9617 | 5509.9332 | 5669.9359 | 5754.9184 | 5794.9684 |
| 10                   | 5189.9311                   | 5229.9582 | 5269.9363 | 5309.9659 | 5509.9354 | 5669.9368 | 5754.9124 | 5794.961  |
| 20                   | 5189.9324                   | 5229.9596 | 5269.9397 | 5309.9689 | 5509.9315 | 5669.9332 | 5754.9106 | 5794.968  |
| 30                   | 5189.9359                   | 5229.9521 | 5269.9353 | 5309.9699 | 5509.9381 | 5669.9381 | 5754.9135 | 5794.9674 |
| 40                   | 5189.932                    | 5229.9528 | 5269.9366 | 5309.9614 | 5509.9334 | 5669.9393 | 5754.9173 | 5794.9621 |
| Max. Deviation (MHz) | 0.0689                      | 0.0479    | 0.0647    | 0.0386    | 0.0685    | 0.0668    | 0.0894    | 0.039     |
| Max. Deviation (ppm) | 11.97                       | 8.32      | 11.24     | 6.71      | 11.9      | 11.61     | 15.53     | 6.78      |





For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

|               |                     |              |                         |
|---------------|---------------------|--------------|-------------------------|
| Product:      | Megabook            | Test Mode:   | 80MHz(IEEE 802.11ac/ax) |
| Test Item:    | Frequency Stability | Temperature: | 25 °C                   |
| Test Voltage: | DC 11.55V           | Humidity:    | 56%RH                   |
| Test Result:  | PASS                |              |                         |

#### Voltage vs. Frequency Stability

| Voltage (V)          | Measurement Frequency (MHz) |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|
|                      | 5210 MHz                    | 5290 MHz  | 5530 MHz  | 5610 MHz  | 5775 MHz  |
| 126.50               | 5209.9306                   | 5289.951  | 5529.9345 | 5609.9678 | 5774.9382 |
| 110.00               | 5209.9314                   | 5289.9545 | 5529.9341 | 5609.9698 | 5774.9348 |
| 93.50                | 5209.9323                   | 5289.9501 | 5529.9374 | 5609.969  | 5774.9376 |
| Max. Deviation (MHz) | 0.0694                      | 0.0499    | 0.0659    | 0.0322    | 0.0652    |
| Max. Deviation (ppm) | 13.32                       | 8.67      | 11.45     | 5.6       | 11.33     |

#### Temperature vs. Frequency Stability

| Temperature (°C)     | Measurement Frequency (MHz) |           |           |           |           |
|----------------------|-----------------------------|-----------|-----------|-----------|-----------|
|                      | 5210 MHz                    | 5290 MHz  | 5530 MHz  | 5610 MHz  | 5775 MHz  |
| 0                    | 5209.9312                   | 5289.9524 | 5529.9302 | 5609.9605 | 5774.938  |
| 10                   | 5209.9304                   | 5289.9554 | 5529.9394 | 5609.9664 | 5774.9378 |
| 20                   | 5209.9362                   | 5289.9563 | 5529.936  | 5609.9692 | 5774.9354 |
| 30                   | 5209.9368                   | 5289.9541 | 5529.9367 | 5609.969  | 5774.9383 |
| 40                   | 5209.939                    | 5289.9588 | 5529.9394 | 5609.968  | 5774.9346 |
| Max. Deviation (MHz) | 0.0696                      | 0.0476    | 0.0698    | 0.0395    | 0.0654    |
| Max. Deviation (ppm) | 12.09                       | 8.27      | 12.13     | 6.86      | 11.36     |



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 8. BAND EDGE EMISSIONS

### 8.1 Test Equipment

Please refer to Section 4 this report.

### 8.2 Test Procedure

| Band Edge Emissions Measurement:                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Method:                                                                                                                                             | <p>a.)The EUT was tested according to ANSI C63.10.</p> <p>b)The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 1.5 m. All set up is according to ANSI C63.10.</p> <p>c)The frequency spectrum from 9 kHz to 40 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.</p> <p>d)The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.</p> <p>e) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.</p> <p>f)Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.10.</p> |
| Band Edge Emissions Measurement:                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test Equipment Setting:                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p>a)Attenuation: Auto</p> <p>b)Span Frequency: 100 MHz</p> <p>c)RBW/VBW (Emission in restricted band): 1MHz / 3MHz for Peak, 1MHz / 1/T for Average</p> | <p>d)RBW/VBW(Emission in non-restricted band) 1MHz / 3MHz for peak</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 8.3 Test Setup

Same as section 2.2 of this report

### 8.4 Configuration of the EUT

Same as section 2.2 of this report

### 8.5 EUT Operating Condition

Same as section 2.2 of this report.





Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 8. 6 Limit

| Spurious Radiated Emission & Band Edge Emissions Measurement: |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Limit:                                                        | <p>For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.</p> <p>All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)</p> |
| Note:                                                         | <p>Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.</p> <p>47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |



For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)


Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## 8. 7 Test Result

### Band Edge and Fundamental Emissions

|               |                                     |              |                           |
|---------------|-------------------------------------|--------------|---------------------------|
| Product:      | Megabook                            | Test Mode:   | 20MHzIEEE 802.11a/n/ac/ax |
| Test Item:    | Band Edge and Fundamental Emissions | Temperature: | 25 °C                     |
| Test Voltage: | DC 11.55V                           | Humidity:    | 56%RH                     |
| Test Result:  | PASS                                |              |                           |

20MHz(IEEE 802.11a/n/ac/ax)  
Channel Low (5180MHz)

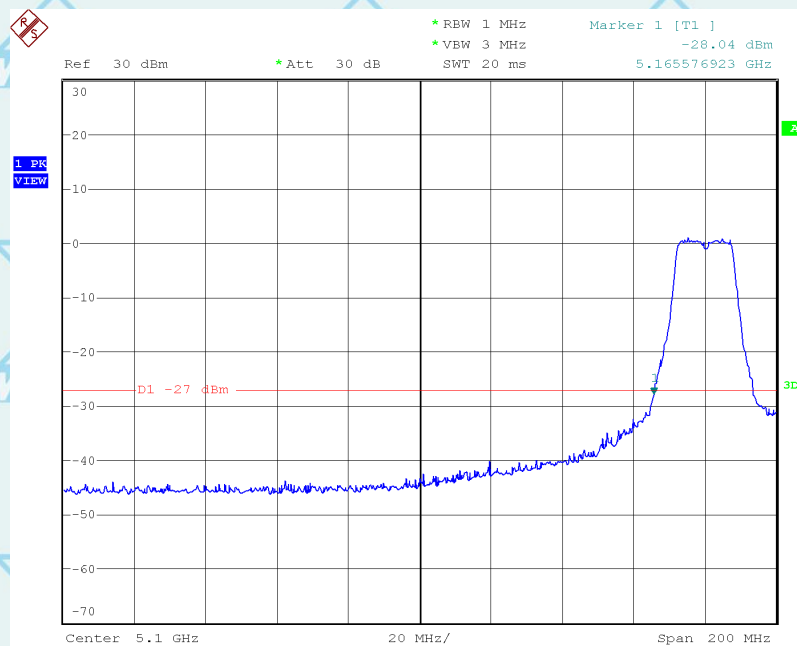


Date: 25.JUL.2022 17:04:04




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Channel High (5320MHz)

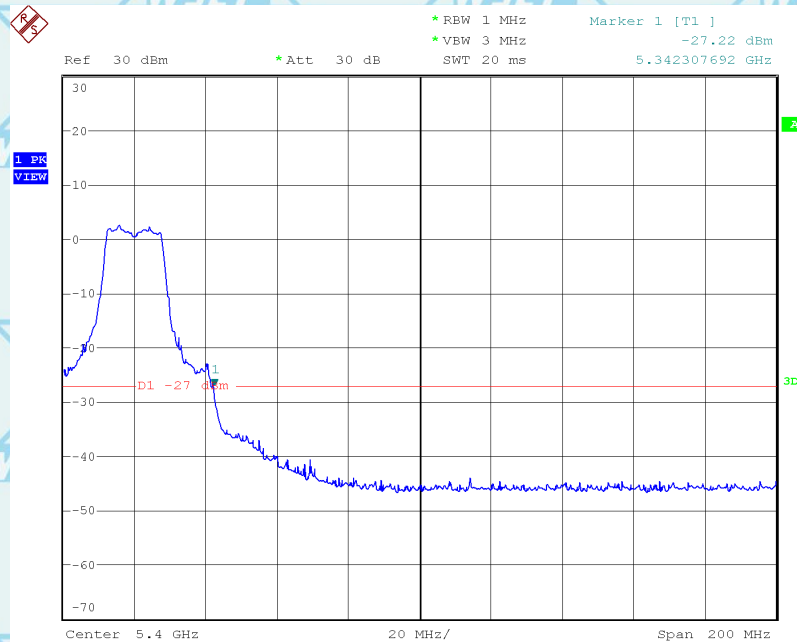

Date: 25.JUL.2022 17:05:25

Channel Low (5745MHz)

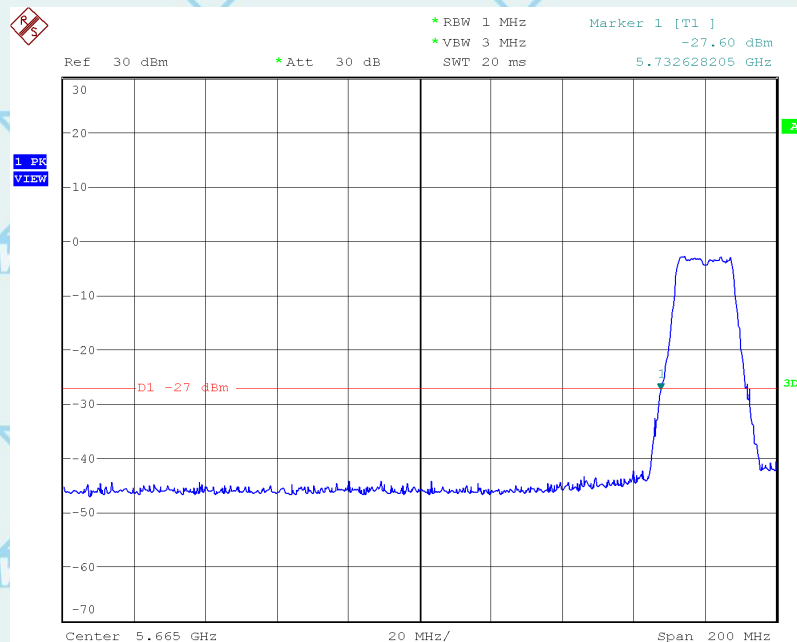


Date: 25.JUL.2022 17:06:38



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Channel High (5825MHz)

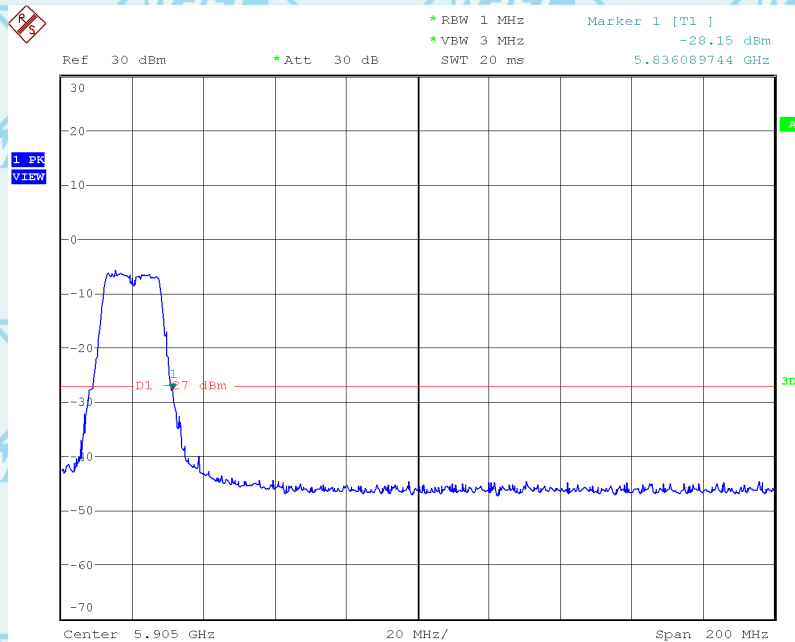


Date: 25.JUL.2022 17:07:41






Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

40MHz IEEE 802.11n/ac/ax  
Channel Low (5190MHz)

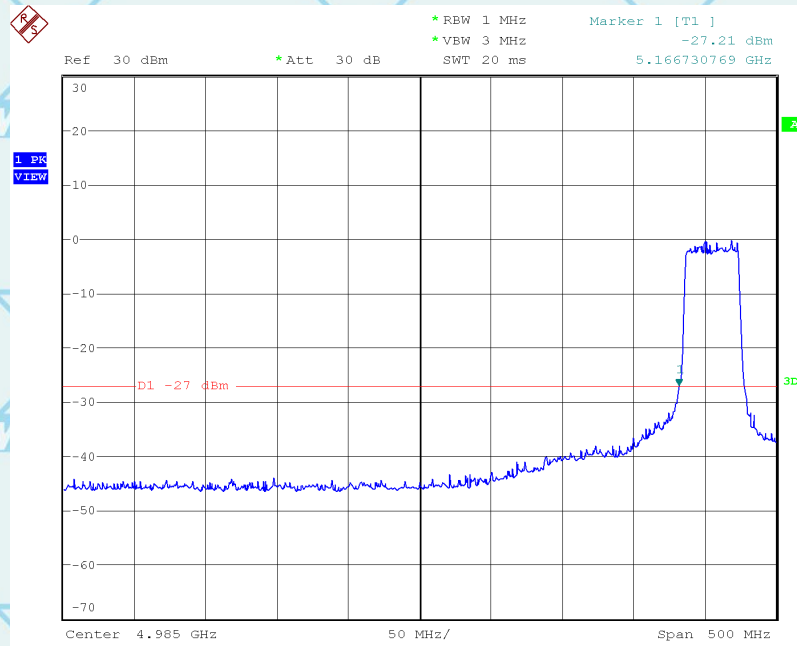

Date: 25.JUL.2022 17:10:16

Channel High (5310MHz)

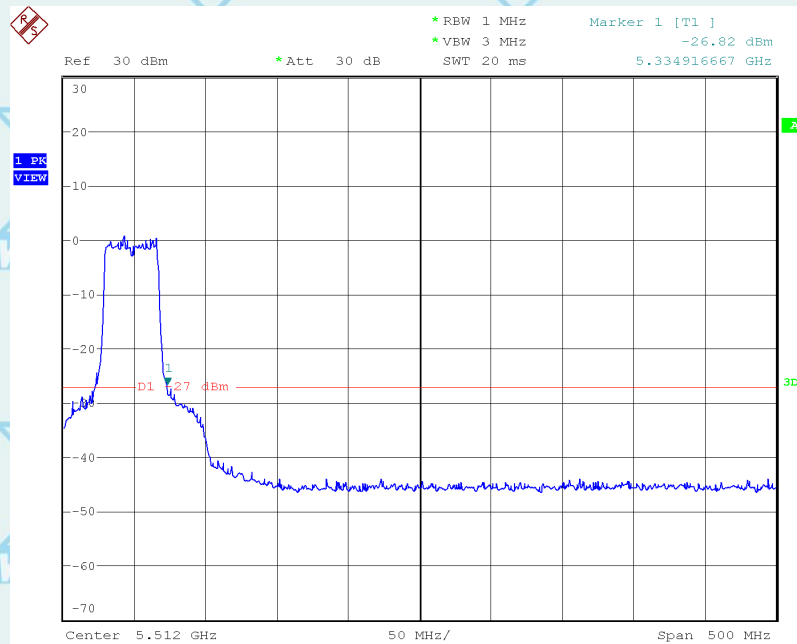


Date: 25.JUL.2022 17:13:05




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Channel Low (5755MHz)

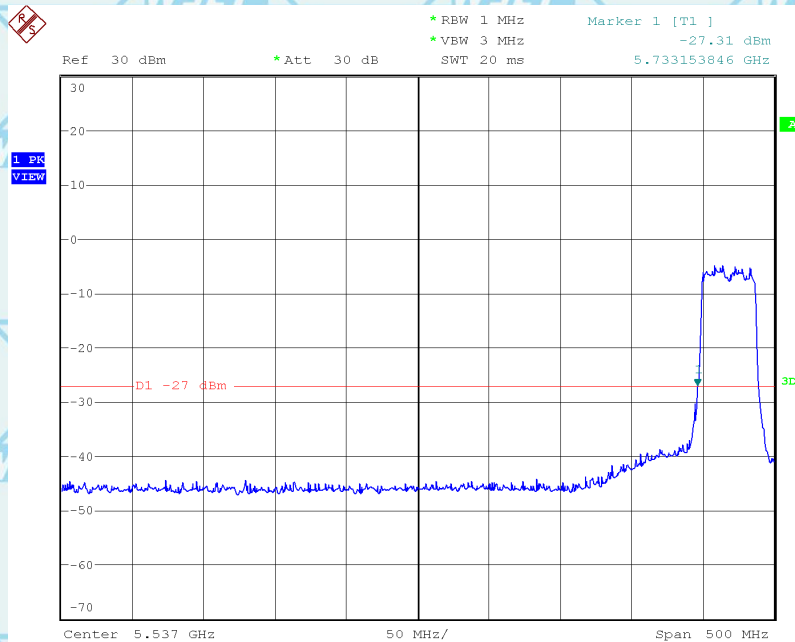

Date: 25.JUL.2022 17:14:38

Channel High (5795MHz)

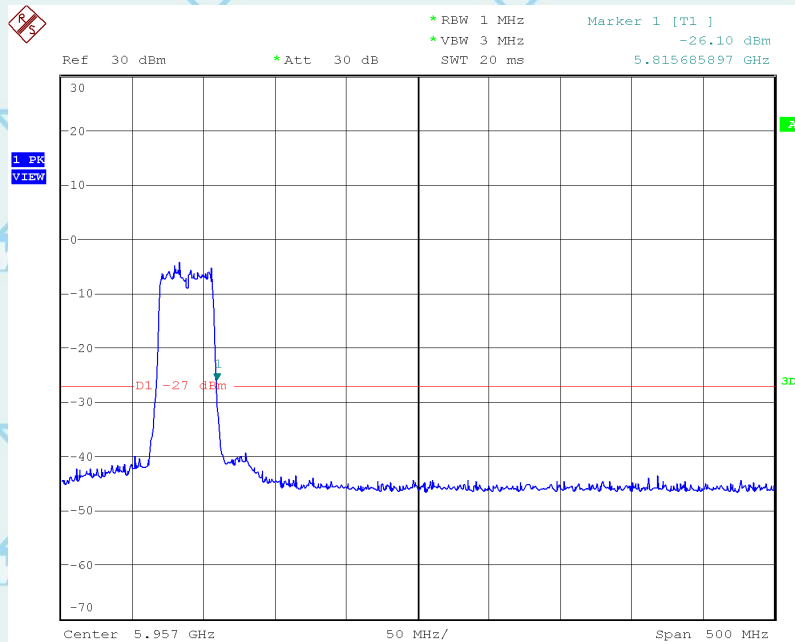


Date: 25.JUL.2022 17:16:20




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

80MHzIEEE 802.11ac/ax  
Channel Low (5210MHz)

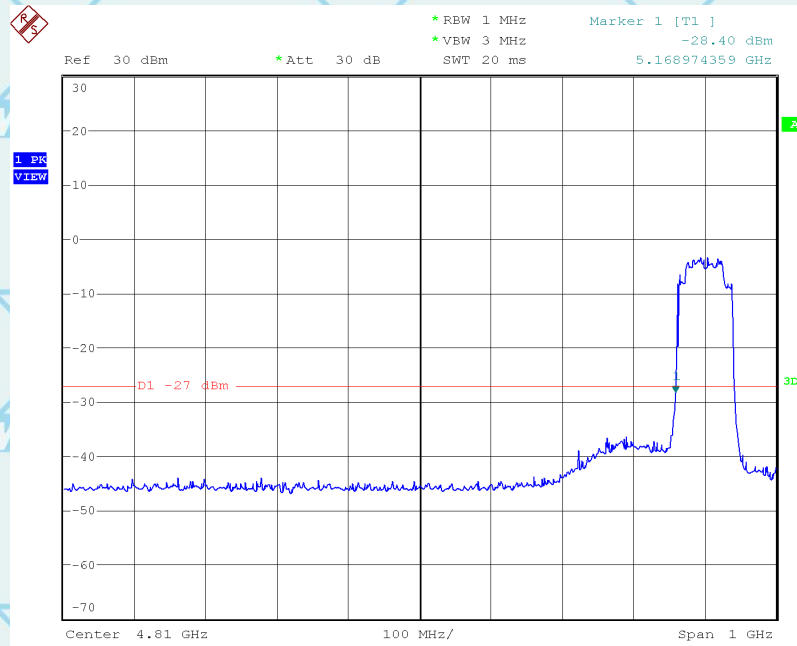

Date: 25.JUL.2022 17:18:19

Channel High (5290MHz)

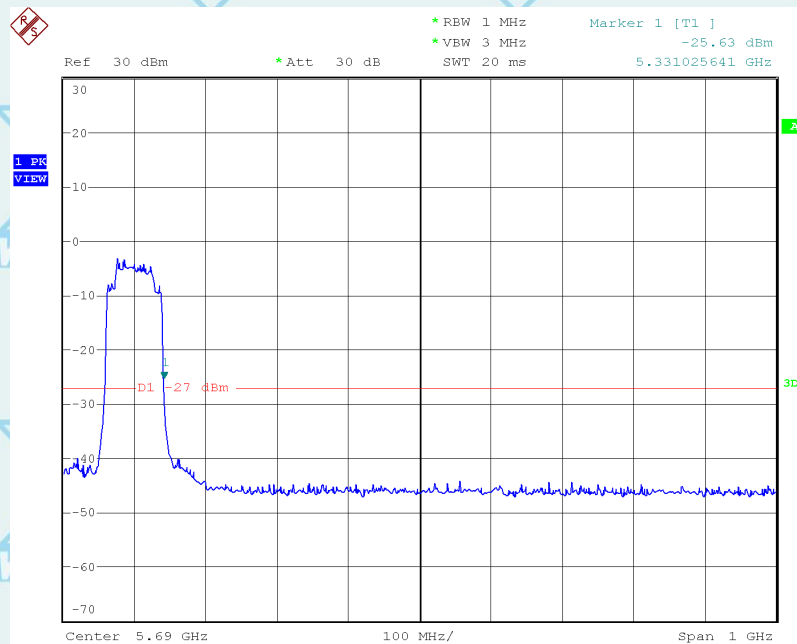


Date: 25.JUL.2022 17:19:35



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Channel Low (5775MHz)

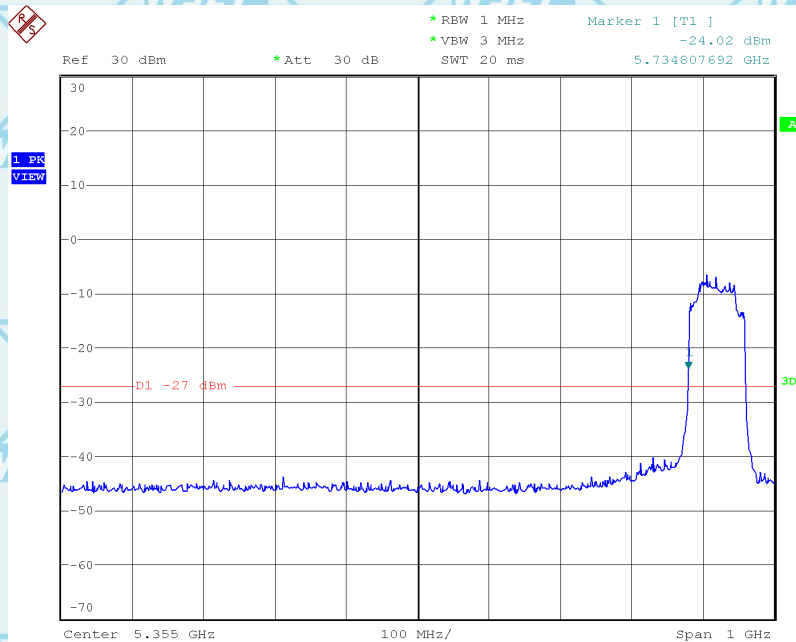

Date: 25.JUL.2022 18:05:14





Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

## 9. DYNAMIC FREQUENCY SELECTION (DFS) DFS OVERVIEW

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands. Within the context of the operation of the DFS function, a U-NII device will operate in either *Master Mode* or *Client Mode*. U-NII devices operating in *Client Mode* can only operate in a network controlled by a U-NII device operating in *Master Mode*.

Tables 1 and 2 shown below summarize the information contained in sections 5.1.1 and 5.1.2

**Table 1: Applicability of DFS Requirements Prior to Use of a Channel**

| Requirement                            | Operational Mode |                                |                             |
|----------------------------------------|------------------|--------------------------------|-----------------------------|
|                                        | Master           | Client Without Radar Detection | Client With Radar Detection |
| <i>Non-Occupancy Period</i>            | Yes              | Not required                   | Yes                         |
| <i>DFS Detection Threshold</i>         | Yes              | Not required                   | Yes                         |
| <i>Channel Availability Check Time</i> | Yes              | Not required                   | Not required                |
| <i>U-NII Detection Bandwidth</i>       | Yes              | Not required                   | Yes                         |

**Table 2: Applicability of DFS requirements during normal operation**

| Requirement                              | Operational Mode                             |                                |
|------------------------------------------|----------------------------------------------|--------------------------------|
|                                          | Master Device or Client with Radar Detection | Client Without Radar Detection |
| <i>DFS Detection Threshold</i>           | Yes                                          | Not required                   |
| <i>Channel Closing Transmission Time</i> | Yes                                          | Yes                            |
| <i>Channel Move Time</i>                 | Yes                                          | Yes                            |
| <i>U-NII Detection Bandwidth</i>         | Yes                                          | Not required                   |

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                            | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i>                                                                                                                                                                                                                                                                                           | All BW modes must be tested                  | Not required                                         |
| <i>Channel Move Time and Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                               | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| <i>All other tests</i>                                                                                                                                                                                                                                                                                                                                       | Any single BW mode                           | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                              |                                                      |



Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

The operational behavior and individual DFS requirements that are associated with these modes are as follows:

### DFS DETECTION THRESHOLDS

**Table 3** below provides the *DFS Detection Thresholds* for *Master Devices* as well as *Client Devices* incorporating *In-Service Monitoring*.

**Table 3: DFS Detection Thresholds for Master Devices  
and Client Devices with Radar Detection**

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Value<br>(See Notes 1, 2, and 3) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| EIRP $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm                          |
| EIRP $<$ 200 milliwatt and<br>power spectral density $<$ 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -62 dBm                          |
| EIRP $<$ 200 milliwatt that do not meet the power spectral density<br>requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -64 dBm                          |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> |                                  |

### RESPONSE REQUIREMENTS

**Table 4** provides the response requirements for *Master* and *Client Devices* incorporating DFS.

**Table 4: DFS Response Requirement Values**

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Minimum 30 minutes                                                                                                 |
| <i>Channel Availability Check Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 seconds                                                                                                         |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10 seconds<br>See Note 1.                                                                                          |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 milliseconds + an<br>aggregate of 60<br>milliseconds over remaining<br>10 second period.<br>See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Minimum 100% of the U-<br>NII 99% transmission<br>power bandwidth. See Note<br>3.                                  |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                                    |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

### Short Pulse Radar Test Waveforms

Table 5 – Short Pulse Radar Test Waveforms

| Radar Type                                                                                                                                  | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                                                                                                                     | Number of Pulses                                                                                                 | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                           | 1                  | 1428                                                                                                                                                                                                                                                           | 18                                                                                                               | See Note 1                                 | See Note 1               |
| 1                                                                                                                                           | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a<br><br>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | Roundup $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$ | 60%                                        | 30                       |
| 2                                                                                                                                           | 1-5                | 150-230                                                                                                                                                                                                                                                        | 23-29                                                                                                            | 60%                                        | 30                       |
| 3                                                                                                                                           | 6-10               | 200-500                                                                                                                                                                                                                                                        | 16-18                                                                                                            | 60%                                        | 30                       |
| 4                                                                                                                                           | 11-20              | 200-500                                                                                                                                                                                                                                                        | 12-16                                                                                                            | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                                 |                    |                                                                                                                                                                                                                                                                |                                                                                                                  | 80%                                        | 120                      |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                                                                                                                                |                                                                                                                  |                                            |                          |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses would be

$$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$$

Report No.: WSCT-A2LA-R&amp;E220300004A-Wi-Fi2

Table 5a - Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|------------------------------------------------|------------------------------------------|
| 1                                 | 1930.5                                         | 518                                      |
| 2                                 | 1858.7                                         | 538                                      |
| 3                                 | 1792.1                                         | 558                                      |
| 4                                 | 1730.1                                         | 578                                      |
| 5                                 | 1672.2                                         | 598                                      |
| 6                                 | 1618.1                                         | 618                                      |
| 7                                 | 1567.4                                         | 638                                      |
| 8                                 | 1519.8                                         | 658                                      |
| 9                                 | 1474.9                                         | 678                                      |
| 10                                | 1432.7                                         | 698                                      |
| 11                                | 1392.8                                         | 718                                      |
| 12                                | 1355                                           | 738                                      |
| 13                                | 1319.3                                         | 758                                      |
| 14                                | 1285.3                                         | 778                                      |
| 15                                | 1253.1                                         | 798                                      |
| 16                                | 1222.5                                         | 818                                      |
| 17                                | 1193.3                                         | 838                                      |
| 18                                | 1165.6                                         | 858                                      |
| 19                                | 1139                                           | 878                                      |
| 20                                | 1113.6                                         | 898                                      |
| 21                                | 1089.3                                         | 918                                      |
| 22                                | 1066.1                                         | 938                                      |
| 23                                | 326.2                                          | 3066                                     |

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

| Radar Type                                             | Number of Trials | Number of Successful Detections | Minimum Percentage of Successful Detection |
|--------------------------------------------------------|------------------|---------------------------------|--------------------------------------------|
| 1                                                      | 35               | 29                              | 82.9%                                      |
| 2                                                      | 30               | 18                              | 60%                                        |
| 3                                                      | 30               | 27                              | 90%                                        |
| 4                                                      | 50               | 44                              | 88%                                        |
| Aggregate $(82.9\% + 60\% + 90\% + 88\%) / 4 = 80.2\%$ |                  |                                 |                                            |



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## Long Pulse Radar Test Waveform

Table 6 – Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|--------------------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30                       |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *transmission period* will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst Count*. Each interval is of length  $(12,000,000 / \text{Burst Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

### A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.




For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

- 2) Eight (8) *Bursts* are randomly generated for the *Burst Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random

PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

**Figure 1** provides a graphical representation of the Long Pulse Radar Test Waveform.

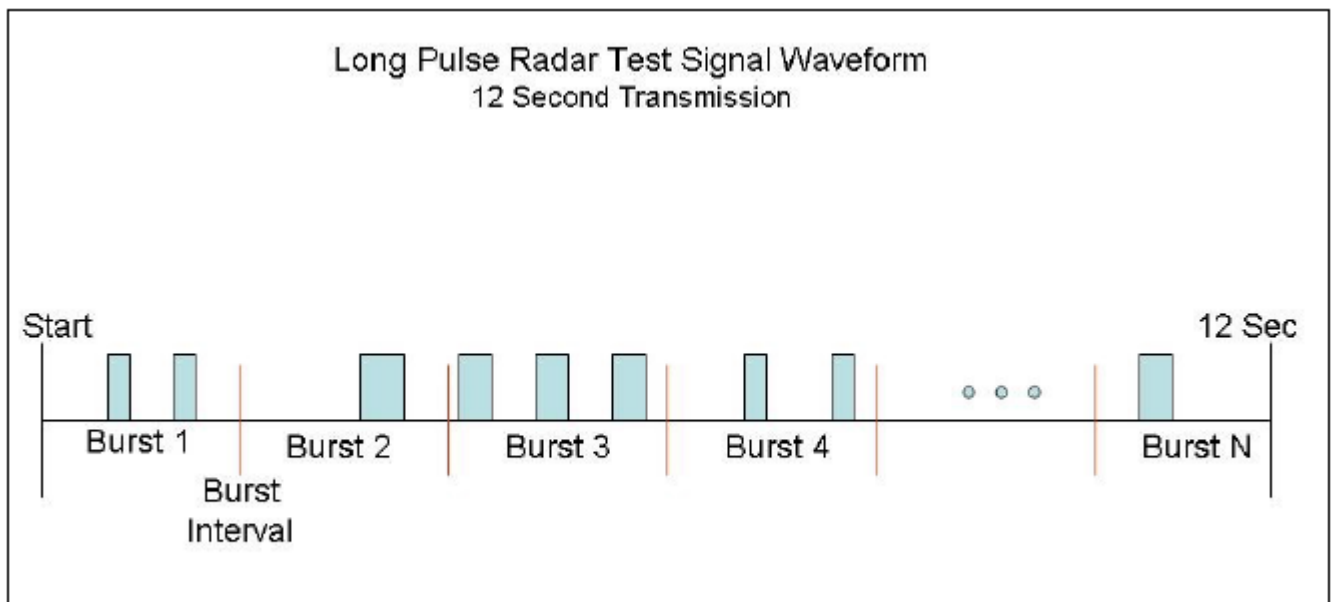

**Figure 1: Graphical Representation of a Long Pulse Radar Type Waveform**



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## Frequency Hopping Radar Test Waveform

**Table 7 – Frequency Hopping Radar Test Waveform**

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30                       |

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm: 4

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2


## TEST PROCEDURE

### DFS MEASUREMENT SYSTEM

A complete DFS Measurement System consists of two subsystems:

- (1) The Radar Signal Generating Subsystem and
- (2) The Traffic Monitoring Subsystem.

The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

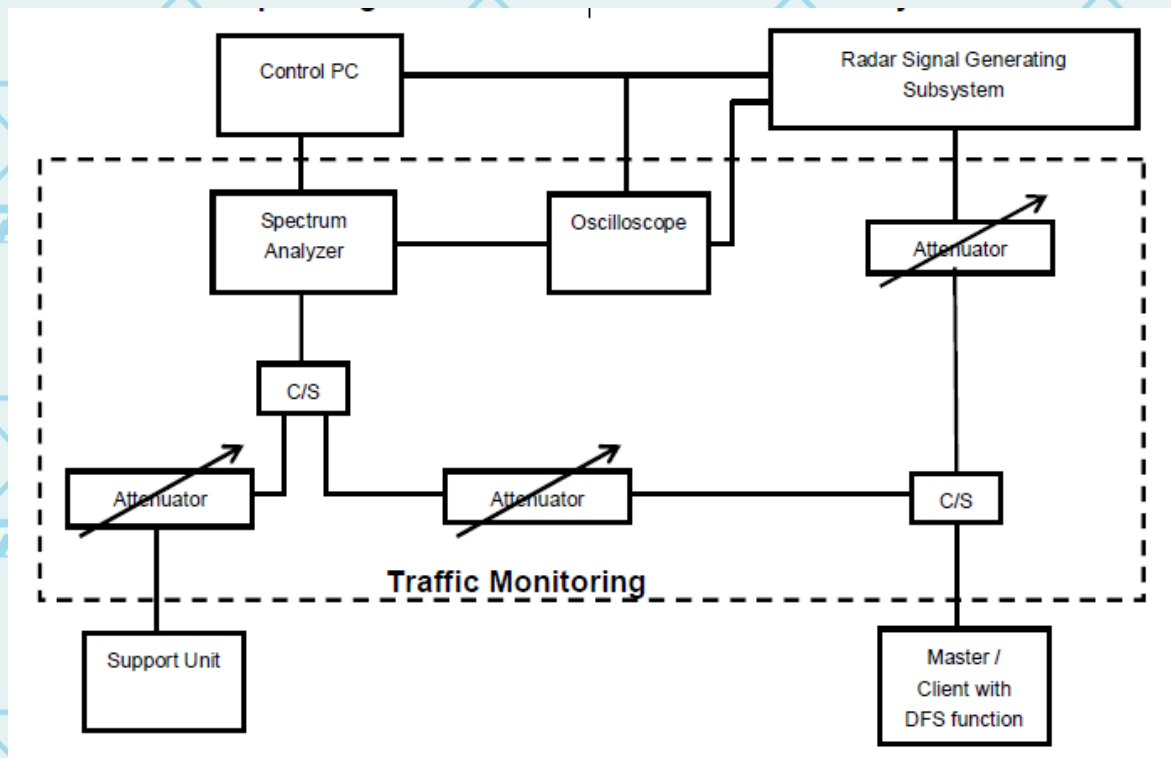

The test transmission will always be from the Master Device to the Client Device. While the Client device is set up to associate with the Master device and play the MPEG file (6 y Magic Hours) from Master device, the designated MPEG test file and instructions are located at:  
<http://ntiacsd.ntia.doc.gov/dfs/>.




Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

## CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

The measured channel is 5260MHz. The radar signal was the same as transmitted channels, and injected into the antenna port of Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

## SLAVE WITHOUT RADAR DETECTION MODE

The antenna gain is -4dBi and required detection threshold is -65dBm ( $= -62 + 1 - 4$ )dBm. The calibrated conducted detection threshold level is set to -65dBm.

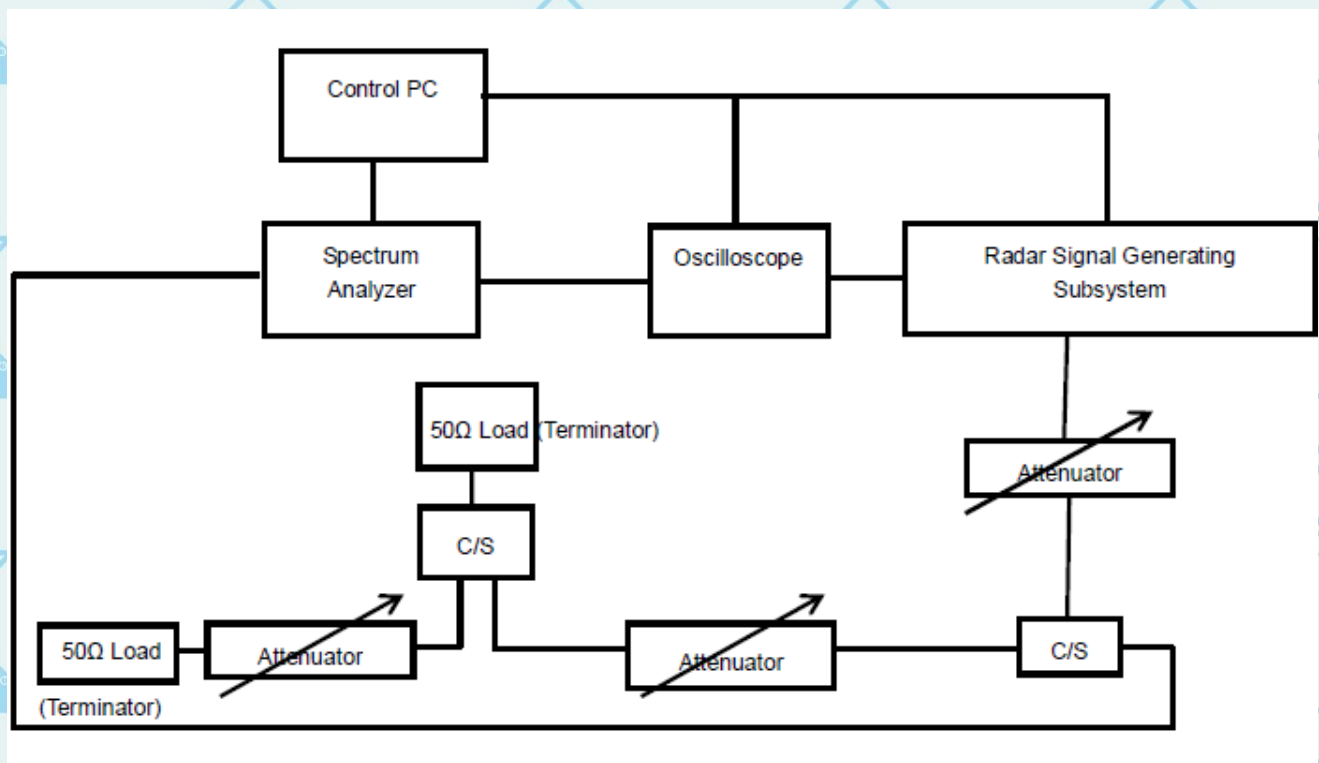

## DEVIATION FROM TEST STANDARD

No deviation.



Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

**RESULT: PASS**



| Test Items                        | Remark     | Result |
|-----------------------------------|------------|--------|
| Channel Closing Transmission Time | Applicable | PASS   |
| Channel Move Time                 | Applicable | PASS   |

Note: This phone can only be used as a slave without radar detection function.

**MEASUREMENT RECORD (THE WOST CASE)**

Measurement data below:

| 5320MHz                           |            |           |             |
|-----------------------------------|------------|-----------|-------------|
| Test Items                        | Value (ms) | Limit (s) | Test Result |
| Channel Closing Transmission Time | 52.4       | 1         | Pass        |
| Channel Move Time                 | 870.6      | 10        | Pass        |

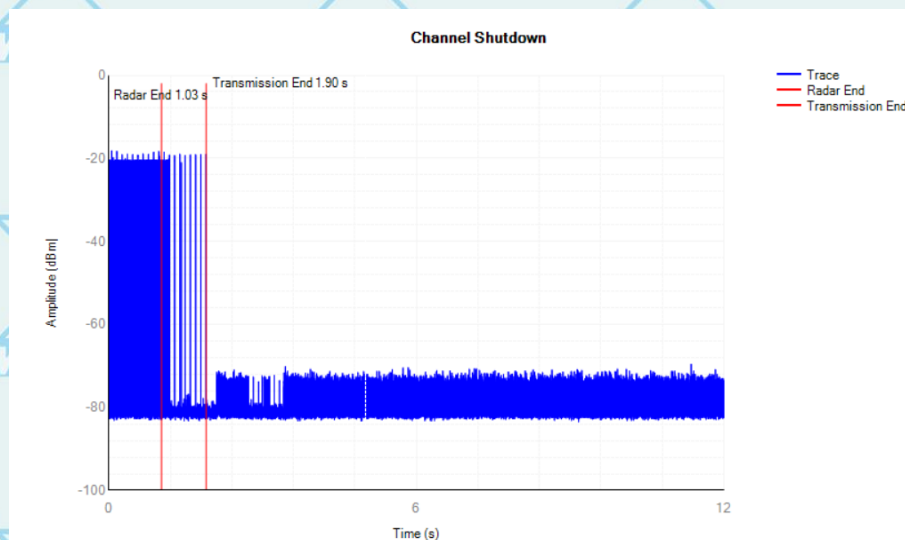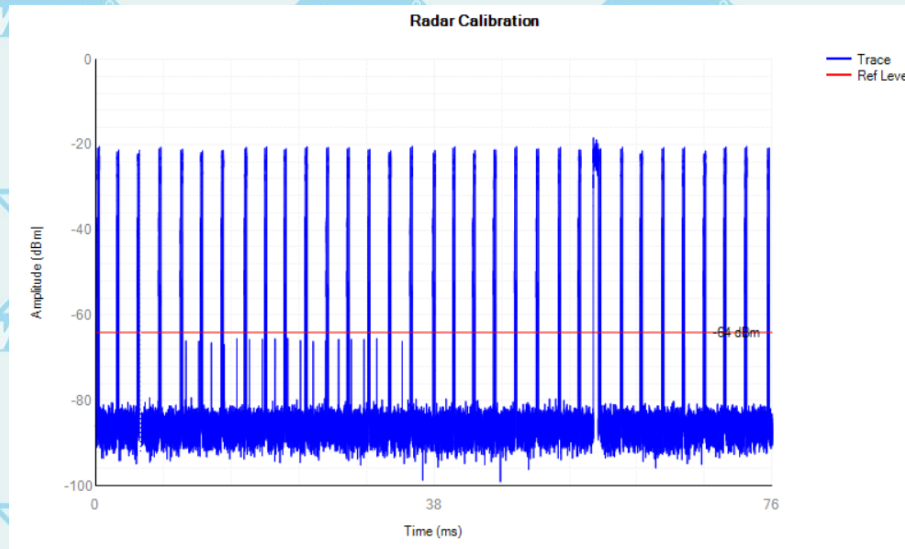



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

Report No.: WSCT-A2LA-R&E220300004A-Wi-Fi2

Measurement data below:

| 5500MHz                           |            |           |             |
|-----------------------------------|------------|-----------|-------------|
| Test Items                        | Value (ms) | Limit (s) | Test Result |
| Channel Closing Transmission Time | 30.8       | 1         | Pass        |
| Channel Move Time                 | 800.4      | 10        | Pass        |

