

WSCT**WSCT**

TEST REPORT

FCC ID: 2ADYY-T1001W

Product: Tablet

Model No.: T1001W

Trade Mark: TECNO

Report No.: WSCT-ANAB-R&E241000052A-BT

Issued Date: 07 November 2024

Issued for: TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By: WSCT

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli' an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyuan
Street, Bao' an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

Standardization Certification& Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification& Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

| | |
|--|-----------|
| 1. Test Certification | 3 |
| 2. Test Result Summary | 4 |
| 3. EUT Description..... | 5 |
| 4. Genera Information..... | 7 |
| 4.1. TEST ENVIRONMENT AND MODE | 7 |
| 4.2. DESCRIPTION OF SUPPORT UNITS | 7 |
| 5. Facilities and Accreditations | 8 |
| 5.1. FACILITIES | 8 |
| 5.2. ACCREDITATIONS | 8 |
| 5.3. MEASUREMENT UNCERTAINTY | 9 |
| 5.4. MEASUREMENT INSTRUMENTS | 10 |
| 6. Test Results and Measurement Data | 11 |
| 6.1. ANTENNA REQUIREMENT..... | 11 |
| 6.2. CONDUCTED EMISSION | 12 |
| 6.3. CONDUCTED OUTPUT POWER | 16 |
| 6.4. 20dB OCCUPY BANDWIDTH | 23 |
| 6.5. CARRIER FREQUENCIES SEPARATION | 30 |
| 6.6. HOPPING CHANNEL NUMBER | 37 |
| 6.7. DWELL TIME..... | 40 |
| 6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 51 |
| 6.9. CONDUCTED BAND EDGE MEASUREMENT | 52 |
| 6.10. CONDUCTED SPURIOUS EMISSION MEASUREMENT..... | 55 |
| 6.11. RADIATED SPURIOUS EMISSION MEASUREMENT | 65 |
| 7. Test Setup Photographs | 76 |





WSCT

WSCT

WSCT

WSCT

World Standardization Certification & Testing Group (Shenzhen) Co.,Ltd.



ANAB
ANSI National Accreditation Board
ACCREDITED
ISO/IEC 17025
TESTING LABORATORY
Certificate Number: AT-3951

WSCT

WSCT

WSCT

WSCT

Report No.: WSCT-ANAB-R&E241000052A-BT

1. Test Certification

| | |
|-----------------------|--|
| Product: | Tablet |
| Model No.: | T1001W |
| Additional Model: | TECNO |
| Applicant: | TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG |
| Manufacturer: | TECNO MOBILE LIMITED FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG |
| Date of Test: | 22 October 2024 to 07 November 2024 |
| Applicable Standards: | FCC CFR Title 47 Part 15 Subpart C Section 15.247 |

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above.

The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Chen Xu

(Chen Xu)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

07 November 2024



2. Test Result Summary

| Requirement | CFR 47 Section | Result |
|----------------------------------|-------------------------------------|--------|
| Antenna Requirement | §15.203/§15.247 (c) | PASS |
| AC Power Line Conducted Emission | §15.207 | PASS |
| Maximum conducted output power | §15.247 (b)(1) §2.1046 | PASS |
| 20dB Occupied Bandwidth | §15.247 (a)(1) §2.1049 | PASS |
| Carrier Frequencies Separation | §15.247 (a)(1) | PASS |
| Hopping Channel Number | §15.247 (a)(1) | PASS |
| Dwell Time | §15.247 (a)(1) | PASS |
| Radiated Emission | §15.205/§15.209 §2.1053, §2.1057 | PASS |
| Band Edge | §15.247(d) §2.1051, §2.1057 | PASS |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

| | |
|----------------------|--|
| Product Name: | Tablet |
| Model : | T1001W |
| Trade Mark: | TECNO |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel Separation: | 1MHz |
| Number of Channel: | 79 |
| Modulation Type: | GFSK, π/4-DQPSK, 8-DPSK |
| Antenna Type: | PIFA Antenna |
| Antenna Gain: | -0.08dBi |
| Operating Voltage: | Adapter1: FC447U Input: 100-240V~50/60Hz 0.5A MAX Output: 5.0V~3.0A 15.0W 9.0V~2.22A 19.98W 12.0V~1.67A 20.04W Rechargeable Li-ion Battery: T1001 Nominal Voltage: 3.85V--- Limited Charge Voltage: 4.4V--- Rated Capacity: 7000mAh Rated Energy: 26.95Wh |
| Remark: | N/A. |

Note: 1. N/A stands for no applicable.

2. Antenna gain provided by the customer.

Configuration differences

| Configuration | Model | Camera | Adapter | LCD |
|---------------|--------|---------------------------|--------------------|------------------------|
| 1 | T1001W | SA1036G5M / SE1035G13M | T1001 (Ganfeng) | HJR101059D |
| 2 | T1001W | AC55925 / AM5A926 | T1001 (Gaoyuan) | SAT101AT45IM0712-Q0054 |

Note: The prototypes of both configurations have been tested, and the "Configuration1" has the worst test result, which is the main test model reported

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 0 | 2402MHz | 20 | 2422MHz | 40 | 2442MHz | 60 | 2462MHz |
| 1 | 2403MHz | 21 | 2423MHz | 41 | 2443MHz | 61 | 2463MHz |
| ... | WSCT | ... | WSCT | ... | WSCT | ... | WSCT |
| 10 | 2412MHz | 30 | 2432MHz | 50 | 2452MHz | 70 | 2472MHz |
| 11 | 2413MHz | 31 | 2433MHz | 51 | 2453MHz | 71 | 2473MHz |
| ... | ... | ... | ... | ... | ... | ... | ... |
| 18 | 2420MHz | 38 | 2440MHz | 58 | 2460MHz | 78 | 2480MHz |
| 19 | 2421MHz | 39 | 2441MHz | 59 | 2461MHz | - | - |

Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode.

Report No.: WSCT-ANAB-R&E241000052A-BT

4. General Information

4.1.5 Test environment and mode

| Operating Environment: | |
|---|--|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Mode: | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery |
| The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. | |

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| / | / | / | / | / |

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



Report No.: WSCT-ANAB-R&E24100052A-BT

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at
Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street,
Bao'an District, Shenzhen City, Guangdong Province, China of the World **WSCT**
Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|-----|---|-------------------------|
| 1 | Duty Cycle and Tx-Sequence and Tx-Gap | $\pm 1\%$ |
| 2 | Dwell Time and Minimum Frequency Occupation | $\pm 1.2\%$ |
| 3 | Medium Utilisation Factor | $\pm 1.3\%$ |
| 4 | Occupied Channel Bandwidth | $\pm 2.4\%$ |
| 5 | Transmitter Unwanted Emission in the out-of Band | $\pm 1.3\%$ |
| 6 | Transmitter Unwanted Emissions in the Spurious Domain | $\pm 2.5\%$ |
| 7 | Receiver Spurious Emissions | $\pm 2.5\%$ |
| 8 | Conducted Emission Test | $\pm 3.2\text{dB}$ |
| 9 | RF power, conducted | $\pm 0.16\text{dB}$ |
| 10 | Spurious emissions, conducted | $\pm 0.21\text{dB}$ |
| 11 | All emissions, radiated(<1GHz) | $\pm 4.7\text{dB}$ |
| 12 | All emissions, radiated(>1GHz) | $\pm 4.7\text{dB}$ |
| 13 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 14 | Humidity | $\pm 2.0\%$ |



Report No.: WSCT-ANAB-R&E24100052A-BT

5.4. MEASUREMENT INSTRUMENTS

| NAME OF EQUIPMENT | MANUFACTURER | MODEL | SERIAL NUMBER | Calibration Date | Calibration Due. |
|--------------------------------------|------------------------|--------------|---------------|------------------|------------------|
| Test software | -- | EZ-EMC | CON-03A | - | - |
| Test software | -- | MTS8310 | | - | - |
| EMI Test Receiver | R&S | ESCI | 100005 | 11/05/2024 | 11/04/2025 |
| LISN | AFJ | LS16 | 16010222119 | 11/05/2024 | 11/04/2025 |
| LISN(EUT) | Mestec | AN3016 | 04/10040 | 11/05/2024 | 11/04/2025 |
| Universal Radio Communication Tester | R&S | CMU 200 | 1100.0008.02 | 11/05/2024 | 11/04/2025 |
| Coaxial cable | Megalon | LMR400 | | 11/05/2024 | 11/04/2025 |
| GPIB cable | Megalon | GPIB | N/A | 11/05/2024 | 11/04/2025 |
| Spectrum Analyzer | R&S | FSU | 100114 | 11/05/2024 | 11/04/2025 |
| Pre Amplifier | H.P. | HP8447E | 2945A02715 | 11/05/2024 | 11/04/2025 |
| Pre-Amplifier | CDSI | PAP-1G18-38 | -- | 11/05/2024 | 11/04/2025 |
| Bi-log Antenna | SCHWARZBECK | VULB9168 | 01488 | 7/29/2024 | 7/28/2025 |
| 9*6*6 Anechoic | -- | -- | -- | 11/05/2024 | 11/04/2025 |
| Horn Antenna | COMPLIANCE ENGINEERING | CE18000 | -- | 11/05/2024 | 11/04/2025 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 9120D-631 | 11/05/2024 | 11/04/2025 |
| Cable | TIME MICROWAVE | LMR-400 | N-TYPE04 | 11/05/2024 | 11/04/2025 |
| System-Controller | CCS | N/A | N/A | N.C.R | N.C.R |
| Turn Table | CCS | N/A | N/A | N.C.R | N.C.R |
| Antenna Tower | CCS | N/A | N/A | N.C.R | N.C.R |
| RF cable | Murata | MXHQ87WA3000 | - | 11/05/2024 | 11/04/2025 |
| Loop Antenna | EMCO | 6502 | 00042960 | 11/05/2024 | 11/04/2025 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | 1123 | 11/05/2024 | 11/04/2025 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 11/05/2024 | 11/04/2025 |
| Power sensor | Anritsu | MX248XD | -- | 11/05/2024 | 11/04/2025 |
| Spectrum Analyzer | Keysight | N9010B | MY60241089 | 11/05/2024 | 11/04/2025 |



Report No.: WSCT-ANAB-R&E241000052A-BT

6. Test Results and Measurement Data

6.1. Antenna requirement

| | |
|-----------------------|-------------------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 /247(c) |
|-----------------------|-------------------------------------|

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.


| | |
|----------------|--|
| E.U.T Antenna: | |
|----------------|--|

The Bluetooth antenna is a PIFA Antenna. it meets the standards, and the best case gain of the antenna is -0.08dBi.

Please refer to the attached "T1001W Internal Photo" for the antenna location

6.2. Conducted Emission


6.2.1. Test Specification
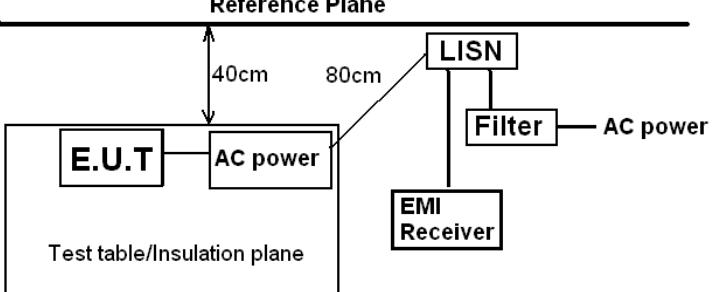
| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|--------------------------|---|--------------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2014 | | | | | | | | | | | | | | |
| Frequency Range: | 150 kHz to 30 MHz | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limits: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test Setup: | <p>Reference Plane</p>  <p>Test table/Insulation plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | | | | | | | | | | | | | |
| Test Mode: | Refer to item 4.1 | | | | | | | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement. | | | | | | | | | | | | | | |
| Test Result: | PASS | | | | | | | | | | | | | | |

6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

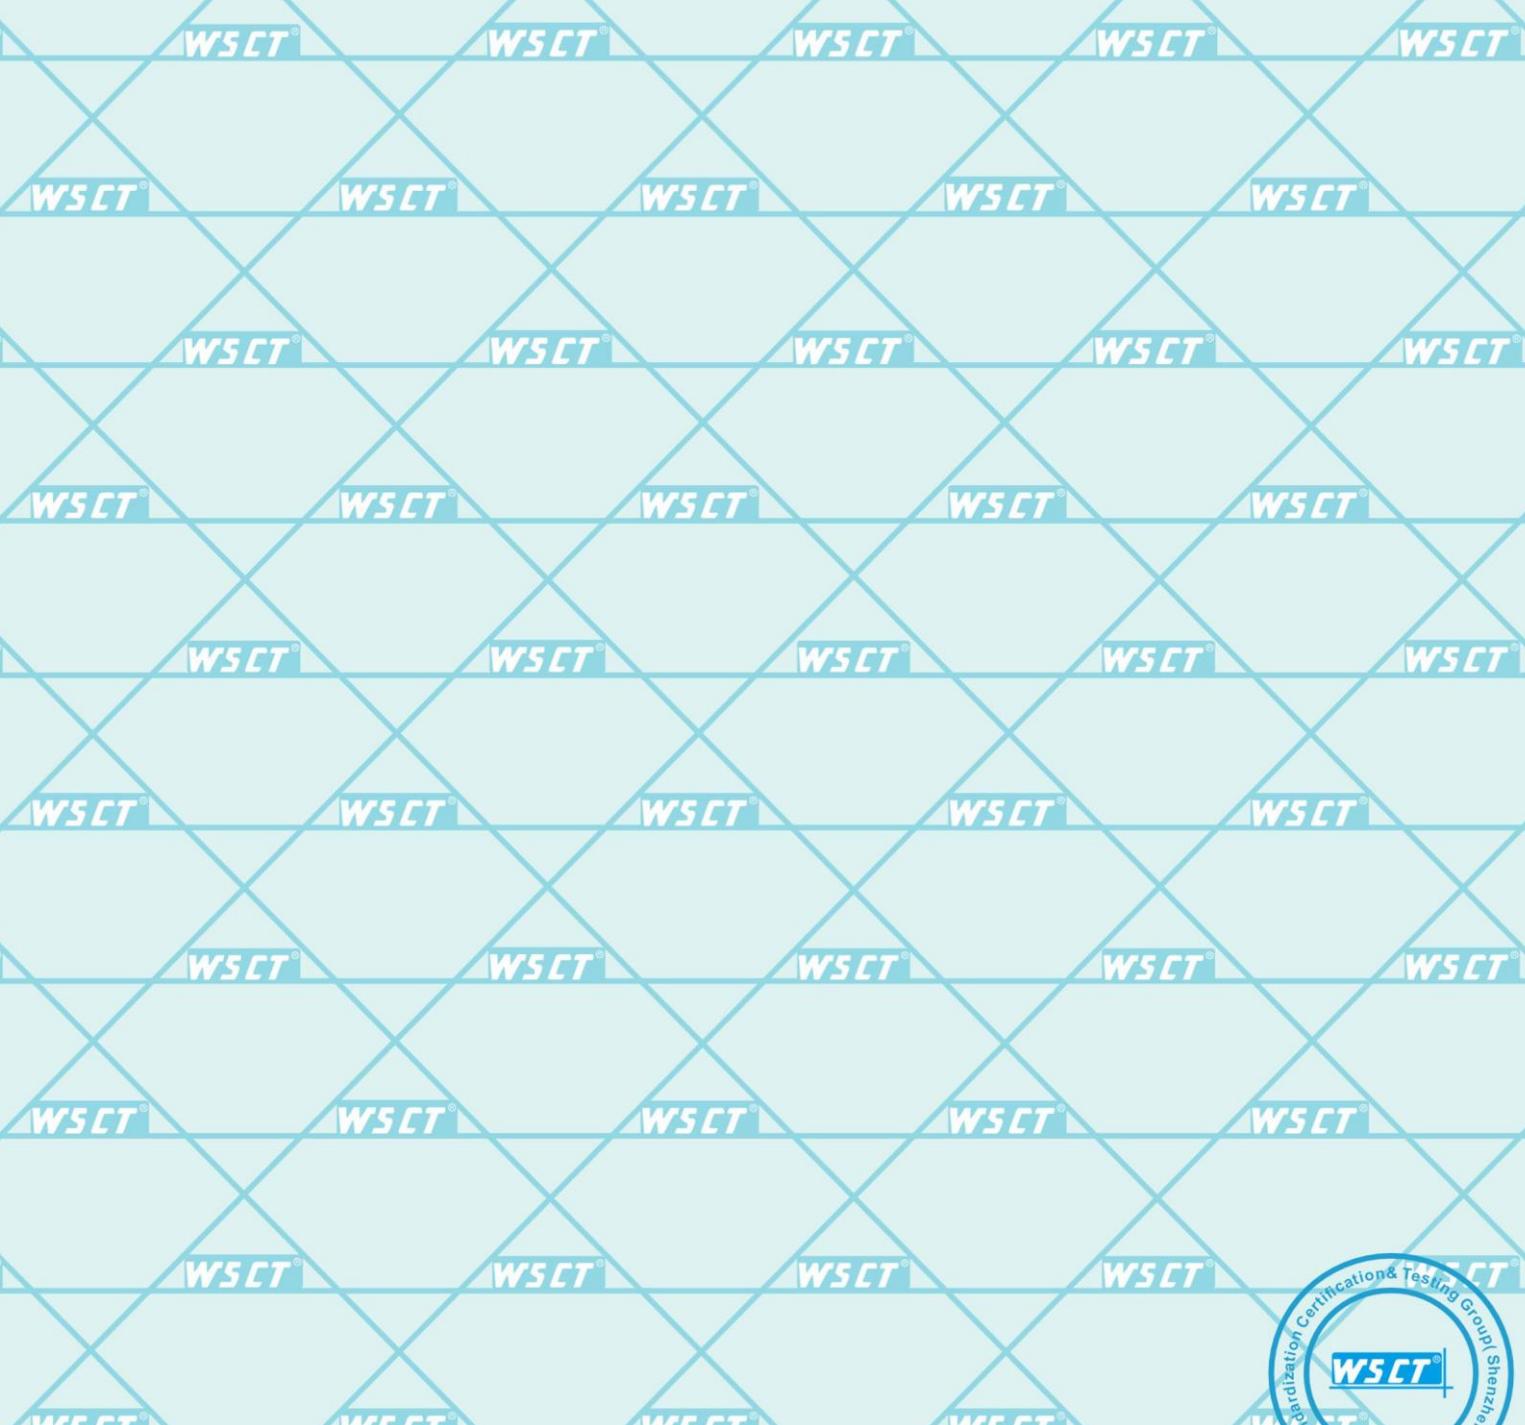


Report No.: WSCT-ANAB-R&E241000052A-BT

Test data

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

For multiple adapters, the report only displays the adapter with the worst data.

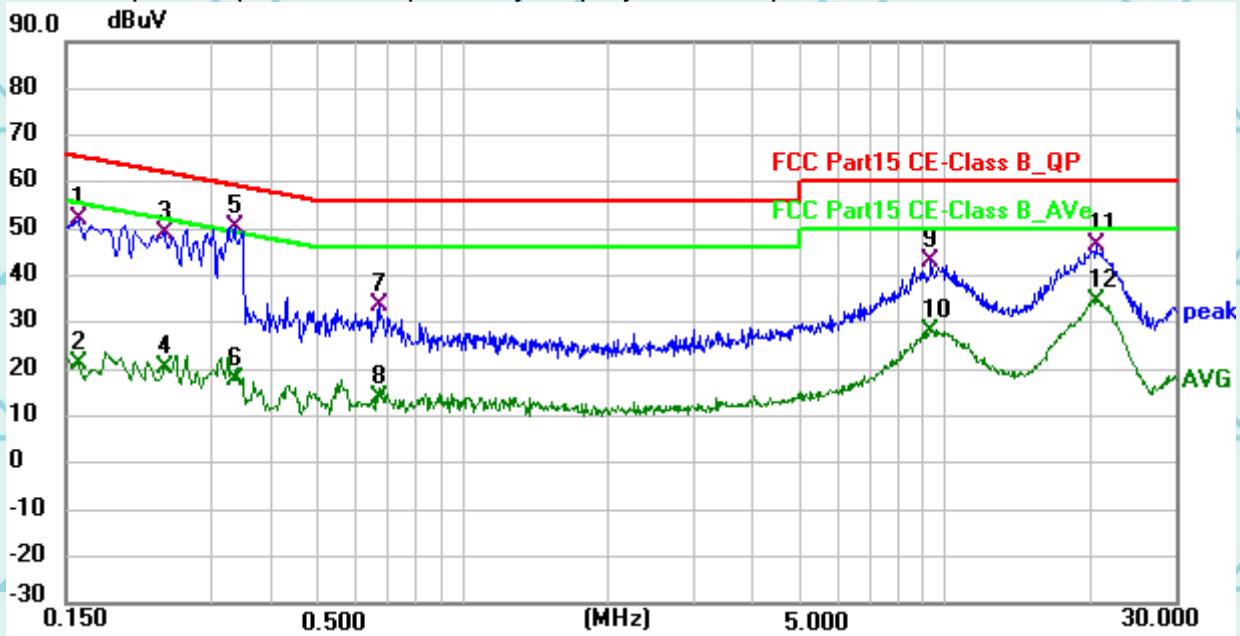


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1 | 0.1590 | 31.17 | 20.72 | 51.89 | 65.52 | -13.63 | QP |
| 2 | 0.1590 | 0.31 | 20.72 | 21.03 | 55.52 | -34.49 | AVG |
| 3 | 0.2400 | 28.30 | 20.67 | 48.97 | 62.10 | -13.13 | QP |
| 4 | 0.2400 | -0.35 | 20.67 | 20.32 | 52.10 | -31.78 | AVG |
| 5 * | 0.3345 | 29.81 | 20.61 | 50.42 | 59.34 | -8.92 | QP |
| 6 | 0.3345 | -2.68 | 20.61 | 17.93 | 49.34 | -31.41 | AVG |
| 7 | 0.6675 | 13.16 | 20.54 | 33.70 | 56.00 | -22.30 | QP |
| 8 | 0.6675 | -6.79 | 20.54 | 13.75 | 46.00 | -32.25 | AVG |
| 9 | 9.3165 | 22.57 | 20.46 | 43.03 | 60.00 | -16.97 | QP |
| 10 | 9.3165 | 7.65 | 20.46 | 28.11 | 50.00 | -21.89 | AVG |
| 11 | 20.5485 | 26.30 | 20.30 | 46.60 | 60.00 | -13.40 | QP |
| 12 | 20.5485 | 14.11 | 20.30 | 34.41 | 50.00 | -15.59 | AVG |



Report No.: WSCT-ANAB-R&E241000052A-BT

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

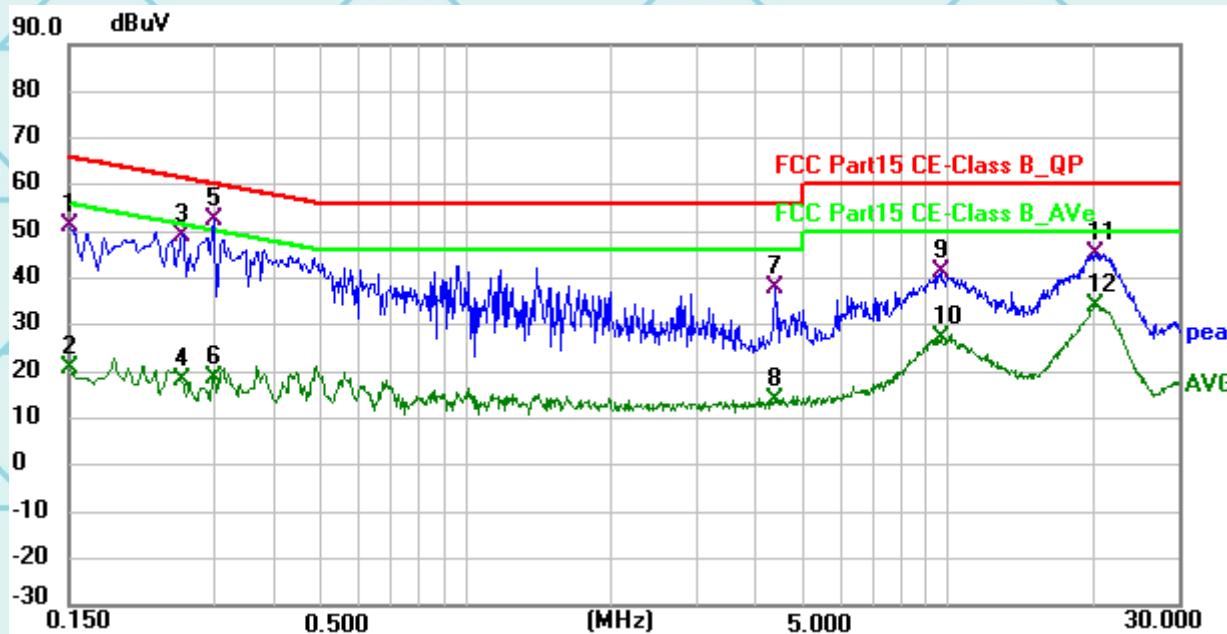

| No. | Frequency (MHz) | Reading (dB μ V) | Factor (dB) | Level (dB μ V) | Limit (dB μ V) | Margin (dB) | Detector |
|-----|-----------------|----------------------|-------------|--------------------|--------------------|-------------|----------|
| 1 | 0.1500 | 30.33 | 20.73 | 51.06 | 66.00 | -14.94 | QP |
| 2 | 0.1500 | 0.11 | 20.73 | 20.84 | 56.00 | -35.16 | AVG |
| 3 | 0.2575 | 28.62 | 20.66 | 49.28 | 61.51 | -12.23 | QP |
| 4 | 0.2575 | -2.32 | 20.66 | 18.34 | 51.51 | -33.17 | AVG |
| 5 * | 0.2985 | 31.91 | 20.63 | 52.54 | 60.28 | -7.74 | QP |
| 6 | 0.2985 | -2.11 | 20.63 | 18.52 | 50.28 | -31.76 | AVG |
| 7 | 4.4025 | 17.27 | 20.58 | 37.85 | 56.00 | -18.15 | QP |
| 8 | 4.4025 | -6.75 | 20.58 | 13.83 | 46.00 | -32.17 | AVG |
| 9 | 9.6674 | 20.87 | 20.46 | 41.33 | 60.00 | -18.67 | QP |
| 10 | 9.6674 | 6.90 | 20.46 | 27.36 | 50.00 | -22.64 | AVG |
| 11 | 20.2290 | 25.11 | 20.28 | 45.39 | 60.00 | -14.61 | QP |
| 12 | 20.2290 | 13.64 | 20.28 | 33.92 | 50.00 | -16.08 | AVG |

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss


Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)Limit (dB μ V) = Limit stated in standardMargin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak AVG=average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification
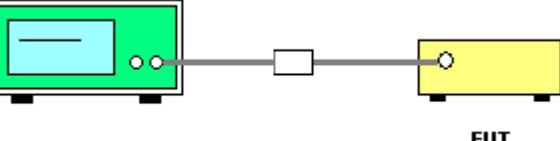
| | |
|--------------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. |
| Test Setup: |  <p>Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <p>Use the following spectrum analyzer settings:</p> <p>Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</p> <p>RBW > the 20 dB bandwidth of the emission being measured $VBW \geq RBW$</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>Allow the trace to stabilize.</p> <p>Use the marker-to-peak function to set the marker to the peak of the emission.</p> |
| Test Result: | PASS |

6.3.2. Test Data

| GFSK mode | | | |
|--------------|--------------------------------------|-------------|--------|
| Test channel | Maximum conducted output power (dBm) | Limit (dBm) | Result |
| Lowest | 9.97 | 20.97 | PASS |
| Middle | 11.97 | 20.97 | PASS |
| Highest | 9.37 | 20.97 | PASS |

| π/4-DQPSK mode | | | |
|----------------|--------------------------------------|-------------|--------|
| Test channel | Maximum conducted output power (dBm) | Limit (dBm) | Result |
| Lowest | 9.93 | 20.97 | PASS |
| Middle | 11.95 | 20.97 | PASS |
| Highest | 9.03 | 20.97 | PASS |

| 8DPSK mode | | | |
|--------------|--------------------------------------|-------------|--------|
| Test channel | Maximum conducted output power (dBm) | Limit (dBm) | Result |
| Lowest | 9.95 | 20.97 | PASS |
| Middle | 12.03 | 20.97 | PASS |
| Highest | 9.08 | 20.97 | PASS |

Test plots as follows:




Report No.: WSCT-ANAB-R&E241000052A-BT

Test Graphs

Power 1-DH5 2402MHz




Report No.: WSCT-ANAB-R&E24100052A-BT

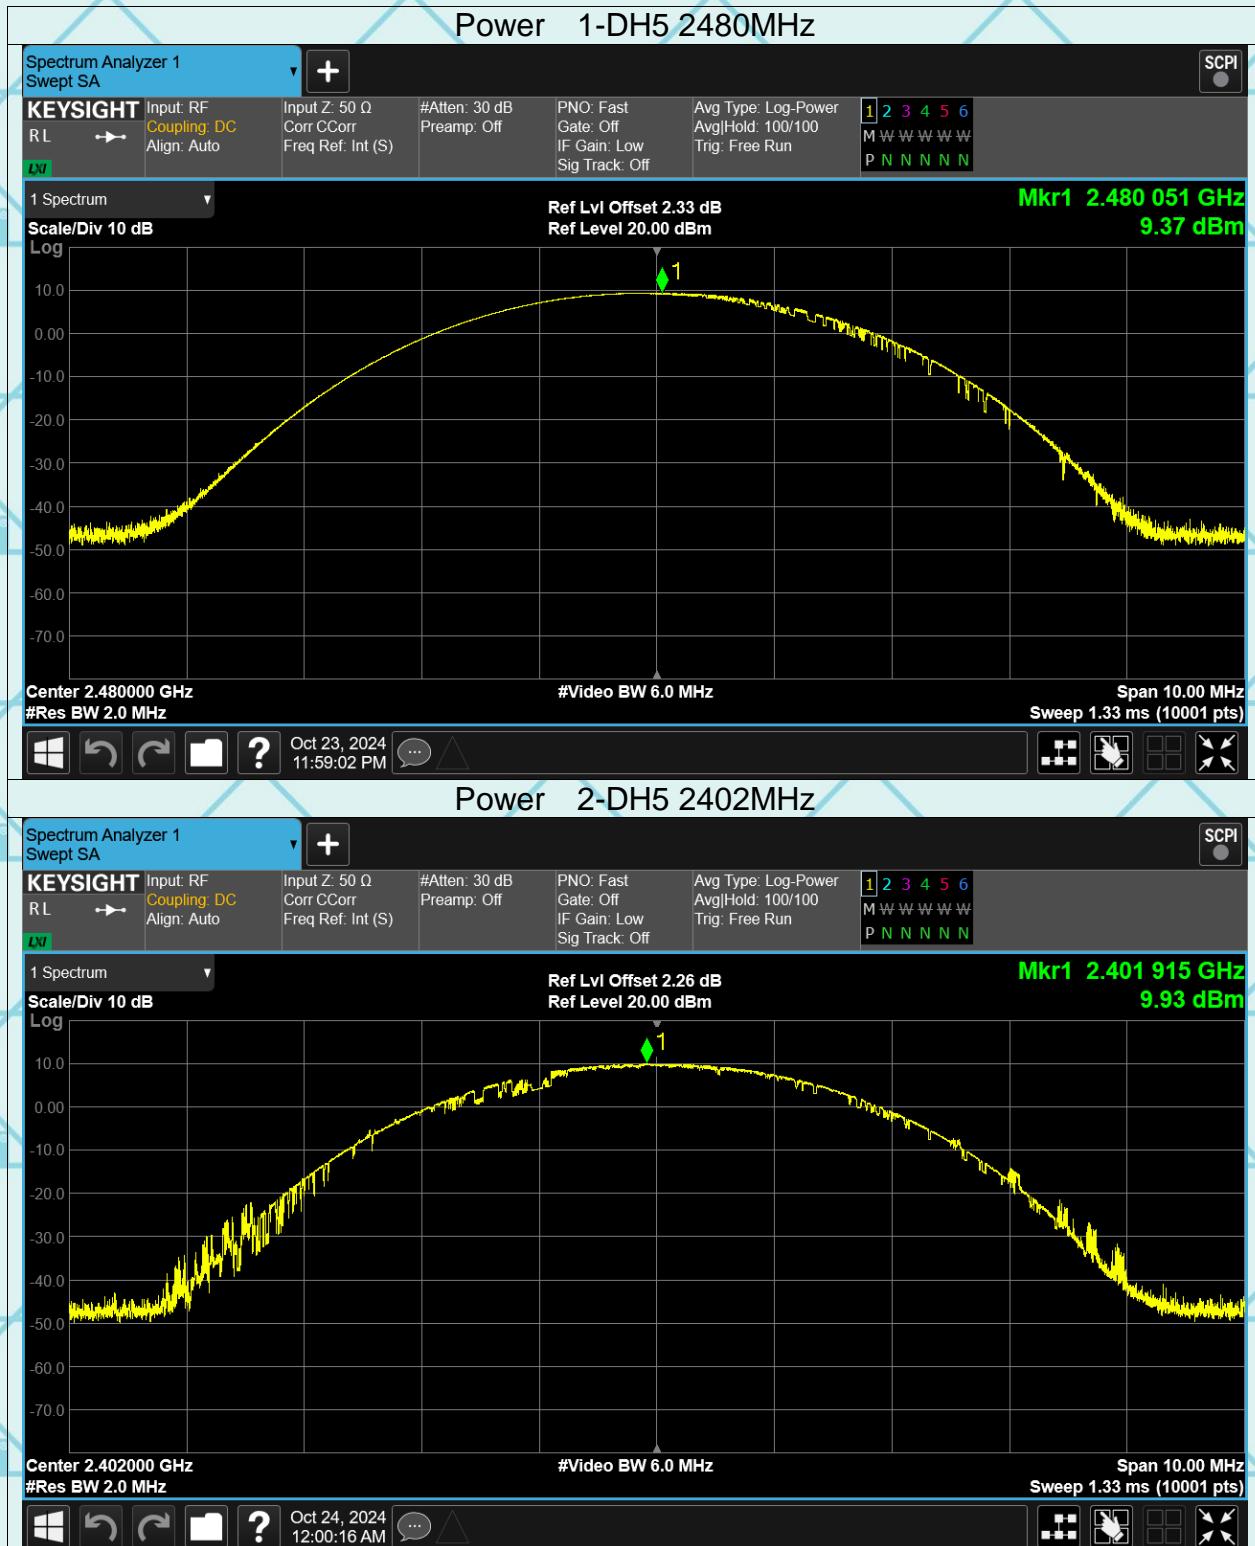


Report No.: WSCT-ANAB-R&E24100052A-BT


Power 2-DH5 2441MHz

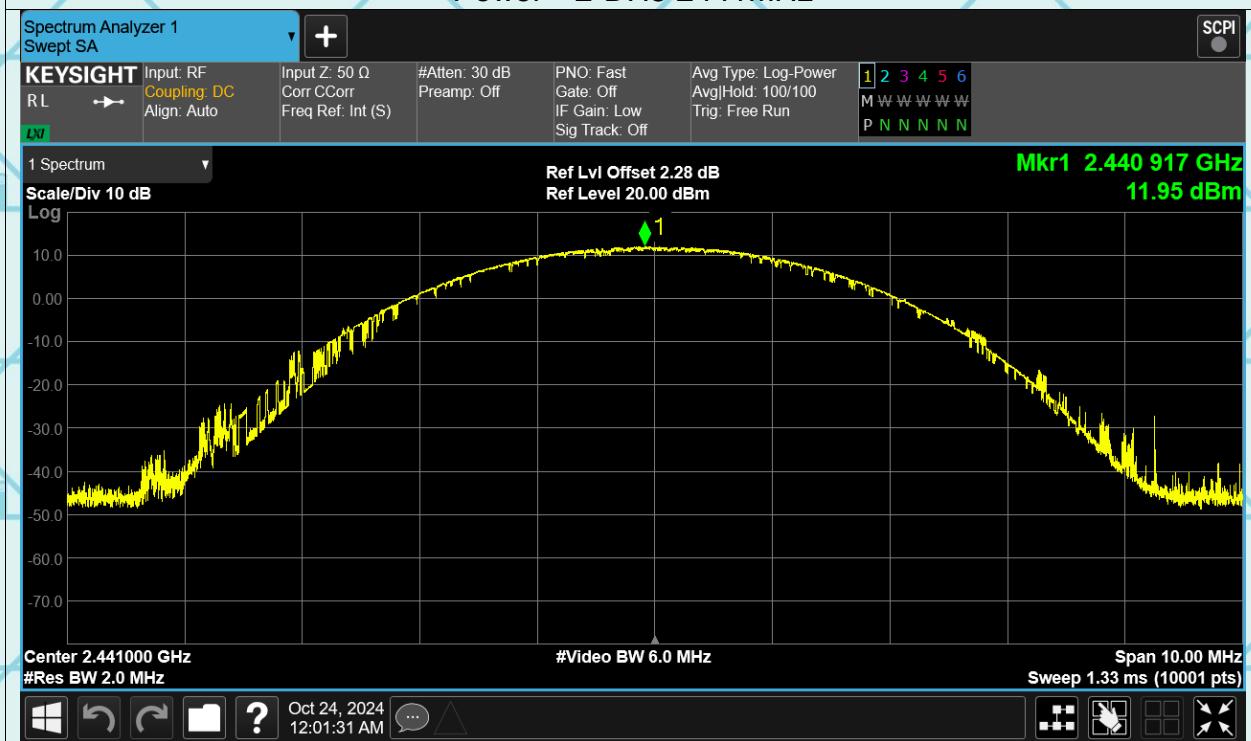


Power 2-DH5 2480MHz

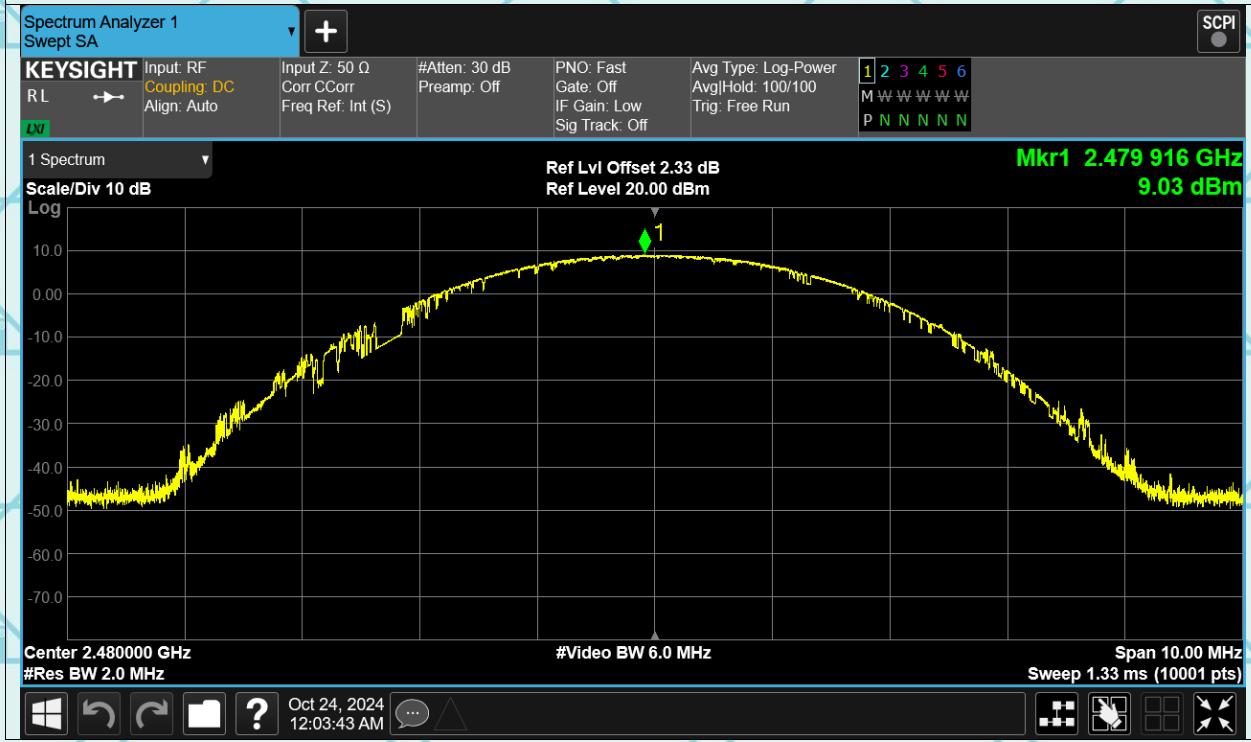


Report No.: WSCT-ANAB-R&E24100052A-BT

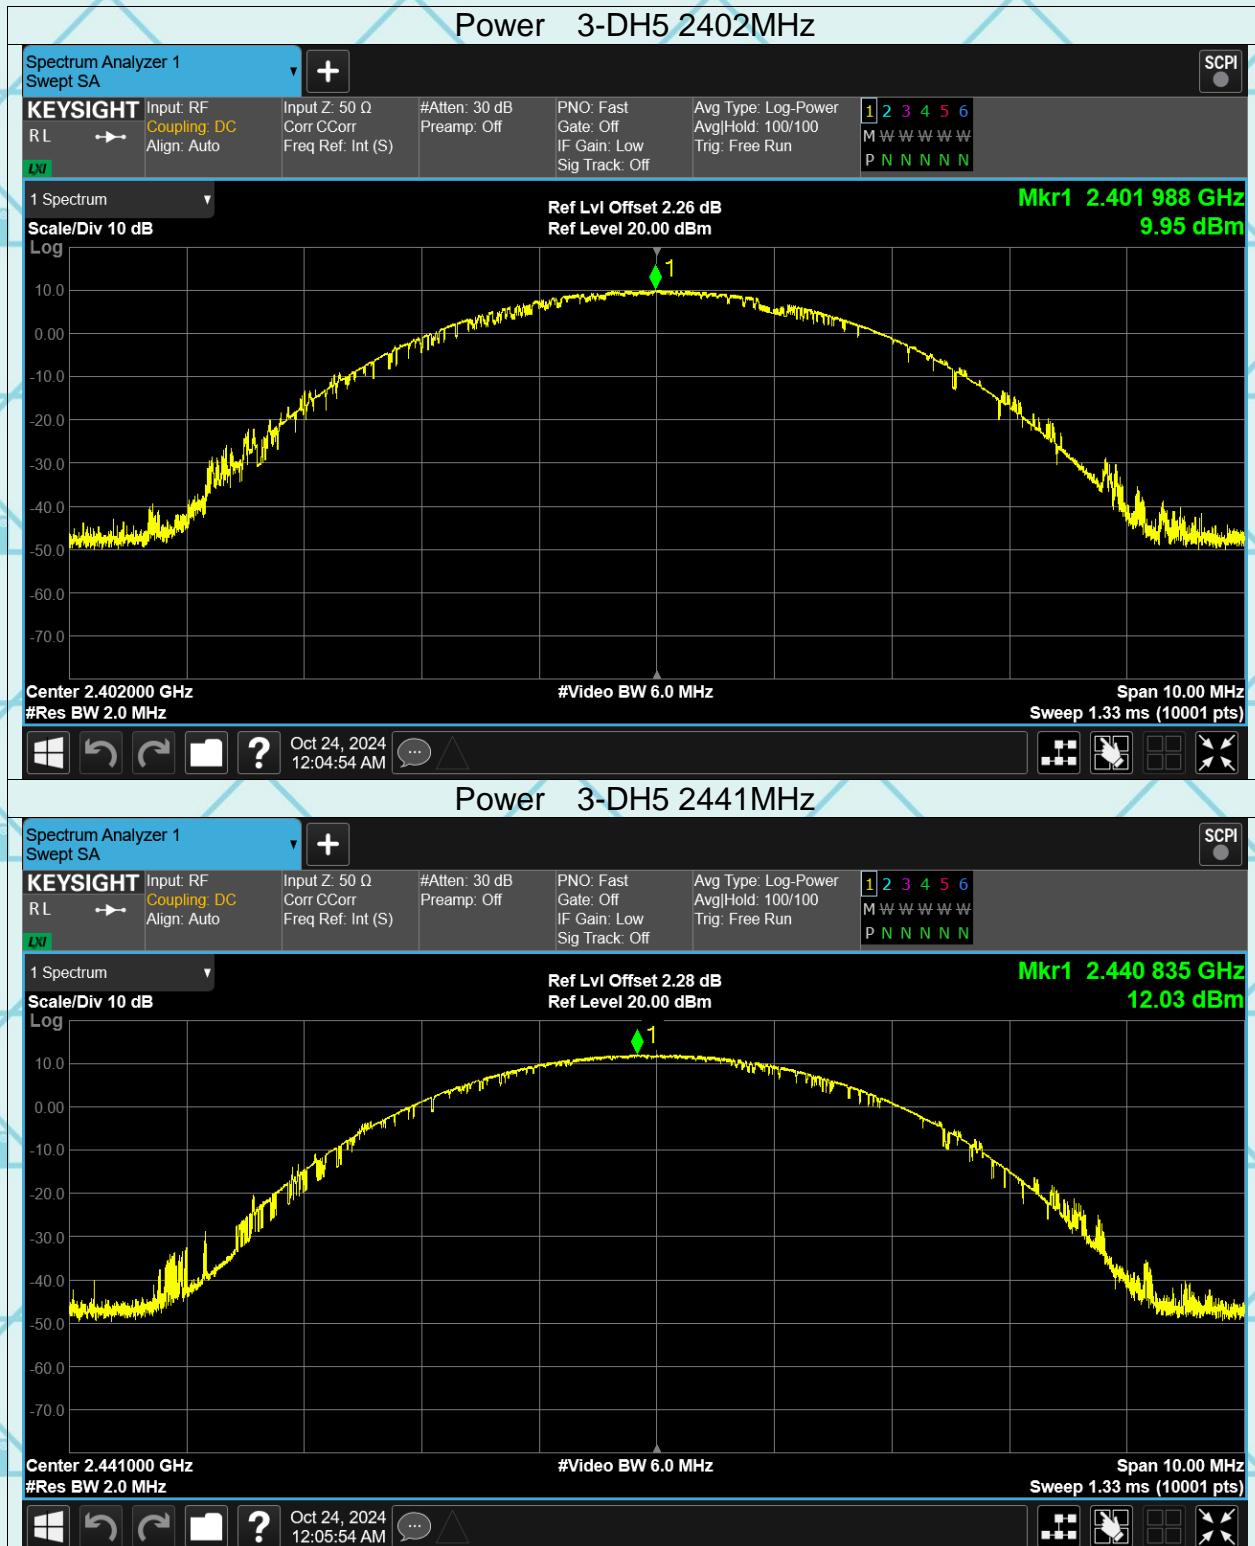

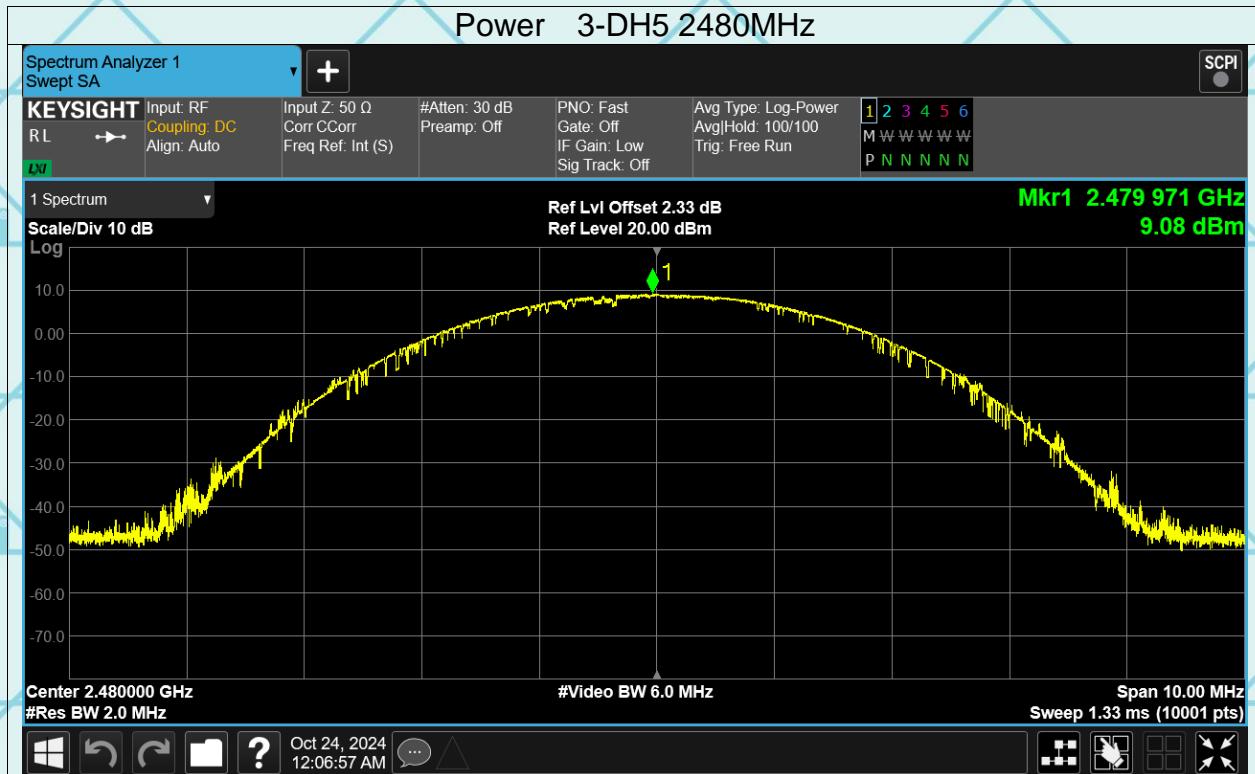

6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

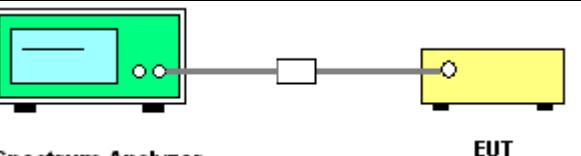
| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | N/A |
| Test Setup: |  |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report. |
| Test Result: | PASS |

6.4.2. Test data

| Test channel | 20dB Occupy Bandwidth (MHz) | | | |
|--------------|-----------------------------|----------------|-------|------------|
| | GFSK | $\pi/4$ -DQPSK | 8DPSK | Conclusion |
| Lowest | 0.695 | 1.077 | 1.086 | PASS |
| Middle | 0.778 | 1.100 | 1.069 | PASS |
| Highest | 0.675 | 1.111 | 1.086 | PASS |

Test plots as follows:

Report No.: WSCT-ANAB-R&E241000052A-BT

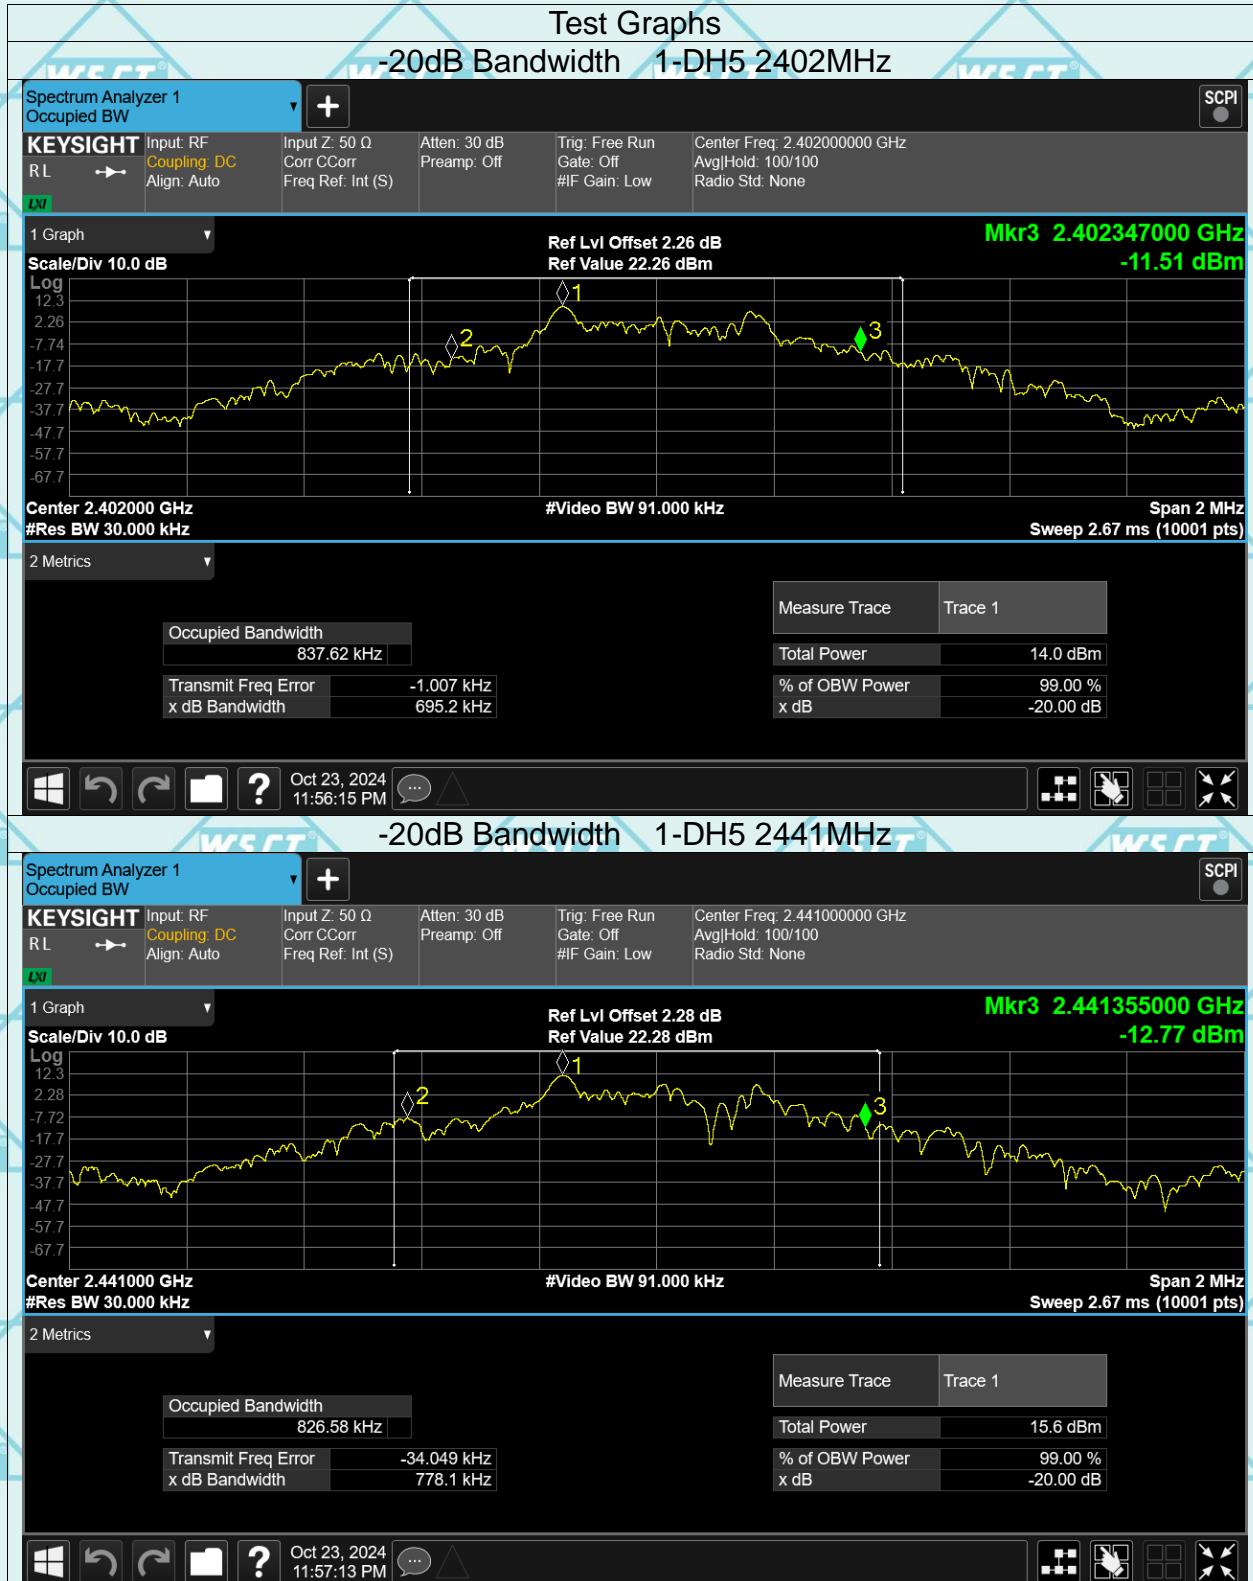


Report No.: WSCT-ANAB-R&E24100052A-BT

-20dB Bandwidth 1-DH5 2480MHz




-20dB Bandwidth 2-DH5 2402MHz

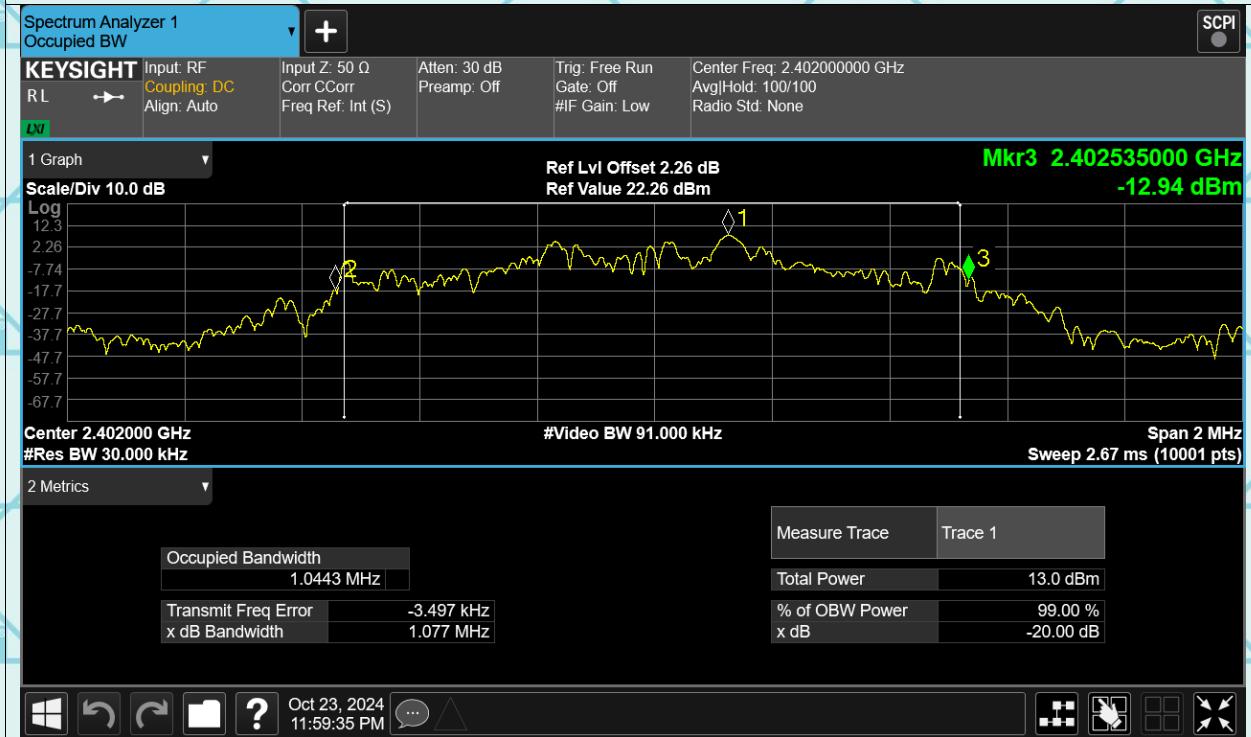

Report No.: WSCT-ANAB-R&E24100052A-BT

-20dB Bandwidth 2-DH5 2441MHz

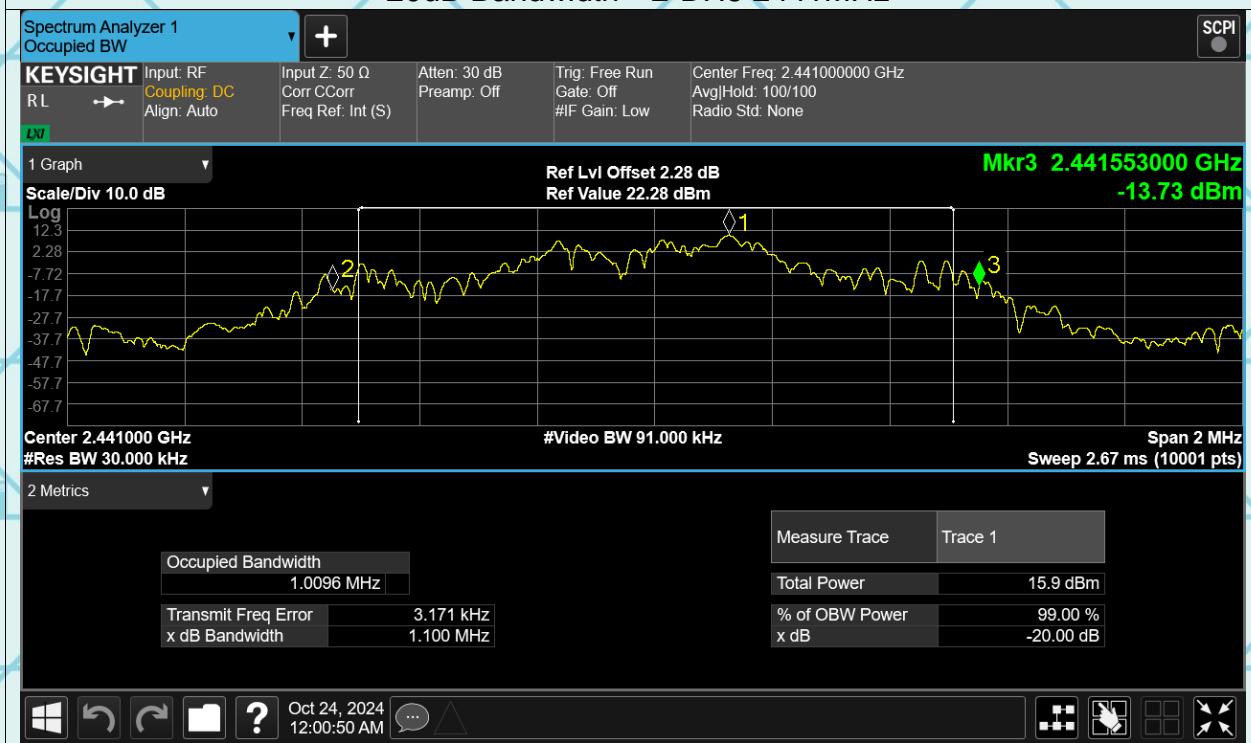

-20dB Bandwidth 2-DH5 2480MHz




Report No.: WSCT-ANAB-R&E241000052A-BT

-20dB Bandwidth 3-DH5 2402MHz



-20dB Bandwidth 3-DH5 2441MHz

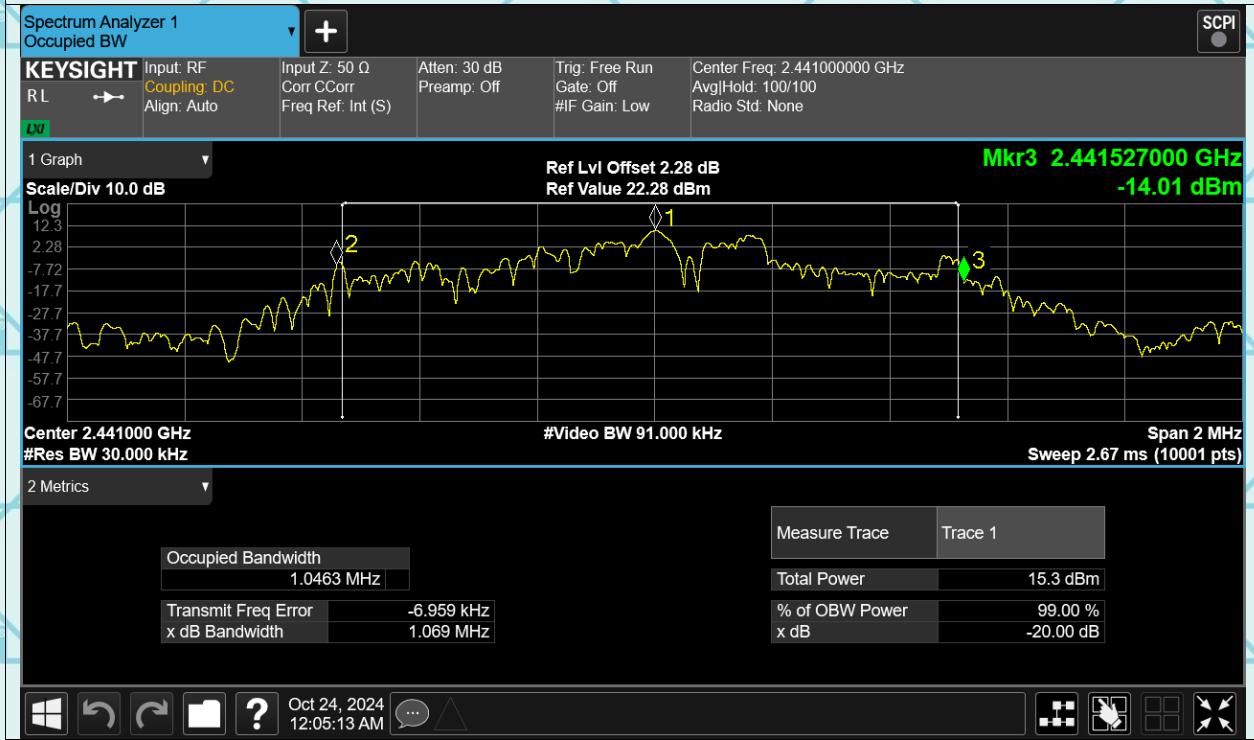

Report No.: WSCT-ANAB-R&E241000052A-BT



Report No.: WSCT-ANAB-R&E241000052A-BT

6.5. Carrier Frequencies Separation

6.5.1. Test Specification