

Plot: 1#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.932$ S/m; $\epsilon_r = 36.595$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant0 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.333 W/kg


Head Left Cheek/Ant0 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.388 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

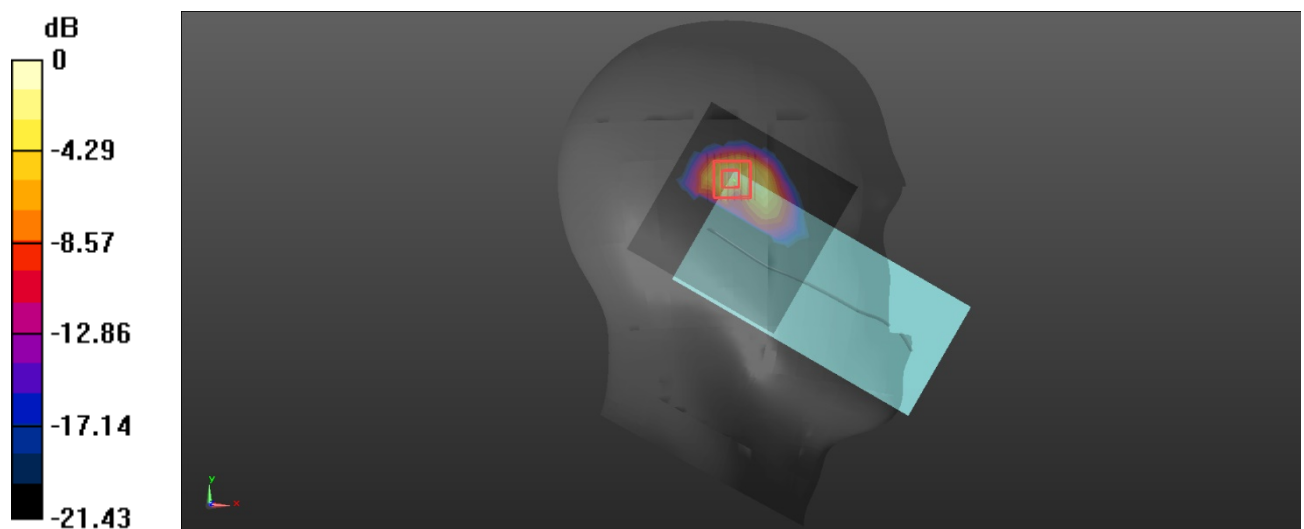

0 dB = 0.343 W/kg = -4.65 dBW/kg

Plot: 2#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 2.932 \text{ S/m}$; $\epsilon_r = 36.595$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/Ant0 LTE Band 42 1RB Mid/Area Scan (10x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.118 W/kg


Body Right/Ant0 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.354 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

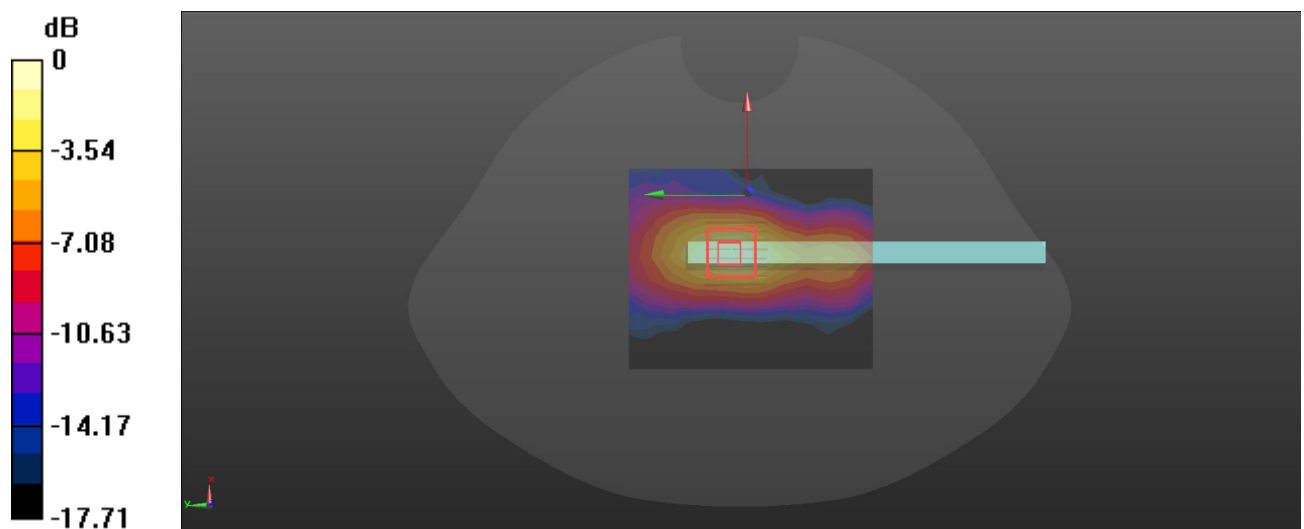

0 dB = 0.115 W/kg = -9.39 dBW/kg

Plot: 3#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.932$ S/m; $\epsilon_r = 36.595$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 LTE Band 42 1RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.137 W/kg


Head Right Cheek/Ant6 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3610 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

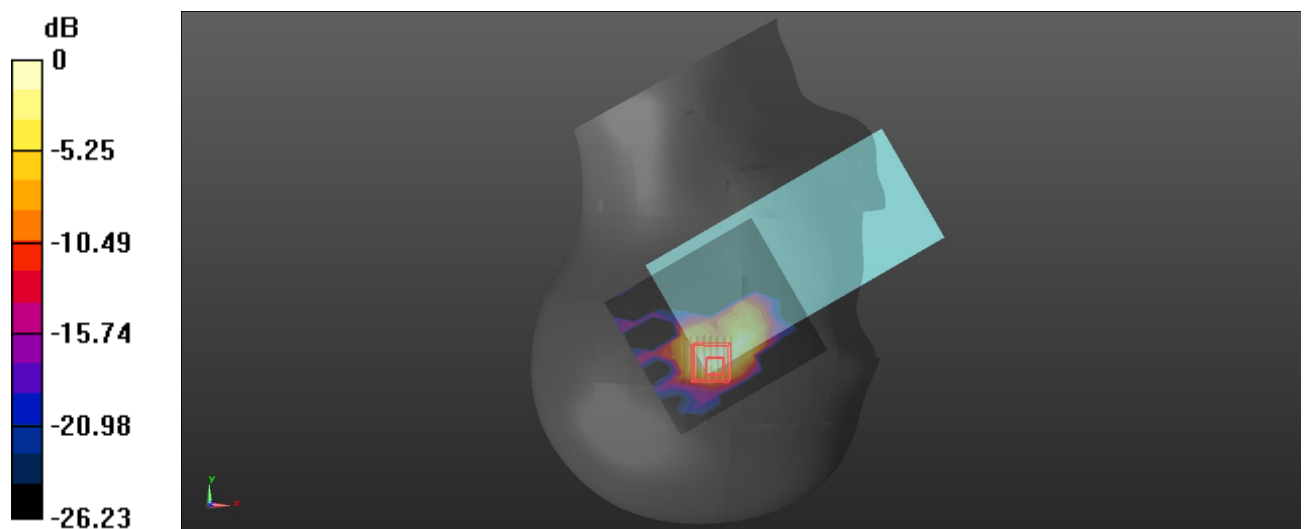

0 dB = 0.157 W/kg = -8.04 dBW/kg

Plot: 4#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.932$ S/m; $\epsilon_r = 36.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 LTE Band 42 1RB Mid/Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0677 W/kg


Body Left/Ant6 LTE Band 42 1RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.575 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0689 W/kg

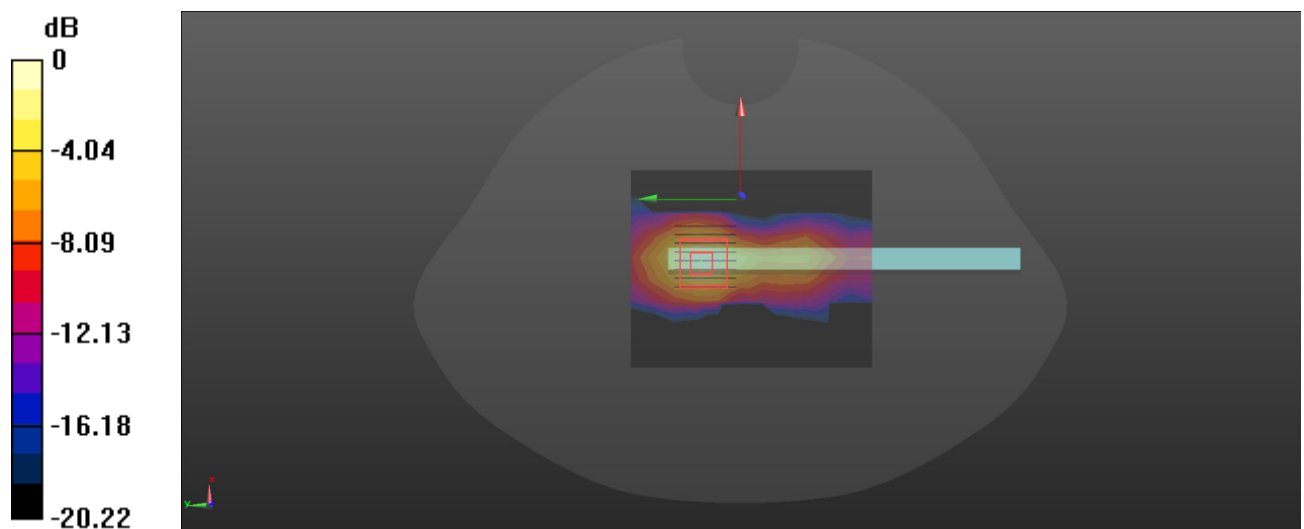

0 dB = 0.0689 W/kg = -11.62 dBW/kg

Plot: 5#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.963$ S/m; $\epsilon_r = 36.999$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant8 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.303 W/kg


Head Right Tilt/Ant8 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.969 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

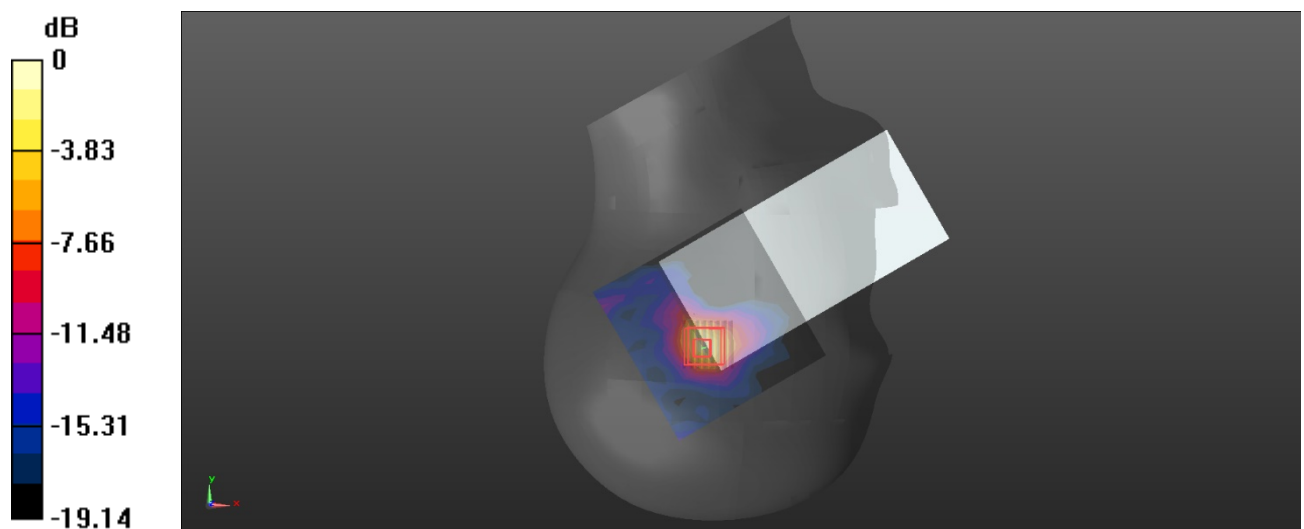

0 dB = 0.314 W/kg = -5.03 dBW/kg

Plot: 6#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.963$ S/m; $\epsilon_r = 36.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant8 LTE Band 42 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0656 W/kg


Body Top/Ant8 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.952 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0768 W/kg

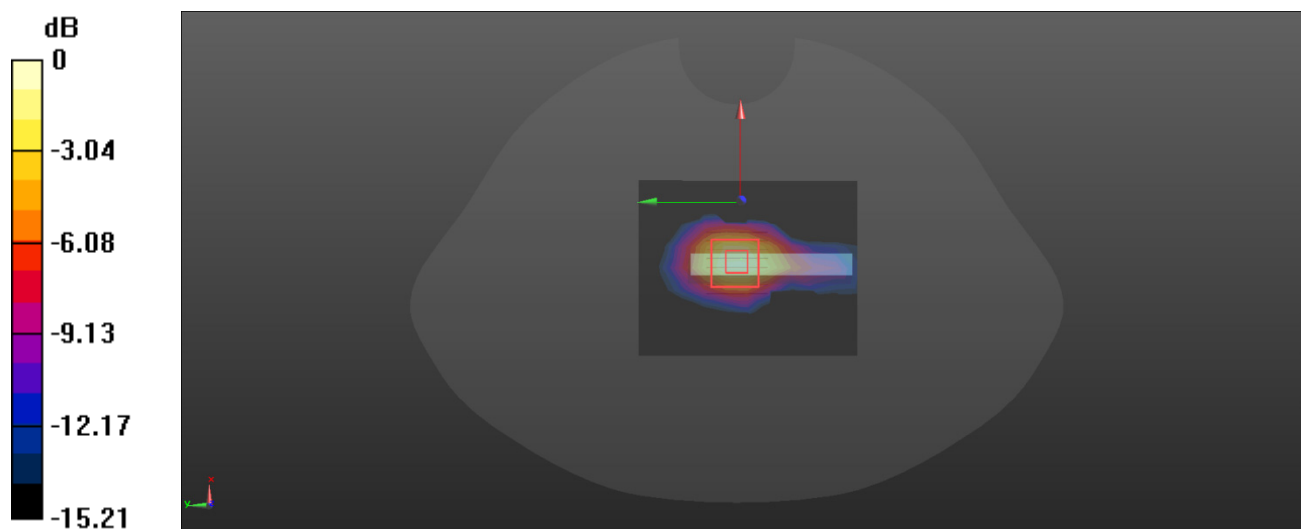

0 dB = 0.0768 W/kg = -11.15 dBW/kg

Plot: 7#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.963$ S/m; $\epsilon_r = 36.999$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant9 LTE Band 42 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.453 W/kg


Head Left Tilt/Ant9 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.425 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

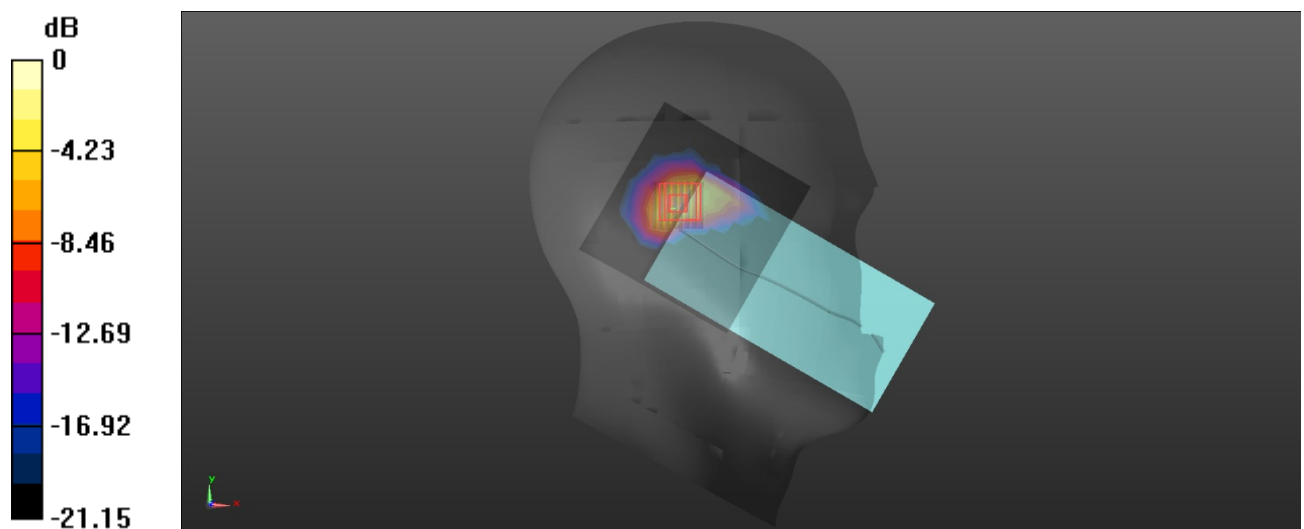

0 dB = 0.535 W/kg = -2.72 dBW/kg

Plot: 8#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.963$ S/m; $\epsilon_r = 36.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant9 LTE Band 42 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.193 W/kg


Body Top/Ant9 LTE Band 42 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.687 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

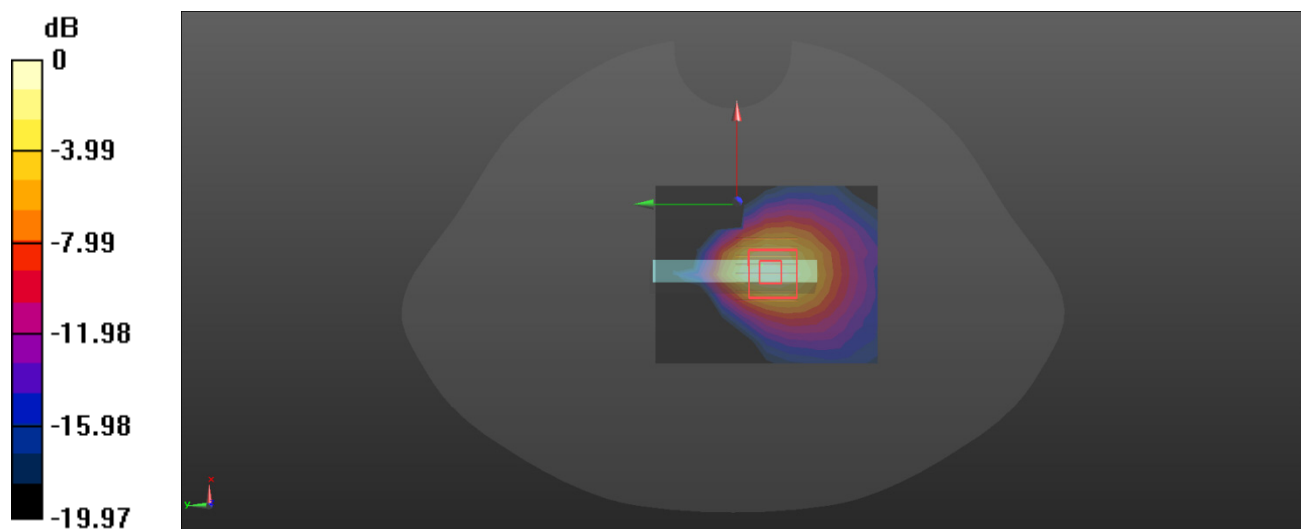

0 dB = 0.197 W/kg = -7.06 dBW/kg

Plot: 9#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.187$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant2 FR1 n 5 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 W/kg


Head Right Cheek/Ant2 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.393 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

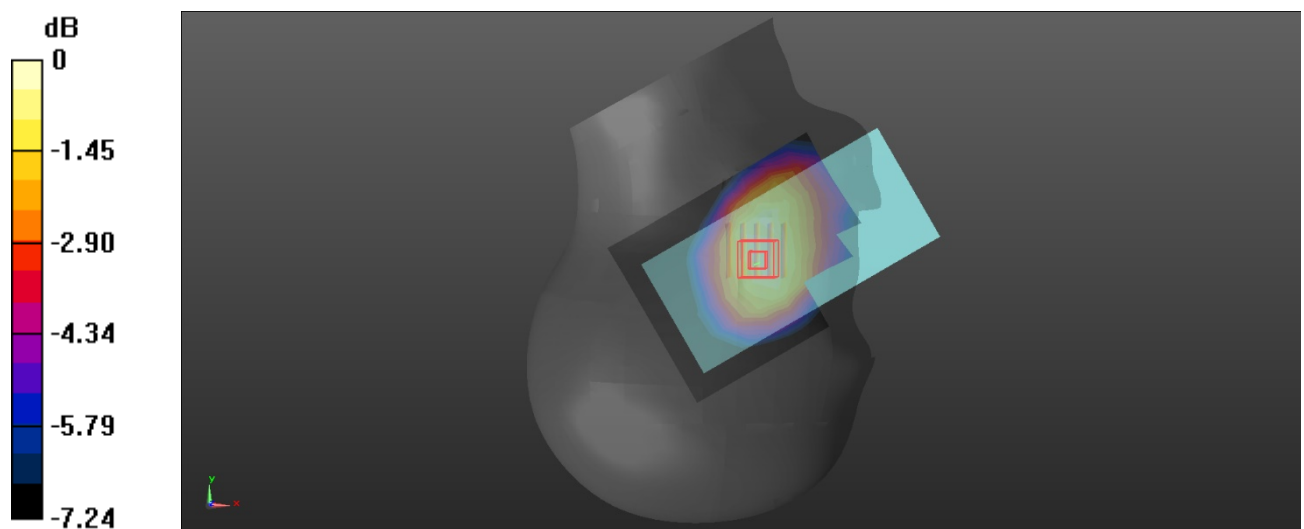

0 dB = 0.200 W/kg = -6.99 dBW/kg

Plot: 10#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.187$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant2 FR1 n 5 50%RB Mid/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.295 W/kg


Body Back/Ant2 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

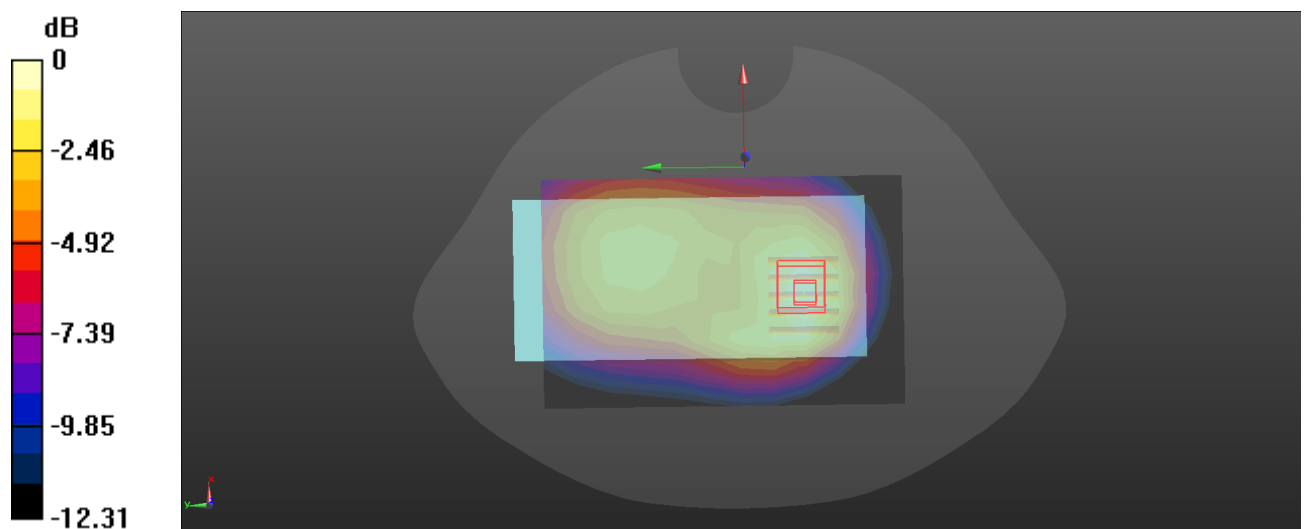

0 dB = 0.301 W/kg = -5.21 dBW/kg

Plot: 11#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.187$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant4 FR1 n 5 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.193 W/kg


Head Left Cheek/Ant4 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.532 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

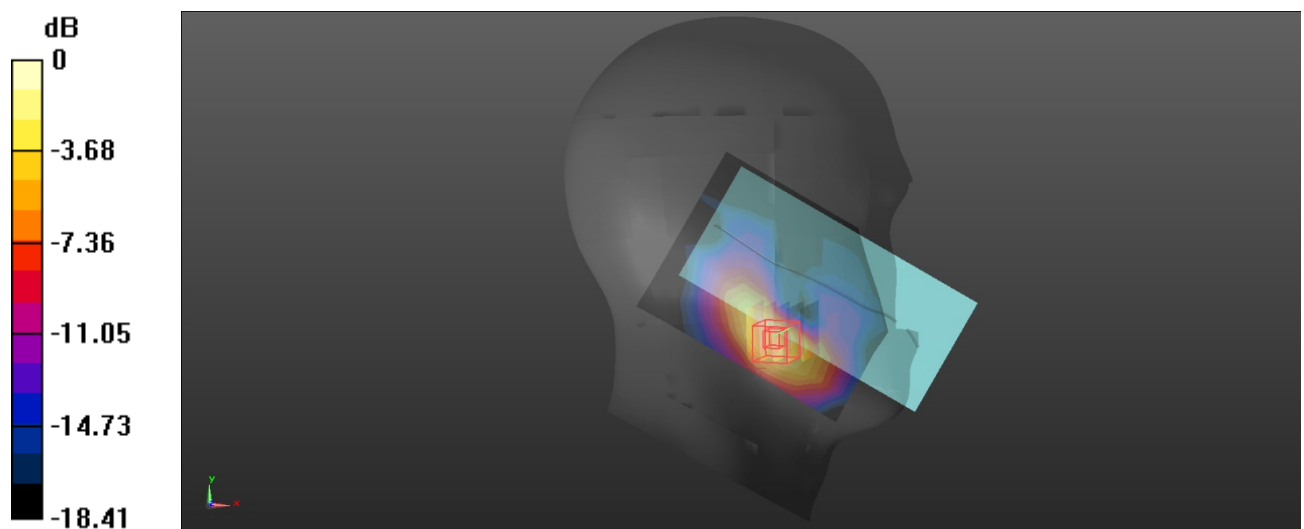

0 dB = 0.263 W/kg = -5.80 dBW/kg

Plot: 12#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.187$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @ 836.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant4 FR1 n 5 50%RB Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg


Body Left/Ant4 FR1 n 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.66 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

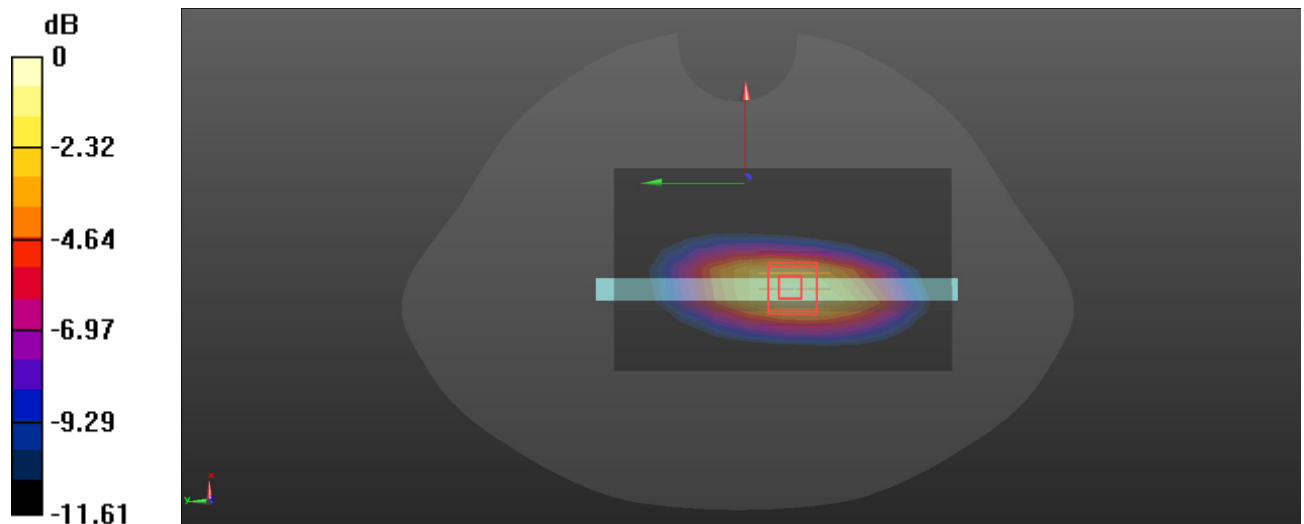

0 dB = 0.276 W/kg = -5.59 dBW/kg

Plot: 13#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 37.809$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 7 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0460 W/kg


Head Left Cheek/Ant3 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.947 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0442 W/kg

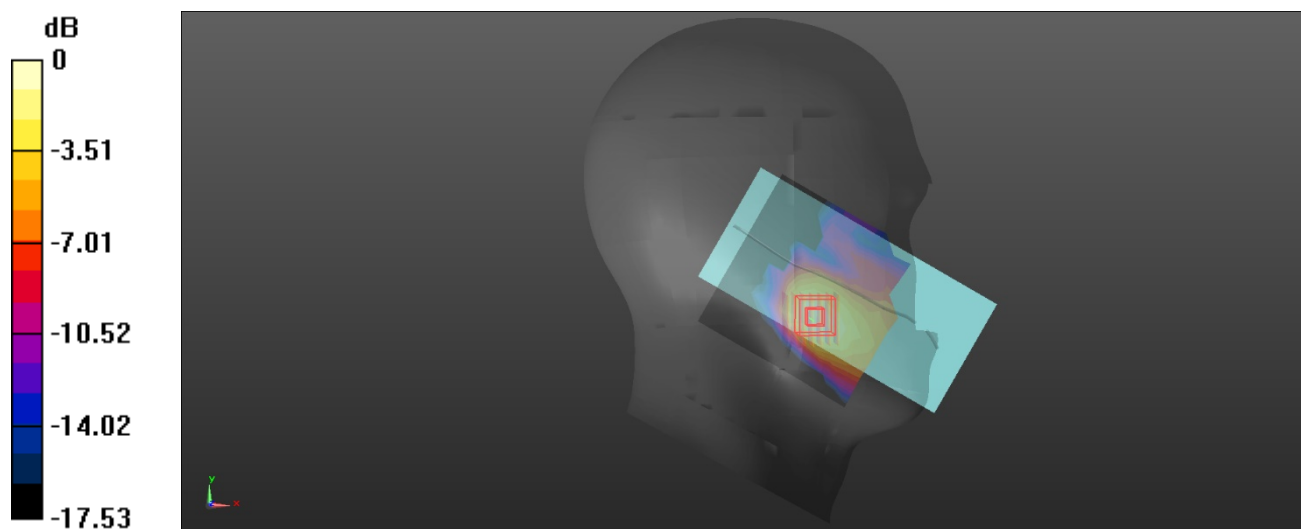

0 dB = 0.0442 W/kg = -13.55 dBW/kg

Plot: 14#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**


Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 37.809$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

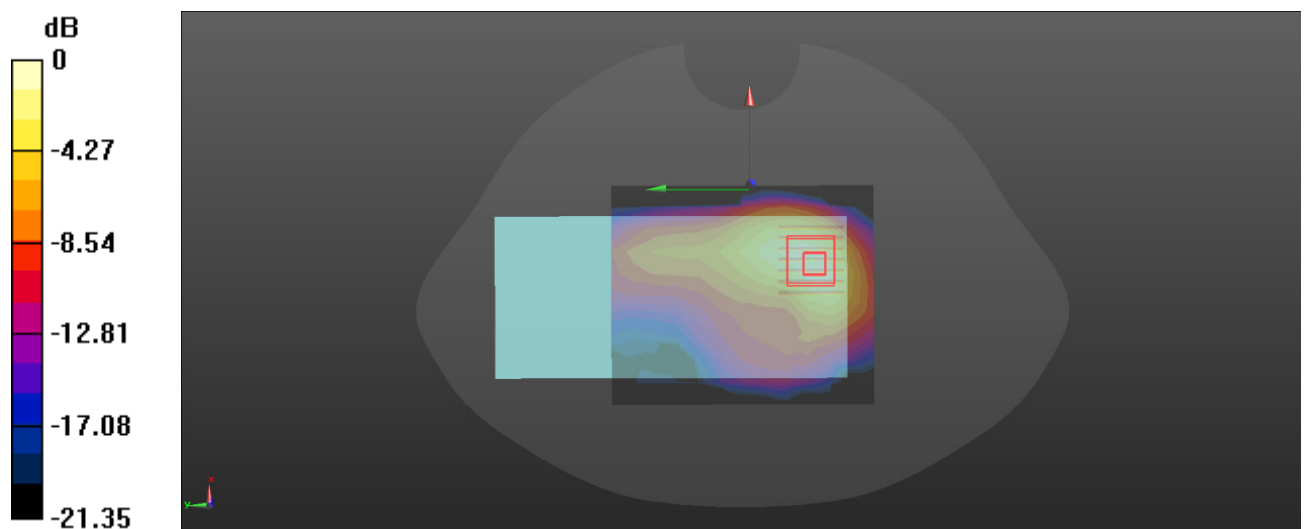Body Back/Ant3 FR1 n 7 50%RB Mid/Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.145 W/kg **Body Back/Ant3 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.347 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.180 W/kg **SAR(1 g) = 0.103 W/kg ; SAR(10 g) = 0.052 W/kg** Maximum value of SAR (measured) = 0.153 W/kg  $0 \text{ dB} = 0.153 \text{ W/kg} = -8.15 \text{ dBW/kg}$

Plot: 15#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 37.809$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant5 FR1 n 7 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.603 W/kg


Head Right Cheek/Ant5 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.029 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

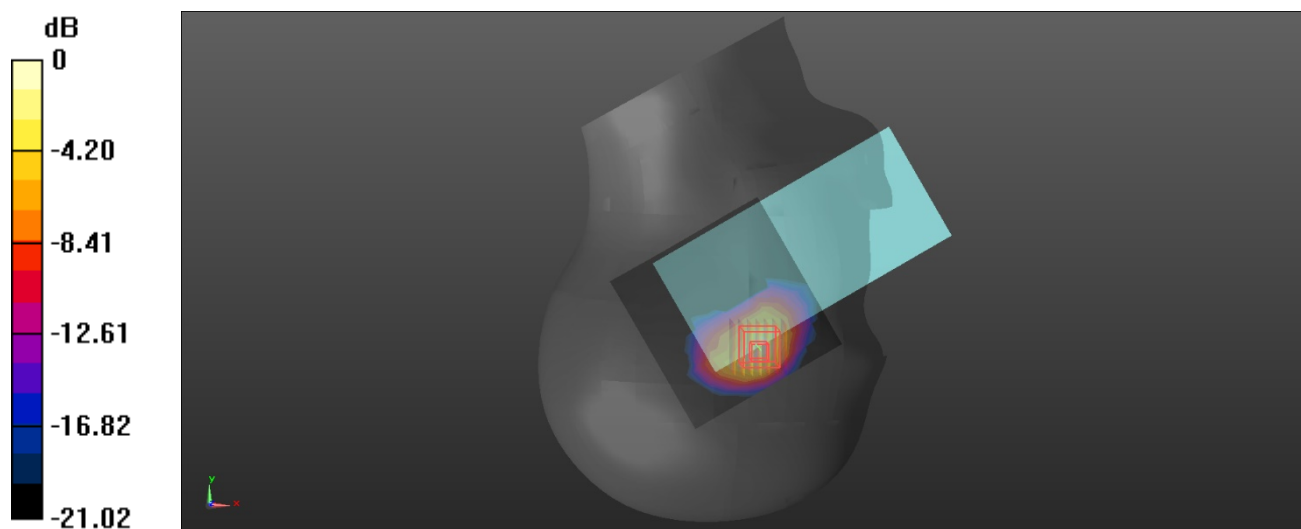

0 dB = 0.646 W/kg = -1.90 dBW/kg

Plot: 16#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 37.809$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2535 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant5 FR1 n 7 50%RB Mid/Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.204 W/kg


Body Left/Ant5 FR1 n 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.192 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

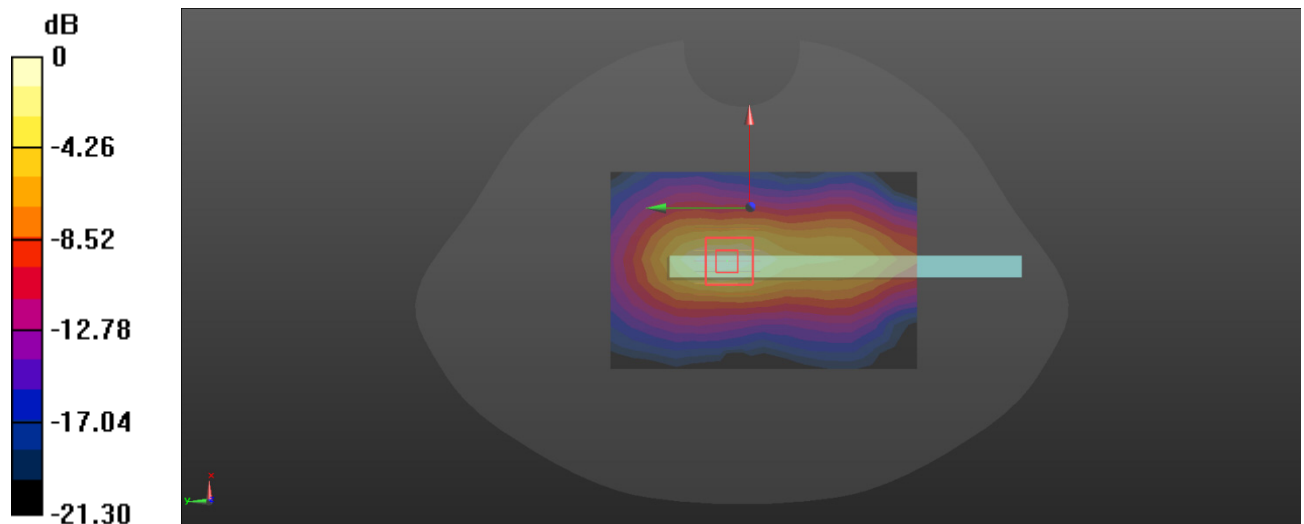

0 dB = 0.204 W/kg = -6.90 dBW/kg

Plot: 17#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant2 FR1 n 12 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


Head Right Cheek/Ant2 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.068 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

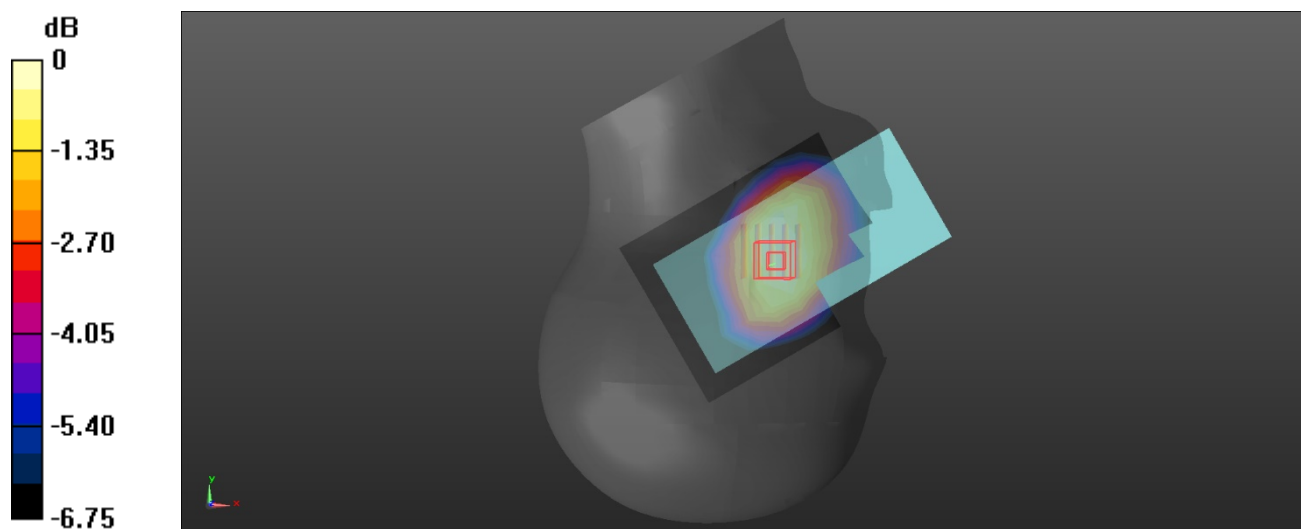

0 dB = 0.112 W/kg = -9.51 dBW/kg

Plot: 18#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/Ant2 FR1 n 12 50%RB Mid/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.245 W/kg


Body Right/Ant2 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.41 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

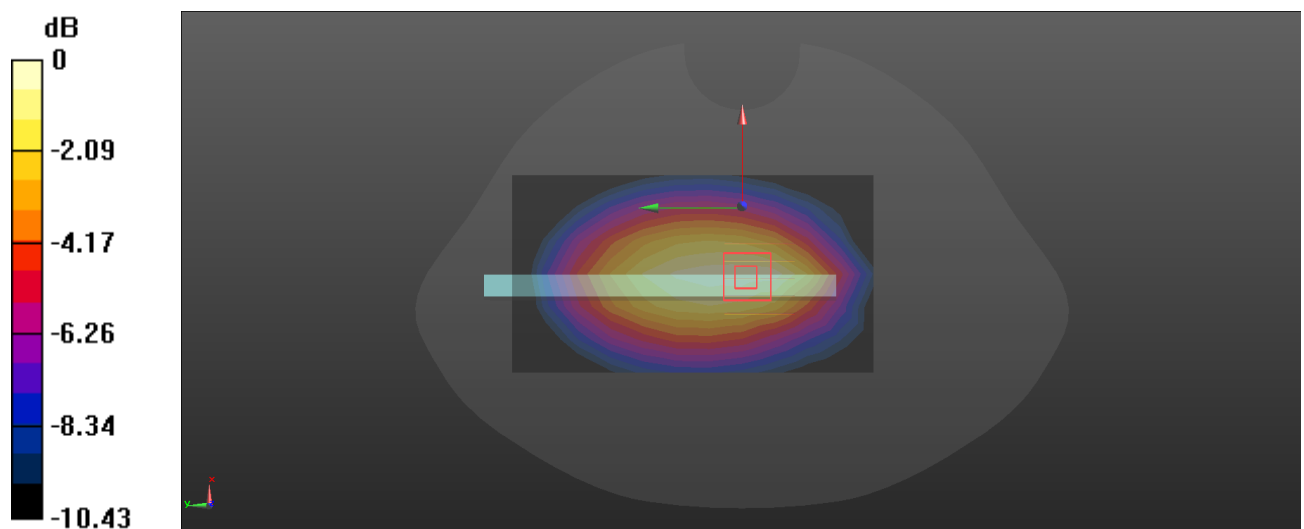

Plot: 19#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant4 FR1 n 12 50%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


Head Left Cheek/Ant4 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.177 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

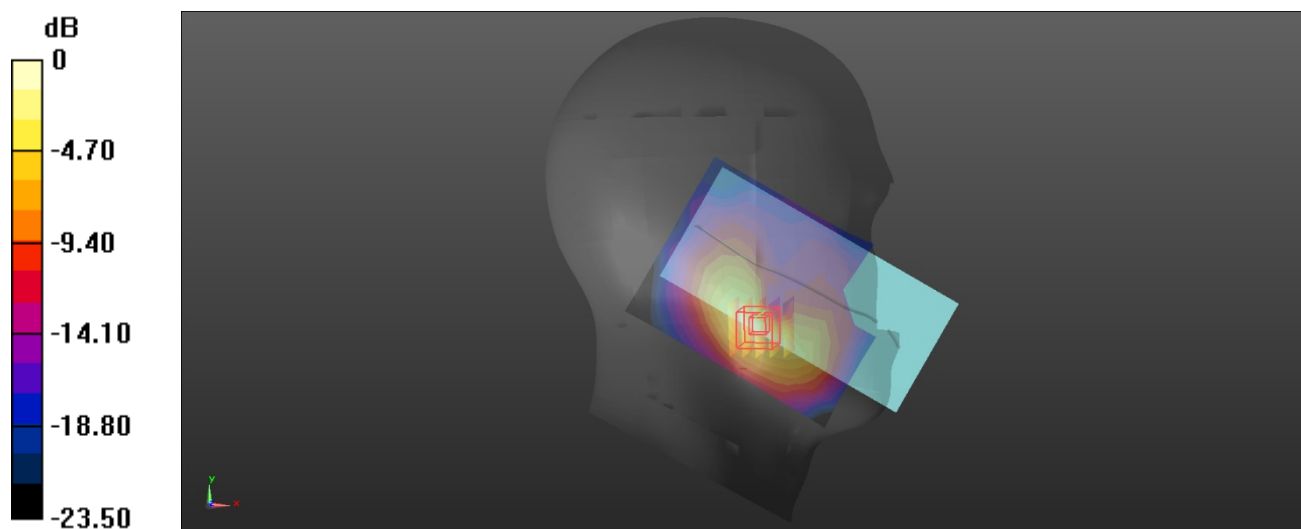

0 dB = 0.352 W/kg = -4.53 dBW/kg

Plot: 20#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 42.783$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @ 707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant4 FR1 n 12 50%RB Mid/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 W/kg


Body Left/Ant4 FR1 n 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.94 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

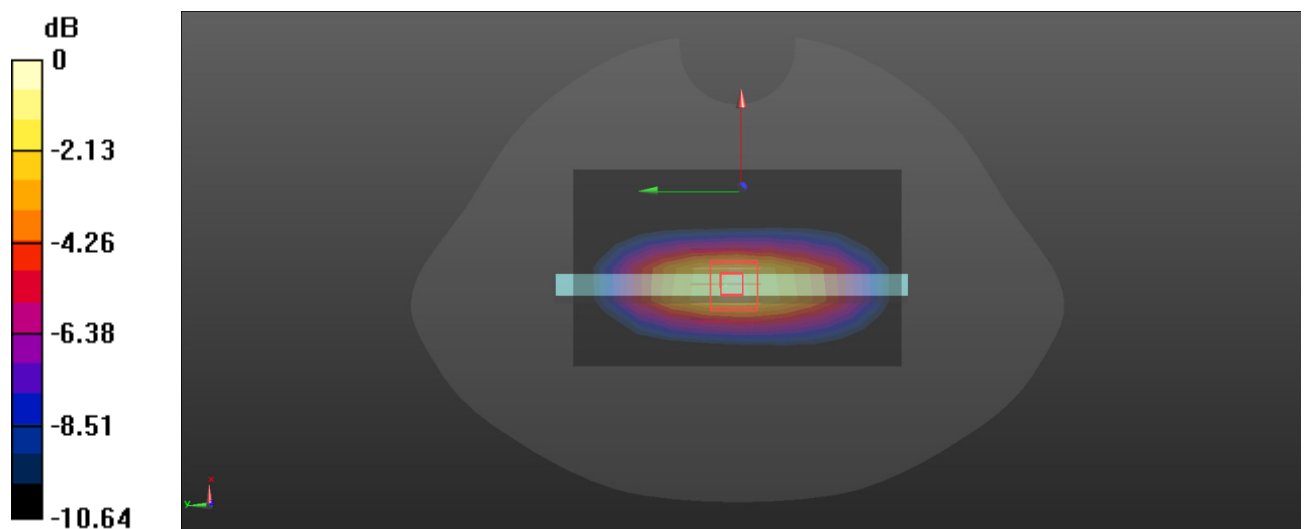

0 dB = 0.309 W/kg = -5.10 dBW/kg

Plot: 21#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant3 FR1 n 38 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0218 W/kg


Head Left Cheek/Ant3 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.776 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.0044 W/kg

Maximum value of SAR (measured) = 0.0185 W/kg

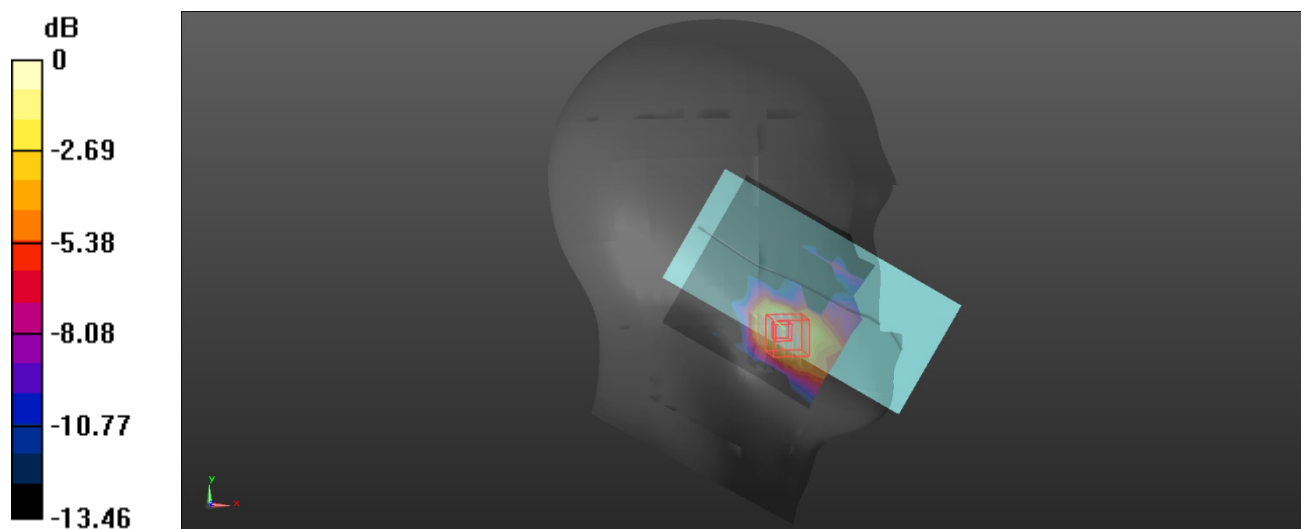

0 dB = 0.0185 W/kg = -17.33 dBW/kg

Plot: 22#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 38 50%RB Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0700 W/kg


Body Bottom/Ant3 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.162 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0662 W/kg

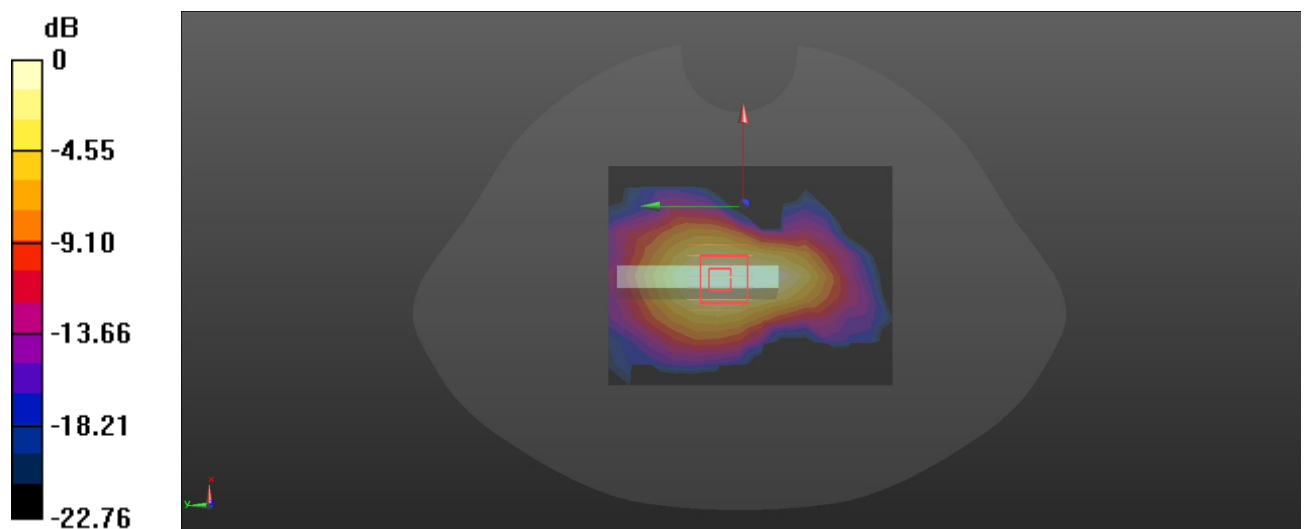

Plot: 23#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.985 \text{ S/m}$; $\epsilon_r = 37.864$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant5 FR1 n 38 50%RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.551 W/kg


Head Right Cheek/Ant5 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.269 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

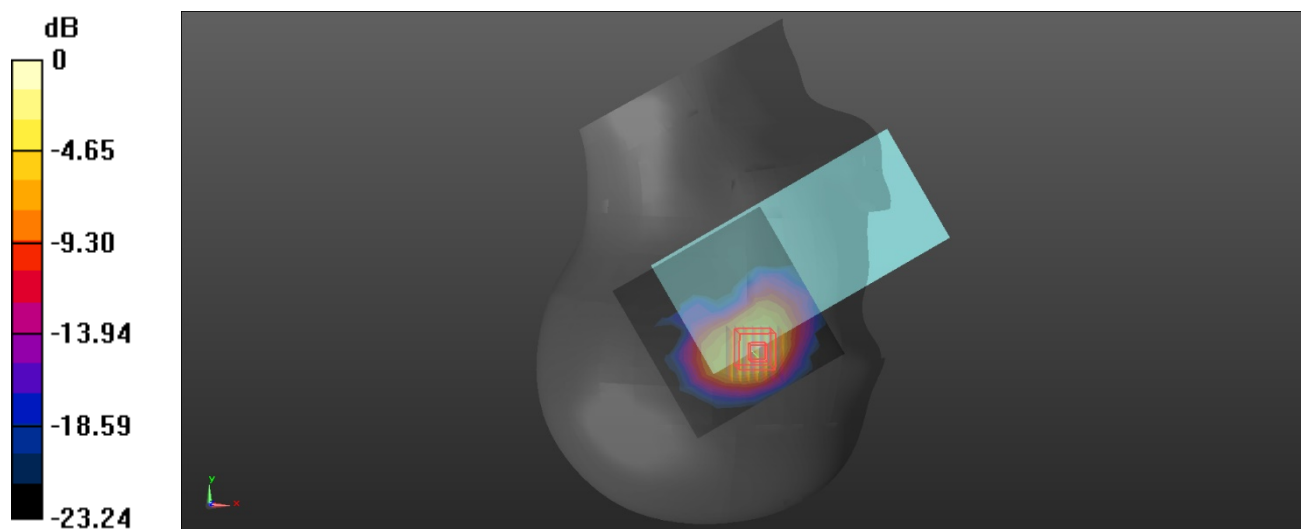

0 dB = 0.671 W/kg = -1.73 dBW/kg

Plot: 24#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant5 FR1 n 38 50%RB Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.185 W/kg


Body Left/Ant5 FR1 n 38 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.534 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

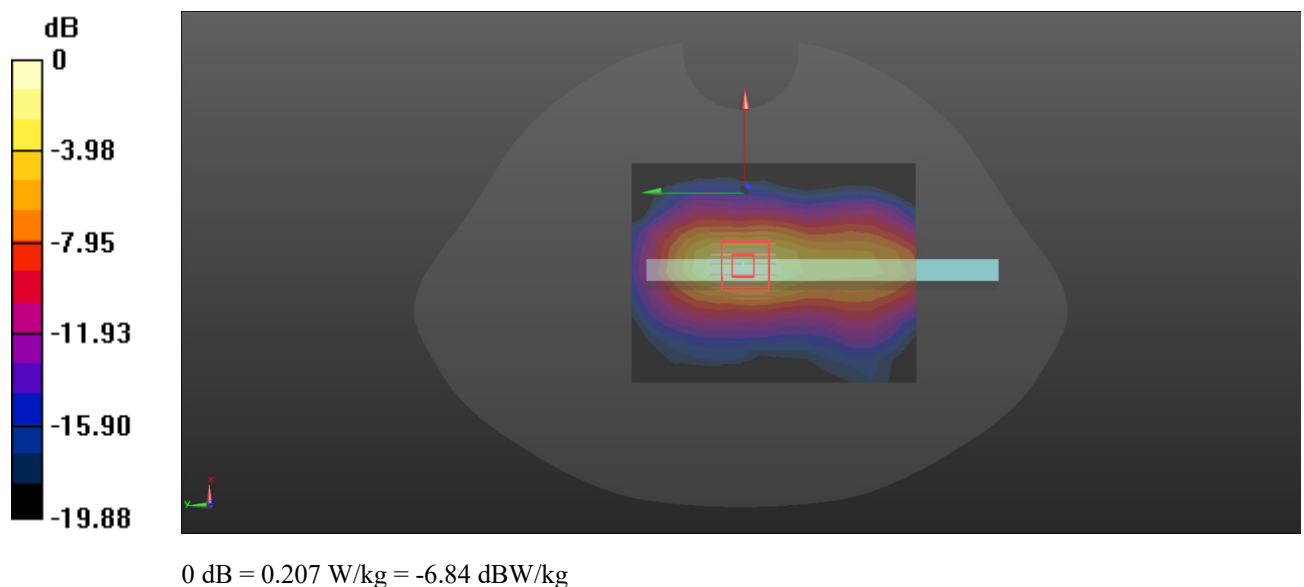

Plot: 25#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/Ant3 FR1 n 41 50%RB Mid/Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0471 W/kg


Body Bottom/Ant3 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.620 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0418 W/kg

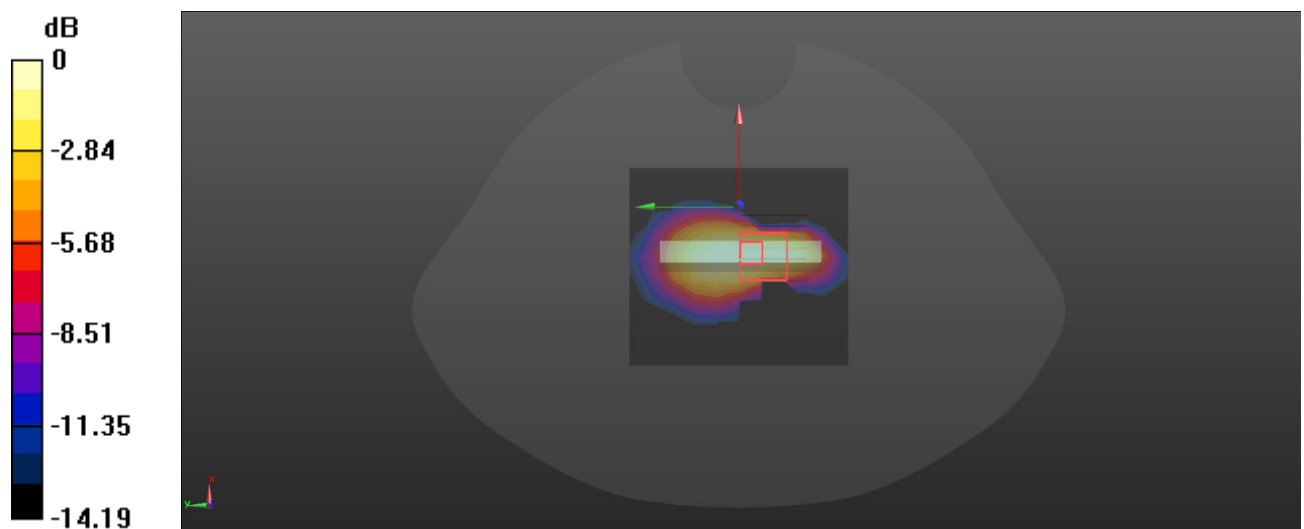

0 dB = 0.0418 W/kg = -13.79 dBW/kg

Plot: 26#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.171$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant5 FR1 n 41 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.488 W/kg


Head Right Cheek/Ant5 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3160 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

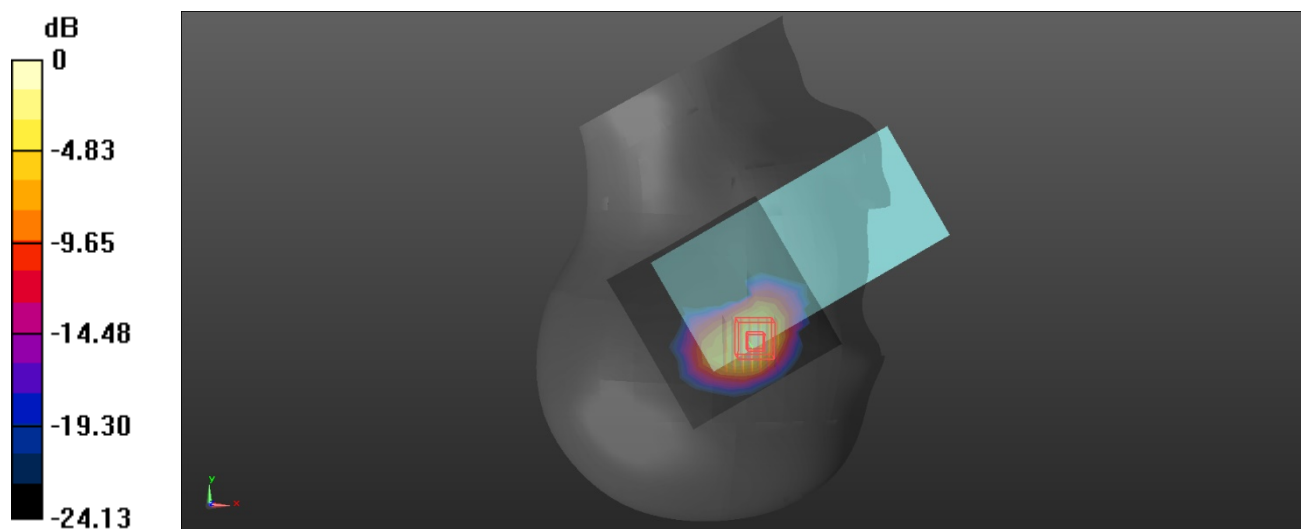

0 dB = 0.565 W/kg = -2.48 dBW/kg

Plot: 27#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @ 2593 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant5 FR1 n 41 50%RB Mid/Area Scan (10x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.107 W/kg


Body Left/Ant5 FR1 n 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.067 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

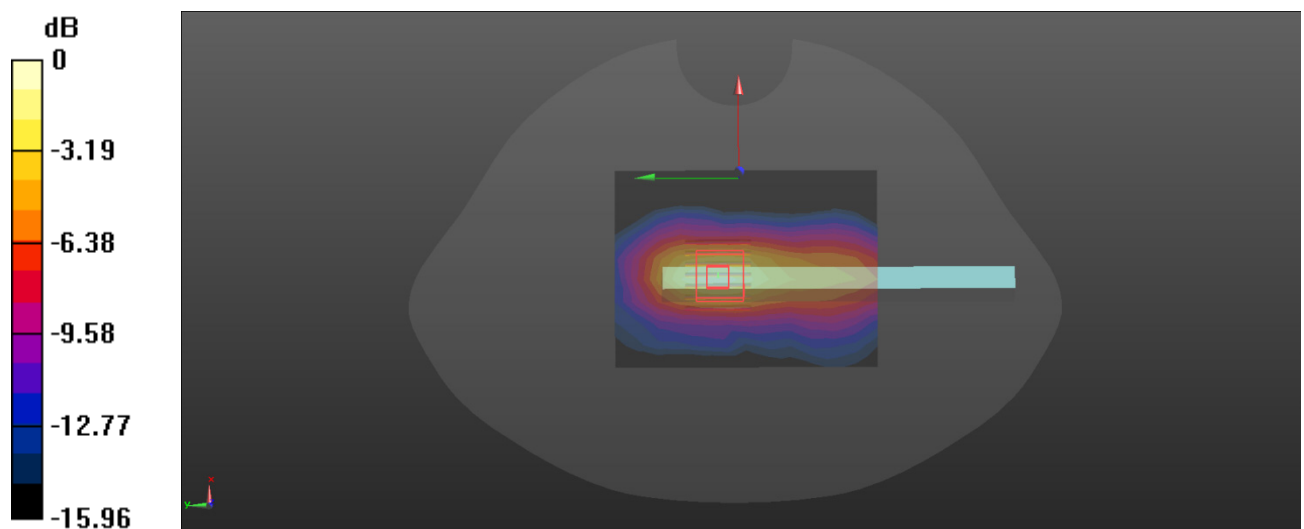

Plot: 28#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.329 \text{ S/m}$; $\epsilon_r = 38.759$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant3 FR1 n 66 50%RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0644 W/kg


Head Right Cheek/Ant3 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.8710 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0610 W/kg

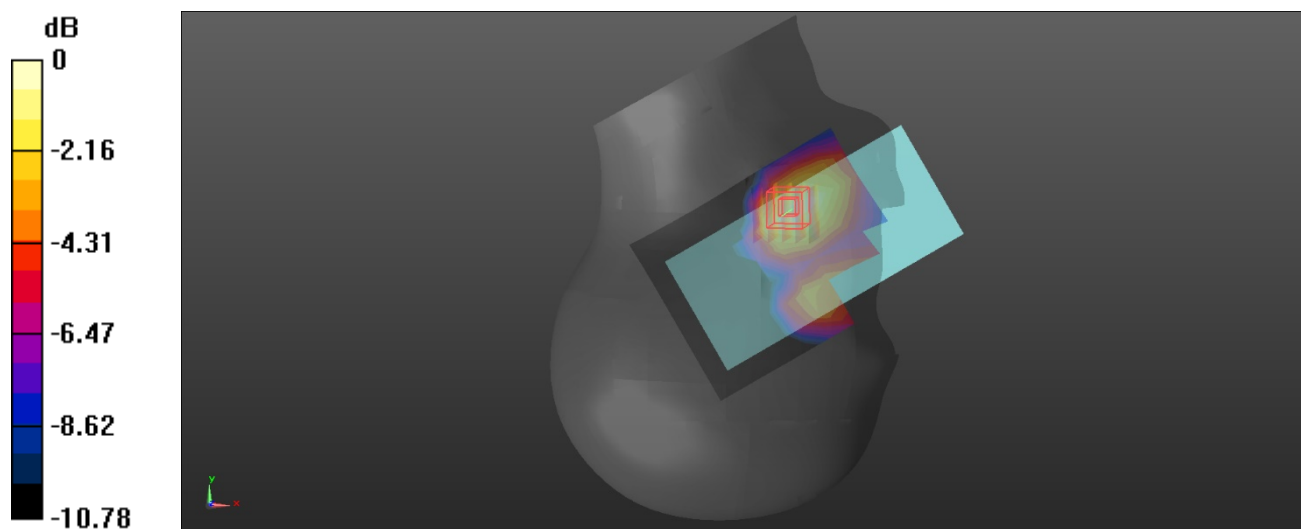 $0 \text{ dB} = 0.0610 \text{ W/kg} = -12.15 \text{ dBW/kg}$

Plot: 29#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**


Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.329 \text{ S/m}$; $\epsilon_r = 38.759$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

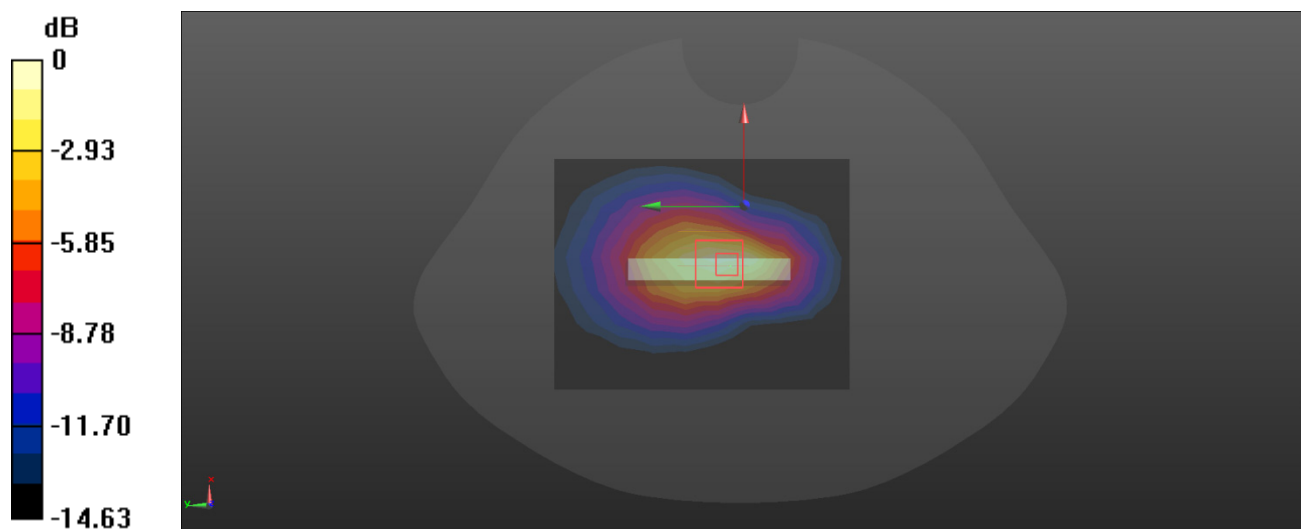Body Bottom/Ant3 FR1 n 66 50%RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.340 W/kg **Body Bottom/Ant3 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.57 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.412 W/kg **SAR(1 g) = 0.265 W/kg ; SAR(10 g) = 0.153 W/kg** Maximum value of SAR (measured) = 0.366 W/kg  $0 \text{ dB} = 0.366 \text{ W/kg} = -4.37 \text{ dBW/kg}$

Plot: 30#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.329 \text{ S/m}$; $\epsilon_r = 38.759$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant5 FR1 n 66 50%RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.224 W/kg


Head Right Cheek/Ant5 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.374 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

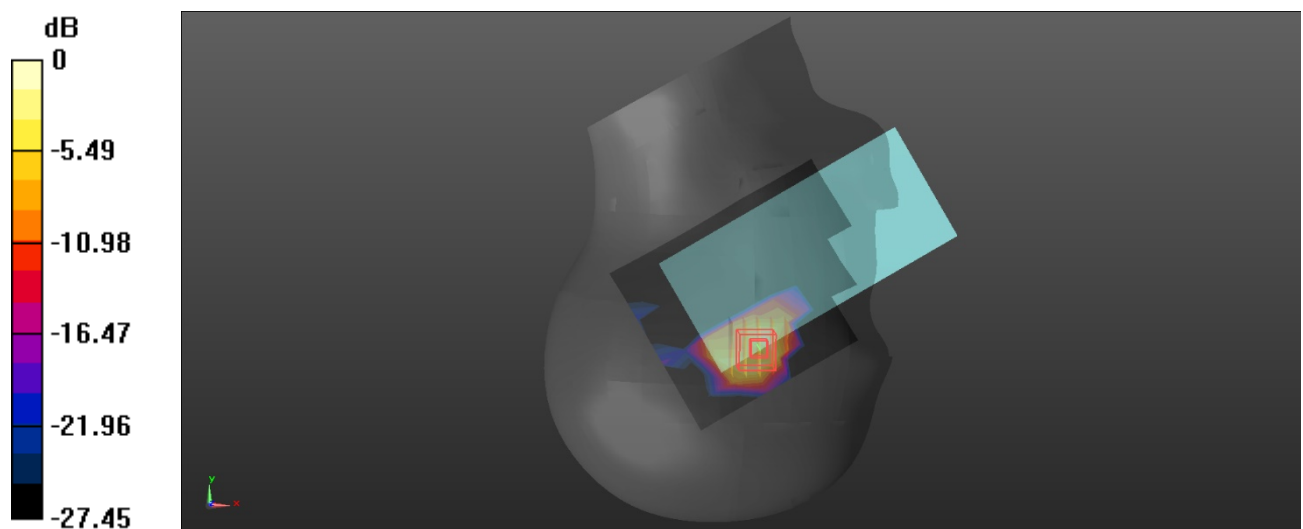

0 dB = 0.295 W/kg = -5.30 dBW/kg

Plot: 31#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.329 \text{ S/m}$; $\epsilon_r = 38.759$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @ 1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant5 FR1 n 66 50%RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0302 W/kg


Body Back/Ant5 FR1 n 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.469 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0334 W/kg

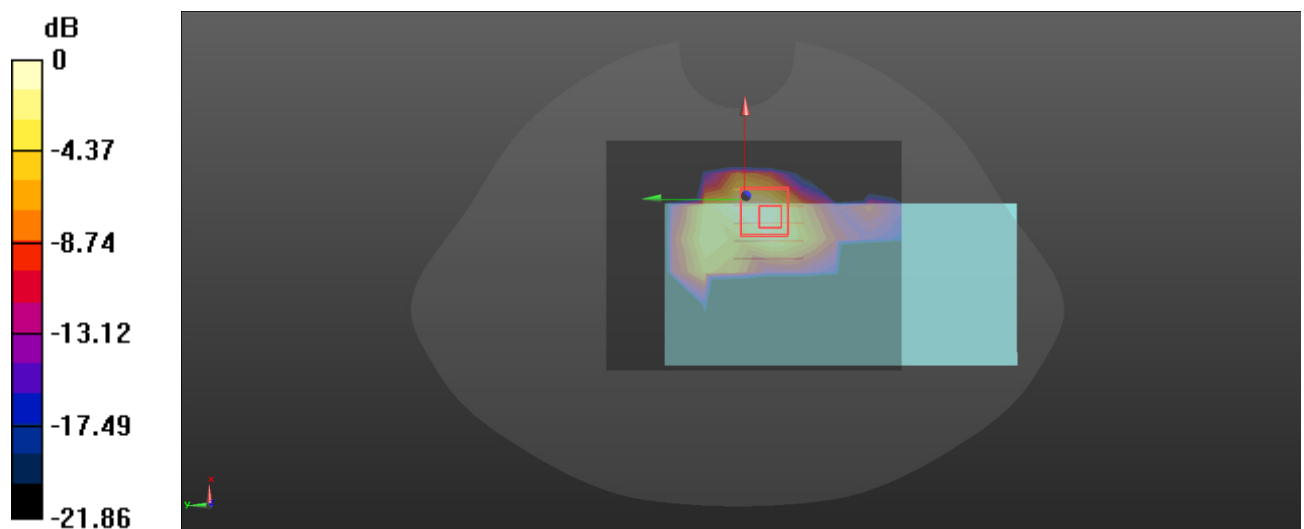

0 dB = 0.0334 W/kg = -14.76 dBW/kg

Plot: 32#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 2.901 \text{ S/m}$; $\epsilon_r = 37.011$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant0 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.415 W/kg


Head Left Cheek/Ant0 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.635 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

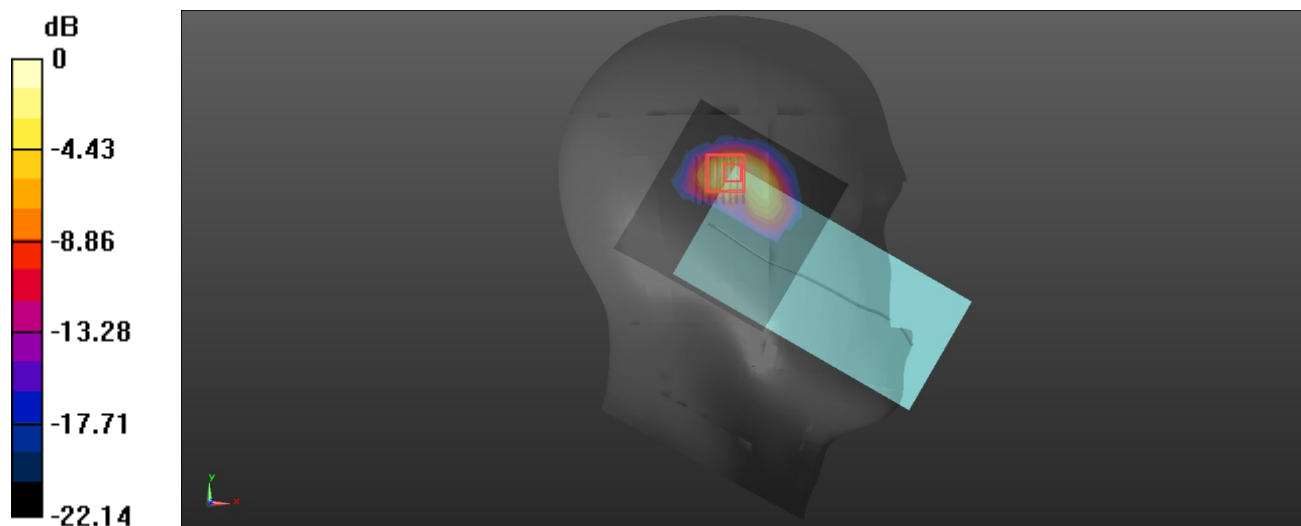 $0 \text{ dB} = 0.472 \text{ W/kg} = -3.26 \text{ dBW/kg}$

Plot: 33#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.901$ S/m; $\epsilon_r = 37.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/Ant0 FR1 n77 Lower 50%RB Mid/Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.127 W/kg


Body Right/Ant0 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.260 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

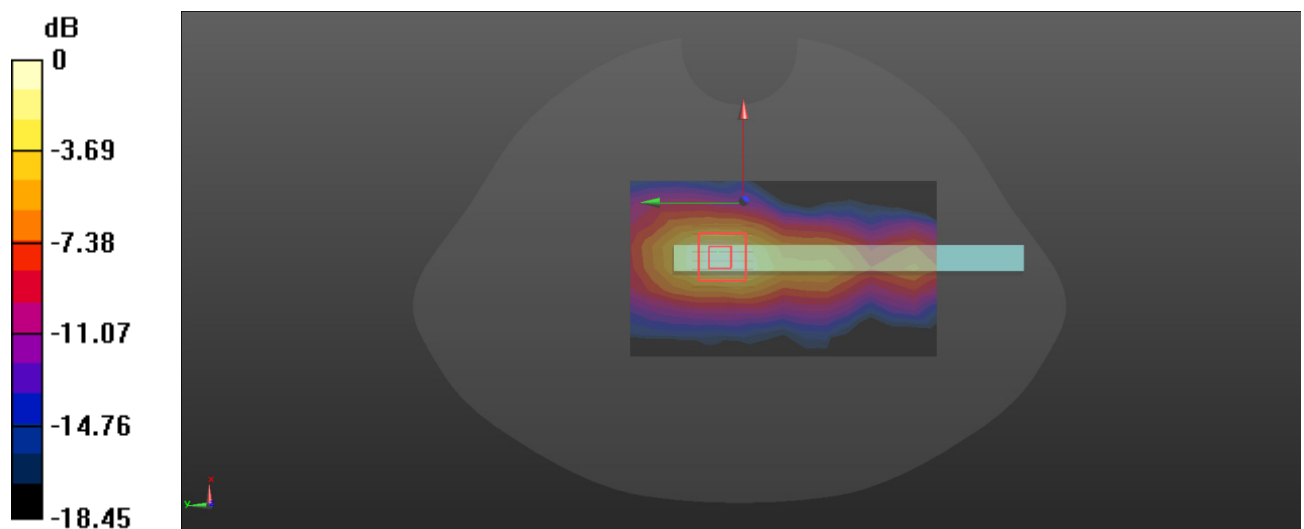

0 dB = 0.145 W/kg = -8.39 dBW/kg

Plot: 34#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.901$ S/m; $\epsilon_r = 37.011$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 FR1 n77 Lower 50%RB Mid/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.409 W/kg


Head Right Cheek/Ant6 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7140 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.460 W/kg

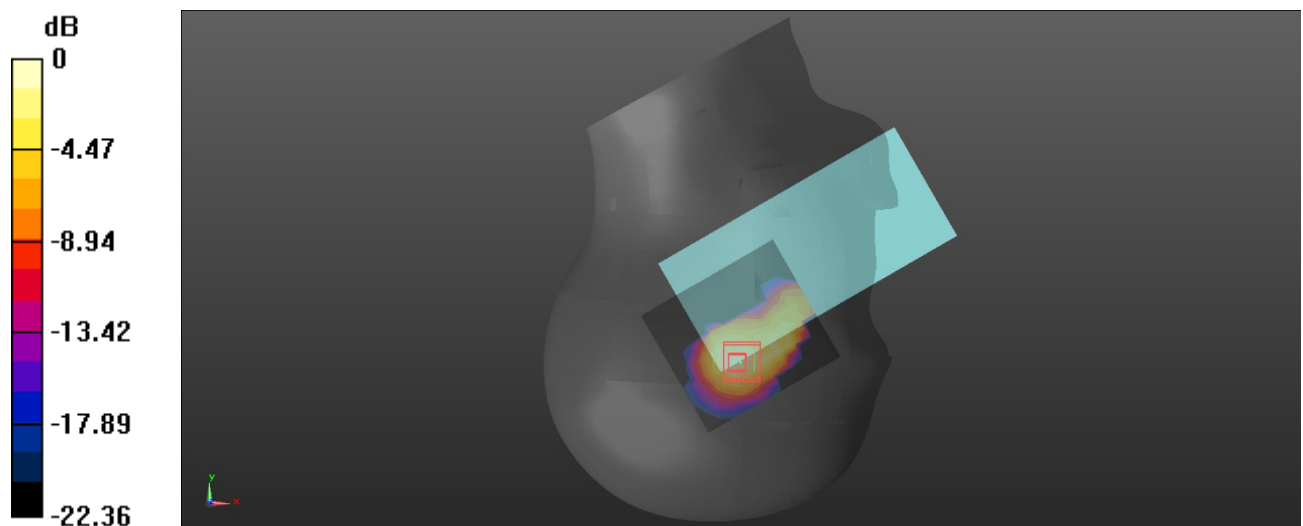

Plot: 35#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.901$ S/m; $\epsilon_r = 37.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 FR1 n77 Lower 50%RB Mid/Area Scan (10x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.140 W/kg


Body Left/Ant6 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.697 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

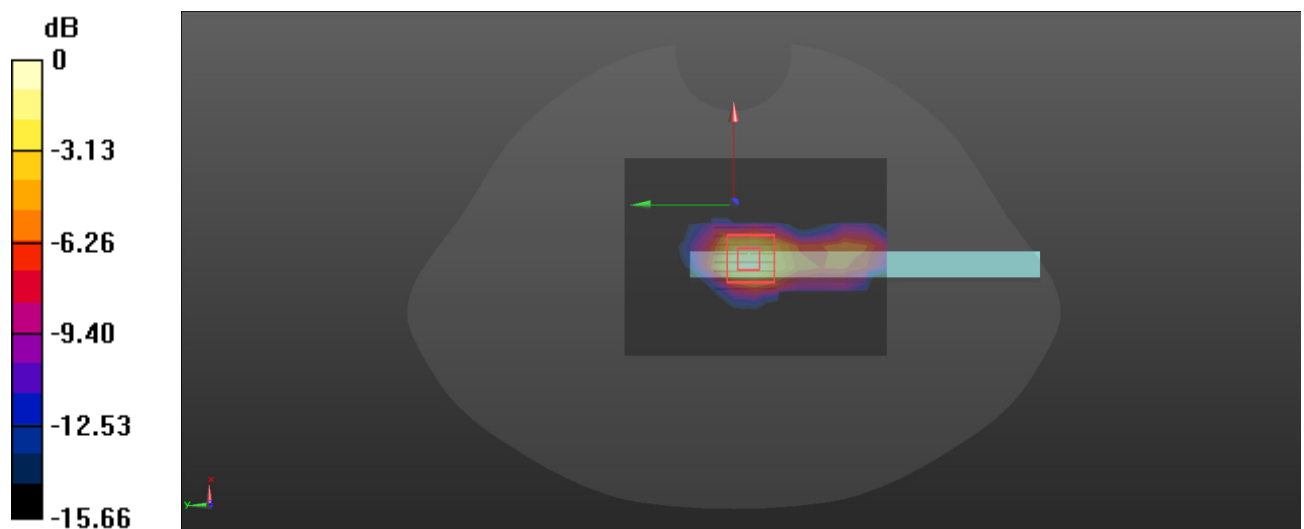

0 dB = 0.166 W/kg = -7.80 dBW/kg

Plot: 36#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.966$ S/m; $\epsilon_r = 38.019$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant8 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.429 W/kg


Head Right Cheek/Ant8 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.120 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

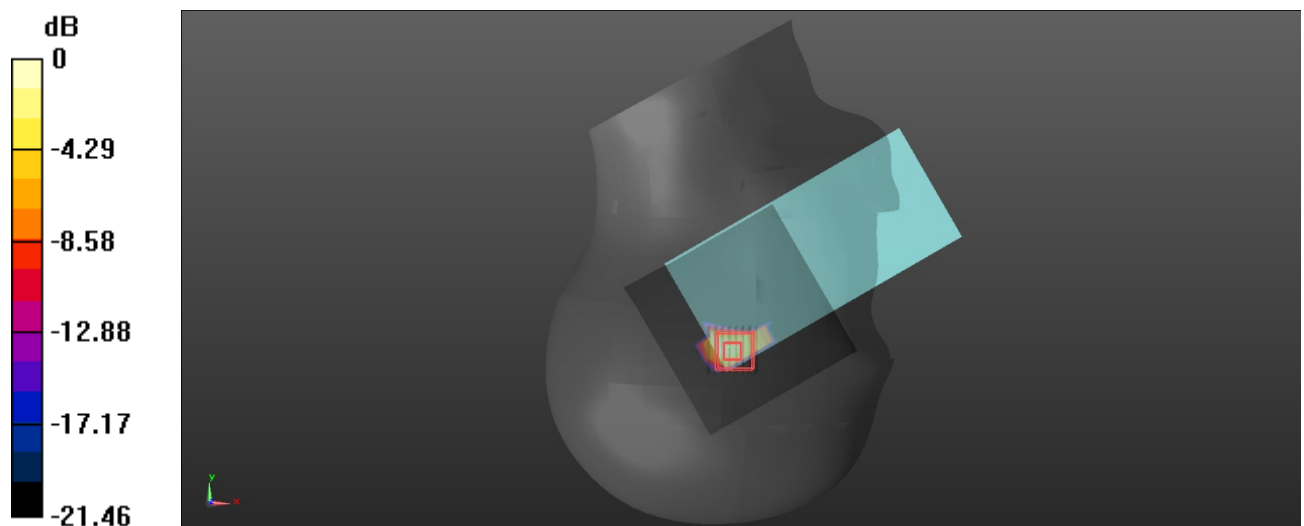

0 dB = 0.502 W/kg = -2.99 dBW/kg

Plot: 37#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.966$ S/m; $\epsilon_r = 38.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant8 FR1 n77 Lower 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.227 W/kg


Body Top/Ant8 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.775 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

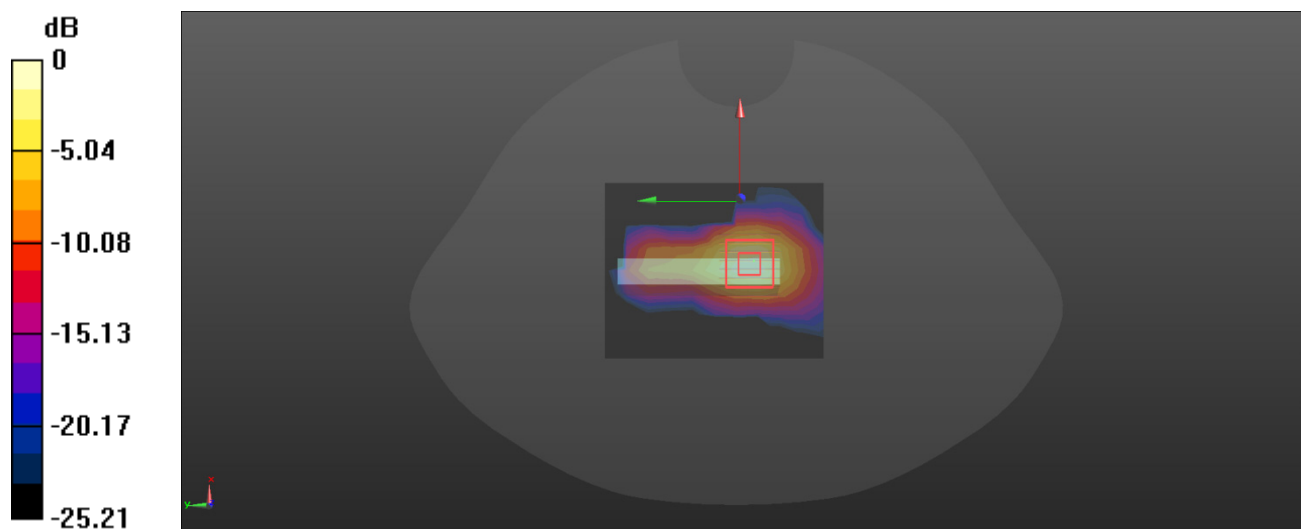

0 dB = 0.255 W/kg = -5.93 dBW/kg

Plot: 38#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.966$ S/m; $\epsilon_r = 38.019$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant9 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.587 W/kg


Head Left Tilt/Ant9 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.650 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.700 W/kg

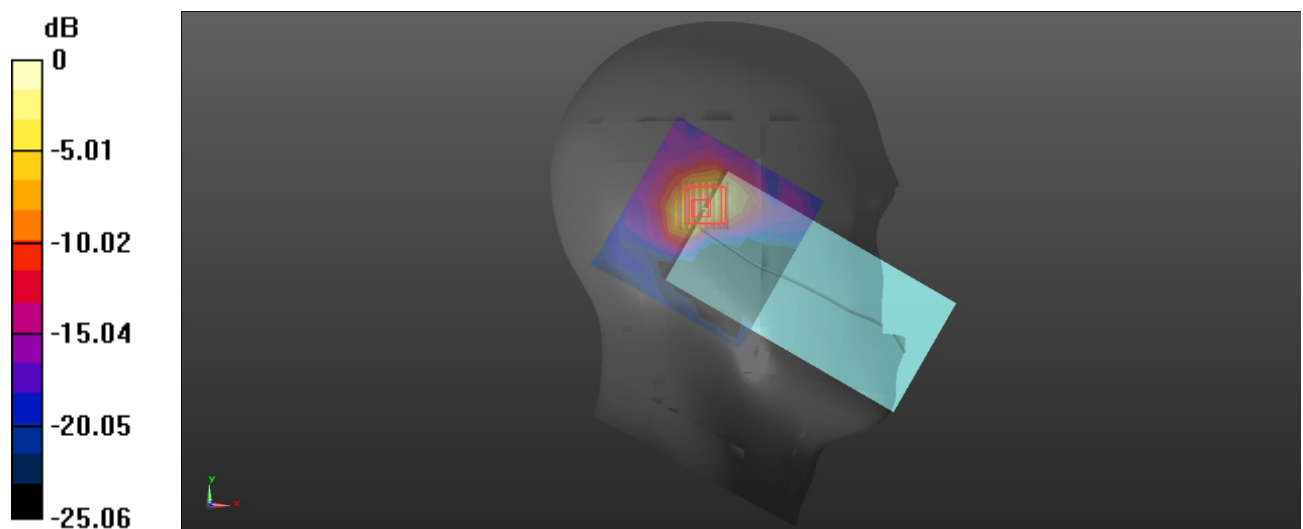

0 dB = 0.700 W/kg = -1.55 dBW/kg

Plot: 39#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.966$ S/m; $\epsilon_r = 38.019$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.91, 6.19, 6.2) @ 3500 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant9 FR1 n77 Lower 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.265 W/kg


Body Top/Ant9 FR1 n77 Lower 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6710 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

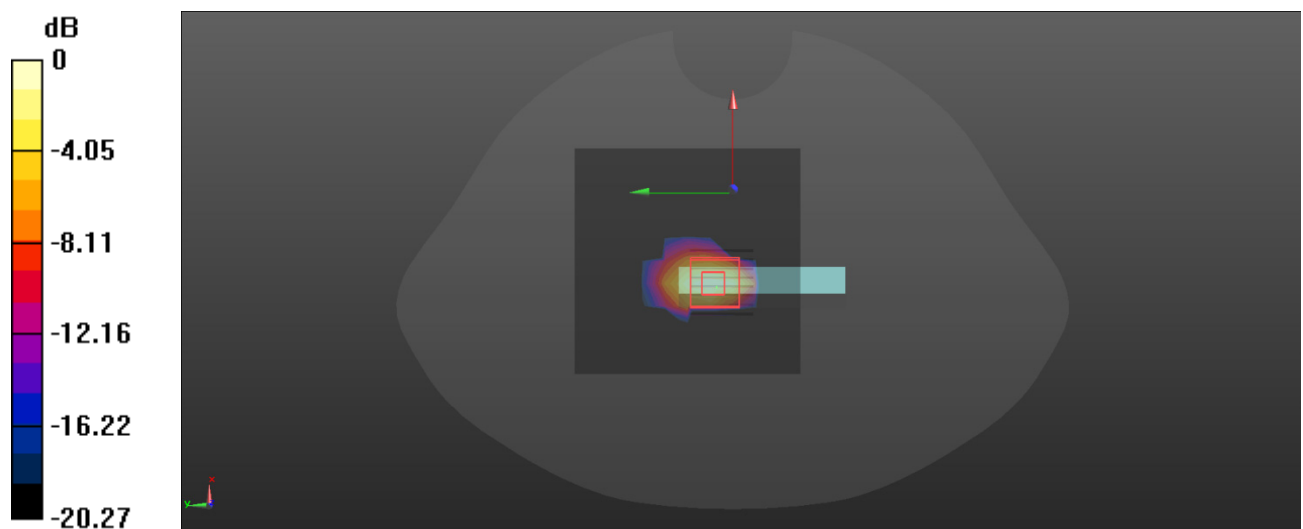

Plot: 40#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.107$ S/m; $\epsilon_r = 38.595$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant0 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.402 W/kg


Head Left Cheek/Ant0 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.549 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

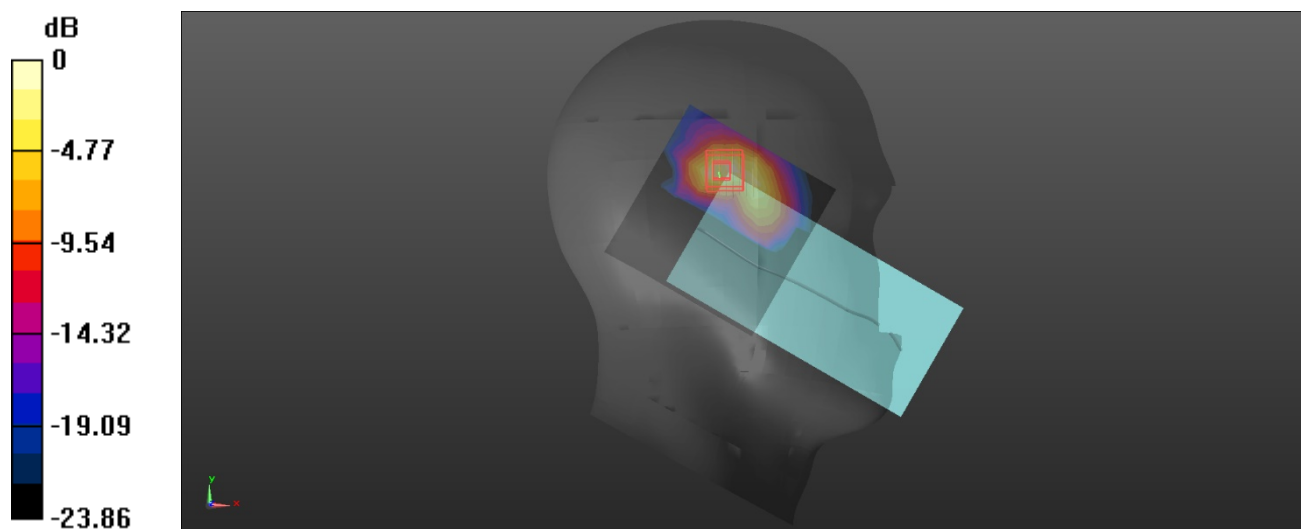

0 dB = 0.418 W/kg = -3.79 dBW/kg

Plot: 41#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625 \text{ MHz}$; $\sigma = 3.107 \text{ S/m}$; $\epsilon_r = 38.595$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Right/Ant0 FR1 n77 Mid 50%RB Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.116 W/kg


Body Right/Ant0 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.639 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

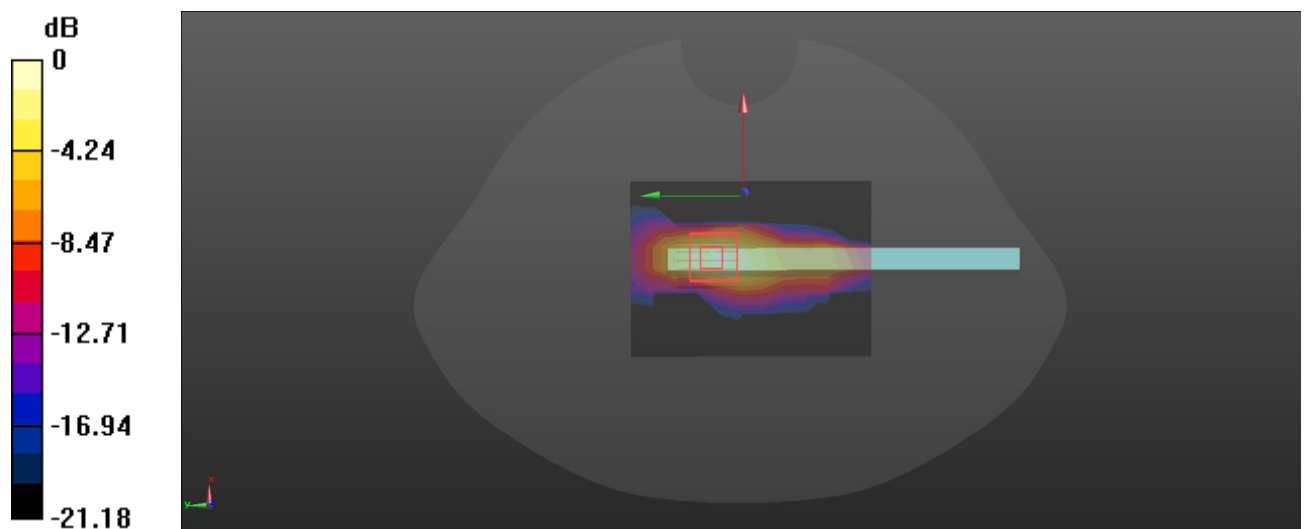

0 dB = 0.152 W/kg = -8.18 dBW/kg

Plot: 42#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625 \text{ MHz}$; $\sigma = 3.107 \text{ S/m}$; $\epsilon_r = 38.595$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant6 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.178 W/kg


Head Right Tilt/Ant6 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.219 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

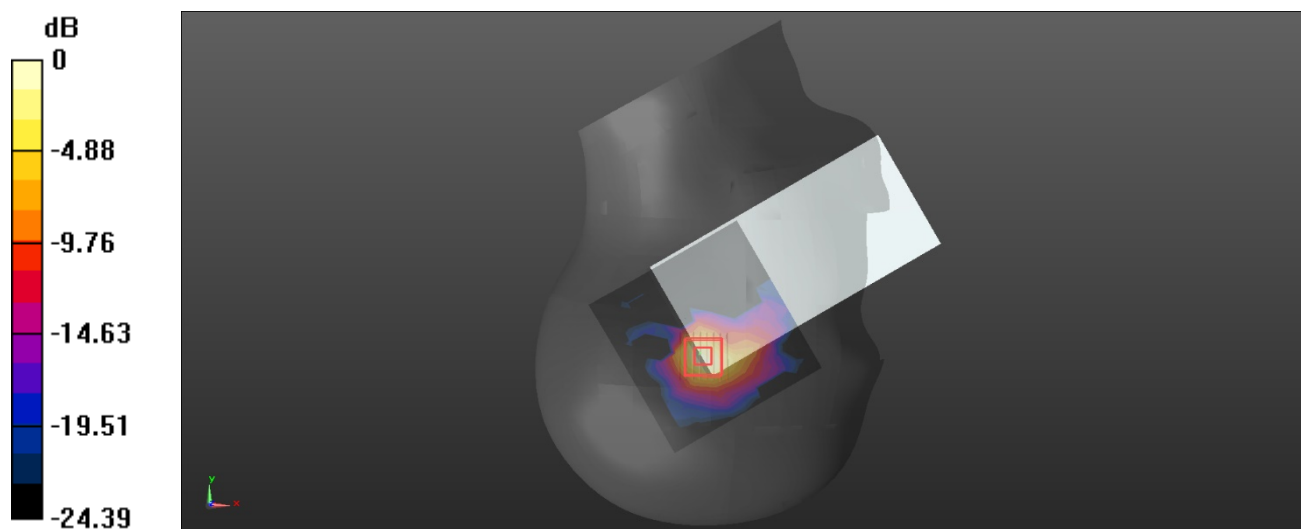

0 dB = 0.183 W/kg = -7.38 dBW/kg

Plot: 43#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.107$ S/m; $\epsilon_r = 38.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 FR1 n77 Mid 50%RB Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0661 W/kg


Body Left/Ant6 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.235 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.00988 W/kg

Maximum value of SAR (measured) = 0.0550 W/kg

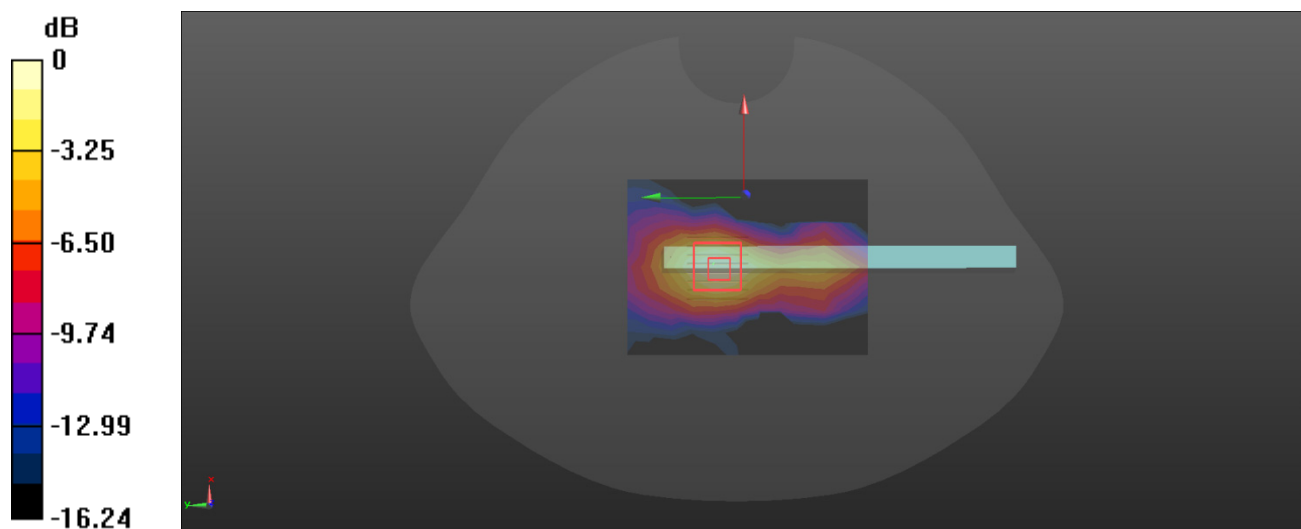

0 dB = 0.0550 W/kg = -12.60 dBW/kg

Plot: 44#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.238$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant8 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.649 W/kg


Head Right Tilt/Ant8 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.177 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.911 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

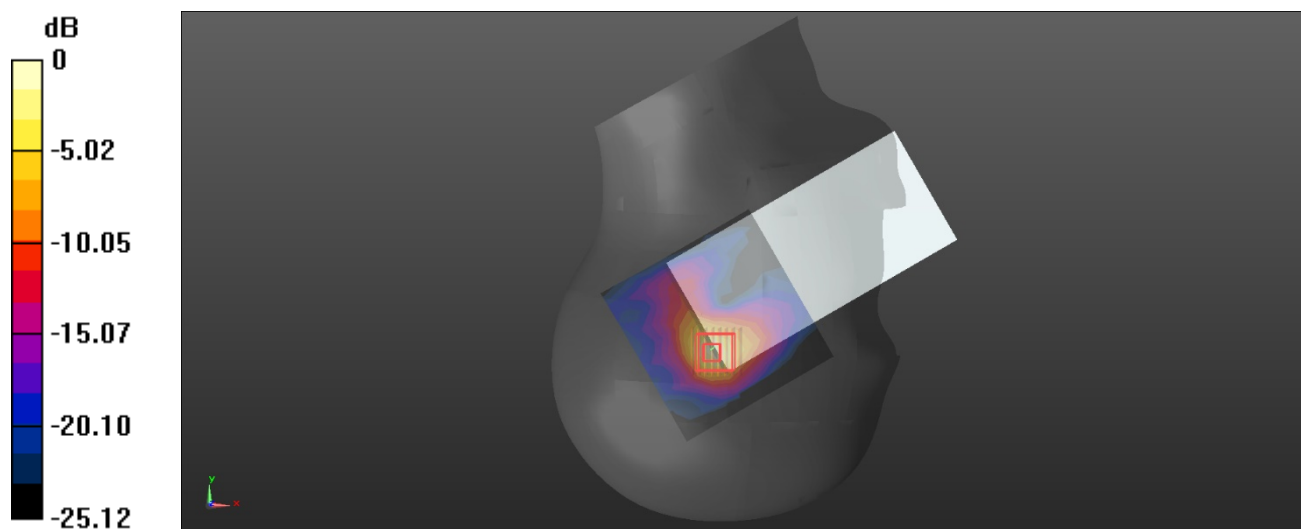

0 dB = 0.694 W/kg = -1.59 dBW/kg

Plot: 45#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant8 FR1 n77 Mid 50%RB Mid/Area Scan (10x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.162 W/kg


Body Top/Ant8 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.511 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

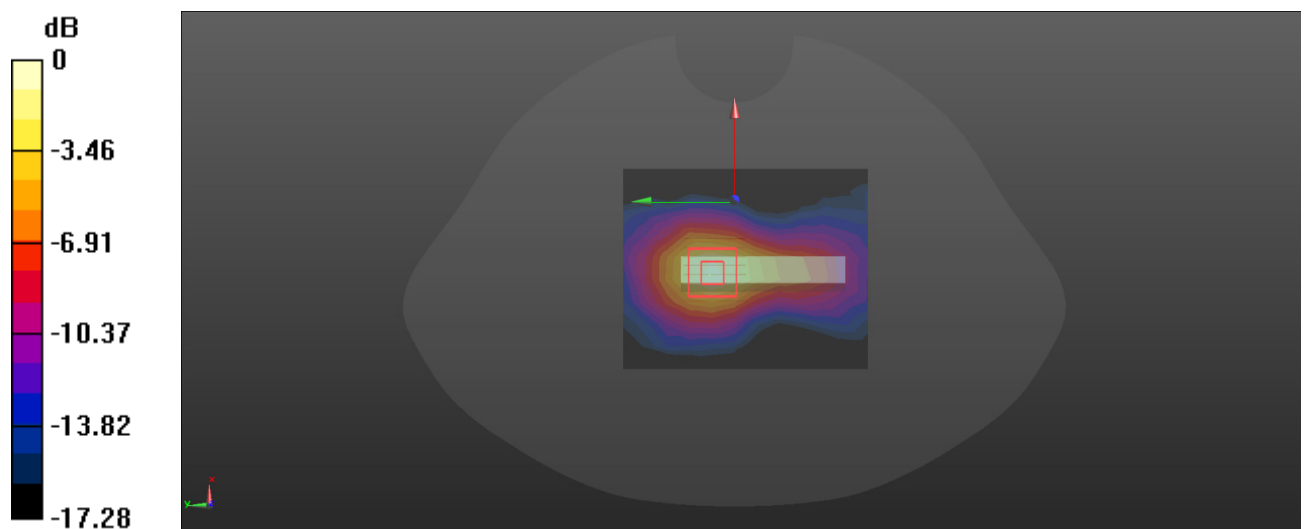

0 dB = 0.181 W/kg = -7.42 dBW/kg

Plot: 46#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.238$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant9 FR1 n77 Mid 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.430 W/kg


Head Left Tilt/Ant9 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.165 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

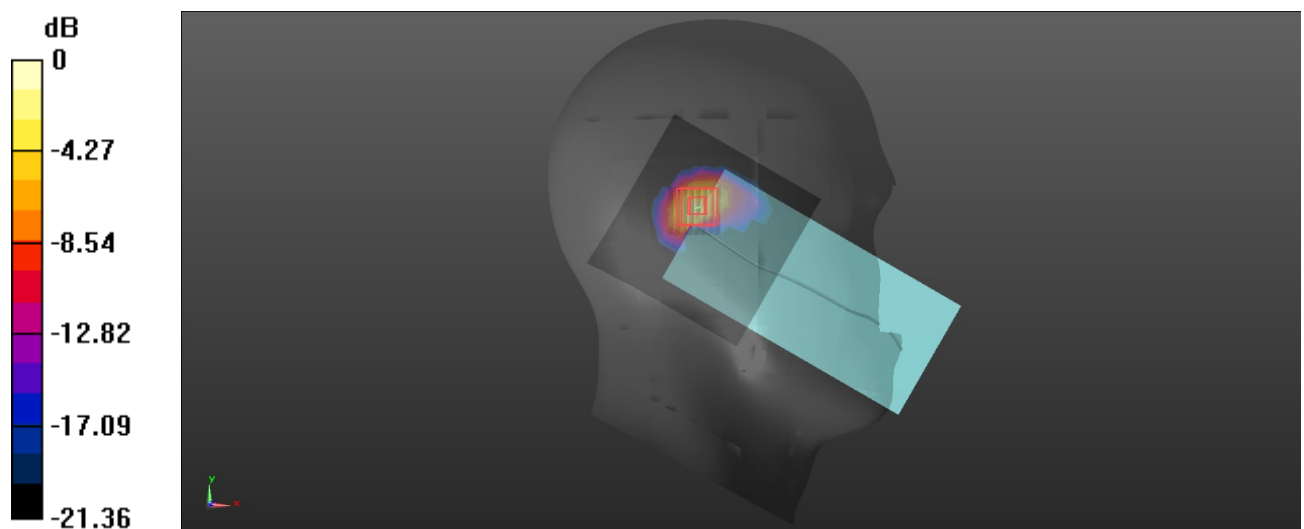

0 dB = 0.468 W/kg = -3.30 dBW/kg

Plot: 47#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.92, 6.2, 6.21) @ 3625 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant9 FR1 n77 Mid 50%RB Mid/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.188 W/kg


Body Top/Ant9 FR1 n77 Mid 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.630 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.182 W/kg

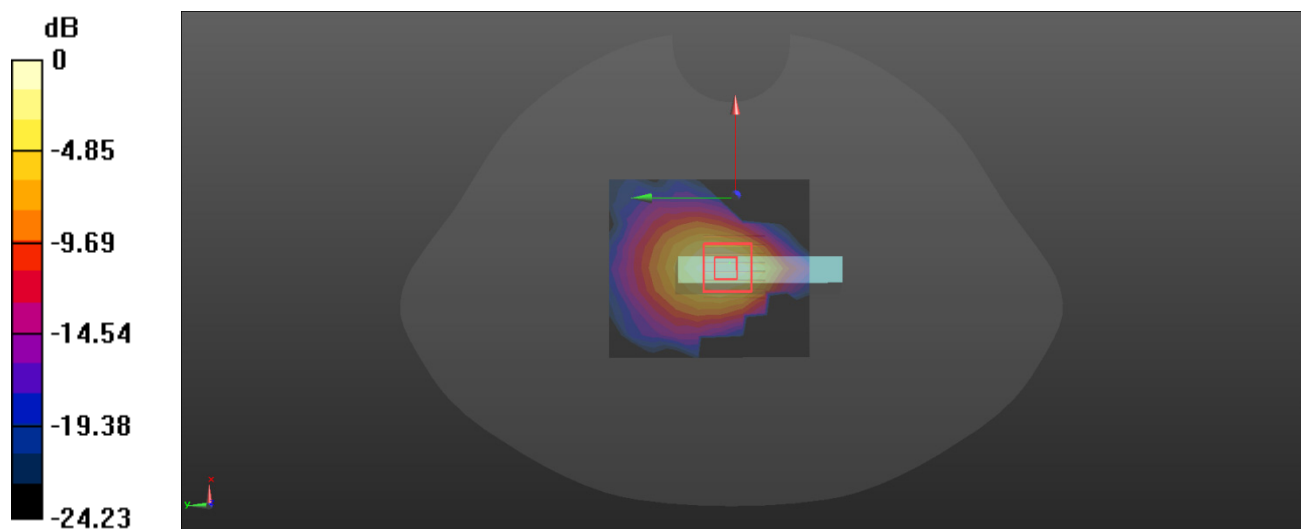

Plot: 48#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840 \text{ MHz}$; $\sigma = 3.359 \text{ S/m}$; $\epsilon_r = 37.283$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/Ant0 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.439 W/kg


Head Left Cheek/Ant0 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.4960 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.488 W/kg

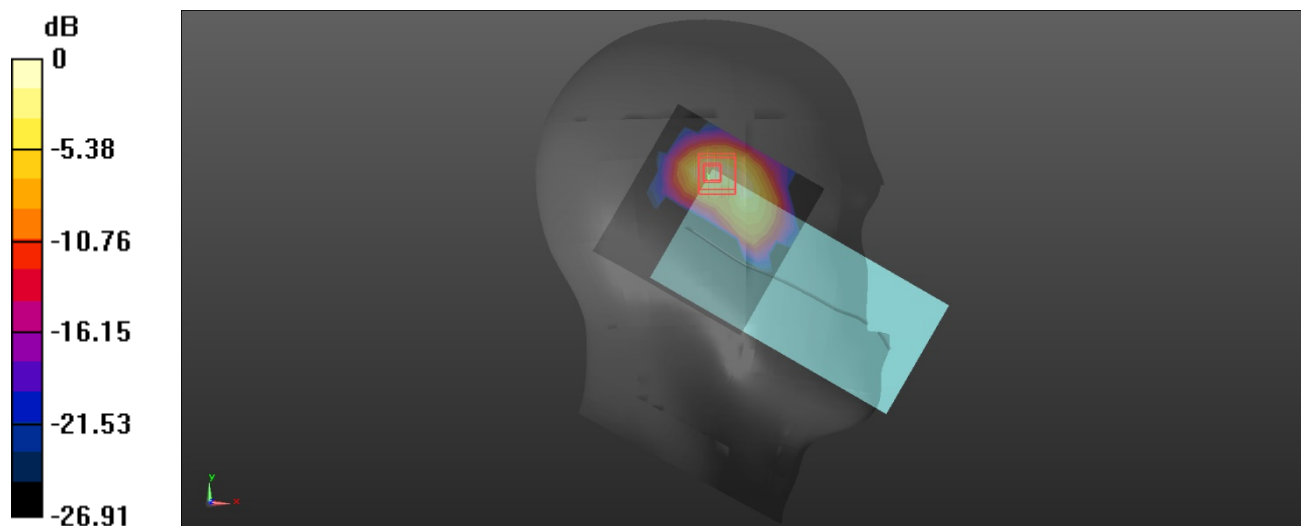

0 dB = 0.488 W/kg = -3.12 dBW/kg

Plot: 49#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.359$ S/m; $\epsilon_r = 37.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/Ant0 FR1 n77 Upper 50%RB Mid/Area Scan (11x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0854 W/kg


Body Back/Ant0 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.488 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

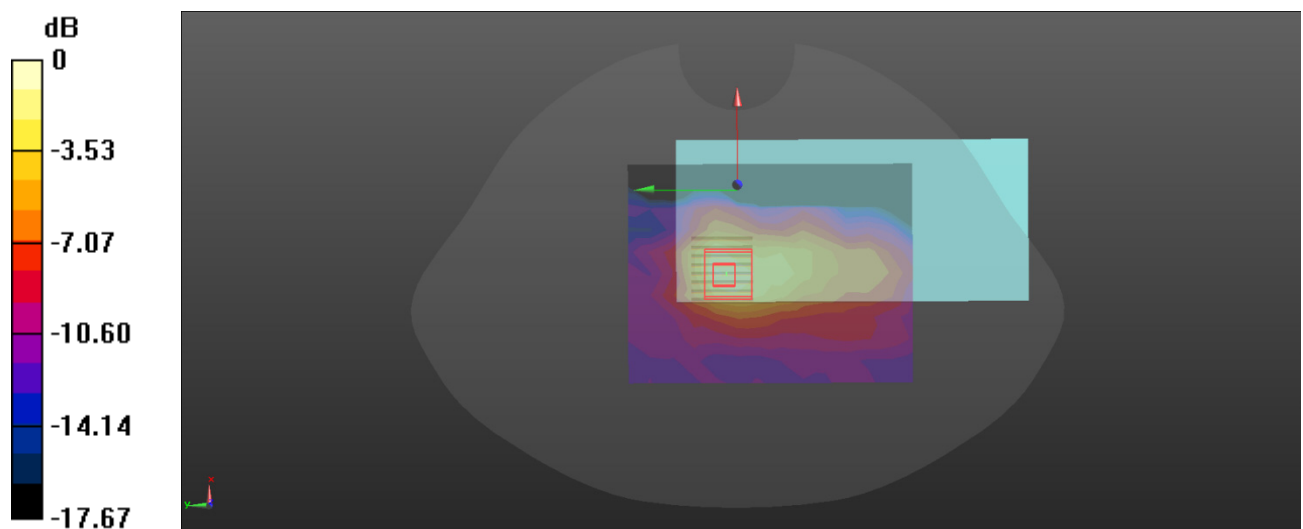

0 dB = 0.107 W/kg = -9.71 dBW/kg

Plot: 50#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.359$ S/m; $\epsilon_r = 37.283$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/Ant6 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.177 W/kg


Head Right Cheek/Ant6 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.797 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

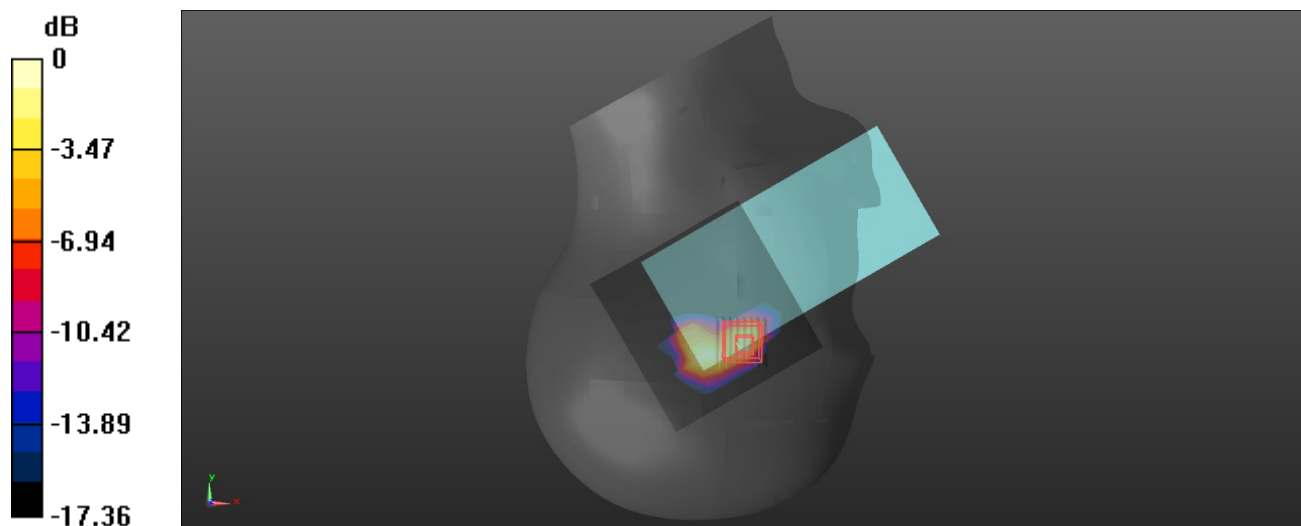

0 dB = 0.196 W/kg = -7.08 dBW/kg

Plot: 51#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.359$ S/m; $\epsilon_r = 37.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/Ant6 FR1 n77 Upper 50%RB Mid/Area Scan (8x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.144 W/kg


Body Left/Ant6 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.021 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

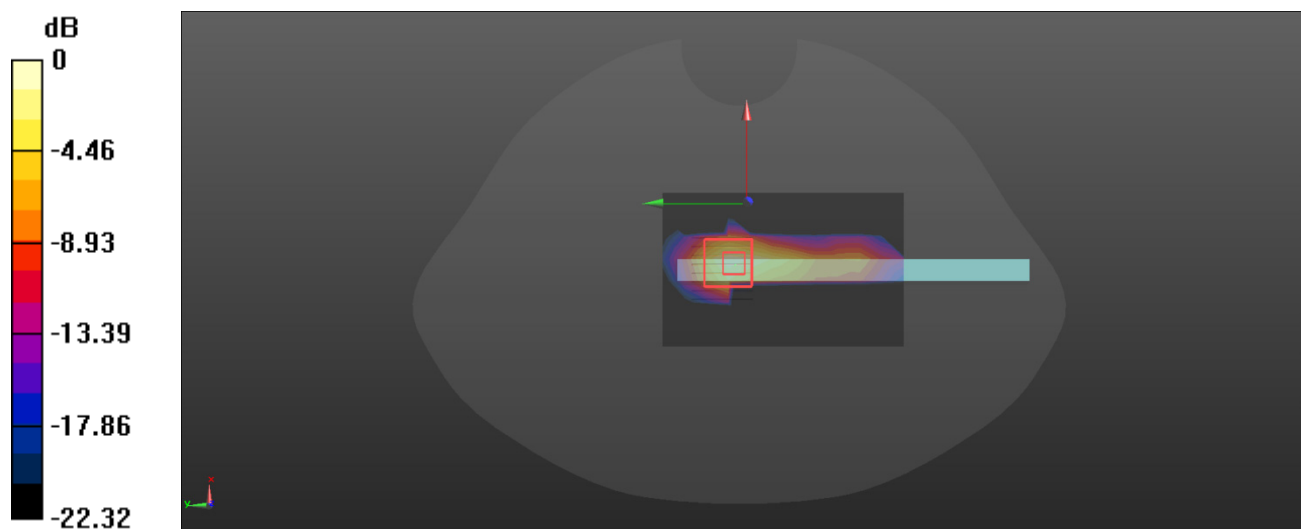

0 dB = 0.150 W/kg = -8.24 dBW/kg

Plot: 52#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840 \text{ MHz}$; $\sigma = 3.159 \text{ S/m}$; $\epsilon_r = 36.767$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/Ant8 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.471 W/kg


Head Right Tilt/Ant8 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.859 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

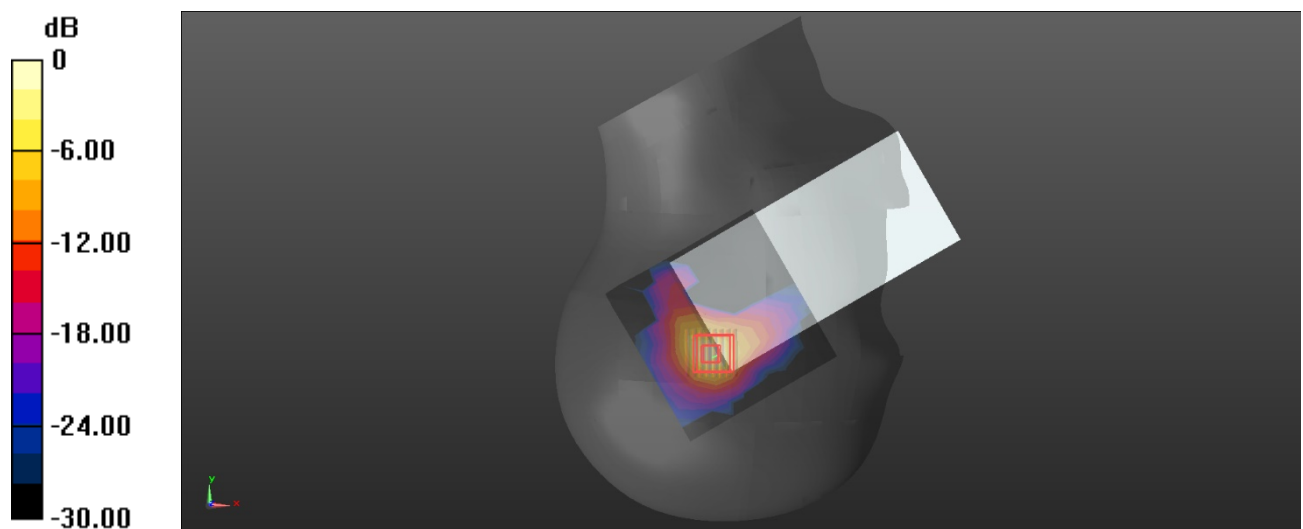 $0 \text{ dB} = 0.592 \text{ W/kg} = -2.28 \text{ dBW/kg}$

Plot: 53#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840 \text{ MHz}$; $\sigma = 3.159 \text{ S/m}$; $\epsilon_r = 36.767$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant8 FR1 n77 Upper 50%RB Mid/Area Scan (10x14x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0919 W/kg


Body Top/Ant8 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.853 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0991 W/kg

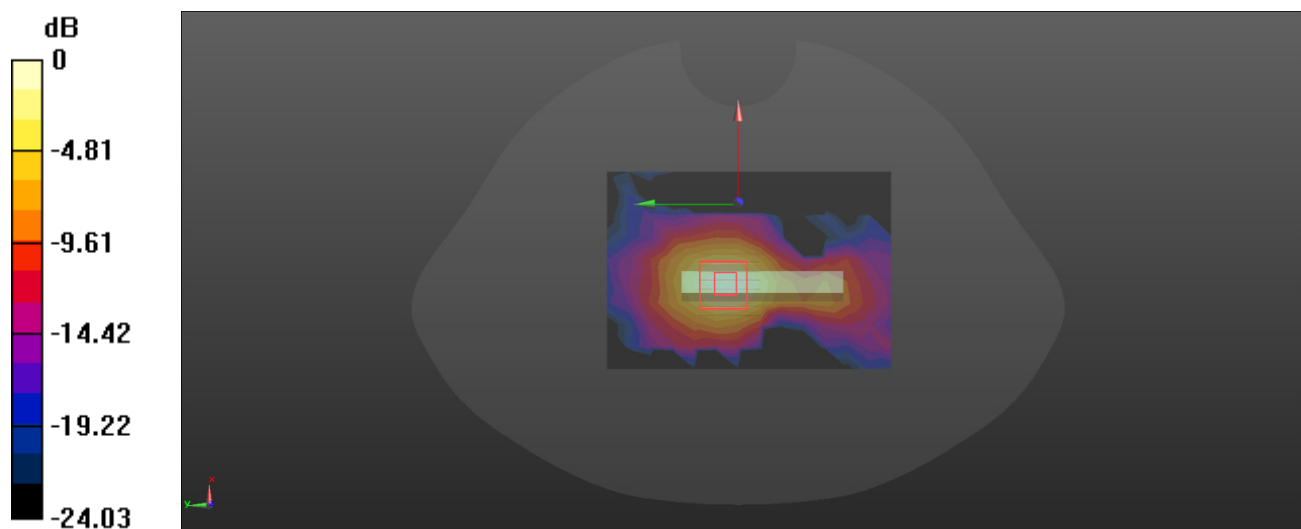

0 dB = 0.0991 W/kg = -10.04 dBW/kg

Plot: 54#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.159$ S/m; $\epsilon_r = 36.767$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/Ant9 FR1 n77 Upper 50%RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.302 W/kg


Head Left Tilt/Ant9 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.603 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

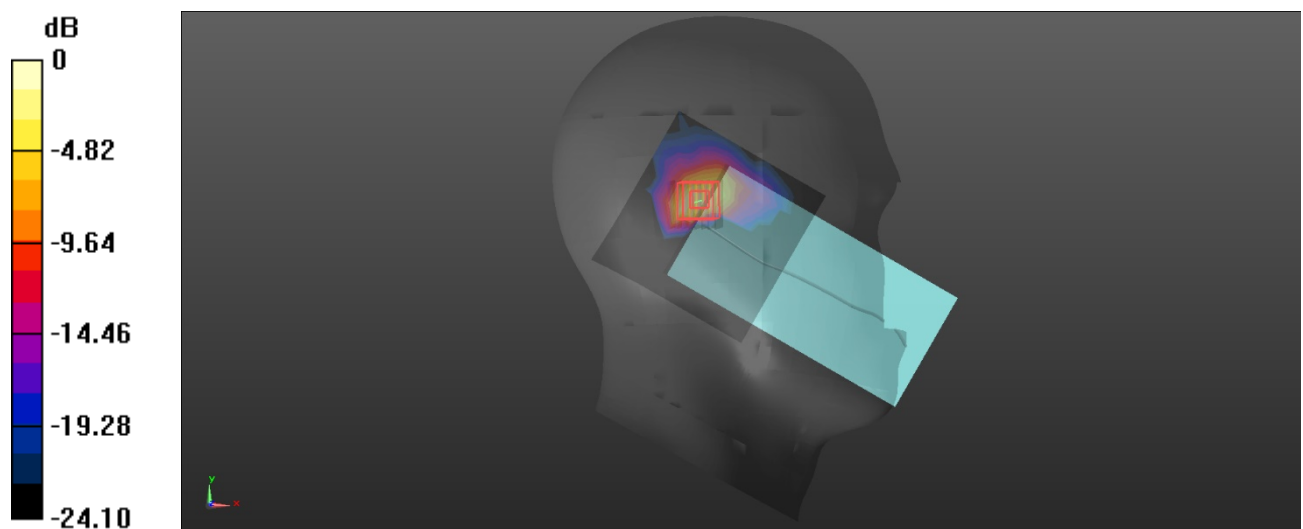

0 dB = 0.379 W/kg = -4.21 dBW/kg

Plot: 55#**DUT: Mobile Phone; Type: CM8; Serial: 2X9Q-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1.58

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.159$ S/m; $\epsilon_r = 36.767$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(5.79, 6.07, 6.07) @ 3840 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 10/8/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/Ant9 FR1 n77 Upper 50%RB Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0949 W/kg


Body Top/Ant9 FR1 n77 Upper 50%RB Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.318 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

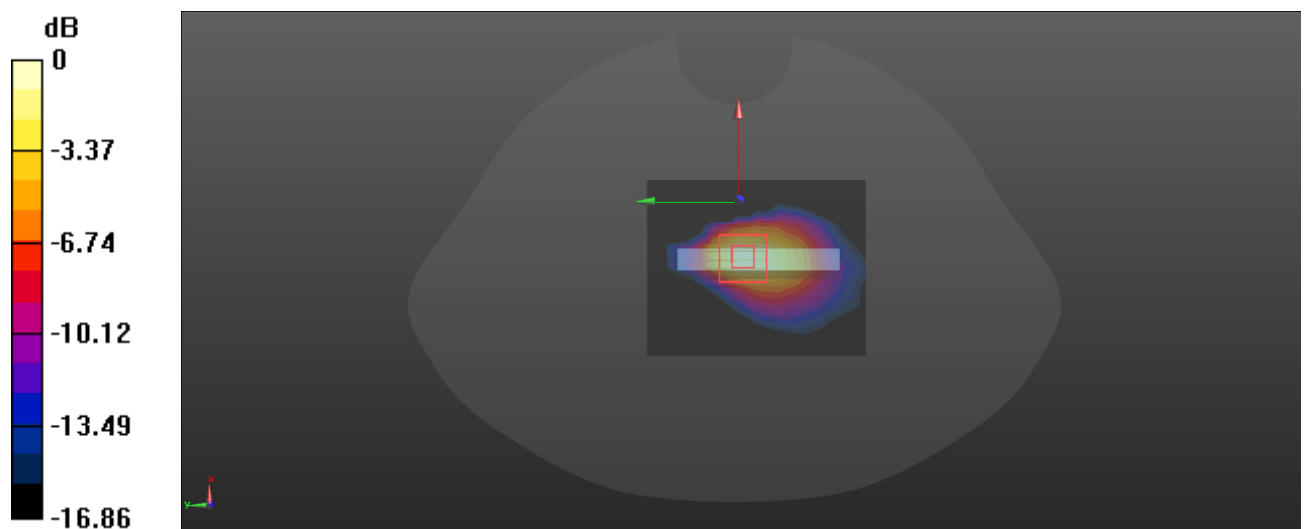

0 dB = 0.118 W/kg = -9.28 dBW/kg