

FCC SAR REPORT

Report No.: JYTSZ-R14-2500125

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: KM6

Trade mark: TECNO

FCC ID: 2ADYY-YY5-KM6

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 21 Jun., 2025 ~ 30 Jun., 2025

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 0.547 Body: 0.637 Hotspot: 0.751

Project by: Eric Wang **Date:** 04 Jul., 2025

Reviewed by: Jeta Zhang **Date:** 04 Jul., 2025

Approved by: James Wei **Date:** 04 Jul., 2025

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	04 Jul., 2025	Original

3 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY.....	5
5	GENERAL INFORMATION.....	7
5.1	CLIENT INFORMATION.....	7
5.2	GENERAL DESCRIPTION OF EUT	7
5.3	MAXIMUM RF OUTPUT POWER.....	9
5.4	ENVIRONMENT OF TEST SITE	10
5.5	TEST SAMPLE PLAN	10
5.6	LABORATORY FACILITY.....	10
5.7	TEST LOCATION	10
6	INTRODUCTION.....	11
6.1	INTRODUCTION	11
6.2	SAR DEFINITION.....	11
7	RF EXPOSURE LIMITS	12
7.1	UNCONTROLLED ENVIRONMENT.....	12
7.2	CONTROLLED ENVIRONMENT	12
7.3	RF EXPOSURE LIMITS	12
8	SAR MEASUREMENT SYSTEM.....	13
8.1	E-FIELD PROBE.....	14
8.2	DATA ACQUISITION ELECTRONICS (DAE).....	14
8.3	ROBOT	15
8.4	MEASUREMENT SERVER	15
8.5	LIGHT BEAM UNIT.....	15
8.6	PHANTOM	16
8.7	DEVICE HOLDER.....	17
8.8	DATA STORAGE AND EVALUATION	18
8.9	TEST EQUIPMENT LIST	20
9	TISSUE SIMULATING LIQUIDS	21
10	SAR SYSTEM VERIFICATION.....	23
11	EUT TESTING POSITION.....	25
11.1	HANDSET REFERENCE POINTS	25
11.2	POSITIONING FOR CHEEK / TOUCH	26
11.3	POSITIONING FOR EAR / 15o TILT.....	26
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	27
11.5	BODY WORN ACCESSORY CONFIGURATIONS.....	27
11.6	WIRELESS ROUTER (HOTSPOT) CONFIGURATIONS	28
11.7	LTE CA ADDITIONAL SPECIFICATION	29
12	MEASUREMENT PROCEDURES	30
12.1	SPATIAL PEAK SAR EVALUATION	30
12.2	POWER REFERENCE MEASUREMENT.....	31
12.3	AREA & ZOOM SCAN PROCEDURES.....	31
12.4	VOLUME SCAN PROCEDURES	32
12.5	SAR AVERAGED METHODS	32
12.6	POWER DRIFT MONITORING	32
13	CONDUCTED RF OUTPUT POWER.....	33
13.1	GSM CONDUCTED POWER	33
13.2	WCDMA CONDUCTED POWER	35
13.3	LTE CONDUCTED POWER	38
13.4	WLAN 2.4 GHz BAND CONDUCTED POWER	79
13.5	WLAN 5.2GHz BAND CONDUCTED POWER.....	80
13.6	WLAN 5.3GHz BAND CONDUCTED POWER.....	81
13.7	WLAN 5.6GHz BAND CONDUCTED POWER.....	81
13.8	WLAN 5.8GHz BAND CONDUCTED POWER.....	82

13.9	BLUETOOTH CONDUCTED POWER	82
13.10	NFC CONDUCTED POWER	83
14	EXPOSURE POSITIONS CONSIDERATION	84
14.1	EUT ANTENNA LOCATIONS.....	84
14.2	TEST POSITIONS CONSIDERATION	85
15	SAR TEST RESULTS SUMMARY	86
15.1	STANDALONE HEAD SAR DATA.....	86
15.2	STANDALONE BODY SAR	94
15.3	BODY SAR IN HOTSPOT MODE	100
15.4	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....	108
15.5	SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....	109
15.6	MEASUREMENT UNCERTAINTY	110
15.7	MEASUREMENT CONCLUSION	111
16	REFERENCE.....	112
APPENDIX A: PLOTS OF SAR SYSTEM CHECK		113
APPENDIX B: PLOTS OF SAR TEST DATA		124

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as below:
<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.416	PCE	0.547
	PCS 1900	0.210		
	WCDMA Band II	0.304		
	WCDMA Band IV	0.456		
	WCDMA Band V	0.439		
	LTE Band 2	0.349		
	LTE Band 4	0.510		
	LTE Band 5	0.547		
	LTE Band 7	0.446		
	LTE Band 12	0.281		
	LTE Band 13	0.263		
	LTE Band 17	0.245		
	LTE Band 26	0.466		
	LTE Band 38	0.429		
	LTE Band 41	0.428		
	LTE Band 66	0.485		
	WLAN 2.4 GHz	0.340	DTS	
	Bluetooth	0.103	DSS	
	WLAN 5.2 GHz	0.337	NII	
	WLAN 5.3 GHz	0.357		
	WLAN 5.6 GHz	0.393		
WLAN 5.8 GHz	0.312			
Body (10 mm Gap)	GSM 850	0.637	PCE	0.637
	PCS 1900	0.444		
	WCDMA Band II	0.181		
	WCDMA Band IV	0.335		
	WCDMA Band V	0.318		
	LTE Band 2	0.183		
	LTE Band 4	0.395		
	LTE Band 5	0.415		
	LTE Band 7	0.380		
	LTE Band 12	0.213		
	LTE Band 13	0.281		
	LTE Band 17	0.188		
	LTE Band 26	0.350		
	LTE Band 38	0.326		
	LTE Band 41	0.425		
	LTE Band 66	0.347		
	WLAN 2.4GHz	0.143	DTS	
	Bluetooth	0.029	DSS	
	WLAN 5.2 GHz	0.187	NII	
	WLAN 5.3 GHz	0.192		
	WLAN 5.6 GHz	0.187		
WLAN 5.8 GHz	0.133			
Hotspot (10 mm Gap)	GSM 850	0.637	PCE	0.751
	PCS 1900	0.532		
	WCDMA Band II	0.247		
	WCDMA Band IV	0.681		
	WCDMA Band V	0.318		
	LTE Band 2	0.231		
	LTE Band 4	0.751		

	LTE Band 5	0.415		
	LTE Band 7	0.638		
	LTE Band 12	0.303		
	LTE Band 13	0.317		
	LTE Band 17	0.277		
	LTE Band 26	0.350		
	LTE Band 38	0.414		
	LTE Band 41	0.425		
	LTE Band 66	0.722		
	WLAN 2.4GHz	0.178	DTS	
	Bluetooth	0.060	DSS	
	WLAN 5.2 GHz	0.187	NII	
	WLAN 5.8 GHz	0.157		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Bottom	LTE Band 5	0.547	PCE	0.908
	WLAN 5.6 GHz	0.314	NII	
	Bluetooth	0.047	DSS	
	NFC	0.000	DXX	

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528: 2013.
3. For DFS operation type is slaver device without radar detection function, 5.3GHz WLAN and 5.6GHz WLAN does not support hotspot mode.

5 General Information

5.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address of Applicant:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address of Manufacturer:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address of Factory:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

5.2 General Description of EUT

Product Name:	Mobile Phone		
Model No.:	KM6		
Category of device	Portable device		
Operation Frequency:	GSM:	GSM850: 824.2~848.8 MHz	PCS 1900: 1850.2~1909.8 MHz
	WCDMA:	Band II: 1852.4~1907.6 MHz	Band V: 826.4~846.6 MHz
		Band IV: 1712.4~1752.6 MHz	
	LTE:	Band 2: 1850MHz~1910MHz	Band 4: 1710MHz~1755MHz
		Band 5: 824MHz~849MHz	Band 7: 2500MHz~2570MHz
		Band 12: 699MHz~716MHz	Band 13: 777MHz~787MHz
		Band 17: 704MHz~716MHz	Band 26: 814MHz~849MHz
		Band 41: 2535MHz~2655MHz	Band 38: 2570 MHz - 2620 MHz
		LTE 66: 1710 MHz - 1780 MHz	
	LTE CA(UL):	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_66C	
	Wi-Fi:	2412MHz~2462MHz	5150MHz-5250MHz
		5250MHz-5350MHz	5470MHz-5725MHz
		5725MHz-5850MHz	
	Bluetooth: 2402 MHz ~ 2480 MHz		
	NFC: 13.56MHz		
Modulation technology:	GSM:	☒ Voice(GMSK) ☒ GPRS(GMSK) ☐ EGPRS(GMSK, 8PSK)	
	WCDMA:	☒ RMC(QPSK) ☒ HSUPA(QPSK) ☒ HSDPA(QPSK, 16QAM)	
	LTE:	☒ QPSK ☒ 16QAM ☒ 64QAM	
	Wi-Fi:	☒ 802.11b(DSSS) ☒ 802.11a/g/n/ac (OFDM)	
	Bluetooth:	☒ BDR(GFSK) ☒ EDR($\pi/4$ -DQPSK, 8DPSK) ☒ LE(GFSK)	
	NFC:	☒ ASK	
Antenna Type:	Internal Antenna		
Antenna Gain:	GSM 850:	ANT0: -5.83 dBi	PCS 1900:
		ANT2: -8.50 dBi	
	WCDMA Band II:	ANT0: -2.94 dBi	WCDMA Band V:
		ANT2: -2.27 dBi	
	WCDMA Band II:	ANT0: -5.83 dBi	WCDMA Band V:
		ANT2: -8.50 dBi	

	WCDMA Band IV:	ANT0: -4.43 dBi		
		ANT2: -3.32 dBi		
	LTE Band 2:	ANT0: -2.94 dBi	LTE Band 4	ANT0: -4.43 dBi
		ANT2: -2.27 dBi		ANT2: -3.32 dBi
	LTE Band 5:	ANT0: -5.83 dBi	LTE Band 7:	ANT0: -4.06 dBi
		ANT2: -8.50 dBi		ANT2: -2.69 dBi
	LTE Band 12:	ANT0: -5.75 dBi	LTE Band 13:	ANT0: -5.75 dBi
		ANT2: -9.30 dBi		ANT2: -9.30 dBi
	LTE Band 17:	ANT0: -5.75 dBi	LTE Band 26:	ANT0: -5.83 dBi
		ANT2: -9.30 dBi		ANT2: -8.50 dBi
LTE Band 38:	ANT0: -4.06 dBi	LTE Band 41:	ANT0: -4.06 dBi	
	ANT2: -2.69 dBi		ANT2: -2.69 dBi	
LTE Band 66:	ANT0: -4.43 dBi			
	ANT2: -3.32 dBi			
Bluetooth/BLE:	ANT13: 0.5 dBi	2.4G Wi-Fi:	ANT13: 0.5 dBi	
5G Wi-Fi:	ANT14: -2.57 dBi			
GPRS Class:	GPRS Class: 12			
DFS Operation Type:	☐ Master Device ☐ Slaver Device with Radar detection function ☒ Slaver Device without Radar detection function			
Dimensions (L*W*H):	164 mm (L)× 76 mm (W)× 7 mm (H)			
Accessories information:	Adapter: Model: U450TSB Input: AC100-240V, 50/60Hz, 1.8A Output: DC 5.0V, 3.0A 15.0W or 5.0-10.0V, 4.5A or 11.0V,4.1A 45.0W MAX		Battery: Rechargeable Li-ion Polymer Battery 3.92V/5060mAh	
			Headset: Support headset (shipped without)	

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	PCS 1900
GSM (Voice)	33.42	30.22
GPRS (1 TX Slot)	33.41	30.19
GPRS (2 TX Slots)	32.70	29.52
GPRS (3 TX Slots)	31.01	27.77
GPRS (4 TX Slots)	29.76	26.53

Mode	Average Power (dBm)		
	WCDMA Band II	WCDMA Band IV	WCDMA Band V
AMR 12.2 kbps	23.99	23.75	24.24
RMC 12.2 kbps	24.02	23.72	24.32
HSDPA Sub-test 1	24.03	23.75	24.35
HSDPA Sub-test 2	23.45	23.19	23.84
HSDPA Sub-test 3	23.47	23.19	23.81
HSDPA Sub-test 4	23.45	23.19	23.79
HSUPA Sub-test 1	22.02	21.75	22.38
HSUPA Sub-test 2	22.46	22.21	22.84
HSUPA Sub-test 3	22.99	22.71	23.37
HSUPA Sub-test 4	22.03	21.75	22.41
HSUPA Sub-test 5	23.98	23.72	24.35

Mode	Average Power (dBm)								
	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 26	LTE Band 41
BW/1.4 MHz	24.22	23.67	24.07	/	23.89	/	/	24.25	/
BW/3.0 MHz	23.99	23.47	23.98	/	23.67	/	/	24.08	/
BW/5.0 MHz	24.29	23.85	24.26	23.39	24.02	23.92	23.99	24.34	23.53
BW/10 MHz	24.14	23.76	24.19	23.24	23.8	23.78	23.85	24.24	23.63
BW/15 MHz	24.23	23.78	/	23.19	/	/	/	24.26	23.7
BW/20 MHz	24.25	23.75	/	23.33	/	/	/	/	23.66

Mode/Band	b	g	n (HT-20)
WLAN 2.4GHz	18.04	16.70	17.01

WLAN 5.2 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.2GHz	16.45	15.49	15.28	15.14	15.68	15.22

WLAN 5.3 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.3GHz	16.54	15.62	15.48	14.74	15.57	15.46

WLAN 5.6 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.6GHz	16.12	14.20	13.88	13.97	14.93	14.73

WLAN 5.8 GHz Band Average Power (dBm)						
Mode/Band	a	ac 20	ac 40	ac 80	n 20	n 40
WLAN 5.8GHz	16.39	14.69	14.02	13.75	15.33	14.87

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
Bluetooth	17.73	17.75	17.68	6.21	6.19	6.19	6.17

NFC Average Power (dBm)	
Frequency (MHz)	ASK
13.56	-44.35

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
SZR142500125-2	SAR

Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Test Location

JianYan Testing Group Shenzhen Co., Ltd.

No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community,Xinqiao Street, Bao'an District, Shenzhen, Guangdong,People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

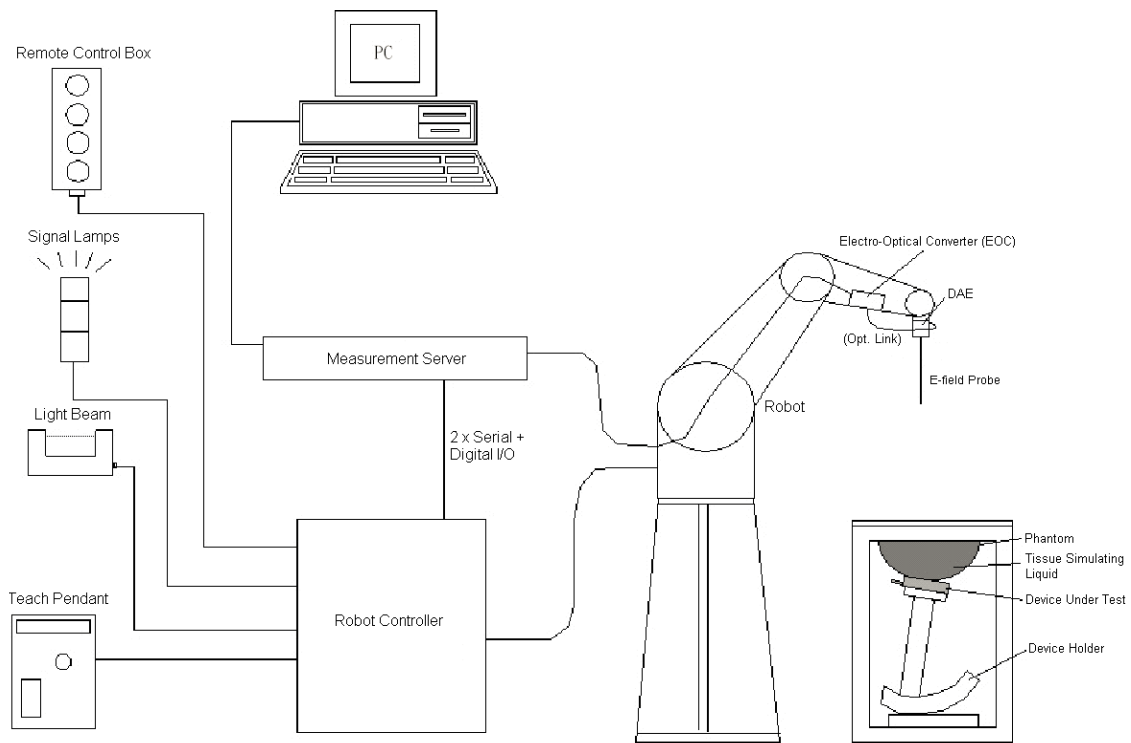


Fig. 8.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in the following sub-sections.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification <EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency Directivity	10 MHz to 6 GHz; Linearity: ± 0.2 dB ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20mm) Tip diameter: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig. 8.2 Photo of E-Field Probe

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y and Norm Z), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix E of this report.

8.2 Data Acquisition Electronics (DAE)

The Data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig. 8.3 Photo of DAE

8.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; nobelt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Fig. 8.4 Photo of Robot

8.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY 5: 400MHz, Intel Celeron), chip-disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig. 8.5 Photo of Server for DASY5

8.5 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 8.6 Photo of Light Beam

8.6 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume Dimensions	Approx. 25 liters Length: 1000mm; Width: 500mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat phantom



Fig. 8.7 Photo of SAM Twin Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom >

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom can be used with the following tissue simulating liquids:

- Water-sugar based liquids can be left permanently in the phantom. Always cover the liquid if the system is not in use; otherwise the parameters will change due to water evaporation.
- DGBE based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the phantom resistiveness

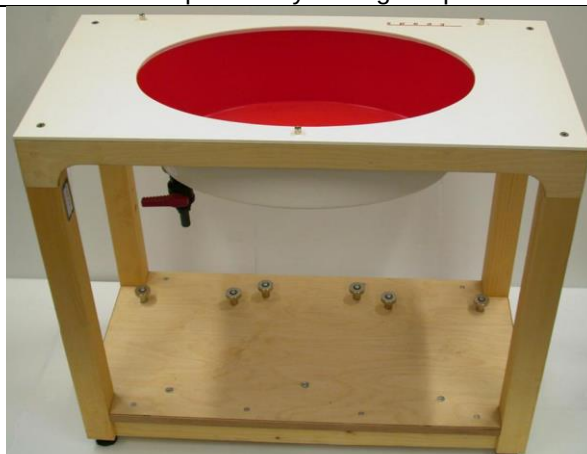


Fig.8.8 Photo of ELI4 Phantom

8.7 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards. The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP).

Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-low POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 8.9 Photo of Device Holder

8.8 Data storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verifications of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe Parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion	ConvF_i
	- Diode compression point	dcp_i
Device Parameters:	- Frequency	f
	- Crest	cf
Media Parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcpⁱ = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E- Field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-Field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency (GHz)
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

With SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in (mho/m) or (Siemens/m)
 ρ = equipment tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

8.9 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	WXJ023	05.18.2023	05.17.2026
SPEAG	835MHz System Validation Kit	D835V2	WXJ023-1	06.08.2022	06.07.2025
SPEAG	1750MHz System Validation Kit	D1750V2	WXJ023-6	01.17.2024	01.16.2027
SPEAG	1900MHz System Validation Kit	D1900V2	WXJ023-2	06.07.2022	06.06.2025
SPEAG	2450MHz System Validation Kit	D2450V2	WXJ023-3	06.06.2022	06.05.2025
SPEAG	2600MHz System Validation Kit	D2600V2	WXJ023-4	10.23.2024	10.22.2027
SPEAG	5GHz System Validation Kit	D5GHZV2	WXJ023-14	01.16.2024	01.15.2027
SPEAG	Data Acquisition Electronics	DAE4	WXJ021	12.31.2024	12.30.2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	WXJ022-1	01.15.2025	01.14.2026
SPEAG	DASY 52 Measurement Software	DASY 52	Version 52.10.4.1527	N.C.R	N.C.R
SPEAG	DASY 52 File Conversion Software	SEMCAD X	Version 14.6.14 (7501)	N.C.R	N.C.R
SPEAG	Robot Controller	CS8Cspeag-TX60	WXG023-1	N.C.R	N.C.R
SPEAG	Phantom	Twin SAM V5.0	WXG023-4	N.C.R	N.C.R
SPEAG	Phantom	2mm Oval Phantom ELI5	WXG023-5	N.C.R	N.C.R
SPEAG	Phone Positioner	N/A	WXG023-6	N.C.R	N.C.R
St?ubli	Robot	TX60Lspeag	WXG023-3	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-5	12.16.2024	12.15.2026
R&S	Universal Radio Communication Tester	CMU200	WXJ008-2	12.27.2023	12.26.2025
KEYSIGHT	Network Analyzer	E5071C	WXJ091	12.16.2024	12.15.2025
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	05.08.2025	05.07.2026
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	05.08.2025	05.07.2026
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	05.08.2025	05.07.2026
KEYSIGHT	Signal Generator	N5173B	WXJ006-3	09.09.2024	09.08.2025
SPEAG	Dielectric Assessment Kit	3.5 Probe	WXJ022-2	02.17.2025	02.16.2026
Huber Suhner	RF Cable	SUCOFLEX	WXG008-13	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-14	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-15	See Note 3	
Weinschel	Attenuator	23-3-34	WXG008-16	See Note 3	
Anritsu	Directional Coupler	MP654A	WXG008-17	See Note 3	
SPEAG	DAK Measurement Software	DAK	Version: DAK 3.5	N.C.R	
TXC	Broadband Amplifier	BBA018000	WXG008-11	See Note 4	

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.

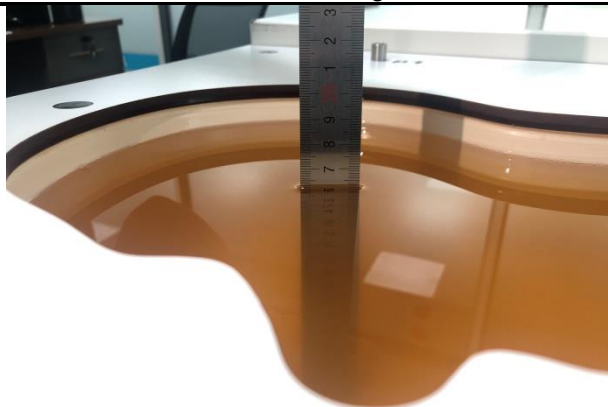


Fig. 9.1 Photo of Liquid Height for Head SAR

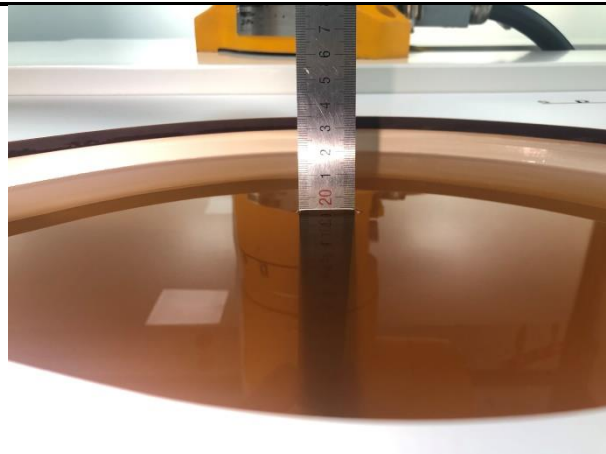


Fig. 9.2 Photo of Liquid Height for Body SAR

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5800	35.3	5.27

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The dielectric parameters of liquids were verified prior to the SAR evaluation using a Speag Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
750	23.1	0.87	42.99	0.89	41.90	-1.80	2.60	±5	6/21/2025
835	23.1	0.88	42.79	0.90	41.50	-2.22	3.11	±5	6/22/2025
1750	21.5	1.36	41.25	1.37	40.10	-0.73	2.87	±5	6/20/2025
1900	22.7	1.39	41.04	1.40	40.00	-0.71	2.60	±5	6/23/2025
2450	23.1	1.78	40.24	1.80	39.20	-1.11	2.65	±5	6/25/2025
2600	21.1	1.90	39.97	1.96	39.00	-3.06	2.49	±5	6/24/2025
5200	22.2	4.56	36.53	4.66	36.00	-2.19	1.46	±5	6/29/2025
5300	22.2	4.66	36.37	4.76	35.90	-2.10	1.31	±5	6/29/2025
5600	22.1	4.98	36.12	5.07	35.50	-1.78	1.75	±5	6/30/2025
5800	22.1	5.20	35.77	5.27	35.30	-1.37	1.32	±5	6/30/2025

10 SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

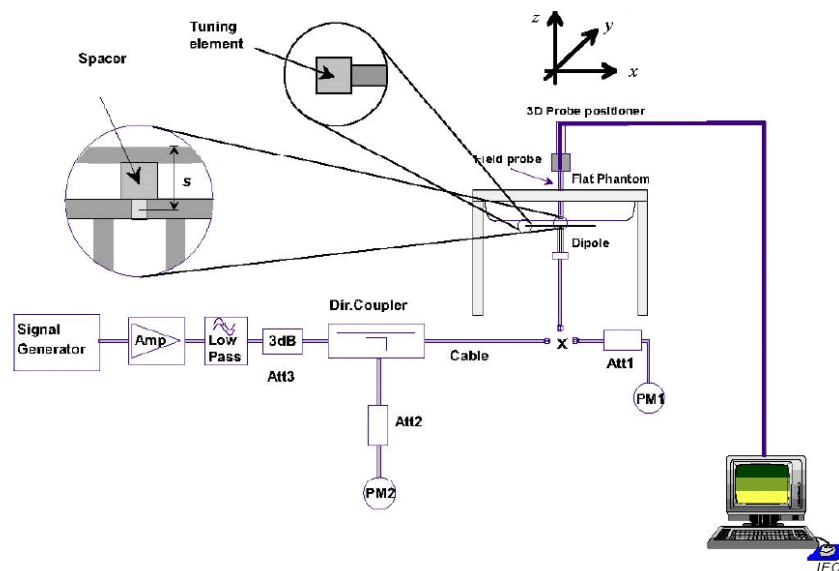


Fig.10.1 System Verification Setup Diagram

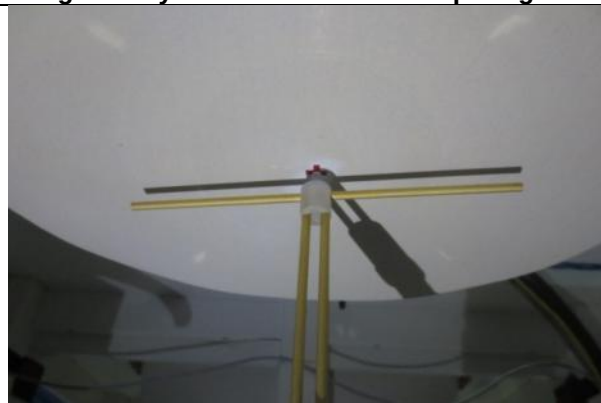


Fig.10.2 Photo of Dipole setup



➤ System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
6/21/2025	750	80	0.661	8.26	8.55	-3.39
6/22/2025	835	80	0.739	9.24	9.58	-3.55
6/20/2025	1750	40	1.480	37.00	36.5	1.37
6/23/2025	1900	40	1.590	39.75	39.7	0.13
6/25/2025	2450	40	2.080	52.00	52.1	-0.19
6/24/2025	2600	40	2.200	55.00	56.3	-2.31
6/29/2025	5200	40	3.180	79.50	77.00	3.25
6/29/2025	5300	40	3.370	84.25	79.20	6.38
6/30/2025	5600	40	3.450	86.25	81.90	5.31
6/30/2025	5800	40	3.280	82.00	78.90	3.93

11 EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/Left Side/Right Side/Top Side/Bottom Side of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

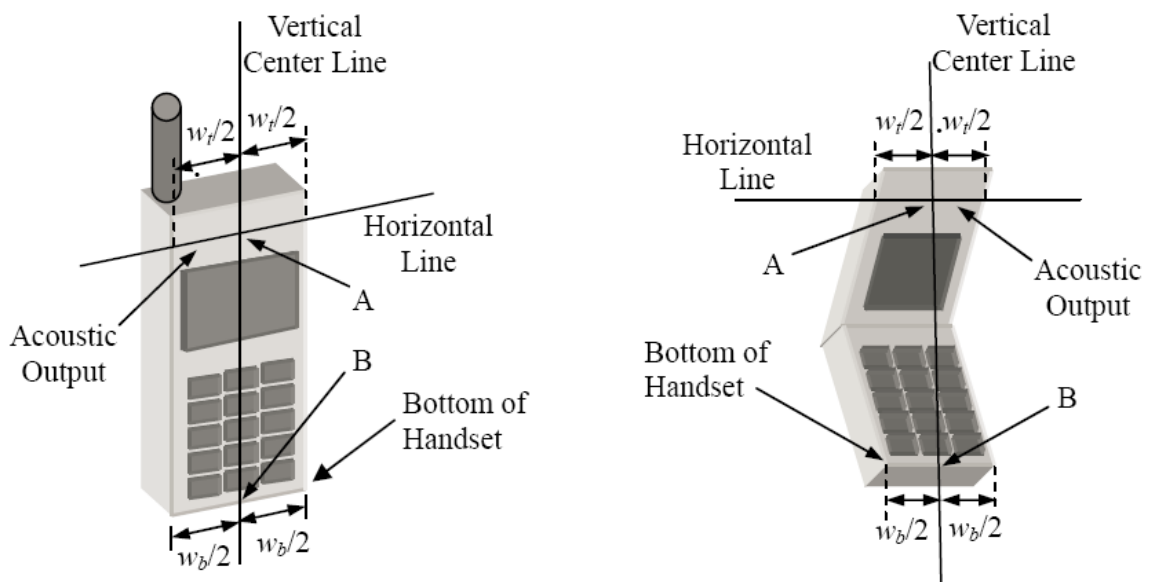


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15o Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

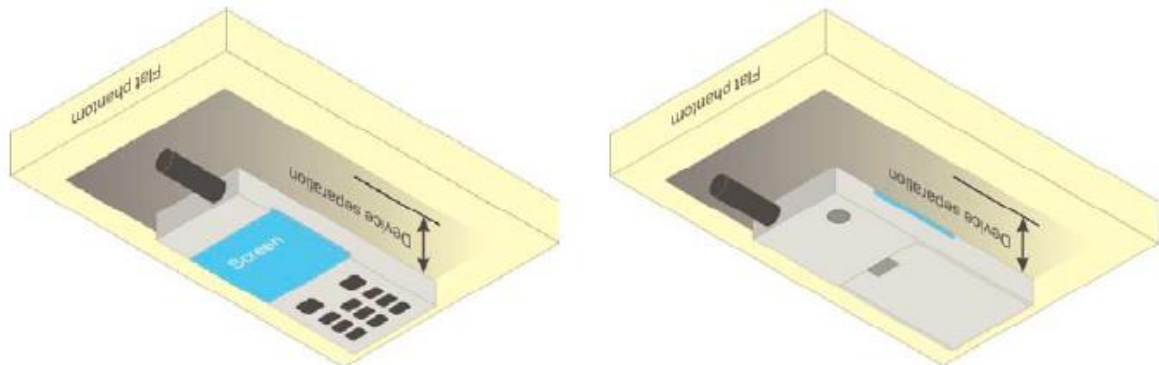


Fig.11.5 Illustration for Body Worn Position

11.6 Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

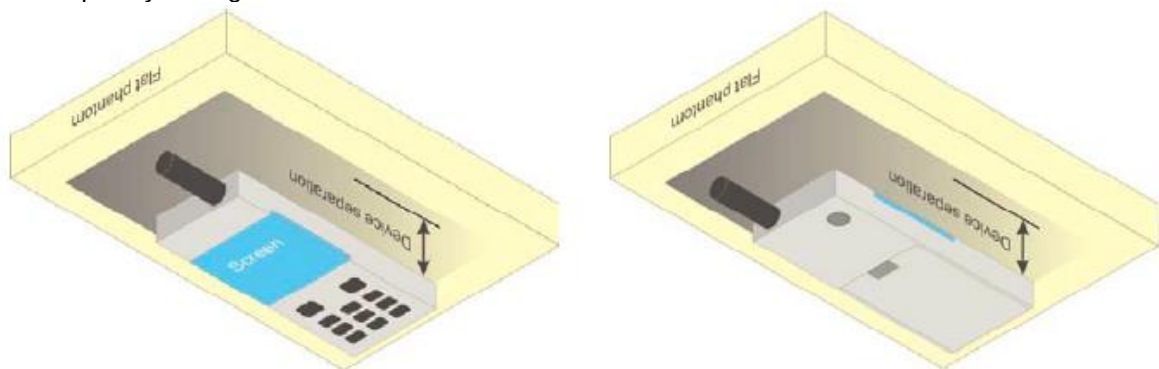


Fig.11.6 Illustration for Hotspot Position

11.7 LTE CA additional specification

The device supports intra-band contiguous uplink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

a) Intra-band carrier aggregation requirements for uplink.

The possible uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0.

SAR test procedure for intra-band contiguous UL LTE CA is as below:

1) Maximum output power is measured for each UL CA configuration for the required test channels described in KDB 941225 D05

–UL PCC configuration is determined by the required test channel

–SCC and subsequent CCs are added alternatively to either side of the PCC or within the transmission band for channels at the ends of a frequency band.

2) SAR for UL CA is required in each exposure condition and frequency band combination

3) For this device, as the maximum output for Intra-band uplink LTE CA is $\leq$ standalone LTE mode (without CA), - PCC is configured according to the highest standalone SAR configuration tested.

- SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC

4) When the reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based)

5)UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.

E-UTRA CA Band	E-UTRA Band	Uplink(UL) operating band	Downlink(DL) operating band	Duplex Mode
		BS receive/ UE transmit	BS transmit/ UE receive	
		$F_{UL\ low} - F_{UL\ high}$	$F_{DL\ low} - F_{DL\ high}$	
CA_2C	2	1850MHz~1910MHz	1930MHz ~1990MHz	FDD
CA_5B	5	824MHz~849MHz	869MHz ~894MHz	FDD
CA_7C	7	2500MHz~2570MHz	2620MHz ~2690MHz	FDD
CA_38C	38	2570MHz~2620MHz	2570MHz~2620MHz	TDD
CA_41C	41	2535MHz~2655MHz	2535MHz~2655MHz	TDD
CA_66C	66	1710MHz~1780MHz	2110MHz ~2200MHz	FDD

12 Measurement Procedures

The measurement procedures are as below:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans are completed, the software, SEMCAD post-processor scan combines and subsequently superposes these measurement data to calculate the multiband SAR.

12.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	33.38	33.42	33.40	24.35	24.39	24.37
GPRS (GMSK, 1 TX slot)	33.37	33.41	33.39	24.34	24.38	24.36
GPRS (GMSK, 2 TX slots)	32.67	32.69	32.70	26.65	26.67	26.68
GPRS (GMSK, 3 TX slots)	30.97	30.97	31.01	26.71	26.71	26.75
GPRS (GMSK, 4 TX slots)	29.71	29.72	29.76	26.70	26.71	26.75

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Body worn SAR testing and Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- For GPRS multi time slots SAR measurement, when the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Band: PCS 1900	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	30.02	30.21	30.22	20.99	21.18	21.19
GPRS (GMSK, 1 TX slot)	30.01	30.19	30.19	20.98	21.16	21.16
GPRS (GMSK, 2 TX slots)	29.33	29.52	29.49	23.31	23.50	23.47
GPRS (GMSK, 3 TX slots)	27.53	27.77	27.67	23.27	23.51	23.41
GPRS (GMSK, 4 TX slots)	26.27	26.53	26.41	23.26	23.52	23.40

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in PCS 1900 Voice mode.
- For Body worn SAR testing and Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	23.43	23.51	23.99
RMC 12.2 kbps	23.38	23.68	24.02
HSDPA Sub-test 1	23.42	23.66	24.03
HSDPA Sub-test 2	22.82	23.11	23.45
HSDPA Sub-test 3	22.87	23.13	23.47
HSDPA Sub-test 4	22.84	23.14	23.45
HSUPA Sub-test 1	21.41	21.69	22.02
HSUPA Sub-test 2	21.89	22.14	22.46
HSUPA Sub-test 3	22.38	22.66	22.99
HSUPA Sub-test 4	21.41	21.64	22.03
HSUPA Sub-test 5	23.40	23.66	23.98

WCDMA Average power (dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
AMR 12.2 kbps	23.55	23.75	23.54
RMC 12.2 kbps	23.72	23.71	23.52
HSDPA Sub-test 1	23.75	23.73	23.55
HSDPA Sub-test 2	23.18	23.19	23.00
HSDPA Sub-test 3	23.19	23.16	22.98
HSDPA Sub-test 4	23.19	23.17	23.00
HSUPA Sub-test 1	21.75	21.72	21.54
HSUPA Sub-test 2	22.21	22.20	22.00
HSUPA Sub-test 3	22.71	22.67	22.49
HSUPA Sub-test 4	21.75	21.72	21.53
HSUPA Sub-test 5	23.71	23.72	23.55

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	24.24	24.09	24.09
RMC 12.2 kbps	24.32	24.23	24.04
HSDPA Sub-test 1	24.35	24.24	24.12
HSDPA Sub-test 2	23.84	23.73	23.58
HSDPA Sub-test 3	23.81	23.68	23.59
HSDPA Sub-test 4	23.79	23.68	23.59
HSUPA Sub-test 1	22.38	22.24	22.13
HSUPA Sub-test 2	22.84	22.73	22.61
HSUPA Sub-test 3	23.37	23.26	23.12
HSUPA Sub-test 4	22.41	22.27	22.13
HSUPA Sub-test 5	24.35	24.24	24.11

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> ?$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> ?$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

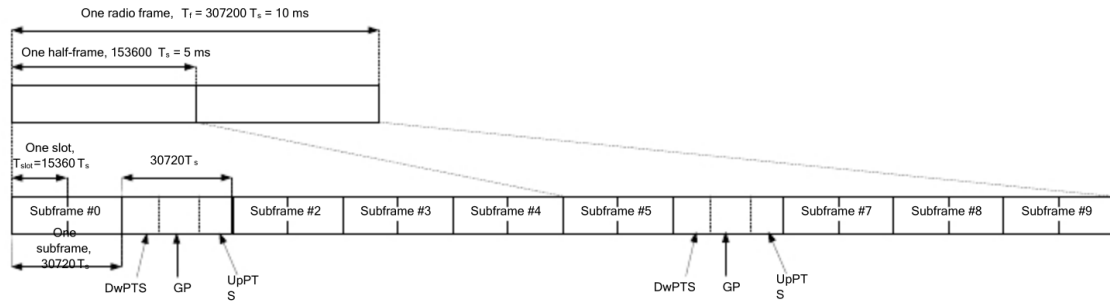


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink		Extended cyclic prefix in downlink	
	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-		
8	$24144 \cdot T_s$			-		
9	-			-		

Per 3GPP 36.211 section 4.2, each radio frame of length $T_f = 37200 \cdot T_s = 10$ ms consists of two half-frames of length $153600 \cdot T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 \cdot T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	23.23	23.82	24.07
			1	2	23.29	23.84	24.11
			1	5	23.23	23.77	24.07
			3	0	23.35	23.97	24.22
			3	1	23.38	23.96	24.22
			3	2	23.35	23.99	24.22
			6	0	22.43	22.99	23.27
		16QAM	1	0	22.34	22.89	23.14
			1	2	22.47	22.98	23.25
			1	5	22.37	22.89	23.17
			3	0	22.25	22.83	23.14
			3	1	22.25	22.88	23.13
			3	2	22.28	22.77	23.10
			6	0	21.54	22.14	22.16
		64QAM	1	0	21.75	22.30	22.21
			1	2	21.78	22.38	22.33
			1	5	21.78	22.33	22.21
			3	0	21.52	22.08	22.20
			3	1	21.54	22.08	22.20
			3	2	21.52	22.13	22.21
			6	0	20.34	20.95	21.25

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	22.97	23.55	23.84
			1	7	23.16	23.63	23.99
			1	14	23.04	23.56	23.95
			8	0	22.34	22.87	23.11
			8	4	22.31	22.84	23.12
			8	7	22.38	22.86	23.15
			15	0	22.32	22.84	23.13
		16QAM	1	0	22.22	22.76	22.98
			1	7	22.34	22.86	23.10
			1	14	22.27	22.77	23.00
			8	0	21.33	21.94	22.18
			8	4	21.33	21.95	22.18
			8	7	21.43	21.89	22.26
			15	0	21.37	21.92	22.06
		64QAM	1	0	21.14	21.72	21.99
			1	7	21.34	21.87	22.17
			1	14	21.26	21.73	22.10
			8	0	20.34	20.89	21.26
			8	4	20.36	20.90	21.20
			8	7	20.40	20.92	21.22
			15	0	20.45	20.98	21.17

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	23.38	23.93	24.12
			1	12	23.55	24.04	24.29
			1	24	23.42	23.90	24.17
			12	0	22.37	22.89	23.21
			12	6	22.40	22.91	23.18
			12	11	22.38	22.93	23.17
			25	0	22.42	22.93	23.22
		16QAM	1	0	22.56	22.95	23.29
			1	12	22.75	22.99	23.42
			1	24	22.70	22.93	23.36
			12	0	21.44	21.96	22.27
			12	6	21.43	21.95	22.24
			12	11	21.46	21.95	22.24
			25	0	21.47	22.04	22.21
		64QAM	1	0	21.96	21.93	22.81
			1	12	22.20	21.99	22.90
			1	24	22.14	21.94	22.83
			12	0	20.47	21.00	21.27
			12	6	20.47	20.99	21.26
			12	11	20.47	20.99	21.31
			25	0	20.46	21.01	21.26

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	23.28	22.23	24.03
			1	24	23.46	23.91	24.14
			1	49	23.41	23.89	24.14
			25	0	22.36	22.92	23.16
			25	12	22.42	22.92	23.11
			25	24	22.38	22.91	23.14
			50	0	22.46	22.93	23.15
		16QAM	1	0	22.54	23.06	23.18
			1	24	22.75	23.16	23.37
			1	49	22.74	23.07	23.28
			25	0	21.36	21.93	22.21
			25	12	21.39	21.89	22.21
			25	24	21.42	21.95	22.20
			50	0	21.47	21.97	22.19
		64QAM	1	0	21.44	21.90	22.21
			1	24	21.61	22.04	22.30
			1	49	21.58	21.95	22.23
			25	0	20.35	20.90	21.16
			25	12	20.38	20.92	21.17
			25	24	20.37	20.95	21.14
			50	0	20.49	20.96	21.17

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	23.31	23.78	24.03
			1	37	23.46	23.94	24.16
			1	74	23.51	23.83	24.23
			36	0	22.42	22.87	23.07
			36	16	22.41	22.86	23.10
			36	35	22.42	22.88	23.12
			75	0	22.52	22.99	23.21
		16QAM	1	0	22.62	23.04	23.34
			1	37	22.88	23.11	23.47
			1	74	22.95	23.06	23.50
			36	0	21.54	21.90	22.27
			36	16	21.49	21.90	22.23
			36	35	21.50	21.94	22.23
			75	0	21.53	21.90	22.20
		64QAM	1	0	21.66	21.90	22.42
			1	37	21.94	21.97	22.53
			1	74	21.94	21.95	22.48
			36	0	20.42	20.97	21.19
			36	16	20.47	20.96	21.17
			36	35	20.50	21.05	21.19
			75	0	20.61	20.96	21.20

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	23.29	23.84	24.00
			1	49	23.67	24.08	24.25
			1	99	23.66	23.97	24.21
			50	0	22.48	22.94	23.13
			50	24	22.43	22.91	23.07
			50	49	22.43	22.91	23.09
			100	0	22.58	22.96	23.16
		16QAM	1	0	22.37	22.95	23.20
			1	49	22.75	23.11	23.36
			1	99	22.70	23.06	23.29
			50	0	21.43	21.89	22.14
			50	24	21.42	21.91	22.15
			50	49	21.43	21.91	22.16
			100	0	21.57	21.95	22.15
		64QAM	1	0	21.76	22.28	22.36
			1	49	22.09	22.45	22.54
			1	99	22.05	22.43	22.53
			50	0	20.43	20.95	21.19
			50	24	20.47	20.93	21.18
			50	49	20.46	20.94	21.16
			100	0	20.58	21.01	21.18

LTE Band 4 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19957	20175	20393
					1710.7	1732.5	1754.3
Band 4	1.4	QPSK	1	0	23.33	23.50	23.22
			1	2	23.38	23.49	23.30
			1	5	23.36	23.50	23.23
			3	0	23.42	23.63	23.36
			3	1	23.46	23.65	23.39
			3	2	23.44	23.67	23.36
			6	0	22.55	22.75	22.47
		16QAM	1	0	22.44	22.70	22.14
			1	2	22.53	22.80	22.23
			1	5	22.46	22.73	22.11
			3	0	22.34	22.60	22.27
			3	1	22.31	22.58	22.20
			3	2	22.36	22.59	22.23
			6	0	21.62	21.67	21.47
		64QAM	1	0	21.83	21.71	21.64
			1	2	21.90	21.78	21.71
			1	5	21.85	21.72	21.66
			3	0	21.64	21.67	21.62
			3	1	21.64	21.67	21.63
			3	2	21.59	21.65	21.59
			6	0	20.41	20.62	20.48

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19965	20175	20385
					1711.5	1732.5	1753.5
Band 4	3	QPSK	1	0	23.16	23.43	23.06
			1	7	23.27	23.47	23.10
			1	14	23.26	23.38	23.03
			8	0	22.44	22.70	22.39
			8	4	22.41	22.65	22.35
			8	7	22.53	22.70	22.41
			15	0	22.46	22.64	22.31
		16QAM	1	0	22.31	22.32	22.27
			1	7	22.47	22.46	22.38
			1	14	22.39	22.31	22.20
			8	0	21.47	21.70	21.43
			8	4	21.44	21.69	21.43
			8	7	21.51	21.69	21.41
			15	0	21.37	21.59	21.39
		64QAM	1	0	21.28	21.88	21.23
			1	7	21.47	21.97	21.36
			1	14	21.42	21.85	21.18
			8	0	20.46	20.65	20.37
			8	4	20.51	20.69	20.42
			8	7	20.50	20.62	20.36
			15	0	20.44	20.64	20.50

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19975	20175	20375
					1712.5	1732.5	1752.5
Band 4	5	QPSK	1	0	23.46	23.80	23.45
			1	12	23.69	23.85	23.54
			1	24	23.58	23.72	23.36
			12	0	22.51	22.74	22.48
			12	6	22.49	22.78	22.47
			12	11	22.50	22.75	22.47
			25	0	22.61	22.75	22.43
		16QAM	1	0	22.69	22.83	22.47
			1	12	22.88	22.94	22.55
			1	24	22.83	22.81	22.40
			12	0	21.53	21.76	21.43
			12	6	21.53	21.79	21.50
			12	11	21.52	21.72	21.47
			25	0	21.62	21.82	21.50
		64QAM	1	0	22.11	22.19	21.44
			1	12	22.33	22.29	21.52
			1	24	22.26	22.15	21.39
			12	0	20.59	20.81	20.53
			12	6	20.53	20.84	20.54
			12	11	20.55	20.82	20.56
			25	0	20.57	20.80	20.49

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20000	20175	20350
					1715	1732.5	1750
Band 4	10	QPSK	1	0	23.39	23.66	23.47
			1	24	23.62	23.76	23.46
			1	49	23.60	23.62	23.37
			25	0	22.51	22.75	22.48
			25	12	22.49	22.72	22.46
			25	24	22.51	22.74	22.49
			50	0	22.60	22.72	22.48
		16QAM	1	0	22.64	22.60	22.64
			1	24	22.77	22.69	22.68
			1	49	22.77	22.62	22.49
			25	0	21.53	21.76	21.47
			25	12	21.54	21.77	21.47
			25	24	21.54	21.80	21.50
			50	0	21.65	21.69	21.42
		64QAM	1	0	21.54	22.03	21.56
			1	24	21.70	22.14	21.52
			1	49	21.66	22.06	21.32
			25	0	20.52	20.73	20.49
			25	12	20.49	20.70	20.50
			25	24	20.54	20.74	20.48
			50	0	20.50	20.75	20.47

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20025	20175	20325
					1717.5	1732.5	1747.5
Band 4	15	QPSK	1	0	23.40	23.69	23.54
			1	37	23.67	23.78	23.54
			1	74	23.61	23.68	23.32
			36	0	22.55	22.75	22.60
			36	16	22.59	22.80	22.59
			36	35	22.58	22.73	22.59
			75	0	22.68	22.74	22.56
		16QAM	1	0	22.79	22.62	22.79
			1	37	22.93	22.71	22.76
			1	74	22.95	22.55	22.55
			36	0	21.65	21.76	21.57
			36	16	21.67	21.72	21.59
			36	35	21.66	21.73	21.63
			75	0	21.67	21.72	21.51
		64QAM	1	0	21.79	22.06	21.64
			1	37	22.01	22.16	21.64
			1	74	22.04	22.05	21.35
			36	0	20.64	20.76	20.67
			36	16	20.59	20.75	20.66
			36	35	20.67	20.76	20.66
			75	0	20.73	20.76	20.55

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20050	20175	20300
					1720	1732.5	1745
Band 4	20	QPSK	1	0	22.09	23.53	23.66
			1	49	23.75	23.68	23.70
			1	99	23.69	23.47	23.39
			50	0	22.59	22.85	22.64
			50	24	22.63	22.81	22.68
			50	49	22.59	22.81	22.63
			100	0	22.61	22.79	22.62
		16QAM	1	0	22.61	22.68	22.76
			1	49	22.94	22.87	22.73
			1	99	22.91	22.63	22.48
			50	0	21.64	21.83	21.68
			50	24	21.58	21.85	21.66
			50	49	21.56	21.82	21.63
			100	0	21.62	21.73	21.60
		64QAM	1	0	21.83	21.63	22.09
			1	49	22.10	21.86	22.10
			1	99	22.01	21.54	21.73
			50	0	20.63	20.82	20.63
			50	24	20.65	20.80	20.67
			50	49	20.66	20.80	20.66
			100	0	20.69	20.76	20.57

LTE Band 5 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
Band 5	1.4	QPSK	1	0	24.00	23.97	23.71
			1	2	24.04	23.98	23.77
			1	5	23.98	23.97	23.73
			3	0	24.05	24.06	23.83
			3	1	24.04	24.06	23.87
			3	2	24.07	24.05	23.88
			6	0	23.11	23.12	22.95
		16QAM	1	0	23.00	23.10	22.66
			1	2	23.09	23.18	22.77
			1	5	23.01	23.10	22.67
			3	0	22.96	23.02	22.74
			3	1	22.96	23.01	22.74
			3	2	22.97	23.01	22.69
			6	0	22.16	22.08	21.97
		64QAM	1	0	22.37	22.11	22.14
			1	2	22.41	22.15	22.23
			1	5	22.38	22.07	22.13
			3	0	22.18	22.05	22.09
			3	1	22.21	22.08	22.06
			3	2	22.18	22.06	22.10
			6	0	21.01	21.04	20.92

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
Band 5	3	QPSK	1	0	23.84	23.79	23.56
			1	7	23.98	23.92	23.65
			1	14	23.86	23.79	23.56
			8	0	23.07	23.08	22.83
			8	4	23.04	23.06	22.84
			8	7	23.04	23.08	22.83
			15	0	23.07	23.03	22.83
		16QAM	1	0	22.97	22.69	22.78
			1	7	23.09	22.84	22.84
			1	14	23.00	22.72	22.76
			8	0	22.12	22.02	21.95
			8	4	22.11	22.06	21.96
			8	7	22.05	22.11	21.86
			15	0	22.00	21.95	21.84
		64QAM	1	0	21.92	22.18	21.69
			1	7	22.11	22.32	21.83
			1	14	21.99	22.15	21.66
			8	0	21.15	21.07	20.95
			8	4	21.15	21.05	20.90
			8	7	21.09	21.03	20.81
			15	0	21.03	21.03	20.98

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
Band 5	5	QPSK	1	0	24.13	24.14	24.04
			1	12	24.26	24.25	24.12
			1	24	24.16	24.16	23.96
			12	0	23.18	23.13	23.03
			12	6	23.18	23.10	23.02
			12	11	23.16	23.12	23.00
			25	0	23.18	23.22	22.98
		16QAM	1	0	23.10	23.36	23.01
			1	12	23.23	23.43	23.15
			1	24	23.14	23.29	22.98
			12	0	22.15	22.19	22.05
			12	6	22.16	22.19	22.07
			12	11	22.17	22.18	22.11
			25	0	22.26	22.20	22.02
		64QAM	1	0	22.09	22.71	22.35
			1	12	22.23	22.80	22.40
			1	24	22.19	22.67	22.37
			12	0	21.28	21.20	21.12
			12	6	21.21	21.21	21.14
			12	11	21.25	21.18	21.12
			25	0	21.28	21.20	21.08

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20450	20525	20600
					829MHz	836.5MHz	844MHz
Band 5	10	QPSK	1	0	24.09	24.13	23.94
			1	24	24.18	24.19	24.01
			1	49	24.06	24.01	23.83
			25	0	23.14	23.07	23.03
			25	12	23.08	23.07	23.06
			25	24	23.11	23.12	23.04
			50	0	23.13	23.14	23.03
		16QAM	1	0	23.19	23.04	23.19
			1	24	23.34	23.11	23.21
			1	49	23.28	23.00	23.06
			25	0	22.18	22.18	22.04
			25	12	22.10	22.18	22.13
			25	24	22.13	22.15	22.05
			50	0	22.19	22.19	22.02
		64QAM	1	0	22.12	22.41	22.03
			1	24	22.26	22.50	22.09
			1	49	22.16	22.32	21.98
			25	0	21.14	21.14	21.09
			25	12	21.11	21.16	21.10
			25	24	21.11	21.12	21.08
			50	0	21.19	21.12	20.99

LTE Band 7 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535MHz	2567.5MHz
Band 7	5	QPSK	1	0	23.29	23.07	22.74
			1	12	23.39	23.14	22.87
			1	24	23.28	22.99	22.75
			12	0	22.22	22.02	21.70
			12	6	22.23	22.05	21.71
			12	11	22.23	22.09	21.70
			25	0	22.26	22.06	21.74
		16QAM	1	0	22.19	22.22	21.70
			1	12	22.30	22.29	21.84
			1	24	22.24	22.17	21.72
			12	0	21.24	21.02	20.73
			12	6	21.27	21.08	20.70
			12	11	21.23	21.07	20.70
			25	0	21.33	21.03	20.73
		64QAM	1	0	21.15	21.58	21.02
			1	12	21.27	21.66	21.16
			1	24	21.16	21.57	21.02
			12	0	20.31	20.07	19.81
			12	6	20.32	20.12	19.87
			12	11	20.35	20.11	19.82
			25	0	20.35	20.10	19.73

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505MHz	2535MHz	2565MHz
Band 7	10	QPSK	1	0	23.14	23.06	22.72
			1	24	23.24	23.07	22.77
			1	49	23.11	22.99	22.65
			25	0	22.25	22.07	21.71
			25	12	22.26	22.07	21.67
			25	24	22.26	22.09	21.69
			50	0	22.27	22.07	21.75
		16QAM	1	0	22.32	22.21	21.65
			1	24	22.41	22.23	21.66
			1	49	22.26	22.13	21.60
			25	0	21.20	21.09	20.77
			25	12	21.25	21.10	20.76
			25	24	21.26	21.15	20.78
			50	0	21.24	21.07	20.69
		64QAM	1	0	21.12	21.09	20.99
			1	24	21.25	21.13	21.03
			1	49	21.07	21.02	20.93
			25	0	20.28	20.05	19.72
			25	12	20.23	20.10	19.71
			25	24	20.31	20.04	19.71
			50	0	20.28	20.09	19.71

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535MHz	2562.5MHz
Band 7	15	QPSK	1	0	23.11	23.03	22.81
			1	37	23.19	23.06	22.73
			1	74	23.09	22.91	22.66
			36	0	22.17	22.04	21.74
			36	16	22.15	21.97	21.75
			36	35	22.13	22.03	21.76
			75	0	22.21	22.02	21.73
		16QAM	1	0	22.26	22.25	21.70
			1	37	22.31	22.30	21.68
			1	74	22.22	22.15	21.52
			36	0	21.13	21.09	20.66
			36	16	21.14	21.10	20.74
			36	35	21.13	21.06	20.67
			75	0	21.13	21.02	20.71
		64QAM	1	0	21.07	21.25	21.06
			1	37	21.20	21.34	21.05
			1	74	21.05	21.20	20.91
			36	0	20.26	20.08	19.77
			36	16	20.23	20.09	19.79
			36	35	20.27	20.06	19.75
			75	0	20.22	20.09	19.73

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510MHz	2535MHz	2560MHz
Band 7	20	QPSK	1	0	23.22	22.92	22.84
			1	49	23.33	22.97	22.91
			1	99	23.15	22.77	22.62
			50	0	22.12	22.05	21.76
			50	24	22.06	22.06	21.76
			50	49	22.02	22.08	21.75
			100	0	22.15	21.97	21.77
		16QAM	1	0	22.30	22.00	21.89
			1	49	22.33	22.10	21.90
			1	99	22.19	21.88	21.59
			50	0	21.13	21.08	20.68
			50	24	21.10	21.08	20.71
			50	49	21.13	21.11	20.71
			100	0	21.15	21.02	20.71
		64QAM	1	0	21.40	20.96	21.19
			1	49	21.46	21.04	21.17
			1	99	21.29	20.82	20.93
			50	0	20.20	20.12	19.81
			50	24	20.18	20.06	19.74
			50	49	20.18	20.10	19.76
			100	0	20.22	20.09	19.76

LTE Band 12 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23017	23095	23175
					699.7MHz	707.5MHz	715.3MHz
Band 12	1.4	QPSK	1	0	23.44	23.54	23.70
			1	2	23.41	23.56	23.75
			1	5	23.35	23.56	23.75
			3	0	23.53	23.68	23.87
			3	1	23.53	23.66	23.89
			3	2	23.50	23.66	23.88
			6	0	22.59	22.78	22.88
		16QAM	1	0	22.54	22.66	22.56
			1	2	22.65	22.79	22.64
			1	5	22.53	22.71	22.61
			3	0	22.37	22.53	22.66
			3	1	22.40	22.60	22.67
			3	2	22.41	22.54	22.64
			6	0	21.64	21.69	21.92
		64QAM	1	0	21.90	21.70	22.07
			1	2	21.98	21.74	22.12
			1	5	21.92	21.75	22.10
			3	0	21.65	21.67	22.05
			3	1	21.65	21.64	22.04
			3	2	21.63	21.67	22.05
			6	0	20.51	20.65	20.88

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23025	23095	23165
					700.5MHz	707.5MHz	714.5MHz
Band 12	3	QPSK	1	0	23.30	23.33	23.57
			1	7	23.37	23.45	23.67
			1	14	23.30	23.36	23.64
			8	0	22.54	22.59	22.78
			8	4	22.52	22.55	22.80
			8	7	22.50	22.64	22.77
			15	0	22.52	22.60	22.75
		16QAM	1	0	22.15	22.55	22.72
			1	7	22.32	22.59	22.78
			1	14	22.21	22.58	22.69
			8	0	21.48	21.64	21.77
			8	4	21.54	21.60	21.80
			8	7	21.53	21.67	21.79
			15	0	21.43	21.60	21.72
		64QAM	1	0	21.67	21.47	21.68
			1	7	21.79	21.57	21.82
			1	14	21.65	21.53	21.73
			8	0	20.50	20.61	20.83
			8	4	20.52	20.60	20.84
			8	7	20.56	20.65	20.82
			15	0	20.49	20.71	20.76

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23035	23095	23155
					701.5MHz	707.5MHz	713.5MHz
Band 12	5	QPSK	1	0	23.64	23.65	23.84
			1	12	23.67	23.81	24.02
			1	24	23.67	23.81	23.98
			12	0	22.55	22.57	22.81
			12	6	22.58	22.61	22.77
			12	11	22.53	22.60	22.83
			25	0	22.62	22.70	22.85
		16QAM	1	0	22.57	22.87	22.81
			1	12	22.69	23.04	23.03
			1	24	22.69	22.97	22.94
			12	0	21.52	21.66	21.86
			12	6	21.51	21.62	21.82
			12	11	21.52	21.64	21.83
			25	0	21.64	21.66	21.94
		64QAM	1	0	21.60	22.37	22.15
			1	12	21.62	22.41	22.31
			1	24	21.61	22.41	22.28
			12	0	20.60	20.68	20.89
			12	6	20.59	20.66	20.86
			12	11	20.58	20.68	20.87
			25	0	20.65	20.69	20.88

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23060	23095	23130
					704MHz	707.5MHz	711MHz
Band 12	10	QPSK	1	0	23.49	23.58	23.61
			1	24	23.73	23.78	23.78
			1	49	23.73	23.76	23.80
			25	0	22.48	22.62	22.75
			25	12	22.48	22.65	22.78
			25	24	22.52	22.61	22.78
			50	0	22.60	22.65	22.83
		16QAM	1	0	22.72	22.54	22.85
			1	24	22.89	22.71	22.99
			1	49	22.91	22.70	23.01
			25	0	21.54	21.67	21.78
			25	12	21.55	21.65	21.77
			25	24	21.55	21.66	21.77
			50	0	21.69	21.67	21.83
		64QAM	1	0	21.62	21.86	21.65
			1	24	21.77	22.09	21.81
			1	49	21.80	22.08	21.81
			25	0	20.51	20.57	20.81
			25	12	20.50	20.58	20.81
			25	24	20.49	20.61	20.76
			50	0	20.64	20.64	20.81

LTE Band 13 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23205	23230	23255
					779.5	782	784.5
Band 13	5	QPSK	1	0	23.73	23.84	23.84
			1	12	23.87	23.92	23.86
			1	24	23.77	23.79	23.80
			12	0	22.70	22.78	22.77
			12	6	22.67	22.74	22.75
			12	11	22.74	22.78	22.75
			25	0	22.74	22.78	22.77
		16QAM	1	0	22.89	22.78	22.95
			1	12	23.01	22.89	23.05
			1	24	22.94	22.80	22.96
			12	0	21.74	21.80	21.77
			12	6	21.77	21.76	21.81
			12	11	21.77	21.80	21.75
			25	0	21.78	21.83	21.81
		64QAM	1	0	22.27	21.74	22.33
			1	12	22.40	21.87	22.41
			1	24	22.32	21.71	22.33
			12	0	20.76	20.82	20.80
			12	6	20.77	20.88	20.77
			12	11	20.73	20.85	20.77
			25	0	20.76	20.79	20.75

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
						23230	
						782	
Band 13	10	QPSK	1	0	/	23.70	/
			1	24	/	23.78	/
			1	49	/	23.75	/
			25	0	/	22.71	/
			25	12	/	22.72	/
			25	24	/	22.70	/
			50	0	/	22.74	/
		16QAM	1	0	/	22.86	/
			1	24	/	22.95	/
			1	49	/	22.90	/
			25	0	/	21.68	/
			25	12	/	21.73	/
			25	24	/	21.72	/
			50	0	/	21.75	/
		64QAM	1	0	/	21.65	/
			1	24	/	21.85	/
			1	49	/	21.74	/
			25	0	/	20.69	/
			25	12	/	20.65	/
			25	24	/	20.71	/
			50	0	/	20.71	/

LTE Band 17 Part :

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
Band 17	5	QPSK	1	0	23.62	23.73	23.85
			1	12	23.82	23.88	23.99
			1	24	23.72	23.82	23.91
			12	0	22.64	22.79	22.77
			12	6	22.64	22.72	22.84
			12	11	22.60	22.74	22.79
			25	0	22.67	22.80	22.85
		16QAM	1	0	22.63	23.01	22.80
			1	12	22.80	23.00	23.00
			1	24	22.70	23.01	22.83
			12	0	21.60	21.75	21.79
			12	6	21.63	21.75	21.79
			12	11	21.59	21.76	21.81
			25	0	21.71	21.78	21.94
		64QAM	1	0	21.55	22.36	22.17
			1	12	21.72	22.47	22.32
			1	24	21.70	22.43	22.18
			12	0	20.63	20.82	20.86
			12	6	20.69	20.77	20.86
			12	11	20.66	20.77	20.89
			25	0	20.73	20.80	20.93

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
Band 17	10	QPSK	1	0	23.62	23.63	23.58
			1	24	23.82	23.85	23.75
			1	49	23.80	23.79	23.78
			25	0	22.58	22.66	22.75
			25	12	22.64	22.67	22.75
			25	24	22.62	22.67	22.75
			50	0	22.70	22.78	22.79
		16QAM	1	0	22.80	22.51	22.81
			1	24	23.00	22.76	23.01
			1	49	22.93	22.72	22.96
			25	0	21.64	21.70	21.76
			25	12	21.62	21.72	21.76
			25	24	21.65	21.67	21.74
			50	0	21.69	21.77	21.85
		64QAM	1	0	21.66	21.97	21.63
			1	24	21.92	22.18	21.86
			1	49	21.89	22.10	21.74
			25	0	20.60	20.66	20.73
			25	12	20.59	20.67	20.73
			25	24	20.62	20.70	20.72
			50	0	20.68	20.75	20.78

LTE Band 26 Part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26697	26865	27033
					814.7MHz	831.5MHz	848.3MHz
Band 26	1.4	QPSK	1	0	24.15	23.96	23.77
			1	2	24.12	24.05	23.83
			1	5	24.11	24.01	23.77
			3	0	24.21	23.96	23.89
			3	1	24.20	24.10	23.85
			3	2	24.25	24.01	23.88
			6	0	23.29	23.17	22.98
		16QAM	1	0	23.22	22.91	22.70
			1	2	23.30	23.13	22.79
			1	5	23.20	22.95	22.69
			3	0	23.16	22.89	22.76
			3	1	23.16	22.91	22.77
			3	2	23.17	22.95	22.71
			6	0	22.22	22.10	22.03
		64QAM	1	0	22.20	22.20	22.20
			1	2	22.26	22.26	22.25
			1	5	22.19	22.18	22.16
			3	0	22.22	22.16	22.13
			3	1	22.19	22.17	22.16
			3	2	22.23	22.20	22.13
			6	0	21.19	21.06	20.96

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26705	26865	27025
					815.5MHz	831.5MHz	847.5MHz
Band 26	3	QPSK	1	0	23.99	23.88	23.58
			1	7	24.08	24.01	23.69
			1	14	23.96	23.91	23.57
			8	0	23.18	22.96	22.87
			8	4	23.13	22.97	22.90
			8	7	23.16	22.96	22.89
			15	0	23.17	23.01	22.83
		16QAM	1	0	23.15	23.01	22.79
			1	7	23.16	23.11	22.91
			1	14	23.06	22.96	22.78
			8	0	22.25	21.96	21.94
			8	4	22.23	22.03	21.98
			8	7	22.20	22.03	21.95
			15	0	22.10	22.03	21.91
		64QAM	1	0	22.07	21.98	21.73
			1	7	22.21	21.99	21.86
			1	14	22.05	22.01	21.75
			8	0	21.27	20.96	20.92
			8	4	21.22	21.03	20.97
			8	7	21.23	20.98	20.89
			15	0	21.16	21.07	21.01

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26715	26865	27015
					816.5MHz	831.5MHz	846.6MHz
Band 26	5	QPSK	1	0	24.30	23.99	23.97
			1	12	24.34	24.16	24.07
			1	24	24.28	23.96	23.91
			12	0	23.23	23.12	23.06
			12	6	23.26	23.12	23.00
			12	11	23.22	23.14	23.00
			25	0	23.28	23.06	23.01
		16QAM	1	0	23.43	23.14	22.97
			1	12	23.49	23.41	23.09
			1	24	23.34	22.99	22.96
			12	0	22.26	22.15	22.04
			12	6	22.29	22.21	22.03
			12	11	22.27	21.96	21.94
			25	0	22.33	22.13	22.05
		64QAM	1	0	22.82	21.96	21.92
			1	12	22.88	22.65	22.07
			1	24	22.76	22.09	21.95
			12	0	21.27	21.13	21.07
			12	6	21.31	21.22	21.09
			12	11	21.27	21.03	20.98
			25	0	21.31	21.03	20.98

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26740	26865	26990
					819MHz	831.5MHz	844MHz
Band 26	10	QPSK	1	0	24.19	24.13	24.04
			1	24	24.24	24.11	24.01
			1	49	24.13	24.03	23.88
			25	0	23.23	23.09	23.05
			25	12	23.18	23.11	23.08
			25	24	23.15	22.98	22.94
			50	0	23.25	23.15	23.06
		16QAM	1	0	23.32	23.29	23.20
			1	24	23.34	23.30	23.19
			1	49	23.25	23.21	23.13
			25	0	22.23	22.20	22.11
			25	12	22.22	22.13	22.09
			25	24	22.24	22.14	22.03
			50	0	22.23	22.13	22.02
		64QAM	1	0	22.26	22.22	22.02
			1	24	22.29	22.05	22.01
			1	49	22.18	22.03	21.90
			25	0	21.18	21.11	21.06
			25	12	21.21	21.20	21.12
			25	24	21.20	21.11	20.98
			50	0	21.29	21.09	21.02

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					26765	26865	26965
					821.5MHz	831.5MHz	841.5MHz
Band 26	15	QPSK	1	0	24.15	24.16	24.10
			1	37	24.22	24.26	24.16
			1	74	24.03	24.12	23.89
			36	0	22.36	22.39	22.33
			36	16	22.41	22.52	22.39
			36	35	22.31	22.43	22.26
			75	0	23.22	23.27	23.14
		16QAM	1	0	23.15	23.10	23.31
			1	37	23.22	23.12	23.33
			1	74	23.11	23.03	23.23
			36	0	22.40	22.42	22.37
			36	16	22.41	22.51	22.36
			36	35	22.32	22.42	22.24
			75	0	22.18	22.22	22.12
		64QAM	1	0	22.39	22.43	22.37
			1	37	22.46	22.57	22.42
			1	74	22.32	22.47	22.29
			36	0	22.39	22.40	22.37
			36	16	22.42	22.53	22.41
			36	35	22.36	22.42	22.28
			75	0	21.22	21.23	21.13

LTE Band 41 Part

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40065	40355	40640	40750	41215
					2537.5MHz	2566.5MHz	2595.0MHz	2624.0MHz	2652.5MHz
Band 41	5	QPSK	1	0	23.09	23.25	23.11	23.20	23.41
			1	12	23.18	23.36	23.30	23.34	23.53
			1	24	23.02	23.20	23.28	23.23	23.38
			12	0	22.17	22.36	22.17	22.30	22.55
			12	6	22.17	22.35	22.18	22.29	22.53
			12	11	22.16	22.37	22.18	22.30	22.57
			25	0	22.22	22.40	22.24	22.34	22.57
		16QAM	1	0	22.40	22.60	22.56	22.58	22.79
			1	12	22.55	22.70	22.70	22.70	22.85
			1	24	22.39	22.56	22.66	22.59	22.73
			12	0	21.16	21.36	21.16	21.29	21.56
			12	6	21.18	21.39	21.14	21.30	21.59
			12	11	21.15	21.35	21.16	21.29	21.55
			25	0	21.24	21.39	21.22	21.33	21.54
		64QAM	1	0	21.75	21.88	21.57	21.78	22.01
			1	12	21.82	21.98	21.71	21.89	22.14
			1	24	21.74	21.85	21.59	21.76	21.95
			12	0	20.29	20.48	20.20	20.38	20.66
			12	6	20.26	20.44	20.24	20.37	20.61
			12	11	20.27	20.48	20.20	20.39	20.69
			25	0	20.22	20.40	20.29	20.36	20.57

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40090	40365	40640	40915	41190
					2540.0MHz	2567.5MHz	2595.0MHz	2622.5MHz	2650.0MHz
Band 41	10	QPSK	1	0	23.13	23.36	23.02	23.25	23.59
			1	24	23.17	23.40	23.27	23.36	23.63
			1	49	23.05	23.27	23.28	23.27	23.48
			25	0	22.04	22.33	22.13	22.26	22.61
			25	12	22.02	22.31	22.14	22.25	22.60
			25	24	22.01	22.32	22.17	22.27	22.62
			50	0	22.14	22.38	22.26	22.34	22.61
		16QAM	1	0	21.91	22.18	22.52	22.29	22.44
			1	24	22.05	22.26	22.61	22.38	22.47
			1	49	22.00	22.22	22.66	22.37	22.44
			25	0	21.02	21.31	21.26	21.29	21.60
			25	12	21.01	21.32	21.28	21.31	21.63
			25	24	21.01	21.32	21.26	21.30	21.62
			50	0	21.08	21.33	21.21	21.29	21.57
		64QAM	1	0	21.04	21.24	21.52	21.33	21.44
			1	24	21.09	21.30	21.76	21.45	21.51
			1	49	20.91	21.19	21.66	21.34	21.46
			25	0	19.93	20.24	20.21	20.23	20.55
			25	12	19.94	20.23	20.21	20.22	20.52
			25	24	19.94	20.23	20.20	20.22	20.51
			50	0	20.04	20.29	20.32	20.30	20.54

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40115	40375	40640	40900	41165
					2542.5MHz	2568.5MHz	2595.0MHz	2673.5MHz	2647.5MHz
Band 41	15	QPSK	1	0	23.17	23.42	23.05	23.29	23.66
			1	37	23.22	23.46	23.25	23.39	23.70
			1	74	23.12	23.38	23.27	23.34	23.63
			36	0	21.99	22.29	22.10	22.23	22.59
			36	16	22.04	22.31	22.08	22.23	22.57
			36	35	22.02	22.29	22.16	22.25	22.56
			75	0	22.16	22.38	22.28	22.34	22.59
		16QAM	1	0	22.16	22.36	22.38	22.36	22.55
			1	37	22.23	22.43	22.58	22.48	22.63
			1	74	22.14	22.30	22.66	22.42	22.45
			36	0	21.04	21.31	21.13	21.25	21.57
			36	16	21.04	21.31	21.14	21.25	21.58
			36	35	21.02	21.29	21.12	21.23	21.56
			75	0	21.07	21.30	21.21	21.27	21.53
		64QAM	1	0	21.68	21.74	21.51	21.66	21.80
			1	37	21.72	21.79	21.73	21.77	21.86
			1	74	21.63	21.70	21.82	21.74	21.77
			36	0	20.09	20.36	20.15	20.29	20.62
			36	16	20.09	20.35	20.18	20.29	20.60
			36	35	20.08	20.35	20.17	20.29	20.62
			75	0	20.19	20.37	20.30	20.35	20.55

LTE Band	Band-width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40140	40390	40640	40890	41140
					2545.0MHz	2570.0MHz	2595.0MHz	2620.0MHz	2645.0MHz
Band 41	20	QPSK	1	0	23.10	23.30	23.00	23.20	23.50
			1	49	23.19	23.43	23.27	23.37	23.66
			1	99	23.05	23.23	23.42	23.29	23.41
			50	0	21.92	22.27	22.07	22.20	22.61
			50	24	21.91	22.26	22.08	22.20	22.60
			50	49	21.94	22.28	22.07	22.21	22.61
			100	0	22.07	22.30	22.25	22.28	22.53
		16QAM	1	0	22.21	22.17	22.09	22.14	22.13
			1	49	22.38	22.32	22.46	22.36	22.25
			1	99	22.17	22.12	22.46	22.23	22.06
			50	0	20.95	21.28	21.07	21.21	21.61
			50	24	20.95	21.28	21.04	21.20	21.60
			50	49	20.93	21.28	21.04	21.20	21.62
			100	0	21.03	21.26	21.20	21.24	21.48
		64QAM	1	0	21.21	21.42	21.24	21.36	21.63
			1	49	21.41	21.59	21.49	21.56	21.77
			1	99	21.25	21.38	21.43	21.39	21.50
			50	0	19.91	20.27	20.06	20.20	20.63
			50	24	19.95	20.31	20.05	20.22	20.67
			50	49	19.94	20.30	20.07	20.22	20.66
			100	0	20.04	20.31	20.26	20.29	20.57

Note:

1. Per KDB 447498 D01v06 section 4.1., the required test channels number is 5 for LTE Band 41.

Uplink CA power

CA_2C								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
18700	18898	20+20	QPSK	1	99	0	0	23.73
18900	18702			1	99	0	0	23.71
19100	18902			1	99	0	0	23.85

CA_5B								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
20450	20549	10+10	QPSK	1	49	0	0	23.91
20476	20575			1	49	0	0	23.90
20501	20600			1	49	0	0	23.87

CA_7C								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
20850	21048	20+20	QPSK	1	99	0	0	23.18
21100	20902			1	99	0	0	22.91
21350	21152			1	99	0	0	22.94

CA_38C								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
37850	38048	20+20	QPSK	1	0	0	0	23.26
37901	38099			1	0	0	0	23.25
38150	37952			1	0	0	0	23.31

CA_41C								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
40140	40338	20+20	QPSK	1	99	0	0	22.32
40640	40692			1	99	0	0	22.84
41140	40942			1	99	0	0	23.19

CA_66C								
PCC Channel	SCC Channel	Bandwidth (MHz)	Modulation	PCC		SCC		Average Power (dBm)
				RB Size	RB Offset	RB Size	RB Offset	
132072	132270	20+20	QPSK	1	99	0	0	23.43
132322	132520			1	99	0	0	23.31
132572	132374			1	99	0	0	23.13

13.4 WLAN 2.4 GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)
CH 01	2412	17.40	16.20	16.50
CH 06	2437	18.04	16.70	17.01
CH 11	2462	17.57	16.10	16.63

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
b/CH 6	2.437	18.5	70.79	5	22.09	3.0
g/CH 6	2.462	17.5	56.23	5	17.54	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 b mode is required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.5 WLAN 5.2GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 36	5180	16.18	15.45	15.26
CH 40	5200	16.10	15.36	15.49
CH 48	5240	16.45	15.49	15.68

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 38	5190	15.28	15.18
CH 46	5230	15.15	15.22

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 42	5210	15.14

Note:

1. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.6 WLAN 5.3GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 52	5260	16.00	14.99	15.14
CH 56	5280	15.52	14.37	14.63
CH 64	5320	16.54	15.62	15.57

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 54	5270	14.69	14.67
CH 62	5310	15.48	15.46

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 58	5290	14.74

Note:

1. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.7 WLAN 5.6GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 100	5500	15.23	13.94	14.73
CH 120	5600	15.48	13.74	14.34
CH 140	5700	16.12	14.20	14.93

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 102	5510	13.88	14.73
CH 108	5590	13.57	14.34
CH 134	5670	13.26	14.12

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 106	5530	13.97
CH 122	5610	13.67

Note:

1. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.8 WLAN 5.8GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 n20
CH 149	5745	15.36	13.62	14.25
CH 157	5785	16.39	14.69	15.33
CH 165	5825	15.80	14.41	15.21

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac40	802.11 n40
CH 151	5755	13.48	14.44
CH 159	5795	14.02	14.87

Average Power (dBm)		
Channel	Frequency (MHz)	802.11 ac80
CH 155	5775	13.75

Note:

1. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.9 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	13.84	14.05	13.96
CH 39	2441	17.73	17.75	17.68
CH 78	2480	16.11	15.85	15.83

Average Power (dBm)					
Channel	Frequency (MHz)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
CH 00	2402	3.58	3.93	3.57	3.56
CH 20	2442	6.21	6.19	6.19	6.17
CH 39	2480	4.42	4.46	4.40	4.36

Note:

1. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
2. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.

13.10 NFC Conducted Power

Average Power (dBm)	
Frequency (MHz)	ASK
13.56	-44.35

Note:

1. Per KDB 447498 D01v06 section 4.3 Test Exemption, $P_{th}=1+\log(100/f_{MHz})= 1.87mW = 2.72dBm$, $P_{NFC}= -44.35dBm < P_{th}$, SAR test for NFC is not required.
2. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

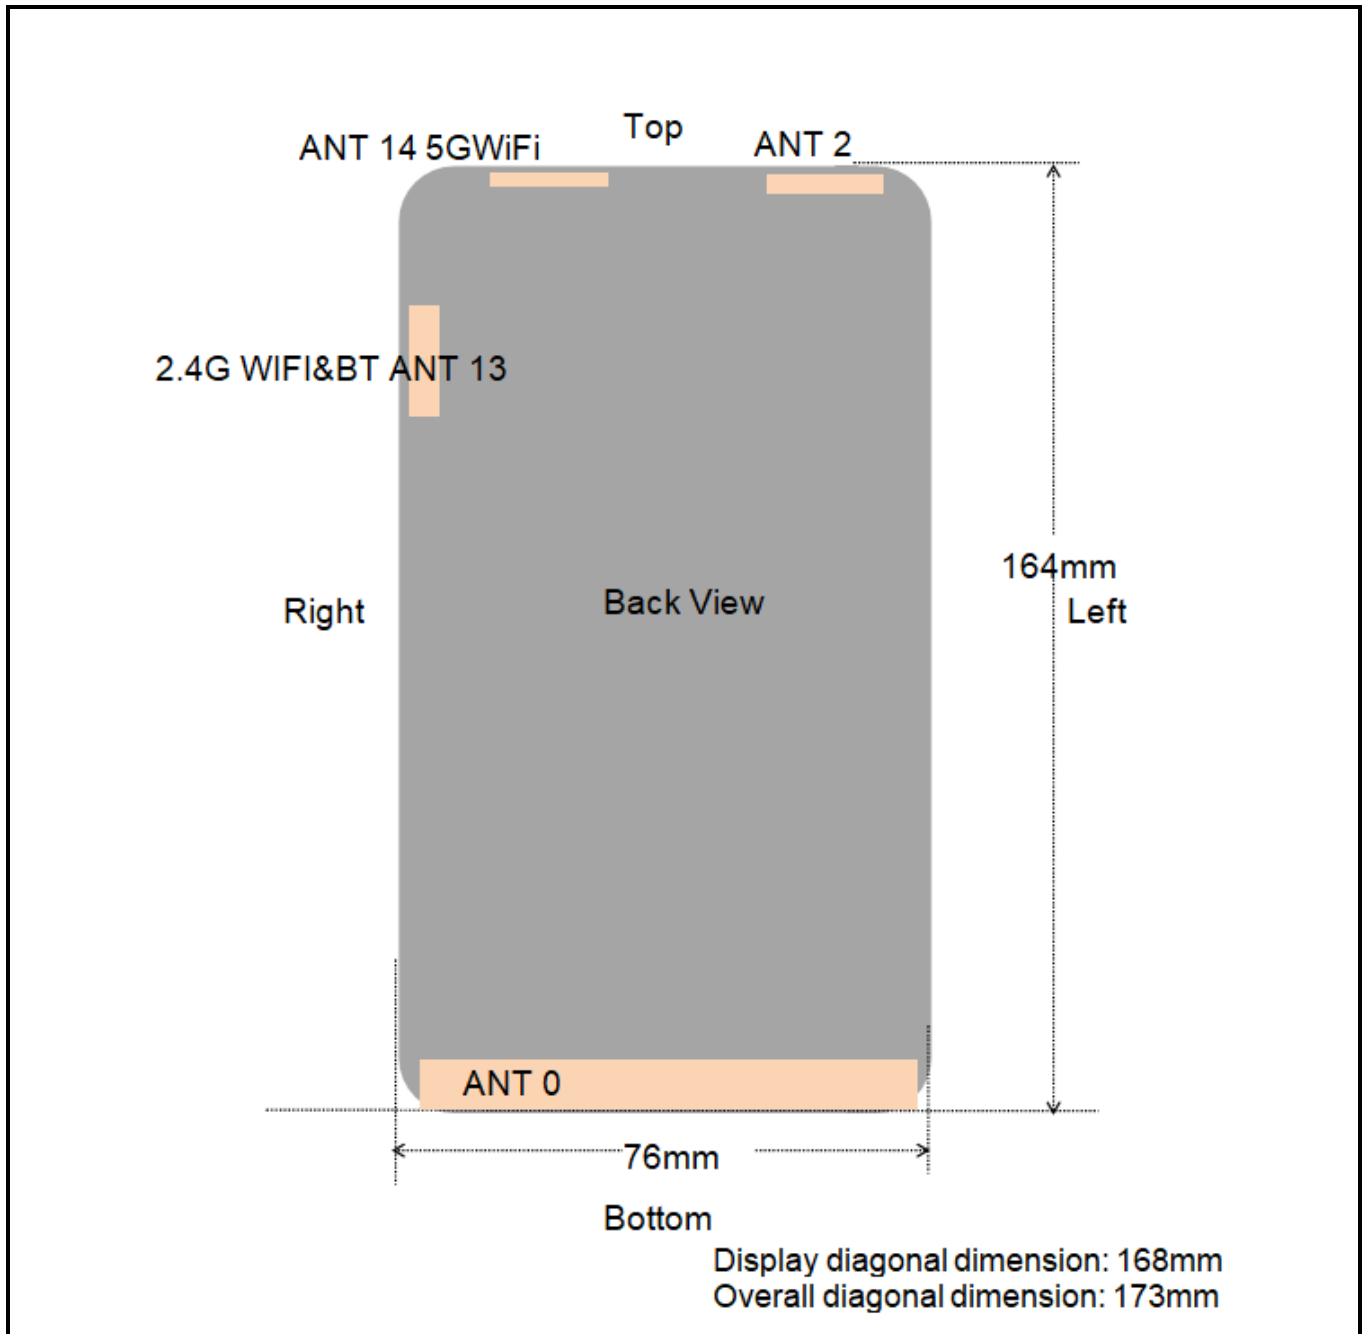


Fig.14.1 EUT Antenna Locations

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

Distance of Antennas to EUT edge/surface Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
ANT 0 : GSM& WCDMA<E DRX	<25mm	<25mm	150mm	<25mm	<25mm	<25mm
ANT 2 : GSM& WCDMA<E PRX	<25mm	<25mm	<25mm	150mm	<25mm	35mm
ANT 13 : BT& 2.4GWiFi	<25mm	<25mm	<25mm	120mm	<25mm	70mm
ANT 14: 5GWiFi	<25mm	<25mm	<25mm	155mm	<25mm	35mm

Test Positions Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
ANT 0 : GSM& WCDMA<E DRX	Yes	Yes	No	Yes	Yes	Yes
ANT 2 : GSM& WCDMA<E PRX	Yes	Yes	Yes	No	Yes	No
ANT 13 : BT& 2.4GWiFi	Yes	Yes	Yes	No	Yes	No
ANT 14: 5GWiFi	Yes	Yes	Yes	No	Yes	No

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for hotspot SAR, and 10 mm for body-worn SAR.
4. Per KDB 648474 D04 v01r03, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg

15 SAR Test Results Summary

15.1 Standalone Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GSM850/Voice	0	Right Cheek	190	836.6	33.42	0.04	33.5	0.136	1.019	0.139
	GSM850/Voice	0	Right Tilted	190	836.6	33.42	-0.04	33.5	0.064	1.019	0.066
	GSM850/Voice	0	Left Cheek	190	836.6	33.42	-0.08	33.5	0.123	1.019	0.125
	GSM850/Voice	0	Left Tilted	190	836.6	33.42	0.10	33.5	0.054	1.019	0.055
1	GSM850/Voice	2	Right Cheek	190	836.6	33.42	0.15	33.5	0.408	1.019	0.416
	GSM850/Voice	2	Right Tilted	190	836.6	33.42	0.01	33.5	0.368	1.019	0.375
	GSM850/Voice	2	Left Cheek	190	836.6	33.42	0.04	33.5	0.330	1.019	0.336
	GSM850/Voice	2	Left Tilted	190	836.6	33.42	-0.01	33.5	0.237	1.019	0.242
	PCS1900/Voice	0	Right Cheek	810	1909.8	30.22	-0.01	30.5	0.009	1.067	0.010
	PCS1900/Voice	0	Right Tilted	810	1909.8	30.22	0.04	30.5	0.004	1.067	0.004
	PCS1900/Voice	0	Left Cheek	810	1909.8	30.22	0.00	30.5	0.007	1.067	0.007
	PCS1900/Voice	0	Left Tilted	810	1909.8	30.22	-0.18	30.5	0.003	1.067	0.003
	PCS1900/Voice	2	Right Cheek	810	1909.8	30.22	0.12	30.5	0.189	1.067	0.202
2	PCS1900/Voice	2	Right Tilted	810	1909.8	30.22	0.08	30.5	0.197	1.067	0.210
	PCS1900/Voice	2	Left Cheek	810	1909.8	30.22	0.05	30.5	0.117	1.067	0.125
	PCS1900/Voice	2	Left Tilted	810	1909.8	30.22	0.12	30.5	0.135	1.067	0.144
	PCS1900/Voice	0	Right Cheek	810	1909.8	30.22	-0.01	30.5	0.009	1.067	0.010
	PCS1900/Voice	0	Right Tilted	810	1909.8	30.22	0.04	30.5	0.004	1.067	0.004
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ WCDMA Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	0	Right Cheek	9538	1907.6	24.02	0.10	24.5	0.021	1.117	0.023
	Band II/RMC	0	Right Tilted	9538	1907.6	24.02	-0.05	24.5	0.011	1.117	0.012
	Band II/RMC	0	Left Cheek	9538	1907.6	24.02	-0.09	24.5	0.008	1.117	0.009
	Band II/RMC	0	Left Tilted	9538	1907.6	24.02	-0.08	24.5	0.010	1.117	0.011
	Band II/RMC	2	Right Cheek	9538	1907.6	24.02	-0.15	24.5	0.229	1.117	0.256
3	Band II/RMC	2	Right Tilted	9538	1907.6	24.02	0.03	24.5	0.272	1.117	0.304
	Band II/RMC	2	Left Cheek	9538	1907.6	24.02	0.07	24.5	0.201	1.117	0.225
	Band II/RMC	2	Left Tilted	9538	1907.6	24.02	-0.05	24.5	0.263	1.117	0.294
	Band IV/RMC	0	Right Cheek	1312	1712.4	23.72	0.01	24.0	0.031	1.067	0.033
	Band IV/RMC	0	Right Tilted	1312	1712.4	23.72	0.00	24.0	0.025	1.067	0.027
	Band IV/RMC	0	Left Cheek	1312	1712.4	23.72	0.06	24.0	0.031	1.067	0.033
	Band IV/RMC	0	Left Tilted	1312	1712.4	23.72	0.04	24.0	0.033	1.067	0.036
	Band IV/RMC	2	Right Cheek	1312	1712.4	23.72	0.17	24.0	0.345	1.067	0.368
4	Band IV/RMC	2	Right Tilted	1312	1712.4	23.72	0.05	24.0	0.427	1.067	0.456
	Band IV/RMC	2	Left Cheek	1312	1712.4	23.72	0.13	24.0	0.312	1.067	0.333
	Band IV/RMC	2	Left Tilted	1312	1712.4	23.72	-0.15	24.0	0.416	1.067	0.444
	Band V/RMC	0	Right Cheek	4132	826.4	24.32	0.16	24.5	0.145	1.042	0.151
	Band V/RMC	0	Right Tilted	4132	826.4	24.32	0.00	24.5	0.071	1.042	0.074
	Band V/RMC	0	Left Cheek	4132	826.4	24.32	0.14	24.5	0.050	1.042	0.052
	Band V/RMC	0	Left Tilted	4132	826.4	24.32	-0.08	24.5	0.057	1.042	0.060
5	Band V/RMC	2	Right Cheek	4132	826.4	24.32	0.16	24.5	0.421	1.042	0.439
	Band V/RMC	2	Right Tilted	4132	826.4	24.32	0.06	24.5	0.402	1.042	0.419
	Band V/RMC	2	Left Cheek	4132	826.4	24.32	0.03	24.5	0.279	1.042	0.291
	Band V/RMC	2	Left Tilted	4132	826.4	24.32	-0.03	24.5	0.272	1.042	0.283
	Band V/RMC	0	Right Cheek	4132	826.4	24.32	0.16	24.5	0.145	1.042	0.151

ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	1.6 W/kg (mW/g) Averaged over 1g
--	-------------------------------------

➤ FDD-LTE Band 2(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	0	Right Cheek	19100	1900	24.25	0.11	24.5	0.023	1.059	0.024
	Band2/1RB#49	0	Right Tilted	19100	1900	24.25	0.00	24.5	0.015	1.059	0.015
	Band2/1RB#49	0	Left Cheek	19100	1900	24.25	0.15	24.5	0.011	1.059	0.011
	Band2/1RB#49	0	Left Tilted	19100	1900	24.25	0.18	24.5	0.014	1.059	0.014
	Band2/1RB#49	2	Right Cheek	19100	1900	24.25	0.11	24.5	0.266	1.059	0.282
6	Band2/1RB#49	2	Right Tilted	19100	1900	24.25	0.03	24.5	0.330	1.059	0.349
	Band2C/1RB#99	2	Right Tilted	19100+18902	1900+1880.2	23.85	0.13	24.0	0.290	1.035	0.300
	Band2/1RB#49	2	Left Cheek	19100	1900	24.25	0.03	24.5	0.220	1.059	0.233
	Band2/1RB#49	2	Left Tilted	19100	1900	24.25	0.02	24.5	0.319	1.059	0.338
	Band2/50%RB#0	0	Right Cheek	19100	1900	23.13	0.09	23.5	0.019	1.089	0.021
	Band2/50%RB#0	0	Right Tilted	19100	1900	23.13	-0.19	23.5	0.013	1.089	0.014
	Band2/50%RB#0	0	Left Cheek	19100	1900	23.13	-0.12	23.5	0.007	1.089	0.008
	Band2/50%RB#0	0	Left Tilted	19100	1900	23.13	0.18	23.5	0.011	1.089	0.012
	Band2/50%RB#0	2	Right Cheek	19100	1900	23.13	0.04	23.5	0.212	1.089	0.231
	Band2/50%RB#0	2	Right Tilted	19100	1900	23.13	0.05	23.5	0.232	1.089	0.253
	Band2/50%RB#0	2	Left Cheek	19100	1900	23.13	0.17	23.5	0.187	1.089	0.204
	Band2/50%RB#0	2	Left Tilted	19100	1900	23.13	0.15	23.5	0.224	1.089	0.244
	Band2/50%RB#0	0	Right Cheek	19100	1900	23.13	0.09	23.5	0.019	1.089	0.021
	Band2/50%RB#0	0	Right Tilted	19100	1900	23.13	-0.19	23.5	0.013	1.089	0.014
	Band2/50%RB#0	0	Left Cheek	19100	1900	23.13	-0.12	23.5	0.007	1.089	0.008

ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	1.6 W/kg (mW/g) Averaged over 1g
--	-------------------------------------

➤ FDD-LTE Band 4(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#49	0	Right Cheek	20050	1720	23.75	-0.11	24.0	0.032	1.059	0.034
	Band4/1RB#49	0	Right Tilted	20050	1720	23.75	-0.11	24.0	0.022	1.059	0.023
	Band4/1RB#49	0	Left Cheek	20050	1720	23.75	0.01	24.0	0.018	1.059	0.019
	Band4/1RB#49	0	Left Tilted	20050	1720	23.75	0.06	24.0	0.020	1.059	0.021
	Band4/1RB#49	2	Right Cheek	20050	1720	23.75	-0.19	24.0	0.379	1.059	0.401
7	Band4/1RB#49	2	Right Tilted	20050	1720	23.75	0.06	24.0	0.482	1.059	0.510
	Band4/1RB#49	2	Left Cheek	20050	1720	23.75	-0.14	24.0	0.328	1.059	0.347
	Band4/1RB#49	2	Left Tilted	20050	1720	23.75	0.16	24.0	0.427	1.059	0.452
	Band4/50%RB#0	0	Right Cheek	20175	1732.5	22.85	-0.02	23.0	0.026	1.035	0.027
	Band4/50%RB#0	0	Right Tilted	20175	1732.5	22.85	0.00	23.0	0.018	1.035	0.019
	Band4/50%RB#0	0	Left Cheek	20175	1732.5	22.85	-0.12	23.0	0.012	1.035	0.012
	Band4/50%RB#0	0	Left Tilted	20175	1732.5	22.85	0.00	23.0	0.015	1.035	0.016
	Band4/50%RB#0	2	Right Cheek	20175	1732.5	22.85	0.09	23.0	0.246	1.035	0.255
	Band4/50%RB#0	2	Right Tilted	20175	1732.5	22.85	-0.03	23.0	0.306	1.035	0.317
	Band4/50%RB#0	2	Left Cheek	20175	1732.5	22.85	-0.15	23.0	0.220	1.035	0.228
	Band4/50%RB#0	2	Left Tilted	20175	1732.5	22.85	0.18	23.0	0.284	1.035	0.294
	Band4/50%RB#0	0	Right Cheek	20175	1732.5	22.85	-0.02	23.0	0.026	1.035	0.027
	Band4/50%RB#0	0	Right Tilted	20175	1732.5	22.85	0.00	23.0	0.018	1.035	0.019
	Band4/50%RB#0	0	Left Cheek	20175	1732.5	22.85	-0.12	23.0	0.012	1.035	0.012
	Band4/50%RB#0	0	Left Tilted	20175	1732.5	22.85	0.00	23.0	0.015	1.035	0.016

ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	1.6 W/kg (mW/g) Averaged over 1g
--	-------------------------------------

➤ FDD-LTE Band 5(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#49	0	Right Cheek	20525	836.5	24.19	-0.08	24.5	0.159	1.074	0.171
	Band5/1RB#49	0	Right Tilted	20525	836.5	24.19	-0.12	24.5	0.078	1.074	0.084
	Band5/1RB#49	0	Left Cheek	20525	836.5	24.19	0.02	24.5	0.050	1.074	0.054
	Band5/1RB#49	0	Left Tilted	20525	836.5	24.19	0.14	24.5	0.058	1.074	0.062
8	Band5/1RB#49	2	Right Cheek	20525	836.5	24.19	0.12	24.5	0.509	1.074	0.547
	Band5B/1RB#49	2	Right Cheek	20476+20575	836.1+841.5	23.90	0.01	24.5	0.472	1.148	0.542
	Band5/1RB#49	2	Right Tilted	20525	836.5	24.19	0.03	24.5	0.435	1.074	0.467
	Band5/1RB#49	2	Left Cheek	20525	836.5	24.19	-0.01	24.5	0.378	1.074	0.406
	Band5/1RB#49	2	Left Tilted	20525	836.5	24.19	0.03	24.5	0.294	1.074	0.316
	Band5/50%RB#0	0	Right Cheek	20450	829	23.14	0.04	23.5	0.118	1.086	0.128
	Band5/50%RB#0	0	Right Tilted	20450	829	23.14	0.16	23.5	0.062	1.086	0.067
	Band5/50%RB#0	0	Left Cheek	20450	829	23.14	0.18	23.5	0.037	1.086	0.040
	Band5/50%RB#0	0	Left Tilted	20450	829	23.14	0.18	23.5	0.039	1.086	0.042
	Band5/50%RB#0	2	Right Cheek	20450	829	23.14	0.02	23.5	0.370	1.086	0.402
	Band5/50%RB#0	2	Right Tilted	20450	829	23.14	-0.14	23.5	0.328	1.086	0.356
	Band5/50%RB#0	2	Left Cheek	20450	829	23.14	0.09	23.5	0.288	1.086	0.313
	Band5/50%RB#0	2	Left Tilted	20450	829	23.14	0.14	23.5	0.261	1.086	0.283
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	0	Right Cheek	20850	2510	23.33	0.09	23.5	0.090	1.04	0.094
	Band7/1RB#49	0	Right Tilted	20850	2510	23.33	0.02	23.5	0.101	1.04	0.105
	Band7/1RB#49	0	Left Cheek	20850	2510	23.33	0.08	23.5	0.089	1.04	0.092
	Band7/1RB#49	0	Left Tilted	20850	2510	23.33	0.04	23.5	0.047	1.04	0.049
	Band7/1RB#49	2	Right Cheek	20850	2510	23.33	-0.05	23.5	0.153	1.04	0.159
9	Band7/1RB#49	2	Right Tilted	20850	2510	23.33	-0.03	23.5	0.429	1.04	0.446
	Band7C/1RB#99	2	Right Tilted	20850+21048	2510+2529.8	23.18	0.03	23.5	0.412	1.076	0.443
	Band7/1RB#49	2	Left Cheek	20850	2510	23.33	0.09	23.5	0.180	1.04	0.187
	Band7/1RB#49	2	Left Tilted	20850	2510	23.33	0.02	23.5	0.217	1.04	0.226
	Band7/50%RB#0	0	Right Cheek	20850	2510	22.12	0.02	22.5	0.081	1.091	0.088
	Band7/50%RB#0	0	Right Tilted	20850	2510	22.12	0.06	22.5	0.092	1.091	0.100
	Band7/50%RB#0	0	Left Cheek	20850	2510	22.12	-0.08	22.5	0.074	1.091	0.081
	Band7/50%RB#0	0	Left Tilted	20850	2510	22.12	0.15	22.5	0.032	1.091	0.035
	Band7/50%RB#0	2	Right Cheek	20850	2510	22.12	-0.14	22.5	0.121	1.091	0.132
	Band7/50%RB#0	2	Right Tilted	20850	2510	22.12	0.13	22.5	0.365	1.091	0.398
	Band7/50%RB#0	2	Left Cheek	20850	2510	22.12	-0.16	22.5	0.128	1.091	0.140
	Band7/50%RB#0	2	Left Tilted	20850	2510	22.12	-0.13	22.5	0.184	1.091	0.201
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 12(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#49	0	Right Cheek	23130	711	23.80	0.03	24.5	0.109	1.175	0.128
	Band12/1RB#49	0	Right Tilted	23130	711	23.80	0.19	24.5	0.055	1.175	0.064
	Band12/1RB#49	0	Left Cheek	23130	711	23.80	0.01	24.5	0.104	1.175	0.122
	Band12/1RB#49	0	Left Tilted	23130	711	23.80	0.04	24.5	0.060	1.175	0.071
10	Band12/1RB#49	2	Right Cheek	23130	711	23.80	0.06	24.5	0.239	1.175	0.281

	Band12/1RB#49	2	Right Tilted	23130	711	23.80	0.12	24.5	0.207	1.175	0.243
	Band12/1RB#49	2	Left Cheek	23130	711	23.80	-0.05	24.5	0.146	1.175	0.172
	Band12/1RB#49	2	Left Tilted	23130	711	23.80	-0.01	24.5	0.129	1.175	0.152
	Band12/50%RB#12	0	Right Cheek	23130	711	22.78	-0.15	23.0	0.092	1.052	0.097
	Band12/50%RB#12	0	Right Tilted	23130	711	22.78	0.01	23.0	0.042	1.052	0.044
	Band12/50%RB#12	0	Left Cheek	23130	711	22.78	-0.18	23.0	0.087	1.052	0.092
	Band12/50%RB#12	0	Left Tilted	23130	711	22.78	0.00	23.0	0.047	1.052	0.049
	Band12/50%RB#12	2	Right Cheek	23130	711	22.78	-0.01	23.0	0.215	1.052	0.226
	Band12/50%RB#12	2	Right Tilted	23130	711	22.78	0.10	23.0	0.189	1.052	0.199
	Band12/50%RB#12	2	Left Cheek	23130	711	22.78	0.07	23.0	0.122	1.052	0.128
	Band12/50%RB#12	2	Left Tilted	23130	711	22.78	0.06	23.0	0.099	1.052	0.104
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 13(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#24	0	Right Cheek	23230	782	23.78	0.05	24.0	0.144	1.052	0.151
	Band13/1RB#24	0	Right Tilted	23230	782	23.78	0.14	24.0	0.071	1.052	0.075
	Band13/1RB#24	0	Left Cheek	23230	782	23.78	0.13	24.0	0.106	1.052	0.112
	Band13/1RB#24	0	Left Tilted	23230	782	23.78	0.11	24.0	0.073	1.052	0.077
	Band13/1RB#24	2	Right Cheek	23230	782	23.78	0.05	24.0	0.246	1.052	0.259
11	Band13/1RB#24	2	Right Tilted	23230	782	23.78	-0.19	24.0	0.250	1.052	0.263
	Band13/1RB#24	2	Left Cheek	23230	782	23.78	0.01	24.0	0.172	1.052	0.181
	Band13/1RB#24	2	Left Tilted	23230	782	23.78	0.03	24.0	0.156	1.052	0.164
	Band13/50%RB#12	0	Right Cheek	23230	782	22.72	0.03	23.0	0.103	1.067	0.110
	Band13/50%RB#12	0	Right Tilted	23230	782	22.72	0.11	23.0	0.059	1.067	0.063
	Band13/50%RB#12	0	Left Cheek	23230	782	22.72	-0.07	23.0	0.084	1.067	0.090
	Band13/50%RB#12	0	Left Tilted	23230	782	22.72	0.15	23.0	0.061	1.067	0.065
	Band13/50%RB#12	2	Right Cheek	23230	782	22.72	0.05	23.0	0.152	1.067	0.162
	Band13/50%RB#12	2	Right Tilted	23230	782	22.72	-0.12	23.0	0.179	1.067	0.191
	Band13/50%RB#12	2	Left Cheek	23230	782	22.72	-0.04	23.0	0.123	1.067	0.131
	Band13/50%RB#12	2	Left Tilted	23230	782	22.72	0.17	23.0	0.111	1.067	0.118
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 17(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band17/1RB#24	0	Right Cheek	23790	710	23.85	0.17	24.0	0.132	1.035	0.137
	Band17/1RB#24	0	Right Tilted	23790	710	23.85	0.16	24.0	0.066	1.035	0.068
	Band17/1RB#24	0	Left Cheek	23790	710	23.85	-0.19	24.0	0.098	1.035	0.101
	Band17/1RB#24	0	Left Tilted	23790	710	23.85	-0.08	24.0	0.069	1.035	0.071
12	Band17/1RB#24	2	Right Cheek	23790	710	23.85	0.01	24.0	0.237	1.035	0.245
	Band17/1RB#24	2	Right Tilted	23790	710	23.85	0.01	24.0	0.224	1.035	0.232
	Band17/1RB#24	2	Left Cheek	23790	710	23.85	0.00	24.0	0.141	1.035	0.146
	Band17/1RB#24	2	Left Tilted	23790	710	23.85	0.00	24.0	0.136	1.035	0.141
	Band17/50%RB#0	0	Right Cheek	23800	711	22.75	0.09	23.0	0.115	1.059	0.122
	Band17/50%RB#0	0	Right Tilted	23800	711	22.75	-0.08	23.0	0.054	1.059	0.057
	Band17/50%RB#0	0	Left Cheek	23800	711	22.75	-0.17	23.0	0.080	1.059	0.085
	Band17/50%RB#0	0	Left Tilted	23800	711	22.75	-0.03	23.0	0.057	1.059	0.060
	Band17/50%RB#0	2	Right Cheek	23800	711	22.75	0.08	23.0	0.206	1.059	0.218
	Band17/50%RB#0	2	Right Tilted	23800	711	22.75	-0.01	23.0	0.184	1.059	0.195
	Band17/50%RB#0	2	Left Cheek	23800	711	22.75	0.19	23.0	0.121	1.059	0.128

Band17/50%RB#0	2	Left Tilted	23800	711	22.75	0.19	23.0	0.106	1.059	0.112
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band26/1RB#37	0	Right Cheek	26865	831.5	24.26	0.06	24.5	0.149	1.057	0.157
	Band26/1RB#37	0	Right Tilted	26865	831.5	24.26	0.14	24.5	0.070	1.057	0.074
	Band26/1RB#37	0	Left Cheek	26865	831.5	24.26	0.08	24.5	0.131	1.057	0.138
	Band26/1RB#37	0	Left Tilted	26865	831.5	24.26	0.10	24.5	0.065	1.057	0.068
13	Band26/1RB#37	2	Right Cheek	26865	831.5	24.26	0.04	24.5	0.441	1.057	0.466
	Band26/1RB#37	2	Right Tilted	26865	831.5	24.26	0.01	24.5	0.412	1.057	0.435
	Band26/1RB#37	2	Left Cheek	26865	831.5	24.26	0.05	24.5	0.366	1.057	0.387
	Band26/1RB#37	2	Left Tilted	26865	831.5	24.26	-0.12	24.5	0.288	1.057	0.304
	Band26/50%RB#16	0	Right Cheek	26865	831.5	22.52	-0.08	23.0	0.128	1.117	0.143
	Band26/50%RB#16	0	Right Tilted	26865	831.5	22.52	-0.05	23.0	0.054	1.117	0.060
	Band26/50%RB#16	0	Left Cheek	26865	831.5	22.52	-0.15	23.0	0.121	1.117	0.135
	Band26/50%RB#16	0	Left Tilted	26865	831.5	22.52	0.01	23.0	0.052	1.117	0.058
	Band26/50%RB#16	2	Right Cheek	26865	831.5	22.52	0.05	23.0	0.381	1.117	0.426
	Band26/50%RB#16	2	Right Tilted	26865	831.5	22.52	-0.11	23.0	0.365	1.117	0.408
	Band26/50%RB#16	2	Left Cheek	26865	831.5	22.52	-0.08	23.0	0.302	1.117	0.337
	Band26/50%RB#16	2	Left Tilted	26865	831.5	22.52	-0.03	23.0	0.242	1.117	0.270
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band38(15MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band38/1RB#49	0	Right Cheek	38150	2610	23.53	-0.16	24.0	0.087	1.114	1.008	0.098
	Band38/1RB#49	0	Right Tilted	38150	2610	23.53	0.05	24.0	0.098	1.114	1.008	0.110
	Band38/1RB#49	0	Left Cheek	38150	2610	23.53	0.16	24.0	0.057	1.114	1.008	0.064
	Band38/1RB#49	0	Left Tilted	38150	2610	23.53	-0.01	24.0	0.014	1.114	1.008	0.016
	Band38/1RB#49	2	Right Cheek	38150	2610	23.53	0.01	24.0	0.108	1.114	1.008	0.121
14	Band38/1RB#49	2	Right Tilted	38150	2610	23.53	0.13	24.0	0.382	1.114	1.008	0.429
	Band38C/1RB#99	2	Right Tilted	38150+37952	2610+2590.2	23.31	0.03	24.0	0.326	1.172	1.008	0.385
	Band38/1RB#49	2	Left Cheek	38150	2610	23.53	0.19	24.0	0.128	1.114	1.008	0.144
	Band38/1RB#49	2	Left Tilted	38150	2610	23.53	0.15	24.0	0.166	1.114	1.008	0.186
	Band38/50%RB#0	0	Right Cheek	38150	2610	22.38	-0.11	22.5	0.062	1.028	1.008	0.064
	Band38/50%RB#0	0	Right Tilted	38150	2610	22.38	-0.01	22.5	0.078	1.028	1.008	0.081
	Band38/50%RB#0	0	Left Cheek	38150	2610	22.38	0.06	22.5	0.032	1.028	1.008	0.033
	Band38/50%RB#0	0	Left Tilted	38150	2610	22.38	0.03	22.5	0.008	1.028	1.008	0.008
	Band38/50%RB#0	2	Right Cheek	38150	2610	22.38	0.19	22.5	0.084	1.028	1.008	0.087
	Band38/50%RB#0	2	Right Tilted	38150	2610	22.38	0.05	22.5	0.290	1.028	1.008	0.301
	Band38/50%RB#0	2	Left Cheek	38150	2610	22.38	-0.02	22.5	0.090	1.028	1.008	0.093
	Band38/50%RB#0	2	Left Tilted	38150	2610	22.38	-0.07	22.5	0.126	1.028	1.008	0.131
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ TDD-LTE Band41(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	0	Right Cheek	41140	2645	23.66	-0.04	24.0	0.091	1.081	1.008	0.099
	Band41/1RB#49	0	Right Tilted	41140	2645	23.66	0.04	24.0	0.101	1.081	1.008	0.110
	Band41/1RB#49	0	Left Cheek	41140	2645	23.66	0.02	24.0	0.066	1.081	1.008	0.072

	Band41/1RB#49	0	Left Tilted	41140	2645	23.66	0.07	24.0	0.020	1.081	1.008	0.022
	Band41/1RB#49	2	Right Cheek	41140	2645	23.66	-0.01	24.0	0.112	1.081	1.008	0.122
15	Band41/1RB#49	2	Right Tilted	41140	2645	23.66	0.20	24.0	0.393	1.081	1.008	0.428
	Band41C/1RB#99	2	Right Tilted	41140+40942	2645+2625.2	23.19	-0.06	24.0	0.344	1.205	1.008	0.418
	Band41/1RB#49	2	Left Cheek	41140	2645	23.66	-0.07	24.0	0.132	1.081	1.008	0.144
	Band41/1RB#49	2	Left Tilted	41140	2645	23.66	0.00	24.0	0.179	1.081	1.008	0.195
	Band41/50%RB#0	0	Right Cheek	41140	2645	22.61	0.07	23.0	0.074	1.094	1.008	0.082
	Band41/50%RB#0	0	Right Tilted	41140	2645	22.61	0.01	23.0	0.079	1.094	1.008	0.087
	Band41/50%RB#0	0	Left Cheek	41140	2645	22.61	-0.13	23.0	0.041	1.094	1.008	0.045
	Band41/50%RB#0	0	Left Tilted	41140	2645	22.61	0.14	23.0	0.011	1.094	1.008	0.012
	Band41/50%RB#0	2	Right Cheek	41140	2645	22.61	-0.13	23.0	0.096	1.094	1.008	0.106
	Band41/50%RB#0	2	Right Tilted	41140	2645	22.61	0.01	23.0	0.290	1.094	1.008	0.320
	Band41/50%RB#0	2	Left Cheek	41140	2645	22.61	-0.04	23.0	0.099	1.094	1.008	0.109
	Band41/50%RB#0	2	Left Tilted	41140	2645	22.61	0.14	23.0	0.135	1.094	1.008	0.149
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ FDD-LTE Band 66(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	0	Right Cheek	132072	1720	23.90	0.00	24.0	0.031	1.023	0.032
	Band66/1RB#49	0	Right Tilted	132072	1720	23.90	0.01	24.0	0.017	1.023	0.017
	Band66/1RB#49	0	Left Cheek	132072	1720	23.90	0.00	24.0	0.032	1.023	0.032
	Band66/1RB#49	0	Left Tilted	132072	1720	23.90	0.06	24.0	0.014	1.023	0.015
	Band66/1RB#49	2	Right Cheek	132072	1720	23.90	0.04	24.0	0.250	1.023	0.256
16	Band66/1RB#49	2	Right Tilted	132072	1720	23.90	-0.06	24.0	0.474	1.023	0.485
	Band66C/1RB#99	2	Right Tilted	132072+132270	1720+1739.8	23.43	0.16	24.0	0.345	1.14	0.393
	Band66/1RB#49	2	Left Cheek	132072	1720	23.90	0.00	24.0	0.233	1.023	0.238
	Band66/1RB#49	2	Left Tilted	132072	1720	23.90	-0.06	24.0	0.349	1.023	0.357
	Band66/50%RB#24	0	Right Cheek	132322	1745	22.76	-0.12	23.0	0.020	1.057	0.021
	Band66/50%RB#24	0	Right Tilted	132322	1745	22.76	-0.07	23.0	0.013	1.057	0.014
	Band66/50%RB#24	0	Left Cheek	132322	1745	22.76	-0.19	23.0	0.024	1.057	0.025
	Band66/50%RB#24	0	Left Tilted	132322	1745	22.76	0.00	23.0	0.009	1.057	0.010
	Band66/50%RB#24	2	Right Cheek	132322	1745	22.76	0.17	23.0	0.224	1.057	0.237
	Band66/50%RB#24	2	Right Tilted	132322	1745	22.76	-0.01	23.0	0.309	1.057	0.327
	Band66/50%RB#24	2	Left Cheek	132322	1745	22.76	-0.08	23.0	0.203	1.057	0.215
	Band66/50%RB#24	2	Left Tilted	132322	1745	22.76	-0.11	23.0	0.274	1.057	0.290
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b		Right Cheek	6	2437	18.04	-0.11	18.5	0.046	1.112	1.000	0.051
	2.4GHz/802.11b		Right Tilted	6	2437	18.04	0.04	18.5	0.028	1.112	1.000	0.031
17	2.4GHz/802.11b		Left Cheek	6	2437	18.04	0.01	18.5	0.306	1.112	1.000	0.340
	2.4GHz/802.11b		Left Tilted	6	2437	18.04	-0.03	18.5	0.070	1.112	1.000	0.077
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ WLAN 5.2 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a		Right Cheek	48	5240	16.45	-0.09	16.5	0.187	1.012	1.000	0.189

	5.2GHz/802.11a		Right Tilted	48	5240	16.45	-0.04	16.5	0.212	1.012	1.000	0.215
	5.2GHz/802.11a		Left Cheek	48	5240	16.45	0.04	16.5	0.250	1.012	1.000	0.253
18	5.2GHz/802.11a		Left Tilted	48	5240	16.45	0.00	16.5	0.333	1.012	1.000	0.337
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.3 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.3GHz/802.11a		Right Cheek	64	5320	16.54	-0.10	17.0	0.199	1.112	1.000	0.221
	5.3GHz/802.11a		Right Tilted	64	5320	16.54	-0.01	17.0	0.230	1.112	1.000	0.256
	5.3GHz/802.11a		Left Cheek	64	5320	16.54	0.11	17.0	0.219	1.112	1.000	0.244
19	5.3GHz/802.11a		Left Tilted	64	5320	16.54	0.06	17.0	0.321	1.112	1.000	0.357
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.6 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.6GHz/802.11a		Right Cheek	140	5700	16.12	0.02	16.5	0.288	1.091	1.000	0.314
	5.6GHz/802.11a		Right Tilted	140	5700	16.12	-0.03	16.5	0.322	1.091	1.000	0.351
	5.6GHz/802.11a		Left Cheek	140	5700	16.12	0.03	16.5	0.323	1.091	1.000	0.352
20	5.6GHz/802.11a		Left Tilted	140	5700	16.12	0.17	16.5	0.360	1.091	1.000	0.393
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a		Right Cheek	157	5785	16.39	0.08	16.5	0.257	1.026	1.000	0.264
	5.8GHz/802.11a		Right Tilted	157	5785	16.39	0.04	16.5	0.282	1.026	1.000	0.289
	5.8GHz/802.11a		Left Cheek	157	5785	16.39	0.16	16.5	0.215	1.026	1.000	0.221
21	5.8GHz/802.11a		Left Tilted	157	5785	16.39	0.20	16.5	0.304	1.026	1.000	0.312
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ Bluetooth Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK		Right Cheek	39	2441	17.75	0.05	18.0	0.044	1.059	1.000	0.047
	BT/GFSK		Right Tilted	39	2441	17.75	0.02	18.0	0.014	1.059	1.000	0.015
22	BT/GFSK		Left Cheek	39	2441	17.75	0.05	18.0	0.097	1.059	1.000	0.103
	BT/GFSK		Left Tilted	39	2441	17.75	0.01	18.0	0.040	1.059	1.000	0.042
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg.

3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 56.23mW(17.5dBm) and 63.1mW(18.0dBm), the scaled SAR would be $0.340 \times (56.23/63.1) = 0.303$ W/Kg < 1.2 W/kg, therefore, SAR is not required for OFDM.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination
7. Highlight part of test data means repeated test.
8. *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show " $<0.001^* \text{ W/Kg}$ " in the report.

15.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
23	GPRS850/4 slots	0	Front	251	848.8	29.76	0.00	30.0	0.603	1.057	0.637
	GPRS850/4 slots	0	Back	251	848.8	29.76	-0.06	30.0	0.526	1.057	0.556
	GPRS850/4 slots	2	Front	251	848.8	29.76	0.09	30.0	0.190	1.057	0.201
	GPRS850/4 slots	2	Back	251	848.8	29.76	-0.06	30.0	0.395	1.057	0.418
	GPRS1900/4 slots	0	Front	661	1880	26.53	0.10	27.0	0.186	1.114	0.207
	GPRS1900/4 slots	0	Back	661	1880	26.53	-0.10	27.0	0.188	1.114	0.209
	GPRS1900/4 slots	2	Front	661	1880	26.53	-0.07	27.0	0.193	1.114	0.215
24	GPRS1900/4 slots	2	Back	661	1880	26.53	-0.12	27.0	0.399	1.114	0.444
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ WCDMA Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	0	Front	9538	1907.6	24.02	-0.19	24.5	0.089	1.117	0.099
	Band II/RMC	0	Back	9538	1907.6	24.02	-0.18	24.5	0.077	1.117	0.086
	Band II/RMC	2	Front	9538	1907.6	24.02	-0.10	24.5	0.087	1.117	0.097
25	Band II/RMC	2	Back	9538	1907.6	24.02	0.05	24.5	0.162	1.117	0.181
	Band IV/RMC	0	Front	1312	1712.4	23.72	0.01	24.0	0.241	1.067	0.257
26	Band IV/RMC	0	Back	1312	1712.4	23.72	0.08	24.0	0.314	1.067	0.335
	Band IV/RMC	2	Front	1312	1712.4	23.72	-0.08	24.0	0.103	1.067	0.110
	Band IV/RMC	2	Back	1312	1712.4	23.72	0.02	24.0	0.205	1.067	0.219
	Band V/RMC	0	Front	4132	826.4	24.32	-0.02	24.5	0.278	1.042	0.290
27	Band V/RMC	0	Back	4132	826.4	24.32	-0.01	24.5	0.305	1.042	0.318
	Band V/RMC	2	Front	4132	826.4	24.32	-0.07	24.5	0.103	1.042	0.107
	Band V/RMC	2	Back	4132	826.4	24.32	0.02	24.5	0.200	1.042	0.208
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	0	Front	19100	1900	24.25	0.06	24.5	0.097	1.059	0.102
	Band2/1RB#49	0	Back	19100	1900	24.25	0.20	24.5	0.096	1.059	0.102
	Band2/1RB#49	2	Front	19100	1900	24.25	-0.07	24.5	0.081	1.059	0.086
28	Band2/1RB#49	2	Back	19100	1900	24.25	0.05	24.5	0.173	1.059	0.183
	Band2C/1RB#99	2	Back	19100+18902	1900+1880.2	23.85	0.05	24.0	0.151	1.035	0.156
	Band2/50%RB#0	0	Front	19100	1900	23.13	-0.02	23.5	0.074	1.089	0.081
	Band2/50%RB#0	0	Back	19100	1900	23.13	-0.15	23.5	0.071	1.089	0.077
	Band2/50%RB#0	2	Front	19100	1900	23.13	0.08	23.5	0.064	1.089	0.070
	Band2/50%RB#0	2	Back	19100	1900	23.13	0.16	23.5	0.136	1.089	0.148
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 4(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#49	0	Front	20050	1720	23.75	0.15	24.0	0.309	1.059	0.327
29	Band4/1RB#49	0	Back	20050	1720	23.75	0.05	24.0	0.373	1.059	0.395
	Band4/1RB#49	2	Front	20050	1720	23.75	-0.16	24.0	0.103	1.059	0.109
	Band4/1RB#49	2	Back	20050	1720	23.75	0.07	24.0	0.199	1.059	0.211
	Band4/50%RB#0	0	Front	20175	1732.5	22.85	-0.07	23.0	0.263	1.035	0.272
	Band4/50%RB#0	0	Back	20175	1732.5	22.85	0.18	23.0	0.339	1.035	0.351
	Band4/50%RB#0	2	Front	20175	1732.5	22.85	-0.11	23.0	0.095	1.035	0.098
	Band4/50%RB#0	2	Back	20175	1732.5	22.85	0.19	23.0	0.168	1.035	0.174
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#49	0	Front	20525	836.5	24.19	-0.09	24.5	0.326	1.074	0.350
30	Band5/1RB#49	0	Back	20525	836.5	24.19	0.01	24.5	0.386	1.074	0.415
	Band5B/1RB#49	0	Back	20476+20575	836.1+841.5	23.90	-0.01	24.5	0.355	1.148	0.408
	Band5/1RB#49	2	Front	20525	836.5	24.19	0.04	24.5	0.121	1.074	0.130
	Band5/1RB#49	2	Back	20525	836.5	24.19	0.14	24.5	0.208	1.074	0.223
	Band5/50%RB#0	0	Front	20450	829	23.14	0.07	23.5	0.285	1.086	0.310
	Band5/50%RB#0	0	Back	20450	829	23.14	-0.15	23.5	0.342	1.086	0.371
	Band5/50%RB#0	2	Front	20450	829	23.14	0.01	23.5	0.112	1.086	0.122
	Band5/50%RB#0	2	Back	20450	829	23.14	0.17	23.5	0.189	1.086	0.205
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	0	Front	20850	2510	23.33	0.04	23.5	0.304	1.040	0.316
31	Band7/1RB#49	0	Back	20850	2510	23.33	-0.05	23.5	0.365	1.040	0.380
	Band7C/1RB#99	0	Back	20850+21048	2510+2529.8	23.18	-0.07	23.5	0.325	1.076	0.350
	Band7/1RB#49	2	Front	20850	2510	23.33	-0.08	23.5	0.076	1.040	0.079
	Band7/1RB#49	2	Back	20850	2510	23.33	-0.04	23.5	0.362	1.040	0.376
	Band7/50%RB#0	0	Front	20850	2510	22.12	-0.17	22.5	0.249	1.091	0.272
	Band7/50%RB#0	0	Back	20850	2510	22.12	0.02	22.5	0.325	1.091	0.355
	Band7/50%RB#0	2	Front	20850	2510	22.12	0.19	22.5	0.056	1.091	0.061
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
32	Band12/1RB#49	0	Front	23130	711	23.80	0.02	24.5	0.181	1.175	0.213
	Band12/1RB#49	0	Back	23130	711	23.80	0.01	24.5	0.167	1.175	0.196
	Band12/1RB#49	2	Front	23130	711	23.80	0.02	24.5	0.063	1.175	0.074
	Band12/1RB#49	2	Back	23130	711	23.80	0.04	24.5	0.110	1.175	0.129
	Band12/50%RB#12	0	Front	23130	711	22.78	-0.18	23.0	0.153	1.052	0.161
	Band12/50%RB#12	0	Back	23130	711	22.78	-0.12	23.0	0.112	1.052	0.118
	Band12/50%RB#12	2	Front	23130	711	22.78	0.11	23.0	0.048	1.052	0.050
	Band12/50%RB#12	2	Back	23130	711	22.78	0.09	23.0	0.084	1.052	0.088
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 13(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#24	0	Front	23230	782	23.78	0.03	24.0	0.207	1.052	0.218
33	Band13/1RB#24	0	Back	23230	782	23.78	0.00	24.0	0.267	1.052	0.281
	Band13/1RB#24	2	Front	23230	782	23.78	0.01	24.0	0.077	1.052	0.081
	Band13/1RB#24	2	Back	23230	782	23.78	-0.02	24.0	0.120	1.052	0.126
	Band13/50%RB#12	0	Front	23230	782	22.72	0.17	23.0	0.175	1.067	0.187
	Band13/50%RB#12	0	Back	23230	782	22.72	-0.12	23.0	0.218	1.067	0.233
	Band13/50%RB#12	2	Front	23230	782	22.72	-0.15	23.0	0.054	1.067	0.058
	Band13/50%RB#12	2	Back	23230	782	22.72	0.03	23.0	0.103	1.067	0.110
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 17(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
34	Band17/1RB#24	0	Front	23790	710	23.85	0.01	24.0	0.182	1.035	0.188
	Band17/1RB#24	0	Back	23790	710	23.85	-0.02	24.0	0.179	1.035	0.185
	Band17/1RB#24	2	Front	23790	710	23.85	-0.14	24.0	0.069	1.035	0.071
	Band17/1RB#24	2	Back	23790	710	23.85	0.08	24.0	0.128	1.035	0.132
	Band17/50%RB#0	0	Front	23800	711	22.75	0.14	23.0	0.154	1.059	0.163
	Band17/50%RB#0	0	Back	23800	711	22.75	-0.07	23.0	0.148	1.059	0.157
	Band17/50%RB#0	2	Front	23800	711	22.75	-0.10	23.0	0.052	1.059	0.055
	Band17/50%RB#0	2	Back	23800	711	22.75	0.17	23.0	0.107	1.059	0.113
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band26/1RB#37	0	Front	26865	831.5	24.26	0.00	24.5	0.284	1.057	0.300
35	Band26/1RB#37	0	Back	26865	831.5	24.26	-0.01	24.5	0.331	1.057	0.350
	Band26/1RB#37	2	Front	26865	831.5	24.26	-0.01	24.5	0.115	1.057	0.122
	Band26/1RB#37	2	Back	26865	831.5	24.26	-0.02	24.5	0.193	1.057	0.204
	Band26/50%RB#0	0	Front	26865	831.5	22.52	0.06	23.0	0.242	1.117	0.270
	Band26/50%RB#0	0	Back	26865	831.5	22.52	-0.02	23.0	0.302	1.117	0.337
	Band26/50%RB#0	2	Front	26865	831.5	22.52	0.13	23.0	0.095	1.117	0.106
	Band26/50%RB#0	2	Back	26865	831.5	22.52	-0.11	23.0	0.123	1.117	0.137
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band 38(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band38/1RB#49	0	Front	38150	2610	23.53	-0.14	24.0	0.213	1.114	1.008	0.239
36	Band38/1RB#49	0	Back	38150	2610	23.53	0.17	24.0	0.290	1.114	1.008	0.326
	Band38C/1RB#99	0	Back	38150+37952	2610+2590.2	23.31	0.16	24.0	0.241	1.172	1.008	0.285
	Band38/1RB#49	2	Front	38150	2610	23.53	0.08	24.0	0.062	1.114	1.008	0.070
	Band38/1RB#49	2	Back	38150	2610	23.53	0.07	24.0	0.274	1.114	1.008	0.308
	Band38/50%RB#0	0	Front	38150	2610	22.38	0.03	22.5	0.201	1.028	1.008	0.208
	Band38/50%RB#0	0	Back	38150	2610	22.38	-0.20	22.5	0.241	1.028	1.008	0.250
	Band38/50%RB#0	2	Front	38150	2610	22.38	-0.13	22.5	0.053	1.028	1.008	0.055
	Band38/50%RB#0	2	Back	38150	2610	22.38	0.08	22.5	0.232	1.028	1.008	0.240
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	0	Front	41140	2645	23.66	0.11	24.0	0.216	1.081	1.008	0.235
	Band41/1RB#49	0	Back	41140	2645	23.66	0.11	24.0	0.296	1.081	1.008	0.323
	Band41C/1RB#99	0	Back	41140+40942	2645+2625.2	23.19	0.01	24.0	0.138	1.205	1.008	0.168
	Band41/1RB#49	2	Front	41140	2645	23.66	0.06	24.0	0.070	1.081	1.008	0.076
37	Band41/1RB#49	2	Back	41140	2645	23.66	0.00	24.0	0.390	1.081	1.008	0.425
	Band41/50%RB#0	0	Front	41140	2645	22.61	0.10	23.0	0.187	1.094	1.008	0.206
	Band41/50%RB#0	0	Back	41140	2645	22.61	-0.16	23.0	0.253	1.094	1.008	0.279
	Band41/50%RB#0	2	Front	41140	2645	22.61	0.15	23.0	0.053	1.094	1.008	0.058
	Band41/50%RB#0	2	Back	41140	2645	22.61	0.09	23.0	0.307	1.094	1.008	0.339
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
38	Band66/1RB#49	0	Front	132072	1720	23.90	0.09	24.0	0.289	1.023	0.296
	Band66/1RB#49	0	Back	132072	1720	23.90	0.15	24.0	0.339	1.023	0.347
	Band66C/1RB#99	0	Back	132072+132270	1720+1739.8	23.43	-0.05	24.0	0.152	1.140	0.173
	Band66/1RB#49	2	Front	132072	1720	23.90	-0.04	24.0	0.092	1.023	0.094
	Band66/1RB#49	2	Back	132072	1720	23.90	0.01	24.0	0.211	1.023	0.216
	Band66/50%RB#0	0	Front	132322	1745	22.76	0.02	23.0	0.228	1.057	0.241
	Band66/50%RB#0	0	Back	132322	1745	22.76	0.03	23.0	0.286	1.057	0.302
	Band66/50%RB#0	2	Front	132322	1745	22.76	0.13	23.0	0.074	1.057	0.078
	Band66/50%RB#0	2	Back	132322	1745	22.76	-0.05	23.0	0.175	1.057	0.185
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b		Front	6	2437	18.04	0.04	18.5	0.052	1.112	1.000	0.057
39	2.4GHz/802.11b		Back	6	2437	18.04	0.04	18.5	0.129	1.112	1.000	0.143
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.2GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a		Front	48	5240	16.45	0.00	16.5	0.055	1.012	1.000	0.056
40	5.2GHz/802.11a		Back	48	5240	16.45	-0.05	16.5	0.185	1.012	1.000	0.187
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.3GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.3GHz/802.11a		Front	64	5320	16.54	0.00	17.0	0.065	1.112	1.000	0.072
41	5.3GHz/802.11a		Back	64	5320	16.54	0.05	17.0	0.173	1.112	1.000	0.192
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.6GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.6GHz/802.11a		Front	140	5700	16.12	0.00	16.5	0.089	1.091	1.000	0.097
42	5.6GHz/802.11a		Back	140	5700	16.12	0.05	16.5	0.171	1.091	1.000	0.187
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8GHz Wi-Fi Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a		Front	157	5785	16.39	0.00	16.5	0.085	1.026	1.000	0.087
43	5.8GHz/802.11a		Back	157	5785	16.39	0.00	16.5	0.130	1.026	1.000	0.133
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ Bluetooth Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK		Front	39	2441	17.75	-0.01	18.0	0.015	1.059	1.000	0.015
44	BT/GFSK		Back	39	2441	17.75	0.03	18.0	0.027	1.059	1.000	0.029
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

Note:

1. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call is selected to be tested.
4. Per KDB 648474 D04v01r03, when the *Reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
6. Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
7. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
8. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
9. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
10. Highlight part of test data means repeated test.
11. *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show "<0.001* W/Kg" in the report.

15.3 Body SAR in Hotspot Mode

➤ GSM Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
23	GPRS850/4 slots	0	Front	251	848.8	29.76	0.00	30.0	0.603	1.057	0.637
	GPRS850/4 slots	0	Back	251	848.8	29.76	-0.06	30.0	0.526	1.057	0.556
	GPRS850/4 slots	0	Left	251	848.8	29.76	-0.03	30.0	0.200	1.057	0.211
	GPRS850/4 slots	0	Right	251	848.8	29.76	-0.10	30.0	0.463	1.057	0.489
	GPRS850/4 slots	0	Bottom	251	848.8	29.76	-0.05	30.0	0.510	1.057	0.539
	GPRS850/4 slots	2	Front	251	848.8	29.76	0.09	30.0	0.190	1.057	0.201
	GPRS850/4 slots	2	Back	251	848.8	29.76	-0.06	30.0	0.395	1.057	0.418
	GPRS850/4 slots	2	Left	251	848.8	29.76	-0.13	30.0	0.173	1.057	0.183
	GPRS850/4 slots	2	Top	251	848.8	29.76	-0.19	30.0	0.245	1.057	0.259
	GPRS1900/4 slots	0	Front	661	1880	26.53	0.10	27.0	0.186	1.114	0.207
	GPRS1900/4 slots	0	Back	661	1880	26.53	-0.10	27.0	0.188	1.114	0.209
	GPRS1900/4 slots	0	Left	661	1880	26.53	-0.06	27.0	0.056	1.114	0.062
	GPRS1900/4 slots	0	Right	661	1880	26.53	0.00	27.0	0.034	1.114	0.038
45	GPRS1900/4 slots	0	Bottom	661	1880	26.53	0.06	27.0	0.478	1.114	0.532
	GPRS1900/4 slots	2	Front	661	1880	26.53	-0.07	27.0	0.193	1.114	0.215
	GPRS1900/4 slots	2	Back	661	1880	26.53	-0.12	27.0	0.399	1.114	0.444
	GPRS1900/4 slots	2	Left	661	1880	26.53	0.13	27.0	0.059	1.114	0.065
	GPRS1900/4 slots	2	Top	661	1880	26.53	0.03	27.0	0.405	1.114	0.451
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ WCDMA Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	0	Front	9538	1907.6	24.02	-0.19	24.5	0.089	1.117	0.099
	Band II/RMC	0	Back	9538	1907.6	24.02	-0.18	24.5	0.077	1.117	0.086
	Band II/RMC	0	Left	9538	1907.6	24.02	0.19	24.5	0.009	1.117	0.010
	Band II/RMC	0	Right	9538	1907.6	24.02	0.14	24.5	0.189	1.117	0.211
46	Band II/RMC	0	Bottom	9538	1907.6	24.02	-0.13	24.5	0.221	1.117	0.247
	Band II/RMC	2	Front	9538	1907.6	24.02	-0.10	24.5	0.087	1.117	0.097
	Band II/RMC	2	Back	9538	1907.6	24.02	0.05	24.5	0.162	1.117	0.181
	Band II/RMC	2	Left	9538	1907.6	24.02	-0.19	24.5	0.032	1.117	0.036
	Band II/RMC	2	Top	9538	1907.6	24.02	0.06	24.5	0.174	1.117	0.194
	Band IV/RMC	0	Front	1312	1712.4	23.72	0.01	24.0	0.241	1.067	0.257
	Band IV/RMC	0	Back	1312	1712.4	23.72	0.08	24.0	0.314	1.067	0.335
	Band IV/RMC	0	Left	1312	1712.4	23.72	-0.19	24.0	0.034	1.067	0.036
	Band IV/RMC	0	Right	1312	1712.4	23.72	-0.01	24.0	0.626	1.067	0.668
47	Band IV/RMC	0	Bottom	1312	1712.4	23.72	-0.07	24.0	0.638	1.067	0.681
	Band IV/RMC	2	Front	1312	1712.4	23.72	-0.08	24.0	0.103	1.067	0.110
	Band IV/RMC	2	Back	1312	1712.4	23.72	0.02	24.0	0.205	1.067	0.219
	Band IV/RMC	2	Left	1312	1712.4	23.72	-0.04	24.0	0.038	1.067	0.041
	Band IV/RMC	2	Top	1312	1712.4	23.72	-0.10	24.0	0.219	1.067	0.234
	Band V/RMC	0	Front	4132	826.4	24.32	-0.02	24.5	0.278	1.042	0.290
27	Band V/RMC	0	Back	4132	826.4	24.32	-0.01	24.5	0.305	1.042	0.318
	Band V/RMC	0	Left	4132	826.4	24.32	-0.06	24.5	0.095	1.042	0.098
	Band V/RMC	0	Right	4132	826.4	24.32	-0.01	24.5	0.217	1.042	0.226
	Band V/RMC	0	Bottom	4132	826.4	24.32	-0.08	24.5	0.251	1.042	0.262
	Band V/RMC	2	Front	4132	826.4	24.32	-0.07	24.5	0.103	1.042	0.107
	Band V/RMC	2	Back	4132	826.4	24.32	0.02	24.5	0.200	1.042	0.208
	Band V/RMC	2	Left	4132	826.4	24.32	-0.05	24.5	0.128	1.042	0.133
	Band V/RMC	2	Top	4132	826.4	24.32	-0.02	24.5	0.188	1.042	0.196
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	0	Front	19100	1900	24.25	0.06	24.5	0.097	1.059	0.102
	Band2/1RB#49	0	Back	19100	1900	24.25	0.20	24.5	0.096	1.059	0.102
	Band2/1RB#49	0	Left	19100	1900	24.25	-0.03	24.5	0.028	1.059	0.030
	Band2/1RB#49	0	Right	19100	1900	24.25	0.06	24.5	0.015	1.059	0.016
48	Band2/1RB#49	0	Bottom	19100	1900	24.25	-0.06	24.5	0.218	1.059	0.231
	Band2C/1RB#99	0	Bottom	19100+18902	1900+1880.2	23.85	0.13	24.0	0.188	1.035	0.195
	Band2/1RB#49	2	Front	19100	1900	24.25	-0.07	24.5	0.081	1.059	0.086
	Band2/1RB#49	2	Back	19100	1900	24.25	0.05	24.5	0.173	1.059	0.183
	Band2C/1RB#99	2	Back	19100+18902	1900+1880.2	23.85	0.05	24.0	0.151	1.035	0.156
	Band2/1RB#49	2	Left	19100	1900	24.25	-0.03	24.5	0.030	1.059	0.032
	Band2/1RB#49	2	Top	19100	1900	24.25	-0.09	24.5	0.206	1.059	0.218
	Band2/1RB#49	0	Front	19100	1900	24.25	0.06	24.5	0.097	1.059	0.102
	Band2/50%RB#0	0	Front	19100	1900	23.13	-0.02	23.5	0.074	1.089	0.081
	Band2/50%RB#0	0	Back	19100	1900	23.13	-0.15	23.5	0.071	1.089	0.077
	Band2/50%RB#0	0	Left	19100	1900	23.13	-0.07	23.5	0.022	1.089	0.024
	Band2/50%RB#0	0	Right	19100	1900	23.13	-0.02	23.5	0.013	1.089	0.014
	Band2/50%RB#0	0	Bottom	19100	1900	23.13	0.07	23.5	0.203	1.089	0.221
	Band2/50%RB#0	2	Front	19100	1900	23.13	0.08	23.5	0.064	1.089	0.070
	Band2/50%RB#0	2	Back	19100	1900	23.13	0.16	23.5	0.136	1.089	0.148
	Band2/50%RB#0	2	Left	19100	1900	23.13	0.04	23.5	0.021	1.089	0.023
	Band2/50%RB#0	2	Top	19100	1900	23.13	-0.11	23.5	0.162	1.089	0.176
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 4(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#49	0	Front	20050	1720	23.75	0.15	24.0	0.309	1.059	0.327
	Band4/1RB#49	0	Back	20050	1720	23.75	0.05	24.0	0.373	1.059	0.395
	Band4/1RB#49	0	Left	20050	1720	23.75	0.07	24.0	0.085	1.059	0.090
	Band4/1RB#49	0	Right	20050	1720	23.75	0.08	24.0	0.053	1.059	0.056
49	Band4/1RB#49	0	Bottom	20050	1720	23.75	-0.13	24.0	0.709	1.059	0.751
	Band4/1RB#49	2	Front	20050	1720	23.75	-0.16	24.0	0.103	1.059	0.109
	Band4/1RB#49	2	Back	20050	1720	23.75	0.07	24.0	0.199	1.059	0.211
	Band4/1RB#49	2	Left	20050	1720	23.75	0.09	24.0	0.038	1.059	0.040
	Band4/1RB#49	2	Top	20050	1720	23.75	-0.15	24.0	0.209	1.059	0.221
	Band4/50%RB#0	0	Front	20175	1732.5	22.85	-0.07	23.0	0.263	1.035	0.272
	Band4/50%RB#0	0	Back	20175	1732.5	22.85	0.18	23.0	0.339	1.035	0.351
	Band4/50%RB#0	0	Left	20175	1732.5	22.85	0.10	23.0	0.065	1.035	0.067
	Band4/50%RB#0	0	Right	20175	1732.5	22.85	0.05	23.0	0.042	1.035	0.043
	Band4/50%RB#0	0	Bottom	20175	1732.5	22.85	0.08	23.0	0.623	1.035	0.645
	Band4/50%RB#0	2	Front	20175	1732.5	22.85	-0.11	23.0	0.095	1.035	0.098
	Band4/50%RB#0	2	Back	20175	1732.5	22.85	0.19	23.0	0.168	1.035	0.174
	Band4/50%RB#0	2	Left	20175	1732.5	22.85	-0.02	23.0	0.033	1.035	0.034
	Band4/50%RB#0	2	Top	20175	1732.5	22.85	-0.13	23.0	0.185	1.035	0.191
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#49	0	Front	20525	836.5	24.19	-0.09	24.5	0.326	1.074	0.350

30	Band5/1RB#49	0	Back	20525	836.5	24.19	0.01	24.5	0.386	1.074	0.415
	Band5B/1RB#49	0	Back	20476+20575	836.1+841.5	23.90	-0.01	24.5	0.355	1.148	0.408
	Band5/1RB#49	0	Left	20525	836.5	24.19	-0.11	24.5	0.123	1.074	0.132
	Band5/1RB#49	0	Right	20525	836.5	24.19	0.20	24.5	0.226	1.074	0.243
	Band5/1RB#49	0	Bottom	20525	836.5	24.19	0.13	24.5	0.241	1.074	0.259
	Band5/1RB#49	2	Front	20525	836.5	24.19	0.04	24.5	0.121	1.074	0.130
	Band5/1RB#49	2	Back	20525	836.5	24.19	0.14	24.5	0.208	1.074	0.223
	Band5/1RB#49	2	Left	20525	836.5	24.19	0.10	24.5	0.134	1.074	0.144
	Band5/1RB#49	2	Top	20525	836.5	24.19	0.12	24.5	0.168	1.074	0.180
	Band5/50%RB#0	0	Front	20450	829	23.14	0.07	23.5	0.285	1.086	0.310
	Band5/50%RB#0	0	Back	20450	829	23.14	-0.15	23.5	0.342	1.086	0.371
	Band5/50%RB#0	0	Left	20450	829	23.14	0.09	23.5	0.103	1.086	0.112
	Band5/50%RB#0	0	Right	20450	829	23.14	-0.20	23.5	0.203	1.086	0.220
	Band5/50%RB#0	0	Bottom	20450	829	23.14	-0.02	23.5	0.207	1.086	0.225
	Band5/50%RB#0	2	Front	20450	829	23.14	0.01	23.5	0.112	1.086	0.122
	Band5/50%RB#0	2	Back	20450	829	23.14	0.17	23.5	0.189	1.086	0.205
	Band5/50%RB#0	2	Left	20450	829	23.14	0.15	23.5	0.118	1.086	0.128
	Band5/50%RB#0	2	Top	20450	829	23.14	0.08	23.5	0.143	1.086	0.155
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	0	Front	20850	2510	23.33	0.04	23.5	0.304	1.040	0.316
	Band7/1RB#49	0	Back	20850	2510	23.33	-0.05	23.5	0.365	1.040	0.380
	Band7C/1RB#99	0	Back	20850+21048	2510+2529.8	23.18	-0.07	23.5	0.325	1.076	0.350
	Band7/1RB#49	0	Left	20850	2510	23.33	-0.14	23.5	0.093	1.040	0.097
	Band7/1RB#49	0	Right	20850	2510	23.33	-0.09	23.5	0.213	1.040	0.222
50	Band7/1RB#49	0	Bottom	20850	2510	23.33	0.05	23.5	0.613	1.040	0.638
	Band7C/1RB#99	0	Bottom	20850+21048	2510+2529.8	23.18	0.01	23.5	0.576	1.076	0.620
	Band7/1RB#49	2	Front	20850	2510	23.33	-0.08	23.5	0.076	1.040	0.079
	Band7/1RB#49	2	Back	20850	2510	23.33	-0.04	23.5	0.362	1.040	0.376
	Band7/1RB#49	2	Left	20850	2510	23.33	-0.05	23.5	0.025	1.040	0.026
	Band7/1RB#49	2	Top	20850	2510	23.33	-0.02	23.5	0.258	1.040	0.268
	Band7/50%RB#0	0	Front	20850	2510	22.12	-0.17	22.5	0.249	1.091	0.272
	Band7/50%RB#0	0	Back	20850	2510	22.12	0.02	22.5	0.325	1.091	0.355
	Band7/50%RB#0	0	Left	20850	2510	22.12	-0.08	22.5	0.068	1.091	0.074
	Band7/50%RB#0	0	Right	20850	2510	22.12	0.12	22.5	0.189	1.091	0.206
	Band7/50%RB#0	0	Bottom	20850	2510	22.12	-0.11	22.5	0.528	1.091	0.576
	Band7/50%RB#0	2	Front	20850	2510	22.12	0.19	22.5	0.056	1.091	0.061
	Band7/50%RB#0	2	Back	20850	2510	22.12	0.12	22.5	0.254	1.091	0.277
	Band7/50%RB#0	2	Left	20850	2510	22.12	-0.19	22.5	0.017	1.091	0.019
	Band7/50%RB#0	2	Top	20850	2510	22.12	-0.02	22.5	0.187	1.091	0.204
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#49	0	Front	23130	711	23.80	0.02	24.5	0.181	1.175	0.213
	Band12/1RB#49	0	Back	23130	711	23.80	0.01	24.5	0.167	1.175	0.196
	Band12/1RB#49	0	Left	23130	711	23.80	-0.06	24.5	0.127	1.175	0.149
51	Band12/1RB#49	0	Right	23130	711	23.80	-0.05	24.5	0.258	1.175	0.303
	Band12/1RB#49	0	Bottom	23130	711	23.80	0.06	24.5	0.132	1.175	0.155
	Band12/1RB#49	2	Front	23130	711	23.80	0.02	24.5	0.063	1.175	0.074
	Band12/1RB#49	2	Back	23130	711	23.80	0.04	24.5	0.110	1.175	0.129
	Band12/1RB#49	2	Left	23130	711	23.80	-0.10	24.5	0.138	1.175	0.162
	Band12/1RB#49	2	Top	23130	711	23.80	0.00	24.5	0.072	1.175	0.085
	Band12/50%RB#12	0	Front	23130	711	22.78	-0.18	23.0	0.153	1.052	0.161
	Band12/50%RB#12	0	Back	23130	711	22.78	-0.12	23.0	0.112	1.052	0.118
	Band12/50%RB#12	0	Left	23130	711	22.78	-0.08	23.0	0.096	1.052	0.101
	Band12/50%RB#12	0	Right	23130	711	22.78	0.02	23.0	0.214	1.052	0.225
	Band12/50%RB#12	0	Bottom	23130	711	22.78	0.15	23.0	0.102	1.052	0.107
	Band12/50%RB#12	2	Front	23130	711	22.78	0.11	23.0	0.048	1.052	0.050
	Band12/50%RB#12	2	Back	23130	711	22.78	0.09	23.0	0.084	1.052	0.088
	Band12/50%RB#12	2	Left	23130	711	22.78	-0.18	23.0	0.107	1.052	0.113
	Band12/50%RB#12	2	Top	23130	711	22.78	0.01	23.0	0.052	1.052	0.055
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 13(10MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#24	0	Front	23230	782	23.78	0.03	24.0	0.207	1.052	0.218
	Band13/1RB#24	0	Back	23230	782	23.78	0.00	24.0	0.267	1.052	0.281
	Band13/1RB#24	0	Left	23230	782	23.78	-0.06	24.0	0.127	1.052	0.134
52	Band13/1RB#24	0	Right	23230	782	23.78	-0.06	24.0	0.301	1.052	0.317
	Band13/1RB#24	0	Bottom	23230	782	23.78	0.15	24.0	0.200	1.052	0.210
	Band13/1RB#24	2	Front	23230	782	23.78	0.01	24.0	0.077	1.052	0.081
	Band13/1RB#24	2	Back	23230	782	23.78	-0.02	24.0	0.120	1.052	0.126
	Band13/1RB#24	2	Left	23230	782	23.78	-0.01	24.0	0.116	1.052	0.122
	Band13/1RB#24	2	Top	23230	782	23.78	-0.05	24.0	0.099	1.052	0.104
	Band13/50%RB#12	0	Front	23230	782	22.72	0.17	23.0	0.175	1.067	0.187
	Band13/50%RB#12	0	Back	23230	782	22.72	-0.12	23.0	0.218	1.067	0.233
	Band13/50%RB#12	0	Left	23230	782	22.72	0.07	23.0	0.098	1.067	0.105
	Band13/50%RB#12	0	Right	23230	782	22.72	0.02	23.0	0.251	1.067	0.268
	Band13/50%RB#12	0	Bottom	23230	782	22.72	0.19	23.0	0.162	1.067	0.173
	Band13/50%RB#12	2	Front	23230	782	22.72	-0.15	23.0	0.054	1.067	0.058
	Band13/50%RB#12	2	Back	23230	782	22.72	0.03	23.0	0.103	1.067	0.110
	Band13/50%RB#12	2	Left	23230	782	22.72	-0.16	23.0	0.095	1.067	0.101
	Band13/50%RB#12	2	Top	23230	782	22.72	0.16	23.0	0.074	1.067	0.079
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 17(10MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1q} (W/kg)	Scaling Factor	Reported SAR _{1q} (W/kg)
	Band17/1RB#24	0	Front	23790	710	23.85	0.01	24.0	0.182	1.035	0.188
	Band17/1RB#24	0	Back	23790	710	23.85	-0.02	24.0	0.179	1.035	0.185
	Band17/1RB#24	0	Left	23790	710	23.85	0.12	24.0	0.074	1.035	0.077
53	Band17/1RB#24	0	Right	23790	710	23.85	-0.06	24.0	0.268	1.035	0.277
	Band17/1RB#24	0	Bottom	23790	710	23.85	0.15	24.0	0.118	1.035	0.122
	Band17/1RB#24	2	Front	23790	710	23.85	-0.14	24.0	0.069	1.035	0.071
	Band17/1RB#24	2	Back	23790	710	23.85	0.08	24.0	0.128	1.035	0.132
	Band17/1RB#24	2	Left	23790	710	23.85	-0.03	24.0	0.147	1.035	0.152
	Band17/1RB#24	2	Top	23790	710	23.85	0.01	24.0	0.082	1.035	0.085
	Band17/50%RB#0	0	Front	23800	711	22.75	0.14	23.0	0.154	1.059	0.163
	Band17/50%RB#0	0	Back	23800	711	22.75	-0.07	23.0	0.148	1.059	0.157
	Band17/50%RB#0	0	Left	23800	711	22.75	0.18	23.0	0.054	1.059	0.057
	Band17/50%RB#0	0	Right	23800	711	22.75	-0.11	23.0	0.214	1.059	0.227
	Band17/50%RB#0	0	Bottom	23800	711	22.75	0.00	23.0	0.103	1.059	0.109
	Band17/50%RB#0	2	Front	23800	711	22.75	-0.10	23.0	0.052	1.059	0.055
	Band17/50%RB#0	2	Back	23800	711	22.75	0.17	23.0	0.107	1.059	0.113
	Band17/50%RB#0	2	Left	23800	711	22.75	-0.12	23.0	0.117	1.059	0.124
	Band17/50%RB#0	2	Top	23800	711	22.75	0.09	23.0	0.066	1.059	0.070
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 26(15MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1q} (W/kg)	Scaling Factor	Reported SAR _{1q} (W/kg)
	Band26/1RB#37	0	Front	26865	831.5	24.26	0.00	24.5	0.284	1.057	0.300
35	Band26/1RB#37	0	Back	26865	831.5	24.26	-0.01	24.5	0.331	1.057	0.350
	Band26/1RB#37	0	Left	26865	831.5	24.26	-0.05	24.5	0.112	1.057	0.118
	Band26/1RB#37	0	Right	26865	831.5	24.26	-0.08	24.5	0.231	1.057	0.244
	Band26/1RB#37	0	Bottom	26865	831.5	24.26	0.03	24.5	0.236	1.057	0.249
	Band26/1RB#37	2	Front	26865	831.5	24.26	-0.01	24.5	0.115	1.057	0.122
	Band26/1RB#37	2	Back	26865	831.5	24.26	-0.02	24.5	0.193	1.057	0.204
	Band26/1RB#37	2	Left	26865	831.5	24.26	-0.02	24.5	0.116	1.057	0.123
	Band26/1RB#37	2	Top	26865	831.5	24.26	-0.03	24.5	0.146	1.057	0.154
	Band26/50%RB#0	0	Front	26865	831.5	22.52	0.06	23.0	0.242	1.117	0.270
	Band26/50%RB#0	0	Back	26865	831.5	22.52	-0.02	23.0	0.302	1.117	0.337
	Band26/50%RB#0	0	Left	26865	831.5	22.52	0.07	23.0	0.103	1.117	0.115
	Band26/50%RB#0	0	Right	26865	831.5	22.52	0.13	23.0	0.214	1.117	0.239
	Band26/50%RB#0	0	Bottom	26865	831.5	22.52	0.10	23.0	0.218	1.117	0.244
	Band26/50%RB#0	2	Front	26865	831.5	22.52	0.13	23.0	0.095	1.117	0.106
	Band26/50%RB#0	2	Back	26865	831.5	22.52	-0.11	23.0	0.123	1.117	0.137
	Band26/50%RB#0	2	Left	26865	831.5	22.52	0.01	23.0	0.098	1.117	0.109
	Band26/50%RB#0	2	Top	26865	831.5	22.52	-0.12	23.0	0.114	1.117	0.127
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band 38(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band38/1RB#49	0	Front	38150	2610	23.53	-0.14	24.0	0.213	1.114	1.008	0.239
	Band38/1RB#49	0	Back	38150	2610	23.53	0.17	24.0	0.290	1.114	1.008	0.326
	Band38C/1RB#99	0	Back	38150+37952	2610+2590.2	23.31	0.16	24.0	0.241	1.172	1.008	0.285
	Band38/1RB#49	0	Left	38150	2610	23.53	0.14	24.0	0.074	1.114	1.008	0.083
	Band38/1RB#49	0	Right	38150	2610	23.53	0.05	24.0	0.101	1.114	1.008	0.113
54	Band38/1RB#49	0	Bottom	38150	2610	23.53	0.08	24.0	0.369	1.114	1.008	0.414
	Band38C/1RB#99	0	Bottom	38150+37952	2610+2590.2	23.31	-0.13	24.0	0.325	1.172	1.008	0.384
	Band38/1RB#49	2	Front	38150	2610	23.53	0.08	24.0	0.062	1.114	1.008	0.070
	Band38/1RB#49	2	Back	38150	2610	23.53	0.07	24.0	0.274	1.114	1.008	0.308
	Band38/1RB#49	2	Left	38150	2610	23.53	-0.19	24.0	0.024	1.114	1.008	0.027
	Band38/1RB#49	2	Top	38150	2610	23.53	0.13	24.0	0.224	1.114	1.008	0.252
	Band38/50%RB#0	0	Front	38150	2610	22.38	0.03	22.5	0.201	1.028	1.008	0.208
	Band38/50%RB#0	0	Back	38150	2610	22.38	-0.20	22.5	0.241	1.028	1.008	0.250
	Band38/50%RB#0	0	Left	38150	2610	22.38	-0.04	22.5	0.063	1.028	1.008	0.065
	Band38/50%RB#0	0	Right	38150	2610	22.38	0.13	22.5	0.084	1.028	1.008	0.087
	Band38/50%RB#0	0	Bottom	38150	2610	22.38	0.14	22.5	0.328	1.028	1.008	0.340
	Band38/50%RB#0	2	Front	38150	2610	22.38	-0.13	22.5	0.053	1.028	1.008	0.055
	Band38/50%RB#0	2	Back	38150	2610	22.38	0.08	22.5	0.232	1.028	1.008	0.240
	Band38/50%RB#0	2	Left	38150	2610	22.38	0.06	22.5	0.017	1.028	1.008	0.018
	Band38/50%RB#0	2	Top	38150	2610	22.38	0.14	22.5	0.189	1.028	1.008	0.196
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	0	Front	41140	2645	23.66	0.11	24.0	0.216	1.081	1.008	0.235
	Band41/1RB#49	0	Back	41140	2645	23.66	0.11	24.0	0.296	1.081	1.008	0.323
	Band41C/1RB#99	0	Back	41140+40942	2645+2625.2	23.19	0.01	24.0	0.138	1.205	1.008	0.168
	Band41/1RB#49	0	Left	41140	2645	23.66	-0.02	24.0	0.080	1.081	1.008	0.087
	Band41/1RB#49	0	Right	41140	2645	23.66	-0.10	24.0	0.104	1.081	1.008	0.113
	Band41/1RB#49	0	Bottom	41140	2645	23.66	0.04	24.0	0.375	1.081	1.008	0.409
	Band41C/1RB#99	0	Bottom	41140+40942	2645+2625.2	23.19	-0.13	24.0	0.315	1.205	1.008	0.383
	Band41/1RB#49	2	Front	41140	2645	23.66	0.06	24.0	0.070	1.081	1.008	0.076
37	Band41/1RB#49	2	Back	41140	2645	23.66	0.00	24.0	0.390	1.081	1.008	0.425
	Band41/1RB#49	2	Left	41140	2645	23.66	-0.05	24.0	0.028	1.081	1.008	0.030
	Band41/1RB#49	2	Top	41140	2645	23.66	0.01	24.0	0.237	1.081	1.008	0.258
	Band41/50%RB#0	0	Front	41140	2645	22.61	0.10	23.0	0.187	1.094	1.008	0.206
	Band41/50%RB#0	0	Back	41140	2645	22.61	-0.16	23.0	0.253	1.094	1.008	0.279
	Band41/50%RB#0	0	Left	41140	2645	22.61	0.13	23.0	0.063	1.094	1.008	0.069
	Band41/50%RB#0	0	Right	41140	2645	22.61	0.11	23.0	0.074	1.094	1.008	0.082
	Band41/50%RB#0	0	Bottom	41140	2645	22.61	-0.12	23.0	0.327	1.094	1.008	0.361
	Band41/50%RB#0	2	Front	41140	2645	22.61	0.15	23.0	0.053	1.094	1.008	0.058
	Band41/50%RB#0	2	Back	41140	2645	22.61	0.09	23.0	0.307	1.094	1.008	0.339
	Band41/50%RB#0	2	Left	41140	2645	22.61	-0.03	23.0	0.021	1.094	1.008	0.023
	Band41/50%RB#0	2	Top	41140	2645	22.61	0.07	23.0	0.199	1.094	1.008	0.219
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)						
Spatial Peak						Averaged over 1g						
Uncontrolled Exposure/General Population												

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	0	Front	132072	1720	23.90	0.09	24.0	0.289	1.023	0.296
	Band66/1RB#49	0	Back	132072	1720	23.90	0.15	24.0	0.339	1.023	0.347
	Band66C/1RB#99	0	Back	132072+132270	1720+1739.8	23.43	-0.05	24.0	0.152	1.140	0.173
	Band66/1RB#49	0	Left	132072	1720	23.90	-0.06	24.0	0.038	1.023	0.039
	Band66/1RB#49	0	Right	132072	1720	23.90	0.11	24.0	0.062	1.023	0.064
55	Band66/1RB#49	0	Bottom	132072	1720	23.90	0.02	24.0	0.706	1.023	0.722
	Band66C/1RB#49	0	Bottom	132072+132270	1720+1739.8	23.43	0.18	24.0	0.488	1.140	0.556
	Band66/1RB#49	2	Front	132072	1720	23.90	-0.04	24.0	0.092	1.023	0.094
	Band66/1RB#49	2	Back	132072	1720	23.90	0.01	24.0	0.211	1.023	0.216
	Band66/1RB#49	2	Left	132072	1720	23.90	0.02	24.0	0.020	1.023	0.020
	Band66/1RB#49	2	Top	132072	1720	23.90	-0.08	24.0	0.218	1.023	0.223
	Band66/50%RB#0	0	Front	132322	1745	22.76	0.02	23.0	0.228	1.057	0.241
	Band66/50%RB#0	0	Back	132322	1745	22.76	0.03	23.0	0.286	1.057	0.302
	Band66/50%RB#0	0	Left	132322	1745	22.76	-0.10	23.0	0.027	1.057	0.029
	Band66/50%RB#0	0	Right	132322	1745	22.76	0.17	23.0	0.046	1.057	0.049
	Band66/50%RB#0	0	Bottom	132322	1745	22.76	-0.04	23.0	0.623	1.057	0.659
	Band66/50%RB#0	2	Front	132322	1745	22.76	0.13	23.0	0.074	1.057	0.078
	Band66/50%RB#0	2	Back	132322	1745	22.76	-0.05	23.0	0.175	1.057	0.185
	Band66/50%RB#0	2	Left	132322	1745	22.76	0.09	23.0	0.013	1.057	0.014
	Band66/50%RB#0	2	Top	132322	1745	22.76	-0.03	23.0	0.192	1.057	0.203
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)					
Spatial Peak						Averaged over 1g					
Uncontrolled Exposure/General Population											

➤ WLAN 2.4GHz Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b		Front	6	2437	18.04	0.04	18.5	0.052	1.112	1.000	0.057
	2.4GHz/802.11b		Back	6	2437	18.04	0.04	18.5	0.129	1.112	1.000	0.143
56	2.4GHz/802.11b		Right	6	2437	18.04	0.10	18.5	0.160	1.112	1.000	0.178
	2.4GHz/802.11b		Top	6	2437	18.04	0.11	18.5	0.013	1.112	1.000	0.014
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.2GHz Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11a		Front	48	5240	16.45	0.00	16.5	0.055	1.012	1.000	0.056
40	5.2GHz/802.11a		Back	48	5240	16.45	-0.05	16.5	0.185	1.012	1.000	0.187
	5.2GHz/802.11a		Right	48	5240	16.45	-0.06	16.5	0.054	1.012	1.000	0.055
	5.2GHz/802.11a		Top	48	5240	16.45	-0.03	16.5	0.080	1.012	1.000	0.080
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8GHz Wi-Fi Body SAR in Hotspot Mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a		Front	157	5785	16.39	0.00	16.5	0.085	1.026	1.000	0.087
	5.8GHz/802.11a		Back	157	5785	16.39	0.00	16.5	0.130	1.026	1.000	0.133
	5.8GHz/802.11a		Right	157	5785	16.39	0.00	16.5	0.075	1.026	1.000	0.077
57	5.8GHz/802.11a		Top	157	5785	16.39	-0.02	16.5	0.153	1.026	1.000	0.157
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ Bluetooth Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK		Front	39	2441	17.75	-0.01	18.0	0.015	1.059	1.000	0.015
	BT/GFSK		Back	39	2441	17.75	0.03	18.0	0.027	1.059	1.000	0.029
58	BT/GFSK		Right	39	2441	17.75	0.07	18.0	0.057	1.059	1.000	0.060
	BT/GFSK		Top	39	2441	17.75	0.09	18.0	0.003	1.059	1.000	0.003
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Additional WLAN SAR testing was performed for simultaneous transmission analysis.
- For Hotspot SAR testing, per KDB 941225 D06v02r01, for EUT dimension ≥ 9 cm*5cm, the test distance is 10mm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is < 0.25 dB higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA SAR evaluation can be excluded.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.
- *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show " <0.001 * W/Kg" in the report.

15.4 Multi-Band Simultaneous Transmission Considerations

➤ Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

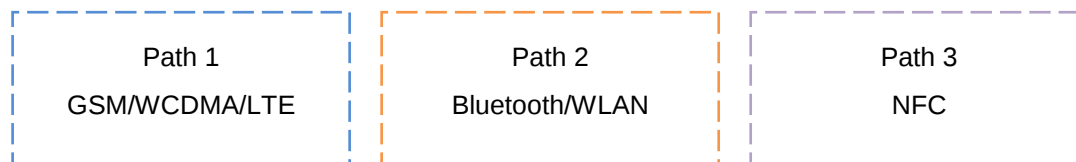


Fig.15.1 Simultaneous Transmission Paths

➤ Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} \cdot \frac{\text{Max power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Head	Body	Hotspot
		Test Distance (mm)	0	10	10
NFC	-44.0	Estimated SAR (W/kg)	0	0	0

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.

➤ Multi-Band simultaneous Transmission Consideration

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	WWAN (Voice) + WLAN 2.4 GHz/5.2GHz/5.3 GHz/5.6GHz/5.8GHz+ NFC
		WWAN (Voice) + Bluetooth+ NFC
	Body	WWAN (Data) + WLAN 2.4 GHz/5.2GHz/5.3 GHz/5.6GHz/5.8GHz+ NFC
		WWAN (Data) + Bluetooth+ NFC
	Hotspot	WWAN (Data) + WLAN 2.4 GHz/5.2GHz/5.3 GHz/5.6GHz/5.8GHz+ NFC
		WWAN (Data) + Bluetooth+ NFC

Note:

- WLAN 2.4GHz Band, WLAN 5.2GHz Band, WLAN 5.3GHz Band , WLAN 5.6GHz Band,WLAN 5.8GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

15.5 SAR Simultaneous Transmission Analysis

➤ Simultaneous Transmission

Position		Standalone SAR(W/kg)					Σ SAR _{1g} (W/kg)	
		1	2	3	4	5	1+2+5	1+3+4+5
		WWAN	2.4G WLAN	5G WLAN	BT	NFC		
Head	Right Cheek	0.547	0.051	0.314	0.047	0.000	0.598	0.908
	Right Tilted	0.510	0.031	0.351	0.015	0.000	0.541	0.876
	Left Cheek	0.406	0.340	0.352	0.103	0.000	0.746	0.861
	Left Tilted	0.452	0.077	0.393	0.042	0.000	0.529	0.887
Body-worn	Front	0.637	0.057	0.097	0.015	0.000	0.694	0.749
	Back	0.556	0.143	0.192	0.029	0.000	0.699	0.777
Hotspot	Front	0.637	0.057	0.087	0.015	0.000	0.694	0.739
	Back	0.556	0.143	0.187	0.029	0.000	0.699	0.772
	Left	0.211	0.000	0.000	0.000	0.000	0.211	0.211
	Right	0.668	0.178	0.077	0.060	0.000	0.846	0.805
	Top	0.451	0.014	0.157	0.003	0.000	0.465	0.611
	Bottom	0.751	0.000	0.000	0.000	0.000	0.751	0.751

➤ Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

15.6 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528: 2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

15.7 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested. Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4]. SPEAG DASY52 System Handbook
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D01 v06, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, October 2015
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMNT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 941225 D06 v02r01, “SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [11]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

Test Laboratory: JYTSZ

Date: 2025/6/21

DUT: Dipole 750 MHz; Type: D750V3; Serial: SN:1118

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 42.988$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(10.65, 10.65, 10.65) @ 750 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 750 MHz Head Tissue/d=15mm, Pin=80 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.27 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm


Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 0.913 W/kg

System Performance Check at Frequency 750 MHz Head Tissue/d=15mm, Pin=80 mW, dist=1.4mm (EX-Probe)/Area Scan (41x151x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.919 W/kg

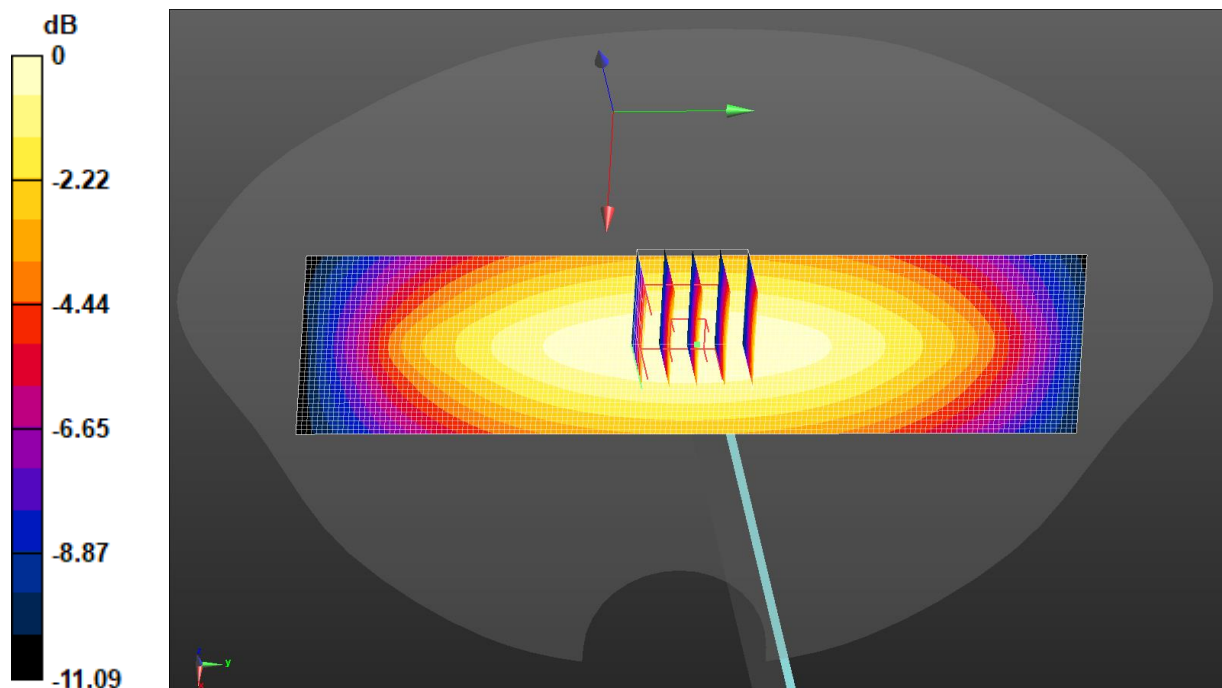

0 dB = 0.913 W/kg = -0.40 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/22

DUT: Dipole 835 MHz; Type: D835V2; Serial: SN:4D154


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(10.25, 10.25, 10.25) @ 835 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 835 MHz Head Tissue/d=15mm, Pin=80 mW, dist=1.4mm (EX-Probe)/Area Scan (41x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

System Performance Check at Frequency 835 MHz Head Tissue/d=15mm, Pin=80 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 34.86 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.471 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 60.5%
Maximum value of SAR (measured) = 1.04 W/kg

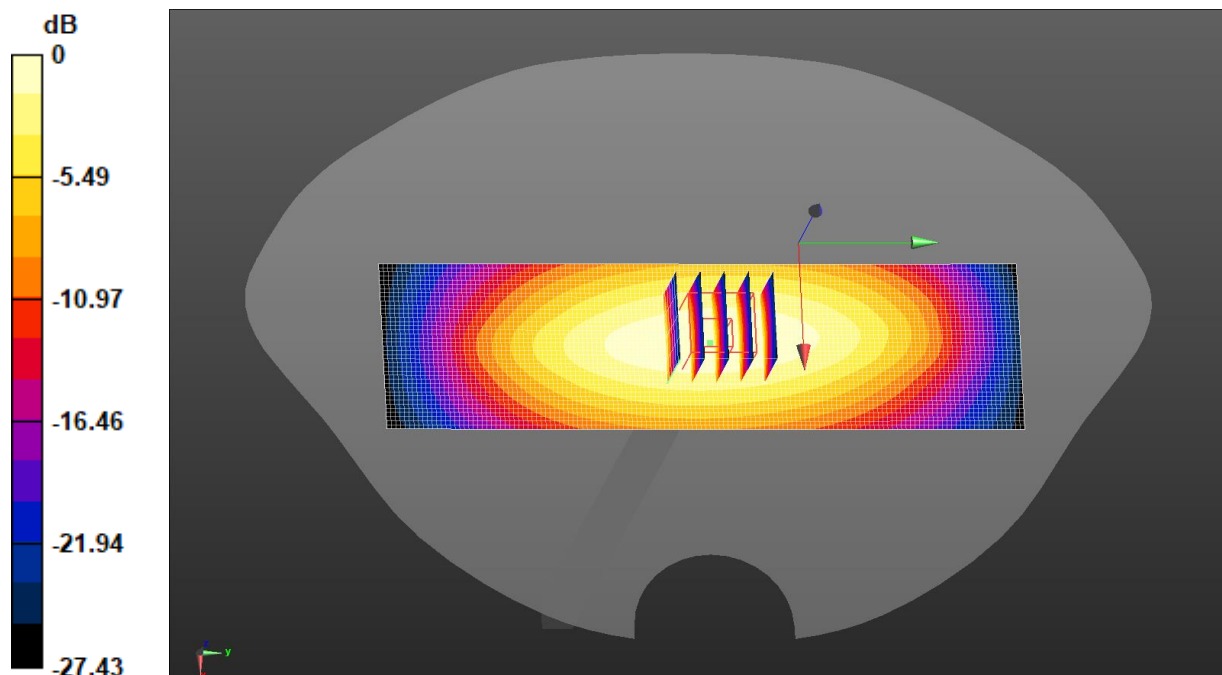

0 dB = 1.04 W/kg = 0.15 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/20

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: SN:1177

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 41.246$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 1750 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.30 W/kg

System Performance Check at Frequency 1750 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.51 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 1.48 W/kg; SAR(10 g) = 0.791 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 2.30 W/kg

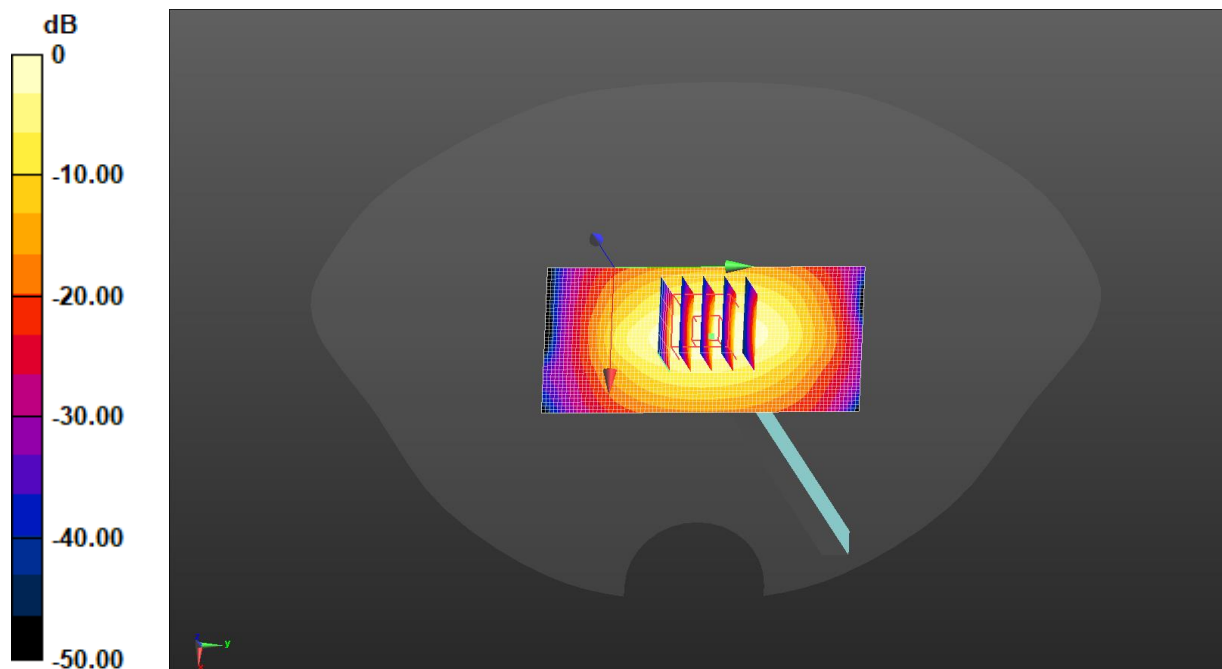

$$0 \text{ dB} = 2.30 \text{ W/kg} = 3.61 \text{ dBW/kg}$$

Test Laboratory: JYTSZ

Date: 2025/6/23

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d175


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 41.036$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(8.42, 8.42, 8.42) @ 1900 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 1900 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.64 W/kg

System Performance Check at Frequency 1900 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 43.70 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.04 W/kg
SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.816 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.2%
Maximum value of SAR (measured) = 2.50 W/kg

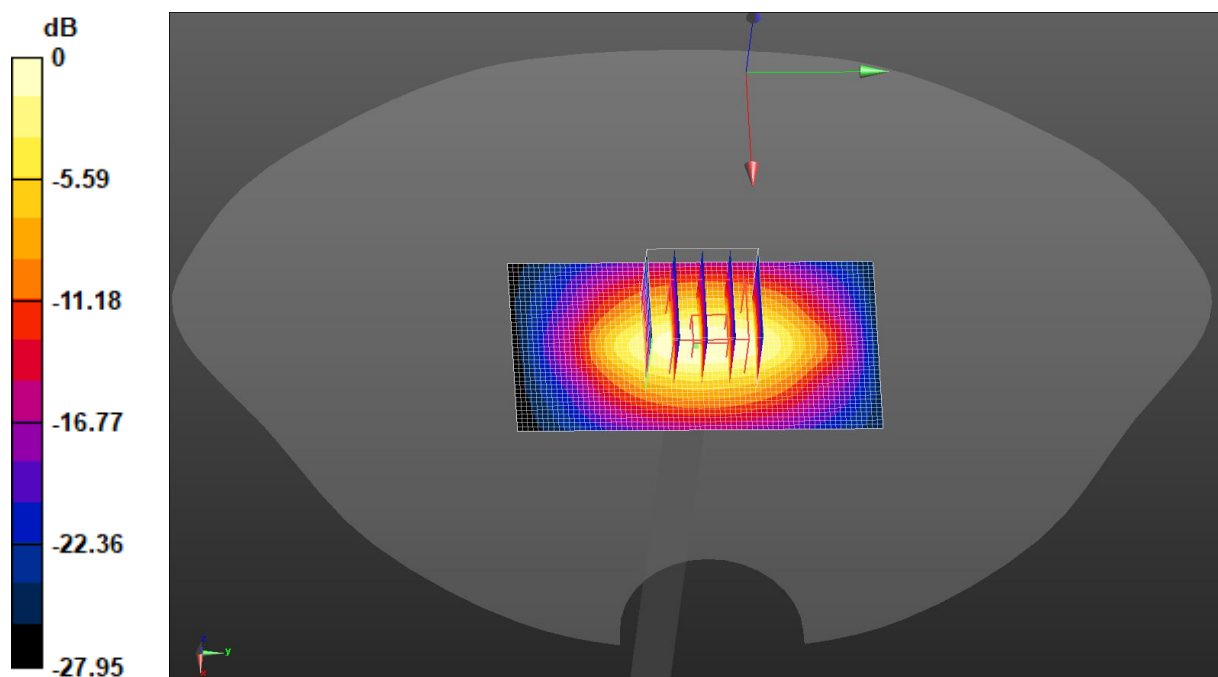

0 dB = 2.64 W/kg = 4.21 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/25

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:910

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.236$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(7.84, 7.84, 7.84) @ 2450 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 2450 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (51x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.61 W/kg

System Performance Check at Frequency 2450 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.19 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 4.31 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 0.973 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 3.35 W/kg

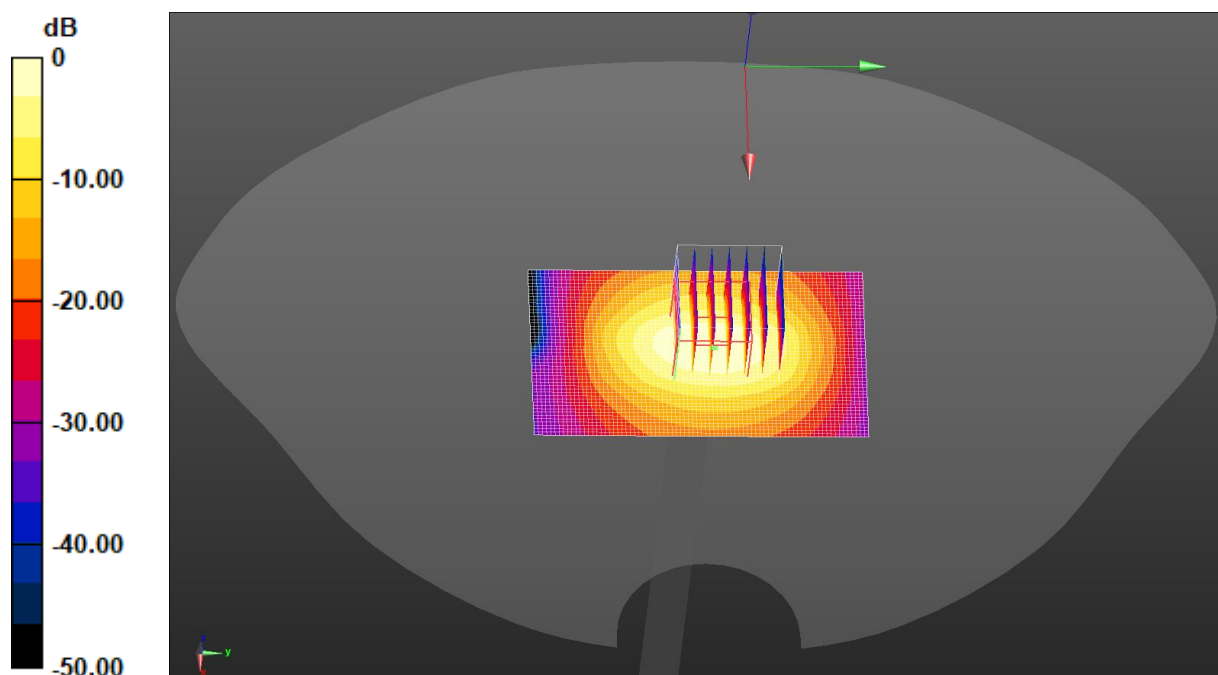

0 dB = 3.61 W/kg = 5.57 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/24

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: SN:1114

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 39.971$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(7.66, 7.66, 7.66) @ 2600 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 2600 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.20 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.70 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 0.995 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm


Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 3.49 W/kg

System Performance Check at Frequency 2600 MHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (51x71x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.09 W/kg

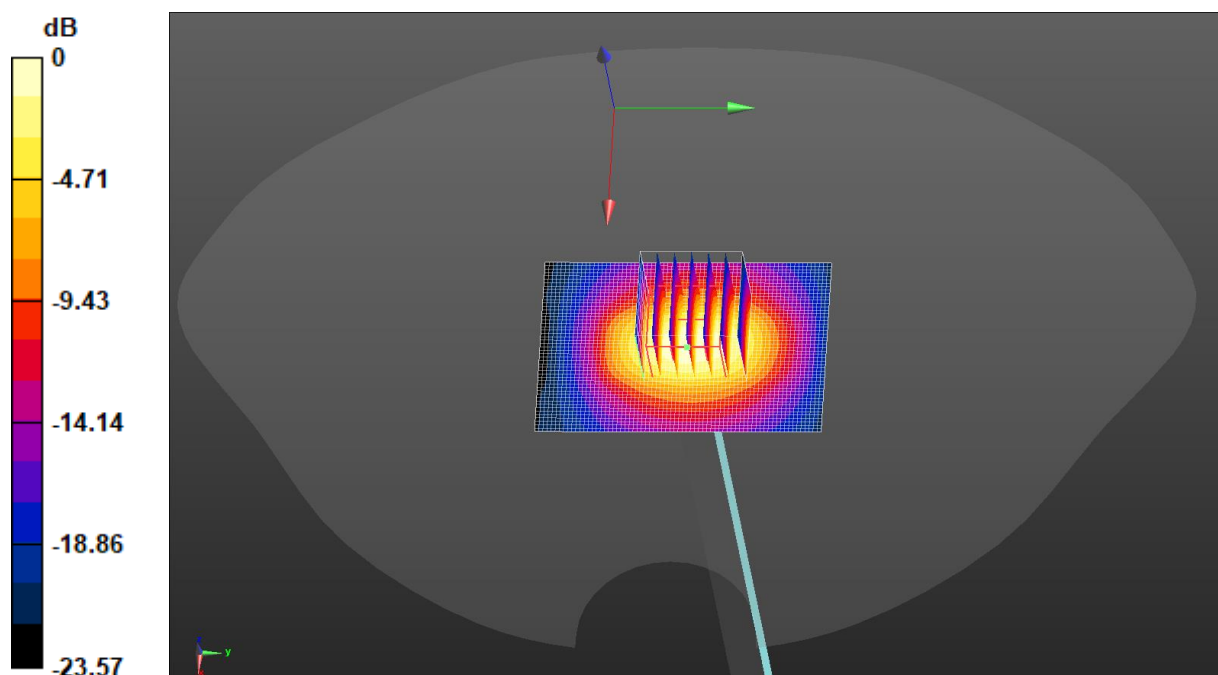

0 dB = 3.49 W/kg = 5.43 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/29

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: SN:1320

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.558$ S/m; $\epsilon_r = 36.525$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(5.52, 5.52, 5.52) @ 5200 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.10 W/kg

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.74 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 0.916 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 7.95 W/kg

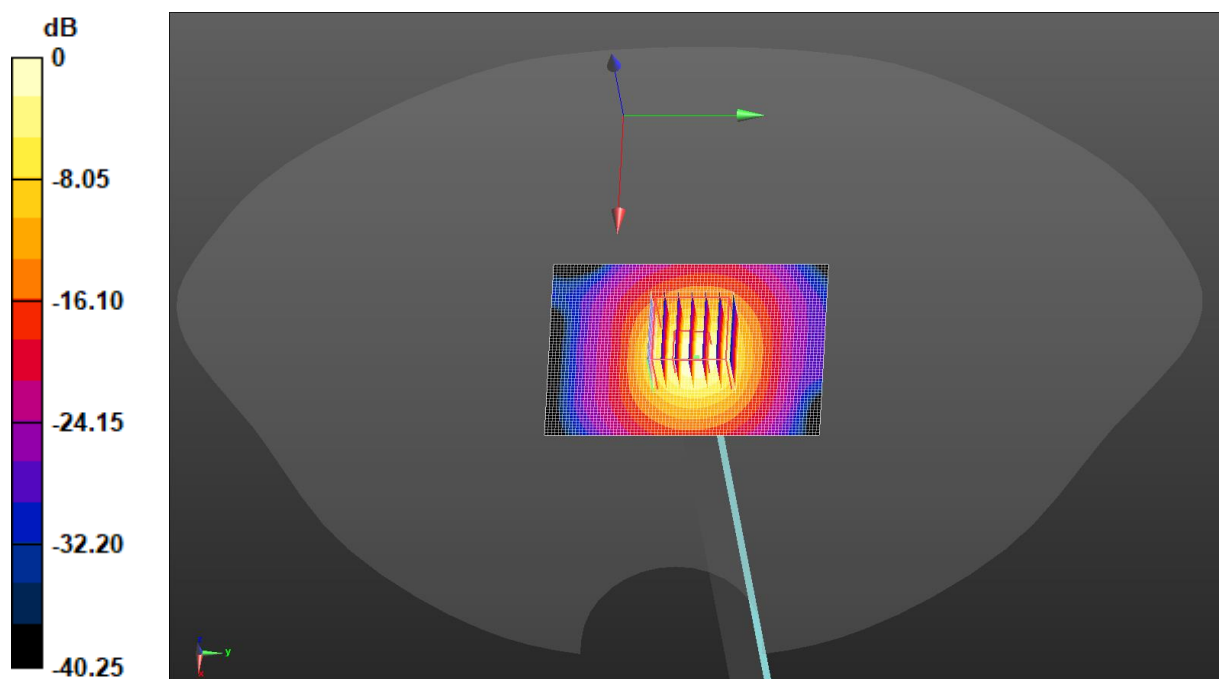

0 dB = 7.95 W/kg = 9.00 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/29

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: SN:1320

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.662$ S/m; $\epsilon_r = 36.367$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(5.52, 5.52, 5.52) @ 5300 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.73 W/kg

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 39.78 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 14.1 W/kg

SAR(1 g) = 3.37 W/kg; SAR(10 g) = 0.955 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 8.64 W/kg

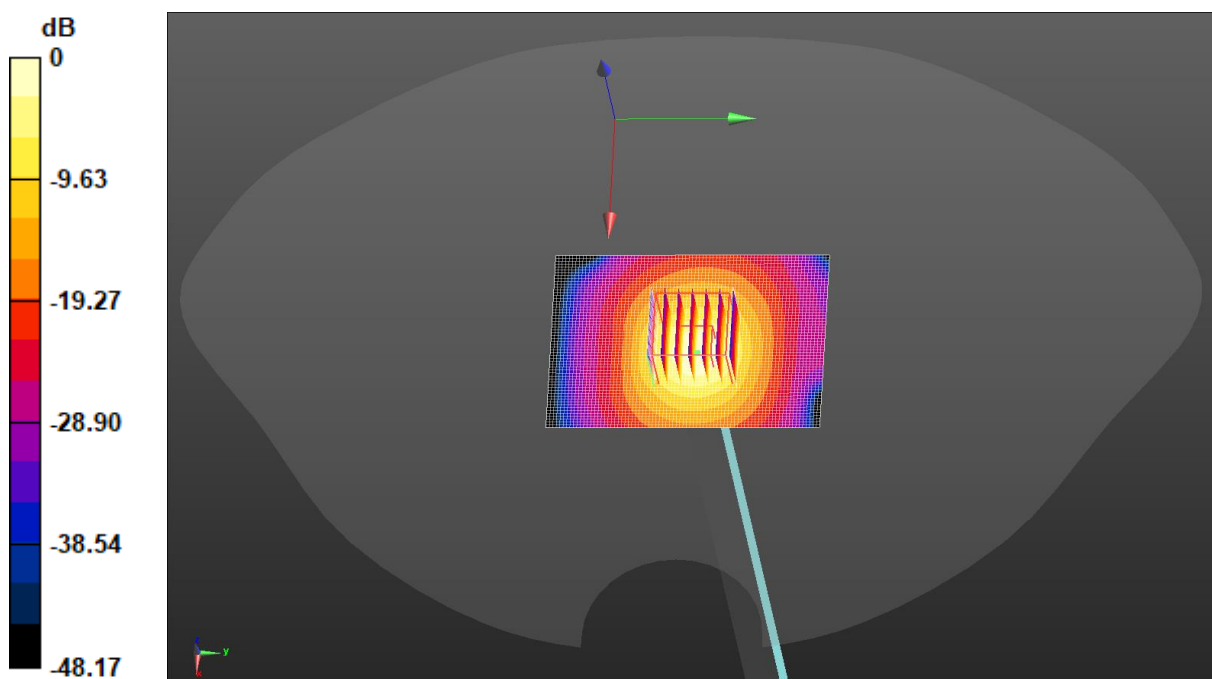

0 dB = 8.64 W/kg = 9.37 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/30

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: SN:1320

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.983$ S/m; $\epsilon_r = 36.119$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.13 W/kg

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.67 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 0.977 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 8.89 W/kg

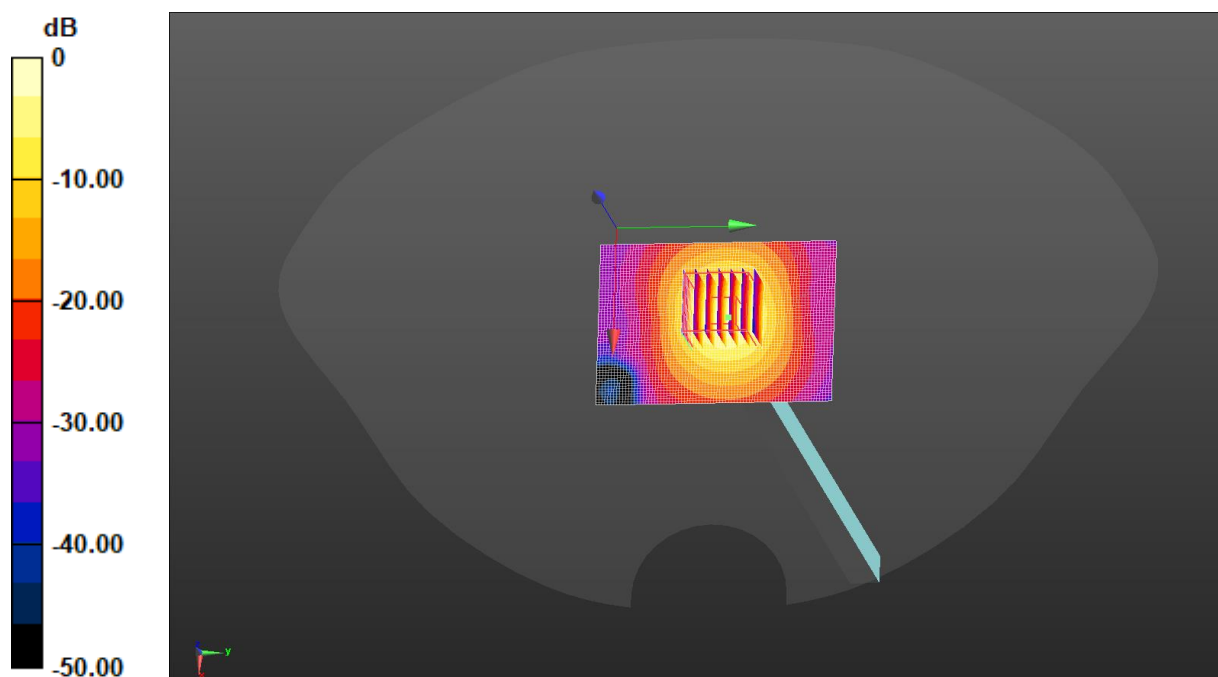

0 dB = 8.89 W/kg = 9.49 dBW/kg

Test Laboratory: JYTSZ

Date: 2025/6/30

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: SN:1320

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.198$ S/m; $\epsilon_r = 35.767$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7601; ConvF(5.07, 5.07, 5.07) @ 5800 MHz; Calibrated: 2025/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 2024/12/31
- Phantom: SAM-Twin; Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.53 W/kg

System Performance Check at Frequency 5GHz Head Tissue/d=10mm, Pin=40 mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.94 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 3.28 W/kg; SAR(10 g) = 0.924 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 8.45 W/kg

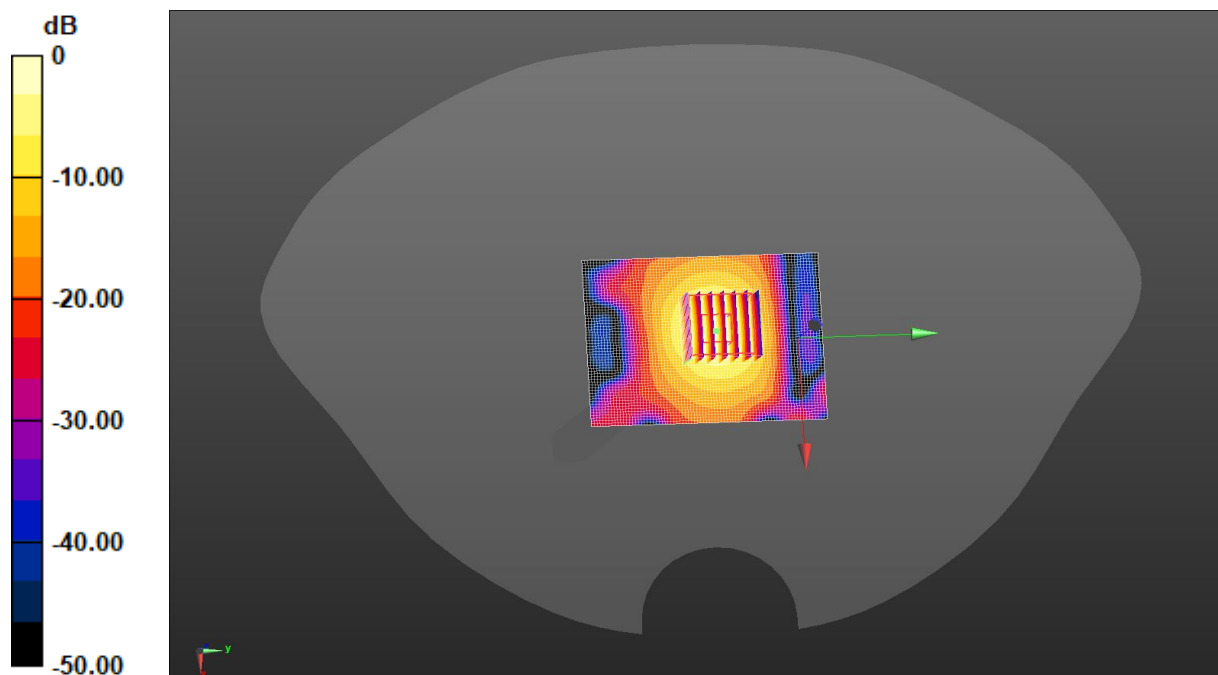

$$0 \text{ dB} = 8.45 \text{ W/kg} = 9.27 \text{ dBW/kg}$$