



FCC Test Report

APPLICANT : Nokia Shanghai Bell Co., Ltd.
EQUIPMENT : Nokia WiFi Beacon 2
BRAND NAME : Nokia
MODEL NAME : Beacon 2
FCC ID : 2ADZRBEACON2
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Oct. 22, 2020 ~ Feb. 15, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 6

 1.6. Test Location 6

 1.7. Test Software 6

 1.8. Applicable Standards 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 9

 2.3. Support Unit used in test configuration and system 9

 2.4. EUT Operation Test Setup 9

3. TEST RESULT 10

 3.1. Test of AC Conducted Emission Measurement 10

 3.2. Test of Radiated Emission Measurement 14

4. LIST OF MEASURING EQUIPMENT 20

5. UNCERTAINTY OF EVALUATION 21

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC093003-03	Rev. 01	Initial issue of report	Mar. 02, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 1.83 dB at 0.417 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.85 dB at 530.520 MHz for Quasi-Peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Nokia Shanghai Bell Co., Ltd.
No.388, Ningqiao Rd, Pilot Free Trade Zone Shanghai, 201206 P.R. China

1.2. Manufacturer

Nokia Shanghai Bell Co., Ltd.
No.388, Ningqiao Rd, Pilot Free Trade Zone Shanghai, 201206 P.R. China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Nokia WiFi Beacon 2
Brand Name	Nokia
Model Name	Beacon 2
FCC ID	2ADZRBEACON2
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n (HT20/HT40) WLAN 2.4GHz 802.11ax (HE20/HE40) WLAN 5GHz 802.11a/n/ac (HT20/HT40/VHT20/VHT40/VHT80) WLAN 5GHz 802.11ax (HE20/HE40/HE80)
HW Version	V1.0
SW Version	3FE49334
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, The differences between two samples are only for Antenna.
3. This is a variant report for Beacon 2. The change note could be referred to Beacon 2_Class II Permissive Change letter which is exhibit separately. According to the change, only worst cases of Radiated Emission are spot check from original report, all the other test cases are quoted on original report FC093003.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Rx Frequency	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Antenna Type	WLAN : Dipole Antenna
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LAN Link + WAN Link + Adapter 1 for sample 1 Mode 2: LAN Link + WAN Link + Adapter 2 for sample 1
Radiated Emissions	Mode 1: LAN Link + WAN Link + Adapter 1 for sample 1 Mode 2: LAN Link + WAN Link + Adapter 2 for sample 1 Mode 3: LAN Link + WAN Link + Adapter 2 for sample 2
Remark:	
<ol style="list-style-type: none"> The worst case of AC is mode 1; only the test data of this mode is reported. The worst case of RE is mode 2; only the test data of this mode is reported. 	

For Spot Check

Test Items	Function Type
Radiated Emissions	Mode 1: LAN Link + WAN Link + Adapter 2

2.2. Connection Diagram of Test System

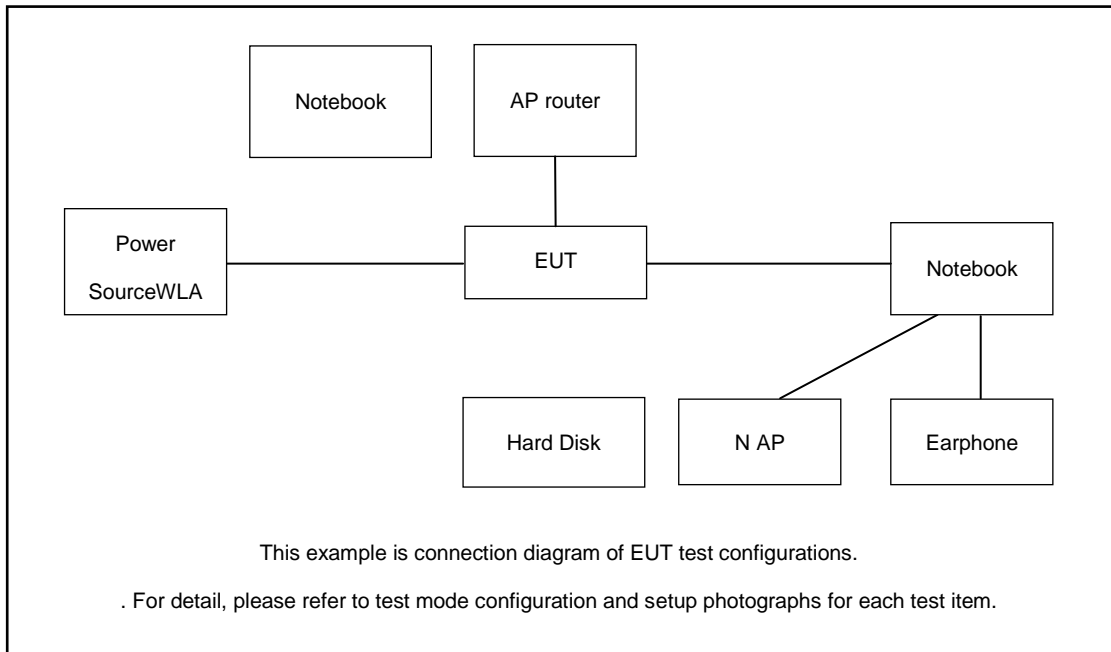

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	V130-141K B001	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
5.	Earphone	Lenovo	P121	N/A	N/A	Unshielded, 1.2m

2.4. EUT Operation Test Setup

The EUT was set in engineer test mode by software controlled via Notebook, and make the LAN/WLAN in Link mode.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

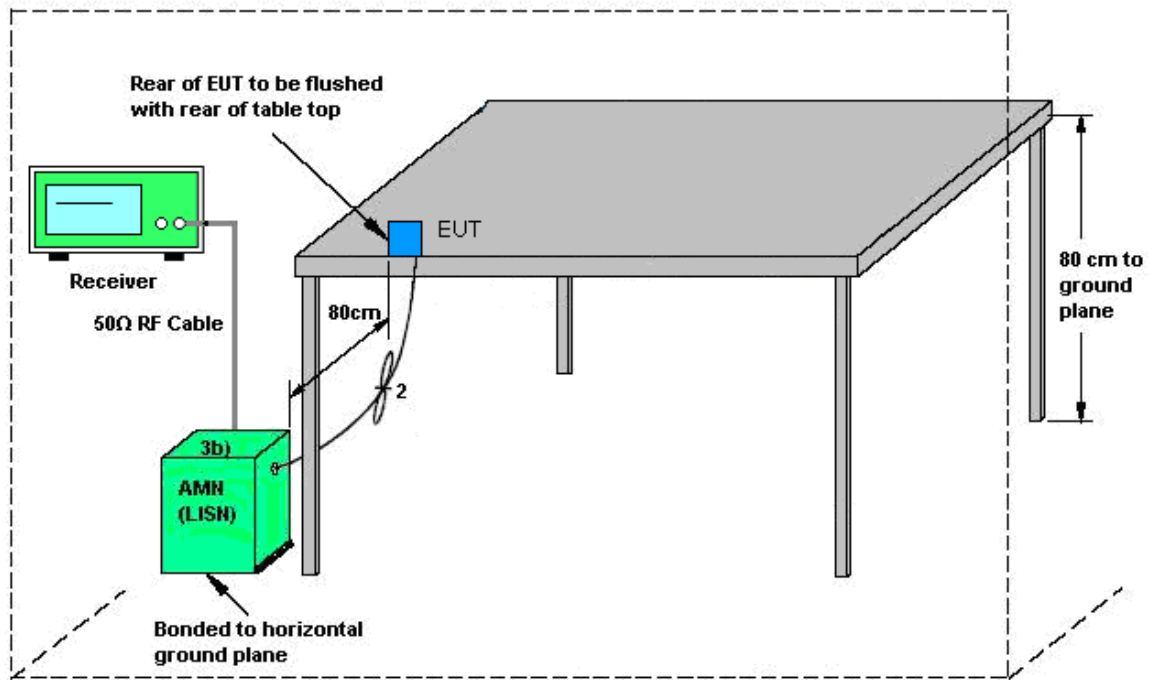


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3 ~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

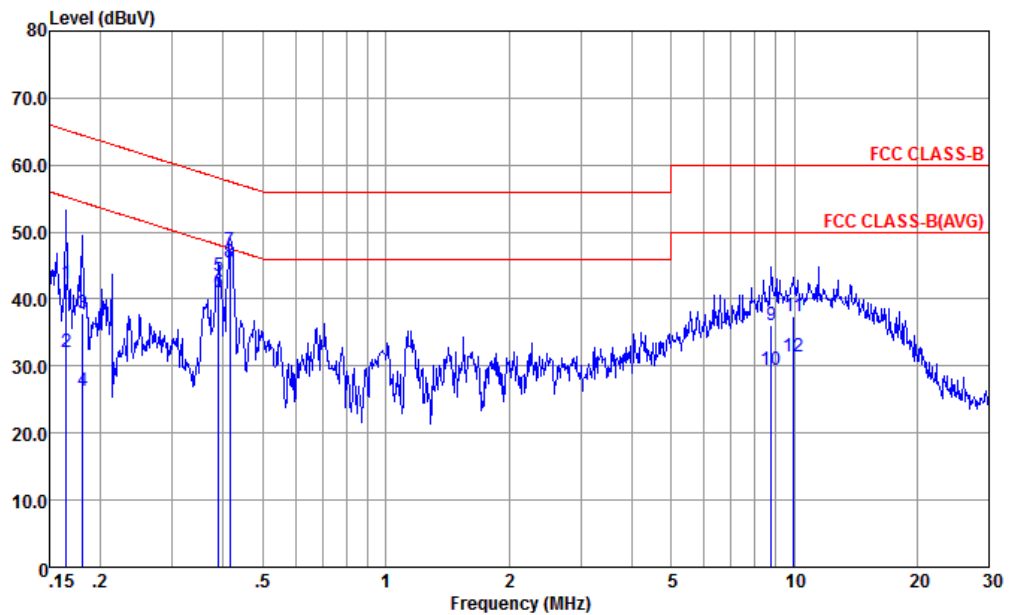


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.165	42.42	-22.79	65.21	31.90	0.08	10.44	QP
2	0.165	32.02	-23.19	55.21	21.50	0.08	10.44	Average
3	0.181	37.99	-26.47	64.46	27.51	0.08	10.40	QP
4	0.181	26.39	-28.07	54.46	15.91	0.08	10.40	Average
5	0.389	43.49	-14.59	58.08	33.10	0.12	10.27	QP
6	0.389	40.99	-7.09	48.08	30.60	0.12	10.27	Average
7	0.415	47.18	-10.37	57.55	36.80	0.12	10.26	QP
8 *	0.415	45.48	-2.07	47.55	35.10	0.12	10.26	Average
9	8.776	36.12	-23.88	60.00	24.90	0.89	10.33	QP
10	8.776	29.42	-20.58	50.00	18.20	0.89	10.33	Average
11	9.966	37.39	-22.61	60.00	26.10	0.95	10.34	QP
12	9.966	31.49	-18.51	50.00	20.20	0.95	10.34	Average



Test Engineer :	Amos Zhang	Temperature :	25.3 ~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

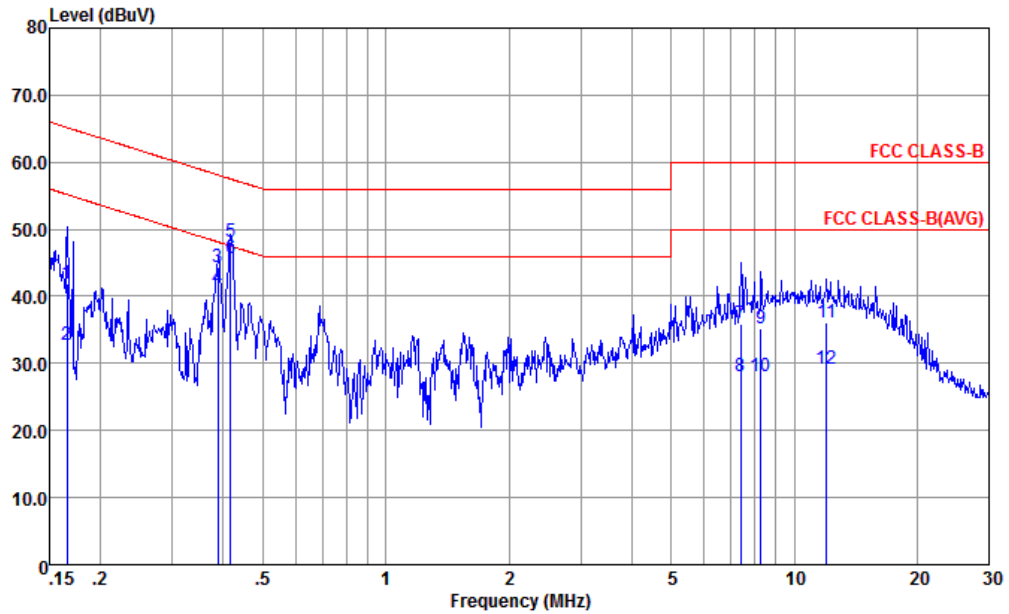

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.166	41.80	-23.36	65.16	31.20	0.16	10.44	QP
2	0.166	32.70	-22.46	55.16	22.10	0.16	10.44	Average
3	0.387	44.28	-13.84	58.12	33.80	0.21	10.27	QP
4	0.387	41.28	-6.84	48.12	30.80	0.21	10.27	Average
5	0.417	48.08	-9.43	57.51	37.60	0.22	10.26	QP
6 *	0.417	45.68	-1.83	47.51	35.20	0.22	10.26	Average
7	7.407	35.83	-24.17	60.00	24.50	1.02	10.31	QP
8	7.407	28.03	-21.97	50.00	16.70	1.02	10.31	Average
9	8.279	35.20	-24.80	60.00	23.80	1.08	10.32	QP
10	8.279	28.00	-22.00	50.00	16.60	1.08	10.32	Average
11	11.996	35.99	-24.01	60.00	24.09	1.53	10.37	QP
12	11.996	29.19	-20.81	50.00	17.29	1.53	10.37	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


- Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

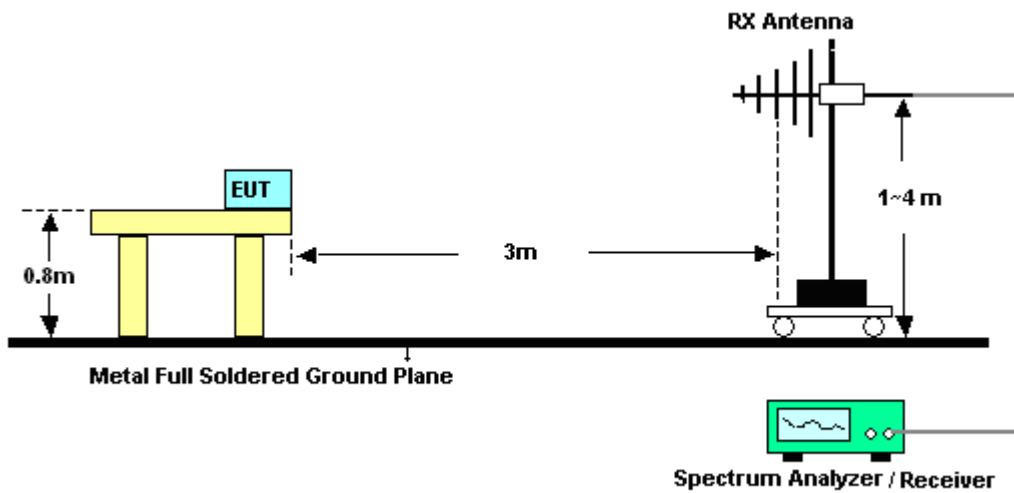


For radiated emissions above 1GHz

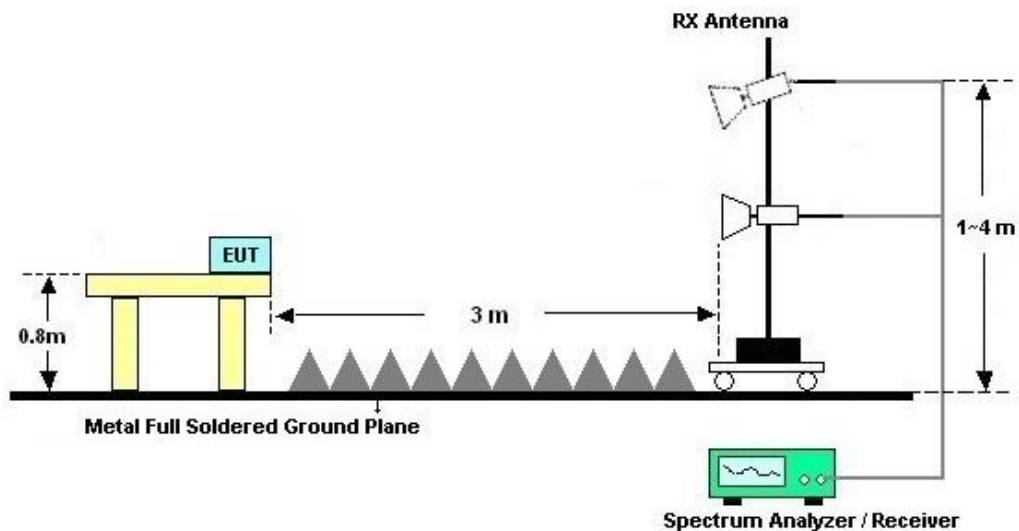



3.2.5. Test Result of Radiated Emission

Test Engineer :	Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

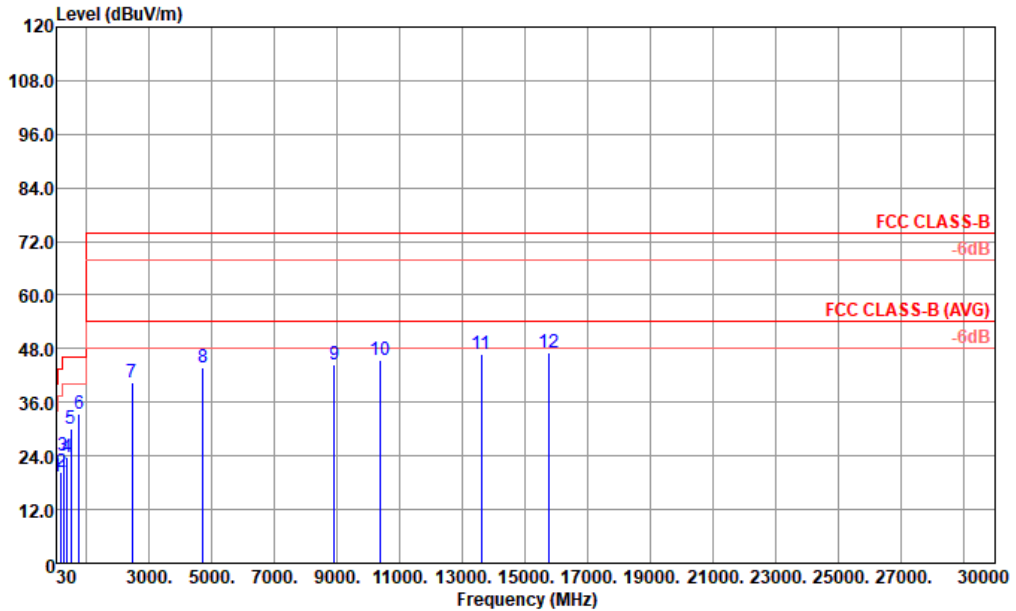


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	19.27	-20.73	40.00	25.13	25.10	1.24	32.20	---	---	Peak
2	179.38	20.47	-23.03	43.50	34.40	15.15	3.02	32.10	---	---	Peak
3	250.19	24.03	-21.97	46.00	33.64	19.02	3.57	32.20	---	---	Peak
4	375.32	23.79	-22.21	46.00	30.58	21.10	4.36	32.25	---	---	Peak
5	500.45	29.95	-16.05	46.00	33.32	24.00	5.03	32.40	---	---	Peak
6	744.89	33.34	-12.66	46.00	31.45	28.05	6.13	32.29	100	0	Peak
7	2456.00	40.57	-33.43	74.00	31.61	33.42	9.47	33.93	---	---	Peak
8	4720.00	43.67	-30.33	74.00	27.70	35.52	13.42	32.97	---	---	Peak
9	8896.00	44.41	-29.59	74.00	20.87	38.57	18.38	33.41	---	---	Peak
10	10359.00	45.62	-28.38	74.00	19.45	39.33	20.01	33.17	---	---	Peak
11	13599.00	46.88	-27.12	74.00	16.01	40.62	23.73	33.48	---	---	Peak
12	15732.00	47.29	-26.71	74.00	14.28	41.89	25.20	34.08	---	---	Peak



Test Engineer :	Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

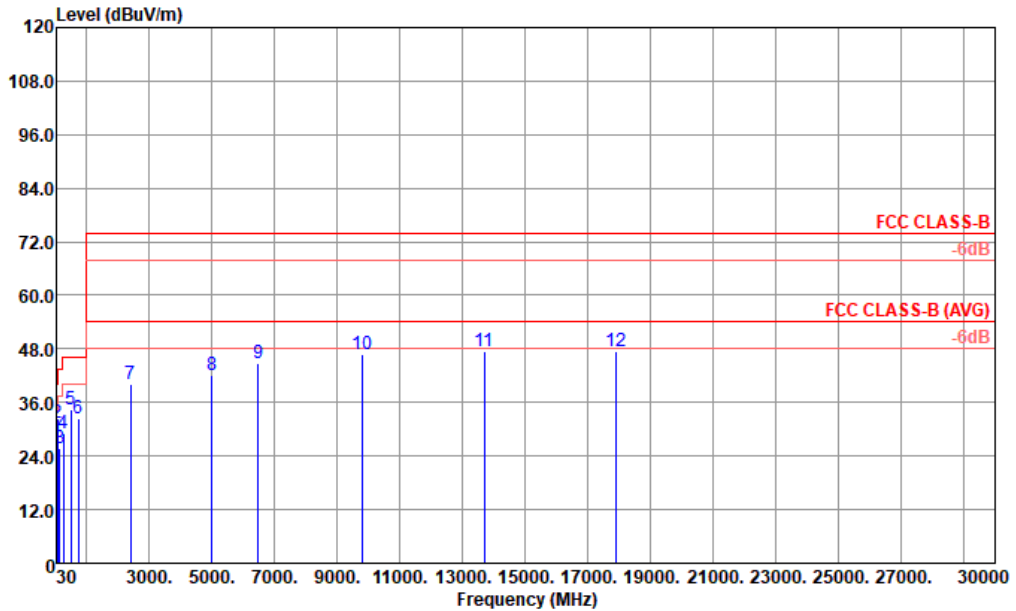

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	32.91	28.24	-11.76	40.00	35.63	23.51	1.30	32.20	---	---	Peak
2	60.07	31.45	-8.55	40.00	49.90	11.90	1.75	32.10	100	0	Peak
3	144.46	25.84	-17.66	43.50	37.92	17.32	2.71	32.11	---	---	Peak
4	250.19	28.98	-17.02	46.00	38.59	19.02	3.57	32.20	---	---	Peak
5	500.45	34.29	-11.71	46.00	37.66	24.00	5.03	32.40	---	---	Peak
6	741.98	32.45	-13.55	46.00	30.65	27.96	6.12	32.28	---	---	Peak
7	2400.00	40.09	-33.91	74.00	31.46	33.27	9.32	33.96	---	---	Peak
8	5000.00	42.26	-31.74	74.00	26.19	35.60	13.27	32.80	---	---	Peak
9	6464.00	44.94	-29.06	74.00	26.48	36.30	15.62	33.46	---	---	Peak
10	9819.00	46.63	-27.37	74.00	20.48	39.33	19.40	32.58	---	---	Peak
11	13689.00	47.50	-26.50	74.00	16.47	40.72	23.77	33.46	---	---	Peak
12	17919.00	47.43	-26.57	74.00	11.23	43.25	27.34	34.39	---	---	Peak


Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



For Spot Check

Test Engineer :	Feng Wang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

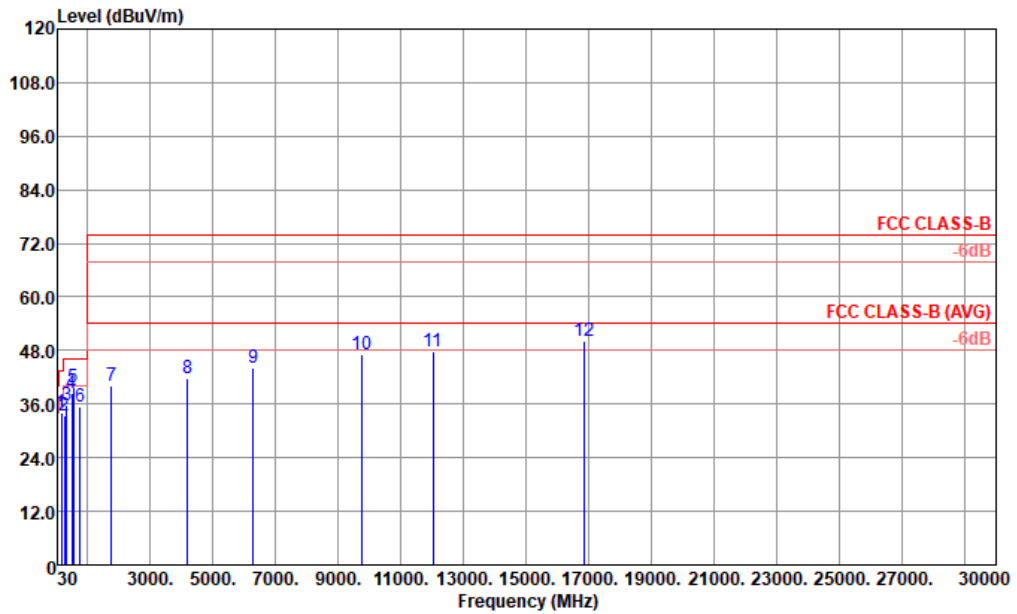


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	167.740	34.07	-9.43	43.50	48.43	15.86	1.88	32.10	---	---	Peak
2	250.190	33.29	-12.71	46.00	44.37	19.02	2.10	32.20	---	---	Peak
3	332.640	35.91	-10.09	46.00	45.41	19.97	2.69	32.16	---	---	Peak
4	499.480	38.28	-7.72	46.00	43.56	23.98	3.14	32.40	---	---	Peak
5	533.430	39.79	-6.21	46.00	44.02	24.93	3.17	32.33	100	155	QP
6	749.740	35.34	-10.66	46.00	35.37	28.20	4.07	32.30	---	---	Peak
7	1748.000	40.27	-33.73	74.00	69.84	29.23	6.24	65.04	---	---	Peak
8	4196.000	41.83	-32.17	74.00	61.74	35.43	9.94	65.28	---	---	Peak
9	6287.000	44.14	-29.86	74.00	62.48	34.85	12.33	65.52	---	---	Peak
10	9738.000	47.05	-26.95	74.00	60.71	37.58	15.79	67.03	---	---	Peak
11	12016.000	47.81	-26.19	74.00	56.42	39.80	17.61	66.02	---	---	Peak
12	16827.000	50.19	-23.81	74.00	52.95	41.08	20.91	64.75	---	---	Peak



Test Engineer :	Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

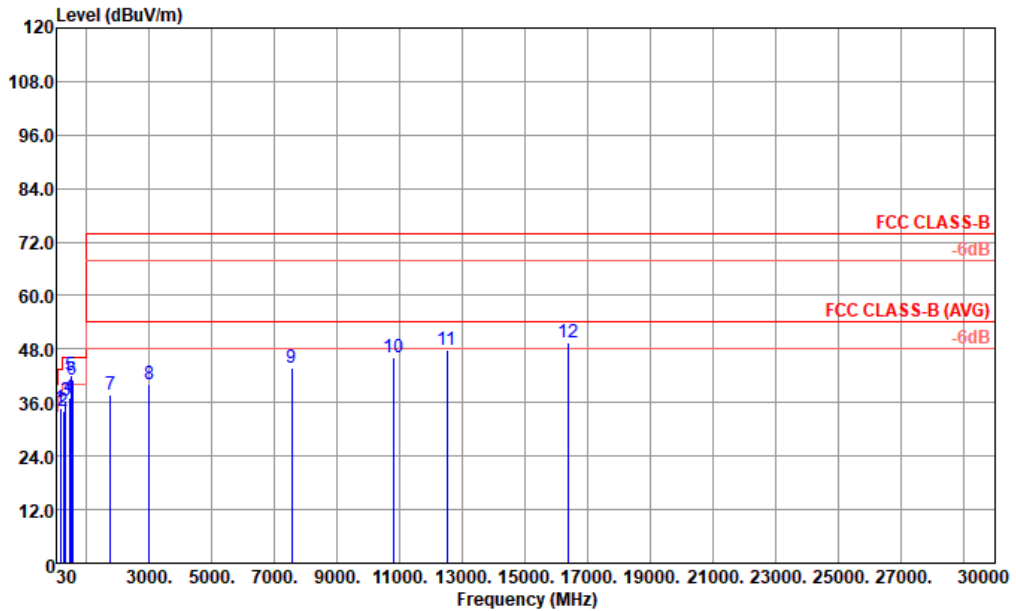

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	167.740	34.67	-8.83	43.50	49.03	15.86	1.88	32.10	---	---	Peak
2	250.190	34.24	-11.76	46.00	45.32	19.02	2.10	32.20	---	---	Peak
3	332.640	36.54	-9.46	46.00	46.04	19.97	2.69	32.16	---	---	Peak
4	443.220	37.16	-8.84	46.00	43.31	22.94	3.12	32.21	---	---	Peak
5	499.480	42.11	-3.89	46.00	47.39	23.98	3.14	32.40	---	---	Peak
6	530.520	41.15	-4.85	46.00	45.47	24.85	3.17	32.34	100	200	QP
7	1748.000	37.73	-36.27	74.00	67.19	29.53	6.05	65.04	---	---	Peak
8	2989.000	40.18	-33.82	74.00	65.16	31.82	8.00	64.80	---	---	Peak
9	7545.000	43.94	-30.06	74.00	60.82	36.64	12.93	66.45	---	---	Peak
10	10809.000	46.01	-27.99	74.00	58.34	38.47	15.86	66.66	---	---	Peak
11	12509.000	47.83	-26.17	74.00	57.25	39.38	17.02	65.82	---	---	Peak
12	16368.000	49.35	-24.65	74.00	52.26	41.91	19.59	64.41	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Original

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Oct. 22, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Oct. 22, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Oct. 22, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Oct. 22, 2020	Oct. 16, 2021	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 17, 2020	Oct. 28, 2020	Oct. 16, 2021	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 17, 2020	Oct. 28, 2020	Oct. 16, 2021	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 30, 2019	Oct. 28, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 10, 2019	Oct. 28, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Oct. 28, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Oct. 28, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 02, 2020	Oct. 28, 2020	Jan. 01, 2021	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Oct. 28, 2020	Oct. 16, 2021	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 28, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 28, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 28, 2020	NCR	Radiation (03CH02-KS)

For Spot Check

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Feb. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Feb. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Feb. 15, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Feb. 15, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Feb. 15, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Feb. 15, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 13, 2021	Feb. 15, 2022	Apr. 12, 2022	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Feb. 15, 2022	Oct. 15, 2022	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Feb. 15, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 15, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 15, 2022	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------