





	26																																														
Mode	Band Edge - R																																														
	2400-2483.5_802.11be EHT40_CH6_Full RU_2437MHz																																														
ANT	0+1																																														
Pol.	Vertical	Fundamental																																													
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.12</td> <td>66.09</td> <td>74.00</td> <td>-7.91</td> <td>53.43</td> <td>26.84</td> <td>7.47</td> <td>32.03</td> <td>10.38</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>377 157 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.12	66.09	74.00	-7.91	53.43	26.84	7.47	32.03	10.38									377 157 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.12	66.09	74.00	-7.91	53.43	26.84	7.47	32.03	10.38																																							
								377 157 PEAK																																							
Avg	 <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.51</td> <td>51.19</td> <td>54.00</td> <td>-2.81</td> <td>38.50</td> <td>26.86</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>377 157 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.51	51.19	54.00	-2.81	38.50	26.86	7.48	32.03	10.38									377 157 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2485.51	51.19	54.00	-2.81	38.50	26.86	7.48	32.03	10.38																																							
								377 157 AVERAGE																																							

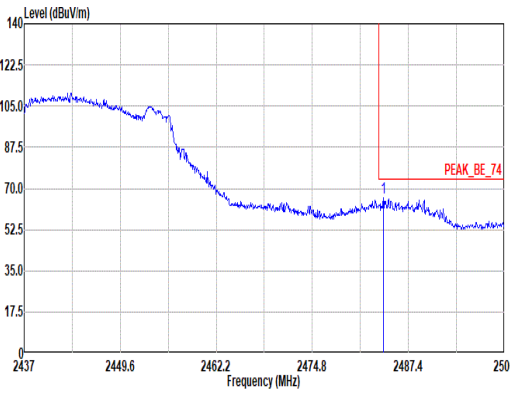

Mode	26																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11be EHT40_CH6_Full RU_2437MHz																																																																																																																																			
ANT	0+1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL Mode : 17</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>46.03</td> <td>74.00</td> <td>-27.97</td> <td>34.57</td> <td>32.65</td> <td>10.52</td> <td>33.17</td> <td>1.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>48.71</td> <td>74.00</td> <td>-25.29</td> <td>32.68</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>38.61</td> <td>54.00</td> <td>-15.39</td> <td>22.58</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	46.03	74.00	-27.97	34.57	32.65	10.52	33.17	1.46	--	--	PEAK	2	7311.00	48.71	74.00	-25.29	32.68	37.38	12.62	35.98	2.01	--	--	PEAK	3	7311.00	38.61	54.00	-15.39	22.58	37.38	12.62	35.98	2.01	--	--	Average	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL Mode : 17</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.70</td> <td>74.00</td> <td>-29.30</td> <td>33.24</td> <td>32.65</td> <td>10.52</td> <td>33.17</td> <td>1.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>49.45</td> <td>74.00</td> <td>-24.55</td> <td>33.42</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>39.34</td> <td>54.00</td> <td>-14.66</td> <td>23.31</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	44.70	74.00	-29.30	33.24	32.65	10.52	33.17	1.46	--	--	PEAK	2	7311.00	49.45	74.00	-24.55	33.42	37.38	12.62	35.98	2.01	--	--	PEAK	3	7311.00	39.34	54.00	-14.66	23.31	37.38	12.62	35.98	2.01	--	--	Average
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4874.00	46.03	74.00	-27.97	34.57	32.65	10.52	33.17	1.46	--	--	PEAK																																																																																																																								
2	7311.00	48.71	74.00	-25.29	32.68	37.38	12.62	35.98	2.01	--	--	PEAK																																																																																																																								
3	7311.00	38.61	54.00	-15.39	22.58	37.38	12.62	35.98	2.01	--	--	Average																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4874.00	44.70	74.00	-29.30	33.24	32.65	10.52	33.17	1.46	--	--	PEAK																																																																																																																								
2	7311.00	49.45	74.00	-24.55	33.42	37.38	12.62	35.98	2.01	--	--	PEAK																																																																																																																								
3	7311.00	39.34	54.00	-14.66	23.31	37.38	12.62	35.98	2.01	--	--	Average																																																																																																																								


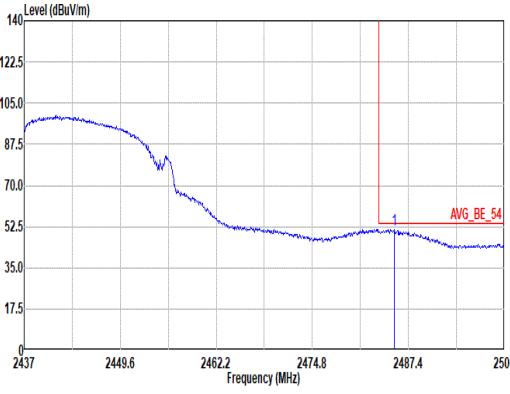


Mode	26	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH6_Full RU_2437MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL Mode : 17</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL Mode : 17</p>



27																																																																																	
Mode	Band Edge - L																																																																																
2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz																																																																																	
ANT	0+1																																																																																
Pol.	Horizontal																																																																																
Peak	Fundamental																																																																																
<p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.82</td> <td>56.51</td> <td>74.00</td> <td>-17.49</td> <td>43.85</td> <td>26.90</td> <td>7.34</td> <td>31.96</td> <td>10.38</td> <td>100</td> <td>217</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2387.82	56.51	74.00	-17.49	43.85	26.90	7.34	31.96	10.38	100	217	PEAK	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>112.43</td> <td>-----</td> <td>-----</td> <td>99.69</td> <td>26.94</td> <td>7.42</td> <td>32.00</td> <td>10.38</td> <td>100</td> <td>217</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2452.00	112.43	-----	-----	99.69	26.94	7.42	32.00	10.38	100	217	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2387.82	56.51	74.00	-17.49	43.85	26.90	7.34	31.96	10.38	100	217	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2452.00	112.43	-----	-----	99.69	26.94	7.42	32.00	10.38	100	217	PEAK																																																																					
Avg	Fundamental																																																																																
<p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.40</td> <td>45.31</td> <td>54.00</td> <td>-8.69</td> <td>32.66</td> <td>26.90</td> <td>7.33</td> <td>31.96</td> <td>10.38</td> <td>100</td> <td>217</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2385.40	45.31	54.00	-8.69	32.66	26.90	7.33	31.96	10.38	100	217	AVERAGE	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>102.85</td> <td>-----</td> <td>-----</td> <td>90.11</td> <td>26.94</td> <td>7.42</td> <td>32.00</td> <td>10.38</td> <td>100</td> <td>217</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2452.00	102.85	-----	-----	90.11	26.94	7.42	32.00	10.38	100	217	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2385.40	45.31	54.00	-8.69	32.66	26.90	7.33	31.96	10.38	100	217	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2452.00	102.85	-----	-----	90.11	26.94	7.42	32.00	10.38	100	217	AVERAGE																																																																					

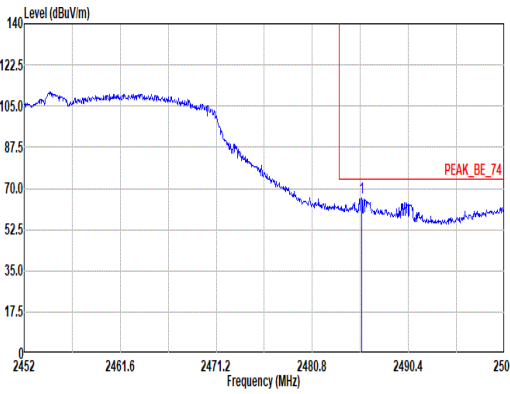
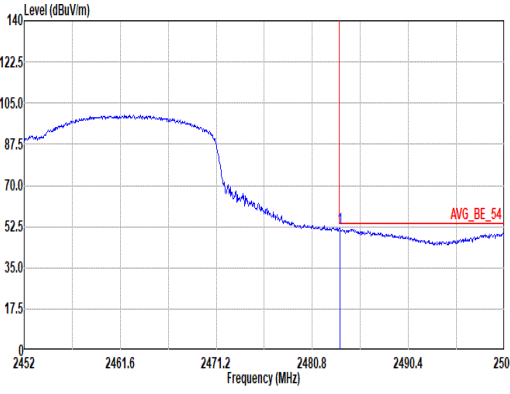


	27																																								
Mode	Band Edge - R																																								
	2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz																																								
ANT	0+1																																								
Pol.	Horizontal	Fundamental																																							
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2485.74</td> <td>65.92</td> <td>74.00</td> <td>-8.08</td> <td>53.23</td> <td>26.86</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> <td>100</td> <td>217 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2485.74	65.92	74.00	-8.08	53.23	26.86	7.48	32.03	10.38	100	217 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 2485.74	65.92	74.00	-8.08	53.23	26.86	7.48	32.03	10.38	100	217 PEAK																															
Avg	 <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.58</td> <td>51.63</td> <td>54.00</td> <td>-2.37</td> <td>38.97</td> <td>26.84</td> <td>7.47</td> <td>32.03</td> <td>10.38</td> <td>100</td> <td>217 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.58	51.63	54.00	-2.37	38.97	26.84	7.47	32.03	10.38	100	217 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 2483.58	51.63	54.00	-2.37	38.97	26.84	7.47	32.03	10.38	100	217 AVERAGE																															



27																																																																															
Mode	Band Edge - L																																																																														
2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz																																																																															
ANT	0+1																																																																														
Pol.	Vertical																																																																														
Peak	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2382.70</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>41.46</td> <td>26.90</td> <td>7.33</td> <td>31.96</td> <td>10.38</td> <td>292</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>110.40</td> <td>-----</td> <td>-----</td> <td>97.69</td> <td>26.90</td> <td>7.44</td> <td>32.01</td> <td>10.38</td> <td>292</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2382.70	54.11	74.00	-19.89	41.46	26.90	7.33	31.96	10.38	292	166	PEAK	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2452.00	110.40	-----	-----	97.69	26.90	7.44	32.01	10.38	292	166	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2382.70	54.11	74.00	-19.89	41.46	26.90	7.33	31.96	10.38	292	166	PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2452.00	110.40	-----	-----	97.69	26.90	7.44	32.01	10.38	292	166	PEAK																																																																				
Avg	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2362.97</td> <td>43.27</td> <td>54.00</td> <td>-10.73</td> <td>30.36</td> <td>27.20</td> <td>7.29</td> <td>31.95</td> <td>10.37</td> <td>292</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>100.57</td> <td>-----</td> <td>-----</td> <td>87.82</td> <td>26.94</td> <td>7.44</td> <td>32.01</td> <td>10.38</td> <td>292</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2362.97	43.27	54.00	-10.73	30.36	27.20	7.29	31.95	10.37	292	166	AVERAGE	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2452.00	100.57	-----	-----	87.82	26.94	7.44	32.01	10.38	292	166	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2362.97	43.27	54.00	-10.73	30.36	27.20	7.29	31.95	10.37	292	166	AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2452.00	100.57	-----	-----	87.82	26.94	7.44	32.01	10.38	292	166	AVERAGE																																																																				

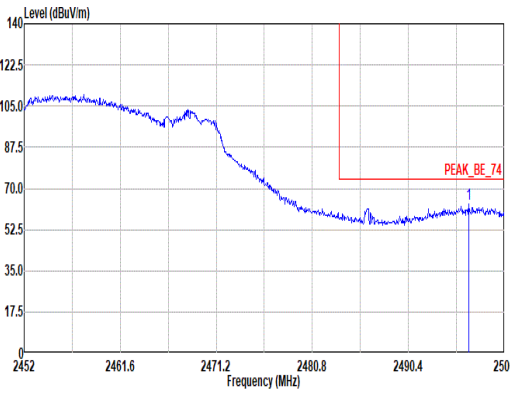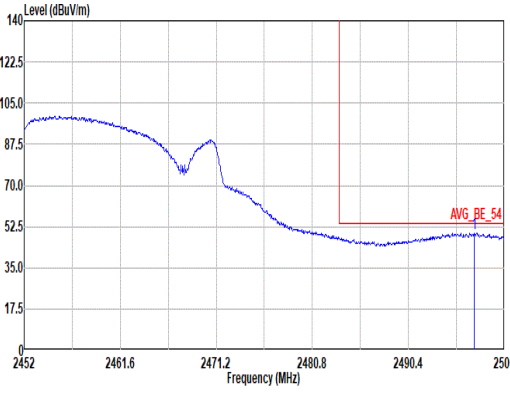

	27																																						
Mode	Band Edge - R																																						
	2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz																																						
ANT	0+1																																						
Pol.	Vertical	Fundamental																																					
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2496.40</td> <td>63.50</td> <td>74.00</td> <td>-10.50</td> <td>50.77</td> <td>26.90</td> <td>7.49</td> <td>32.04</td> <td>10.38</td> <td>292 166 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2496.40	63.50	74.00	-10.50	50.77	26.90	7.49	32.04	10.38	292 166 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2496.40	63.50	74.00	-10.50	50.77	26.90	7.49	32.04	10.38	292 166 PEAK																														
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2496.98</td> <td>49.73</td> <td>54.00</td> <td>-4.27</td> <td>37.00</td> <td>26.90</td> <td>7.49</td> <td>32.04</td> <td>10.38</td> <td>292 166 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2496.98	49.73	54.00	-4.27	37.00	26.90	7.49	32.04	10.38	292 166 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2496.98	49.73	54.00	-4.27	37.00	26.90	7.49	32.04	10.38	292 166 AVERAGE																														







Mode	27																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz																																																																																																																																			
ANT	0+1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL Mode : 18</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>45.20</td> <td>74.00</td> <td>-28.80</td> <td>33.63</td> <td>32.71</td> <td>10.51</td> <td>33.17</td> <td>1.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>49.38</td> <td>74.00</td> <td>-24.62</td> <td>33.37</td> <td>37.29</td> <td>12.73</td> <td>36.01</td> <td>2.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7356.00</td> <td>39.36</td> <td>54.00</td> <td>-14.64</td> <td>23.35</td> <td>37.29</td> <td>12.73</td> <td>36.01</td> <td>2.00</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	45.20	74.00	-28.80	33.63	32.71	10.51	33.17	1.52	--	--	PEAK	2	7356.00	49.38	74.00	-24.62	33.37	37.29	12.73	36.01	2.00	--	--	PEAK	3	7356.00	39.36	54.00	-14.64	23.35	37.29	12.73	36.01	2.00	--	--	Average	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL Mode : 18</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>45.67</td> <td>74.00</td> <td>-28.33</td> <td>34.10</td> <td>32.71</td> <td>10.51</td> <td>33.17</td> <td>1.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>48.81</td> <td>74.00</td> <td>-25.19</td> <td>32.80</td> <td>37.29</td> <td>12.73</td> <td>36.01</td> <td>2.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7356.00</td> <td>38.62</td> <td>54.00</td> <td>-15.38</td> <td>22.61</td> <td>37.29</td> <td>12.73</td> <td>36.01</td> <td>2.00</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	45.67	74.00	-28.33	34.10	32.71	10.51	33.17	1.52	--	--	PEAK	2	7356.00	48.81	74.00	-25.19	32.80	37.29	12.73	36.01	2.00	--	--	PEAK	3	7356.00	38.62	54.00	-15.38	22.61	37.29	12.73	36.01	2.00	--	--	Average
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4904.00	45.20	74.00	-28.80	33.63	32.71	10.51	33.17	1.52	--	--	PEAK																																																																																																																								
2	7356.00	49.38	74.00	-24.62	33.37	37.29	12.73	36.01	2.00	--	--	PEAK																																																																																																																								
3	7356.00	39.36	54.00	-14.64	23.35	37.29	12.73	36.01	2.00	--	--	Average																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4904.00	45.67	74.00	-28.33	34.10	32.71	10.51	33.17	1.52	--	--	PEAK																																																																																																																								
2	7356.00	48.81	74.00	-25.19	32.80	37.29	12.73	36.01	2.00	--	--	PEAK																																																																																																																								
3	7356.00	38.62	54.00	-15.38	22.61	37.29	12.73	36.01	2.00	--	--	Average																																																																																																																								



Mode	27	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH9_Full RU_2452MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL Mode : 18</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL Mode : 18</p>

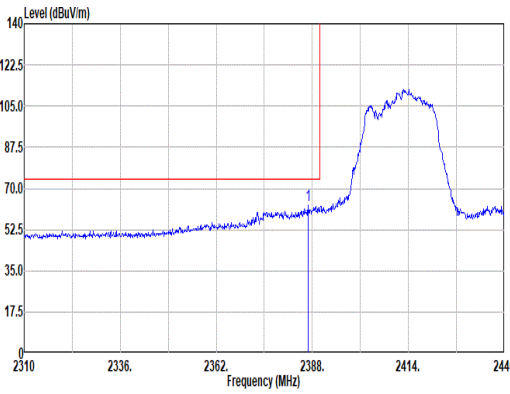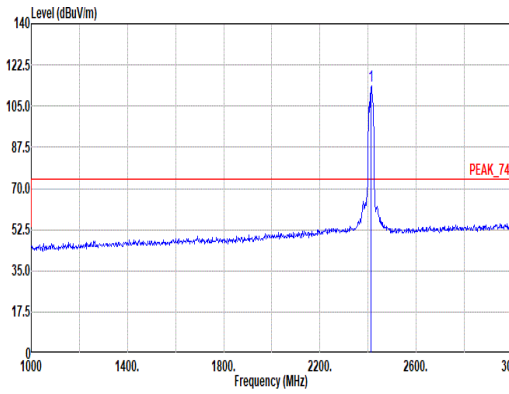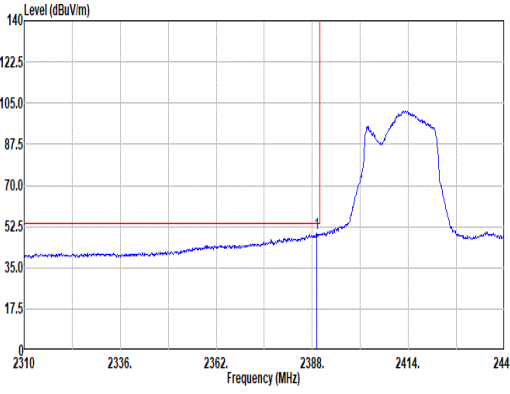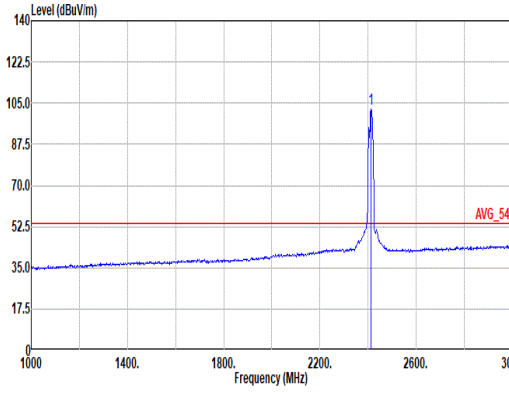

Mode	28																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH1_Full RU_2437MHz																																																																																											
ANT	0+1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.96</td> <td>62.62</td> <td>74.00</td> <td>-11.38</td> <td>49.96</td> <td>26.90</td> <td>7.34</td> <td>31.96</td> <td>10.38</td> <td>100</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2386.96	62.62	74.00	-11.38	49.96	26.90	7.34	31.96	10.38	100	125	PEAK	 <p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>113.70</td> <td>-----</td> <td>-----</td> <td>100.86</td> <td>27.06</td> <td>7.38</td> <td>31.98</td> <td>10.38</td> <td>100</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2412.00	113.70	-----	-----	100.86	27.06	7.38	31.98	10.38	100	125	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																	
1	2386.96	62.62	74.00	-11.38	49.96	26.90	7.34	31.96	10.38	100	125	PEAK																																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																	
1	2412.00	113.70	-----	-----	100.86	27.06	7.38	31.98	10.38	100	125	PEAK																																																																																
Avg	 <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>49.62</td> <td>54.00</td> <td>-4.38</td> <td>36.96</td> <td>26.90</td> <td>7.34</td> <td>31.96</td> <td>10.38</td> <td>100</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2389.17	49.62	54.00	-4.38	36.96	26.90	7.34	31.96	10.38	100	125	AVERAGE	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.39</td> <td>-----</td> <td>-----</td> <td>89.53</td> <td>27.08</td> <td>7.38</td> <td>31.98</td> <td>10.38</td> <td>100</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2412.00	102.39	-----	-----	89.53	27.08	7.38	31.98	10.38	100	125	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																	
1	2389.17	49.62	54.00	-4.38	36.96	26.90	7.34	31.96	10.38	100	125	AVERAGE																																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																	
1	2412.00	102.39	-----	-----	89.53	27.08	7.38	31.98	10.38	100	125	AVERAGE																																																																																



	28																																																																																							
Mode	Band Edge																																																																																							
ANT	0+1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.70</td> <td>65.04</td> <td>74.00</td> <td>-8.96</td> <td>52.38</td> <td>26.90</td> <td>7.34</td> <td>31.96</td> <td>10.38</td> <td>300</td> <td>84 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	65.04	74.00	-8.96	52.38	26.90	7.34	31.96	10.38	300	84 PEAK	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>116.02</td> <td>-----</td> <td>-----</td> <td>103.16</td> <td>27.08</td> <td>7.38</td> <td>31.98</td> <td>10.38</td> <td>300</td> <td>84 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	116.02	-----	-----	103.16	27.08	7.38	31.98	10.38	300	84 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2386.70	65.04	74.00	-8.96	52.38	26.90	7.34	31.96	10.38	300	84 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	116.02	-----	-----	103.16	27.08	7.38	31.98	10.38	300	84 PEAK																																																																													
Avg	<p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>52.65</td> <td>54.00</td> <td>-1.35</td> <td>40.00</td> <td>26.90</td> <td>7.34</td> <td>31.97</td> <td>10.38</td> <td>300</td> <td>84 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	52.65	54.00	-1.35	40.00	26.90	7.34	31.97	10.38	300	84 AVERAGE	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.98</td> <td>-----</td> <td>-----</td> <td>93.11</td> <td>27.10</td> <td>7.37</td> <td>31.98</td> <td>10.38</td> <td>300</td> <td>84 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.98	-----	-----	93.11	27.10	7.37	31.98	10.38	300	84 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2389.82	52.65	54.00	-1.35	40.00	26.90	7.34	31.97	10.38	300	84 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2412.00	105.98	-----	-----	93.11	27.10	7.37	31.98	10.38	300	84 AVERAGE																																																																													



Mode	29																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11ax HE20_CH6_Full RU_2437MHz																																																																																																									
ANT	0+1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>45.85</td> <td>74.00</td> <td>-28.15</td> <td>34.39</td> <td>32.65</td> <td>10.52</td> <td>33.17</td> <td>1.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>49.65</td> <td>74.00</td> <td>-24.35</td> <td>33.62</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>40.88</td> <td>54.00</td> <td>-13.12</td> <td>24.85</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	4874.00	45.85	74.00	-28.15	34.39	32.65	10.52	33.17	1.46	--	--	PEAK	2	7311.00	49.65	74.00	-24.35	33.62	37.38	12.62	35.98	2.01	--	--	PEAK	3	7311.00	40.88	54.00	-13.12	24.85	37.38	12.62	35.98	2.01	--	--	Average	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.85</td> <td>74.00</td> <td>-29.15</td> <td>33.39</td> <td>32.65</td> <td>10.52</td> <td>33.17</td> <td>1.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>49.24</td> <td>74.00</td> <td>-24.76</td> <td>33.21</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>40.06</td> <td>54.00</td> <td>-13.94</td> <td>24.03</td> <td>37.38</td> <td>12.62</td> <td>35.98</td> <td>2.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	4874.00	44.85	74.00	-29.15	33.39	32.65	10.52	33.17	1.46	--	--	PEAK	2	7311.00	49.24	74.00	-24.76	33.21	37.38	12.62	35.98	2.01	--	--	PEAK	3	7311.00	40.06	54.00	-13.94	24.03	37.38	12.62	35.98	2.01	--	--	Average
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																													
1	4874.00	45.85	74.00	-28.15	34.39	32.65	10.52	33.17	1.46	--	--	PEAK																																																																																														
2	7311.00	49.65	74.00	-24.35	33.62	37.38	12.62	35.98	2.01	--	--	PEAK																																																																																														
3	7311.00	40.88	54.00	-13.12	24.85	37.38	12.62	35.98	2.01	--	--	Average																																																																																														
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																														
1	4874.00	44.85	74.00	-29.15	33.39	32.65	10.52	33.17	1.46	--	--	PEAK																																																																																														
2	7311.00	49.24	74.00	-24.76	33.21	37.38	12.62	35.98	2.01	--	--	PEAK																																																																																														
3	7311.00	40.06	54.00	-13.94	24.03	37.38	12.62	35.98	2.01	--	--	Average																																																																																														



Mode	29	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH6_Full RU_2437MHz	
ANT	0+1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL</p>	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL</p>



30																																																																															
Mode	Band Edge																																																																														
2400-2483.5_802.11ax HE20_CH11_Full RU_2452MHz																																																																															
ANT	0+1																																																																														
Pol.	Horizontal																																																																														
Peak	Fundamental																																																																														
<p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.26</td> <td>59.13</td> <td>74.00</td> <td>-14.87</td> <td>46.45</td> <td>26.85</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> <td>281</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.26	59.13	74.00	-14.87	46.45	26.85	7.48	32.03	10.38	281	131	PEAK	<p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>112.69</td> <td>-----</td> <td>-----</td> <td>100.02</td> <td>26.86</td> <td>7.45</td> <td>32.02</td> <td>10.38</td> <td>281</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	112.69	-----	-----	100.02	26.86	7.45	32.02	10.38	281	131	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2485.26	59.13	74.00	-14.87	46.45	26.85	7.48	32.03	10.38	281	131	PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2462.00	112.69	-----	-----	100.02	26.86	7.45	32.02	10.38	281	131	PEAK																																																																				
Avg	Fundamental																																																																														
<p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2485.22</td> <td>47.01</td> <td>54.00</td> <td>-6.99</td> <td>34.33</td> <td>26.85</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> <td>281</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2485.22	47.01	54.00	-6.99	34.33	26.85	7.48	32.03	10.38	281	131	AVERAGE	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>102.84</td> <td>-----</td> <td>-----</td> <td>90.15</td> <td>26.88</td> <td>7.44</td> <td>32.01</td> <td>10.38</td> <td>281</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	102.84	-----	-----	90.15	26.88	7.44	32.01	10.38	281	131	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2485.22	47.01	54.00	-6.99	34.33	26.85	7.48	32.03	10.38	281	131	AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																							
1 2462.00	102.84	-----	-----	90.15	26.88	7.44	32.01	10.38	281	131	AVERAGE																																																																				



Mode	30																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH11_Full RU_2452MHz																																																																																			
ANT	0+1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.31</td> <td>63.73</td> <td>74.00</td> <td>-10.27</td> <td>51.03</td> <td>26.87</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> <td>328</td> <td>210</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.31	63.73	74.00	-10.27	51.03	26.87	7.48	32.03	10.38	328	210	PEAK	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>114.80</td> <td>-----</td> <td>-----</td> <td>102.13</td> <td>26.86</td> <td>7.45</td> <td>32.02</td> <td>10.38</td> <td>328</td> <td>210</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	114.80	-----	-----	102.13	26.86	7.45	32.02	10.38	328	210	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2487.31	63.73	74.00	-10.27	51.03	26.87	7.48	32.03	10.38	328	210	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	114.80	-----	-----	102.13	26.86	7.45	32.02	10.38	328	210	PEAK																																																																								
Avg	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.85</td> <td>51.14</td> <td>54.00</td> <td>-2.86</td> <td>38.44</td> <td>26.87</td> <td>7.48</td> <td>32.03</td> <td>10.38</td> <td>328</td> <td>210</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.85	51.14	54.00	-2.86	38.44	26.87	7.48	32.03	10.38	328	210	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.88</td> <td>-----</td> <td>-----</td> <td>93.19</td> <td>26.88</td> <td>7.44</td> <td>32.01</td> <td>10.38</td> <td>328</td> <td>210</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.88	-----	-----	93.19	26.88	7.44	32.01	10.38	328	210	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2486.85	51.14	54.00	-2.86	38.44	26.87	7.48	32.03	10.38	328	210	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	105.88	-----	-----	93.19	26.88	7.44	32.01	10.38	328	210	AVERAGE																																																																								



Mode	31																																																																															
	SHF																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																															
ANT	0+1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak	<p>Site : 03CH23-HY Condition: PEAK_74 1m SHF_1224_240624 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 18101.52</td> <td>41.13</td> <td>74.00</td> <td>-32.87</td> <td>59.94</td> <td>37.60</td> <td>17.65</td> <td>64.52</td> <td>-9.54</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 18101.52	41.13	74.00	-32.87	59.94	37.60	17.65	64.52	-9.54	--	PEAK	<p>Site : 03CH23-HY Condition: PEAK_74 1m SHF_1224_240624 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 18893.65</td> <td>40.50</td> <td>74.00</td> <td>-33.50</td> <td>58.19</td> <td>38.00</td> <td>18.14</td> <td>64.29</td> <td>-9.54</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 18893.65	40.50	74.00	-33.50	58.19	38.00	18.14	64.29	-9.54	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 18101.52	41.13	74.00	-32.87	59.94	37.60	17.65	64.52	-9.54	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 18893.65	40.50	74.00	-33.50	58.19	38.00	18.14	64.29	-9.54	--	PEAK																																																																						






Mode	32																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																							
ANT	0+1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH23-HY Condition: QP 3m Bilog_47020_241005 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>21.26</td><td>40.00</td><td>-18.74</td><td>28.56</td><td>24.25</td><td>1.07</td><td>32.65</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>139.61</td><td>23.76</td><td>43.50</td><td>-19.74</td><td>36.82</td><td>17.69</td><td>1.83</td><td>32.64</td><td>0.06</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>255.04</td><td>21.96</td><td>46.00</td><td>-24.04</td><td>32.74</td><td>19.38</td><td>2.39</td><td>32.63</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>413.15</td><td>26.58</td><td>46.00</td><td>-19.42</td><td>34.00</td><td>22.23</td><td>3.03</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>741.01</td><td>29.33</td><td>46.00</td><td>-16.67</td><td>29.76</td><td>28.31</td><td>3.88</td><td>32.74</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>944.71</td><td>33.13</td><td>46.00</td><td>-12.87</td><td>29.28</td><td>30.86</td><td>4.29</td><td>31.47</td><td>0.17</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	21.26	40.00	-18.74	28.56	24.25	1.07	32.65	0.03	--	--	Peak	2	139.61	23.76	43.50	-19.74	36.82	17.69	1.83	32.64	0.06	--	--	Peak	3	255.04	21.96	46.00	-24.04	32.74	19.38	2.39	32.63	0.08	--	--	Peak	4	413.15	26.58	46.00	-19.42	34.00	22.23	3.03	32.78	0.10	--	--	Peak	5	741.01	29.33	46.00	-16.67	29.76	28.31	3.88	32.74	0.12	--	--	Peak	6	944.71	33.13	46.00	-12.87	29.28	30.86	4.29	31.47	0.17	--	--	Peak	<p>Site : 03CH23-HY Condition: QP 3m Bilog_47020_241005 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>26.71</td><td>40.00</td><td>-13.29</td><td>34.93</td><td>23.33</td><td>1.06</td><td>32.64</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>185.20</td><td>27.01</td><td>43.50</td><td>-16.49</td><td>42.35</td><td>15.14</td><td>2.06</td><td>32.62</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>264.74</td><td>22.22</td><td>46.00</td><td>-23.78</td><td>32.45</td><td>19.89</td><td>2.44</td><td>32.63</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>418.97</td><td>28.20</td><td>46.00</td><td>-17.80</td><td>35.42</td><td>22.41</td><td>3.05</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>752.65</td><td>30.87</td><td>46.00</td><td>-15.13</td><td>31.17</td><td>28.37</td><td>3.91</td><td>32.69</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>952.47</td><td>33.80</td><td>46.00</td><td>-12.20</td><td>29.66</td><td>31.05</td><td>4.30</td><td>31.39</td><td>0.18</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	32.91	26.71	40.00	-13.29	34.93	23.33	1.06	32.64	0.03	--	--	Peak	2	185.20	27.01	43.50	-16.49	42.35	15.14	2.06	32.62	0.08	--	--	Peak	3	264.74	22.22	46.00	-23.78	32.45	19.89	2.44	32.63	0.07	--	--	Peak	4	418.97	28.20	46.00	-17.80	35.42	22.41	3.05	32.78	0.10	--	--	Peak	5	752.65	30.87	46.00	-15.13	31.17	28.37	3.91	32.69	0.11	--	--	Peak	6	952.47	33.80	46.00	-12.20	29.66	31.05	4.30	31.39	0.18	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	21.26	40.00	-18.74	28.56	24.25	1.07	32.65	0.03	--	--	Peak																																																																																																																																																																												
2	139.61	23.76	43.50	-19.74	36.82	17.69	1.83	32.64	0.06	--	--	Peak																																																																																																																																																																												
3	255.04	21.96	46.00	-24.04	32.74	19.38	2.39	32.63	0.08	--	--	Peak																																																																																																																																																																												
4	413.15	26.58	46.00	-19.42	34.00	22.23	3.03	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	741.01	29.33	46.00	-16.67	29.76	28.31	3.88	32.74	0.12	--	--	Peak																																																																																																																																																																												
6	944.71	33.13	46.00	-12.87	29.28	30.86	4.29	31.47	0.17	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	32.91	26.71	40.00	-13.29	34.93	23.33	1.06	32.64	0.03	--	--	Peak																																																																																																																																																																												
2	185.20	27.01	43.50	-16.49	42.35	15.14	2.06	32.62	0.08	--	--	Peak																																																																																																																																																																												
3	264.74	22.22	46.00	-23.78	32.45	19.89	2.44	32.63	0.07	--	--	Peak																																																																																																																																																																												
4	418.97	28.20	46.00	-17.80	35.42	22.41	3.05	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	752.65	30.87	46.00	-15.13	31.17	28.37	3.91	32.69	0.11	--	--	Peak																																																																																																																																																																												
6	952.47	33.80	46.00	-12.20	29.66	31.05	4.30	31.39	0.18	--	--	Peak																																																																																																																																																																												

**Appendix D. Duty Cycle Plots**

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
0	802.11b	100.00	-	0.00
0	802.11g	99.00	-	0.04
0	2.4GHz 802.11n HT20	97.05	5430	0.13
0	2.4GHz 802.11n HT40	96.80	5440	0.14
0	2.4GHz 802.11be EHT20 Full RU	96.81	5460	0.14
0	2.4GHz 802.11be EHT40 Full RU	97.50	5460	0.11
0	2.4GHz 802.11ax HE20	97.49	5440	0.11
0+1	802.11b	100.00	-	0.00
0+1	802.11g	100.00	-	0.00
0+1	2.4GHz 802.11n HT20	95.83	5382	0.18
0+1	2.4GHz 802.11n HT40	96.51	5400	0.15
0+1	2.4GHz 802.11be EHT20 Full RU	97.49	5440	0.11
0+1	2.4GHz 802.11be EHT40 Full RU	98.19	-	0.08
0+1	2.4GHz 802.11ax HE20	96.80	5445	0.14




<Ant. 0>

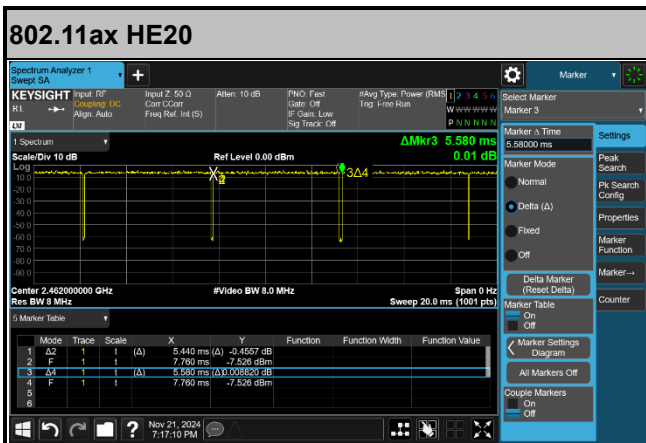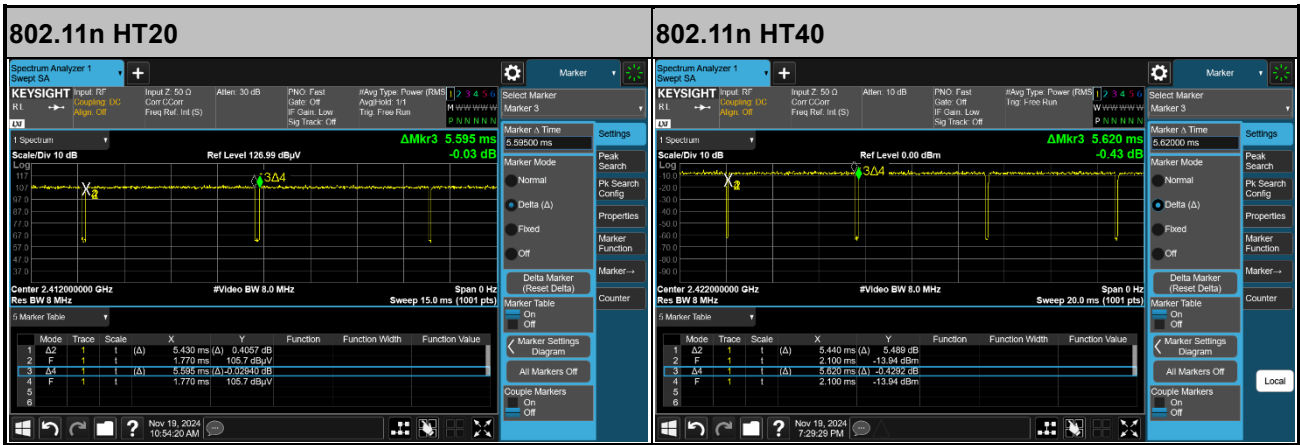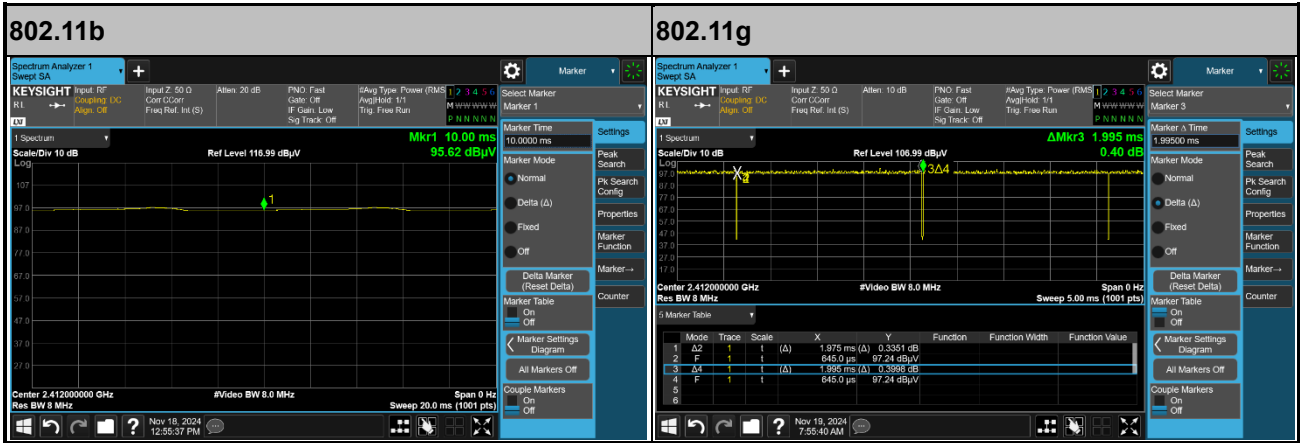




802.11be EHT20

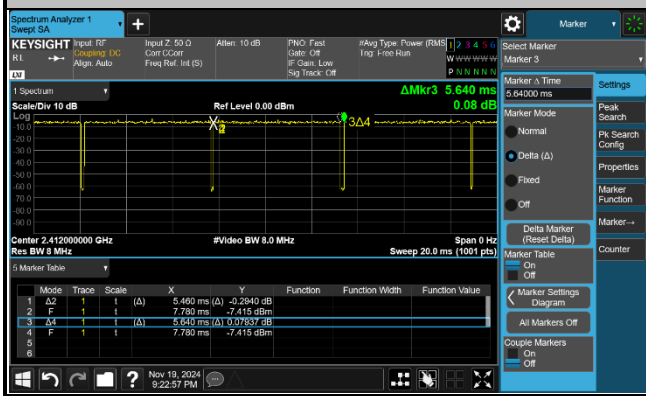


802.11be EHT40

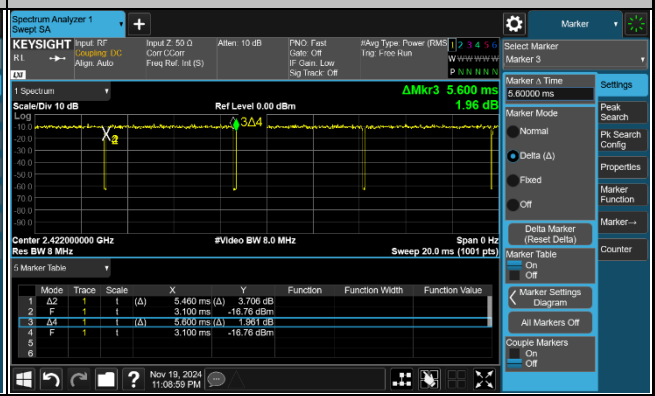


MIMO<Ant. 0+1 >


802.11b

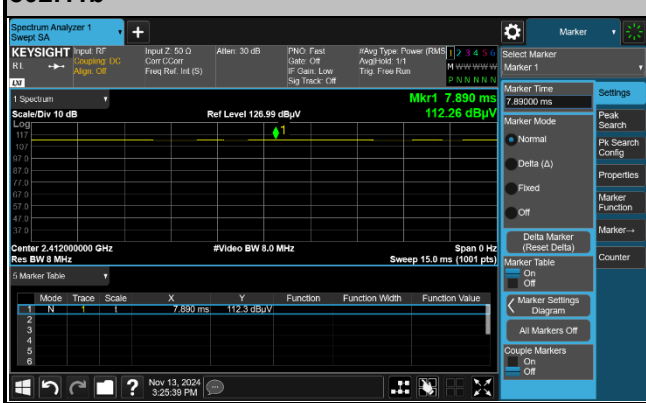


802.11g


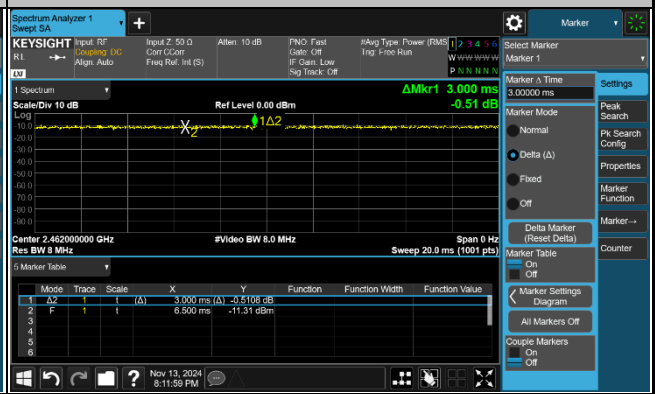


802.11n HT20

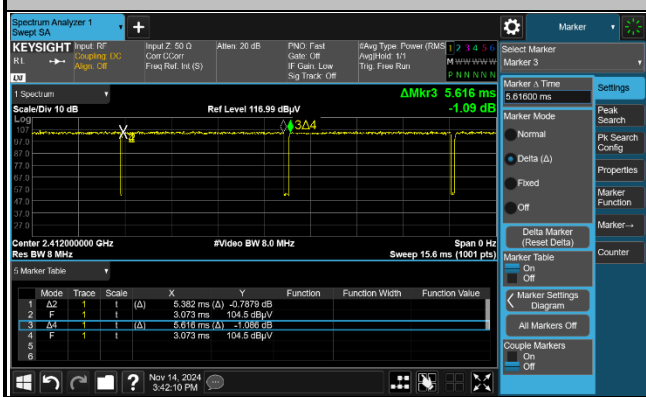

802.11n HT40

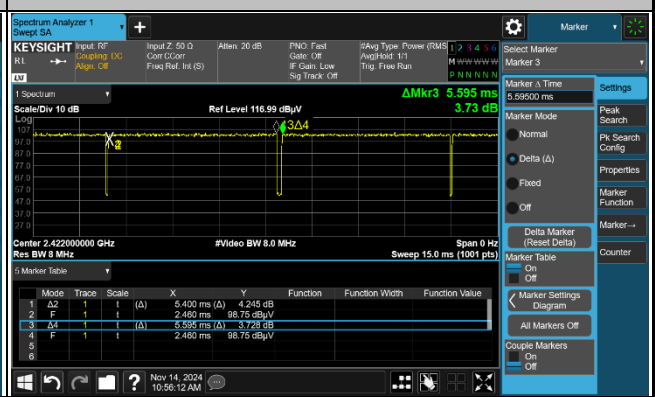

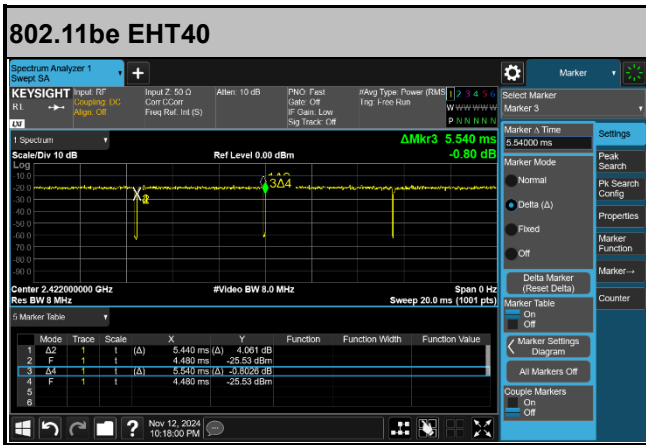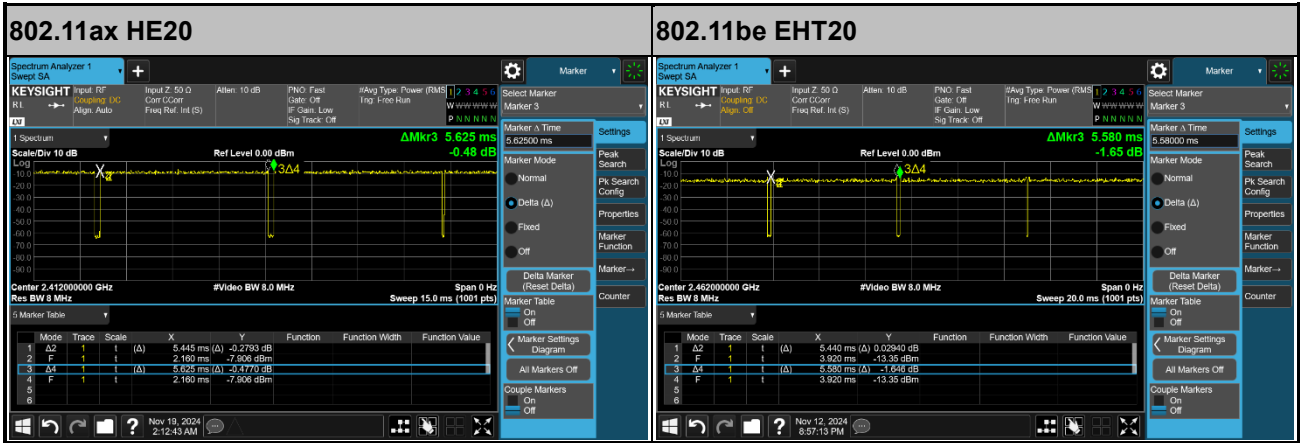

—THE END—