

FCC Radio Test Report

FCC ID: 2AF82-TDD1000

Report No. : BTL-FCCP-3-2503T049
Equipment : Scheduler Docking Station
Model Name : TDD-1000
Brand Name : Qbic
Applicant : Qbic Technology Co., Ltd.
Address : 26F.-12, NO.99, SEC. 1, XINTAI 5TH RD., XIZHI DIST., NEW TAIPEI CITY 22175, TAIWAN

Radio Function : WLAN 2.4 GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement : ANSI C63.10-2013
Procedure(s)

Date of Receipt : 2025/4/2
Date of Test : 2025/4/23 ~ 2025/5/23
Issued Date : 2025/6/3

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

: Brett Shen
Brett Shen, Engineer



Approved by

: Jerry Chuang
Jerry Chuang, Supervisor

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	8
1.4	DUTY CYCLE	9
2	GENERAL INFORMATION	10
2.1	DESCRIPTION OF EUT	10
2.2	TEST MODES	11
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4	SUPPORT UNITS	13
3	AC POWER LINE CONDUCTED EMISSIONS TEST	14
3.1	LIMIT	14
3.2	TEST PROCEDURE	14
3.3	DEVIATION FROM TEST STANDARD	15
3.4	TEST SETUP	15
3.5	TEST RESULT	15
4	RADIATED EMISSIONS TEST	16
4.1	LIMIT	16
4.2	TEST PROCEDURE	17
4.3	DEVIATION FROM TEST STANDARD	17
4.4	TEST SETUP	17
4.5	EUT OPERATING CONDITIONS	18
4.6	TEST RESULT – BELOW 30 MHZ	19
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	19
4.8	TEST RESULT – ABOVE 1 GHZ	19
5	BANDWIDTH TEST	20
5.1	LIMIT	20
5.2	TEST PROCEDURE	20
5.3	DEVIATION FROM TEST STANDARD	20
5.4	TEST SETUP	20
5.5	EUT OPERATING CONDITIONS	20
5.6	TEST RESULT	20
6	OUTPUT POWER TEST	21
6.1	LIMIT	21
6.2	TEST PROCEDURE	21
6.3	DEVIATION FROM TEST STANDARD	21
6.4	TEST SETUP	21
6.5	EUT OPERATING CONDITIONS	21
6.6	TEST RESULT	21
7	POWER SPECTRAL DENSITY	22
7.1	LIMIT	22
7.2	TEST PROCEDURE	22
7.3	DEVIATION FROM TEST STANDARD	22
7.4	TEST SETUP	22
7.5	EUT OPERATING CONDITIONS	22
7.6	TEST RESULT	22
8	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST	23

8.1	LIMIT	23
8.2	TEST PROCEDURE	23
8.3	DEVIATION FROM TEST STANDARD	23
8.4	TEST SETUP	23
8.5	EUT OPERATING CONDITIONS	23
8.6	TEST RESULT	23
9	LIST OF MEASURING EQUIPMENTS	24
10	EUT TEST PHOTO	26
11	EUT PHOTOS	26
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	32
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	37
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	40
APPENDIX E	BANDWIDTH	67
APPENDIX F	OUTPUT POWER	71
APPENDIX G	POWER SPECTRAL DENSITY	73
APPENDIX H	ANTENNA CONDUCTED SPURIOUS EMISSIONS	76

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2503T049	R00	Original Report.	2025/6/3	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.247(a)	Bandwidth	APPENDIX E	Pass	-----
15.247(b)	Output Power	APPENDIX F	Pass	-----
15.247(e)	Power Spectral Density	APPENDIX G	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX H	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 66, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

CB15

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

C05 CB08 CB11 SR10

SR11

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

CB12 SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately 95 %.

A. AC power line conducted emissions test:

Test Site	Measurement Frequency Range	U (dB)
SR05	150 kHz ~ 30 MHz	3.06

B. Radiated emissions test:

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB15 (3m)	0.03~0.2	4.41
	0.02~1	4.61
	1 ~ 6	5.45
	6 ~ 18	5.04
	18 ~ 26	4.03
	26 ~ 40	4.33

C. Conducted test:

Test Item	U
Occupied Bandwidth	0.83 %
Output power	0.4008 dB
Conducted Spurious emissions	1.8274 dB
Conducted Band edges	1.8353 dB
Dwell time	0.8830 dB
Channel separation	0.8830 dB
Channel numbers	0.9198 dB

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	24.1 °C, 52 %	AC 120V	Ken Lan
Radiated emissions below 1 GHz	Refer to data	AC 120V	Winston Fang
Radiated emissions above 1 GHz	Refer to data	AC 120V	Winston Fang
Bandwidth	24.1 °C, 52 %	AC 120V	Ken Lan
Output Power	23.2 °C, 41 %	AC 120V	Ken Lan
Power Spectral Density	24.1 °C, 52 %	AC 120V	Ken Lan
Antenna conducted Spurious Emission	24.1 °C, 52 %	AC 120V	Ken Lan

1.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11b	8.440	1	8.440	8.560	98.60%	0.06
IEEE 802.11g	1.392	1	1.392	1.512	92.06%	0.36
IEEE 802.11n (HT20)	1.308	1	1.308	1.424	91.85%	0.37

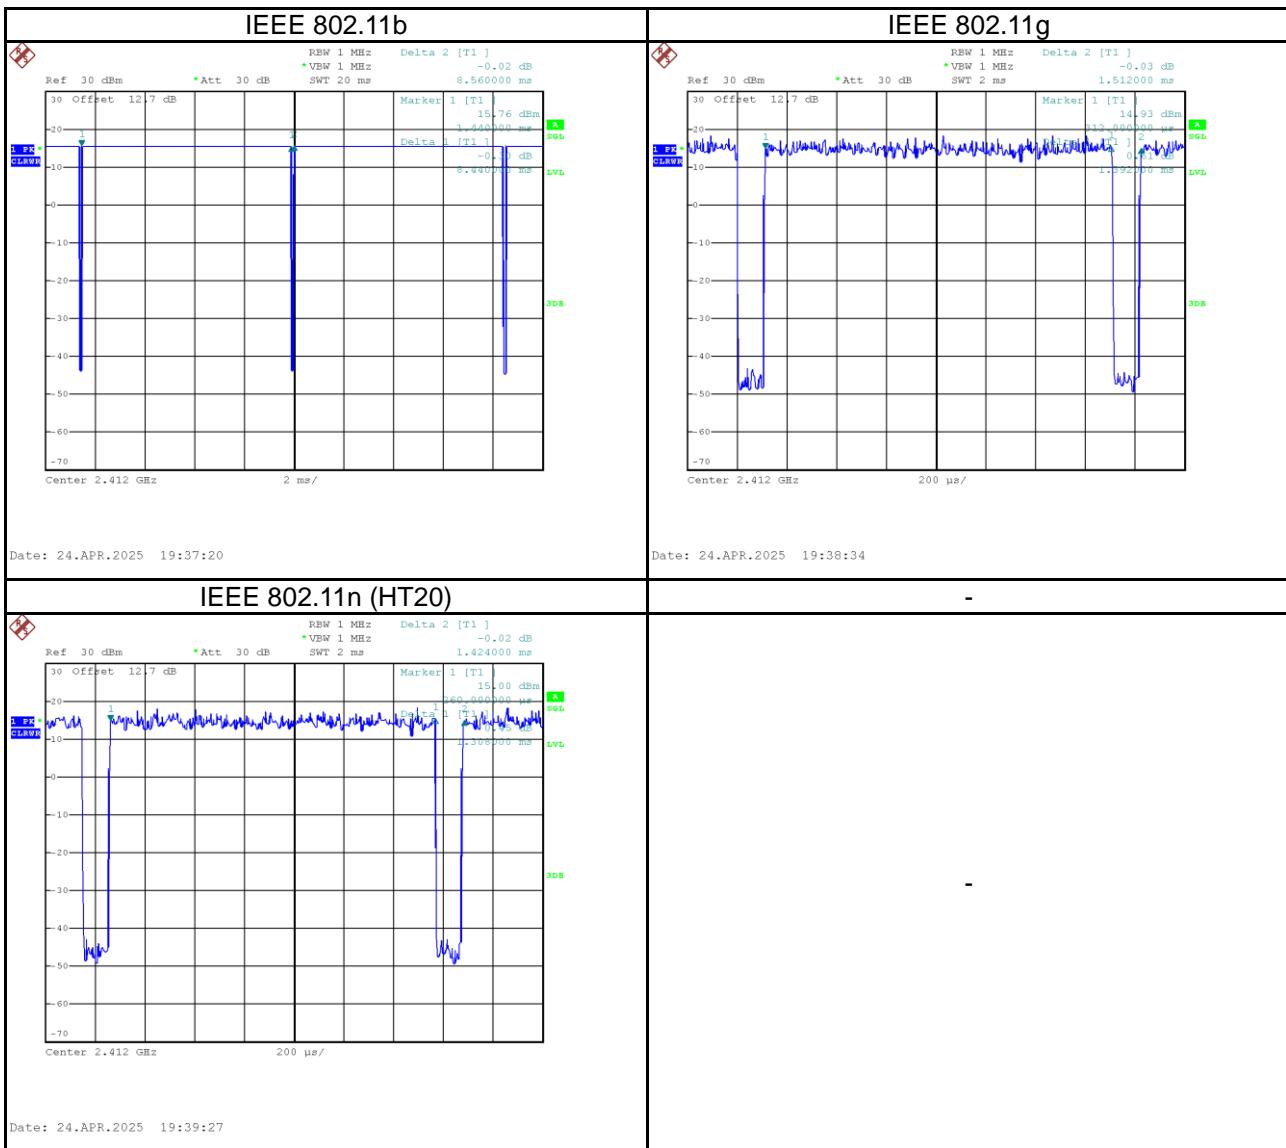

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Scheduler Docking Station
Model Name	TDD-1000
Brand Name	Qbic
Model Difference	N/A
Power Source	DC Voltage supplied from AC/DC adapter. EUT: DC 21V
Power Rating	For Adapter: I/P: 100-240V~, 2.5A 50-60Hz O/P: 21.0V---8.58A 180.0W
Products Covered	1 * Adapter: HUIZHOU CITY YOUWEI CHUANGKE ELECTRONICS CO.,LTD / YW180A2-2100858 1 * Power cable 1* Type-C to Type-C cable
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Technology	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Transfer Rate	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 72.20 Mbps
Maximum Output Power	IEEE 802.11b: 23.59 dBm (0.2286 W) IEEE 802.11g: 24.44 dBm (0.2780 W) IEEE 802.11n (HT20): 24.51 dBm (0.2825 W)
Test Software Version	Command
Test Model	TDD-1000
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

(3) Table for Filed Antenna:

Antenna	Manufacture	Model name	Type	Connector	Frequency Range (MHz)	Gain (dBi)
1	JOYMAX	TBF-V03BMP3B-W015	FPC	I-PEX MHF1	2450	1.31

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11g	06	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/11	Bandedge
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/06/11	Harmonic
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
Bandwidth & Output Power & Power Spectral Density & Antenna conducted Spurious Emission	IEEE 802.11b	01/06/11	-
	IEEE 802.11g		
	IEEE 802.11n (HT20)		


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

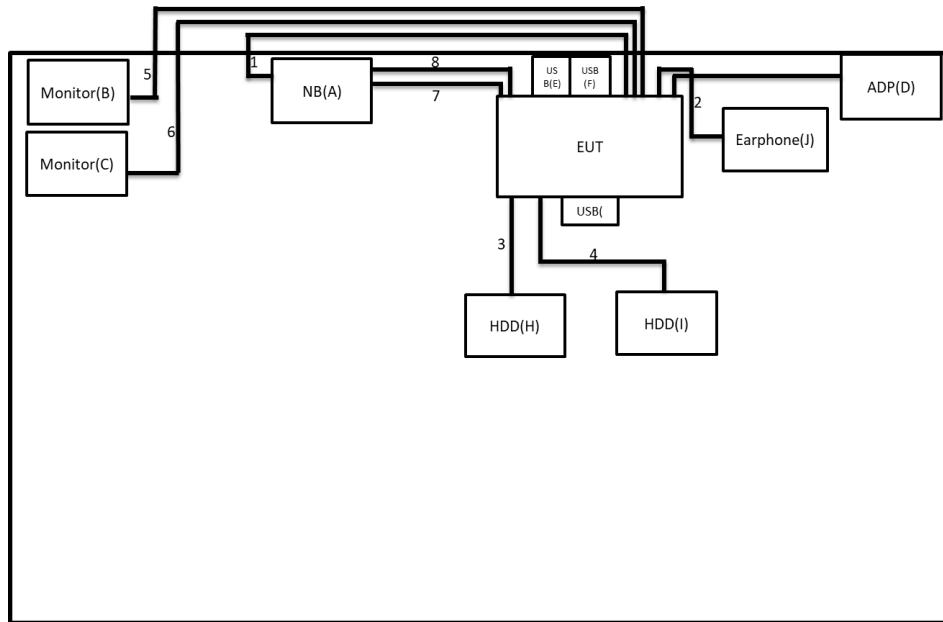

Radiated Emissions

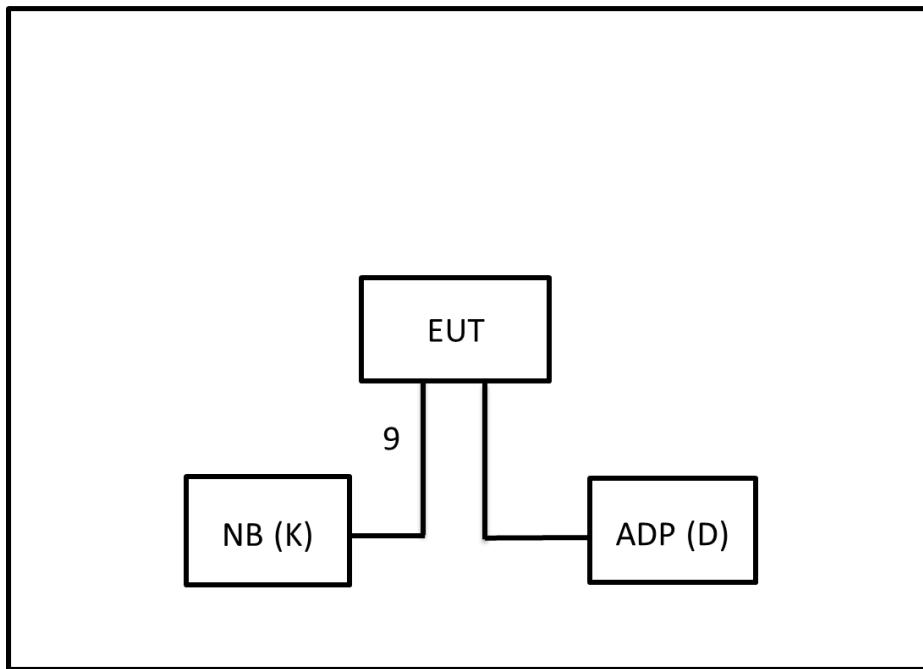

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	Dynabook	N/A	A	Furnished by test lab.
B	Monitor	Dell	N/A	B	Furnished by test lab.
C	Monitor	Dell	N/A	C	Furnished by test lab.
D	ADP	HUIZHOU CITY YOUWEI CHUANGKE ELECTRONICS CO.,LTD	YW180A2-2100858 2422 01533 A1	D	Supplied by test requester
E	USB	Kingston	N/A	E	Furnished by test lab.
F	USB	Kingston	N/A	F	Furnished by test lab.
G	USB	N/A	N/A	G	Furnished by test lab.
H	HDD	WD	N/A	H	Furnished by test lab.
I	HDD	WD	N/A	I	Furnished by test lab.
J	Earphone	soundcore	N/A	J	Furnished by test lab.
K	NB	Dynabook	Satellite pro C50-H	K	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1M	USB-C cable	Supplied by test requester
2	N/A	N/A	1M	USB-C cable	Supplied by test requester
3	N/A	N/A	1M	USB-C cable	Supplied by test requester
4	N/A	N/A	1M	USB-C cable	Supplied by test requester
5	N/A	N/A	1.8M	HDMI Cable	Furnished by test lab.
6	N/A	N/A	2M	DP Cable	Furnished by test lab.
7	N/A	N/A	50CM	USB-A cable	Furnished by test lab.
8	N/A	N/A	50CM	LAN Cable	Furnished by test lab.
9	N/A	N/A	1.9M	USB toMicro Cable	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level (dB μ V)		Correct Factor (dB)		Measurement Value (dB μ V)
38.22	+	3.45	=	41.67

Measurement Value (dB μ V)		Limit Value (dB μ V)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
All other support equipment were powered from an additional LISN(s).
The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
The end of the cable will be terminated, using the correct terminating impedance.
The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

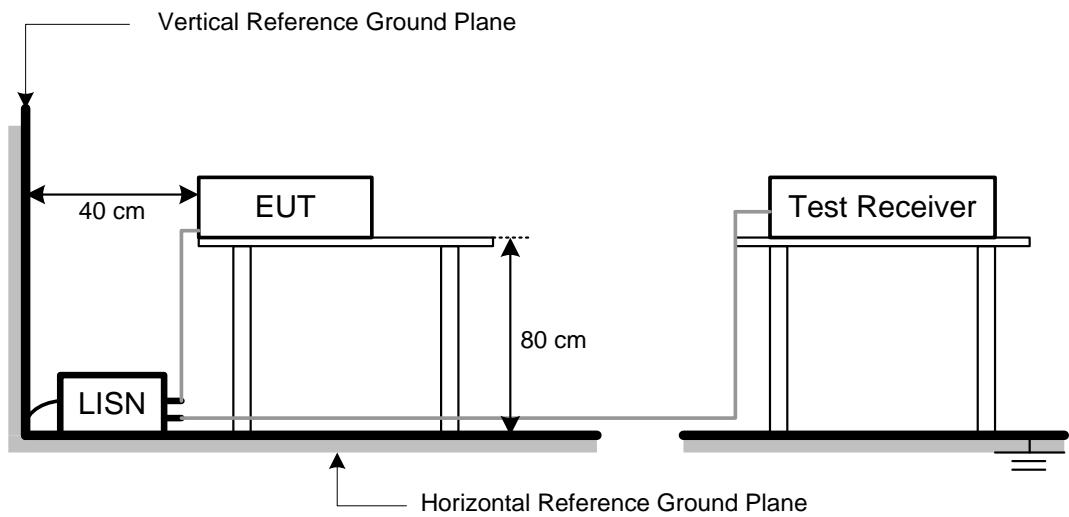

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dB μ V/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dB μ V)		Correct Factor (dB/m)		Measurement Value (dB μ V/m)
41.91	+	-8.36	=	33.55

Measurement Value (dB μ V/m)		Limit Value (dB μ V/m)		Margin Level (dB)
33.55	-	43.50	=	-9.95

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- a. The measuring distance of 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 30MHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- c. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- d. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- f. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- g. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- h. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- i. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- j. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.



4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

9 kHz to 30 MHz

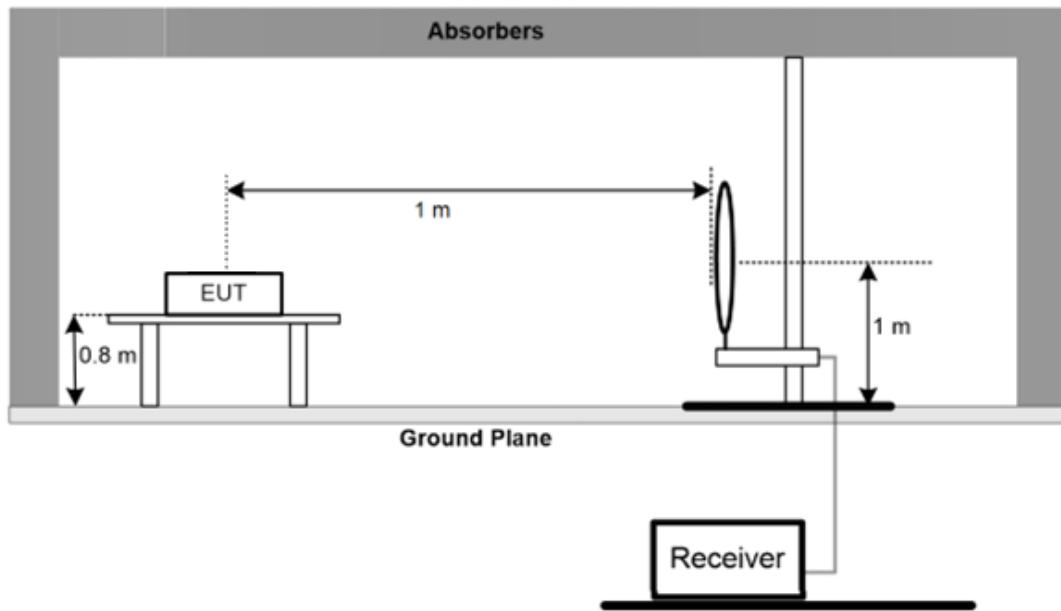

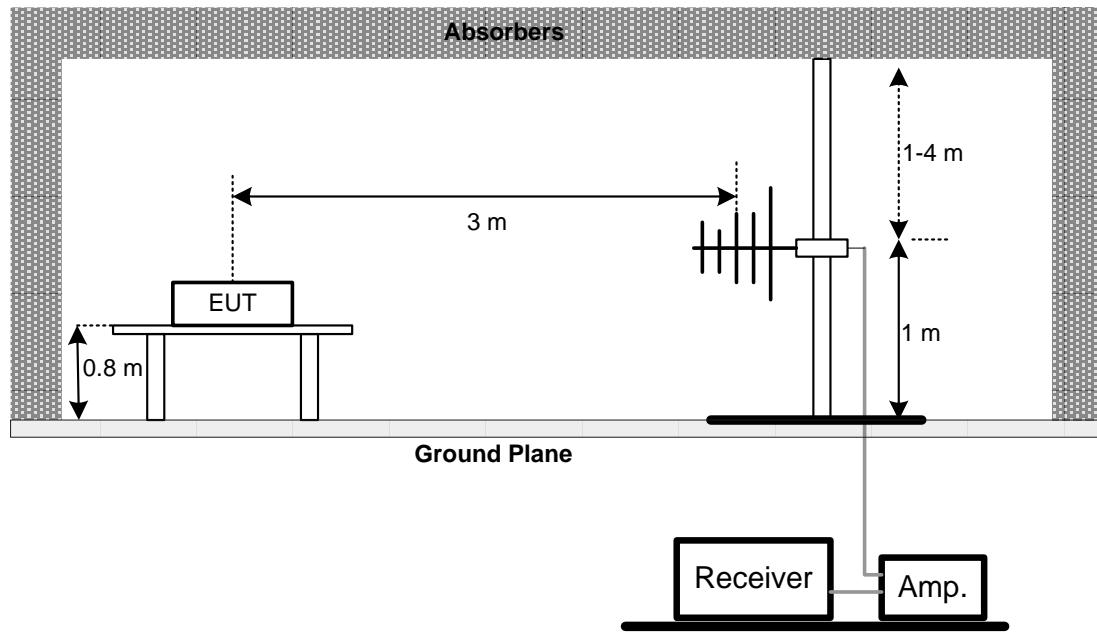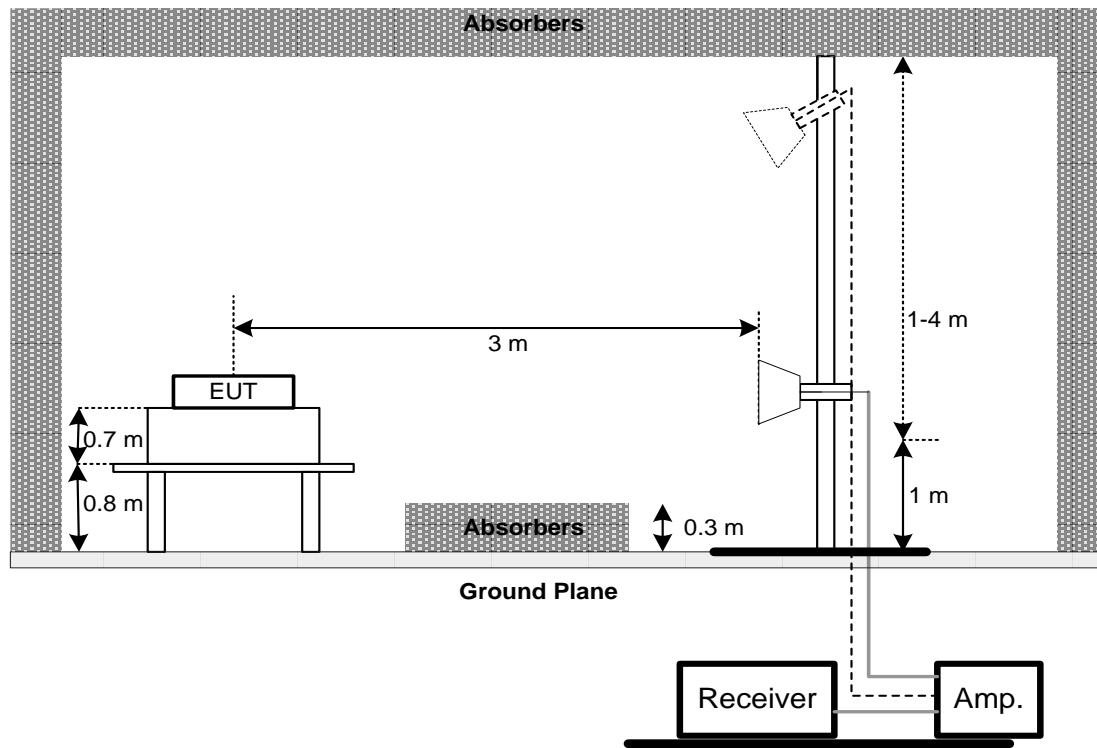30 MHz to 1 GHz**Above 1 GHz****4.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Limit
15.247(a)	6 dB Bandwidth	500 kHz

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit
15.247(b)	Maximum Output Power	1 Watt or 30dBm


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.
- c. Subclause 11.9.1.1 of ANSI C63.10 is applied. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

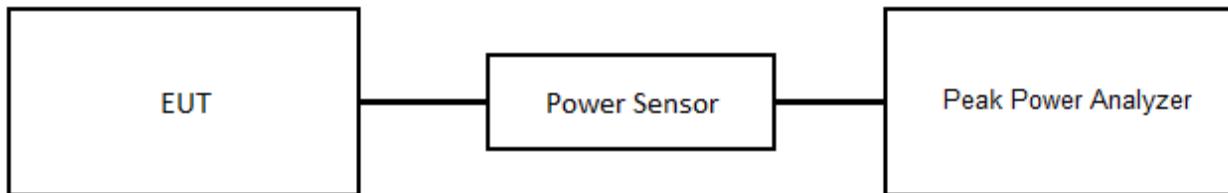

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW = 3 kHz, VBW = 10 kHz, Sweep time = Auto.

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW = 100 kHz, VBW=300 kHz, Sweep time = Auto.
- c. Offset = antenna gain + cable loss.

8.3 DEVIATION FROM TEST STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULT

Please refer to the APPENDIX H.

9 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101497	2024/5/20	2025/5/19
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2024/7/31	2025/7/30
3	EMI Test Receiver	R&S	ESR3	102950	2025/4/14	2026/4/13
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Amplifier	HP	8447D	2944A08558	2025/3/20	2026/3/19
2	Pre-Amplifier	EMCI	EMC012645B	980267	2025/3/25	2026/3/24
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2024/9/4	2025/9/3
4	Preamplifier	EMCI	EMC001340	980579	2024/9/4	2025/9/3
5	Test Cable	EMCI	EMC104-SM-SM-1000	250312	2025/4/2	2026/4/1
6	Test Cable	EMCI	EMC104-SM-SM-1000	250313	2025/4/2	2026/4/1
7	Test Cable	EMCI	EMC104-SM-SM-7000	250314	2025/4/2	2026/4/1
8	Spectrum Analyzer	R&S	FSV3044	101524	2024/6/19	2025/6/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2024/9/9	2025/9/8
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120 D	546	2024/6/19	2025/6/18
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2025/5/15	2026/5/14
12	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	9168-352	2024/8/14	2025/8/13
13	Test Cable	EMCI	EMC101G-KM-K M-3000	220329	2025/3/12	2026/3/11
14	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
15	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2025/3/7	2026/3/6

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Peak Power Analyzer	Keysight	8990B	MY51000517	2025/3/16	2026/3/15
2	Power Sensor	Keysight	N1923A	MY58310005	2025/3/18	2026/3/17

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2025/3/7	2026/3/6

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	101139	2025/3/7	2026/3/6

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2503T049-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2503T049-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/5/8
Test Frequency	-	Phase	Line

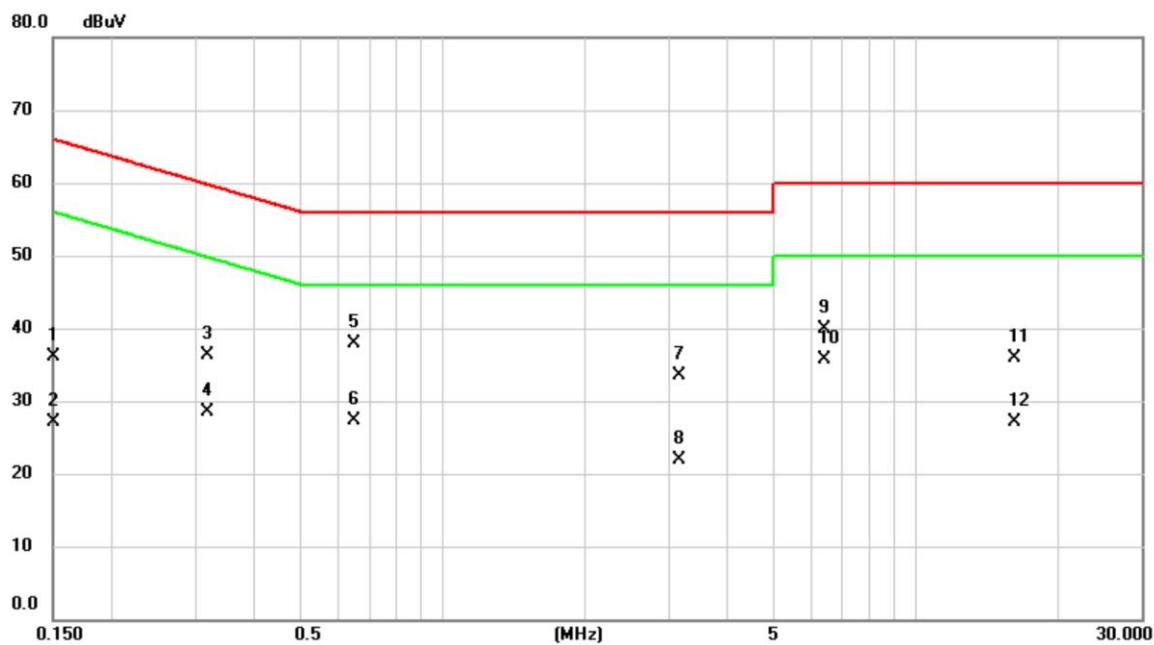


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	26.60	9.58	36.18	66.00	-29.82	QP	
2		0.1500	17.56	9.58	27.14	56.00	-28.86	AVG	
3		0.3187	26.68	9.58	36.26	59.74	-23.48	QP	
4		0.3187	18.89	9.58	28.47	49.74	-21.27	AVG	
5		0.6493	28.28	9.59	37.87	56.00	-18.13	QP	
6		0.6493	17.64	9.59	27.23	46.00	-18.77	AVG	
7		3.1717	23.82	9.69	33.51	56.00	-22.49	QP	
8		3.1717	12.30	9.69	21.99	46.00	-24.01	AVG	
9		6.4207	30.02	9.80	39.82	60.00	-20.18	QP	
10	*	6.4207	25.97	9.80	35.77	50.00	-14.23	AVG	
11		16.1970	25.88	10.08	35.96	60.00	-24.04	QP	
12		16.1970	17.02	10.08	27.10	50.00	-22.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/5/8
Test Frequency	-	Phase	Neutral

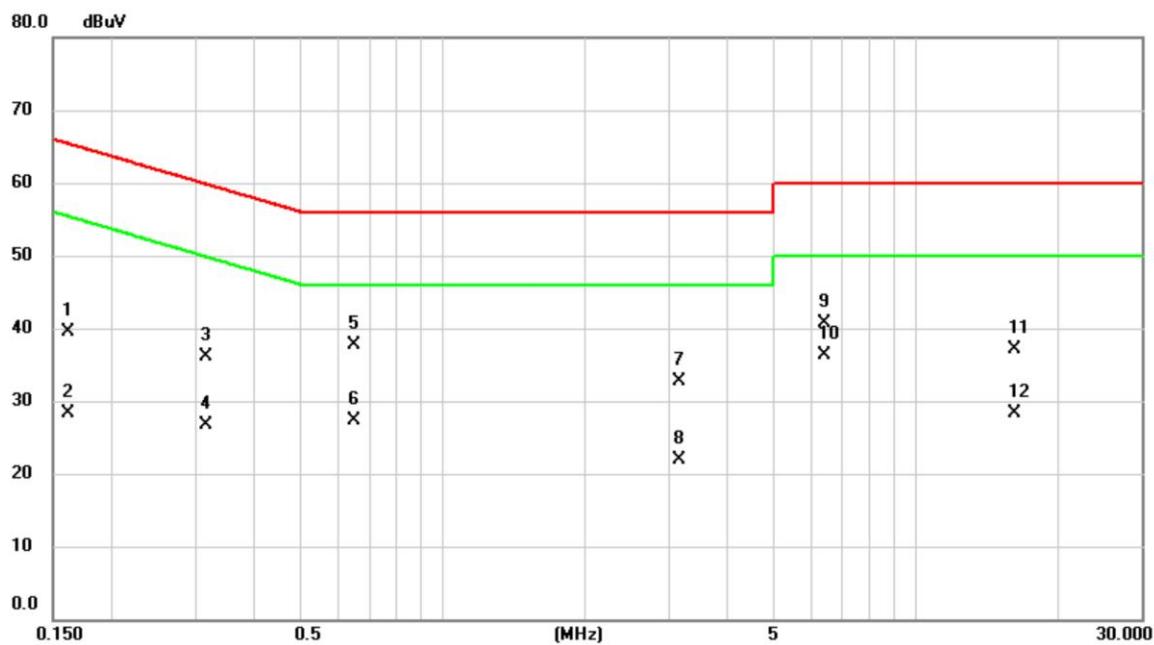


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1613	29.87	9.57	39.44	65.40	-25.96	QP	
2		0.1613	18.80	9.57	28.37	55.40	-27.03	AVG	
3		0.3165	26.43	9.58	36.01	59.80	-23.79	QP	
4		0.3165	17.08	9.58	26.66	49.80	-23.14	AVG	
5		0.6517	28.05	9.60	37.65	56.00	-18.35	QP	
6		0.6517	17.79	9.60	27.39	46.00	-18.61	AVG	
7		3.1650	22.97	9.71	32.68	56.00	-23.32	QP	
8		3.1650	12.28	9.71	21.99	46.00	-24.01	AVG	
9		6.3983	30.78	9.83	40.61	60.00	-19.39	QP	
10	*	6.3983	26.39	9.83	36.22	50.00	-13.78	AVG	
11		16.1408	26.82	10.21	37.03	60.00	-22.97	QP	
12		16.1408	18.11	10.21	28.32	50.00	-21.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/5/8
Test Frequency	-	Phase	Line

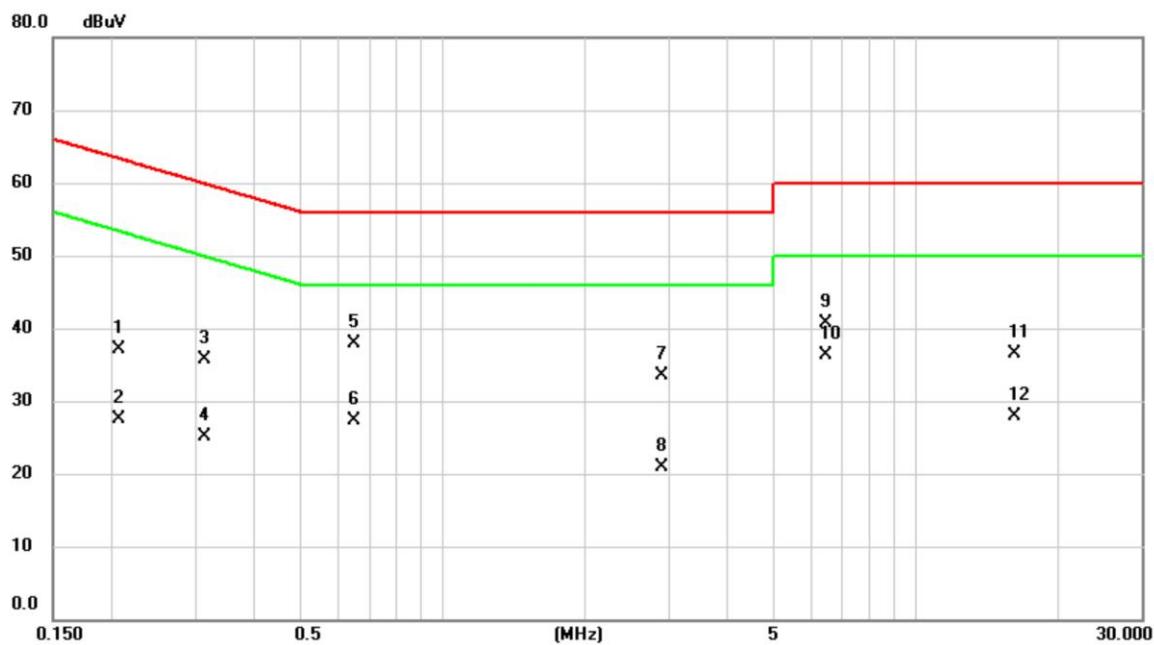


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.2063	27.43	9.59	37.02	63.35	-26.33	QP	
2		0.2063	17.82	9.59	27.41	53.35	-25.94	AVG	
3		0.3141	26.17	9.58	35.75	59.86	-24.11	QP	
4		0.3141	15.51	9.58	25.09	49.86	-24.77	AVG	
5		0.6495	28.26	9.59	37.85	56.00	-18.15	QP	
6		0.6495	17.74	9.59	27.33	46.00	-18.67	AVG	
7		2.9108	23.75	9.68	33.43	56.00	-22.57	QP	
8		2.9108	11.24	9.68	20.92	46.00	-25.08	AVG	
9		6.4658	30.98	9.80	40.78	60.00	-19.22	QP	
10	*	6.4658	26.60	9.80	36.40	50.00	-13.60	AVG	
11		16.2060	26.38	10.08	36.46	60.00	-23.54	QP	
12		16.2060	17.92	10.08	28.00	50.00	-22.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2025/5/8
Test Frequency	-	Phase	Neutral

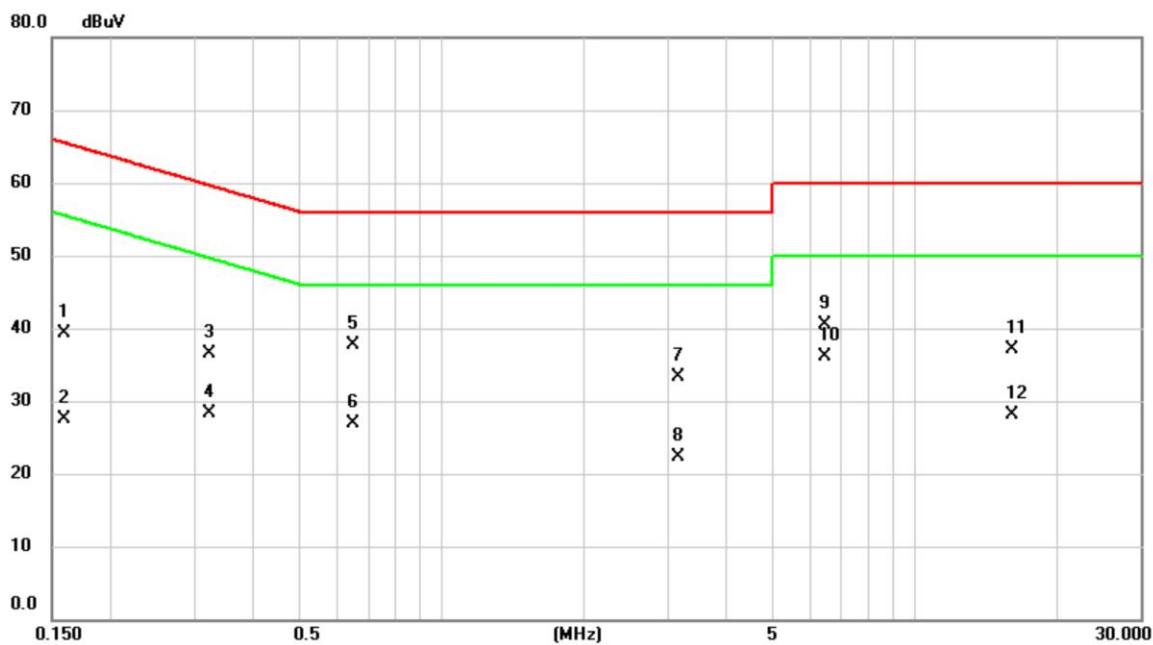


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1590	29.74	9.57	39.31	65.52	-26.21	QP	
2		0.1590	17.96	9.57	27.53	55.52	-27.99	AVG	
3		0.3232	26.88	9.58	36.46	59.62	-23.16	QP	
4		0.3232	18.81	9.58	28.39	49.62	-21.23	AVG	
5		0.6517	28.08	9.60	37.68	56.00	-18.32	QP	
6		0.6517	17.23	9.60	26.83	46.00	-19.17	AVG	
7		3.1560	23.64	9.71	33.35	56.00	-22.65	QP	
8		3.1560	12.50	9.71	22.21	46.00	-23.79	AVG	
9		6.4658	30.60	9.83	40.43	60.00	-19.57	QP	
10	*	6.4658	26.36	9.83	36.19	50.00	-13.81	AVG	
11		16.0170	26.82	10.20	37.02	60.00	-22.98	QP	
12		16.0170	17.89	10.20	28.09	50.00	-21.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

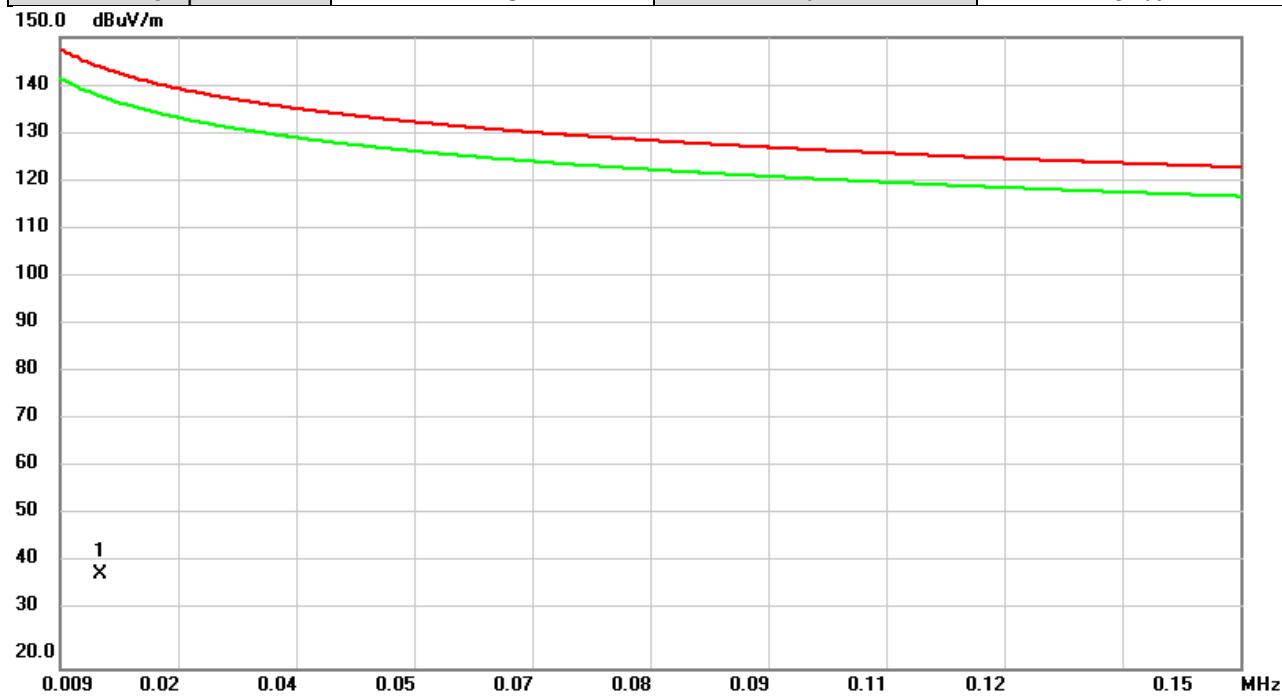


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	0.0137	4.92	34.30	39.22	143.95	-104.73
							Detector Comment
							AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

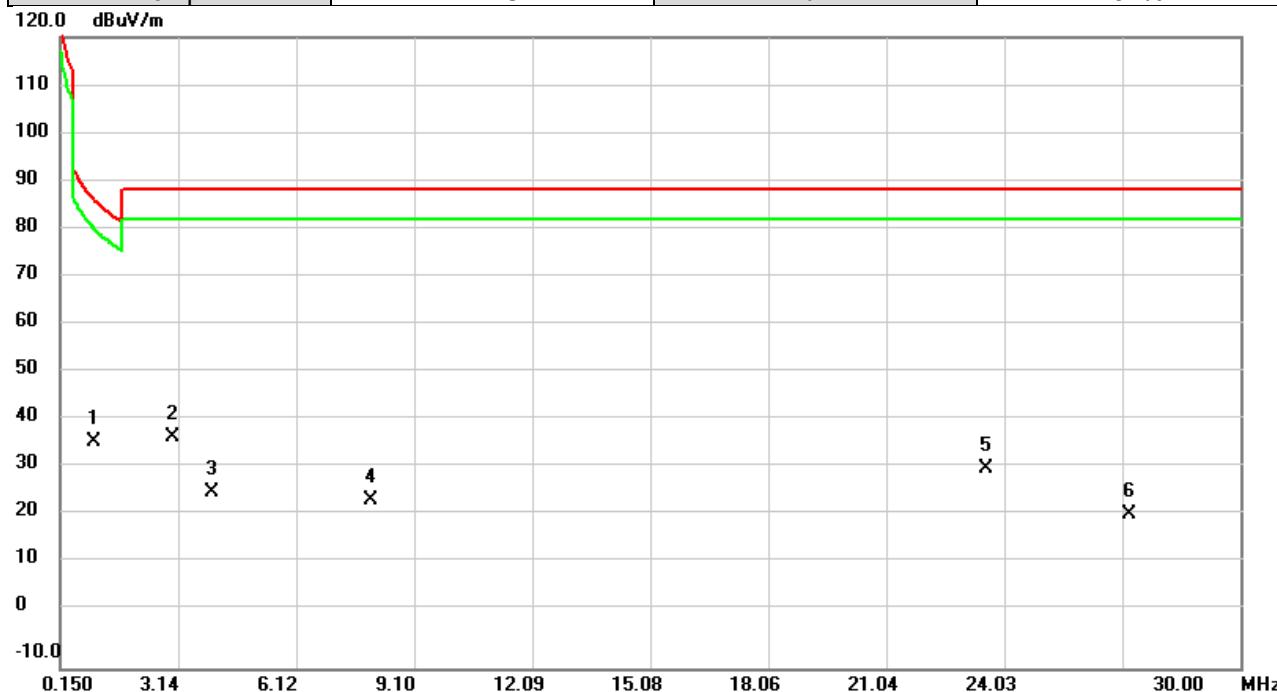


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.9997	36.42	0.23	36.65	86.68	-50.03	QP	
2		2.9997	41.25	-3.75	37.50	88.62	-51.12	QP	
3		3.9997	30.14	-4.06	26.08	88.62	-62.54	QP	
4		8.0006	28.20	-3.54	24.66	88.62	-63.96	QP	
5		23.5554	34.27	-3.22	31.05	88.62	-57.57	QP	
6		27.2031	24.06	-2.52	21.54	88.62	-67.08	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

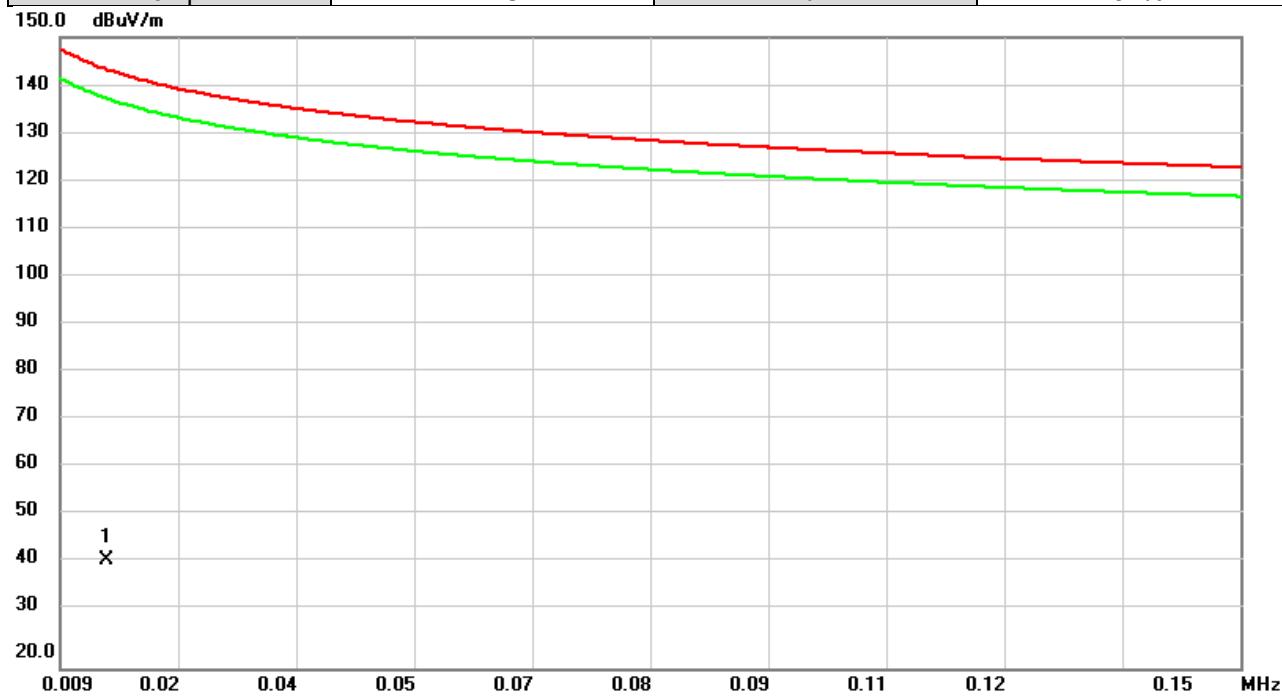


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	0.0146	8.22	33.97	42.19	143.40	-101.21

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

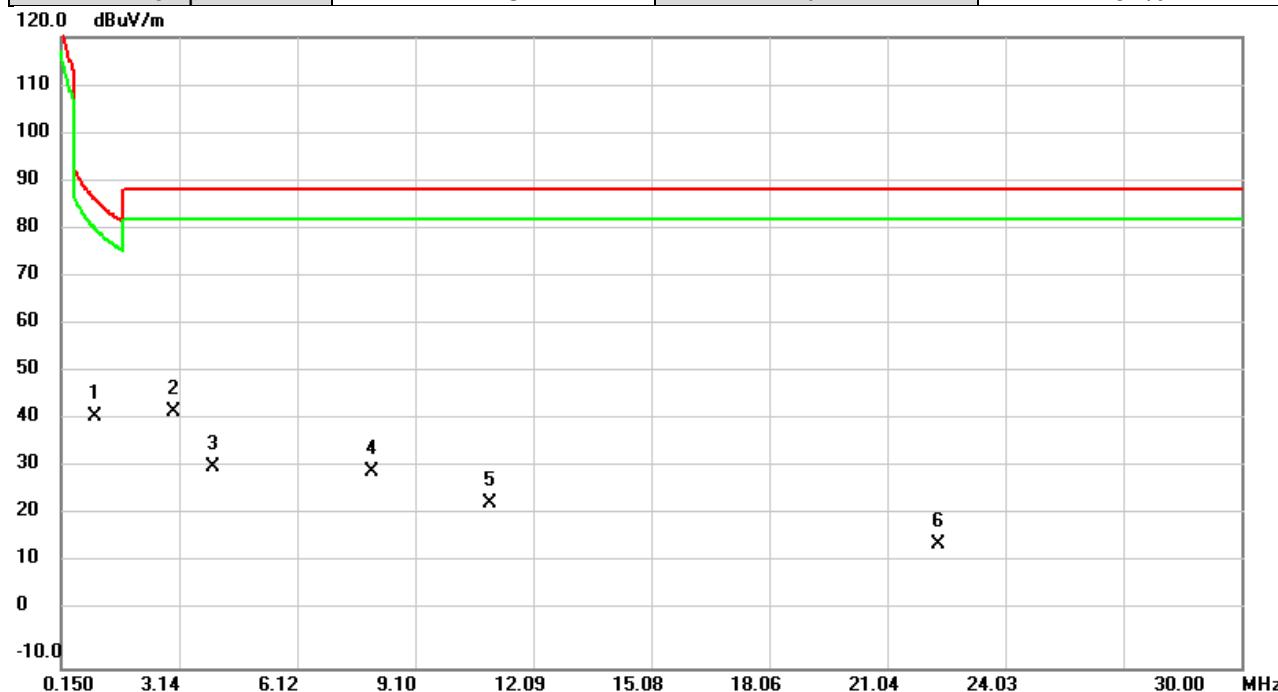


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.9997	41.73	0.23	41.96	86.68	-44.72	QP	
2		2.9997	46.50	-3.75	42.75	88.62	-45.87	QP	
3		3.9997	35.66	-4.06	31.60	88.62	-57.02	QP	
4		8.0006	34.16	-3.54	30.62	88.62	-58.00	QP	
5		11.0004	26.95	-3.07	23.88	88.62	-64.74	QP	
6		22.3335	18.98	-3.47	15.51	88.62	-73.11	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

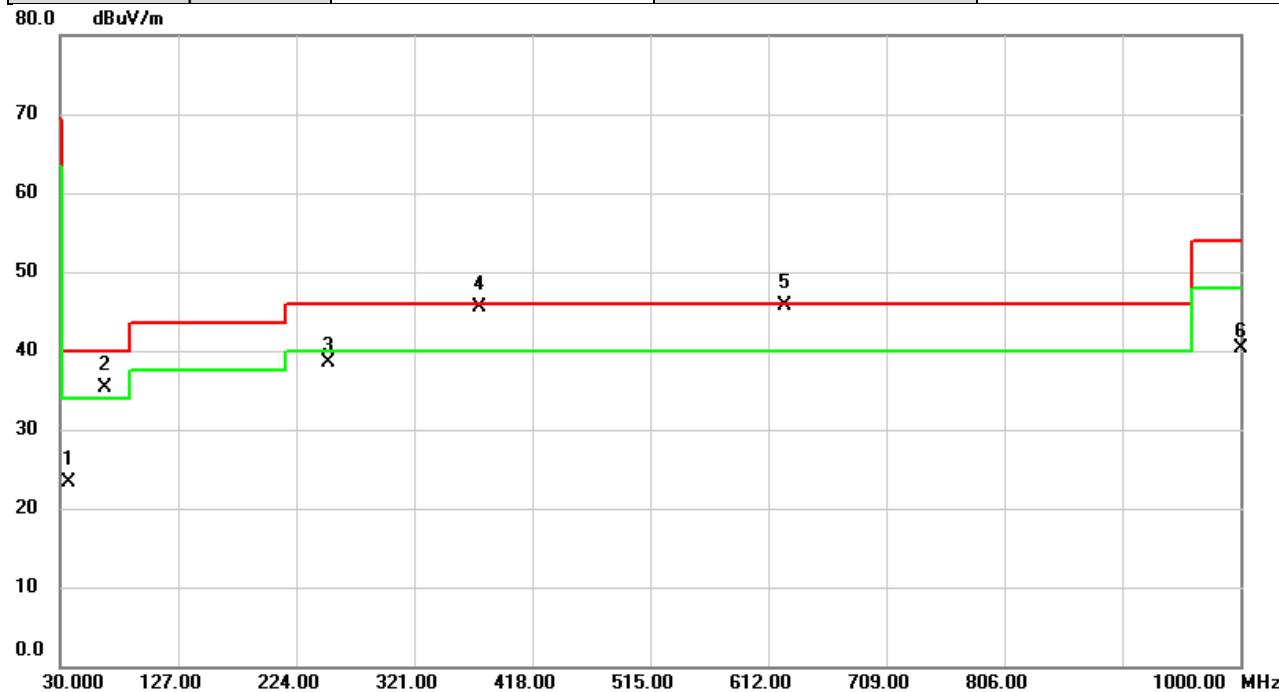


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		36.7253	32.98	-9.58	23.40	40.00	-16.60	QP
2	!	66.8600	45.64	-10.29	35.35	40.00	-4.65	QP
3		250.0283	47.69	-9.11	38.58	46.00	-7.42	peak
4	!	375.0290	51.67	-6.13	45.54	46.00	-0.46	QP
5	*	625.0303	46.98	-1.25	45.73	46.00	-0.27	QP
6		1000.000	36.05	4.29	40.34	54.00	-13.66	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

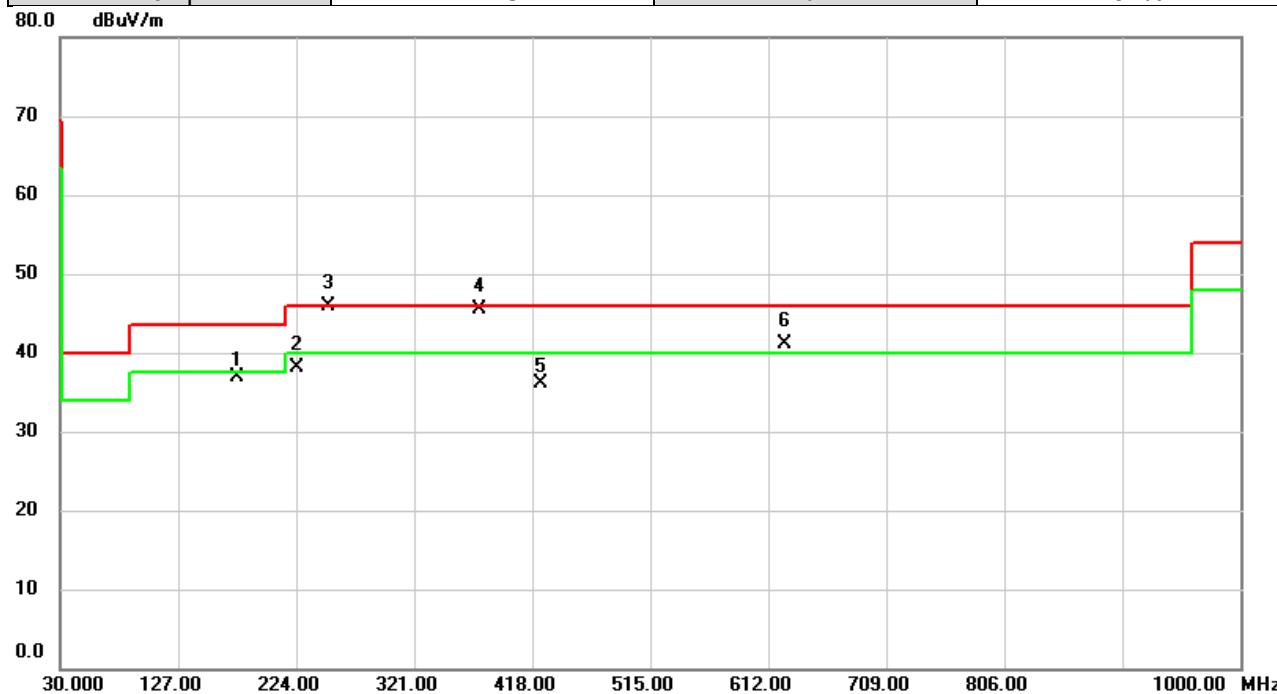


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		175.0150	46.17	-9.26	36.91	43.50	-6.59	peak	
2		225.0023	49.28	-11.09	38.19	46.00	-7.81	QP	
3	*	249.9960	54.98	-9.11	45.87	46.00	-0.13	QP	
4	!	374.9967	51.67	-6.14	45.53	46.00	-0.47	QP	
5		425.0163	41.11	-5.07	36.04	46.00	-9.96	peak	
6	!	624.9980	42.27	-1.25	41.02	46.00	-4.98	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

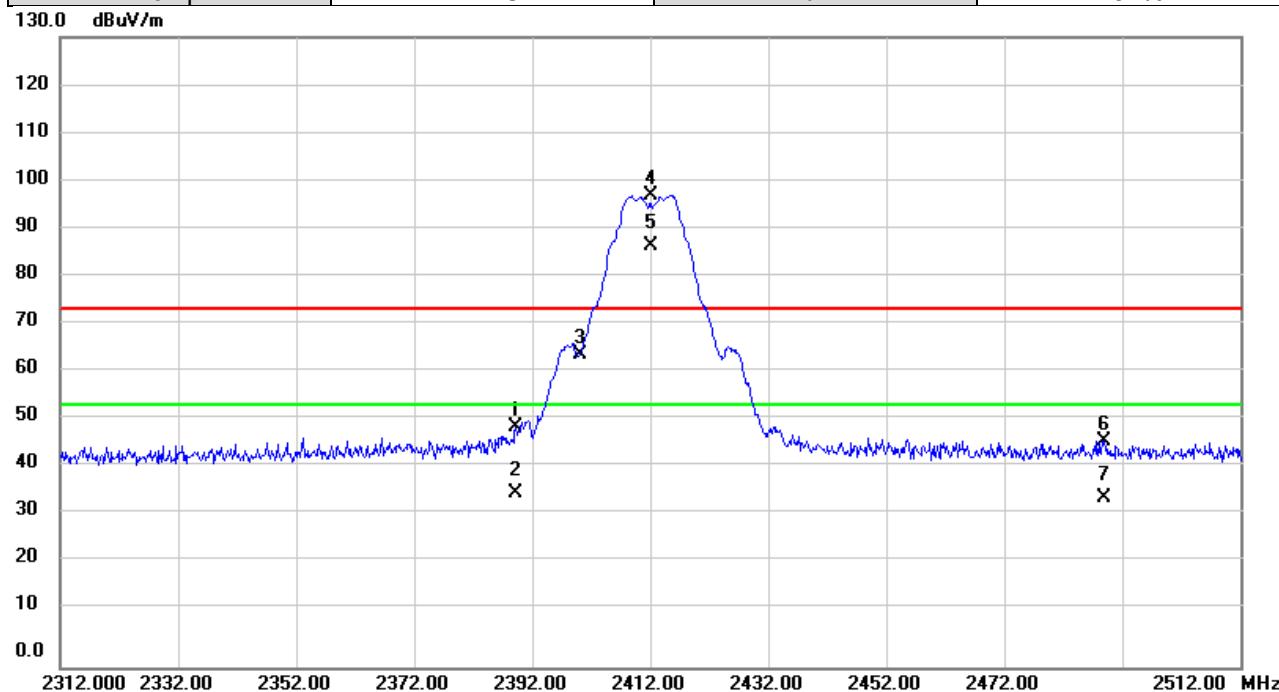


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Detector	Comment
1		2389.300	66.84	-17.43	49.41	74.00	-24.59	peak	
2		2389.300	53.30	-17.43	35.87	54.00	-18.13	AVG	
3		2400.000	81.82	-17.38	64.44	74.00	-9.56	peak	NoLimit
4	X	2412.000	114.77	-17.33	97.44	74.00	23.44	peak	NoLimit
5	*	2412.000	104.15	-17.33	86.82	54.00	32.82	AVG	NoLimit
6		2488.800	63.53	-16.97	46.56	74.00	-27.44	peak	
7		2488.800	51.99	-16.97	35.02	54.00	-18.98	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

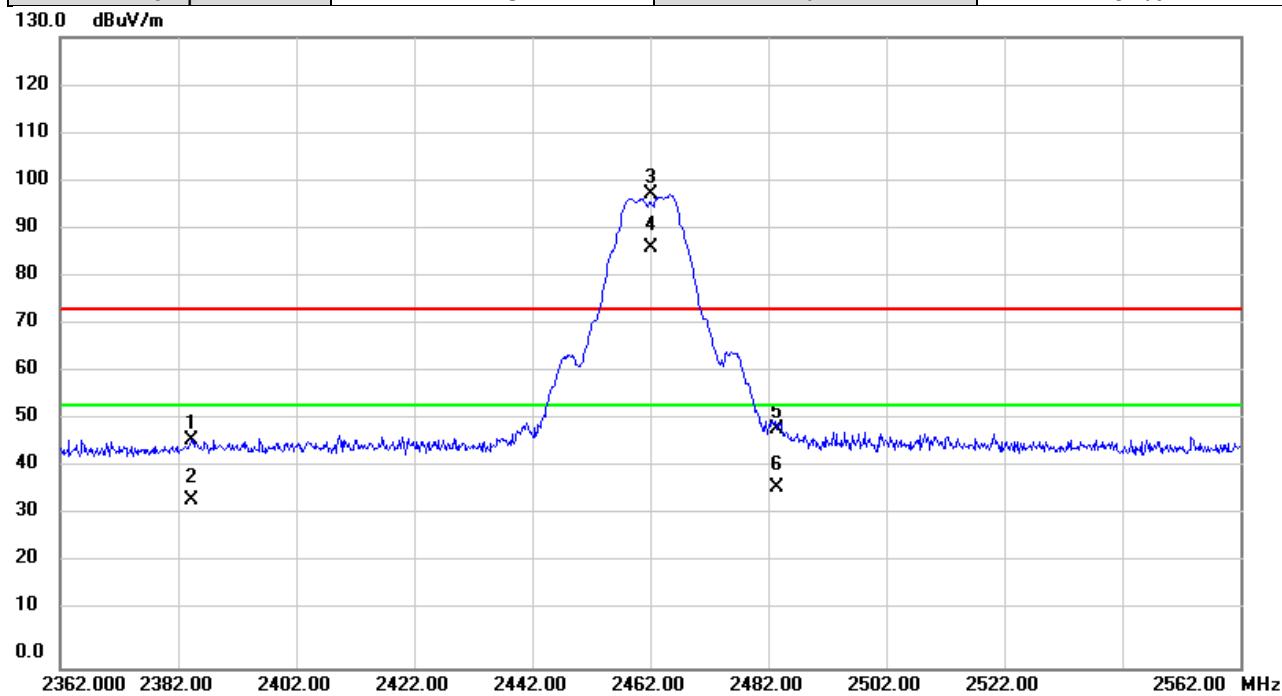


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2384.393	64.46	-17.45	47.01	74.00	-26.99	peak	
2		2384.393	52.19	-17.45	34.74	54.00	-19.26	AVG	
3	X	2462.000	114.61	-17.10	97.51	74.00	23.51	peak	NoLimit
4	*	2462.000	103.62	-17.10	86.52	54.00	32.52	AVG	NoLimit
5		2483.500	66.22	-17.00	49.22	74.00	-24.78	peak	
6		2483.500	54.36	-17.00	37.36	54.00	-16.64	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

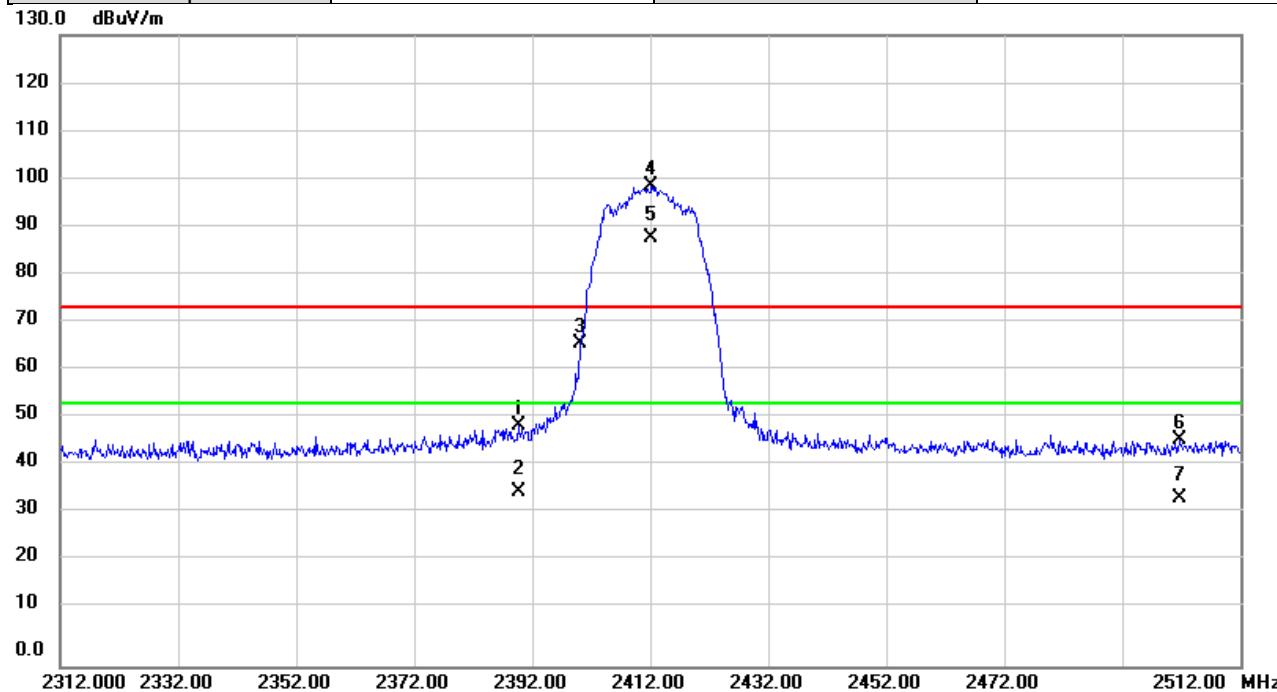


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2389.780	66.94	-17.43	49.51	74.00	-24.49	peak
2		2389.780	53.50	-17.43	36.07	54.00	-17.93	AVG
3		2400.000	83.81	-17.38	66.43	74.00	-7.57	peak NoLimit
4	X	2412.000	116.32	-17.33	98.99	74.00	24.99	peak NoLimit
5	*	2412.000	105.53	-17.33	88.20	54.00	34.20	AVG NoLimit
6		2501.760	63.62	-16.92	46.70	74.00	-27.30	peak
7		2501.760	51.64	-16.92	34.72	54.00	-19.28	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

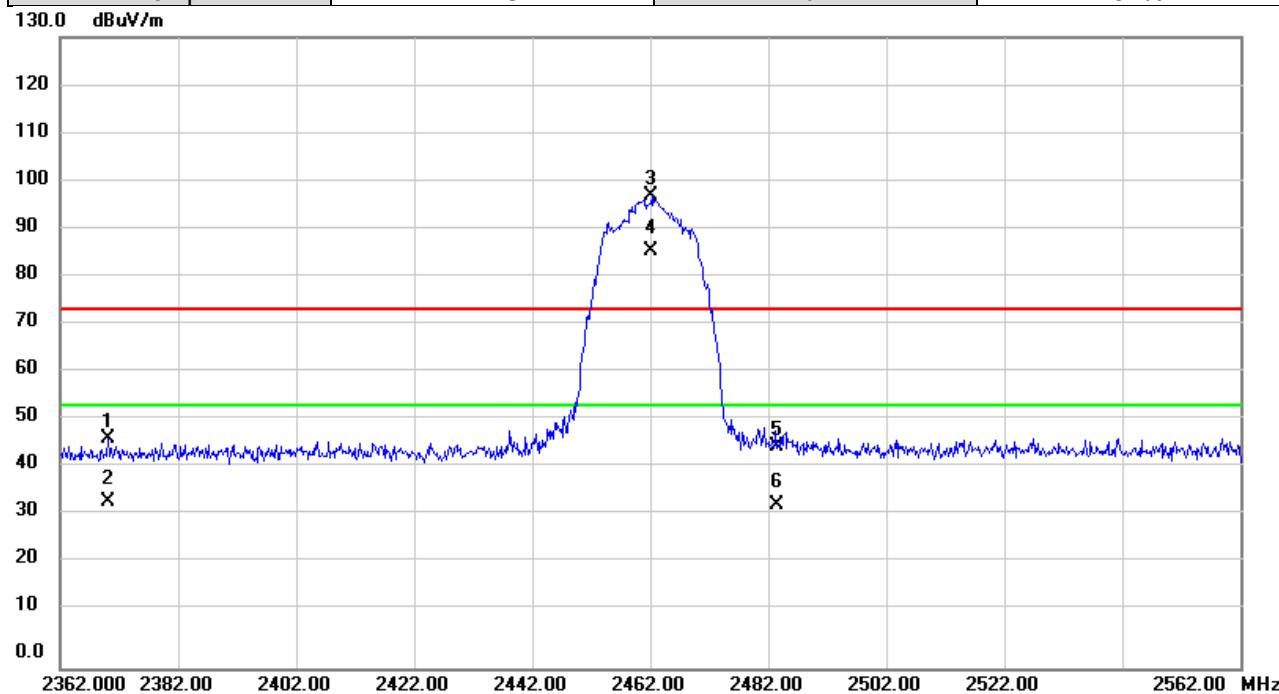


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2370.113	64.88	-17.52	47.36	74.00	-26.64	peak	
2		2370.113	51.92	-17.52	34.40	54.00	-19.60	AVG	
3	X	2462.000	114.46	-17.10	97.36	74.00	23.36	peak	NoLimit
4	*	2462.000	103.13	-17.10	86.03	54.00	32.03	AVG	NoLimit
5		2483.500	62.55	-17.00	45.55	74.00	-28.45	peak	
6		2483.500	50.63	-17.00	33.63	54.00	-20.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

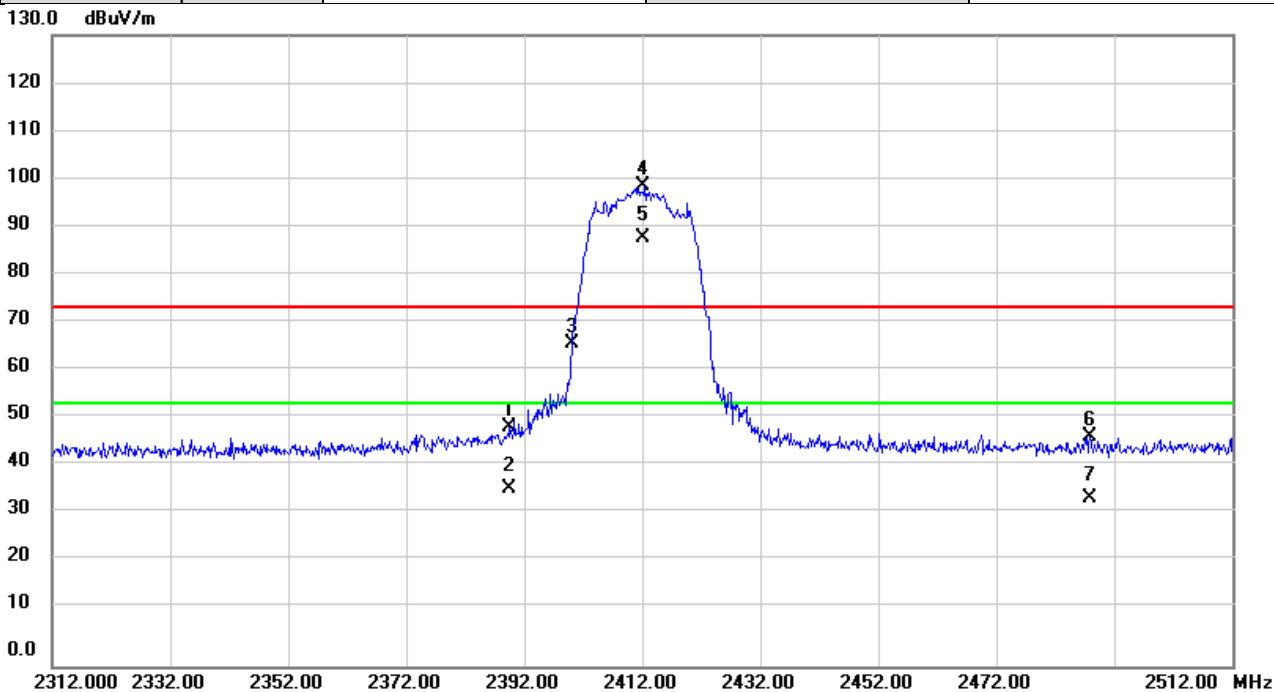


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	
							Detector	Comment
1		2389.527	66.83	-17.43	49.40	74.00	-24.60	peak
2		2389.527	53.87	-17.43	36.44	54.00	-17.56	AVG
3		2400.000	83.89	-17.38	66.51	74.00	-7.49	peak NoLimit
4	X	2412.000	116.45	-17.33	99.12	74.00	25.12	peak NoLimit
5	*	2412.000	105.50	-17.33	88.17	54.00	34.17	AVG NoLimit
6		2487.980	64.14	-16.97	47.17	74.00	-26.83	peak
7		2487.980	51.69	-16.97	34.72	54.00	-19.28	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

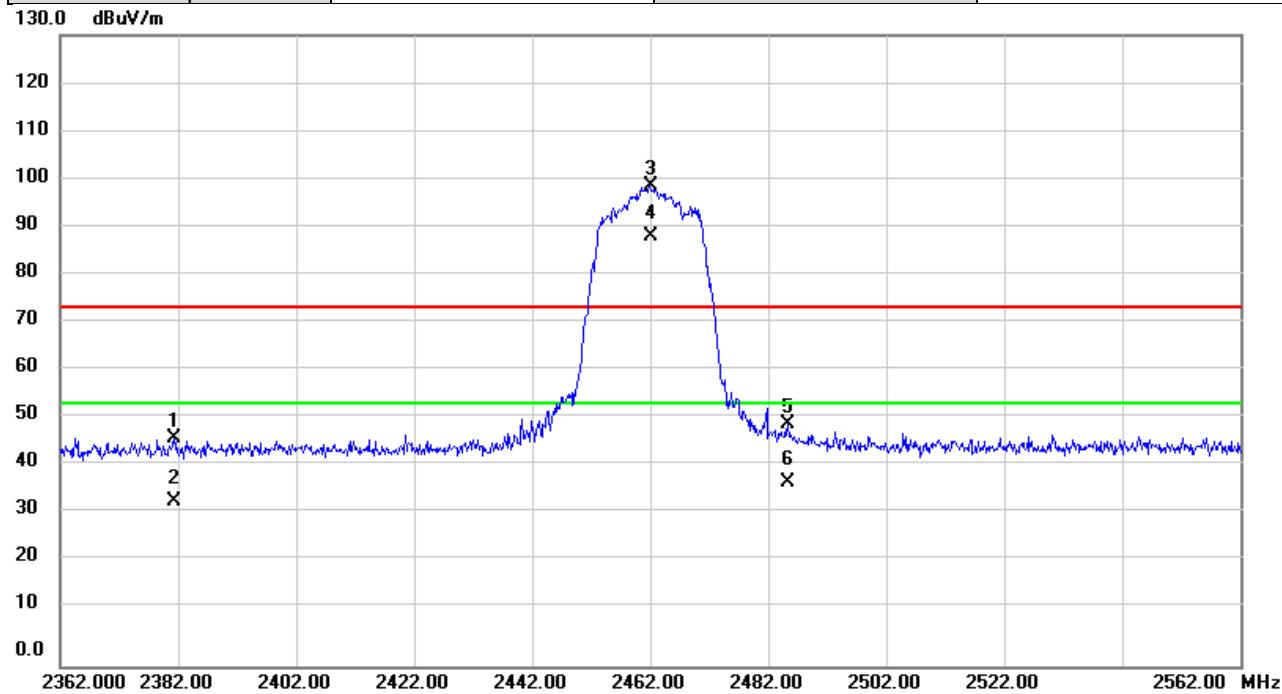


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		2381.253	64.34	-17.47	46.87	74.00	-27.13	peak
2		2381.253	51.28	-17.47	33.81	54.00	-20.19	AVG
3	X	2462.000	116.21	-17.10	99.11	74.00	25.11	peak NoLimit
4	*	2462.000	105.69	-17.10	88.59	54.00	34.59	AVG NoLimit
5		2485.427	66.72	-16.98	49.74	74.00	-24.26	peak
6		2485.427	54.77	-16.98	37.79	54.00	-16.21	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

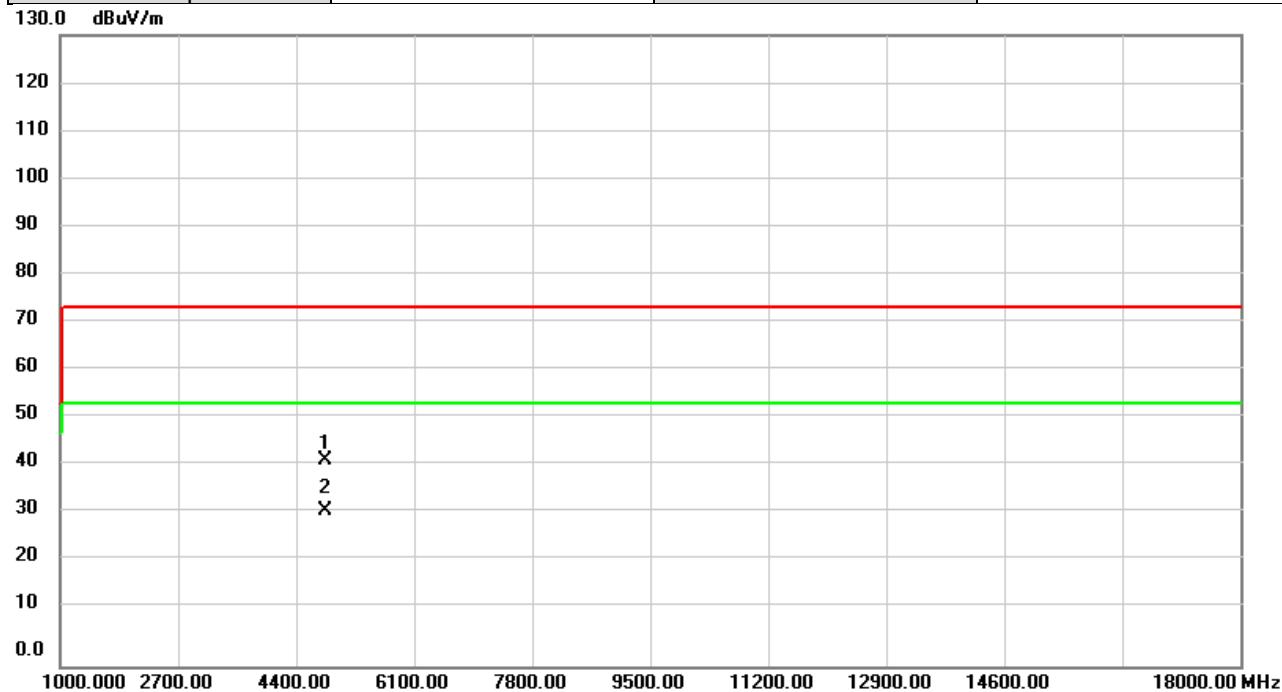


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	52.89	-10.42	42.47	74.00	-31.53	peak	
2	*	4824.000	42.46	-10.42	32.04	54.00	-21.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

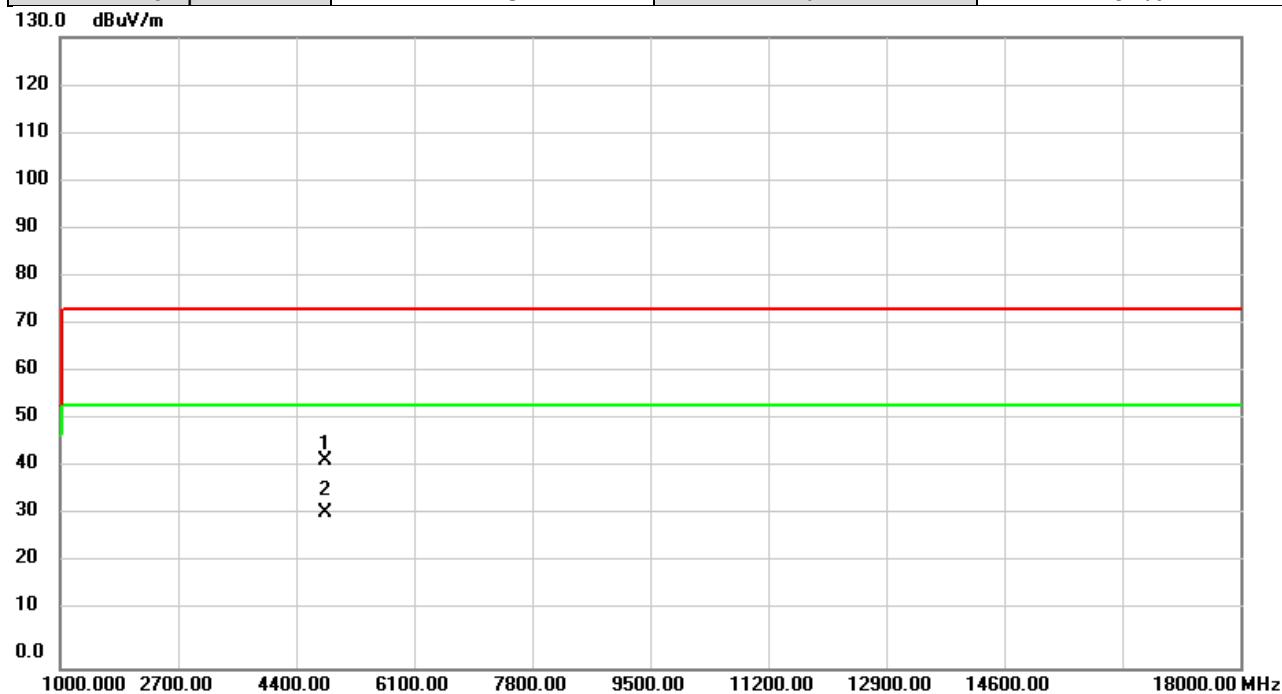


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	53.23	-10.42	42.81	74.00	-31.19	peak	
2	*	4824.000	42.32	-10.42	31.90	54.00	-22.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

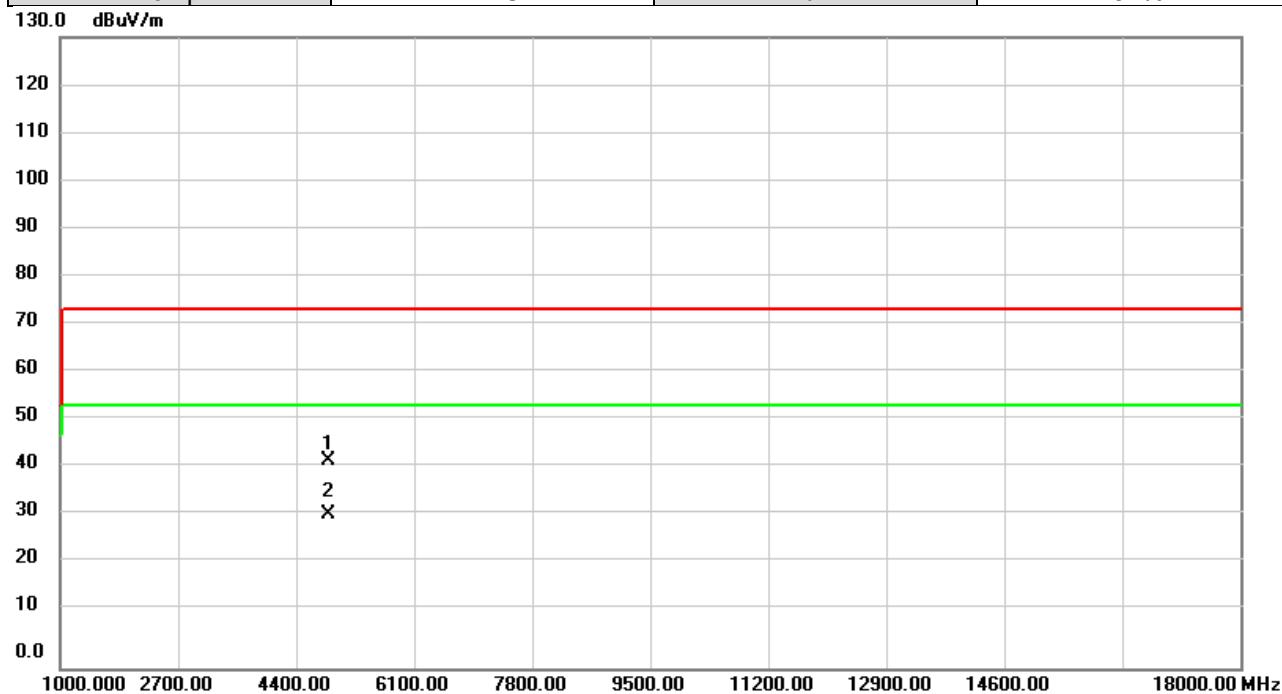


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	53.21	-10.31	42.90	74.00	-31.10	peak	
2	*	4874.000	42.02	-10.31	31.71	54.00	-22.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

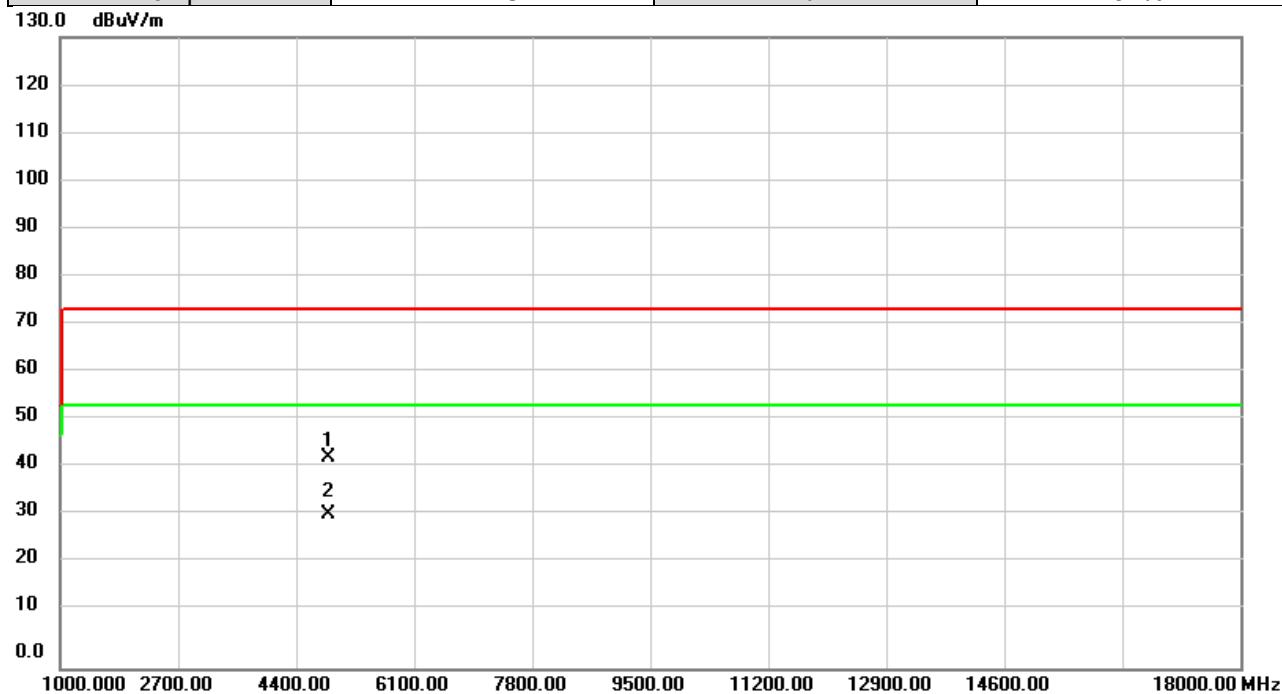


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	53.67	-10.31	43.36	74.00	-30.64	peak	
2	*	4874.000	42.01	-10.31	31.70	54.00	-22.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

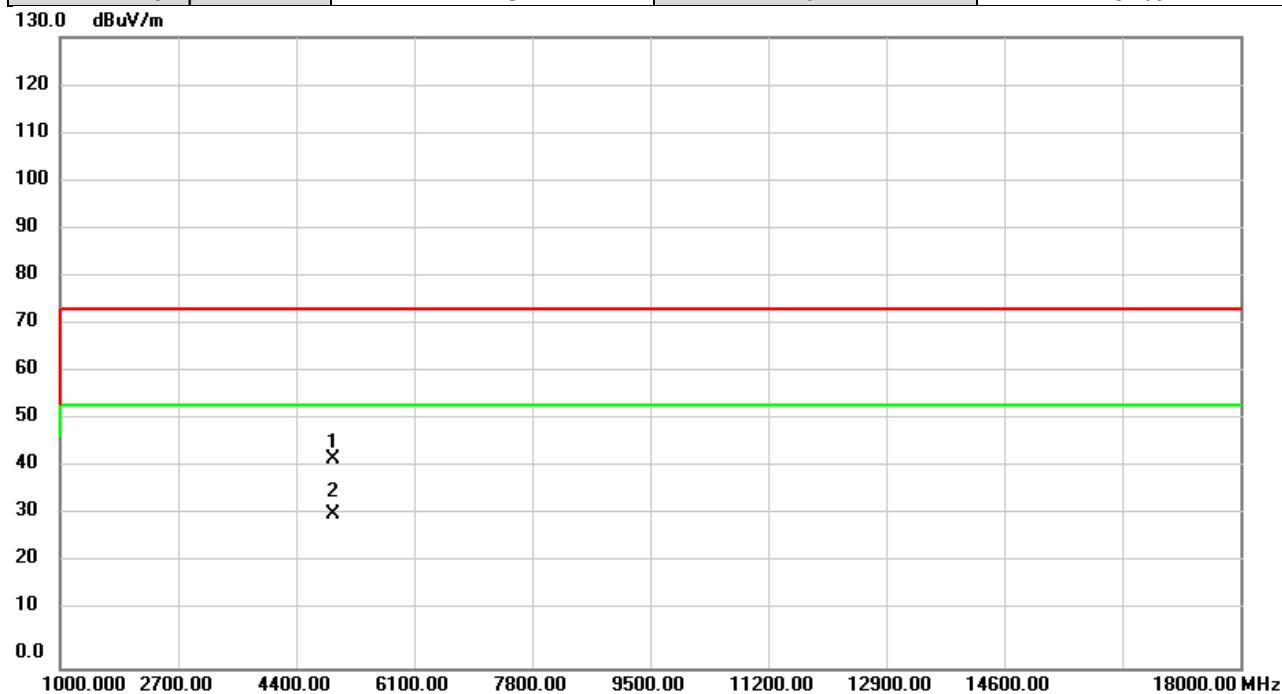


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	53.26	-10.19	43.07	74.00	-30.93	peak	
2	*	4924.000	41.94	-10.19	31.75	54.00	-22.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

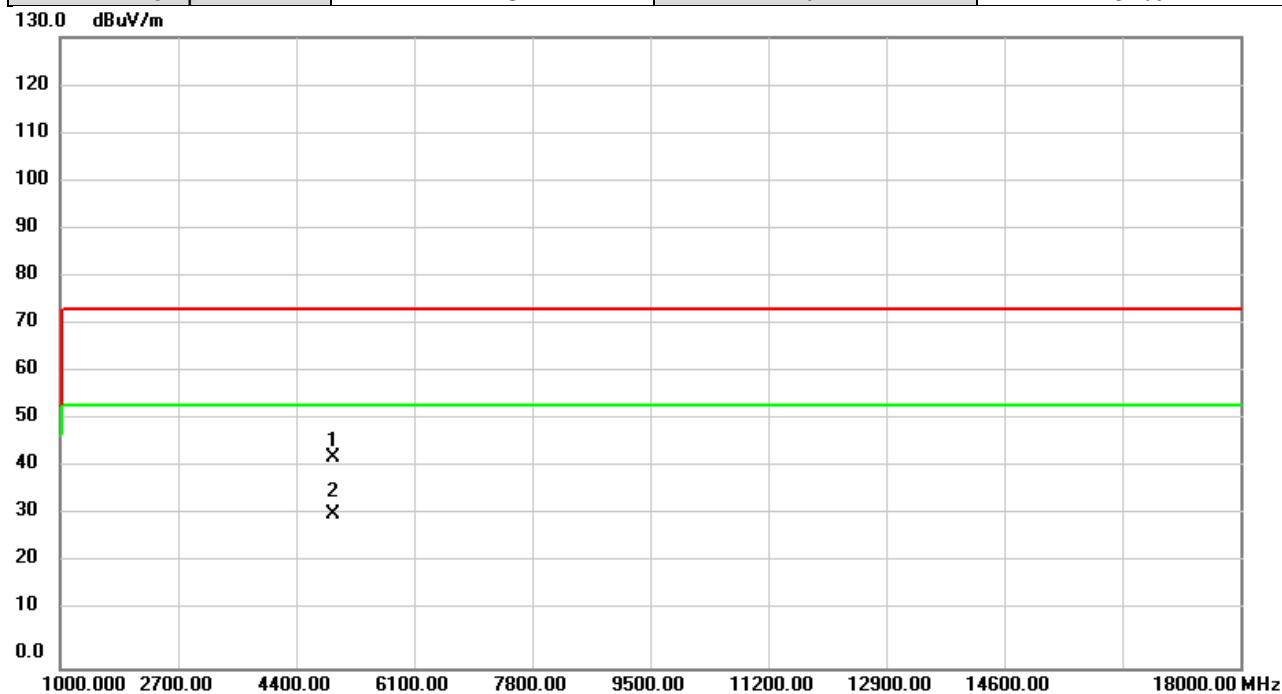


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	Detector	Comment
1		4924.000	53.68	-10.19	43.49	74.00	-30.51	peak
2	*	4924.000	41.92	-10.19	31.73	54.00	-22.27	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

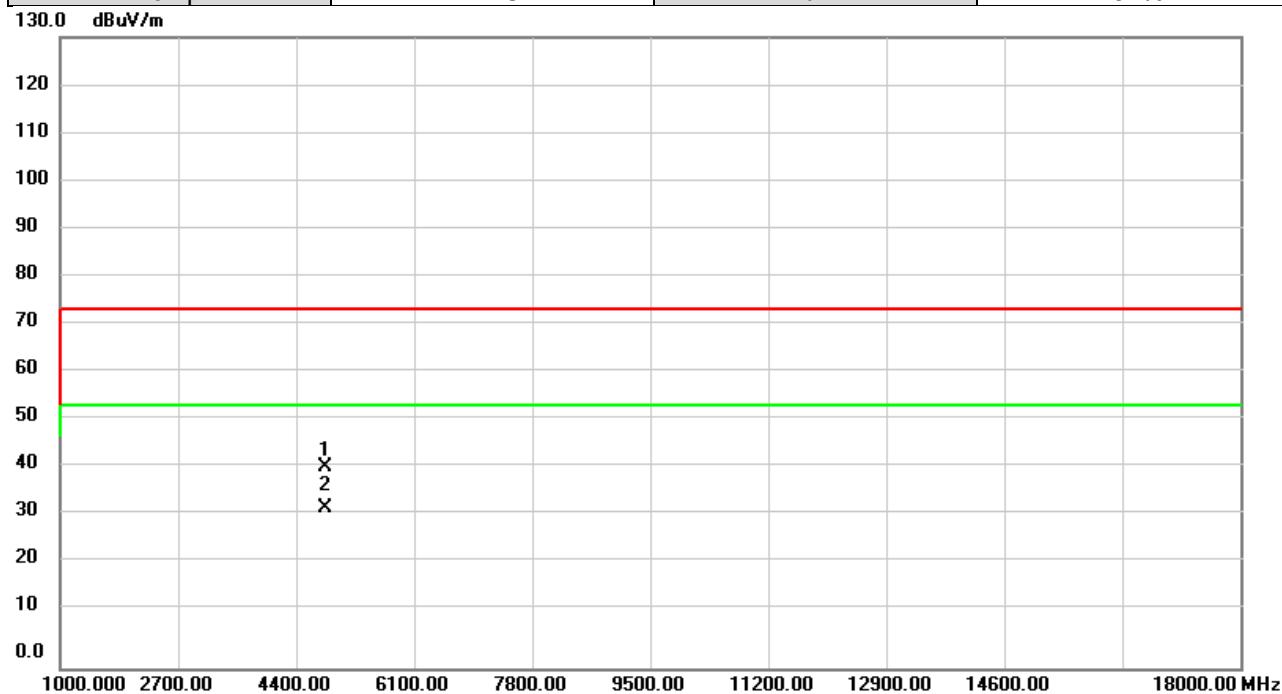


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	Detector	Comment
1		4824.000	52.00	-10.42	41.58	74.00	-32.42	peak
2	*	4824.000	43.42	-10.42	33.00	54.00	-21.00	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

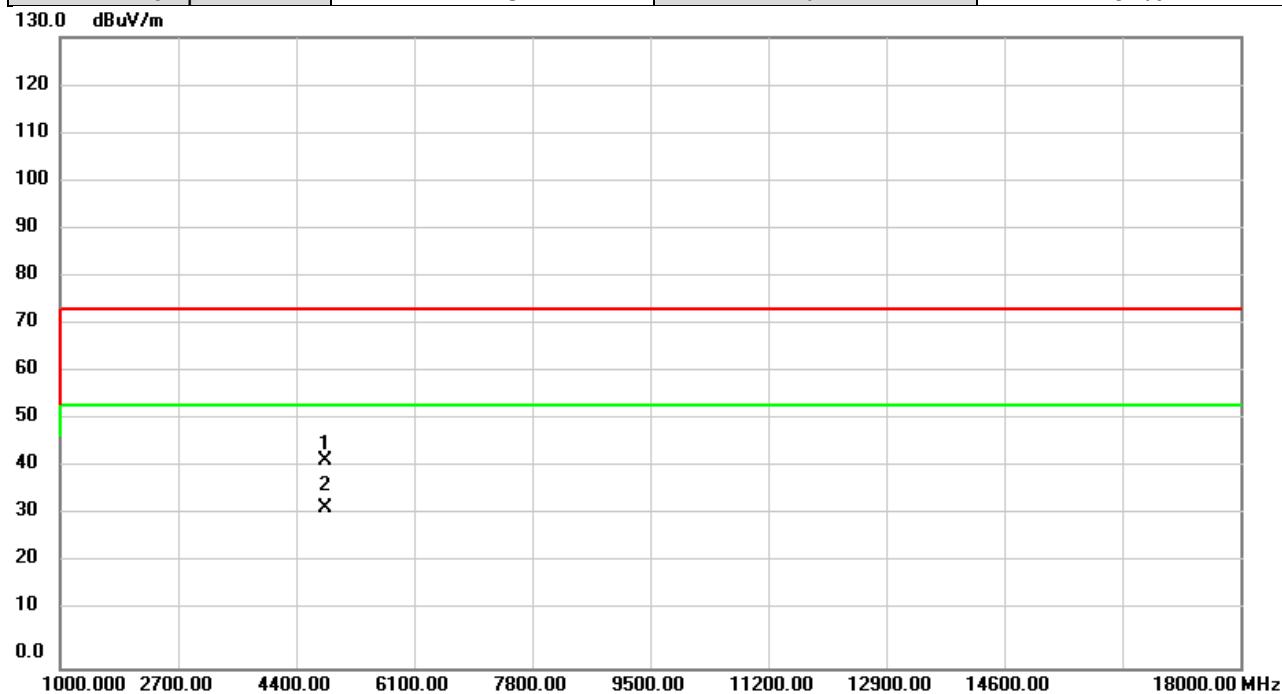


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	53.12	-10.42	42.70	74.00	-31.30	peak	
2	*	4824.000	43.48	-10.42	33.06	54.00	-20.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

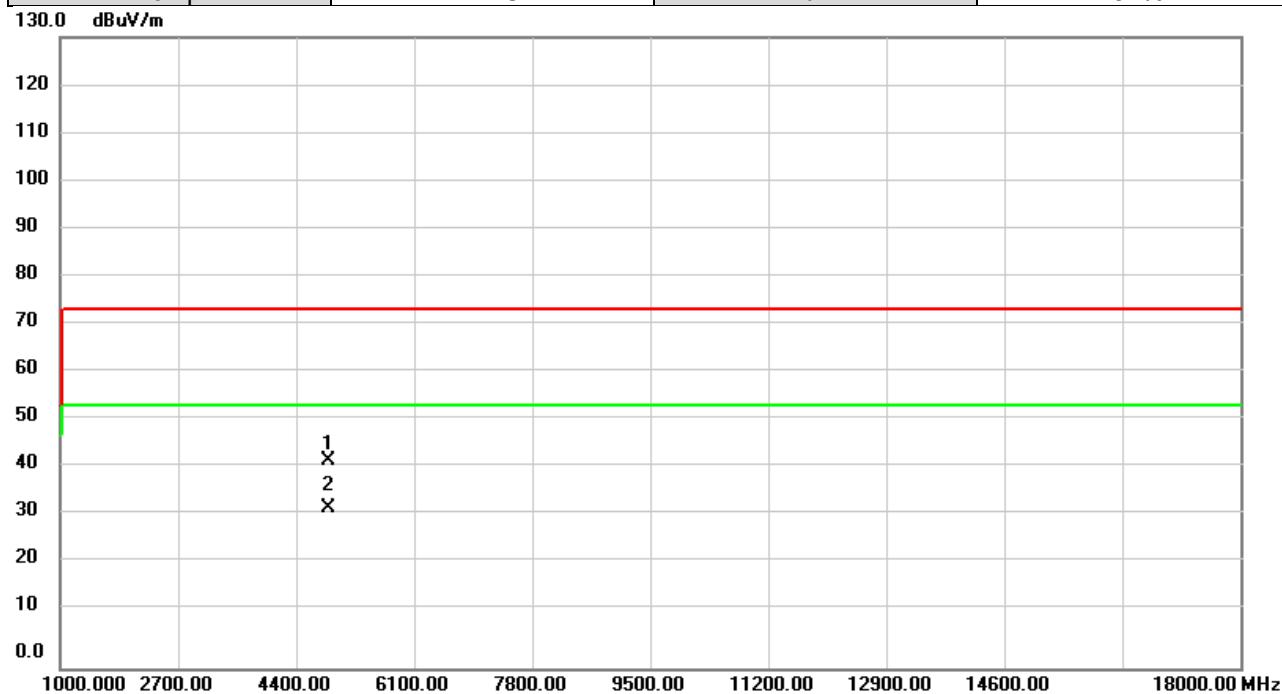


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	53.04	-10.31	42.73	74.00	-31.27	peak	
2	*	4874.000	43.19	-10.31	32.88	54.00	-21.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

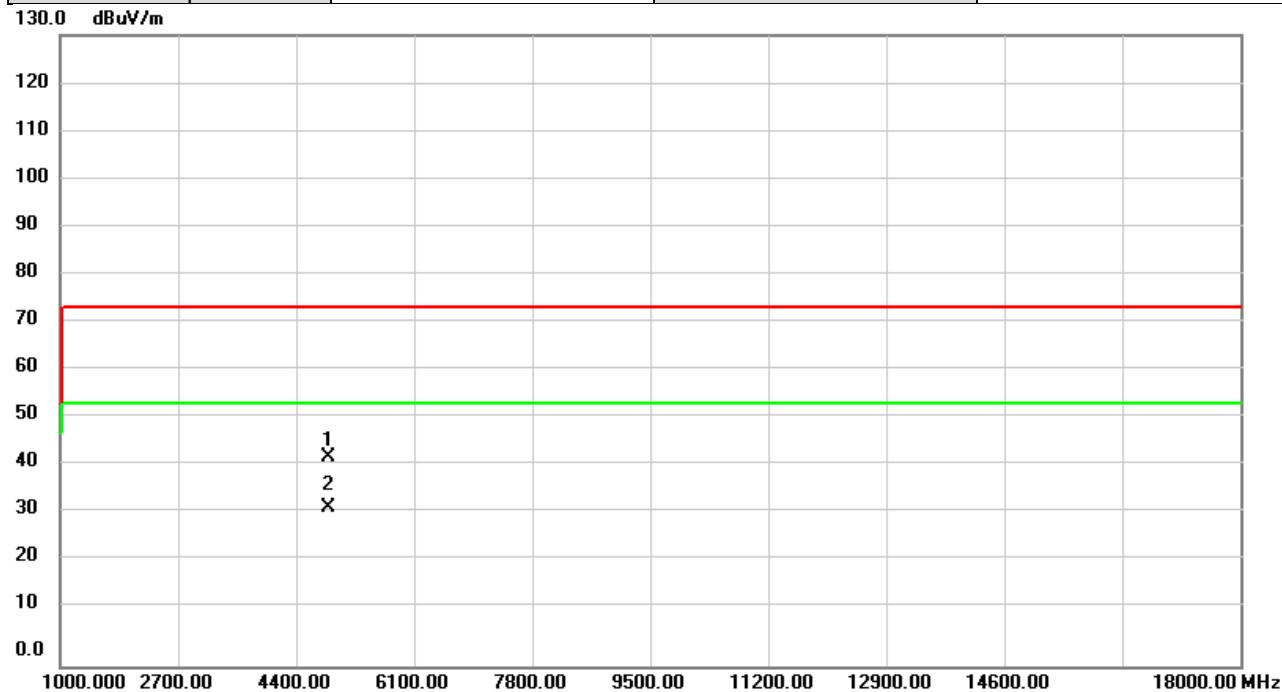


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	53.38	-10.31	43.07	74.00	-30.93	peak	
2	*	4874.000	43.02	-10.31	32.71	54.00	-21.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

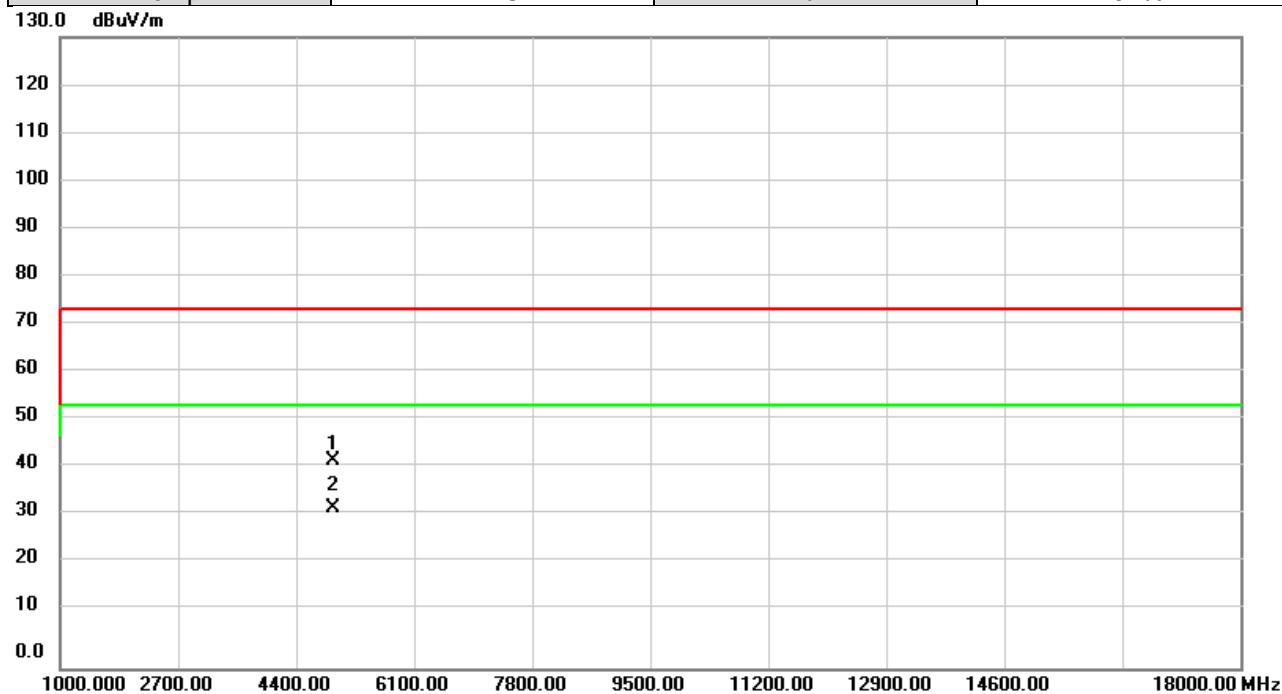


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	52.86	-10.19	42.67	74.00	-31.33	peak	
2	*	4924.000	43.05	-10.19	32.86	54.00	-21.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

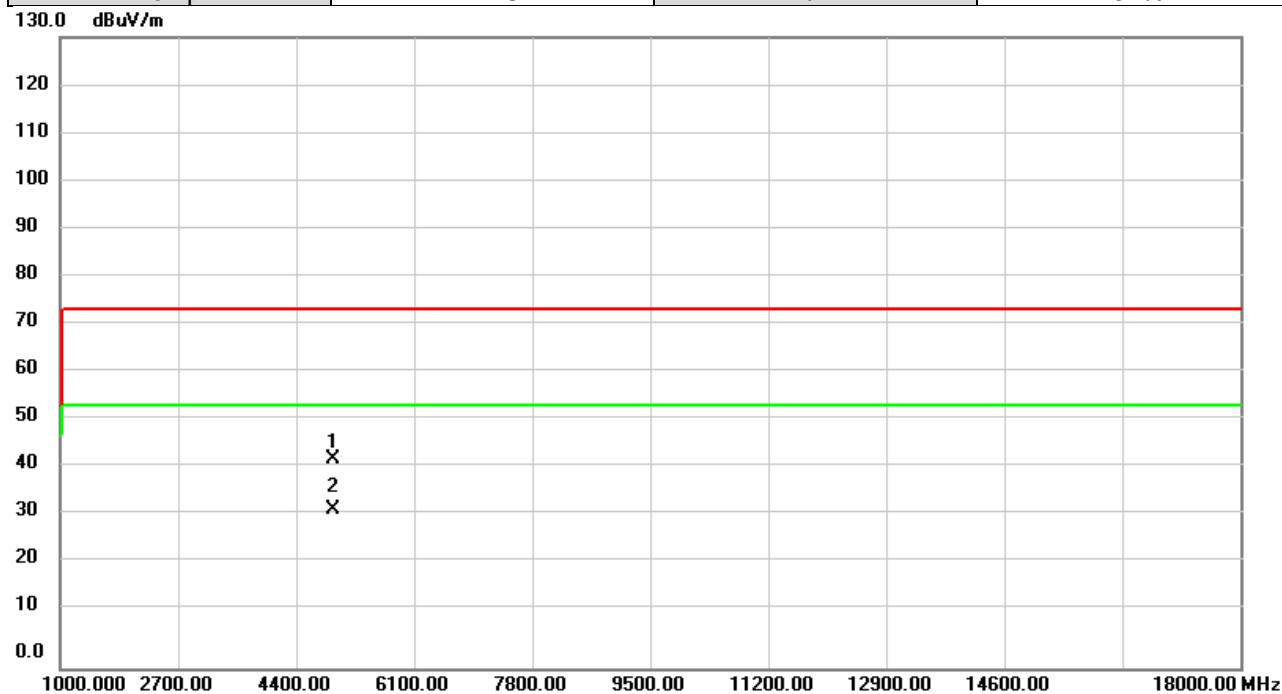


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	53.10	-10.19	42.91	74.00	-31.09	peak	
2	*	4924.000	42.93	-10.19	32.74	54.00	-21.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

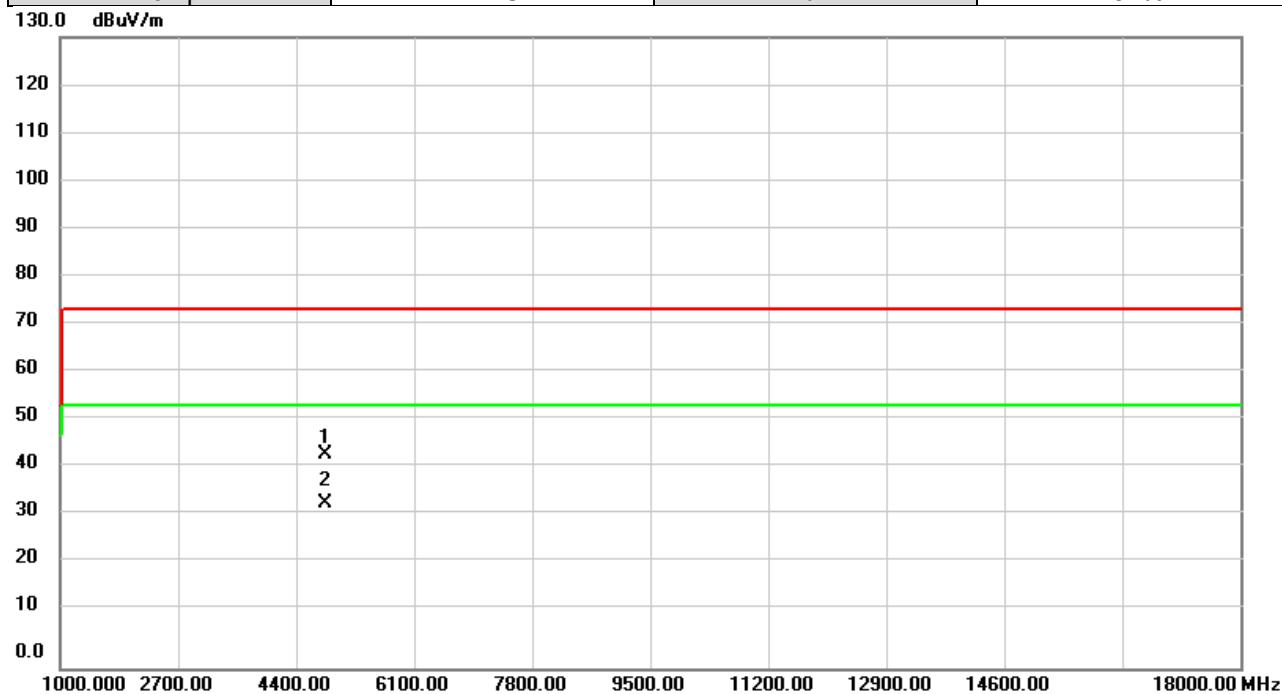


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	54.30	-10.42	43.88	74.00	-30.12	peak	
2	*	4824.000	44.26	-10.42	33.84	54.00	-20.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2412MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

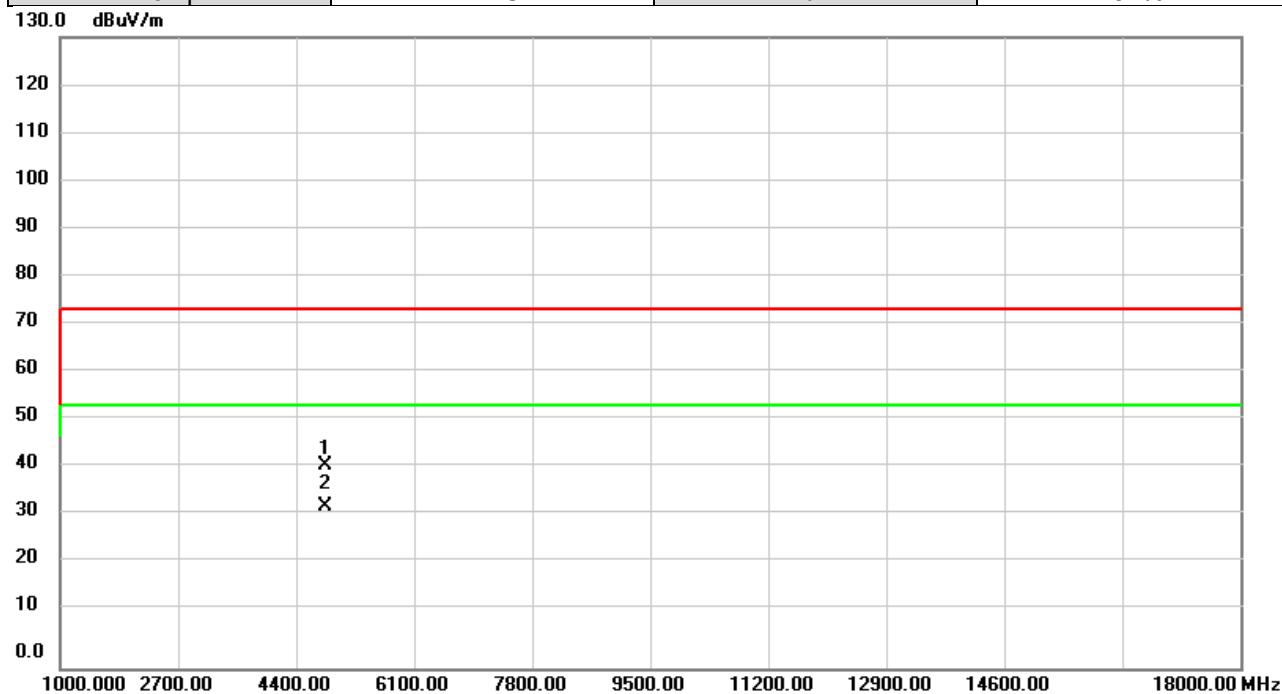


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	52.34	-10.42	41.92	74.00	-32.08	peak	
2	*	4824.000	43.84	-10.42	33.42	54.00	-20.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

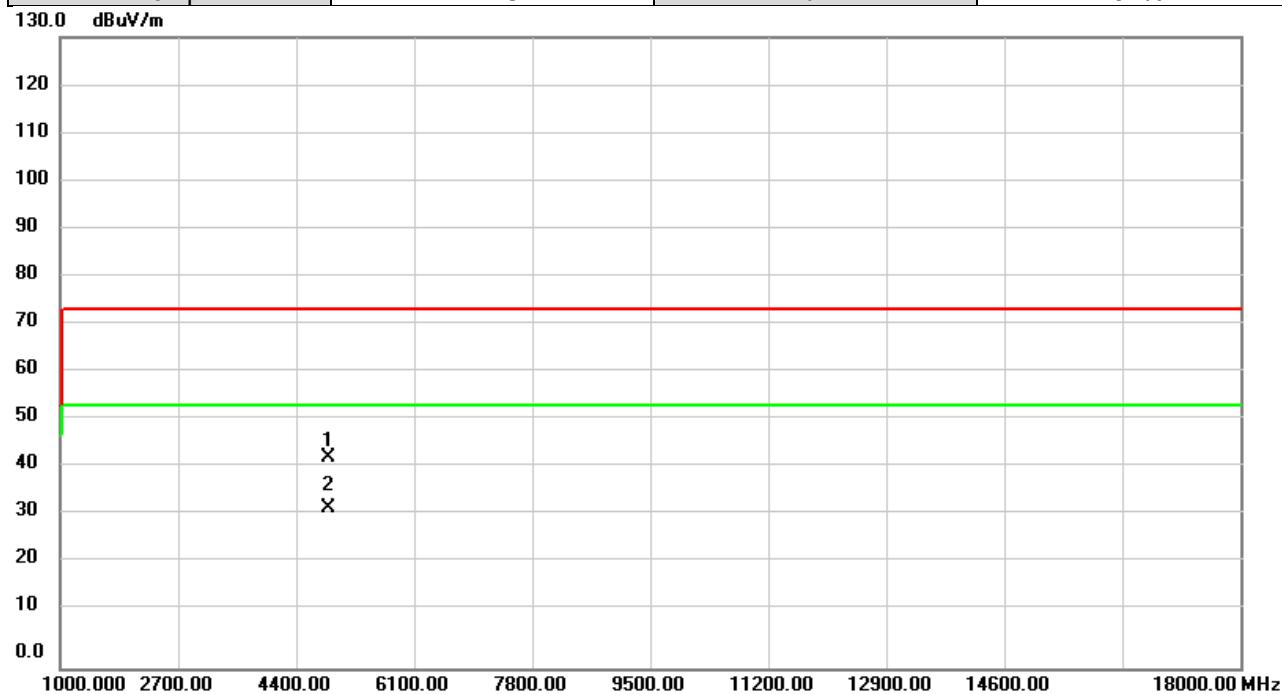


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	53.58	-10.31	43.27	74.00	-30.73	peak	
2	*	4874.000	43.37	-10.31	33.06	54.00	-20.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

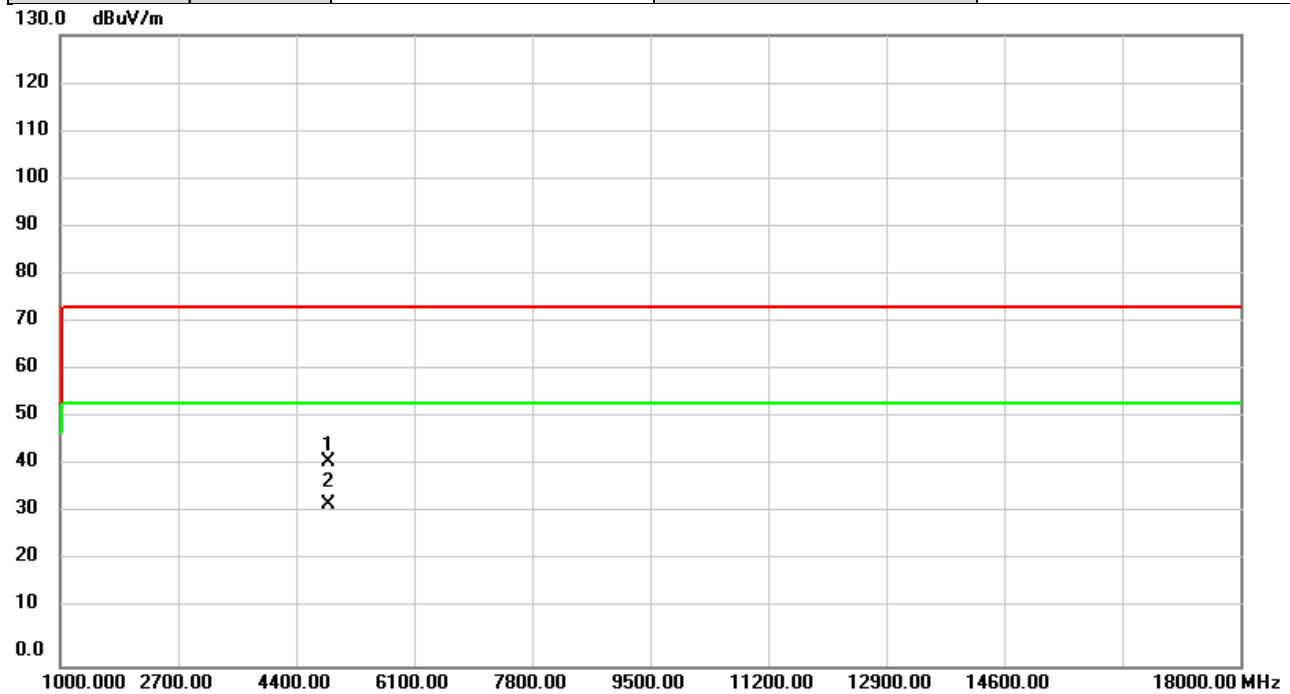


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	Detector	Comment
1		4874.000	52.54	-10.31	42.23	74.00	-31.77	peak
2	*	4874.000	43.56	-10.31	33.25	54.00	-20.75	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Vertical
Temp	27°C	Hum.	52%

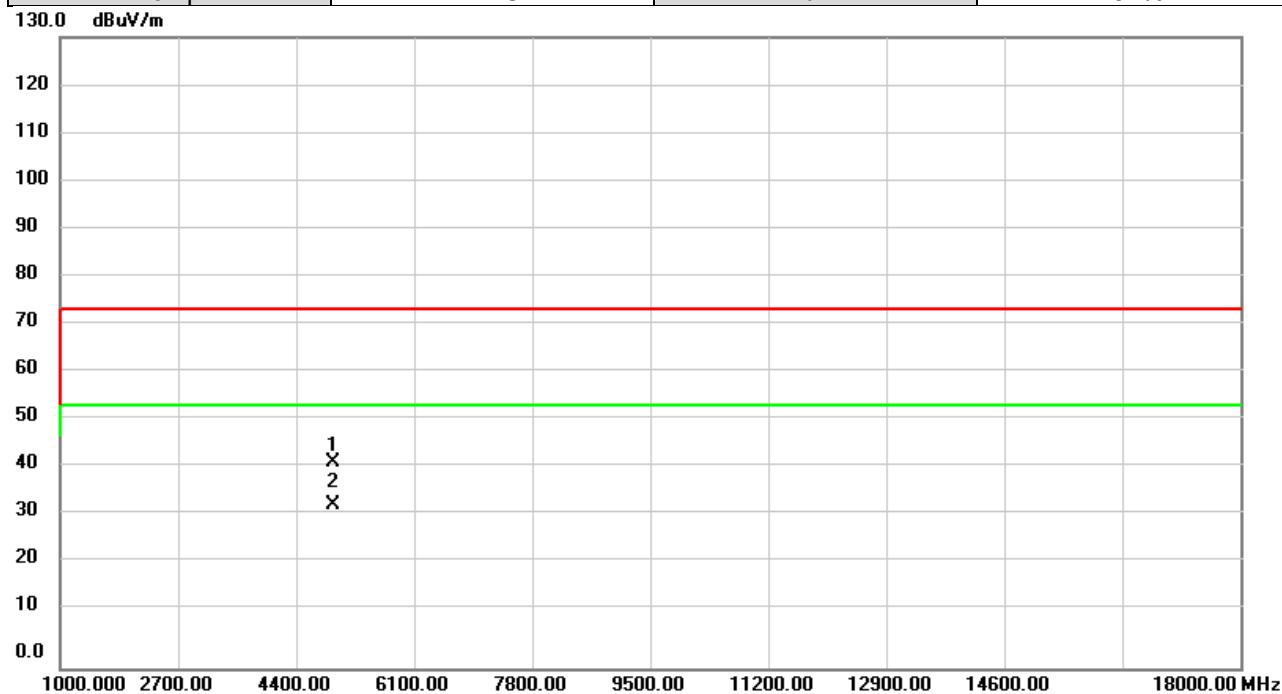


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	52.60	-10.19	42.41	74.00	-31.59	peak	
2	*	4924.000	43.76	-10.19	33.57	54.00	-20.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n	Test Date	2025/5/23
Test Frequency	2462MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

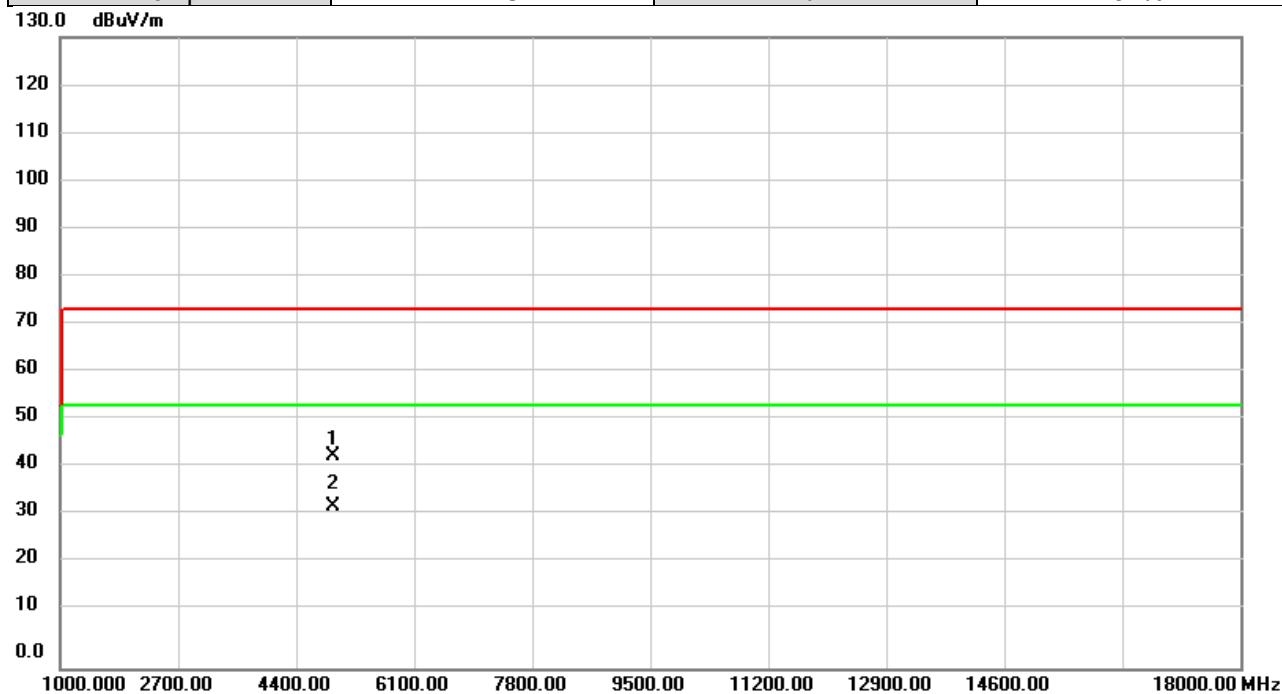

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	Detector	Comment
1		4924.000	53.90	-10.19	43.71	74.00	-30.29	peak
2	*	4924.000	43.47	-10.19	33.28	54.00	-20.72	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Vertical
Temp	27°C	Hum.	52%




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		19496.00	52.59	-5.82	46.77	74.00	-27.23
2	*	19496.00	42.90	-5.82	37.08	54.00	-16.92
							Detector Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/5/23
Test Frequency	2437MHz	Polarization	Horizontal
Temp	27°C	Hum.	52%

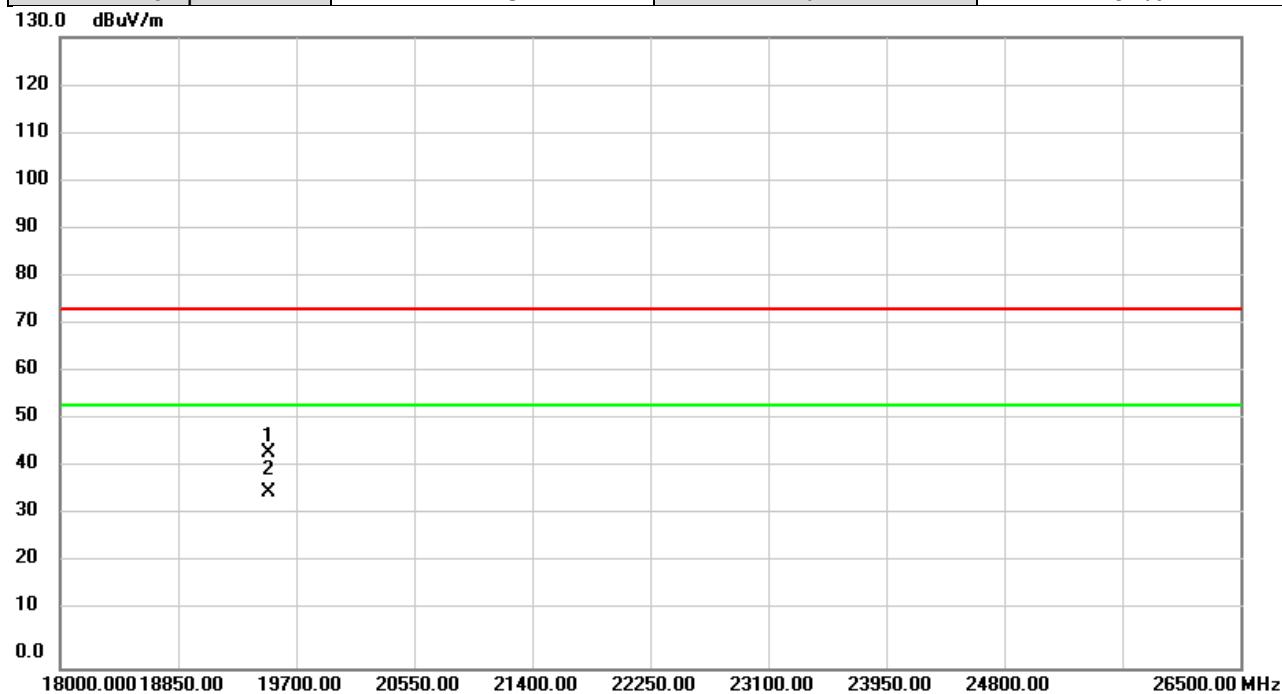

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		19496.00	50.23	-5.82	44.41	74.00	-29.59	peak	
2	*	19496.00	42.07	-5.82	36.25	54.00	-17.75	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E BANDWIDTH


Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	9.12	16.00	≥ 500	Pass
2437	9.11	16.08	≥ 500	Pass
2462	10.06	16.08	≥ 500	Pass

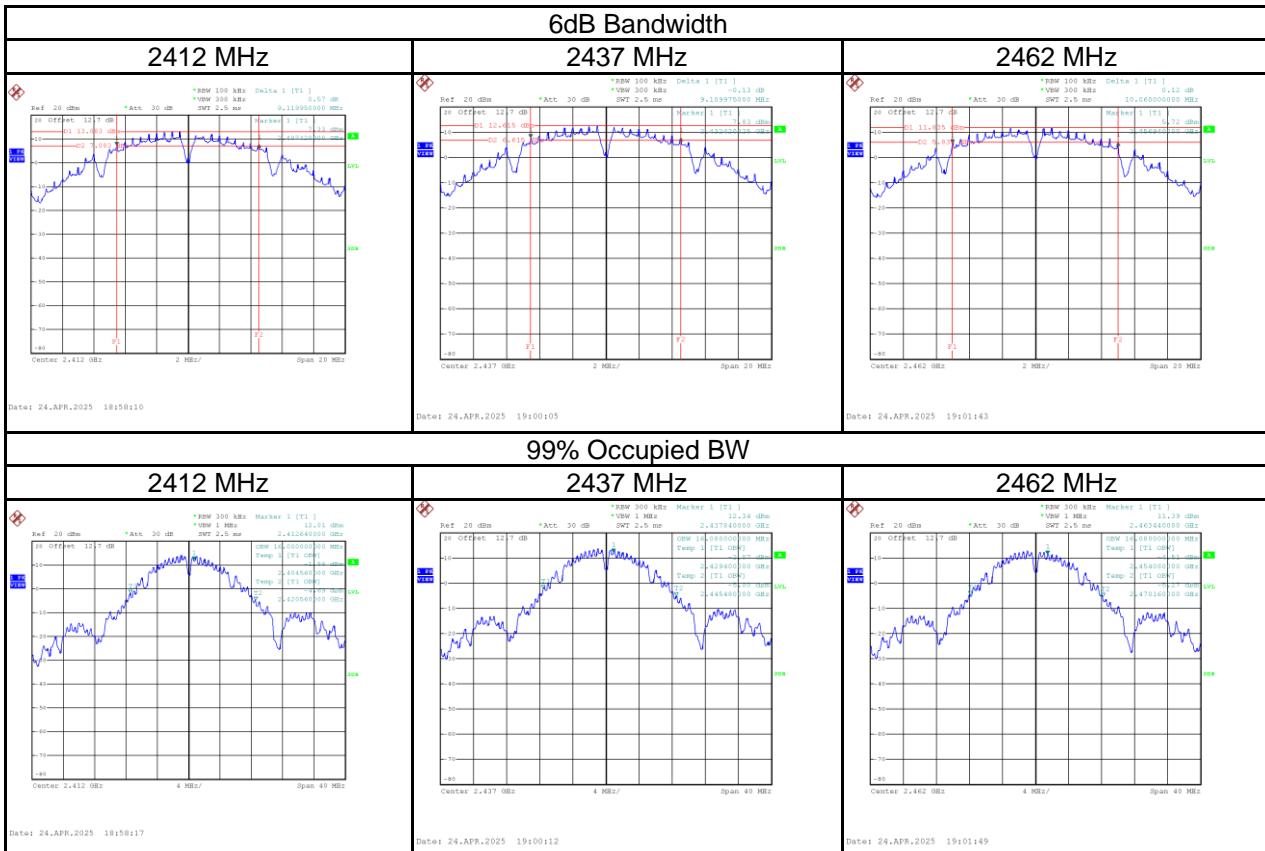


Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	15.18	22.16	≥ 500	Pass
2437	15.14	28.32	≥ 500	Pass
2462	15.16	27.44	≥ 500	Pass

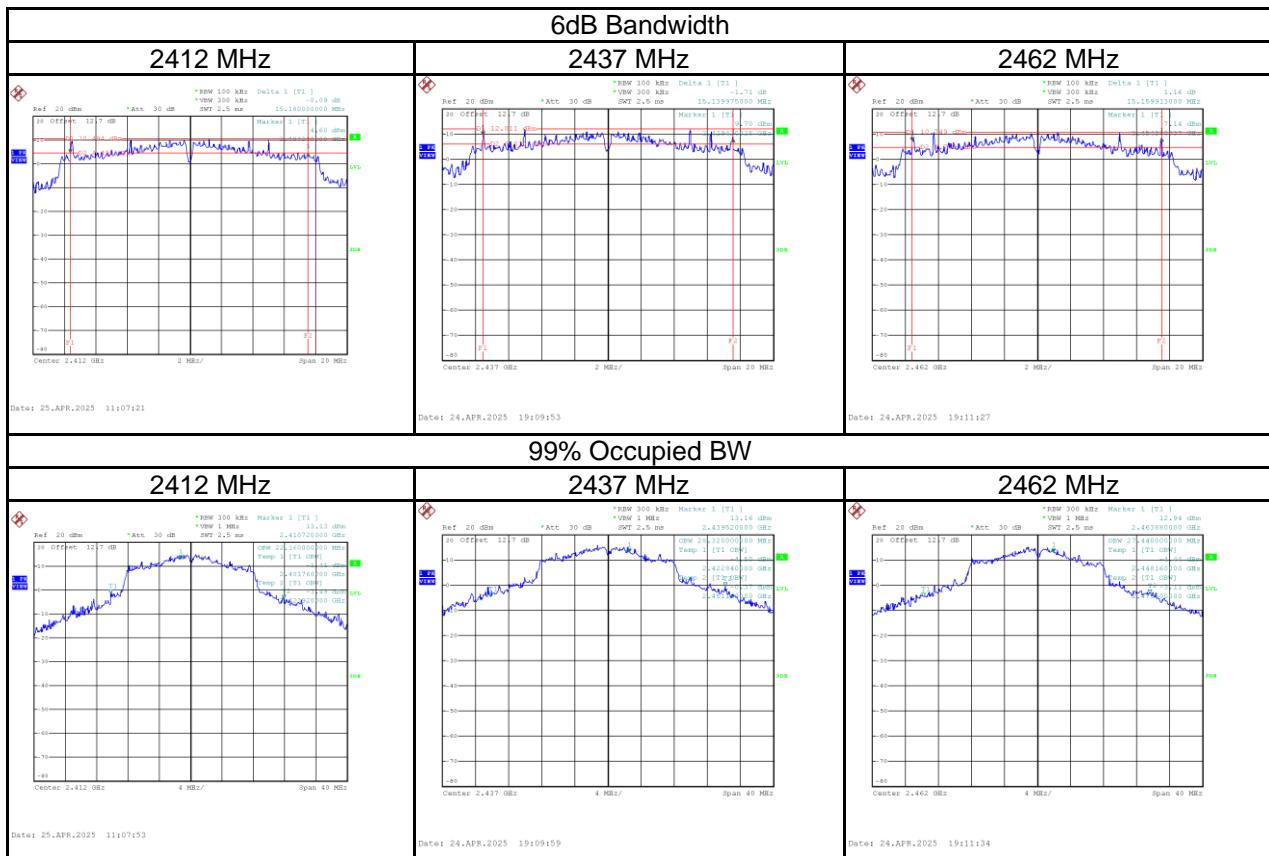

Test Mode	IEEE 802.11n (HT20)
-----------	---------------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	15.22	22.24	≥ 500	Pass
2437	15.20	28.56	≥ 500	Pass
2462	16.35	28.32	≥ 500	Pass

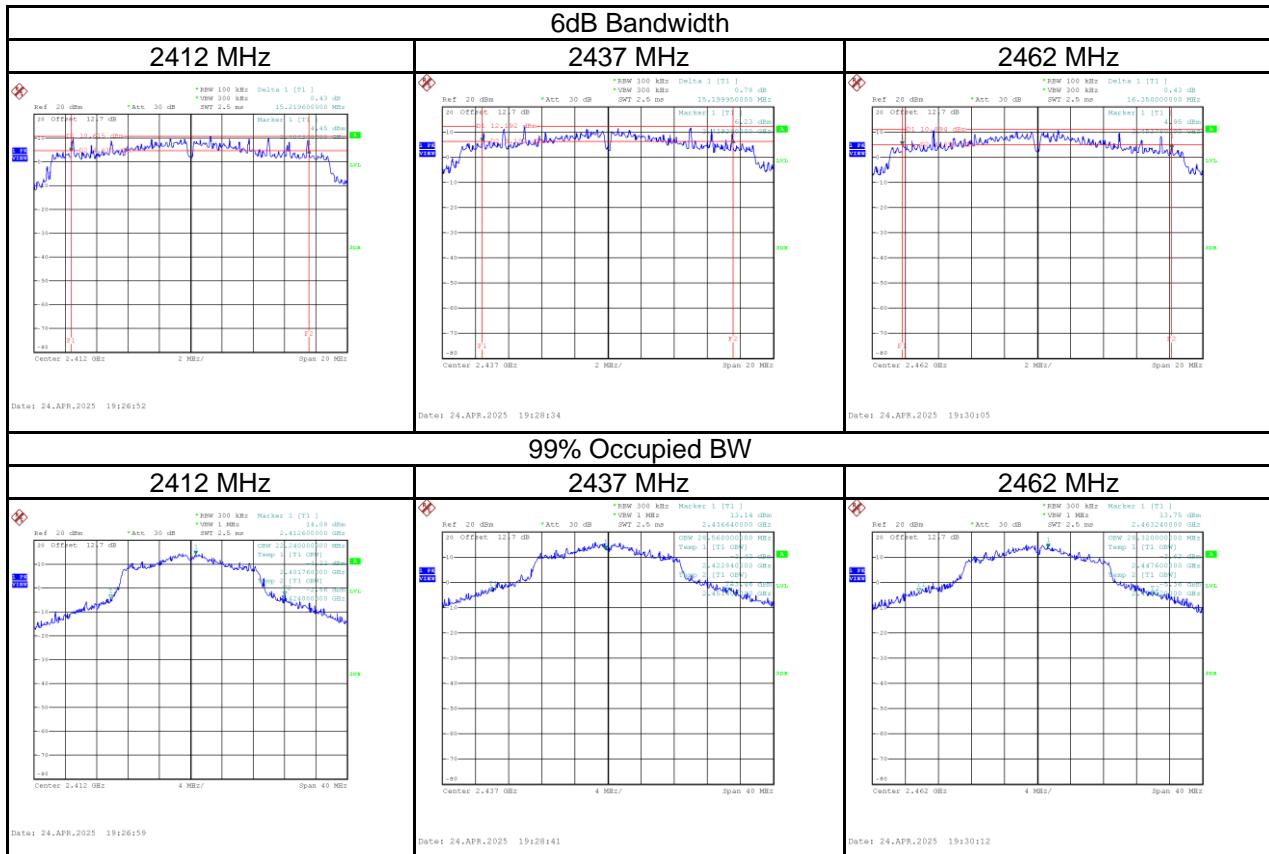

APPENDIX F OUTPUT POWER

Test Mode	IEEE 802.11b	Tested Date	2025/4/23~ 2025/5/23
-----------	--------------	-------------	-------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Test Result
2412	23.59	0.2286	30.00	1.0000	Pass
2437	23.56	0.2270	30.00	1.0000	Pass
2462	23.25	0.2113	30.00	1.0000	Pass

Test Mode	IEEE 802.11g	Tested Date	2025/4/23~ 2025/5/23
-----------	--------------	-------------	-------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Test Result
2412	24.44	0.2780	30.00	1.0000	Pass
2437	23.57	0.2275	30.00	1.0000	Pass
2462	23.55	0.2265	30.00	1.0000	Pass


Test Mode	IEEE 802.11n (HT20)	Tested Date	2025/4/23~ 2025/5/23
-----------	---------------------	-------------	-------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Test Result
2412	24.51	0.2825	30.00	1.0000	Pass
2437	23.48	0.2228	30.00	1.0000	Pass
2462	23.53	0.2254	30.00	1.0000	Pass

APPENDIX G POWER SPECTRAL DENSITY


Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-1.34	8.00	Pass
2437	-1.57	8.00	Pass
2462	-2.55	8.00	Pass

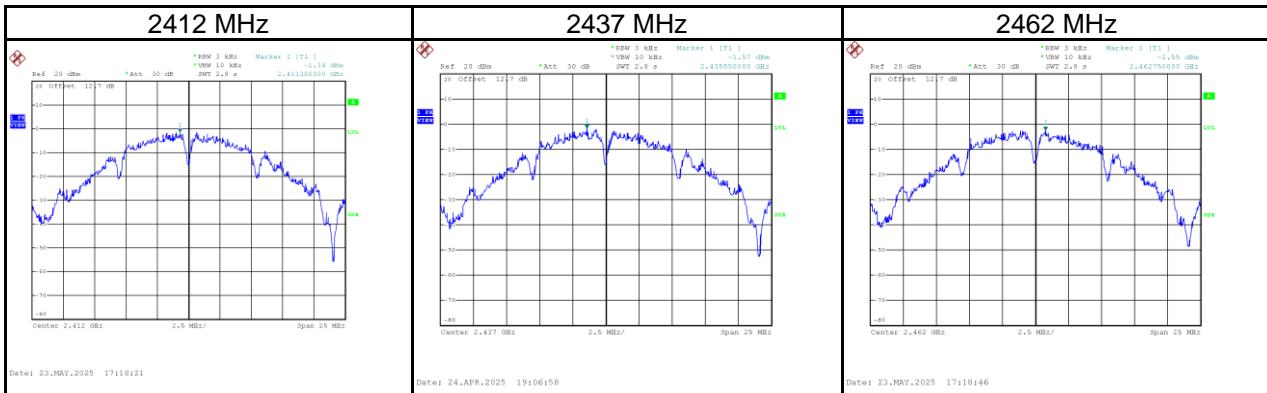


Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-3.26	8.00	Pass
2437	-0.92	8.00	Pass
2462	-2.96	8.00	Pass

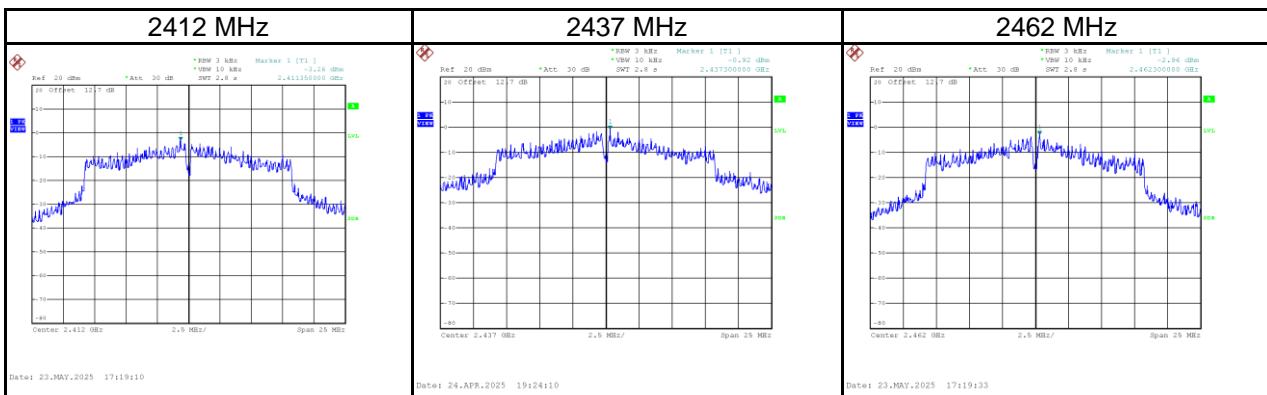

Test Mode | IEEE 802.11n (HT20)

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-3.98	8.00	Pass
2437	-1.22	8.00	Pass
2462	-3.12	8.00	Pass

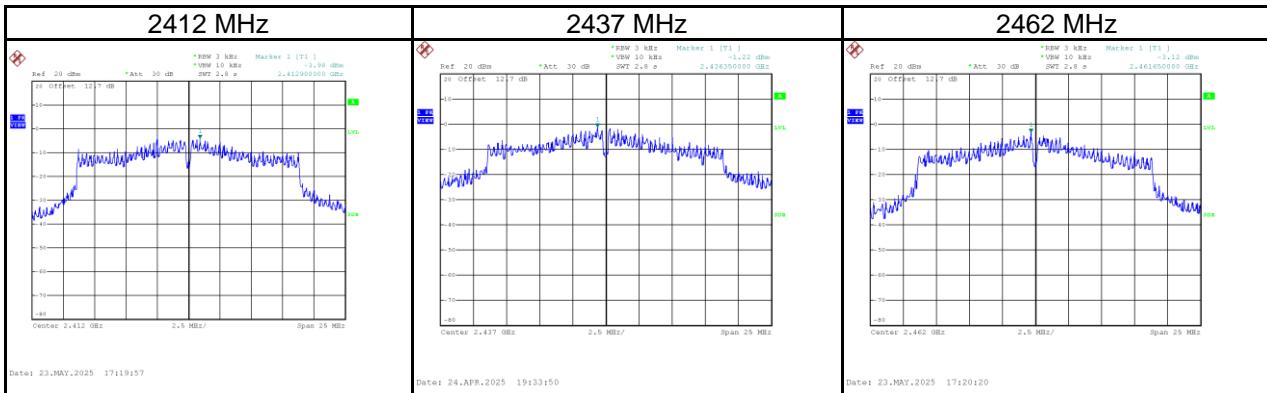


APPENDIX H ANTENNA CONDUCTED SPURIOUS EMISSIONS

Test Mode


IEEE 802.11b

Low Bandedge-2412 MHz

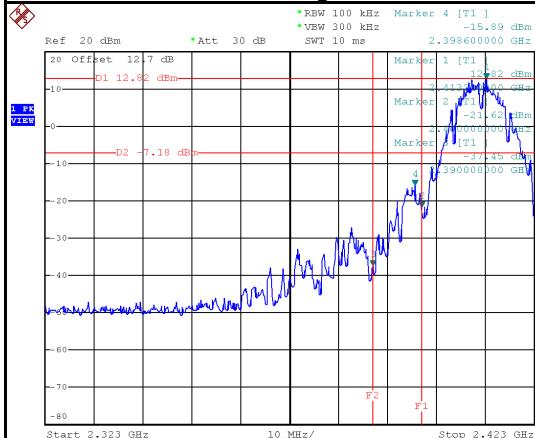


Date: 24.APR.2025 18:58:41

High Bandedge-2462 MHz

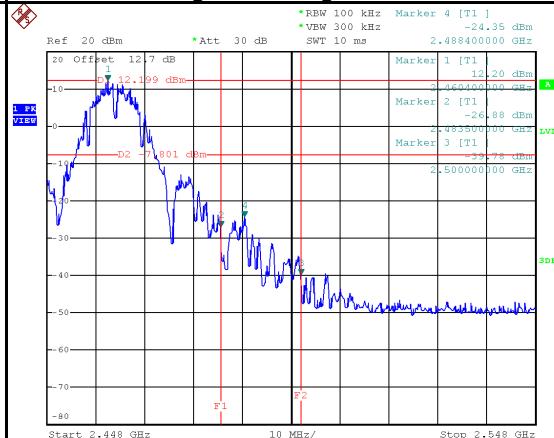


Date: 24.APR.2025 19:01:57


2412 MHz-10th Harmonics

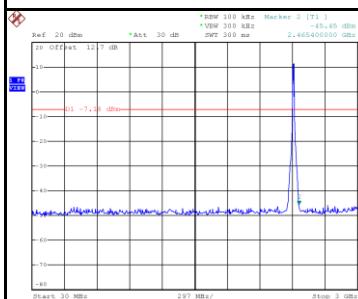

Date: 24.APR.2025 18:58:55

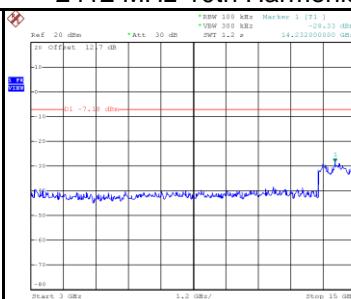


Date: 24.APR.2025 18:59:02

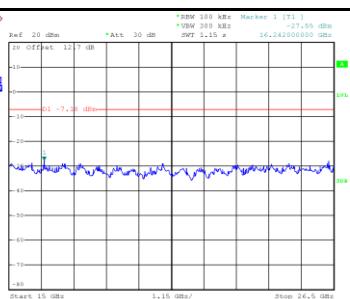


Date: 24.APR.2025 18:59:09


2437 MHz-10th Harmonics

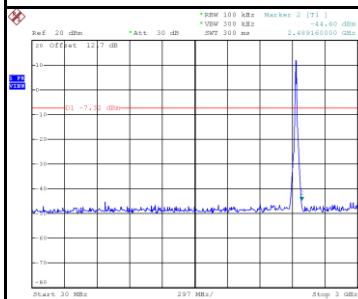

Date: 24.APR.2025 19:00:33

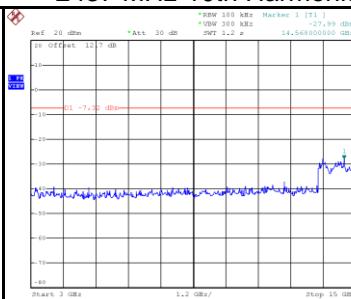


Date: 24.APR.2025 19:00:40

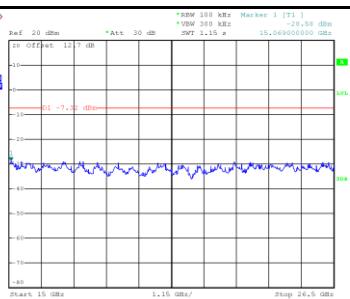


Date: 24.APR.2025 19:00:47


2462 MHz-10th Harmonics

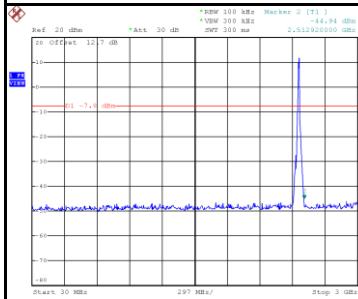

Date: 24.APR.2025 19:02:10

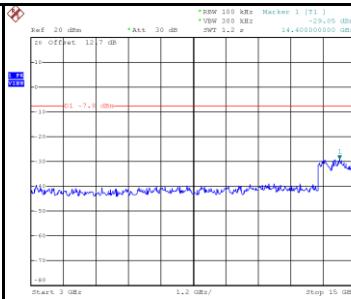





Date: 24.APR.2025 19:02:17

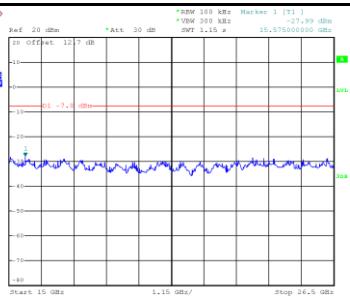

Date: 24.APR.2025 19:02:24





Test Mode

IEEE 802.11g

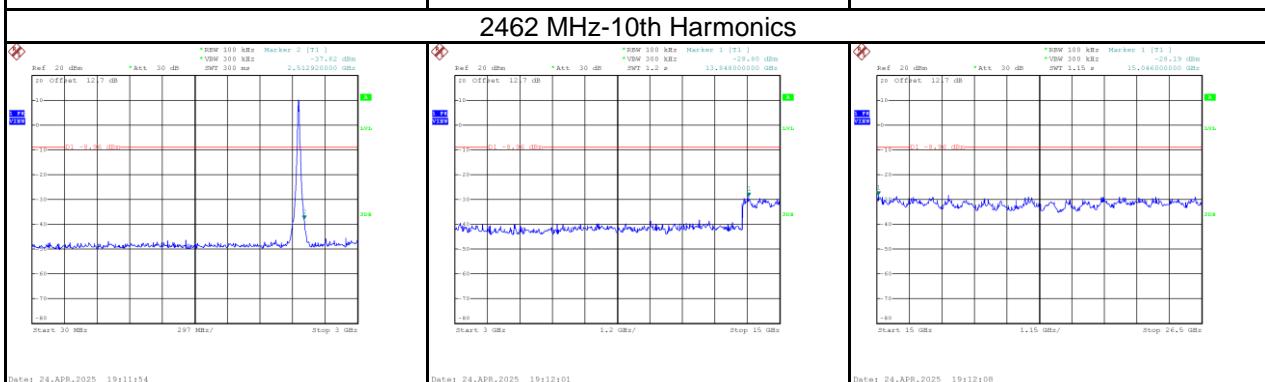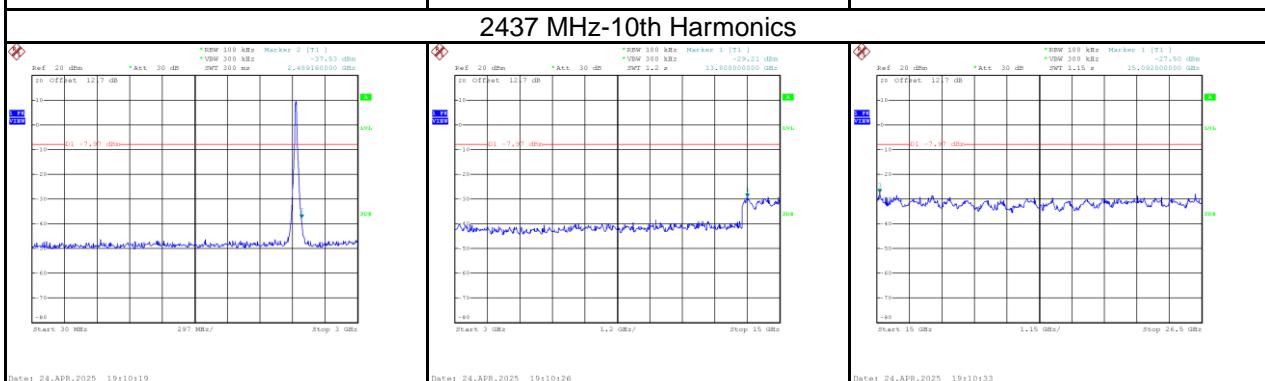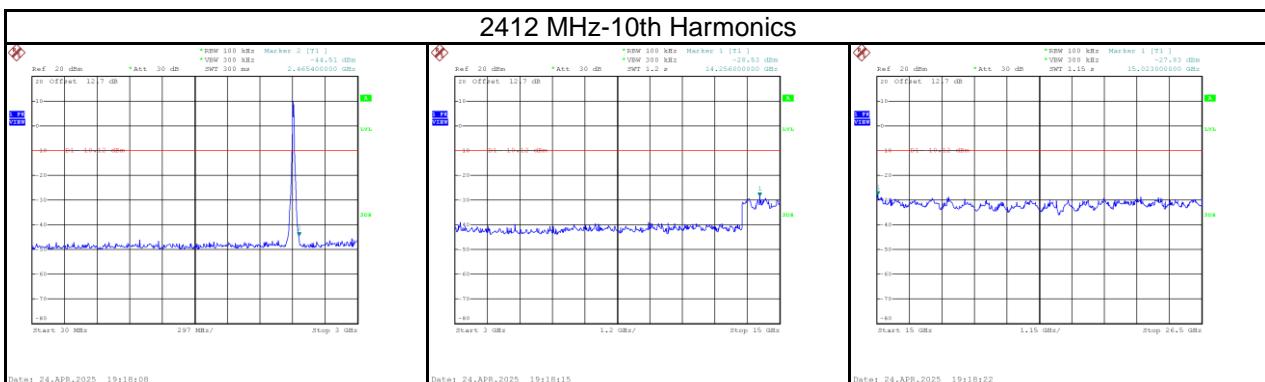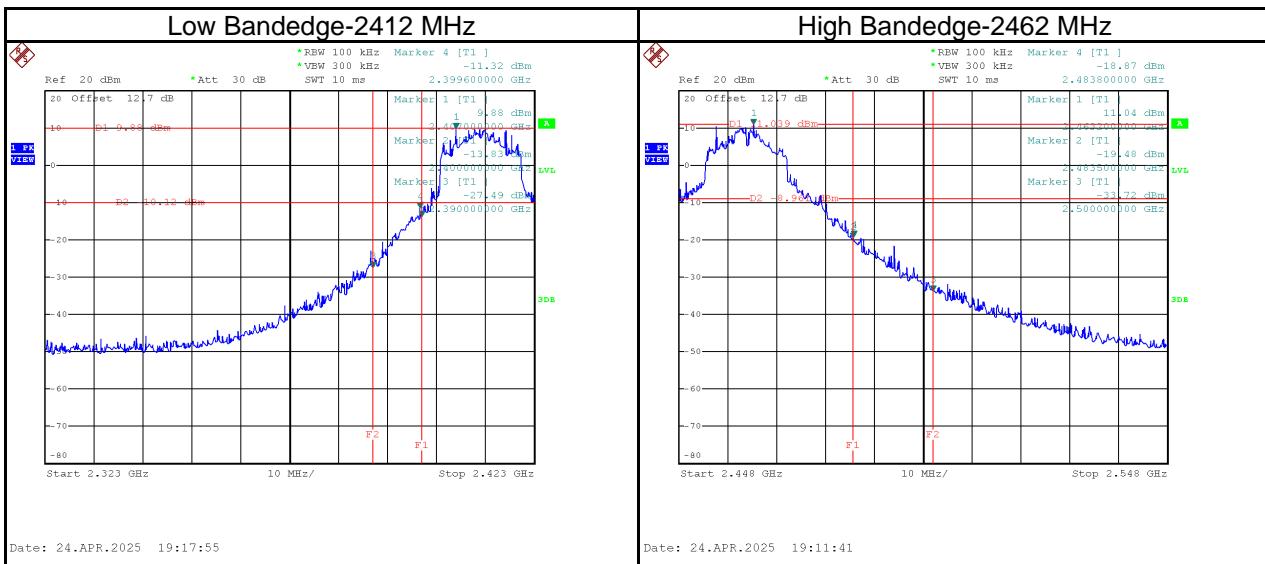

Test Mode

IEEE 802.11n (HT20)

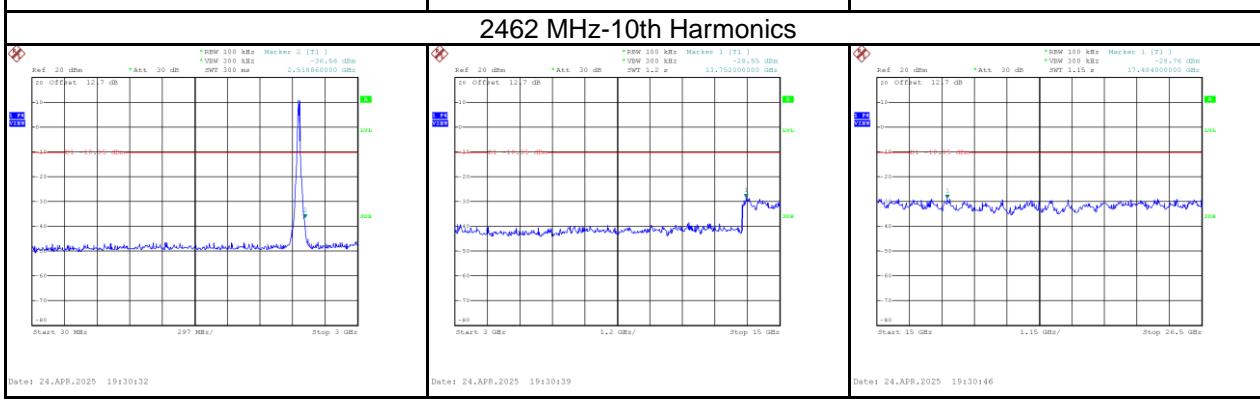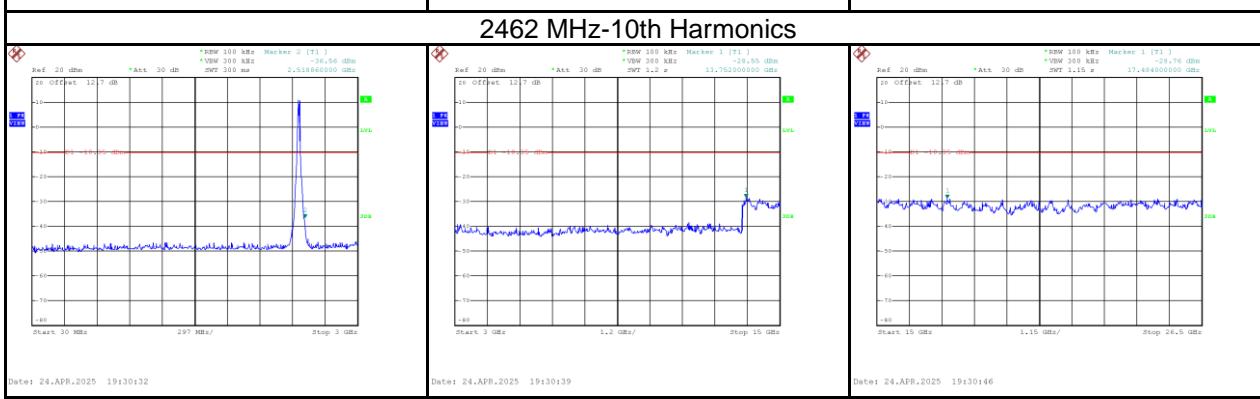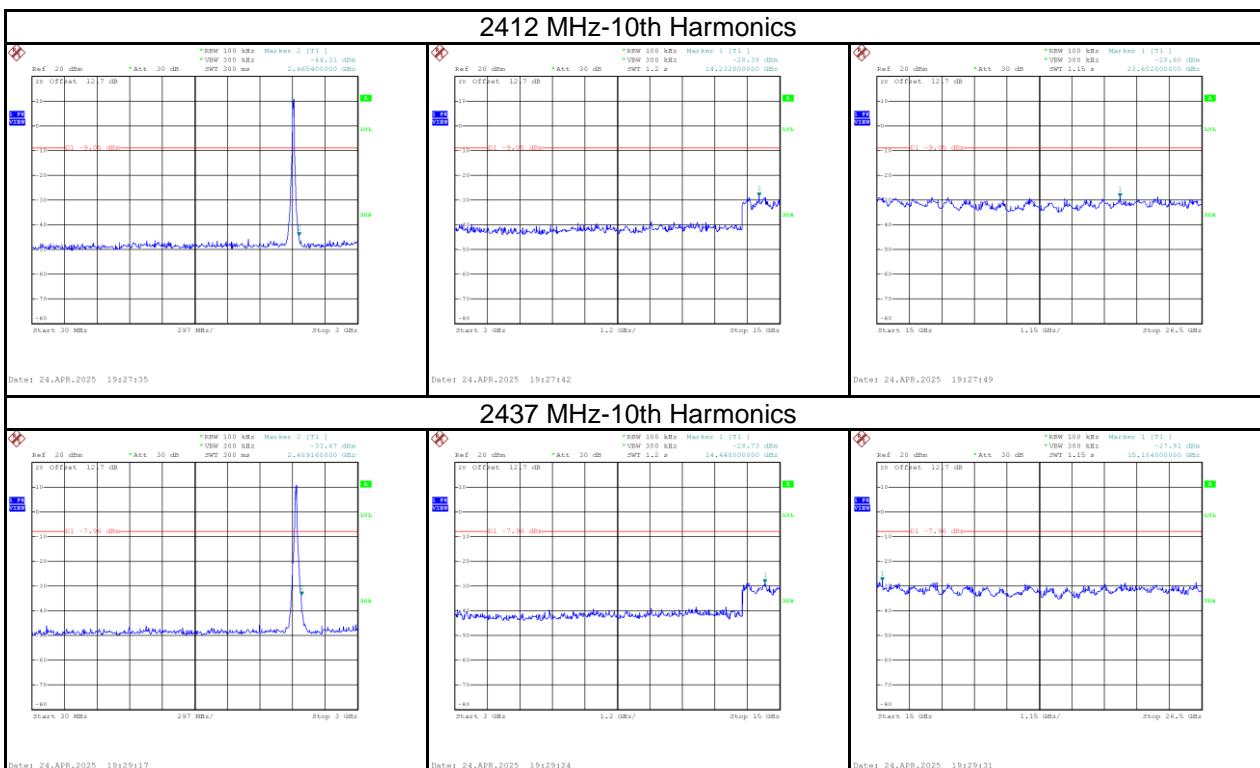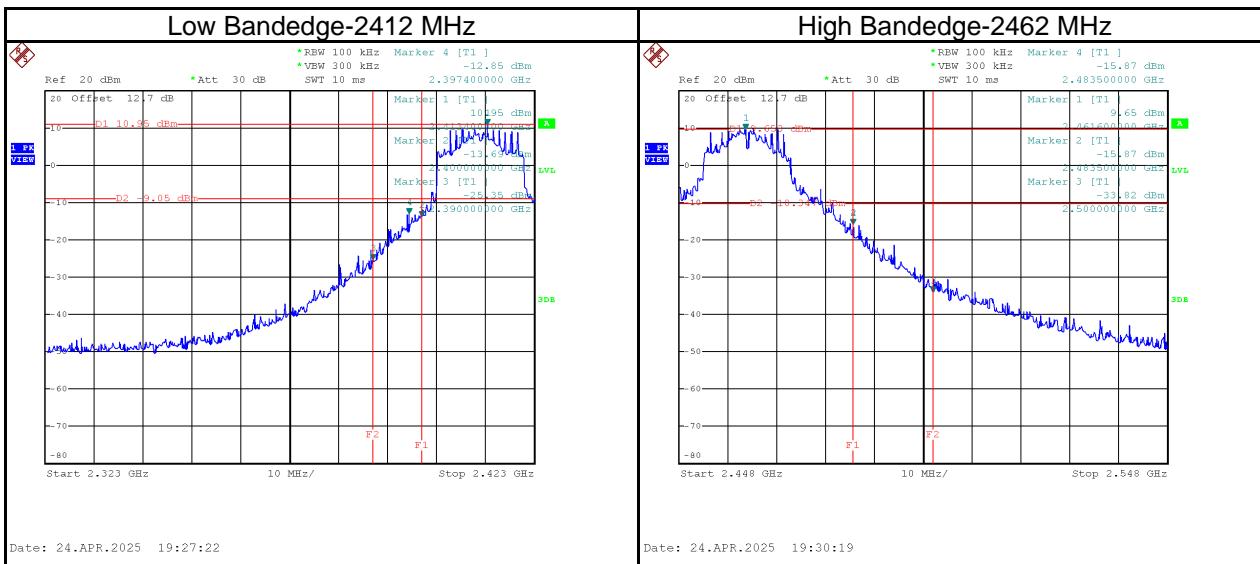

End of Test Report