


Product Title
Font: Arial, Regular, 12pt
Top-align with Top Label Margin
Left-align with Left Label Margin

**Serial Number,
Part Number,
IMEI Number**
Heading Font: Arial Narrow, Bold, 6pt
Barcode Format: Code 128
Barcode Line Height: 2.5mm
Barcode Text Font: OCR-B 10 BT, Regular, 11pt /
Arial, Regular, 9pt
Left-align with Left Label Margin

Bluetooth MAC Address
Heading Font: Arial Narrow, Regular, 6pt
Paragraph Alignment: Justify
MAC Address Font: Arial, Regular, 8pt
Left-align with Left Label Margin

**Product Version,
Supplier Code,
Date Of Manufacture**
Font: Arial, Regular, 8pt
Paragraph alignment: Left
Left-align with Left Label Margin

MiX Telematics Logo
Width: 29.91mm
Height: 5.36mm
Bottom-align with Bottom Label Margin
Left-align with Left Label Margin

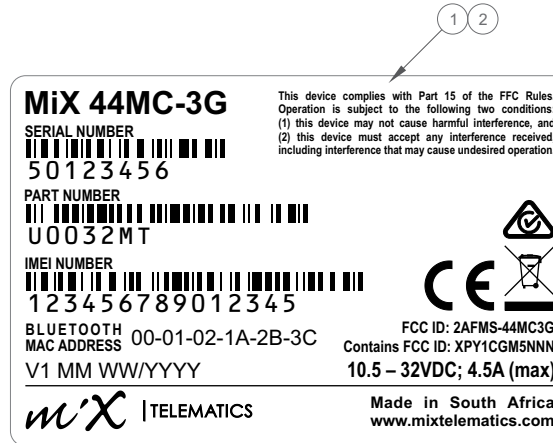

FCC Compliance Notice Text
Font: Arial Narrow, Bold, 4.5pt
Paragraph alignment: Justify
Right-align with Right Label Margin
Top-align with Top Label Margin

RCM Logo
Width: 6.78mm
Height: 5mm
Right-align with Right Label Margin
Bottom-align 1mm above Wheelie Bin Logo

Wheelie Bin Logo
Width: 5.44mm
Height: 7.0mm
Right-align with Right Label Margin
Bottom-align with IMEI Barcode Text

CE Logo
Width: 9.1mm
Height: 6.5mm
Right-align 1.5mm from Wheelie Bin Logo
Bottom-align with IMEI Barcode Text

FCC Text
Font: Arial Narrow, Bold, 6pt
Paragraph alignment: Right
Right-align with Right Label Margin
Bottom-align with Bluetooth MAC Address Heading

Power Rating Text
Font: Arial Narrow, Bold, 8pt
Right-align with Right Label Margin
Bottom-align with Date of Manufacture Text

Line
Height: 0.5pt
Width: (Area between Left and Right Label Margins)

**Origin Text,
MiX Telematics Website**
Font: Arial, Bold, 6pt
Paragraph alignment: Justify
Right-align with Right Label Margin
Centre vertically with MiX Telematics Logo

REF	DESCRIPTION	PART NUMBER
1	LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM	CON0153
2	RIBBON THER TRANS 110MMx70M NOTCHES B325	CON0154

NOTES

1. Use 2mm margin on all sides of label
2. Do not scale logos. Use only logo artwork provided
3. Apply label symmetrically to indentation on bottom surface of the OBC's housing.
Orientate label so that bottom edge of label is closest to the OBC's connectors.

	SPECIFICATION				REV	DATE	ECN	CHANGES
	DOCUMENT TITLE	MiX 44MC-3G: Housing Label			1A	18 Sep 2019	721	Field Trial 1
	DOCUMENT NUMBER	SLU0032A			1B	4 Nov 2019	736	First release
	SHEET	1 OF 1	SHEET SIZE	A4				
	SCALE	1:1 Except where shown otherwise						
	FORM	7.11.5-22	FORM REVISION	5				