

FCC Testing of the
MiX Telematics International (Pty) Ltd
MiX41MC-3G Model 440FT0426
In accordance with FCC 47 CFR Part 15C

Prepared for: MiX Telematics Europe Ltd
Cherry Orchard North
Kembrey Park
Swindon
SN1 2NR
United Kingdom

FCC ID: 2AFMS-41MC3G

COMMERCIAL-IN-CONFIDENCE

Document Number: 75936634-08 | Issue: 02



Product Service

Choose certainty.
Add value.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Steven White	02 November 2018	
Authorised Signatory	Matthew Russell	02 November 2018	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Mehadi Choudhury	02 November 2018	
Testing	Graeme Lawler	02 November 2018	

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC 47 CFR Part 15C: 2017.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2017 TÜV SÜD Product Service.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD Product Service
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD Product Service
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

- 1 Report Summary2**
- 1.1 Report Modification Record.....2
- 1.2 Introduction.....2
- 1.3 Brief Summary of Results3
- 1.4 Application Form4
- 1.5 Product Information6
- 1.6 Deviations from the Standard.....6
- 1.7 EUT Modification Record6
- 1.8 Test Location6
- 2 Test Details7**
- 2.1 6 dB Bandwidth7
- 2.2 Maximum Conducted Output Power 11
- 2.3 Spurious Radiated Emissions 13
- 2.4 Restricted Band Edges..... 27
- 2.5 Authorised Band Edges 31
- 2.6 Power Spectral Density 34
- 3 Measurement Uncertainty 38**



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	08 March 2017
2	To include a declared variant	02 November 2018

Table 1

1.2 Introduction

Applicant	MiX Telematics Europe Limited
Manufacturer	MiX Telematics International (Pty) Ltd
Model Number(s)	1) MiX41MC-3G 2) MiX424C-2G*
Declared Variant(s)	MiX 45MC-4G
Serial Number(s)	1) 40000279 2) 41000265
Hardware Version(s)	1) V5A 2) V1 [V2E (pcb)]
Software Version(s)	1) V1.0.9 2) V1.0.9
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2017**
Order Number	PO086320
Date	18-October-2016
Date of Receipt of EUT	03-November-2016
Start of Test	05-December-2016
Finish of Test	15-December-2016
Name of Engineer(s)	Mehadi Choudhury and Graeme Lawler
Related Document(s)	ANSI C63.10 (2013) KDB 558074 D01 v03 r05

* The bluetooth low energy circuitry is identical in the products used for testing and therefore conducted testing on the MiX424C-2G is representative.

**The original testing was performed in December 2016 in accordance with FCC 47 CFR Part 15C: 2015. A gap-analysis between the 2015 and 2017 versions of FCC 47 CFR Part 15C was performed by the test lab and it was confirmed that there were no changes to the clauses tested in the present document.



Product Service

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration: Bluetooth Low Energy				
2.1	15.247 (a)(2)	6 dB Bandwidth	Pass	ANSI C63.10
2.2	15.247 (b)(3)	Maximum Conducted Output Power	Pass	ANSI C63.10
2.3	15.247 (d) and 15.205	Spurious Radiated Emissions	Pass	ANSI C63.10
2.4	15.205	Restricted Band Edges	Pass	ANSI C63.10
2.5	15.247 (d)	Authorised Band Edges	Pass	ANSI C63.10
2.6	15.247 (e)	Power Spectral Density	Pass	ANSI C63.10

Table 2



1.4 Application Form

EQUIPMENT DESCRIPTION					
Model Name/Number	MiX41MC-3G				
Part Number	440FT0426				
Hardware Version	V5A				
Software Version	V1.0.9				
FCC ID (if applicable)	2AFMS-41MC3G				
Industry Canada ID (if applicable)					
Technical Description (Please provide a brief description of the intended use of the equipment)	The MiX4000 is a high-end Fleet Management product integrating 3G GSM modem, GPS receiver, Blue Tooth Low Energy, 915MHz short range transceiver and CAN bus.				
POWER SOURCE					
<input type="checkbox"/> AC mains State voltage AC supply frequency (Hz) VAC Max Current Hz <input type="checkbox"/> Single phase <input type="checkbox"/> Three phase And / Or <input checked="" type="checkbox"/> External DC supply Nominal voltage 12 V Max Current 0.500 A Extreme upper voltage 33 V Extreme lower voltage 10.5 V Battery <input type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Lead acid (Vehicle regulated) <input type="checkbox"/> Alkaline <input type="checkbox"/> Leclanche <input type="checkbox"/> Lithium <input type="checkbox"/> Other Details : Volts nominal. End point voltage as quoted by equipment manufacturer V					
FREQUENCY INFORMATION					
Frequency Range	2402 to 2480	MHz			
Channel Spacing (where applicable)	2 MHz				
Receiver Frequency Range (if different)	2402 to 2480	MHz			
Channel Spacing (if different)					
Test Frequencies*	Bottom	2402	MHz	Channel Number (if applicable)	0
	Middle	2440	MHz	Channel Number (if applicable)	19
	Top	2480	MHz	Channel Number (if applicable)	39
Intermediate Frequencies	MHz				
Highest Internally Generated Frequency :	2100 MHz				



POWER CHARACTERISTICS					
Maximum TX power	0.01	W			
Minimum TX power	W (if variable)				
Is transmitter intended for :					
Continuous duty			<input checked="" type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	
Intermittent duty			<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
If intermittent state DUTY CYCLE					
Transmitter ON	0 seconds				
Transmitter OFF	seconds				
ANTENNA CHARACTERISTICS					
<input type="checkbox"/> Antenna connector			State impedance	Ohm	
<input type="checkbox"/> Temporary antenna connector			State impedance	Ohm	
<input checked="" type="checkbox"/> Integral antenna	Type	PCB tracked	State gain	1.4	dBi
<input type="checkbox"/> External antenna	Type		State gain	dBi	
MODULATION CHARACTERISTICS					
<input type="checkbox"/> Amplitude			<input checked="" type="checkbox"/> Frequency		
<input type="checkbox"/> Phase			<input type="checkbox"/> Other (please provide details):		
Can the transmitter operate un-modulated?			<input type="checkbox"/> Yes	<input type="checkbox"/> No	
CLASS OF EMISSION USED					
ITU designation or Class of Emission:					
1 1M50G7D					
(if applicable) 2					
(if applicable) 3					
If more than three classes of emission, list separately:					
BATTERY POWER SUPPLY					
Model name/number			Identification/Part number		
Manufacturer			Country of Origin		
ANCILLARIES (If applicable)					
Model name/number			Identification/Part number		
Manufacturer			Country of Origin		
EXTREME CONDITIONS					
Extreme test voltages (Max)	33	V	Extreme test voltages (Min)	10.5	V
Nominal DC Voltage	12	V	DC Maximum Current	0.5	A
Maximum temperature	-20	°C	Minimum temperature	60	°C

I hereby declare that the information supplied is correct and complete.

Name: Steve Dawes

Position held: Engineering Manager

Date: 03/11/16



1.5 Product Information

1.5.1 Technical Description

The MiX41MC-3G is a high-end Fleet Management product integrating 3G GSM modem, GPS receiver, Blue Tooth Low Energy, 915MHz short range transceiver and CAN bus.

1.6 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: 41000265			
0	As supplied by the customer	Not Applicable	Not Applicable
1	EUT configured using V.29 of test application	Mehadi Choudhury	13-December-2016
Serial Number: 40000279			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: Bluetooth Low Energy		
6 dB Bandwidth	Mehadi Choudhury	UKAS
Maximum Conducted Output Power	Mehadi Choudhury	UKAS
Spurious Radiated Emissions	Graeme Lawler	UKAS
Restricted Band Edges	Graeme Lawler	UKAS
Authorised Band Edges	Graeme Lawler	UKAS
Power Spectral Density	Mehadi Choudhury	UKAS

Table 4

Office Address:

Octagon House
Concorde Way
Segensworth North
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 6 dB Bandwidth

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)

2.1.2 Equipment Under Test and Modification State

MiX424C-2G, S/N: 41000265 - Modification State 1

2.1.3 Date of Test

12-December-2016

2.1.4 Test Method

The test was performed in accordance with KDB 558074 D01, Clause 8.2.

2.1.5 Environmental Conditions

Ambient Temperature 23.5 °C

Relative Humidity 45.7 %

2.1.6 Test Results

Bluetooth Low Energy

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	6 dB Bandwidth (kHz)
2402	1052.4
2440	1042.2
2480	1039.3

Table 5



Product Service

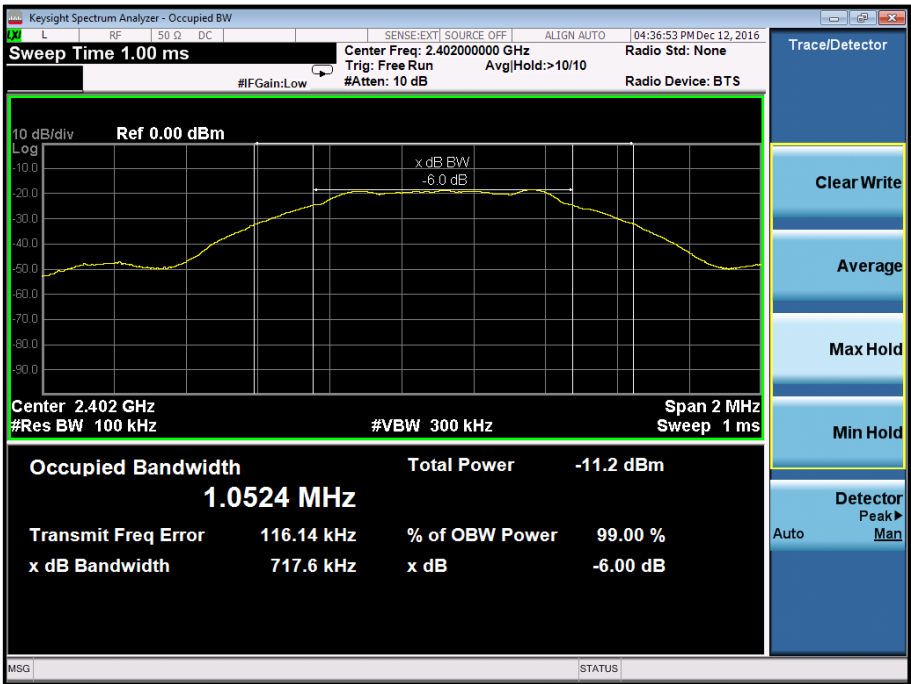


Figure 1 - 2402 MHz

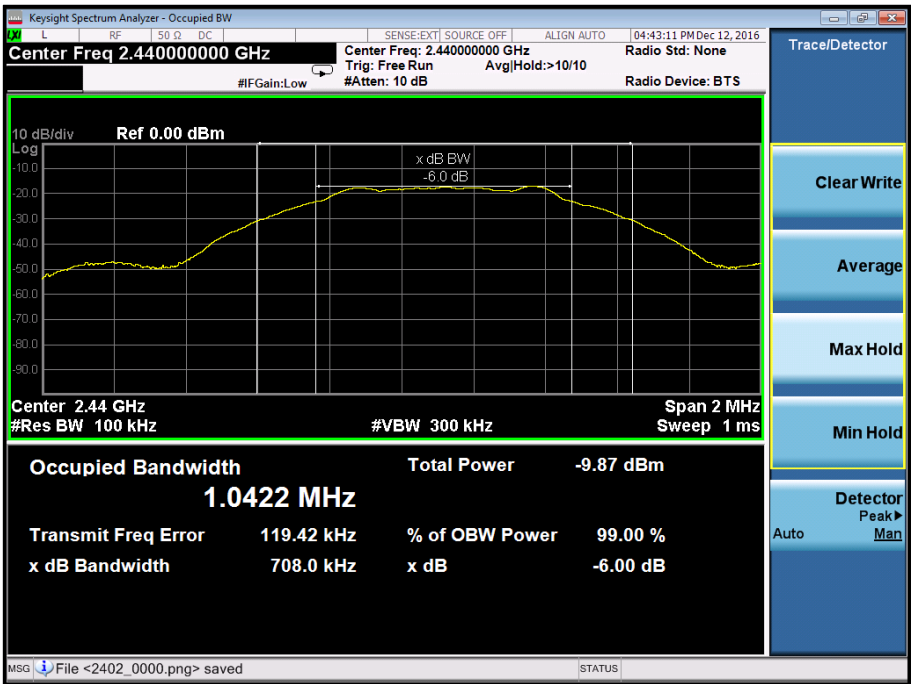


Figure 2 - 2440 MHz



Product Service

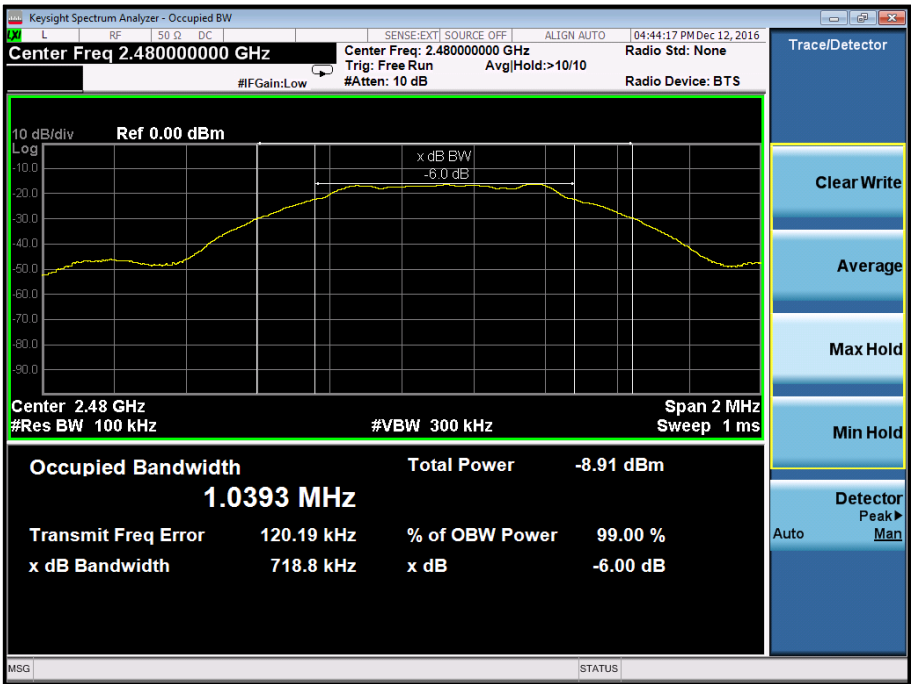


Figure 3 - 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(2)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Dual Power Supply Unit	Hewlett Packard	6253A	271	-	O/P Mon
20dB SMA Attenuator dc - 18GHz	Sealectro	60-674-1020-89	345	12	30-Jun-2017
Multimeter	Iso-tech	IDM101	2419	12	14-Nov-2017
Hygrometer	Rotronic	I-1000	3220	12	23-Aug-2017
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	08-Sep-2017
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	05-Mar-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	24-Oct-2017
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4726	12	03-Aug-2017

Table 6

O/P Mon – Output Monitored using calibrated equipment



2.2 Maximum Conducted Output Power

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)

2.2.2 Equipment Under Test and Modification State

MiX424C-2G, S/N: 41000265 - Modification State 1

2.2.3 Date of Test

13-December-2016

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, Clause 11.9.1.1

2.2.5 Environmental Conditions

Ambient Temperature 24.5 °C

Relative Humidity 44.0 %

2.2.6 Test Results

Bluetooth Low Energy

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	Output Power	
	dBm	mW
2402	6.15	4.12
2440	6.34	4.31
2480	6.45	4.42

Table 7

FCC 47 CFR Part 15, Limit Clause 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Dual Power Supply Unit	Hewlett Packard	6253A	271	-	O/P Mon
20dB SMA Attenuator dc - 18GHz	Sealectro	60-674-1020-89	345	12	30-Jun-2017
Multimeter	Iso-tech	IDM101	2419	12	14-Nov-2017
Hygrometer	Rotronic	I-1000	3220	12	23-Aug-2017
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	08-Sep-2017
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	05-Mar-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	24-Oct-2017
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4726	12	03-Aug-2017

Table 8

O/P Mon – Output Monitored using calibrated equipment



2.3 Spurious Radiated Emissions

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205

2.3.2 Equipment Under Test and Modification State

MiX41MC-3G, S/N: 40000279 - Modification State 0

2.3.3 Date of Test

06-December-2016

2.3.4 Test Method

Testing was performed in accordance with ANSI C63.10, Clause 11.11, 11.12.1 and 11.12.2.7

Plots for average measurements were taken in accordance with ANSI C63.10, Clause 4.1.4.2.3

Final average measurements were taken in accordance with ANSI C63.10, Clause 4.1.4.2.2

2.3.5 Environmental Conditions

Ambient Temperature 19.5 °C

Relative Humidity 45.0 %



2.3.6 Test Results

Bluetooth Low Energy

2402 MHz

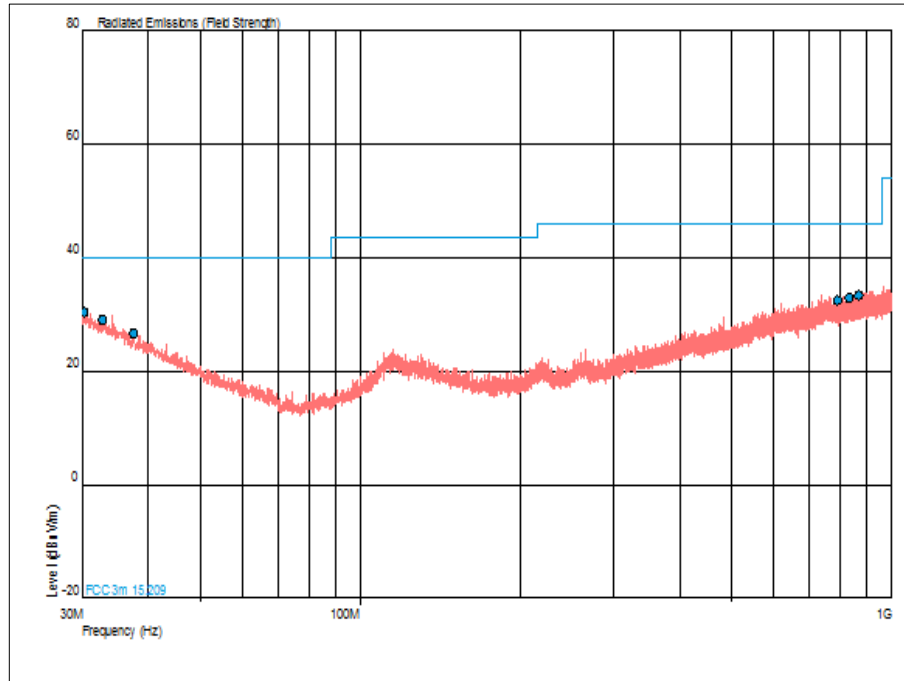


Figure 4 - Frequency Range Under Test: 30 MHz to 1 GHz - Polarity Horizontal and Vertical

Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
30.211	30.4	40.0	-9.6	0	1.00	Horizontal
32.746	29.0	40.0	-11.0	0	1.00	Horizontal
37.555	26.6	40.0	-13.4	0	1.00	Vertical
791.660	32.5	46.0	-13.5	0	1.00	Vertical
833.862	32.9	46.0	-13.1	0	1.00	Horizontal
866.252	33.4	46.0	-12.6	0	1.00	Horizontal

Table 9



1 GHz to 25 GHz

Frequency (GHz)	Result (μV/m)		Limit (μV/m)		Margin (μV/m)	
	Peak	Average	Peak	Average	Peak	Average
4.804240	668.34	369.40	5000.00	500.00	4331.66	130.60
12.011327	1417.42	420.73	5000.00	500.00	3582.58	79.27

Table 10

No other emissions were detected within 10 dB of the limit.

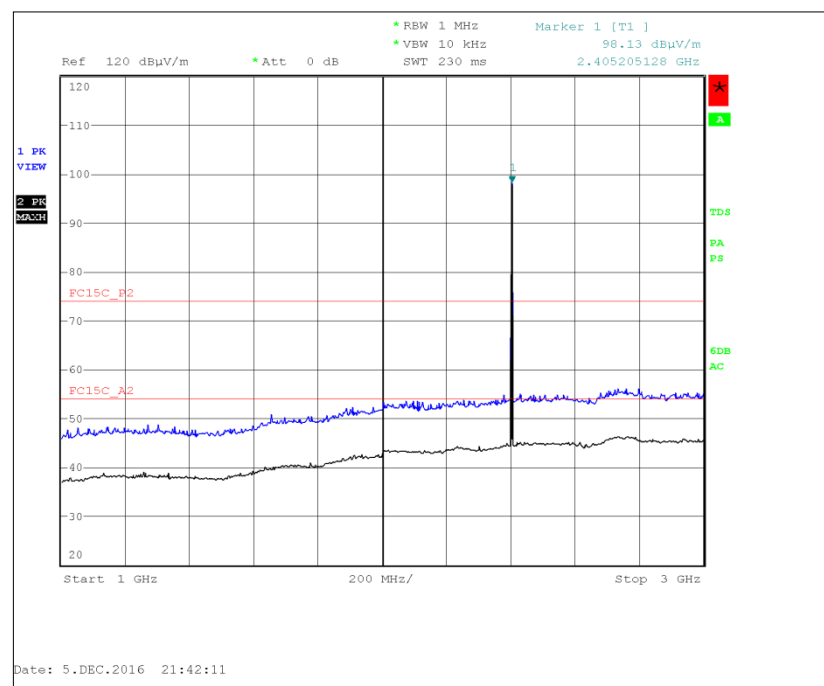


Figure 5 - Frequency Range Under Test: 1 GHz to 3 GHz - Polarity: Horizontal and Vertical



Product Service

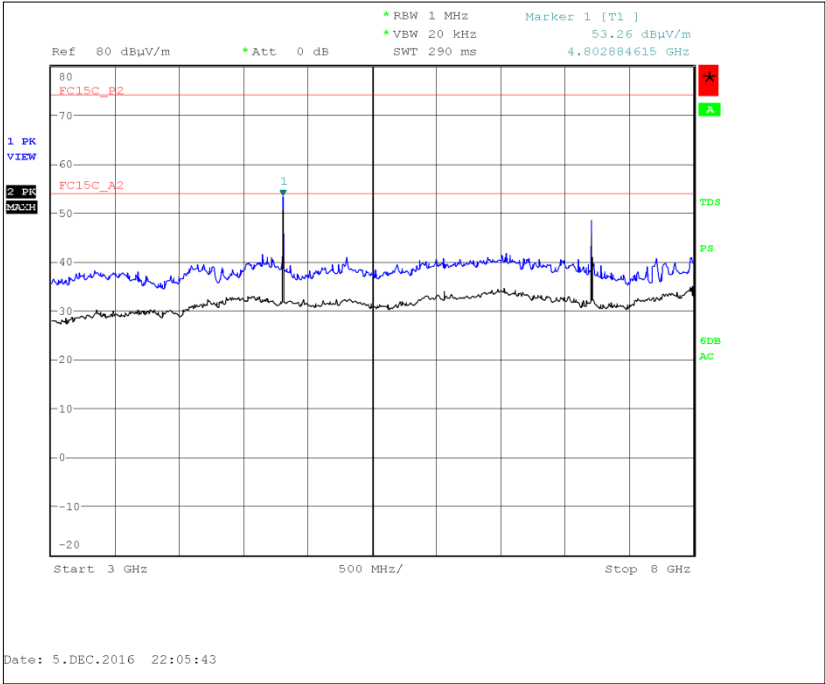


Figure 6 - Frequency Range Under Test: 3 GHz to 8 GHz - Polarity: Horizontal and Vertical

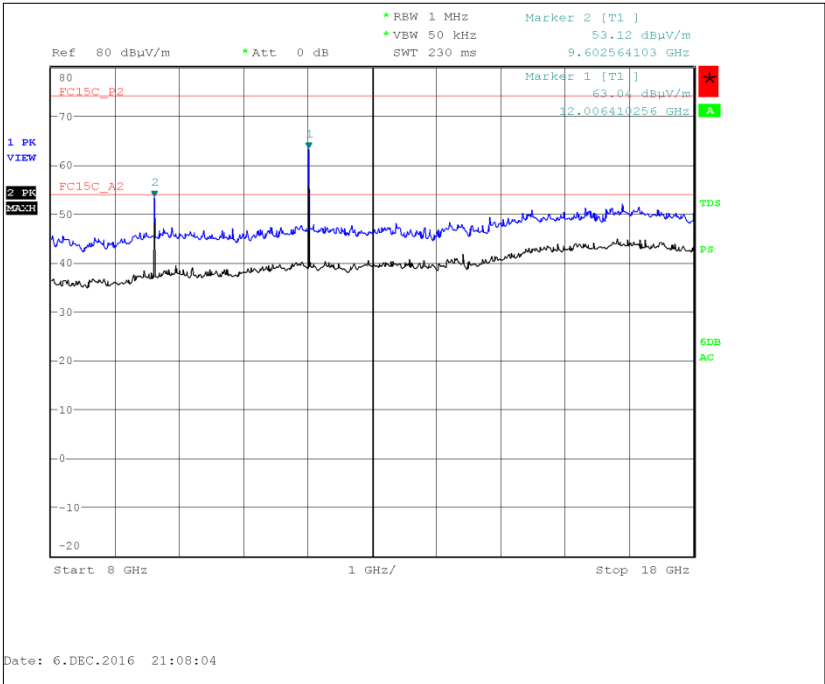


Figure 7 - Frequency Range Under Test: 8 GHz to 18 GHz - Polarity: Horizontal and Vertical



Product Service

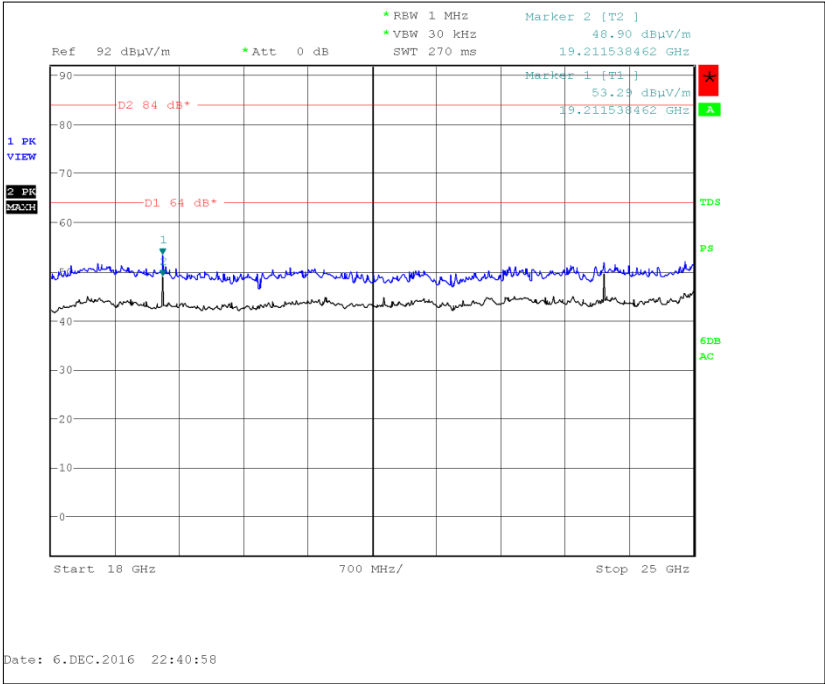


Figure 8 - Frequency Range Under Test: 18 GHz to 25 GHz - Polarity: Horizontal and Vertical



2440 MHz

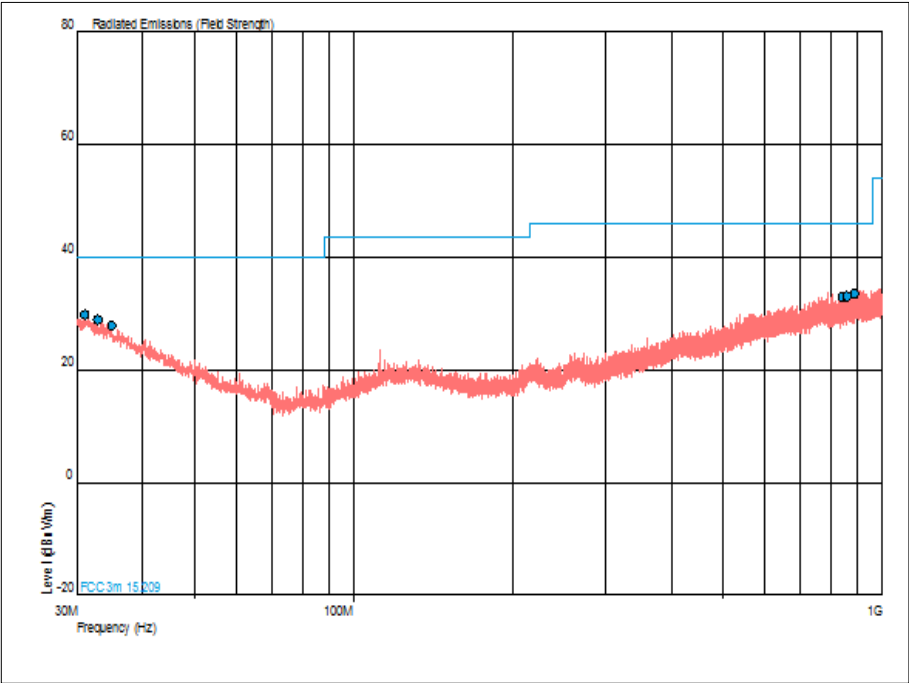


Figure 9 - Frequency Range Under Test: 30 MHz to 1 GHz - Polarity Horizontal and Vertical

Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
31.126	29.7	40.0	-10.3	0	1.00	Vertical
32.902	28.8	40.0	-11.2	0	1.00	Vertical
34.897	27.8	40.0	-12.2	0	1.00	Vertical
840.228	32.9	46.0	-13.1	0	1.00	Vertical
858.823	33.0	46.0	-13.0	0	1.00	Vertical
888.516	33.5	46.0	-12.5	0	1.00	Vertical

Table 11



1 GHz to 25 GHz

Frequency (GHz)	Result (µV/m)		Limit (µV/m)		Margin (µV/m)	
	Peak	Average	Peak	Average	Peak	Average
4.880269	819.41	451.86	5000.00	500.00	4180.59	48.14
7.320393	434.51	266.99	5000.00	500.00	4565.49	233.01
12.200680	1061.70	342.37	5000.00	500.00	3938.30	157.63

Table 12

No other emissions were detected within 10 dB of the limit.

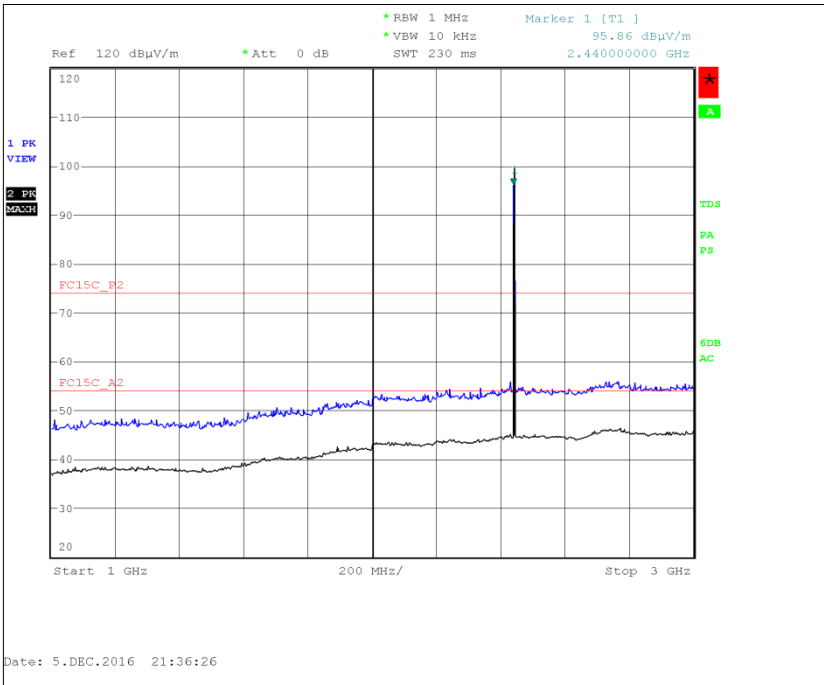


Figure 10 - Frequency Range Under Test: 1 GHz to 3 GHz - Polarity: Horizontal and Vertical

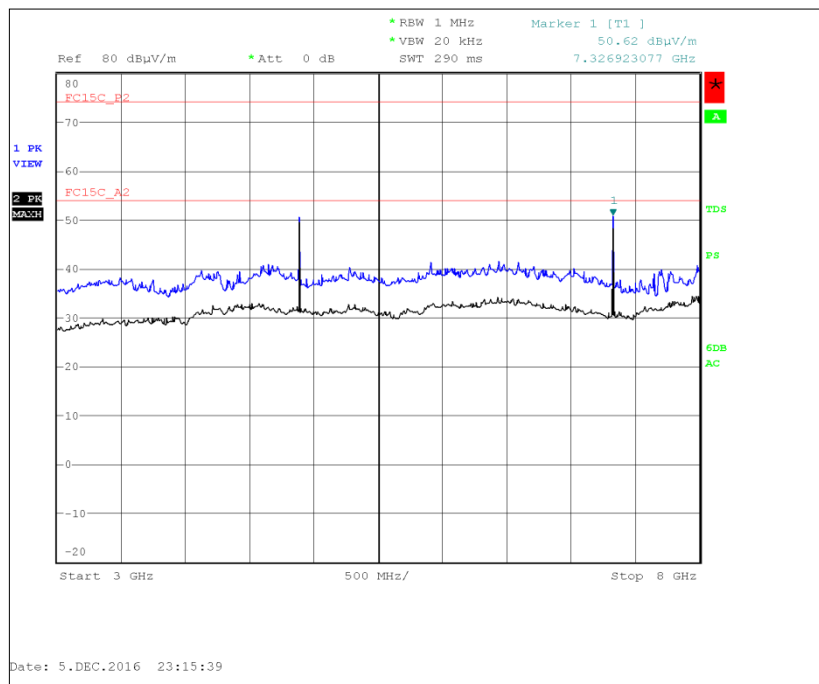


Figure 11 - Frequency Range Under Test: 3 GHz to 8 GHz - Polarity: Horizontal and Vertical

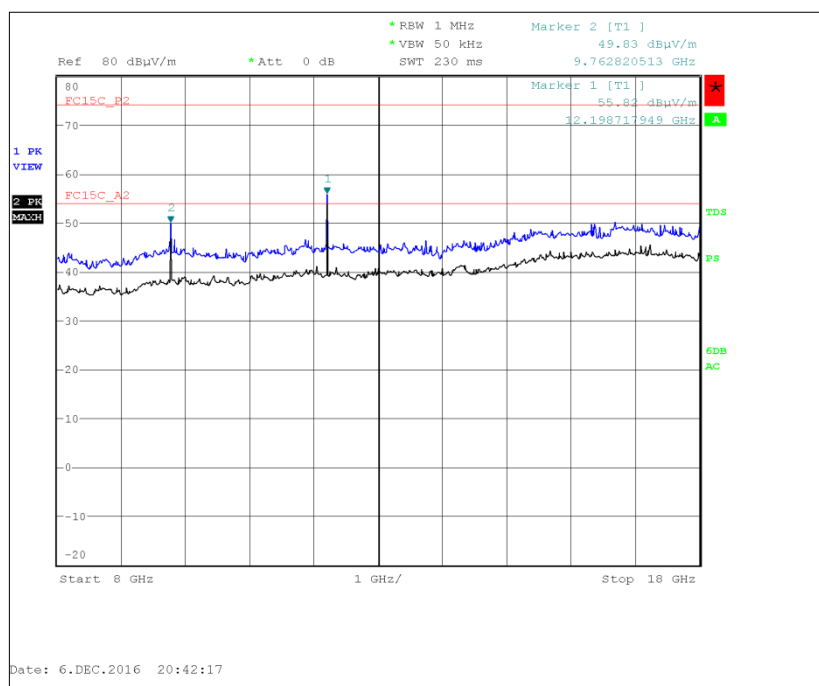


Figure 12 - Frequency Range Under Test: 8 GHz to 18 GHz - Polarity: Horizontal and Vertical



Product Service

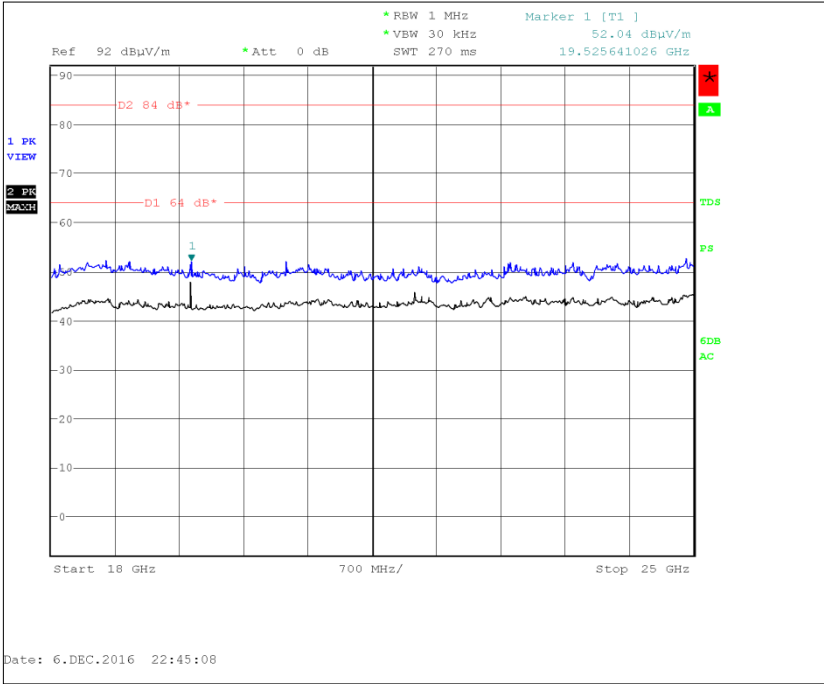


Figure 13 - Frequency Range Under Test: 18 GHz to 25 GHz - Polarity: Horizontal and Vertical



2480 MHz

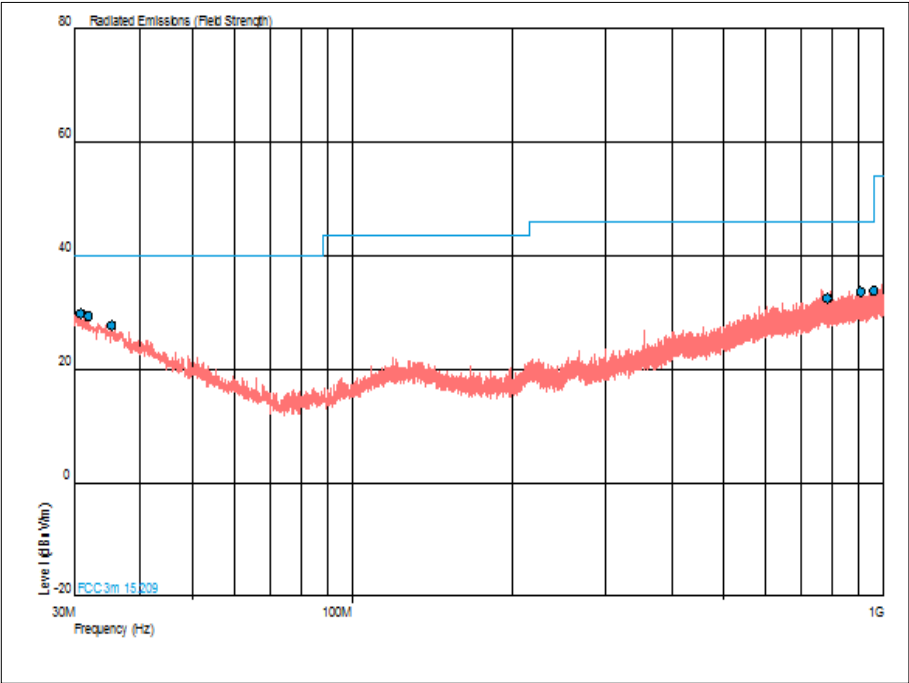


Figure 14 - Frequency Range Under Test: 30 MHz to 1 GHz - Polarity Horizontal and Vertical

Frequency (MHz)	QP Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dBuV/m)	Angle(Deg)	Height(m)	Polarity
30.843	29.8	40.0	-10.2	0	1.00	Vertical
31.940	29.4	40.0	-10.6	0	1.00	Vertical
35.329	27.6	40.0	-12.4	0	1.00	Vertical
783.019	32.5	46.0	-13.5	0	1.00	Vertical
906.350	33.6	46.0	-12.4	0	1.00	Vertical
958.513	33.7	46.0	-12.3	0	1.00	Vertical

Table 13



1 GHz to 25 GHz

Frequency (GHz)	Result (µV/m)		Limit (µV/m)		Margin (µV/m)	
	Peak	Average	Peak	Average	Peak	Average
7.440440	457.61	260.02	5000.00	500.00	4542.39	239.98
12.401341	861.99	345.94	5000.00	500.00	4138.01	154.06

Table 14

No other emissions were detected within 10 dB of the limit.

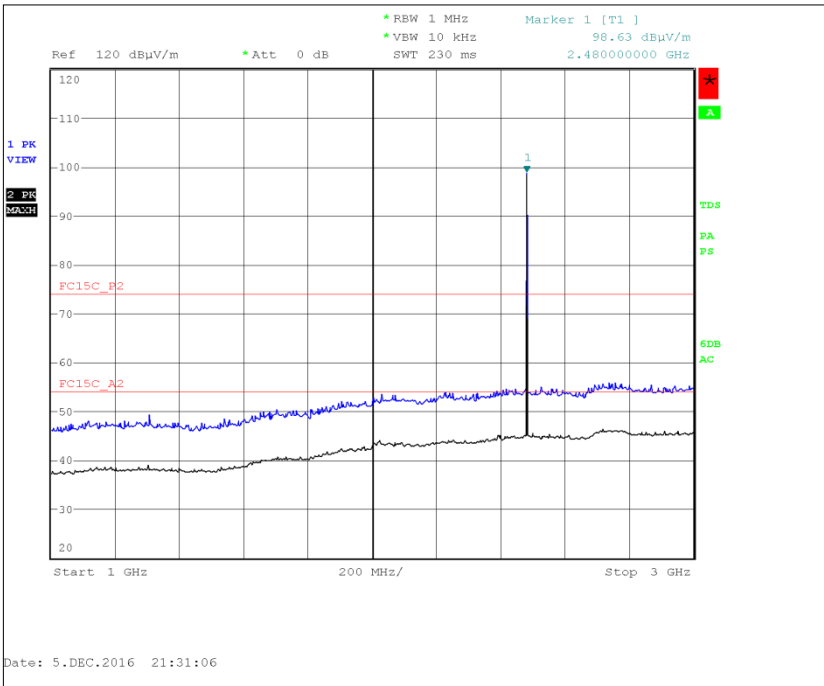


Figure 15 - Frequency Range Under Test: 1 GHz to 3 GHz - Polarity: Horizontal and Vertical

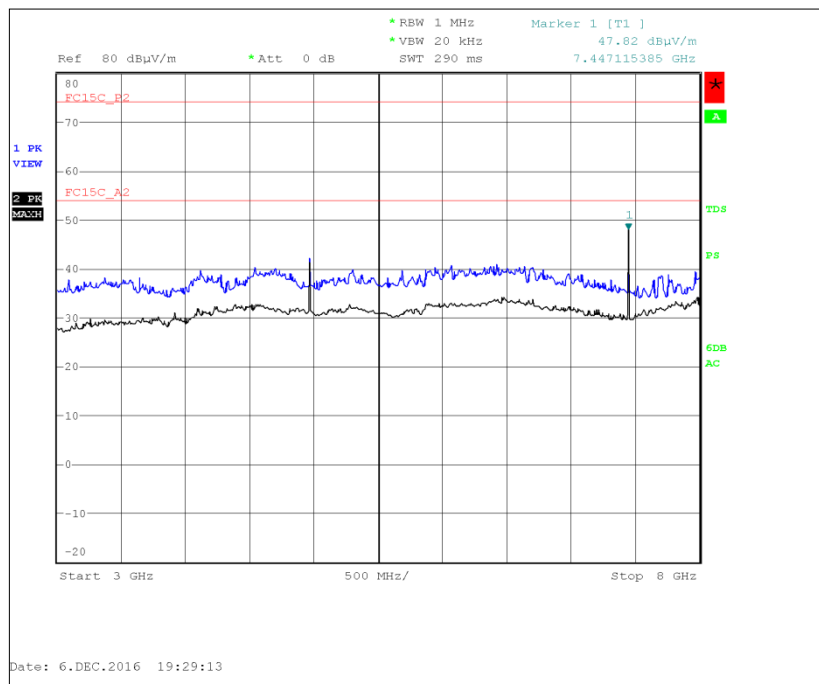


Figure 16 - Frequency Range Under Test: 3 GHz to 8 GHz - Polarity: Horizontal and Vertical

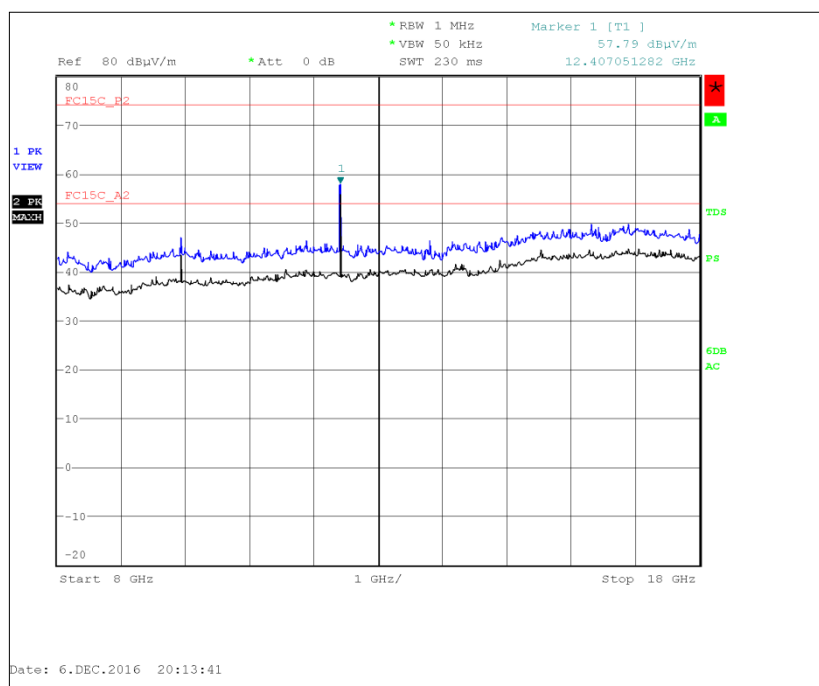


Figure 17 - Frequency Range Under Test: 8 GHz to 18 GHz - Polarity: Horizontal and Vertical

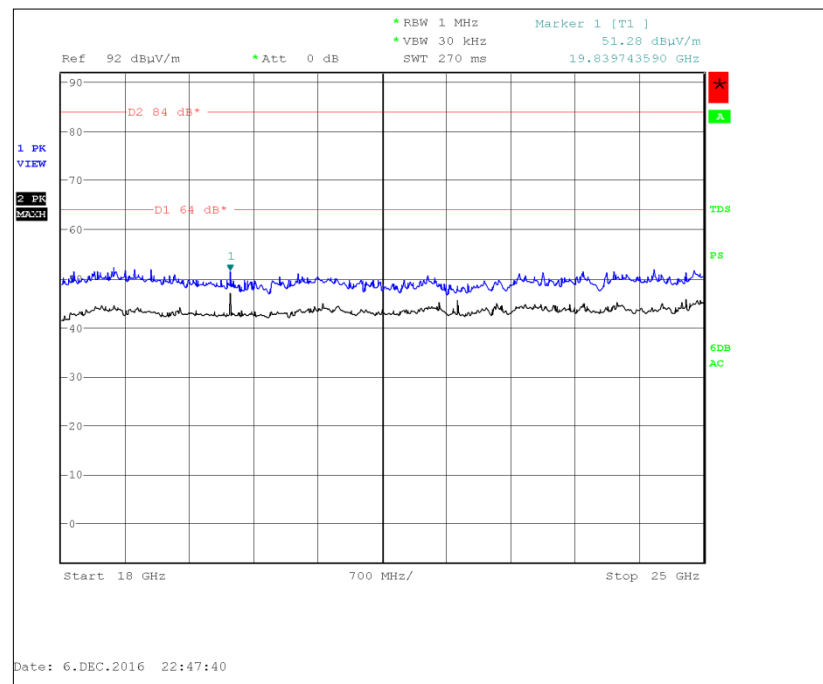


Figure 18 - Frequency Range Under Test: 18 GHz to 25 GHz - Polarity: Horizontal and Vertical

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)



2.3.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Pre-Amplifier	Phase One	PS04-0086	1533	12	29-Jul-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	21-Sep-2017
Multimeter	Iso-tech	IDM101	2417	12	30-Sep-2017
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	02-Nov-2017
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	-	O/P Mon
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	26-Feb-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	17-Oct-2017
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4411	12	23-Mar-2017
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4412	12	23-Mar-2017
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	O/P Mon
Cable (Rx, SMAm-SMAm 0.5m)	Scott Cables	SLSLL18-SMSM-00.50M	4528	6	03-Feb-2017
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016
4 Channel PSU	Rohde & Schwarz	HMP4040	4736	-	O/P Mon

Table 15

TU – Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.4 Restricted Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205

2.4.2 Equipment Under Test and Modification State

MiX41MC-3G, S/N: 40000279 - Modification State 0

2.4.3 Date of Test

05-December-2016

2.4.4 Test Method

The test was performed in accordance ANSI C63.10 clause 11.13.1, 6.3, 6.6 and 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.3.

Final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

2.4.5 Environmental Conditions

Ambient Temperature 24.0 °C

Relative Humidity 45.5.0 %

2.4.6 Test Results

Bluetooth Low Energy

Modulation	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
GFSK	2402	2390.0	62.38	46.19
GFSK	2480	2483.5	62.93	46.44

Table 16

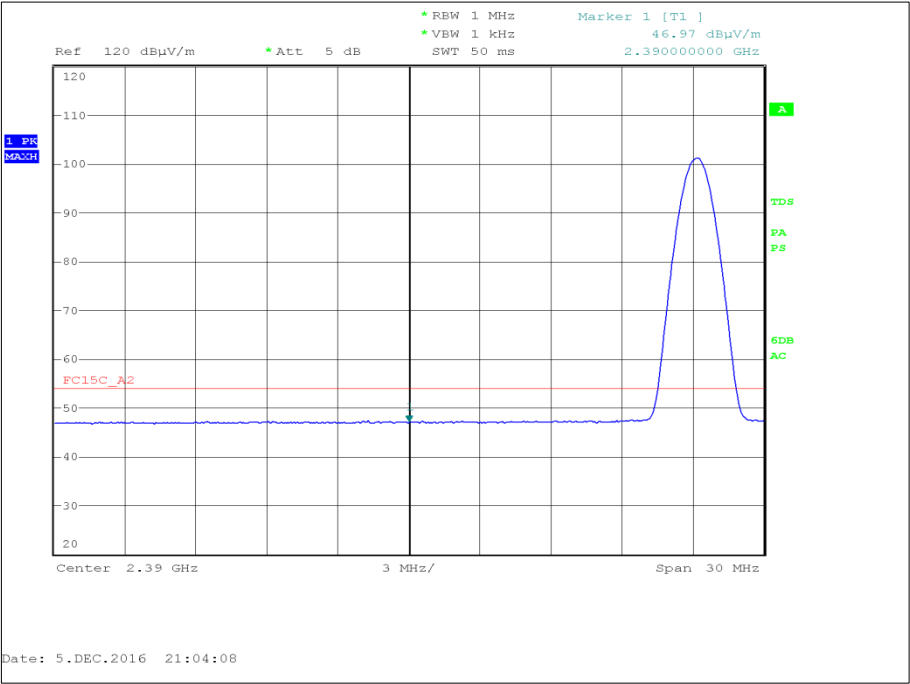


Figure 19 - GFSK 2402 MHz, Measured Frequency 2390.0 MHz, Average

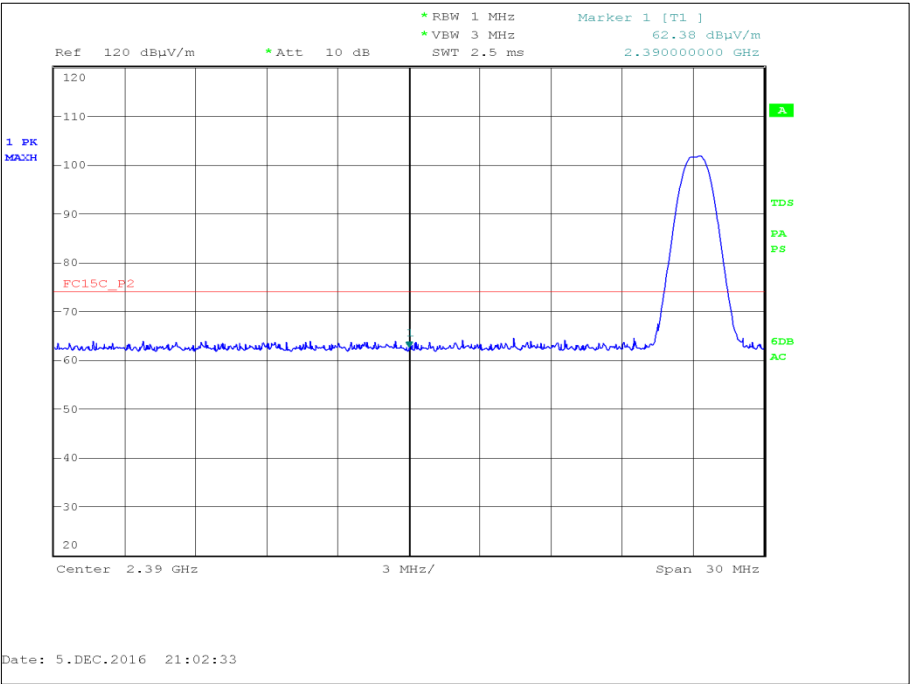


Figure 20 – GFSK 2402 MHz, Measured Frequency 2390.0 MHz, Peak

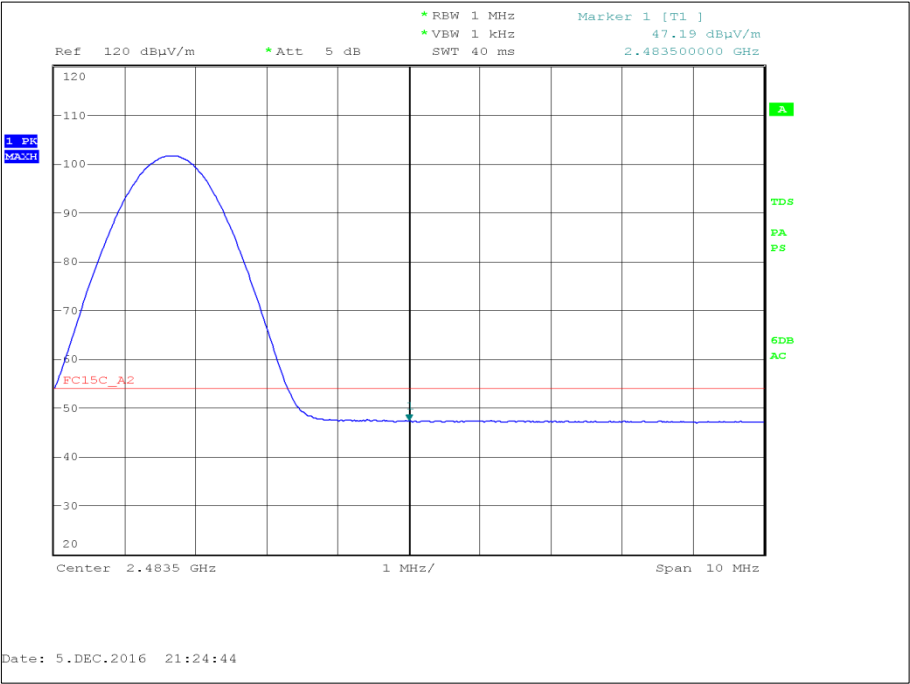


Figure 21 - GFSK 2480 MHz, Measured Frequency 2483.5 MHz, Average

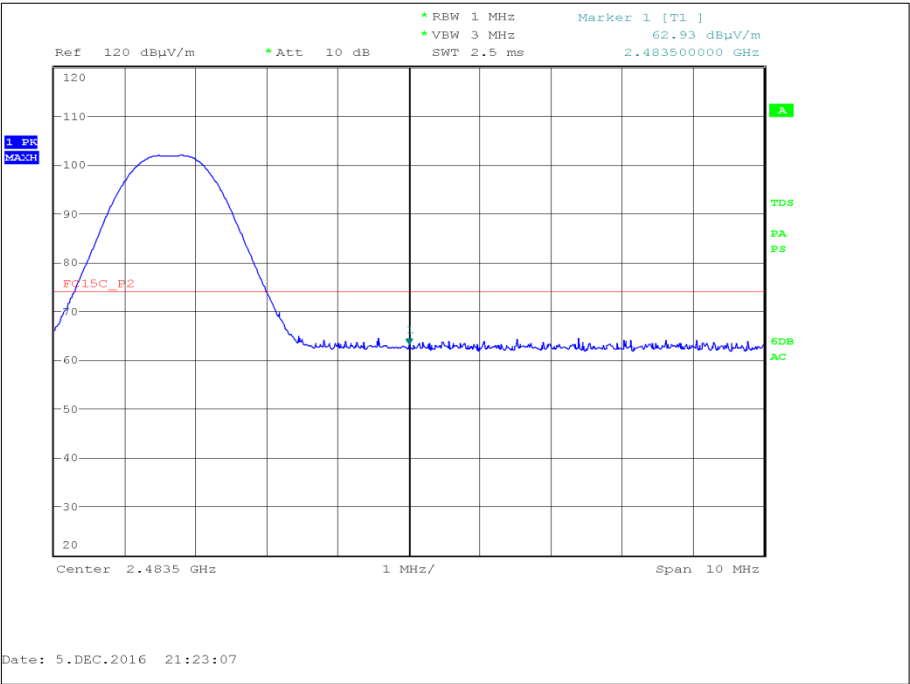


Figure 22 - GFSK 2480 MHz, Measured Frequency 2483.5 MHz, Peak



FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54

Table 17

2.4.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	A1	1388	12	13-Apr-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	21-Sep-2017
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	O/P Mon
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016
4 Channel PSU	Rohde & Schwarz	HMP4040	4736	-	O/P Mon

Table 18

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.5 Authorised Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)

2.5.2 Equipment Under Test and Modification State

MiX41MC-3G, S/N: 40000279 - Modification State 0

2.5.3 Date of Test

05-December-2016

2.5.4 Test Method

The test was performed in accordance ANSI C63.10, Clause 11.13.1, 6.3, 6.6 and 6.10.4.

2.5.5 Environmental Conditions

Ambient Temperature 22.7 °C

Relative Humidity 24.0 %

2.5.6 Test Results

Bluetooth Low Energy

Modulation	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dBµV/m)
GFSK	2402	2400.0	52.07
GFSK	2480	2483.5	51.80

Table 19



Product Service

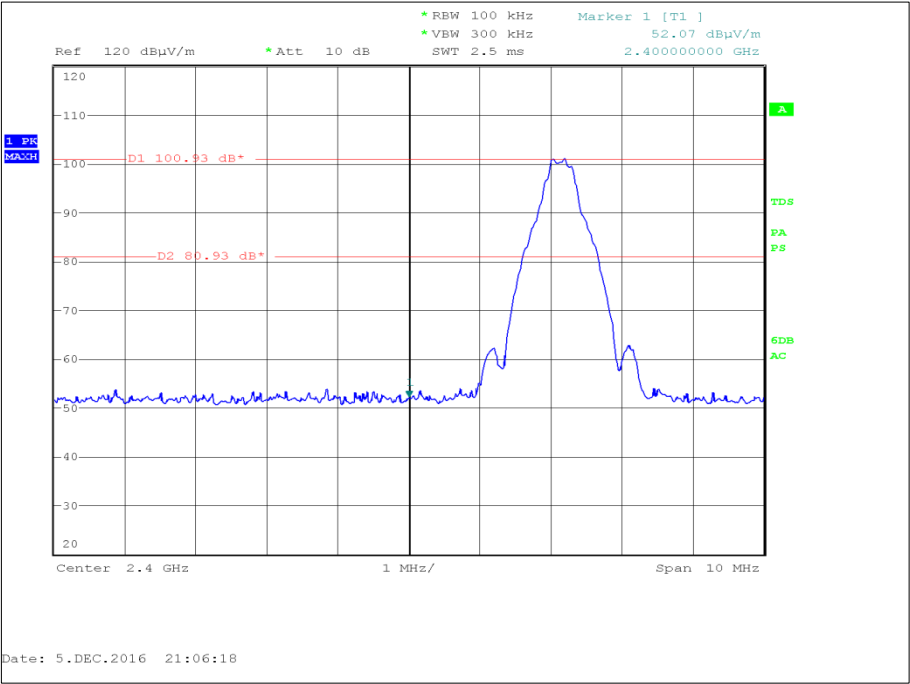


Figure 23 – GFSK 2402 MHz, Measured Frequency 2400.00 MHz

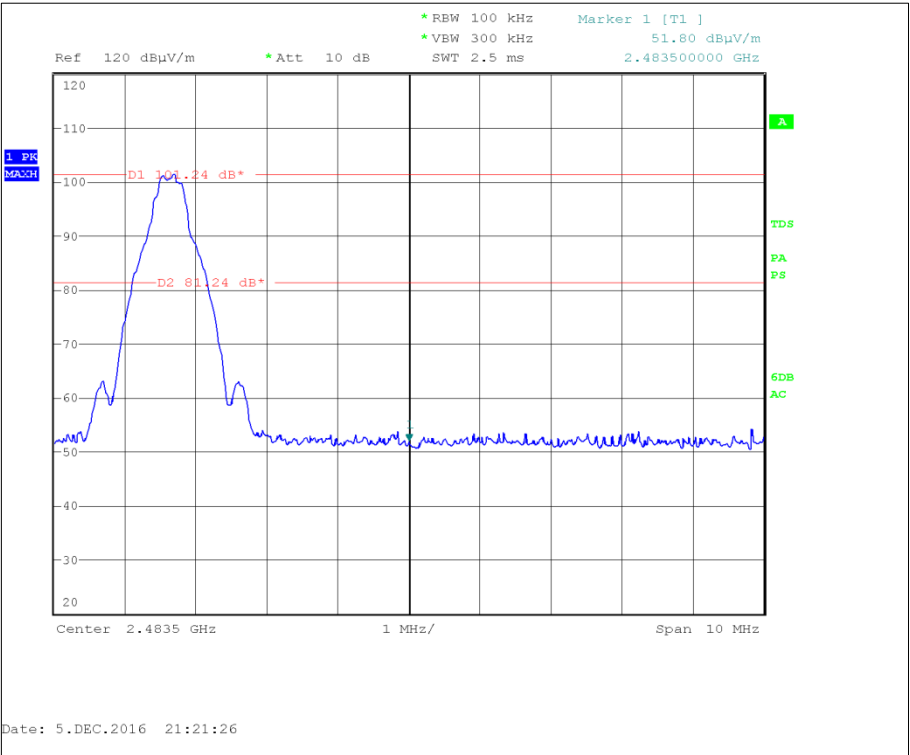


Figure 24 – GFSK 2480 MHz, Measured Frequency 2483.50 MHz



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

2.5.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	A1	1388	12	13-Apr-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygrometer	Rotronic	HYGROPALM 1	2338	12	21-Sep-2017
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	12-Nov-2017
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	O/P Mon
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016
4 Channel PSU	Rohde & Schwarz	HMP4040	4736	-	O/P Mon

Table 20

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)

2.6.2 Equipment Under Test and Modification State

MiX424C-2G, S/N: 41000265 - Modification State 1

2.6.3 Date of Test

13-December-2016

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10, Clause 11.10.2.

2.6.5 Environmental Conditions

Ambient Temperature 24.5 °C

Relative Humidity 44.0 %

2.6.6 Test Results

Bluetooth Low Energy, GFSK

Frequency (MHz)	Power Spectral Density (dBm)
2402	-3.79
2440	-3.63
2480	-3.67

Table 21



Product Service

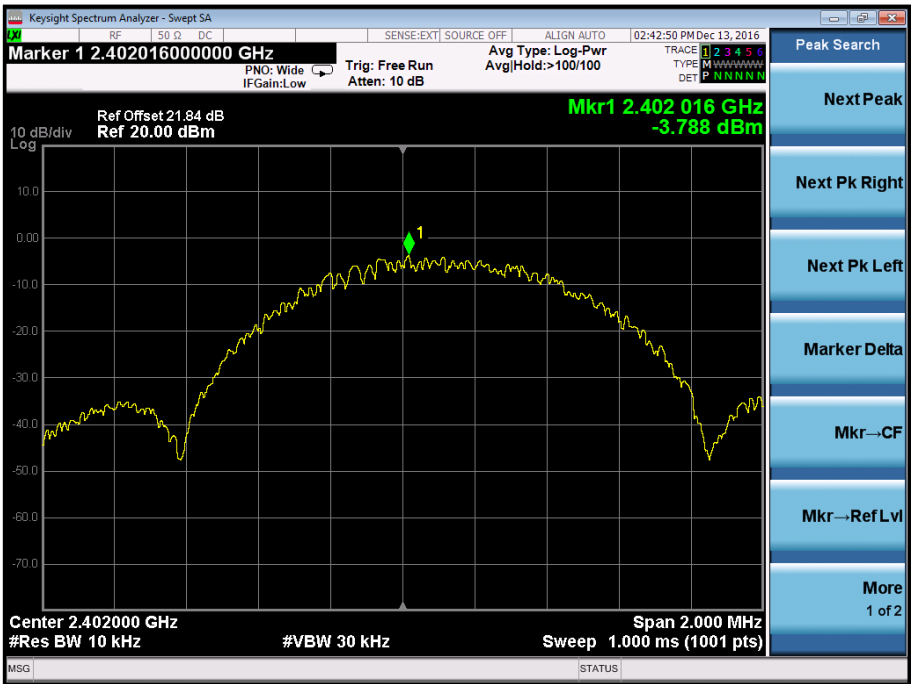


Figure 25 - 2402 MHz



Figure 26 - 2440 MHz



Product Service

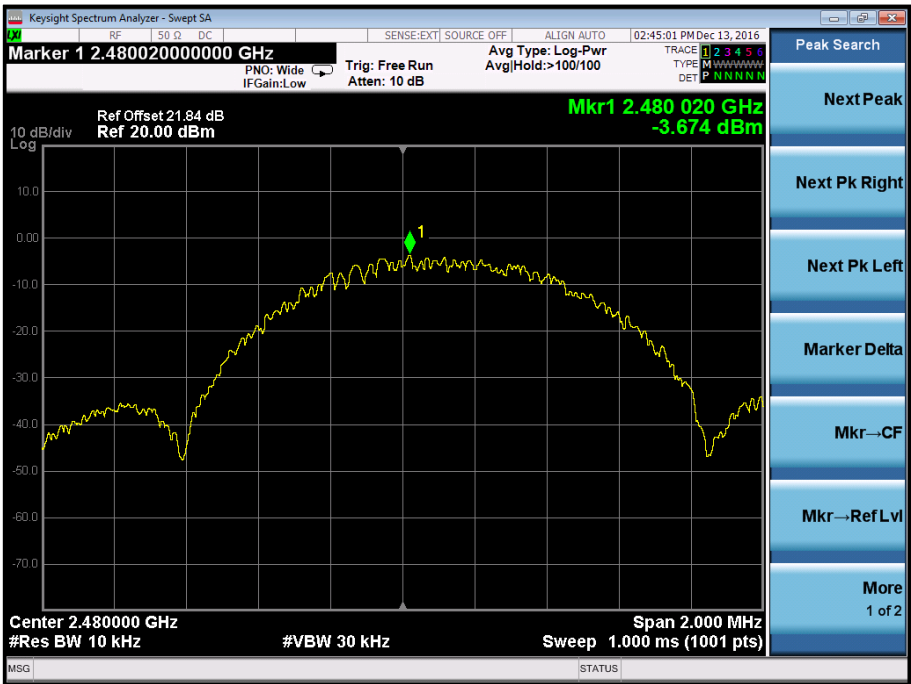


Figure 27 - 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Dual Power Supply Unit	Hewlett Packard	6253A	271	-	O/P Mon
20dB SMA Attenuator dc - 18GHz	Sealectro	60-674-1020-89	345	12	30-Jun-2017
Multimeter	Iso-tech	IDM101	2419	12	14-Nov-2017
Hygrometer	Rotronic	I-1000	3220	12	23-Aug-2017
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	15-Sep-2017
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	08-Sep-2017
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	05-Mar-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	24-Oct-2017
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4726	12	03-Aug-2017

Table 22

O/P Mon – Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
6 dB Bandwidth	± 212.114 kHz
Maximum Conducted Output Power	± 0.70 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	Conducted: ± 3.08 dB Radiated: 30 MHz to 1 GHz: ± 5.1 dB Radiated: 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 3.0 dB

Table 23