



FCC RF Test Report

APPLICANT : Lemobile Information Technology (Beijing) Co., Ltd.
EQUIPMENT : Mobile phone
BRAND NAME : LeEco
MODEL NAME : LEX727
FCC ID : 2AFWMLEX727
STANDARD : FCC 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 30, 2016 and completely tested on Sep. 27, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Maximum Frequency Tolerance and Emission Designator.....	6
1.7 Testing Site.....	6
1.8 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Test Mode	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system.....	8
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels	9
3 CONDUCTED TEST ITEMS	10
3.1 Measuring Instruments	10
3.2 Test Setup	10
3.3 Test Result of Conducted Test.....	10
3.4 Conducted Output Power Measurement	11
3.5 Peak-to-Average Ratio	12
3.6 EIRP Power Density	13
3.7 Occupied Bandwidth.....	14
3.8 Conducted Band Edge Measurement	15
3.9 Conducted Spurious Emission Measurement	16
3.10 Frequency Stability Measurement	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test	18
4.4 Radiated Spurious Emission Measurement	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION	21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	-	Peak-to-Average Ratio	<13dB	N/A	Reporting only
3.6	§27.50 (a)(3)	EIRP Power Density	EIRP < 250mW/5MHz	PASS	-
3.7	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.8	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.9	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	$< 70+10\log_{10}(P[\text{Watts}])$	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	$< 70+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 24.46 dB at 6916.770 MHz



1 General Description

1.1 Applicant

Lemobile Information Technology (Beijing) Co., Ltd.

Wenhuaying North (No.1, Linkong 2nd St), Gaoliying, Shunyi District, Beijing

1.2 Manufacturer

Lemobile Information Technology (Beijing) Co., Ltd.

Wenhuaying North (No.1, Linkong 2nd St), Gaoliying, Shunyi District, Beijing

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	LeEco
Model Name	LEX727
FCC ID	2AFWMLEX727
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 862524030000166 Radiation: 862524030000281 for Top Antenna 862524030000372 for Bottom Antenna
HW Version	HW_1.0.0
SW Version	zI1_cert_fcc
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz
Rx Frequency	LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Top Antenna	LTE Band 30 : 16.19 dBm
Maximum Output Power to Bottom Antenna	LTE Band 30 : 23.43 dBm
Type of Modulation	QPSK / 16QAM



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Frequency Tolerance and Emission Designator

LTE Band 30		QPSK				16QAM			
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)		Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)	
				Top	Bottom			Top	Bottom
5	2307.5 ~ 2312.5	4M50G7D	-	0.0412	0.2183	4M50W7D	-	0.0344	0.1845
10	2310.0	9M03G7D	0.0026	0.0416	0.2203	9M03W7D	-	0.0351	0.1888

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27(D)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 Power Meas License Digital Systems D01 v02r02

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	30	-	-	V		-	-	V	V	V	V	V	V	V	V
		-	-		V	-	-	V	V	V	V	V		V	
Peak-to-Average Ratio	30	-	-		V	-	-	V	V	V		V		V	
E.I.R.P PSD	30	-	-	V		-	-	V	V	V			V	V	V
		-	-		V	-	-	V	V	V				V	
26dB and 99% Bandwidth	30	-	-	V		-	-	V	V			V	V	V	V
		-	-		V	-	-	V	V			V		V	
Conducted Band Edge	30	-	-	V		-	-	V	V	V		V	V		V
		-	-		V	-	-	V	V	V		V		V	
Conducted Spurious Emission	30	-	-	V		-	-	V	V	V			V	V	V
		-	-		V	-	-	V	V	V				V	
Frequency Stability	30	-	-		V	-	-	V				V		V	
Radiated Spurious Emission	30	-	-	V		-	-	V		V			V	V	V
					V			V		V			V		V
Note	<ol style="list-style-type: none">1. The mark "v" means that this configuration is chosen for testing2. The mark "-" means that this bandwidth is not supported.3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

Top Antenna/Bottom Antenna

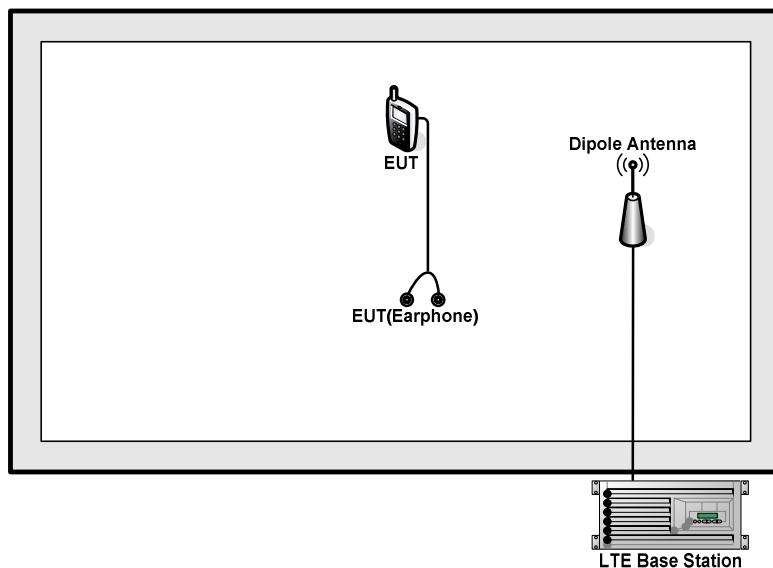

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

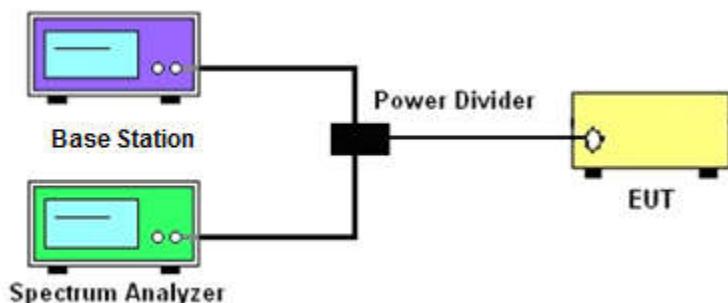

3.2.3 Frequency Stability

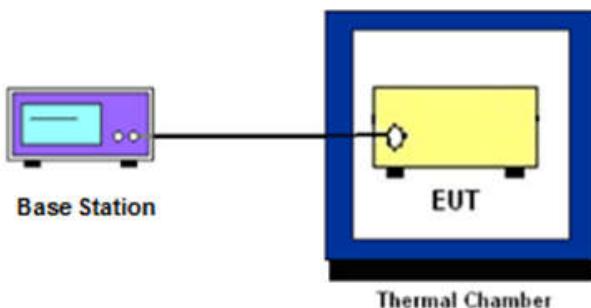

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 EIRP Power Density

3.6.1 Description of EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.6.2 Test Procedures

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).



3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26dB occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal 26 dB.

The 26 dB emission bandwidth(EBW) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF powers with full RB sizes were measured.



3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;
- (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.

3.8.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels were measured with $RBW \geq 1\% EBW$ set in Spectrum Analyzer, while the EUT was transmitting under maximum power.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
4. The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$
$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB}) = [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB}) = -13\text{dBm}.$$



3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [70 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[70 + 10\log(P)]$ (dB)
 $= -40$ dBm.



3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.10.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

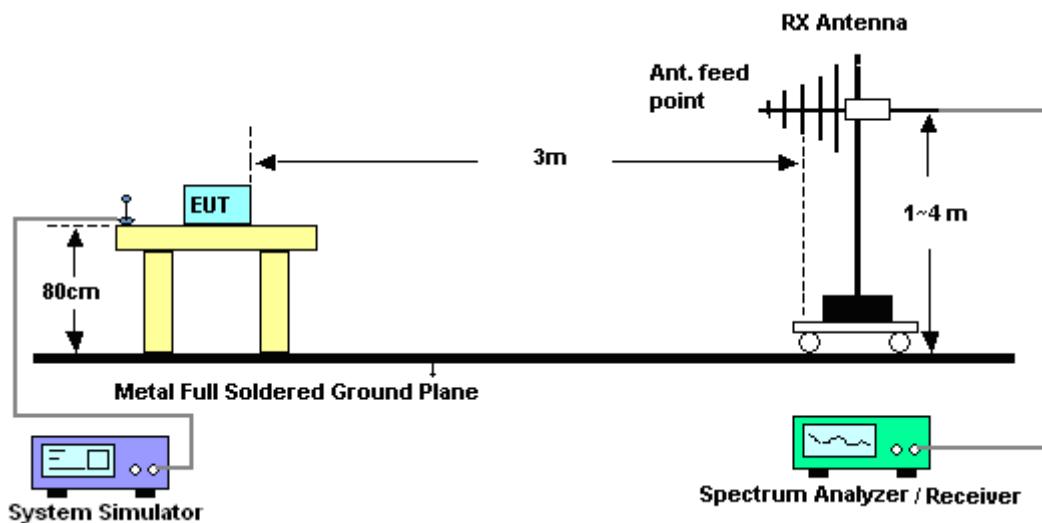

4.2.2 For radiated test above 1GHz

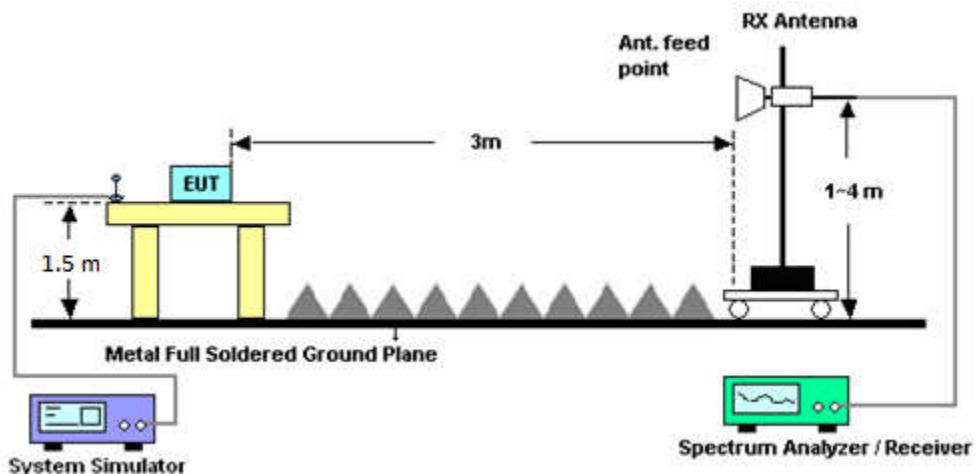

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log(P)$ dB.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [70 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[70 + 10\log(P)]$ (dB)
= -40dBm.

11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Sep. 14, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Sep. 14, 2016	Oct. 23, 2016	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Sep. 27, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Sep. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Sep. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Oct. 10, 2015	Sep. 27, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Sep. 27, 2016	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Sep. 27, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Jan. 20, 2016	Sep. 27, 2016	Jan. 19, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 27, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 27, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 27, 2016	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.5 dB
--	---------------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.5dB
--	--------------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.6dB
--	--------------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 30 Maximum Average Power [dBm] Top Antenna						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	16.08	16.12	16.15
	1	12		15.99	16.04	15.99
	1	24		15.98	16.07	16.02
	12	0		14.96	15.00	15.14
	12	7		15.02	15.09	15.06
	12	13		15.03	15.05	15.02
	25	0		15.01	15.04	15.01
5	1	0	16-QAM	15.26	15.37	15.36
	1	12		15.29	15.32	15.27
	1	24		15.17	15.27	15.17
	12	0		14.01	14.06	14.15
	12	7		14.05	14.09	14.09
	12	13		14.07	14.09	14.06
	25	0		14.00	14.06	14.05
10	1	0	QPSK		16.19	
	1	25			16.04	
	1	49			15.97	
	25	0			15.05	
	25	12			15.10	
	25	25			15.07	
	50	0			15.05	
10	1	0	16-QAM		15.45	
	1	25			15.27	
	1	49			15.20	
	25	0			14.03	
	25	12			14.09	
	25	25			14.05	
	50	0			14.06	



LTE Band 30 Maximum Average Power [dBm] Bottom Antenna						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.37	23.39	23.32
	1	12		23.24	23.32	23.29
	1	24		23.22	23.21	23.21
	12	0		22.30	22.30	22.35
	12	7		22.34	22.34	22.38
	12	13		22.31	22.29	22.34
	25	0		22.29	22.26	22.29
5	1	0	16-QAM	22.61	22.66	22.65
	1	12		22.49	22.64	22.65
	1	24		22.51	22.55	22.44
	12	0		21.35	21.31	21.36
	12	7		21.34	21.34	21.38
	12	13		21.32	21.30	21.33
	25	0		21.31	21.28	21.32
10	1	0	QPSK		23.43	
	1	25			23.22	
	1	49			23.08	
	25	0			22.34	
	25	12			22.31	
	25	25			22.27	
	50	0			22.30	
10	1	0	16-QAM		22.76	
	1	25			22.55	
	1	49			22.37	
	25	0			21.30	
	25	12			21.34	
	25	25			21.27	
	50	0			21.28	

**Peak-to-Average Ratio**

Mode	LTE Band 30 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Middle CH	3.88	4.72	4.93	5.80	PASS



LTE Band 30 / 10MHz / QPSK

Middle Channel / 1RB




Middle Channel / Full RB




LTE Band 30 / 10MHz / 16QAM

Middle Channel / 1RB

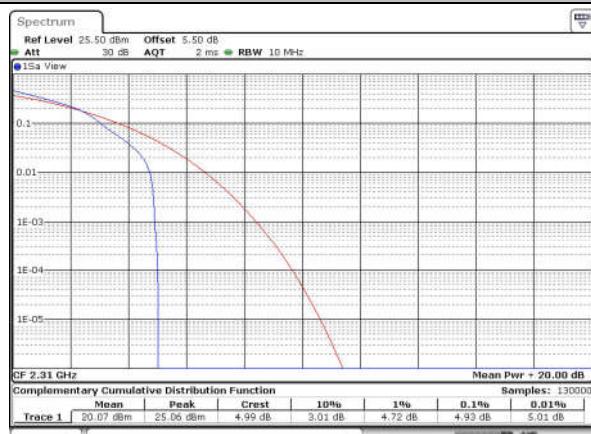

Middle Channel / Full RB

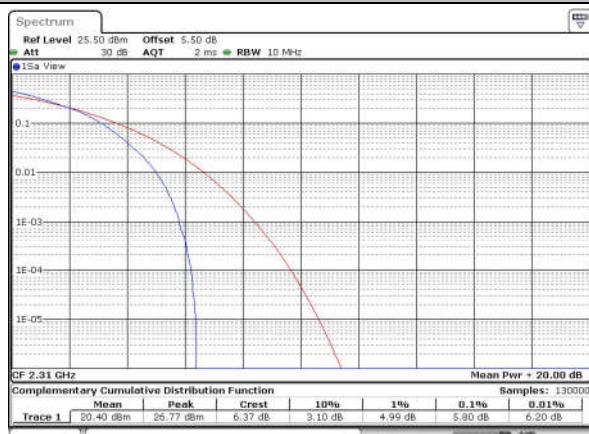

**EIRP Power Density**


Mode	LTE Band 30 : Conducted Power Density (dBm/5MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					23.96	23.46						
Middle CH					24.23	23.04	24.15	23.30				
Highest CH					24.05	23.18						

Mode	LTE Band 30 : EIRP Power Density (dBm/5MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					22.96	22.46						
Middle CH					23.23	22.04	23.15	22.30				
Highest CH					23.05	22.18						
Antenna Gain	-1 dBi											
Limit	250mW / 5MHz = 24dBm / 5MHz											
Result	Pass											




LTE Band 30 / 5MHz

Lowest Channel / 5MHz / 1RB0 / QPSK

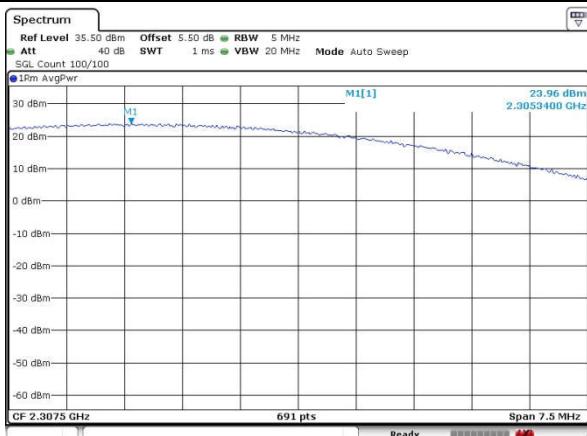


Date: 14 SEP 2016 22:48:47

Lowest Channel / 5MHz / 1RB0 / 16QAM

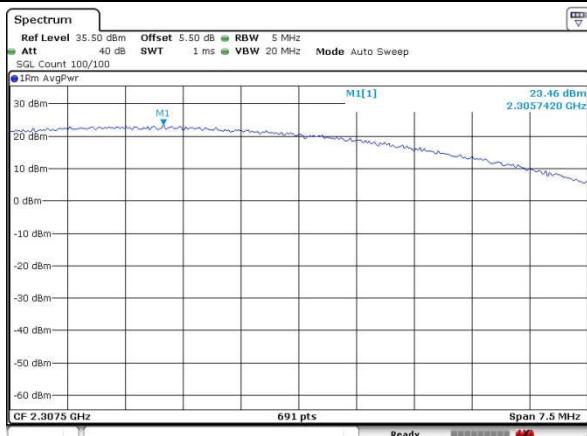


Date: 14 SEP 2016 22:52:21

Middle Channel / 5MHz / 1RB0 / QPSK

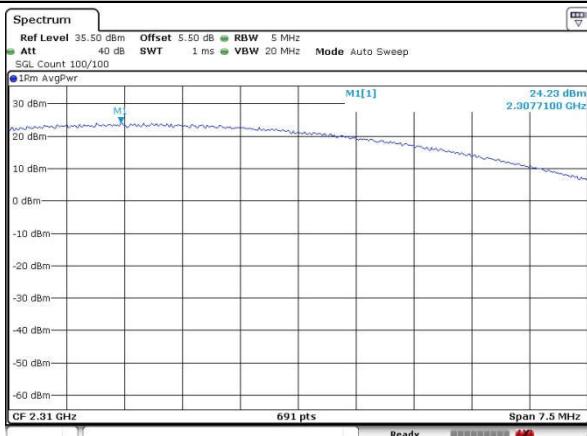


Date: 14 SEP 2016 22:55:01

Middle Channel / 5MHz / 1RB0 / 16QAM

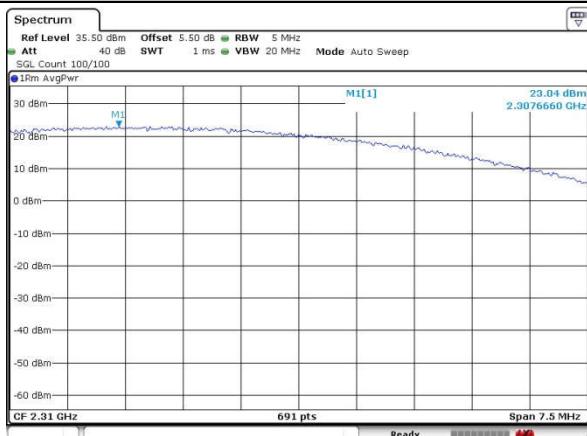


Date: 14 SEP 2016 22:56:48

Highest Channel / 5MHz / 1RB0 / QPSK

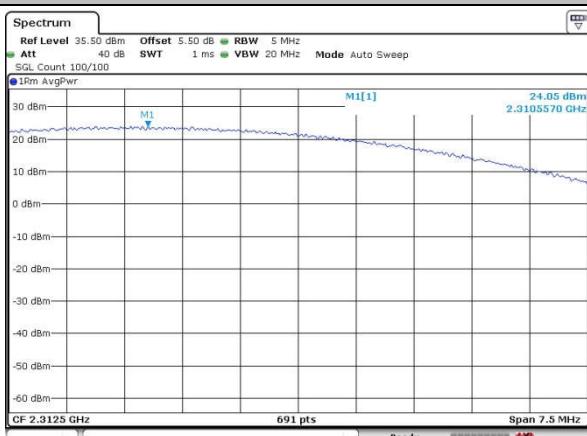

Date: 14 SEP 2016 23:04:40

Highest Channel / 5MHz / 1RB0 / 16QAM

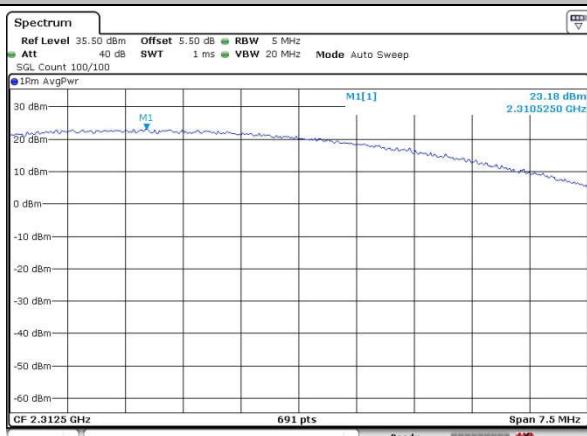

Date: 14 SEP 2016 23:03:16



LTE Band 30 / 10MHz

Lowest Channel / 10MHz / 1RB0 / QPSK



Date: 14 SEP 2016 23:09:29


Lowest Channel / 10MHz / 1RB0 / 16QAM




Date: 14 SEP 2016 23:13:44

**26dB Bandwidth**

Mode	LTE Band 30 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					4.90	4.92						
Middle CH					4.79	4.89	9.91	9.89				
Highest CH					4.94	4.85						

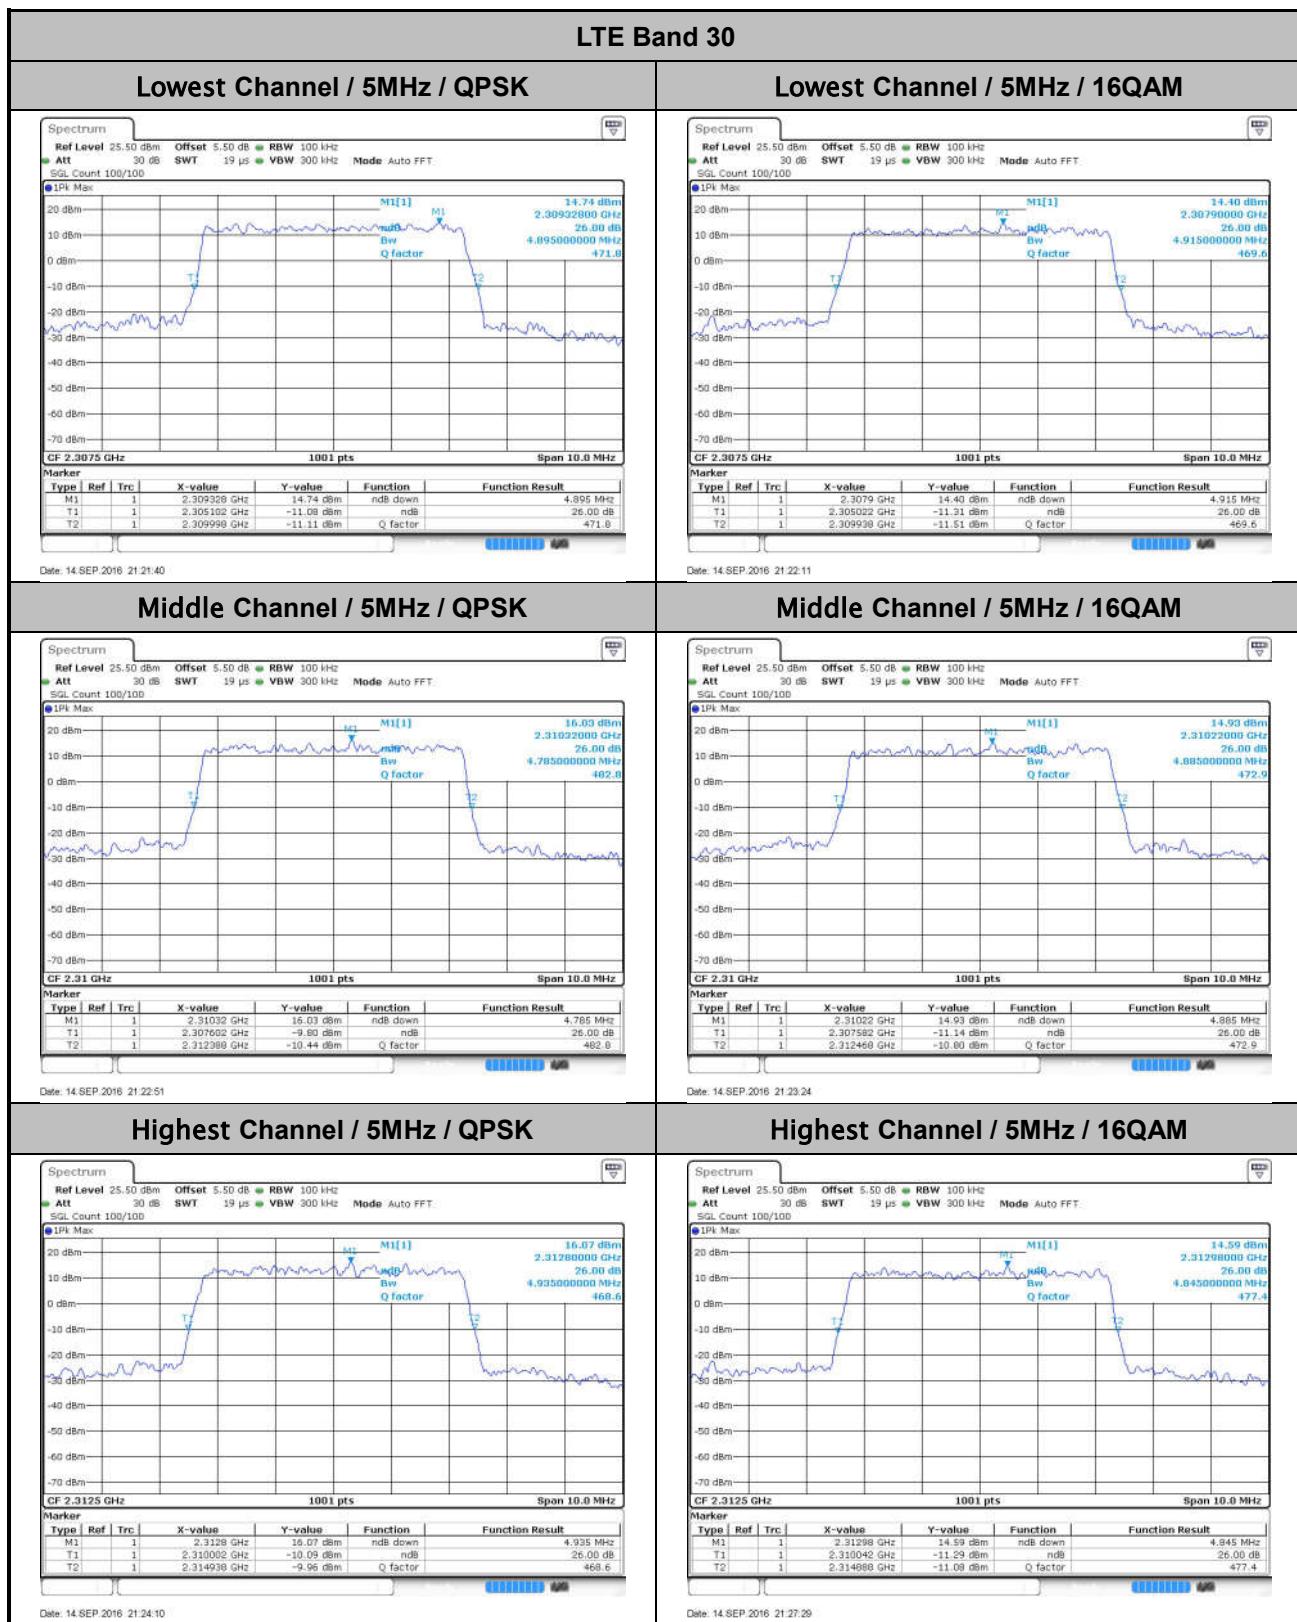


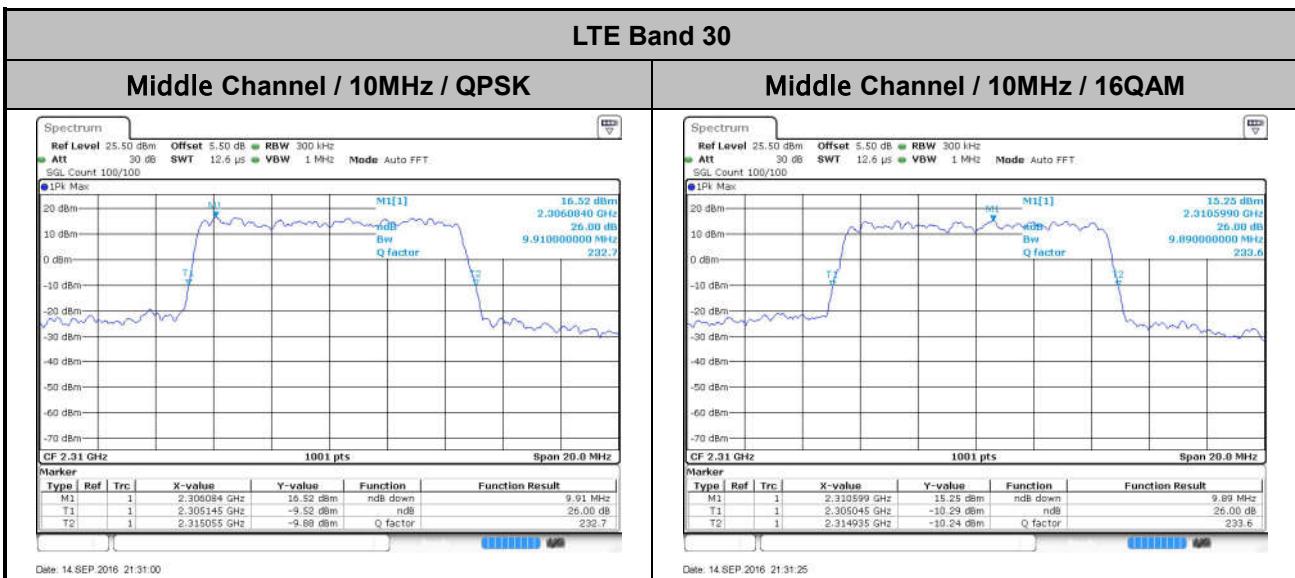



Occupied Bandwidth


Mode	LTE Band 30 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					4.50	4.50						
Middle CH					4.50	4.47	9.03	9.03				
Highest CH					4.48	4.50						

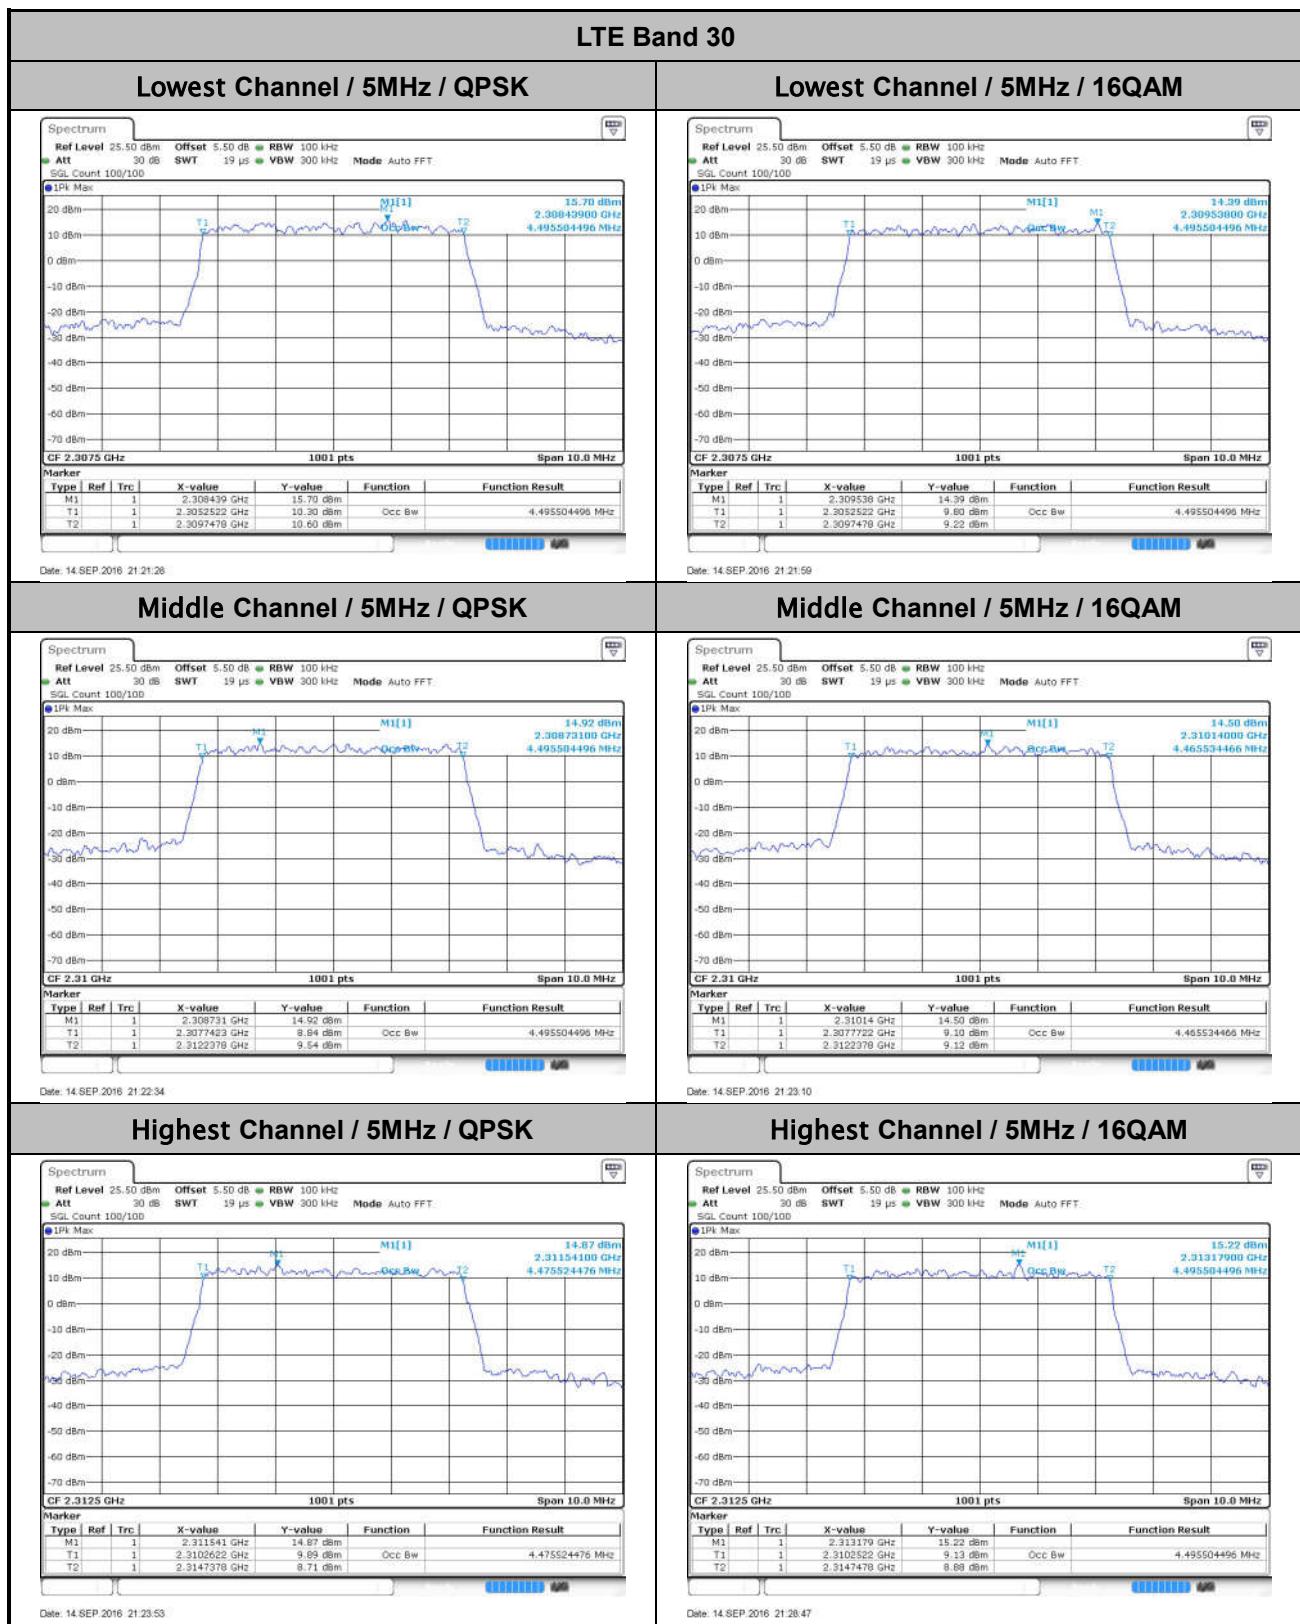




LTE Band 30

Middle Channel / 10MHz / QPSK

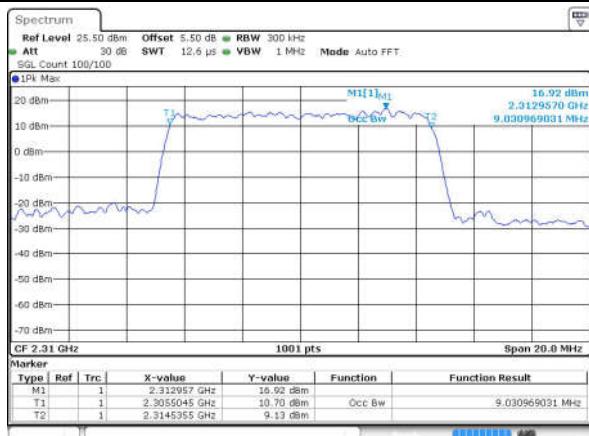



Middle Channel / 10MHz / 16QAM

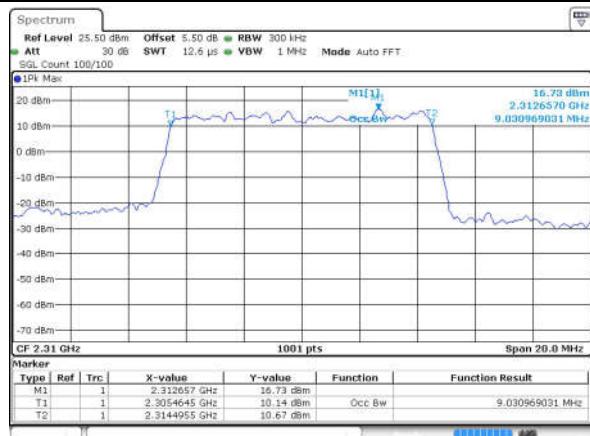





Conducted Band Edge

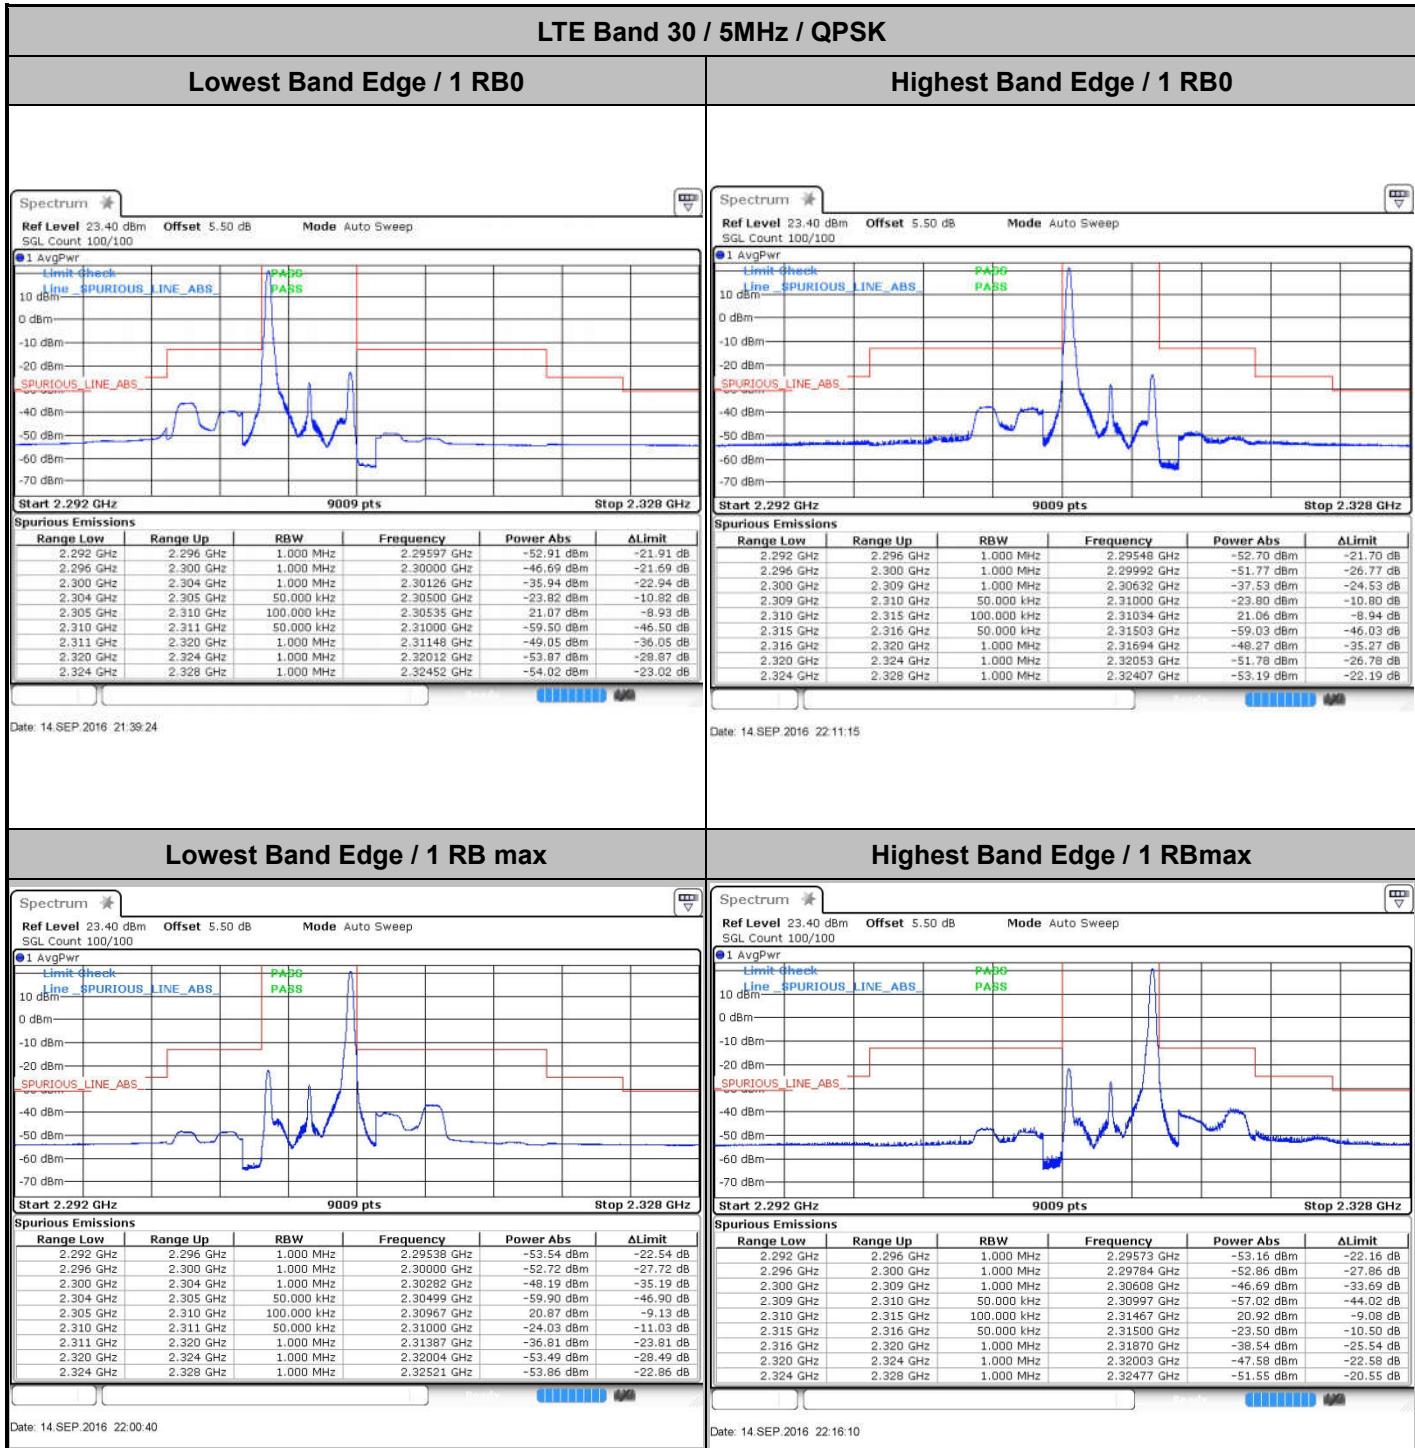

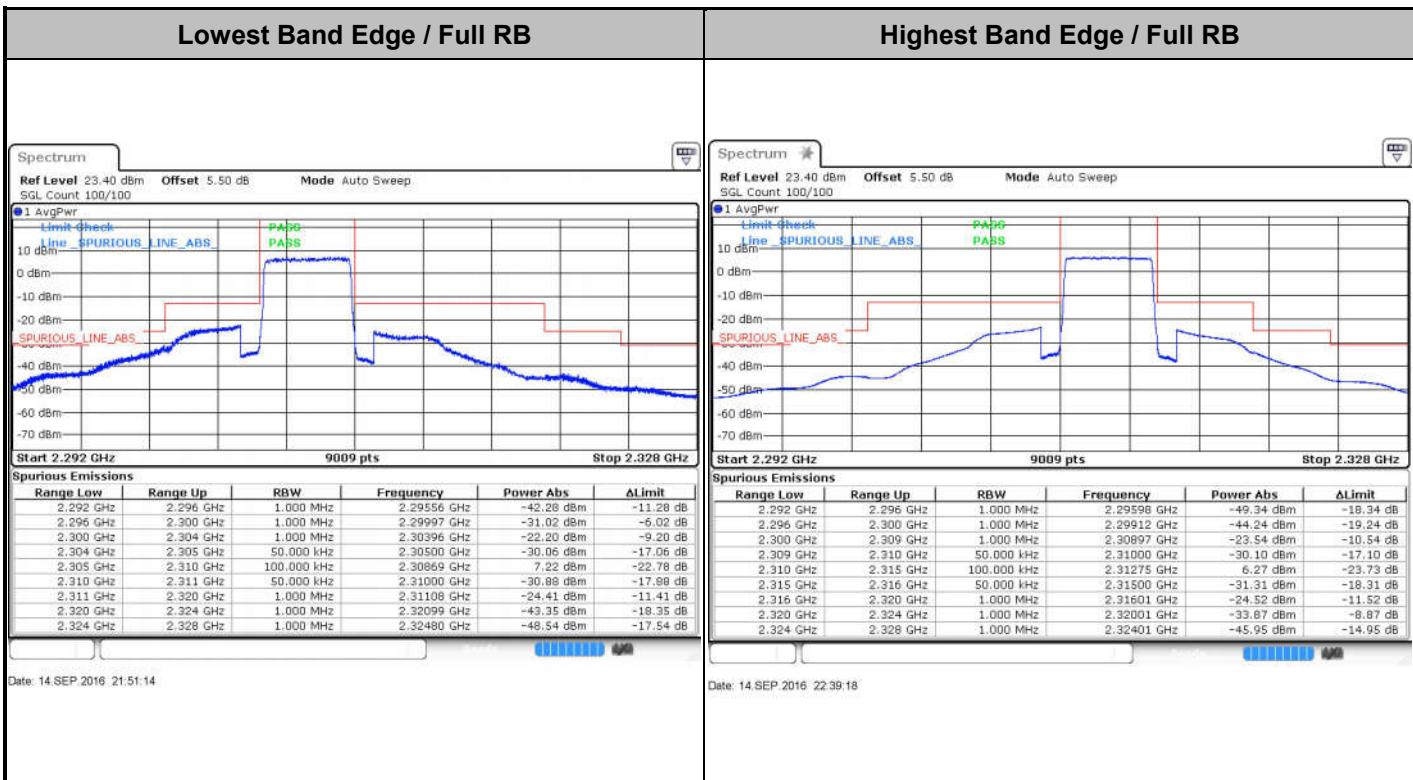

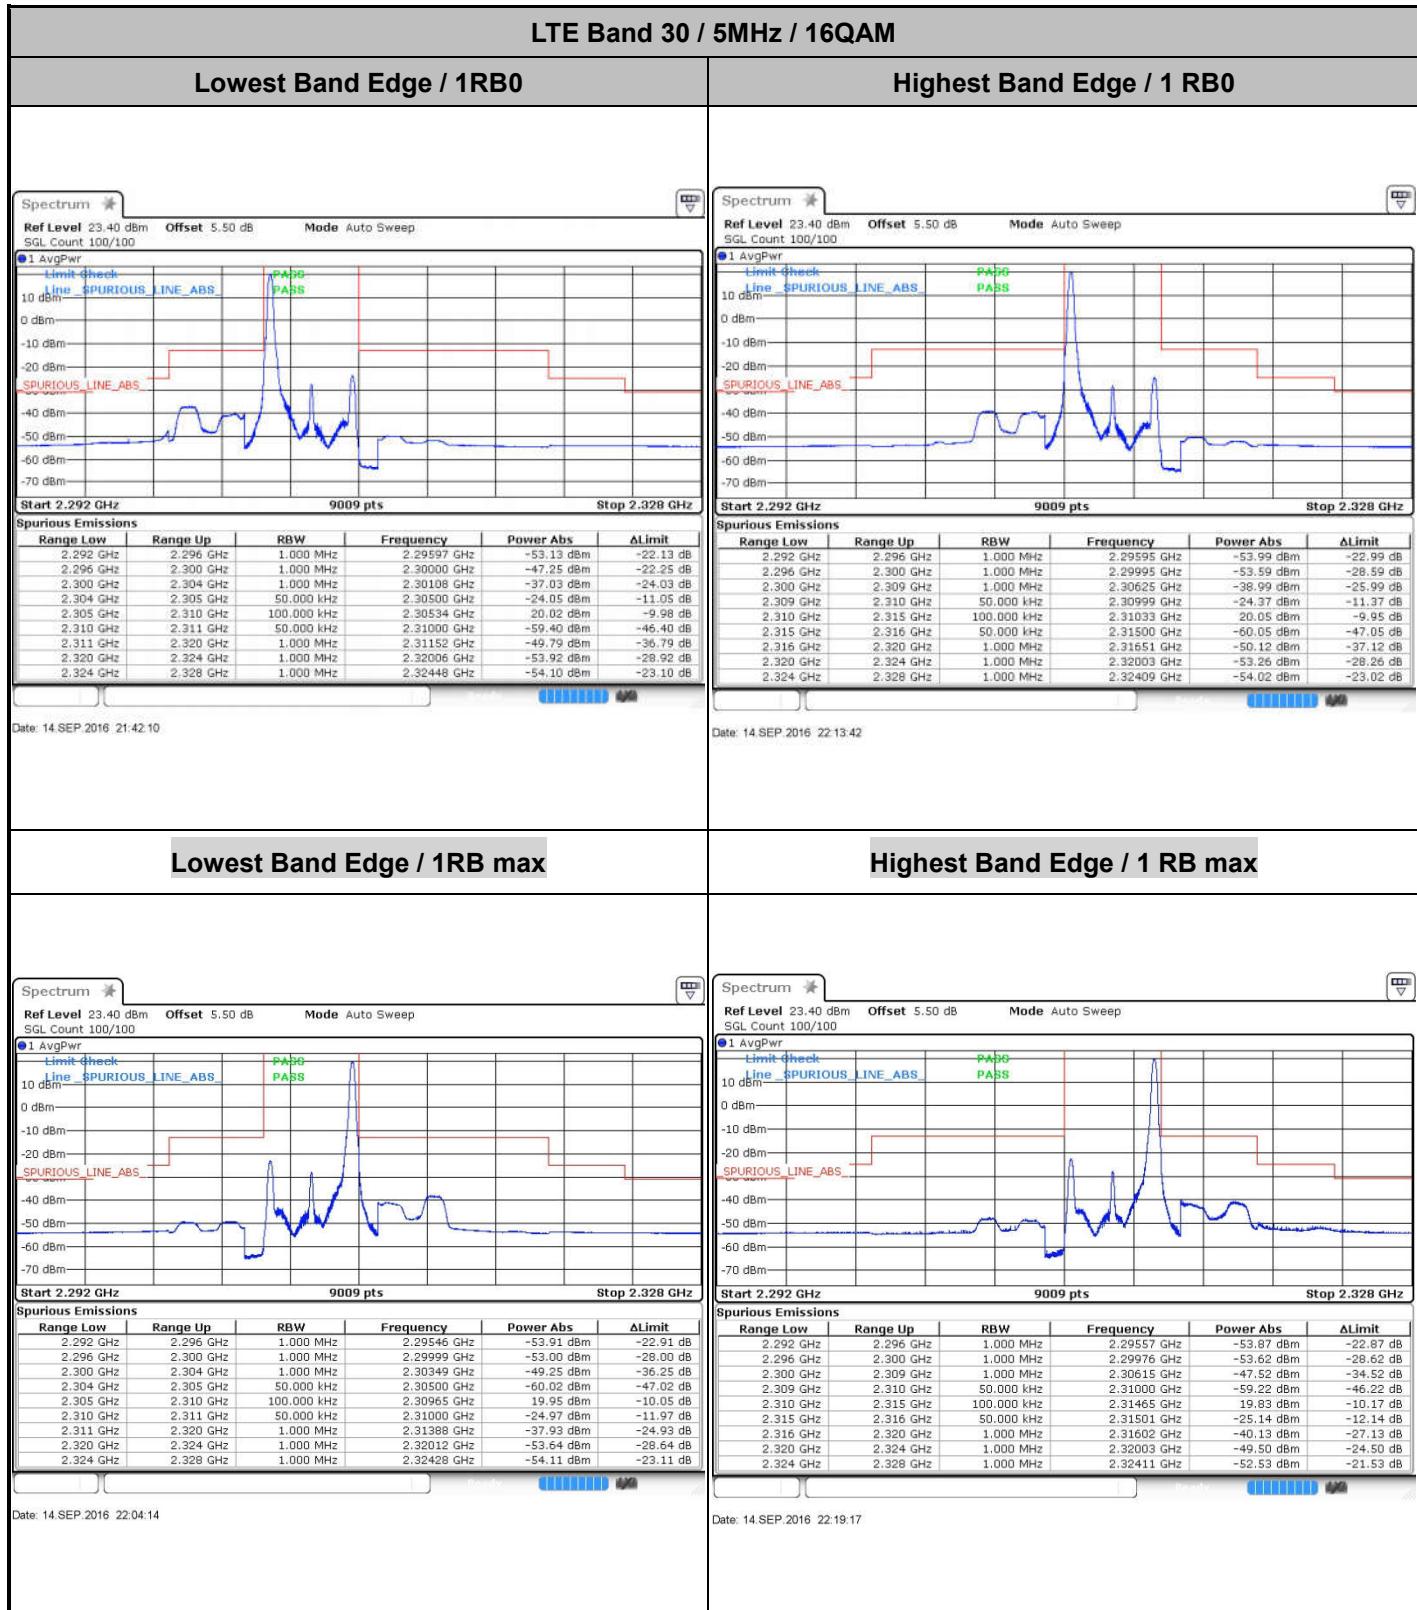


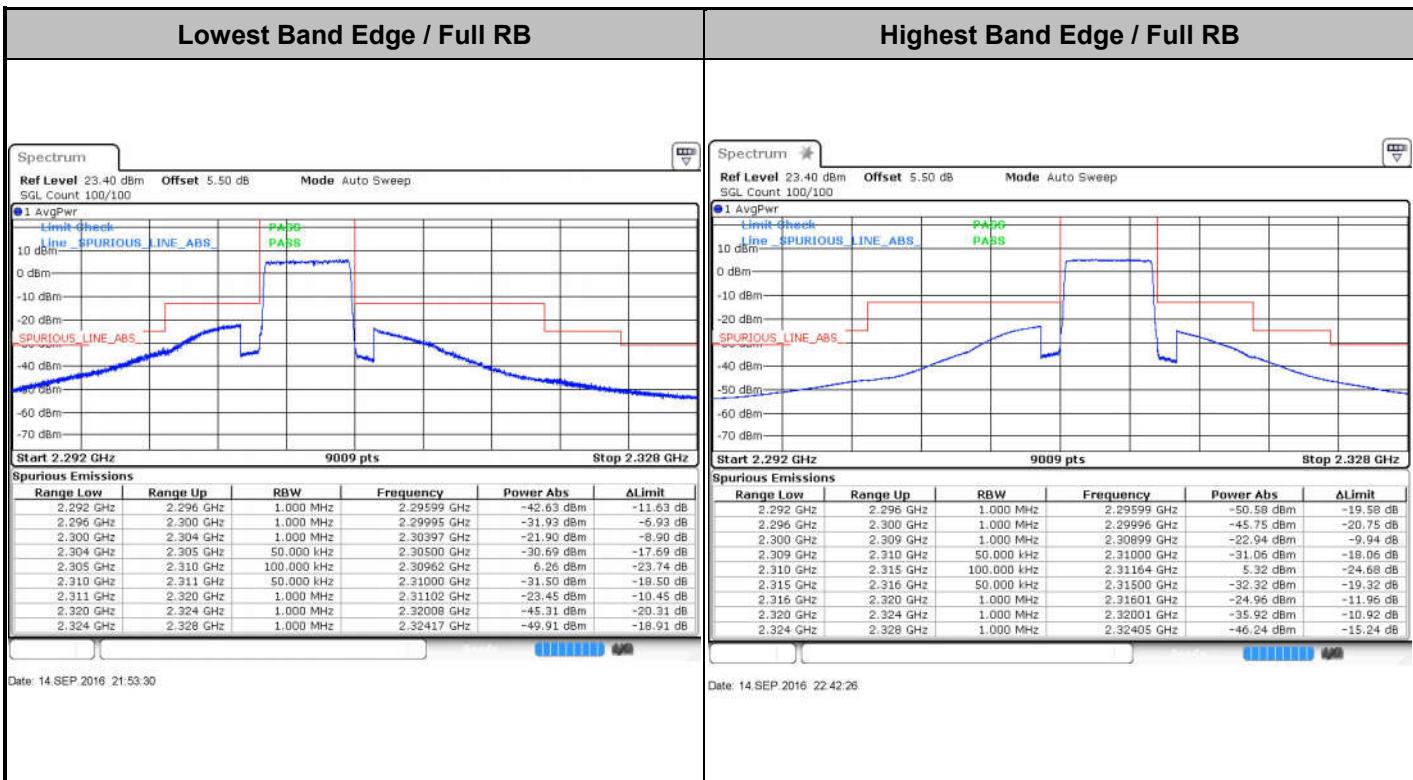




LTE Band 30 / 10MHz / QPSK

Lowest Band Edge / 1 RB0


Highest Band Edge / 1 RB0

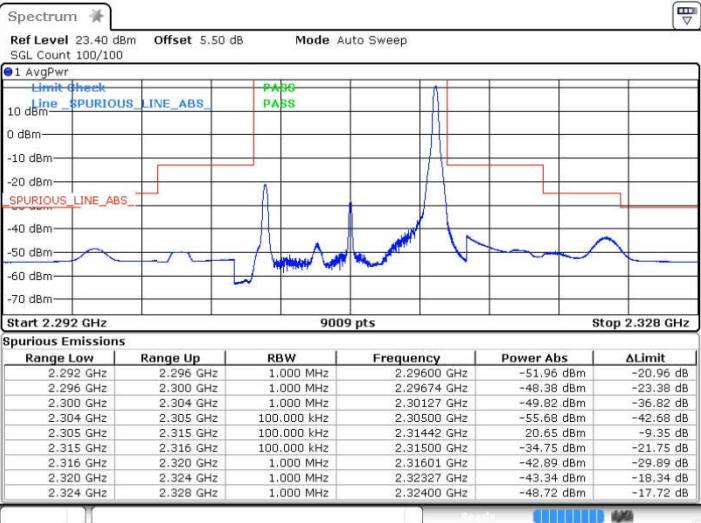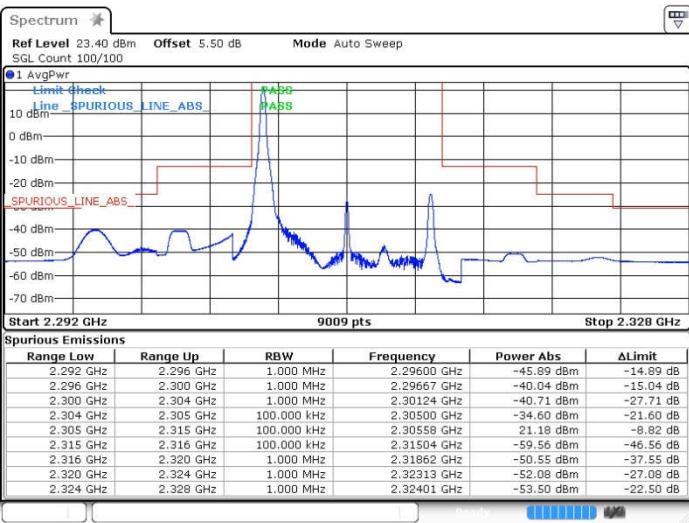

Date: 14.SEP.2016 23:17:53

Date: 14.SEP.2016 23:32:11

Band Edge / Full RB

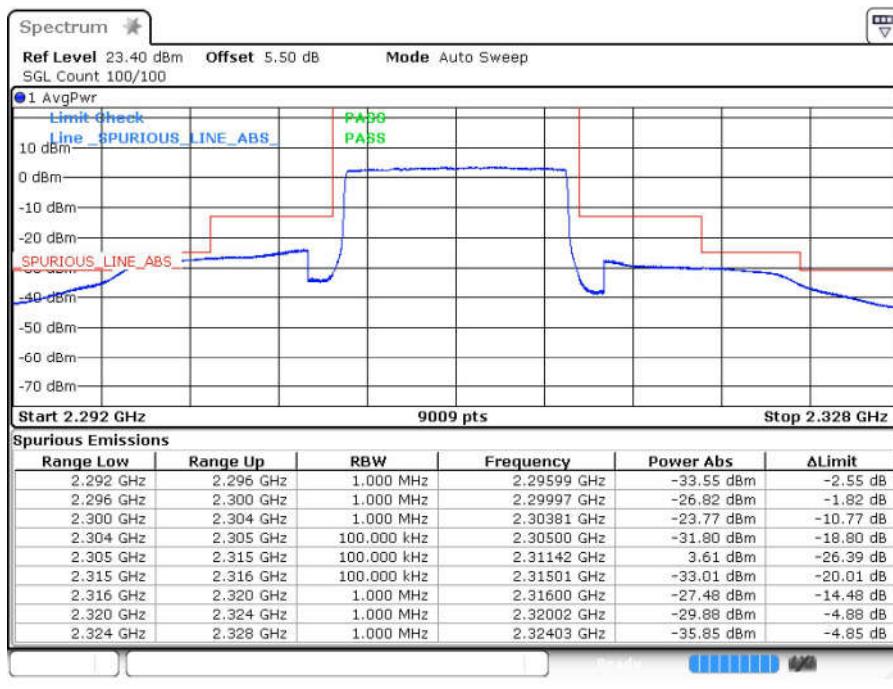



Date: 14.SEP.2016 23:37:35



LTE Band 30 / 10MHz / 16QAM

Lowest Band Edge / 1 RB


Highest Band Edge / 1 RB

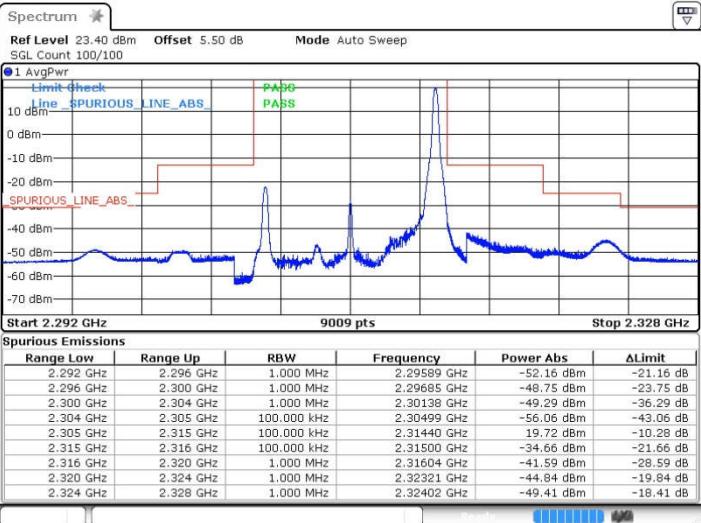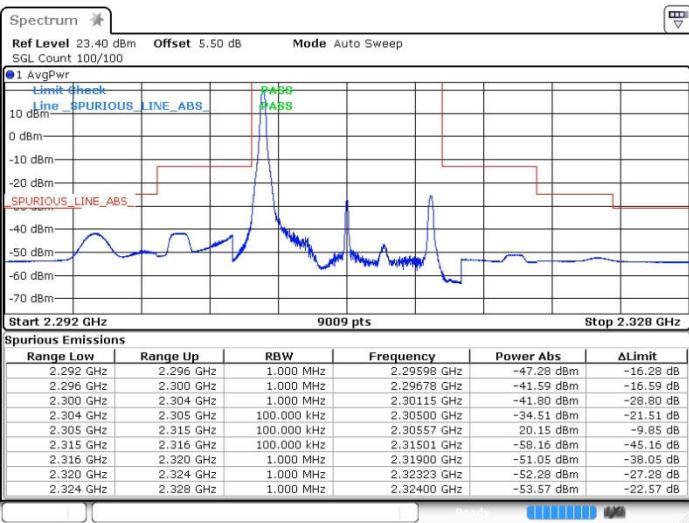

Date: 14.SEP.2016 23:29:32

Date: 14.SEP.2016 23:34:52

Band Edge / Full RB

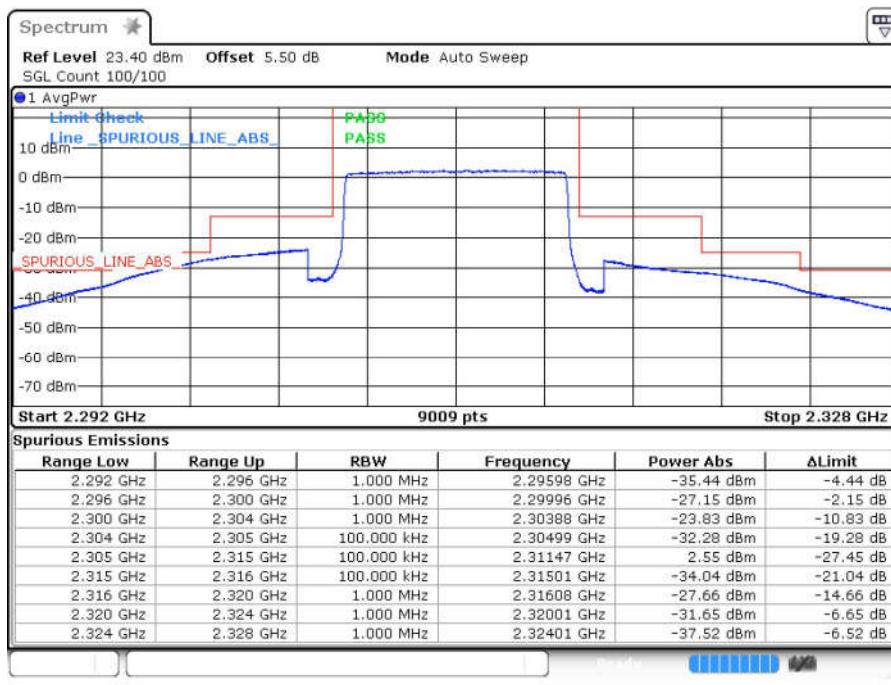

Date: 14.SEP.2016 23:45:14





Conducted Spurious Emission

LTE Band 30 / 5MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

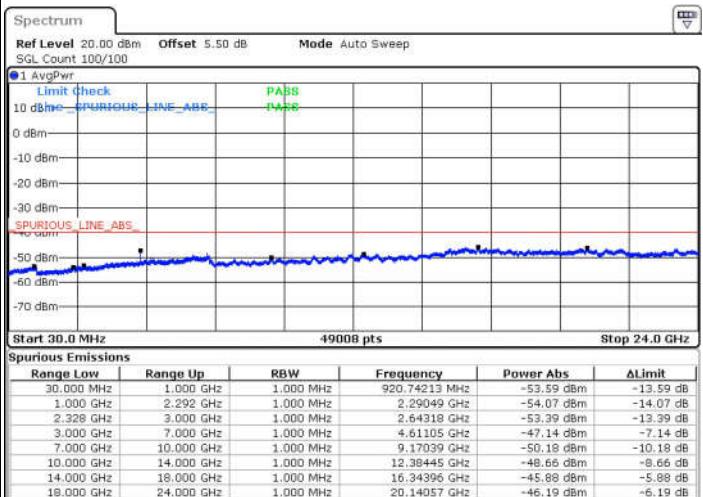
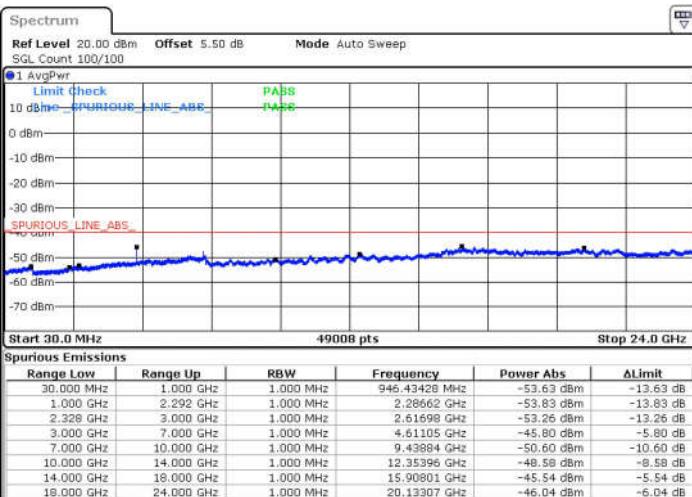


Date: 14 SEP 2016 21:44:36

Date: 14 SEP 2016 21:43:37

Middle Channel / QPSK

Middle Channel / 16QAM

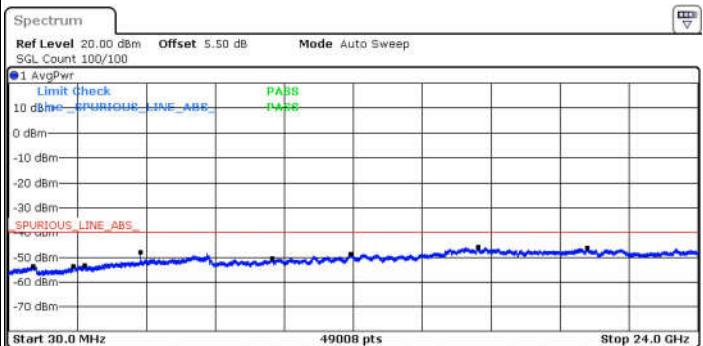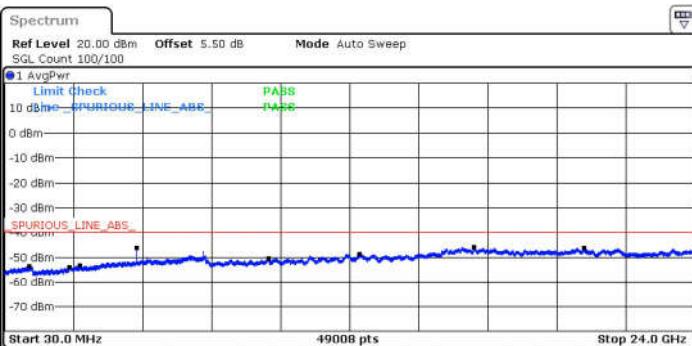

Date: 14 SEP 2016 22:06:42


Date: 14 SEP 2016 22:06:33




LTE Band 30 / 5MHz

Highest Channel / QPSK

Highest Channel / 16QAM

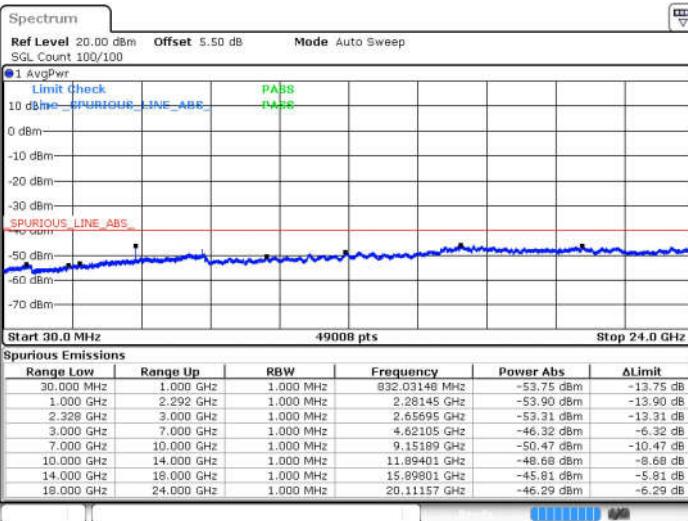

Date: 14.SEP.2016 22:07:26

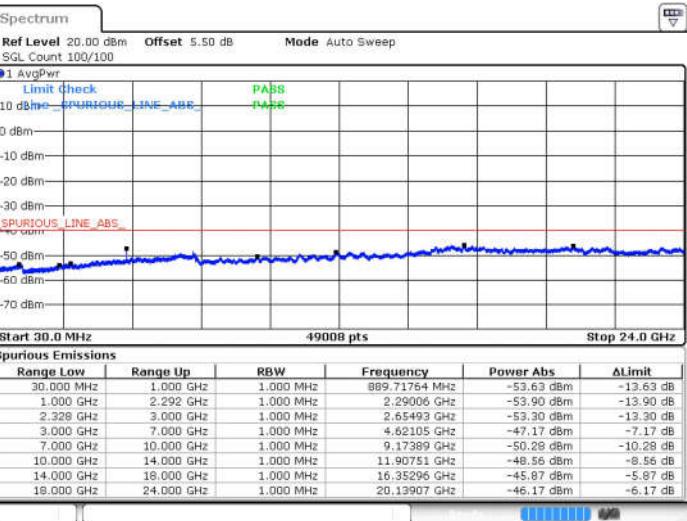


Date: 14.SEP.2016 22:08:44


LTE Band 30 / 10MHz

Middle Channel / QPSK

Middle Channel / 16QAM

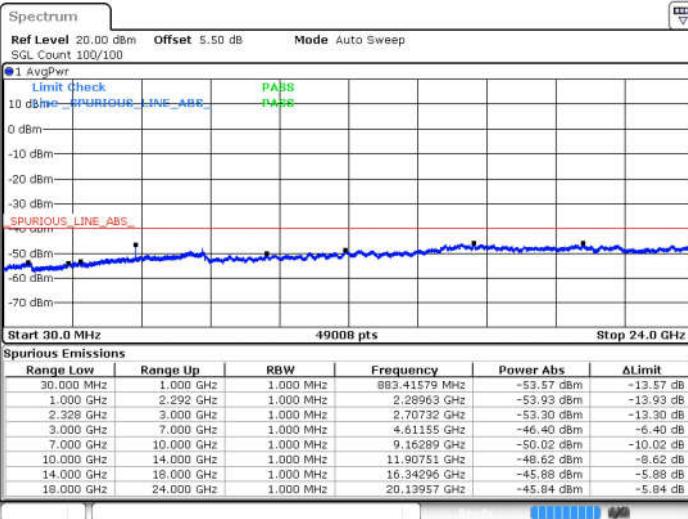

Date: 14.SEP.2016 23:47:31

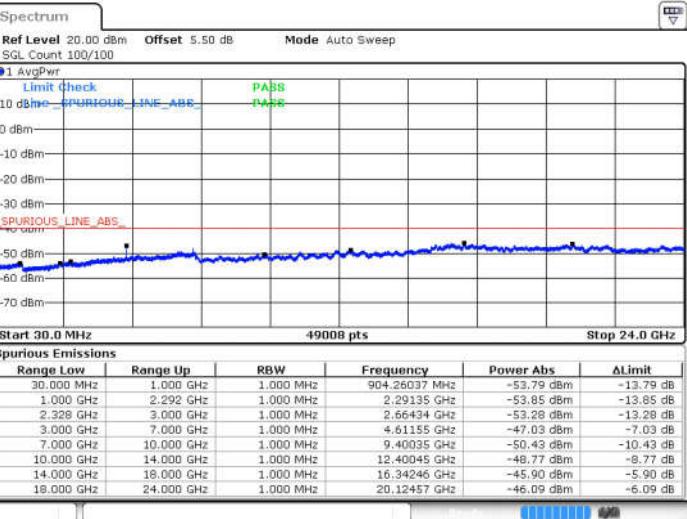

Date: 14.SEP.2016 23:48:26



Frequency Stability

Test Conditions		LTE Band 30 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0022	PASS
40	Normal Voltage	0.0001	
30	Normal Voltage	0.0026	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0001	
0	Normal Voltage	0.0026	
-10	Normal Voltage	0.0018	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0020	
4.35V	Maximum Voltage	0.0007	
3.85V	Normal Voltage	0.0001	
BEP= 3.70V	Battery End Point	0.0019	

Note:

1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.7 V. ; Maximum Voltage =4.35 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

<Top Antenna>

LTE Band 30 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4608	-74.48	-40	-34.48	-58.74	-81.02	2.07	8.60	H
	6916.29	-66.51	-40	-26.51	-59.90	-74.58	2.60	10.67	H
	9225	-70.33	-40	-30.33	-65.26	-79.29	3.27	12.23	H
	4610.86	-72.32	-40	-32.32	-58.8	-78.85	2.07	8.60	V
	6918	-65.63	-40	-25.63	-58.81	-73.70	2.60	10.67	V
	9225	-70.54	-40	-30.54	-65.29	-79.51	3.27	12.23	V
Middle	4614	-73.96	-40	-33.96	-58.22	-80.50	2.07	8.60	H
	6923.79	-66.07	-40	-26.07	-59.46	-74.14	2.60	10.67	H
	9234	-70.10	-40	-30.10	-65.03	-79.06	3.27	12.23	H
	4615.86	-72.57	-40	-32.57	-59.05	-79.10	2.07	8.60	V
	6924	-65.77	-40	-25.77	-58.95	-73.84	2.60	10.67	V
	9234	-70.49	-40	-30.49	-65.24	-79.46	3.27	12.23	V
Highest	4620	-74.83	-40	-34.83	-59.09	-81.37	2.07	8.60	H
	6931.29	-65.71	-40	-25.71	-59.10	-73.78	2.60	10.67	H
	9243	-70.36	-40	-30.36	-65.29	-79.32	3.27	12.23	H
	4620.86	-72.58	-40	-32.58	-59.06	-79.11	2.07	8.60	V
	6930	-66.05	-40	-26.05	-59.23	-74.12	2.60	10.67	V
	9243	-70.48	-40	-30.48	-65.23	-79.45	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4614	-74.79	-40	-34.79	-59.05	-81.33	2.07	8.60	H
	6916.77	-65.15	-40	-25.15	-58.54	-73.22	2.60	10.67	H
	9225	-70.70	-40	-30.70	-65.63	-79.66	3.27	12.23	H
	4611.18	-72.85	-40	-32.85	-59.33	-79.38	2.07	8.60	V
	6918	-66.22	-40	-26.22	-59.4	-74.29	2.60	10.67	V
	9225	-70.26	-40	-30.26	-65.01	-79.23	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Bottom Antenna>

LTE Band 30 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4608	-74.13	-40	-34.13	-58.39	-80.67	2.07	8.60	H
	6918	-65.15	-40	-25.15	-58.54	-73.22	2.60	10.67	H
	9225	-71.03	-40	-31.03	-65.96	-79.99	3.27	12.23	H
	4608	-71.62	-40	-31.62	-58.1	-78.15	2.07	8.60	V
	6916.02	-66.54	-40	-26.54	-59.72	-74.61	2.60	10.67	V
	9225	-71.48	-40	-31.48	-66.23	-80.45	3.27	12.23	V
Middle	4614	-74.63	-40	-34.63	-58.89	-81.17	2.07	8.60	H
	6923.52	-65.97	-40	-25.97	-59.36	-74.04	2.60	10.67	H
	9234	-70.40	-40	-30.40	-65.33	-79.36	3.27	12.23	H
	4614	-72.04	-40	-32.04	-58.52	-78.57	2.07	8.60	V
	6923.52	-65.39	-40	-25.39	-58.57	-73.46	2.60	10.67	V
	9234	-70.57	-40	-30.57	-65.32	-79.54	3.27	12.23	V
Highest	4620	-75.01	-40	-35.01	-59.27	-81.55	2.07	8.60	H
	6931	-66.22	-40	-26.22	-59.61	-74.29	2.60	10.67	H
	9241	-70.75	-40	-30.75	-65.68	-79.71	3.27	12.23	H
	4620	-72.03	-40	-32.03	-58.51	-78.56	2.07	8.60	V
	6931	-65.59	-40	-25.59	-58.77	-73.66	2.60	10.67	V
	9241	-71.00	-40	-31.00	-65.75	-79.97	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4614	-74.78	-40	-34.78	-59.04	-81.32	2.07	8.60	H
	6916.77	-65.56	-40	-25.56	-58.95	-73.63	2.60	10.67	H
	9225	-70.62	-40	-30.62	-65.55	-79.58	3.27	12.23	H
	4614	-71.36	-40	-31.36	-57.84	-77.89	2.07	8.60	V
	6916.77	-64.46	-40	-24.46	-57.64	-72.53	2.60	10.67	V
	9225	-70.26	-40	-30.26	-65.01	-79.23	3.27	12.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.