

# Appendix B

## Detailed Test Results

1. GSM
GSM850 for Head & Body
GSM1900 for Head & Body
2. WCDMA
WCDMA Band II for Head & Body
WCDMA Band IV for Head & Body
WCDMA Band V for Head & Body
3. LTE
LTE Band 2 for Head & Body
LTE Band 4 for Head & Body
LTE Band 7 for Head & Body
LTE Band 12 for Head & Body
LTE Band 13 for Head & Body
LTE Band 26 for Head & Body
LTE Band 41 for Head & Body
4. 5G NR
5G NR n5 for Head & Body
5G NR n7 for Head & Body
5G NR n41 for Head & Body
5G NR n66 for Head & Body
5G NR n77(3450~3550) for Head & Body
5G NR n77(3700~3980) for Head & Body
5. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
6. BT
BT for Head & Body
7. NFC

NFC for Body

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM850 GPRS 4TS 190CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 42.996$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.525 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.614 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 0.825 W/kg

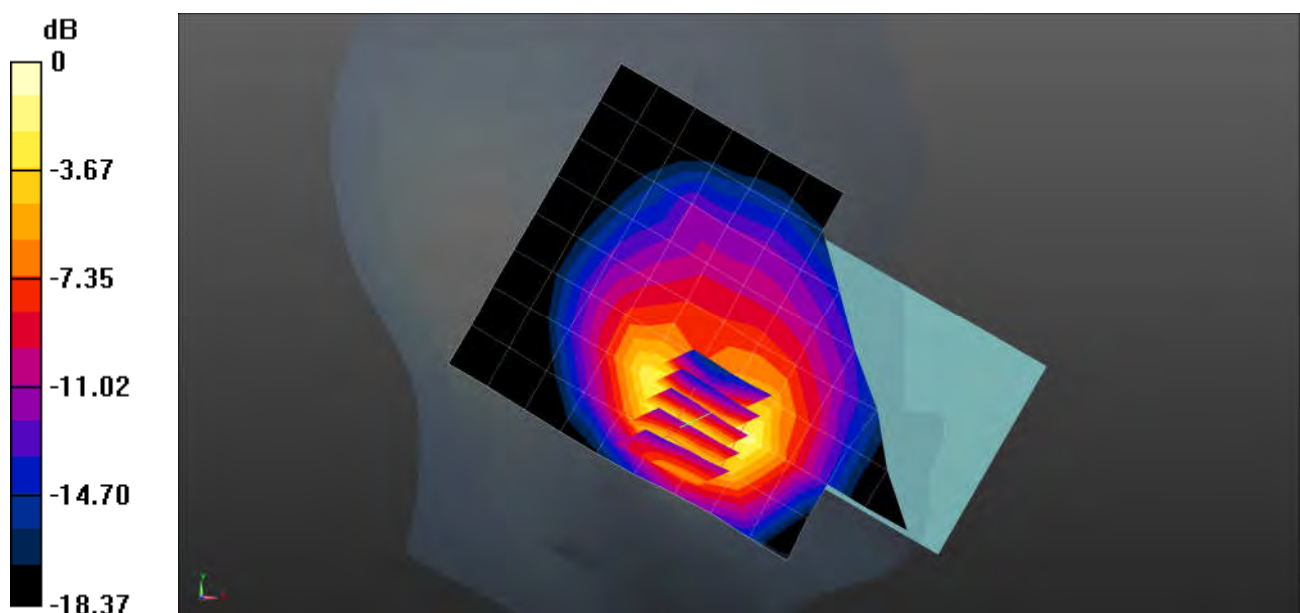

0 dB = 0.825 W/kg = -0.84 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM850 GPRS 4TS 190CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 42.996$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.693 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.10 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.996 W/kg

**SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.342 W/kg**

Maximum value of SAR (measured) = 0.797 W/kg

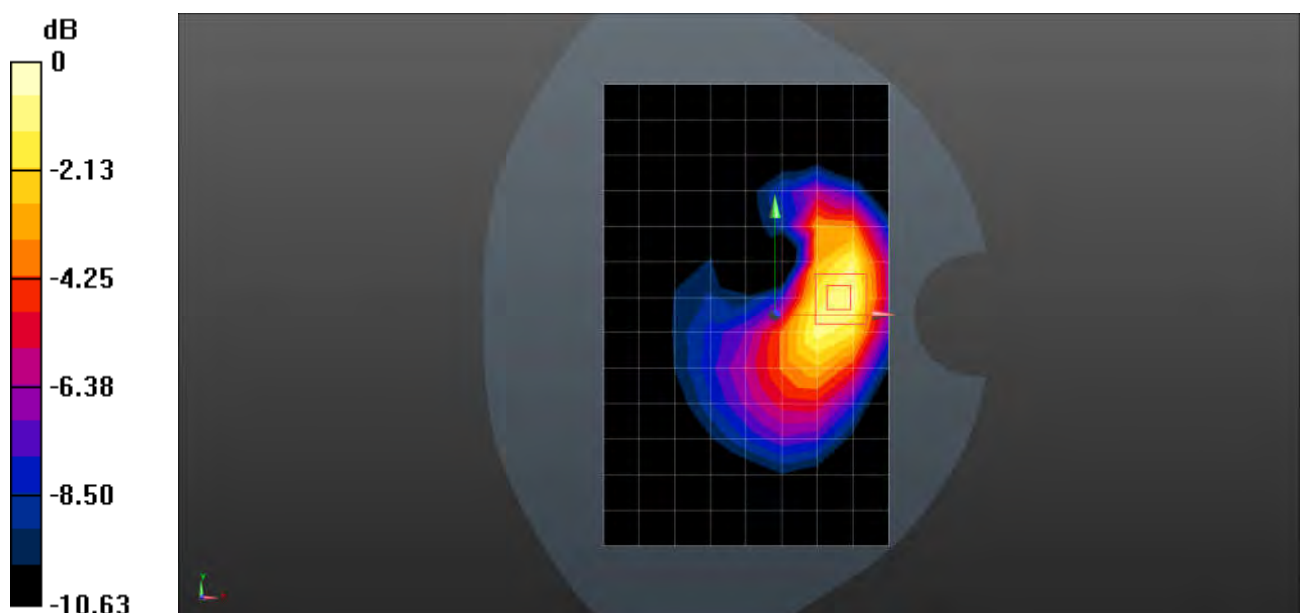

0 dB = 0.797 W/kg = -0.99 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM850 GPRS 4TS 251CH Left Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 42.922$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.835 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.89 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.344 W/kg**

Maximum value of SAR (measured) = 0.917 W/kg

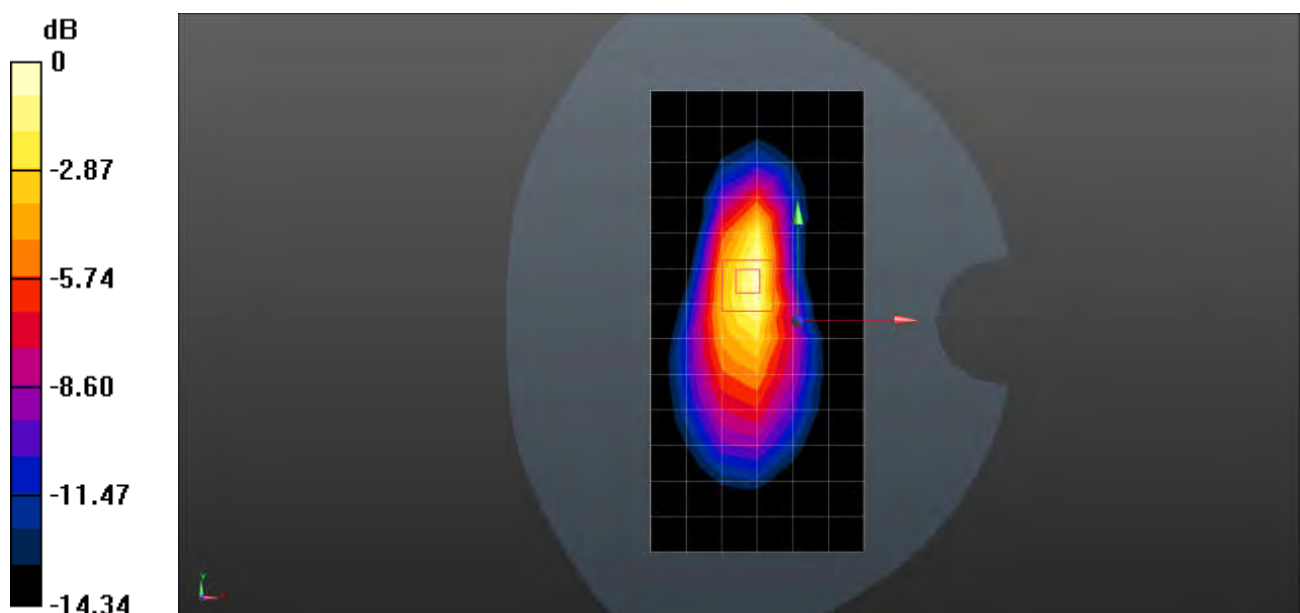

0 dB = 0.917 W/kg = -0.38 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM850 GPRS 4TS 190CH Left Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium: HSL835; Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 42.996$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.60 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.16 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 11.4 W/kg

**SAR(1 g) = 2.73 W/kg; SAR(10 g) = 1.03 W/kg**

Maximum value of SAR (measured) = 7.34 W/kg

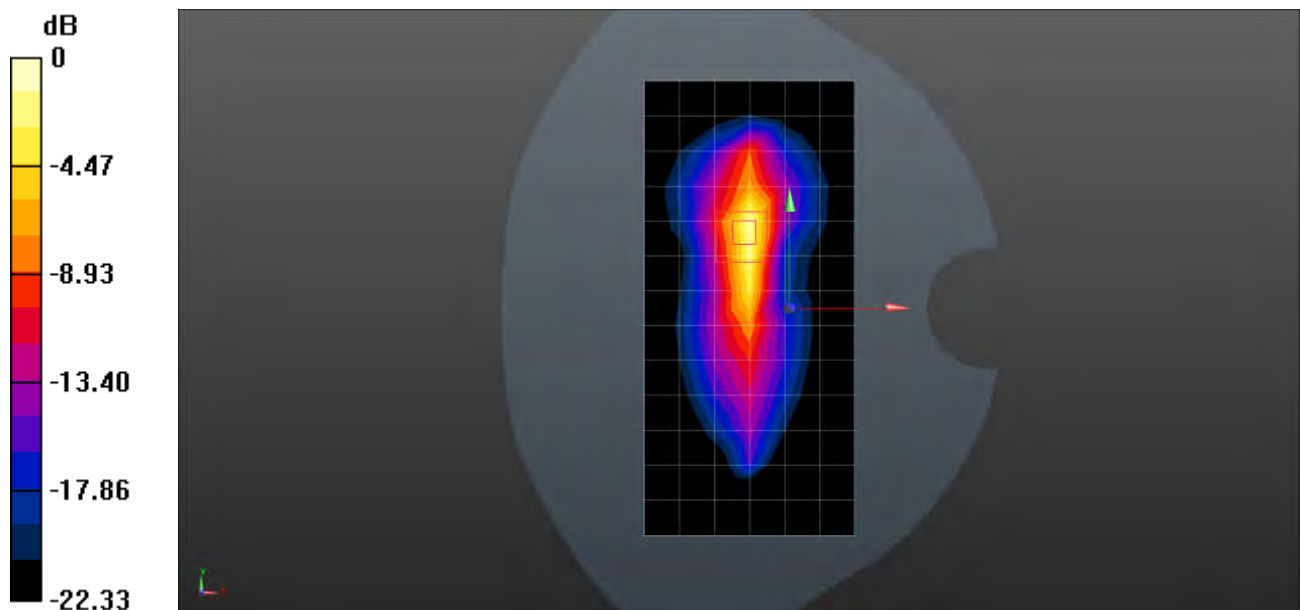

0 dB = 7.34 W/kg = 8.66 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM1900 GPRS 4TS 661CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.715 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.69 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.378 W/kg**

Maximum value of SAR (measured) = 1.26 W/kg

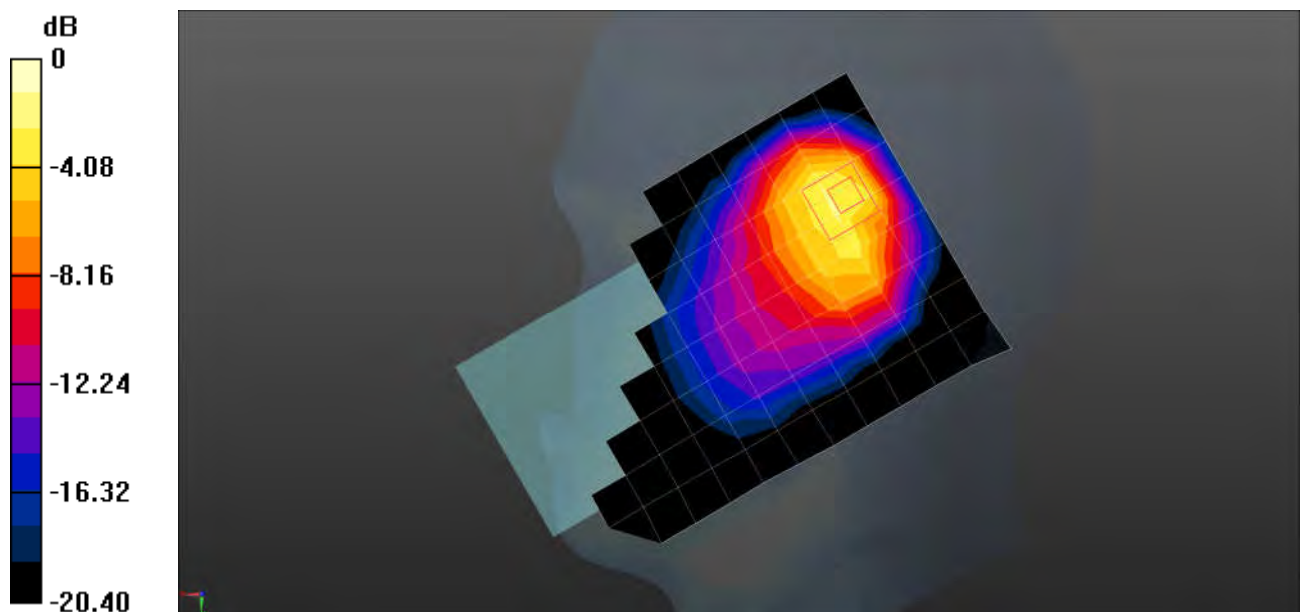

0 dB = 1.26 W/kg = 0.99 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM1900 GPRS 4TS 661CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.271 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.356 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

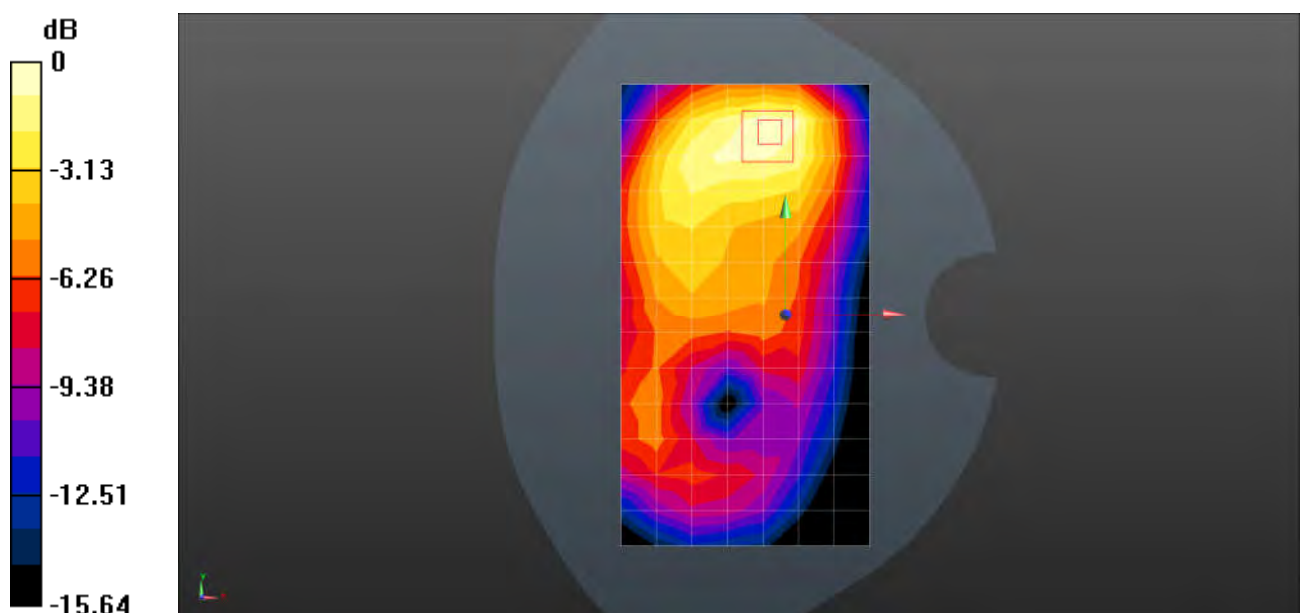

0 dB = 0.295 W/kg = -5.30 dBW/kg



Test Laboratory: SGS-SAR Lab

## 23122PCD1G GSM1900 GPRS 4TS 661CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.597 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.17 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.713 W/kg

**SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (measured) = 0.599 W/kg

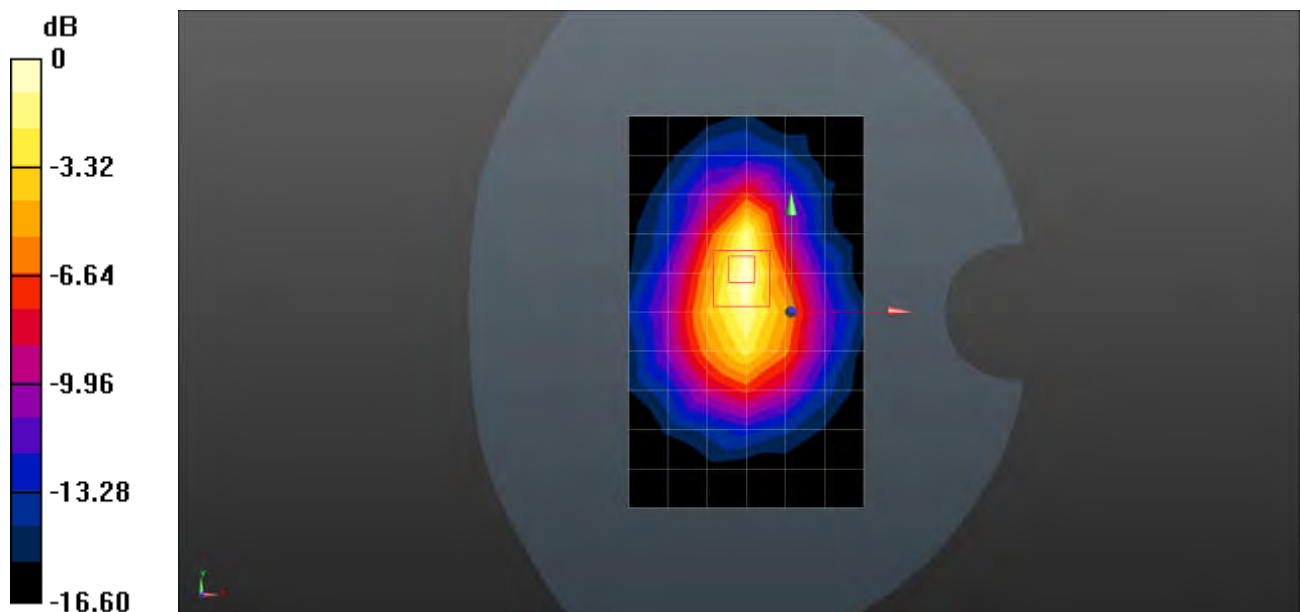

0 dB = 0.599 W/kg = -2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band II RMC 9538CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.419$  S/m;  $\epsilon_r = 38.838$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.47 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.703 W/kg; SAR(10 g) = 0.347 W/kg**

Maximum value of SAR (measured) = 1.51 W/kg

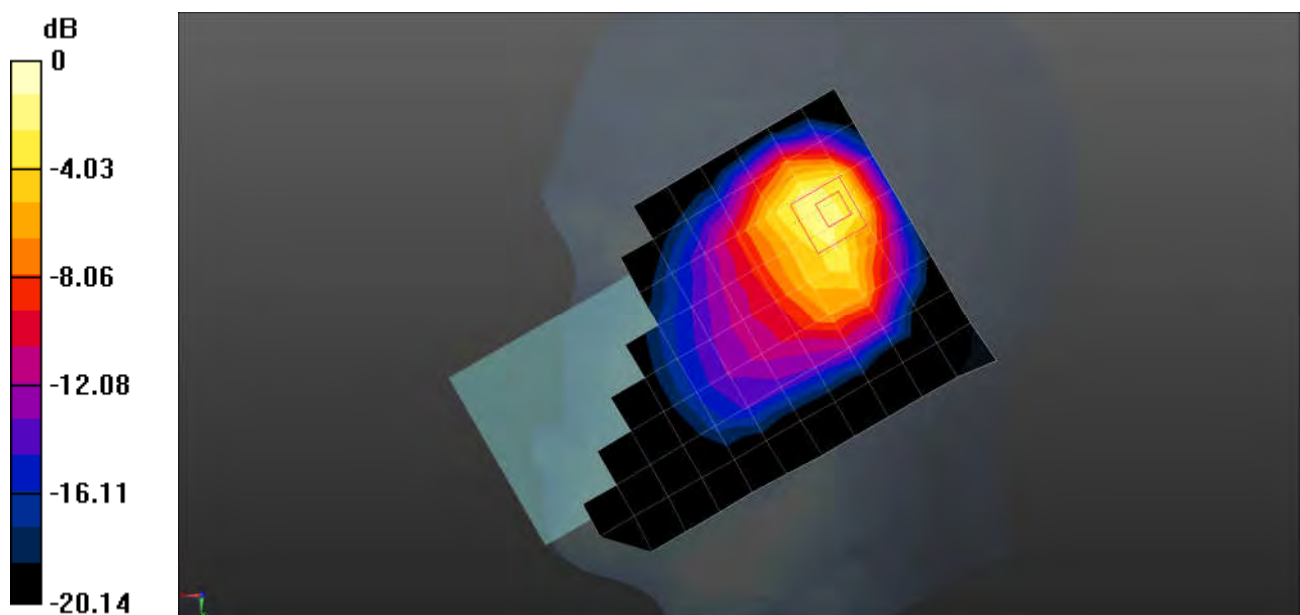

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band II RMC 9400CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.677 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.929 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.779 W/kg

**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 0.659 W/kg

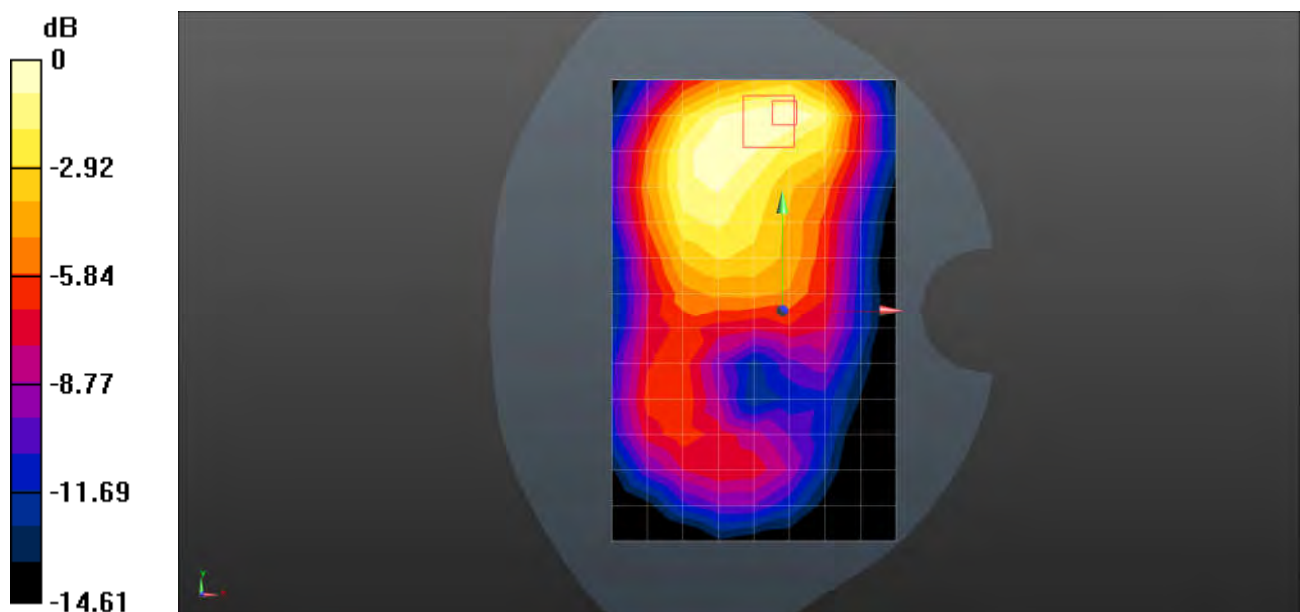

0 dB = 0.659 W/kg = -1.81 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band II RMC 9262CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 39.11$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.769 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.38 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.332 W/kg**

Maximum value of SAR (measured) = 0.975 W/kg

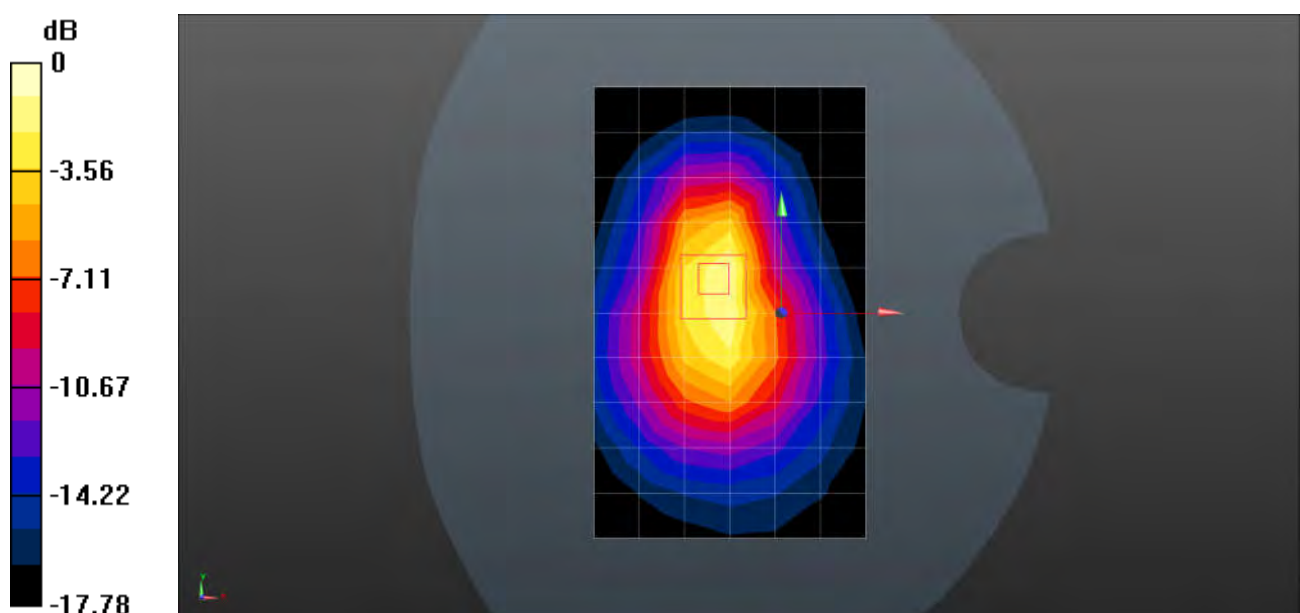

0 dB = 0.975 W/kg = -0.11 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band IV RMC 1412CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1732.4$  MHz;  $\sigma = 1.319$  S/m;  $\epsilon_r = 40.247$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.898 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.64 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.396 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

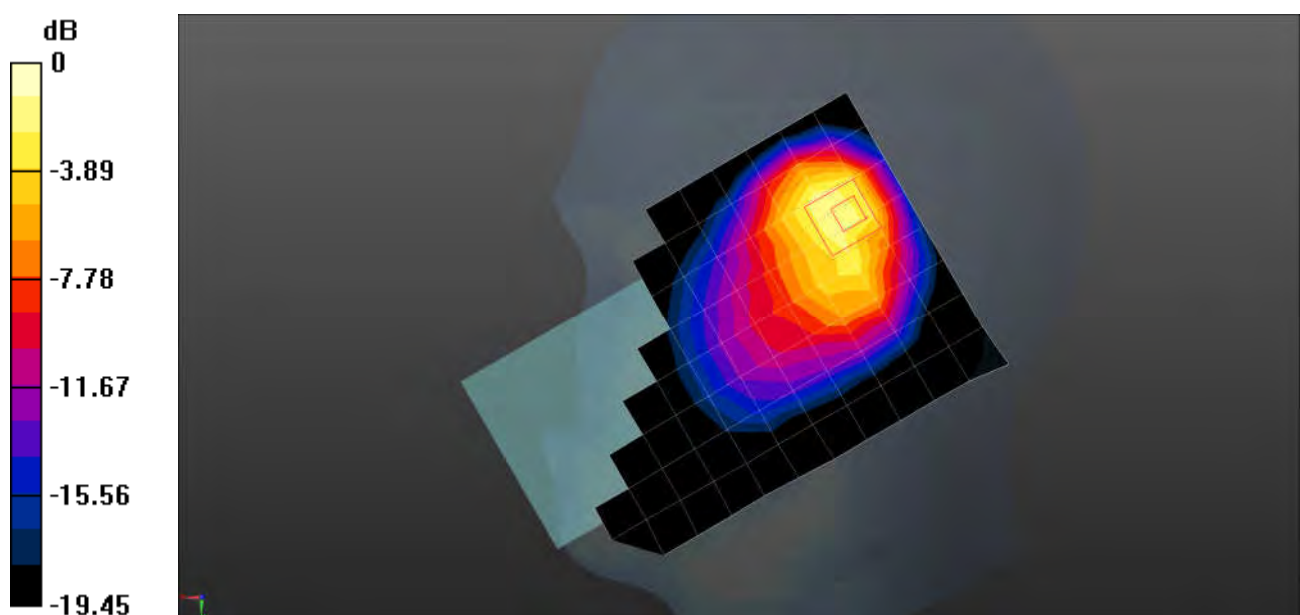

0 dB = 1.29 W/kg = 1.10 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G WCDMA Band IV RMC 1513CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.338$  S/m;  $\epsilon_r = 40.171$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.835 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.02 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.994 W/kg

**SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.397 W/kg**

Maximum value of SAR (measured) = 0.856 W/kg

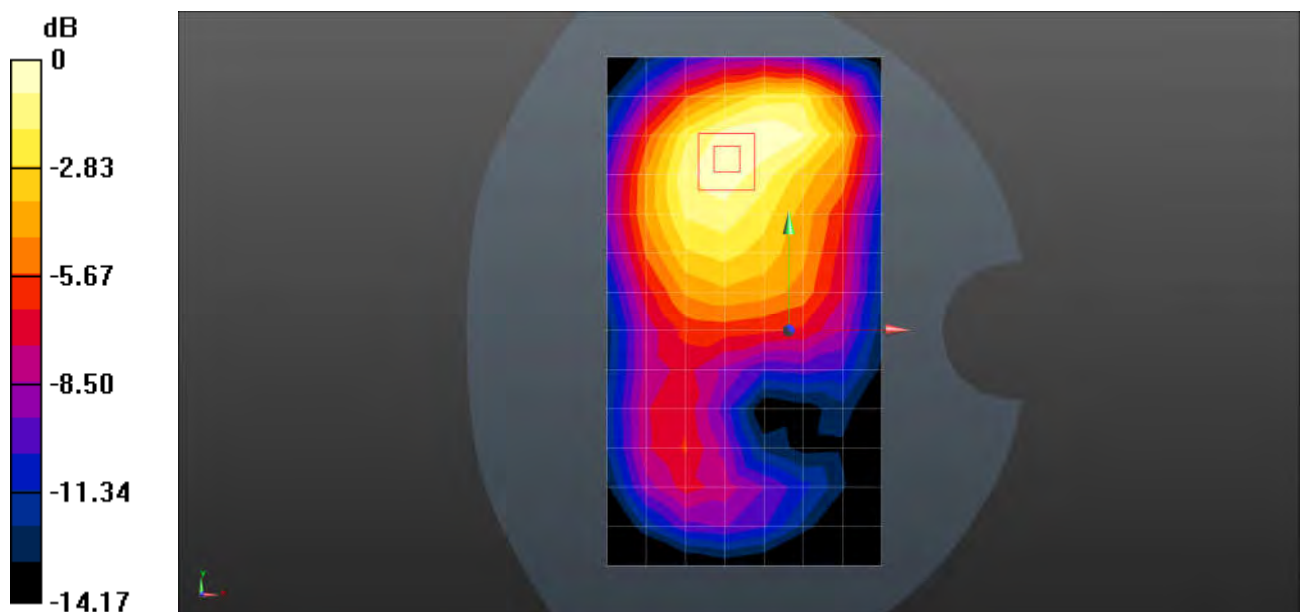

0 dB = 0.856 W/kg = -0.68 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band IV RMC 1513CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.338$  S/m;  $\epsilon_r = 40.171$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.816 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.21 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.358 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

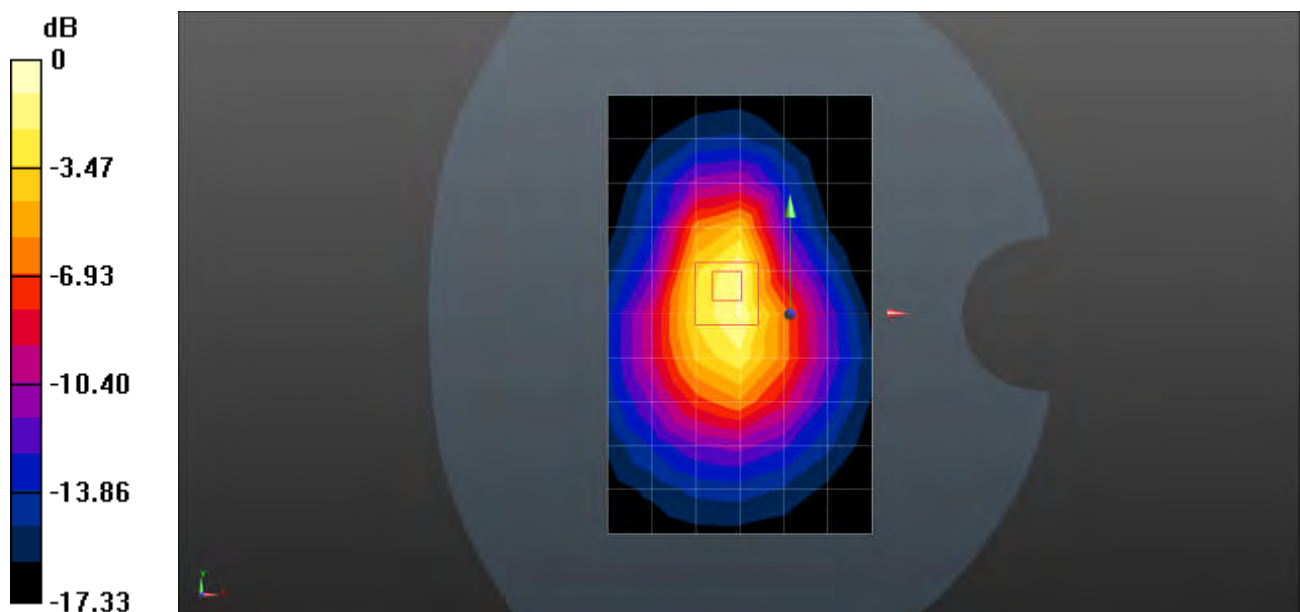

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band V RMC 4182CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.002$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.809 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.172 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

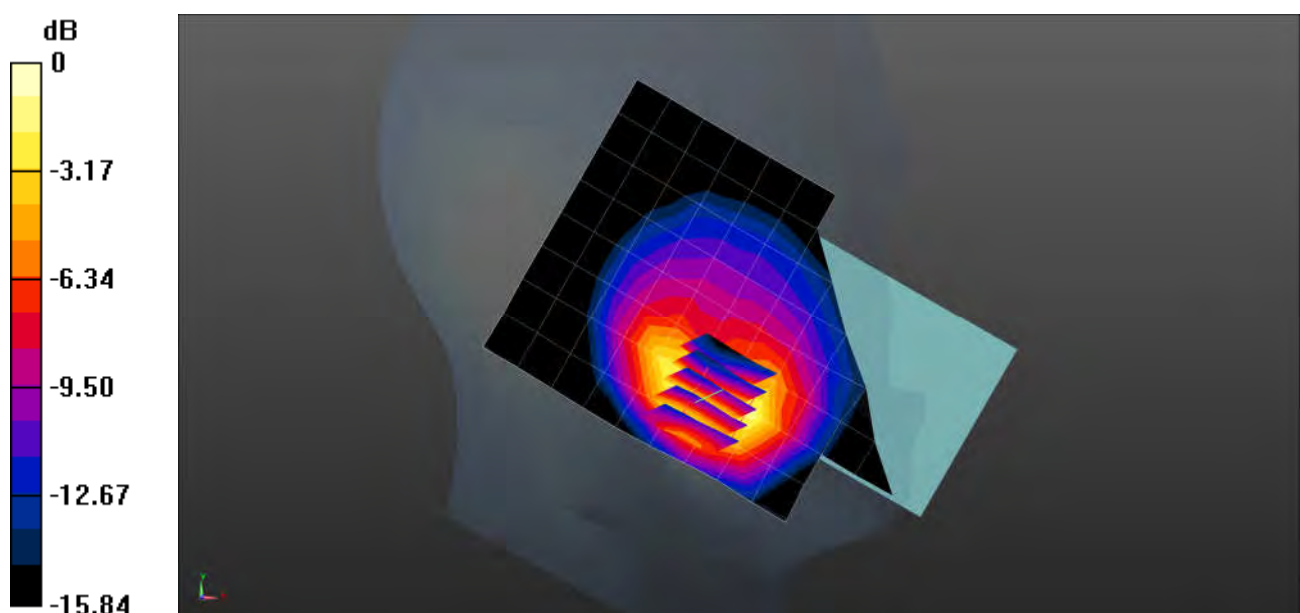

0 dB = 1.09 W/kg = 0.37 dBW/kg



Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band V RMC 4182CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.002$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.345 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.701 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.478 W/kg

**SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

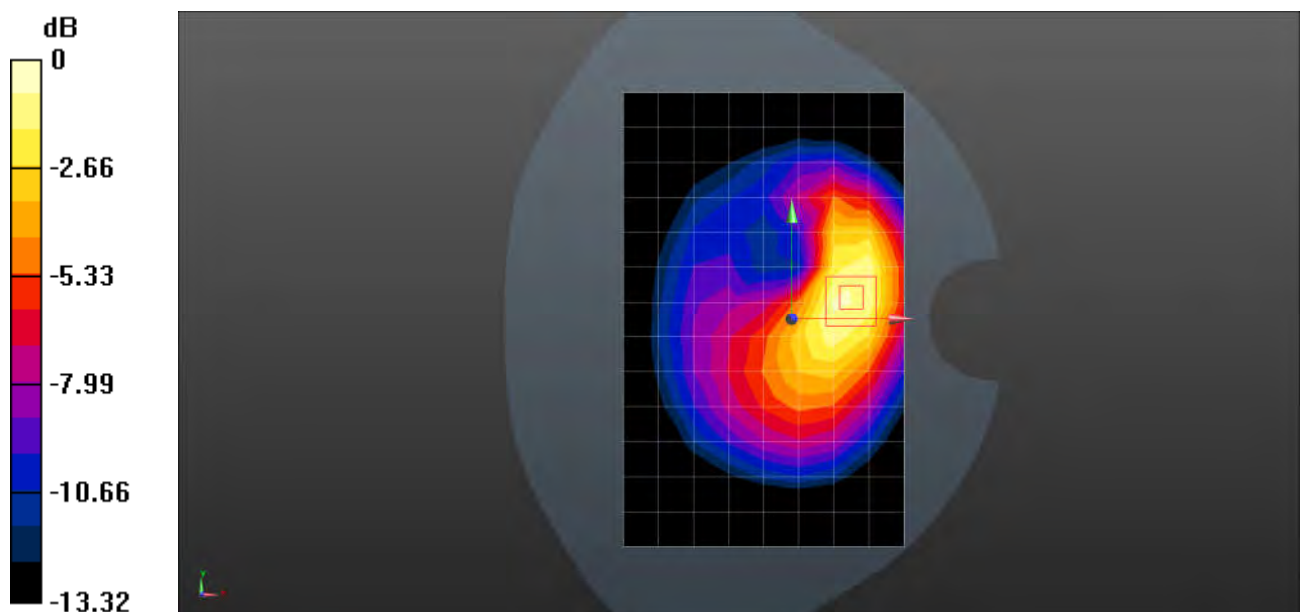

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G WCDMA Band V RMC 4233CH Left Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.03 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.96 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.375 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

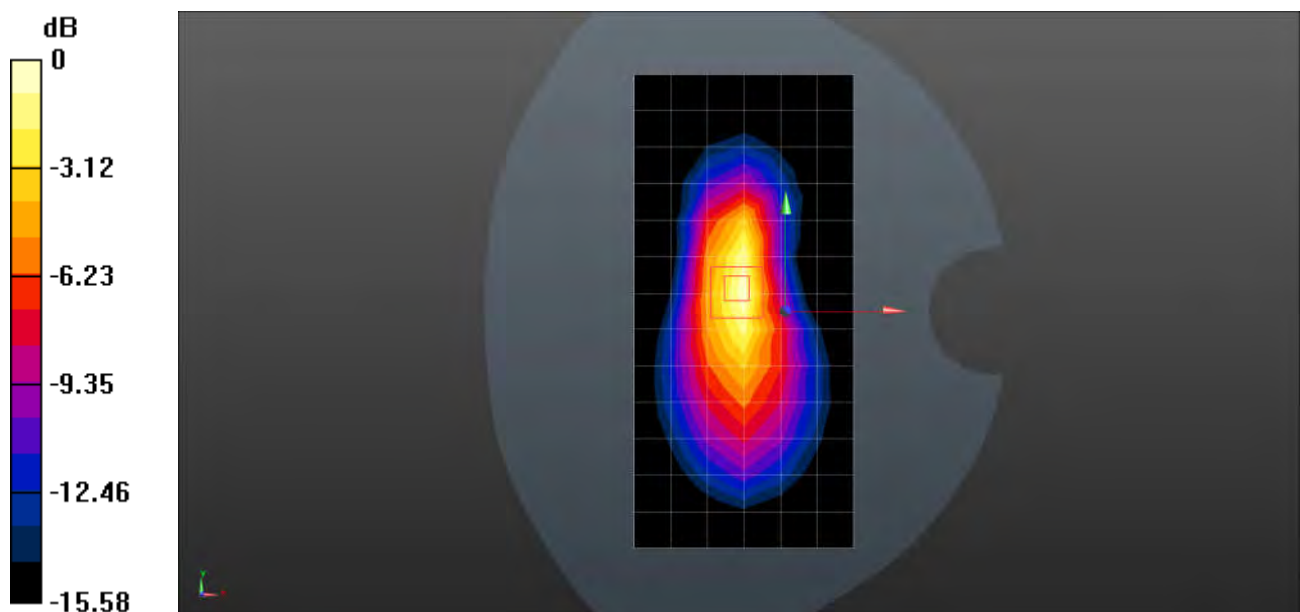

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WCDMA Band V RMC 4182CH Left Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.002$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 3.17 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.99 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 9.64 W/kg

**SAR(1 g) = 2.36 W/kg; SAR(10 g) = 0.913 W/kg**

Maximum value of SAR (measured) = 6.04 W/kg

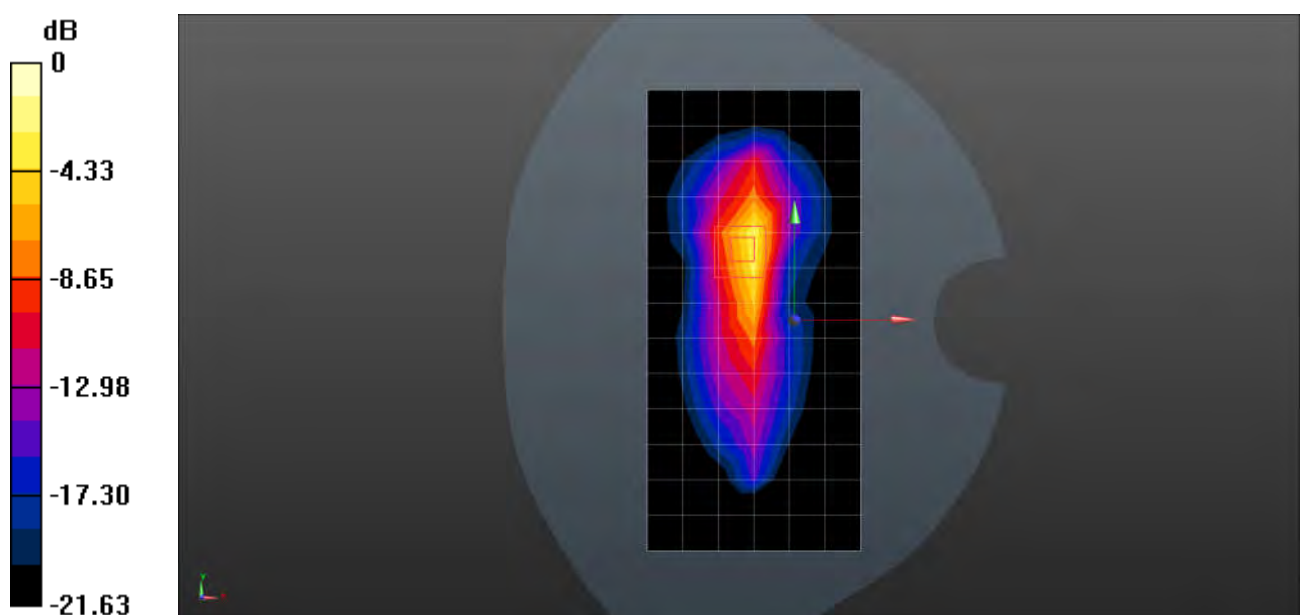

0 dB = 6.04 W/kg = 7.81 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 2 20M 1RB0 18700CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.039$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.879 W/kg


**Configuration/Head/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.48 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.404 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

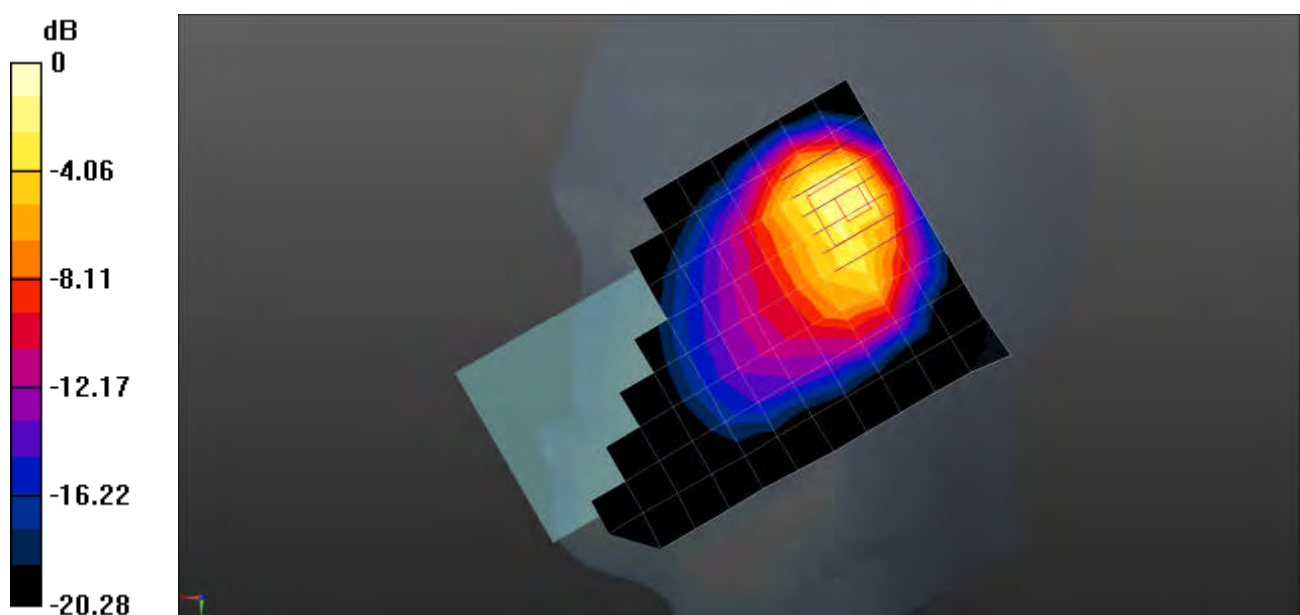

0 dB = 1.31 W/kg = 1.17 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 2 20M 1RB0 18900CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.725 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.947 W/kg

**SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.333 W/kg**

Maximum value of SAR (measured) = 0.810 W/kg

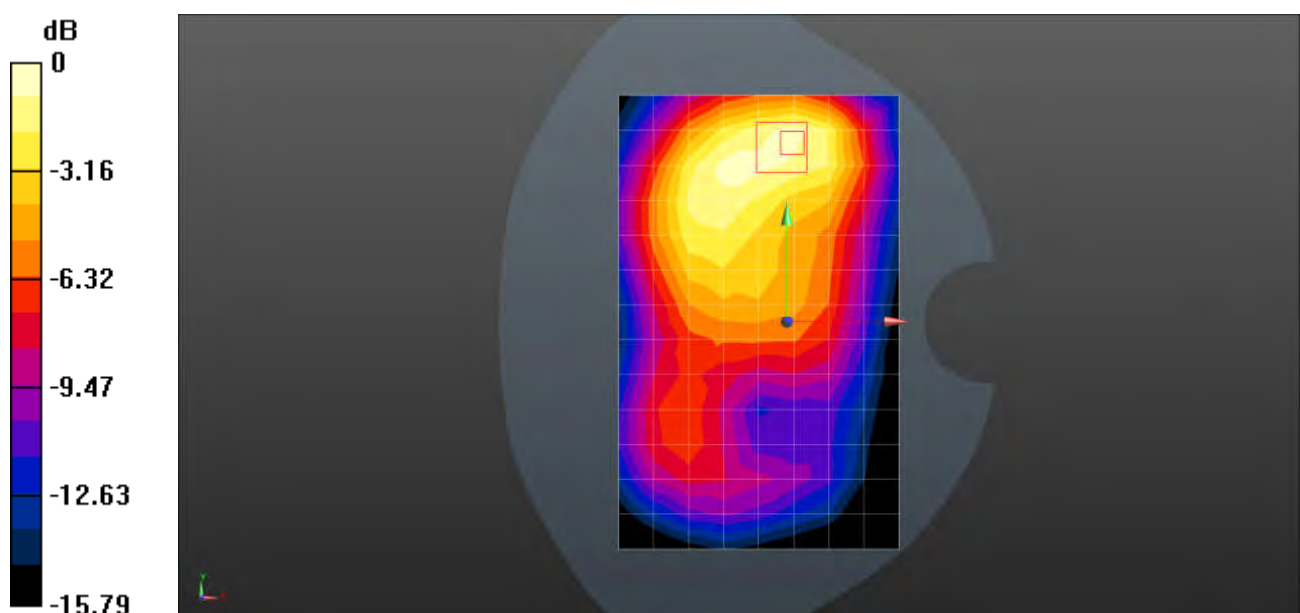

0 dB = 0.810 W/kg = -0.92 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 2 20M 1RB0 18900CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.401$  S/m;  $\epsilon_r = 38.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.49, 8.49, 8.49); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.736 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 1.16 W/kg

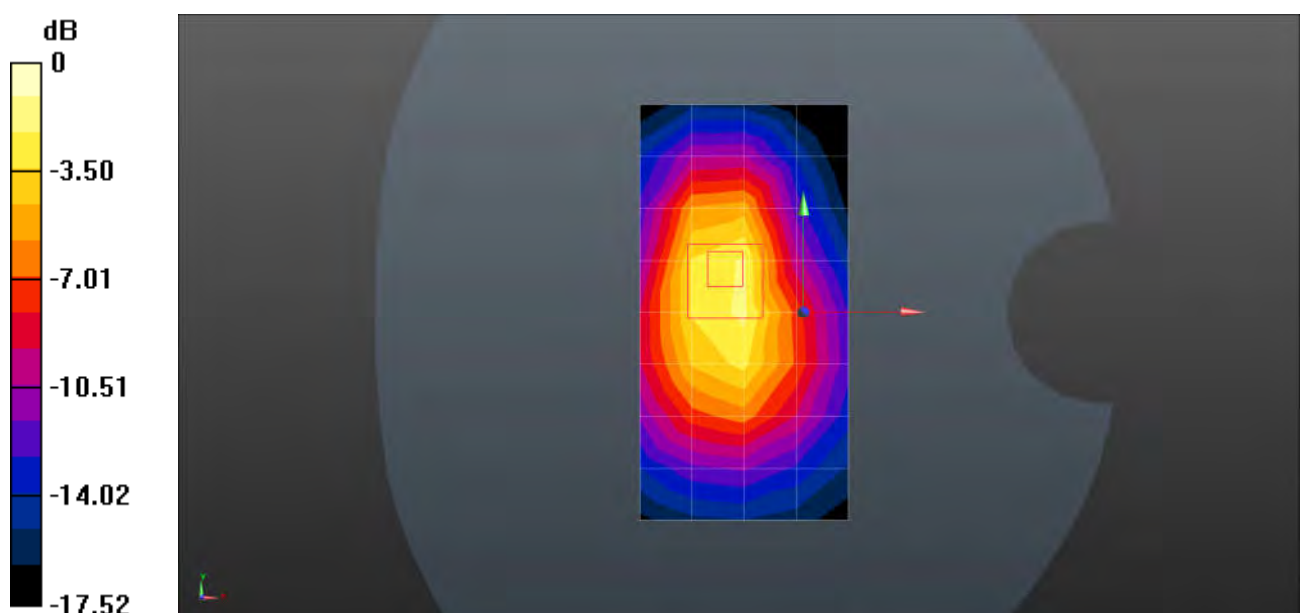

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 4 20M 1RB0 20175CH Right Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.32$  S/m;  $\epsilon_r = 40.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.154 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.672 W/kg

**SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.309 W/kg**

Maximum value of SAR (measured) = 1.21 W/kg

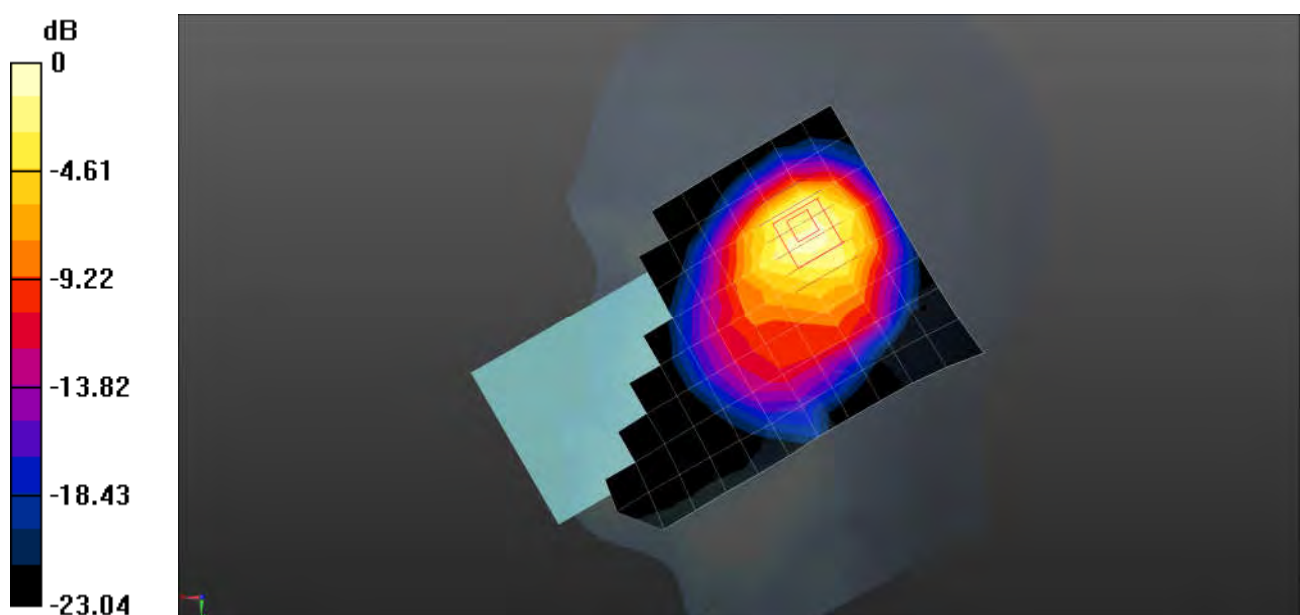

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 4 20M 1RB0 20175CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.32$  S/m;  $\epsilon_r = 40.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.810 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.21 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.377 W/kg**

Maximum value of SAR (measured) = 0.875 W/kg

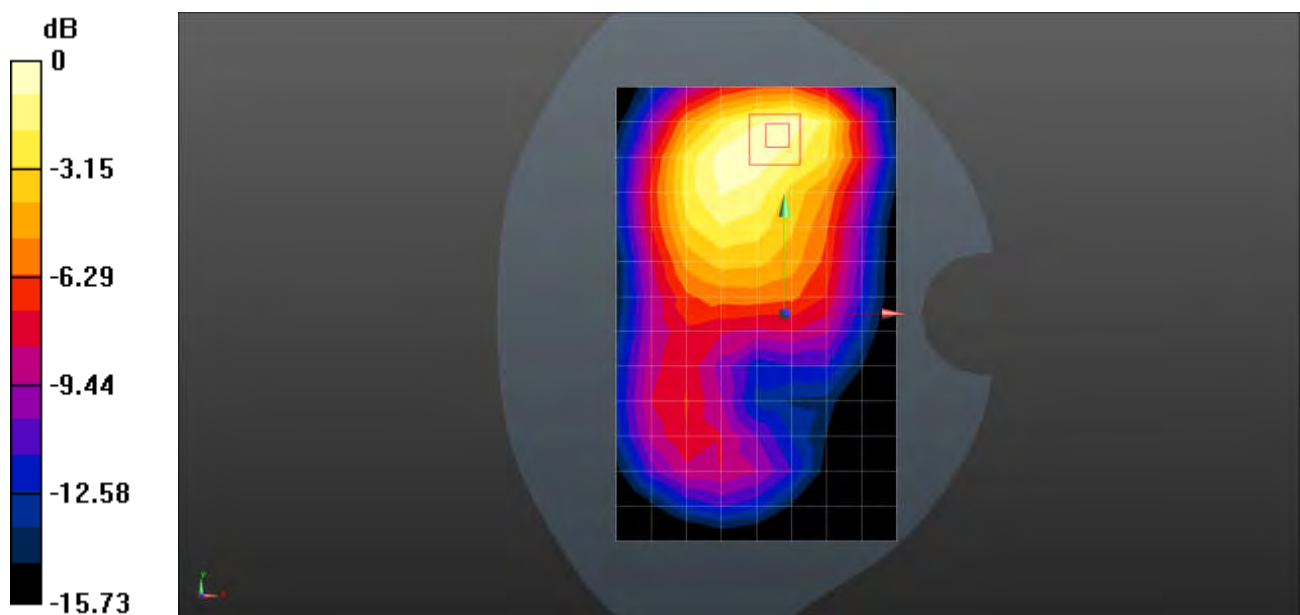

0 dB = 0.875 W/kg = -0.58 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 4 20M 50RB0 20175CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.32$  S/m;  $\epsilon_r = 40.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.654 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.98 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.994 W/kg

**SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.297 W/kg**

Maximum value of SAR (measured) = 0.834 W/kg

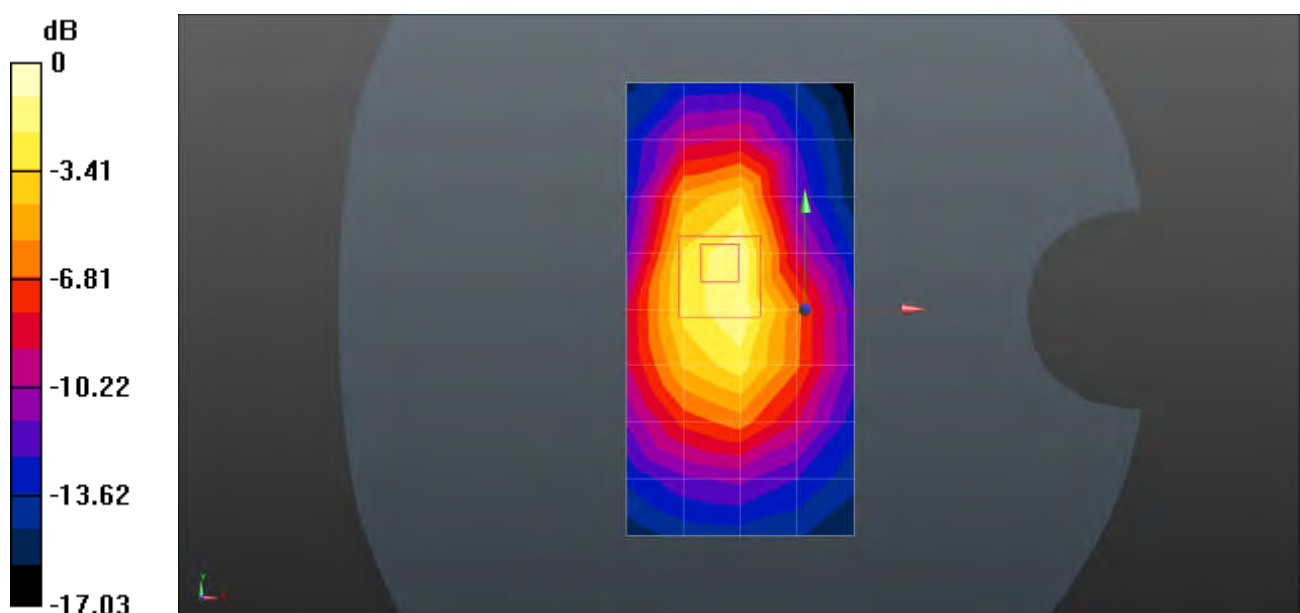

0 dB = 0.834 W/kg = -0.79 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 7 20M 50RB0 21100CH Right Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.950 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.38 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.286 W/kg**

Maximum value of SAR (measured) = 0.959 W/kg

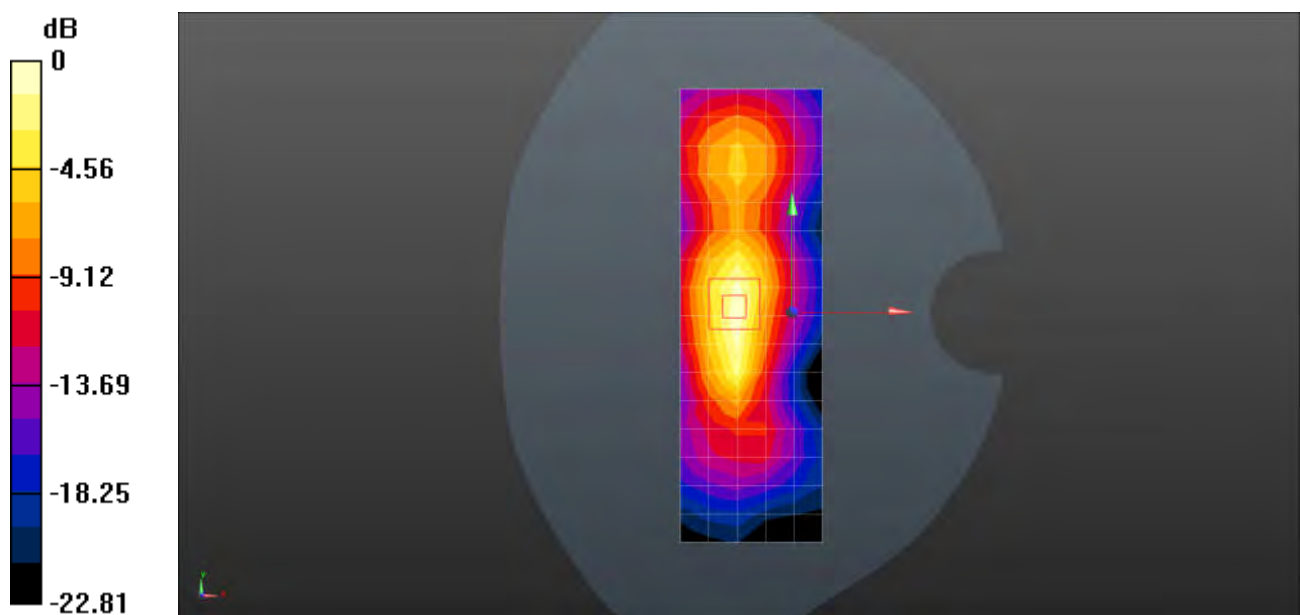

0 dB = 0.959 W/kg = -0.18 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 7 20M 1RB0 21100CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.962 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.501 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.284 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

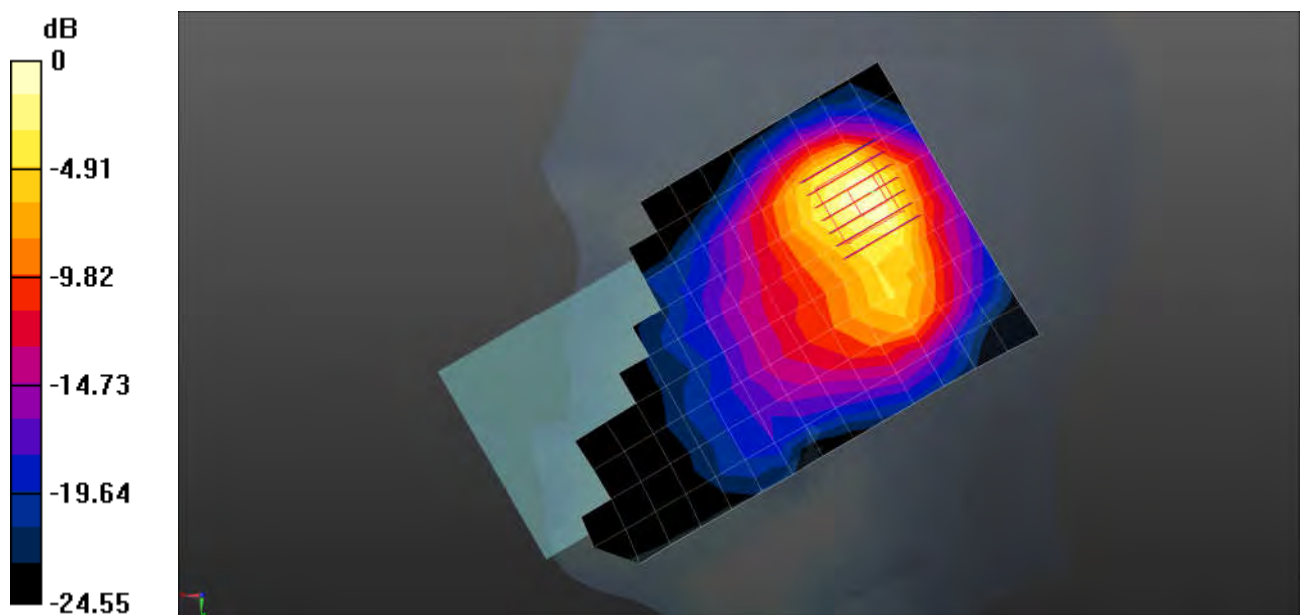

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 7 20M 1RB0 21100CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.854 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.265 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.309 W/kg**

Maximum value of SAR (measured) = 0.914 W/kg

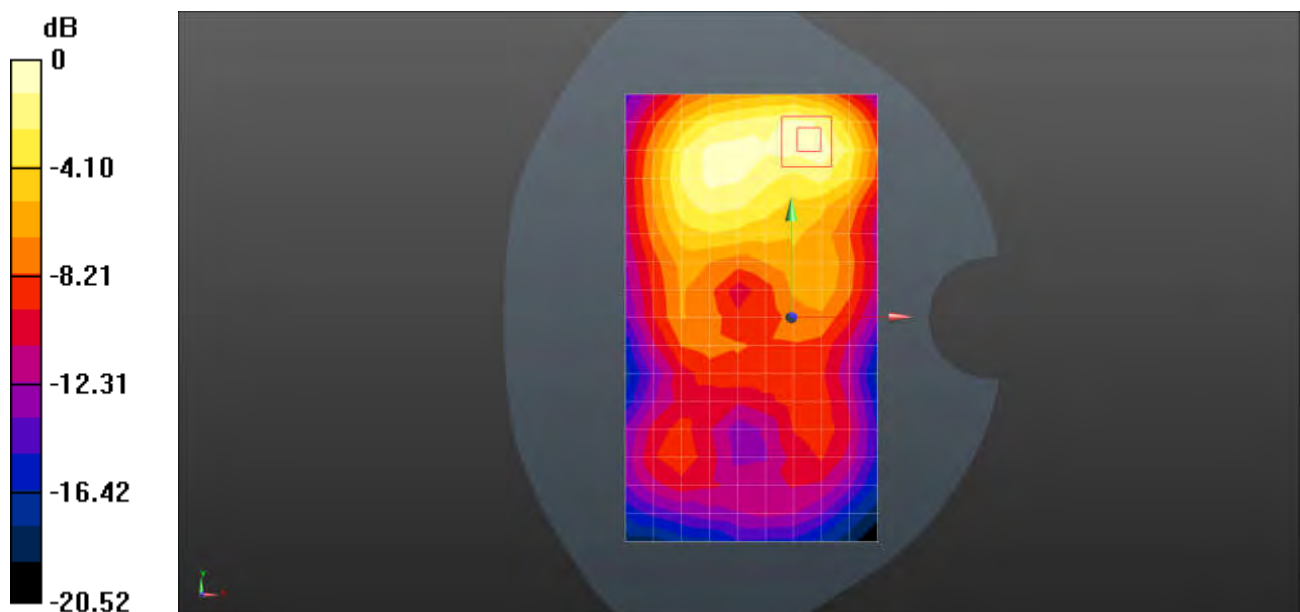

0 dB = 0.914 W/kg = -0.39 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 12 10M 1RB0 23095CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.732 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.862 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.241 W/kg**

Maximum value of SAR (measured) = 0.685 W/kg

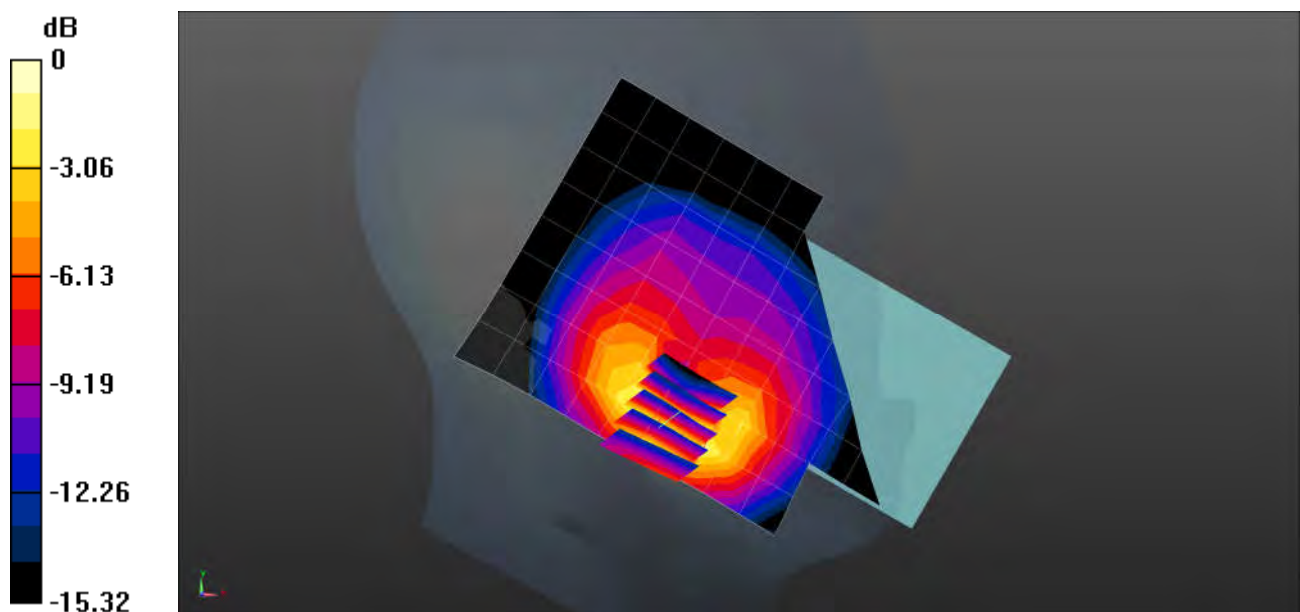

0 dB = 0.685 W/kg = -1.64 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 12 10M 1RB0 23095CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.288 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.722 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.459 W/kg

**SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.334 W/kg

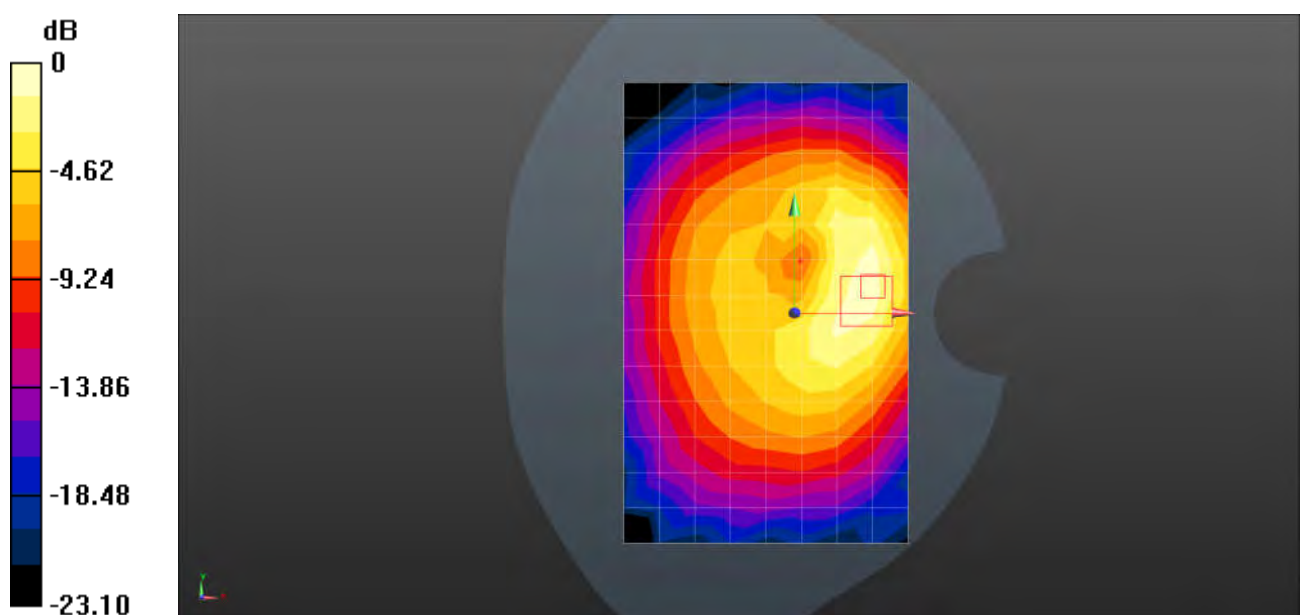

0 dB = 0.334 W/kg = -4.76 dBW/kg

Test Laboratory: SGS-SAR Lab

**23122PCD1G LTE Band 12 10M 1RB0 23095CH Left Side 10mm**

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 43.29$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.785 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.92 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.309 W/kg**

Maximum value of SAR (measured) = 0.846 W/kg

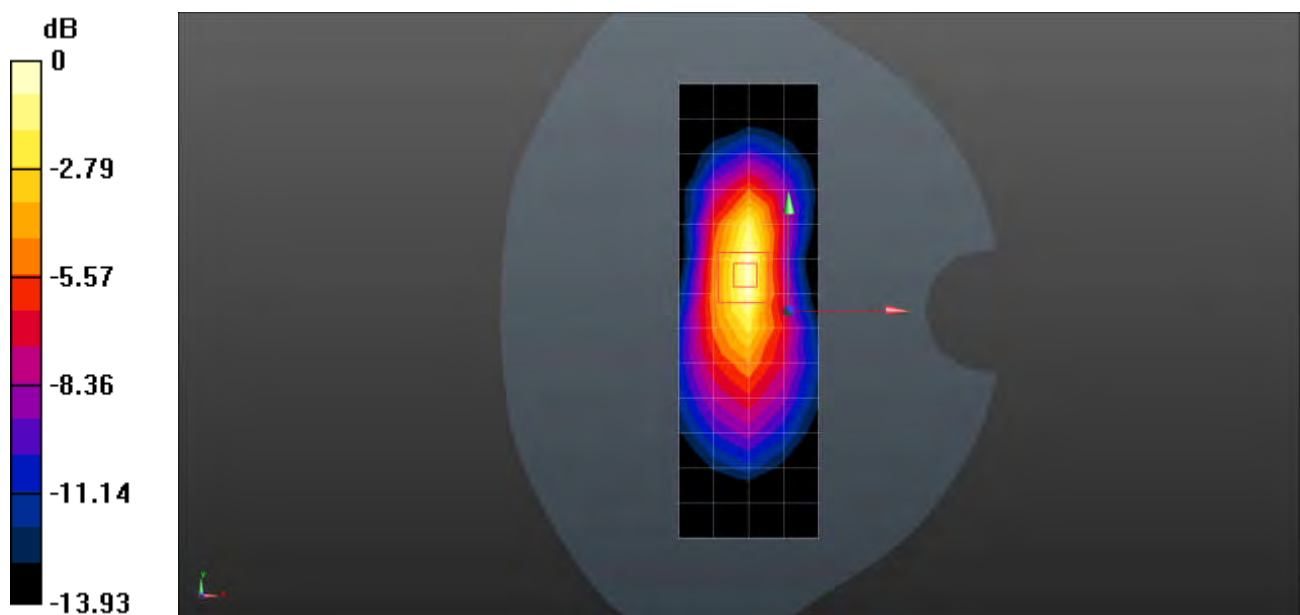

0 dB = 0.846 W/kg = -0.73 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 13 10M 1RB0 23230CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 41.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.03 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.297 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.363 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

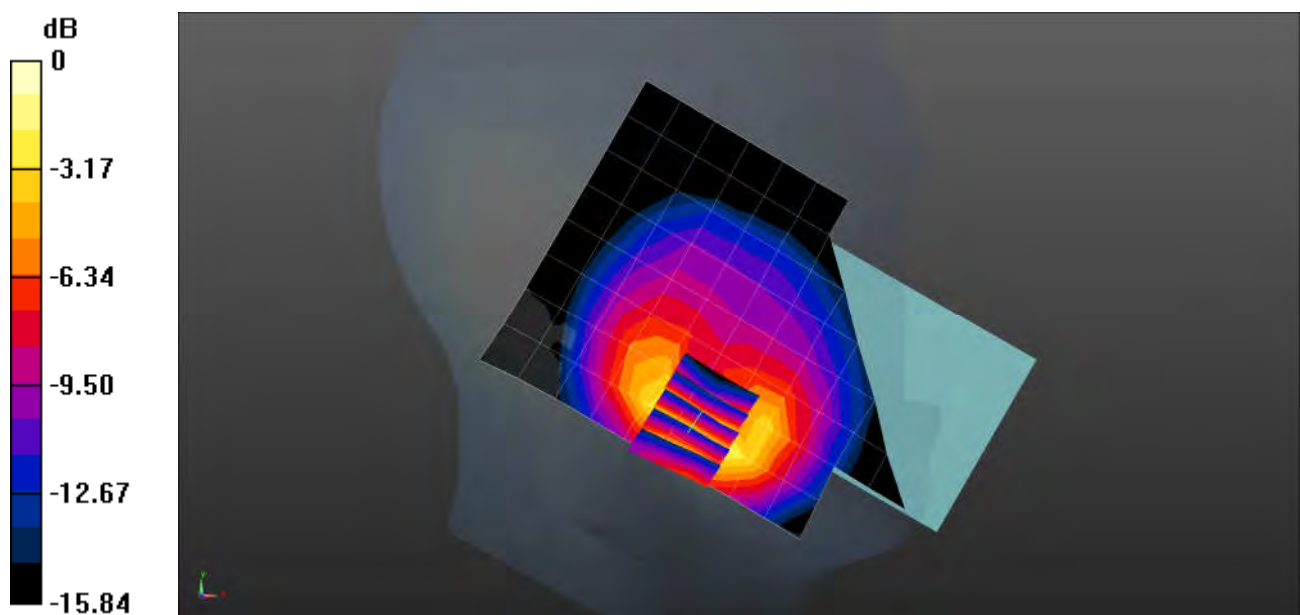

0 dB = 1.08 W/kg = 0.33 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 13 10M 1RB0 23230CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 41.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.855 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.836 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.241 W/kg**

Maximum value of SAR (measured) = 0.944 W/kg

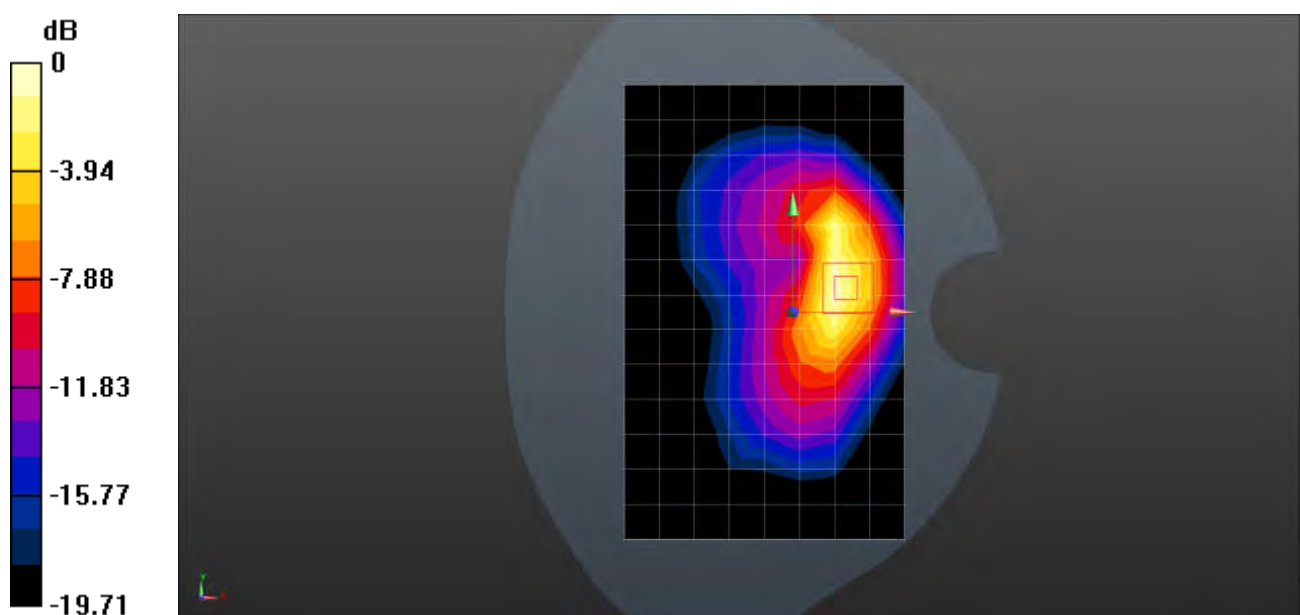

0 dB = 0.944 W/kg = -0.25 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 13 10M 1RB0 23230CH Left Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.924 \text{ S/m}$ ;  $\epsilon_r = 41.85$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.22 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.74 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.471 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

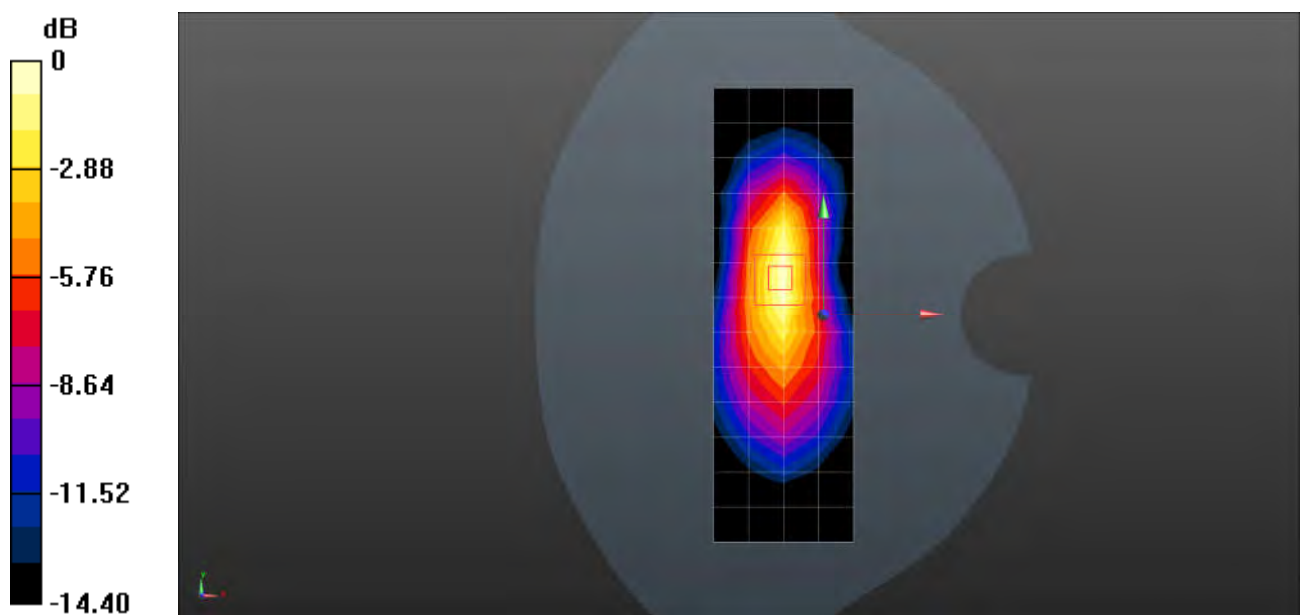

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 13 10M 1RB0 23230CH Back Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 41.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.09, 9.09, 9.09); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.11 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.23 W/kg

**SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.07 W/kg**

Maximum value of SAR (measured) = 4.43 W/kg

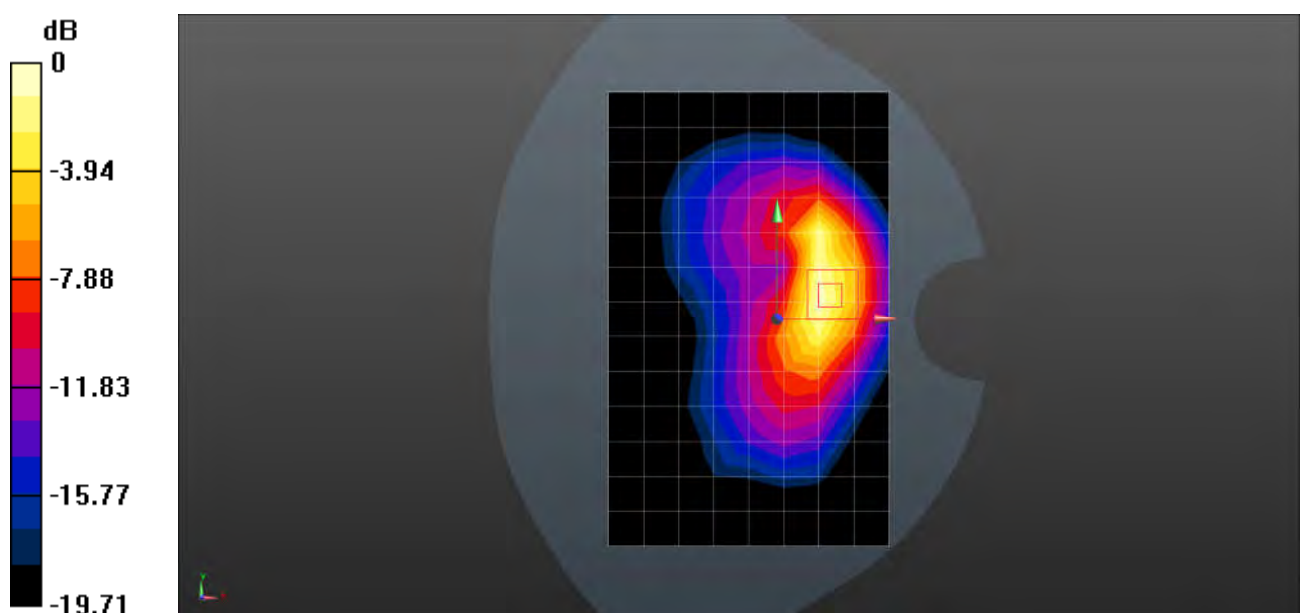

0 dB = 4.43 W/kg = 6.46 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 26 15M 1RB0 26865CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 43.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.748 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.265 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 0.824 W/kg

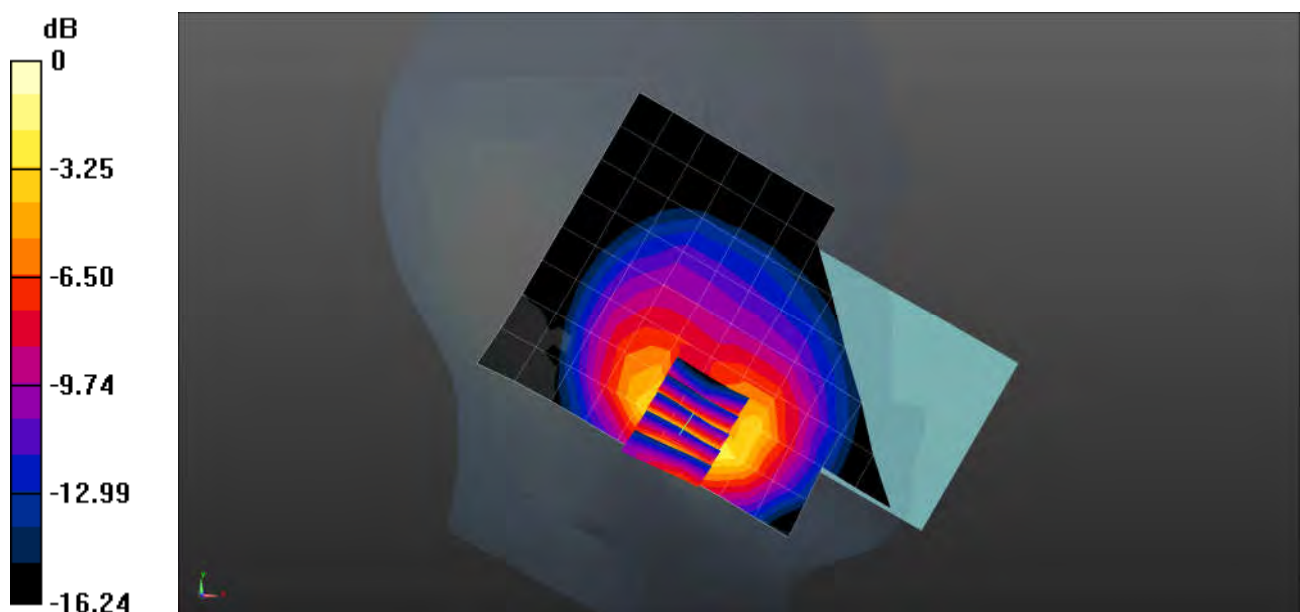

0 dB = 0.824 W/kg = -0.84 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 26 15M 1RB0 26865CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 43.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.545 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.159 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.729 W/kg

**SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 0.619 W/kg

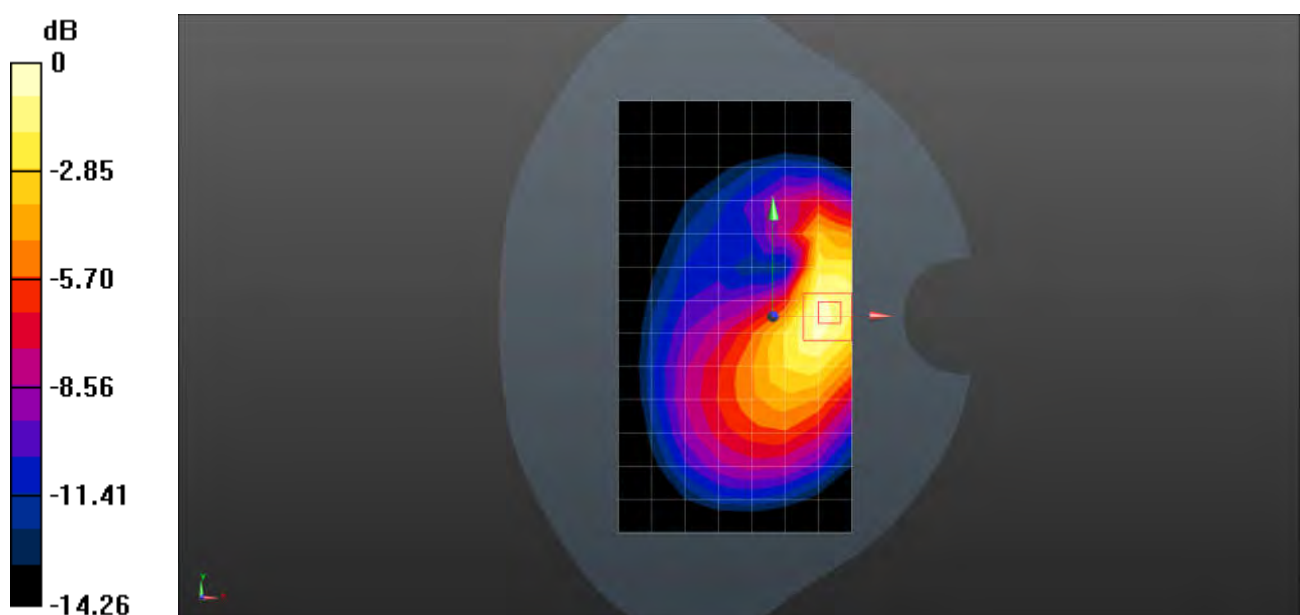

0 dB = 0.619 W/kg = -2.08 dBW/kg

Test Laboratory: SGS-SAR Lab

**23122PCD1G LTE Band 26 15M 36RB0 26865CH Left Side 10mm**

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 43.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.708 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.72 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.299 W/kg**

Maximum value of SAR (measured) = 0.876 W/kg

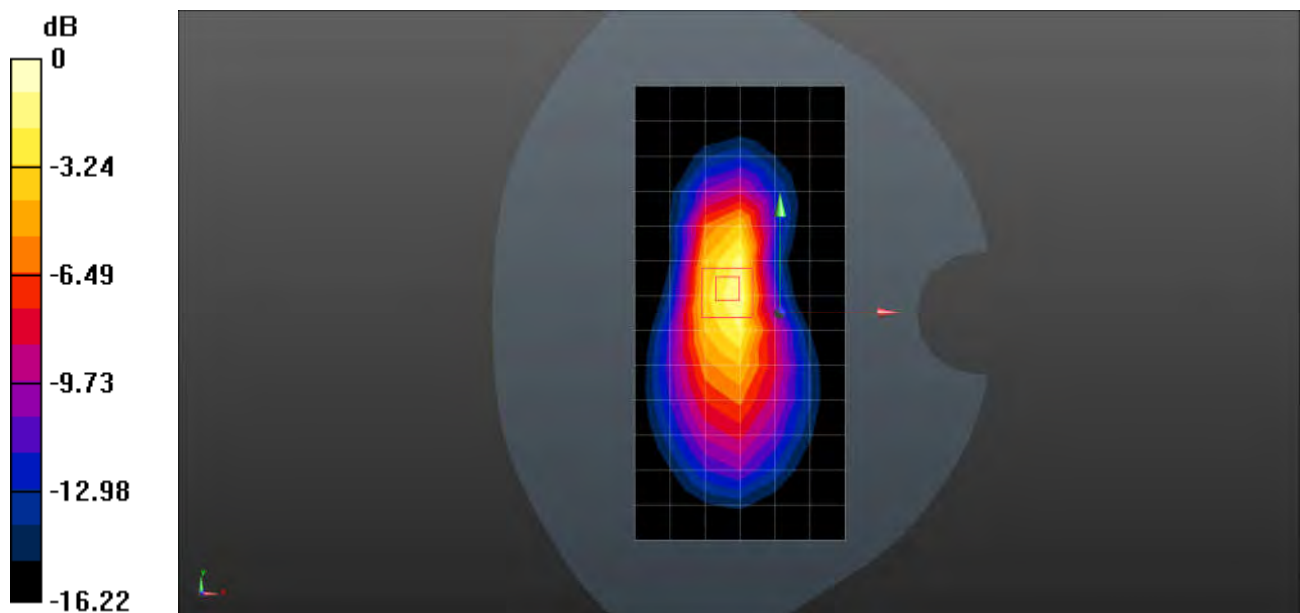

0 dB = 0.876 W/kg = -0.57 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 26 15M 1RB0 26865CH Left Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 43.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 6.77 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.90 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 4.19 W/kg; SAR(10 g) = 1.48 W/kg**

Maximum value of SAR (measured) = 10.7 W/kg

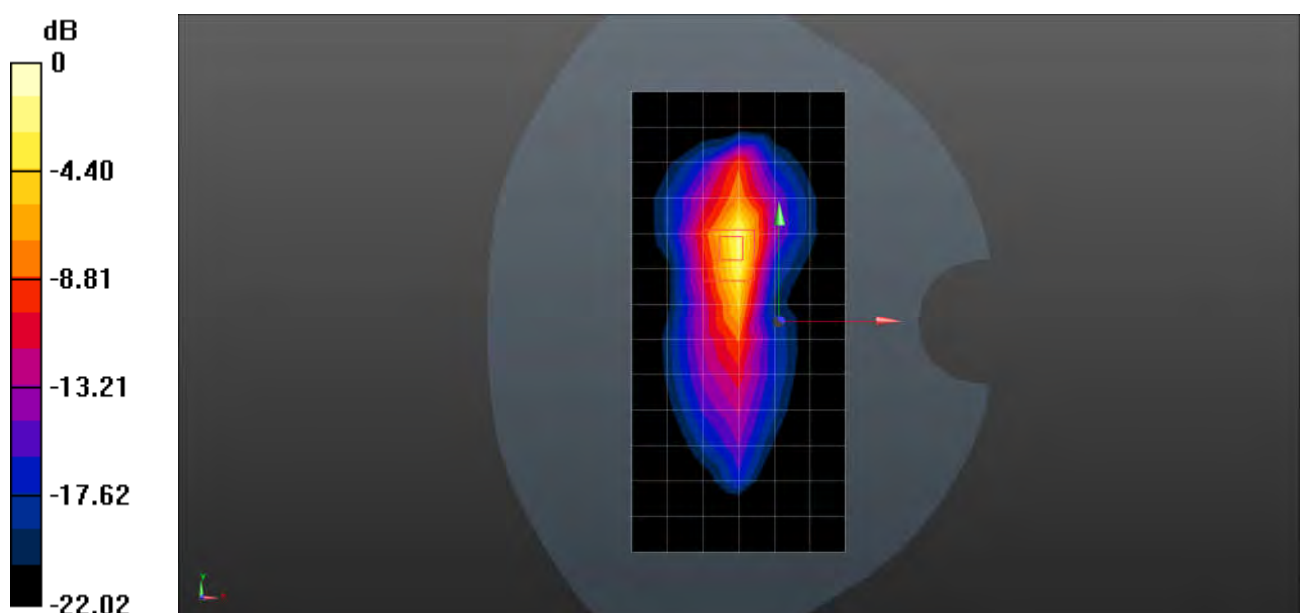

0 dB = 10.7 W/kg = 10.29 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 41 20M 1RB0 39750CH Right Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.876$  S/m;  $\epsilon_r = 37.886$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.41 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.296 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

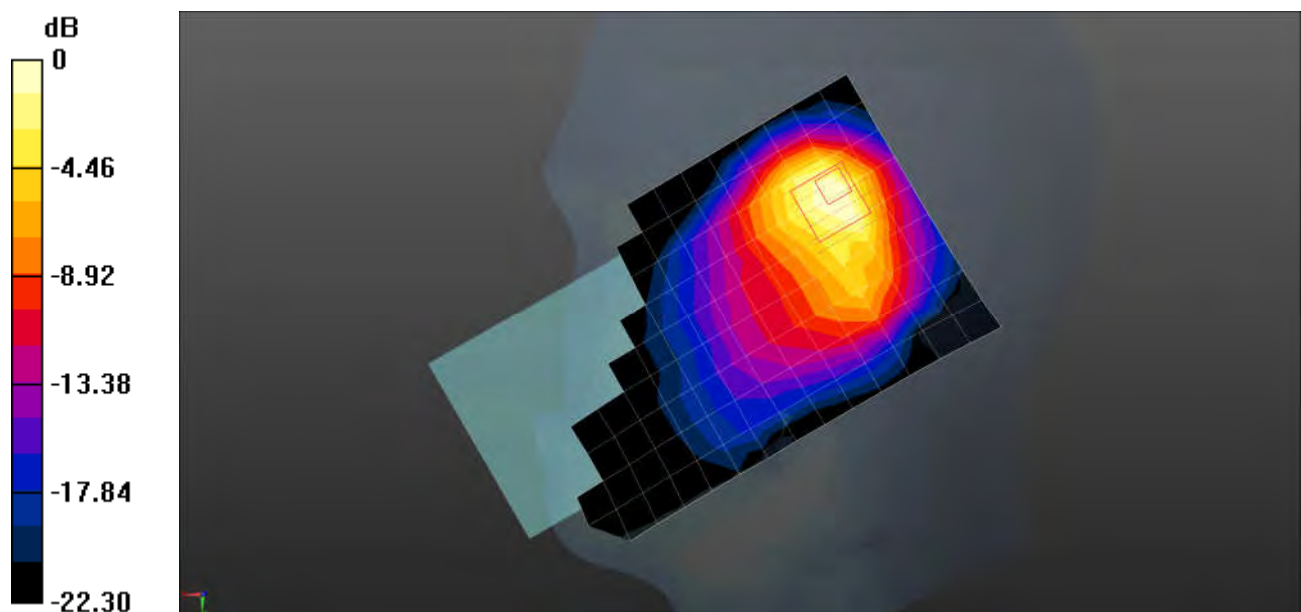

0 dB = 1.28 W/kg = 1.07 dBW/kg



Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 41 20M 1RB0 40620CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.493 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.163 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.601 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.482 W/kg

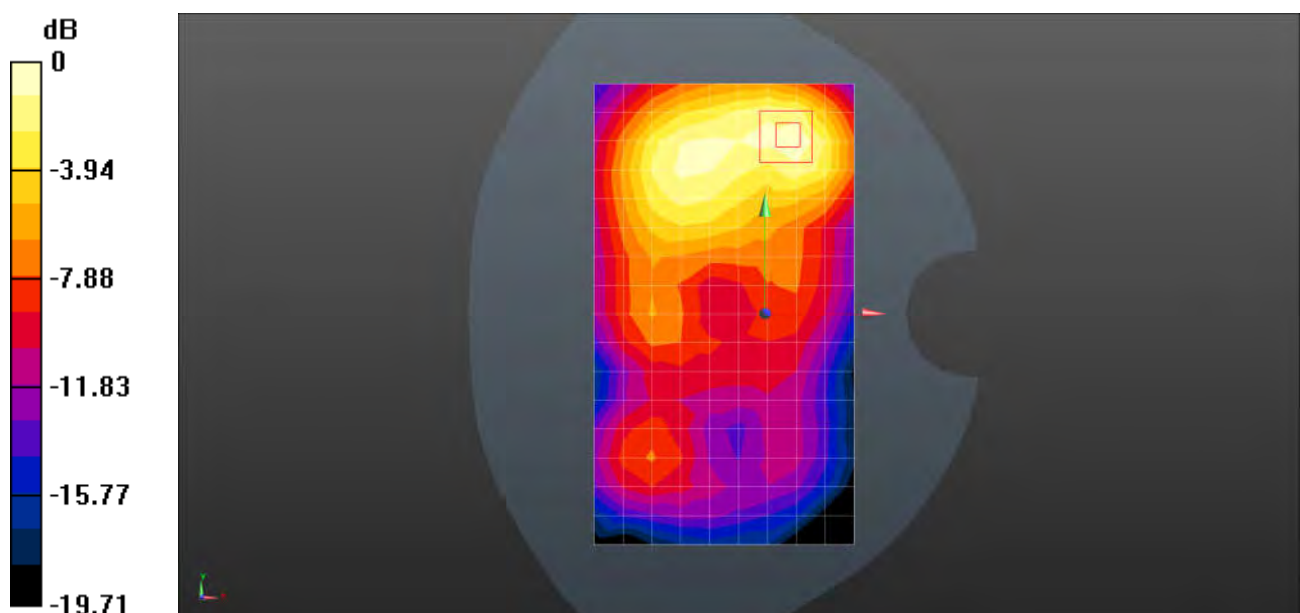

0 dB = 0.482 W/kg = -3.17 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 41 20M 1RB0 39750CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.876$  S/m;  $\epsilon_r = 37.886$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.670 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.861 W/kg

**SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.692 W/kg

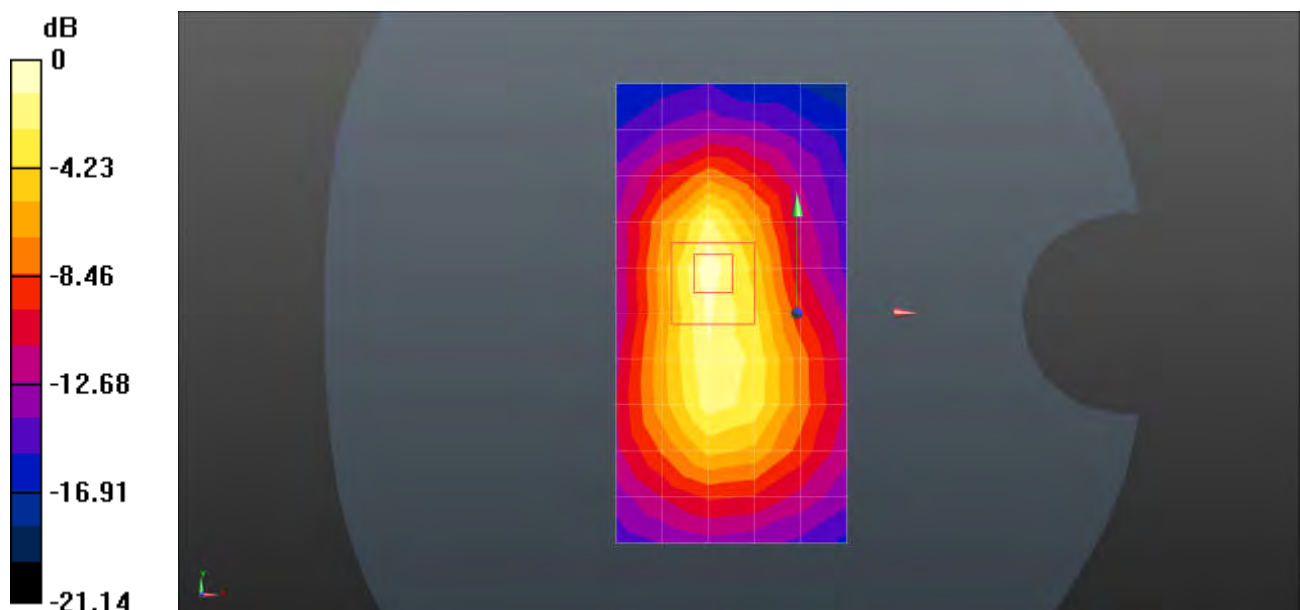

0 dB = 0.692 W/kg = -1.60 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G LTE Band 66 20M 1RB0 132572CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.365$  S/m;  $\epsilon_r = 40.166$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.408 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.317 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

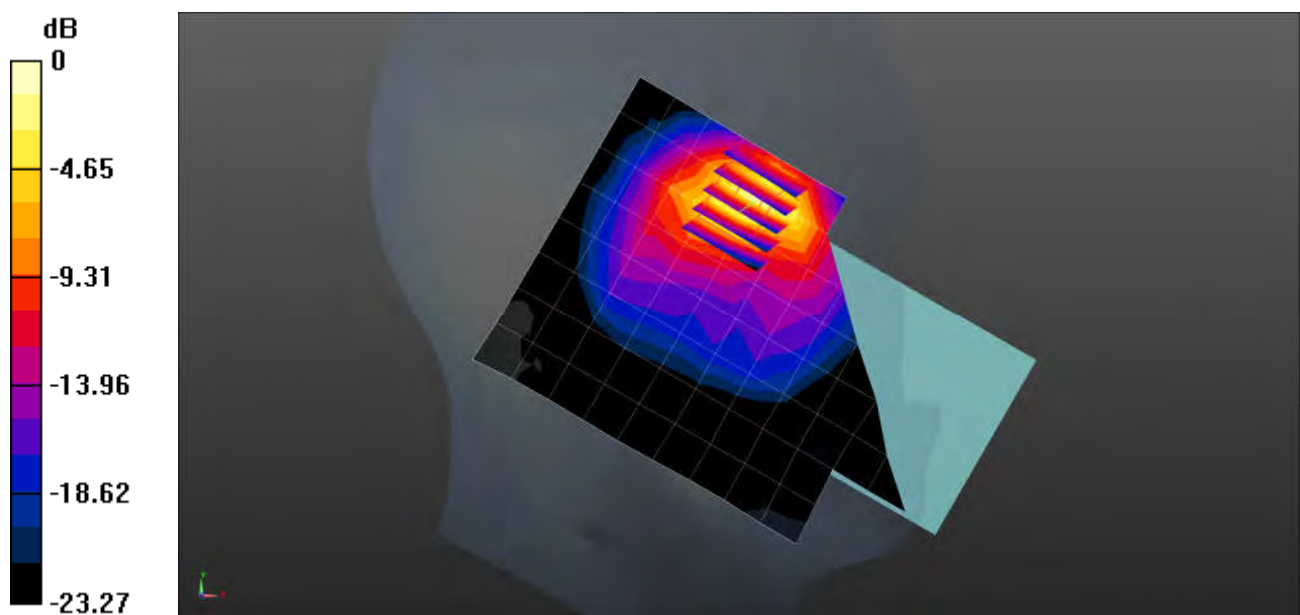

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 66 20M 1RB0 132322CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.424 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.709 W/kg

**SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.608 W/kg

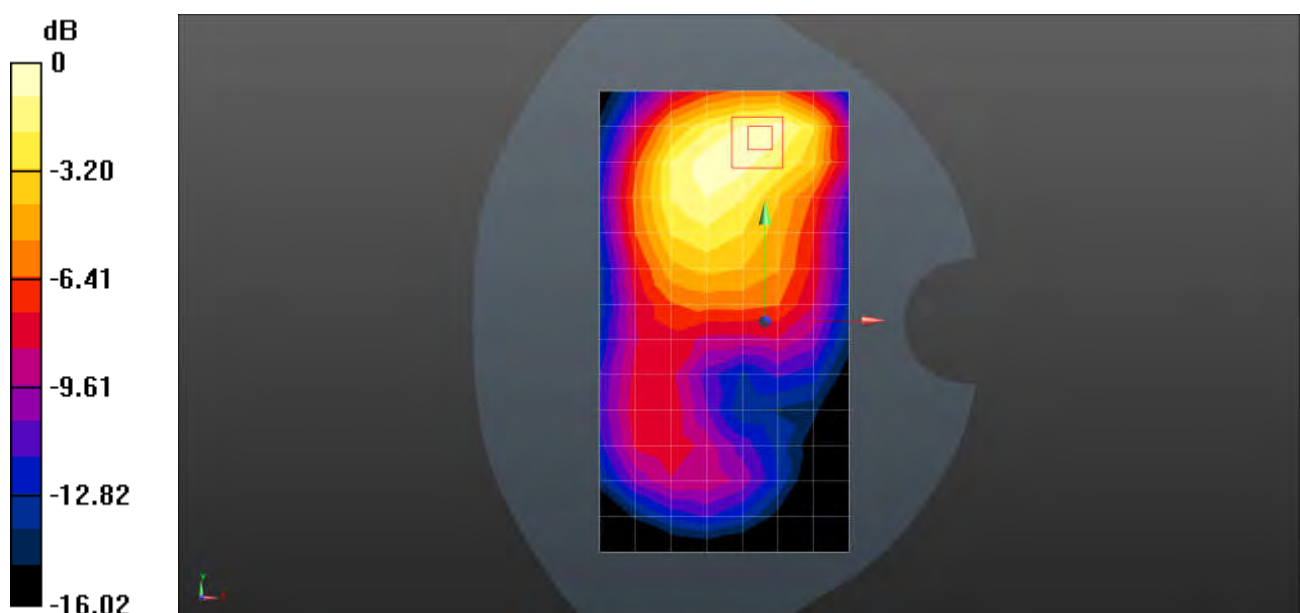

0 dB = 0.608 W/kg = -2.16 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G LTE Band 66 20M 50RB0 132572CH Bottom Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019848**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.365$  S/m;  $\epsilon_r = 40.166$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.988 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.04 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.358 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

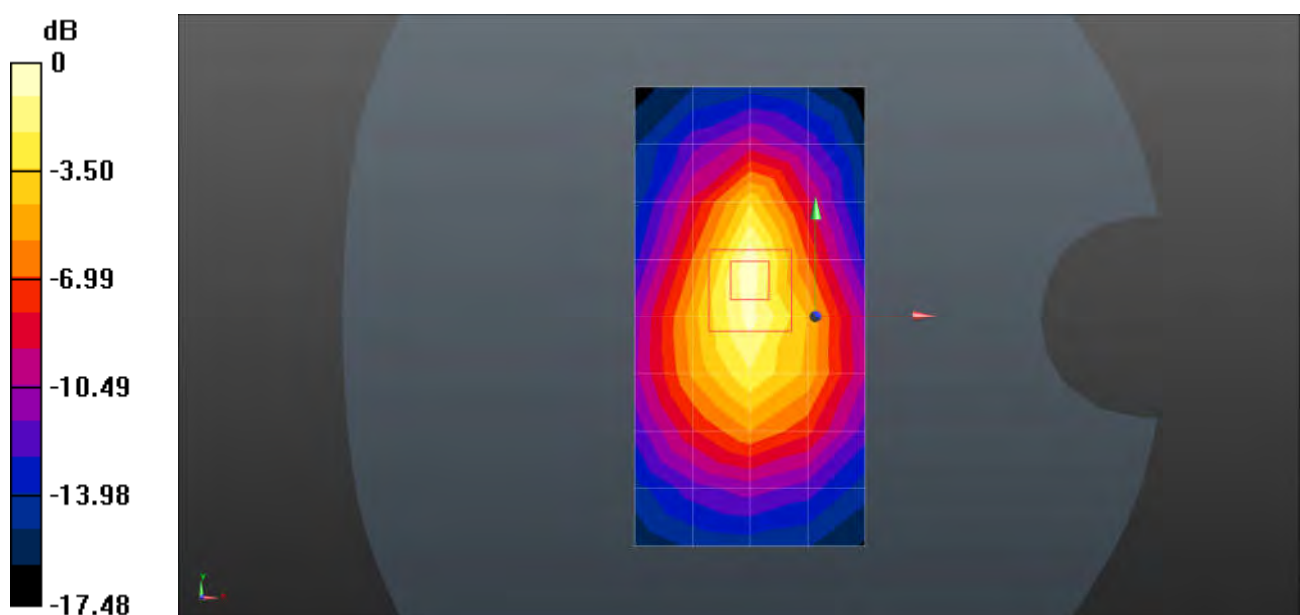

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n5 20M QPSK 50RB28 167300CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1769
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.633 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.663 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.365 W/kg**

Maximum value of SAR (measured) = 0.995 W/kg

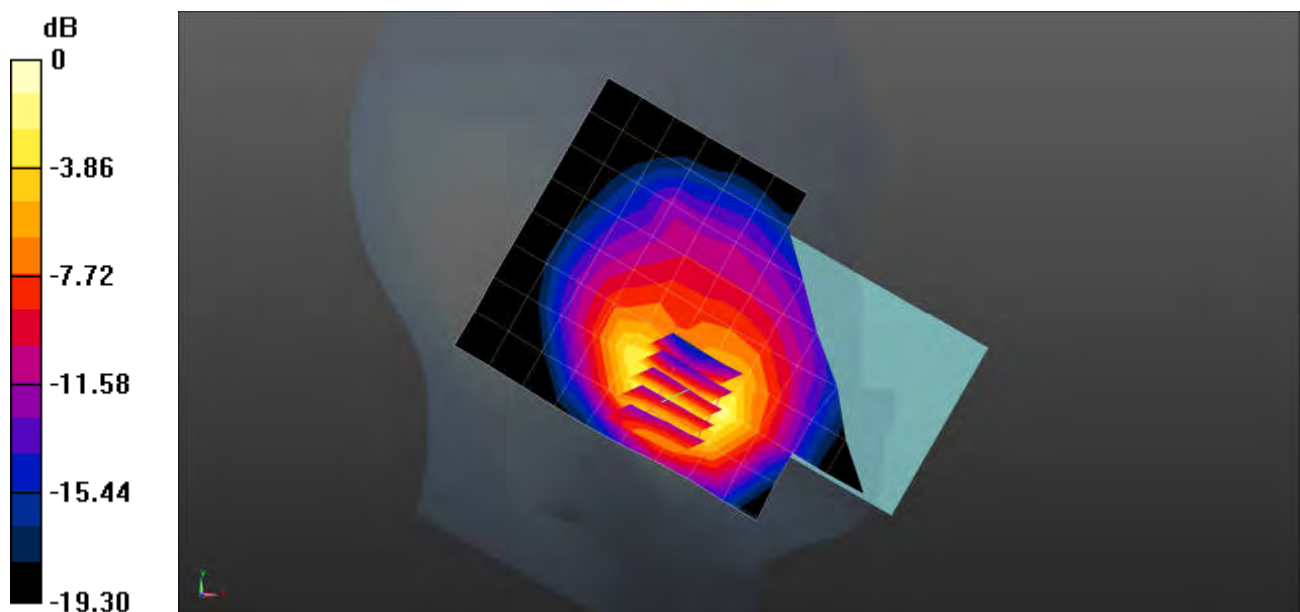

0 dB = 0.995 W/kg = -0.02 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n5 20M QPSK 50RB28 167300CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.229 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.507 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.433 W/kg

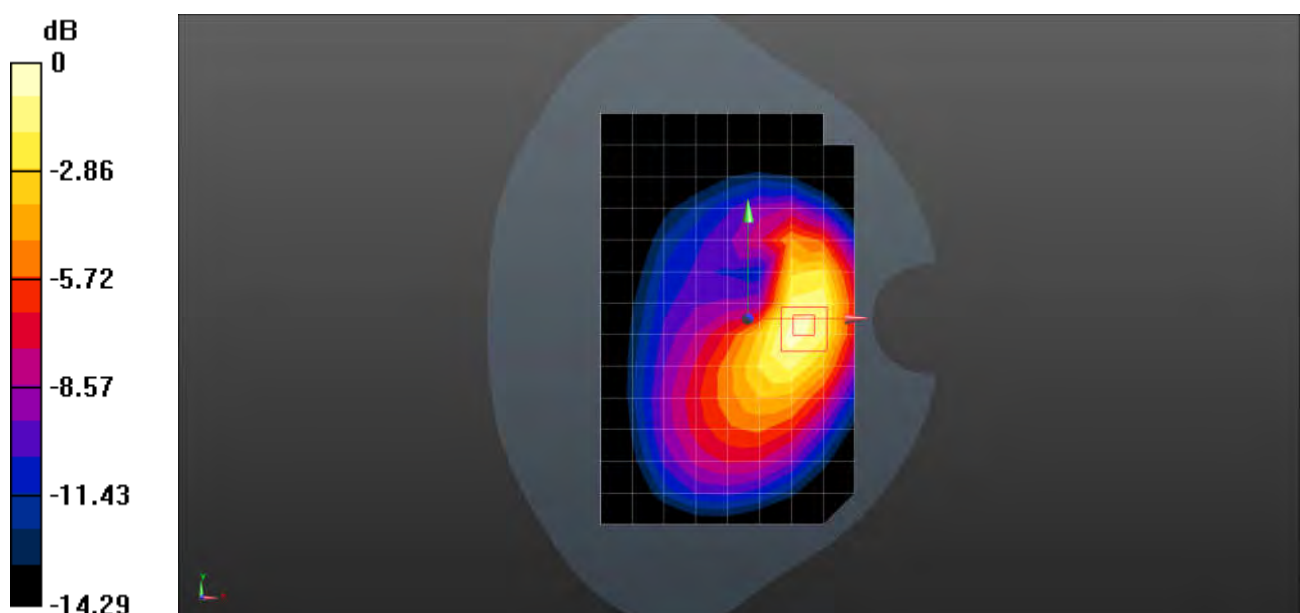

0 dB = 0.433 W/kg = -3.64 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n5 20M QPSK 50RB28 167300CH Left Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 43.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.76, 8.76, 8.76); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.929 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.29 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

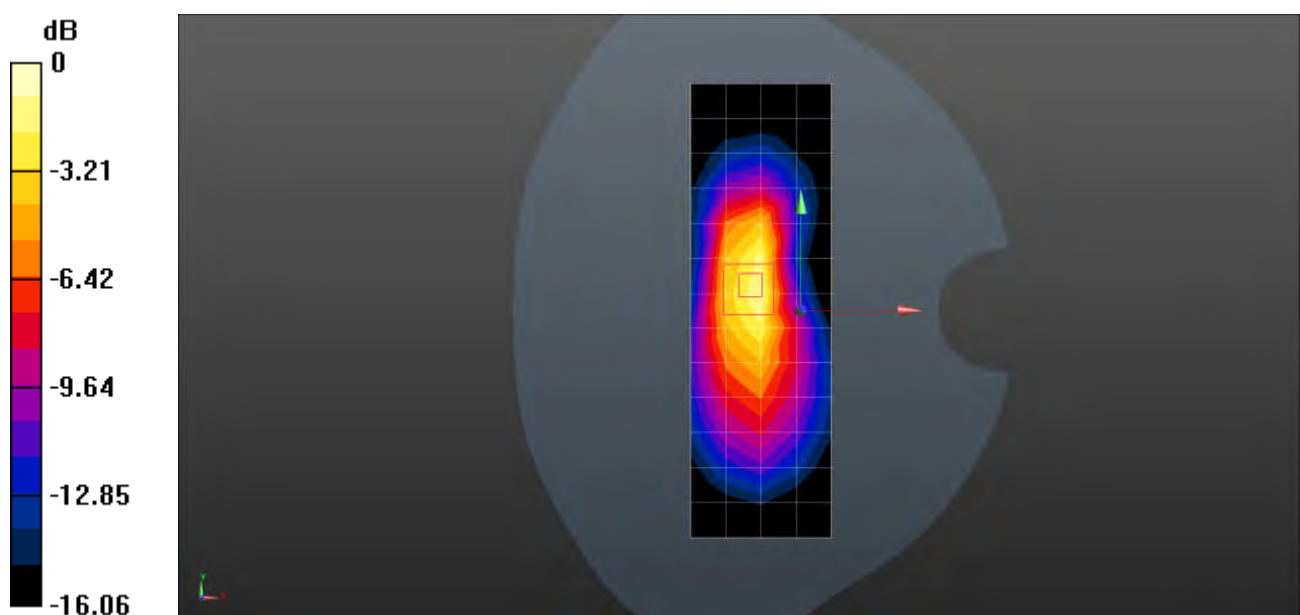

0 dB = 1.17 W/kg = 0.68 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n7 40M QPSK 1RB1 507000CH Right Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.835 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.62 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.233 W/kg**

Maximum value of SAR (measured) = 0.864 W/kg

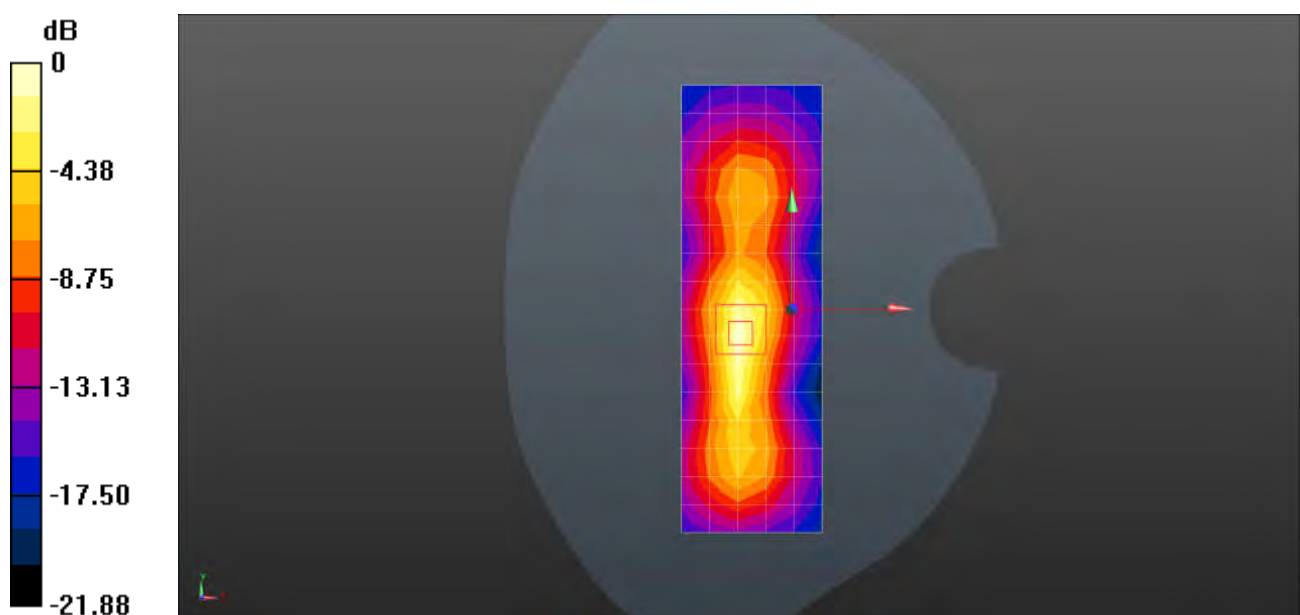

0 dB = 0.864 W/kg = -0.63 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n7 40M QPSK 108RB54 507000CH Right Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 4.91 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.21 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 7.71 W/kg

**SAR(1 g) = 2.45 W/kg; SAR(10 g) = 0.842 W/kg**

Maximum value of SAR (measured) = 5.36 W/kg

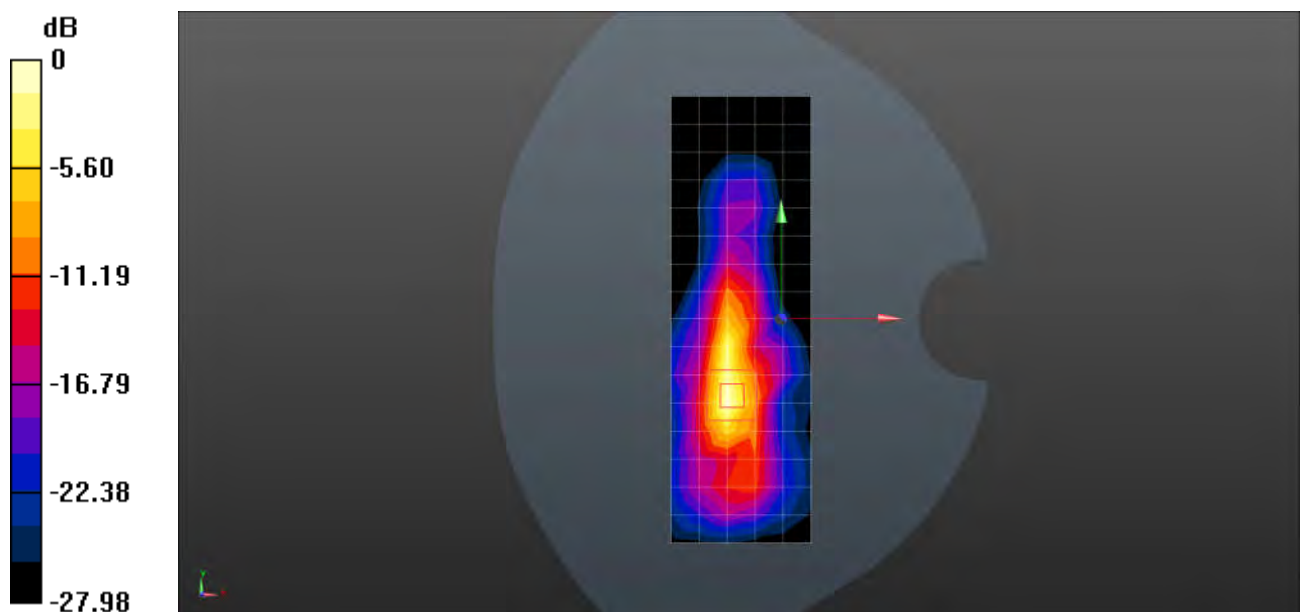

0 dB = 5.36 W/kg = 7.29 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n7 40M QPSK 1RB1 507000CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.820 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.514 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.284 W/kg**

Maximum value of SAR (measured) = 0.862 W/kg

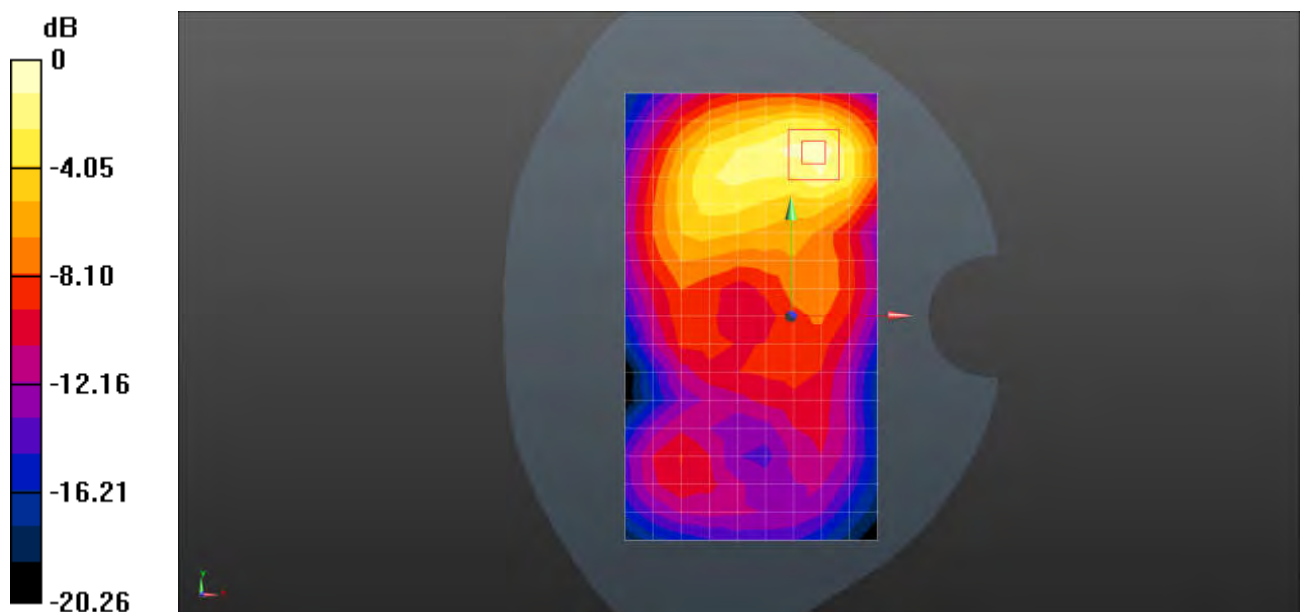

0 dB = 0.862 W/kg = -0.64 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n7 40M QPSK 216RB0 507000CH Right Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.914$  S/m;  $\epsilon_r = 37.729$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (11x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.17 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.086 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.321 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

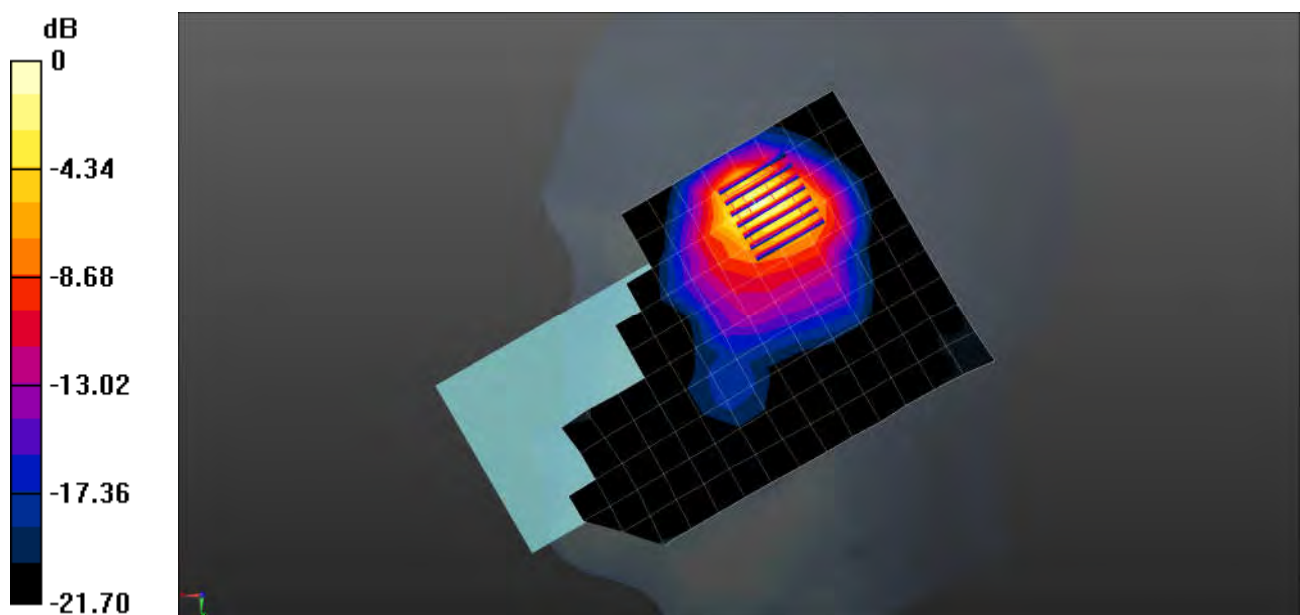

0 dB = 1.37 W/kg = 1.37 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n41 100M QPSK 135RB69 518598CH Right Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.869 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.718 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.319 W/kg**

Maximum value of SAR (measured) = 1.33 W/kg

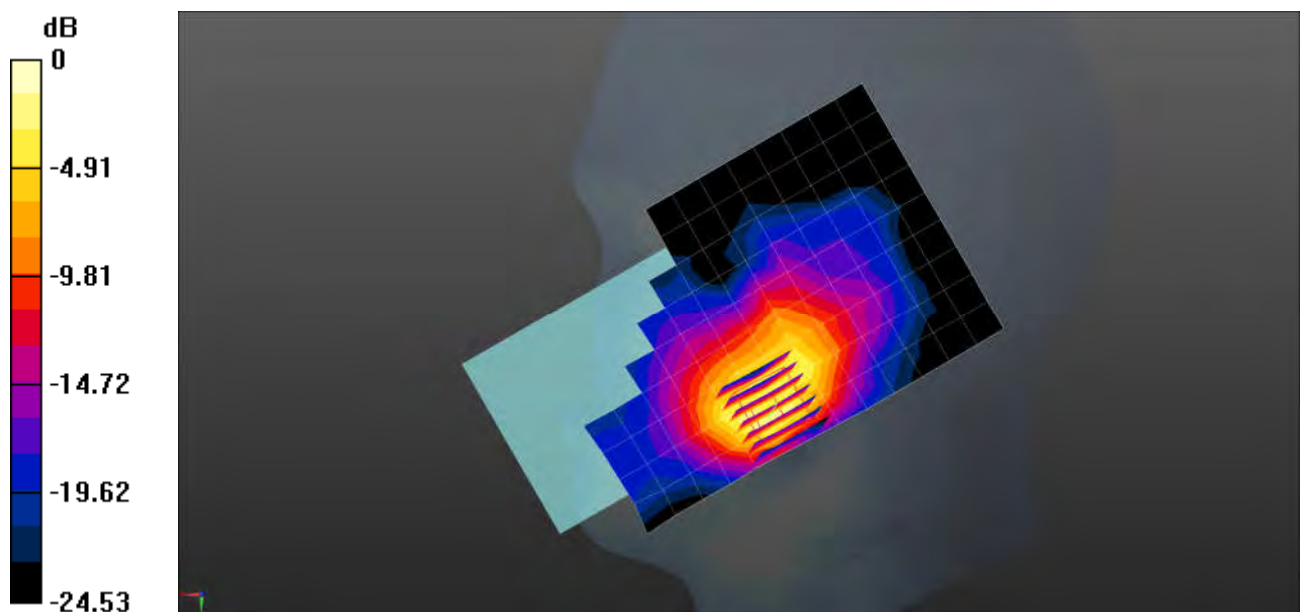

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n41 100M QPSK 1RB1 518598CH Right Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.842 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.03 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.296 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

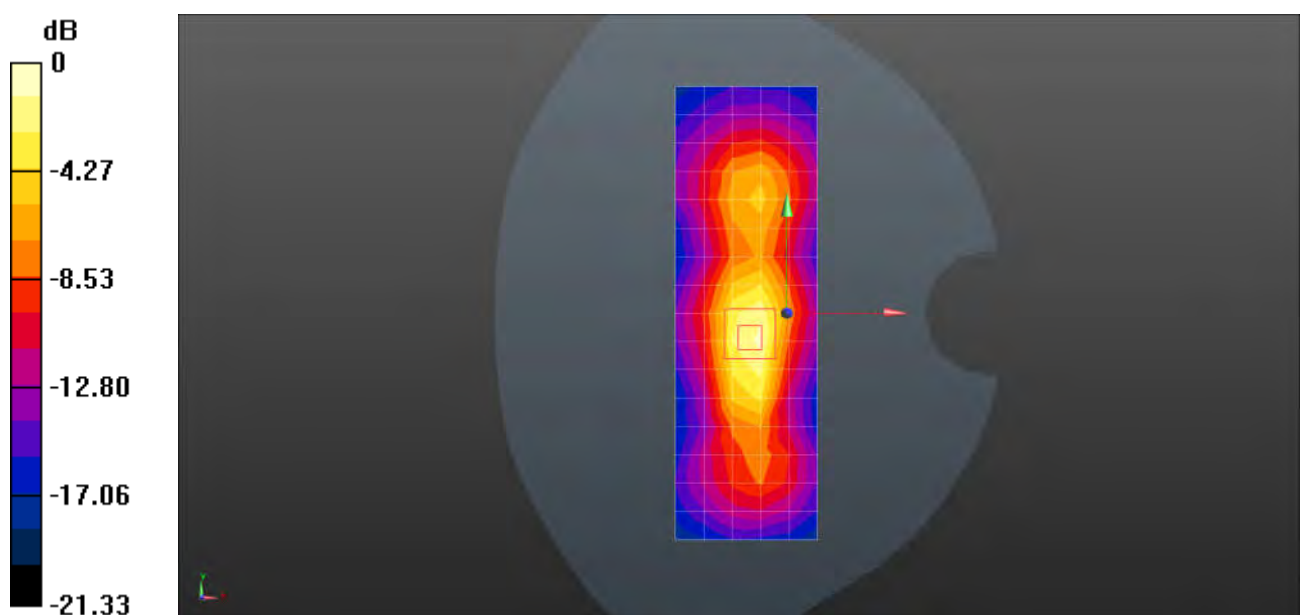

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n41 100M QPSK 135RB69 518598CH Right Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 2.27 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.16 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 7.51 W/kg

**SAR(1 g) = 2.28 W/kg; SAR(10 g) = 0.806 W/kg**

Maximum value of SAR (measured) = 5.27 W/kg

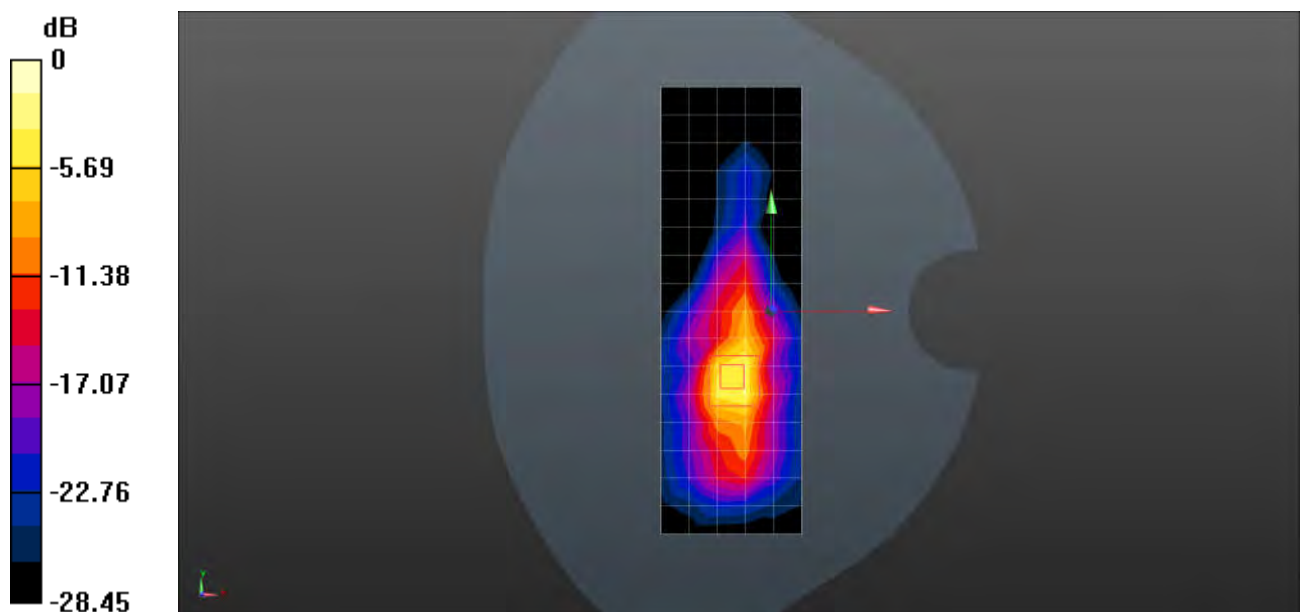

0 dB = 5.27 W/kg = 7.22 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n41 100M QPSK 1RB1 518598CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.503$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.71, 7.71, 7.71); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.596 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.232 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.792 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.209 W/kg**

Maximum value of SAR (measured) = 0.648 W/kg

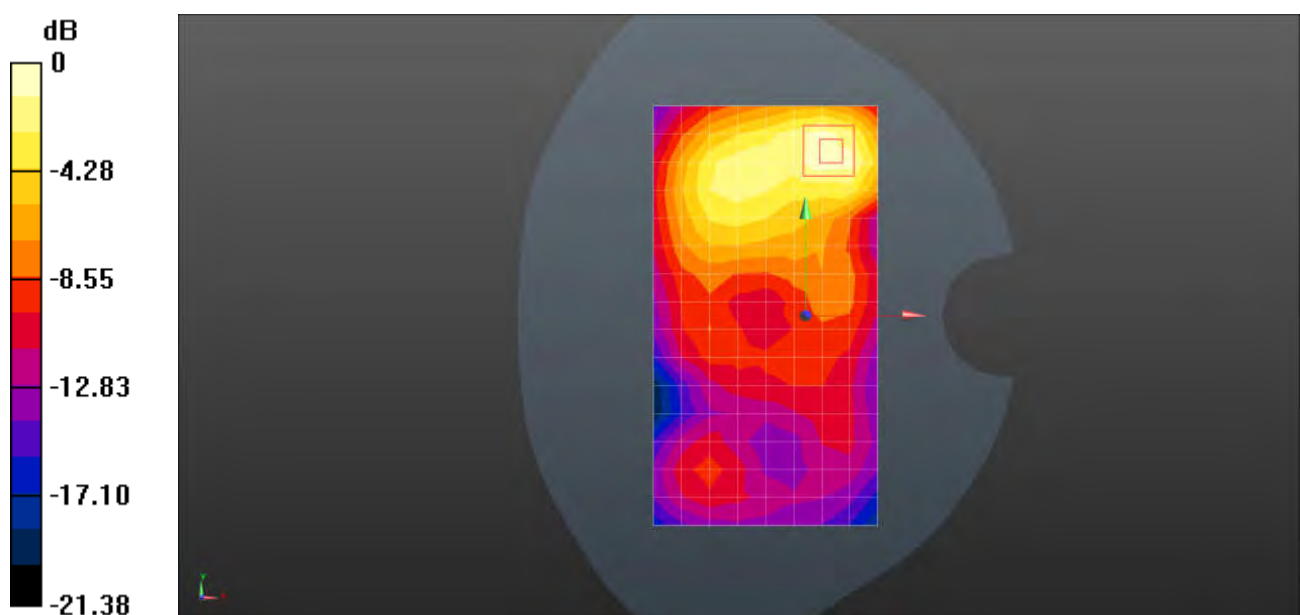

0 dB = 0.648 W/kg = -1.88 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n66 40M QPSK 1RB1 349000CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.714 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.88 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.822 W/kg

**SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.707 W/kg

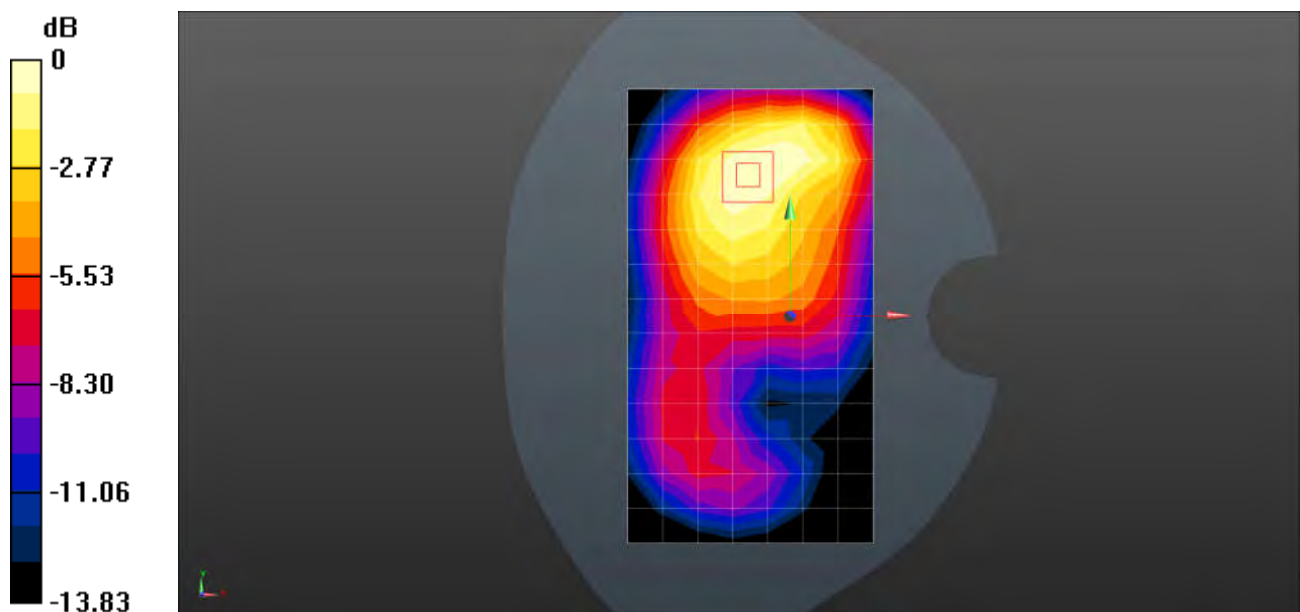

0 dB = 0.707 W/kg = -1.51 dBW/kg

Test Laboratory: SGS-SAR Lab

**23122PCD1G 5G NR n66 40M QPSK 1RB1 349000CH Bottom Side 10mm**

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.794 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.39 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.336 W/kg**

Maximum value of SAR (measured) = 0.956 W/kg

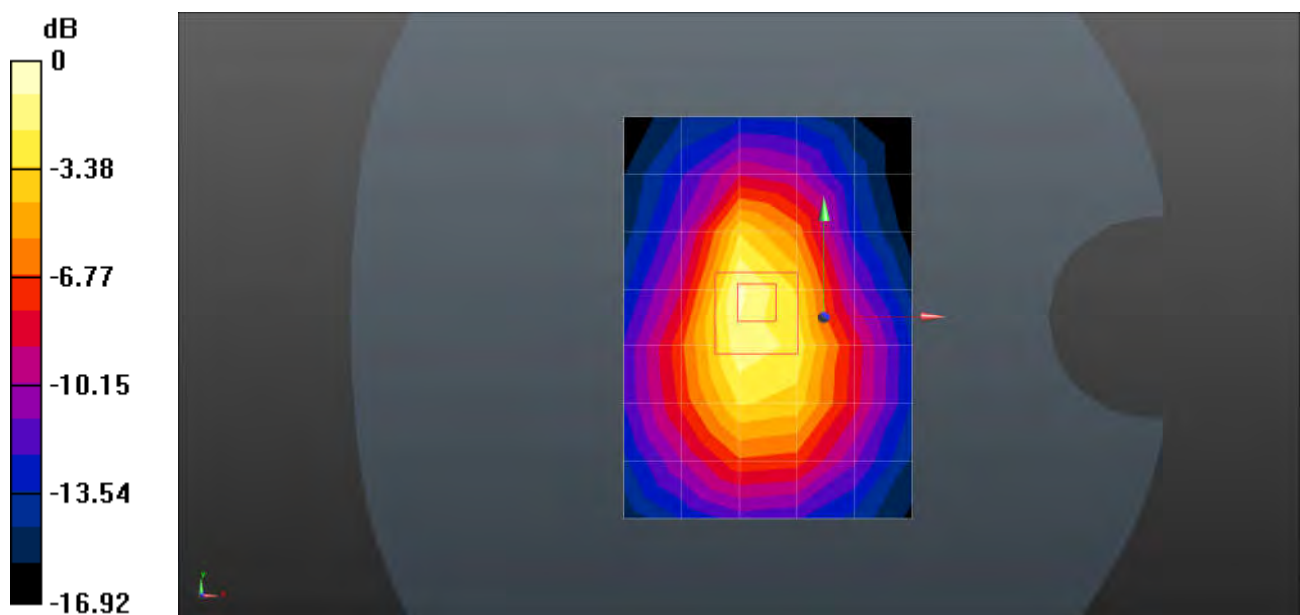

0 dB = 0.956 W/kg = -0.20 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n66 40M QPSK 216RB0 349000CH Right Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.65, 7.65, 7.65); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.34 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.08 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.393 W/kg**

Maximum value of SAR (measured) = 1.24 W/kg

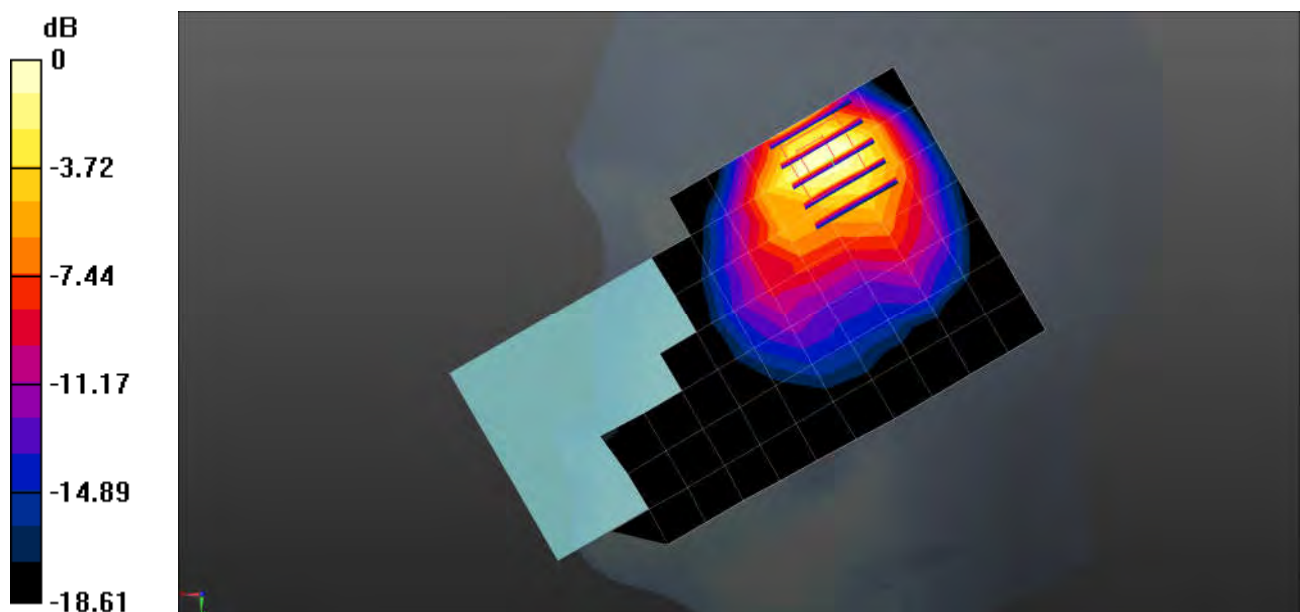

Test Laboratory: SGS-SAR Lab

**23122PCD1G 5G NR n77 100M QPSK 135RB69 633334CH Left Side 10mm**

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used:  $f = 3500$  MHz;  $\sigma = 3.017$  S/m;  $\epsilon_r = 38.133$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.51, 6.51, 6.51); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x20x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.02 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.244 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

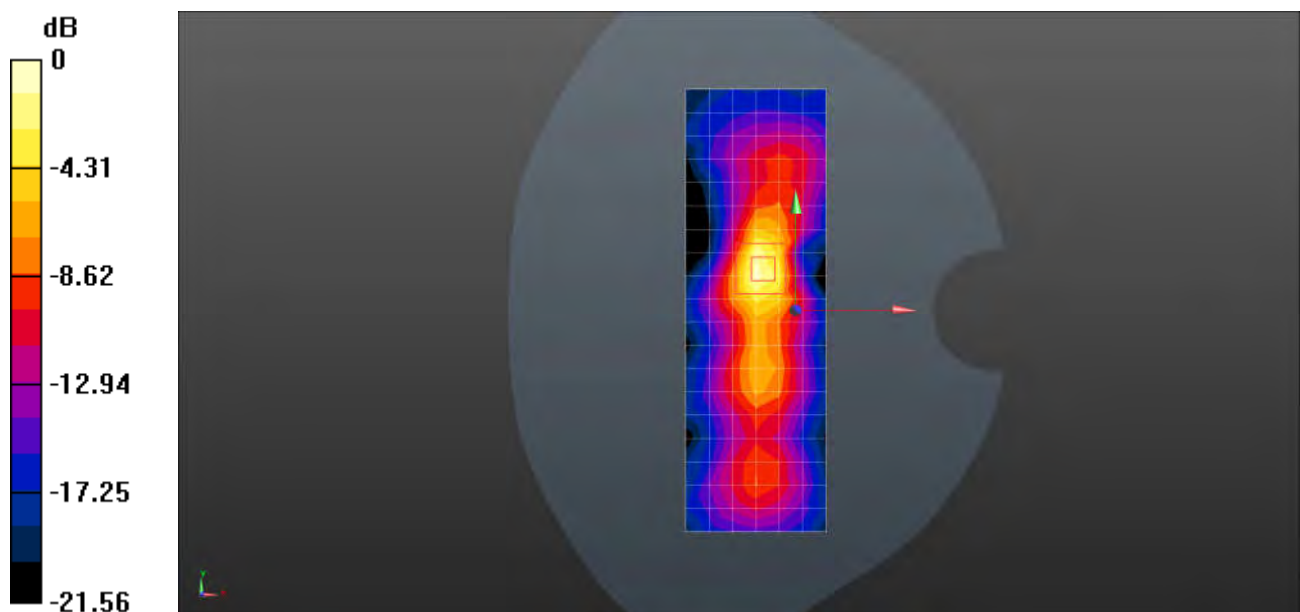

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Laboratory: SGS-SAR Lab

**23122PCD1G 5G NR n77 100M QPSK 1RB1 633334CH Back Side 15mm**

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used:  $f = 3500$  MHz;  $\sigma = 3.017$  S/m;  $\epsilon_r = 38.133$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.51, 6.51, 6.51); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.700 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.897 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.935 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.739 W/kg

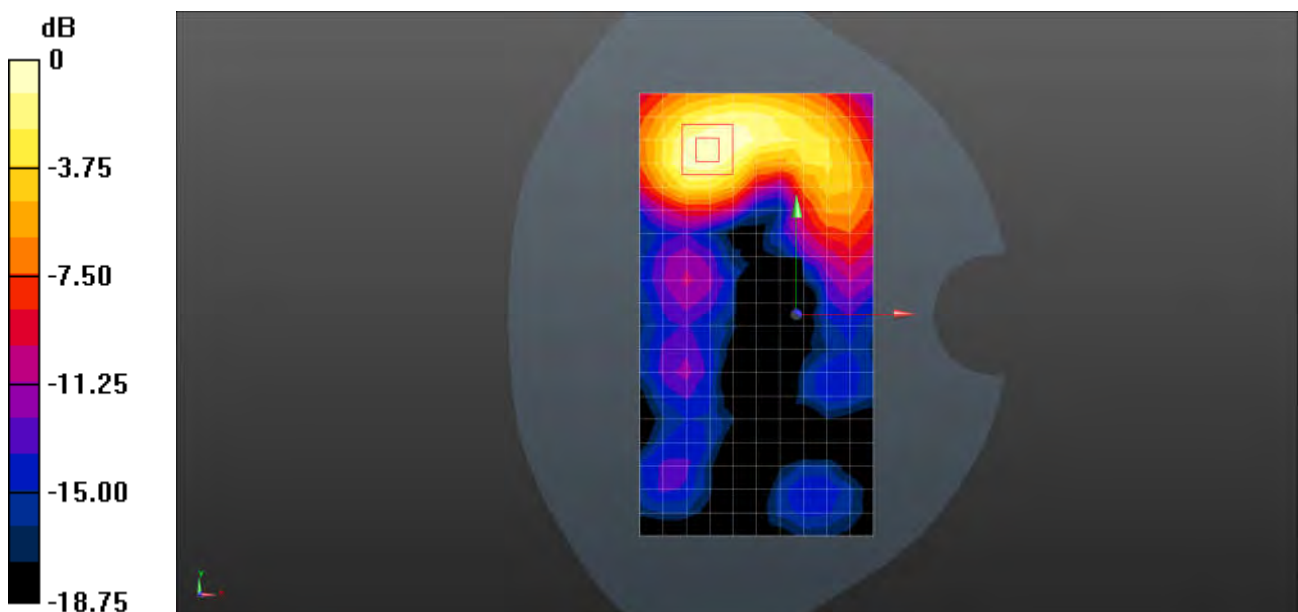

0 dB = 0.739 W/kg = -1.31 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G 5G NR n77 100M QPSK 1RB1 633334CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used:  $f = 3500$  MHz;  $\sigma = 3.017$  S/m;  $\epsilon_r = 38.133$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.51, 6.51, 6.51); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (12x19x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.867 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.199 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.193 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

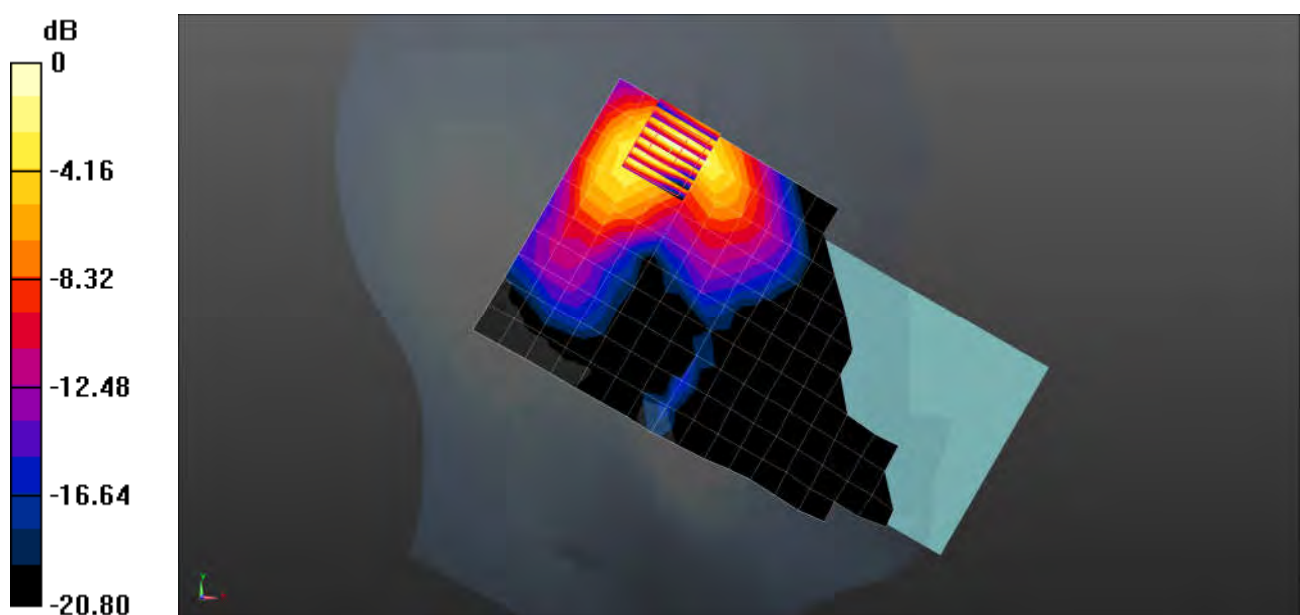

0 dB = 1.01 W/kg = 0.04 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n77 100M QPSK 1RB1 656000CH Left Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.394$  S/m;  $\epsilon_r = 37.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.2, 6.2, 6.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.685 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.231 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.816 W/kg

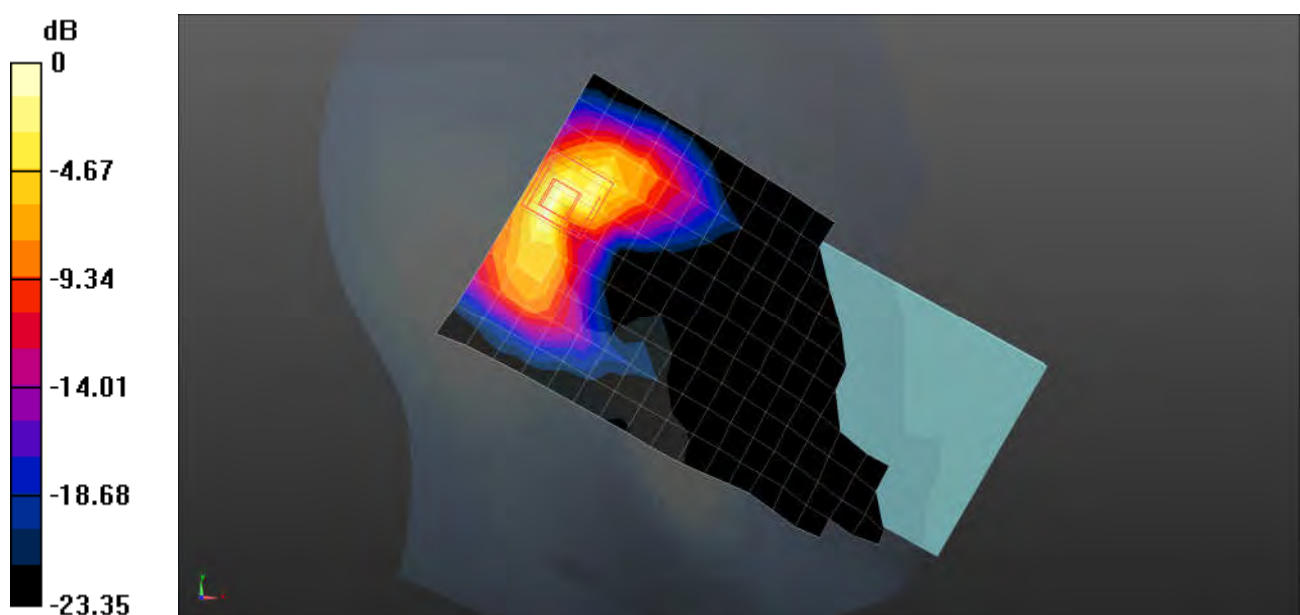

0 dB = 0.816 W/kg = -0.88 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n77 100M QPSK 1RB1 656000CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.394$  S/m;  $\epsilon_r = 37.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.2, 6.2, 6.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.661 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.678 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.926 W/kg

**SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.191 W/kg**

Maximum value of SAR (measured) = 0.698 W/kg

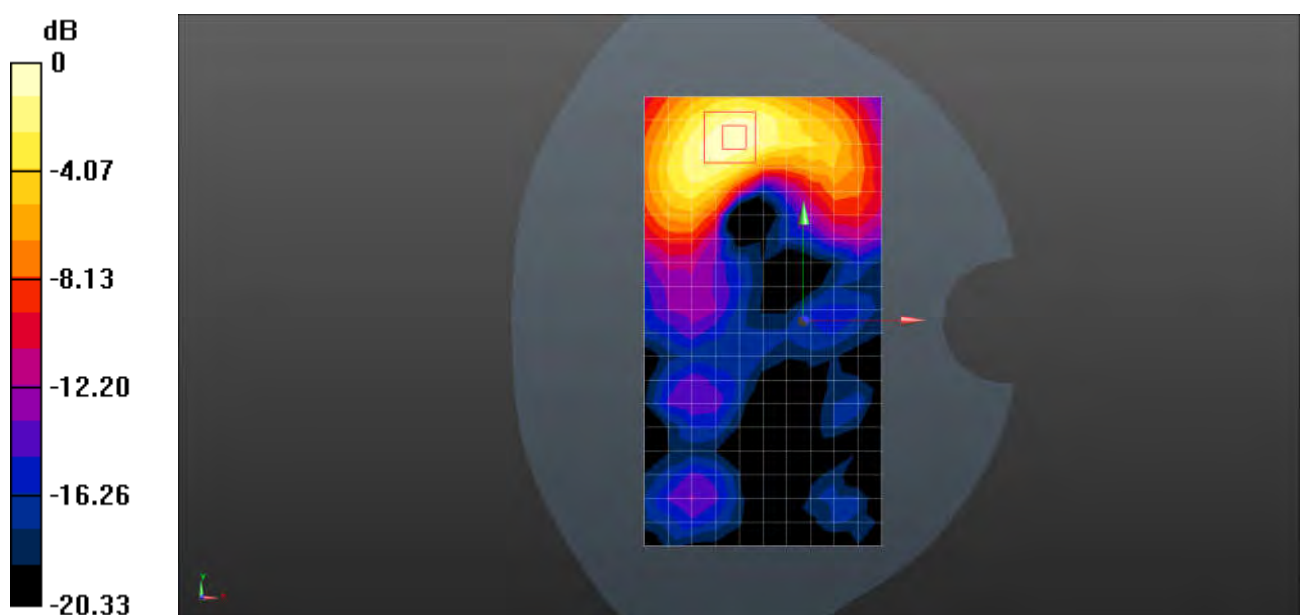



Test Laboratory: SGS-SAR Lab

## 23122PCD1G 5G NR n77 100M QPSK 1RB1 656000CH Right Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060019723**

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.394$  S/m;  $\epsilon_r = 37.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.2, 6.2, 6.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.425 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.747 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.678 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.497 W/kg

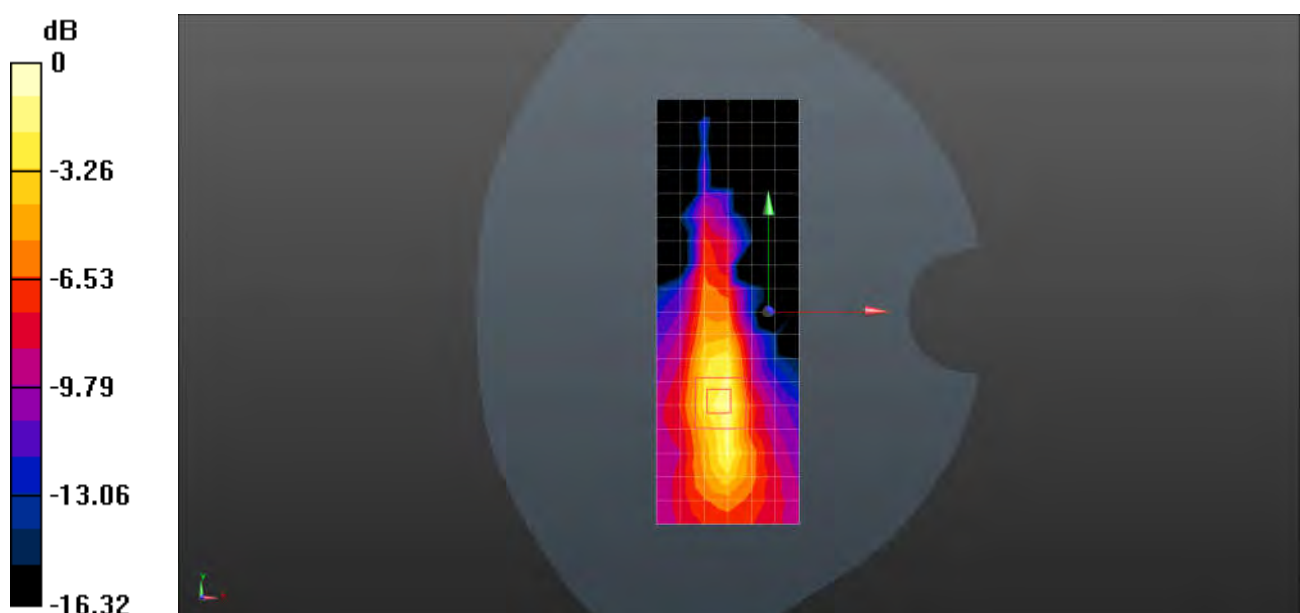

0 dB = 0.497 W/kg = -3.04 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI2.4G 802.11b 6CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.012

Medium: HSL2450;Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.759$  S/m;  $\epsilon_r = 40.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.33 W/kg


**Configuration/Body/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.56 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.381 W/kg**

Maximum value of SAR (measured) = 1.49 W/kg

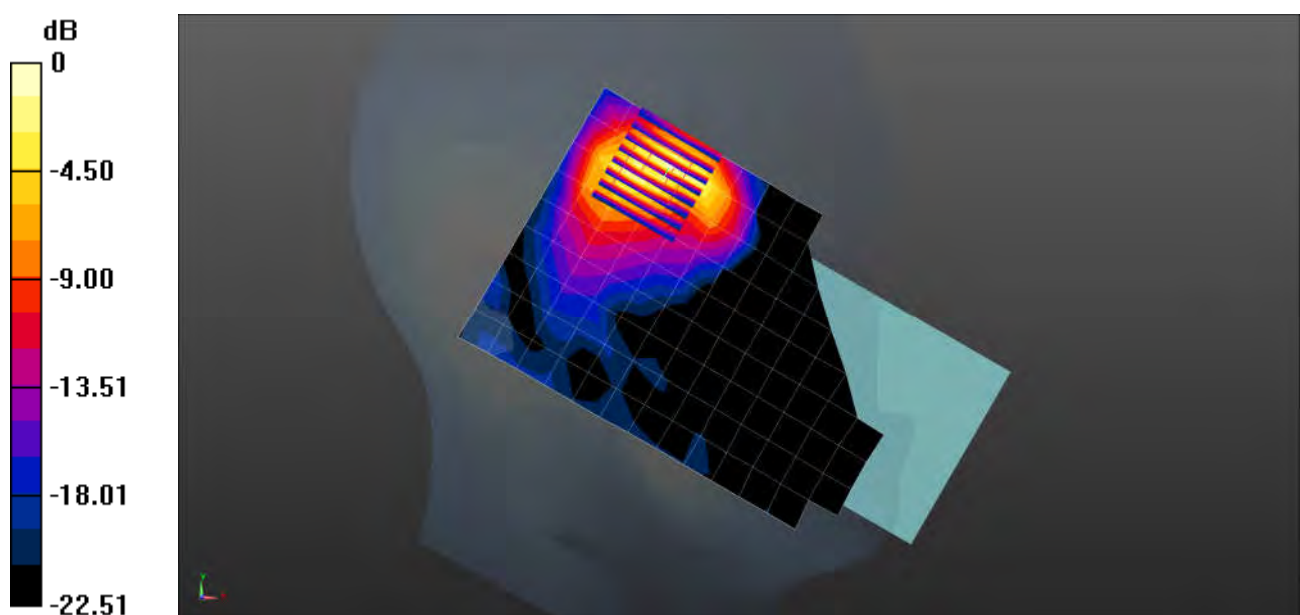

0 dB = 1.49 W/kg = 1.73 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI2.4G 802.11b 6CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.012

Medium: HSL2450;Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.759$  S/m;  $\epsilon_r = 40.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.332 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.632 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.401 W/kg

**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.333 W/kg

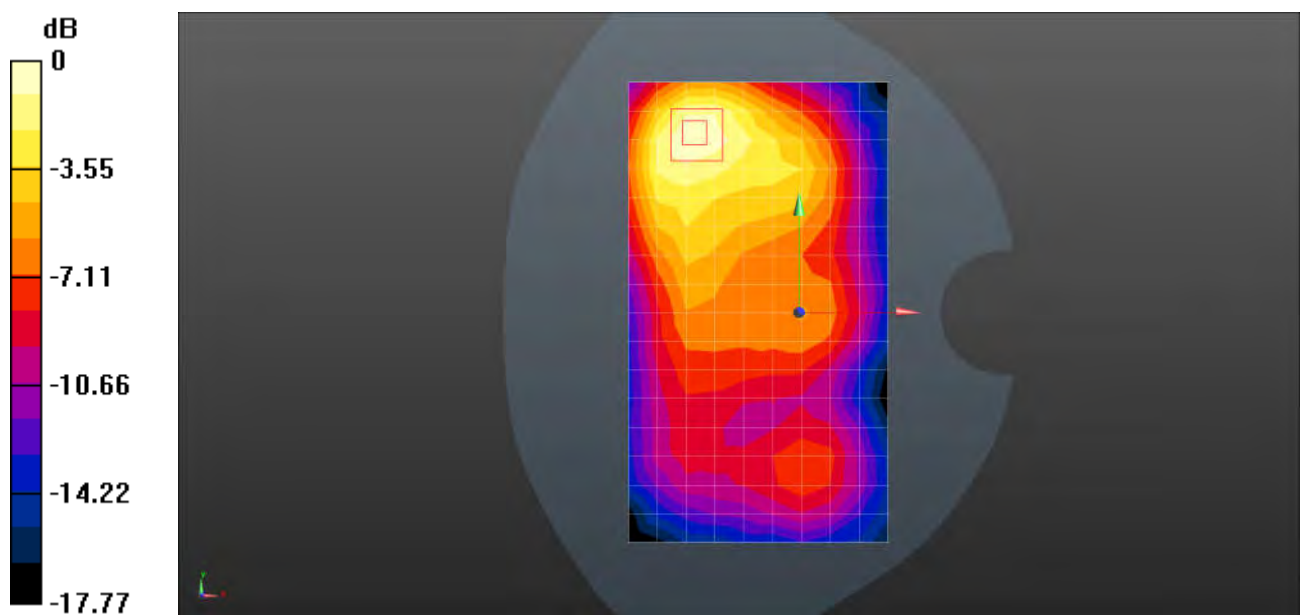

0 dB = 0.333 W/kg = -4.78 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI2.4G 802.11b 6CH Right Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.012

Medium: HSL2450;Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.759$  S/m;  $\epsilon_r = 40.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (6x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.747 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.181 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.939 W/kg

**SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.213 W/kg**

Maximum value of SAR (measured) = 0.767 W/kg

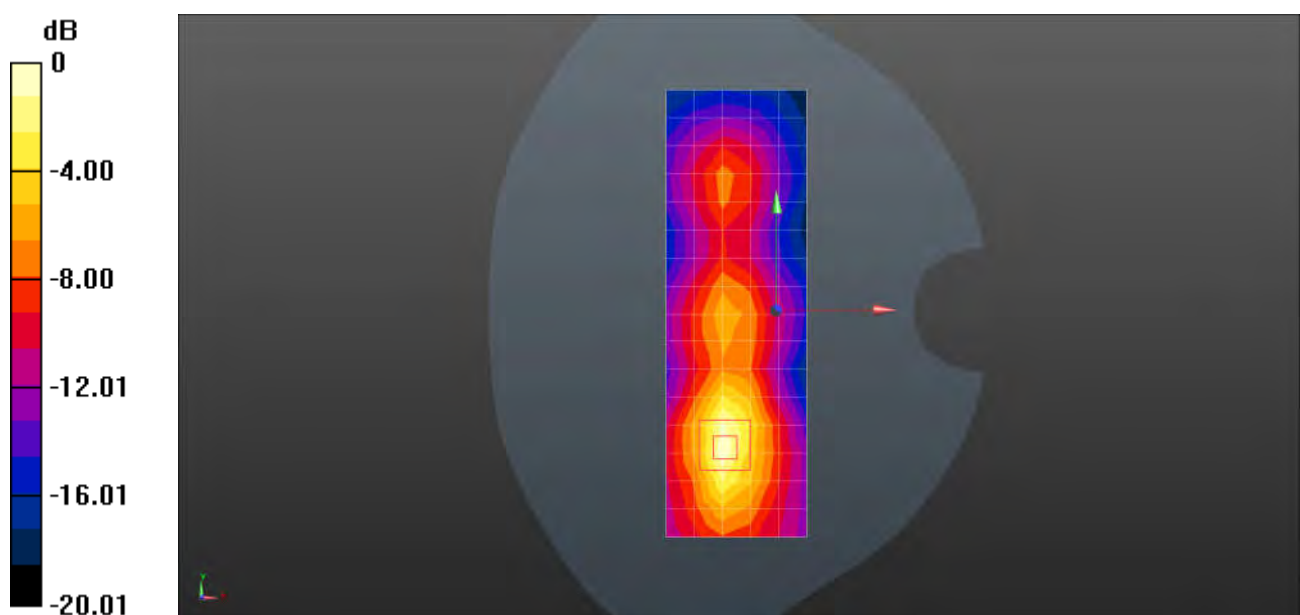

0 dB = 0.767 W/kg = -1.15 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 64CH Left Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.742$  S/m;  $\epsilon_r = 35.748$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.474 W/kg


**Configuration/Body/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.401 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.738 W/kg

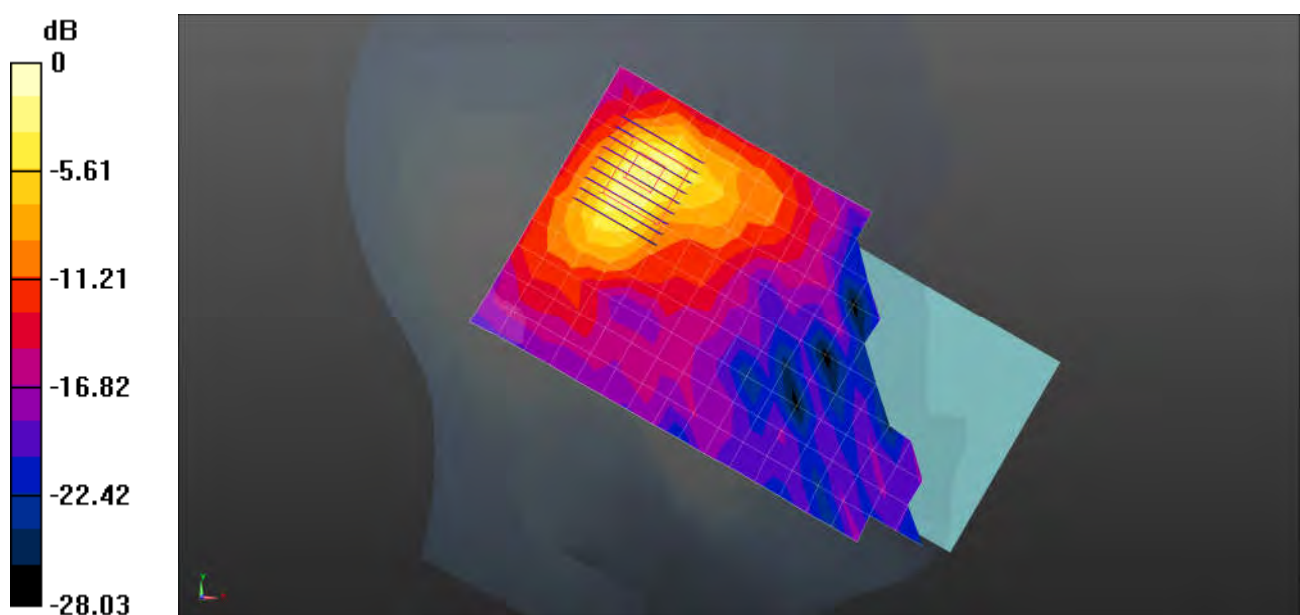

0 dB = 0.738 W/kg = -1.32 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 140CH Left Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.042$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.15, 5.15, 5.15); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.564 W/kg



**Configuration/Body/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.846 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.756 W/kg

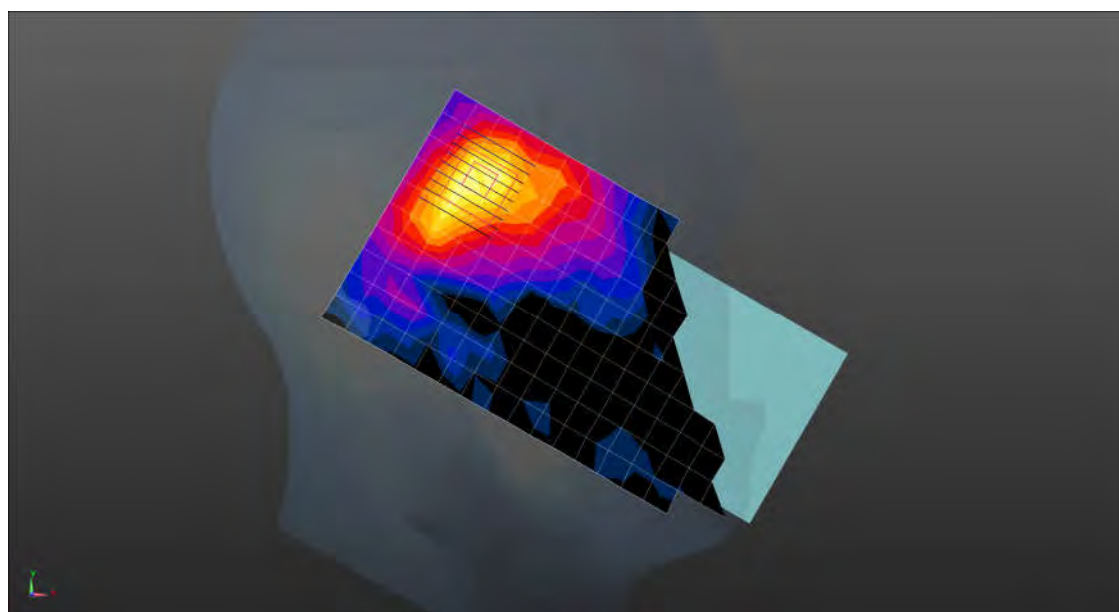

0 dB = 0.756 W/kg = -1.21 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 165CH Left Tilted

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.391$  S/m;  $\epsilon_r = 34.787$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.15, 5.15, 5.15); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (11x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.05 W/kg


**Configuration/Body/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.171 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.30 W/kg

**SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

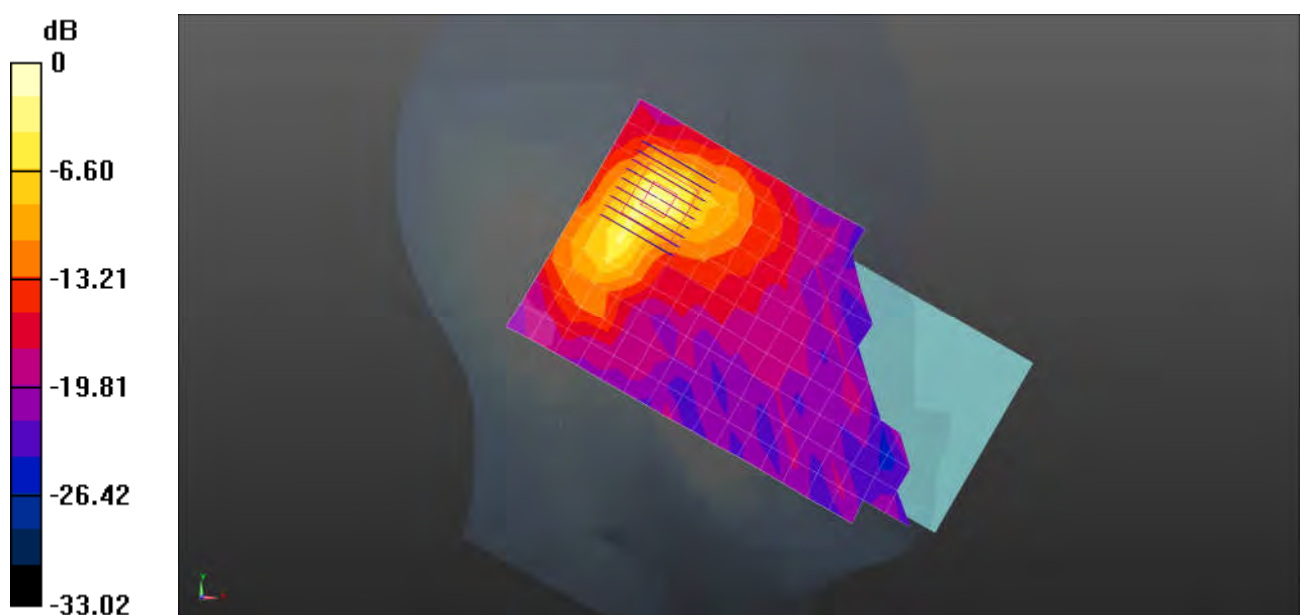

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G WIFI5G 802.11a 52CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5260 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.655$  S/m;  $\epsilon_r = 35.854$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (12x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.323 W/kg


**Configuration/Body/Zoom Scan (10x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.223 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.476 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

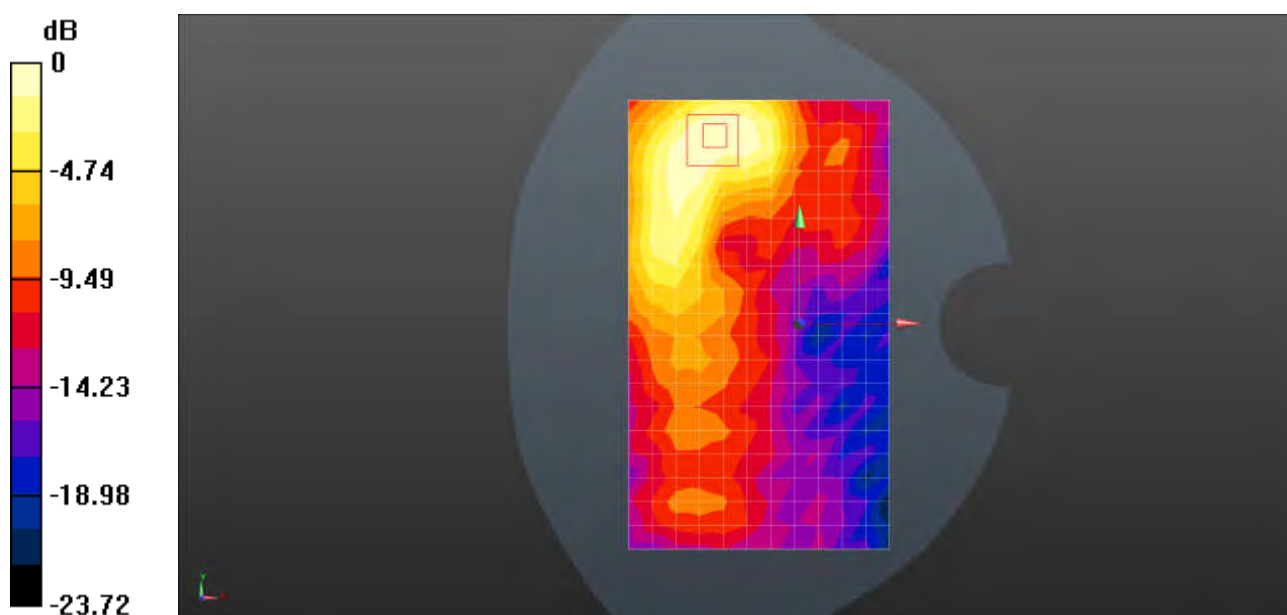

0 dB = 0.326 W/kg = -4.87 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G WIFI5G 802.11a 140CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz; Duty Cycle: 1:1.019

Medium: HSL5G; Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.042$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.15, 5.15, 5.15); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (12x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.409 W/kg


**Configuration/Body/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.686 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.657 W/kg

**SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.429 W/kg

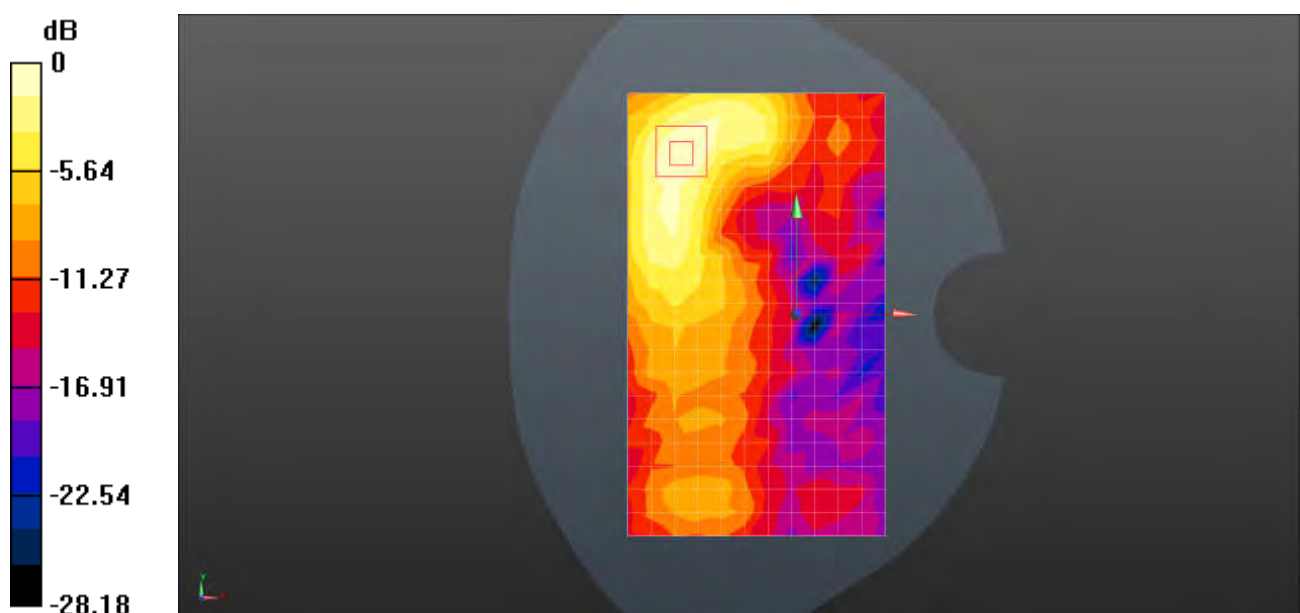

0 dB = 0.429 W/kg = -3.68 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 149CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5745 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.3$  S/m;  $\epsilon_r = 34.866$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.15, 5.15, 5.15); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (12x20x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.467 W/kg


**Configuration/Body/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.023 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.481 W/kg

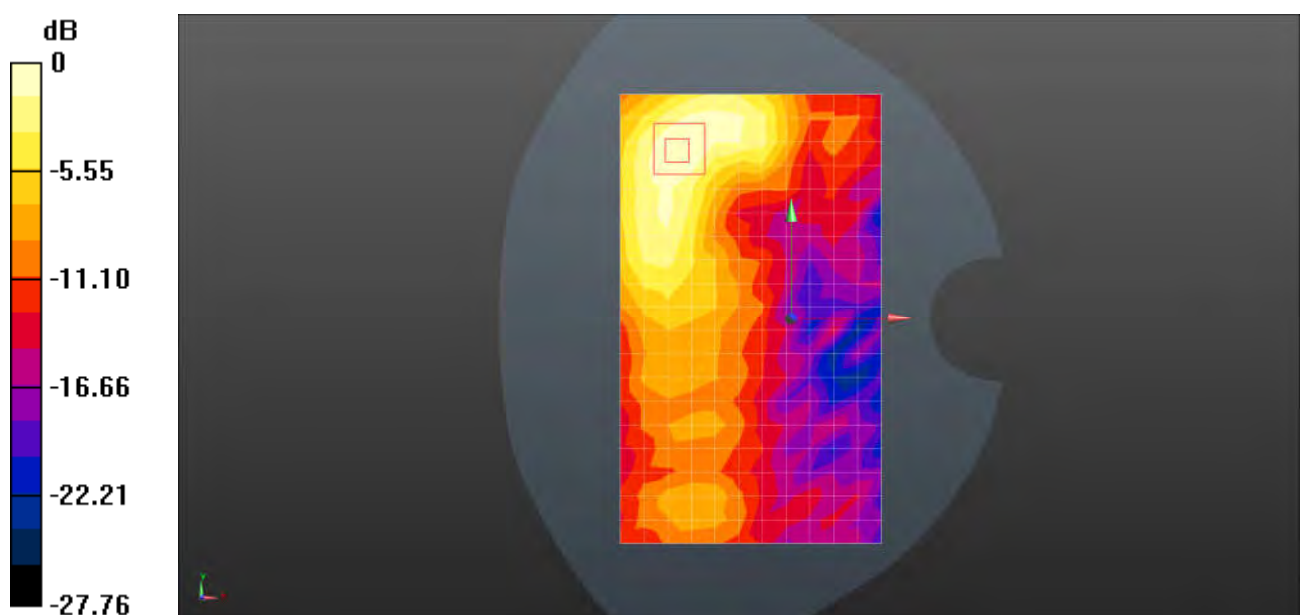

0 dB = 0.481 W/kg = -3.18 dBW/kg

Test Laboratory: SGS-SAR Lab

### 23122PCD1G WIFI5G 802.11a 40CH Top Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.588$  S/m;  $\epsilon_r = 36.042$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.783 W/kg


**Configuration/Body/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.543 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.144 W/kg**

Maximum value of SAR (measured) = 0.783 W/kg

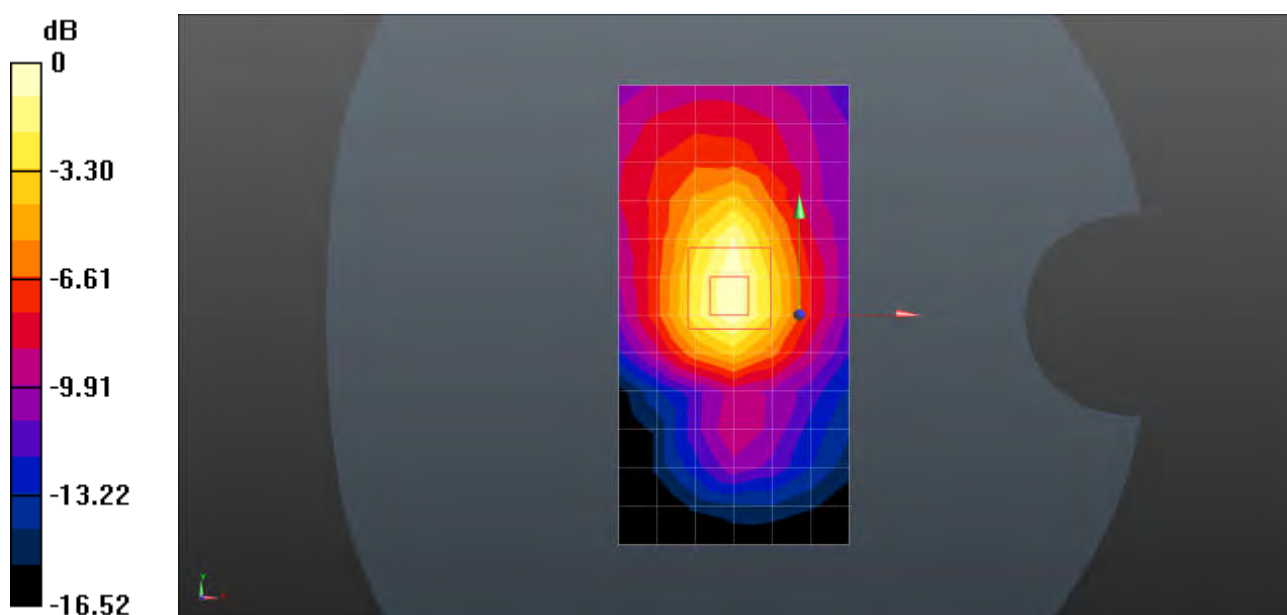

0 dB = 0.783 W/kg = -1.06 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 165CH Top Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.391$  S/m;  $\epsilon_r = 34.787$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.15, 5.15, 5.15); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


**Configuration/Body/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.24 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

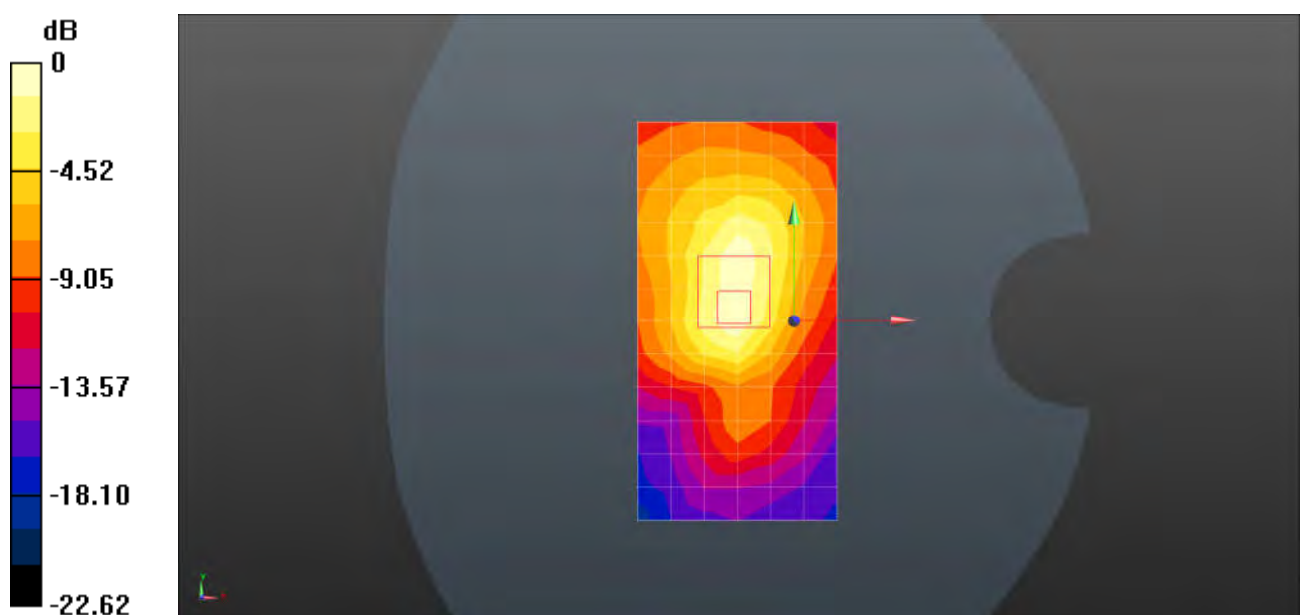

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 52CH Right Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5260 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.655$  S/m;  $\epsilon_r = 35.854$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.65, 5.65, 5.65); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.2 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.994 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 24.9 W/kg

**SAR(1 g) = 4.05 W/kg; SAR(10 g) = 0.944 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg

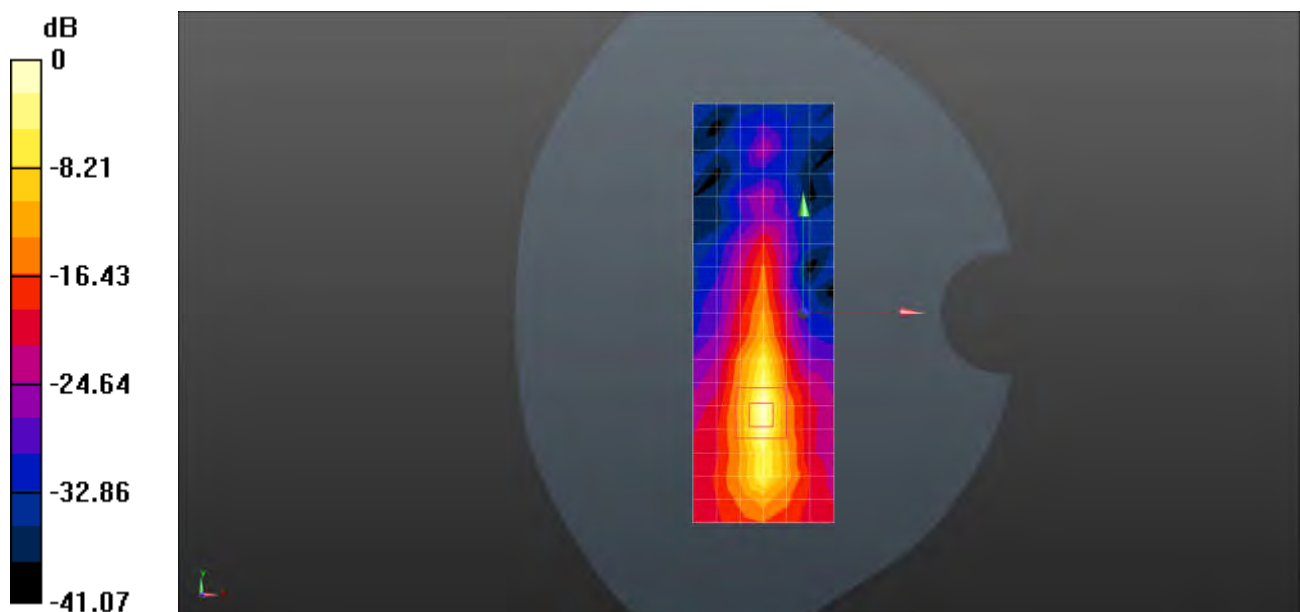

0 dB = 13.2 W/kg = 11.21 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G WIFI5G 802.11a 140CH Top Side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz;Duty Cycle: 1:1.019

Medium: HSL5G;Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.042$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(4.43, 4.43, 4.43); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.5 W/kg


**Configuration/Body/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 29.70 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.1 W/kg

**SAR(1 g) = 4.54 W/kg; SAR(10 g) = 1.13 W/kg**

Maximum value of SAR (measured) = 14.7 W/kg

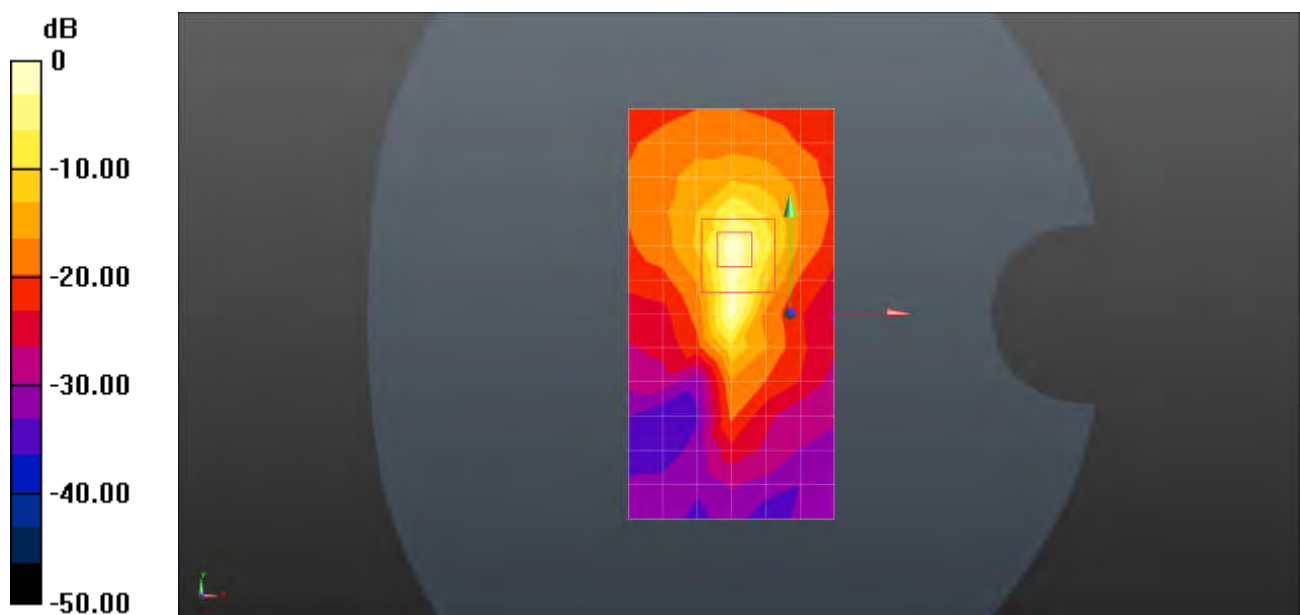

0 dB = 14.7 W/kg = 11.67 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G Bluetooth DH5 39CH Left Cheek

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298

Medium: HSL2450; Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 40.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.117 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.701 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

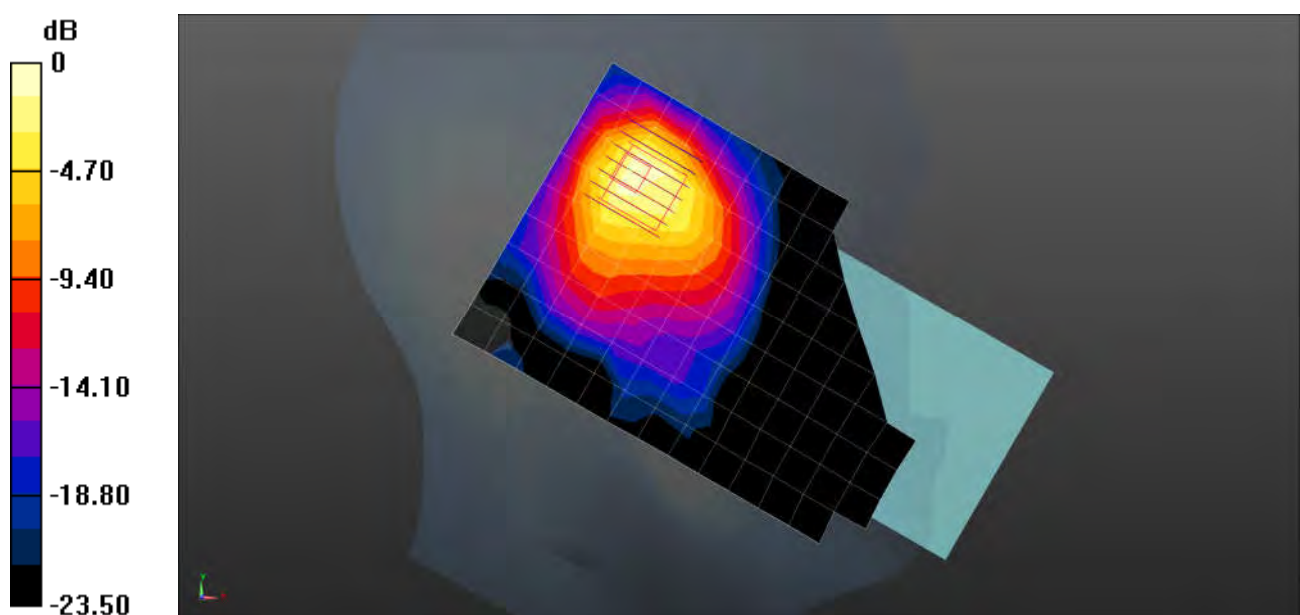

0 dB = 0.138 W/kg = -8.60 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G Bluetooth DH5 39CH Back Side 15mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298

Medium: HSL2450; Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 40.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.0299 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.557 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0400 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0331 W/kg

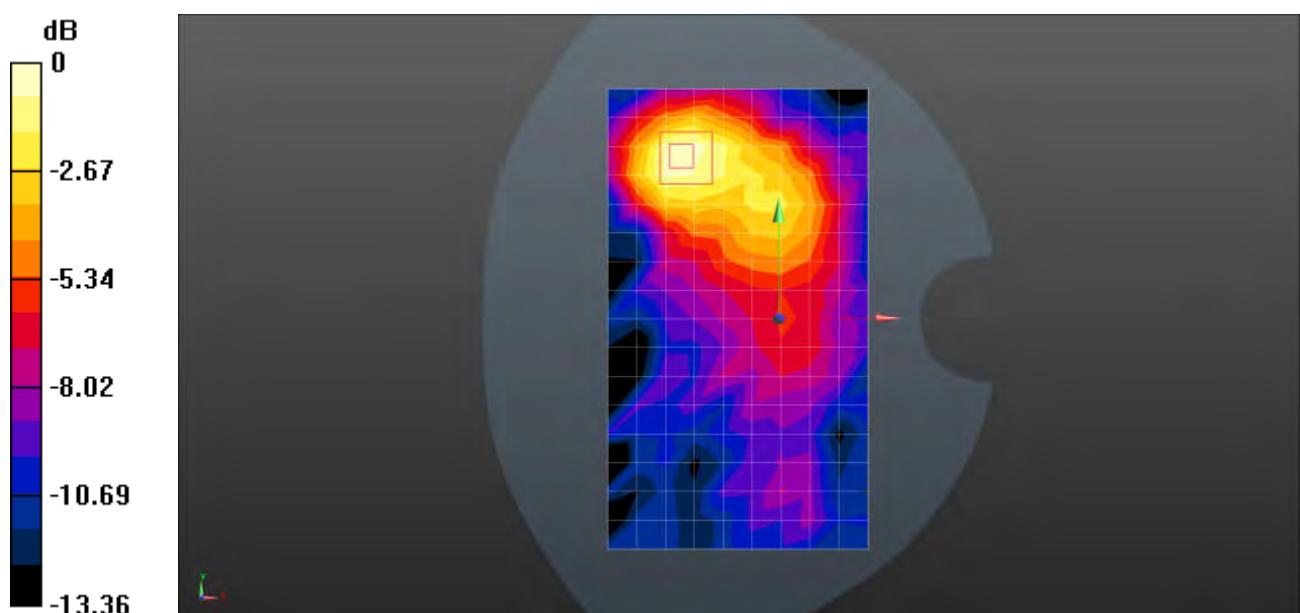

0 dB = 0.0331 W/kg = -14.80 dBW/kg



Test Laboratory: SGS-SAR Lab

### 23122PCD1G Bluetooth DH5 39CH Back Side 10mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298

Medium: HSL2450; Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.763$  S/m;  $\epsilon_r = 40.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.9, 7.9, 7.9); Calibrated: 2023-01-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.119 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.708 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

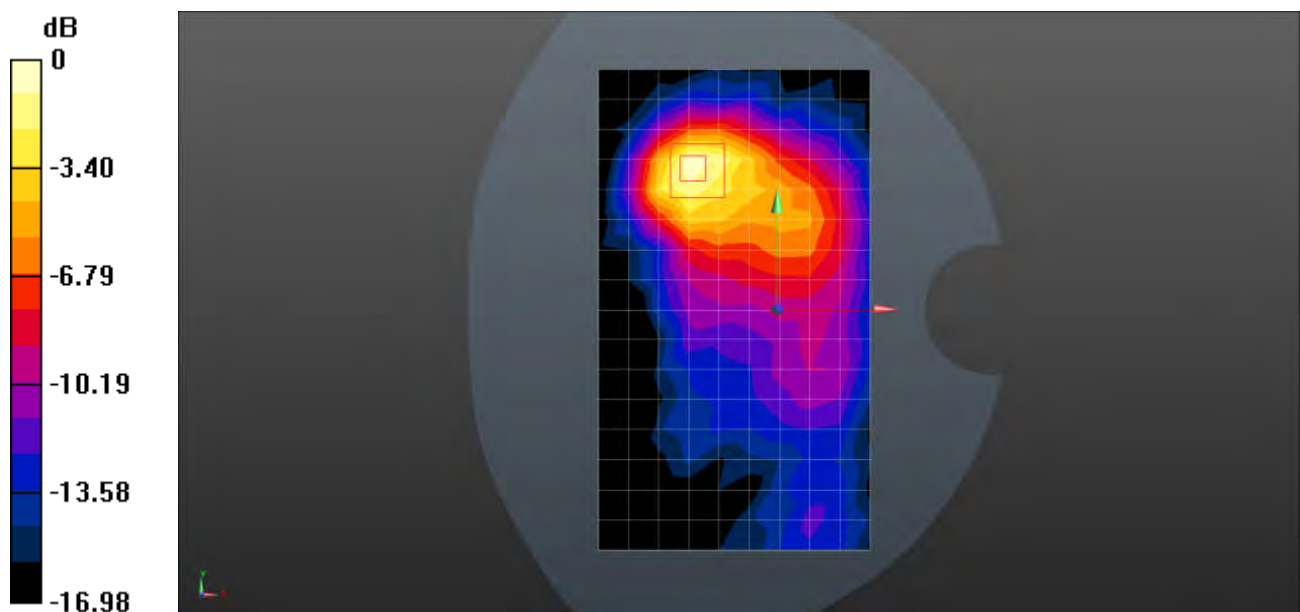

0 dB = 0.135 W/kg = -8.70 dBW/kg

Test Laboratory: SGS-SAR Lab

## 23122PCD1G NFC 13.56MHz Back side 0mm

**DUT: 23122PCD1G; Type: Mobile Phone; Serial: 867837060041743**

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL\_13; Medium parameters used:  $f = 14$  MHz;  $\sigma = 0.749$  S/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(15.3, 15.3, 15.3); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAR 8-2; Type: EL4; Serial: TP:1143
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Configuration/Head/Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.051 W/kg


**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.735 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.126 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.009 W/kg**

Maximum value of SAR (measured) = 0.075 W/kg

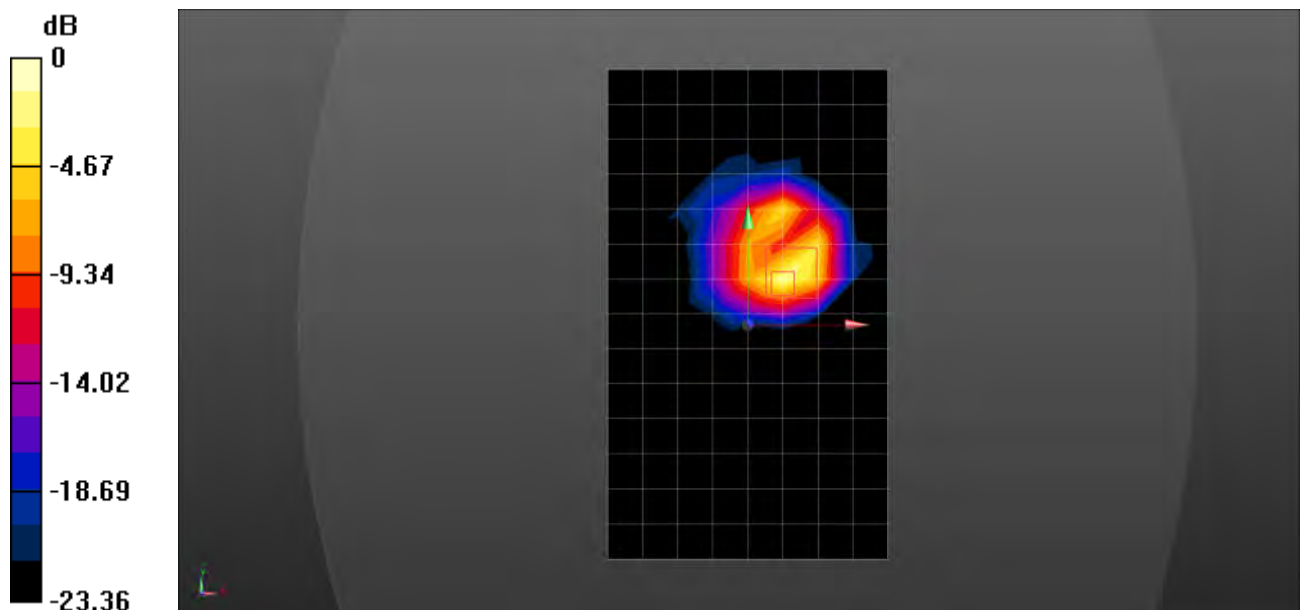

0 dB = 0.075 W/kg = -11.25 dBW/kg