


Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5720MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

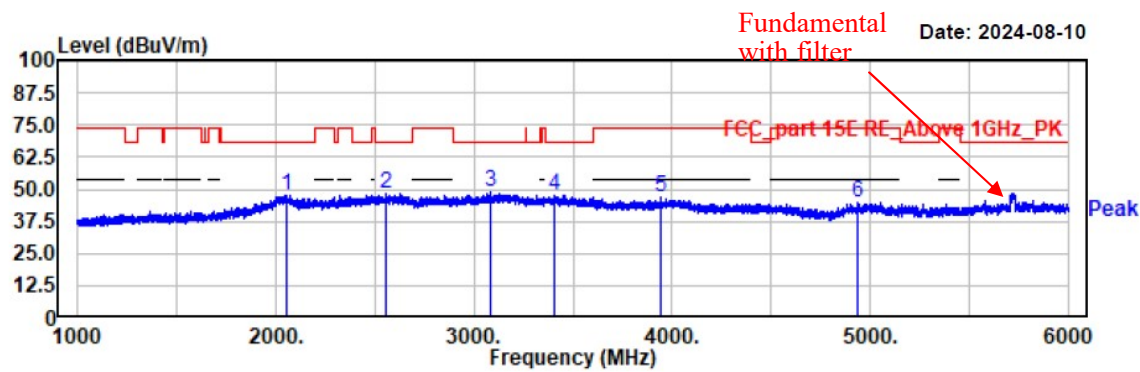


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2054.50	43.89	3.96	47.85	68.20	20.35	vertical	Peak
2559.50	42.50	6.05	48.55	68.20	19.65	vertical	Peak
3081.50	43.08	5.90	48.98	68.20	19.22	vertical	Peak
3405.00	42.38	5.47	47.85	68.20	20.35	vertical	Peak
3947.00	42.34	4.73	47.07	74.00	26.93	vertical	Peak
4940.50	41.30	3.72	45.02	74.00	28.98	vertical	Peak

B4

Project No.: 2407W89602E-RF
Test Mode: 802.11ac 5745MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

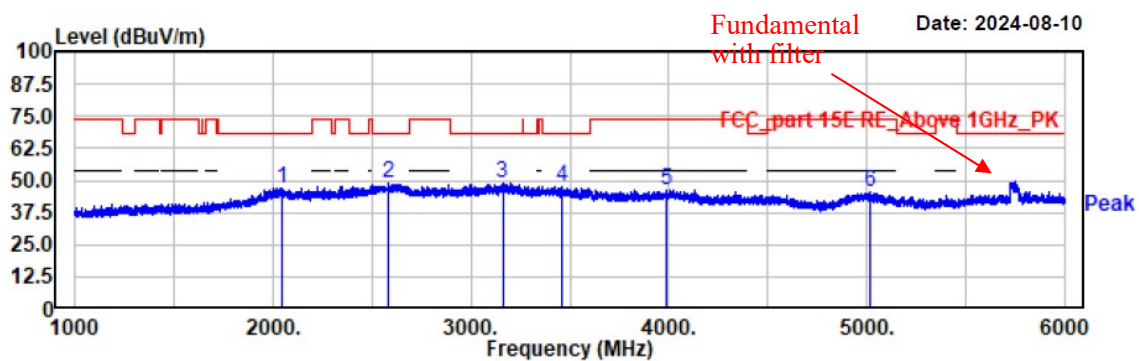

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2047.00	43.06	4.01	47.07	68.20	21.13	horizontal	Peak
2581.50	42.83	6.13	48.96	68.20	19.24	horizontal	Peak
3160.00	42.63	6.18	48.81	68.20	19.39	horizontal	Peak
3463.50	42.36	5.25	47.61	68.20	20.59	horizontal	Peak
3992.00	41.70	4.65	46.35	74.00	27.65	horizontal	Peak
5019.00	41.57	3.96	45.53	74.00	28.47	horizontal	Peak

Project No.: 2407W89602E-RF
Test Mode: 802.11ac 5745MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

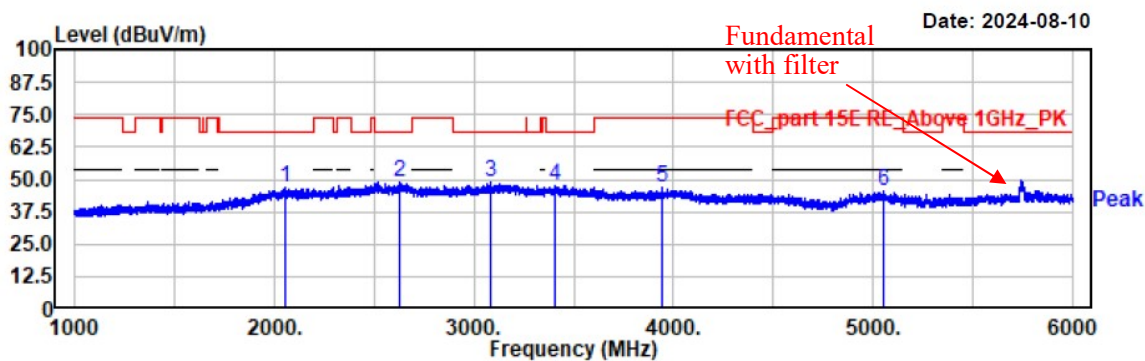

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2054.50	42.89	3.96	46.85	68.20	21.35	vertical	Peak
2628.50	43.01	6.14	49.15	68.20	19.05	vertical	Peak
3081.50	43.08	5.90	48.98	68.20	19.22	vertical	Peak
3405.00	42.38	5.47	47.85	68.20	20.35	vertical	Peak
3947.00	42.34	4.73	47.07	74.00	26.93	vertical	Peak
5051.00	41.64	3.93	45.57	74.00	28.43	vertical	Peak

Project No.: 2407W89602E-RF
Test Mode: 802.11ac 5785MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

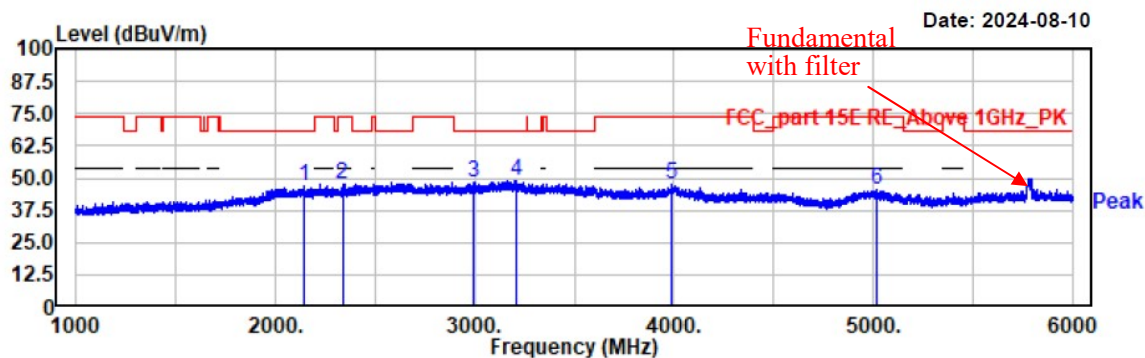

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2142.00	43.63	3.08	46.71	68.20	21.49	horizontal	Peak
2336.50	43.85	3.69	47.54	74.00	26.46	horizontal	Peak
2991.50	43.26	5.17	48.43	68.20	19.77	horizontal	Peak
3206.50	42.95	6.08	49.03	68.20	19.17	horizontal	Peak
3992.00	42.70	4.65	47.35	74.00	26.65	horizontal	Peak
5019.00	41.57	3.96	45.53	74.00	28.47	horizontal	Peak

Project No.: 2407W89602E-RF
Test Mode: 802.11ac 5785MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

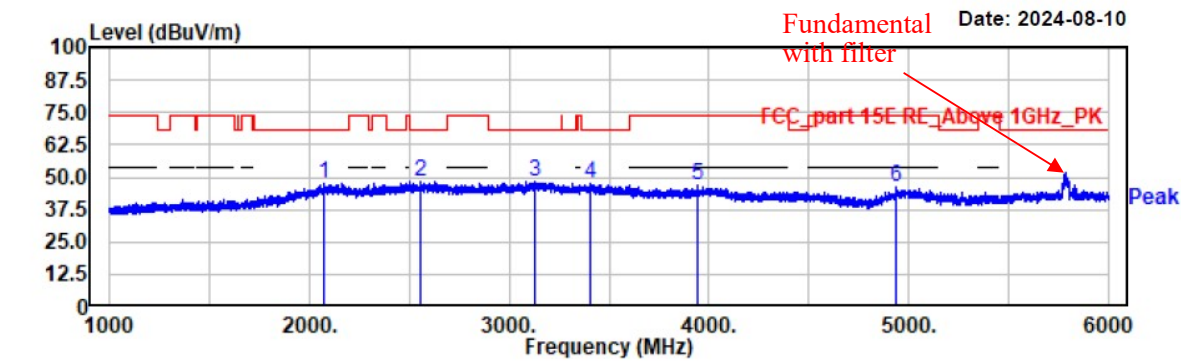

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2076.00	43.72	3.57	47.29	68.20	20.91	vertical	Peak
2559.50	42.50	6.05	48.55	68.20	19.65	vertical	Peak
3132.50	41.95	6.16	48.11	68.20	20.09	vertical	Peak
3405.00	42.38	5.47	47.85	68.20	20.35	vertical	Peak
3947.00	42.34	4.73	47.07	74.00	26.93	vertical	Peak
4940.50	42.30	3.72	46.02	74.00	27.98	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5825MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

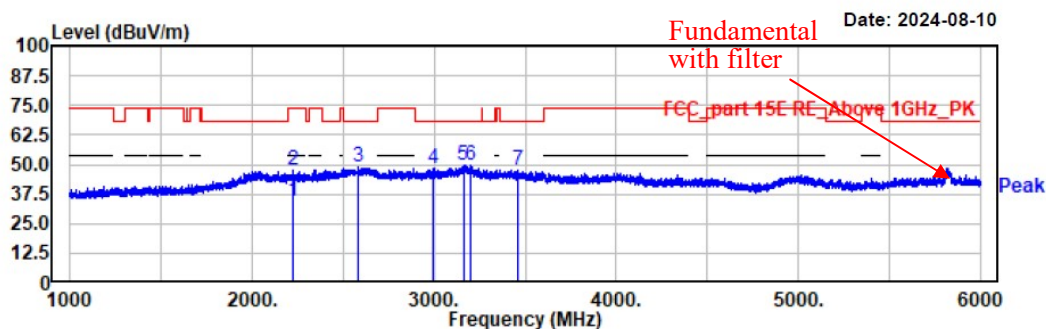

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2227.00	31.20	3.48	34.68	54.00	19.32	horizontal	Average
2227.00	43.80	3.48	47.28	74.00	26.72	horizontal	Peak
2581.50	42.83	6.13	48.96	68.20	19.24	horizontal	Peak
2991.50	43.26	5.17	48.43	68.20	19.77	horizontal	Peak
3160.00	43.63	6.18	49.81	68.20	18.39	horizontal	Peak
3198.50	43.56	6.19	49.75	68.20	18.45	horizontal	Peak
3463.50	42.36	5.25	47.61	68.20	20.59	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5825MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

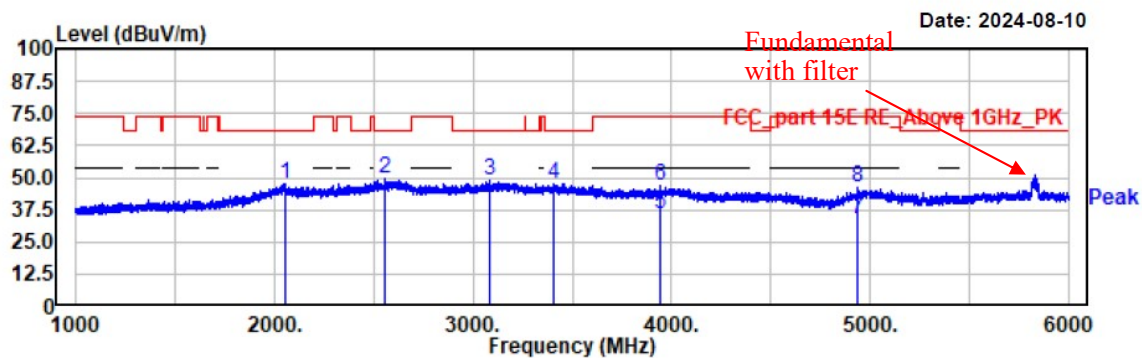

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2054.50	43.89	3.96	47.85	68.20	20.35	vertical	Peak
2559.50	43.50	6.05	49.55	68.20	18.65	vertical	Peak
3081.50	43.08	5.90	48.98	68.20	19.22	vertical	Peak
3405.00	42.38	5.47	47.85	68.20	20.35	vertical	Peak
3947.00	31.43	4.73	36.16	74.00	37.84	vertical	Average
3947.00	42.34	4.73	47.07	74.00	26.93	vertical	Peak
4940.50	30.17	3.72	33.89	74.00	40.11	vertical	Average
4940.50	42.30	3.72	46.02	74.00	27.98	vertical	Peak

3) 6GHz~18GHz

B1

Project No.: 2407W89602E-RF

Test Mode: 802.11a 5180MHz


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

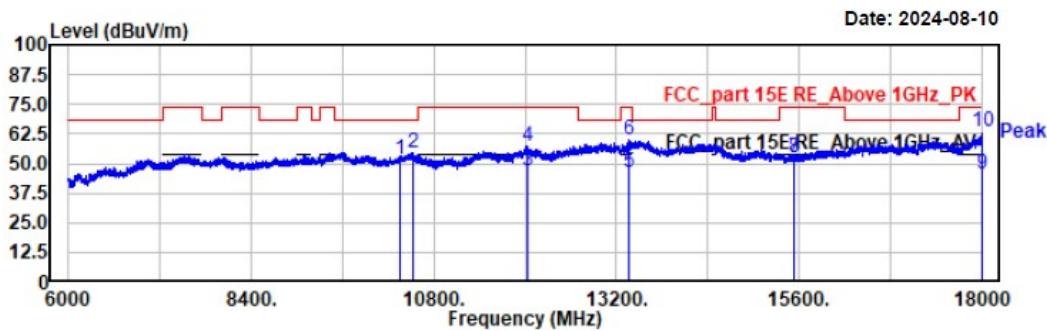

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	38.66	12.99	51.65	68.20	16.55	horizontal	Peak
10525.20	41.05	13.49	54.54	68.20	13.66	horizontal	Peak
12026.40	31.07	15.88	46.95	54.00	7.05	horizontal	Average
12026.40	41.42	15.88	57.30	74.00	16.70	horizontal	Peak
13358.40	28.43	17.95	46.38	54.00	7.62	horizontal	Average
13358.40	41.80	17.95	59.75	74.00	14.25	horizontal	Peak
15540.00	39.65	12.63	52.28	74.00	21.72	horizontal	Peak
15540.00	39.65	12.63	52.28	74.00	21.72	horizontal	Peak
18000.00	25.36	19.98	45.34	54.00	8.66	horizontal	Average
18000.00	43.67	19.98	63.65	74.00	10.35	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5180MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

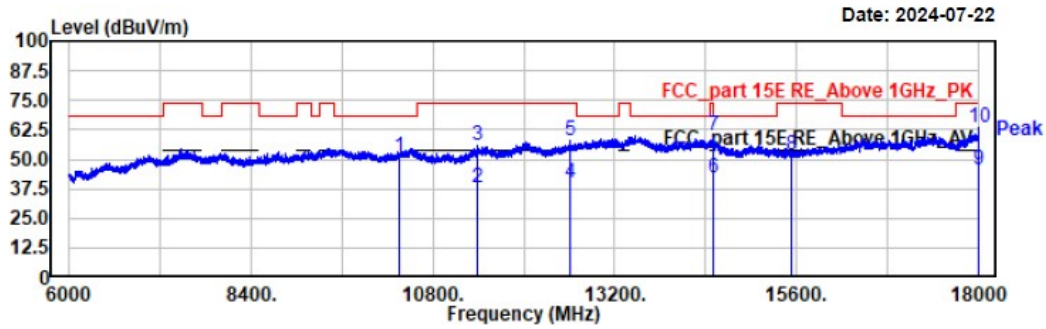

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	38.14	12.99	51.13	68.20	17.07	vertical	Peak
11394.00	23.75	14.11	37.86	54.00	16.14	vertical	Average
11394.00	41.79	14.11	55.90	74.00	18.10	vertical	Peak
12604.80	23.86	16.48	40.34	54.00	13.66	vertical	Average
12604.80	41.37	16.48	57.85	74.00	16.15	vertical	Peak
14496.00	25.32	16.74	42.06	54.00	11.94	vertical	Average
14496.00	43.01	16.74	59.75	74.00	14.25	vertical	Peak
15540.00	39.36	12.63	51.99	74.00	22.01	vertical	Peak
18000.00	25.42	19.98	45.40	54.00	8.60	vertical	Average
18000.00	43.46	19.98	63.44	74.00	10.56	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5200MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

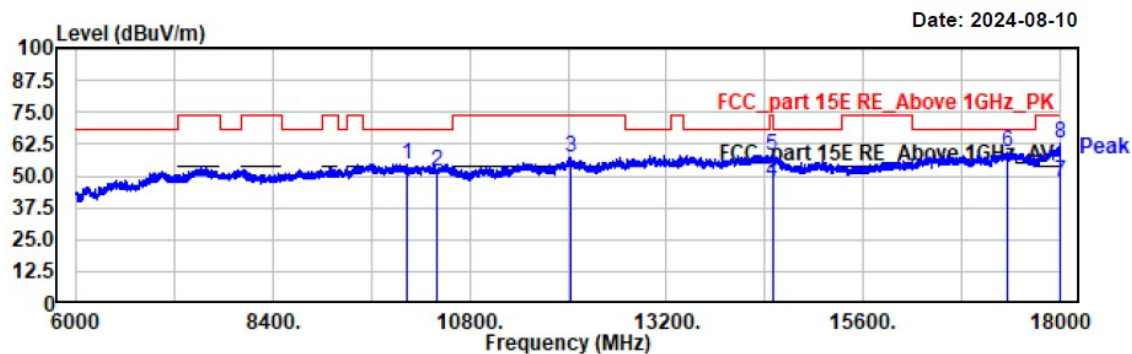

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10044.00	43.29	11.38	54.67	68.20	13.53	horizontal	Peak
10400.40	39.02	13.00	52.02	68.20	16.18	horizontal	Peak
12026.40	41.42	15.88	57.30	74.00	16.70	horizontal	Peak
14492.40	31.14	16.75	47.89	54.00	6.11	horizontal	Average
14492.40	41.51	16.75	58.26	74.00	15.74	horizontal	Peak
17349.60	41.32	17.84	59.16	68.20	9.04	horizontal	Peak
17997.60	27.51	19.96	47.47	54.00	6.53	horizontal	Average
17997.60	42.69	19.96	62.65	74.00	11.35	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5200MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

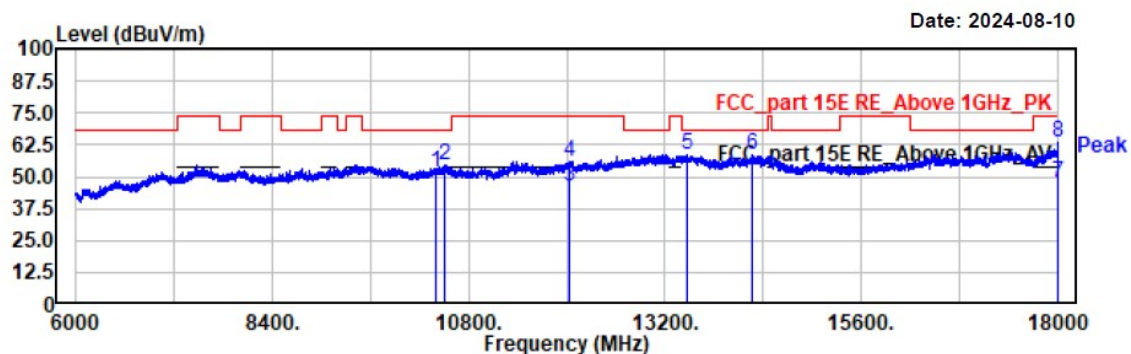

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	38.76	13.00	51.76	68.20	16.44	vertical	Peak
10507.20	41.07	13.59	54.66	68.20	13.54	vertical	Peak
12025.20	30.48	15.88	46.36	54.00	7.64	vertical	Average
12025.20	40.32	15.88	56.20	74.00	17.80	vertical	Peak
13480.80	40.37	18.33	58.70	68.20	9.50	vertical	Peak
14268.00	41.01	17.30	58.31	68.20	9.89	vertical	Peak
17996.40	27.59	19.96	47.55	54.00	6.45	vertical	Average
17996.40	43.31	19.96	63.27	74.00	10.73	vertical	Peak

Project No.: 2407W89604E-RF

Test Mode: 802.11a 5240MHz


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

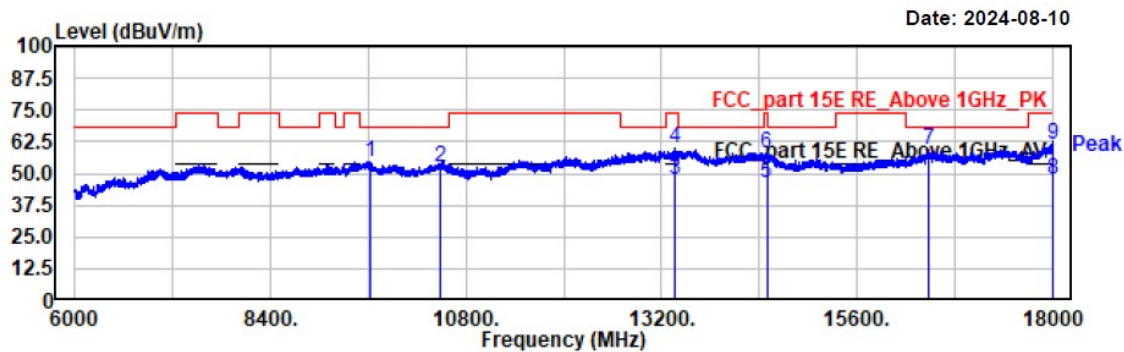

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
9619.20	40.52	13.75	54.27	68.20	13.93	horizontal	Peak
10479.60	39.14	13.51	52.65	68.20	15.55	horizontal	Peak
13358.40	29.93	17.95	47.88	54.00	6.12	horizontal	Average
13358.40	41.80	17.95	59.75	74.00	14.25	horizontal	Peak
14492.40	29.28	16.75	46.03	54.00	7.97	horizontal	Average
14492.40	41.51	16.75	58.26	74.00	15.74	horizontal	Peak
16477.20	43.49	15.50	58.99	68.20	9.21	horizontal	Peak
18000.00	27.48	19.96	47.44	54.00	6.56	horizontal	Average
18000.00	41.67	19.98	61.65	74.00	12.35	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5240MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

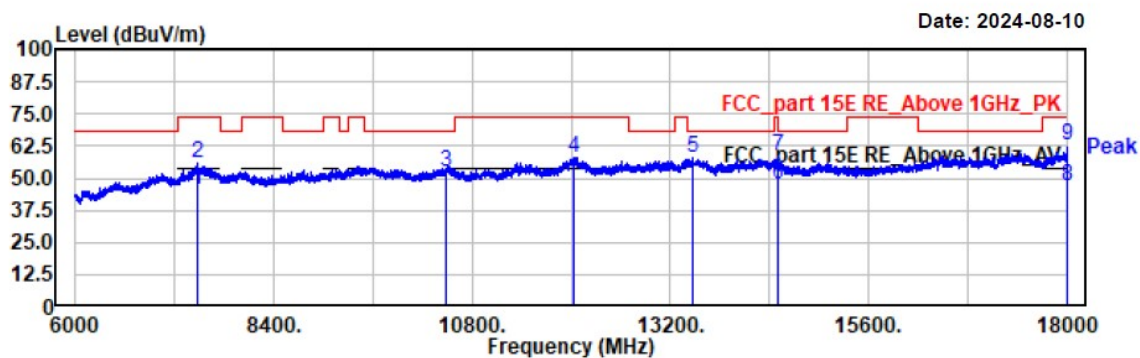


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
7478.40	33.65	12.04	45.69	54.00	8.31	vertical	Average
7478.40	43.64	12.04	55.68	74.00	18.32	vertical	Peak
10480.00	39.07	13.50	52.57	68.20	15.63	vertical	Peak
12025.20	42.32	15.88	58.20	74.00	15.80	vertical	Peak
13480.80	39.37	18.33	57.70	68.20	10.50	vertical	Peak
14496.00	31.07	16.74	47.81	54.00	6.19	vertical	Average
14496.00	42.01	16.74	58.75	74.00	15.25	vertical	Peak
18000.00	27.24	19.98	47.22	54.00	6.78	vertical	Average
18000.00	42.46	19.98	62.44	74.00	11.56	vertical	Peak

B2

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5260MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

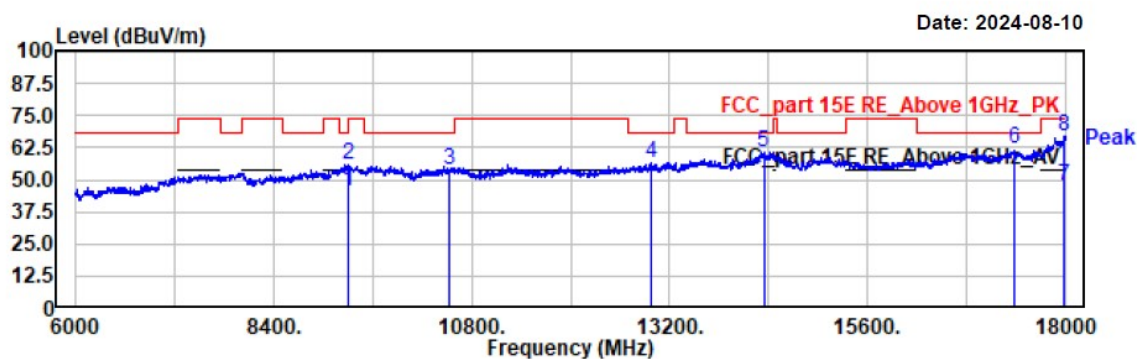

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
9302.80	578.33	-532.69	45.64	54.00	8.36	Horizontal	Average
9302.80	588.31	-532.69	55.62	74.00	18.38	Horizontal	Peak
10520.00	586.40	-532.38	54.02	68.20	14.18	Horizontal	Peak
12968.00	588.10	-531.84	56.26	68.20	11.94	Horizontal	Peak
14341.60	592.12	-531.18	60.94	68.20	7.26	Horizontal	Peak
17374.40	591.69	-529.89	61.80	68.20	6.40	Horizontal	Peak
17989.80	576.71	-529.39	47.32	54.00	6.68	Horizontal	Average
17989.80	596.48	-529.39	67.09	74.00	6.91	Horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5260MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

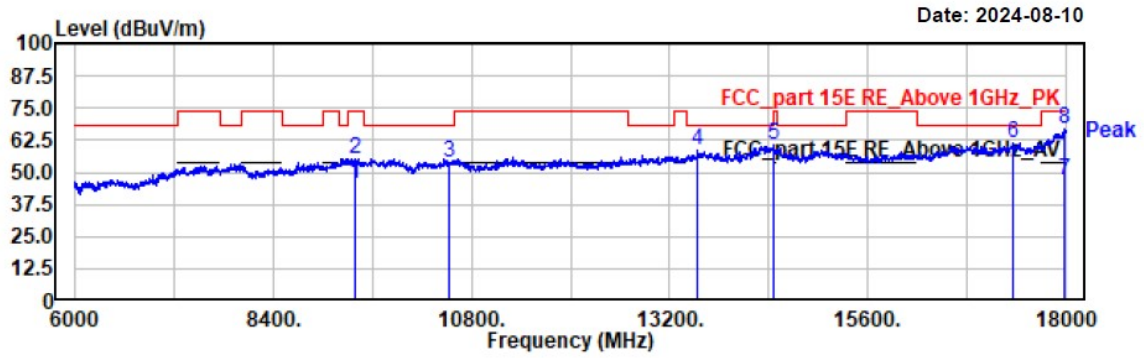

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
9398.00	36.50	9.04	45.54	54.00	8.46	vertical	Average
9398.00	46.47	9.04	55.51	74.00	18.49	vertical	Peak
10520.00	44.58	9.42	54.00	68.20	14.20	vertical	Peak
13539.20	46.74	11.67	58.41	68.20	9.79	vertical	Peak
14450.40	47.27	13.18	60.45	68.20	7.75	vertical	Peak
17364.20	47.42	14.27	61.69	68.20	6.51	vertical	Peak
17986.40	28.01	18.91	46.92	54.00	7.08	vertical	Average
17986.40	47.93	18.91	66.84	74.00	7.16	vertical	Peak

Project No.: 2407W89602E-RF
Test Mode: 802.11a 5300MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

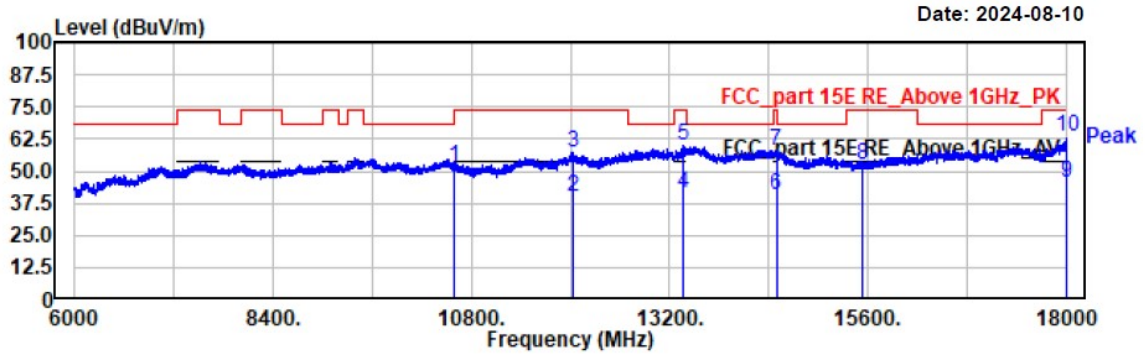

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10600.00	38.87	13.09	51.96	68.20	16.24	horizontal	Peak
12026.40	23.90	15.88	39.78	54.00	14.22	horizontal	Average
12026.40	41.42	15.88	57.30	74.00	16.70	horizontal	Peak
13358.40	23.77	17.95	41.72	54.00	12.28	horizontal	Average
13358.40	41.80	17.95	59.75	74.00	14.25	horizontal	Peak
14492.40	23.76	16.75	40.51	54.00	13.49	horizontal	Average
14492.40	41.51	16.75	58.26	74.00	15.74	horizontal	Peak
15540.00	39.65	12.63	52.28	74.00	21.72	horizontal	Peak
18000.00	25.78	19.98	45.76	54.00	8.24	horizontal	Average
18000.00	43.67	19.98	63.65	74.00	10.35	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5300MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

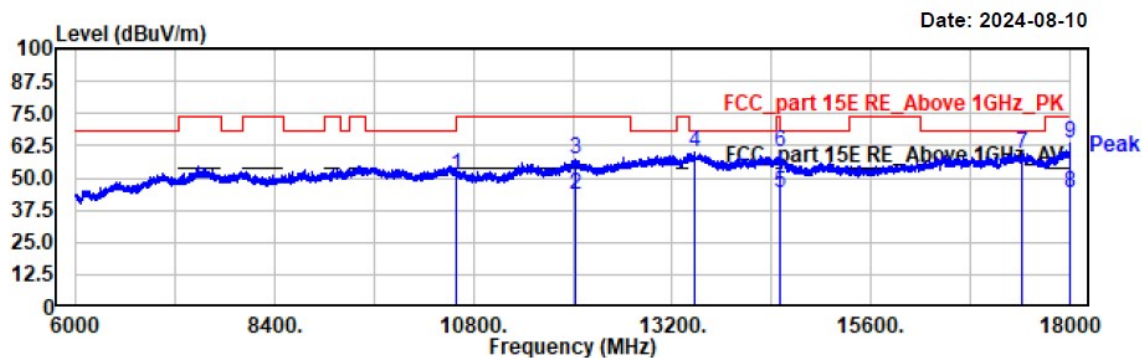

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10600.00	38.05	13.09	51.14	68.20	17.06	vertical	Peak
12025.20	27.67	15.88	43.55	54.00	10.45	vertical	Average
12025.20	41.32	15.88	57.20	74.00	16.80	vertical	Peak
13480.80	41.37	18.33	59.70	68.20	8.50	vertical	Peak
14496.00	27.37	16.74	44.11	54.00	9.89	vertical	Average
14496.00	43.01	16.74	59.75	74.00	14.25	vertical	Peak
17419.20	41.84	17.81	59.65	68.20	8.55	vertical	Peak
18000.00	24.37	19.98	44.35	54.00	9.65	vertical	Average
18000.00	43.46	19.98	63.44	74.00	10.56	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5320MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

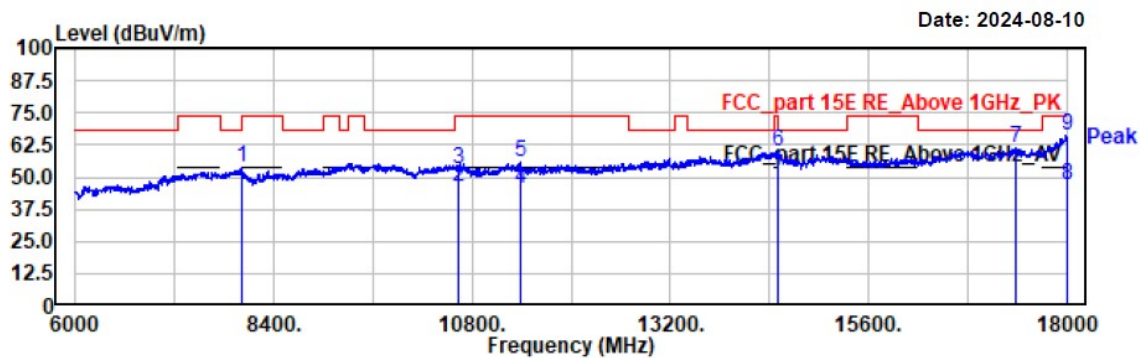

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
8010.80	47.81	5.66	53.47	68.20	14.73	horizontal	Peak
10639.00	37.10	9.12	46.22	54.00	7.78	horizontal	Average
10640.00	44.29	9.12	53.41	74.00	20.59	horizontal	Peak
11380.20	36.04	9.59	45.63	54.00	8.37	horizontal	Average
11380.20	46.09	9.59	55.68	74.00	18.32	horizontal	Peak
14511.60	46.84	13.07	59.91	68.20	8.29	horizontal	Peak
17377.80	47.08	14.30	61.38	68.20	6.82	horizontal	Peak
18000.00	27.83	19.02	46.85	54.00	7.15	horizontal	Average
18000.00	47.15	19.02	66.17	74.00	7.83	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11a 5320MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

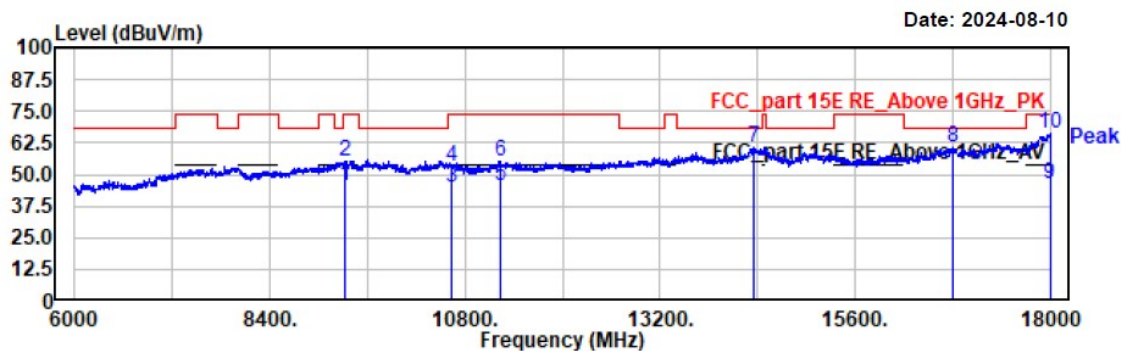


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
9333.40	37.24	8.39	45.63	54.00	8.37	vertical	Average
9333.40	47.02	8.39	55.41	74.00	18.59	vertical	Peak
10640.00	35.43	9.12	44.55	54.00	9.45	vertical	Average
10640.00	44.20	9.12	53.32	74.00	20.68	vertical	Peak
11240.80	36.29	9.34	45.63	54.00	8.37	vertical	Average
11240.80	45.90	9.34	55.24	74.00	18.76	vertical	Peak
14355.20	47.17	13.34	60.51	68.20	7.69	vertical	Peak
16806.60	46.76	13.60	60.36	68.20	7.84	vertical	Peak
17993.20	27.32	18.96	46.28	54.00	7.72	vertical	Average
17993.20	47.43	18.96	66.39	74.00	7.61	vertical	Peak

B3

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5500MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

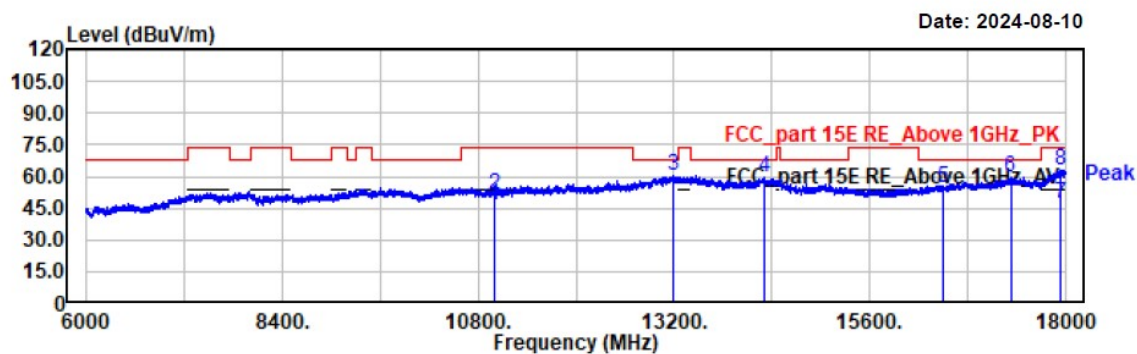

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	41.54	4.80	46.34	54.00	7.66	horizontal	Average
11000.00	46.58	4.80	51.38	74.00	22.62	horizontal	Peak
13184.40	50.60	10.21	60.81	68.20	7.39	horizontal	Peak
14307.60	49.94	9.32	59.26	68.20	8.94	horizontal	Peak
16500.00	49.01	5.65	54.66	68.20	13.54	horizontal	Peak
17328.00	50.75	8.81	59.56	68.20	8.64	horizontal	Peak
17943.60	34.89	12.64	47.53	54.00	6.47	horizontal	Average
17943.60	50.30	12.64	62.94	74.00	11.06	horizontal	Peak


Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5500MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

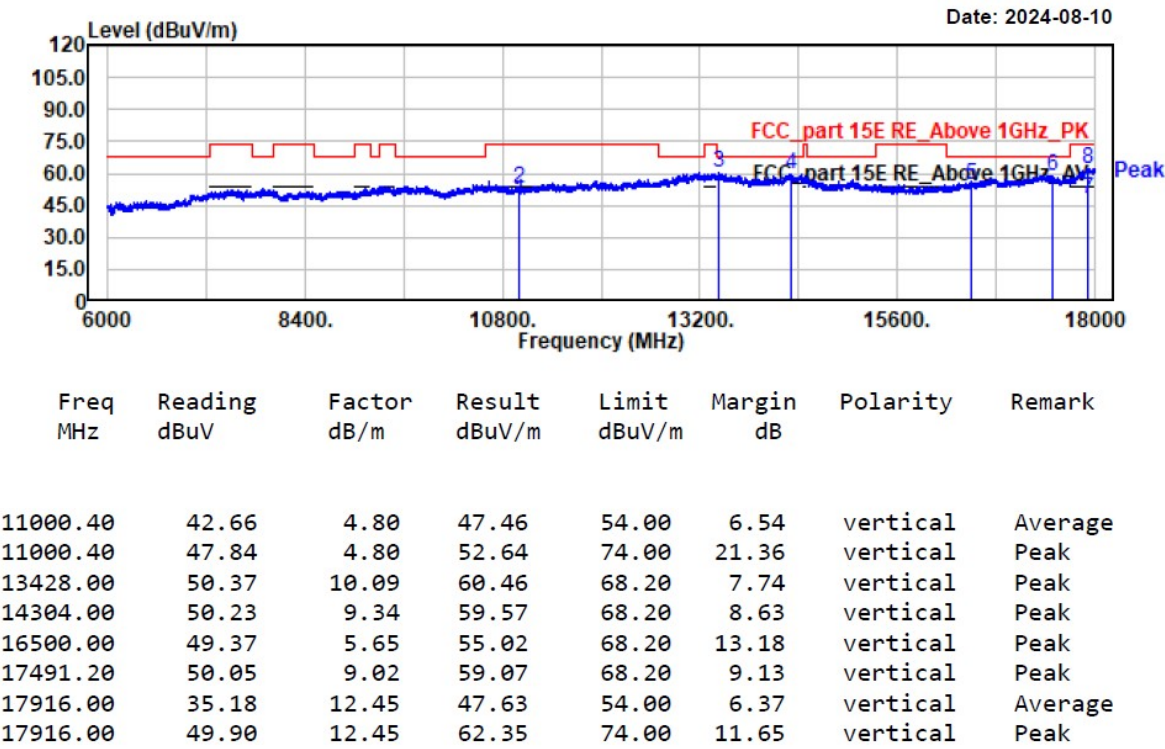

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5580MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

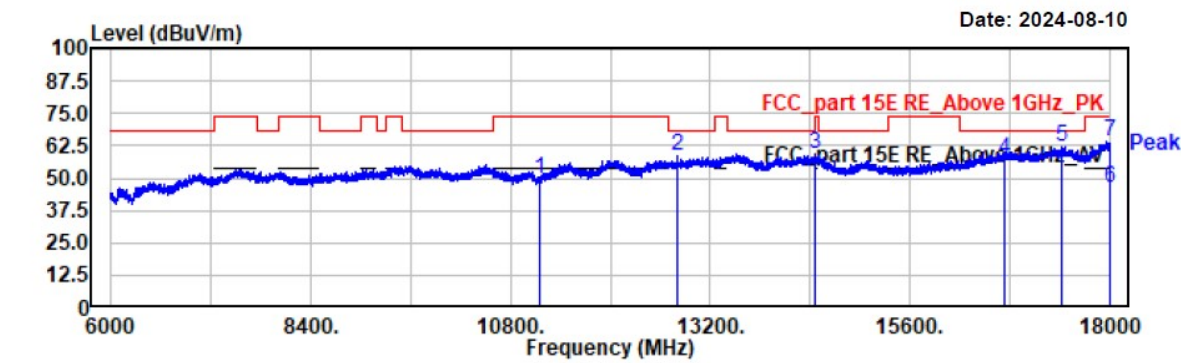

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	37.29	12.71	50.00	74.00	24.00	horizontal	Peak
12802.80	41.61	17.08	58.69	68.20	9.51	horizontal	Peak
14467.20	42.32	16.80	59.12	68.20	9.08	horizontal	Peak
16740.00	40.25	17.02	57.27	68.20	10.93	horizontal	Peak
17432.40	44.25	17.80	62.05	68.20	6.15	horizontal	Peak
17998.80	26.26	19.97	46.23	54.00	7.77	horizontal	Average
17998.80	44.20	19.97	64.17	74.00	9.83	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5580MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

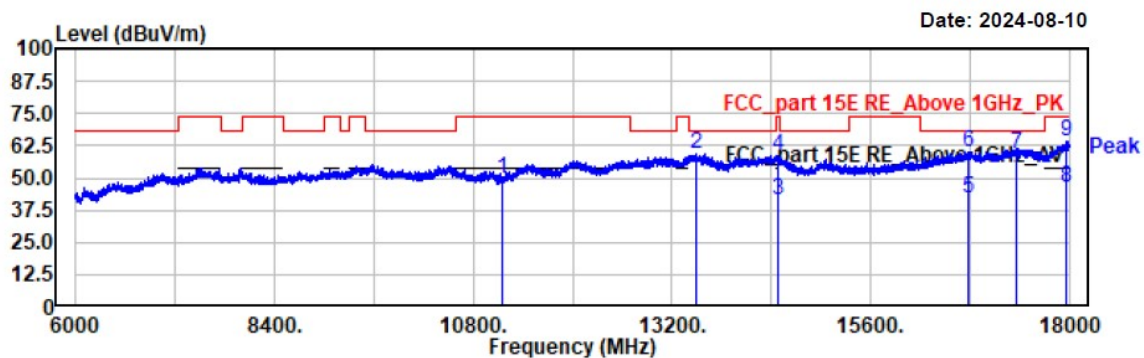

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	36.82	12.71	49.53	74.00	24.47	vertical	Peak
13485.60	40.77	18.35	59.12	68.20	9.08	vertical	Peak
14487.60	24.43	16.75	41.18	74.00	32.82	vertical	Average
14487.60	42.02	16.75	58.77	74.00	15.23	vertical	Peak
16785.60	24.83	17.55	42.38	68.20	25.82	vertical	Average
16785.60	42.51	17.55	60.06	68.20	8.14	vertical	Peak
17354.40	41.20	17.84	59.04	68.20	9.16	vertical	Peak
17958.00	26.25	19.85	46.10	74.00	27.90	vertical	Average
17958.00	44.25	19.85	64.10	74.00	9.90	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5720MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

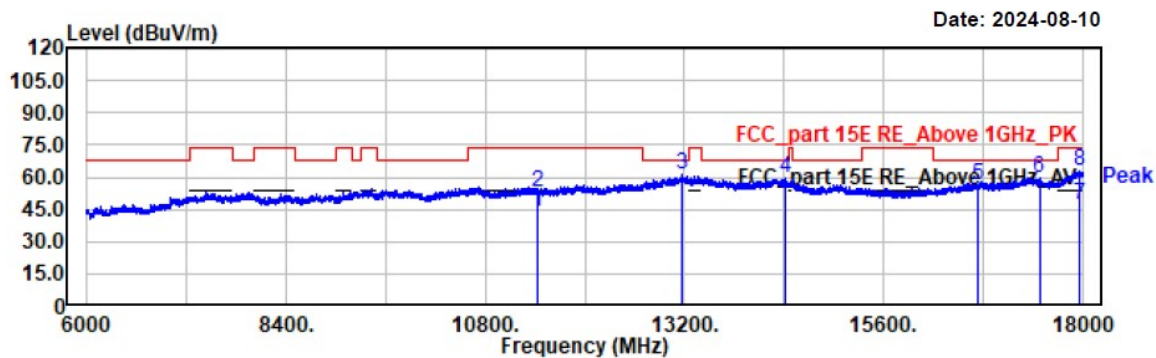

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11440.00	38.17	5.72	43.89	54.00	10.11	horizontal	Average
11440.00	47.53	5.72	53.25	74.00	20.75	horizontal	Peak
13180.80	50.93	10.21	61.14	68.20	7.06	horizontal	Peak
14421.60	50.69	8.72	59.41	68.20	8.79	horizontal	Peak
16740.00	48.92	7.24	56.16	68.20	12.04	horizontal	Peak
17478.00	50.72	9.01	59.73	68.20	8.47	horizontal	Peak
17966.40	34.29	12.78	47.07	54.00	6.93	horizontal	Average
17966.40	49.77	12.78	62.55	74.00	11.45	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5720MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

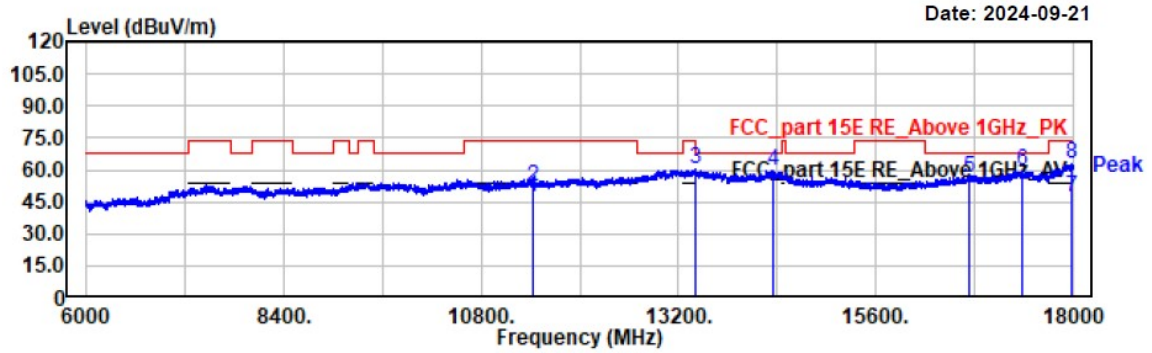

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11440.00	41.72	5.72	47.44	54.00	6.56	vertical	Average
11440.00	46.76	5.72	52.48	74.00	21.52	vertical	Peak
13404.00	50.01	10.10	60.11	68.20	8.09	vertical	Peak
14349.60	50.53	9.05	59.58	68.20	8.62	vertical	Peak
16740.00	48.78	7.24	56.02	68.20	12.18	vertical	Peak
17376.00	50.68	8.90	59.58	68.20	8.62	vertical	Peak
17977.20	34.19	12.85	47.04	54.00	6.96	vertical	Average
17977.20	49.81	12.85	62.66	74.00	11.34	vertical	Peak

B4

Project No.: 2407W89604E-RF

Test Mode: 802.11ac 5745MHz


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

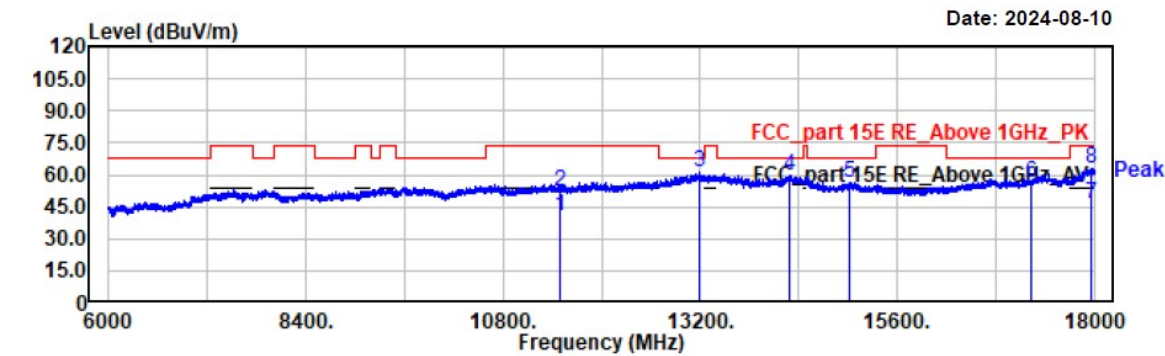

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	34.73	5.83	40.56	54.00	13.44	horizontal	Average
11490.00	46.51	5.83	52.34	74.00	21.66	horizontal	Peak
13191.60	50.85	10.22	61.07	68.20	7.13	horizontal	Peak
14295.60	50.04	9.32	59.36	68.20	8.84	horizontal	Peak
15015.60	50.51	6.00	56.51	68.20	11.69	horizontal	Peak
17235.00	48.02	8.43	56.45	68.20	11.75	horizontal	Peak
17960.40	33.99	12.74	46.73	54.00	7.27	horizontal	Average
17960.40	50.06	12.74	62.80	74.00	11.20	horizontal	Peak

Project No.: 2407W89604E-RF

Test Mode: 802.11ac 5745MHz


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

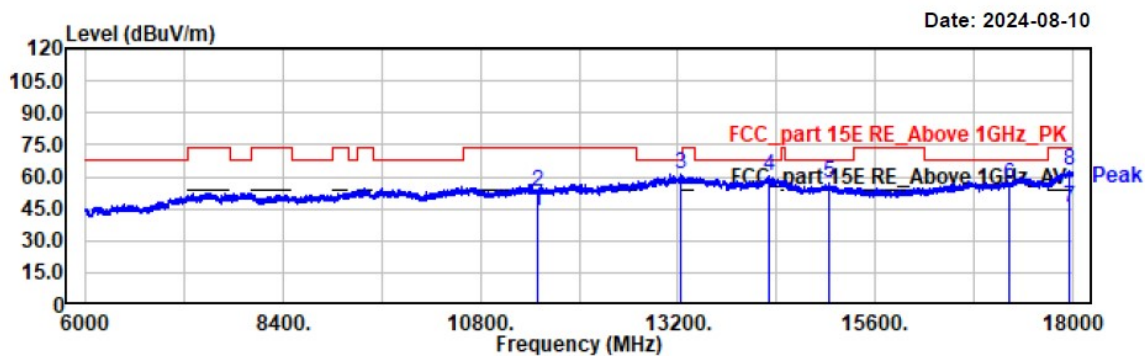

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	38.16	5.83	43.99	54.00	10.01	vertical	Average
11490.00	46.89	5.83	52.72	74.00	21.28	vertical	Peak
13238.40	51.23	9.98	61.21	68.20	6.99	vertical	Peak
14301.60	50.76	9.35	60.11	68.20	8.09	vertical	Peak
15048.00	50.85	5.87	56.72	68.20	11.48	vertical	Peak
17235.00	48.04	8.43	56.47	68.20	11.73	vertical	Peak
17962.80	33.13	12.76	45.89	54.00	8.11	vertical	Average
17962.80	49.79	12.76	62.55	74.00	11.45	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5785MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

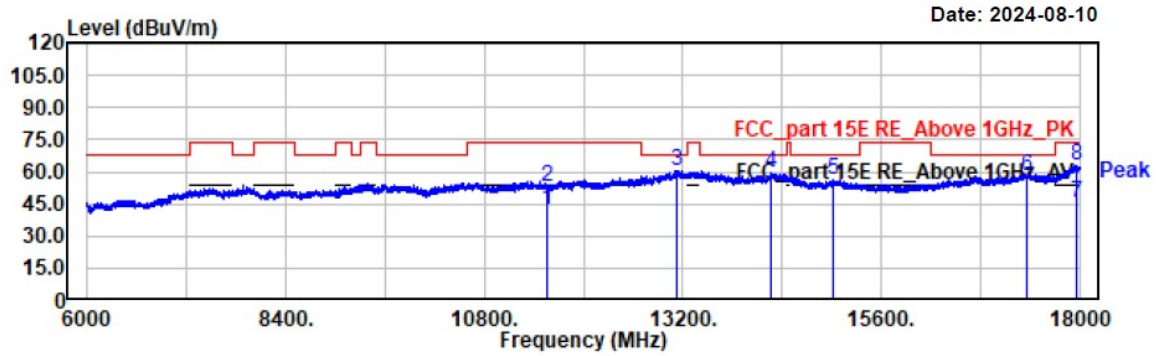

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	36.65	5.86	42.51	54.00	11.49	horizontal	Average
11570.00	47.20	5.86	53.06	74.00	20.94	horizontal	Peak
13134.00	50.65	10.15	60.80	68.20	7.40	horizontal	Peak
14262.00	50.38	8.99	59.37	68.20	8.83	horizontal	Peak
15021.60	50.21	5.96	56.17	68.20	12.03	horizontal	Peak
17355.00	48.94	8.85	57.79	68.20	10.41	horizontal	Peak
17968.80	33.07	12.79	45.86	54.00	8.14	horizontal	Average
17968.80	49.77	12.79	62.56	74.00	11.44	horizontal	Peak