


Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5785MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wliff Wu
Power Source: AC 120V/60Hz

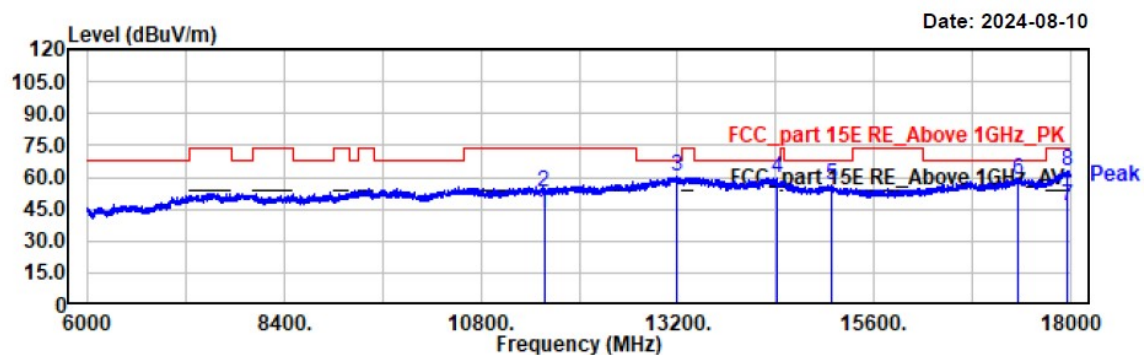

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	36.79	5.86	42.65	54.00	11.35	vertical	Average
11570.40	47.36	5.86	53.22	74.00	20.78	vertical	Peak
13198.80	50.06	10.24	60.30	68.20	7.90	vertical	Peak
14407.20	51.19	8.73	59.92	68.20	8.28	vertical	Peak
15085.20	50.83	5.71	56.54	68.20	11.66	vertical	Peak
17355.00	49.66	8.85	58.51	68.20	9.69	vertical	Peak
17962.80	33.61	12.76	46.37	54.00	7.63	vertical	Average
17962.80	50.48	12.76	63.24	74.00	10.76	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5825MHz
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

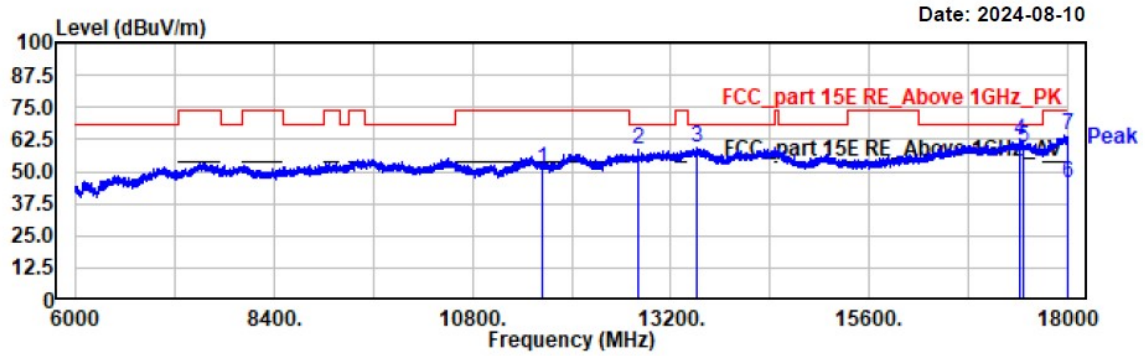

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	36.18	14.87	51.05	74.00	22.95	horizontal	Peak
12802.80	41.61	17.08	58.69	68.20	9.51	horizontal	Peak
13509.60	40.97	18.31	59.28	68.20	8.92	horizontal	Peak
17432.40	44.25	17.80	62.05	68.20	6.15	horizontal	Peak
17475.00	41.67	17.75	59.42	68.20	8.78	horizontal	Peak
17998.80	25.37	19.97	45.34	54.00	8.66	horizontal	Average
17998.80	44.20	19.97	64.17	74.00	9.83	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 802.11ac 5825MHz
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

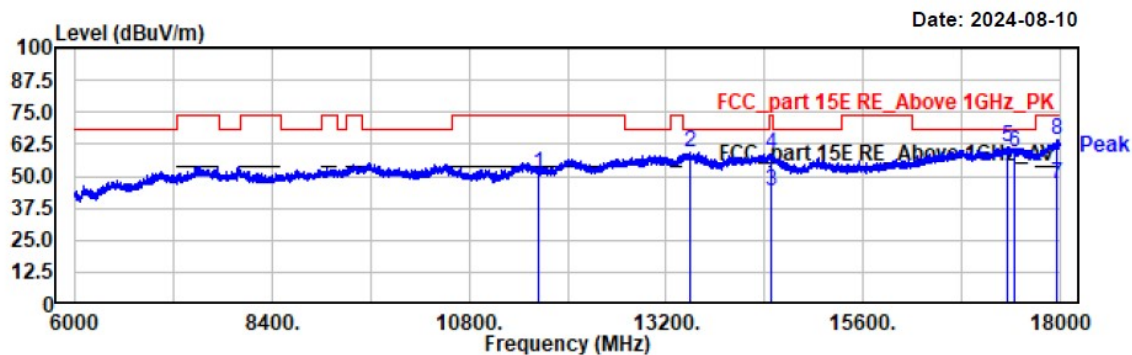

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11650.00	36.03	14.87	50.90	74.00	23.10	vertical	Peak
13485.60	40.77	18.35	59.12	68.20	9.08	vertical	Peak
14487.60	27.67	16.75	44.42	54.00	9.58	vertical	Average
14487.60	42.02	16.75	58.77	74.00	15.23	vertical	Peak
17360.40	43.78	17.86	61.64	68.20	6.56	vertical	Peak
17450.00	41.44	17.77	59.21	68.20	8.99	vertical	Peak
17958.00	27.00	19.85	46.85	54.00	7.15	vertical	Average
17958.00	44.25	19.85	64.10	74.00	9.90	vertical	Peak

5) 18GHz~40GHz(Worst case)

Project No.: 2407W89604E-RF

Test Mode: 802.11a 5180MHz


EUT Model: SLM927

Test distance: 1.5m

Temp/Humi/ATM: 21.3℃/51%/101.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

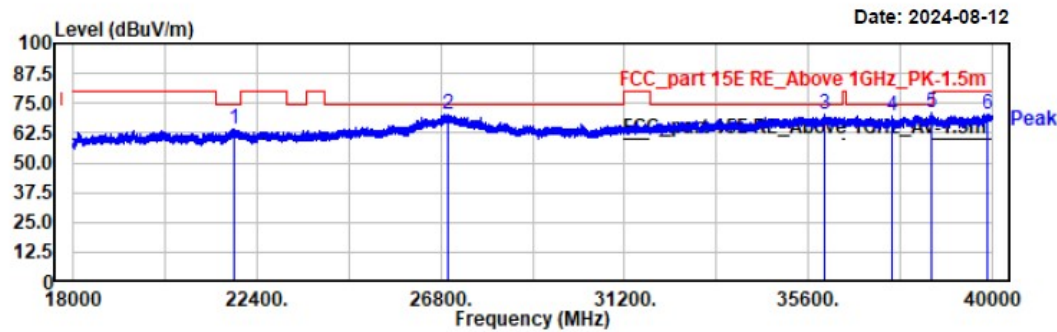

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21850.00	38.08	25.90	63.98	74.20	10.22	horizontal	Peak
26979.30	36.32	34.05	70.37	74.20	3.83	horizontal	Peak
35986.10	38.42	31.74	70.16	74.20	4.04	horizontal	Peak
37594.30	40.03	29.61	69.64	74.20	4.56	horizontal	Peak
38560.10	41.29	29.74	71.03	74.20	3.17	horizontal	Peak
39894.40	39.85	30.82	70.67	80.00	9.33	horizontal	Peak

Project No.: 2407W89604E-RF
 Test Mode: 802.11a 5180MHz
 EUT Model: SLM927
 Test distance: 1.5m

Temp/Humi/ATM: 21.3°C/51%/101.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

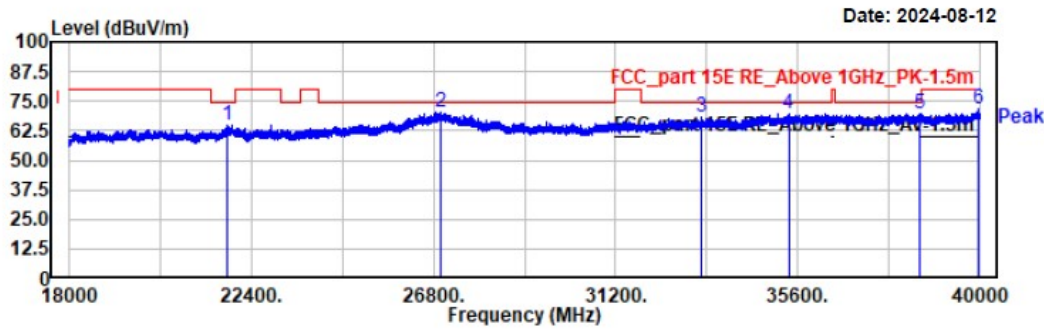

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21830.20	38.83	25.91	64.74	74.20	9.46	vertical	Peak
26960.60	36.49	33.98	70.47	74.20	3.73	vertical	Peak
33280.10	38.02	30.27	68.29	74.20	5.91	vertical	Peak
35381.10	37.76	31.98	69.74	74.20	4.46	vertical	Peak
38553.50	39.97	29.75	69.72	74.20	4.48	vertical	Peak
39954.90	41.15	30.38	71.53	80.00	8.47	vertical	Peak

Restricted Bands Emissions:


*Pre-Scan with 5G Wi-Fi 802.11a/n ht20/ac vht20, 802.11n ht40/ac vht40, 802.11ac vht80 modes in the X, Y and Z axes of orientation, and the worst case **Z-axis of orientation** is recorded*

Note:
 Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)
 Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)
 Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

Band 1

Project No.: 2407W89604E-RF
 Test Mode: 11a-5180
 EUT Model: SLM927
 Test distance: 3m

Temp/Humi/ATM: 23.6°C/56%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC 120V/60Hz

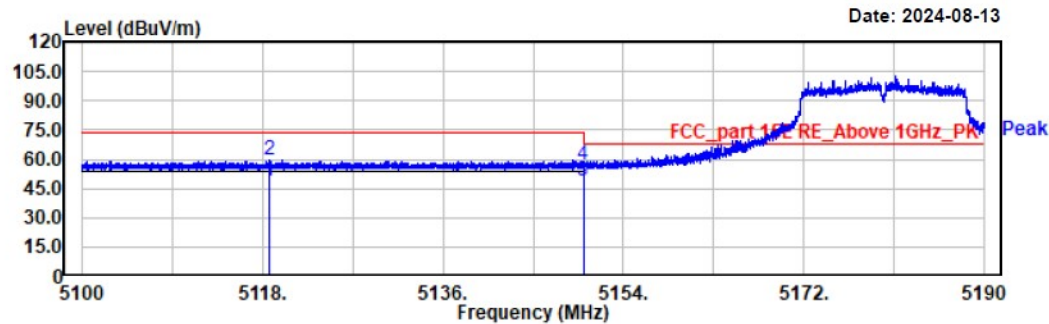

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5118.70	11.46	37.18	48.64	54.00	5.36	horizontal	Average
5118.70	22.72	37.18	59.90	74.00	14.10	horizontal	Peak
5150.00	11.50	37.28	48.78	54.00	5.22	horizontal	Average
5150.00	19.52	37.28	56.80	74.00	17.20	horizontal	Peak

Project No.: 2407W89604E-RF

Test Mode: 11a-5180


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.6°C/56%/100.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

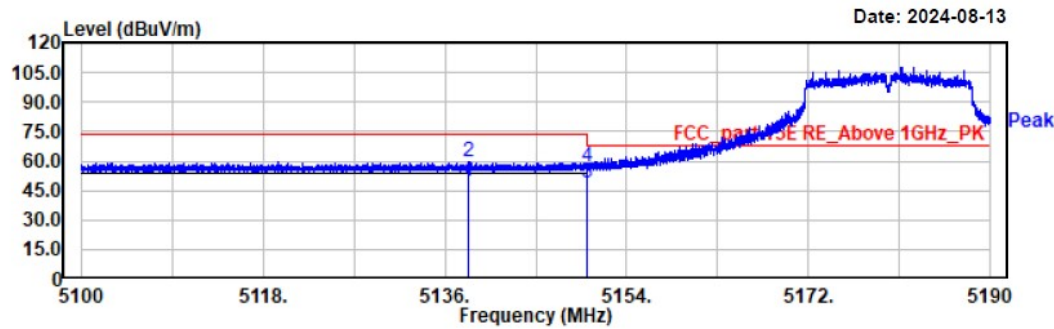

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5138.29	12.31	37.24	49.55	54.00	4.45	vertical	Average
5138.29	21.95	37.24	59.19	74.00	14.81	vertical	Peak
5150.00	11.46	37.28	48.74	54.00	5.26	vertical	Average
5150.00	19.51	37.28	56.79	74.00	17.21	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5240
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

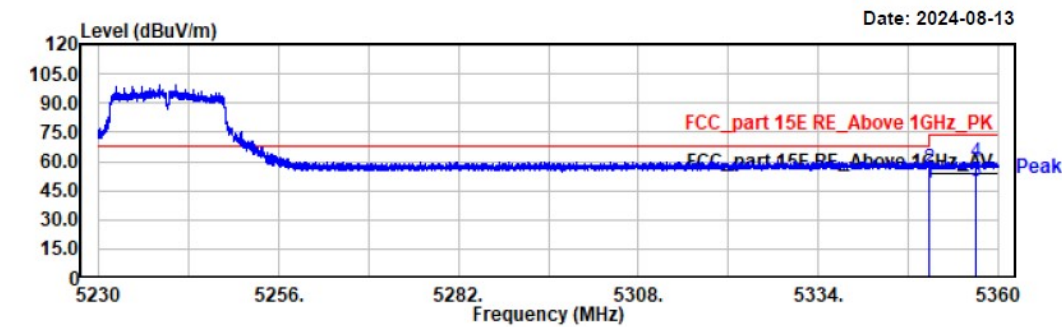

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.74	37.20	48.94	54.00	5.06	horizontal	Average
5350.00	18.91	37.20	56.11	74.00	17.89	horizontal	Peak
5356.72	12.76	37.23	49.99	54.00	4.01	horizontal	Average
5356.72	22.67	37.23	59.90	74.00	14.10	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5240
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

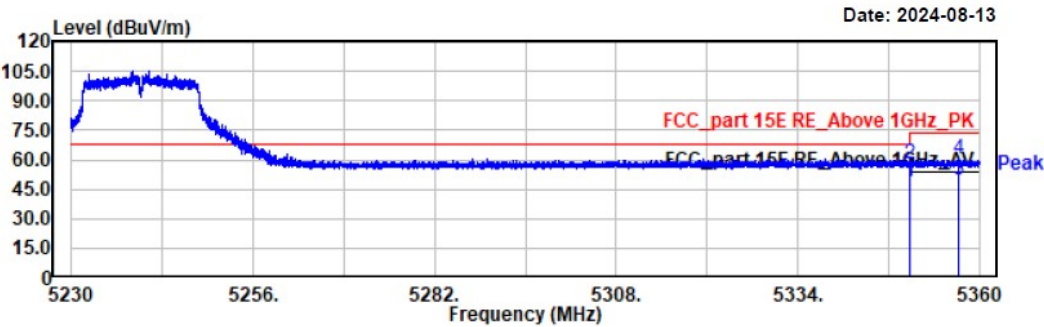

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.31	37.20	48.51	54.00	5.49	vertical	Average
5350.00	20.85	37.20	58.05	74.00	15.95	vertical	Peak
5356.95	12.46	37.23	49.69	54.00	4.31	vertical	Average
5356.95	22.95	37.23	60.18	74.00	13.82	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5180
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

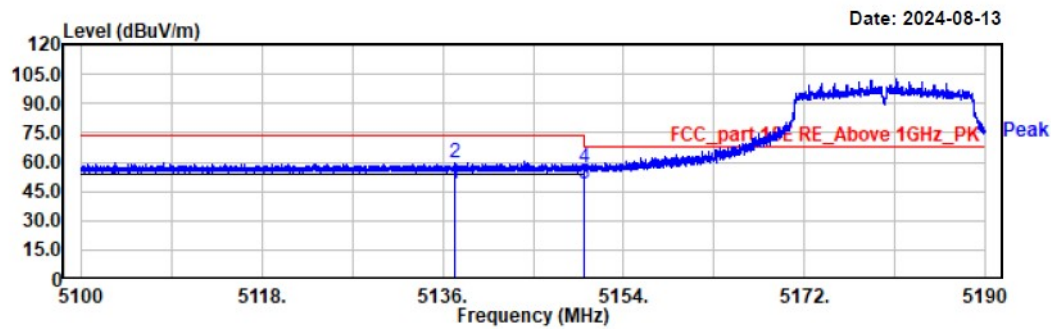

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5137.20	11.46	37.24	48.70	54.00	5.30	horizontal	Average
5137.20	22.18	37.24	59.42	74.00	14.58	horizontal	Peak
5150.00	11.38	37.28	48.66	54.00	5.34	horizontal	Average
5150.00	19.94	37.28	57.22	74.00	16.78	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5180
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

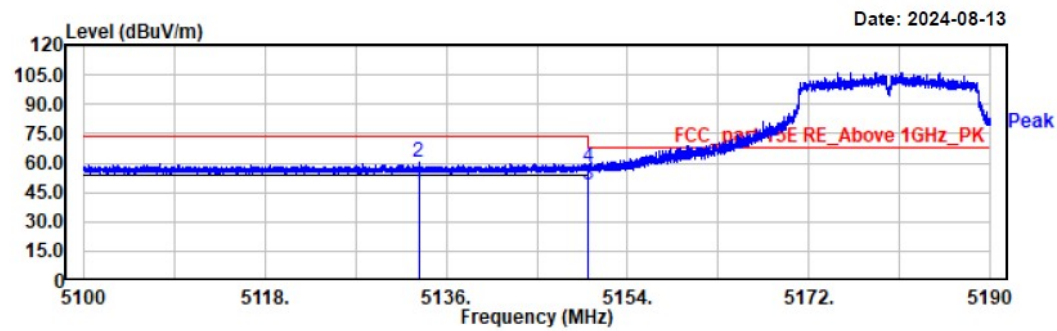

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5133.25	11.38	37.23	48.61	54.00	5.39	vertical	Average
5133.25	22.95	37.23	60.18	74.00	13.82	vertical	Peak
5150.00	11.38	37.28	48.66	54.00	5.34	vertical	Average
5150.00	20.48	37.28	57.76	74.00	16.24	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5240
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

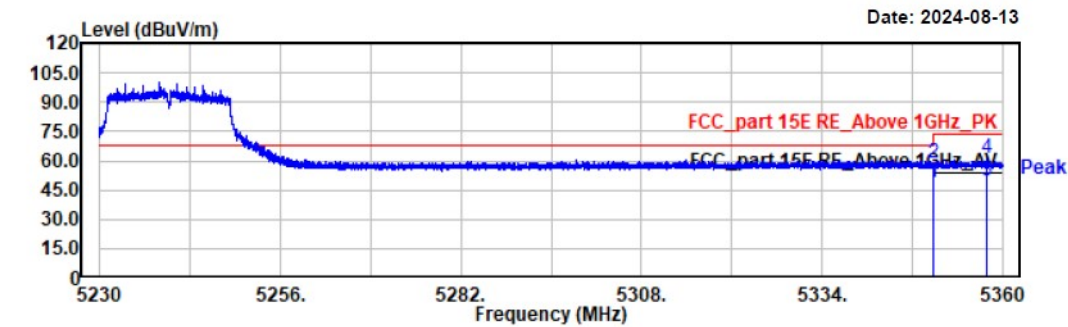

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.35	37.20	48.55	54.00	5.45	horizontal	Average
5350.00	21.19	37.20	58.39	74.00	15.61	horizontal	Peak
5357.83	12.06	37.24	49.30	54.00	4.70	horizontal	Average
5357.83	23.60	37.24	60.84	74.00	13.16	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5240
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

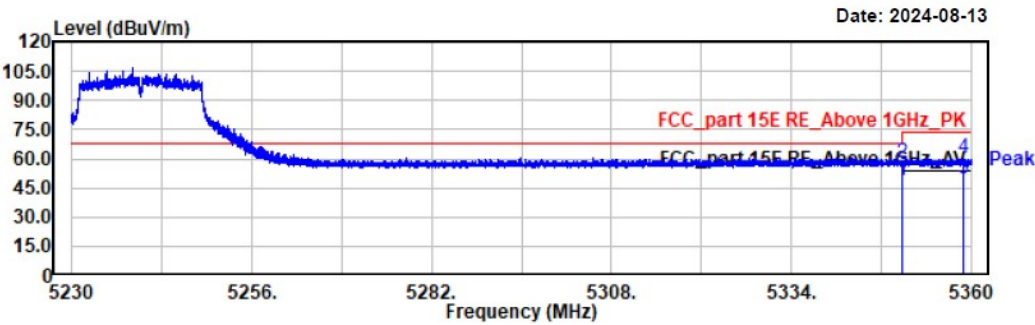

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.37	37.20	48.57	54.00	5.43	vertical	Average
5350.00	20.53	37.20	57.73	74.00	16.27	vertical	Peak
5358.88	12.05	37.24	49.29	54.00	4.71	vertical	Average
5358.88	23.21	37.24	60.45	74.00	13.55	vertical	Peak

Project No.: 2407W89604E-RF

Test Mode: 11ac40-5190


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.6°C/56%/100.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

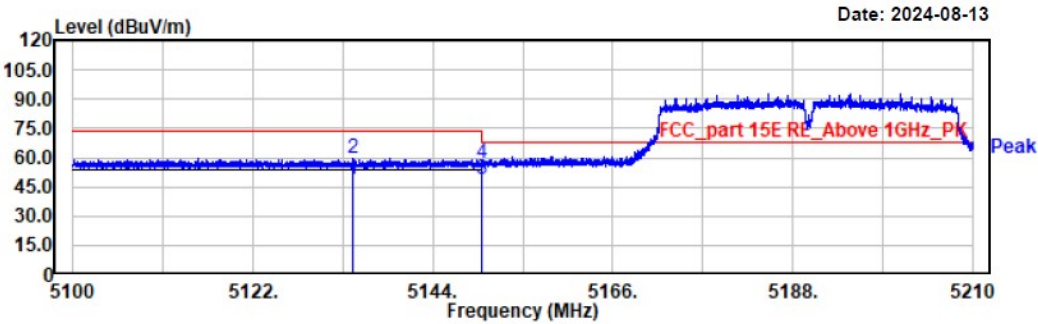

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5134.25	11.72	37.24	48.96	54.00	5.04	horizontal	Average
5134.25	22.16	37.24	59.40	74.00	14.60	horizontal	Peak
5150.00	11.74	37.28	49.02	54.00	4.98	horizontal	Average
5150.00	19.52	37.28	56.80	74.00	17.20	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5190
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

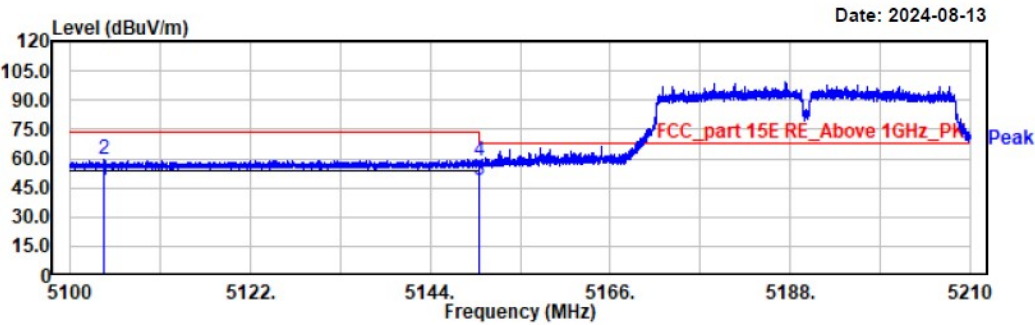

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5104.04	11.78	37.14	48.92	54.00	5.08	vertical	Average
5104.04	22.15	37.14	59.29	74.00	14.71	vertical	Peak
5150.00	11.78	37.28	49.06	54.00	4.94	vertical	Average
5150.00	21.07	37.28	58.35	74.00	15.65	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5230
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

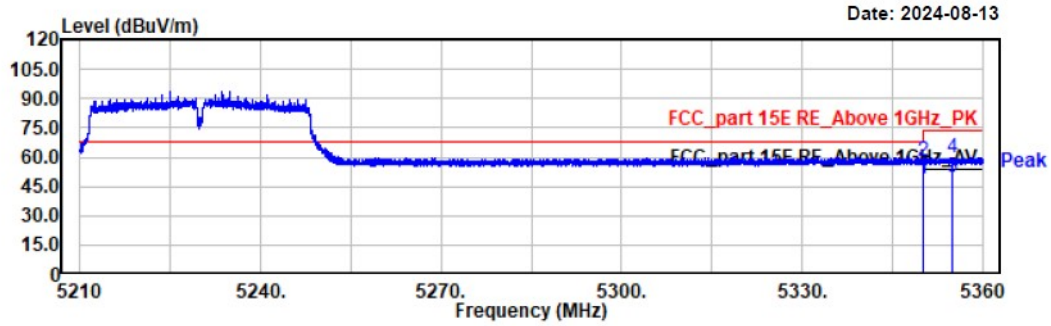

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.71	37.20	48.91	54.00	5.09	horizontal	Average
5350.00	20.39	37.20	57.59	74.00	16.41	horizontal	Peak
5354.96	12.25	37.22	49.47	54.00	4.53	horizontal	Average
5354.96	22.77	37.22	59.99	74.00	14.01	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5230
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

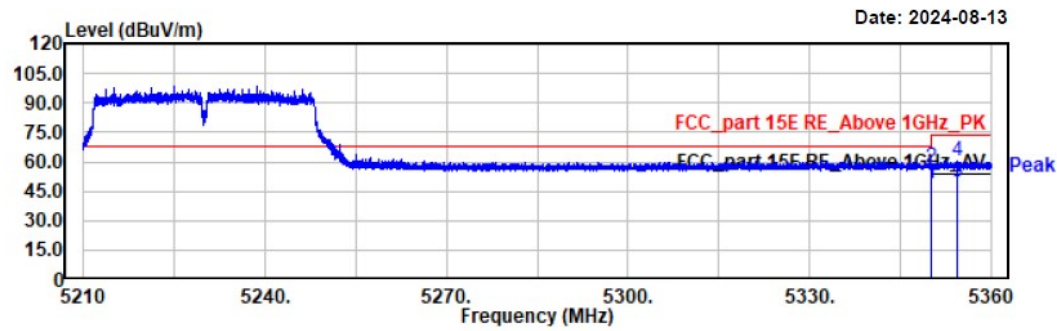

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.73	37.20	48.93	54.00	5.07	vertical	Average
5350.00	20.00	37.20	57.20	74.00	16.80	vertical	Peak
5354.47	12.25	37.22	49.47	54.00	4.53	vertical	Average
5354.47	23.20	37.22	60.42	74.00	13.58	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac80-5210
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

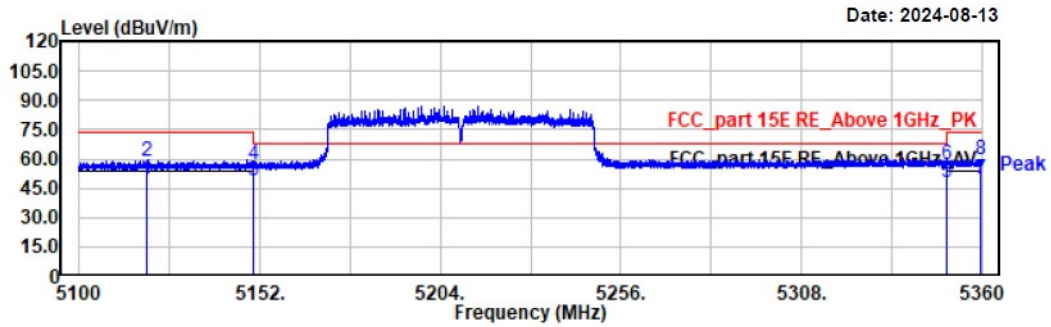

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5119.50	12.21	37.19	49.40	54.00	4.60	horizontal	Average
5119.50	21.72	37.19	58.91	74.00	15.09	horizontal	Peak
5150.00	11.74	37.28	49.02	54.00	4.98	horizontal	Average
5150.00	19.62	37.28	56.90	74.00	17.10	horizontal	Peak
5350.00	11.17	37.20	48.37	54.00	5.63	horizontal	Average
5350.00	19.91	37.20	57.11	74.00	16.89	horizontal	Peak
5359.53	12.16	37.25	49.41	54.00	4.59	horizontal	Average
5359.53	22.51	37.25	59.76	74.00	14.24	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac80-5210
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 23.6°C/56%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

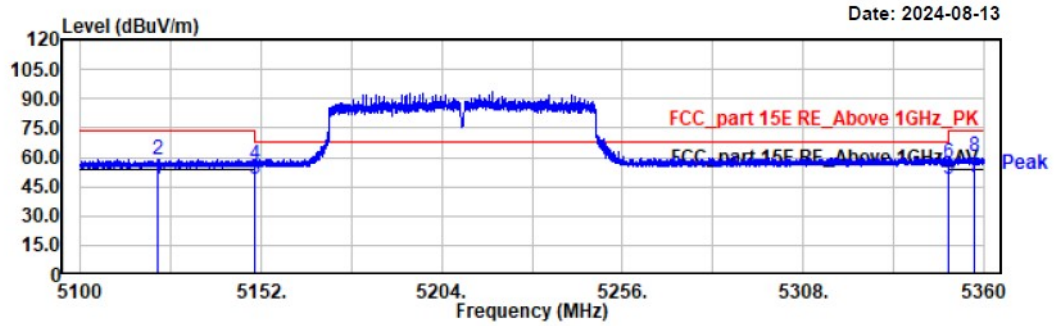

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5122.41	11.80	37.20	49.00	54.00	5.00	vertical	Average
5122.41	21.74	37.20	58.94	74.00	15.06	vertical	Peak
5150.00	11.79	37.28	49.07	54.00	4.93	vertical	Average
5150.00	19.24	37.28	56.52	74.00	17.48	vertical	Peak
5350.00	11.73	37.20	48.93	54.00	5.07	vertical	Average
5350.00	20.03	37.20	57.23	74.00	16.77	vertical	Peak
5357.50	12.31	37.24	49.55	54.00	4.45	vertical	Average
5357.50	23.43	37.24	60.67	74.00	13.33	vertical	Peak

Band 2

Project No.: 2407W89604E-RF

Test Mode: 11a-5260


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

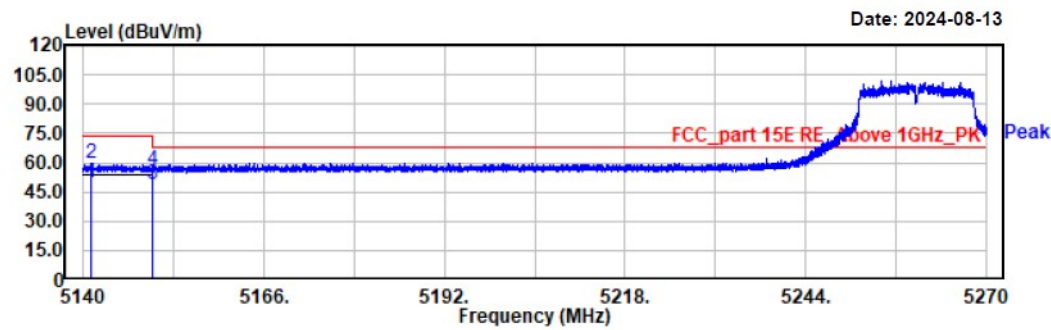

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5141.08	12.07	37.25	49.32	54.00	4.68	horizontal	Average
5141.08	22.31	37.25	59.56	74.00	14.44	horizontal	Peak
5150.00	11.38	37.28	48.66	54.00	5.34	horizontal	Average
5150.00	18.98	37.28	56.26	74.00	17.74	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5260
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

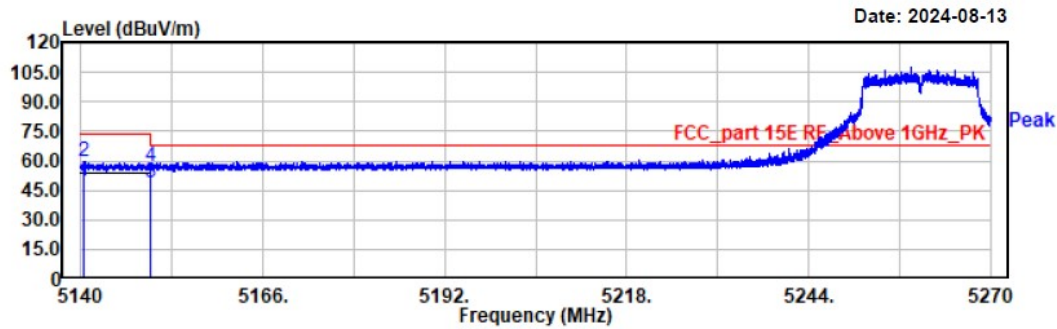

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5140.43	12.42	37.25	49.67	54.00	4.33	vertical	Average
5140.43	22.01	37.25	59.26	74.00	14.74	vertical	Peak
5150.00	11.79	37.28	49.07	54.00	4.93	vertical	Average
5150.00	19.96	37.28	57.24	74.00	16.76	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5320
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

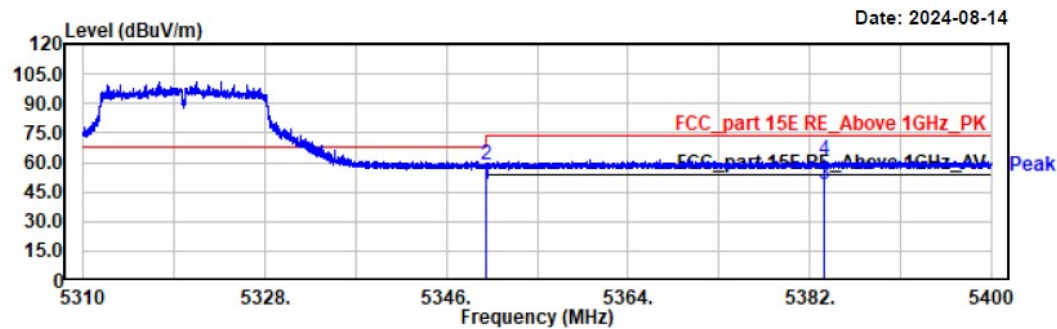

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.78	37.20	48.98	54.00	5.02	horizontal	Average
5350.00	21.25	37.20	58.45	74.00	15.55	horizontal	Peak
5383.49	11.78	37.37	49.15	54.00	4.85	horizontal	Average
5383.49	23.84	37.37	61.21	74.00	12.79	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5320
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

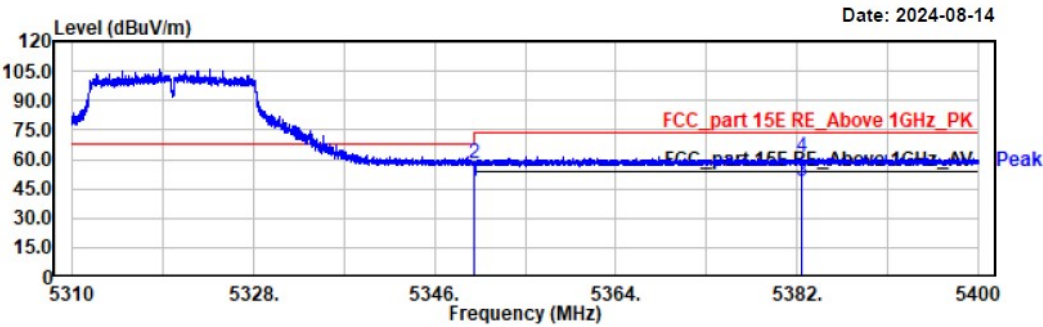

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.78	37.20	48.98	54.00	5.02	vertical	Average
5350.00	20.79	37.20	57.99	74.00	16.01	vertical	Peak
5382.43	11.78	37.36	49.14	54.00	4.86	vertical	Average
5382.43	24.21	37.36	61.57	74.00	12.43	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5260
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

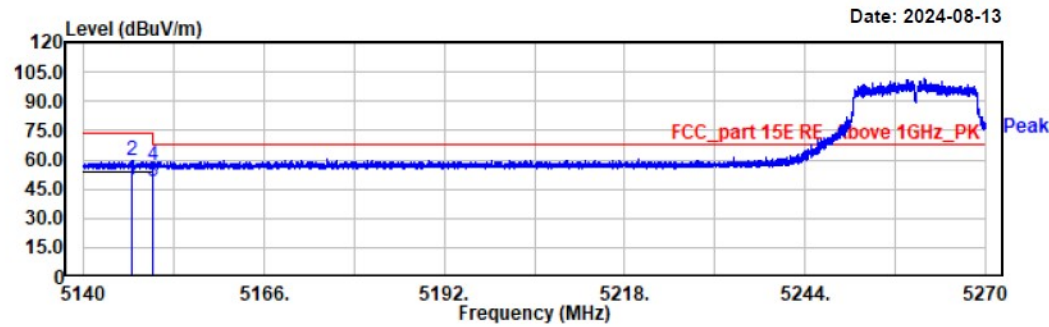

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5146.94	12.46	37.27	49.73	54.00	4.27	horizontal	Average
5146.94	22.39	37.27	59.66	74.00	14.34	horizontal	Peak
5150.00	11.79	37.28	49.07	54.00	4.93	horizontal	Average
5150.00	19.52	37.28	56.80	74.00	17.20	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5260
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

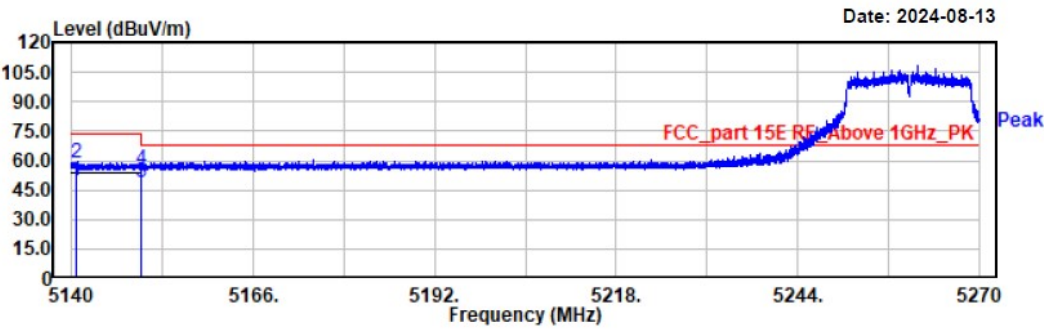

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5140.57	12.27	37.25	49.52	54.00	4.48	vertical	Average
5140.57	21.73	37.25	58.98	74.00	15.02	vertical	Peak
5150.00	11.37	37.28	48.65	54.00	5.35	vertical	Average
5150.00	18.52	37.28	55.80	74.00	18.20	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5320
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

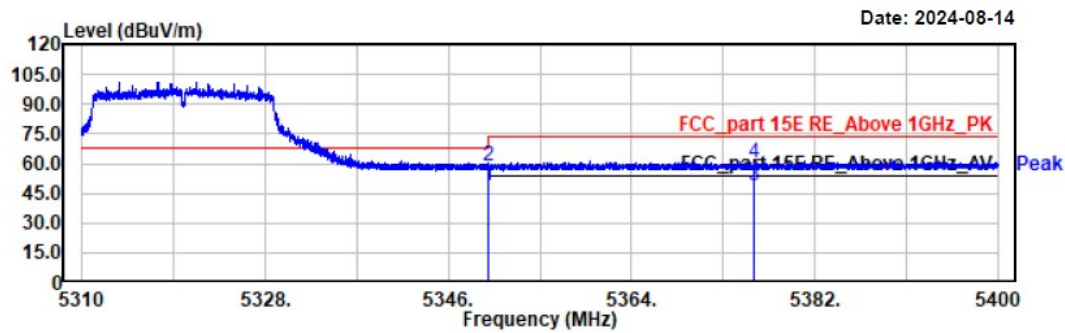

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	11.78	37.20	48.98	54.00	5.02	horizontal	Average
5350.00	21.68	37.20	58.88	74.00	15.12	horizontal	Peak
5376.07	11.63	37.33	48.96	54.00	5.04	horizontal	Average
5376.07	23.41	37.33	60.74	74.00	13.26	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5320
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

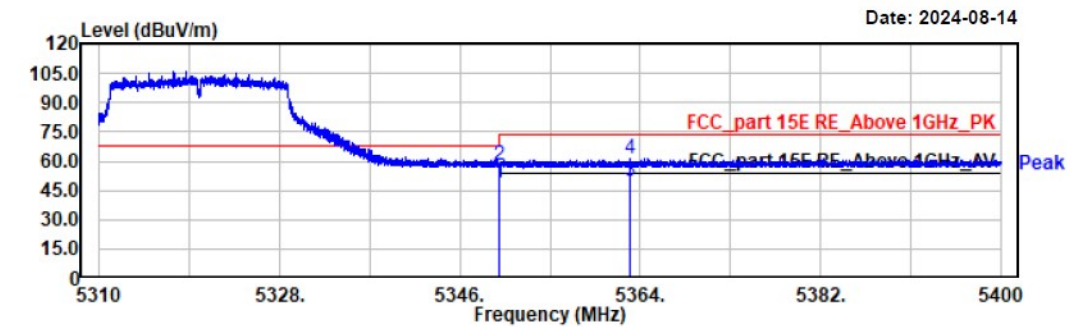

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	12.04	37.20	49.24	54.00	4.76	vertical	Average
5350.00	20.96	37.20	58.16	74.00	15.84	vertical	Peak
5362.90	12.12	37.27	49.39	54.00	4.61	vertical	Average
5362.90	23.86	37.27	61.13	74.00	12.87	vertical	Peak

Project No.: 2407W89604E-RF

Test Mode: 11ac40-5270


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

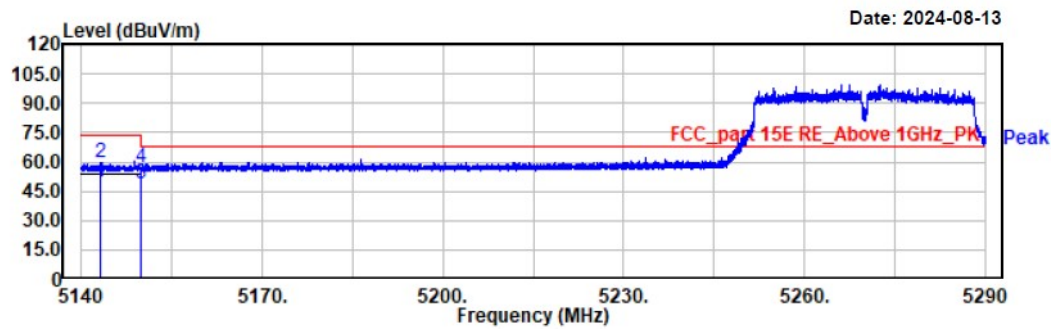

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5143.26	12.33	37.26	49.59	54.00	4.41	horizontal	Average
5143.26	22.69	37.26	59.95	74.00	14.05	horizontal	Peak
5150.01	11.72	37.28	49.00	54.00	5.00	horizontal	Average
5150.01	19.70	37.28	56.98	74.00	17.02	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5270
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

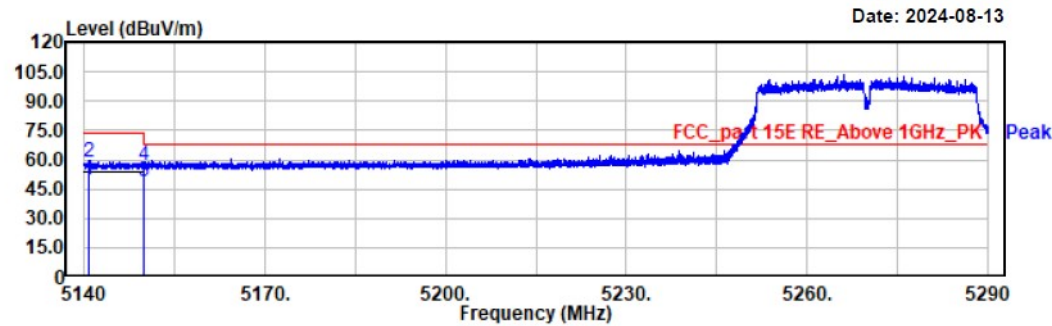

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5140.81	12.52	37.25	49.77	54.00	4.23	vertical	Average
5140.81	21.92	37.25	59.17	74.00	14.83	vertical	Peak
5150.01	11.32	37.28	48.60	54.00	5.40	vertical	Average
5150.01	19.69	37.28	56.97	74.00	17.03	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5310
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

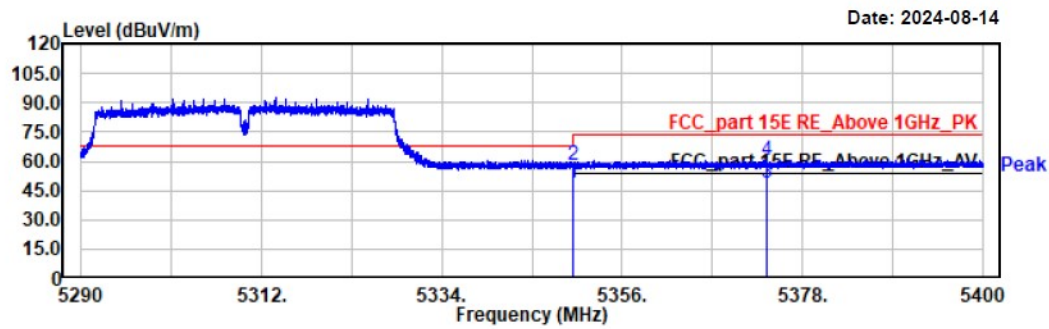

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	11.73	37.20	48.93	54.00	5.07	horizontal	Average
5350.01	20.41	37.20	57.61	74.00	16.39	horizontal	Peak
5373.66	11.53	37.32	48.85	54.00	5.15	horizontal	Average
5373.66	23.25	37.32	60.57	74.00	13.43	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac40-5310
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

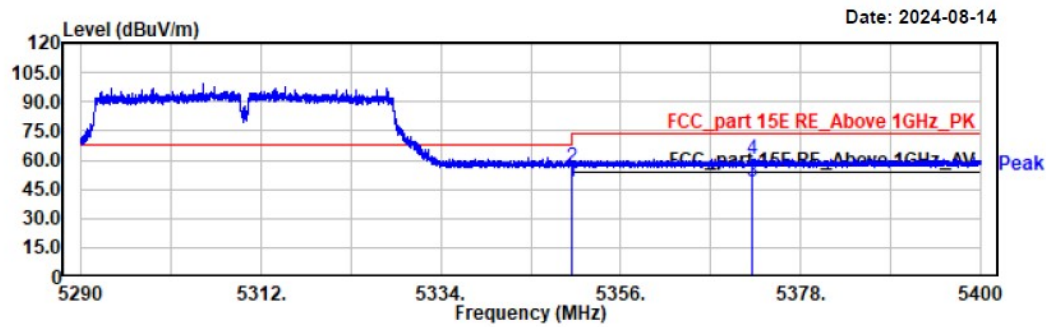

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	11.76	37.20	48.96	54.00	5.04	vertical	Average
5350.01	19.38	37.20	56.58	74.00	17.42	vertical	Peak
5372.12	11.30	37.31	48.61	54.00	5.39	vertical	Average
5372.12	23.47	37.31	60.78	74.00	13.22	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac80-5290
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

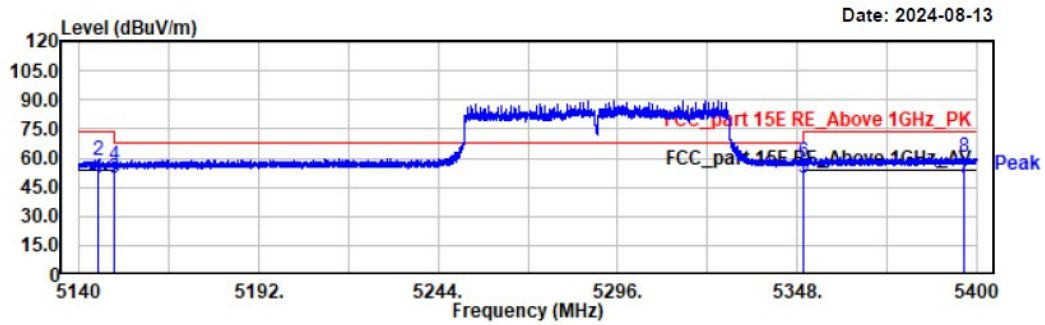

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5145.56	12.44	37.27	49.71	54.00	4.29	horizontal	Average
5145.56	21.74	37.27	59.01	74.00	14.99	horizontal	Peak
5150.00	12.32	37.28	49.60	54.00	4.40	horizontal	Average
5150.00	19.22	37.28	56.50	74.00	17.50	horizontal	Peak
5350.00	12.64	37.20	49.84	54.00	4.16	horizontal	Average
5350.00	21.13	37.20	58.33	74.00	15.67	horizontal	Peak
5396.41	12.03	37.44	49.47	54.00	4.53	horizontal	Average
5396.41	23.34	37.44	60.78	74.00	13.22	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac80-5290
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

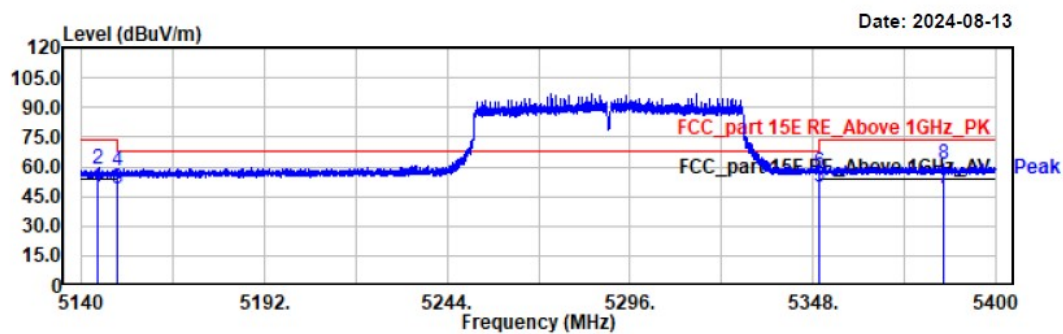

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5144.58	12.45	37.27	49.72	54.00	4.28	vertical	Average
5144.58	21.29	37.27	58.56	74.00	15.44	vertical	Peak
5150.00	11.88	37.28	49.16	54.00	4.84	vertical	Average
5150.00	20.39	37.28	57.67	74.00	16.33	vertical	Peak
5350.00	12.40	37.20	49.60	54.00	4.40	vertical	Average
5350.00	20.24	37.20	57.44	74.00	16.56	vertical	Peak
5385.34	11.35	37.38	48.73	54.00	5.27	vertical	Average
5385.34	23.72	37.38	61.10	74.00	12.90	vertical	Peak

Band 3

Project No.: 2407W89604E-RF

Test Mode: 11a-5500


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

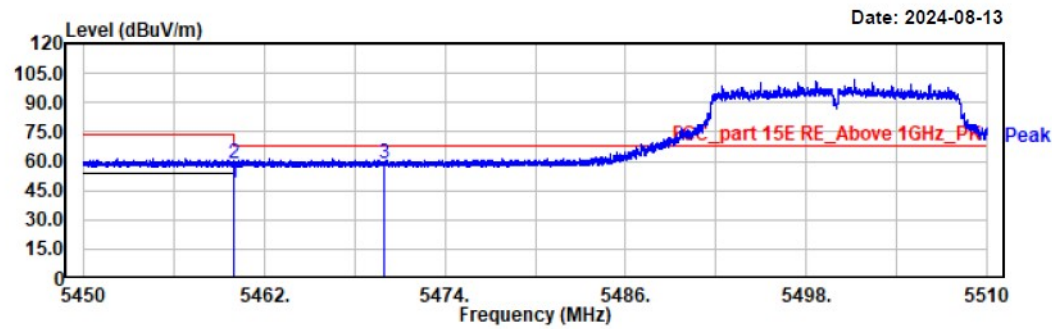

Freq MHz	Reading dBUV	Factor dB/m	Result dBUV/m	Limit dBUV/m	Margin dB	Polarity	Remark
5460.00	11.43	37.48	48.91	54.00	5.09	horizontal	Average
5460.00	21.18	37.48	58.66	74.00	15.34	horizontal	Peak
5470.00	21.04	37.55	58.59	68.20	9.61	horizontal	Peak

Project No.: 2407W89604E-RF

Test Mode: 11a-5500


EUT Model: SLM927

Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa

Tested by: Wlif Wu


Power Source: AC 120V/60Hz

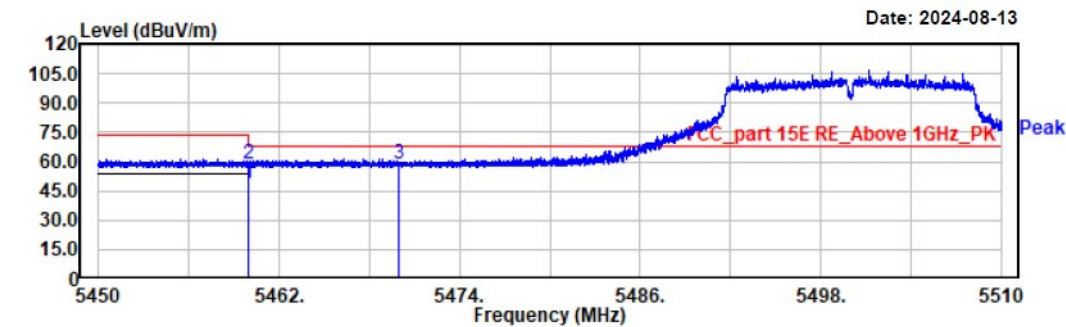

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5460.00	11.74	37.48	49.22	54.00	4.78	vertical	Average
5460.00	20.87	37.48	58.35	74.00	15.65	vertical	Peak
5470.00	20.81	37.55	58.36	68.20	9.84	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5700
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

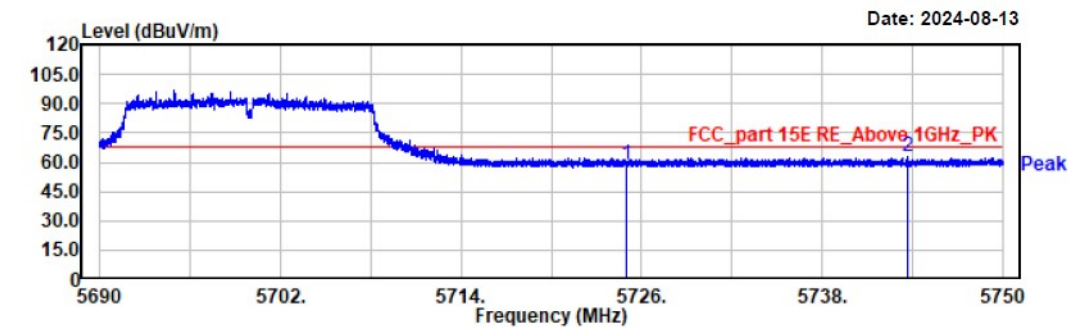

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	19.63	39.27	58.90	68.20	9.30	horizontal	Peak
5743.63	23.27	39.42	62.69	68.20	5.51	horizontal	Peak

Project No.: 2407W89604E-RF
Test Mode: 11a-5700
EUT Model: SLM927
Test distance: 3m


Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

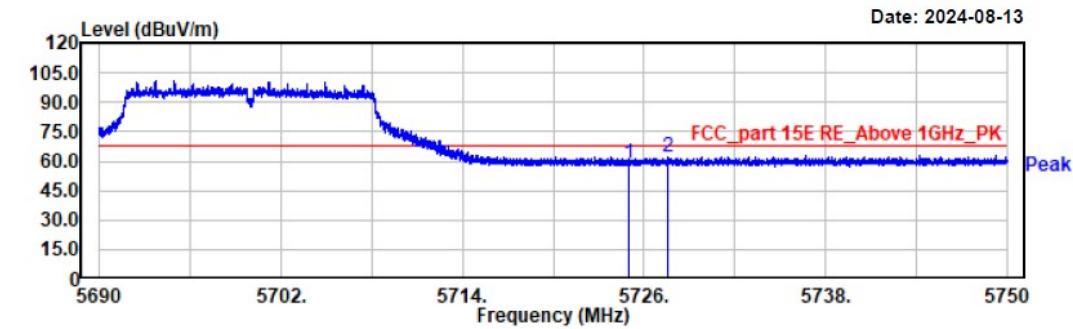

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	19.48	39.27	58.75	68.20	9.45	vertical	Peak
5727.61	23.10	39.30	62.40	68.20	5.80	vertical	Peak

Project No.: 2407W89604E-RF
Test Mode: 11ac20-5500
EUT Model: SLM927
Test distance: 3m

Temp/Humi/ATM: 23.9°C/60%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

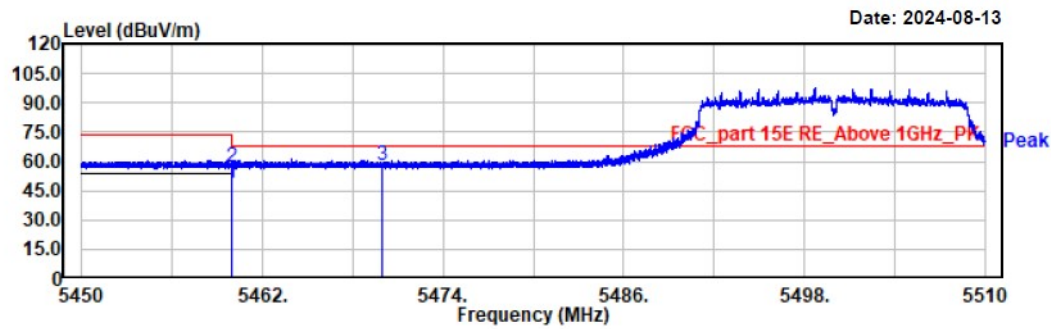

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5460.00	11.43	37.48	48.91	54.00	5.09	horizontal	Average
5460.00	19.60	37.48	57.08	74.00	16.92	horizontal	Peak
5470.00	20.34	37.55	57.89	68.20	10.31	horizontal	Peak