



Report No.SH15110005W01


FCC RF TEST REPORT

Issued to

Smartx Network Technology(Shanghai) Co., Ltd.

For

LEO & GONDAR

Model Name : Z-1001
Trade Name : 
Brand Name : GALAXY ZEGA
Standard : 47 CFR Part 15, Subpart C
ANSI C63.4-2014
FCC ID : 2AGE5-ZEGA0001
Test date : Nov.5,2015 to Nov.7,2015
Issue date : Nov.10,2015

by
Shanghai MORLAB Communication Technology Co., Ltd.

Tested by

Wu Hongfei

Approved by

Gu Yujing

Review by

Zhang Jie



CTIA Authorized Test Lab
LAB CODE 20081223-00
IEEE 1725

OTA

OFTA
電訊管理局



GCF
Official Observer of
Global Certification Forum

Bluetooth
BQTF

FCC
Reg.
No.741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shanghai MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shanghai MORLAB Communication Technology Co., Ltd. to his customer. Supplier or others persons directly concerned. Shanghai MORLAB Communication Technology Co., Ltd. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shanghai MORLAB Communication Technology Co., Ltd. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1.	General Information	4
1.1	Applicant	4
1.2	Manufacturer	4
1.3	Description of EUT	4
2.	Facilities and Accreditations	5
2.1	Test Facility	5
2.2	Environmental Conditions	5
2.3	Measurement Uncertainty	5
2.4	List of Equipments Used	6
3.	Test Standards and Results	7
4.	47 CFR Part 15C	8
4.1	Antenna requirement	8
5.	Test Result.....	9
5.1	Peak Output Power.....	9
5.2	Average Power	12
5.3	6dB & 20dB Bandwidth.....	13
5.4	Conducted Spurious Emissions and Band Edge	17
5.5	Power Spectral Density(PSD)	21
5.6	Restricted Frequency Bands.....	23
5.7	Conducted Emission	27
5.8	Radiated Emission.....	30
Annex A	Photos of the EUT	33
Annex B	Photos of Setup	35

Change History

Issue	Date	Reason for change
1.0	Nov.10,2015	First edition

1. General Information

1.1 Applicant

Smartx Network Technology(Shanghai) Co., Ltd.


Room 502-5, Building No. 23, No. 518, Xinzhuan Rd., Songjiang District, Shanghai, PRChina.

1.2 Manufacturer

Smartx Network Technology(Shanghai) Co., Ltd.

Room 502-5, Building No. 23, No. 518, Xinzhuan Rd., Songjiang District, Shanghai, PRChina.

1.3 Description of EUT

EUT Name.....: LEO & GONDAR
Model Name.....: Z-1001
Brand Name.....: GALAXY ZEGA
Trade Name.....: 
Hardware Version.....: A4.4-1
Software Version.....: A1.5
Modulation Type.....: Bluetooth V4.0:1Mbps(GFSK), FHSS
Frequency Range.....: 2.402GHz - 2.480GHz (at interval of 2MHz)
Channel Number.....: 40
EUT Stage.....: Production Unit
Antenna Type.....: PCB Antenna
Antenna Gain.....: 6 dBi
Battery.....: 4.2V, 800mAh

NOTE 1:

*The EUT is a smart toy controlled by Bluetooth. The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).*

NOTE 2:

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacture.

2. Facilities and Accreditations

2.1 Test Facility

Shanghai Morlab Communications Technology Co., Ltd. Morlab Laboratory is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6644. A 9*6*6(m) full/semi-anechoic chamber was used for the radiated emissions test.

2.2 Environmental Conditions

Ambient temperature: 15~35°C

Relative humidity: 30~60%

Atmosphere pressure: 86-106kPa

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission: $\pm 1.76\text{dB}$

Uncertainty of Radiated Emission: $\pm 3.16\text{dB}$

2.4 List of Equipments Used

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Service Simulator	Anritsu	MT8852A	6K00002788	2015.9.22	1year
Spectrum Analyzer	R&S	FSU26	200880	2015.2.25	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Power Splitter	Mini-Circuits	ZFRSC-183-S+	765001016	(n.a.)	(n.a.)
Attenuator 1	Resnet	10dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)
Full/Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2015.9.14	3year
EMI Test Receiver	R&S	ESCI	101351	2015.8.5	1year
Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2015.7.25	1year
Antenna	R&S	HL562	100385	2015.6.17	1year
Antenna	R&S	HF906	100565	2015.6.17	1year
LISN	Rohde&Schwarz	ENV216	812744	2015.9.22	1year
Personal Computer	HP	(n.a.)	(n.a.)	(n.a.)	(n.a.)
Test Antenna-Horn	Schwarzbeck	BBHA9170	BBHA91970171	2015.9.22	1year
Test Antenna-Log	Schwarzbeck	VULB 9163	9163-561	2015.9.25	1year
Test Antenna-Loop	Rohde&Schwarz	HFH2-Z2	860004/001	2015.9.22	1year
Temporary Antenna Connector	Farpu	SMA-K	(n.a.)	(n.a.)	(n.a.)
RF Cable	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)

NOTE:

Equipments listed above have been calibrated and are in the period of validation.

3. Test Standards and Results

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

FCC Part 15 Subpart C §15.247

ANSI C63.4-2014

June 2015 KDB558074

NOTE:

(1) All test items were verified and recorded according to the standards and without any deviation during the test.

(2) This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart C (Bluetooth, 2.4GHz ISM band radiators), recorded in a separate test report.

Test items and the results are as follows:

No.	FCC Rules	Description	Result
1	15.203	Antenna Requirement	Pass
2	15.247(b)	Peak Output power	Pass
3	15.247(b)	Average Power	Pass
4	15.247(a)	20dB Bandwidth	Pass
5	15.247(d)	Conducted Spurious Emission and Band Edge	Pass
6	15.247(d)	Restricted Frequency Bands	Pass
7	15.207	Conducted Emission	Pass
8	15.247(d) 15.209	Radiated Emission	Pass
9	15.247(e)	Power Spectral Density (PSD)	Pass

4. 47 CFR Part 15C

4.1 Antenna requirement

4.1.1 Applicable standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

5. Test Result

5.1 Peak Output Power


5.1.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

5.1.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

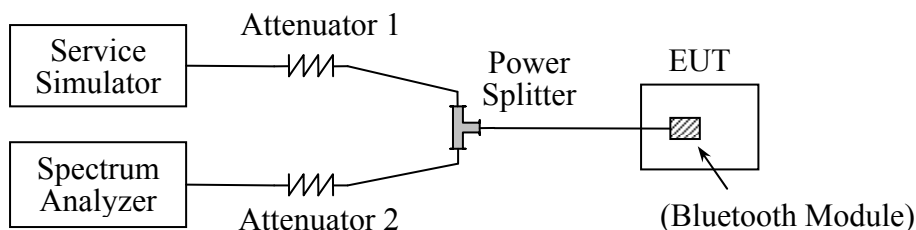

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.


5.1.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. (Duty cycle > 98%)

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Refer to plot	Limit		Verdict
		dBm	W		dBm	W	
0	2402	-1.14	0.000769	Plot A	30	1	Pass
19	2440	-1.69	0.000678	Plot B			Pass
39	2480	-2.40	0.000575	Plot C			Pass

B. Test Plots:

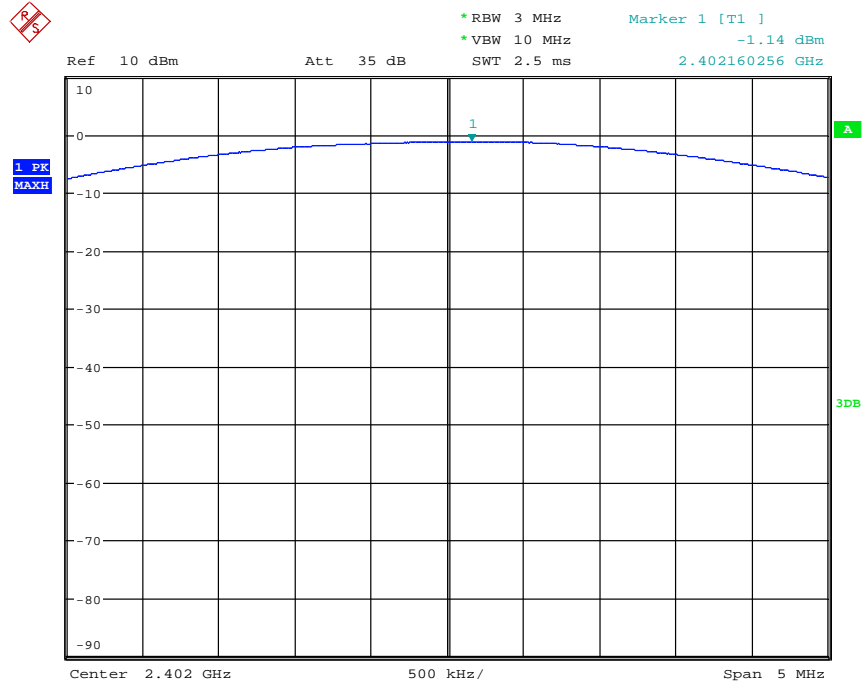


Date: 5.NOV.2015 16:14:54

(Plot A: Channel 0:2402MHz)

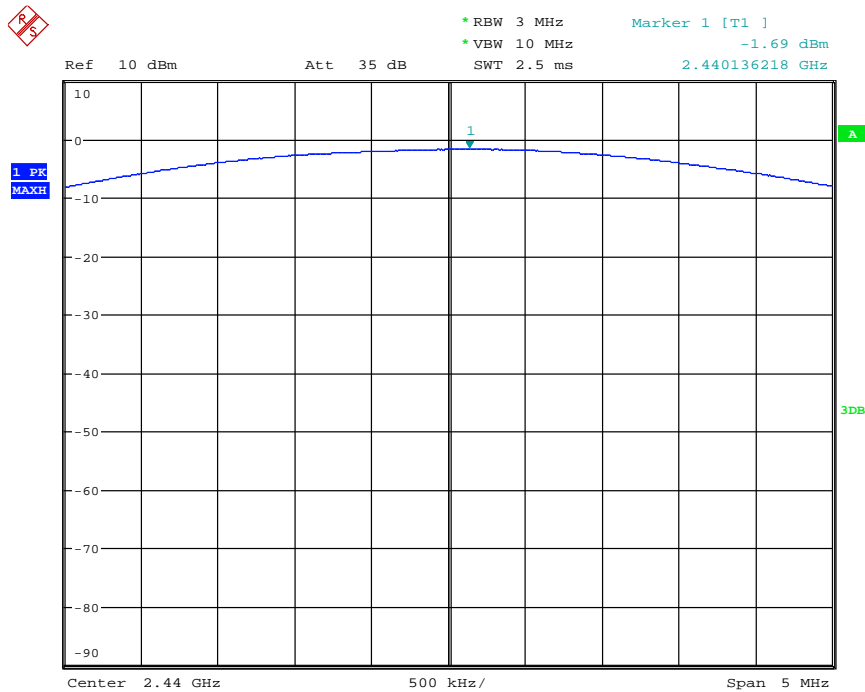

Date: 5.NOV.2015 16:15:52

(Plot B:Channel 19: 2440MHz)

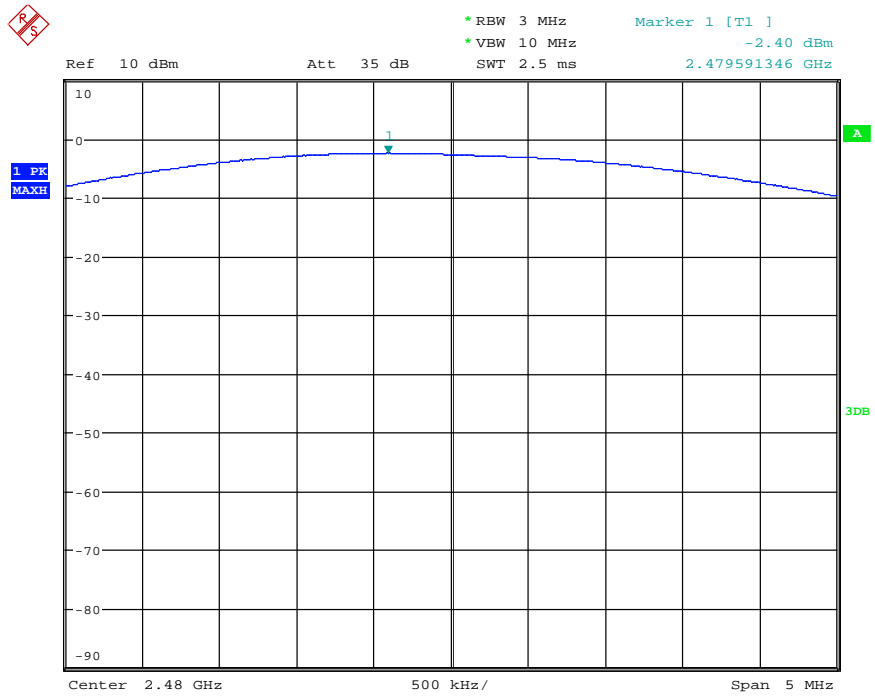

Date: 5.NOV.2015 16:16:23

(Plot C: Channel 39:2480MHz)


5.2 Average Power

5.2.1 Requirement

None; for reporting purposes only.

5.2.2 Test Description

The transmitter output was split to 2 ways, the one was connected to Service Simulator as monitor, the other one was connected to Power Meter. (Duty cycle > 98%)

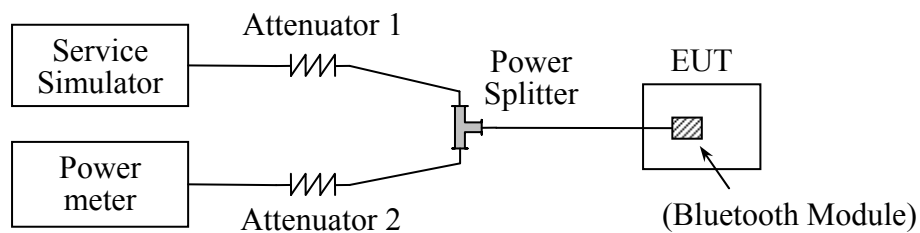

5.2.3 Results

Channel	Frequency (MHz)	Measured Output Peak Power	
		dBm	W
0	2402	-1.44	0.000718
19	2440	-2.14	0.000611
39	2480	-2.86	0.000518

5.3 6dB & 20dB Bandwidth

5.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2 Test Description

See section 5.1.2 of this report.


5.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

A. Test Verdict:


Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Refer to plot	20dB Bandwidth (MHz)	Refer to plot	Limit (KHz)	Result
0	2402	677.88	Plot A1	1.240	Plot A2	≥ 500	Pass
19	2440	677.88	Plot B1	1.240	Plot B2	≥ 500	Pass
39	2480	673.07	Plot C1	1.250	Plot C2	≥ 500	Pass

B. Test Plots:

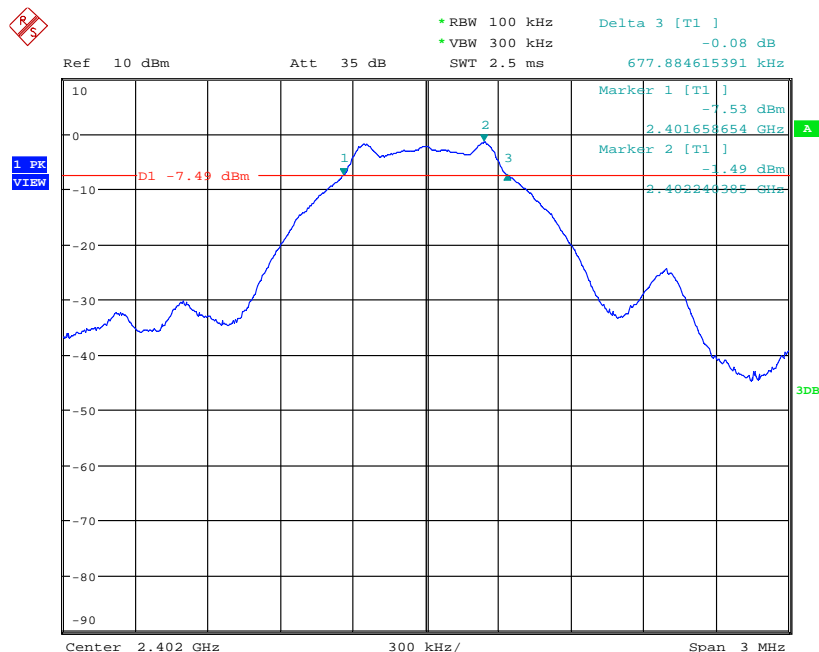


Date: 5.NOV.2015 16:24:55

(Plot A1:Channel 0:2402MHz)

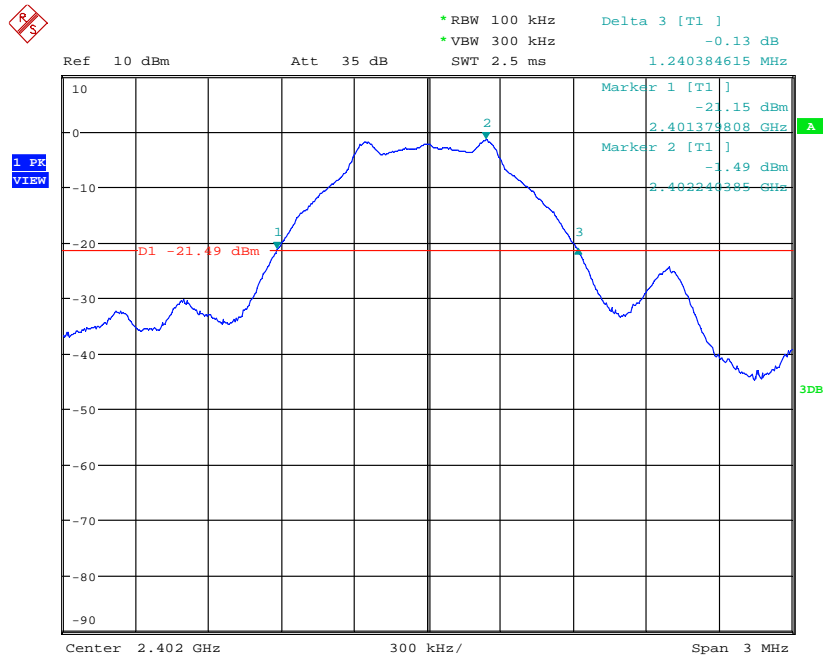


Date: 5.NOV.2015 16:26:12

(Plot A2:Channel 0:2402MHz)

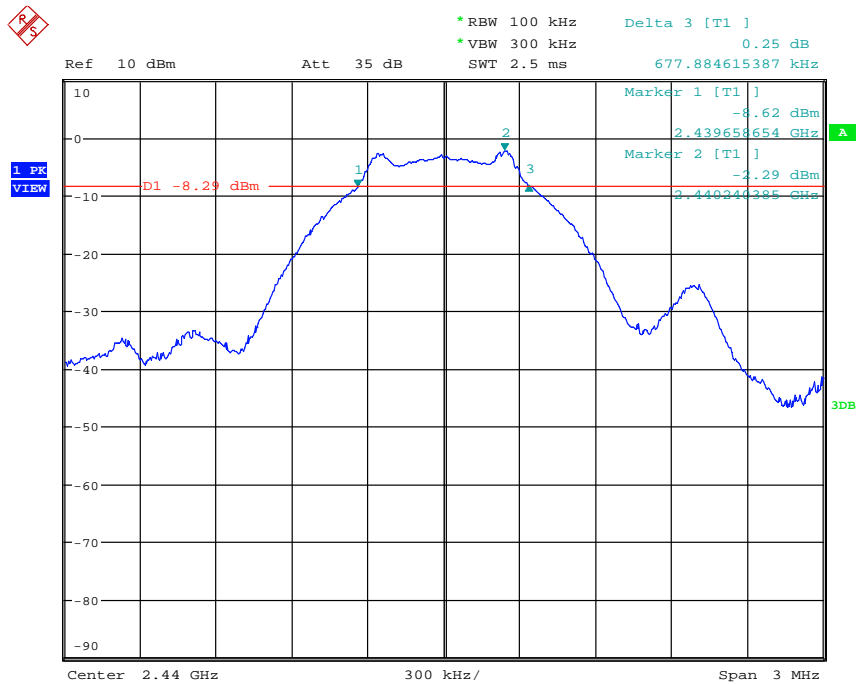


Date: 5.NOV.2015 16:32:37

(Plot B1:Channel 19:2440MHz)

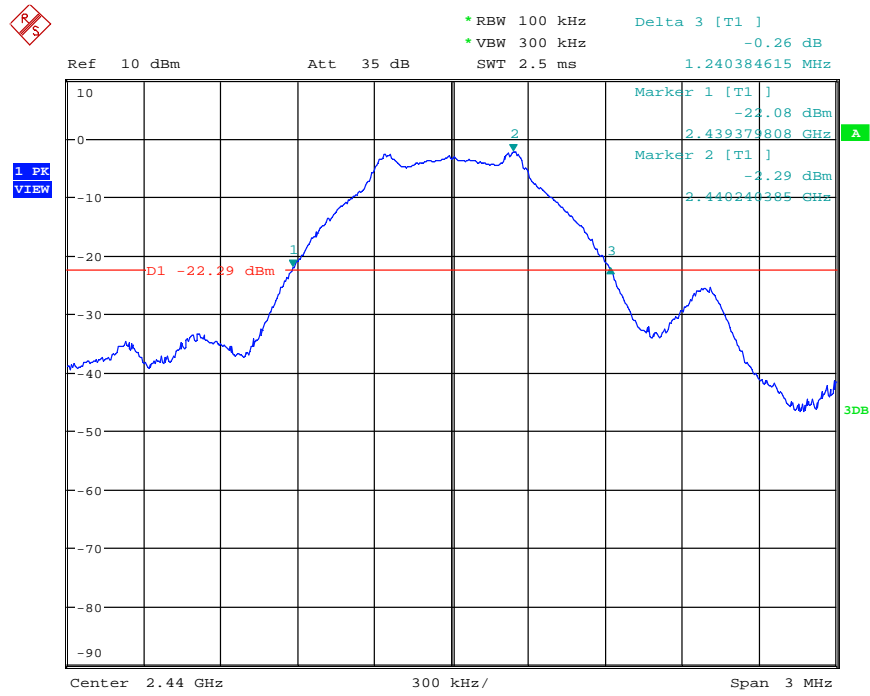


Date: 5.NOV.2015 16:31:14

(Plot B2:Channel 19:2440MHz)

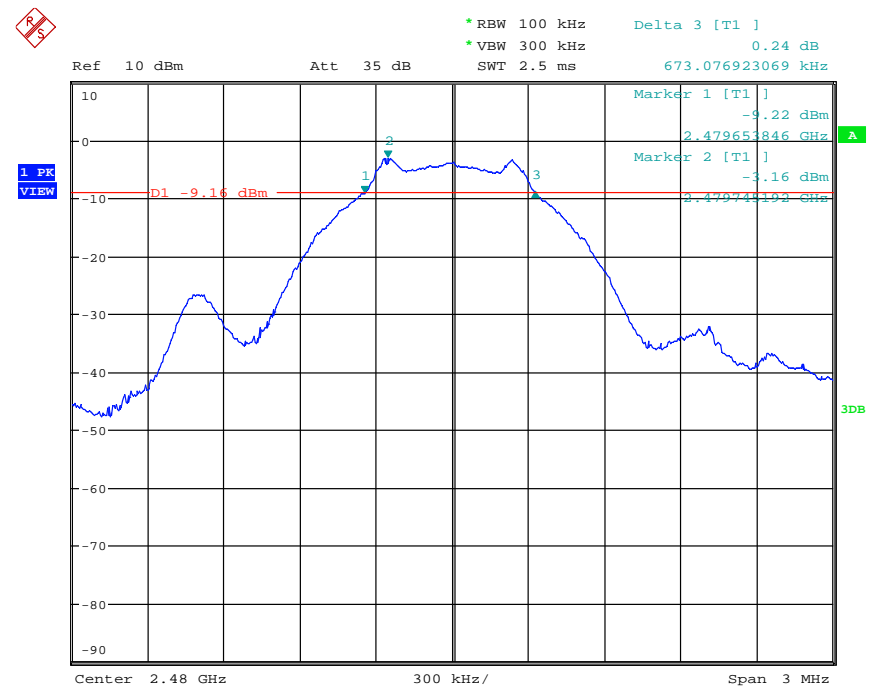

Date: 5.NOV.2015 16:34:53

(Plot C1:Channel 39:2480MHz)

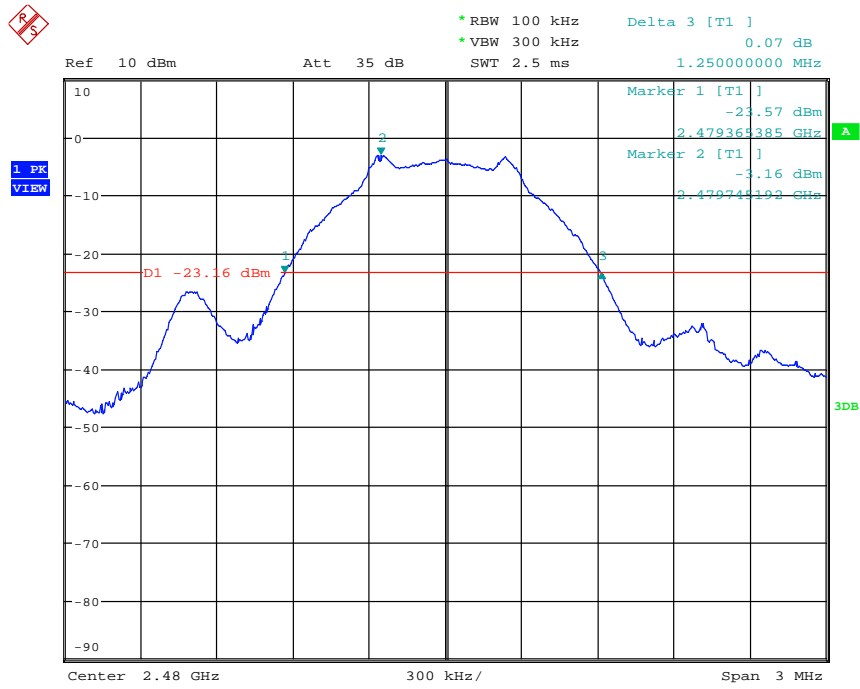

Date: 5.NOV.2015 16:36:09

(Plot C2:Channel 39:2480MHz)

5.4 Conducted Spurious Emissions and Band Edge

5.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Description

See section 5.1.2 of this report.


5.4.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured max out of band emission(dBm)	Refer to plot	Limit(dBm)		Result
				Carrier level	Calculated 20dBc limit	
0	2402	-46.43	Plot A1/A2	-2.34	-22.34	Pass
19	2440	-45.82	Plot B	-3.60	-23.60	Pass
39	2480	-48.57	Plot C1/C2	-5.39	-25.39	Pass

B. Test Plot:

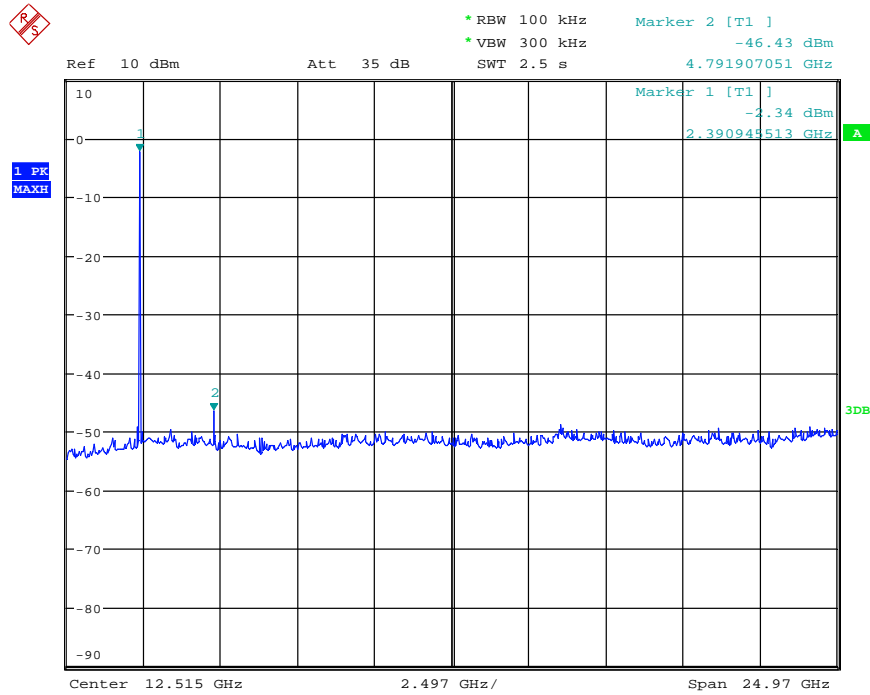


Date: 5.NOV.2015 16:44:21

(Plot A1:Channel0:2402MHz 30MHz~25GHz)

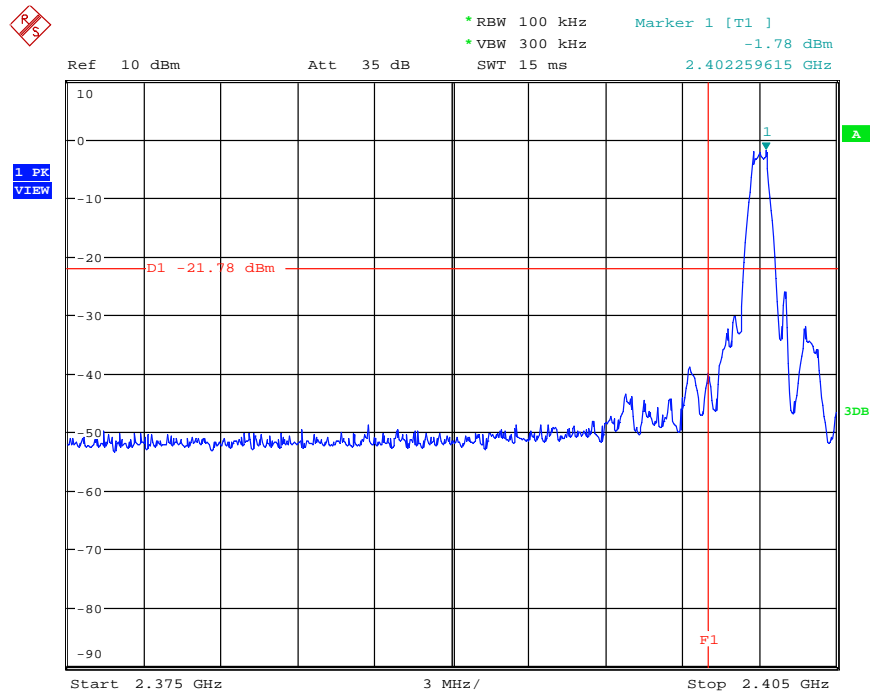


Date: 5.NOV.2015 16:51:00

(Plot A2: Channel 0: 2402MHz Band Edge)

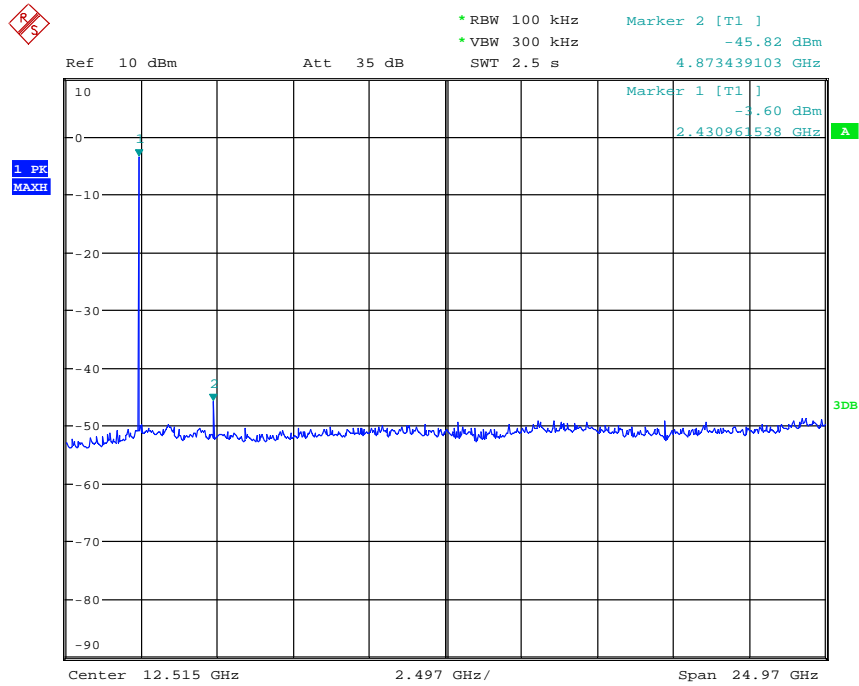


Date: 5.NOV.2015 16:42:25

(PlotB: Channel 19:2440MHz 30MHz~25GHz)

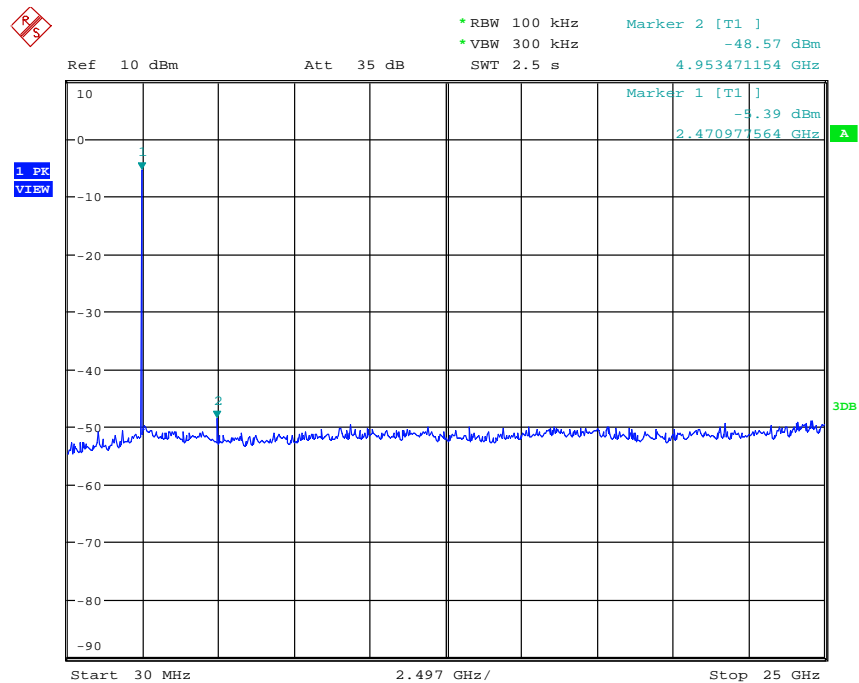

Date: 5.NOV.2015 16:40:04

(PlotC1:Channel39:2480MHz 30MHz~25GHz)

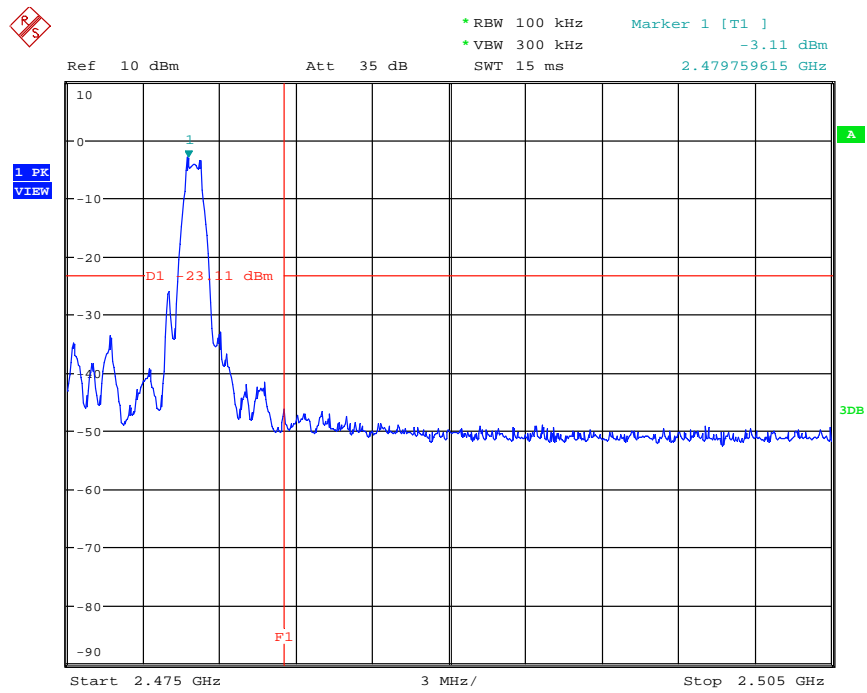

Date: 5.NOV.2015 16:53:18

(PlotC2:Channel 39:2480MHz Band Edge)

5.5 Power Spectral Density(PSD)

5.5.1 Requirement

According to FCC section 15.247(e), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used

5.5.2 Test Description


See section 5.1.2 of this report.

5.5.3 Test Result

A. Test Verdict


Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to plot	Limit (dBm/3kHz)	Result
0	2402	-13.48	Plot A	8	Pass
19	2440	-13.66	Plot B	8	Pass
39	2480	-15.18	Plot C	8	Pass

B. Test Plot

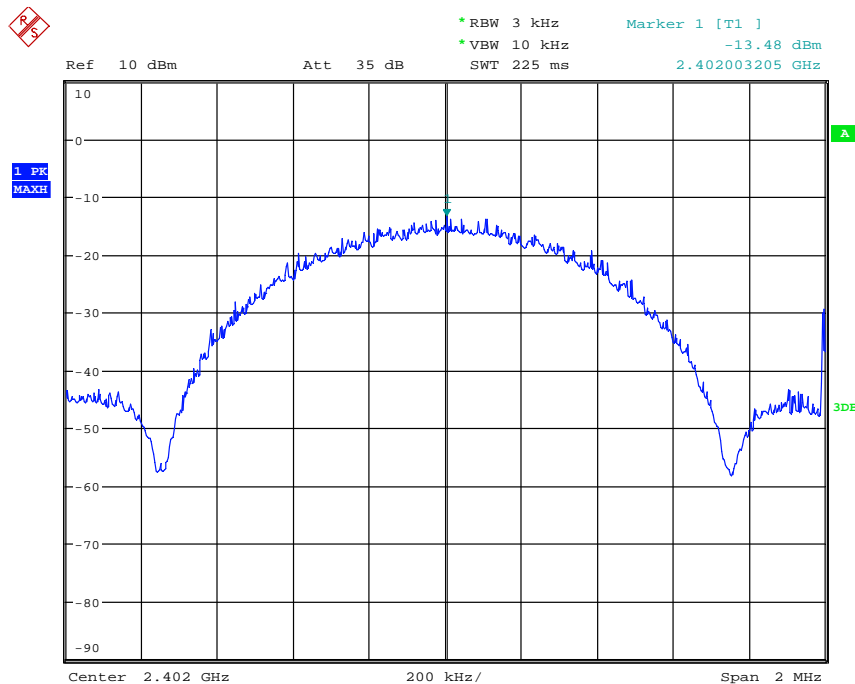


Date: 5.NOV.2015 16:56:53

(Plot A: Channel = 0, 2402MHz)

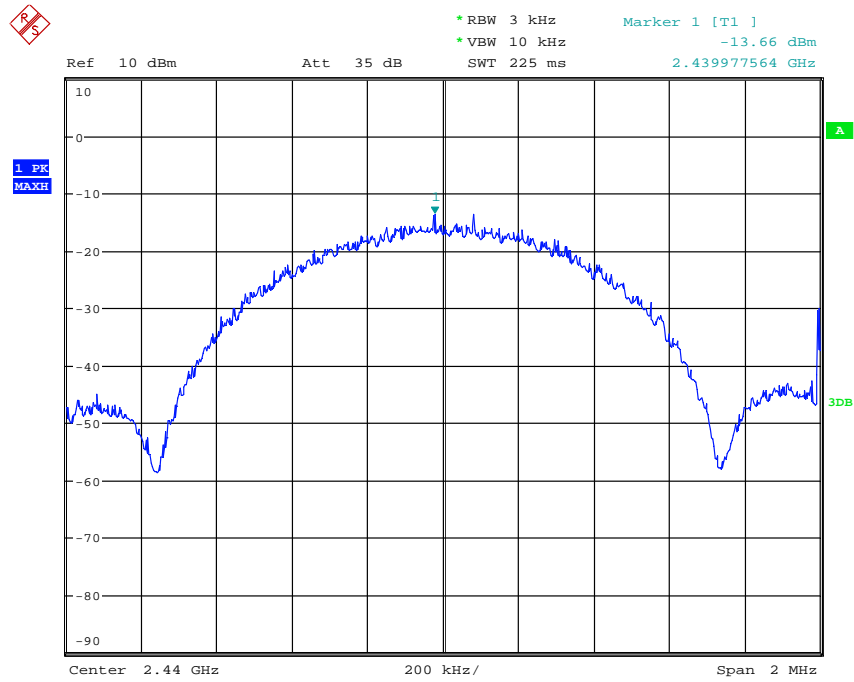

Date: 5.NOV.2015 16:56:06

(Plot B: Channel = 19, 2440MHz)

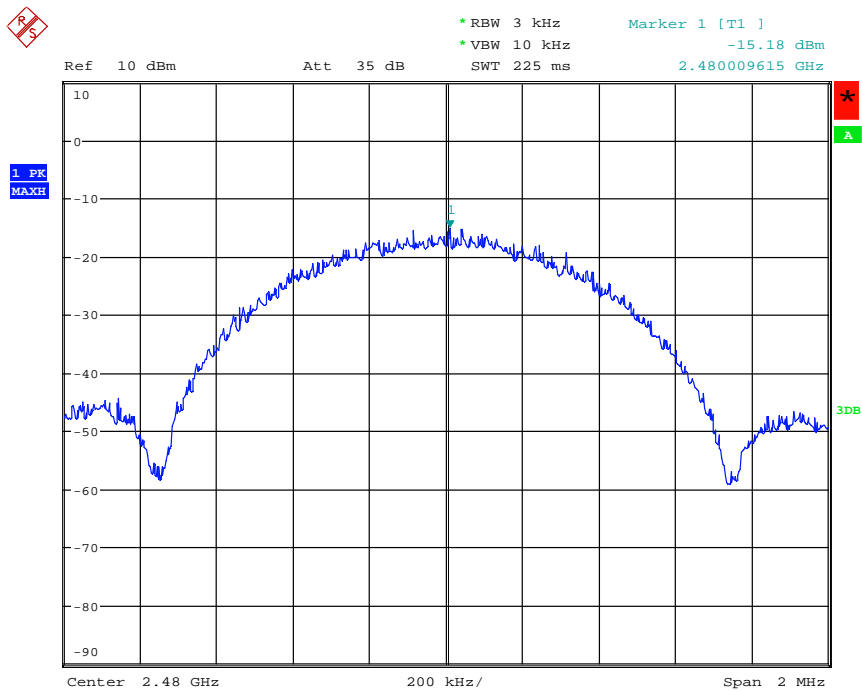

Date: 5.NOV.2015 16:54:26


(Plot C: Channel = 39, 2480MHz)

5.6 Restricted Frequency Bands

5.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, , In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.6.2 Test Description

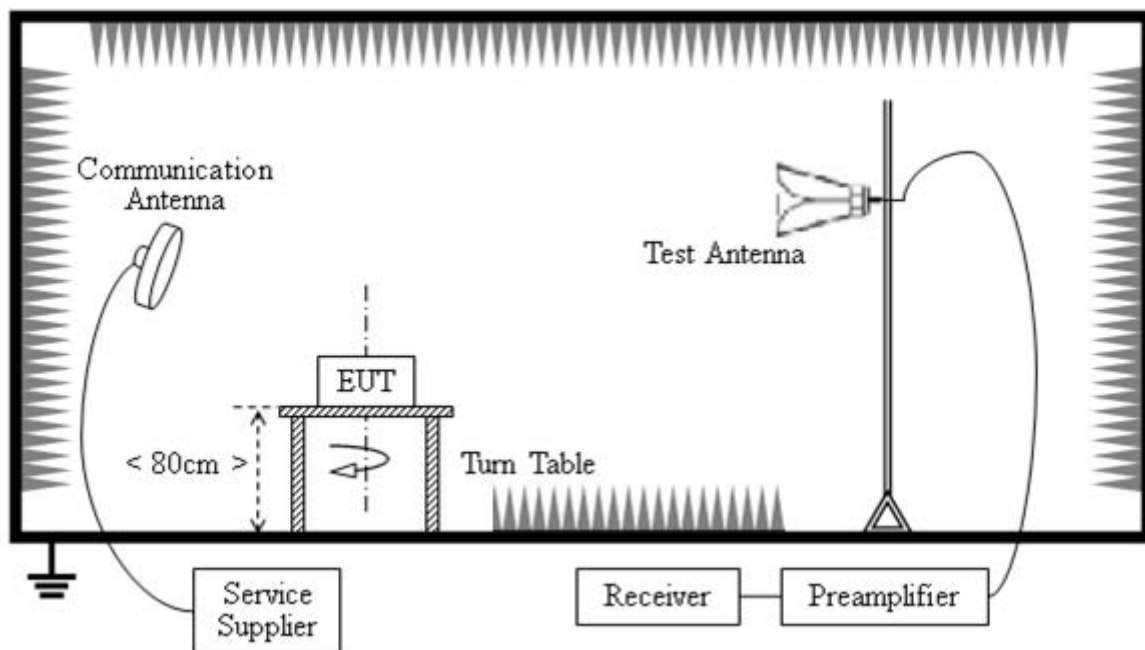

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

5.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dBV/m]} = UR + AT + A\text{Factor [dB]}; AT = LCable \text{ loss [dB]} - G\text{preamp [dB]}$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

The lowest and highest channels are tested to verify the Restricted Frequency Bands

A. Test Verdict


Ch	Frequency (MHz)	Detector PK/AV	Receiver Reading UR (dBuV/m)	AT (dB)	Afactor (dB@3m)	Max. Emission (dBuV/m)	Limit (dBuV/m)	Result
0	2354.83	PK	35.10	-32.2	32.56	35.46	74	Pass
0	2359.33	AV	28.66	-32.2	32.56	29.02	54	Pass
39	2485.43	PK	36.75	-30.7	32.50	28.55	74	Pass
39	2484.52	AV	29.54	-30.7	32.50	31.34	54	Pass

B. Test Plot

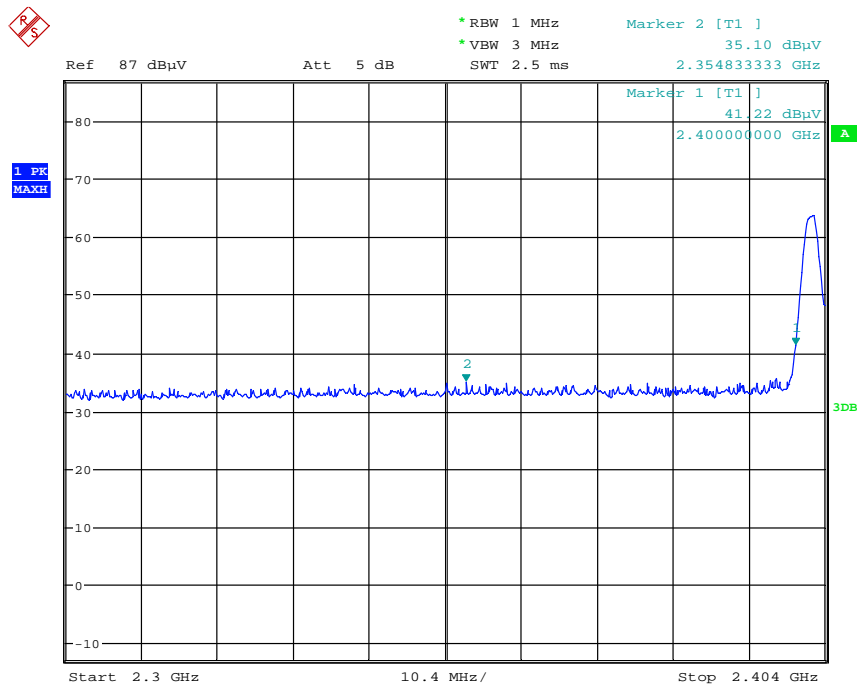


Date: 5.NOV.2015 17:09:10

(Channel = 0 PK)

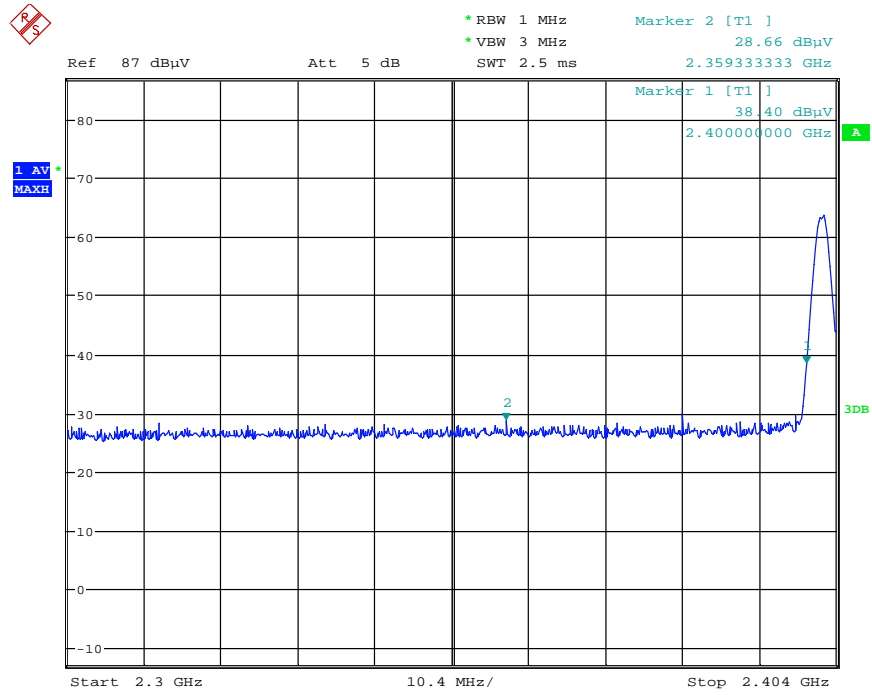


Date: 5.NOV.2015 17:10:03

(Channel = 0 AV)

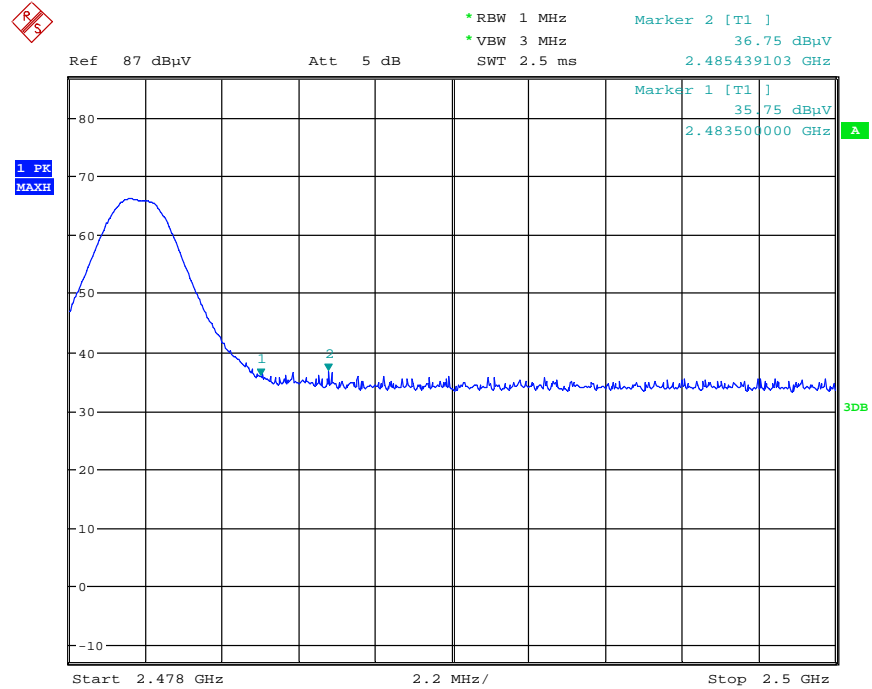

Date: 5.NOV.2015 17:10:43

(Channel = 39 PK)

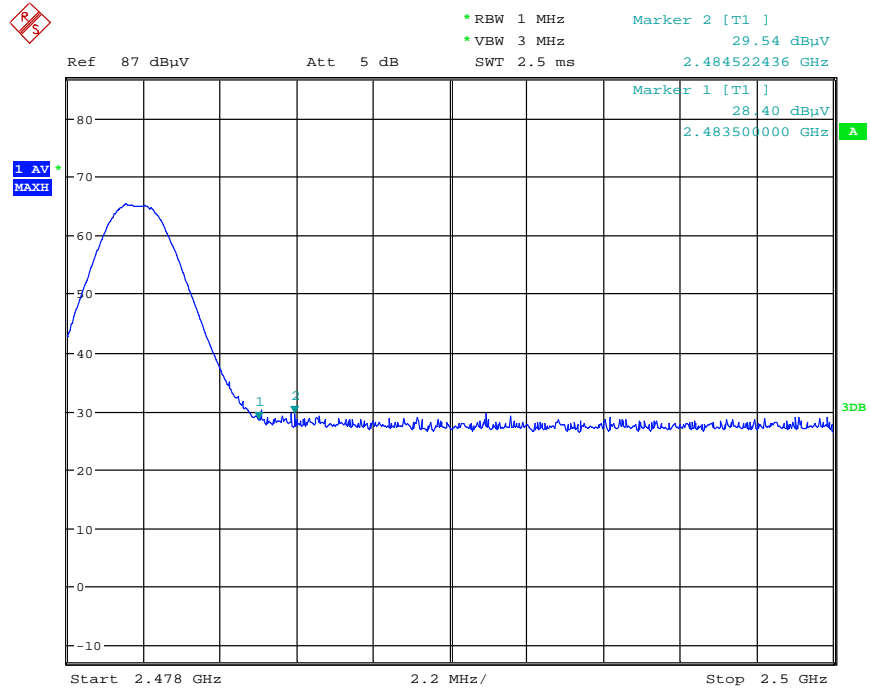

Date: 5.NOV.2015 17:12:18

(Channel = 39 AV)

5.7 Conducted Emission

5.7.1 Requirement


According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network(LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

5.7.2 Test Description

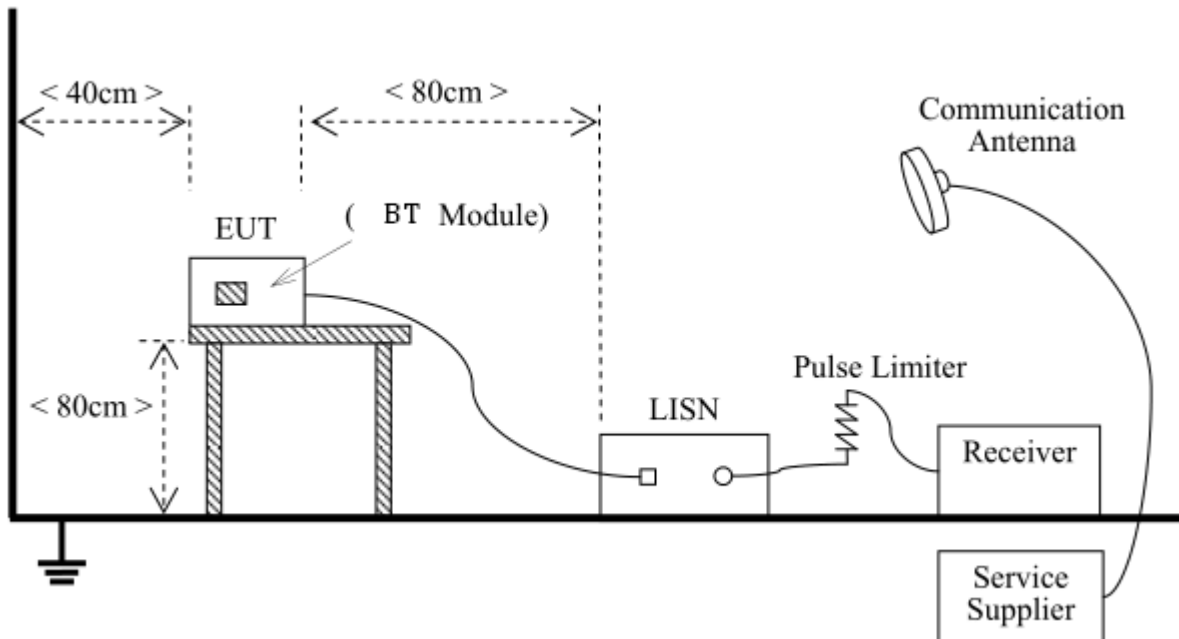


The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2014

5.7.3 Test result


1) Test Result of “L” line:

No.	Frequency MHz	Level dB μ V	Detector	Limit dB μ V	Magin dB
1	0.17	57.09	QP	65.21	8.12
2	0.18	55.40	QP	64.33	8.93
3	0.19	29.84	Average	54.20	24.36
4	0.22	54.38	QP	62.96	8.58
5	0.22	29.06	Average	52.74	23.68
6	0.26	51.22	QP	61.56	10.34
7	0.26	28.23	Average	51.51	23.28
8	0.29	24.75	Average	50.41	25.66
9	0.36	45.48	QP	58.74	13.26
10	0.50	39.86	QP	56.00	16.14
11	0.52	27.23	Average	46.00	18.77
12	0.56	25.60	Average	46.00	20.40

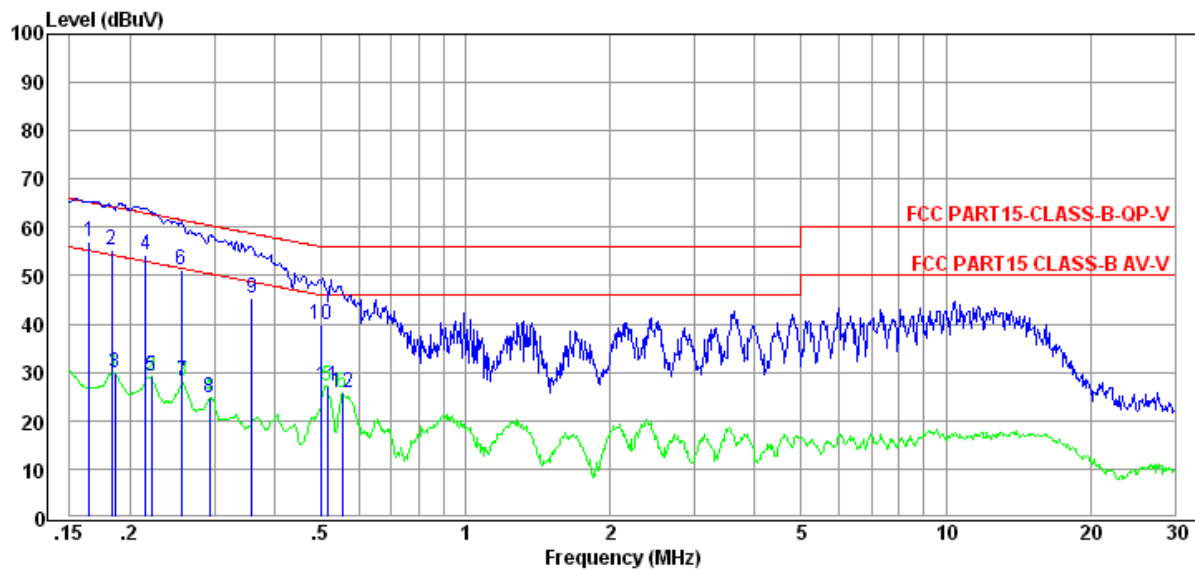

2) Test Result of “N” line:

No.	Frequency MHz	Level dB μ V	Detector	Limit dB μ V	Magin dB
1	0.16	30.02	Average	55.52	25.50
2	0.17	52.20	QP	64.90	12.70
3	0.19	29.76	Average	53.89	24.13
4	0.21	50.31	QP	63.32	13.01
5	0.22	29.20	Average	52.66	23.46
6	0.23	47.64	QP	62.39	14.75
7	0.26	47.24	QP	61.56	14.32
8	0.26	29.90	Average	51.51	21.61
9	0.39	40.96	QP	58.03	17.07
10	0.51	32.70	Average	46.00	13.30
11	0.57	29.78	Average	46.00	16.22
12	1.25	29.50	QP	56.00	26.50

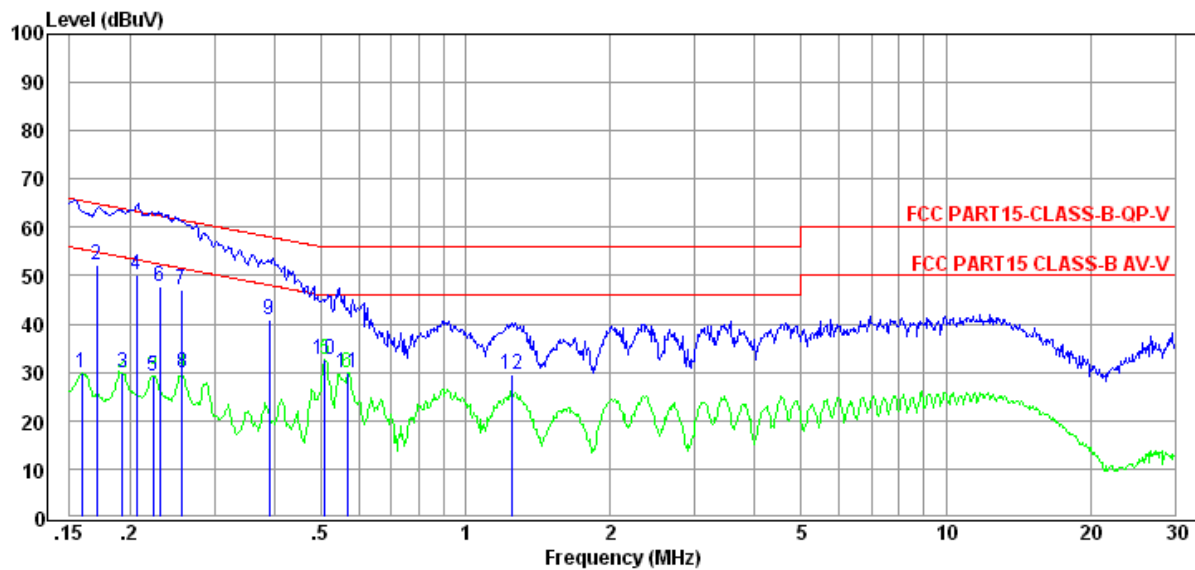

5.8 Radiated Emission

5.8.1 Requirement


According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Limit($\text{dB}\mu\text{V/m}$)	Detector
0.009-0.490	2400/F(kHz)	300	/	/
0.490-1.705	24000/F(kHz)	30	/	/
1.705-30	30	30	/	/
30 - 88	100	3	40	QP
88 - 216	150	3	43.5	QP
216 - 960	200	3	46	QP
960 - 1000	500	3	54	QP
Above 1000	500	3	54	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


5.8.2 Test setup

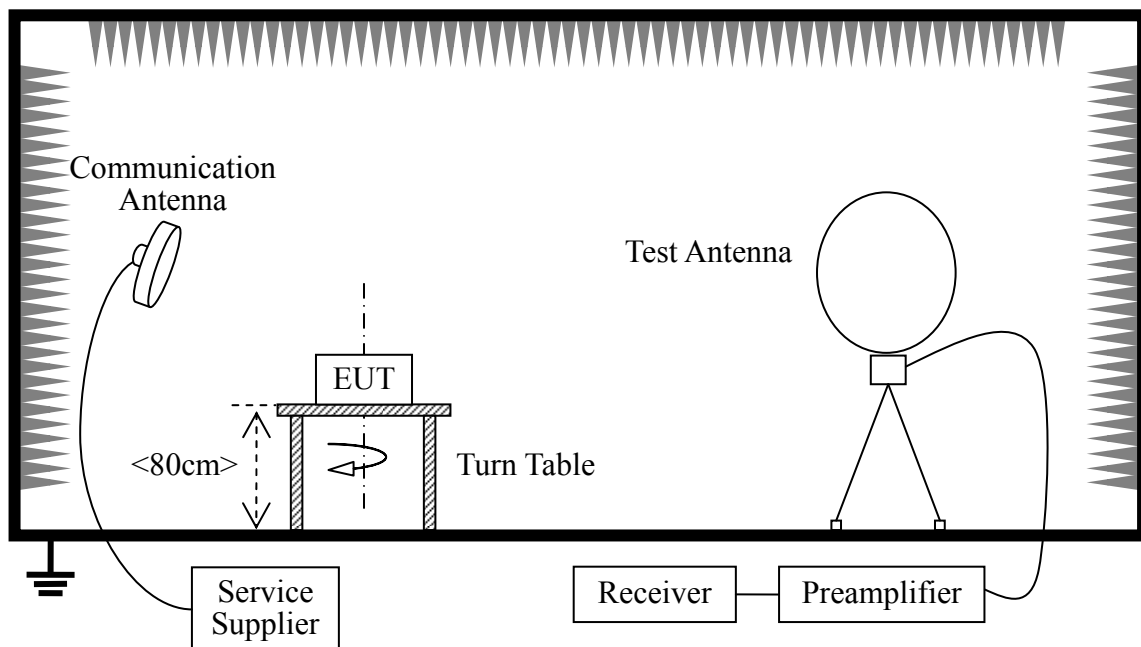

Radiated Emissions Below 30MHz

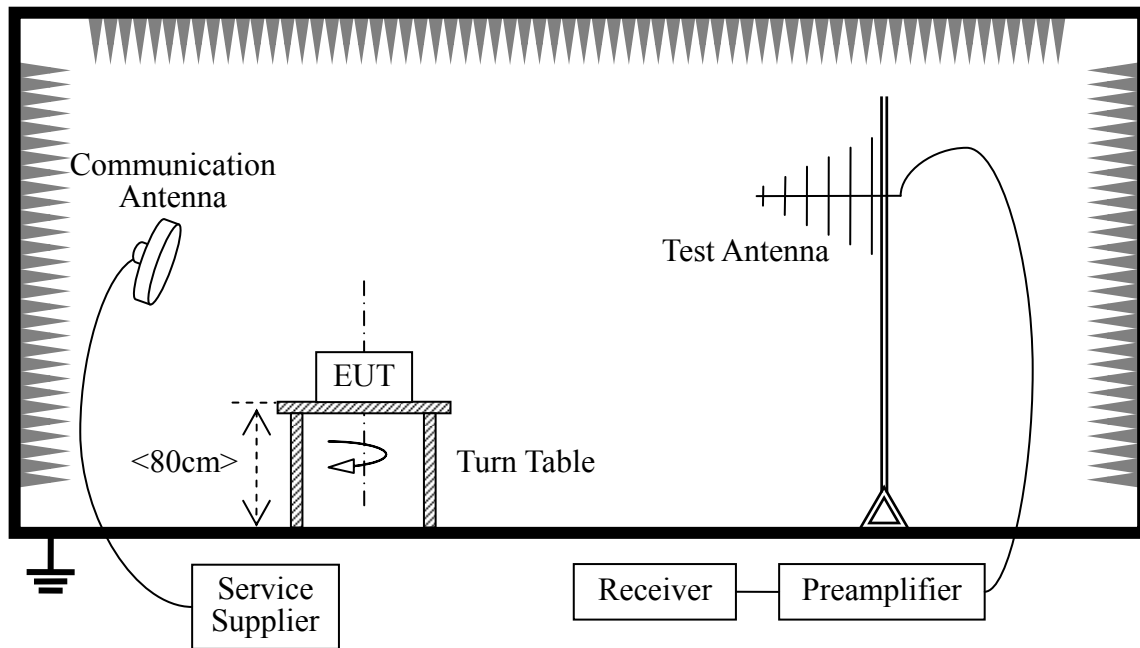

Radiated Emissions 30-1000MHz

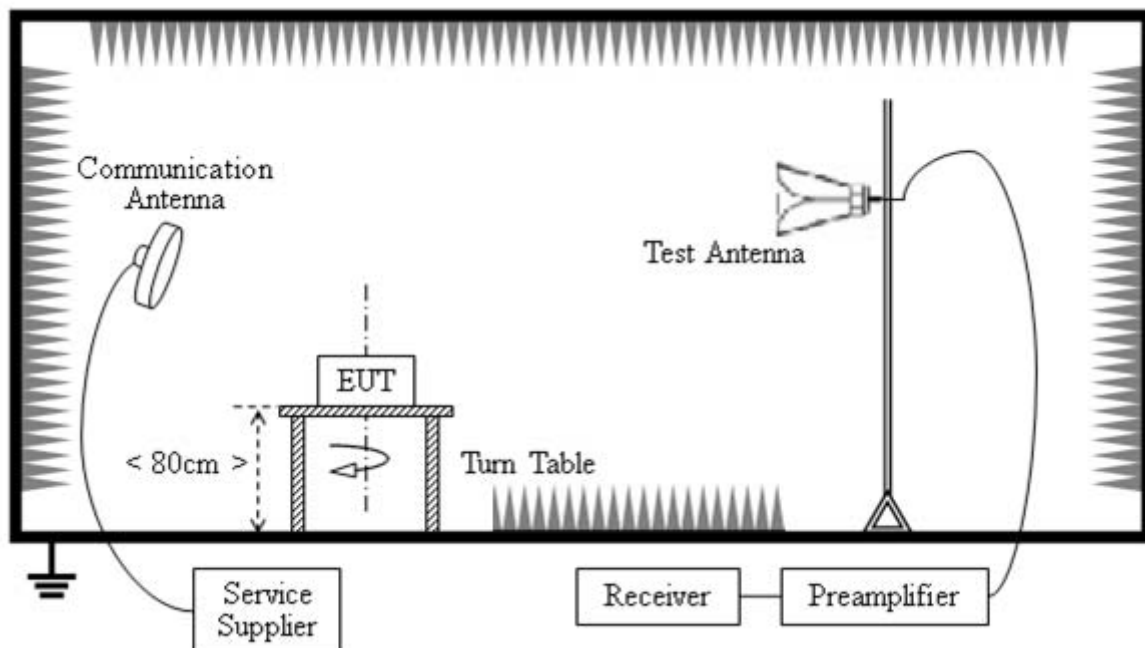

Radiated Emissions above 1000MHz

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2014). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on

test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0o to 360o, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

5.8.3 Test Result

A. Test Result for 9kHz~30MHz

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
--	--	10	--	See Note

Note:

- The amplitude of spurious emissions that are attenuated by more than 10dB below the permissible value has no need to be reported.
- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- Limit line = specific limits (dBuV) + distance extrapolation factor.

B. Test Result for above 30MHz ~ 10th Harmonic

Frequency (MHz)	Level (dBuV)	Limit Line (dBuV)	Margin (dB)	Antenna Polarization	Result
42.90	18.27	40.00	21.73	Horizontal	PASS
104.54	15.06	43.50	28.44	Horizontal	PASS
346.81	19.20	46.00	26.80	Horizontal	PASS
3086.44	23.87	54.00	30.13	Horizontal	PASS
3902.97	25.65	54.00	28.35	Horizontal	PASS
4727.78	26.64	54.00	27.36	Horizontal	PASS
7235.36	29.47	54.00	24.53	Horizontal	PASS
98.14	42.24	43.50	1.26	Vertical	PASS
147.92	32.26	43.50	11.24	Vertical	PASS
218.31	34.14	46.00	11.86	Vertical	PASS
4257.82	26.87	54.00	27.13	Vertical	PASS
4731.08	26.83	54.00	27.17	Vertical	PASS
5027.34	28.68	54.00	25.32	Vertical	PASS
7229.47	29.70	54.00	24.30	Vertical	PASS

Note:

The worst case (Channel 0:2402MHz) is recorded in the report.


Annex A Photos of the EUT




Z-1001 (LEO)



Z-1001 (LEO)

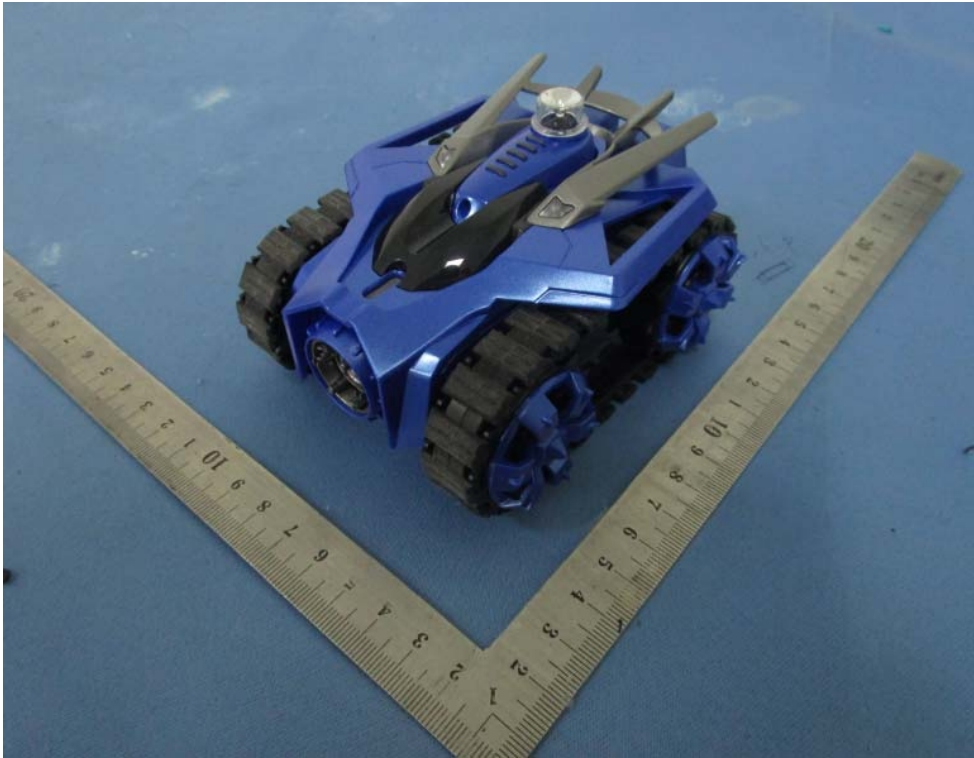


Z-1001 (GONDAR)

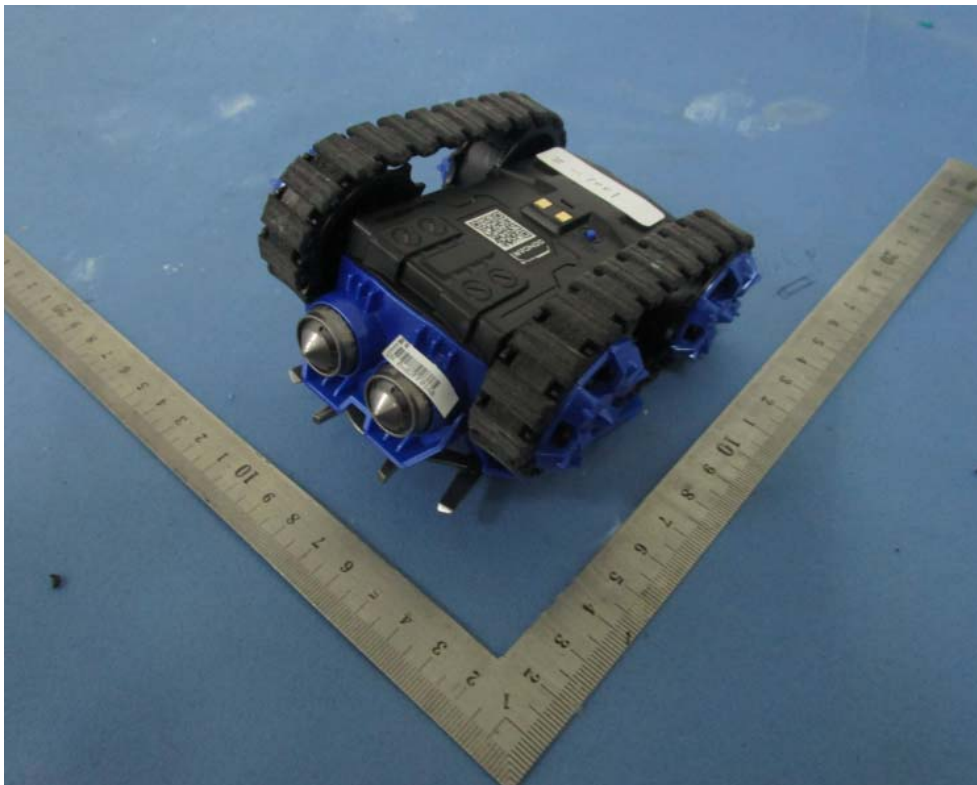

Z-1001 (GONDAR)


Annex B Photos of Setup

1. RF

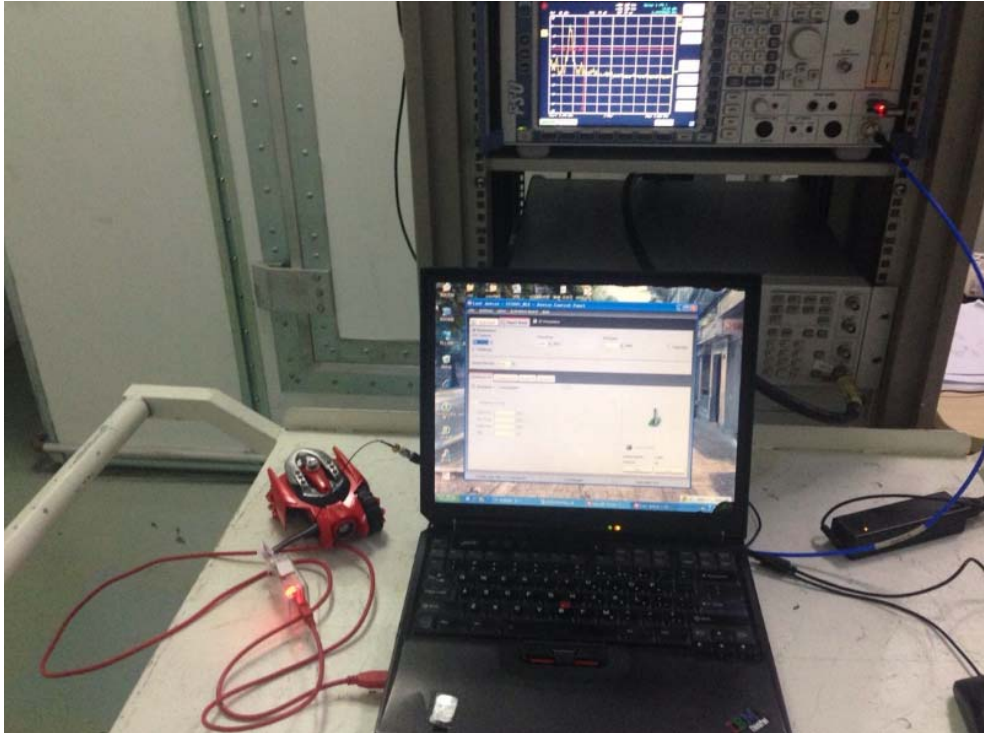



2. Conducted Emission



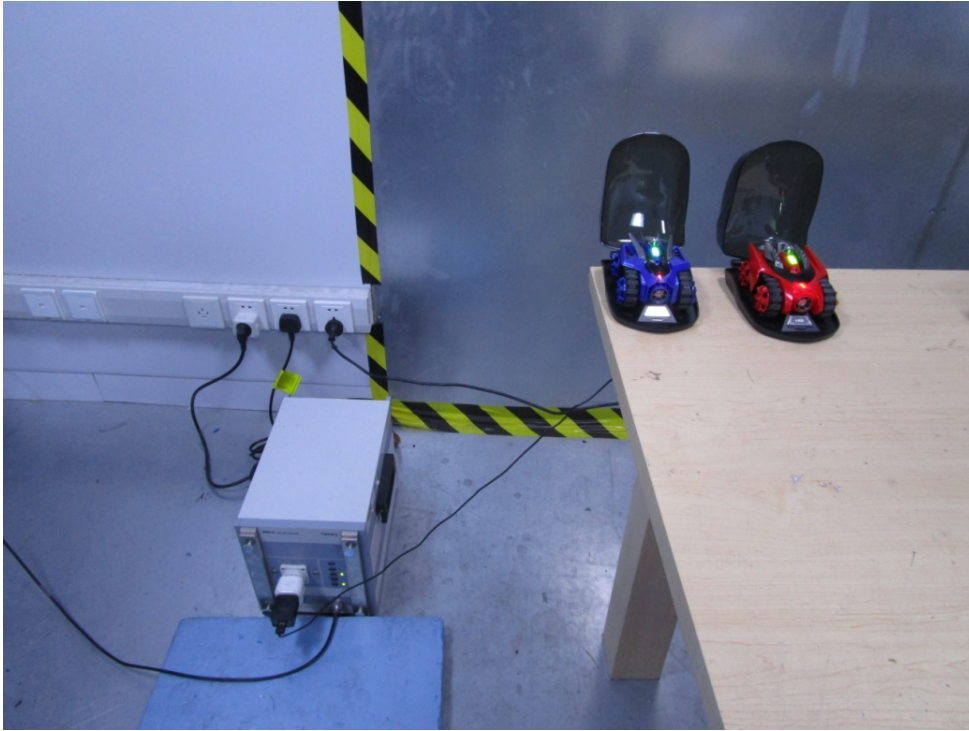

3. Radiated Emission

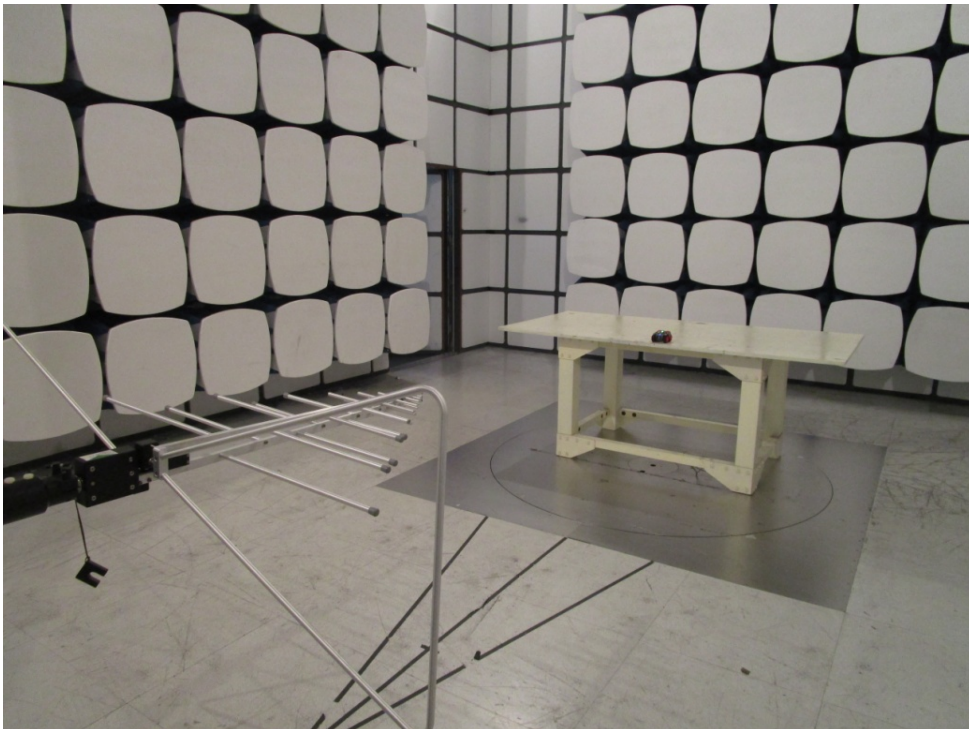

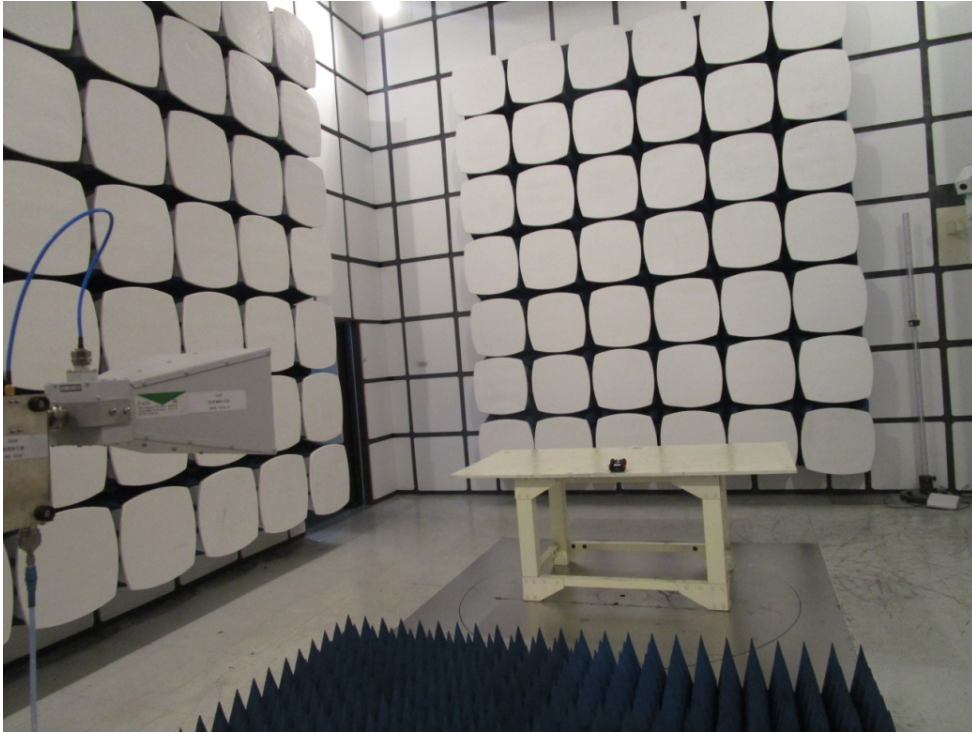

**** END OF REPORT ****