∧UTOM∧TE_®

MOTOR PROGRAMMING INSTRUCTIONS

Li-ion & DC Motors















SOFT STOP

ELECTRONIC LIMIT

SELECTABLE SPEED

433 MHZ BI-DIRECTIONAL

FAVORITE POSITION

BATTERY CHECK













SOLAR OPTION LEVEL CONTROL

BATTERY POWERED


USB CHARGE (Only for Li-ion Motor)

SAFETY INSTRUCTIONS

WARNING: Important safety instructions to be read before installation.

Incorrect installation can lead to serious injury and will void manufacturer's liability and warranty.







WARNING: Important safety instructions to be read before installation and use.

Incorrect installation or use can lead to serious injury and will void manufacturer's liability and warranty. It is important for the safety of persons to follow the enclosed instructions. Save these instructions for future reference.

- Do not expose to water, moisture, humid and damp environments or extreme temperatures.
- Persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge should not be allowed to use this product.
- Use or modification outside the scope of this instruction manual will void warranty.
- Installation and programming to be performed by a suitably qualified installer.
- Follow installation instructions
- For use with motorized shading devices.
- Keep away from children.
- Frequently inspect for improper operation. Do not use if repair or adjustment is necessary.
- Keep clear when in operation.
- Replace battery with correctly specified type.

COMPLIANCE STATEMENT

This device complies with Part 15 of the FCC Rules / Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

[2] l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

To satisfy FCC / IC RF exposure requirements, a separation distance of $20\ \mathrm{cm}$ or more should be maintained

between the antenna of this device and persons during device operation.

To ensure compliance, operations at closer than this distance is not recommended.

Les antennes installées doivent être situées de facon à ce que la population ne puisse y être exposée à une distance de moin de 20 cm. Installer les antennes de facon à ce que le personnel ne puisse approcher à 20 cm ou moins de la position centrale de l' antenne.

La FCC des éltats-unis stipule que cet appareil doit être en tout temps éloigné d'au moins 20 cm des personnes pendant son functionnement.



Do not dispose of in general waste. Please recycle batteries and damaged electrical products appropriately.




CONTENTS


1	ASSEMBLY	4
2	RETROFIT INSTALLATION	5
3	CHARGING	5
4	P1 BUTTON FUNCTIONS	6
4.1	Motor state test	6
4.2	Motor configuration options	6
5	INITIAL SET-UP	7
5.1	Pair motor with controller	7
5.2	Check motor direction	7
5.3	Set limits	8
6	ADJUSTING LIMITS	9
6.1	Adjust upper limit Adjust lower limit	9 9
7	CONTROLLERS AND CHANNELS	10
7.1	Using P2 button on existing controller to	
	controller or channel	10
7.2 cont	Using a pre-existing controller to delete roller or channel	a 10
8	FAVORITE POSITIONING	11
8.1	Set a favorite position	11
8.2	Send shade to favorite position	11
8.3	Delete favorite position	11
9	TILT & ROLLER MODE	12
9.1	Toggle motor to Tilt Mode	12
9.2	Toggle motor to Roller Mode	12
10	ADJUSTING SPEED	13
	Increase motor speed	13
10.2	Decrease motor speed	13
11	SOFT STOP CONFIGURATION	14
11.1	Turn Soft Stop OFF	14
	Turn Soft Ston ON	14


12	BATTERY CHECK FUNCTION	15
12.1	Send Shade to battery charge level	15
13	CHARGING LED	15
13.1	Turn Charging LED ON/OFF	15
13	SLEEP MODE	16
13	TROUBLE SHOOTING	16


ASSEMBLY
























2 RETROFIT INSTALLATION

























3 CHARGING







4 P1 BUTTON FUNCTIONS

4.1 Motor state test


This table describes the function of a short **P1** Button press/release (<2 seconds) depending on current motor configuration.

P1 Press	Condition	Function Achieved	Visual Feedback	Audible Feedback	Function Described
Short Press	If limit is NOT set	None	No Action	None	No Action
	If limits are set	Operational control of motor, run to limit. Stop if running	Motor Runs	None	Operational control of motor after pairing and limit setting is completed first time
	If motor is in "Sleep Mode" & limits are set	Wake and control	Motor wakes and runs in a direction	None	Motor is restored from Sleep Mode and RF control is active

4.2 Motor configuration options


The P1 Button is utilized to administer motor configurations as described below.







Pair motor with controller 5.1

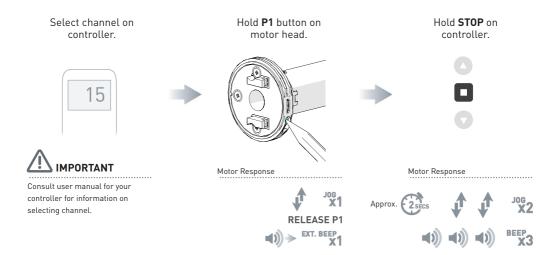



Motor is now in step mode and ready for setting limits

Check motor direction 5.2

To check travel direction of shade, press **UP** or **DOWN** on controller.



Quick Press = Step

To reverse shade direction, hold both UP and DOWN

Until the motor responds.



Motor Response

Long Press = Continuous Travel





Reversing motor direction using this method is only possible during initial set-up

5.3 Set Limits



Cycle shade up and down prior to setting limits to settle fabric

Move shade to the desired highest or lowest position by pressing the **UP** or **DOWN** buttons on controller.



To save upper limit, hold **UP** and **STOP**.

















Move shade to the desired highest or lowest position by pressing the **UP** or **DOWN** buttons on controller.

To save lower limit, hold **DOWN** and **STOP**.







Motor Response















After setting limits, motor will automatically exit from initial set-up mode.

6.1 Adjust upper limit

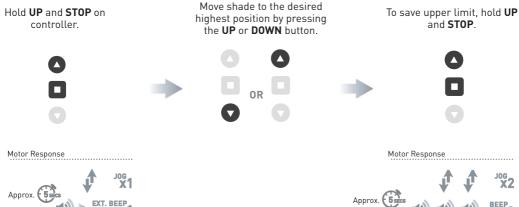

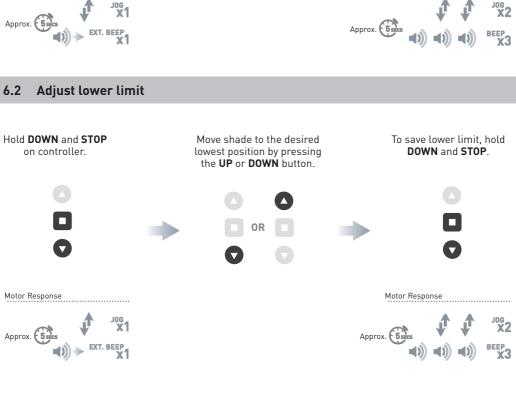

7 CONTROLLERS AND CHANNELS

7.1 Using P2 Button on existing controller to add a new controller or channel

- A = Existing controller or channel (to keep)
- **B** = Controller or channel to add or remove






IMPORTANT Consult user manual for your controller or sensor

7.2 Using a pre-existing controller to add or delete a controller or channel


- A = Existing controller or channel (to keep)
- **B** = Controller or channel to add or remove

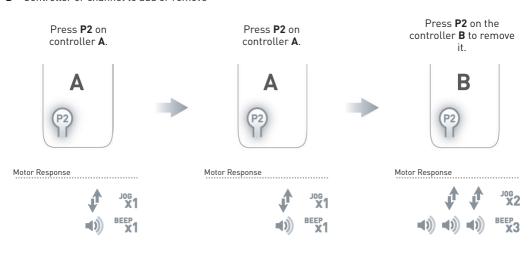

8 FAVORITE POSITIONING

8.1 Set a favorite position


Move shade to the desired position by pressing the ${\bf UP}$ or ${\bf DOWN}$ button on the controller.

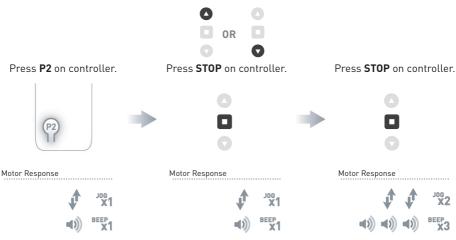

8.2 Send shade to favorite position



8.3 Delete favorite position

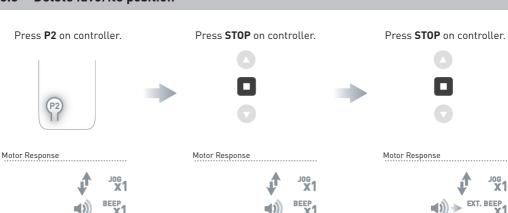


9 TILT & ROLLER MODE

9.1 Toggle motor to Tilt Mode

Default motor mode is Roller after initial Limits have been set, use following steps to change to Roller Mode.


Hold **UP** & **DOWN** on controller. Press **STOP** on controller.



9.2 Toggle Motor to Roller Mode

If motor is in Tilt Mode, use following steps to change to Roller Mode.


Hold **UP** & **DOWN** on controller. Press **STOP** on controller.




10 ADJUSTING SPEED

10.1 Increase Motor Speed

Default motor mode is the slowest speed.

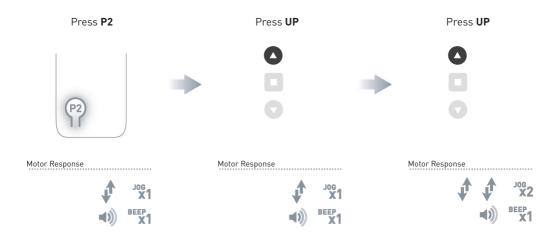

10.2 Decrease Motor Speed

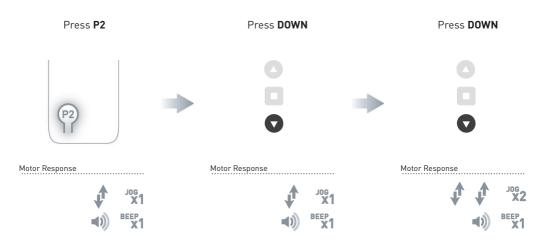

11 SOFT STOP CONFIGURATION


11.1 Turn Soft Stop OFF

Motor must be in slowest speed to turn Soft Stop OFF.



11.2 Turn Soft Stop ON

Motor must be in fastest speed to turn Soft Stop ON.

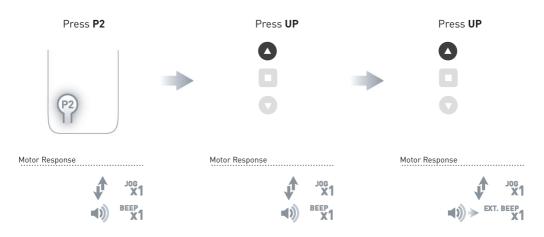

12 BATTERY CHECK FUNCTION

12.1 Send Shade to battery charge level

Shade must be at Upper Limit.

Hold UP

Upper Limit

Percentage of
Battery Charge
Remaining

Lower Limit

Percentage Depleted

Shade must be at Upper Limit
Hold UP for Approx. 5s

Shade moves to percentage of
battery charge remaining


NOTE: This feature is can only be used with a DC motor when it is using a Battery Pack as its power source.

13 CHARGING LED

Approx. 5 secs

13.1 Turn Charging LED ON/OFF

Motor must be at Lower Limit.

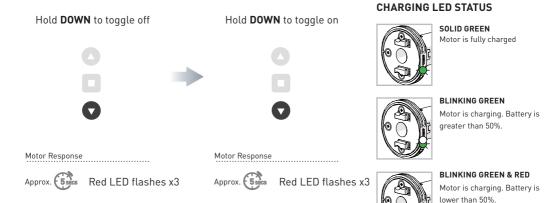

SLEEP MODE 14

If multiple motors are grouped on a single channel, Sleep Mode may be used to put all but 1 motor to sleep, allowing programming of just the one motor that remains "Awake". See page 6 for detailed P1 functions.

Enter Sleep Mode

Sleep mode is utilized to prevent a motor from incorrect configuration during other motor setup.

Hold P1 button on the motor head

Motor Response









RELEASE P1 ◄))) **◄**))) ^{BEEP} X2

Exit Sleep Mode: Method 1

Exit sleep mode once the shade is ready.

Press and release P1 button on the motor head

Motor Response



Exit Sleep Mode: Method 2

Remove power and then re-power the motor.

TROUBLE SHOOTING

Problem	Cause	Remedy	
Motor is not responding	Battery in motor is depleted	Recharge with a compatible charger	
	Insufficient charging from solar PV panel	Check connection and orientation of PV panel	
	Transmitter battery is discharged	Replace battery	
	Battery is inserted incorrectly into transmitter	Check battery polarity	
	Radio interference/shielding	Ensure transmitter is positioned away from metal objects and the aerial on motor or receiver is kept straight and away from metal	
	Receiver distance is too far from transmitter	Move transmitter to a closer position	
	Charging failure	Check power supply to motor is connected and active	
Motor beeps x10 when in use	Battery voltage is low	Recharge with a compatible charger	
Cannot program a single motor (multiple motors respond)	Multiple motors are paired to the same channel	Always reserve an individual channel for programming functions. Use Sleep Mode to program individual motors.	

ROLLEASE ACMEDA I USA

750 East Main Street | 7th Floor Stamford, CT 06902, USA

T+1 800 552 5100 | F+1 203 964 0513

ROLLEASE ACMEDA I AUSTRALIA

110 Northcorp Boulevard, Broadmeadows VIC 3047, AUS

T +61 3 9355 0100 LF +61 3 9355 0110

ROLLEASE ACMEDA I EUROPE

T+39 02 8982 7317 | F+39 02 8982 7317