



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Autel Robotics Co., Ltd.

Address: 601,701,801,901, Block B1, Nanshan iPark, No. 1001 Xueyuan Avenue,
Nanshan District, Shenzhen, Guangdong, 518055, China

FCC ID: 2AGNTMDX600958A

Product Name: EVO Max

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by
China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230955603-00D

Date Of Issue: 2023/11/29

Reviewed By: Julie Tan

Title: RF Engineer

Julie Tan

Approved By: Sun Zhong

Title: Manager

Sun Zhong

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	10
1.2.1 EUT Operation Condition:.....	10
1.2.2 Support Equipment List and Details	11
1.2.3 Support Cable List and Details	11
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 AC LINE CONDUCTED EMISSIONS.....	14
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
3.2 RADIATION SPURIOUS EMISSIONS.....	17
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	18
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	19
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH.....	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	24
3.6 DUTY CYCLE	25
3.6.1 EUT Setup.....	25
3.6.2 Test Procedure	25
3.7 ANTENNA REQUIREMENT.....	26
3.7.1 Applicable Standard.....	26
3.7.2 Judgment.....	26

4. Test DATA AND RESULTS	27
4.1 AC LINE CONDUCTED EMISSIONS.....	27
4.2 RADIATION SPURIOUS EMISSIONS.....	28
4.3 EMISSION BANDWIDTH:	78
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	105
4.5 MAXIMUM POWER SPECTRAL DENSITY:	108
4.6 DUTY CYCLE:.....	135
5. EUT PHOTOGRAPHS	138
6. TEST SETUP PHOTOGRAPHS	139

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230955603-00D	Original Report	2023/11/29

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	EVO Max
EUT Model:	MDX
Operation Frequency:	5150-5250 MHz band: SRD 1.4MHz: 5154-5246 MHz SRD 10MHz: 5157-5243MHz SRD 20MHz: 5167-5233MHz 5725-5850 MHz band: SRD 1.4MHz: 5728-5847 MHz SRD 10MHz: 5733-5842 MHz SRD 20MHz: 5738-5839 MHz
Maximum Average Output Power (Conducted):	20.03dBm (5150-5250 MHz) 24.65dBm (5725-5850 MHz)
Modulation Type:	QPSK, 16QAM
Rated Input Voltage:	DC 14.88V from battery
Serial Number:	2BJM-12 (For RF Conducted Test) 2BJM-1 (For Radiated Emission Test)
EUT Received Date:	2023/9/22
EUT Received Status:	Good

1.1.2 Operation Frequency Detail:

For SRD-5.2GHz band:

1.4MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5154	48	5201
2	5155	49	5202
3	5156	...	...
...	...	...	...
...	...	92	5245
46	5199	93	5246
47	5200	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5154
Middle	5201
Highest	5246

10MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5157	45	5201
2	5158	46	5202
3	5159	...	...
...	...	...	...
...	...	86	5242
43	5199	87	5243
44	5200	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5157
Middle	5201
Highest	5243

20MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5167	35	5201
2	5168	36	5202
3	5169	...	...
...	...	...	...
...	...	66	5232
33	5199	67	5233
34	5200	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5167
Middle	5201
Highest	5233

For SRD-5.8GHz band:**1.4MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5728	61	5788
2	5729	62	5789
3	5730	...	...
...	...	...	...
...	...	118	5845
59	5786	119	5846
60	5787	120	5847

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5728
Middle	5789
Highest	5847

For SRD-5.8GHz band 10MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5733	56	5788
2	5734	57	5789
3	5735	...	...
...	...	...	...
...	...	108	5840
54	5786	109	5841
55	5787	110	5842

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5733
Middle	5789
Highest	5842

For SRD-5.8GHz band 20MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5738	52	5789
2	5739	53	5790
3	5740	...	...
...	...	...	...
...	...	100	5837
50	5787	101	5838
51	5788	102	5839

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	5738
Middle	5790
Highest	5839

1.1.3 Antenna Information Detail▲:

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
0 (Tx&Rx)	Autel Robotics Co., Ltd.	PCB	50	902-928 MHz	0.3 dBi
				2400-2483.5 MHz	1.7 dBi
				5150-5250 MHz	-1.6 dBi
				5725-5850 MHz	0.8 dBi
1 (Rx Only)		PCB	50	902-928 MHz	1.1 dBi
				2400-2483.5 MHz	1.5 dBi
				5150-5250 MHz	4.2 dBi
				5725-5850 MHz	3.3 dBi
2 (Tx&Rx)		PCB	50	902-928 MHz	-0.8 dBi
				2400-2483.5 MHz	1.9 dBi
				5150-5250 MHz	0.7 dBi
				5725-5850 MHz	0.9 dBi
3 (Rx Only)	PCB	50	902-928 MHz	1.8 dBi	
			2400-2483.5 MHz	1.3 dBi	
			5150-5250 MHz	3.0 dBi	
			5725-5850 MHz	3.9 dBi	
The Method of §15.203 Compliance: ☒ Antenna was permanently attached to the unit. ☐ Antenna use a unique type of connector to attach to the EUT. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.					

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Esun Power Technology Co.,Ltd	MDX 120W	Input: 100-240Vac 50/60Hz 3.0A Output: 17.0Vdc,7.06A(Main); USB-C:5.0Vdc,3.0A; 9.0Vdc,3.0A; 12.0Vdc,2.5A Total Output Power:120W Max

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The device only supports MIMO mode 2Tx4Rx.		
Equipment Modifications:			No		
EUT Exercise Software:			RRTL6.0.0_VCOM		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:					
5150-5250 MHz Band: QPSK					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 2
1.4M	Lowest	5154	120kbps	68	78
	Middle	5201	120kbps	68	78
	Highest	5246	120kbps	68	78
10M	Lowest	5157	19Mbps	58	68
	Middle	5201	19Mbps	58	68
	Highest	5243	19Mbps	58	68
20M	Lowest	5167	38Mbps	58	68
	Highest	5201	38Mbps	58	68
	Middle	5233	38Mbps	58	68
5725-5850 MHz Band: QPSK					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 2
1.4M	Lowest	5728	120kbps	42	42
	Middle	5789	120kbps	42	42
	Highest	5847	120kbps	42	42
10M	Lowest	5733	19Mbps	40	40
	Middle	5789	19Mbps	40	40
	Highest	5842	19Mbps	40	40
20M	Lowest	5738	38Mbps	40	40
	Highest	5790	38Mbps	40	40
	Middle	5839	38Mbps	40	40
5150-5250 MHz Band: 16QAM					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 2
1.4M	Lowest	5154	120kbps	68	78
	Middle	5201	120kbps	68	78
	Highest	5246	120kbps	68	78
10M	Lowest	5157	19Mbps	58	68
	Middle	5201	19Mbps	58	68
	Highest	5243	19Mbps	58	68
20M	Lowest	5167	38Mbps	58	68
	Highest	5201	38Mbps	58	68
	Middle	5233	38Mbps	58	68

5725-5850 MHz Band: 16QAM

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 2
1.4M	Lowest	5728	120kbps	42	42
	Middle	5789	120kbps	42	42
	Highest	5847	120kbps	42	42
10M	Lowest	5733	19Mbps	40	40
	Middle	5789	19Mbps	40	40
	Highest	5842	19Mbps	40	40
20M	Lowest	5738	38Mbps	40	40
	Highest	5790	38Mbps	40	40
	Middle	5839	38Mbps	40	40

1.2.2 Support Equipment List and Details

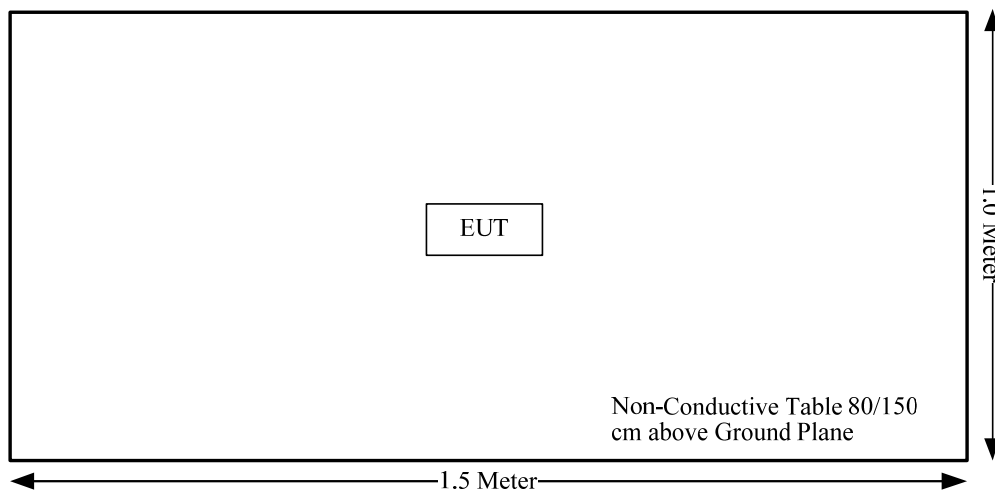
Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

1.2.4 Block Diagram of Test Setup

Spurious Emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Not Applicable
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

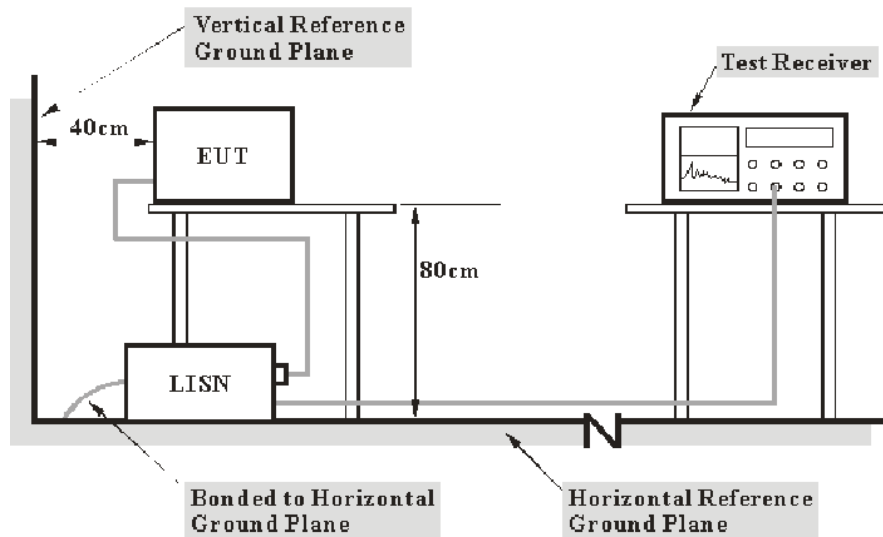
(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

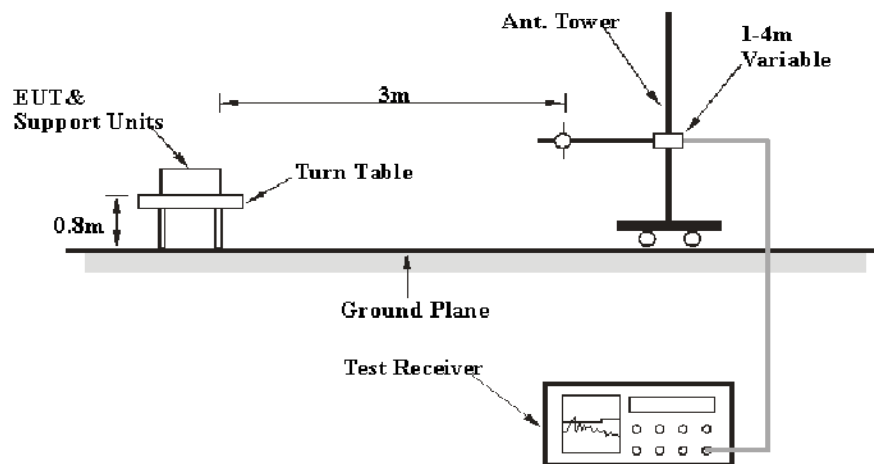
FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:



1-40 GHz:

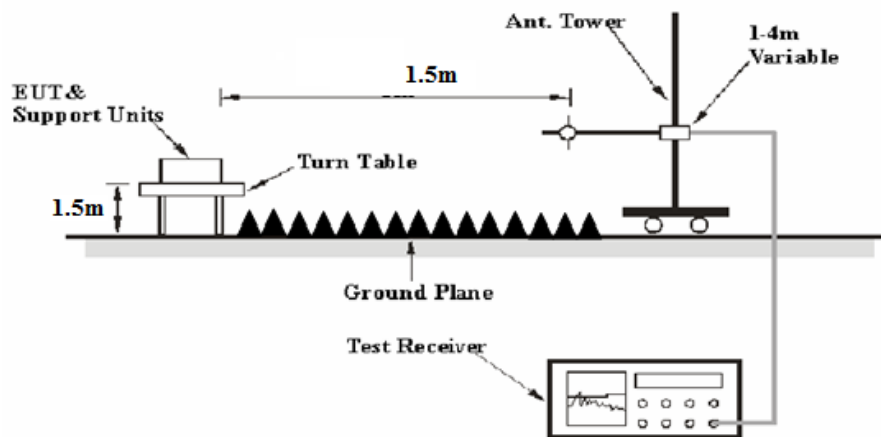

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	100 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard

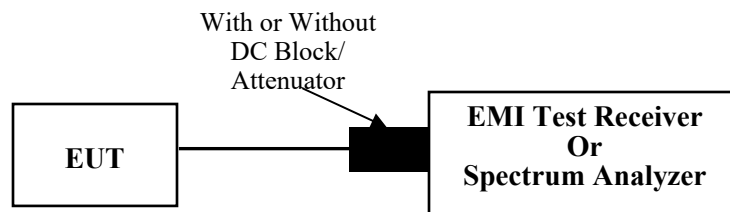
FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

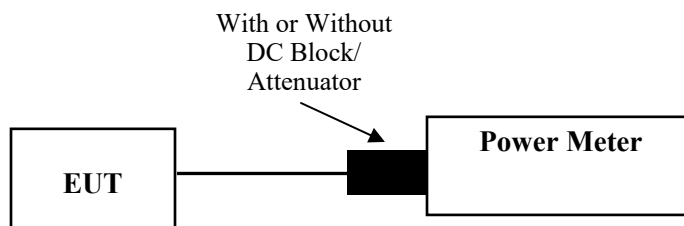
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

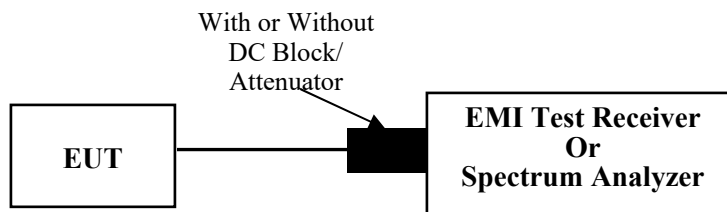
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

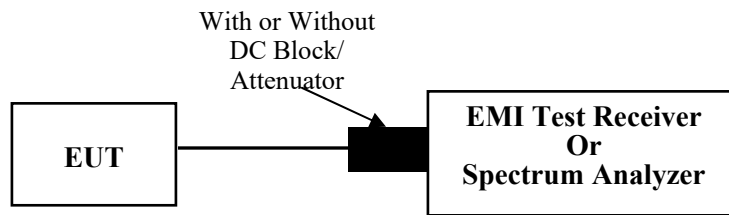
KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.6 Duty Cycle

3.6.1 EUT Setup



3.6.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.7 Antenna Requirement

3.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery when operating.

4.2 Radiation Spurious Emissions

Serial Number:	2BJM-1	Test Date:	2023/10/25~2023/11/29
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Tao Zhu, Jeff Luo	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.5~26.6	Relative Humidity: (%)	56~62	ATM Pressure: (kPa)	100.8~101.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2025/2/23
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

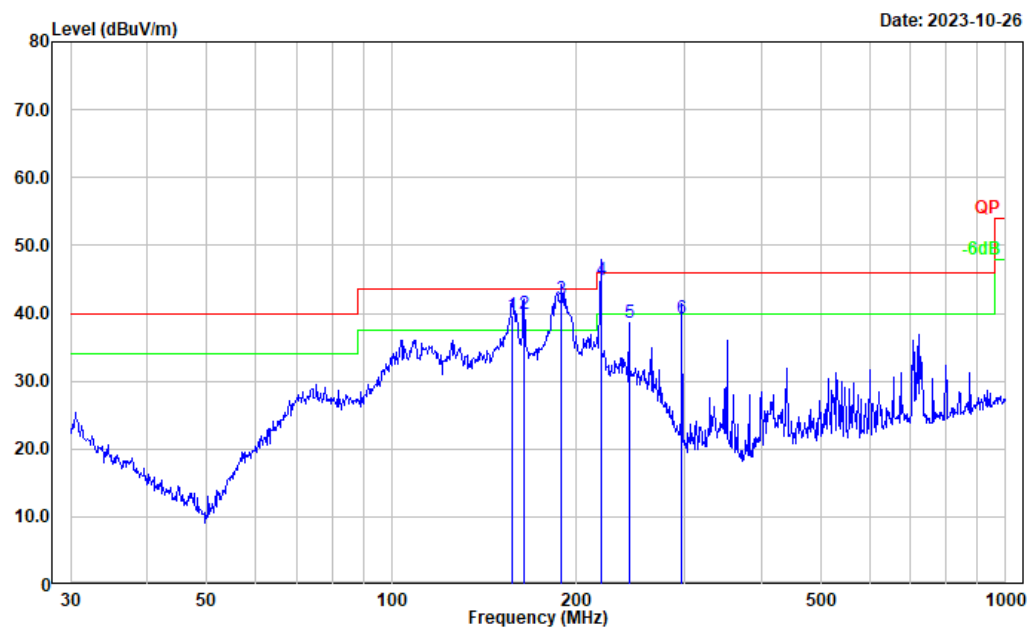
1) 30MHz-1GHz (maximum output power(5.2G 20MHz 16QAM /5.8G 10MHz 16QAM was tested))
5.2G – 20MHz 16-QAM-Low channel:

Project No.: CR230955603-RF

Tester: Jeff Luo


Polarization: horizontal

Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	157.007	51.72	-11.94	39.78	43.50	3.72	QP
2	164.330	52.31	-12.34	39.97	43.50	3.53	QP
3	189.074	55.62	-13.47	42.15	43.50	1.35	QP
4	219.075	57.79	-12.82	44.97	46.00	1.03	QP
5	243.377	51.72	-13.08	38.64	46.00	7.36	Peak
6	297.224	50.05	-10.71	39.34	46.00	6.66	QP

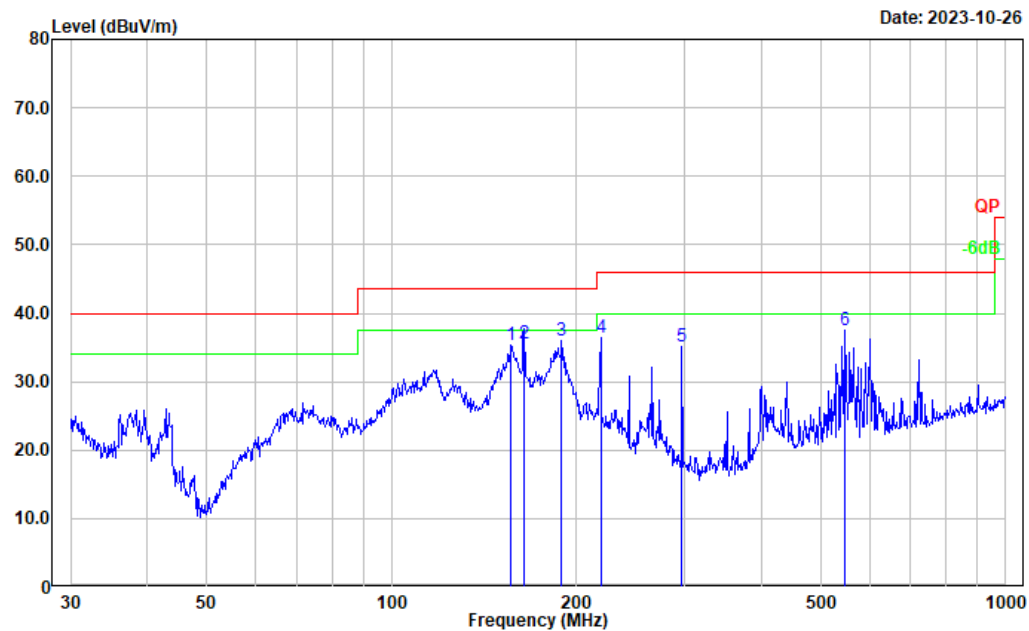
Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	156.458	47.31	-11.94	35.37	43.50	8.13	Peak
2	164.330	47.99	-12.34	35.65	43.50	7.85	QP
3	189.074	49.42	-13.47	35.95	43.50	7.55	Peak
4	219.075	49.23	-12.82	36.41	46.00	9.59	Peak
5	297.224	45.78	-10.71	35.07	46.00	10.93	Peak
6	547.098	43.34	-5.83	37.51	46.00	8.49	Peak


5.2G - 20MHz 16-QAM-Middle channel:

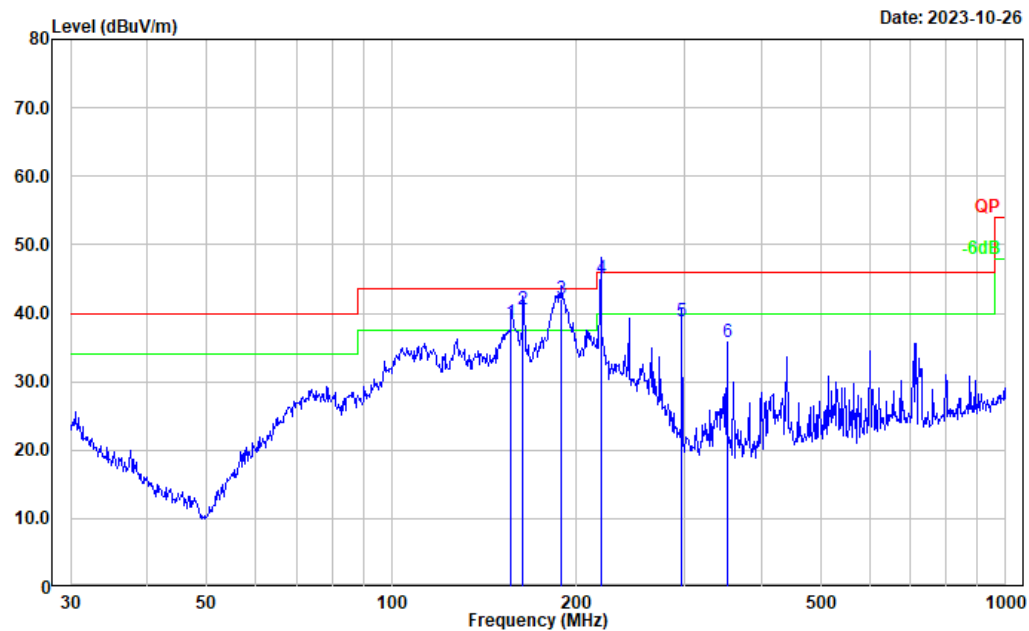Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: horizontal
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	156.458	50.56	-11.94	38.62	43.50	4.88	QP
2	163.755	52.83	-12.28	40.55	43.50	2.95	QP
3	189.074	55.56	-13.47	42.09	43.50	1.41	QP
4	219.075	57.90	-12.82	45.08	46.00	0.92	QP
5	297.224	49.53	-10.71	38.82	46.00	7.18	QP
6	351.708	45.77	-9.99	35.78	46.00	10.22	Peak

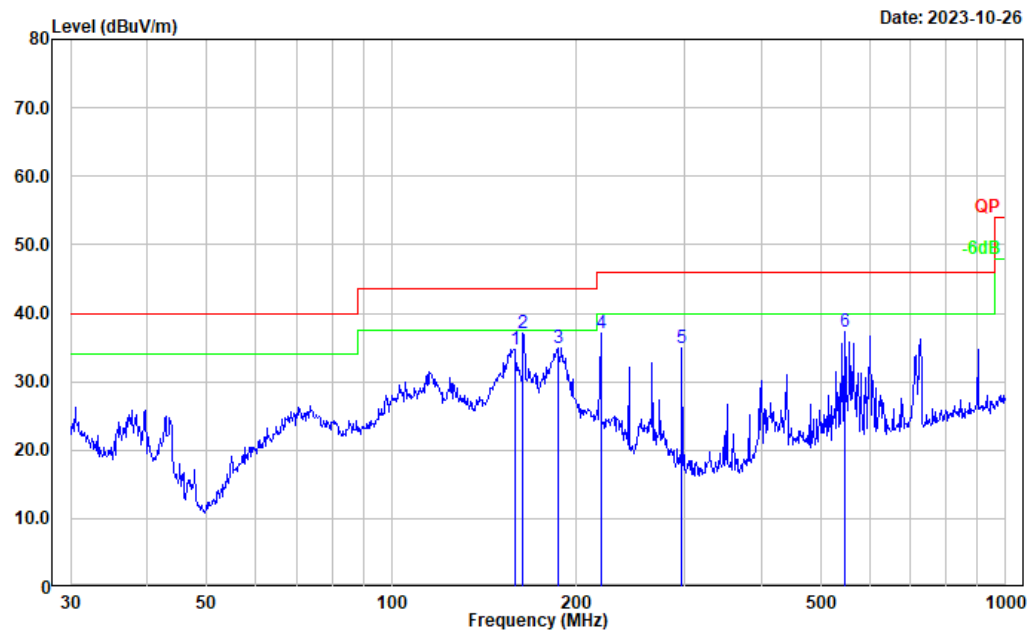
Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	158.668	46.68	-11.95	34.73	43.50	8.77	Peak
2	163.755	49.29	-12.28	37.01	43.50	6.49	Peak
3	186.441	48.40	-13.53	34.87	43.50	8.63	Peak
4	219.075	49.92	-12.82	37.10	46.00	8.90	Peak
5	297.224	45.65	-10.71	34.94	46.00	11.06	Peak
6	547.098	43.17	-5.83	37.34	46.00	8.66	Peak


5.2G - 20MHz 16-QAM-High channel:

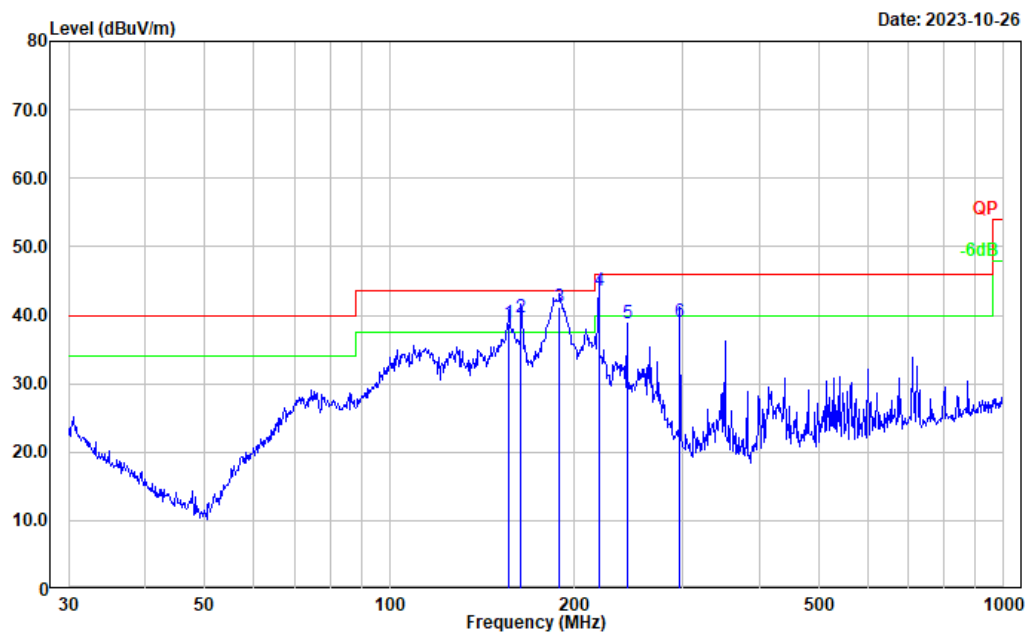Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: horizontal
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	156.458	50.68	-11.94	38.74	43.50	4.76	QP
2	163.755	51.95	-12.28	39.67	43.50	3.83	QP
3	189.074	54.64	-13.47	41.17	43.50	2.33	QP
4	219.075	56.43	-12.82	43.61	46.00	2.39	QP
5	243.377	51.81	-13.08	38.73	46.00	7.27	Peak
6	297.224	49.80	-10.71	39.09	46.00	6.91	QP

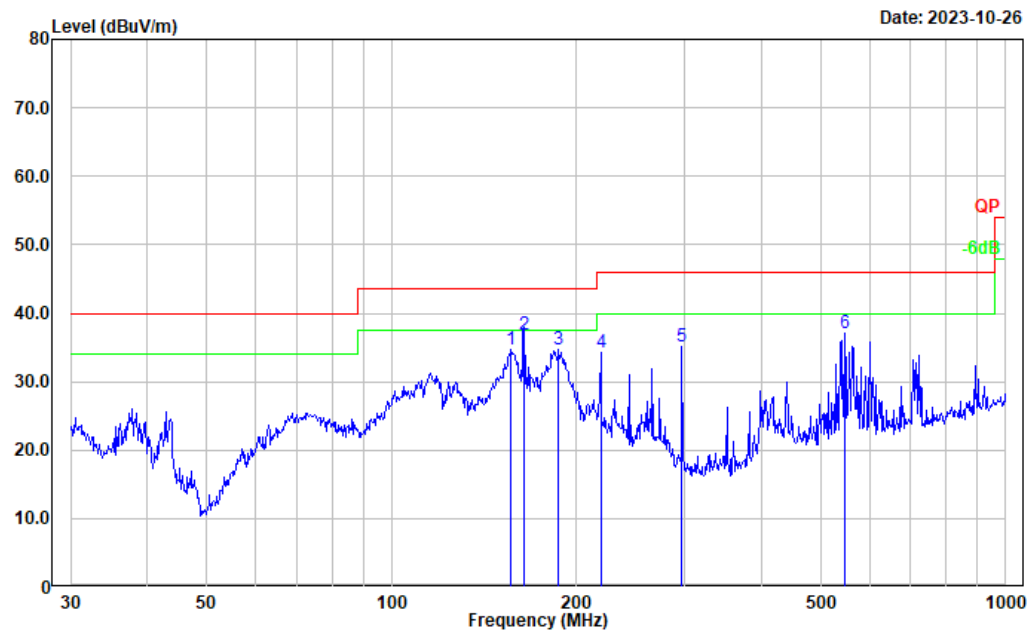Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	156.458	46.56	-11.94	34.62	43.50	8.88	Peak
2	164.330	49.26	-12.34	36.92	43.50	6.58	QP
3	187.096	48.31	-13.54	34.77	43.50	8.73	Peak
4	219.075	47.06	-12.82	34.24	46.00	11.76	Peak
5	297.224	45.85	-10.71	35.14	46.00	10.86	Peak
6	547.098	42.92	-5.83	37.09	46.00	8.91	Peak

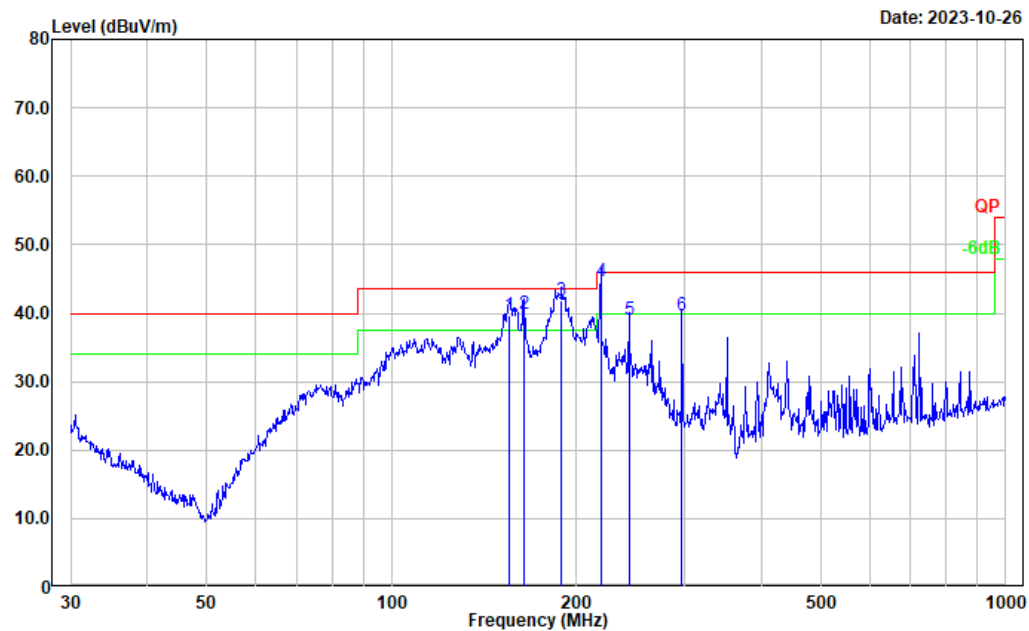
5.8G – 10MHz 16QAM-Low channel:

Project No.: CR230955603-RF

Tester: Jeff Luo


Polarization: horizontal

Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	155.364	51.64	-11.96	39.68	43.50	3.82	QP
2	164.330	52.33	-12.34	39.99	43.50	3.51	QP
3	189.074	55.28	-13.47	41.81	43.50	1.69	QP
4	219.075	57.44	-12.82	44.62	46.00	1.38	QP
5	243.377	52.13	-13.08	39.05	46.00	6.95	QP
6	297.224	50.29	-10.71	39.58	46.00	6.42	QP

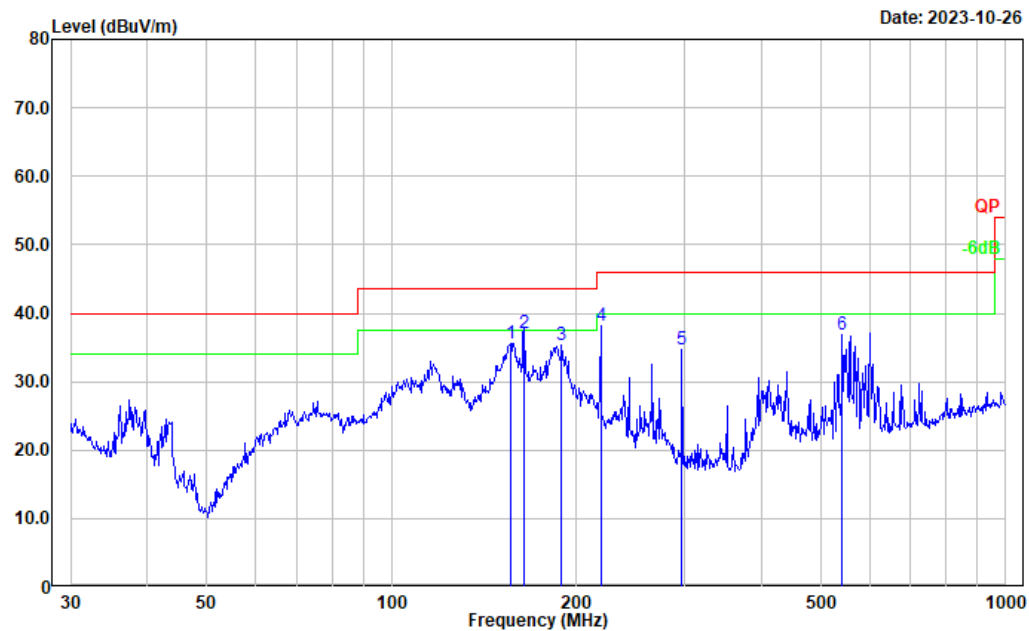Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	155.910	47.57	-11.94	35.63	43.50	7.87	Peak
2	164.330	49.37	-12.34	37.03	43.50	6.47	QP
3	189.074	48.77	-13.47	35.30	43.50	8.20	Peak
4	219.075	50.88	-12.82	38.06	46.00	7.94	Peak
5	297.224	45.47	-10.71	34.76	46.00	11.24	Peak
6	541.373	42.71	-5.92	36.79	46.00	9.21	Peak

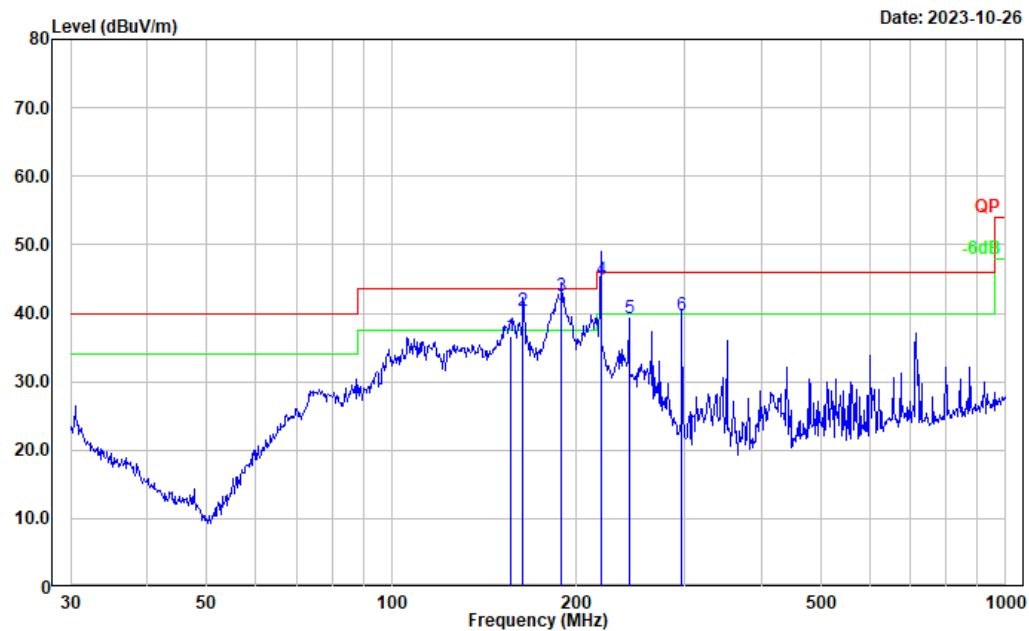
5.8G - 10MHz 16QAM-Middle channel:

Project No.: CR230955603-RF

Tester: Jeff Luo


Polarization: horizontal

Note:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	155.910	48.65	-11.94	36.71	43.50	6.79	QP
2	163.755	52.62	-12.28	40.34	43.50	3.16	QP
3	189.074	55.91	-13.47	42.44	43.50	1.06	QP
4	219.075	57.71	-12.82	44.89	46.00	1.11	QP
5	243.377	52.40	-13.08	39.32	46.00	6.68	Peak
6	297.224	50.31	-10.71	39.60	46.00	6.40	QP

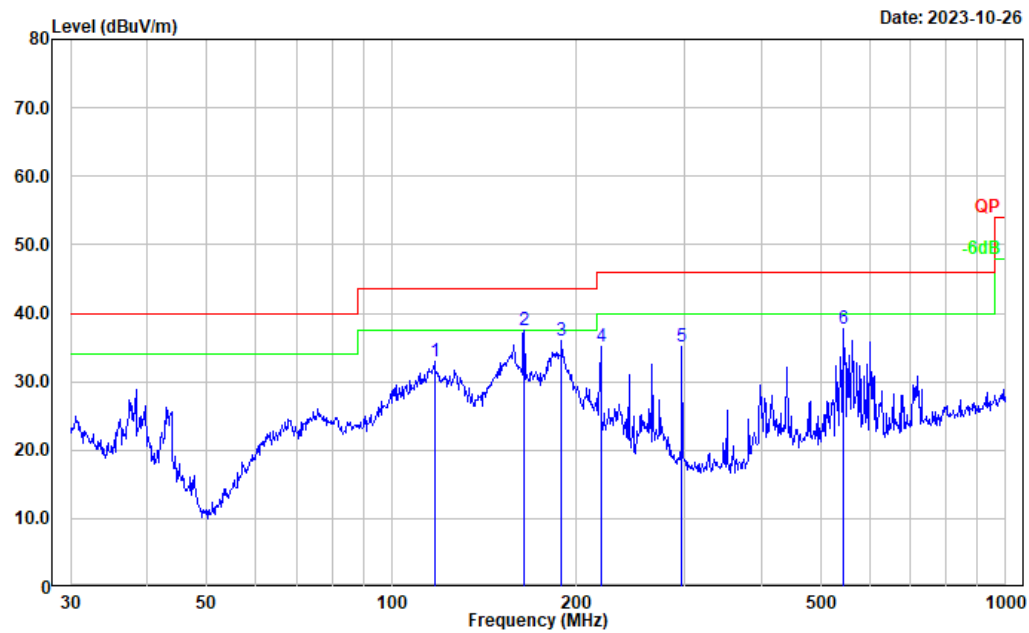Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	117.360	44.61	-11.67	32.94	43.50	10.56	Peak
2	164.330	49.77	-12.34	37.43	43.50	6.07	Peak
3	189.074	49.51	-13.47	36.04	43.50	7.46	Peak
4	219.075	47.93	-12.82	35.11	46.00	10.89	Peak
5	297.224	45.91	-10.71	35.20	46.00	10.80	Peak
6	545.183	43.65	-5.88	37.77	46.00	8.23	Peak

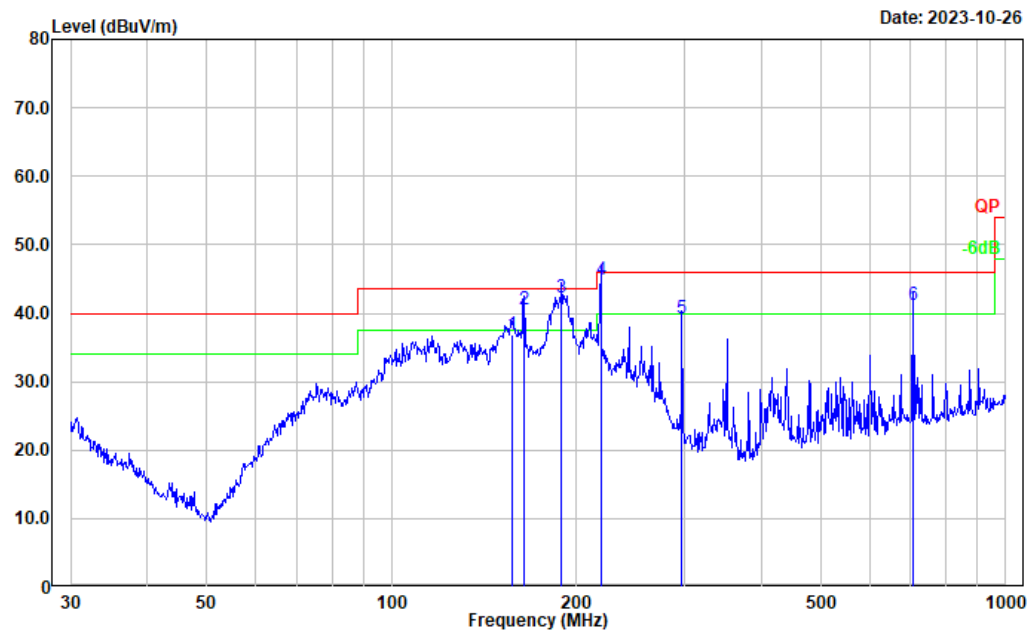
5.8G –10MHz 16QAM-High channel:

Project No.: CR230955603-RF

Tester: Jeff Luo


Polarization: horizontal

Note:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	157.007	48.82	-11.94	36.88	43.50	6.62	QP
2	164.330	52.84	-12.34	40.50	43.50	3.00	QP
3	189.074	55.83	-13.47	42.36	43.50	1.14	QP
4	219.075	57.79	-12.82	44.97	46.00	1.03	QP
5	297.224	50.00	-10.71	39.29	46.00	6.71	QP
6	706.700	44.69	-3.59	41.10	46.00	4.90	QP

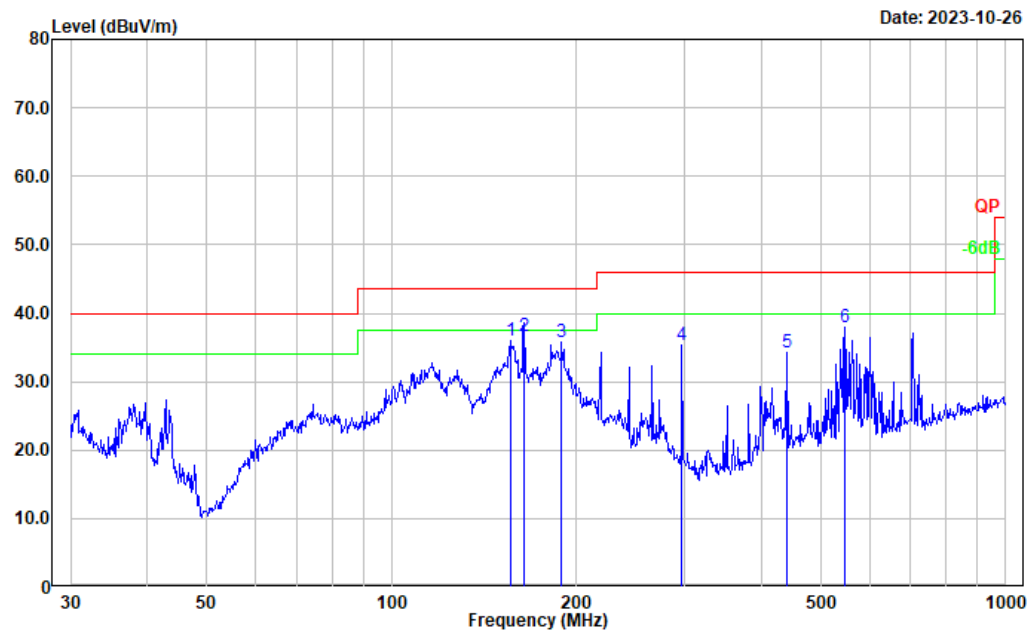Project No.: CR230955603-RF
Tester: Jeff Luo
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	155.910	47.85	-11.94	35.91	43.50	7.59	Peak
2	164.330	48.88	-12.34	36.54	43.50	6.96	QP
3	189.074	49.17	-13.47	35.70	43.50	7.80	Peak
4	297.224	46.11	-10.71	35.40	46.00	10.60	Peak
5	440.196	41.50	-7.28	34.22	46.00	11.78	Peak
6	547.098	43.71	-5.83	37.88	46.00	8.12	Peak

2) 1GHz-40GHz:**5150-5250MHz****1.4M, QPSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5154MHz							
5150.000	31.07	PK	H	32.83	63.90	74.00	10.10
5150.000	17.69	AV	H	32.83	50.52	54.00	3.48
5150.000	33.58	PK	V	32.83	66.41	74.00	7.59
5150.000	19.87	AV	V	32.83	52.70	54.00	1.30
10308.000	33.56	PK	H	14.36	47.92	68.20	20.28
10308.000	33.22	PK	V	14.36	47.58	68.20	20.62
15462.000	36.64	PK	H	18.59	55.23	74.00	18.77
15462.000	24.52	AV	H	18.59	43.11	54.00	10.89
15462.000	35.57	PK	V	18.59	54.16	74.00	19.84
15462.000	23.34	AV	V	18.59	41.93	54.00	12.07
Middle Channel: 5201 MHz							
10402.000	33.46	PK	H	14.52	47.98	68.20	20.22
10402.000	33.17	PK	V	14.52	47.69	68.20	20.51
15603.000	36.29	PK	H	18.69	54.98	74.00	19.02
15603.000	24.34	AV	H	18.69	43.03	54.00	10.97
15603.000	35.10	PK	V	18.69	53.79	74.00	20.21
15603.000	23.39	AV	V	18.69	42.08	54.00	11.92
High Channel: 5246 MHz							
5350.000	30.01	PK	H	32.70	62.71	74.00	11.29
5350.000	16.89	AV	H	32.70	49.59	54.00	4.41
5350.000	30.12	PK	V	32.70	62.82	74.00	11.18
5350.000	17.14	AV	V	32.70	49.84	54.00	4.16
10492.000	33.01	PK	H	14.38	47.39	68.20	20.81
10492.000	33.20	PK	V	14.38	47.58	68.20	20.62
15738.000	36.12	PK	H	18.83	54.95	74.00	19.05
15738.000	24.41	AV	H	18.83	43.24	54.00	10.76
15738.000	36.11	PK	V	18.83	54.94	74.00	19.06
15738.000	24.08	AV	V	18.83	42.91	54.00	11.09

16QAM:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5154MHz							
5150.000	29.72	PK	H	32.83	62.55	74.00	11.45
5150.000	16.88	AV	H	32.83	49.71	54.00	4.29
5150.000	30.01	PK	V	32.83	62.84	74.00	11.16
5150.000	16.74	AV	V	32.83	49.57	54.00	4.43
10308.000	34.01	PK	H	14.36	48.37	68.20	19.83
10308.000	34.20	PK	V	14.36	48.56	68.20	19.64
15462.000	34.51	PK	H	18.59	53.10	74.00	20.90
15462.000	22.28	AV	H	18.59	40.87	54.00	13.13
15462.000	35.04	PK	V	18.59	53.63	74.00	20.37
15462.000	23.11	AV	V	18.59	41.70	54.00	12.30
Middle Channel: 5201 MHz							
10402.000	33.17	PK	H	14.52	47.69	68.20	20.51
10402.000	33.53	PK	V	14.52	48.05	68.20	20.15
15603.000	37.46	PK	H	18.69	56.15	74.00	17.85
15603.000	25.09	AV	H	18.69	43.78	54.00	10.22
15603.000	37.12	PK	V	18.69	55.81	74.00	18.19
15603.000	25.33	AV	V	18.69	44.02	54.00	9.98
High Channel: 5246 MHz							
5350.000	29.59	PK	H	32.70	62.29	74.00	11.71
5350.000	16.42	AV	H	32.70	49.12	54.00	4.88
5350.000	29.44	PK	V	32.70	62.14	74.00	11.86
5350.000	16.34	AV	V	32.70	49.04	54.00	4.96
10492.000	33.00	PK	H	14.38	47.38	68.20	20.82
10492.000	34.01	PK	V	14.38	48.39	68.20	19.81
15738.000	38.03	PK	H	18.83	56.86	74.00	17.14
15738.000	26.01	AV	H	18.83	44.84	54.00	9.16
15738.000	38.45	PK	V	18.83	57.28	74.00	16.72
15738.000	25.78	AV	V	18.83	44.61	54.00	9.39

10M,QPSK:

Channel: 5157 MHz

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5157MHz							
5150.000	31.33	PK	H	32.83	64.16	74.00	9.84
5150.000	18.10	AV	H	32.83	50.93	54.00	3.07
5150.000	34.16	PK	V	32.83	66.99	74.00	7.01
5150.000	20.04	AV	V	32.83	52.87	54.00	1.13
10314.000	33.23	PK	H	14.37	47.60	68.20	20.60
10314.000	33.58	PK	V	14.37	47.95	68.20	20.25
15471.000	36.41	PK	H	18.58	54.99	74.00	19.01
15471.000	24.10	AV	H	18.58	42.68	54.00	11.32
15471.000	35.23	PK	V	18.58	53.81	74.00	20.19
15471.000	23.33	AV	V	18.58	41.91	54.00	12.09
Middle Channel: 5201 MHz							
10402.000	33.11	PK	H	14.52	47.63	68.20	20.57
10402.000	33.28	PK	V	14.52	47.80	68.20	20.40
15603.000	37.58	PK	H	18.69	56.27	74.00	17.73
15603.000	25.30	AV	H	18.69	43.99	54.00	10.01
15603.000	36.74	PK	V	18.69	55.43	74.00	18.57
15603.000	24.10	AV	V	18.69	42.79	54.00	11.21
High Channel: 5243 MHz							
5350.000	29.46	PK	H	32.70	62.16	74.00	11.84
5350.000	16.39	AV	H	32.70	49.09	54.00	4.91
5350.000	30.01	PK	V	32.70	62.71	74.00	11.29
5350.000	17.11	AV	V	32.70	49.81	54.00	4.19
10486.000	33.22	PK	H	14.39	47.61	68.20	20.59
10486.000	33.01	PK	V	14.39	47.40	68.20	20.80
15729.000	36.65	PK	H	18.82	55.47	74.00	18.53
15729.000	24.10	AV	H	18.82	42.92	54.00	11.08
15729.000	36.77	PK	V	18.82	55.59	74.00	18.41
15729.000	24.54	AV	V	18.82	43.36	54.00	10.64

16QAM:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5157MHz							
5150.000	31.11	PK	H	32.83	63.94	74.00	10.06
5150.000	18.87	AV	H	32.83	51.70	54.00	2.30
5150.000	32.80	PK	V	32.83	65.63	74.00	8.37
5150.000	19.29	AV	V	32.83	52.12	54.00	1.88
10314.000	34.29	PK	H	14.37	48.66	68.20	19.54
10314.000	33.78	PK	V	14.37	48.15	68.20	20.05
15471.000	35.20	PK	H	18.58	53.78	74.00	20.22
15471.000	23.47	AV	H	18.58	42.05	54.00	11.95
15471.000	35.95	PK	V	18.58	54.53	74.00	19.47
15471.000	23.10	AV	V	18.58	41.68	54.00	12.32
Middle Channel: 5201 MHz							
10402.000	34.54	PK	H	14.52	49.06	68.20	19.14
10402.000	33.78	PK	V	14.52	48.30	68.20	19.90
15603.000	36.83	PK	H	18.69	55.52	74.00	18.48
15603.000	24.11	AV	H	18.69	42.80	54.00	11.20
15603.000	36.25	PK	V	18.69	54.94	74.00	19.06
15603.000	24.03	AV	V	18.69	42.72	54.00	11.28
High Channel: 5243 MHz							
5350.000	29.78	PK	H	32.70	62.48	74.00	11.52
5350.000	16.44	AV	H	32.70	49.14	54.00	4.86
5350.000	29.65	PK	V	32.70	62.35	74.00	11.65
5350.000	16.37	AV	V	32.70	49.07	54.00	4.93
10486.000	33.69	PK	H	14.39	48.08	68.20	20.12
10486.000	34.10	PK	V	14.39	48.49	68.20	19.71
15729.000	38.34	PK	H	18.82	57.16	74.00	16.84
15729.000	25.60	AV	H	18.82	44.42	54.00	9.58
15729.000	38.10	PK	V	18.82	56.92	74.00	17.08
15729.000	25.43	AV	V	18.82	44.25	54.00	9.75

20M,QPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5167 MHz							
5150.000	31.02	PK	H	32.83	63.85	74.00	10.15
5150.000	18.11	AV	H	32.83	50.94	54.00	3.06
5150.000	32.72	PK	V	32.83	65.55	74.00	8.45
5150.000	19.78	AV	V	32.83	52.61	54.00	1.39
10334.000	33.56	PK	H	14.40	47.96	68.20	20.24
10334.000	33.81	PK	V	14.40	48.21	68.20	19.99
15501.000	35.20	PK	H	18.54	53.74	74.00	20.26
15501.000	23.11	AV	H	18.54	41.65	54.00	12.35
15501.000	35.49	PK	V	18.54	54.03	74.00	19.97
15501.000	23.28	AV	V	18.54	41.82	54.00	12.18
Middle Channel: 5201 MHz							
10402.000	33.64	PK	H	14.52	48.16	68.20	20.04
10402.000	33.50	PK	V	14.52	48.02	68.20	20.18
15603.000	35.46	PK	H	18.69	54.15	74.00	19.85
15603.000	23.77	AV	H	18.69	42.46	54.00	11.54
15603.000	36.60	PK	V	18.69	55.29	74.00	18.71
15603.000	24.11	AV	V	18.69	42.80	54.00	11.20
High Channel: 5233 MHz							
5350.000	30.23	PK	H	32.70	62.93	74.00	11.07
5350.000	17.58	AV	H	32.70	50.28	54.00	3.72
5350.000	30.01	PK	V	32.70	62.71	74.00	11.29
5350.000	17.44	AV	V	32.70	50.14	54.00	3.86
10466.000	33.10	PK	H	14.42	47.52	68.20	20.68
10466.000	33.56	PK	V	14.42	47.98	68.20	20.22
15699.000	36.56	PK	H	18.76	55.32	74.00	18.68
15699.000	24.79	AV	H	18.76	43.55	54.00	10.45
15699.000	37.10	PK	V	18.76	55.86	74.00	18.14
15699.000	25.22	AV	V	18.76	43.98	54.00	10.02

16QAM:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5167 MHz							
5150.000	32.23	PK	H	32.83	65.06	74.00	8.94
5150.000	18.85	AV	H	32.83	51.68	54.00	2.32
5150.000	30.11	PK	V	32.83	62.94	74.00	11.06
5150.000	16.47	AV	V	32.83	49.30	54.00	4.70
10334.000	34.78	PK	H	14.40	49.18	68.20	19.02
10334.000	33.69	PK	V	14.40	48.09	68.20	20.11
15501.000	35.64	PK	H	18.54	54.18	74.00	19.82
15501.000	23.11	AV	H	18.54	41.65	54.00	12.35
15501.000	35.89	PK	V	18.54	54.43	74.00	19.57
15501.000	23.44	AV	V	18.54	41.98	54.00	12.02
Middle Channel: 5201 MHz							
10402.000	34.45	PK	H	14.52	48.97	68.20	19.23
10402.000	33.66	PK	V	14.52	48.18	68.20	20.02
15603.000	37.06	PK	H	18.69	55.75	74.00	18.25
15603.000	25.31	AV	H	18.69	44.00	54.00	10.00
15603.000	36.89	PK	V	18.69	55.58	74.00	18.42
15603.000	24.46	AV	V	18.69	43.15	54.00	10.85
High Channel: 5233 MHz							
5350.000	29.74	PK	H	32.70	62.44	74.00	11.56
5350.000	16.44	AV	H	32.70	49.14	54.00	4.86
5350.000	30.01	PK	V	32.70	62.71	74.00	11.29
5350.000	16.78	AV	V	32.70	49.48	54.00	4.52
10466.000	34.55	PK	H	14.42	48.97	68.20	19.23
10466.000	35.01	PK	V	14.42	49.43	68.20	18.77
15699.000	38.88	PK	H	18.76	57.64	74.00	16.36
15699.000	25.78	AV	H	18.76	44.54	54.00	9.46
15699.000	38.29	PK	V	18.76	57.05	74.00	16.95
15699.000	25.11	AV	V	18.76	43.87	54.00	10.13

5725-5850MHz:**QPSK-1.4M:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5728MHz							
11456.000	33.04	PK	H	15.63	48.67	74.00	25.33
11456.000	20.36	AV	H	15.63	35.99	54.00	18.01
11456.000	34.34	PK	V	15.63	49.97	74.00	24.03
11456.000	21.26	AV	V	15.63	36.89	54.00	17.11
17184.000	33.79	PK	H	22.57	56.36	68.20	11.84
17184.000	34.68	PK	V	22.57	57.25	68.20	10.95
Middle Channel: 5789 MHz							
11578.000	35.02	PK	H	15.73	50.75	74.00	23.25
11578.000	22.13	AV	H	15.73	37.86	54.00	16.14
11578.000	35.12	PK	V	15.73	50.85	74.00	23.15
11578.000	22.30	AV	V	15.73	38.03	54.00	15.97
17367.000	34.02	PK	H	23.42	57.44	68.20	10.76
17367.000	34.11	PK	V	23.42	57.53	68.20	10.67
High Channel: 5847 MHz							
11694.000	34.23	PK	H	16.22	50.45	74.00	23.55
11694.000	21.63	AV	H	16.22	37.85	54.00	16.15
11694.000	34.25	PK	V	16.22	50.47	74.00	23.53
11694.000	21.70	AV	V	16.22	37.92	54.00	16.08
17541.000	33.29	PK	H	24.20	57.49	68.20	10.71
17541.000	34.86	PK	V	24.20	59.06	68.20	9.14

16QAM-1.4M:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5728MHz							
11456.000	34.29	PK	H	15.63	49.92	74.00	24.08
11456.000	22.10	AV	H	15.63	37.73	54.00	16.27
11456.000	34.69	PK	V	15.63	50.32	74.00	23.68
11456.000	22.33	AV	V	15.63	37.96	54.00	16.04
17184.000	35.49	PK	H	22.57	58.06	68.20	10.14
17184.000	35.10	PK	V	22.57	57.67	68.20	10.53
Middle Channel: 5789 MHz							
11578.000	34.21	PK	H	15.73	49.94	74.00	24.06
11578.000	22.01	AV	H	15.73	37.74	54.00	16.26
11578.000	34.69	PK	V	15.73	50.42	74.00	23.58
11578.000	22.52	AV	V	15.73	38.25	54.00	15.75
17367.000	33.11	PK	H	23.42	56.53	68.20	11.67
17367.000	33.56	PK	V	23.42	56.98	68.20	11.22
High Channel: 5847 MHz							
11694.000	36.46	PK	H	16.22	52.68	74.00	21.32
11694.000	24.32	AV	H	16.22	40.54	54.00	13.46
11694.000	39.14	PK	V	16.22	55.36	74.00	18.64
11694.000	27.28	AV	V	16.22	43.50	54.00	10.50
17541.000	33.91	PK	H	24.20	58.11	68.20	10.09
17541.000	34.90	PK	V	24.20	59.10	68.20	9.10

10M-QPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5733MHz							
11466.000	33.94	PK	H	15.58	49.52	74.00	24.48
11466.000	20.69	AV	H	15.58	36.27	54.00	17.73
11466.000	35.91	PK	V	15.58	51.49	74.00	22.51
11466.000	22.65	AV	V	15.58	38.23	54.00	15.77
17199.000	35.62	PK	H	22.58	58.20	68.20	10.00
17199.000	35.01	PK	V	22.58	57.59	68.20	10.61
Middle Channel: 5789 MHz							
11578.000	32.88	PK	H	15.73	48.61	74.00	25.39
11578.000	20.63	AV	H	15.73	36.36	54.00	17.64
11578.000	37.19	PK	V	15.73	52.92	74.00	21.08
11578.000	25.10	AV	V	15.73	40.83	54.00	13.17
17367.000	34.01	PK	H	23.42	57.43	68.20	10.77
17367.000	34.20	PK	V	23.42	57.62	68.20	10.58
High Channel: 5842 MHz							
11684.000	36.24	PK	H	16.17	52.41	74.00	21.59
11684.000	24.12	AV	H	16.17	40.29	54.00	13.71
11684.000	37.38	PK	V	16.17	53.55	74.00	20.45
11684.000	25.23	AV	V	16.17	41.40	54.00	12.60
17526.000	33.96	PK	H	24.09	58.05	68.20	10.15
17526.000	34.12	PK	V	24.09	58.21	68.20	9.99

10M-16QAM:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5733MHz							
11466.000	34.88	PK	H	15.58	50.46	74.00	23.54
11466.000	22.69	AV	H	15.58	38.27	54.00	15.73
11466.000	35.58	PK	V	15.58	51.16	74.00	22.84
11466.000	23.41	AV	V	15.58	38.99	54.00	15.01
17199.000	35.18	PK	H	22.58	57.76	68.20	10.44
17199.000	34.98	PK	V	22.58	57.56	68.20	10.64
Middle Channel: 5789 MHz							
11578.000	35.44	PK	H	15.73	51.17	74.00	22.83
11578.000	23.14	AV	H	15.73	38.87	54.00	15.13
11578.000	37.46	PK	V	15.73	53.19	74.00	20.81
11578.000	25.33	AV	V	15.73	41.06	54.00	12.94
17367.000	34.05	PK	H	23.42	57.47	68.20	10.73
17367.000	33.74	PK	V	23.42	57.16	68.20	11.04
High Channel: 5842 MHz							
11684.000	36.30	PK	H	16.17	52.47	74.00	21.53
11684.000	24.37	AV	H	16.17	40.54	54.00	13.46
11684.000	37.87	PK	V	16.17	54.04	74.00	19.96
11684.000	25.13	AV	V	16.17	41.30	54.00	12.70
17526.000	34.11	PK	H	24.09	58.20	68.20	10.00
17526.000	34.72	PK	V	24.09	58.81	68.20	9.39

20M-QPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5738 MHz							
11476.000	34.37	PK	H	15.53	49.90	74.00	24.10
11476.000	21.50	AV	H	15.53	37.03	54.00	16.97
11476.000	34.63	PK	V	15.53	50.16	74.00	23.84
11476.000	21.28	AV	V	15.53	36.81	54.00	17.19
17214.000	34.26	PK	H	22.62	56.88	68.20	11.32
17214.000	34.29	PK	V	22.62	56.91	68.20	11.29
Middle Channel: 5790 MHz							
11580.000	33.99	PK	H	15.73	49.72	74.00	24.28
11580.000	21.43	AV	H	15.73	37.16	54.00	16.84
11580.000	34.57	PK	V	15.73	50.30	74.00	23.70
11580.000	21.67	AV	V	15.73	37.40	54.00	16.60
17370.000	35.51	PK	H	23.45	58.96	68.20	9.24
17370.000	35.10	PK	V	23.45	58.55	68.20	9.65
High Channel: 5839 MHz							
11678.000	34.47	PK	H	16.14	50.61	74.00	23.39
11678.000	21.25	AV	H	16.14	37.39	54.00	16.61
11678.000	36.89	PK	V	16.14	53.03	74.00	20.97
11678.000	23.55	AV	V	16.14	39.69	54.00	14.31
17517.000	34.51	PK	H	24.04	58.55	68.20	9.65
17517.000	35.02	PK	V	24.04	59.06	68.20	9.14

20M-16QAM:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5738 MHz							
11476.000	35.74	PK	H	15.53	51.27	74.00	22.73
11476.000	23.55	AV	H	15.53	39.08	54.00	14.92
11476.000	33.54	PK	V	15.53	49.07	74.00	24.93
11476.000	21.16	AV	V	15.53	36.69	54.00	17.31
17214.000	33.74	PK	H	22.62	56.36	68.20	11.84
17214.000	34.02	PK	V	22.62	56.64	68.20	11.56
Middle Channel: 5790 MHz							
11580.000	36.01	PK	H	15.73	51.74	74.00	22.26
11580.000	24.31	AV	H	15.73	40.04	54.00	13.96
11580.000	38.42	PK	V	15.73	54.15	74.00	19.85
11580.000	26.11	AV	V	15.73	41.84	54.00	12.16
17370.000	33.85	PK	H	23.45	57.30	68.20	10.90
17370.000	34.45	PK	V	23.45	57.90	68.20	10.30
High Channel: 5839 MHz							
11678.000	37.21	PK	H	16.14	53.35	74.00	20.65
11678.000	24.48	AV	H	16.14	40.62	54.00	13.38
11678.000	38.19	PK	V	16.14	54.33	74.00	19.67
11678.000	25.66	AV	V	16.14	41.80	54.00	12.20
17517.000	34.28	PK	H	24.04	58.32	68.20	9.88
17517.000	35.14	PK	V	24.04	59.18	68.20	9.02

Note:


Result = Reading + Factor- Distance extrapolation Factor


For 1-40GHz:

Distance extrapolation Factor = 20 log (specific distance [3m]/test distance [1.5m]) dB= 6.02 dB

Worst Test plots

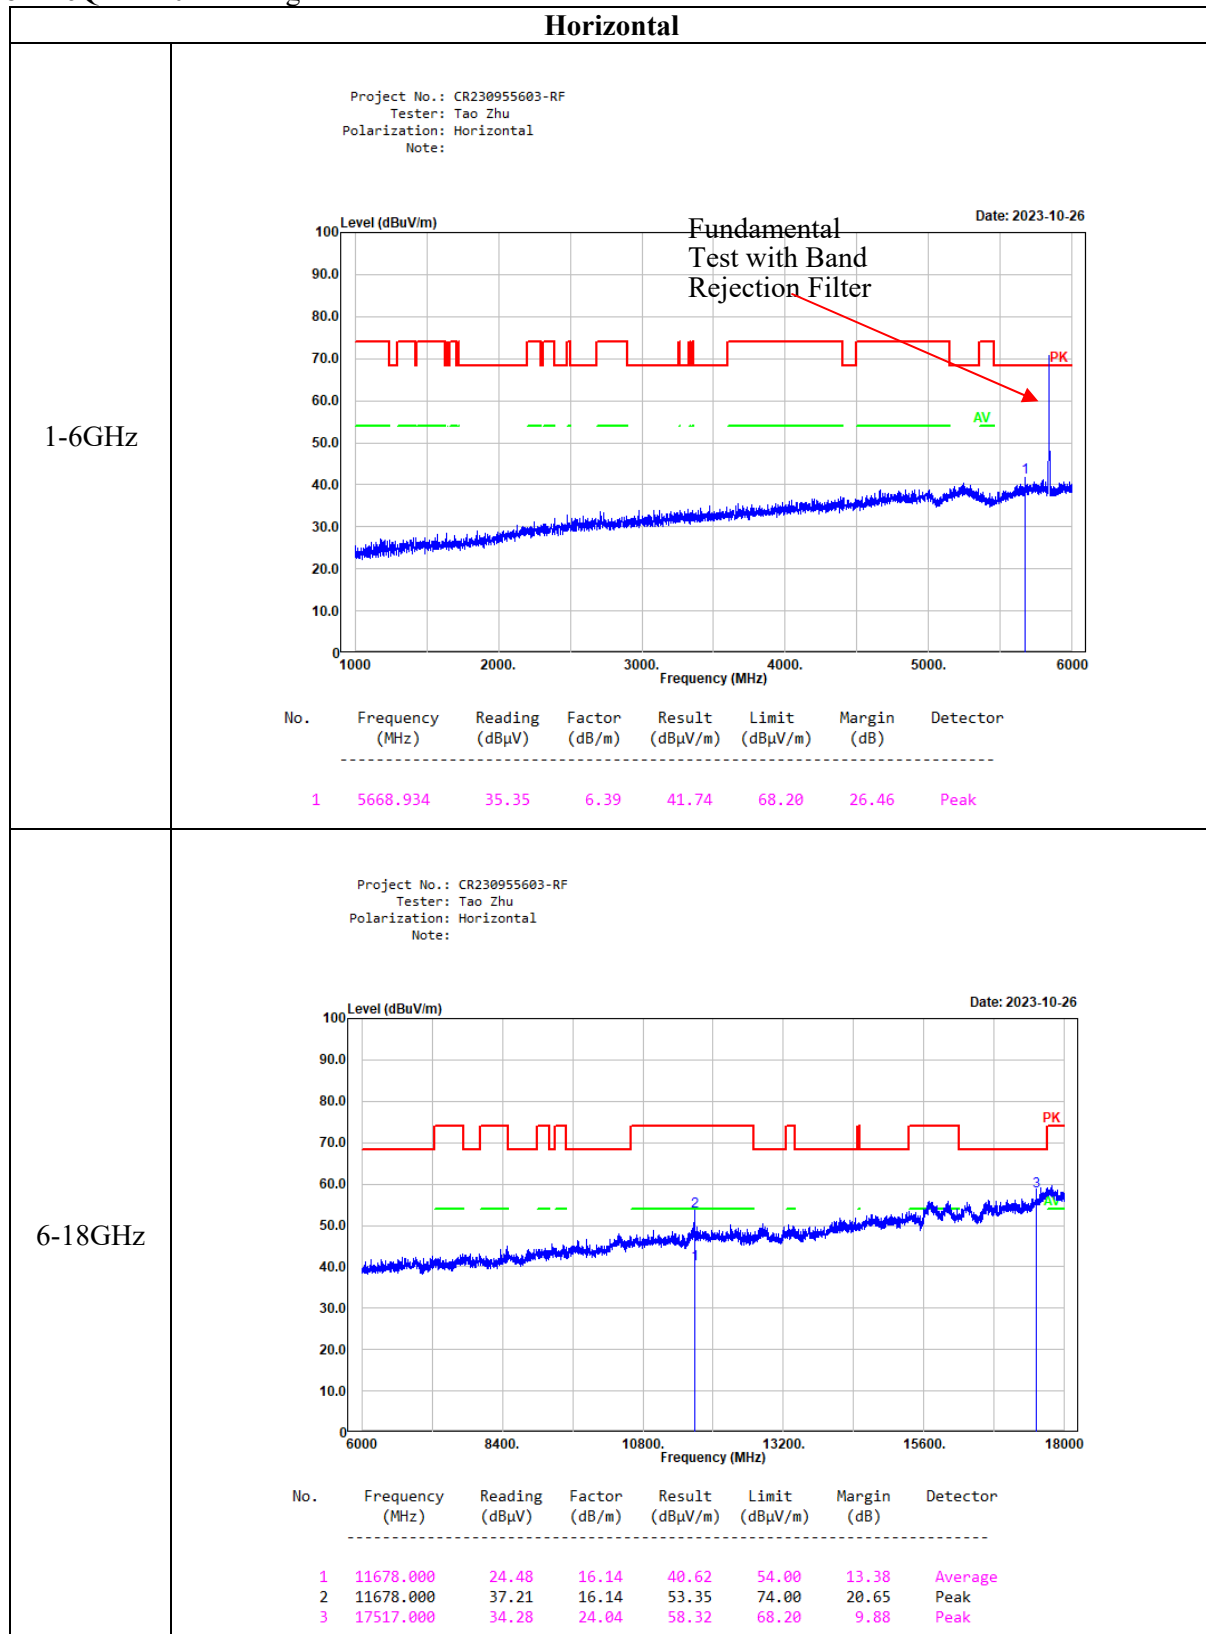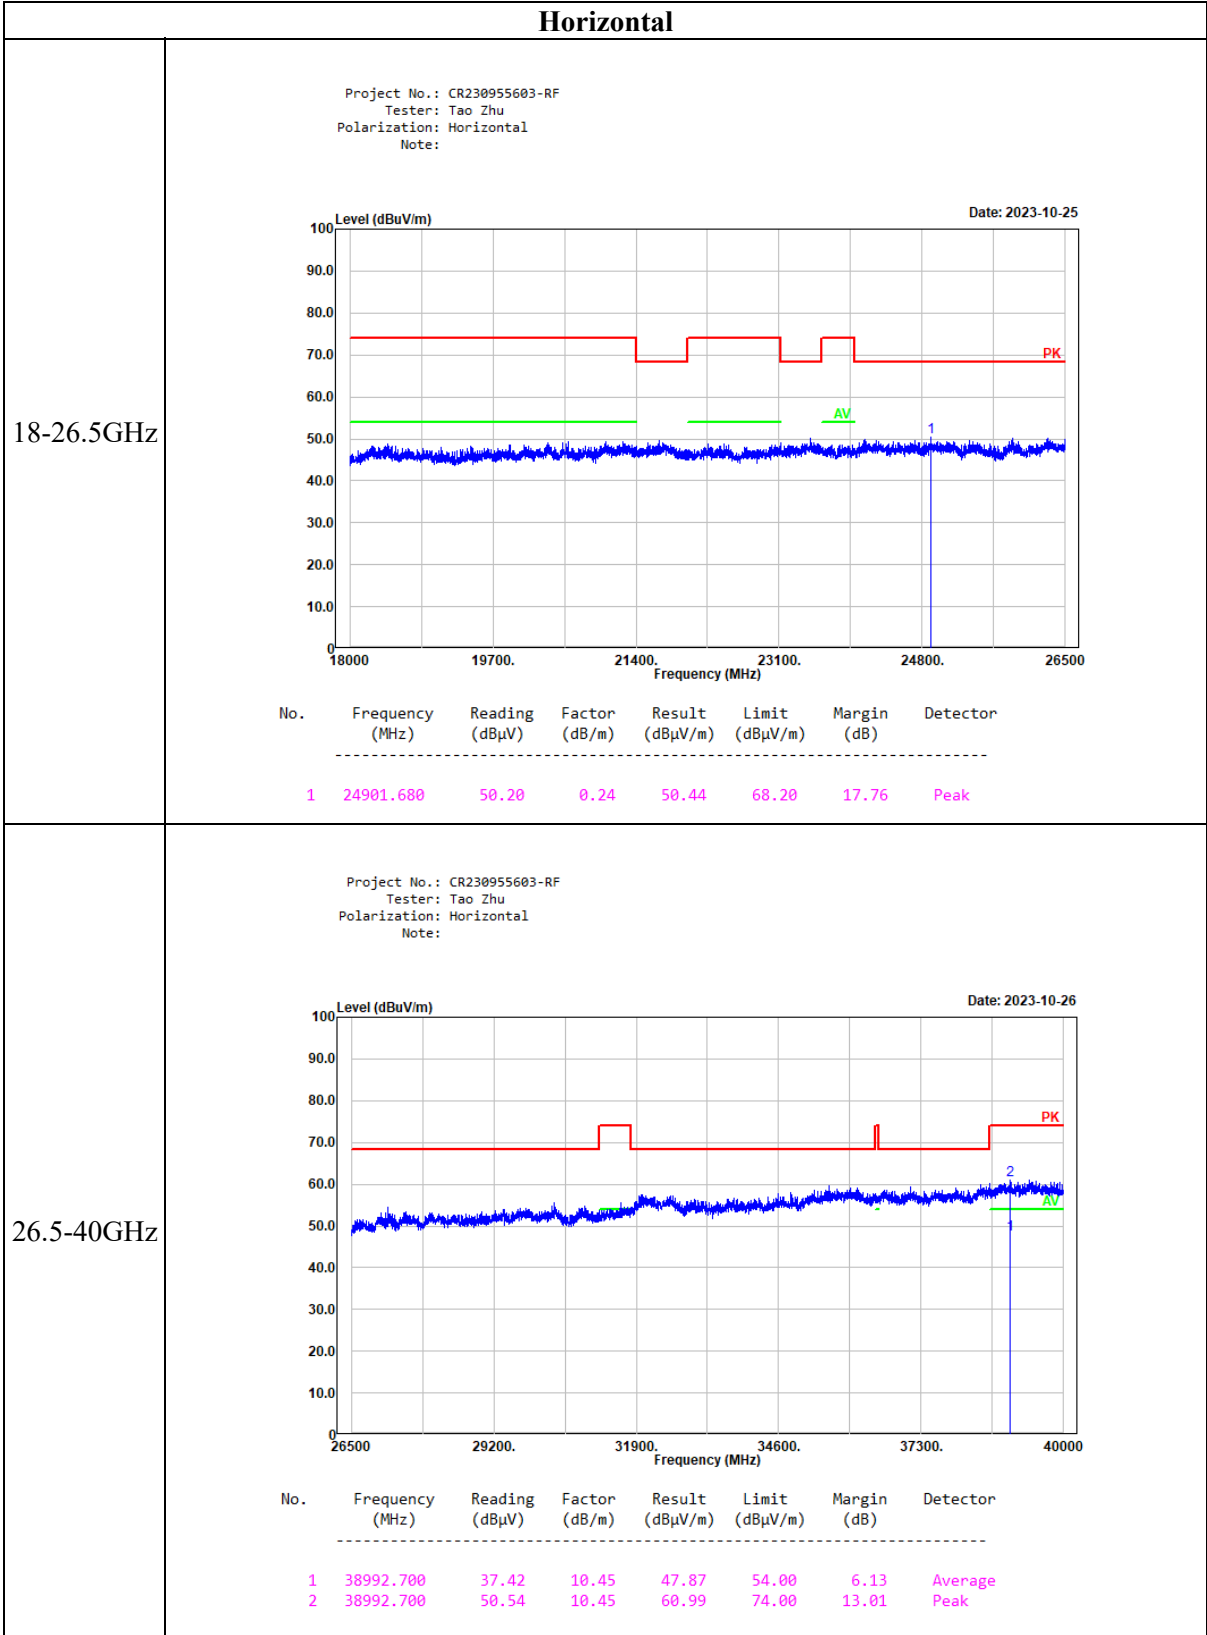5.8G-16QAM-20MHz-High channel:






Vertical

1-6GHz

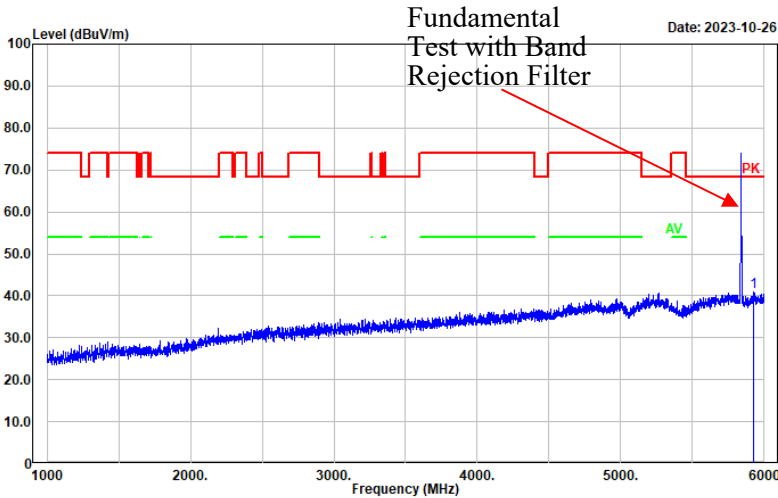
Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: vertical
Note:




No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5924.985	33.96	7.01	40.97	68.20	27.23	Peak

6-18GHz

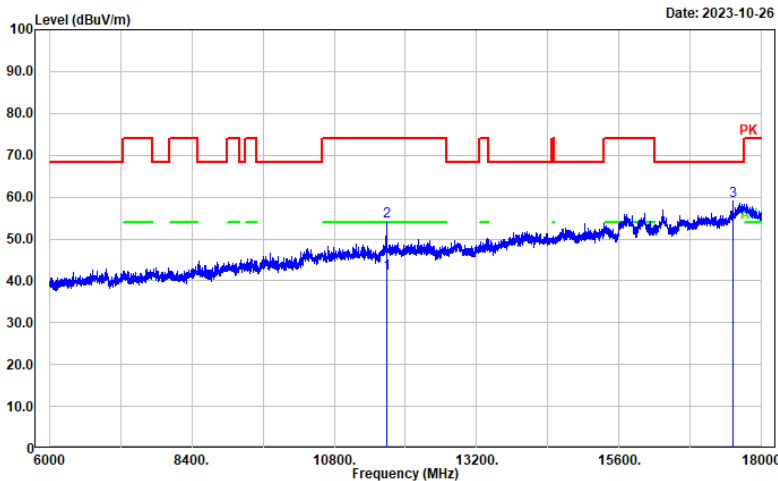
Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11678.000	25.66	16.14	41.80	54.00	12.20	Average
2	11678.000	38.19	16.14	54.33	74.00	19.67	Peak
3	17517.000	35.14	24.04	59.18	68.20	9.02	Peak

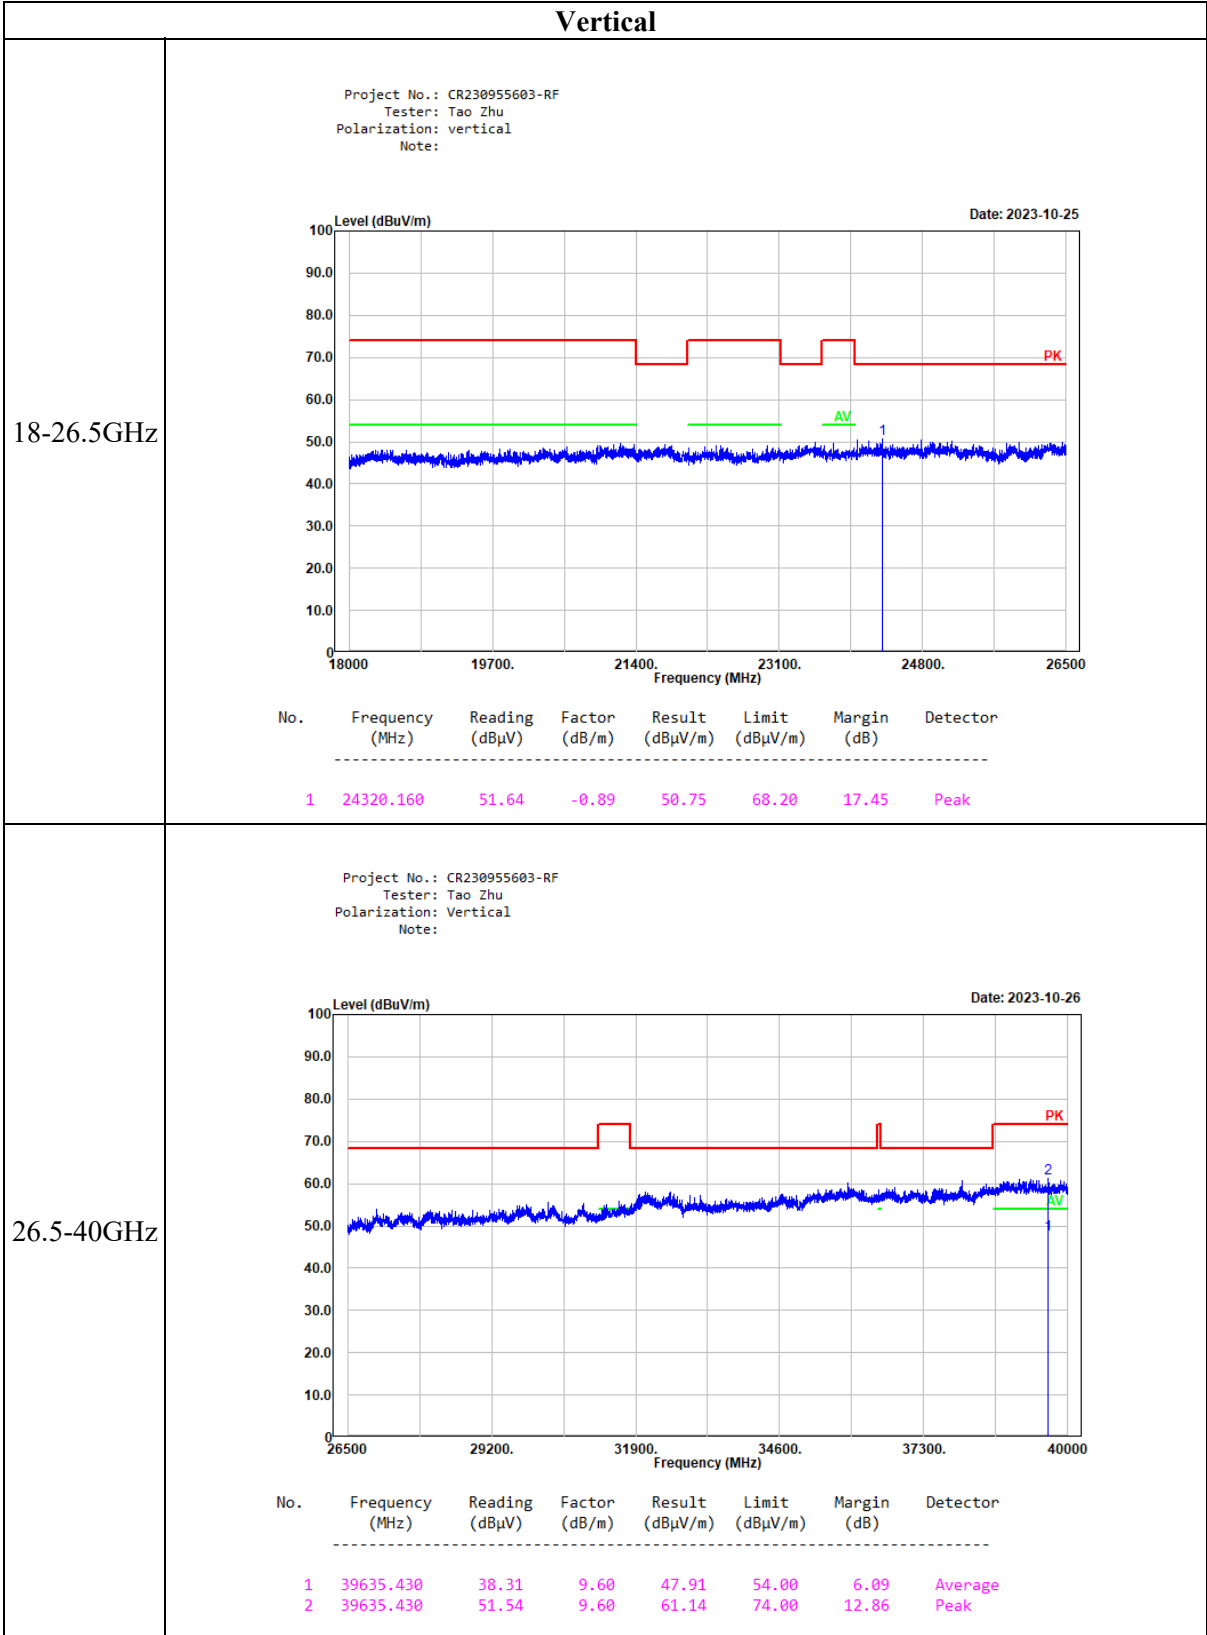

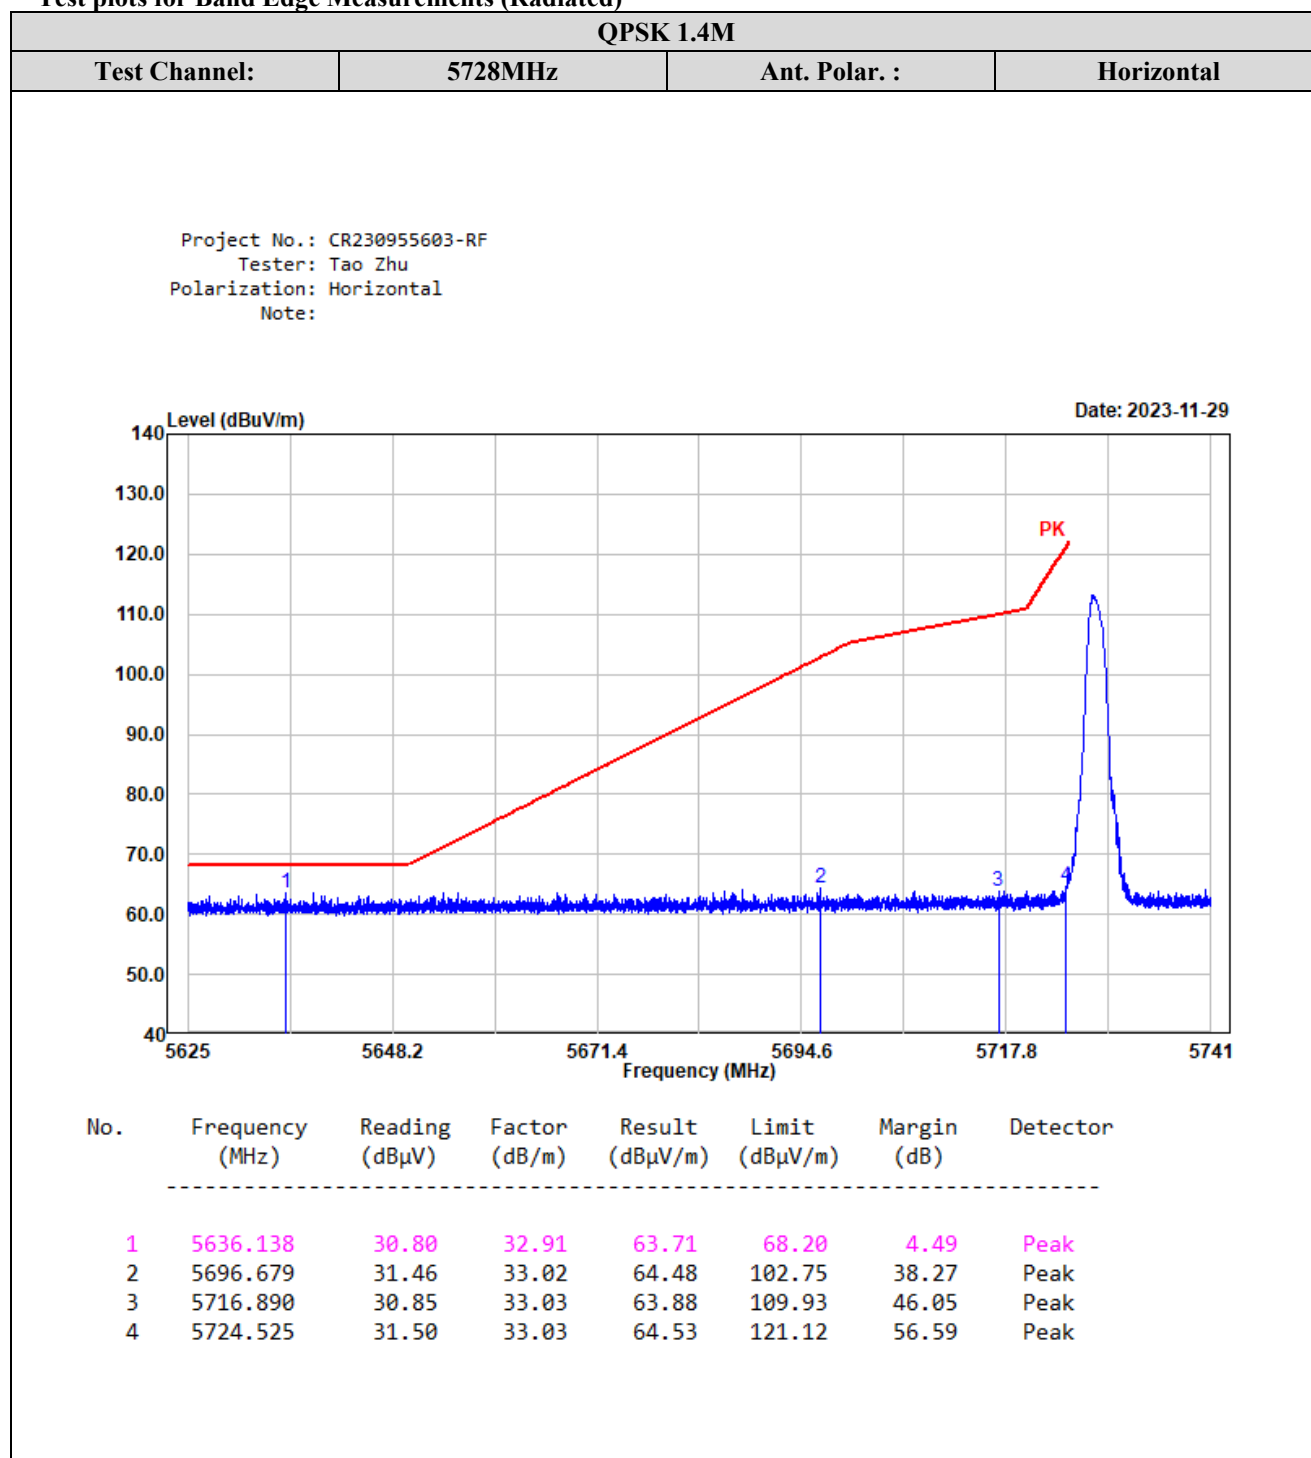Test plots for Band Edge Measurements (Radiated)



QPSK 1.4M

Test Channel:

5847MHz

Ant. Polar. :

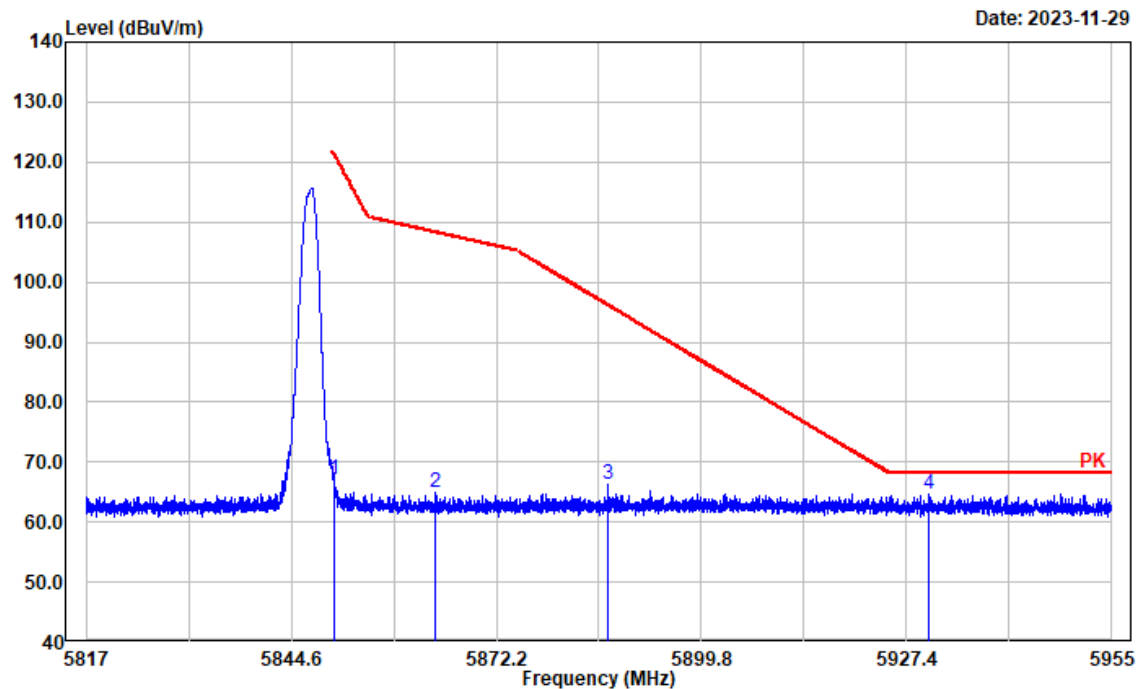
Horizontal

Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Horizontal

Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.430	33.92	33.19	67.11	121.22	54.11	Peak
2	5864.040	31.69	33.27	64.96	108.27	43.31	Peak
3	5887.173	32.80	33.40	66.20	96.16	29.96	Peak
4	5930.431	31.12	33.47	64.59	68.20	3.61	Peak

QPSK 1.4M

Test Channel:

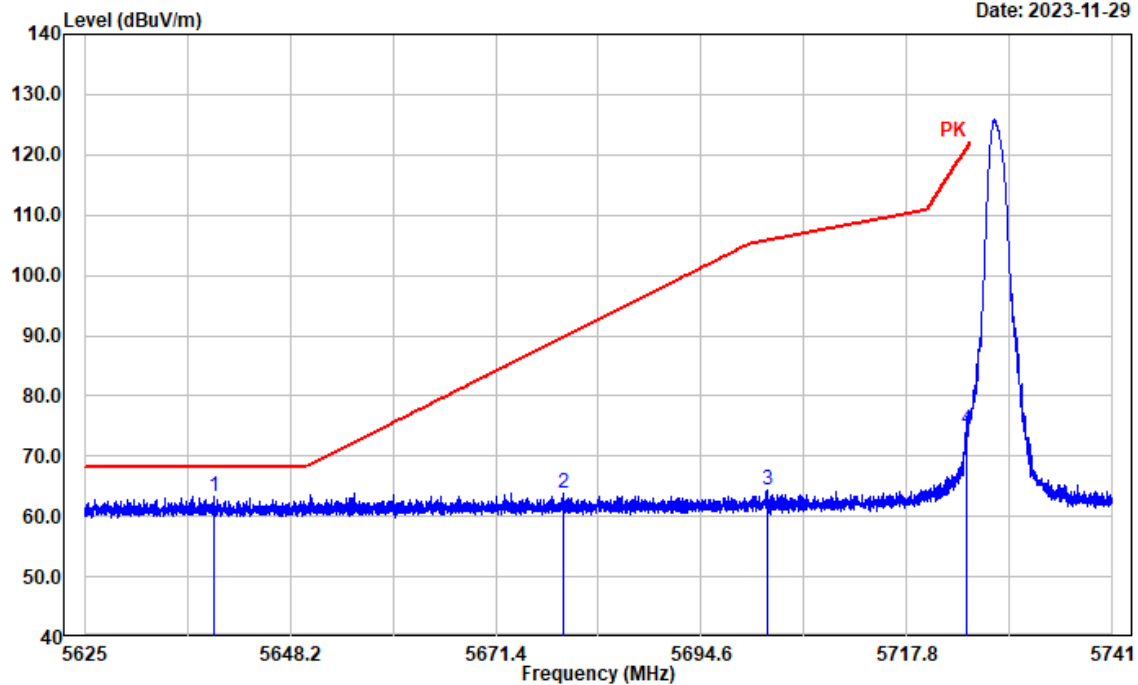
5728MHz

Ant. Polar. :

Vertical

Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: Vertical
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5639.712	30.38	32.92	63.30	68.20	4.90	Peak
2	5679.067	30.97	33.00	63.97	89.75	25.78	Peak
3	5701.993	31.44	33.03	64.47	105.76	41.29	Peak
4	5724.548	41.50	33.03	74.53	121.17	46.64	Peak

QPSK 1.4M

Test Channel:

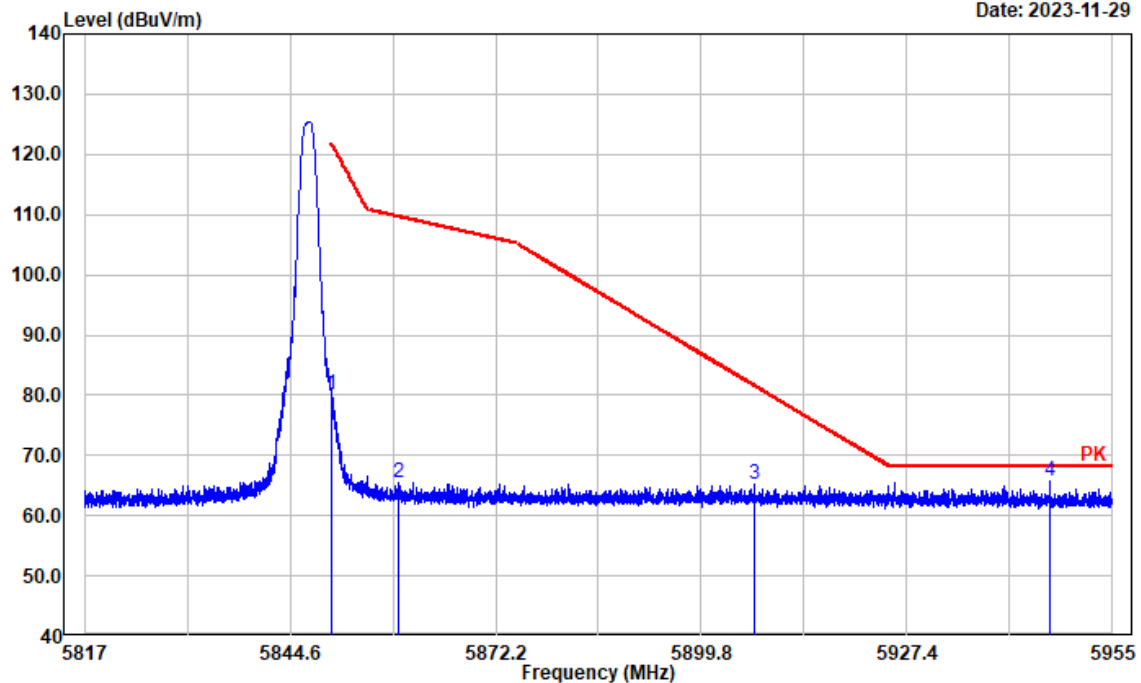
5847MHz

Ant. Polar. :

Vertical

Project No.: CR230955603-RF
 Tester: Tao Zhu
 Polarization: Vertical
 Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.237	46.95	33.19	80.14	121.66	41.52	Peak
2	5859.071	32.34	33.24	65.58	109.66	44.08	Peak
3	5906.911	31.82	33.47	65.29	81.55	16.26	Peak
4	5946.553	32.20	33.46	65.66	68.20	2.54	Peak

16-QAM 1.4M

Test Channel:

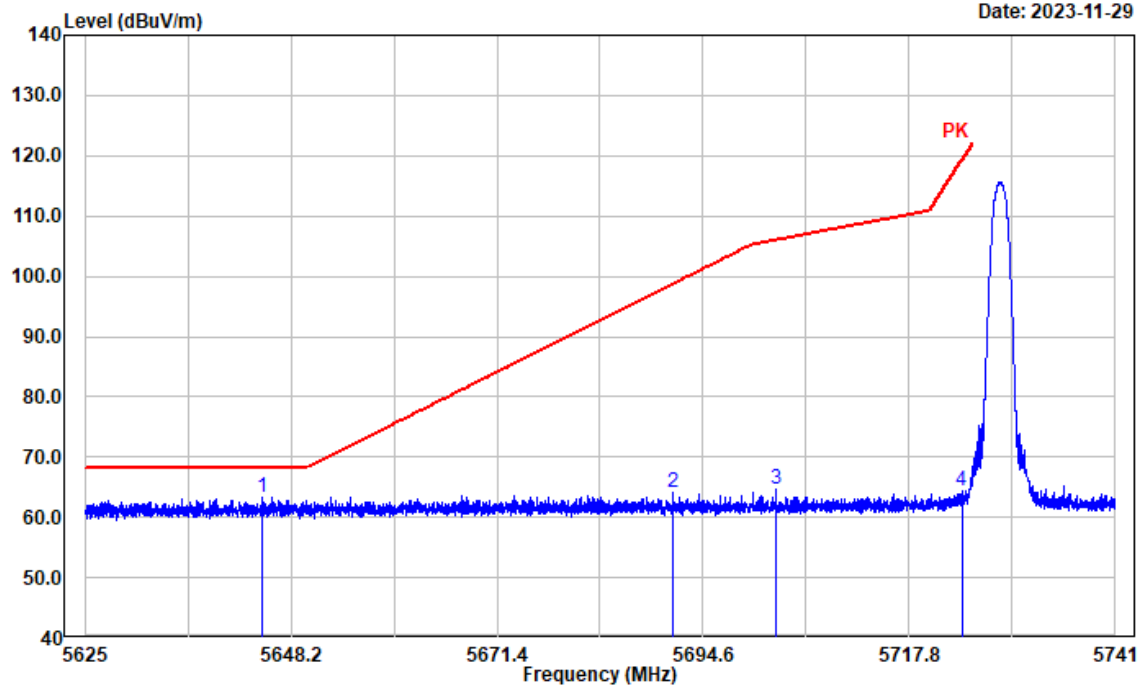
5728MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	5644.910	30.40	32.93	63.33	68.20	4.87	Peak
2	5691.133	30.99	33.02	64.01	98.66	34.65	Peak
3	5702.735	31.58	33.03	64.61	105.97	41.36	Peak
4	5723.712	31.36	33.03	64.39	119.27	54.88	Peak

16-QAM 1.4M

Test Channel:

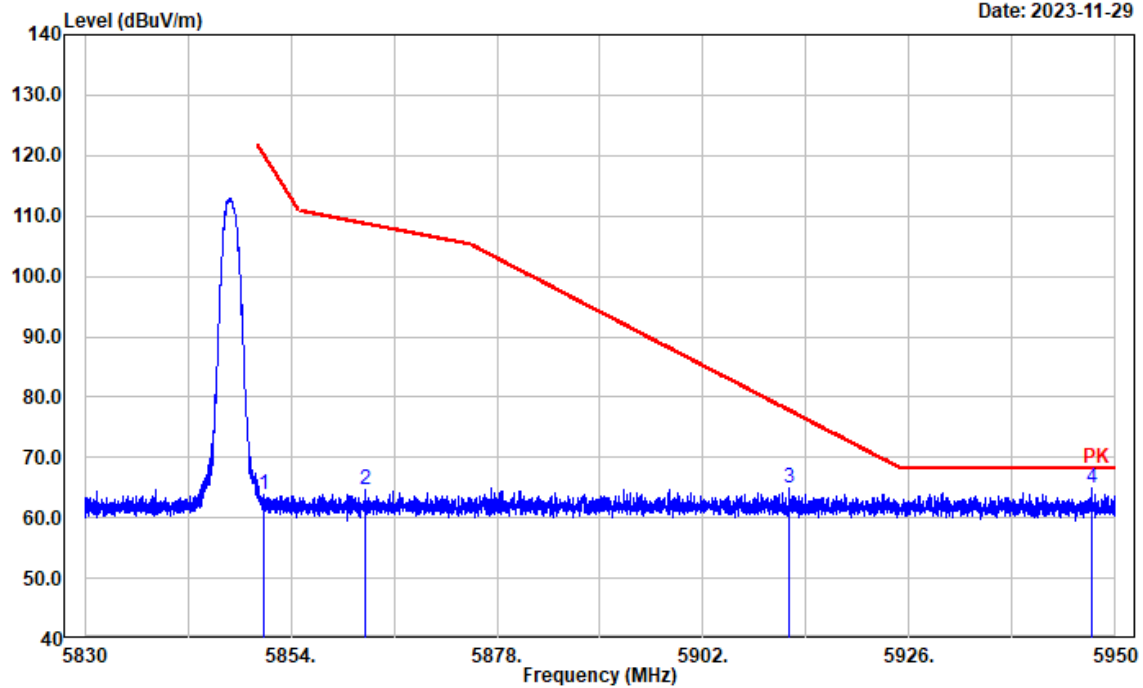
5847MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.884	30.58	33.19	63.77	120.18	56.41	Peak
2	5862.670	31.33	33.26	64.59	108.65	44.06	Peak
3	5912.072	31.58	33.47	65.05	77.74	12.69	Peak
4	5947.288	31.55	33.46	65.01	68.20	3.19	Peak

16-QAM 1.4M

Test Channel:

5728MHz

Ant. Polar. :

Vertical

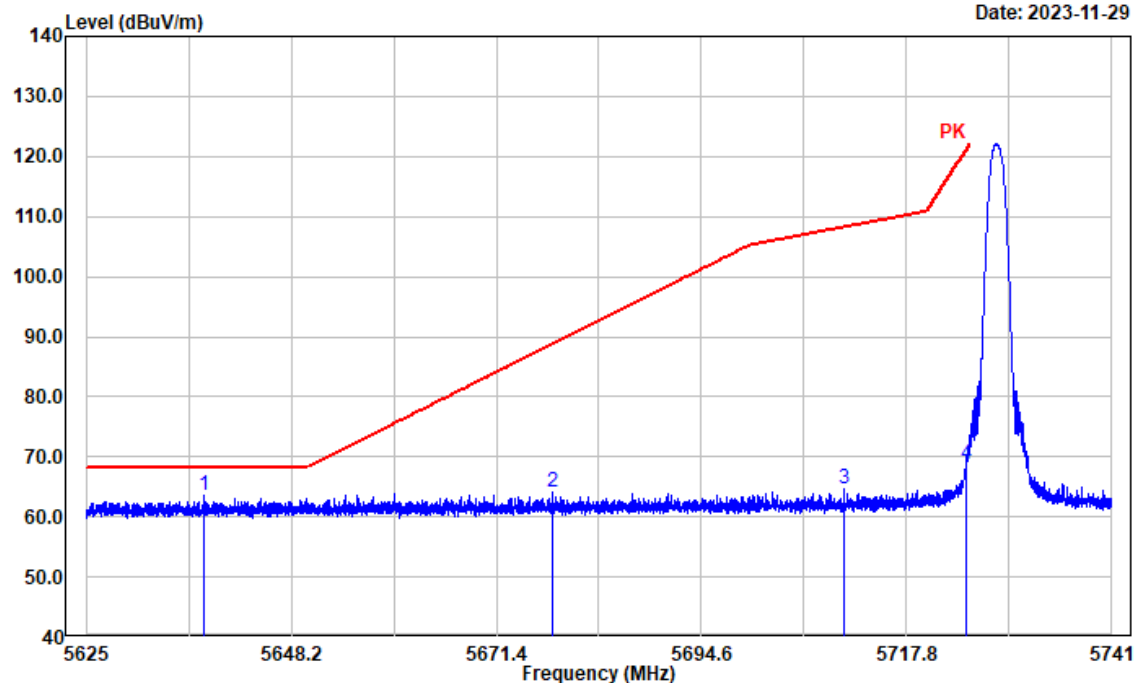
Project No.: CR230955603-RF

Tester: Mack Huang

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5638.366	30.72	32.92	63.64	68.20	4.56	Peak
2	5677.791	31.07	32.99	64.06	88.81	24.75	Peak
3	5710.695	31.53	33.03	64.56	108.20	43.64	Peak
4	5724.548	35.57	33.03	68.60	121.17	52.57	Peak

16-QAM 1.4M

Test Channel:

5847MHz

Ant. Polar. :

Vertical

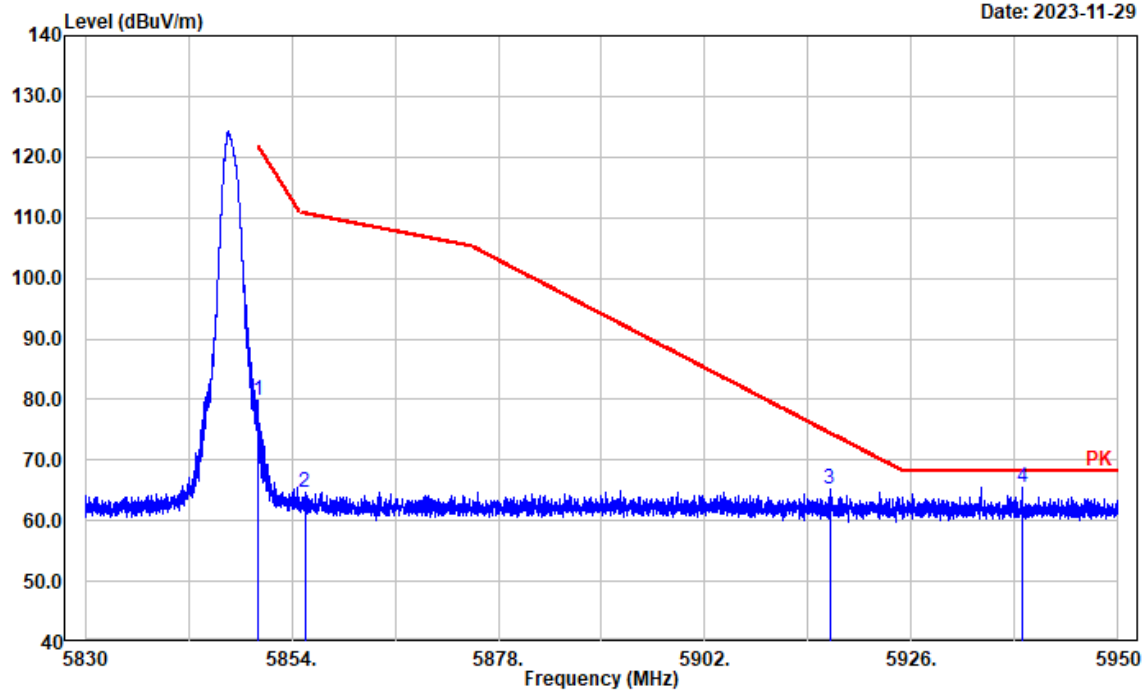
Project No.: CR230955603-RF

Tester: Mack Huang

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.068	46.59	33.19	79.78	122.05	42.27	Peak
2	5855.517	31.40	33.22	64.62	110.65	46.03	Peak
3	5916.489	31.70	33.47	65.17	74.48	9.31	Peak
4	5938.790	31.89	33.46	65.35	68.20	2.85	Peak

QPSK 10M

Test Channel:

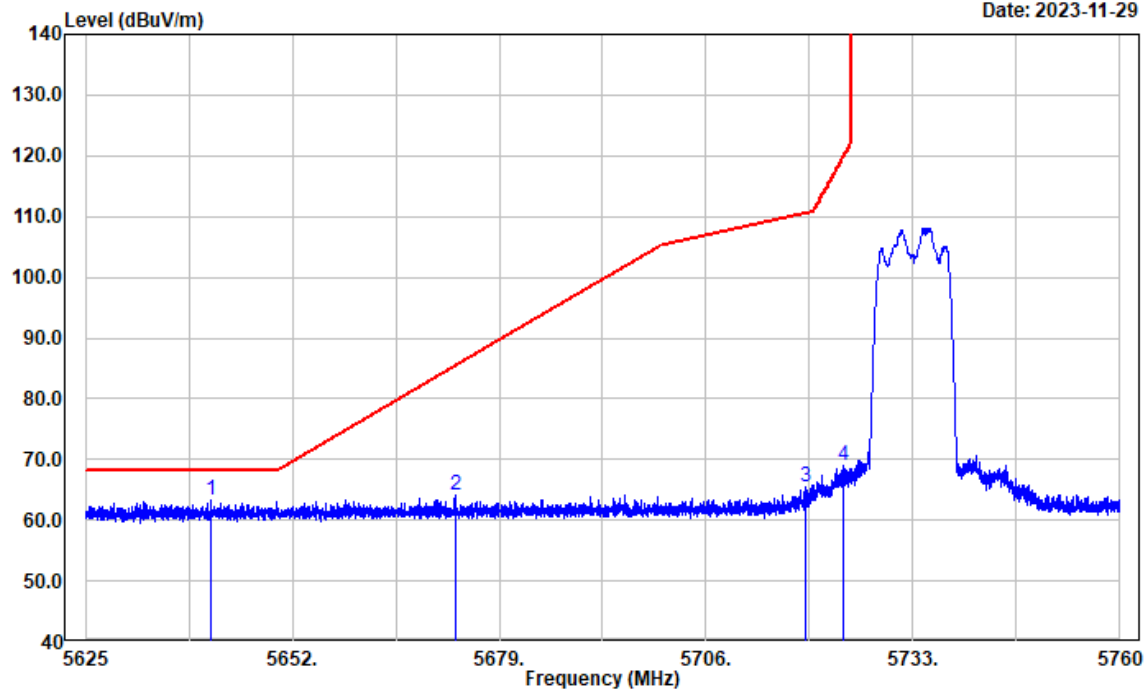
5733MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5641.365	30.26	32.93	63.19	68.20	5.01	Peak
2	5673.340	31.25	32.99	64.24	85.51	21.27	Peak
3	5719.006	32.44	33.03	65.47	110.52	45.05	Peak
4	5723.921	35.91	33.03	68.94	119.74	50.80	Peak

QPSK 10M

Test Channel:

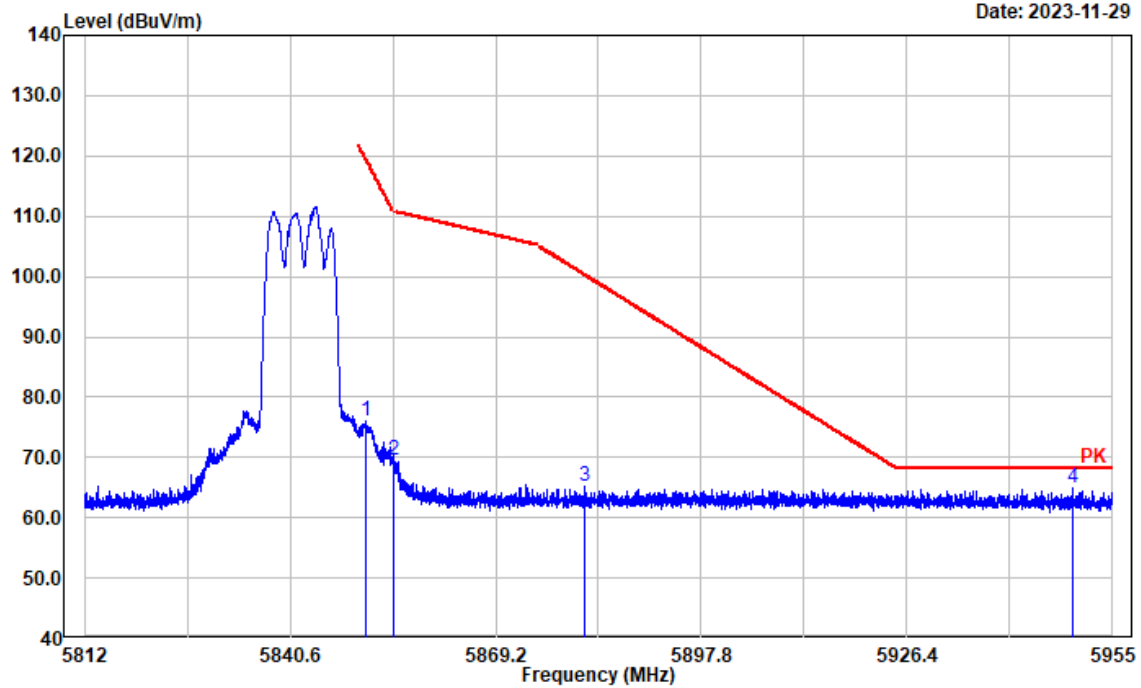
5842MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5851.047	42.96	33.19	76.15	119.81	43.66	Peak
2	5855.109	36.25	33.22	69.47	110.77	41.30	Peak
3	5881.626	31.78	33.37	65.15	100.28	35.13	Peak
4	5949.451	31.34	33.46	64.80	68.20	3.40	Peak

QPSK 10M

Test Channel:

5733MHz

Ant. Polar. :

Vertical

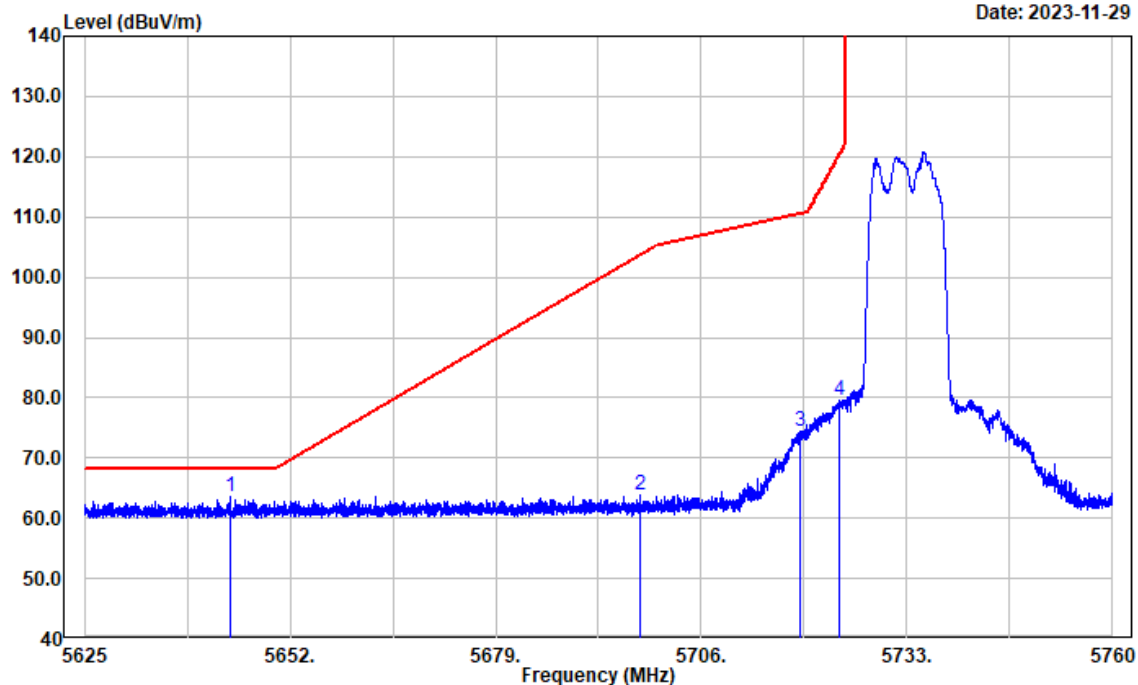
Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5644.147	30.62	32.93	63.55	68.20	4.65	Peak
2	5697.969	30.69	33.03	63.72	103.70	39.98	Peak
3	5718.925	41.43	33.03	74.46	110.50	36.04	Peak
4	5724.218	46.62	33.03	79.65	120.42	40.77	Peak

QPSK 10M

Test Channel:

5842MHz

Ant. Polar. :

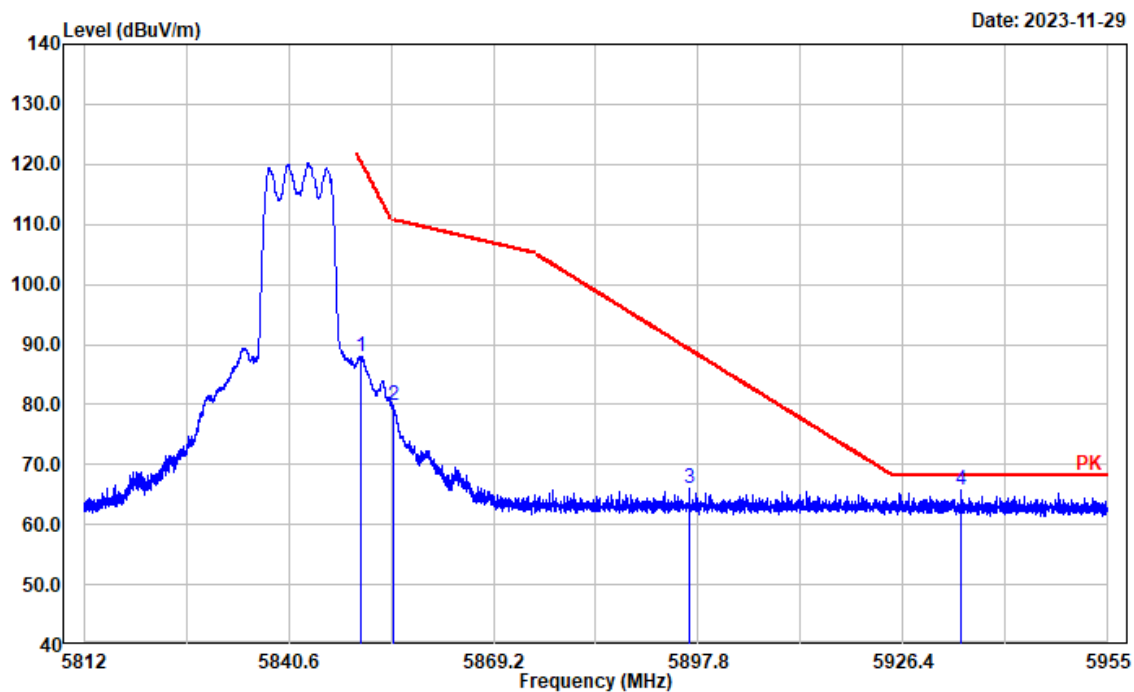
Vertical

Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Vertical

Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.675	54.88	33.19	88.07	120.66	32.59	Peak
2	5855.137	46.68	33.22	79.90	110.76	30.86	Peak
3	5896.616	32.67	33.45	66.12	89.17	23.05	Peak
4	5934.518	32.20	33.47	65.67	68.20	2.53	Peak

16-QAM 10M

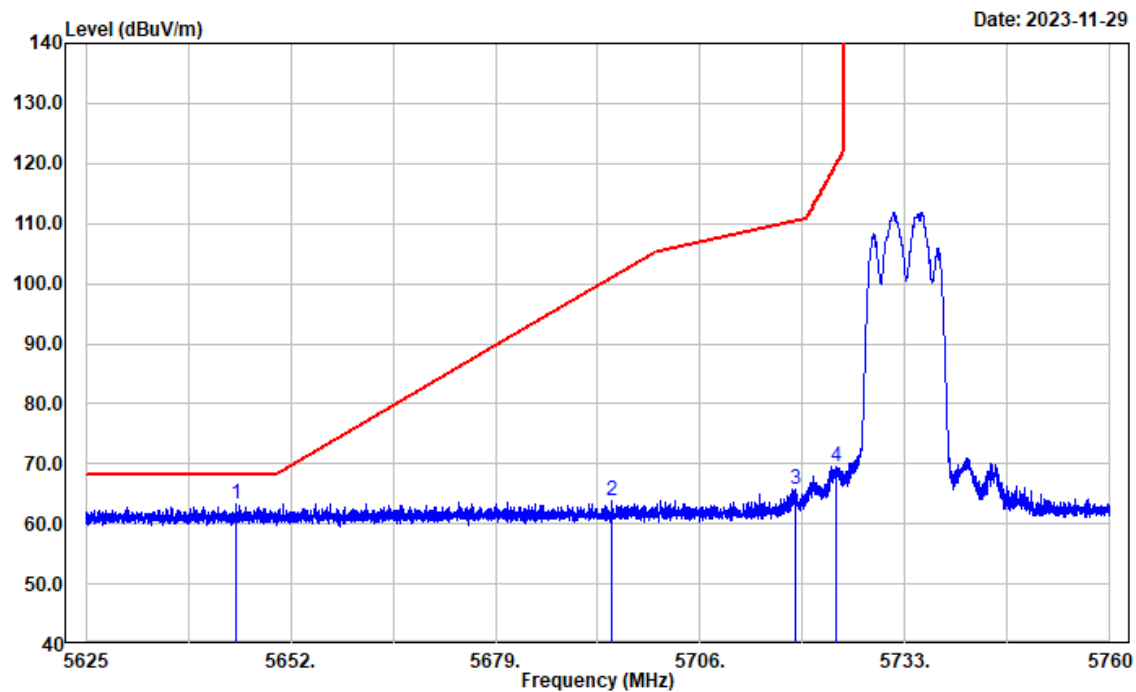
Test Channel:

5733MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: Horizontal
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5644.714	30.32	32.93	63.25	68.20	4.95	Peak
2	5694.404	30.72	33.02	63.74	101.07	37.33	Peak
3	5718.493	32.75	33.03	65.78	110.38	44.60	Peak
4	5724.002	36.59	33.03	69.62	119.93	50.31	Peak

16-QAM 10M

Test Channel:

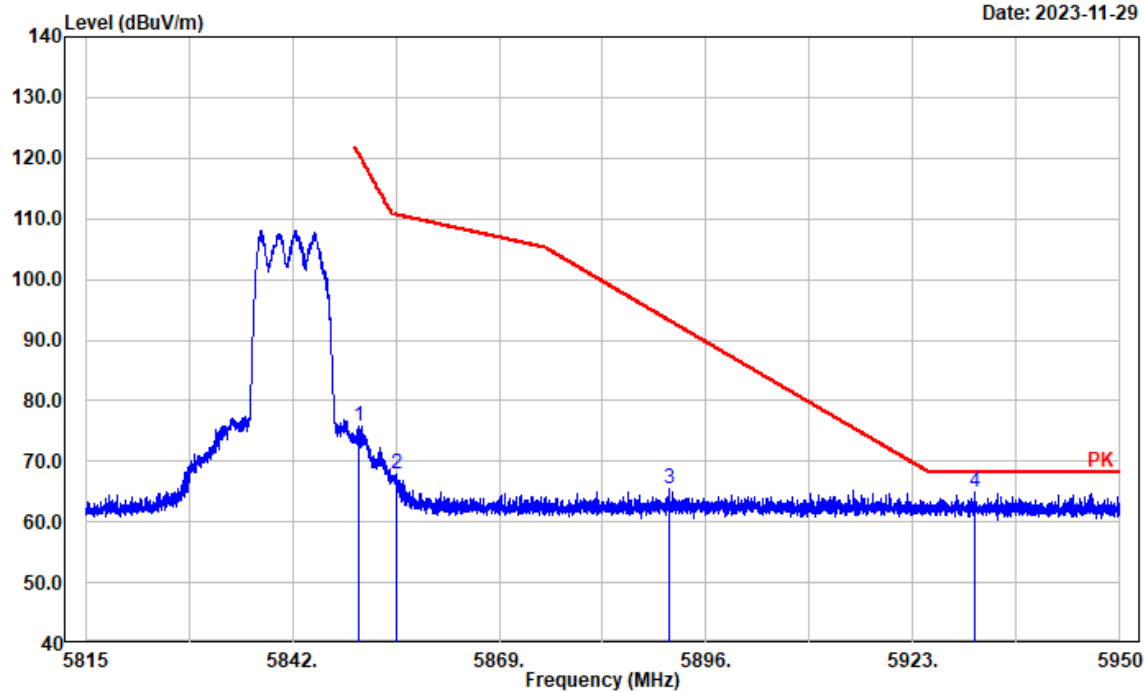
5842MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.620	42.57	33.19	75.76	120.79	45.03	Peak
2	5855.697	34.57	33.22	67.79	110.60	42.81	Peak
3	5891.155	31.99	33.42	65.41	93.21	27.80	Peak
4	5931.150	31.58	33.46	65.04	68.20	3.16	Peak

16-QAM 10M

Test Channel:

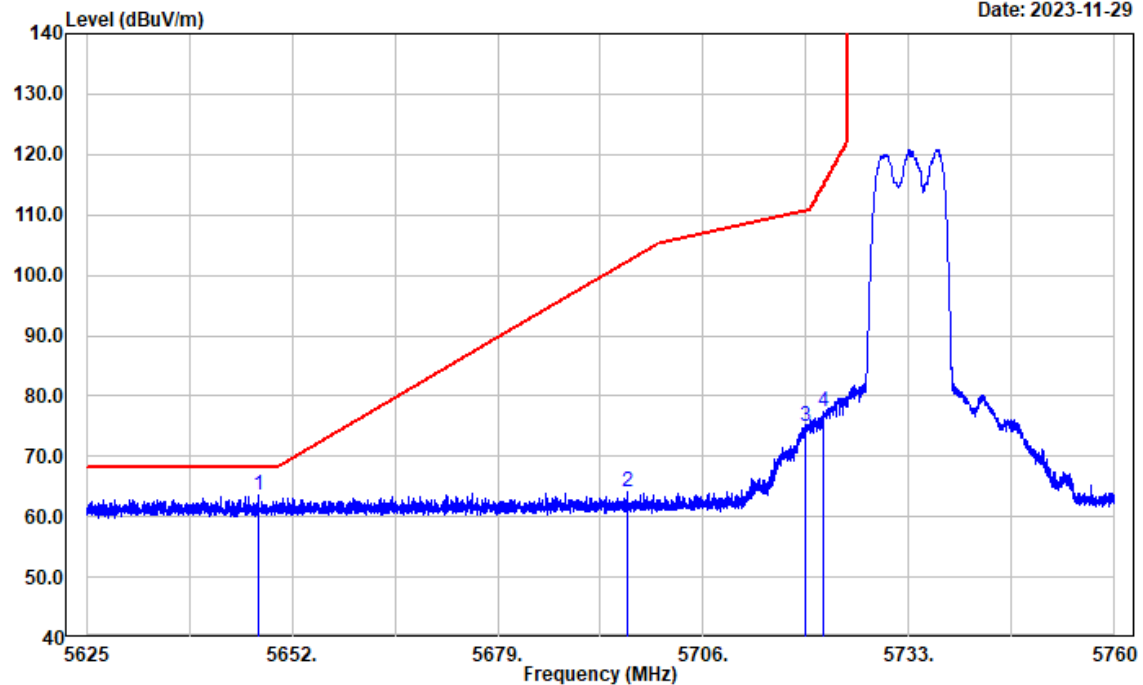
5733MHz

Ant. Polar. :

Vertical

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: vertical
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5647.522	30.51	32.95	63.46	68.20	4.74	Peak
2	5696.078	31.15	33.02	64.17	102.31	38.14	Peak
3	5719.384	42.00	33.03	75.03	110.63	35.60	Peak
4	5721.788	44.29	33.03	77.32	114.88	37.56	Peak

16-QAM 10M

Test Channel:

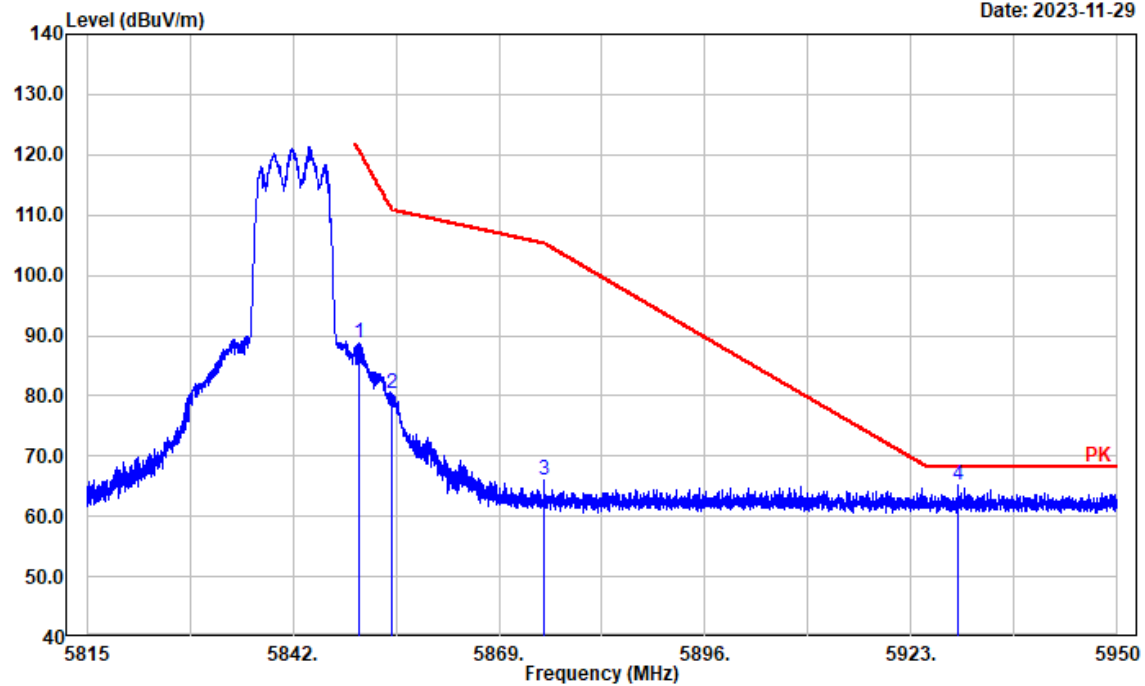
5842MHz

Ant. Polar. :

Vertical

Project No.: CR230955603-RF
Tester: Mack Huang
Polarization: vertical
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.674	55.65	33.19	88.84	120.66	31.82	Peak
2	5855.022	47.20	33.22	80.42	110.79	30.37	Peak
3	5874.898	32.56	33.33	65.89	105.23	39.34	Peak
4	5929.125	31.67	33.47	65.14	68.20	3.06	Peak

QPSK 20M

Test Channel:

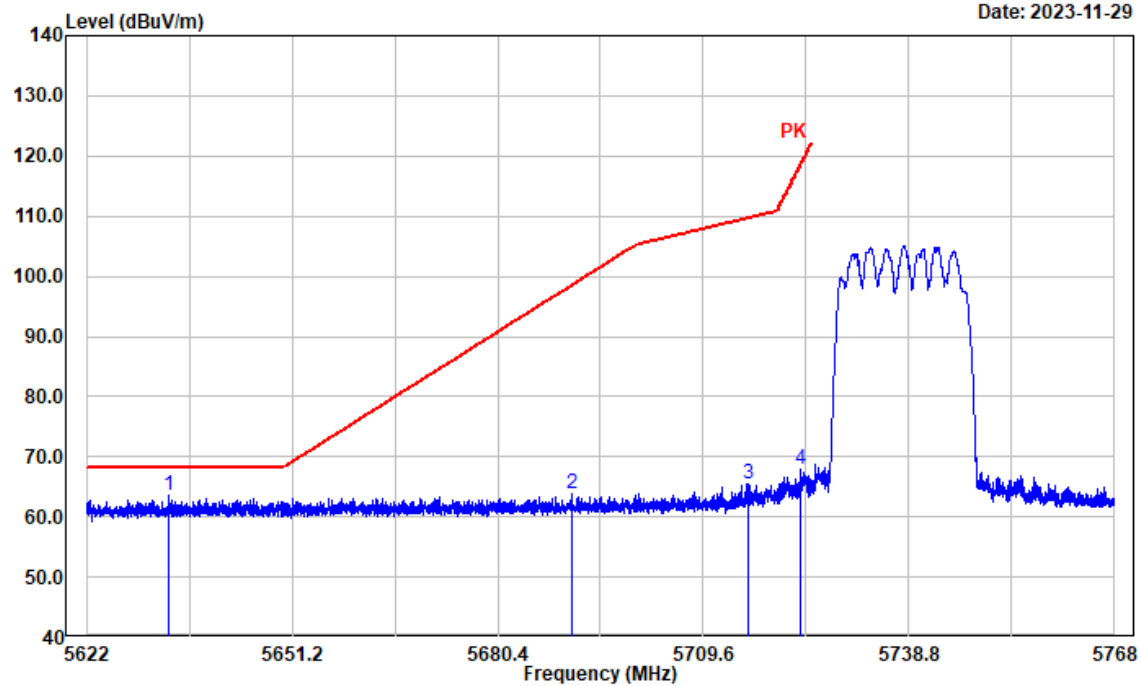
5738MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
Tester: Tao Zhu
Polarization: Horizontal
Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5633.770	30.58	32.90	63.48	68.20	4.72	Peak
2	5690.984	30.78	33.02	63.80	98.55	34.75	Peak
3	5716.014	32.35	33.03	65.38	109.69	44.31	Peak
4	5723.490	34.78	33.03	67.81	118.76	50.95	Peak

QPSK 20M

Test Channel:

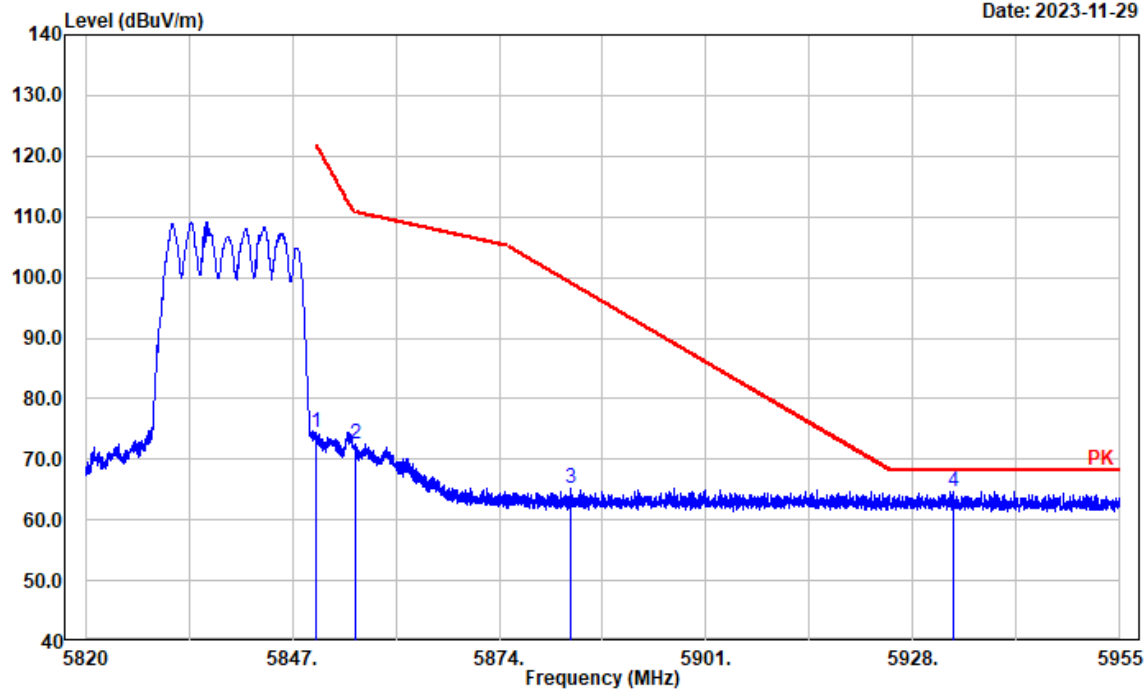
5839MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
 Tester: Tao Zhu
 Polarization: Horizontal
 Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.138	41.32	33.19	74.51	121.88	47.37	Peak
2	5855.215	39.30	33.22	72.52	110.74	38.22	Peak
3	5883.328	31.93	33.37	65.30	99.02	33.72	Peak
4	5933.261	31.31	33.46	64.77	68.20	3.43	Peak

QPSK 20M

Test Channel:

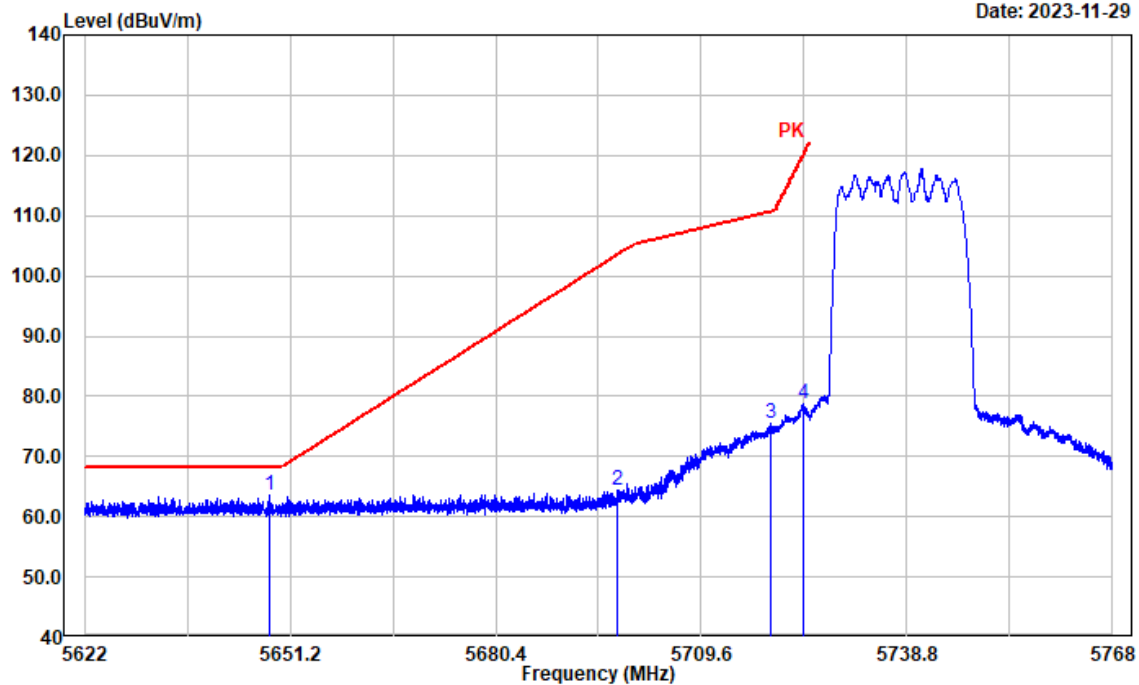
5738MHz

Ant. Polar. :

Vertical

Project No.: CR230955603-RF
 Tester: Tao Zhu
 Polarization: Vertical
 Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5648.198	30.72	32.95	63.67	68.20	4.53	Peak
2	5697.731	31.27	33.03	64.30	103.53	39.23	Peak
3	5719.547	42.46	33.03	75.49	110.67	35.18	Peak
4	5724.104	45.67	33.03	78.70	120.16	41.46	Peak

QPSK 20M

Test Channel:

5839MHz

Ant. Polar. :

Vertical

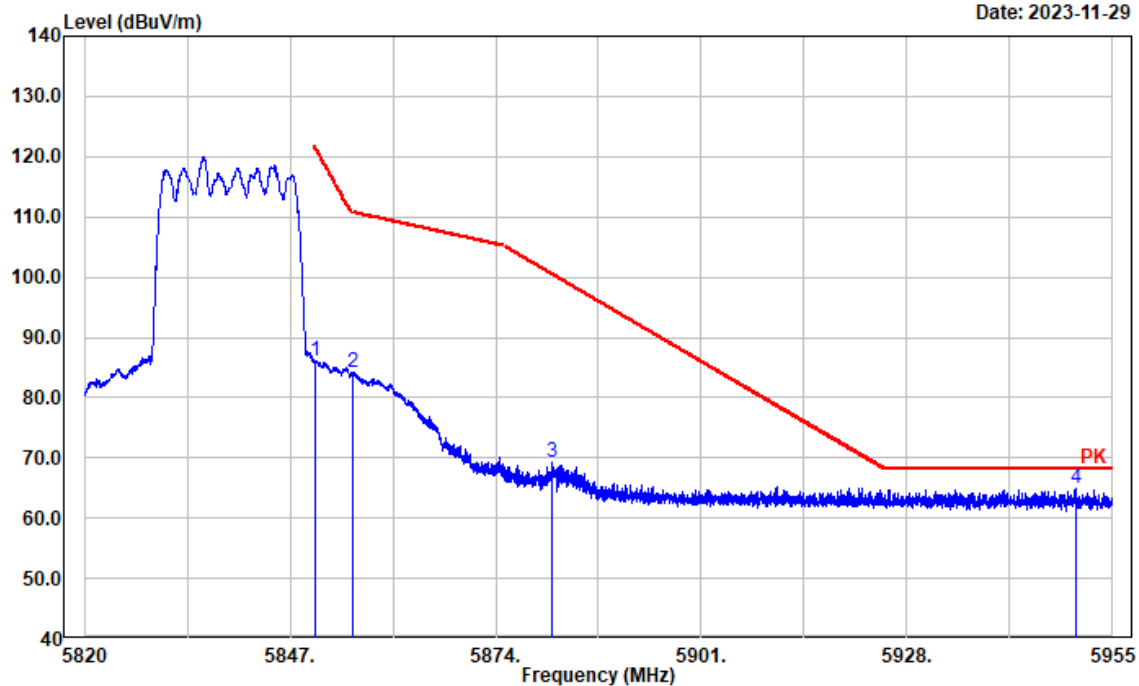
Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.219	53.01	33.19	86.20	121.70	35.50	Peak
2	5855.323	51.02	33.22	84.24	110.71	26.47	Peak
3	5881.491	35.80	33.37	69.17	100.38	31.21	Peak
4	5950.112	31.48	33.46	64.94	68.20	3.26	Peak

16-QAM 20M

Test Channel:

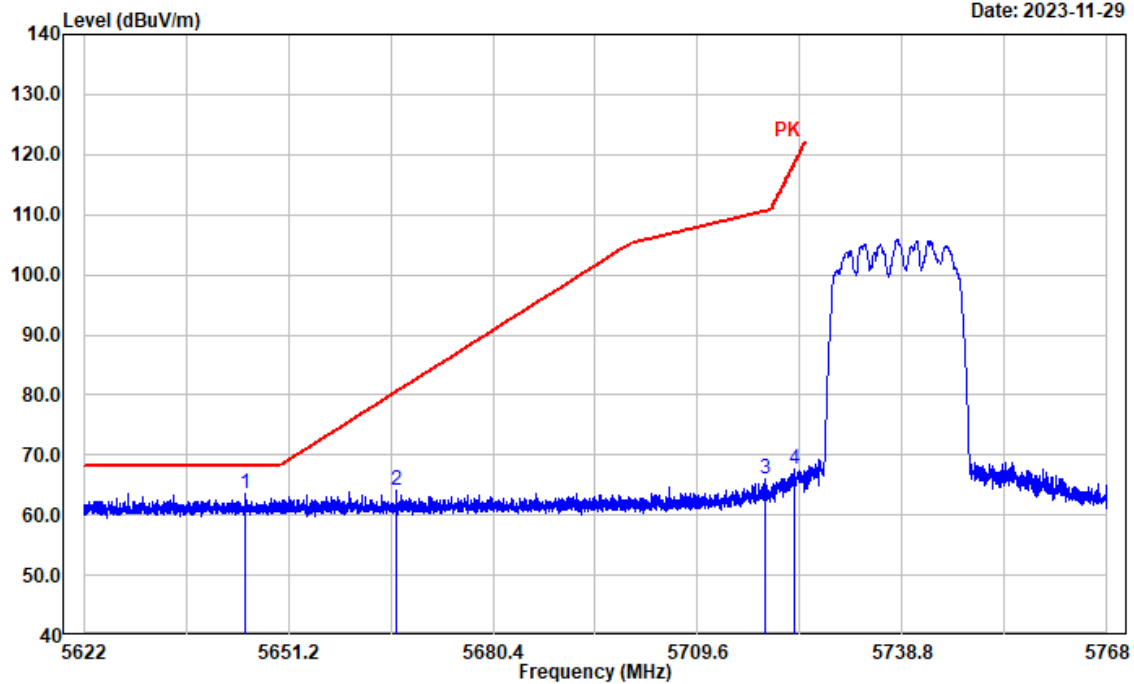
5738MHz

Ant. Polar. :

Horizontal

Project No.: CR230955603-RF
 Tester: Tao Zhu
 Polarization: Horizontal
 Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5645.131	30.70	32.93	63.63	68.20	4.57	Peak
2	5666.626	31.15	32.98	64.13	80.54	16.41	Peak
3	5719.168	32.90	33.03	65.93	110.57	44.64	Peak
4	5723.461	34.62	33.03	67.65	118.69	51.04	Peak

16-QAM 20M

Test Channel:

5839MHz

Ant. Polar. :

Horizontal

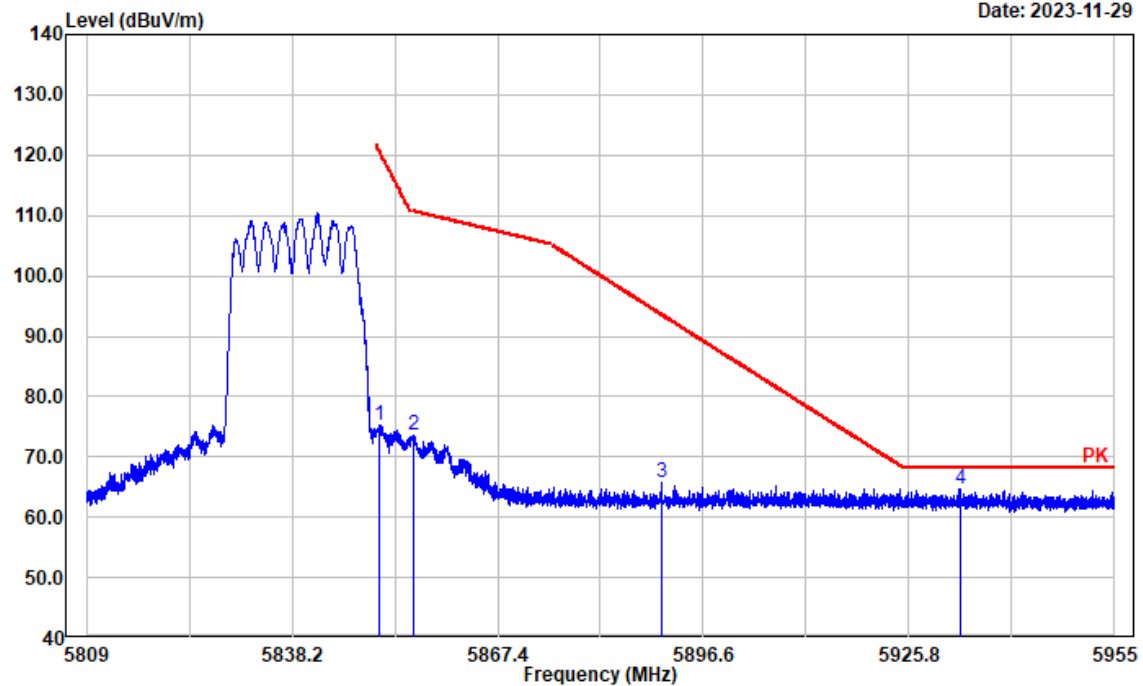
Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Horizontal

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.531	42.11	33.19	75.30	120.99	45.69	Peak
2	5855.408	40.35	33.22	73.57	110.69	37.12	Peak
3	5890.601	32.37	33.41	65.78	93.62	27.84	Peak
4	5933.154	31.23	33.46	64.69	68.20	3.51	Peak

16-QAM 20M

Test Channel:

5738MHz

Ant. Polar. :

Vertical

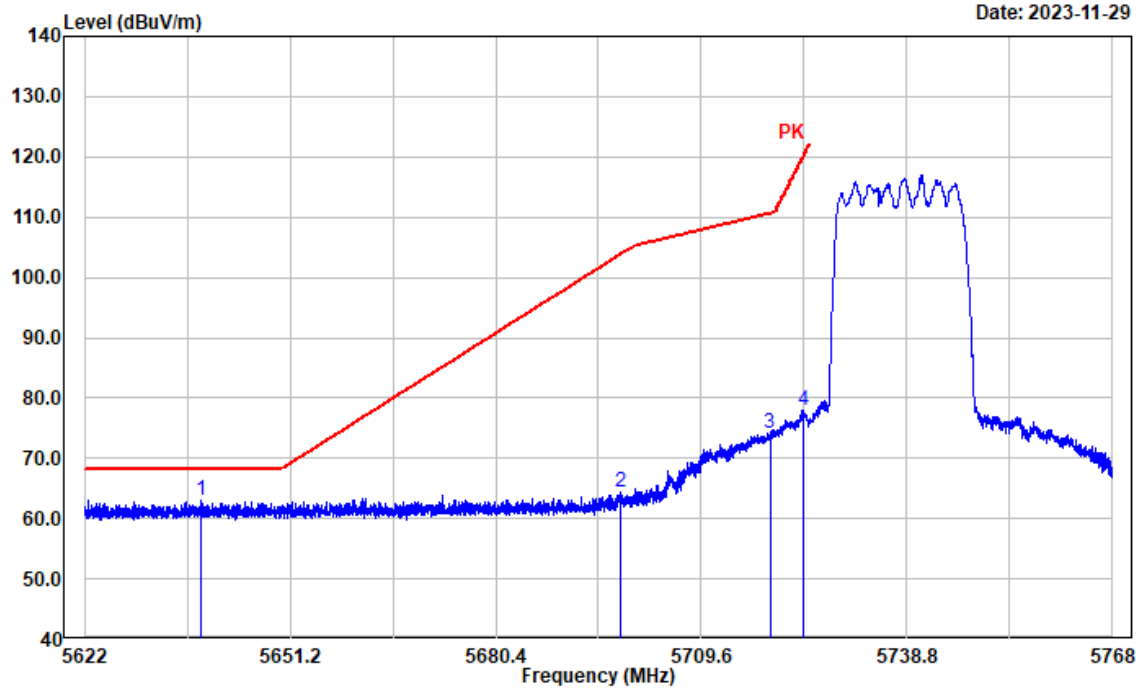
Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5638.589	30.19	32.92	63.11	68.20	5.09	Peak
2	5698.227	31.34	33.03	64.37	103.89	39.52	Peak
3	5719.343	41.20	33.03	74.23	110.62	36.39	Peak
4	5724.162	44.98	33.03	78.01	120.29	42.28	Peak

16-QAM 20M

Test Channel:

5839MHz

Ant. Polar. :

Vertical

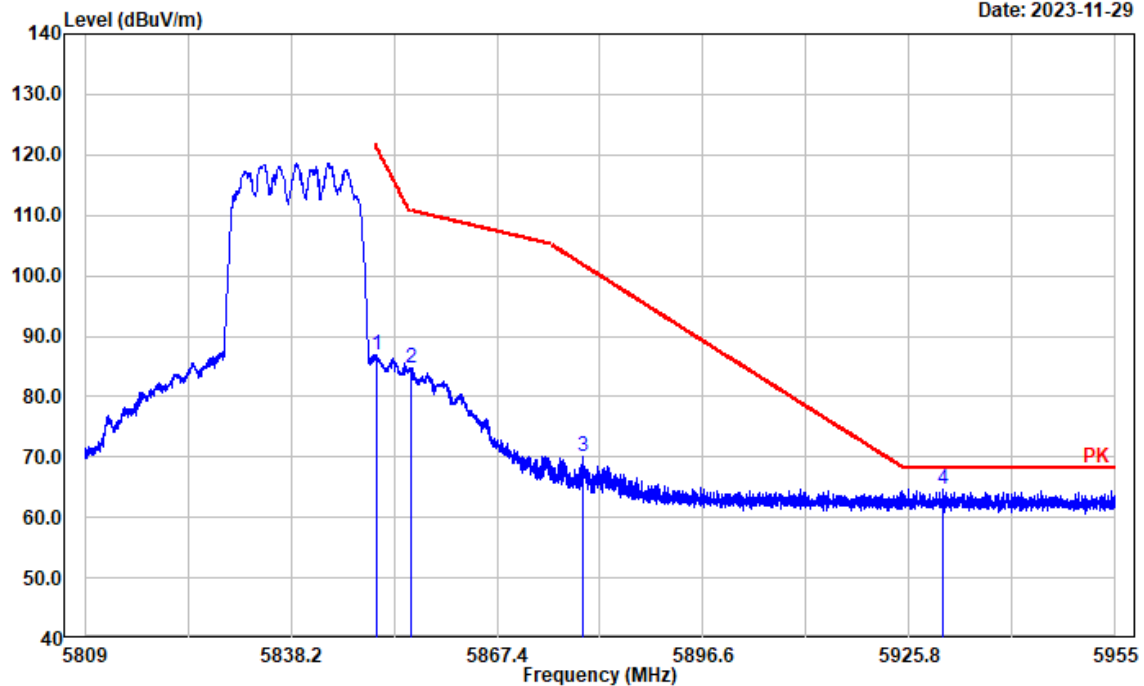
Project No.: CR230955603-RF

Tester: Tao Zhu

Polarization: Vertical

Note:

Date: 2023-11-29



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.326	53.72	33.19	86.91	121.46	34.55	Peak
2	5855.320	51.53	33.22	84.75	110.71	25.96	Peak
3	5879.620	36.80	33.36	70.16	101.77	31.61	Peak
4	5930.584	31.20	33.46	64.66	68.20	3.54	Peak

4.3 Emission Bandwidth:

Serial Number:	2BJM-12	Test Date:	2023/11/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK- 18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

5150-5250 MHz:

Test Modes	Modulation	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1.4M	QPSK	5154	1.207	1.081
		5201	1.207	1.081
		5246	1.207	1.081
	16QAM	5154	1.207	1.081
		5201	1.207	1.081
		5246	1.207	1.081
10M	QPSK	5157	9.580	8.944
		5201	9.580	8.944
		5243	9.580	8.944
	16QAM	5157	9.580	8.944
		5201	9.580	8.944
		5243	9.580	8.944
20M	QPSK	5167	19.161	17.945
		5201	19.161	17.945
		5233	19.161	17.945
	16QAM	5167	19.161	17.945
		5201	19.161	17.945
		5233	19.161	17.945
Note: Test only was performed at Chain 0. The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.				

5725-5850 MHz:

Test Modes	Modulation	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1.4M	QPSK	5728	1.142	1.094
		5789	1.142	1.090
		5847	1.142	1.090
	16QAM	5728	1.142	1.094
		5789	1.142	1.090
		5847	1.142	1.094
10M	QPSK	5733	9.001	8.944
		5789	9.001	8.944
		5842	9.001	8.944
	16QAM	5733	9.001	8.944
		5789	9.001	8.944
		5842	9.001	8.944
20M	QPSK	5738	18.061	17.945
		5790	18.061	17.945
		5839	18.061	17.945
	16QAM	5738	18.061	17.945
		5790	18.061	17.945
		5839	18.061	17.945

Note:

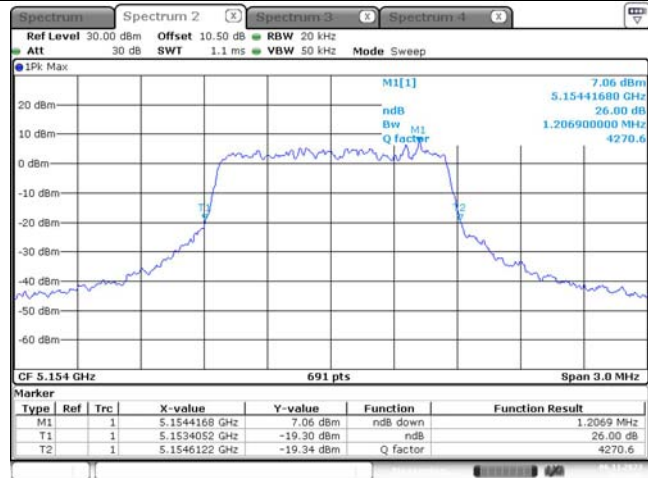
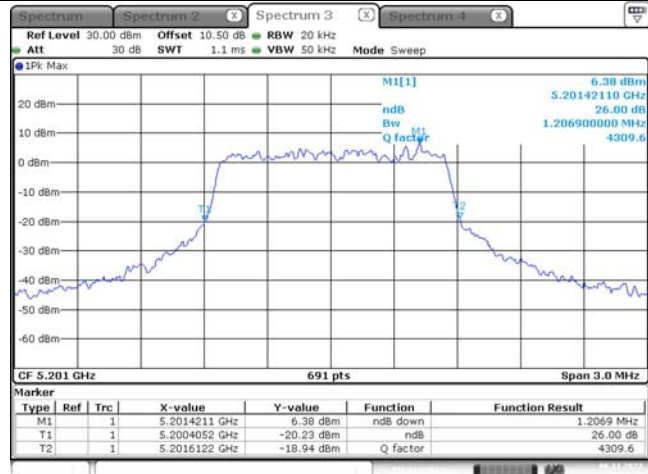
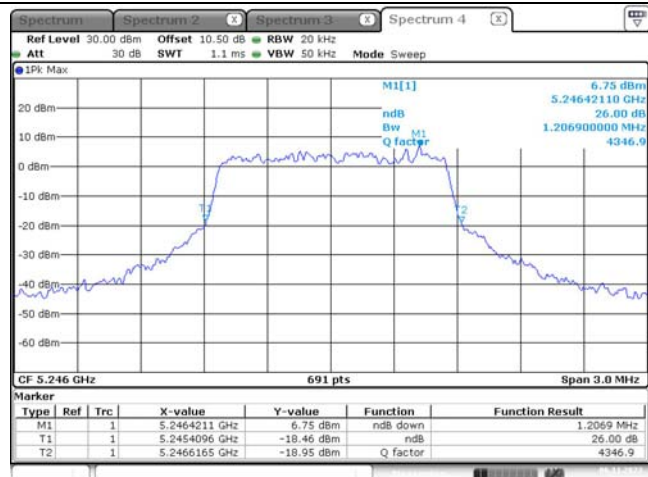
6dB Emission Bandwidth Limit: ≥ 0.5 MHz

Test only was performed at Chain 0.




The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

5150-5250MHz:




26dB Emission Bandwidth

QPSK, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:13:42QPSK, 1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:18:19QPSK, 1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:19:11

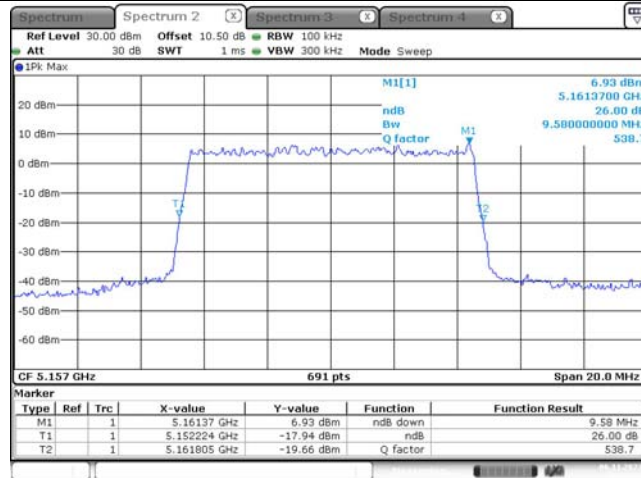
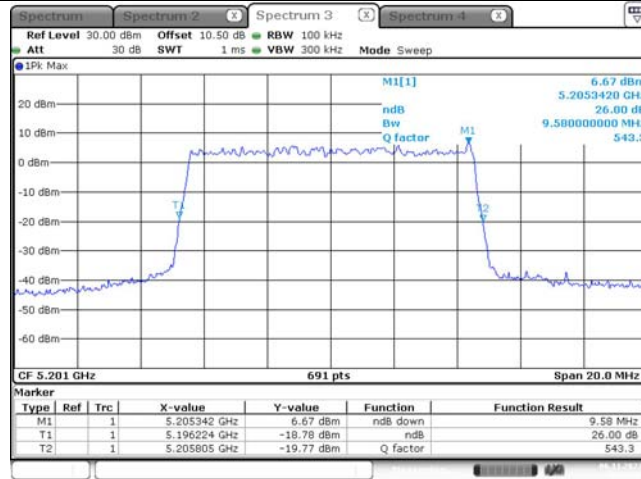
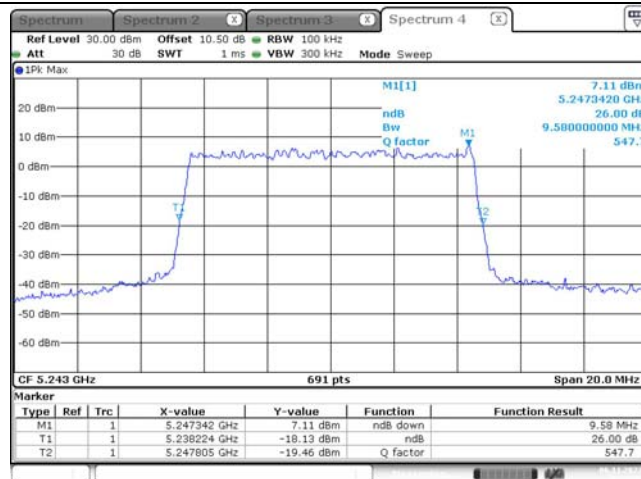
26dB Emission Bandwidth

QPSK,10M
Lowest ChannelQPSK,10M
Middle ChannelQPSK,10M
Highest Channel

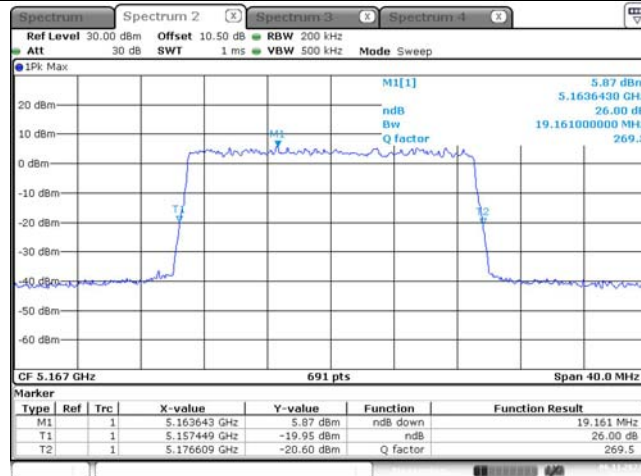
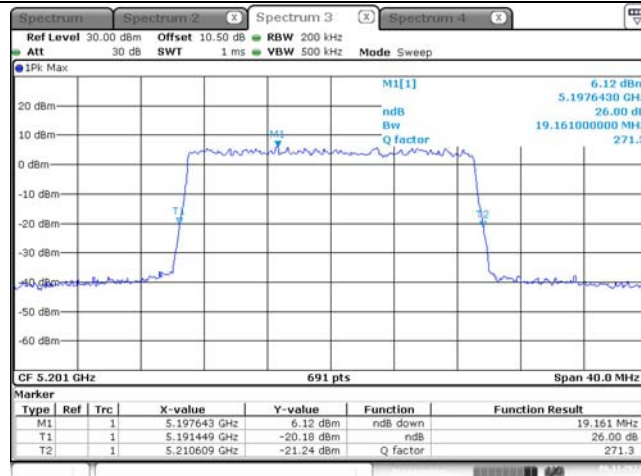
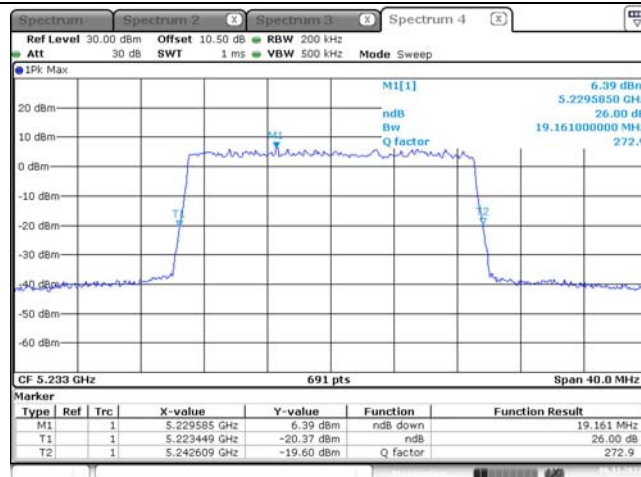
26dB Emission Bandwidth

QPSK,20M
Lowest ChannelQPSK,20M
Middle ChannelQPSK,20M
Highest Channel

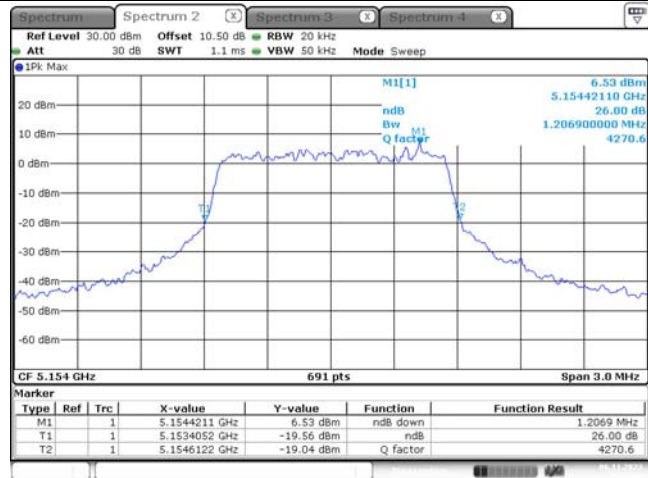
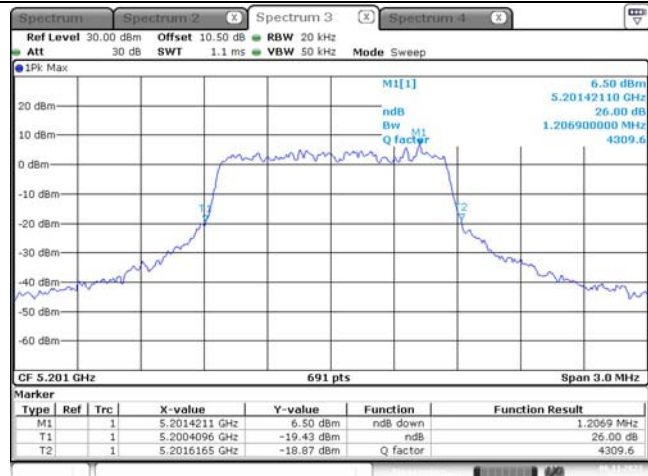
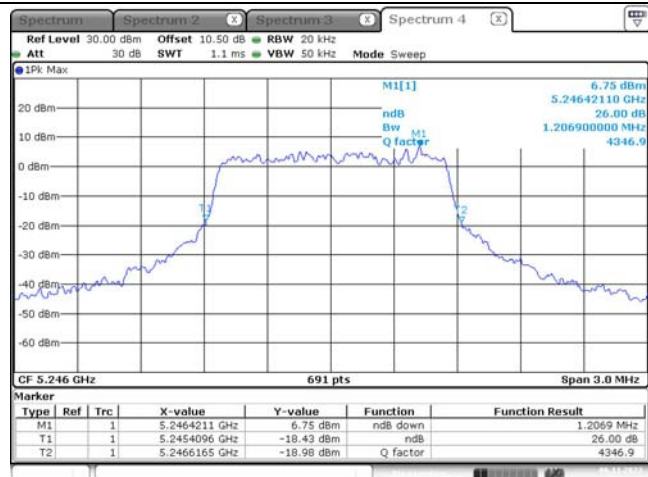
26dB Emission Bandwidth

16QAM,1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:15:1516QAM,1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:15:5816QAM,1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:20:47

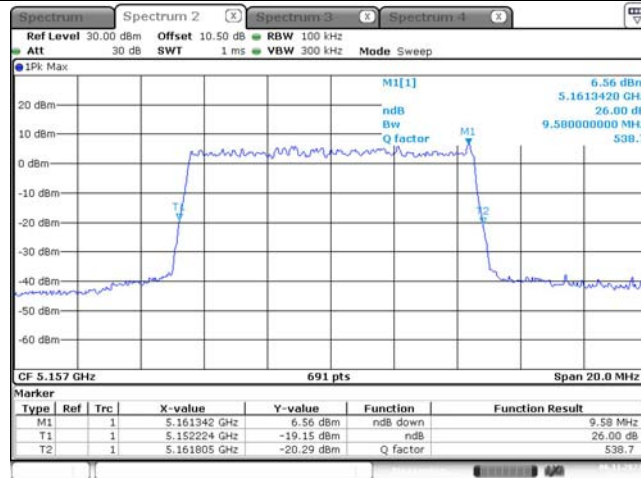
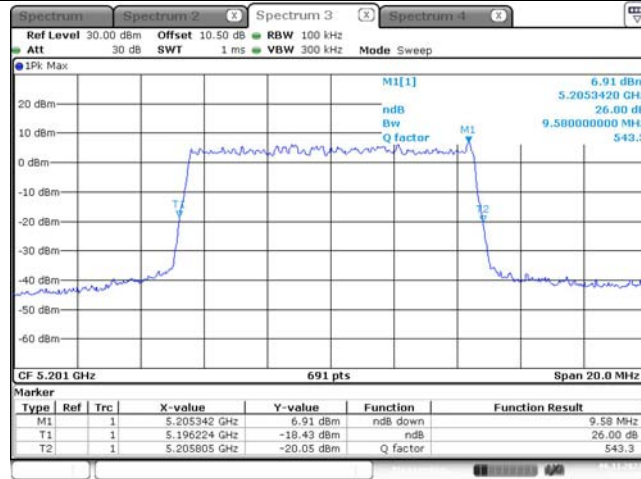
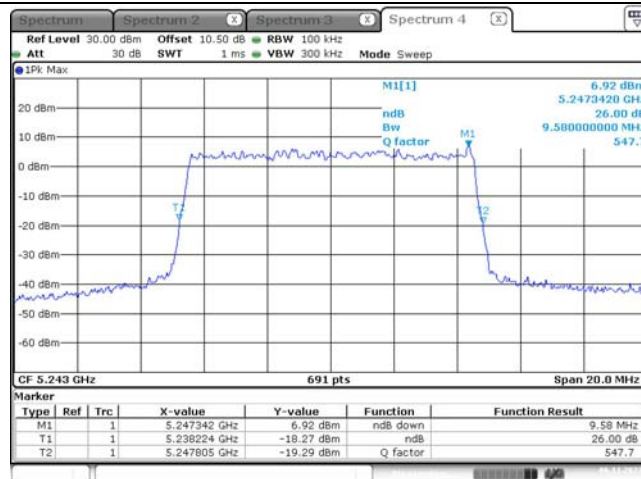
26dB Emission Bandwidth

16QAM,10M
Lowest Channel16QAM,10M
Middle Channel16QAM,10M
Highest Channel

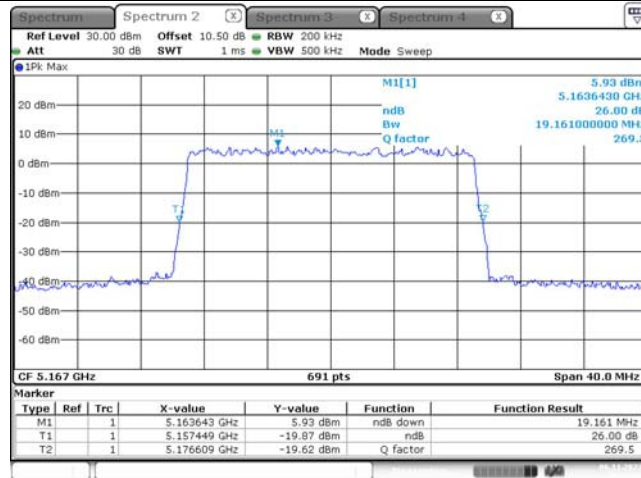
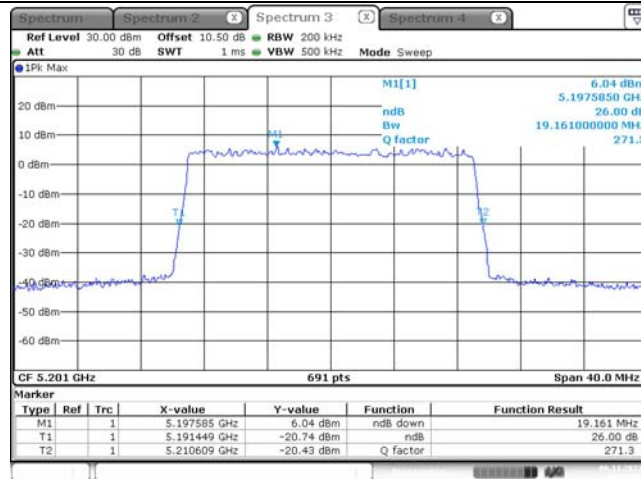
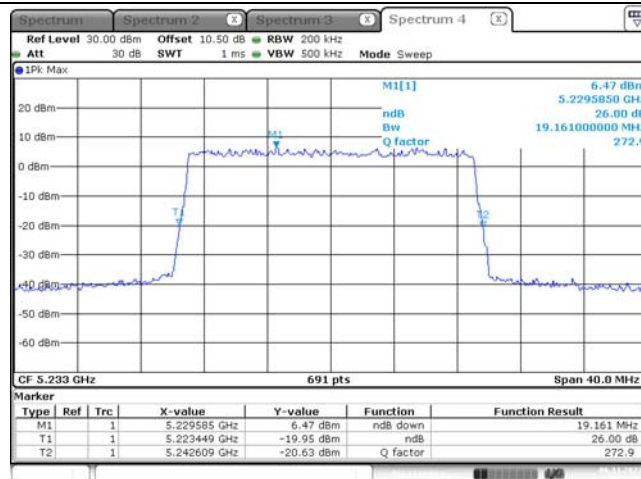
26dB Emission Bandwidth

16QAM,20M
Lowest Channel16QAM,20M
Middle Channel16QAM,20M
Highest Channel

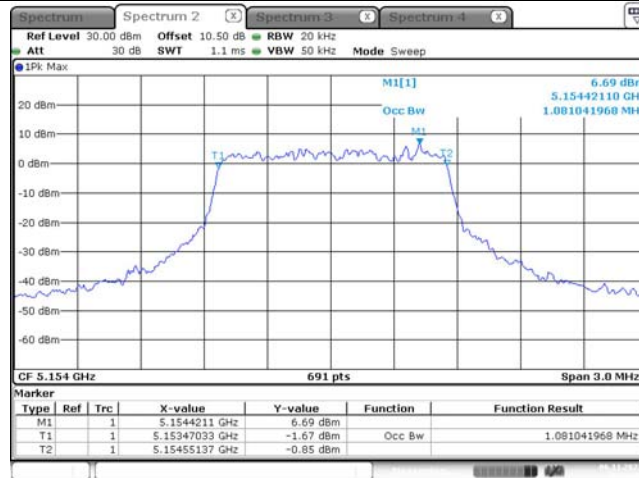
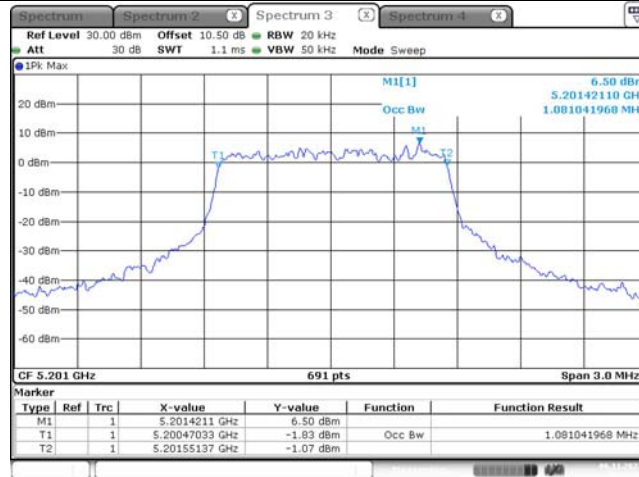
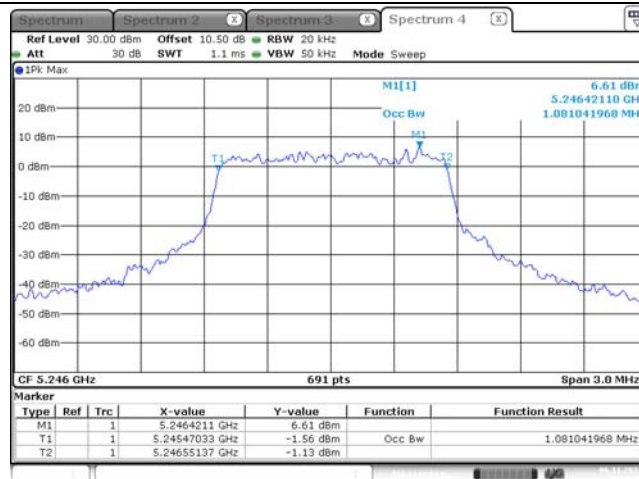
99% Emission Bandwidth-QPSK

QPSK, 1.4M
Lowest ChannelQPSK, 1.4M
Middle ChannelQPSK, 1.4M
Highest Channel

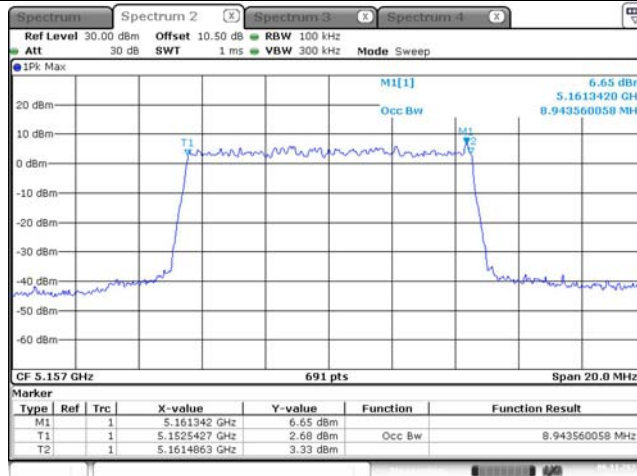
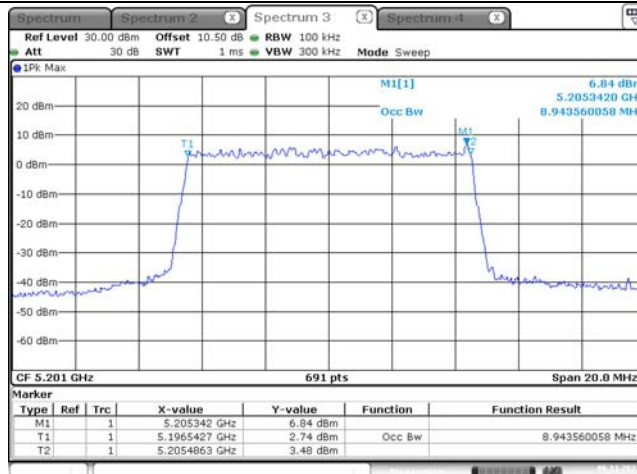
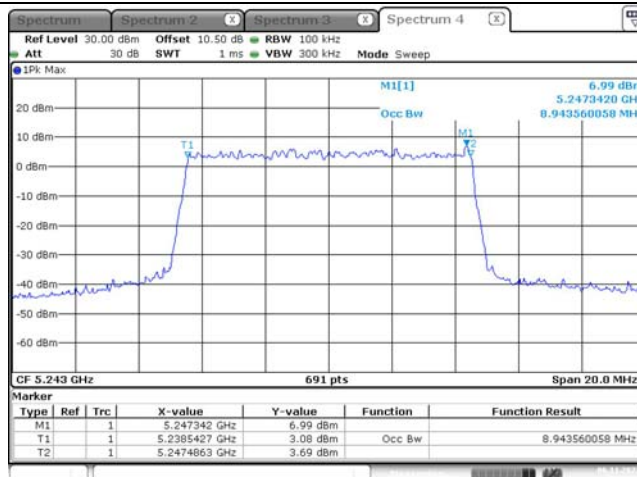
99% Emission Bandwidth

QPSK,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:54:40QPSK,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:57:53QPSK,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:01:24

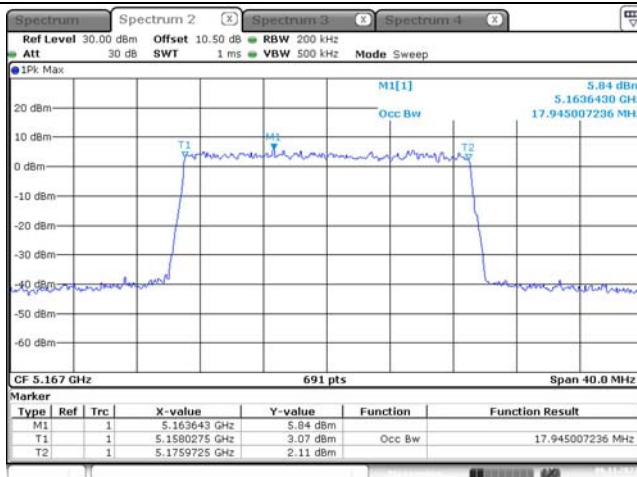
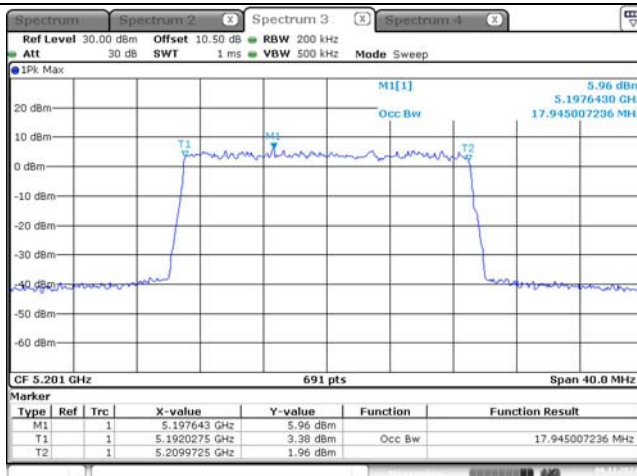
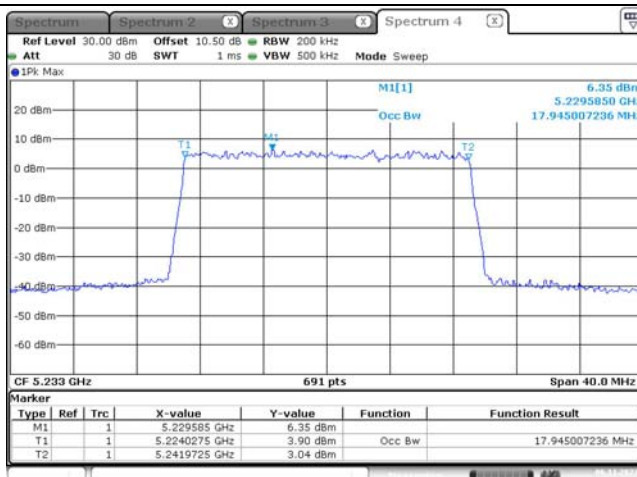
99% Emission Bandwidth

QPSK,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 18:10:54QPSK,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 18:07:57QPSK,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 18:06:22

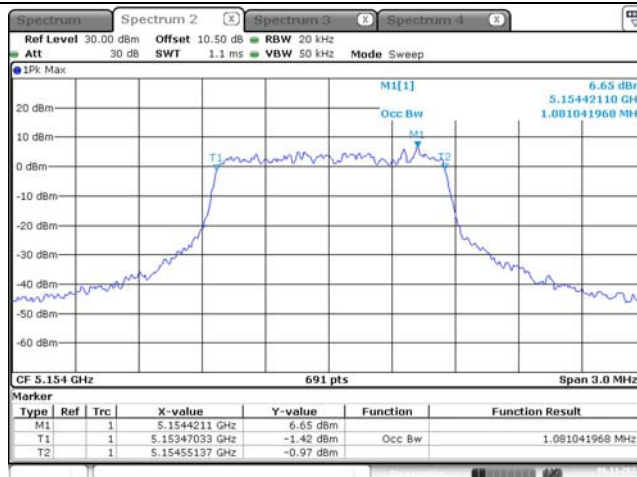
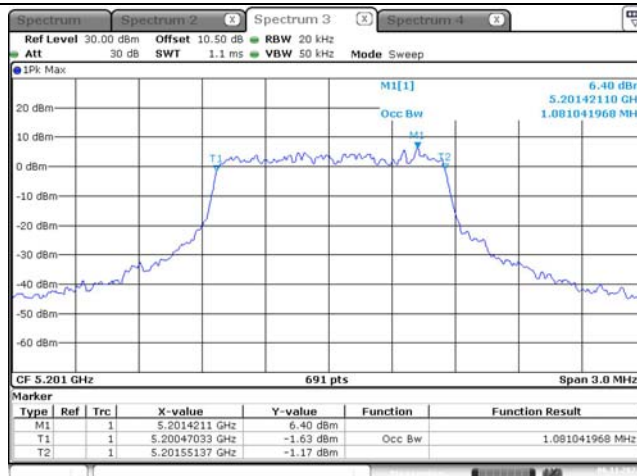
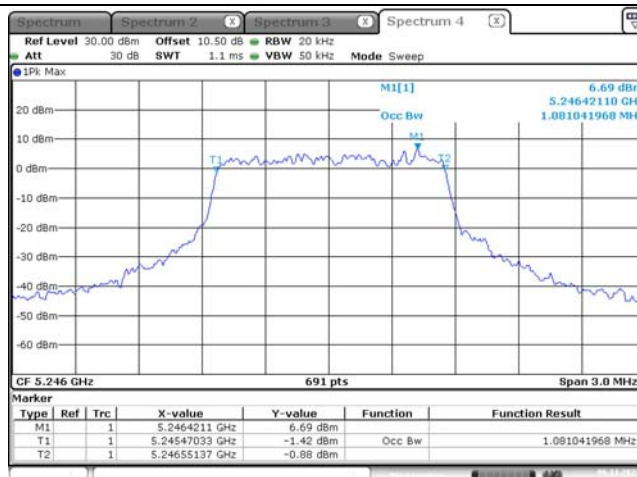
99% Emission Bandwidth-

16QAM, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:14:4116QAM,1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:16:3116QAM,1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:20:24

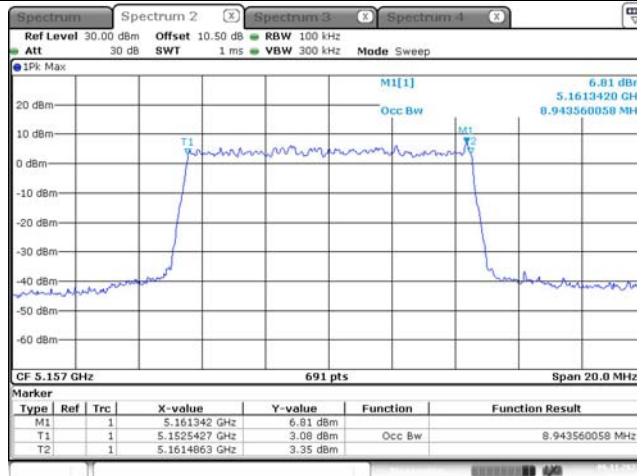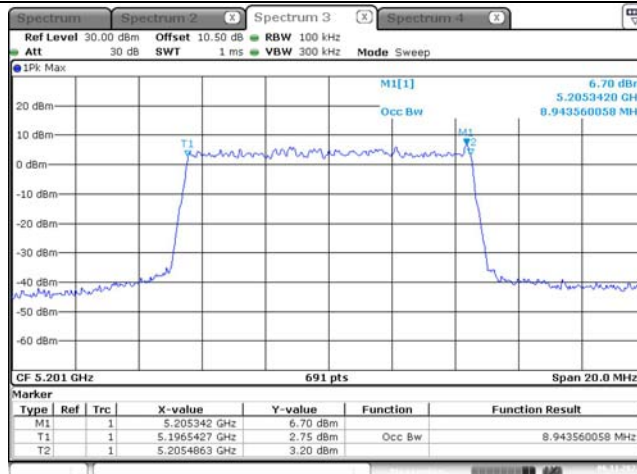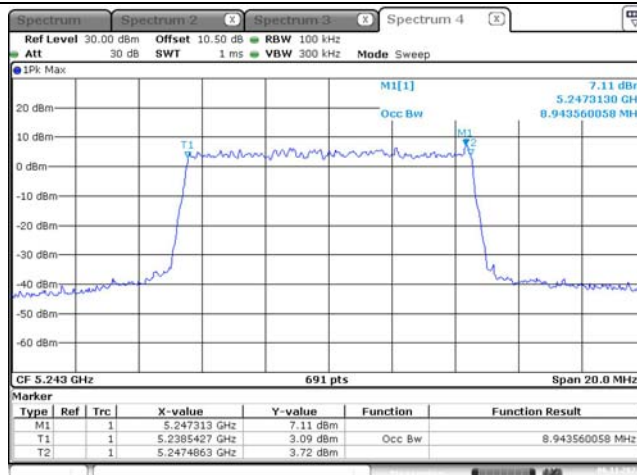
99% Emission Bandwidth

16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:55:2716QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:57:1316QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 18:02:14

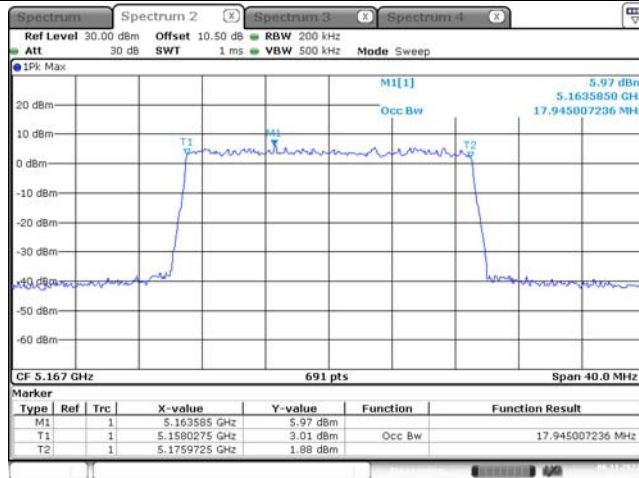
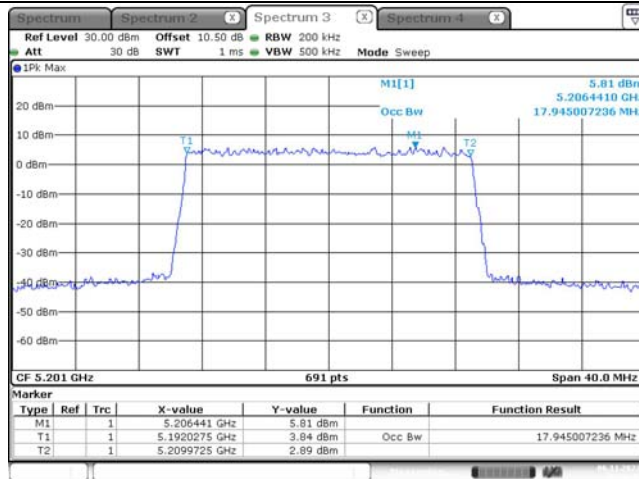
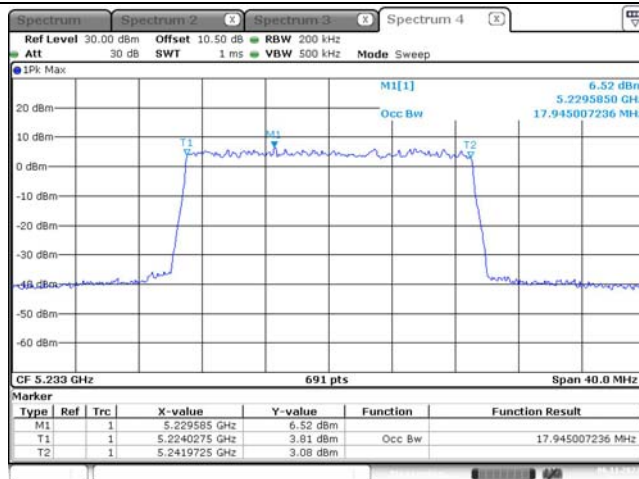
99% Emission Bandwidth

16QAM,20M
Lowest Channel16QAM,20M
Middle Channel16QAM,20M
Highest Channel



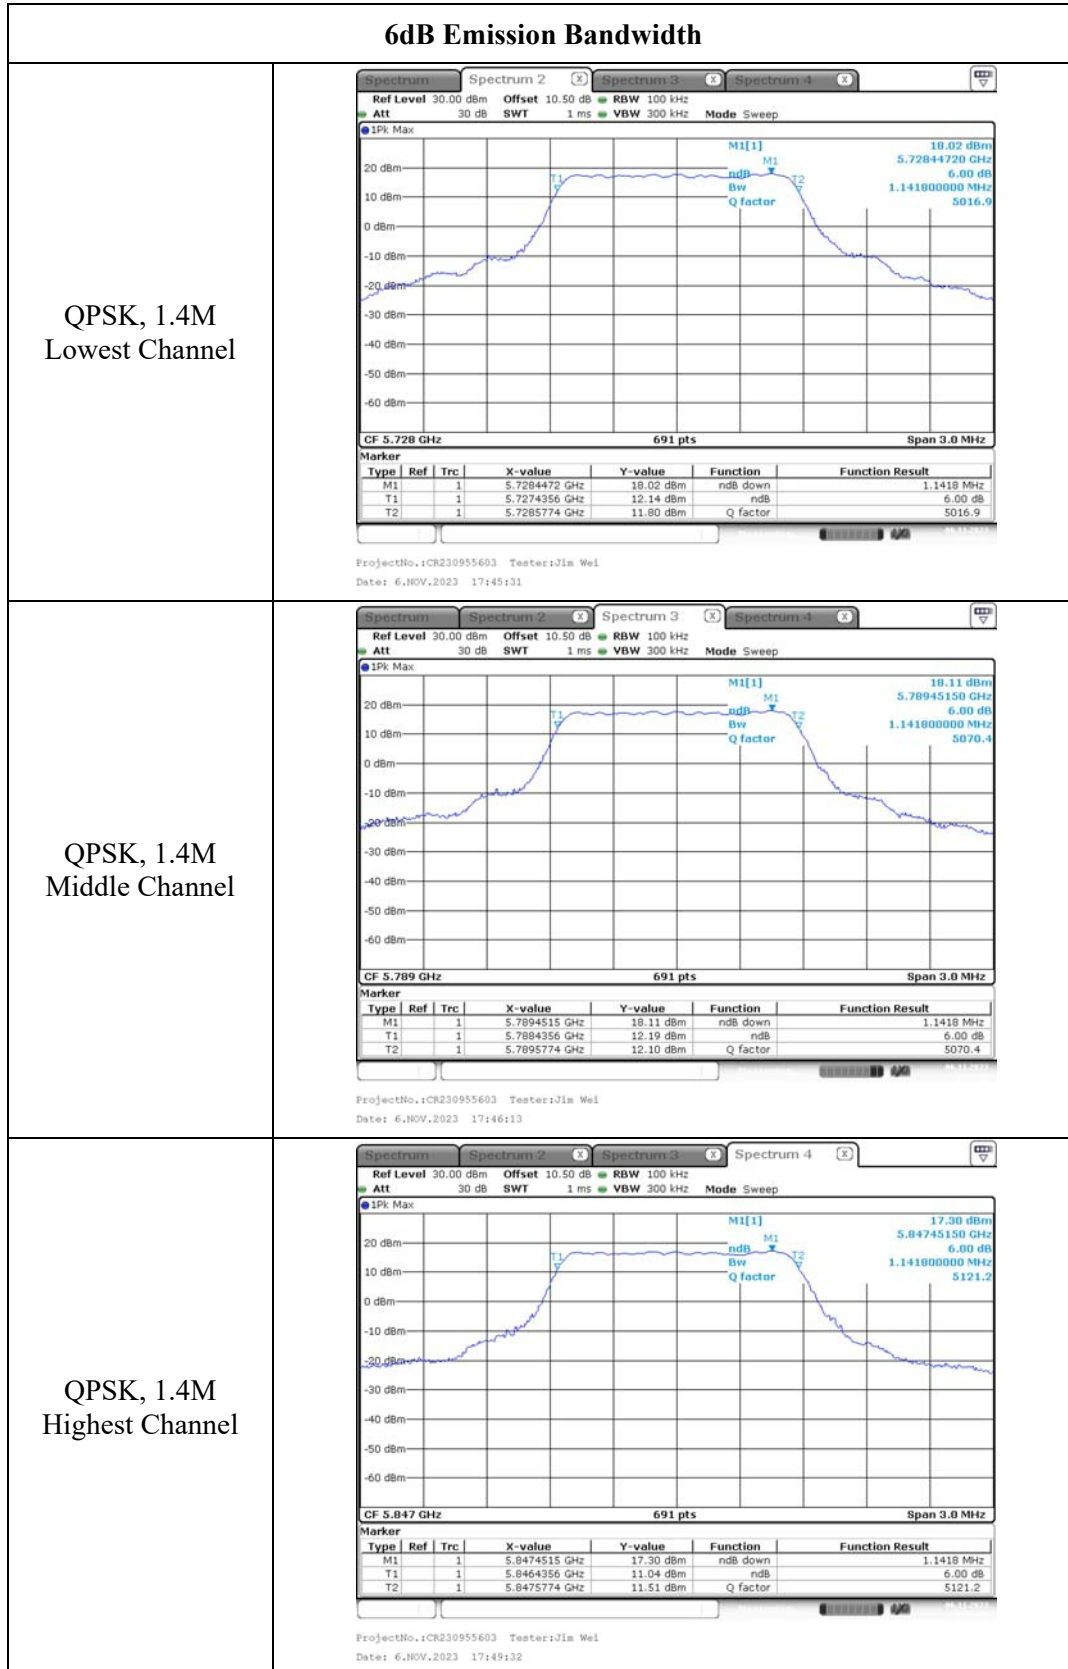
5725-5850MHz:






6dB Emission Bandwidth

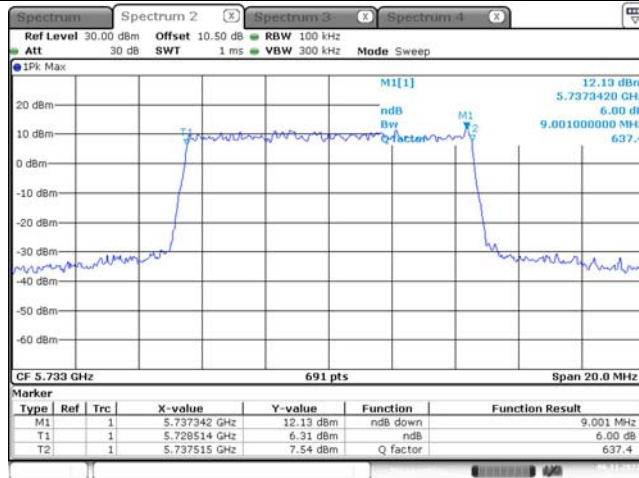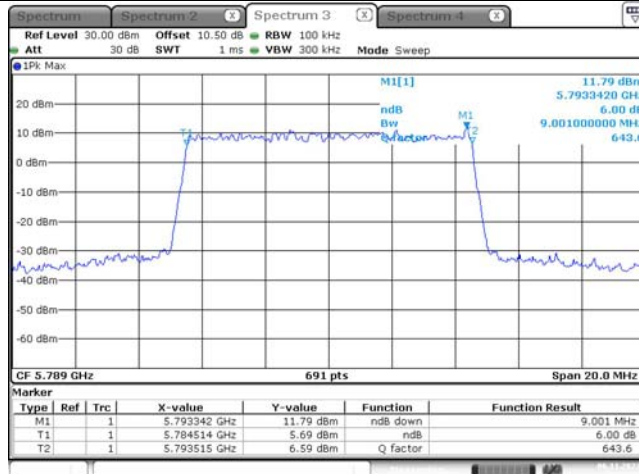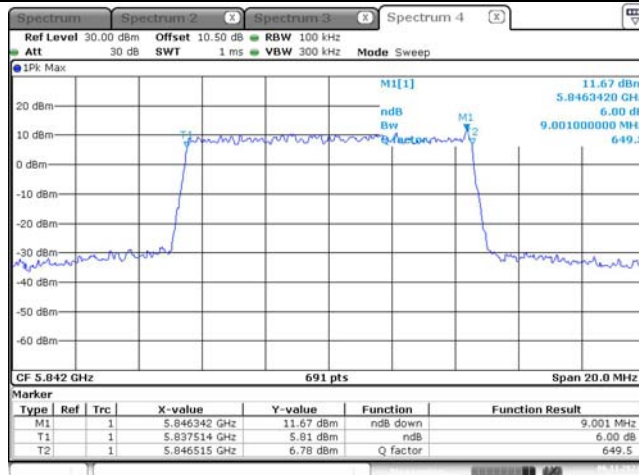QPSK, 10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:30:26QPSK, 10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:32:20QPSK, 10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:35:33

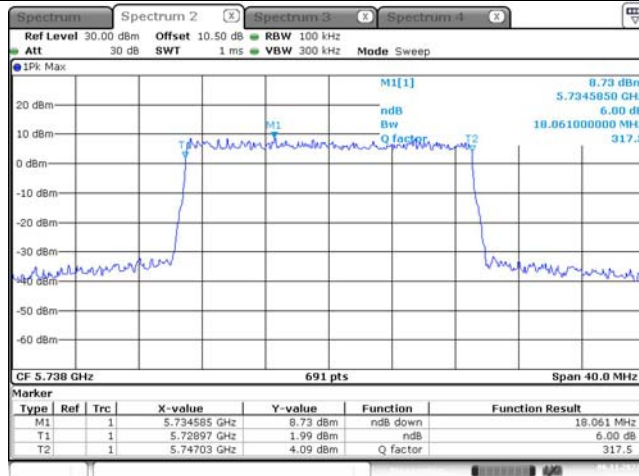
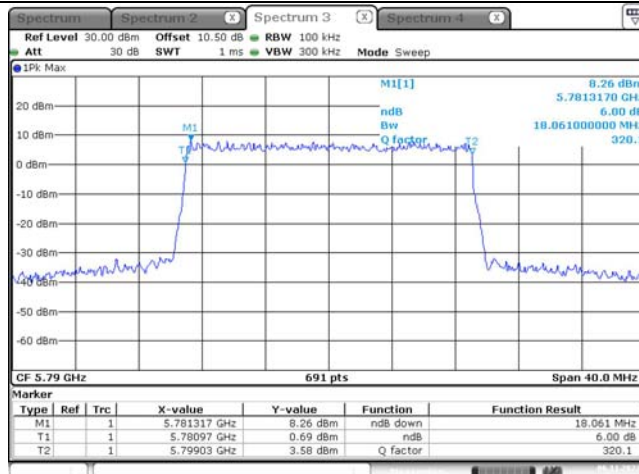
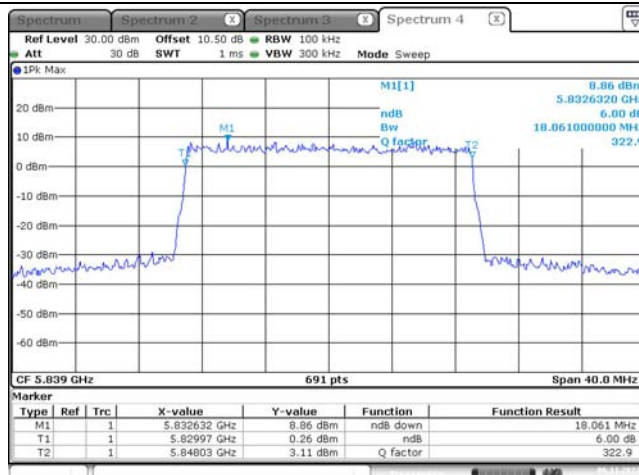
6dB Emission Bandwidth

QPSK, 20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:42:12QPSK, 20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:41:32QPSK, 20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:13:42

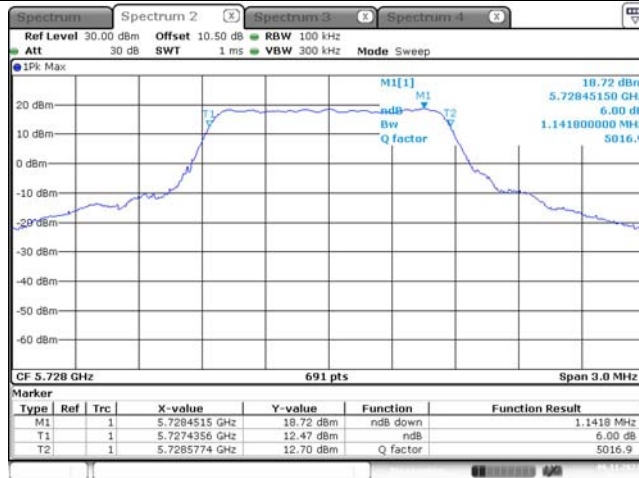
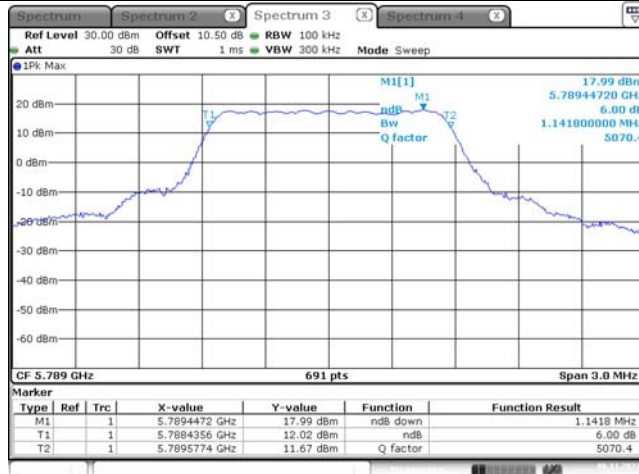
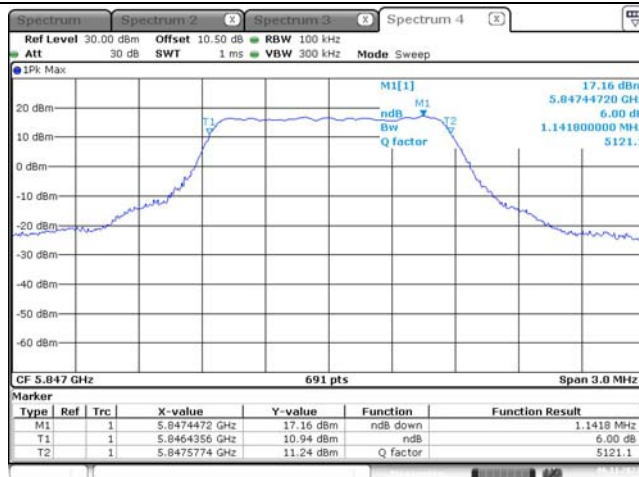
6dB Emission Bandwidth

16QAM, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:44:2316QAM, 1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:46:5916QAM, 1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:48:58

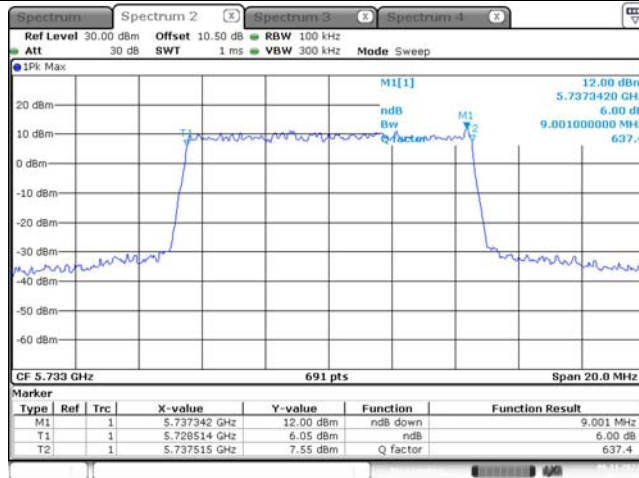
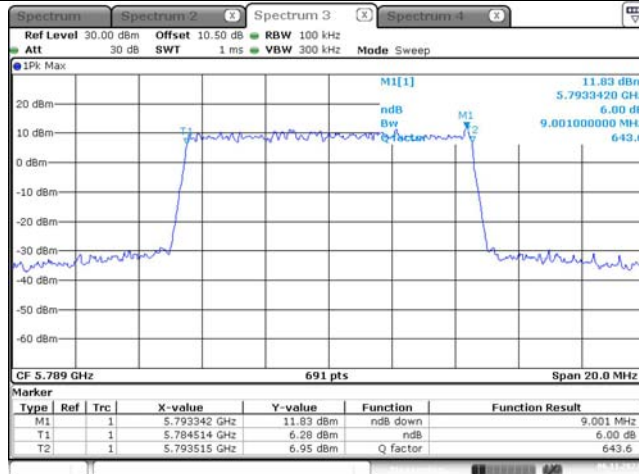
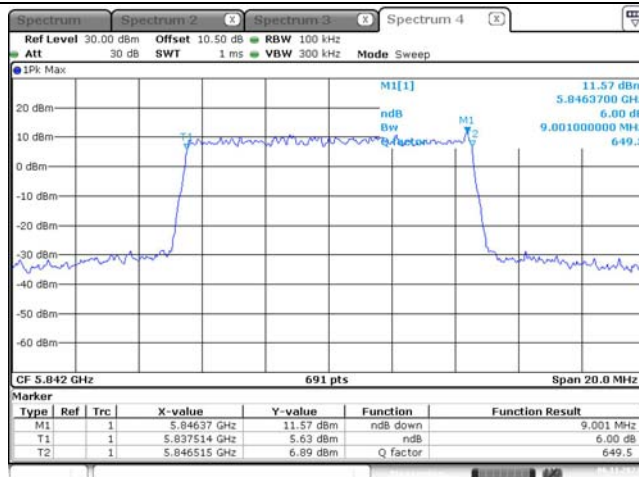
6dB Emission Bandwidth

16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:29:4216QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:32:5016QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:34:40

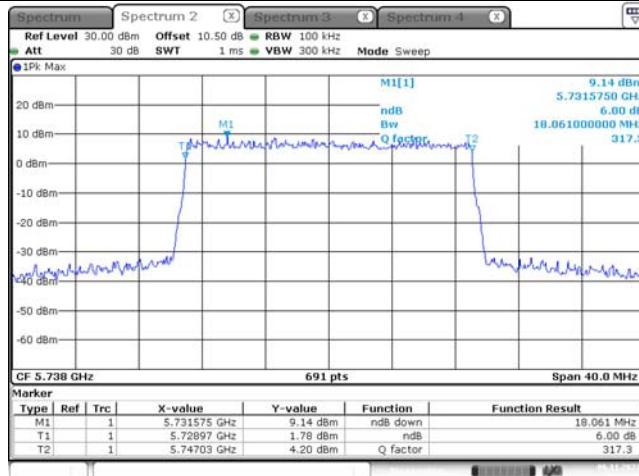
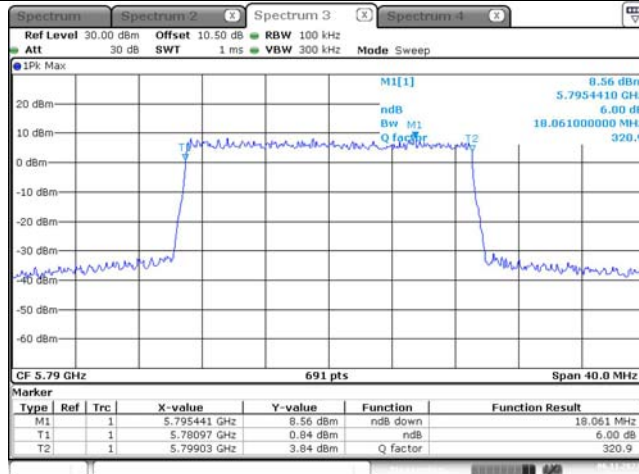
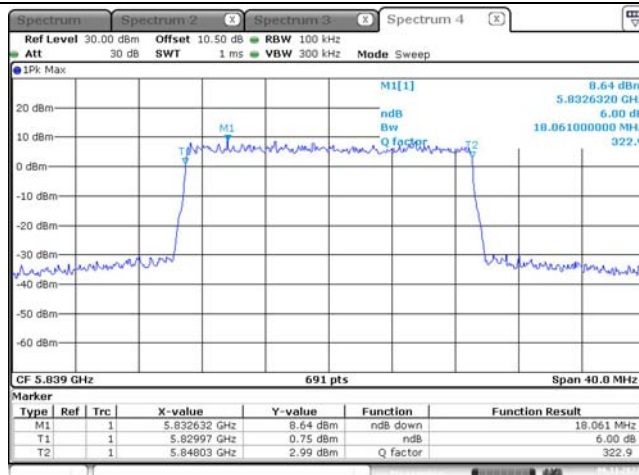
6dB Emission Bandwidth

16QAM,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:42:4516QAM,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:41:0116QAM,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:40:14

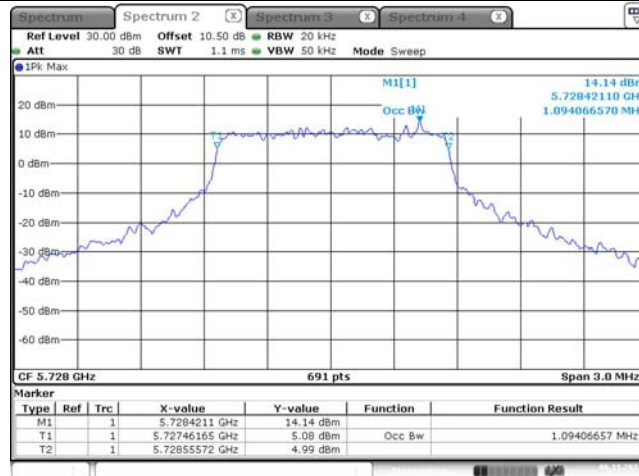
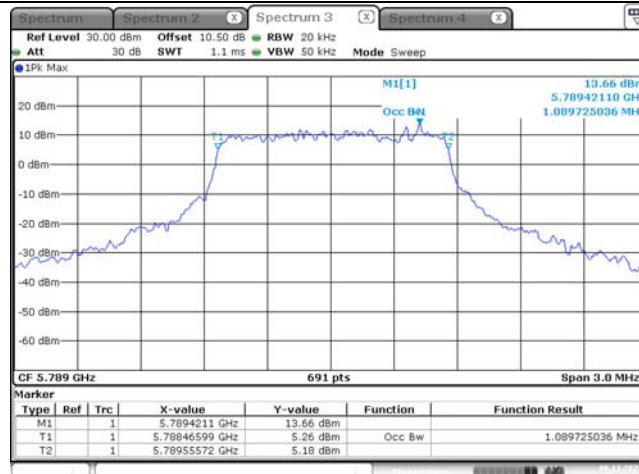
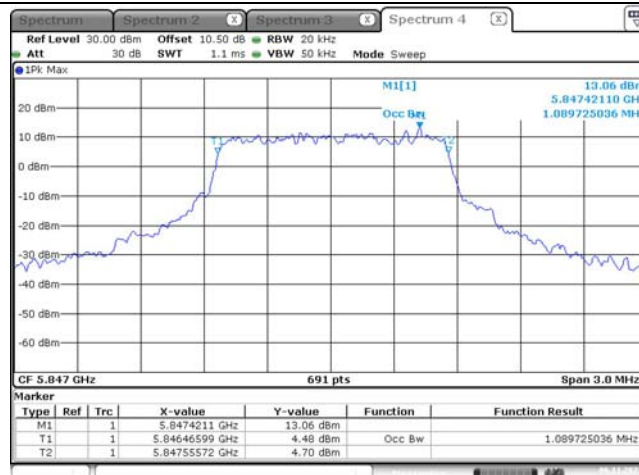
99% Emission Bandwidth

QPSK,1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:15:57QPSK,1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:16:26QPSK,1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:18:37

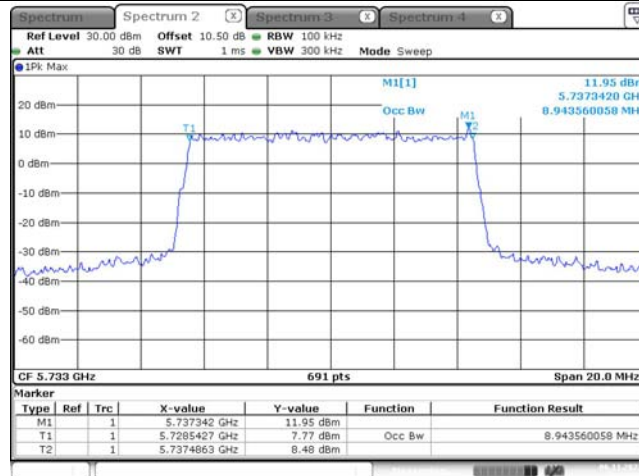
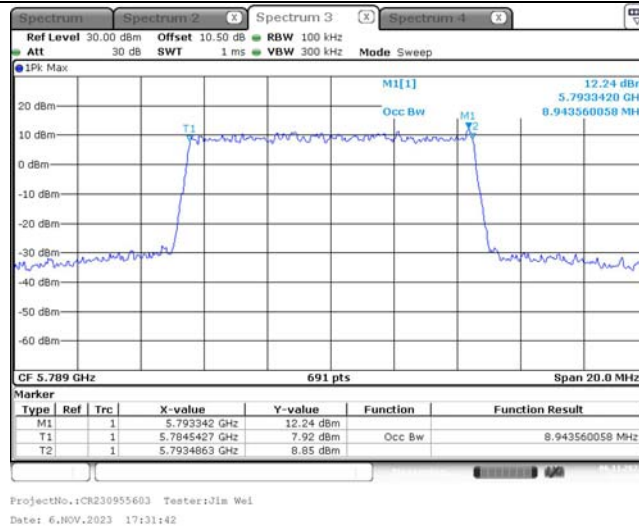
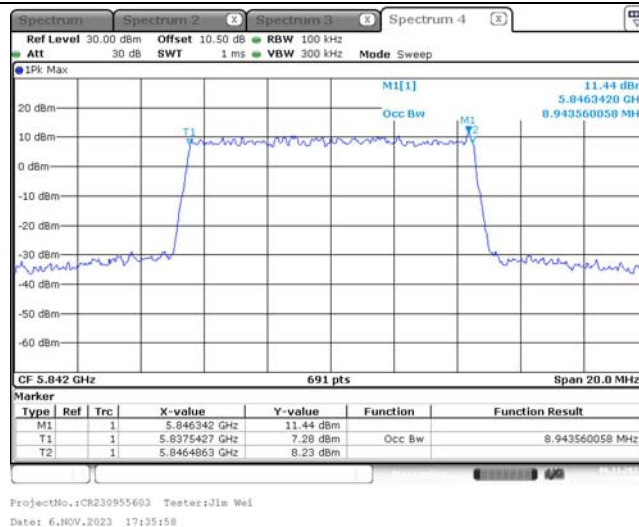
99% Emission Bandwidth

QPSK,10M
Lowest ChannelQPSK,10M
Middle ChannelQPSK,10M
Highest Channel

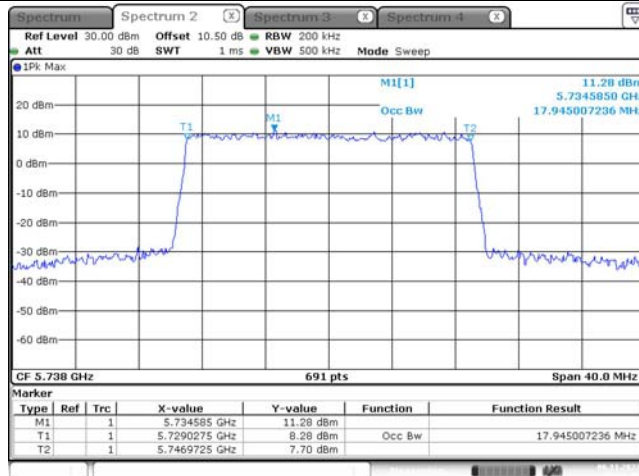
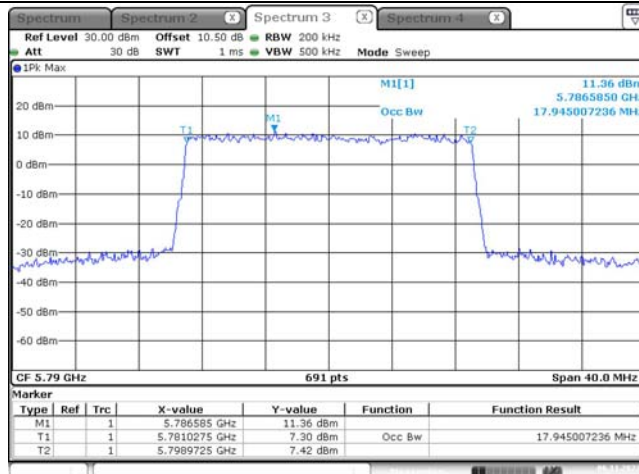
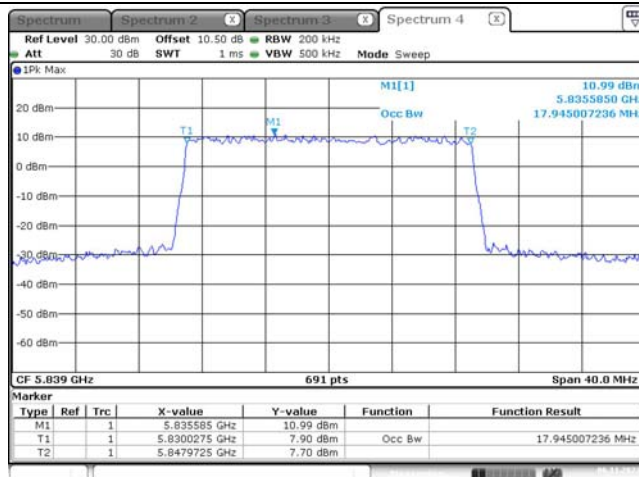
99% Emission Bandwidth

QPSK,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:26:01QPSK,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:25:16QPSK,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:23:18

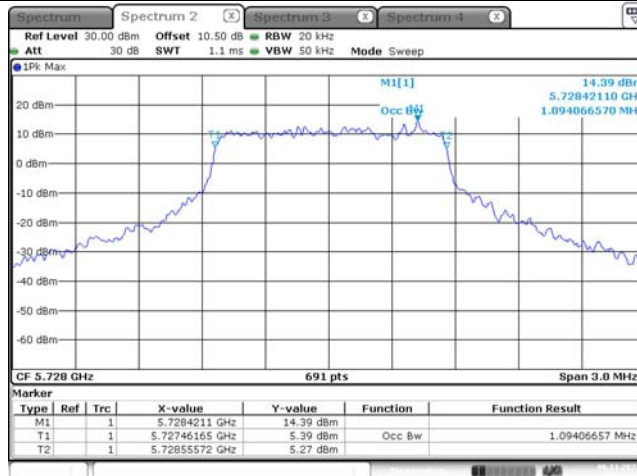
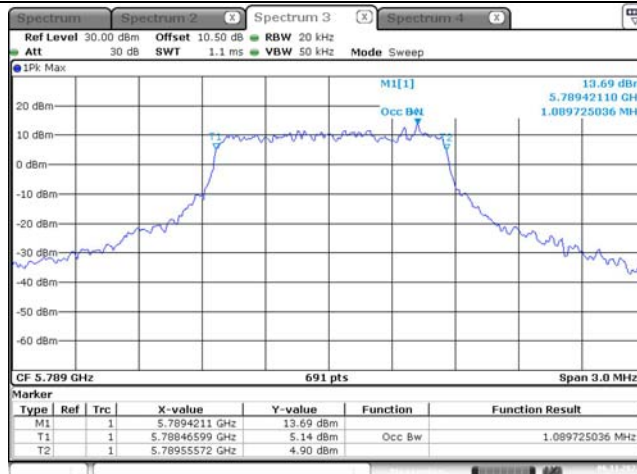
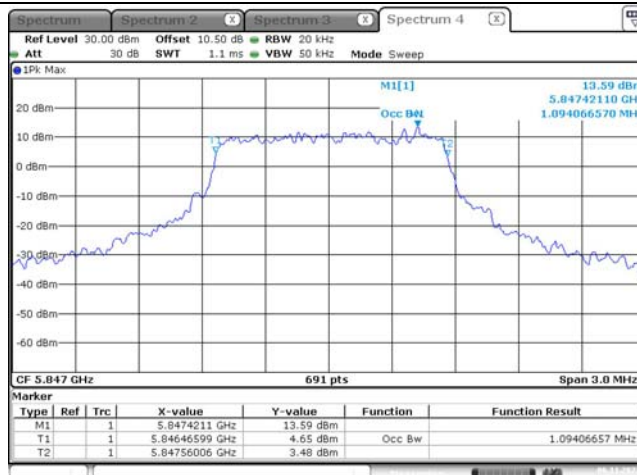
99% Emission Bandwidth

16QAM, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:15:2316QAM, 1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:17:0216QAM, 1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:17:52

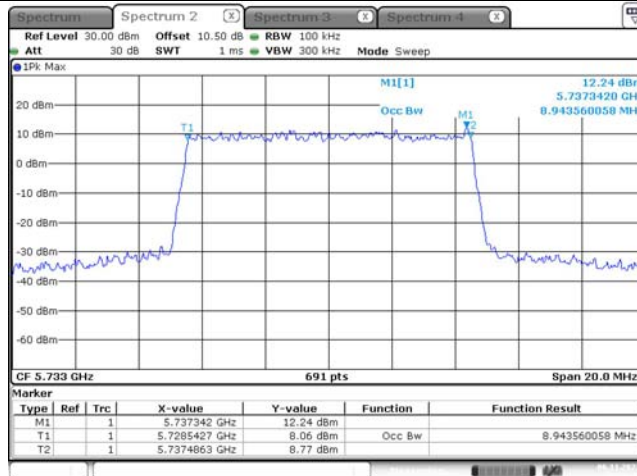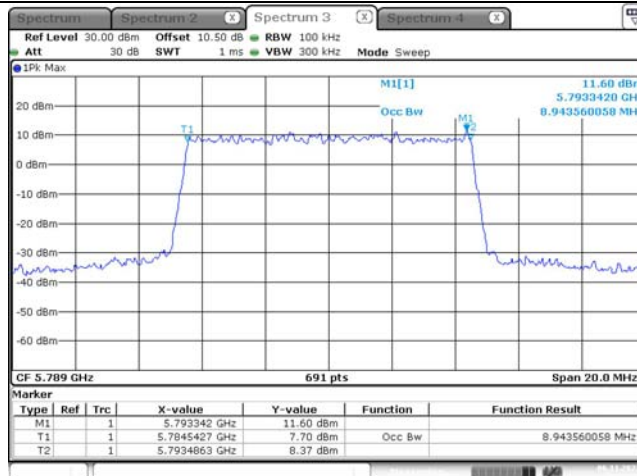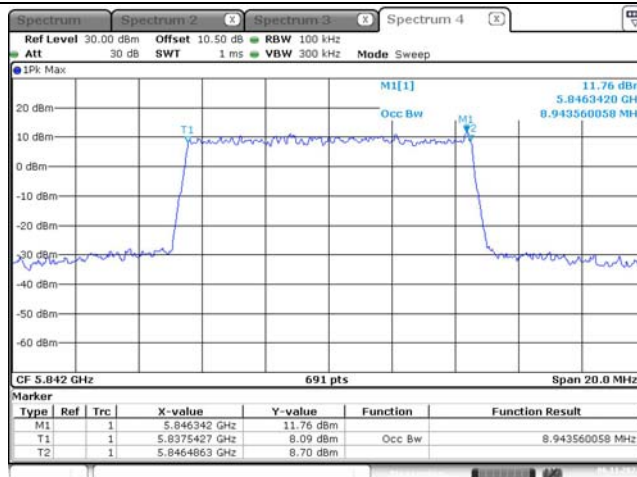99% Emission Bandwidth

16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:28:4816QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:33:1916QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:34:12

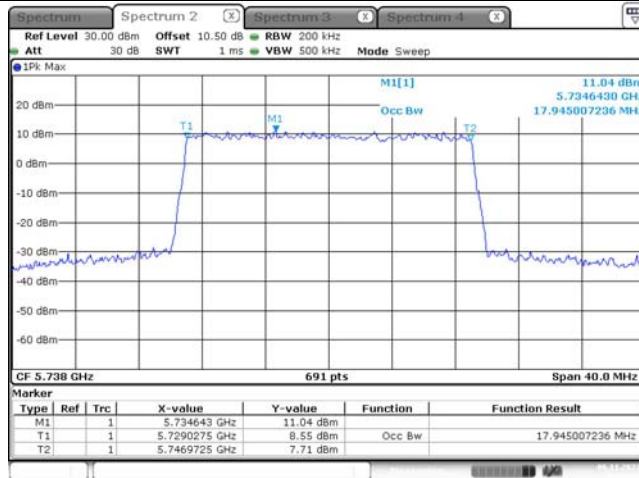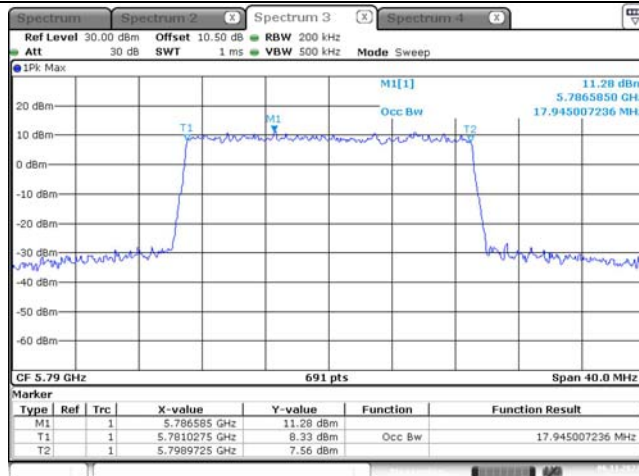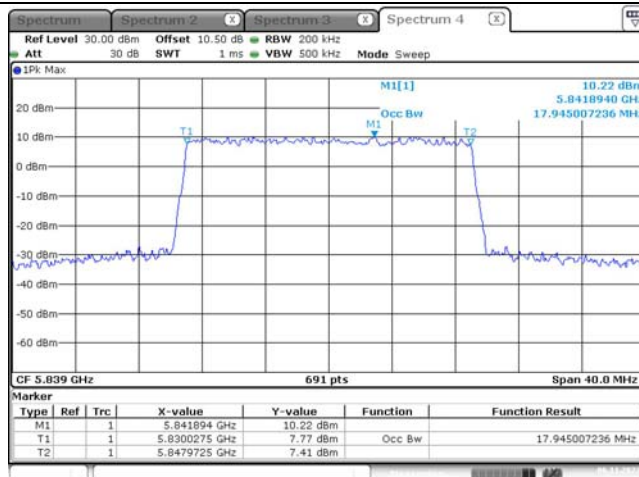99% Emission Bandwidth

16QAM,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:26:4516QAM,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:24:3516QAM,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:23:50

4.4 Maximum Conducted Output Power:

Serial Number:	2BJM-12	Test Date:	2023/11/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Average Power Sensor	U2001H	MY50000432	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK- 18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Modulation	Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
			Chain 0	Chain 2	Total	Limit
QPSK	1.4M	5154	14.49	14.42	17.47	30
		5201	14.66	14.93	17.81	30
		5246	14.56	15.02	17.81	30
	10M	5157	16.65	16.76	19.72	30
		5201	16.58	16.88	19.74	30
		5243	16.47	17.07	19.79	30
	20M	5167	16.64	16.78	19.72	30
		5201	16.61	16.98	19.81	30
		5233	16.56	17.15	19.88	30
16QAM	1.4M	5154	14.69	14.49	17.60	30
		5201	14.27	14.75	17.53	30
		5246	14.41	14.98	17.71	30
	10M	5157	16.66	16.51	19.60	30
		5201	16.61	17.01	19.82	30
		5243	16.78	17.15	19.98	30
	20M	5167	16.67	16.88	19.79	30
		5201	16.59	16.93	19.77	30
		5233	16.87	17.16	20.03	30

Note:

The device is a master device when this modes operating.

The Maximum antenna gain is 0.7dBi

The Maximum EIRP=20.73 dBm, meet the requirement of The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

5725-5850 MHz:

Modulation	Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
			Chain 0	Chain 2	Total	Limit
QPSK	1.4M	5728	21.46	21.31	24.40	30
		5789	21.57	21.25	24.42	30
		5847	21.28	20.97	24.14	30
	10M	5733	21.71	21.18	24.46	30
		5789	21.77	21.32	24.56	30
		5842	21.45	21.12	24.30	30
	20M	5738	21.67	21.45	24.57	30
		5790	21.71	21.27	24.51	30
		5839	21.04	21.32	24.19	30
16QAM	1.4M	5728	21.53	21.21	24.38	30
		5789	21.56	21.45	24.52	30
		5847	21.16	21.83	24.52	30
	10M	5733	21.85	21.41	24.65	30
		5789	21.79	21.23	24.53	30
		5842	21.33	21.28	24.32	30
	20M	5738	21.79	21.27	24.55	30
		5790	21.53	21.35	24.45	30
		5839	21.27	21.11	24.20	30
Note: The Maximum antenna gain is 0.9dBi						

4.5 Maximum power spectral density:

Serial Number:	2BJM-12	Test Date:	2023/11/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK- 18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:




Test Data:

5150-5250 MHz:




Modulation	Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			
			Chain 0	Chain 2	Total	Limit
QPSK	1.4M	5154	12.34	12.77	15.57	17
		5201	12.53	13.18	15.88	17
		5246	12.62	13.54	16.11	17
	10M	5157	6.51	7.49	10.04	17
		5201	6.69	7.50	10.12	17
		5243	6.83	7.72	10.31	17
	20M	5167	3.25	4.29	6.81	17
		5201	3.37	4.26	6.85	17
		5233	3.62	4.57	7.13	17
16QAM	1.4M	5154	12.20	12.78	15.51	17
		5201	12.35	13.36	15.89	17
		5246	12.75	13.62	16.22	17
	10M	5157	6.36	7.45	9.95	17
		5201	6.61	7.63	10.16	17
		5243	6.71	7.81	10.31	17
	20M	5167	3.46	4.23	6.87	17
		5201	3.60	4.15	6.89	17
		5233	3.74	4.79	7.31	17
Note: The Maximum antenna gain is 0.7dBi The device is a master device when this modes operating. Method SA-1 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01was used for PSD test.						

5725-5850 MHz:



Modulation	Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/500kHz)			
			Chain 0	Chain 2	Total	Limit
QPSK	1.4M	5728	16.97	16.88	19.94	30
		5789	16.88	16.61	19.76	30
		5847	16.86	16.66	19.77	30
	10M	5733	9.21	8.38	11.83	30
		5789	9.00	8.94	11.98	30
		5842	9.11	8.46	11.81	30
	20M	5738	5.52	5.56	8.55	30
		5790	5.39	5.37	8.39	30
		5839	4.93	5.24	8.10	30
16QAM	1.4M	5728	17.03	16.42	19.75	30
		5789	16.98	16.57	19.79	30
		5847	16.74	16.72	19.74	30
	10M	5733	9.19	8.74	11.98	30
		5789	9.02	8.75	11.90	30
		5842	8.96	8.38	11.69	30
	20M	5738	5.42	5.47	8.46	30
		5790	5.48	5.54	8.52	30
		5839	5.49	5.34	8.43	30
Note: The Maximum antenna gain is 0.9dBi Method SA-1 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01was used for PSD test.						

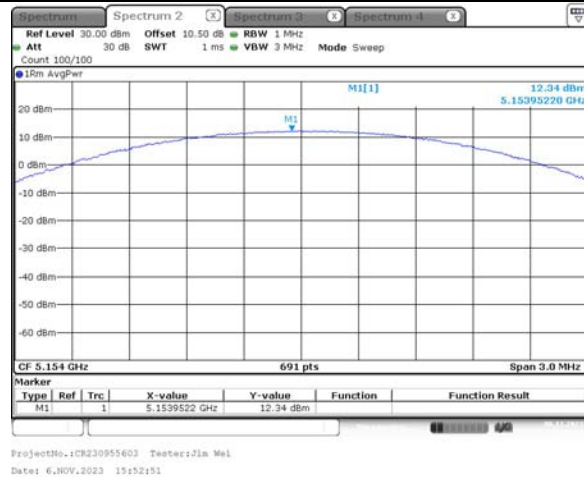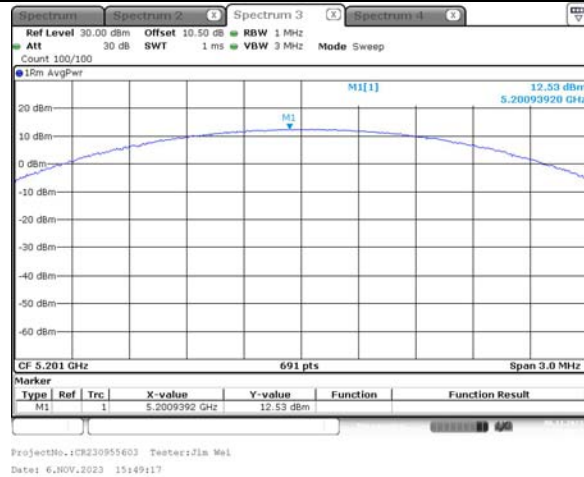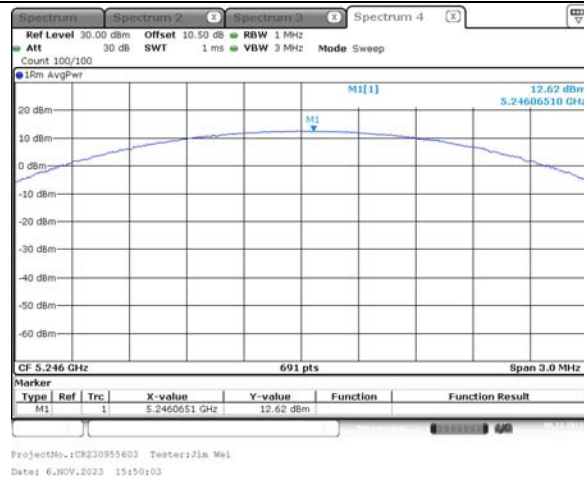**5150-5250MHz:
Chain 0****Maximum power spectral density**QPSK, 1.4M
Lowest ChannelQPSK,1.4M
Middle ChannelQPSK,1.4M
Highest Channel

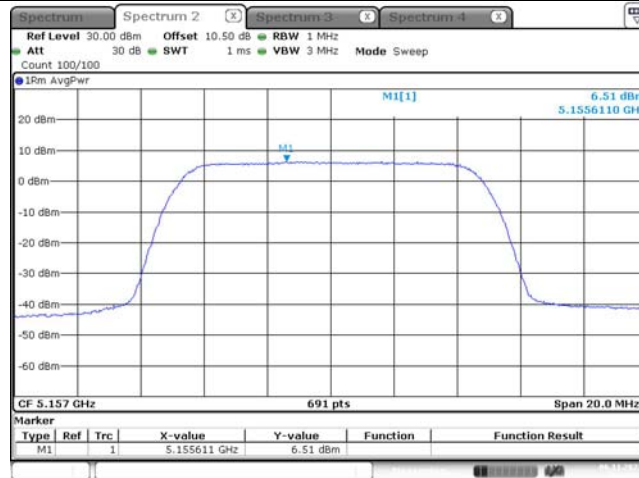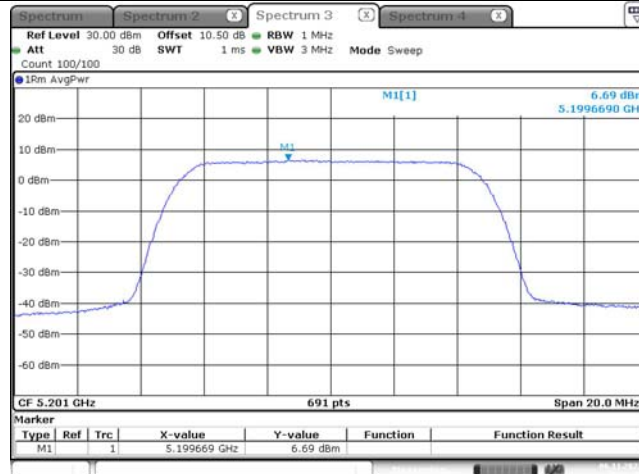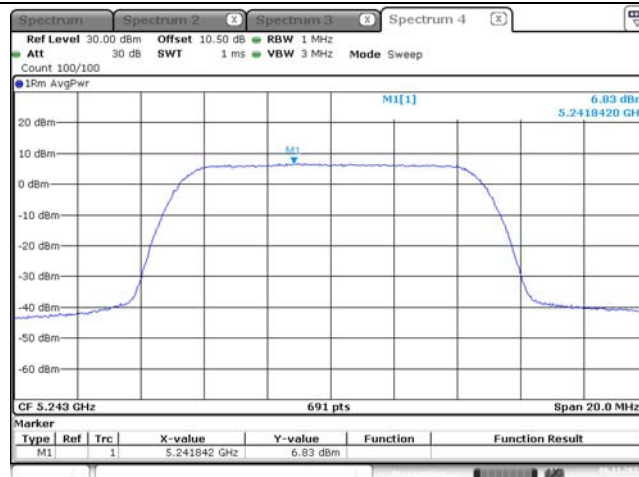Maximum power spectral density


QPSK, 10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:35:05QPSK, 10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:36:00QPSK, 10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:39:11

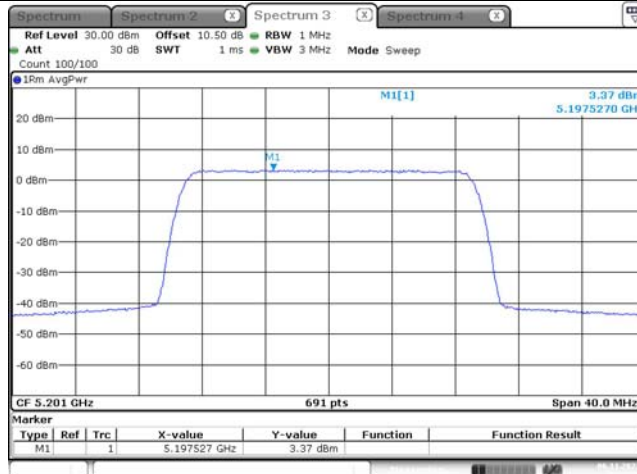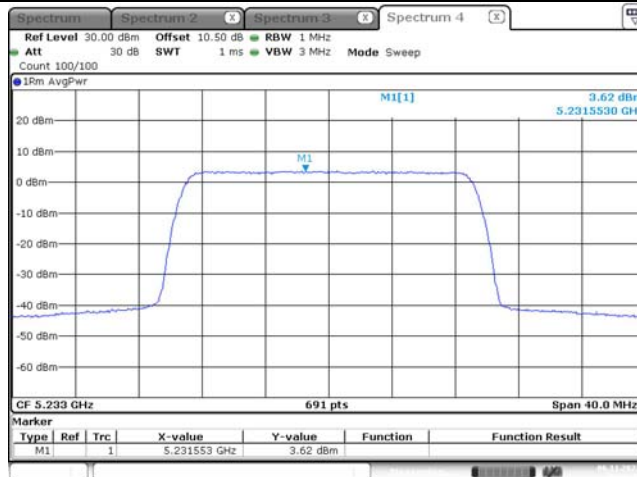Maximum power spectral density


QPSK, 20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:44:57QPSK, 20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:44:15QPSK, 20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:40:50

Maximum power spectral density

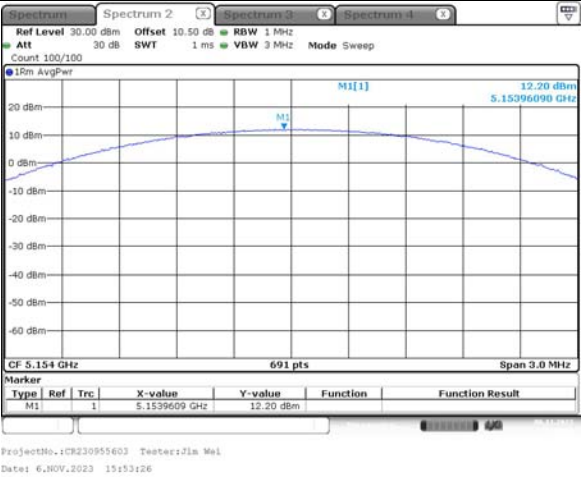
16QAM,1.4M
Lowest Channel






16QAM,1.4M
Middle Channel

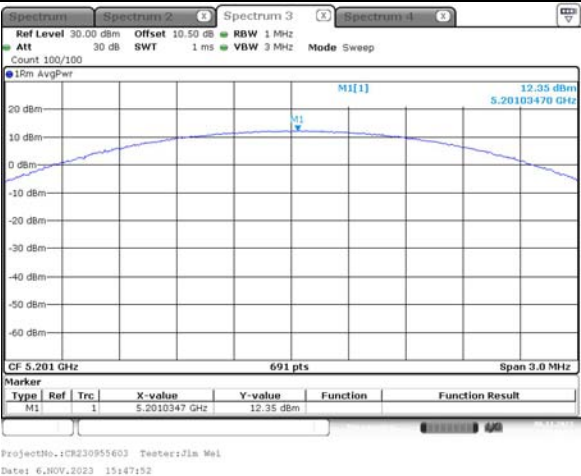



16QAM,1.4M
Highest Channel

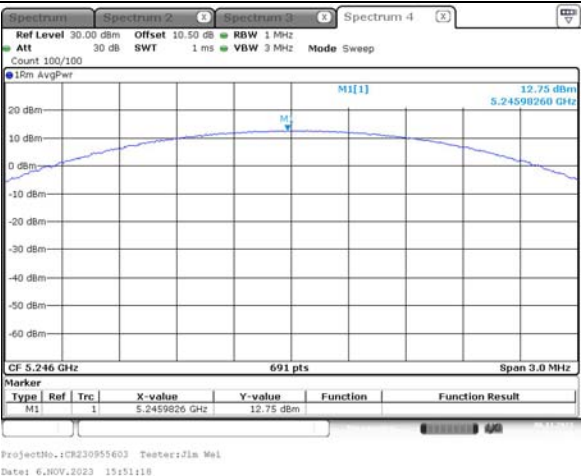

Maximum power spectral density

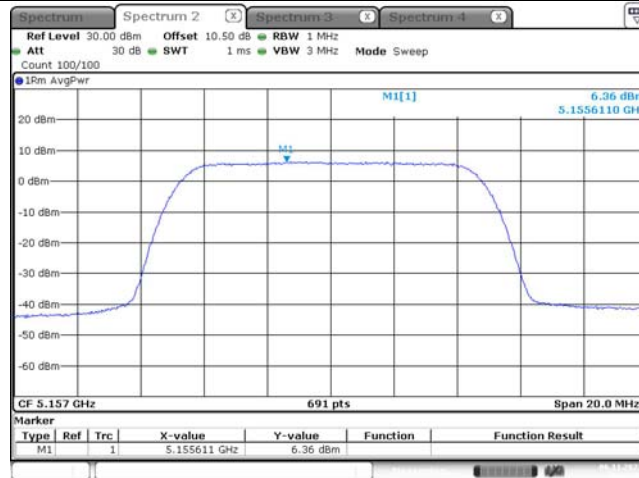
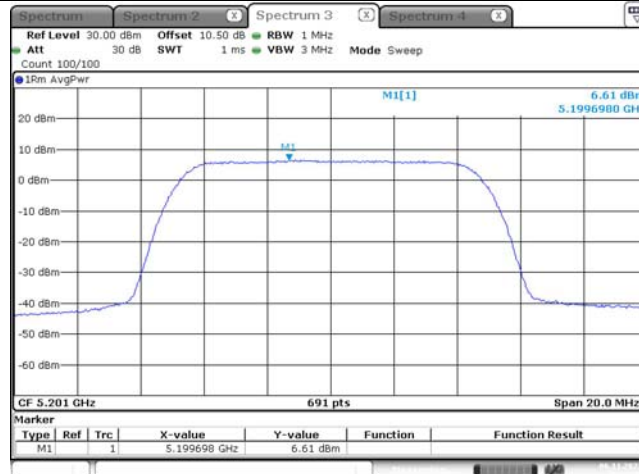
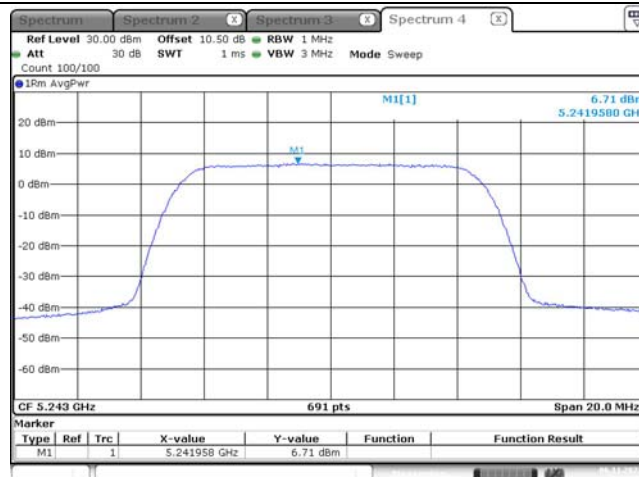
16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:33:3616QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:37:3616QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:38:35

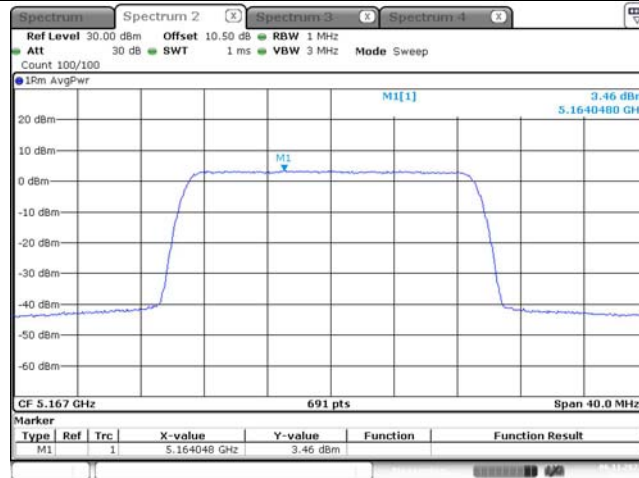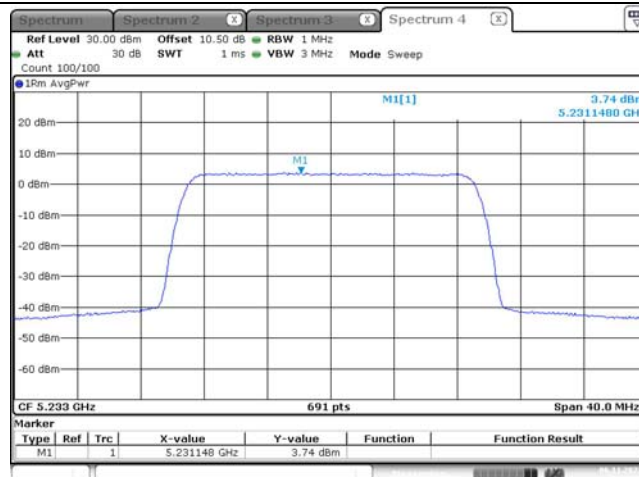Maximum power spectral density




16QAM,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 16:45:3016QAM,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 16:43:3616QAM,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 16:43:02

Chain 2:

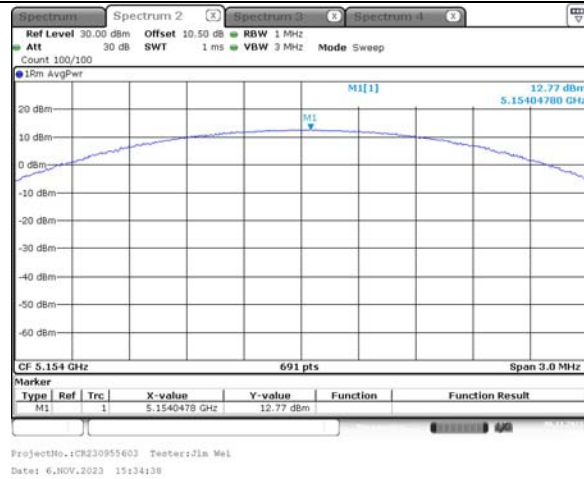
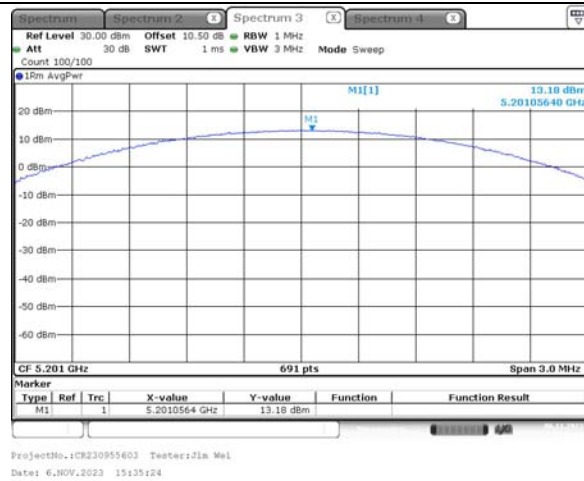
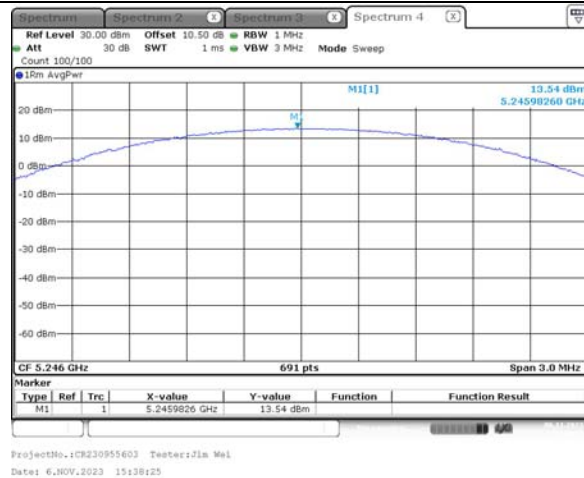
Maximum power spectral density

QPSK,1.4M
Lowest ChannelQPSK,1.4M
Middle ChannelQPSK,1.4M
Highest Channel

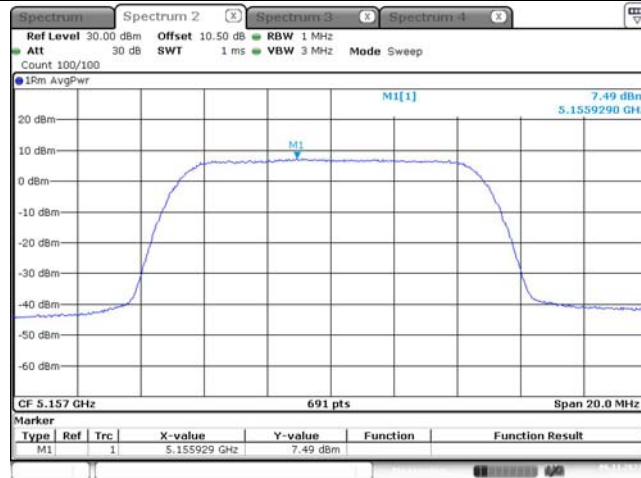
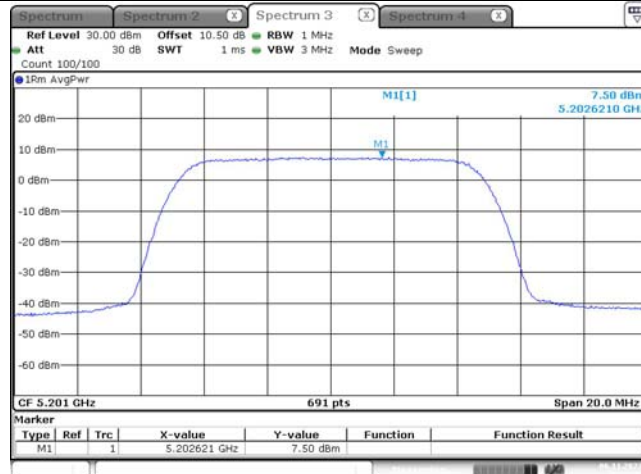
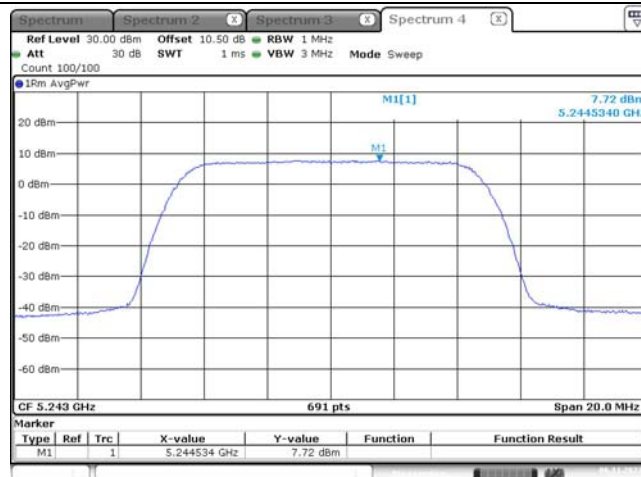
Maximum power spectral density

QPSK,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:13:15QPSK,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:22:46QPSK,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:23:25

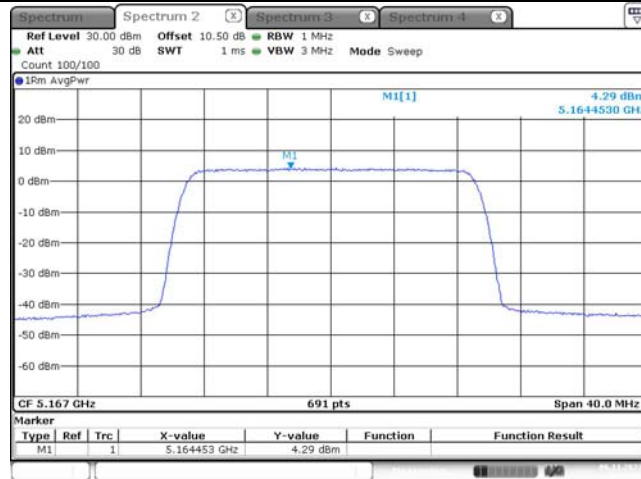
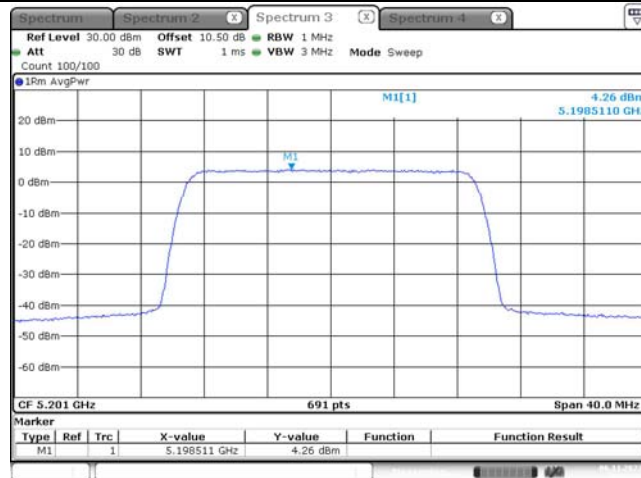
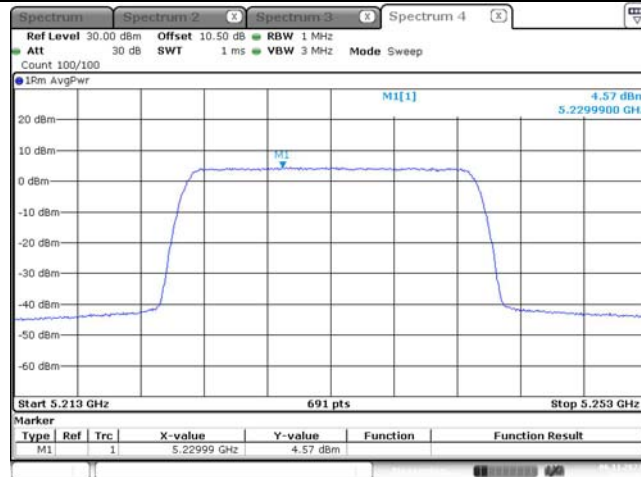
Maximum power spectral density

QPSK,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6,NOV,2023 15:13:16QPSK,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6,NOV,2023 15:06:15QPSK,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6,NOV,2023 15:05:45

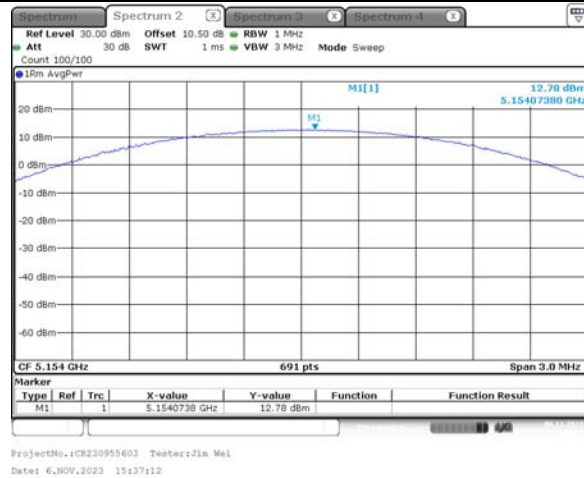
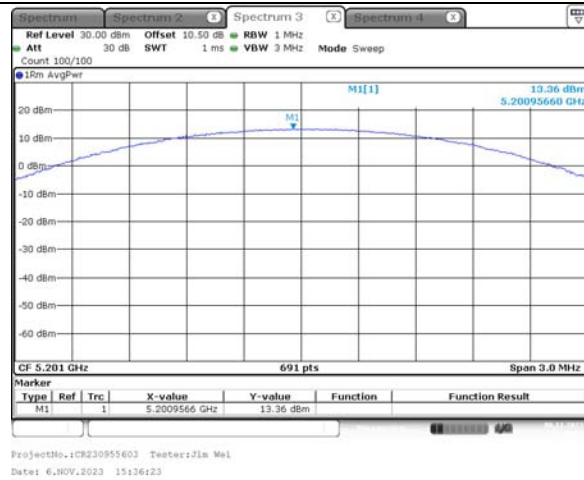
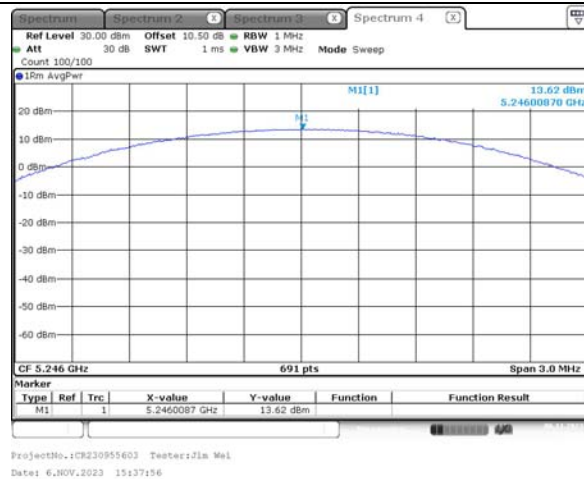
Maximum power spectral density




16QAM,1.4M
Lowest Channel16QAM,1.4M
Middle Channel16QAM,1.4M
Highest Channel

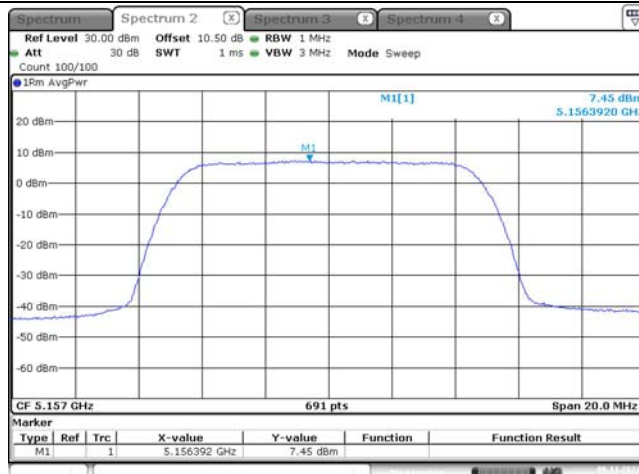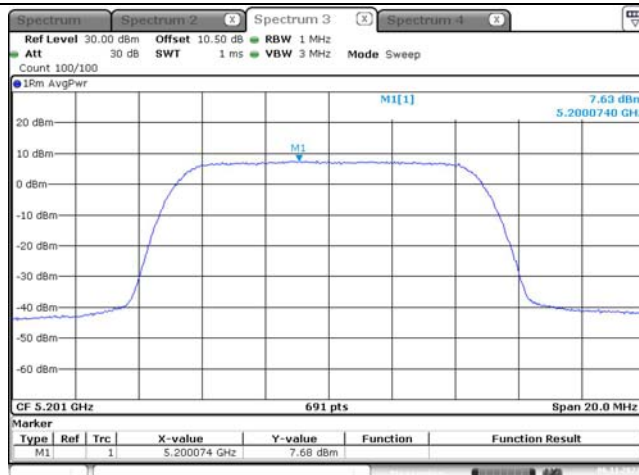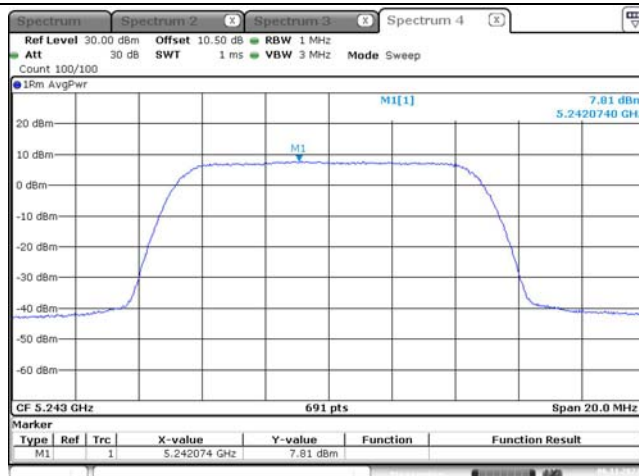Maximum power spectral density




16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 15:27:2116QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 15:22:0616QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 15:23:52

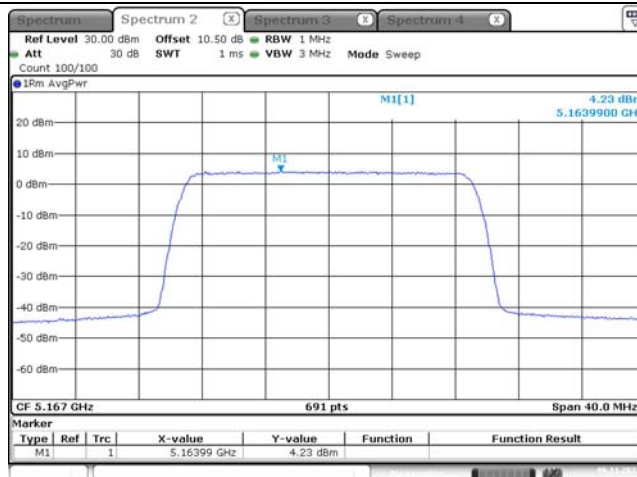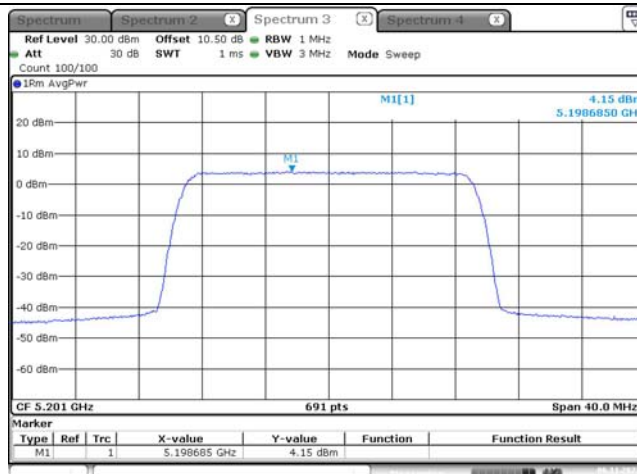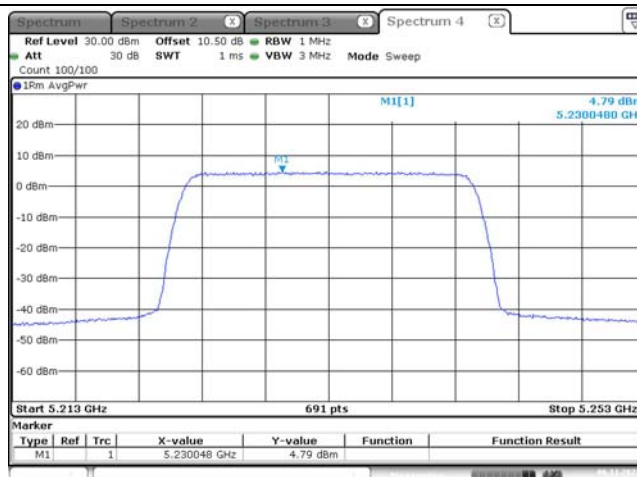Maximum power spectral density

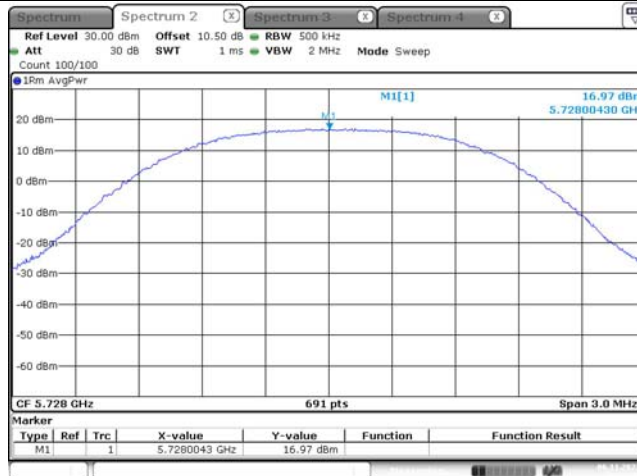
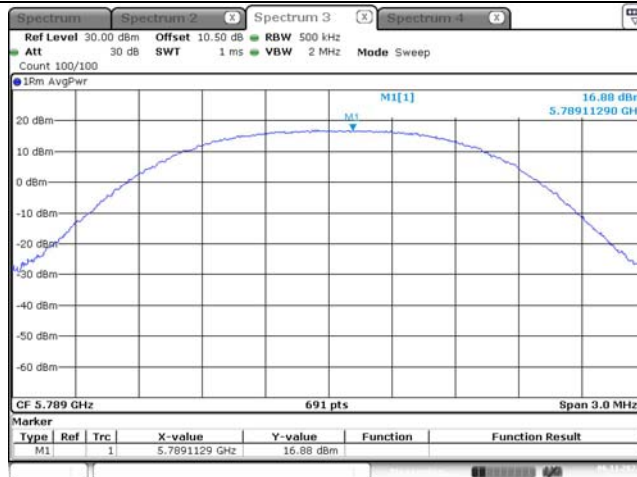
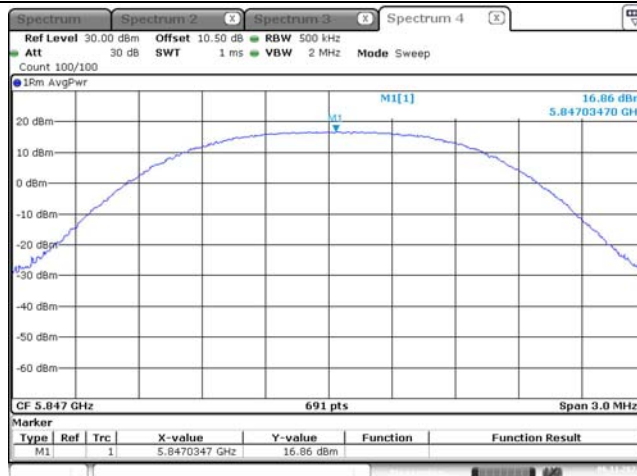
16QAM,20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:13:5916QAM,20M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:06:4916QAM,20M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 15:04:53

**5725-5850MHz:
Chain 0****Maximum power spectral density**QPSK, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:11:58QPSK, 1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:09:22QPSK, 1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:08:25

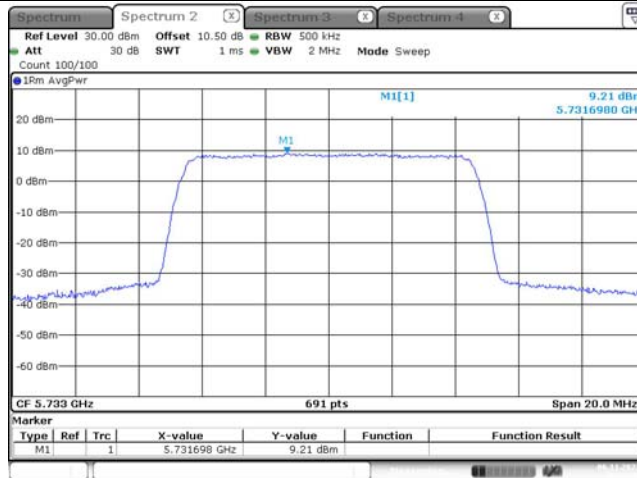
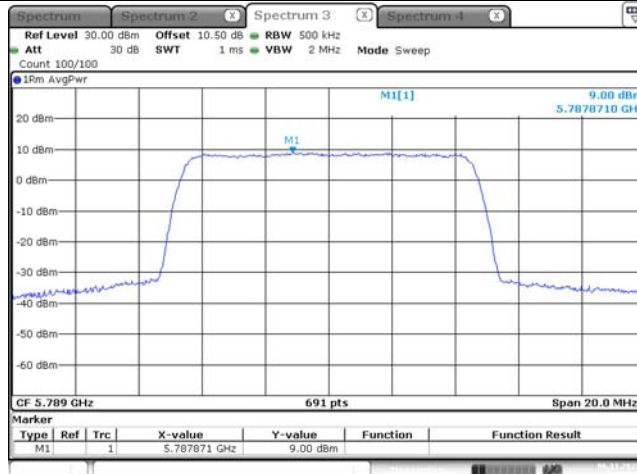
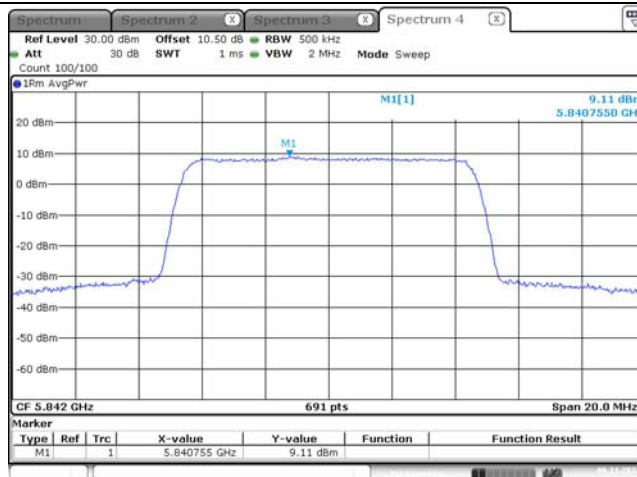
Maximum power spectral density

QPSK, 10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:55:40QPSK, 10M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:59:54QPSK, 10M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:00:28

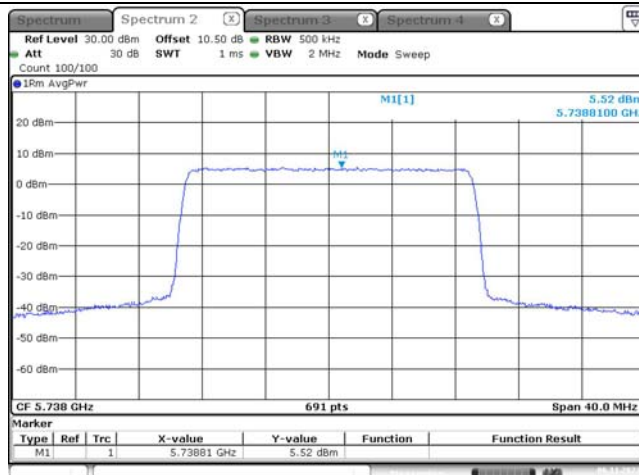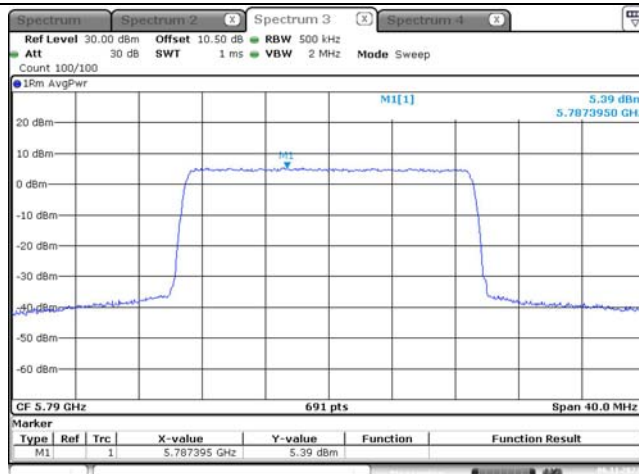
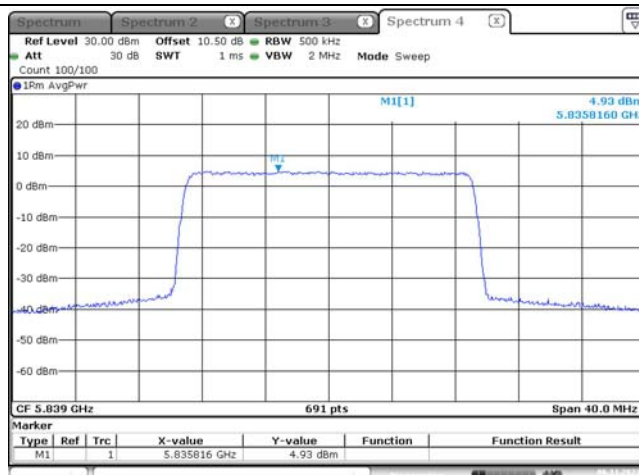
Maximum power spectral density

QPSK, 20M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:53:39QPSK, 20M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:49:56QPSK, 20M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 16:49:13

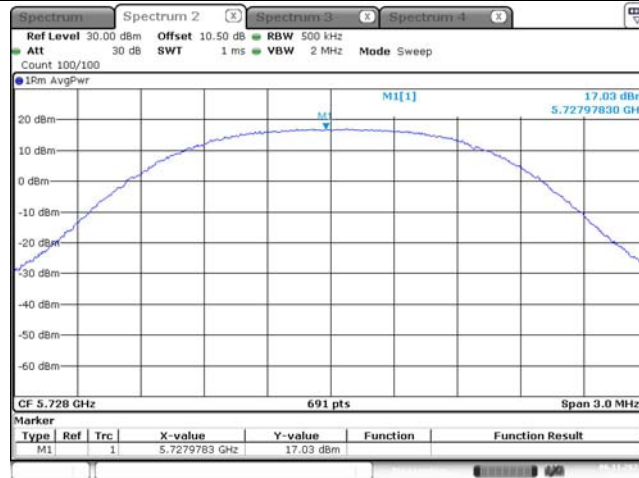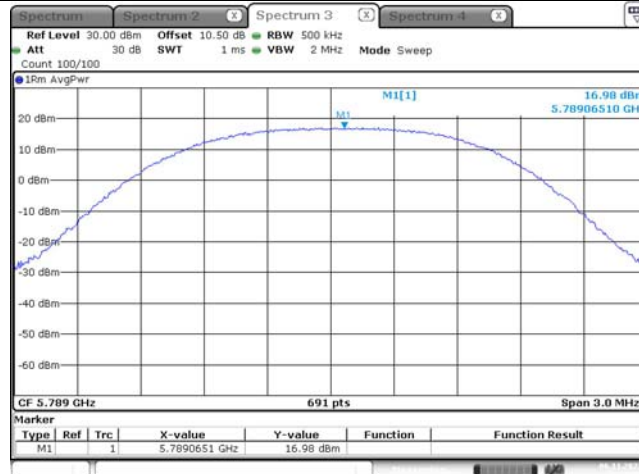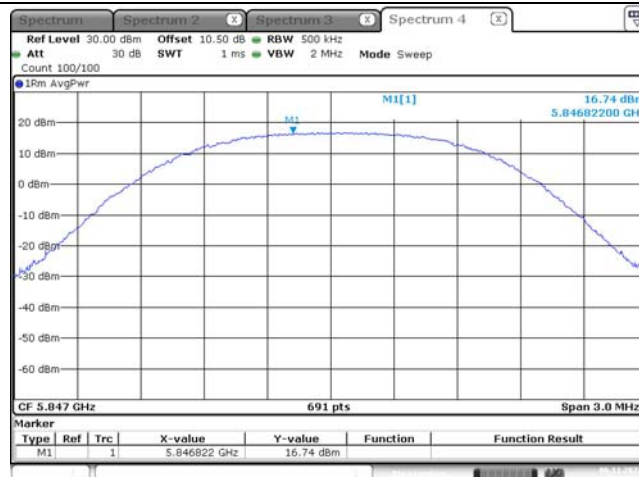Maximum power spectral density

16QAM, 1.4M
Lowest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:11:2016QAM, 1.4M
Middle ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:10:0116QAM, 1.4M
Highest ChannelProjectNo.:CR230955603 Tester:Jim Wei
Date: 6.NOV.2023 17:07:34

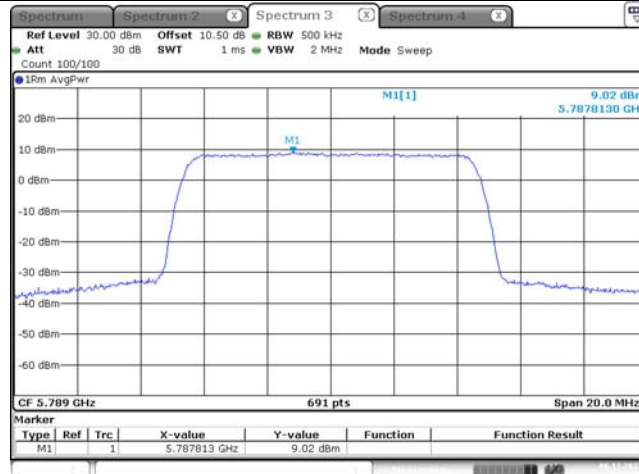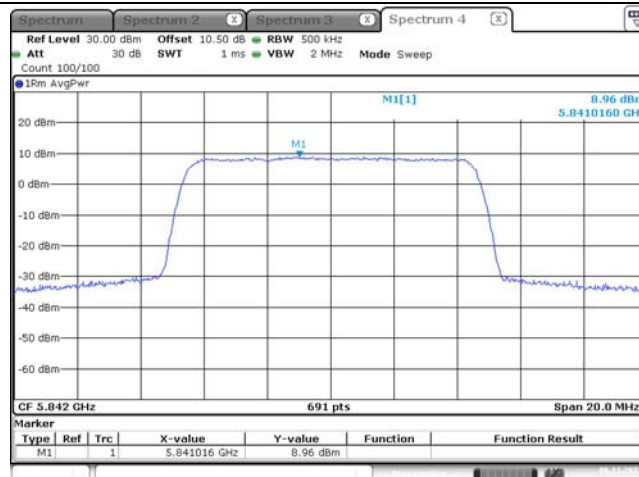Maximum power spectral density

16QAM,10M
Lowest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 16:57:1116QAM,10M
Middle ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 16:59:0816QAM,10M
Highest ChannelProjectNo.:CR230955603 Tester:Jin Wei
Date: 6.NOV.2023 17:01:07