


**Industrial Internet Innovation Center (Shanghai) Co.,Ltd.****RF TEST REPORT**

<b>PRODUCT</b>	Smart POS system
<b>BRAND</b>	SUNMI
<b>MODEL</b>	T6831
<b>APPLICANT</b>	Shanghai Sunmi Technology Co.,Ltd.
<b>FCC ID</b>	2AH25T6831
<b>ISSUE DATE</b>	June 6, 2024
<b>STANDARD(S)</b>	FCC Part 2, FCC Part 22H, FCC Part 24E,FCC Part27

Prepared by: *Fan Yuhang*Reviewed by: *Yang Fan*Approved by: *Zhang Min***CAUTION:**

*This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.*

## CONTENTS

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>3</b>
1.1 TEST STANDARD (S) .....	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	5
<b>2. GENERAL INFORMATION OF THE LABORATORY .....</b>	<b>6</b>
2.1 TESTING LABORATORY .....	6
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	6
2.3 PROJECT INFORMATION .....	6
<b>3. GENERAL INFORMATION OF THE CUSTOMER.....</b>	<b>7</b>
3.1 APPLICANT .....	7
3.2 MANUFACTURER .....	7
<b>4. GENERAL INFORMATION OF THE PRODUCT.....</b>	<b>8</b>
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	8
4.2 DESCRIPTION FOR AUXILIARY EQUIPMENT (AE) .....	8
4.3 ADDITIONAL INFORMATION .....	9
<b>5. TEST CONFIGURATION INFORMATION .....</b>	<b>10</b>
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	10
5.2 TEST EQUIPMENTS UTILIZED.....	10
5.3 MEASUREMENT UNCERTAINTY .....	11
<b>6. TEST RESULTS .....</b>	<b>13</b>
6.1 OUTPUT POWER .....	13
6.2 PEAK-TO-AVERAGE POWER RATIO .....	15
6.3 99% OCCUPIED BANDWIDTH .....	16
6.4 26DB EMISSION BANDWIDTH .....	17
6.5 BAND EDGE AT ANTENNA TERMINALS .....	18
6.6 FREQUENCY STABILITY .....	20
6.7 CONDUCTED SPURIOUS EMISSION.....	22
6.8 EMISSION LIMIT .....	24
<b>ANNEX A: REVISED HISTORY .....</b>	<b>32</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>33</b>



## 1. Summary of Test Report

### 1.1 Test Standard (s)

No.	Test Standard	Title	Version
1	FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	--
2	FCC Part 22H	CELLULAR RADIOTELEPHONE SERVICE	--
3	FCC Part 24E	BROADBAND PCS	--
4	FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	--
Note: FCC Part 2 have not been accredited by A2LA.			

### 1.2 Reference Documents

No.	Test Standard	Title	Version
1	ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
2	ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
3	KDB 971168 D01 Power Meas License Digital Systems	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01
4	KDB 484596 D01 Referencing Test Data	Test Reductions Via Data Referencing	v02r03
Note: KDB 971168 D01 Power Meas License Digital Systems and KDB 484596 D01 Referencing Test Data have not been accredited by A2LA.			

### 1.3 Summary of Test Results

#### WCDMA II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	2.1046,24.232(c)	Pass <sup>Note 2</sup>
2	Emission Limit	2.1053/24.238(a)	Pass
3	Frequency Stability	24.235	Pass <sup>Note3</sup>
4	Occupied Bandwidth	2.1049	Pass <sup>Note3</sup>
5	Emission Bandwidth	2.1049	Pass <sup>Note3</sup>
6	Band Edge Compliance	2.1051/24.238(a)	Pass <sup>Note3</sup>
7	Conducted Spurious Emission	2.1051/24.238(a)	Pass <sup>Note3</sup>

8	Peak to Average Power Ratio	24.232(d)	Pass <sup>Note3</sup>
---	-----------------------------	-----------	-----------------------

**WCDMA IV**

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	2.1046/27.50(d)(4)	Pass <sup>Note 2</sup>
2	Emission Limit	2.1053/27.53(h)	Pass
3	Frequency Stability	27.54	Pass <sup>Note3</sup>
4	Occupied Bandwidth	2.1049	Pass <sup>Note3</sup>
5	Emission Bandwidth	2.1049	Pass <sup>Note3</sup>
6	Band Edge Compliance	2.1051/27.53(h)	Pass <sup>Note3</sup>
7	Conducted Spurious Emission	2.1051/27.53(h)	Pass <sup>Note3</sup>
8	Peak to Average Power Ratio	27.50(d)(5)	Pass <sup>Note3</sup>

**WCDMA V**

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	2.1046/22.913(a)	Pass <sup>Note 2</sup>
2	Emission Limit	2.1053/22.917(a)	Pass
3	Frequency Stability	22.355	Pass <sup>Note3</sup>
4	Occupied Bandwidth	2.1049	Pass <sup>Note3</sup>
5	Emission Bandwidth	2.1049	Pass <sup>Note3</sup>
6	Band Edge Compliance	2.1051/22.917(a)	Pass <sup>Note3</sup>
7	Conducted Spurious Emission	2.1051/22.917(a)	Pass <sup>Note3</sup>
8	Peak to Average Power Ratio	N/A	Pass <sup>Note3</sup>

**Note:**

The T6F10, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing.

This project is a variant project based on the 23T04I30131-RF02-V01,original FCC ID 2AH25T6F10 with below changes:

**SOFTWARE MODIFICATIONS:**

Other changes detailed: Optimize functions, solve bugs, and iterate software versions. Iterative software upgrades do not affect RF performance.

**HARDWARE MODIFICATIONS:**

Components on PCB changes: Yes

Camera changes: Please refer to the following difference chart

LCD changes: Please refer to the following difference chart

Type of Service	Model Name	Scanner	Rear Camera	Flash Lamp	LCD (Just different manufacturers)
Original	T6F10	Yes	5M AF+flash	Yes	SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD (9A-3R067-7026A)
Variant	T6831	NO	2M FF	NO	SHENZHEN DJN PHOTOELECTRIC



				TECHNOLOGY CO., LTD (98-31050-7084A) S10aa (Mainly Supply)
				SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD (98-31050-7084A-H) S12aa (Secondary Supply)
				GUANGDONG SUPERVIEW OPTOELECTRONICS CO.,LTD. (G499BHA085A0) S16aa (Thirdly Supply)

Other changes: PCBA Change: The difference between the original and the variant of PCBA

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: YES

Mechanical shell changes: YES

Other changes detailed:

- 1.No scanner.
- 2.The position of the front camera is different.
- 3.Add keyboard.

According to the Product Change Description, we tested all modes of radiated spurious emission and the worst mode of rest test cases in the original report, and the test data was recorded in this report.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 5.3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 6 of this test report.

Note 2:

The test data refer to the original report, and the data in this report is spot check data.The verification data meets the KDB484596 requirements within 3dB.

Note 3:

The test data refer to the original report, and the data in this report is spot check data.

#### 1.4 Data Provided by Applicant

No.	Item(s)	Data
1	WCDMA Band 2	0.46dBi
2	WCDMA Band 4	-0.42dBi
3	WCDMA Band 5	-1.63dBi
Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.		

## 2. General Information of The Laboratory

### 2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364

### 2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa

### 2.3 Project Information

Project Manager	Gao Hongning
Test Date	April 20, 2024 to May 31, 2024



### 3. General Information of The Customer

#### 3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

#### 3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

## 4. General Information of The Product

### 4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS system
Model	T6831
Date of Receipt	S10aa/ S12aa/S16aa/S04aa/S06aa: April 15, 2024 S23aa: April 29, 2024
EUT ID*	S04aa/S06aa/S10aa/S12aa/S16aa/S23aa
SN/IMEI	S04aa: 860104070000517'860104070005516 S06aa: 860104070000061'860104070005060 S10aa: 860104070000897'860104070005896 S12aa: 860104070001424'86010407006423 S16aa: 860104070002166'86010407007165 S23aa: 860104070000178'860104070005177
Supported Radio Technology and Bands	GSM850/GSM900/DCS1800/PCS1900 WCDMA Band I/II/IV/V/VI/VIII/XIX LTE Band 1/2/3/4/5/7/8/18/19/20/26/28/34/38/39/40/41 BT 5.0 BLE/BR/EDR WLAN 802.11b/g/n WLAN 802.11a/n/ac GPS/GLONASS/BDS/Galileo NFC
Hardware Version	V1.0
Software Version	V3.0.4
FCC ID	2AH25T6831
NOTE1: EUT ID is the internal identification code of the laboratory. NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.	

### 4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A
CA01	Adapter	TPA-141A050200UU01	N/A
CD01	Adapter	UC13US	N/A
UA02	AC Cable	N/A	N/A
BA10	Battery	HPPA	Guangdong Highpower NewEnergy Technology Co., Ltd.
NOTE1: AE ID is the internal identification code of the laboratory. NOTE2: By verifying that CA01+BA10 is the worst battery and adapter combination, this battery and adapter are used in all tests.			



### 4.3 Additional Information

Modulation:

Type of modulation	QPSK/16QAM
--------------------	------------

Band Frequency Range:

Band	Frequency Range(MHz)
Band II	1850 -1910
Band IV	1710 -1755
Band V	824 – 849

Band List:

Band	Low Channel	Low Freq. (MHz)	Mid Channel	Mid Freq. (MHz)	High Channel	High Freq. (MHz)
Band II	9262	1852.4	9400	1880	9538	1907.6
Band IV	1312	1712.4	1413	1732.6	1513	1752.6
Band V	4132	826.4	4183	836.6	4233	846.6

## 5. Test Configuration Information

### 5.1 Laboratory Environmental Conditions

#### 5.1.1 Permanent Facilities

Relative Humidity	Min. = 45%, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25℃	-10℃	50℃
Working Voltage of EUT	Normal	Minimum	Maximum
	7.7V	6.0V	8.8 V

### 5.2 Test Equipments Utilized

#### Conduction test system

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Software	Eagle V3.3	N/A	V3.3	N/A	3IN	N/A	N/A
2	Frequency spectrum analyzer	FSQ	101091	V4.75	V11.00	R&S	2023-07-26	1 Year
3	Wideband Radio Communication Tester	CMW 500	148874	V3.5.136	N/A	R&S	2023-07-27	1 Year
4	Temperature Chamber	B-TF-107C	201804107	N/A	N/A	BoYi	2023-06-28	1 Year
5	Programmable power supply	Keithley 2303	4039070	N/A	N/A	Keithley	2023-06-23	1 Year
6	RF Test Automation Box	RF 2021B	2001	V3.3	N/A	RANATEC	N/A	N/A

#### Radiated emission test system

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123126	V5.2.1	B12	R&S	2023-10-16	1 Year
2	Universal Radio Communication Tester	CMW500	104178	V3.7.20	1206.0600.00	R&S	2023-10-16	1 Year



3	EMI Test Receiver	ESU40	100307	V5.1-24-3	01	R&S	2023-12-19	1 Year
4	TRILOG Broadband Antenna	VULB9163	01345	N/A	N/A	Schwar zbeck	2024 03-23	1 Year
5	Double- ridged Waveguide Antenna	ETS-3117	0013589 0	N/A	N/A	ETS	2023-07-28	2 Years
6	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
7	Preamplifier	SCU08F1	8320024	N/A	N/A	R&S	2023-10-16	1 year
8	Preamplifier	SCU18	10155	N/A	N/A	R&S	2023-10-16	1 year
9	Antenna	SWB-VUBA 9117	9117-266	N/A	N/A	Schwar zbeck	2023-9-8	1 year
10	Antenna	BBHA9120 D	02112	N/A	N/A	Schwar zbeck	2023-7-28	1 year
11	Signal Generator	SMF100A	102314	3.20.390.2 4	05.10	R&S	2023-10-16	1 year

Anechoic chamber

Fully anechoic chamber by ETS.

### 5.3 Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents.

The detailed measurement uncertainty is defined in 3IN documents.

#### Measurement Uncertainty of Radiation test

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 5.10$
$1\text{GHz} \leq f \leq 18\text{GHz}$	$\pm 5.66$
$18\text{GHz} \leq f \leq 40\text{GHz}$	$\pm 5.22$

#### Measurement Uncertainty of Conduction test

No	Item	Extended uncertainty (k=2)	
1	Frequency Tolerance	23Hz	
2	RF Output Power	0.7dB	
3	conducted spurious	9kHz~3.6GHz	1.5dB
		3.6GHz~8.4GHz	2.8dB
		8.4GHz~12.75GHz	3.4dB
4	EVM	2.1%	
5	Occupied Bandwidth	Bandwidth 1.4MHz	0.03MHz
		Bandwidth 3MHz	0.03MHz
		Bandwidth 5MHz	0.03MHz
		Bandwidth 10MHz	0.05MHz

		Bandwidth 15MHz	0.06MHz
		Bandwidth 20MHz	0.08MHz
6	Emission intermodulation	Adjacent channel	1.4dB
		Alternate channel	1.4dB
7	Range of frequency	0.08MHz	



## 6. Test Results

### 6.1 Output Power

#### 6.1.1 Measurement Limit

FCC §22.913(a) Mobile stations are limited to 7watts.

FCC §24.232(c) Mobile and portable stations are limited to 2 watts.

FCC §27.50d(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### 6.1.2 Method of Measurements

Method of measurements please refer to KDB971168 D01 v03 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz base station CMW500.

These measurements were done at 3 frequencies.(bottom, middle and top of operational frequency range).


1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record maximum average power for other modulation signal.
5. During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio.
6. Communication tester to ensure max power transmission and proper modulation.
7. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

$EIRP = \text{Conducted power} + \text{Gain}$ ,  $ERP = EIRP - 2.15\text{dBi}$ .

#### 6.1.3 Test procedures

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the base station reading.

#### 6.1.4 Test Setup

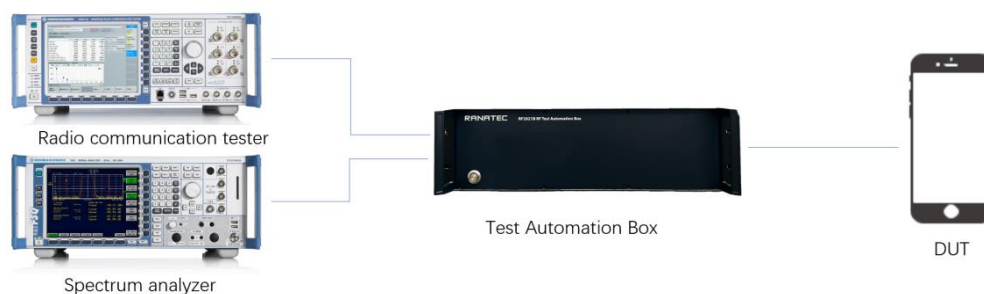

### 6.1.5 Output Power results

BAND	Mode	Original data(dBm)	Verified power(dBm)	$d_{dB}^{Note3}$
Band 2	RMC	23.08	23.23	0.15
Band 4	RMC	23.13	22.38	0.75
Band 5	RMC	23.78	23.99	0.21

Note1: The power of the worst part is verified to meet the requirements.

Note2: The difference between Original and verified power is less than 3dB and meets the requirements of KDB484596 D01 data reference. The power listed in the original certificate still applies to this case.

Note3:  $d_{dB} = |\text{Verified}_{dB} - \text{original}_{dB}|$

### 6.1.6 EIRP/ERP results

BAND	Mode	EIRP (dBm)	ERP (dBm)
Band 2	RMC	23.69	21.54
Band 4	RMC	21.96	19.81
Band 5	RMC	22.36	20.21



## 6.2 Peak-to-Average Power Ratio

### 6.2.1 Measurement Limit

CFR Part 22.913(d)/24.232(d)/27.50: The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB

### 6.2.2 Method of Measurement

The EUT was connected to the spectrum analyzer and system simulator via a power divider.

Select the spectrum analyzer CCDF function.


Set RBW  $\geq$  signal's occupied bandwidth.

Set the number of counts to a value that stabilizes the measured CCDF curve;

Sweep time  $\geq$  1s.

Record the maximum PAPR level associated with a probability of 0.1%.

### 6.2.3 Test Setup

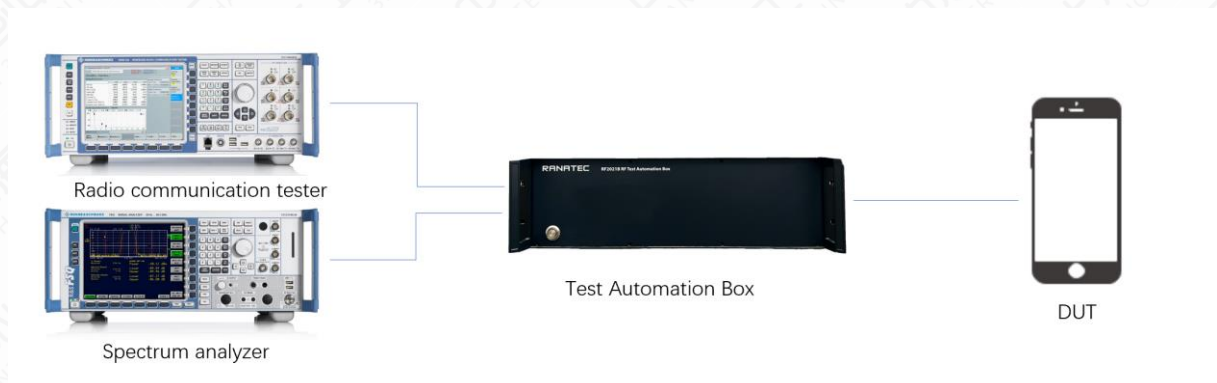

### 6.2.4 Measurement results

Band	Channel	PAPR	Limit
WCDMA V	Low	3.17	13

### 6.3 99% Occupied Bandwidth

### 6.3.1 Summary

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA BAND II , WCDMA BAND IV and WCDMA BAND V.


### 6.3.2 Method of Measurement

The EUT output RF connector was connected with a short cable to the signal analyzer.

RBW was set to about 1% of emission BW, VBW  $\geq 3$  times RBW,.


99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

### 6.3.3 Test Setup

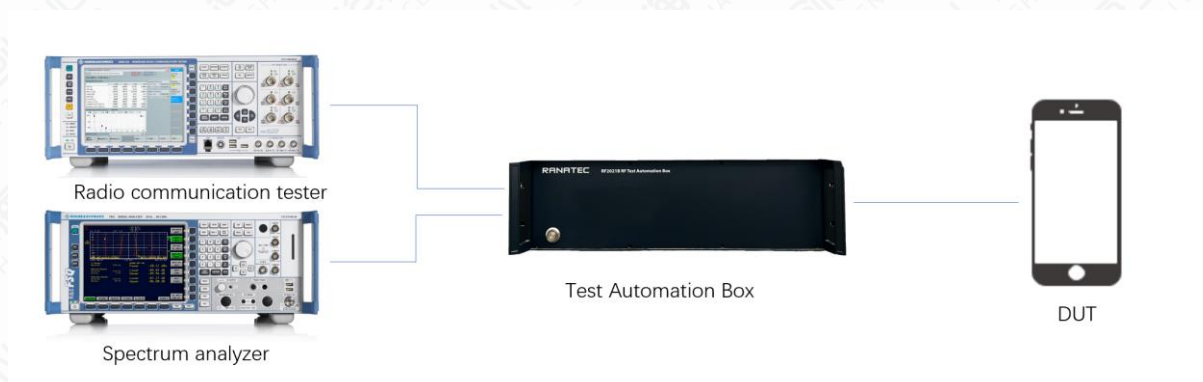

### 6.3.4 Measurement results

Band	Channel	99%Occupied Width(kHz)
OB5	4132	4175.00 kHz

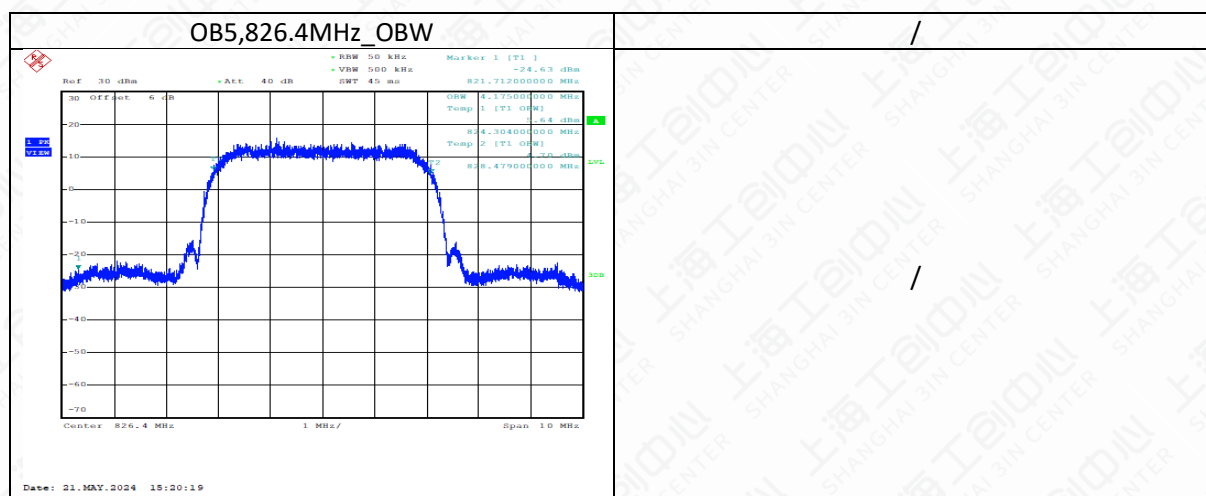



## 6.4 26dB Emission Bandwidth

### 6.4.1 Summary

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA BANDII, WCDMA BANDIV, WCDMA BANDV.

### 6.4.2 Method of Measurement


The EUT output RF connector was connected with a short cable to the signal analyzer.

RBW was set to about 1% of emission BW, VBW  $\geq$  3 times RBW,.

26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.


For WCDMA: signal analyzer setting as: RBW=50KHz; VBW=200KHz; Span=10MHz.

### 6.4.3 Test Setup

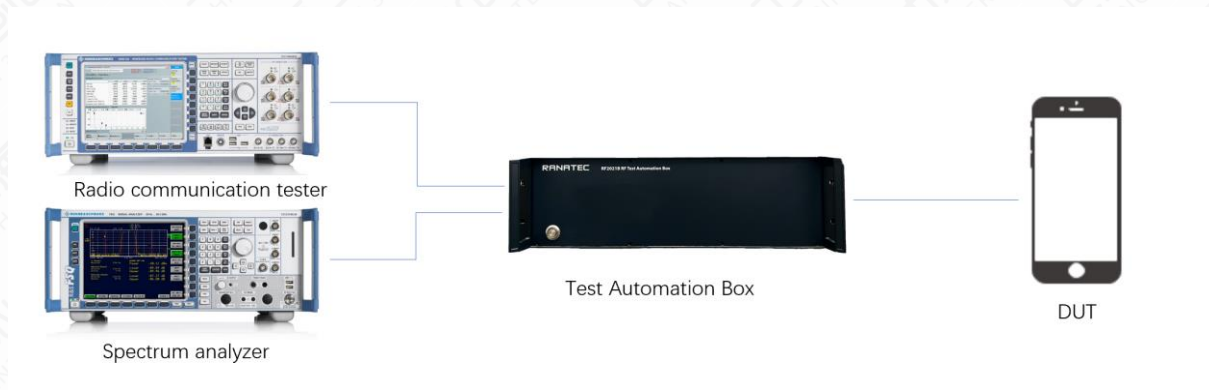

### 6.4.4 Measurement results

Band	Channel	26dBDown OccupiedWidth(kHz)
WCDMA V	4132	4668.00 kHz

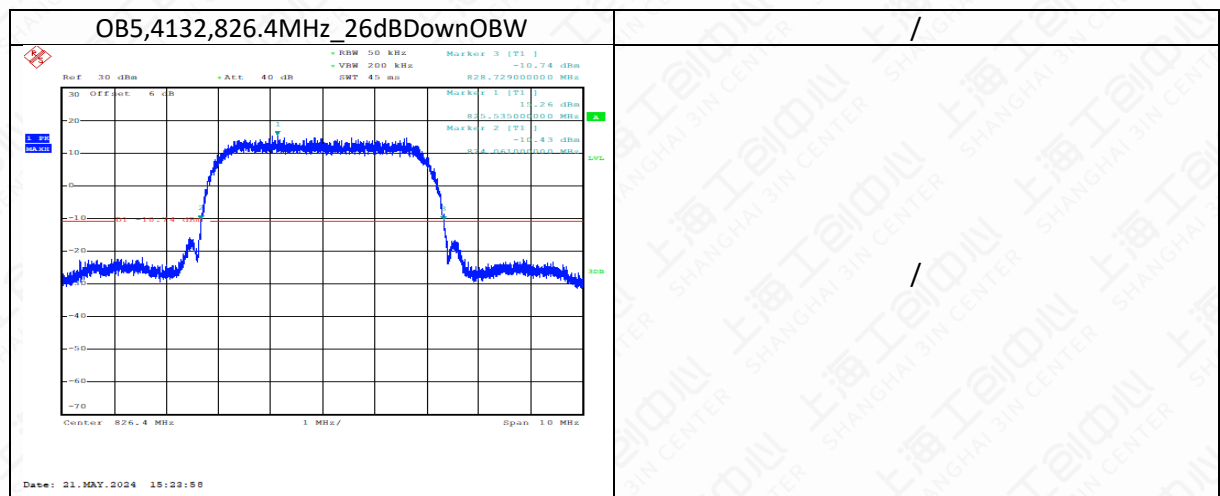

## 6.5 Band Edge at antenna terminals

### 6.5.1 Measurement Limit

FCC §22.917(a): The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §27.53(h):

AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz, and 2180–2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

(2) Additional protection levels. Notwithstanding the foregoing paragraph (h)(1) of this section:

(i) Operations in the 2180–2200 MHz band are subject to the out-of-band emission requirements set forth in § 27.1134 for the protection of federal government operations operating in the 2200–2290 MHz band.

(ii) For operations in the 2000–2020 MHz band, the power of any emissions below 2000 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iii) For operations in the 1915–1920 MHz band, the power of any emission between 1930–1995 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iv) For operations in the 1995–2000 MHz band, the power of any emission between 2005–2020 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

### 6.5.2 Method of Measurement

The RF output of the transceiver was connected to a signal analyzer through appropriate attenuation.

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band

The limit line is derived from  $43 + 10 \log(P)$  Db below the transmitter power P(Watts)


$$= P(W) - [43 + 10 \log(P)](dB)$$

$$= [30 + 10 \log(P)](dBm) - [43 + 10 \log(P)](dB)$$


$$= -13 dBm$$



### 6.5.3 Test Setup

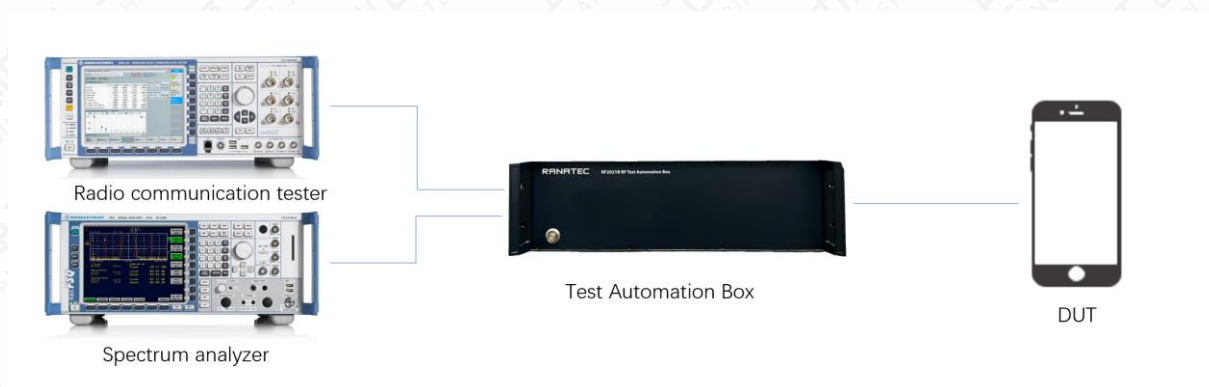

### 6.5.4 Measurement Result

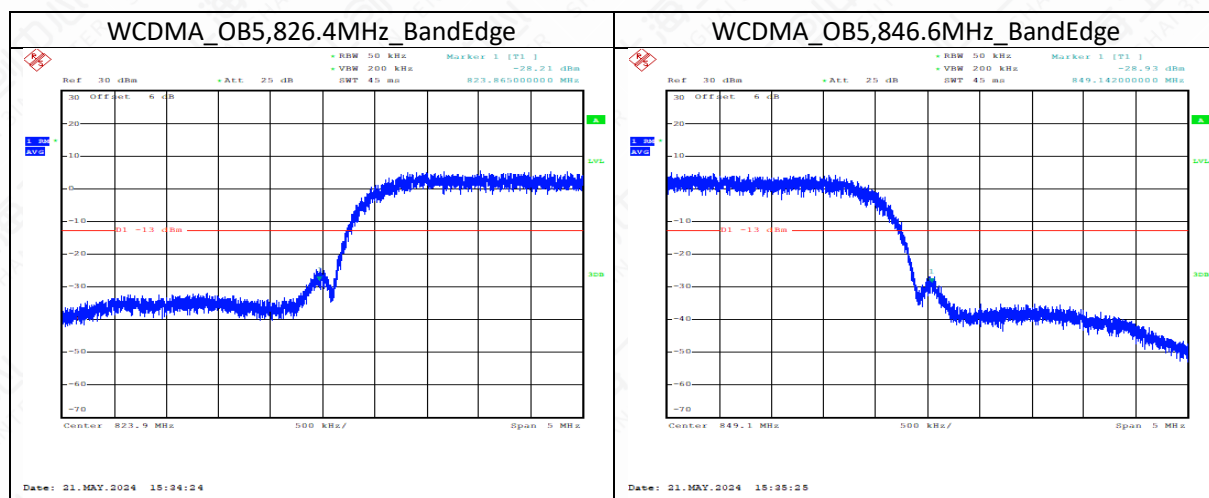

## 6.6 Frequency Stability

### 6.6.1 Measurement Limit

FCC §2.1055 The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (2) From  $-20^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

FCC §24.235 Frequency stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC §22.355 Frequency tolerance. Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

FCC §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 6.6.2 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at  $-30^{\circ}\text{C}$ .
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on mid channel of WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at  $10^{\circ}\text{C}$  increments from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ . Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at  $+50^{\circ}\text{C}$ .
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at  $10^{\circ}\text{C}$  increments from  $+50^{\circ}\text{C}$  to  $-30^{\circ}\text{C}$ . Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to  $\pm 0.5^{\circ}\text{C}$  during the measurement procedure.



### 6.6.3 Test Setup



### 6.6.4 Test results

Band	Channel	Temperature	Voltage	Frequency Error(Hz)	Frequency Error(ppm)	Result
OB5	4183	Normal	Low	-10.278	0.012	Pass
OB5	4183	Normal	Normal	-11.494	0.014	Pass
OB5	4183	Normal	High	-11.237	0.013	Pass
OB5	4183	50	Normal	-12.338	0.015	Pass
OB5	4183	40	Normal	-12.381	0.015	Pass
OB5	4183	30	Normal	-13.325	0.016	Pass
OB5	4183	20	Normal	-13.261	0.016	Pass
OB5	4183	10	Normal	-12.574	0.015	Pass
OB5	4183	0	Normal	-15.349	0.018	Pass
OB5	4183	-10	Normal	-12.474	0.015	Pass
OB5	4183	-20	Normal	-7.381	0.009	Pass
OB5	4183	-30	Normal	-9.57	0.011	Pass

## 6.7 Conducted Spurious Emission

### 6.7.1 Measurement Limit

FCC §22.917(a): The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §27.53(h):

AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz, and 2180–2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

(2) Additional protection levels. Notwithstanding the foregoing paragraph (h)(1) of this section:

(i) Operations in the 2180–2200 MHz band are subject to the out-of-band emission requirements set forth in § 27.1134 for the protection of federal government operations operating in the 2200–2290 MHz band.

(ii) For operations in the 2000–2020 MHz band, the power of any emissions below 2000 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iii) For operations in the 1915–1920 MHz band, the power of any emission between 1930–1995 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iv) For operations in the 1995–2000 MHz band, the power of any emission between 2005–2020 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

### 6.7.2 Method of Measurement

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II and WCDMA BANDIV, these equate to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.

2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.


3. The procedure to get the conducted spurious emission is as follows:

The trace mode is set to MaxHold to get the highest signal at each frequency; Wait 25 seconds; Get the result.


4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.



### 6.7.3 Test Setup

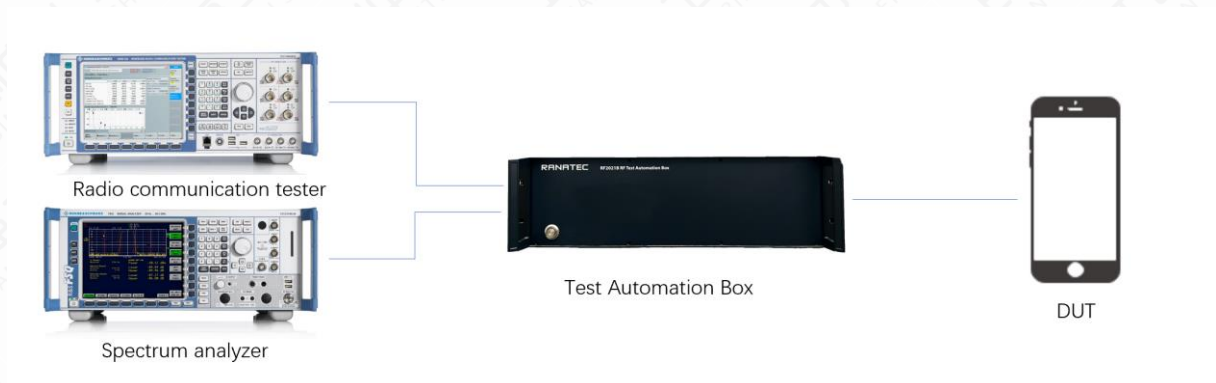

### 6.7.4 Measurement Limit

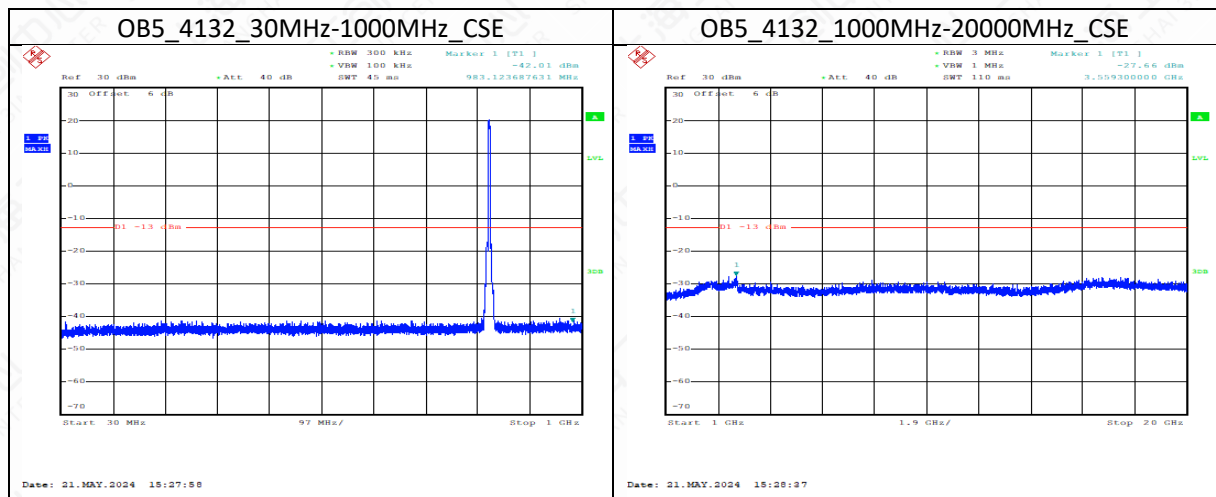

## 6.8 Emission Limit

### 6.8.1 Measurement Limit

After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least  $43 + 10 \log_{10} p$  (watts) dB. Limit -13 dBm

FCC §22.917(a): The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §24.238(a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC §27.53(h):

AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz, and 2180–2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

(2) Additional protection levels. Notwithstanding the foregoing paragraph (h)(1) of this section:

(i) Operations in the 2180–2200 MHz band are subject to the out-of-band emission requirements set forth in § 27.1134 for the protection of federal government operations operating in the 2200–2290 MHz band.

(ii) For operations in the 2000–2020 MHz band, the power of any emissions below 2000 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iii) For operations in the 1915–1920 MHz band, the power of any emission between 1930–1995 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.

(iv) For operations in the 1995–2000 MHz band, the power of any emission between 2005–2020 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.



## 6.8.2 Method of Measurement


The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.


The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

**The procedure of radiated spurious emissions is as follows**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

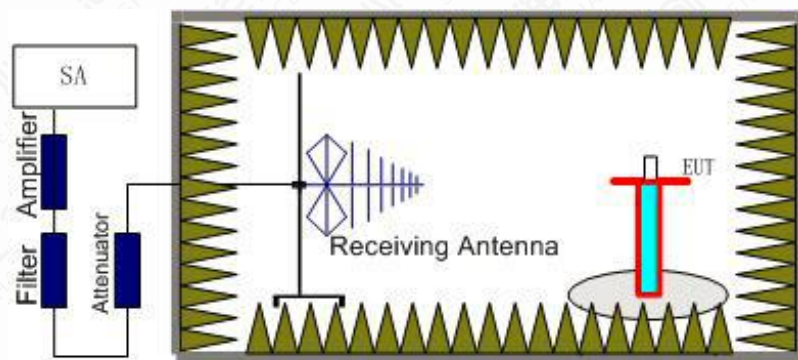

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

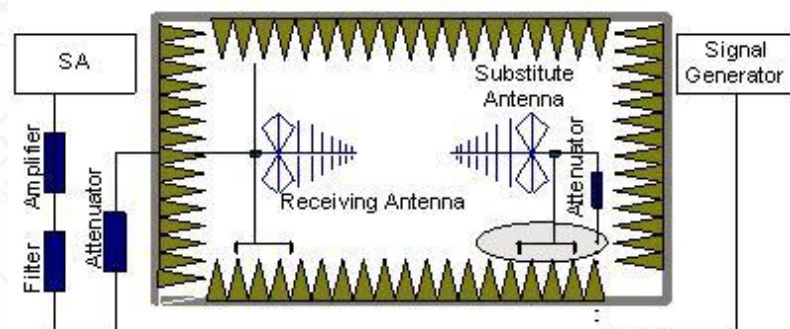

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The

test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (Pcl) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (Ga) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (Pcl) is the summation of the cable loss .

The test results are obtained as described below:

Power(EIRP)=PMea- Pcl+ Ga

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi

### 6.8.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band IV . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

test Frequency range: 30M-20G

**Only the worst mode data is provided**

**Mainly Supply**

**RSE-W2-T-S10-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3707.2	-56.37	6.6	7.9	-55.07	-13	42.07	V
5555.2	-56.78	8.2	9.8	-55.18	-13	42.18	V
7404.4	-50.68	9.7	11.6	-48.78	-13	35.78	V
9279.2	-59.06	10.7	12.7	-57.06	-13	44.06	V
11069.3	-54.56	12.1	12.3	-54.36	-13	41.36	H
12711.2	-53.21	12.7	12.3	-53.61	-13	40.61	H

**RSE-W2-T-S10-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3757.6	-52.76	6.6	7.9	-51.46	-13	38.46	V
5644.4	-54.84	8.3	10.2	-52.94	-13	39.94	H



7517.6	-48.17	9.7	11.6	-46.27	-13	33.27	V
9396.0	-58.43	10.7	12.7	-56.43	-13	43.43	V
11170.1	-54.56	12.1	12.3	-54.36	-13	41.36	H
13075.5	-54.77	13.0	12.3	-55.47	-13	42.47	H

**RSE-W2-T-S10-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3814.0	-53.95	6.7	7.9	-52.75	-13	39.75	V
5726.0	-57.49	8.5	10.2	-55.79	-13	42.79	V
7633.2	-43.57	9.7	11.8	-41.47	-13	28.47	V
10201.2	-56.96	11.3	12.5	-55.76	-13	42.76	V
12261.4	-52.56	12.7	12.3	-52.96	-13	39.96	V
15540.9	-50.25	14.5	12.3	-52.45	-13	39.45	H

**RSE-W4-T-S10-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3422.8	-55.6	6.3	7.8	-54.1	-13	41.10	V
6845.2	-54.73	9.2	10.9	-53.03	-13	40.03	V
8561.6	-55.57	10.3	12.6	-53.27	-13	40.27	V
10440.8	-55.51	11.6	12.3	-54.81	-13	41.81	H
11972.6	-55.71	12.6	12.3	-56.01	-13	43.01	V
13689.8	-53.77	13.9	12.3	-55.37	-13	42.37	V

**RSE-W4-T-S10-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3467.2	-59.74	6.4	7.8	-58.34	-13	45.34	H
6926.0	-55.72	9.3	11.1	-53.92	-13	40.92	V
8668.0	-55.73	10.3	12.7	-53.33	-13	40.33	V
10538.0	-56.45	11.6	12.3	-55.75	-13	42.75	H

12216.6	-54.26	12.6	12.3	-54.56	-13	41.56	V
13677.2	-54.43	13.9	12.3	-56.03	-13	43.03	H

**RSE-W4-T-S10-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3503.2	-56.94	6.4	7.8	-55.54	-13	42.54	V
7013.2	-54.09	9.3	11.1	-52.29	-13	39.29	V
8764.0	-56.89	10.4	12.7	-54.59	-13	41.59	V
10732.4	-56.3	11.7	12.3	-55.7	-13	42.70	V
12254.4	-53.61	12.7	12.3	-54.01	-13	41.01	H
14166.4	-54.14	13.7	12.3	-55.54	-13	42.54	V

**RSE-W5-T-S10-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1650.7	-62.25	4.5	4.7	-62.05	-13	49.05	H
2478.8	-56.51	5.4	5.6	-56.31	-13	43.31	H
3308.4	-63.96	6.2	6.9	-63.26	-13	50.26	H
4187.6	-62.46	7.0	8.9	-60.56	-13	47.56	V
5063.2	-60.66	7.8	9.6	-58.86	-13	45.86	H
5823.2	-60.98	8.4	10.2	-59.18	-13	46.18	V

**RSE-W5-T-S10-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1671.4	-61.89	4.5	4.7	-61.69	-13	48.69	H
2475.8	-56.29	5.4	5.6	-56.09	-13	43.09	H
3289.2	-64.57	6.2	6.9	-63.87	-13	50.87	V
4187.2	-61.5	7.0	8.9	-59.6	-13	46.60	V
5132.8	-58.59	7.9	9.4	-57.09	-13	44.09	H
6020.0	-60.03	8.6	10.2	-58.43	-13	45.43	V



**RSE-W5-T-S10-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
1695.0	-60.75	4.5	4.7	-60.55	-13	47.55	H
2538.1	-55.73	5.4	5.6	-55.53	-13	42.53	H
3380.8	-65.49	6.3	7.8	-63.99	-13	50.99	H
4263.2	-60.97	7.1	8.9	-59.17	-13	46.17	V
5070.0	-60.71	7.8	9.6	-58.91	-13	45.91	V
6164.4	-59.69	8.7	10.3	-58.09	-13	45.09	V

## Secondary Supply

**RSE-W2-T-S12-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3703.2	-54.91	6.6	7.9	-53.61	-13	40.61	V
5554.0	-57.23	8.2	9.8	-55.63	-13	42.63	V
7410.4	-56.01	9.7	11.6	-54.11	-13	41.11	V
9264.0	-52.8	10.7	12.7	-50.8	-13	37.80	V
11105.0	-54.28	12.1	12.3	-54.08	-13	41.08	V
12954.8	-55.37	13.2	12.3	-56.27	-13	43.27	H

**RSE-W2-T-S12-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3761.6	-52.83	6.6	7.9	-51.53	-13	38.53	V
5643.6	-60.96	8.3	10.2	-59.06	-13	46.06	V
7514.8	-54.83	9.7	11.6	-52.93	-13	39.93	V
9405.2	-54.76	10.7	12.7	-52.76	-13	39.76	V
11280.4	-54.79	12.1	12.3	-54.59	-13	41.59	H
13097.6	-55.17	13.0	12.3	-55.87	-13	42.87	H

**RSE-W2-T-S12-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3813.2	-49.8	6.7	7.9	-48.6	-13	35.60	V
5724.0	-59.51	8.5	10.2	-57.81	-13	44.81	H
7633.2	-51.66	9.7	11.8	-49.56	-13	36.56	V
9542.8	-55.04	10.7	12.7	-53.04	-13	40.04	V
11439.6	-55.31	12.1	12.3	-55.11	-13	42.11	V
13346.4	-53.02	13.6	12.3	-54.32	-13	41.32	V

**Thirdly Supply**
**RSE-W2-T-S16-L**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3707.2	-56.41	6.6	7.9	-55.11	-13	42.11	H
5554.0	-56.38	8.2	9.8	-54.78	-13	41.78	V
7406.8	-49.39	9.7	11.6	-47.49	-13	34.49	V
9263.2	-55.85	10.7	12.7	-53.85	-13	40.85	V
11177.8	-54.59	12.1	12.3	-54.39	-13	41.39	H
12747.9	-52.29	12.7	12.3	-52.69	-13	39.69	H

**RSE-W2-T-S16-M**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3757.6	-55.63	6.6	7.9	-54.33	-13	41.33	V
5637.2	-57.74	8.3	10.2	-55.84	-13	42.84	V
7515.6	-48.87	9.7	11.6	-46.97	-13	33.97	V
9398.8	-58.02	10.7	12.7	-56.02	-13	43.02	V
11215.2	-54.54	12.1	12.3	-54.34	-13	41.34	V
13076.6	-54.5	13.0	12.3	-55.2	-13	42.20	H



**RSE-W2-T-S16-H**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBd)	Test Result (dBm)	Limit(dBm)	Margin(dBm)	Polarization
3813.2	-52.18	6.7	7.9	-50.98	-13	37.98	V
5726.4	-54.08	8.5	10.2	-52.38	-13	39.38	V
7635.2	-45.82	9.7	11.8	-43.72	-13	30.72	V
9537.6	-57.42	10.7	12.7	-55.42	-13	42.42	H
11370.6	-54.31	12.1	12.3	-54.11	-13	41.11	V
13346.4	-51.81	13.6	12.3	-53.11	-13	40.11	V

## Annex A: Revised History

Version	Revised Content
V0	Initial



## Annex B: Accreditation Certificate



END OF REPORT