

2_WCDMA II_RMC_Body Left_Ch 9400

DUT: TF701

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.185$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400 2/Area Scan (41x171x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.738 W/kg

Ch9400 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.26 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 0.756 W/kg

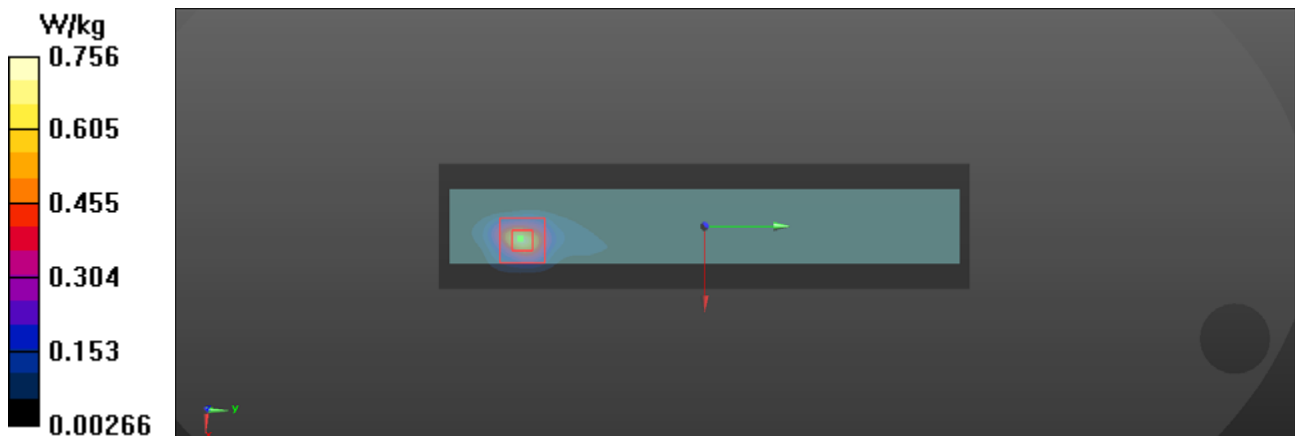

4_WCDMA IV_RMC_Body Left_Ch 1513

DUT: TF701

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL1750 Medium parameters used : $f = 1752.6$ MHz; $\sigma = 1.307$ S/m; $\epsilon_r = 38.997$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1752.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1513 4/Area Scan (41x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.814 W/kg

Ch1513 4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.53 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.879 W/kg

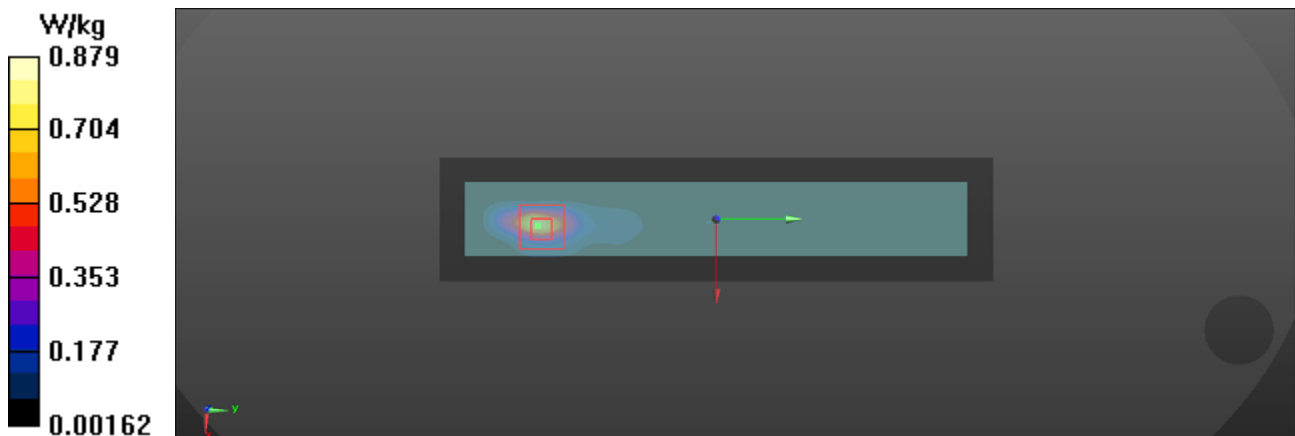

5_WCDMA V_RMC_Body Front_Ch 4183

DUT: TF701

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.912$;
 $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4183/Area Scan (131x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.534 W/kg

Ch4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.21 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.546 W/kg

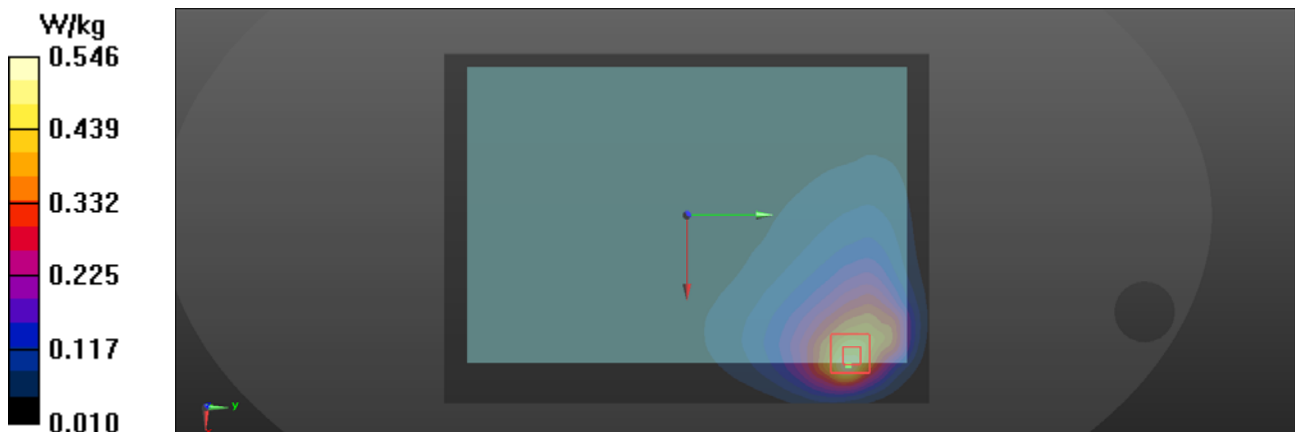

7_LTE FDD Band 12 & 17_10M_QPSK_1RB_0Offset_Body Front_Ch 23095

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.439$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (121x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.785 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.03 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 36.7%

Maximum value of SAR (measured) = 0.844 W/kg

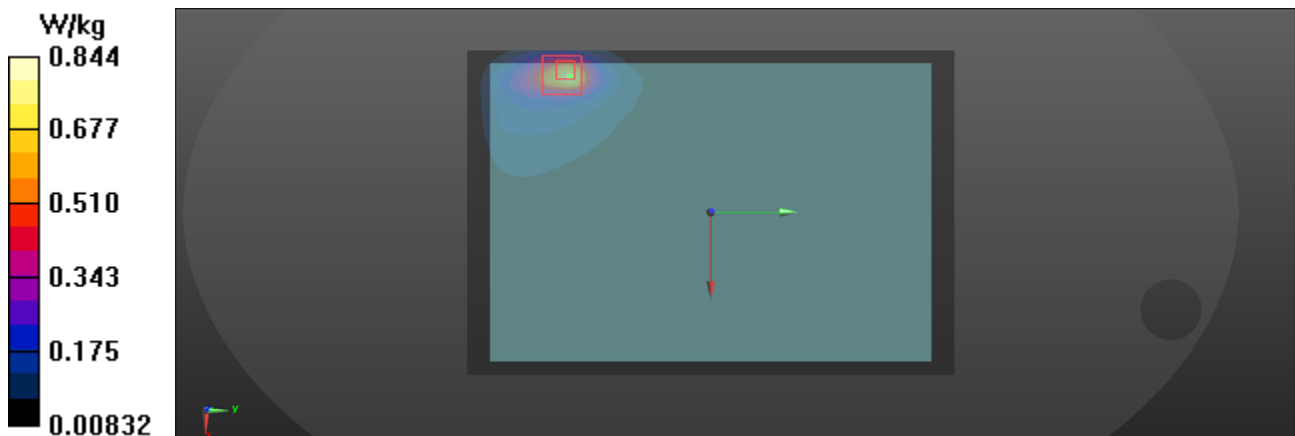

11_LTE FDD Band 13_10M_QPSK_1RB_0Offset_Body Front_Ch 23230

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.147$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 782 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23230/Area Scan (121x181x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.540 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.58 V/m ; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.379 W/kg ; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 0.631 W/kg

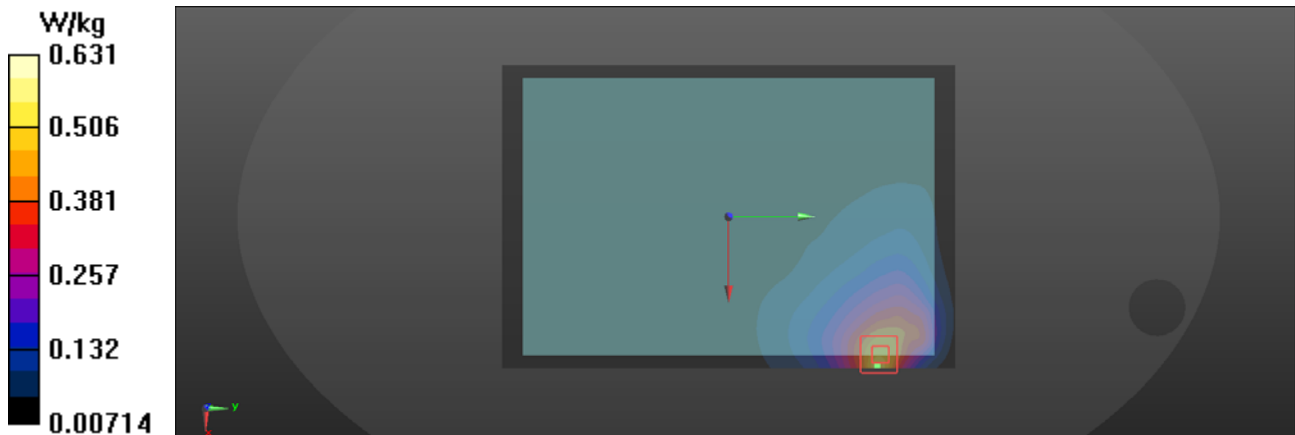

16_LTE FDD Band 14_10M_QPSK_1RB_0Offset_Body Top_Ch 23330

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 793$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.141$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 793 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23330/Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.700 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.60 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.171 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.531 W/kg

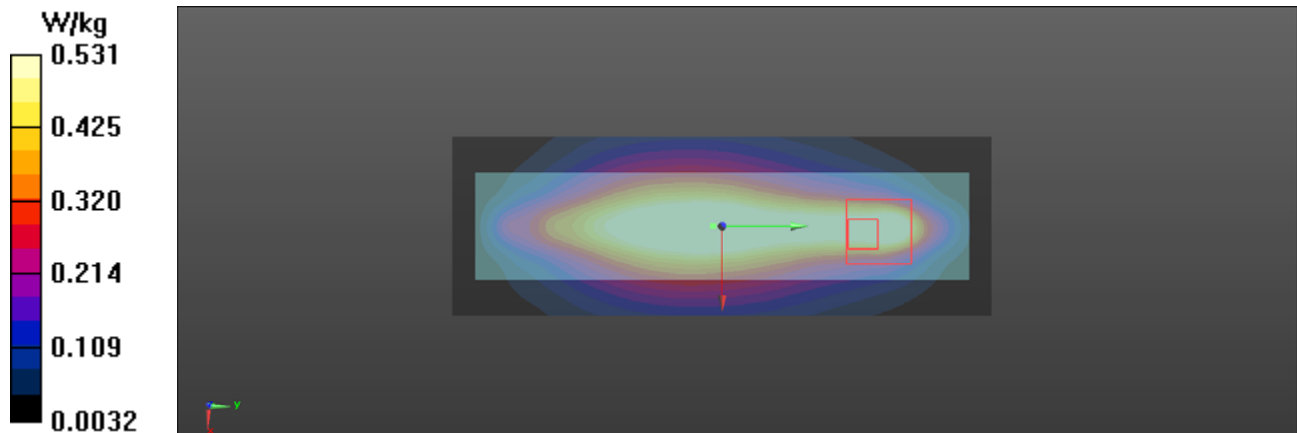

19_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Front_Ch 26865

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.956$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26865/Area Scan (121x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.596 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.32 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.6%

Maximum value of SAR (measured) = 0.684 W/kg

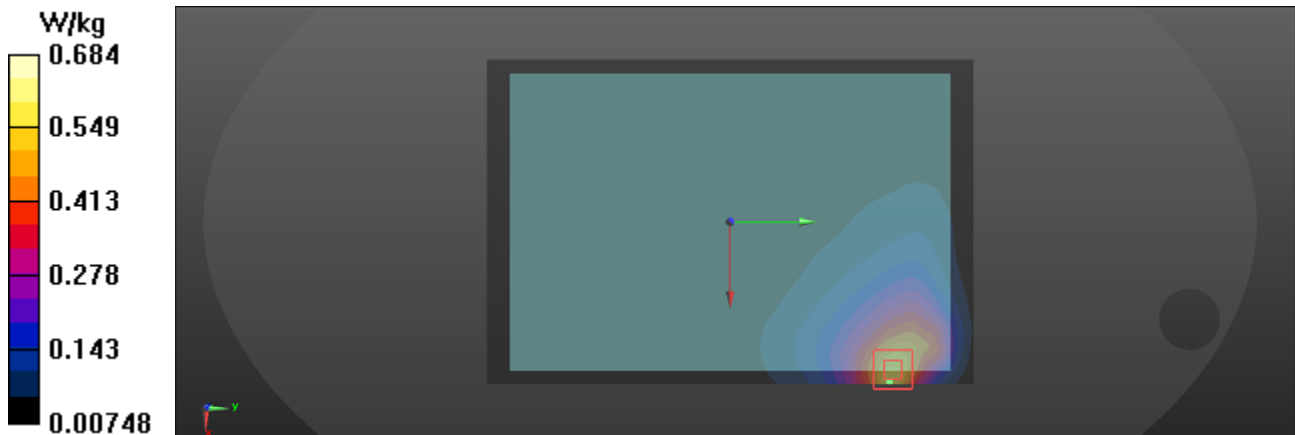

24_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Left_Ch 21350

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 39.225$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2560 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch21350/Area Scan (51x211x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.953 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.03 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 0.986 W/kg

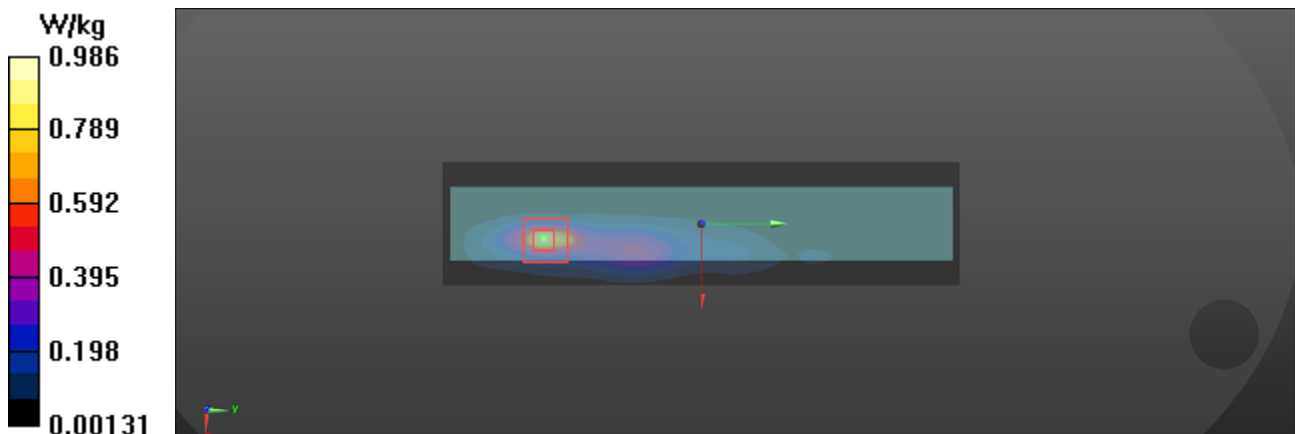

28_LTE FDD Band 2 & 25_20M_QPSK_1RB_0Offset_Body Left_Ch 18900

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.185$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (41x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.437 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.96 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.399 W/kg

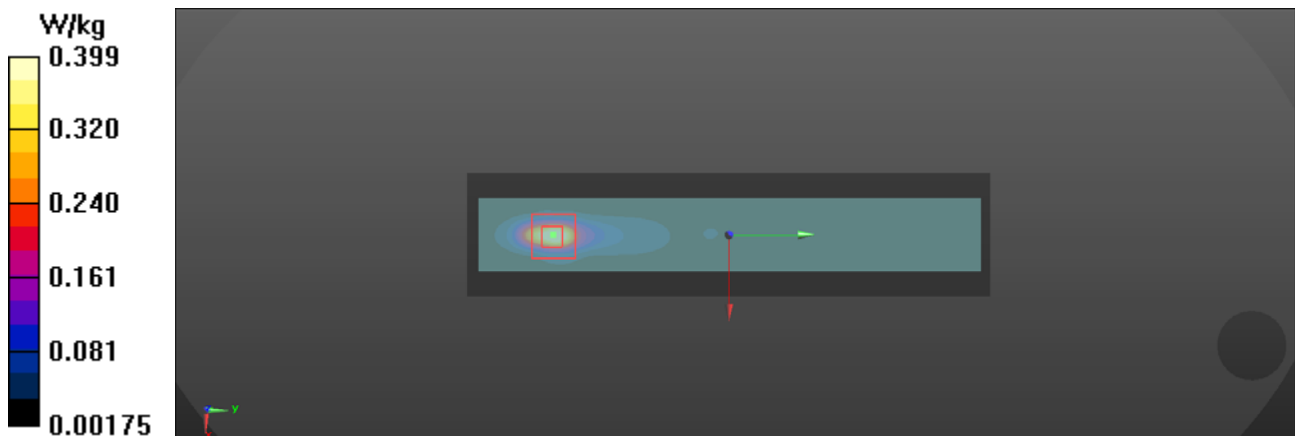

32_LTE FDD Band 4 & 66_20M_QPSK_1RB_0Offset_Body Left_Ch 132322

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 39.018$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (41x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.571 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.464 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 0.639 W/kg

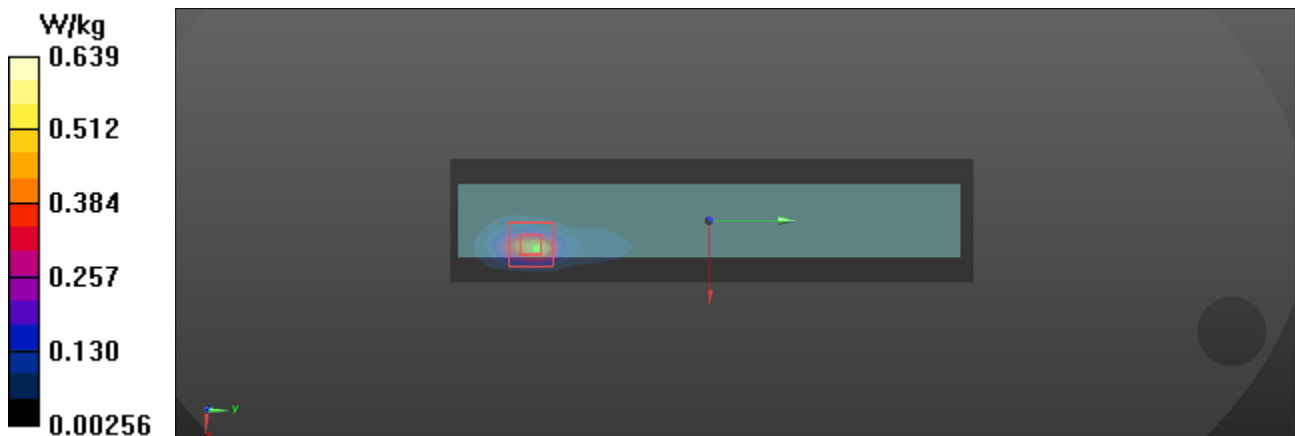

35_LTE FDD Band 71_20M_QPSK_1RB_0Offset_Body Front_Ch 133297

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.446$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 680.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch133297/Area Scan (131x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.576 W/kg

Ch133297/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.11 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 38.7%

Maximum value of SAR (measured) = 0.591 W/kg

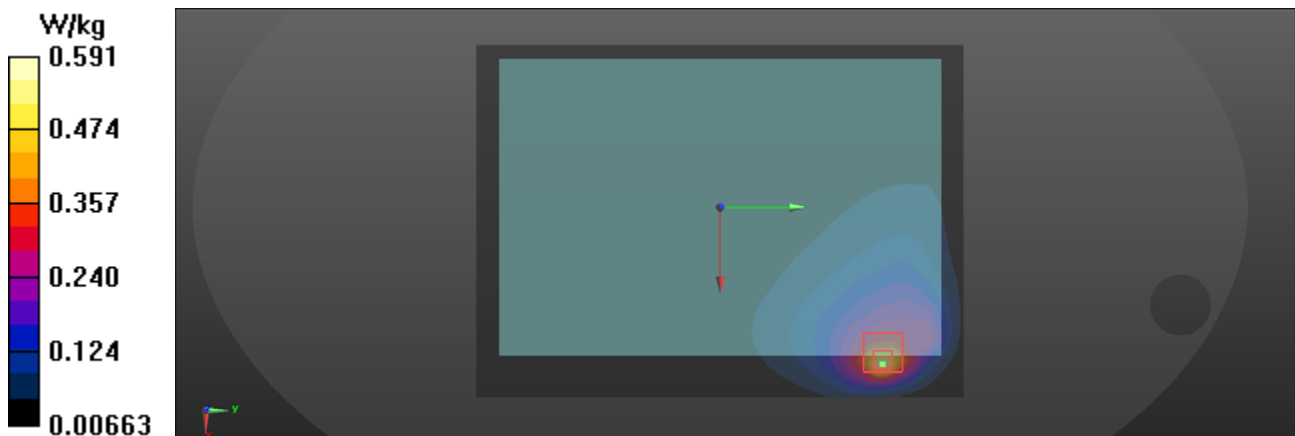

40_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Right_Ch 40740

DUT: TF701

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787

Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 39.144$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (51x211x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.957 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.65 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 0.948 W/kg

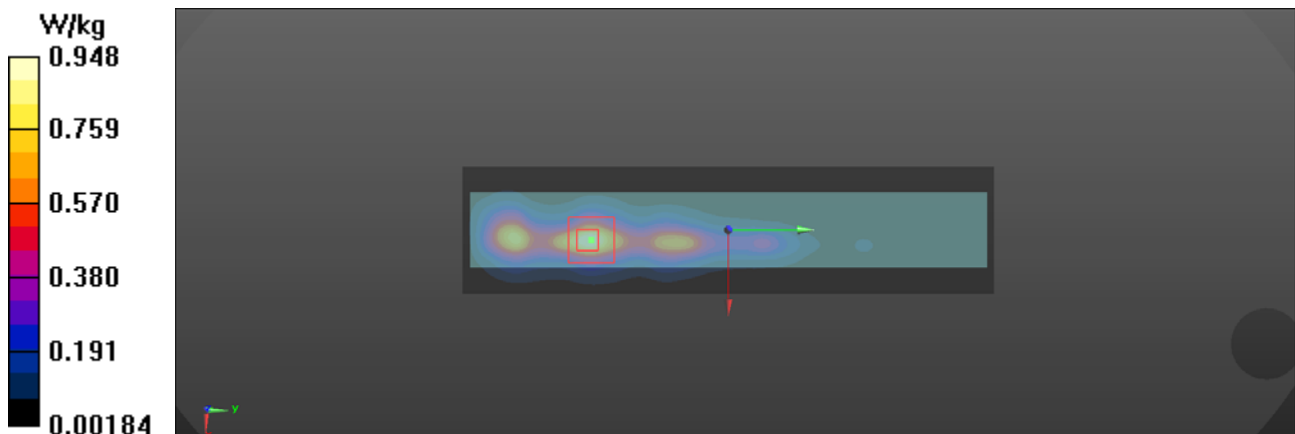

44_WLAN2.4G_802.11b 1Mbps_Body Top_Ch1

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1


Medium: HSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.755$ S/m; $\epsilon_r = 39.473$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2412 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1/Area Scan (41x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.55 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 28.37 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.94 W/kg
SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.260 W/kg
Smallest distance from peaks to all points 3 dB below = 5 mm
Ratio of SAR at M2 to SAR at M1 = 43.7%
Maximum value of SAR (measured) = 1.41 W/kg

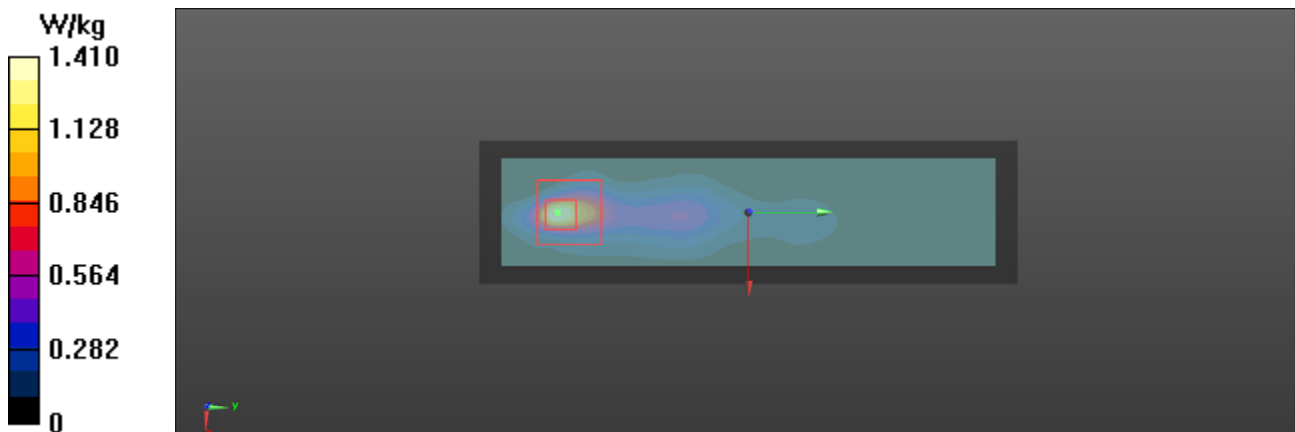

45_WLAN2.4G_802.11b 1Mbps_Body Front_Ch1

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz;Duty Cycle: 1:1


Medium: HSL2450 Medium parameters used : $f = 2412$ MHz; $\sigma = 1.755$ S/m; $\epsilon_r = 39.473$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2412 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch1/Area Scan (151x221x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.184 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.140 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.300 W/kg
SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.048 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 41%
Maximum value of SAR (measured) = 0.212 W/kg

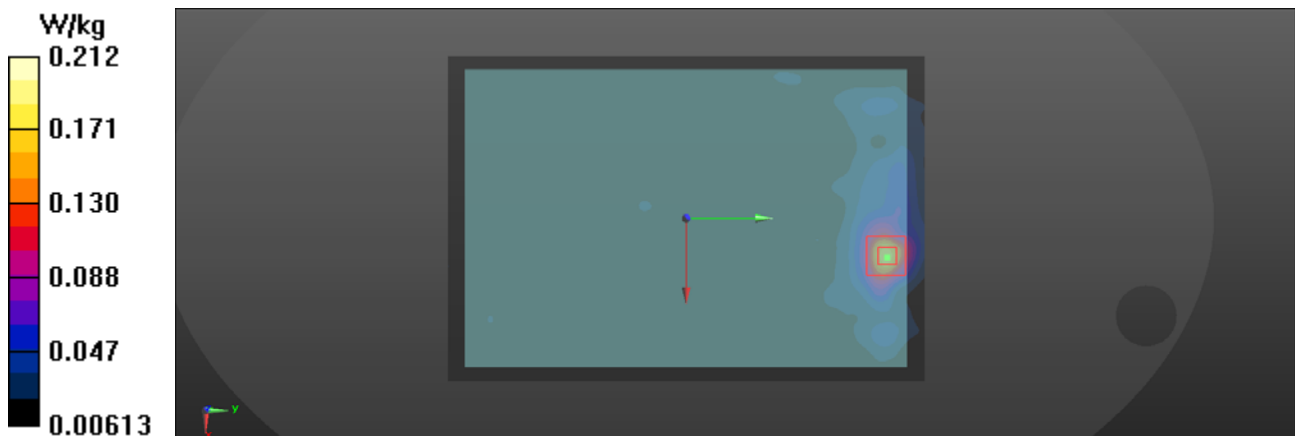

48_BT_1DH5_Body Left_Ch 78

DUT: TF701


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium: HSL2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2480 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch78/Area Scan (51x211x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0318 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 2.562 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.0600 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00542 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 37.3%
Maximum value of SAR (measured) = 0.0273 W/kg

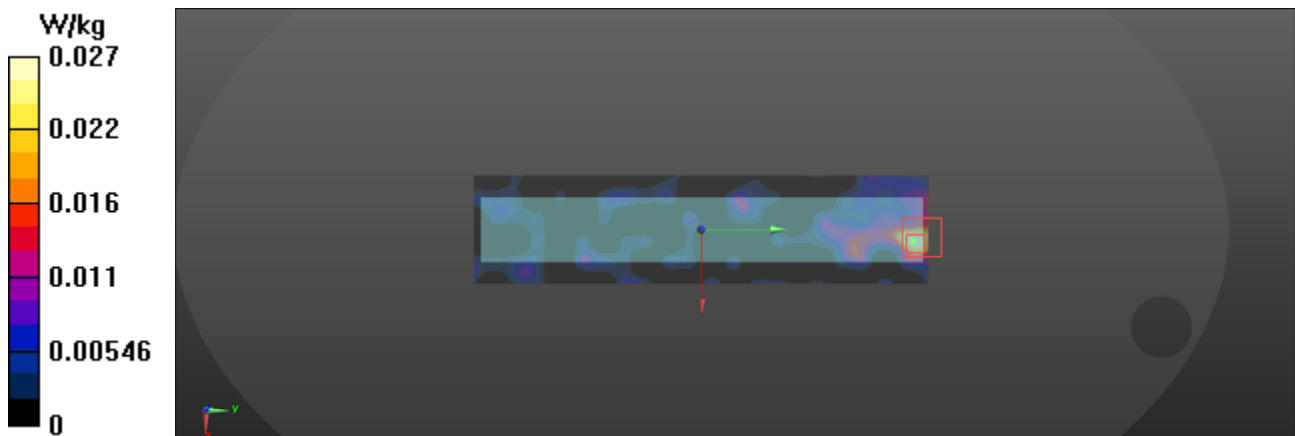

49_WLAN5G_802.11a 6Mbps_Body Front_Ch48

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 5240 MHz;Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.683$ S/m; $\epsilon_r = 35.09$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5240 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch48/Area Scan (181x261x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.15 W/kg

Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.929 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.91 W/kg

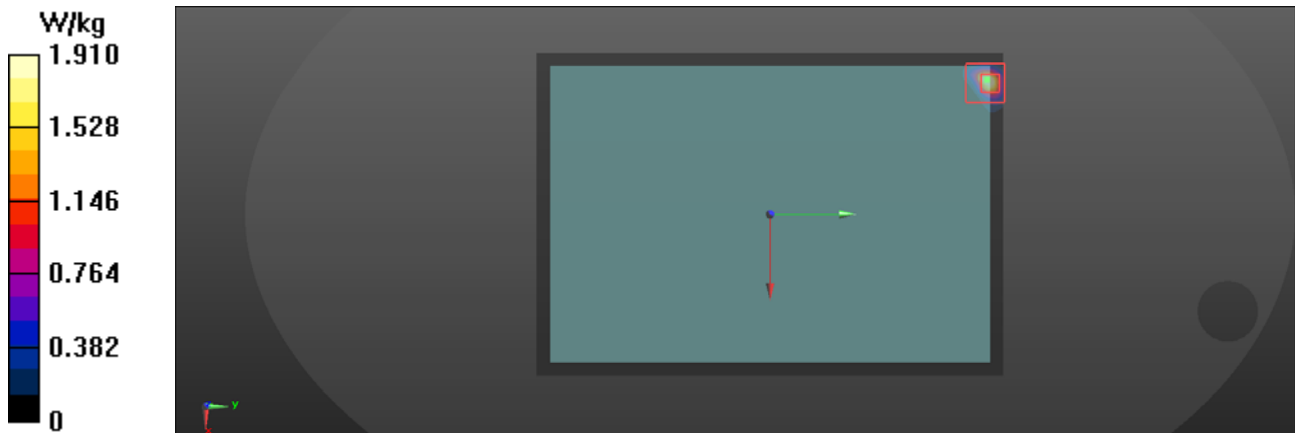

52_WLAN5G_802.11a 6Mbps_Body Top_Ch48

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 5240 MHz;Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.683$ S/m; $\epsilon_r = 35.09$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5240 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch48/Area Scan (51x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.849 W/kg

Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.605 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.872 W/kg

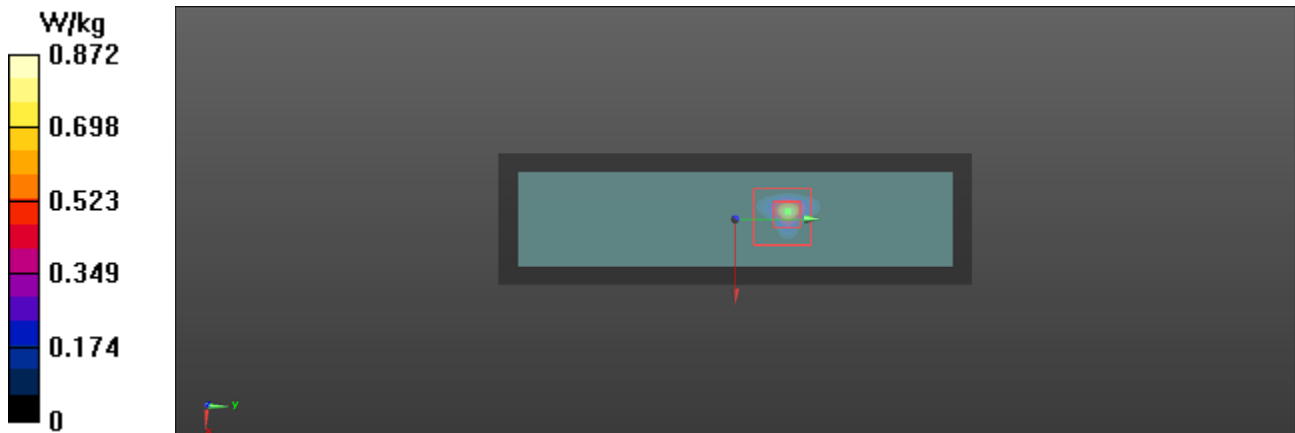

54_WLAN5G_802.11n HT40 6Mbps_Body Top_Ch151

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5755$ MHz; $\sigma = 5.333$ S/m; $\epsilon_r = 34.02$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5755 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch151/Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.35 W/kg

Ch151/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.95 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.39 W/kg

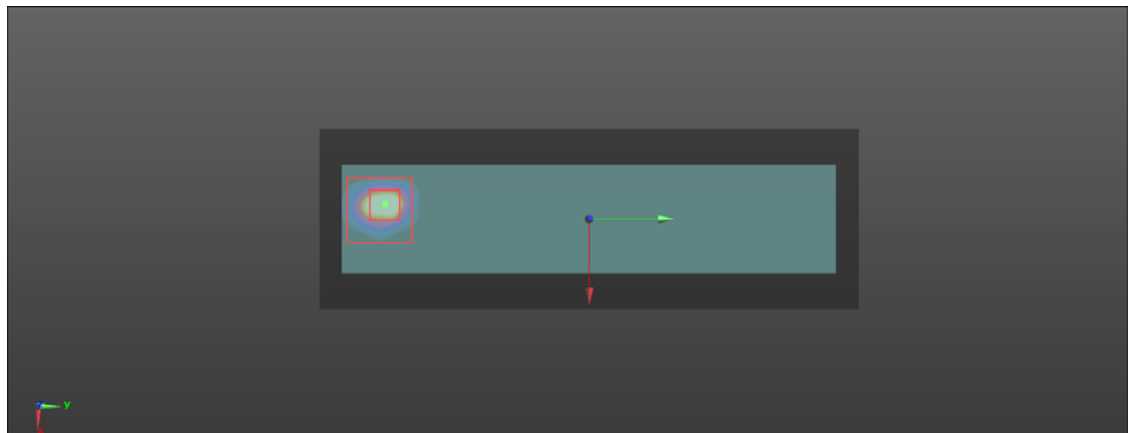

56_WLAN5G_802.11n HT40 6Mbps_Body Top_Ch151

DUT: TF701

Communication System: UID 0, WIFI (0); Frequency: 5755 MHz;Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5755$ MHz; $\sigma = 5.333$ S/m; $\epsilon_r = 34.02$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5755 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch151/Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Ch151/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.07 W/kg

