

TEST REPORT

Applicant Name: JEM ACCESSORIES INC.
Address: 32 Brunswick Avenue, Edison, New Jersey, United States, 08817
Report Number: 2501R31585E-RF-00B
FCC ID: 2AHAS-EOP11004J

Test Standard (s)


FCC PART 15.407

Sample Description

Product Type: Smart 5Ghz 2K socket camera with light
Model No.: EOP1-1004-WHT
Multiple Model(s) No.: EOP1-1003, EOP1-1003-BLK, EOP1-1003-WHT, EOP1-1004, EOP1-1004-BLK
Trade Mark: Energizer **Energizer**[®]
Date Received: 2025-03-24
Issue Date: 2025-06-25

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko Wu
RF Engineer

Approved By:

Michelle Zeng
RF Supervisor

Note: The information marked[#] is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
REQUIREMENTS AND TEST PROCEDURES	14
CONDUCTED EMISSIONS	14
UNDESIRABLE EMISSION.....	16
26 dB & 6dB EMISSION BANDWIDTH	20
CONDUCTED TRANSMITTER OUTPUT POWER.....	22
POWER SPECTRAL DENSITY	23
DUTY CYCLE	24
ANTENNA REQUIREMENT.....	25
TEST DATA AND RESULTS.....	26
CONDUCTED EMISSIONS	26
UNDESIRABLE EMISSION.....	29
RF CONDUCTED DATA	193
RF EXPOSURE EVALUATION	194
EUT PHOTOGRAPHS.....	195
TEST SETUP PHOTOGRAPHS	196

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501R31585E-RF-00B	Original Report	2025-06-25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Smart 5Ghz 2K socket camera with light
Tested Model	EOP1-1004-WHT
Multiple Model(s)	EOP1-1003,EOP1-1003-BLK, EOP1-1003-WHT, EOP1-1004,EOP1-1004-BLK
Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40
Maximum Conducted Average Output Power	5150-5250MHz: 14.96dBm; 5250-5350MHz: 14.97dBm 5470-5725MHz: 15.58dBm; 5725-5850MHz: 15.47dBm
Modulation Technique	OFDM
Antenna Specification[#]	5150-5250MHz: 1.45dBi; 5250-5350MHz: 1.51dBi 5470-5725MHz: 1.45dBi; 5725-5850MHz: 1.49dBi
Voltage Range	AC 120V
Sample serial number	For model: EOP1-1004-WHT:307J-2 for Radiated Emissions above 1GHz Test For model: EOP1-1003-BLK: 307J-3 for Conducted and Radiated Emissions below 1GHz Test 307J-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Note 1: The multiple models are electrically identical with the test model except for model No. and color, appearance, power board and light board, they are electrical identical in RF schematics that model EOP1-1004-WHT was selected for RF testing, and for radiated emission above 1 GHz test items, just the model EOP1-1003-BLK with the worst data according to the data from 2.4G Wi-Fi report, for conducted emission and for radiated emission below 1 GHz test items, and more details please refer to the declaration letter[#] for more detail, which was provided by manufacturer.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	109.2kHz(k=2, 95% level of confidence)	
RF Frequency	56.6Hz(k=2, 95% level of confidence)	
RF output power, conducted	0.86dB(k=2, 95% level of confidence)	
Unwanted Emission, conducted	1.60dB(k=2, 95% level of confidence)	
Power Spectral Density	0.90dB(k=2, 95% level of confidence)	
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature	±1°C	
Humidity	±1%	
Supply voltages	±0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a/n-HT20 mode: channel 36, 40, 48 were tested;

For 802.11n-HT40 mode: channel 38, 46 were tested;

For 5250-5350MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320

For 802.11a, 802.11n-HT20 mode: channel 52, 56, 64 were tested;

For 802.11n-HT40 mode: channel 54, 62 were tested;

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
102	5510	126	5630
104	5520	128	5640
108	5540	132	5660
110	5550	134	5670
112	5560	136	5680
116	5580	140	5700
118	5590	142	5710
120	5600	144	5720

For 802.11a, 802.11n-HT20 mode: channel 100, 116, 140, 144 were tested;

For 802.11n-HT40 mode: channel 102, 110, 134, 142 were tested;

For 5725-5850MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

For 802.11a/n-HT20 mode: channel 149, 157, 165 were tested;

For 802.11n-HT40 mode: channel 151, 159 were tested;

EUT Exercise Software

Exercise Software [#]	SecureCRTPortable.exe		
5150-5250 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	-4
	Middle	6Mbps	-4
	High	6Mbps	-4
802.11n-HT20	Low	MCS0	-4
	Middle	MCS0	-4
	High	MCS0	-4
802.11n-HT40	Low	MCS0	-4
	High	MCS0	-4
5250-5350 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	-2
	Middle	6Mbps	-2
	High	6Mbps	-2
802.11n-HT20	Low	MCS0	-2
	Middle	MCS0	-2
	High	MCS0	-2
802.11n-HT40	Low	MCS0	-2
	High	MCS0	-2

5470-5725 MHz Band

Mode	Test Channels	Data rate	Power Level [#]
			ANT 1
802.11a	Low	6Mbps	-2
	Middle	6Mbps	-2
	High	6Mbps	-2
	Cross	6Mbps	-2
802.11n-HT20	Low	MCS0	-2
	Middle	MCS0	-2
	High	MCS0	-2
	Cross	MCS0	-2
802.11n-HT40	Low	MCS0	-2
	High	MCS0	-2
	Cross	MCS0	-2

5725-5850 MHz Band

Mode	Test Channels	Data rate	Power Level [#]
			ANT 1
802.11a	Low	6Mbps	-4
	Middle	6Mbps	-4
	High	6Mbps	-4
802.11n-HT20	Low	MCS0	-4
	Middle	MCS0	-4
	High	MCS0	-4
802.11n-HT40	Low	MCS0	-4
	High	MCS0	-4

Note: The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	lamp base	Unknown	Unknown
Sandisk	TF card	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded detachable AC cable	1.5	lamp base	LISN/AC Mains

Block Diagram of Test Setup


For Conducted Emissions:

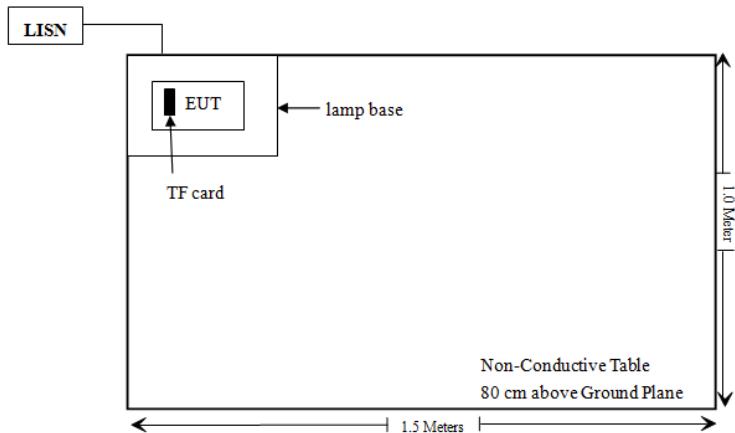

For Radiated Emissions below 1GHz:

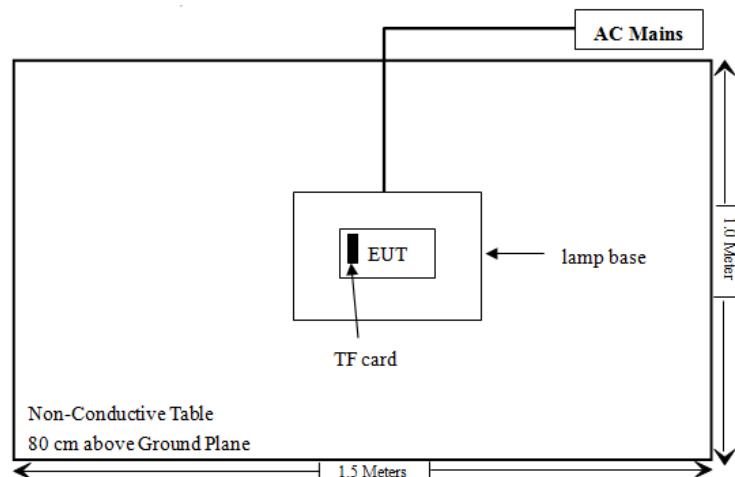

For Radiated Emissions above 1GHz:

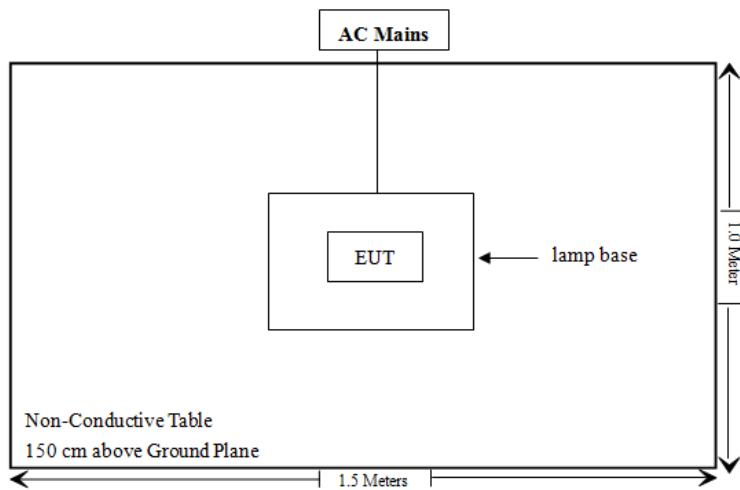

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
/	Duty Cycle	/
§1.1307 (b) & §2.1091	MPE-Based Exemption	Compliant

Compliant*: Please refer to the DFS report 2501R31585E-RF-00C.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is $17.03 \text{ dBm} \leq 27 \text{ dBm}$ (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/04/29	2026/04/28
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/04/29	2026/04/28
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310 N	186238	2025/04/29	2026/04/28
Unknown	Cable	XH500C	J-10M-A	2025/04/29	2026/04/28
Unknown	Cable	Chamber A Cable 1	N/A	2025/04/29	2026/04/28
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Unknown	10dB Attenuator	Unknown	F-03-EM065	2024/06/27	2025/06/26
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

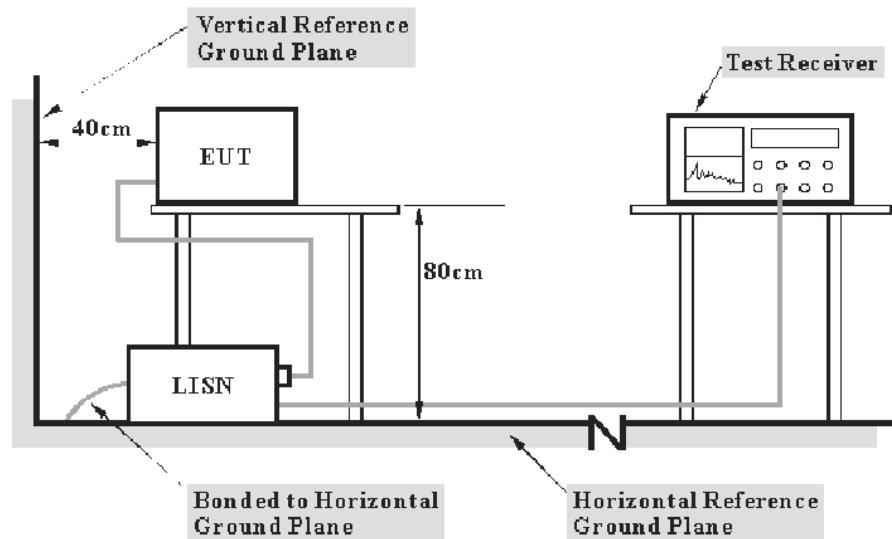

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

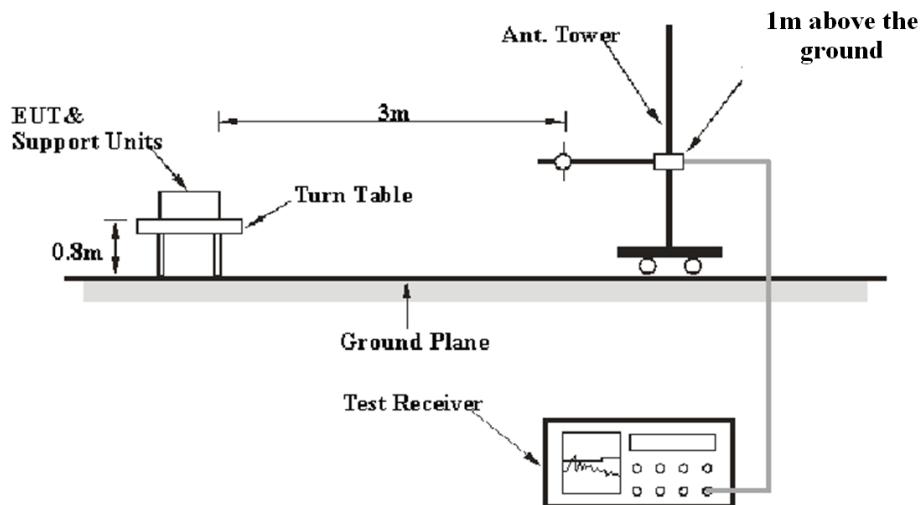

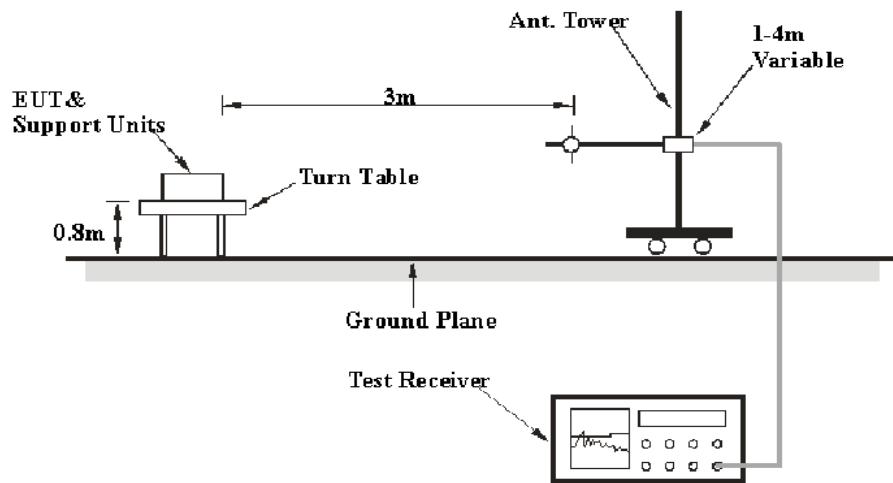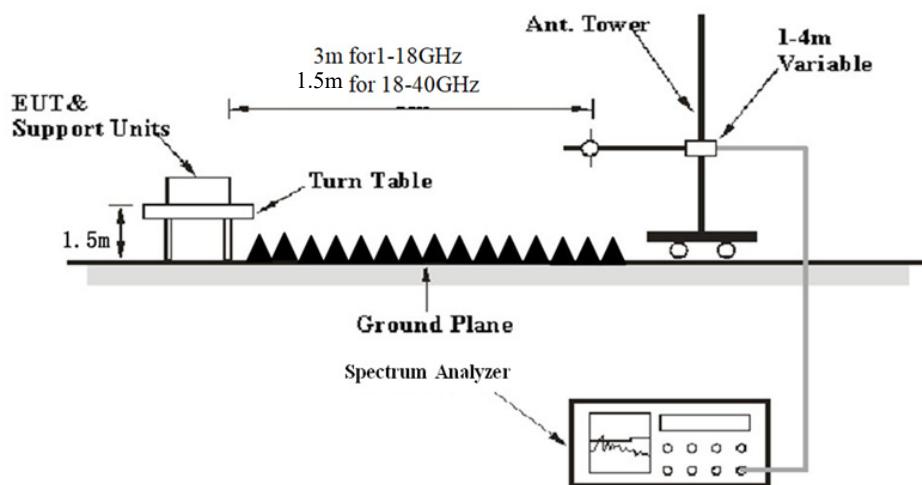30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dB μ V/m
 E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m
 d_{Meas} is the measurement distance, in m
 $d_{\text{SpecLimit}}$ is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \log(1.5/3) = -6.0$ dB, for 18-40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

26 dB & 6dB Emission Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

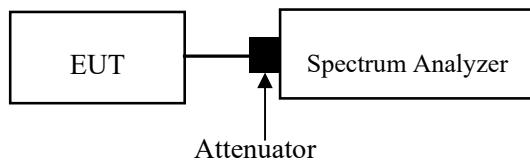

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

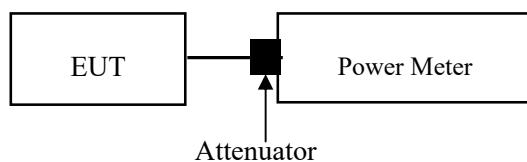

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

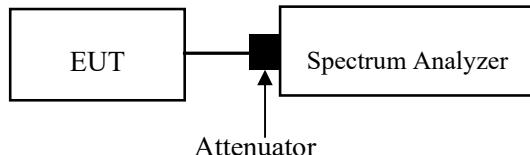

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

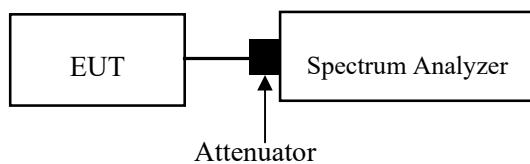

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain [#] (dBi)	Impedance (Ω)	Frequency Range (MHz)
FPC	1.45	50	5150-5250
FPC	1.51	50	5250-5350
FPC	1.45	50	5470-5725
FPC	1.49	50	5725-5850

Result: Compliant


TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	22.9	Relative Humidity (%)	67
ATM Pressure (kPa)	100.9	Test engineer	Macy.shi
Test date	2025.5.30		
EUT operation mode	Transmitting(Maximum output power mode, 802.11a 5720 MHz)		
Note	1. According to the difference test data among test multiple models from 2.4G Wi-Fi report, the model EOP1-1003-BLK was the worst case, so just show the worst case in this report.		

For model: EOP1-1003-BLK


AC 120V 60 Hz, Line

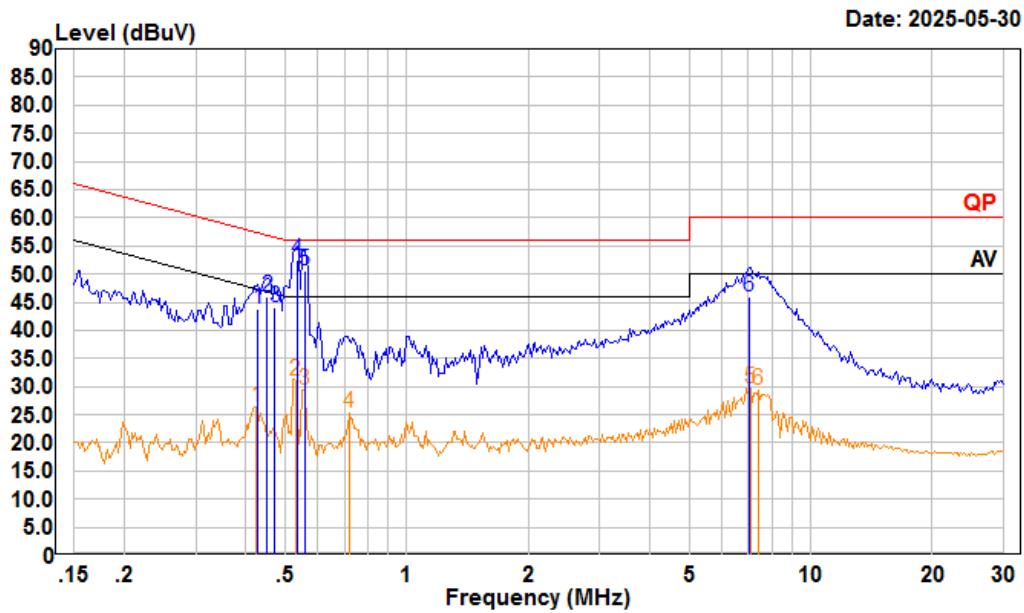

Freq	Read		LISN	Cable	Limit	Over	Remark
	MHz	dBuV	dBuV	Factor	dB	dBuV	dB
1	0.428	23.10	43.71	10.40	10.21	57.29	-13.58 QP
2	0.452	25.30	45.93	10.43	10.20	56.85	-10.92 QP
3	0.471	23.30	43.95	10.46	10.19	56.49	-12.54 QP
4	0.535	31.80	52.54	10.54	10.20	56.00	-3.46 QP
5	0.558	29.89	50.67	10.57	10.21	56.00	-5.33 QP
6	7.025	25.20	46.03	10.60	10.23	60.00	-13.97 QP

Freq	Read		LISN	Cable	Limit	Over	Remark
	MHz	dBuV	dBuV	Factor	dB	dBuV	dB
1	0.424	5.80	26.40	10.39	10.21	47.37	-20.97 Average
2	0.529	10.40	31.12	10.53	10.19	46.00	-14.88 Average
3	0.558	8.63	29.41	10.57	10.21	46.00	-16.59 Average
4	0.720	4.34	25.26	10.69	10.23	46.00	-20.74 Average
5	7.100	8.91	29.73	10.59	10.23	50.00	-20.27 Average
6	7.407	8.69	29.47	10.55	10.23	50.00	-20.53 Average

AC 120V 60 Hz, Neutral

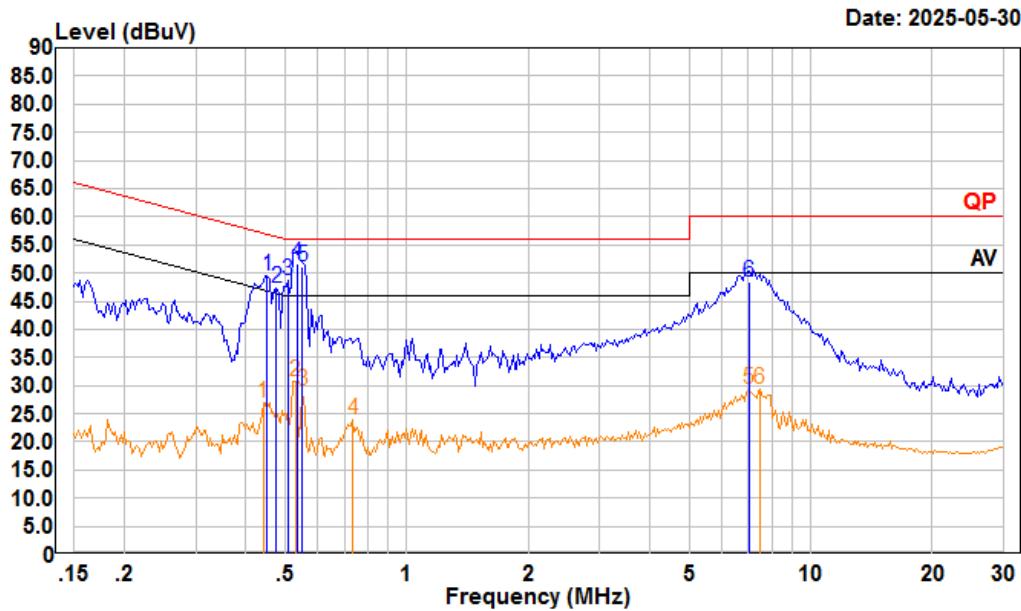


Freq	Read		LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV					
1	0.452	28.87	49.61	10.54	10.20	56.85	-7.24 QP
2	0.476	26.64	47.40	10.57	10.19	56.41	-9.01 QP
3	0.507	27.86	48.64	10.60	10.18	56.00	-7.36 QP
4	0.535	31.02	51.80	10.58	10.20	56.00	-4.20 QP
5	0.552	30.24	51.02	10.57	10.21	56.00	-4.98 QP
6	7.025	27.46	48.29	10.60	10.23	60.00	-11.71 QP
Read		LISN		Cable		Limit	
Freq	Level	Level	Factor	Loss	Line	Over	Remark
MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.442	6.20	26.93	10.53	10.20	47.02	-20.09 Average
2	0.529	9.84	30.61	10.58	10.19	46.00	-15.39 Average
3	0.552	8.25	29.03	10.57	10.21	46.00	-16.97 Average
4	0.735	3.18	23.94	10.53	10.23	46.00	-22.06 Average
5	7.025	8.44	29.27	10.60	10.23	50.00	-20.73 Average
6	7.486	8.63	29.42	10.56	10.23	50.00	-20.58 Average

Undesirable Emission

Temperature (°C)	22.9&25.8	Relative Humidity (%)	47&50.1
ATM Pressure (kPa):	100.2&101.3	Test engineer:	Alex Yan&Zenos Qiao
Test date:	2025.4.17&2025.6.25		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, 802.11a 5720 MHz) Above 1GHz: Transmitting		
Note:	<ol style="list-style-type: none">1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded.2. For the radiated spurious emission below 1 GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.4. For radiated emission test below 1 GHz, according to the difference test data among test model and multiple models from 2.4G Wi-Fi report, the model EOP1-1003-BLK was the worst case, so just show the worst case in this report.		

Below 1GHz:**For model: EOP1-1003-BLK**


9kHz-150kHz

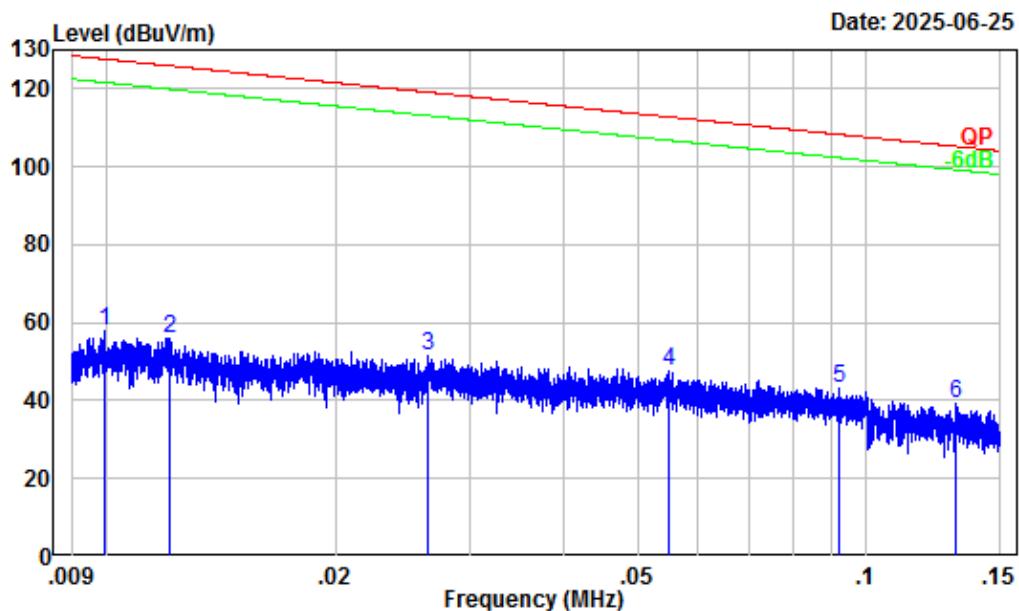

Site : Chamber A
Condition : 3m
Project Number : 2501R31585E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.31	25.51	57.82	127.64	-69.82	Peak
2	0.012	31.90	24.23	56.13	125.93	-69.80	Peak
3	0.027	29.16	22.21	51.37	119.14	-67.77	Peak
4	0.055	25.90	21.57	47.47	112.80	-65.33	Peak
5	0.092	22.57	20.71	43.28	108.34	-65.06	Peak
6	0.131	20.18	19.07	39.25	105.26	-66.01	Peak


150kHz-30MHz

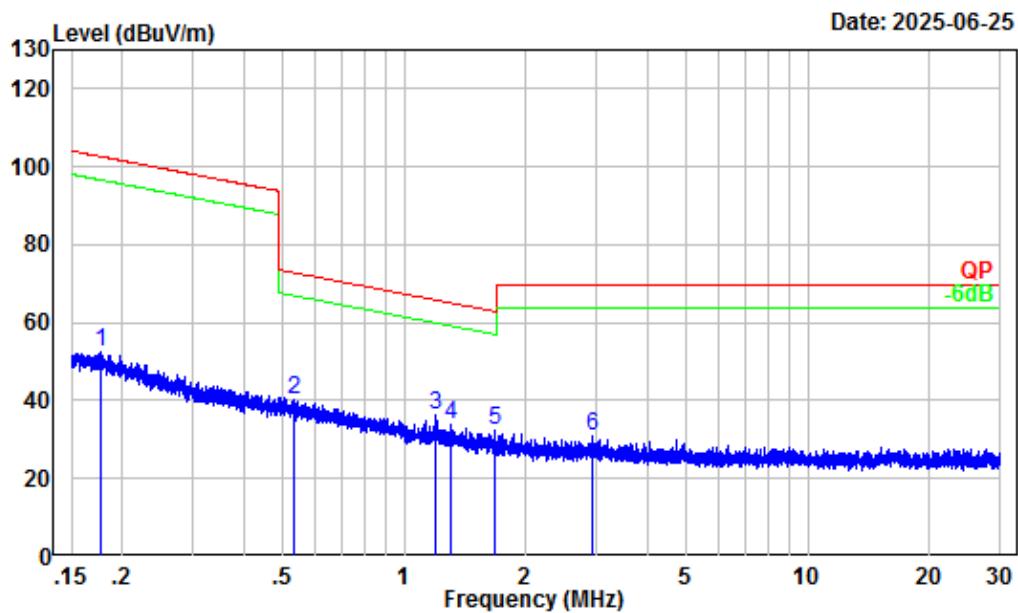

Site : Chamber A
Condition : 3m
Project Number : 2501R31585E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Alex Yan

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.177	17.46	35.09	52.55	102.64 -50.09 Peak
2	0.531	6.01	33.99	40.00	73.08 -33.08 Peak
3	1.195	0.65	35.61	36.26	65.89 -29.63 Peak
4	1.300	0.36	33.66	34.02	65.14 -31.12 Peak
5	1.674	-0.69	32.91	32.22	62.91 -30.69 Peak
6	2.931	-2.11	33.20	31.09	69.54 -38.45 Peak


30MHz-1GHz_Horizontal

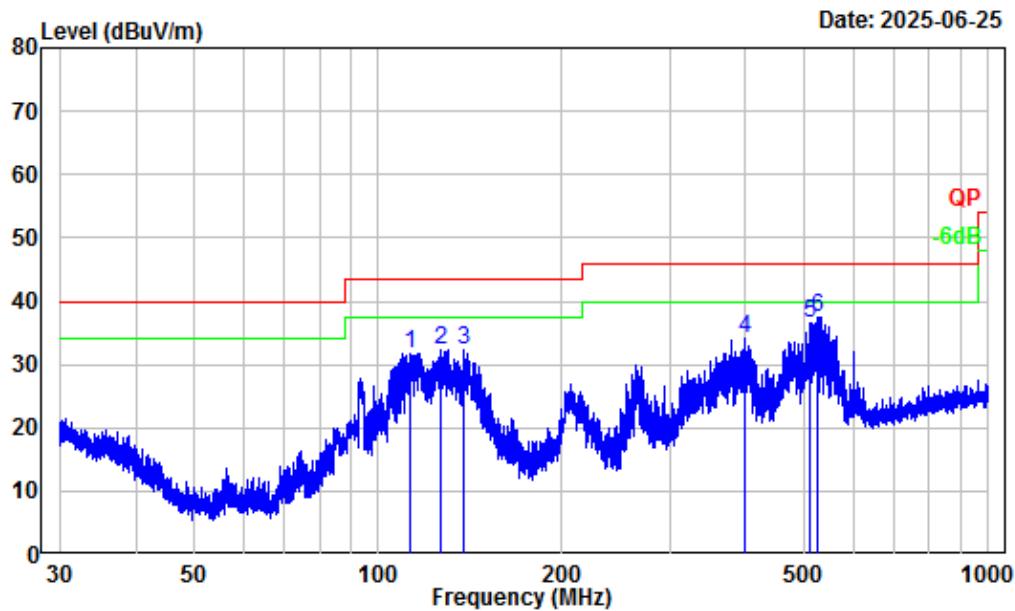

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501R31585E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Alex Yan

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
					dB	
1	112.43	-12.67	44.48	31.81	43.50	-11.69 Peak
2	126.88	-11.12	43.50	32.38	43.50	-11.12 Peak
3	138.33	-11.73	44.03	32.30	43.50	-11.20 Peak
4	400.08	-8.41	42.47	34.06	46.00	-11.94 Peak
5	511.61	-5.80	42.46	36.66	46.00	-9.34 Peak
6	524.55	-5.80	43.28	37.48	46.00	-8.52 Peak

30MHz-1GHz_Verical

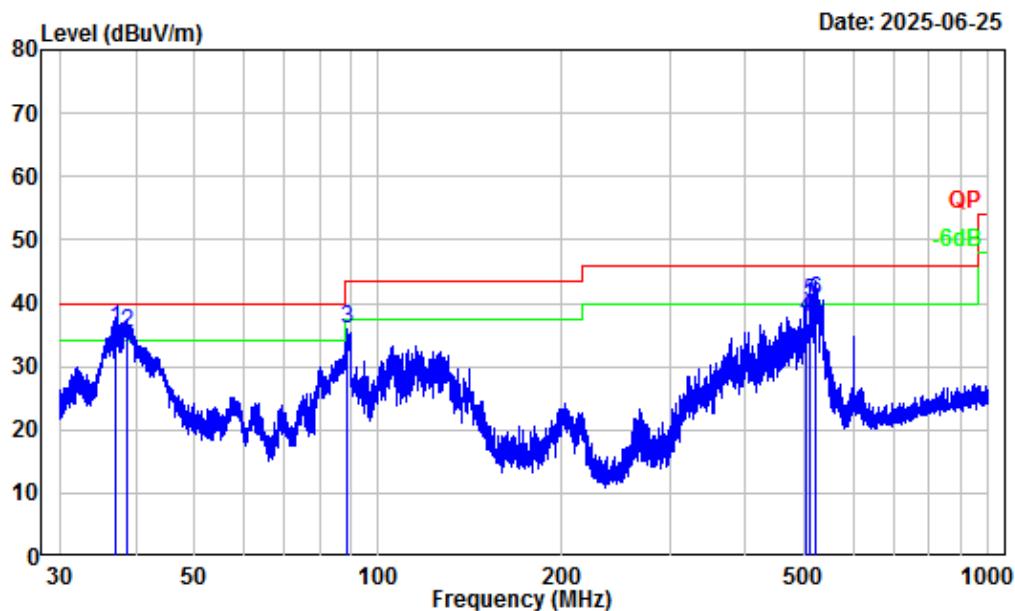

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501R31585E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.15	-10.39	46.17	35.78	40.00	-4.22	QP
2	38.73	-11.49	46.80	35.31	40.00	-4.69	QP
3	88.61	-18.08	53.98	35.90	43.50	-7.60	Peak
4	500.96	-5.76	43.60	37.84	46.00	-8.16	QP
5	511.61	-5.80	46.08	40.28	46.00	-5.72	QP
6	522.26	-5.83	46.20	40.37	46.00	-5.63	QP

Above 1GHz:
5150-5250 MHz

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
10360	52.52	PK	H	2.53	55.05	68.2	-13.15
10360	52.2	PK	V	2.53	54.73	68.2	-13.47
Middle Channel							
10400	52.87	PK	H	2.55	55.42	68.2	-12.78
10400	52.54	PK	V	2.55	55.09	68.2	-13.11
High Channel							
10480	53.18	PK	H	2.25	55.43	68.2	-12.77
10480	52.85	PK	V	2.25	55.1	68.2	-13.1
802.11ac20							
Low Channel							
10360	52.43	PK	H	2.53	54.96	68.2	-13.24
10360	52.09	PK	V	2.53	54.62	68.2	-13.58
Middle Channel							
10400	52.75	PK	H	2.55	55.3	68.2	-12.9
10400	52.42	PK	V	2.55	54.97	68.2	-13.23
High Channel							
10480	53.07	PK	H	2.25	55.32	68.2	-12.88
10480	52.76	PK	V	2.25	55.01	68.2	-13.19
802.11ac40							
Low Channel							
10380	52.15	PK	H	2.54	54.69	68.2	-13.51
10380	51.83	PK	V	2.54	54.37	68.2	-13.83
High Channel							
10460	52.64	PK	H	2.32	54.96	68.2	-13.24
10460	52.29	PK	V	2.32	54.61	68.2	-13.59

5250-5350MHz

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
10520	53.13	PK	H	2.18	55.31	68.2	-12.89
10520	52.72	PK	V	2.18	54.9	68.2	-13.3
Middle Channel							
10560	53.47	PK	H	2.18	55.65	68.2	-12.55
10560	53.09	PK	V	2.18	55.27	68.2	-12.93
High Channel							
10640	53.84	PK	H	2.59	56.43	74	-17.57
10640	39.76	AV	H	2.59	42.35	54	-11.65
10640	53.45	PK	V	2.59	56.04	74	-17.96
10640	39.58	AV	V	2.59	42.17	54	-11.83
802.11ac20							
Low Channel							
10520	53.01	PK	H	2.18	55.19	68.2	-13.01
10520	52.64	PK	V	2.18	54.82	68.2	-13.38
Middle Channel							
10560	53.35	PK	H	2.18	55.53	68.2	-12.67
10560	52.98	PK	V	2.18	55.16	68.2	-13.04
High Channel							
10640	53.71	PK	H	2.59	56.3	74	-17.7
10640	39.62	AV	H	2.59	42.21	54	-11.79
10640	53.34	PK	V	2.59	55.93	74	-18.07
10640	39.46	AV	V	2.59	42.05	54	-11.95
802.11ac40							
Low Channel							
10540	53.08	PK	H	2.18	55.26	68.2	-12.94
10540	52.74	PK	V	2.18	54.92	68.2	-13.28
High Channel							
10620	53.57	PK	H	2.37	55.94	74	-18.06
10620	38.93	AV	H	2.37	41.3	54	-12.7
10620	53.22	PK	V	2.37	55.59	74	-18.41
10620	38.75	AV	V	2.37	41.12	54	-12.88

5470-5725MHz

Frequency (MHz)	Reading (dB μ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
11000	51.96	PK	H	4.29	56.25	74	-17.75
11000	37.45	AV	H	4.29	41.74	54	-12.26
11000	51.58	PK	V	4.29	55.87	74	-18.13
11000	37.22	AV	V	4.29	41.51	54	-12.49
Middle Channel							
11160	52.51	PK	H	3.5	56.01	74	-17.99
11160	38.37	AV	H	3.5	41.87	54	-12.13
11160	52.14	PK	V	3.5	55.64	74	-18.36
11160	38.15	AV	V	3.5	41.65	54	-12.35
High Channel							
11400	53.48	PK	H	3.32	56.8	74	-17.2
11400	39.34	AV	H	3.32	42.66	54	-11.34
11400	53.12	PK	V	3.32	56.44	74	-17.56
11400	39.09	AV	V	3.32	42.41	54	-11.59
Cross Channel							
11440	52.85	PK	H	3.42	56.27	74	-17.73
11440	38.59	AV	H	3.42	42.01	54	-11.99
11440	52.47	PK	V	3.42	55.89	74	-18.11
11440	38.36	AV	V	3.42	41.78	54	-12.22

Frequency (MHz)	Reading (dB μ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac20							
Low Channel							
11000	51.78	PK	H	4.29	56.07	74	-17.93
11000	37.35	AV	H	4.29	41.64	54	-12.36
11000	51.4	PK	V	4.29	55.69	74	-18.31
11000	37.13	AV	V	4.29	41.42	54	-12.58
Middle Channel							
11160	52.73	PK	H	3.5	56.23	74	-17.77
11160	38.42	AV	H	3.5	41.92	54	-12.08
11160	52.36	PK	V	3.5	55.86	74	-18.14
11160	38.17	AV	V	3.5	41.67	54	-12.33
High Channel							
11400	53.67	PK	H	3.32	56.99	74	-17.01
11400	39.49	AV	H	3.32	42.81	54	-11.19
11400	53.34	PK	V	3.32	56.66	74	-17.34
11400	39.28	AV	V	3.32	42.6	54	-11.4
Cross Channel							
11440	53.05	PK	H	3.42	56.47	74	-17.53
11440	38.63	AV	H	3.42	42.05	54	-11.95
11440	52.72	PK	V	3.42	56.14	74	-17.86
11440	38.41	AV	V	3.42	41.83	54	-12.17

Frequency (MHz)	Reading (dB μ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac40							
Low Channel							
11020	51.21	PK	H	4.1	55.31	74	-18.69
11020	37.37	AV	H	4.1	41.47	54	-12.53
11020	50.85	PK	V	4.1	54.95	74	-19.05
11020	37.14	AV	V	4.1	41.24	54	-12.76
Middle Channel							
11100	52.06	PK	H	3.34	55.4	74	-18.6
11100	38.12	AV	H	3.34	41.46	54	-12.54
11100	51.68	PK	V	3.34	55.02	74	-18.98
11100	37.89	AV	V	3.34	41.23	54	-12.77
High Channel							
11340	52.86	PK	H	3.46	56.32	74	-17.68
11340	38.79	AV	H	3.46	42.25	54	-11.75
11340	52.48	PK	V	3.46	55.94	74	-18.06
11340	38.57	AV	V	3.46	42.03	54	-11.97
Cross Channel							
11420	52.43	PK	H	3.37	55.8	74	-18.2
11420	38.36	AV	H	3.37	41.73	54	-12.27
11420	52.04	PK	V	3.37	55.41	74	-18.59
11420	38.15	AV	V	3.37	41.52	54	-12.48

5725-5850MHz

Frequency (MHz)	Reading (dB μ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
11490	51.95	PK	H	3.54	55.49	74	-18.51
11490	38.3	AV	H	3.54	41.84	54	-12.16
11490	51.57	PK	V	3.54	55.11	74	-18.89
11490	38.04	AV	V	3.54	41.58	54	-12.42
Middle Channel							
11570	53.15	PK	H	3.3	56.45	74	-17.55
11570	39.96	AV	H	3.3	43.26	54	-10.74
11570	52.82	PK	V	3.3	56.12	74	-17.88
11570	39.73	AV	V	3.3	43.03	54	-10.97
High Channel							
11650	54.06	PK	H	3.42	57.48	74	-16.52
11650	41.58	AV	H	3.42	45	54	-9
11650	53.67	PK	V	3.42	57.09	74	-16.91
11650	41.31	AV	V	3.42	44.73	54	-9.27
802.11ac20							
Low Channel							
11490	51.49	PK	H	3.54	55.03	74	-18.97
11490	38.11	AV	H	3.54	41.65	54	-12.35
11490	51.08	PK	V	3.54	54.62	74	-19.38
11490	37.87	AV	V	3.54	41.41	54	-12.59
Middle Channel							
11570	52.68	PK	H	3.3	55.98	74	-18.02
11570	39.75	AV	H	3.3	43.05	54	-10.95
11570	52.32	PK	V	3.3	55.62	74	-18.38
11570	39.51	AV	V	3.3	42.81	54	-11.19
High Channel							
11650	53.84	PK	H	3.42	57.26	74	-16.74
11650	41.25	AV	H	3.42	44.67	54	-9.33
11650	53.36	PK	V	3.42	56.78	74	-17.22
11650	40.98	AV	V	3.42	44.4	54	-9.6

Frequency (MHz)	Reading (dB μ V)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac40							
Low Channel							
11510	51.93	PK	H	3.53	55.46	74	-18.54
11510	38.12	AV	H	3.53	41.65	54	-12.35
11510	51.57	PK	V	3.53	55.1	74	-18.9
11510	37.88	AV	V	3.53	41.41	54	-12.59
High Channel							
11590	52.87	PK	H	3.21	56.08	74	-17.92
11590	38.95	AV	H	3.21	42.16	54	-11.84
11590	52.09	PK	V	3.21	55.3	74	-18.7
11590	38.61	AV	V	3.21	41.82	54	-12.18

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots:


Left Bandedge_Horizontal_Peak_802.11a_5180MHz_Band 1

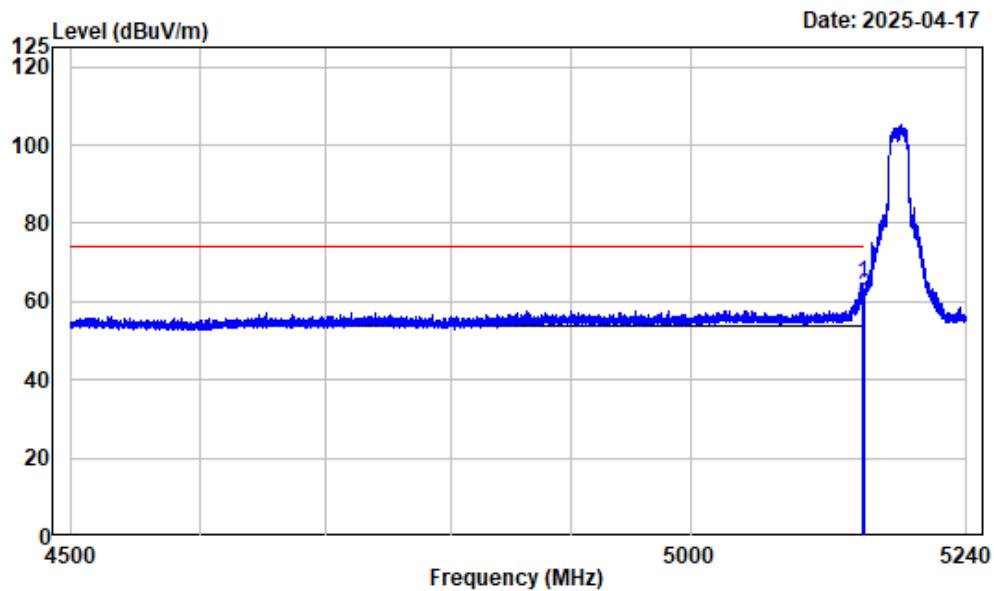

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.506	-7.46	72.07	64.61	74.00	-9.39	Peak
2	5150.000	-7.46	68.75	61.29	74.00	-12.71	Peak


Left Bandedge_Horizontal_Average_802.11a_5180MHz_Band 1

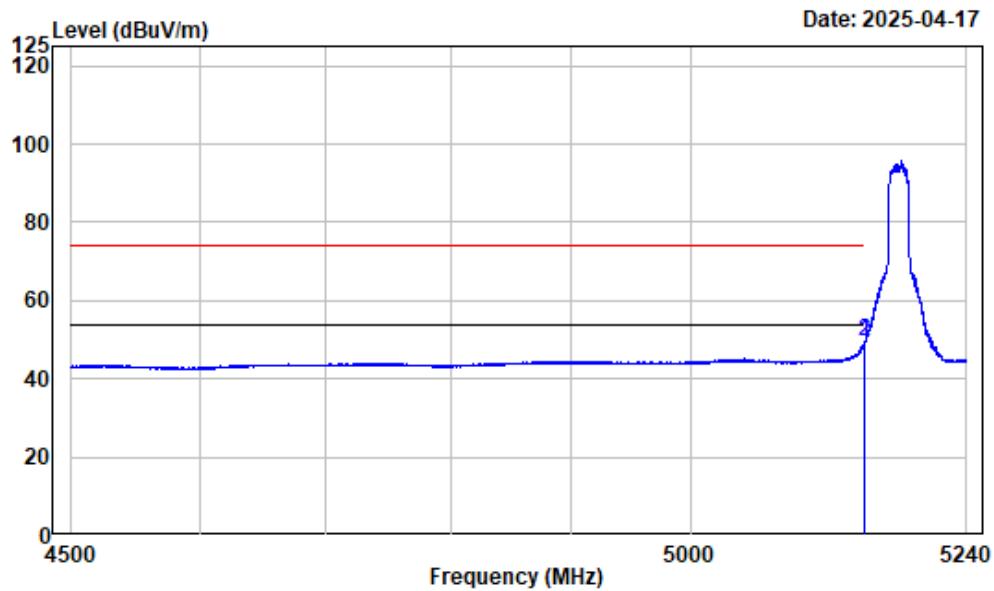

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
1	5149.894	-7.46	57.19	49.73	54.00	-4.27	Average
2	5150.000	-7.46	56.93	49.47	54.00	-4.53	Average


Left Bandedge_Vertical_Peak_802.11a_5180MHz_Band 1

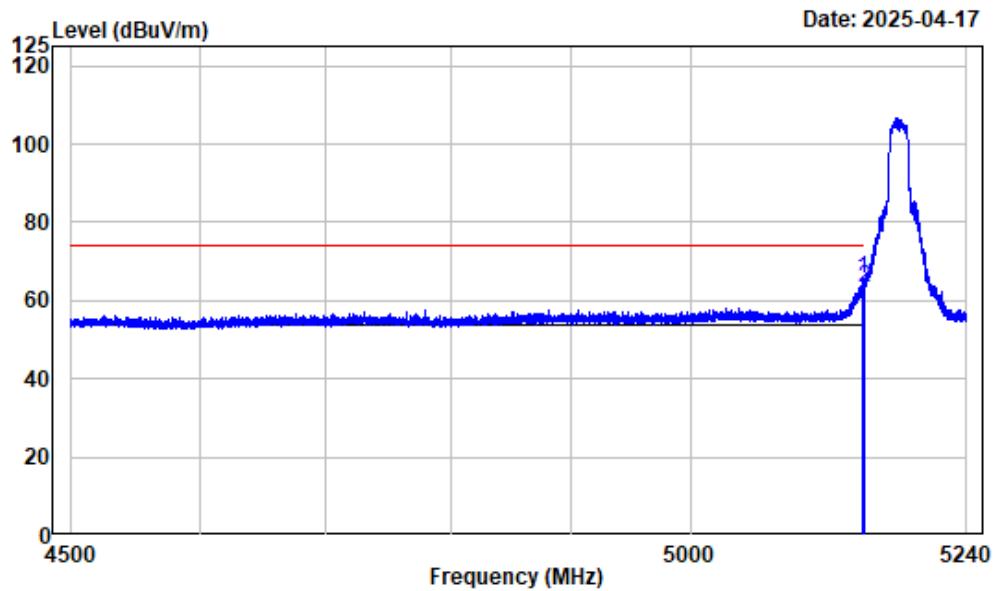

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.414	-7.46	72.99	65.53	74.00	-8.47	Peak
2	5150.000	-7.46	70.80	63.34	74.00	-10.66	Peak


Left Bandedge_Vertical_Average_802.11a_5180MHz_Band 1

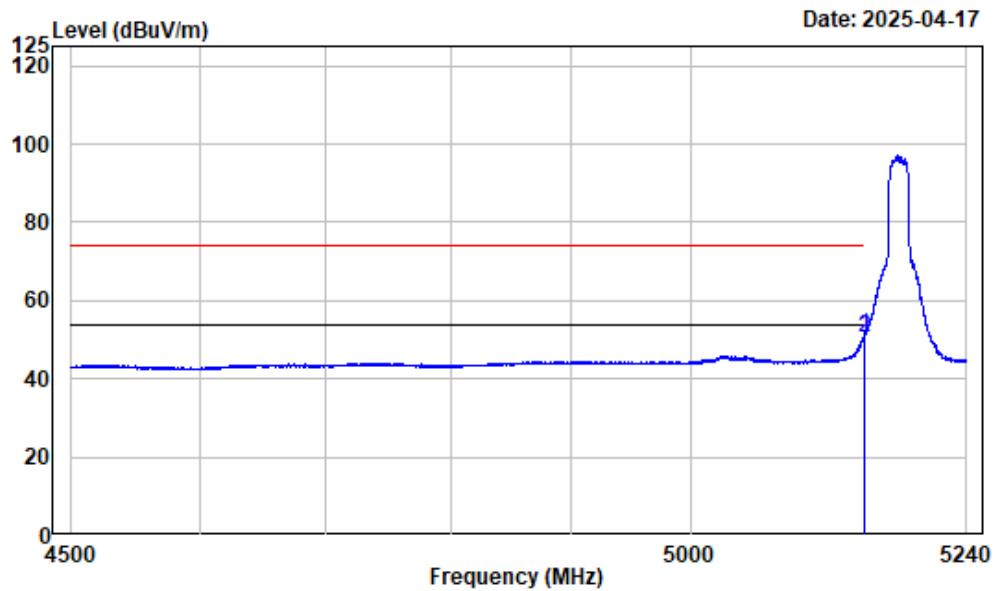

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.894	-7.46	58.25	50.79	54.00	-3.21	Average
2	5150.000	-7.46	58.09	50.63	54.00	-3.37	Average


Right Bandedge_Horizontal_Peak_802.11a_5240MHz_Band 1

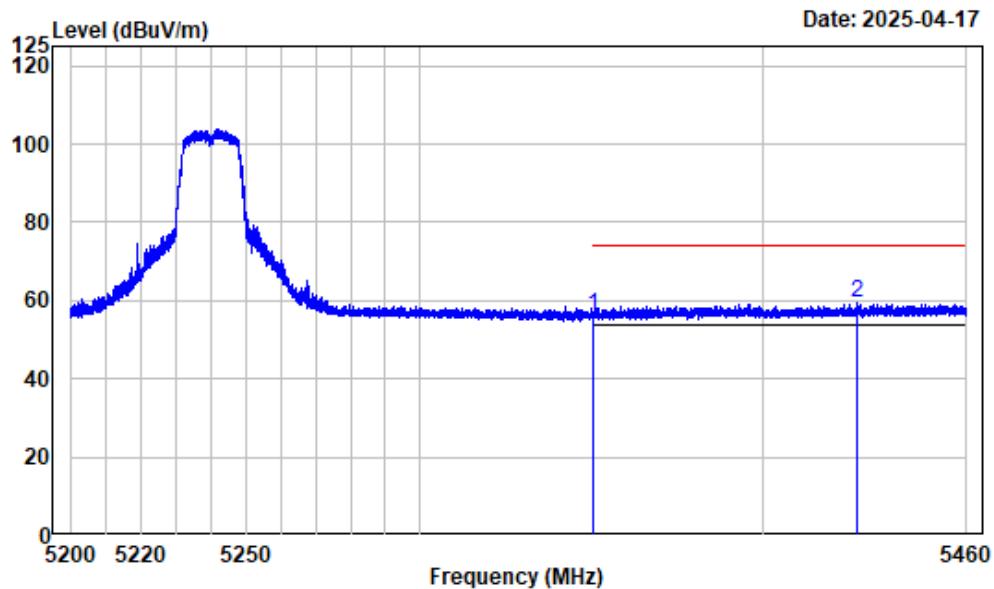

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	62.79	56.05	74.00	-17.95	Peak
2	5427.333	-6.45	65.92	59.47	74.00	-14.53	Peak


Right Bandedge_Horizontal_Average_802.11a_5240MHz_Band 1

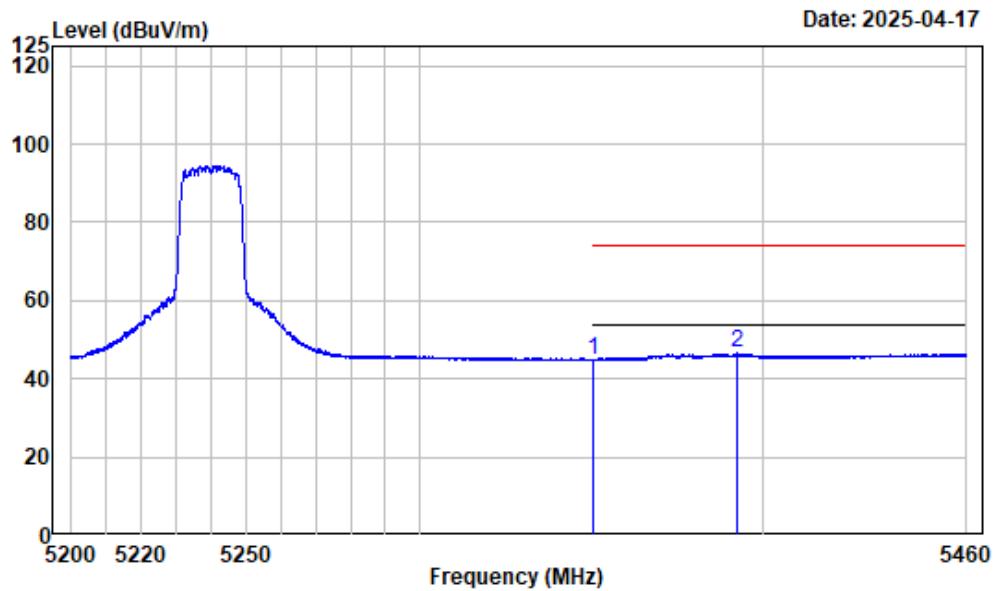

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.45	44.71	54.00	-9.29	Average
2	5392.066	-6.62	53.28	46.66	54.00	-7.34	Average


Right Bandedge_Vertical_Peak_802.11a_5240MHz_Band 1

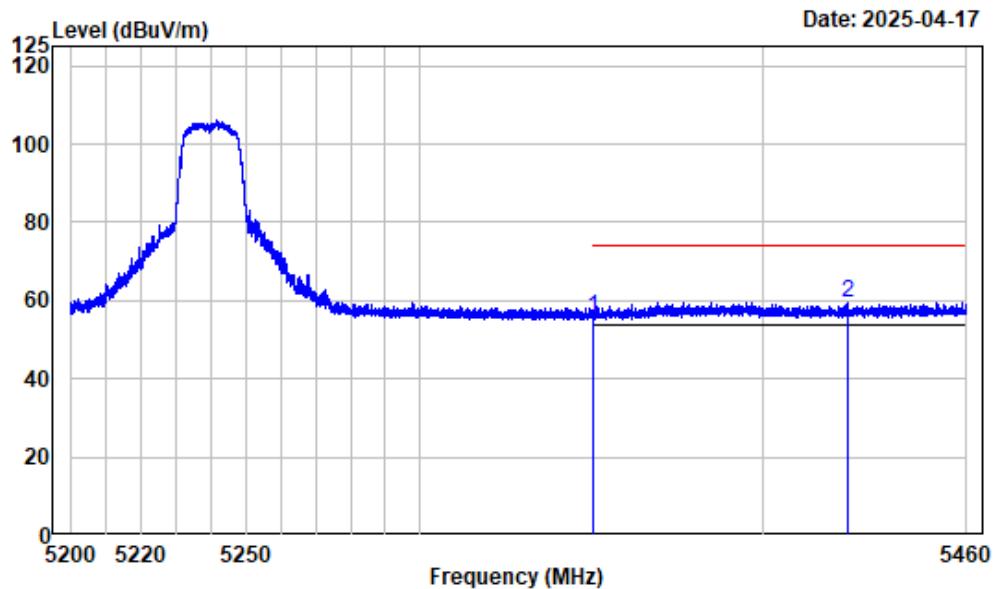

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	62.40	55.66	74.00	-18.34	Peak
2	5425.058	-6.46	66.03	59.57	74.00	-14.43	Peak


Right Bandedge_Vertical_Average_802.11a_5240MHz_Band 1

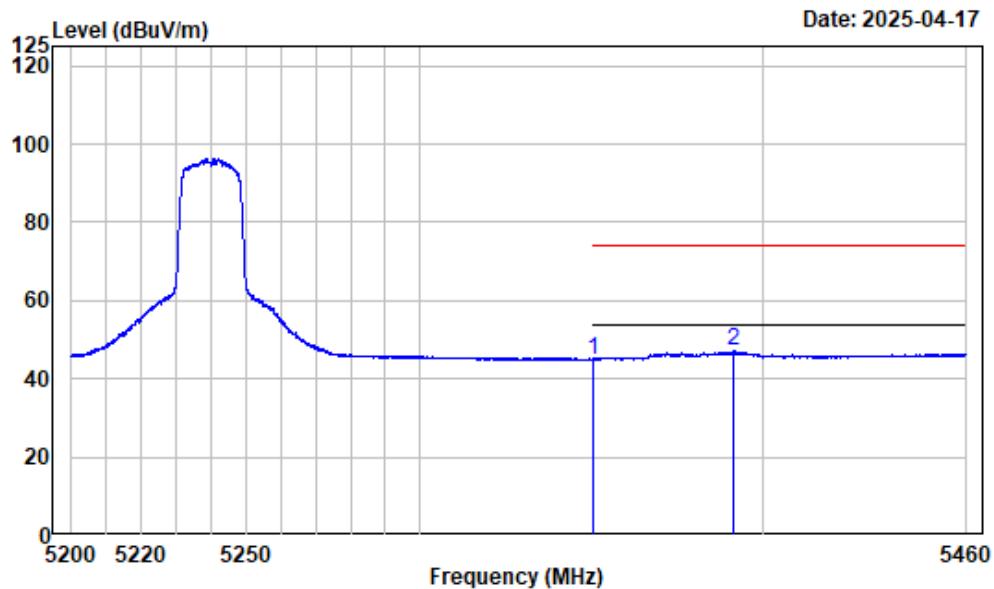

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.73	44.99	54.00	-9.01	Average
2	5391.417	-6.62	53.65	47.03	54.00	-6.97	Average


Left Bandedge_Horizontal_Peak_802.11n-HT20_5180MHz_Band 1

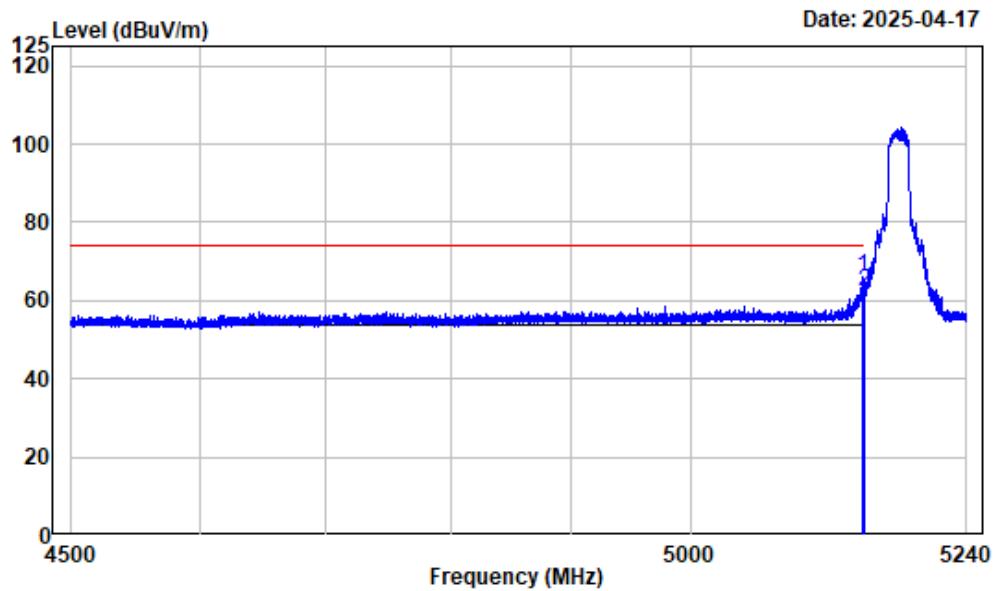

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.876	-7.46	73.44	65.98	74.00	-8.02	Peak
2	5150.000	-7.46	69.74	62.28	74.00	-11.72	Peak


Left Bandedge_Horizontal_Average_802.11n-HT20_5180MHz_Band 1

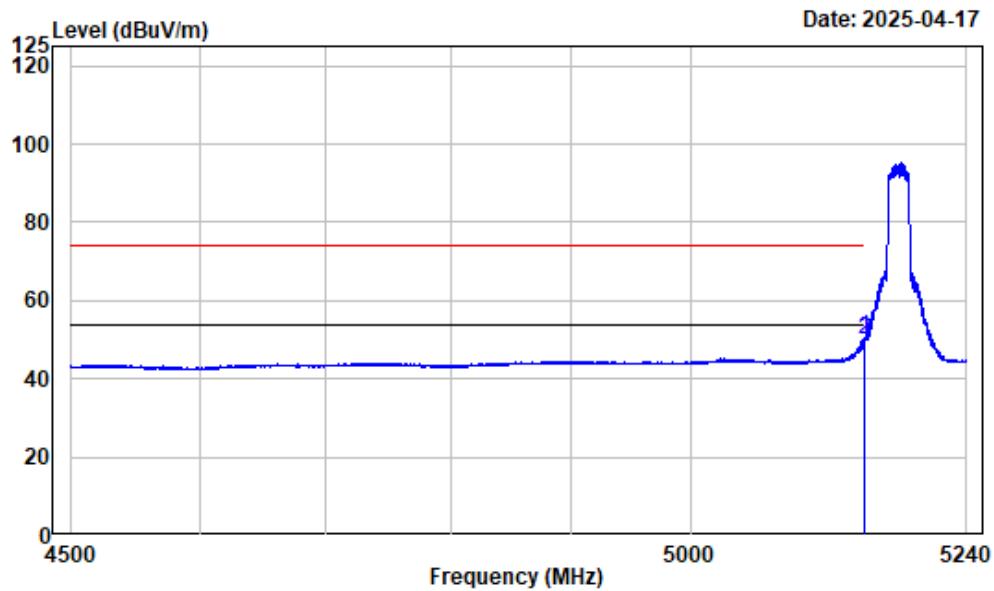

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	5149.708	-7.46	57.89	50.43	54.00	-3.57 Average
2	5150.000	-7.46	57.49	50.03	54.00	-3.97 Average


Left Bandedge_Vertical_Peak_802.11n-HT20_5180MHz_Band 1

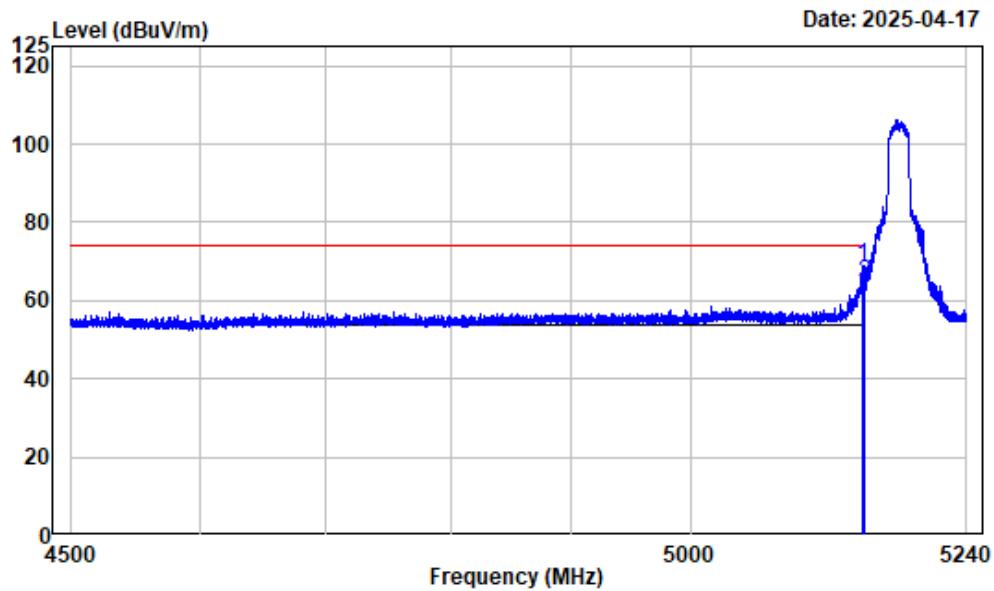

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.061	-7.46	76.38	68.92	74.00	-5.08	Peak
2	5150.000	-7.46	71.94	64.48	74.00	-9.52	Peak


Left Bandedge_Vertical_Average_802.11n-HT20_5180MHz_Band 1

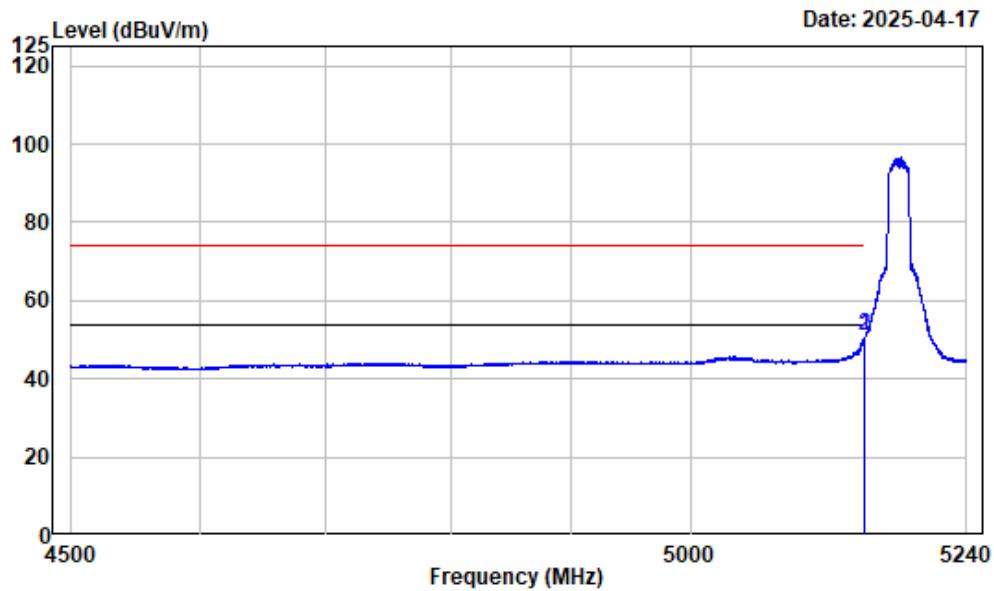

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	5149.616	-7.46	58.41	50.95	54.00	-3.05	Average
2	5150.000	-7.46	58.24	50.78	54.00	-3.22	Average


Right Bandedge_Horizontal_Peak_802.11n-HT20_5240MHz_Band 1

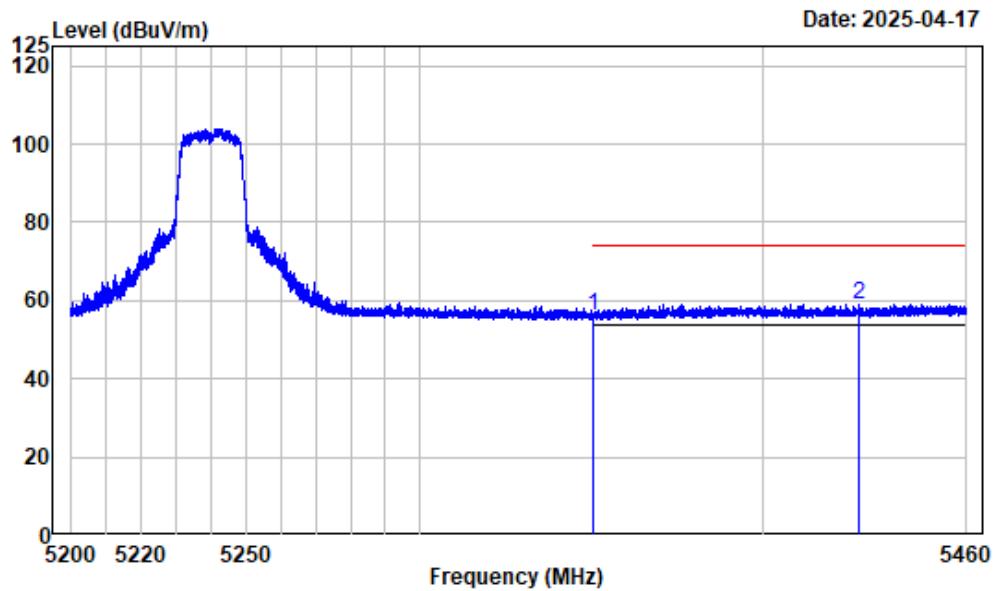

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	62.85	56.11	74.00	-17.89	Peak
2	5427.983	-6.43	65.46	59.03	74.00	-14.97	Peak


Right Bandedge_Horizontal_Average_802.11n-HT20_5240MHz_Band 1

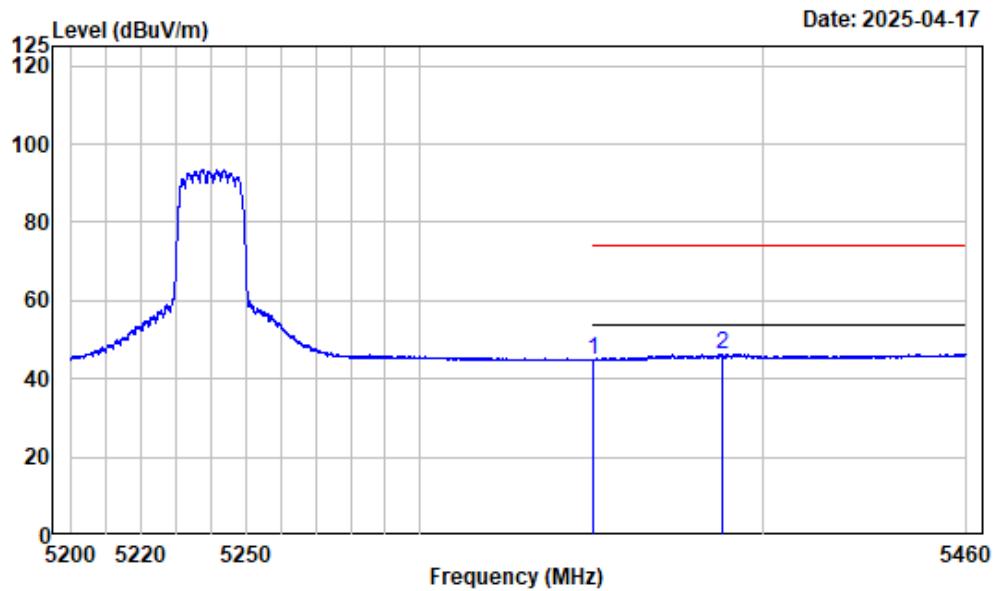

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.48	44.74	54.00	-9.26	Average
2	5387.906	-6.63	53.02	46.39	54.00	-7.61	Average


Right Bandedge_Vertical_Peak_802.11n-HT20_5240MHz_Band 1

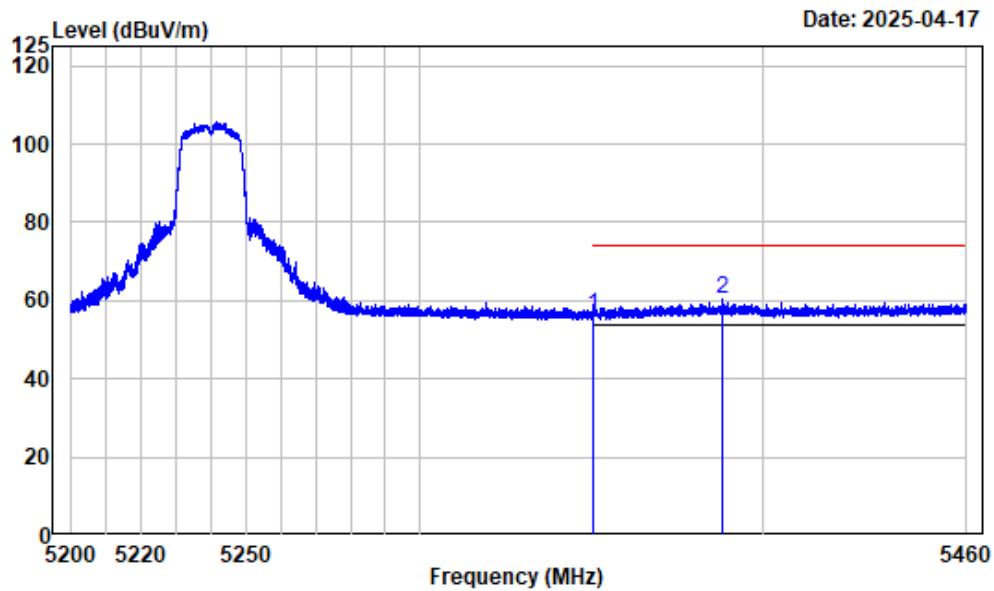

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	62.82	56.08	74.00	-17.92	Peak
2	5388.036	-6.63	66.96	60.33	74.00	-13.67	Peak


Right Bandedge_Vertical_Average_802.11n-HT20_5240MHz_Band 1

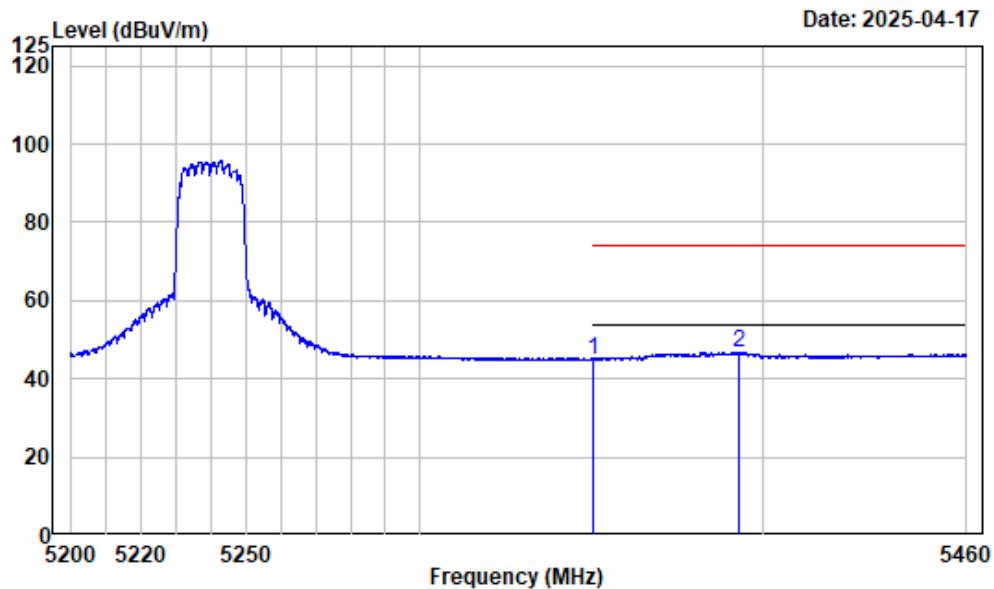

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.70	44.96	54.00	-9.04	Average
2	5392.717	-6.61	53.47	46.86	54.00	-7.14	Average


Left Bandedge_Horizontal_Peak_802.11n-HT40_5190MHz_Band 1

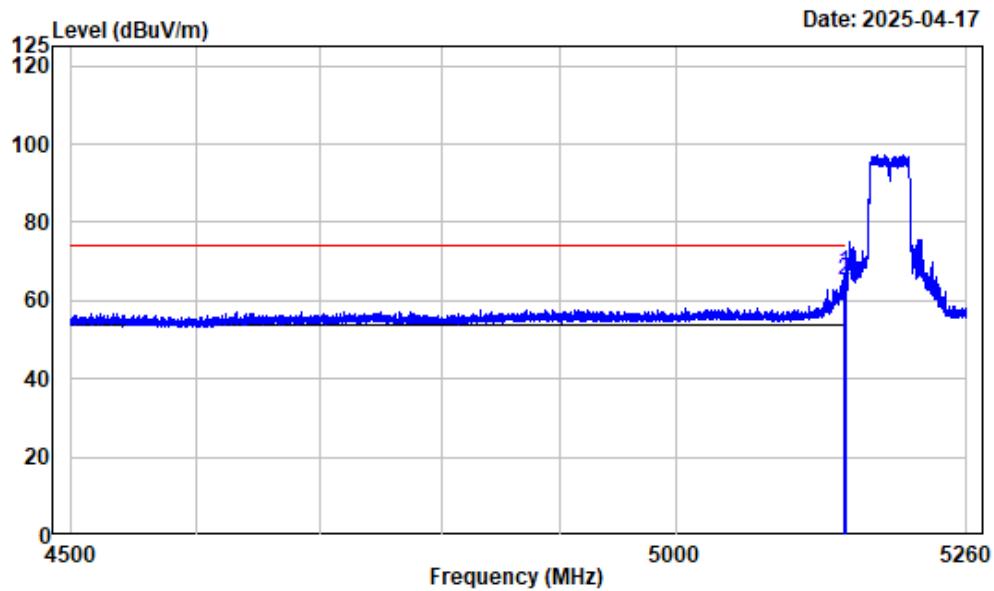

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.406	-7.46	74.67	67.21	74.00	-6.79	Peak
2	5150.000	-7.46	72.69	65.23	74.00	-8.77	Peak

Left Bandedge_Horizontal_Average_802.11n-HT40_5190MHz_Band 1

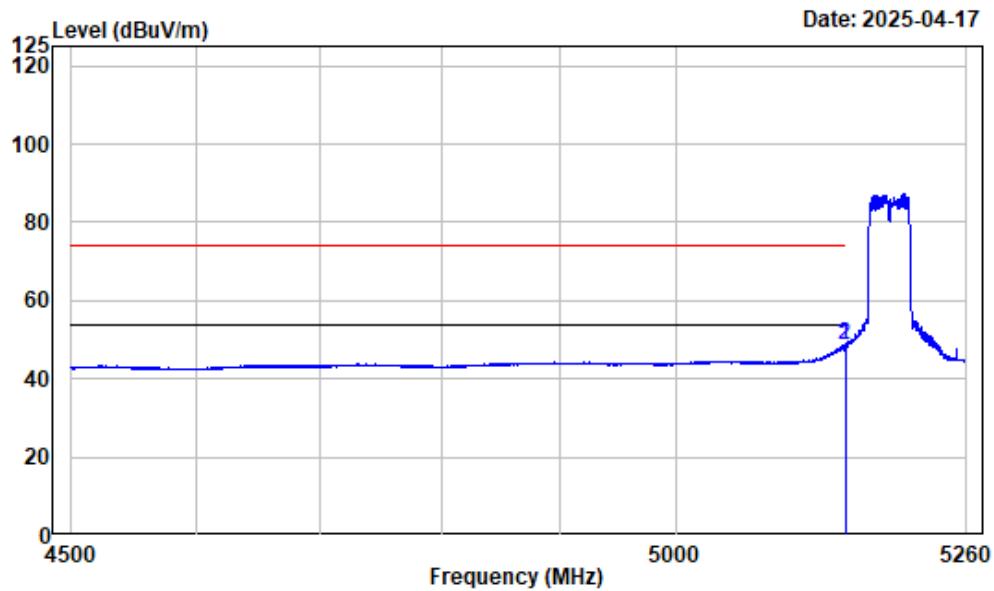

Condition : Horizontal

Project No. : 2501R31585E-RF


Tester : Zenos Qiao

Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak

Note : 5GWiFi-Band1-N40-5190

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.976	-7.46	56.15	48.69	54.00	-5.31	Average
2	5150.000	-7.46	56.03	48.57	54.00	-5.43	Average


Left Bandedge_Vertical_Peak_802.11n-HT40_5190MHz_Band 1

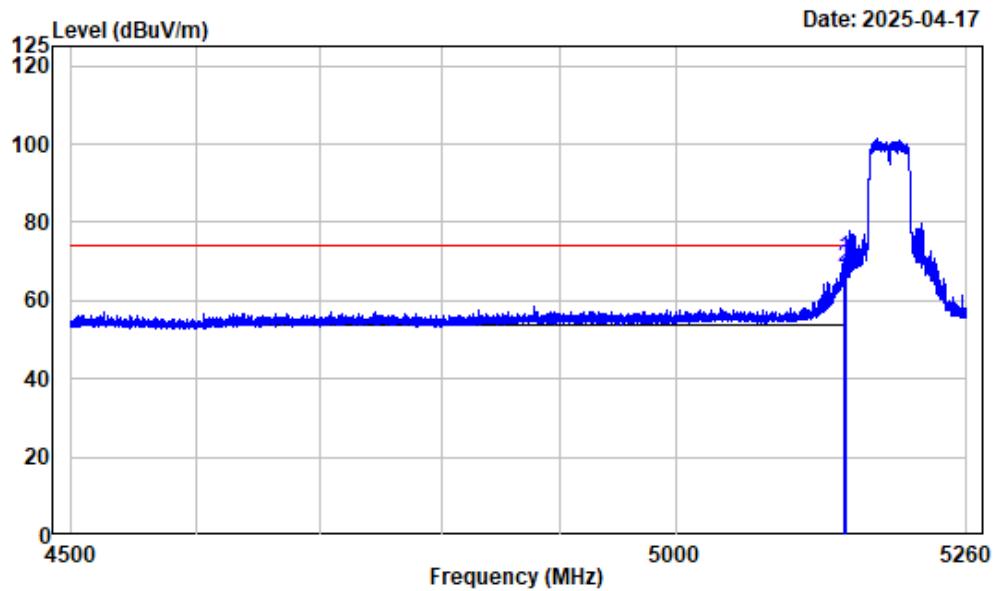

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.596	-7.46	78.10	70.64	74.00	-3.36	Peak
2	5150.000	-7.46	75.74	68.28	74.00	-5.72	Peak


Left Bandedge_Vertical_Average_802.11n-HT40_5190MHz_Band 1

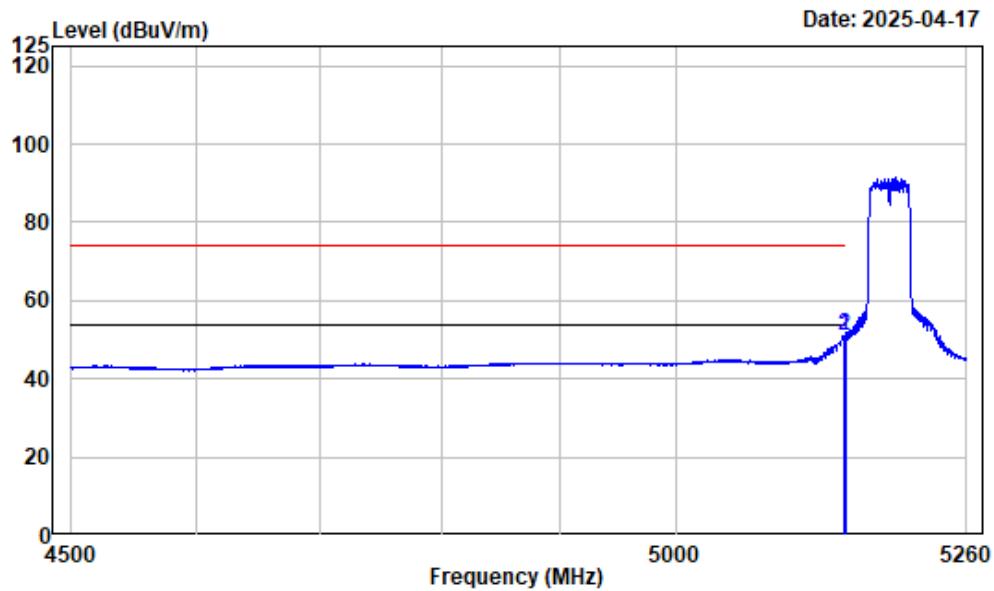

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	5149.881	-7.46	58.40	50.94	54.00 -3.06 Average
2	5150.000	-7.46	58.29	50.83	54.00 -3.17 Average


Right Bandedge_Horizontal_Peak_802.11n-HT40_5230MHz_Band 1

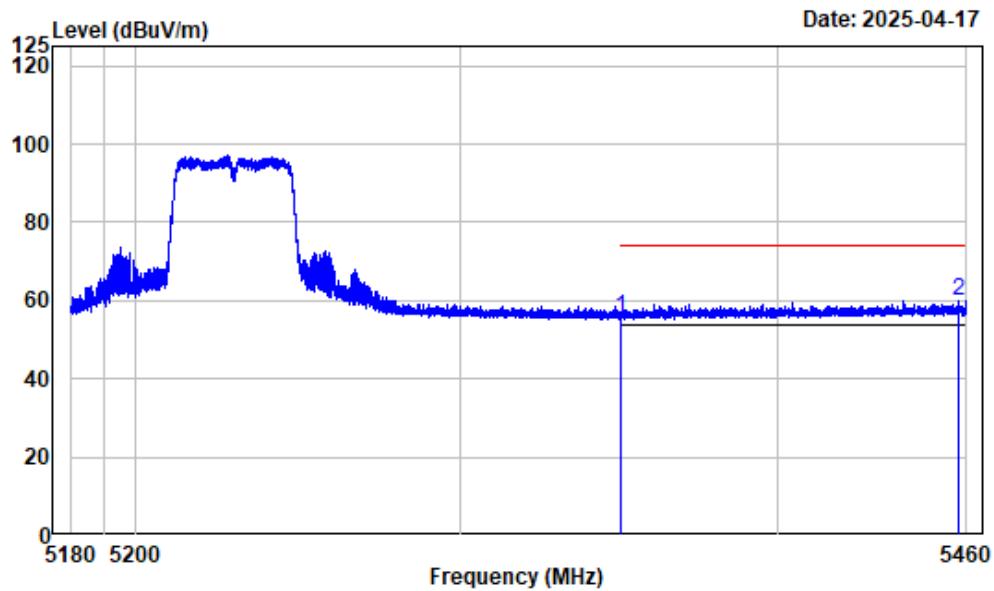

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	62.53	55.79	74.00	-18.21	Peak
2	5457.655	-6.30	66.09	59.79	74.00	-14.21	Peak


Right Bandedge_Horizontal_Average_802.11n-HT40_5230MHz_Band 1

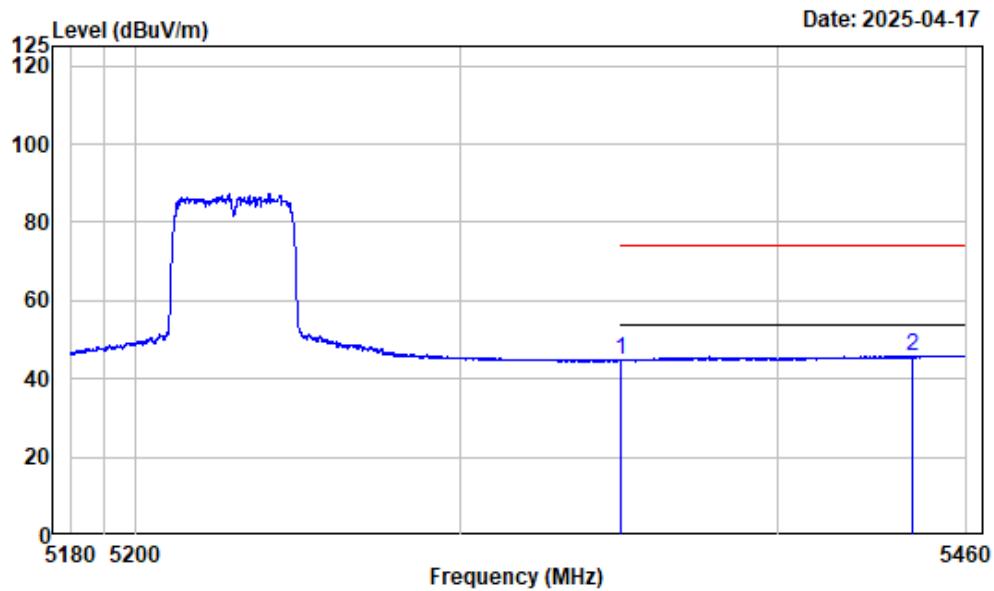

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.74	45.00	54.00	-9.00	Average
2	5442.848	-6.35	52.28	45.93	54.00	-8.07	Average


Right Bandedge_Vertical_Peak_802.11n-HT40_5230MHz_Band 1

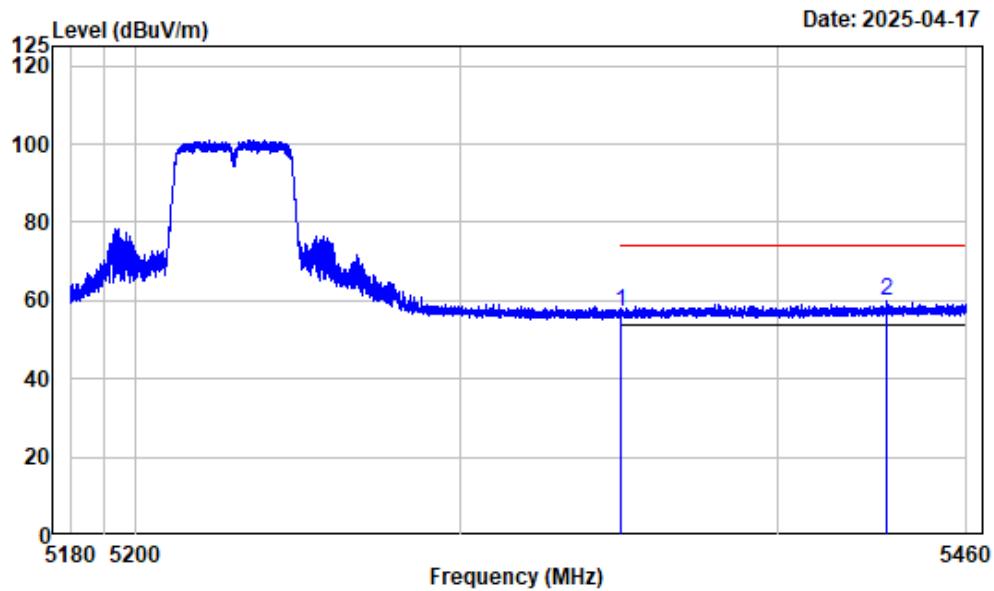

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	63.75	57.01	74.00	-16.99	Peak
2	5434.622	-6.40	66.32	59.92	74.00	-14.08	Peak


Right Bandedge_Vertical_Average_802.11n-HT40_5230MHz_Band 1

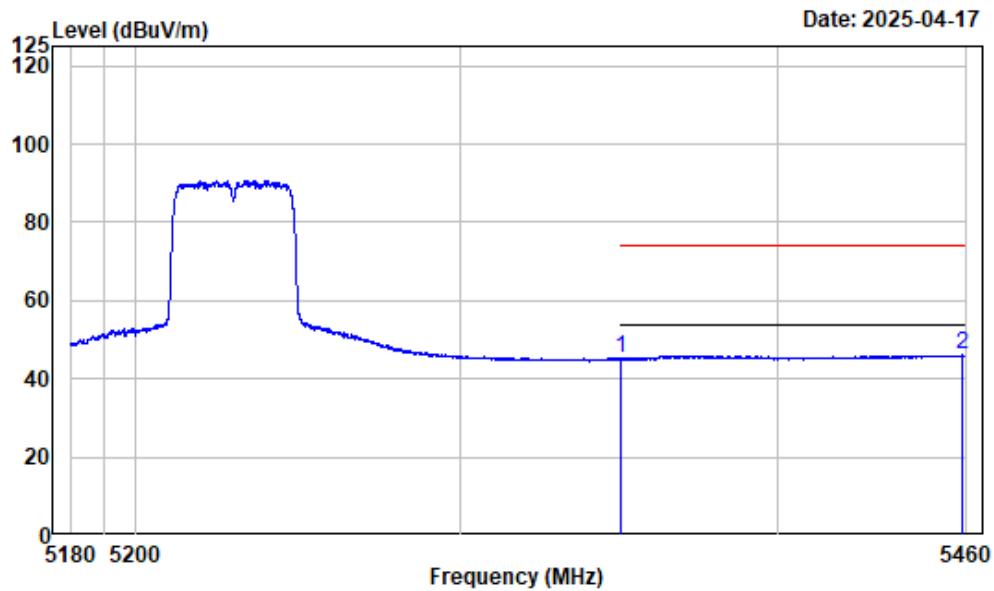

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.80	45.06	54.00	-8.94	Average
2	5458.530	-6.29	52.28	45.99	54.00	-8.01	Average


Left Bandedge_Horizontal_Peak_802.11a_5260MHz_Band 2

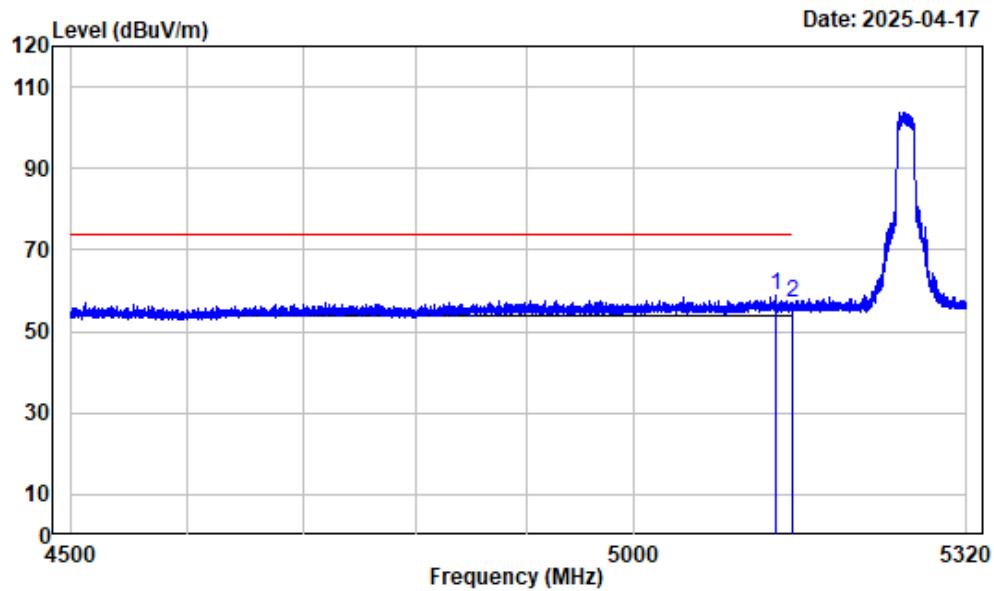

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5133.529	-7.47	66.15	58.68	74.00	-15.32	Peak
2	5150.000	-7.46	64.37	56.91	74.00	-17.09	Peak


Left Bandedge_Horizontal_Average_802.11a_5260MHz_Band 2

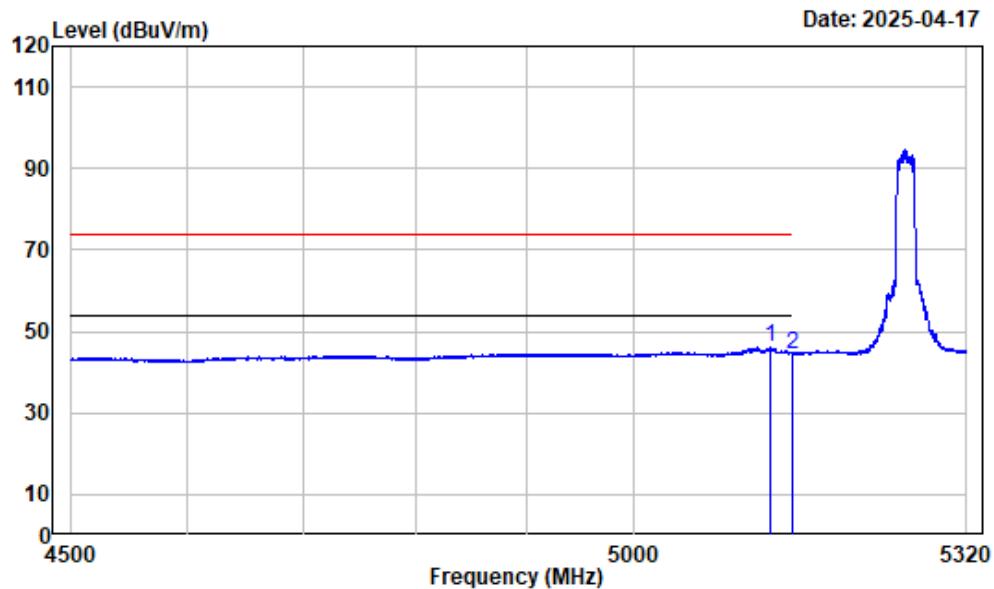

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5128.096	-7.47	53.48	46.01	54.00	-7.99	Average
2	5150.000	-7.46	51.97	44.51	54.00	-9.49	Average


Left Bandedge_Vertical_Peak_802.11a_5260MHz_Band 2

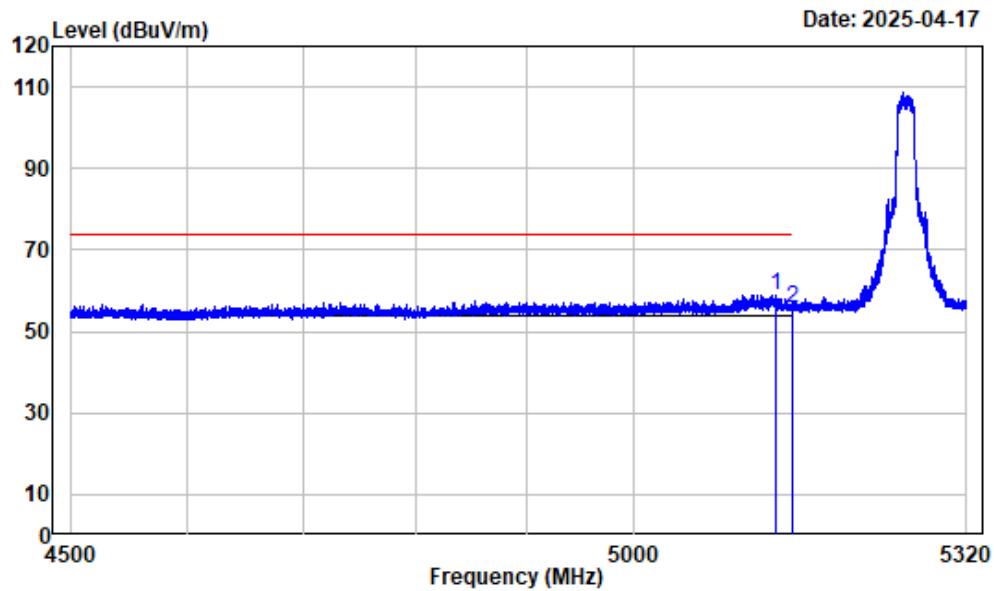

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5133.529	-7.47	66.55	59.08	74.00	-14.92	Peak
2	5150.000	-7.46	63.26	55.80	74.00	-18.20	Peak


Left Bandedge_Vertical_Average_802.11a_5260MHz_Band 2

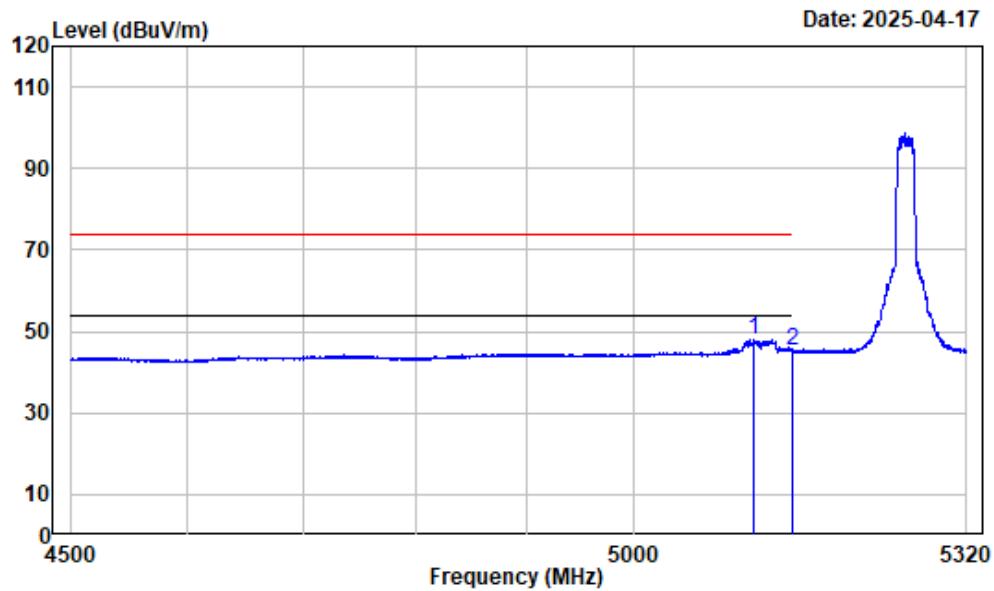

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5113.027	-7.47	55.35	47.88	54.00	-6.12	Average
2	5150.000	-7.46	52.75	45.29	54.00	-8.71	Average


Right Bandedge_Horizontal_Peak_802.11a_5320MHz_Band 2

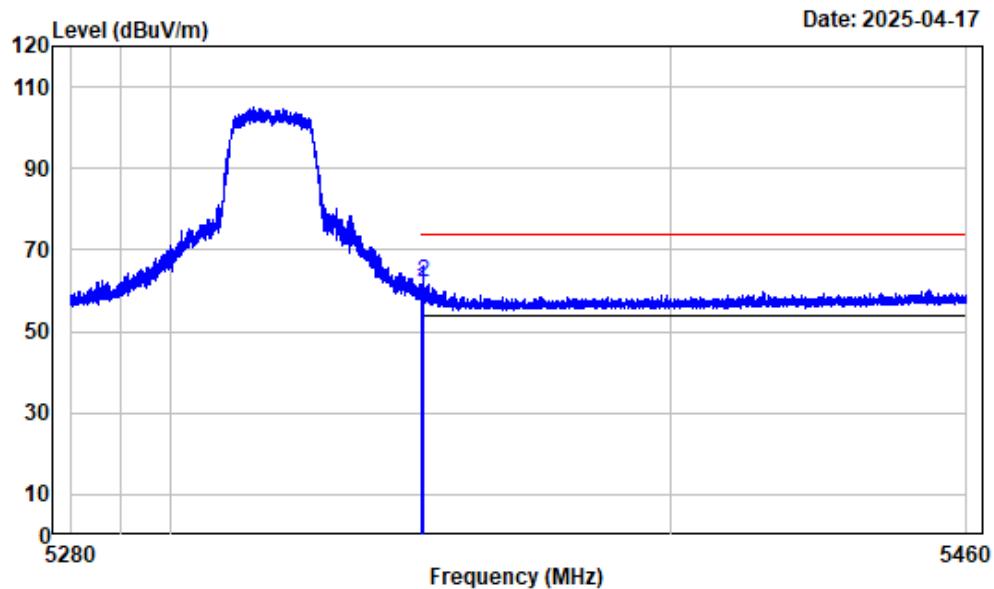

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	67.53	60.79	74.00	-13.21	Peak
2	5350.141	-6.74	68.80	62.06	74.00	-11.94	Peak


Right Bandedge_Horizontal_Average_802.11a_5320MHz_Band 2

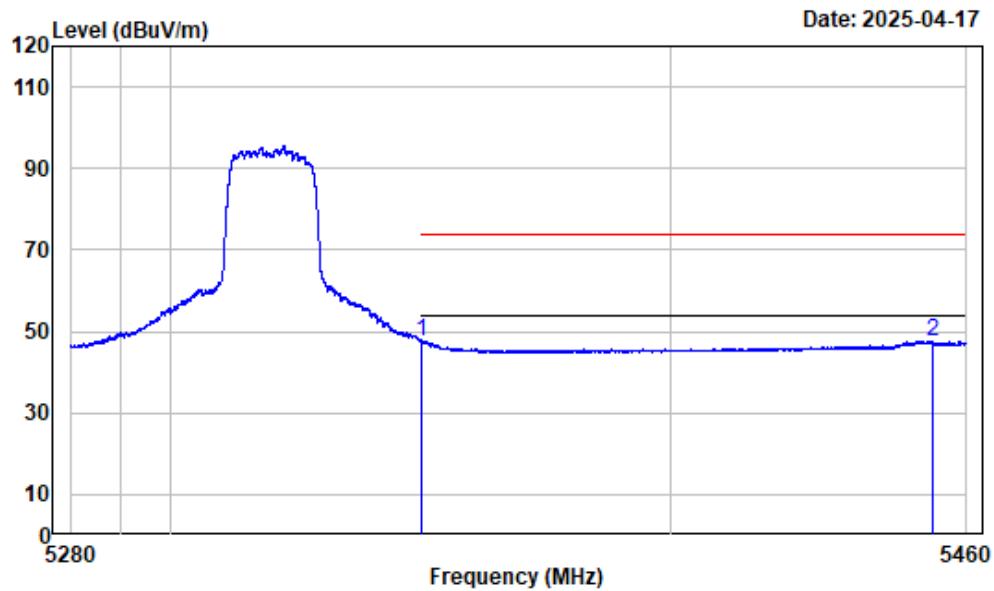

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	54.23	47.49	54.00	-6.51	Average
2	5453.227	-6.31	53.89	47.58	54.00	-6.42	Average


Right Bandedge_Vertical_Peak_802.11a_5320MHz_Band 2

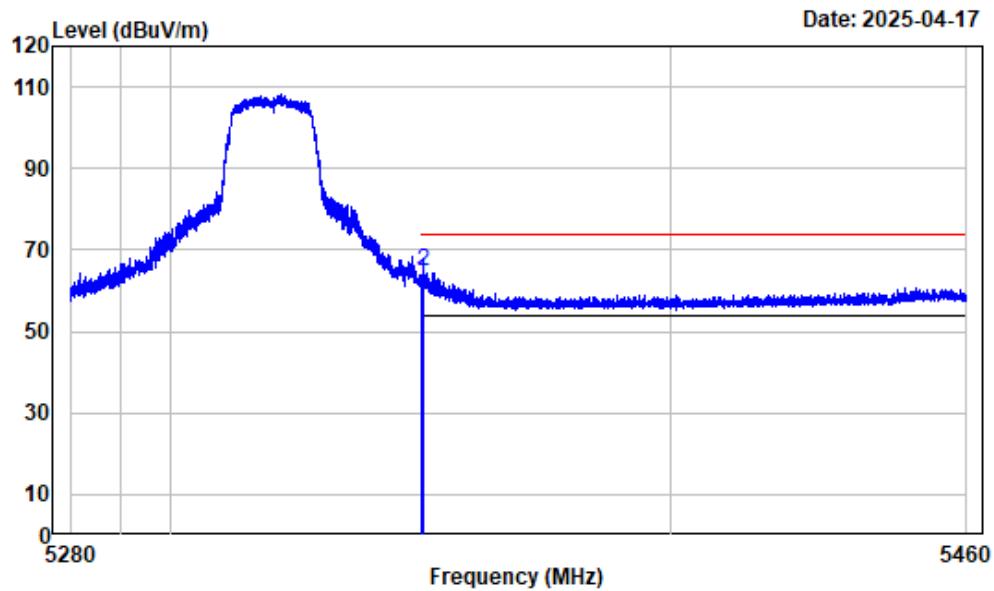

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	69.23	62.49	74.00	-11.51 Peak
2	5350.074	-6.74	71.55	64.81	74.00	-9.19 Peak


Right Bandedge_Vertical_Average_802.11a_5320MHz_Band 2

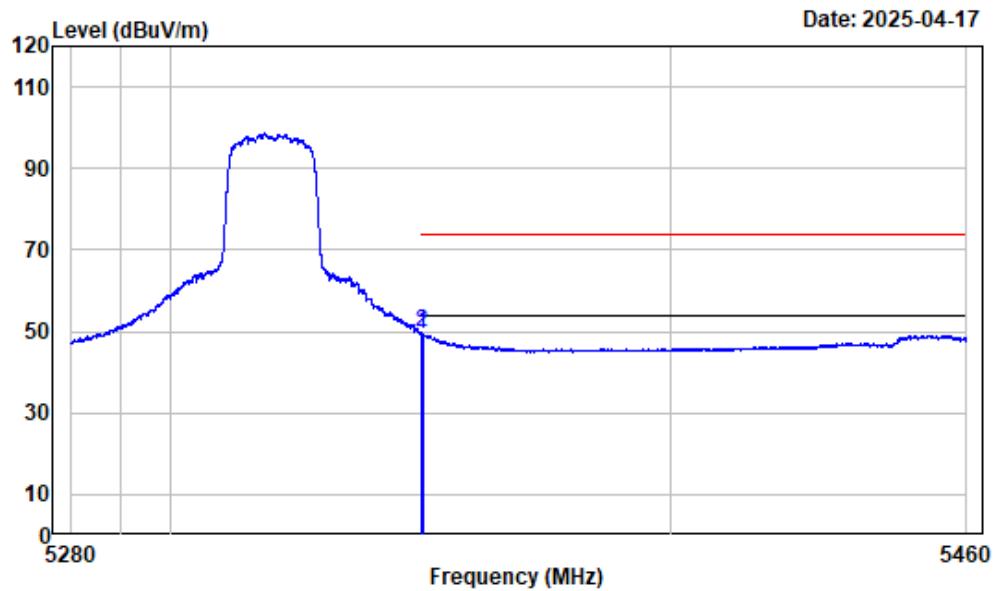

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5350.000	-6.74	56.22	49.48	54.00	-4.52	Average
2	5350.006	-6.74	56.35	49.61	54.00	-4.39	Average


Left Bandedge_Horizontal_Peak_802.11n-HT20_5260MHz_Band 2

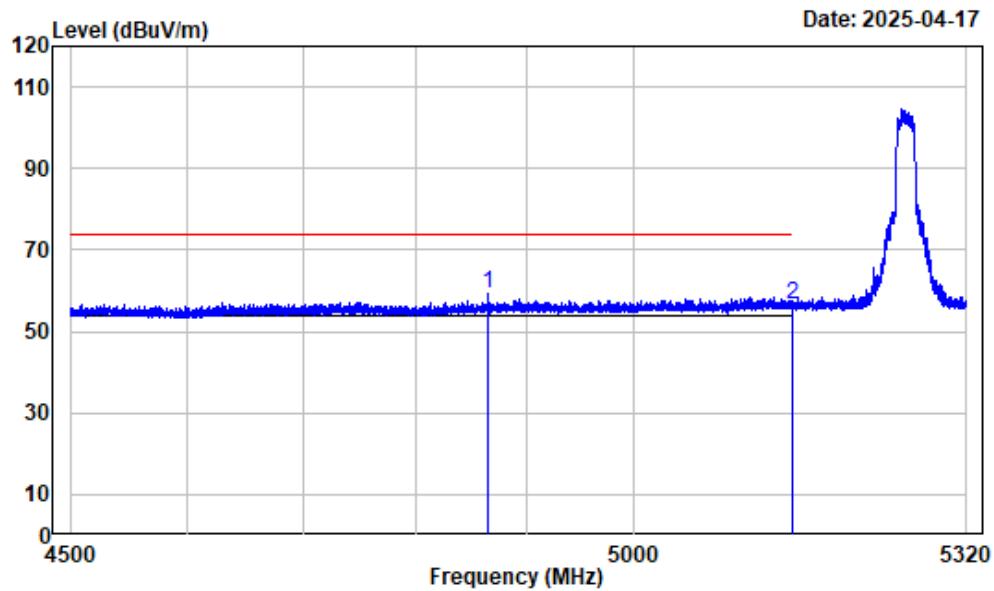

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	4864.536	-7.65	66.85	59.20	74.00	-14.80	Peak
2	5150.000	-7.46	64.01	56.55	74.00	-17.45	Peak


Left Bandedge_Horizontal_Average_802.11n-HT20_5260MHz_Band 2

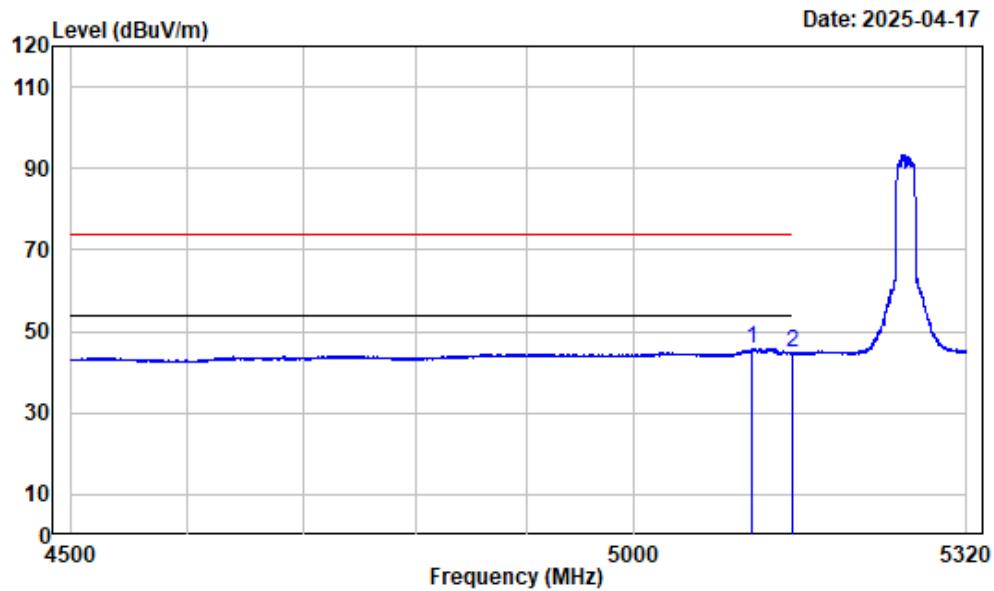

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5111.591	-7.47	53.38	45.91	54.00	-8.09	Average
2	5150.000	-7.46	52.25	44.79	54.00	-9.21	Average


Left Bandedge_Vertical_Peak_802.11n-HT20_5260MHz_Band 2

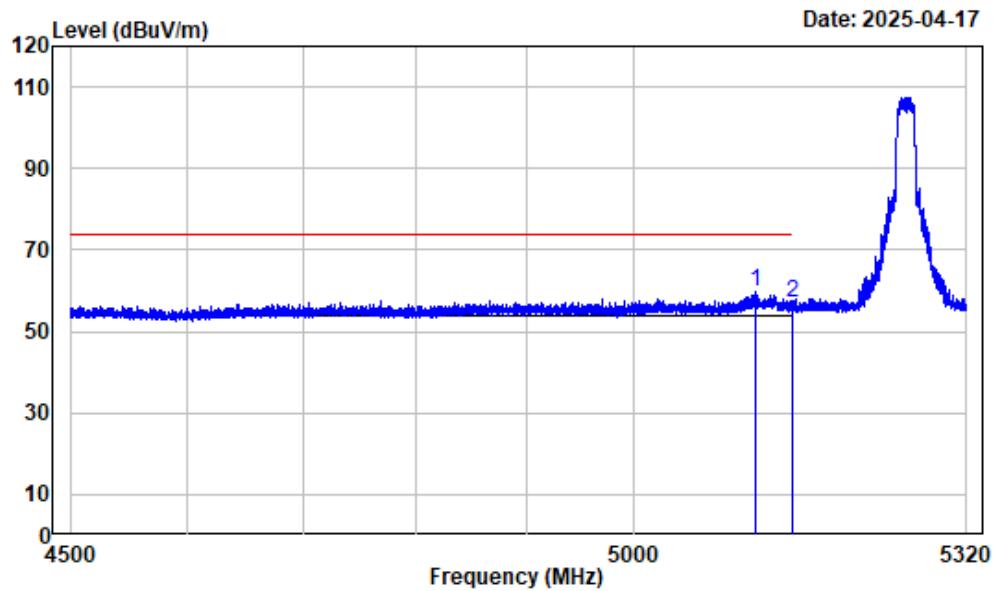

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5114.154	-7.47	67.07	59.60	74.00	-14.40	Peak
2	5150.000	-7.46	64.70	57.24	74.00	-16.76	Peak


Left Bandedge_Vertical_Average_802.11n-HT20_5260MHz_Band 2

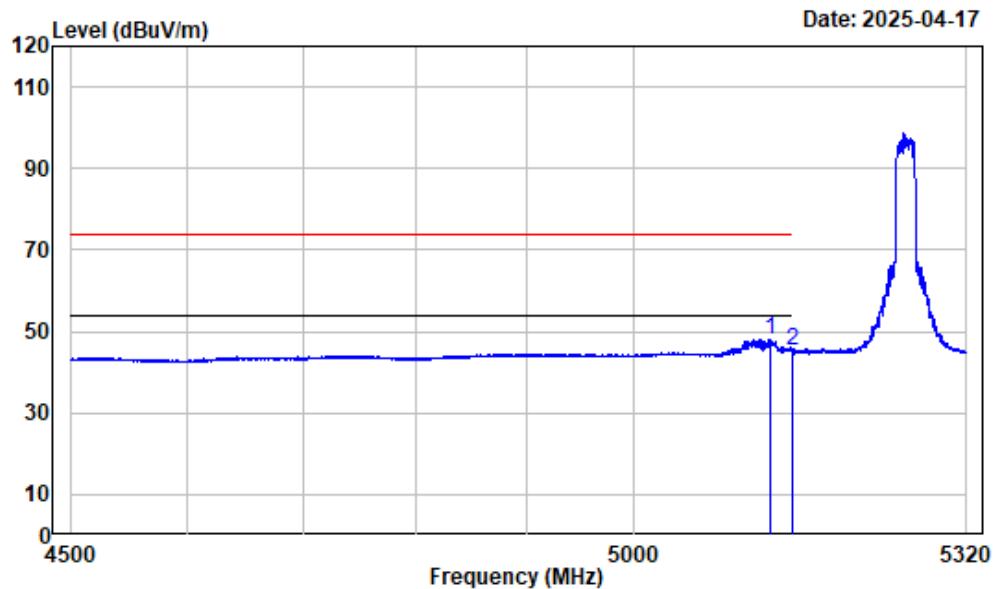

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5128.608	-7.47	55.69	48.22	54.00	-5.78	Average
2	5150.000	-7.46	52.53	45.07	54.00	-8.93	Average


Right Bandedge_Horizontal_Peak_802.11n-HT20_5320MHz_Band 2

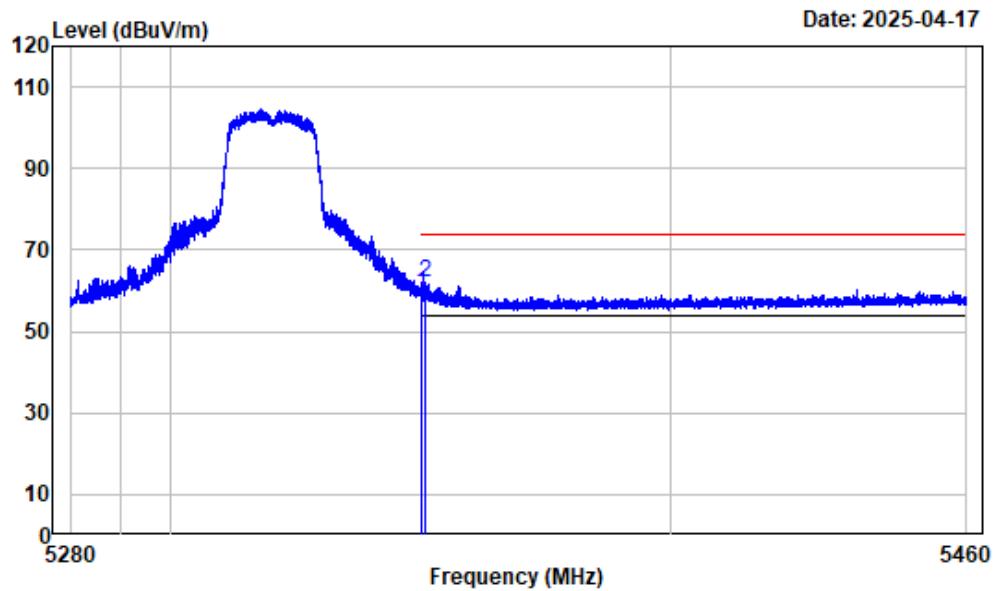

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	65.88	59.14	74.00	-14.86	Peak
2	5350.501	-6.74	68.84	62.10	74.00	-11.90	Peak


Right Bandedge_Horizontal_Average_802.11n-HT20_5320MHz_Band 2

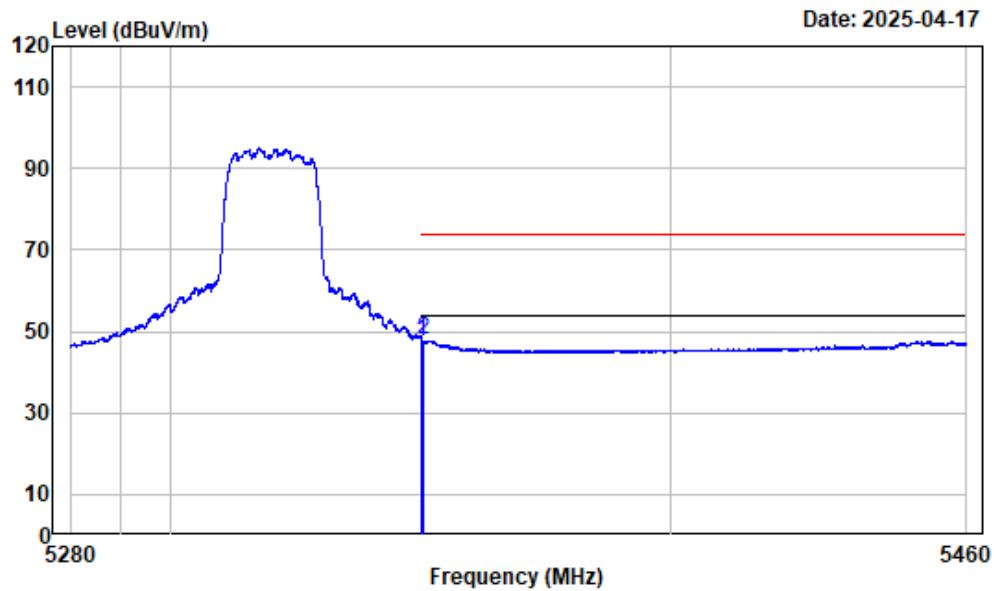

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	54.42	47.68	54.00	-6.32	Average
2	5350.029	-6.74	54.54	47.80	54.00	-6.20	Average


Right Bandedge_Vertical_Peak_802.11n-HT20_5320MHz_Band 2

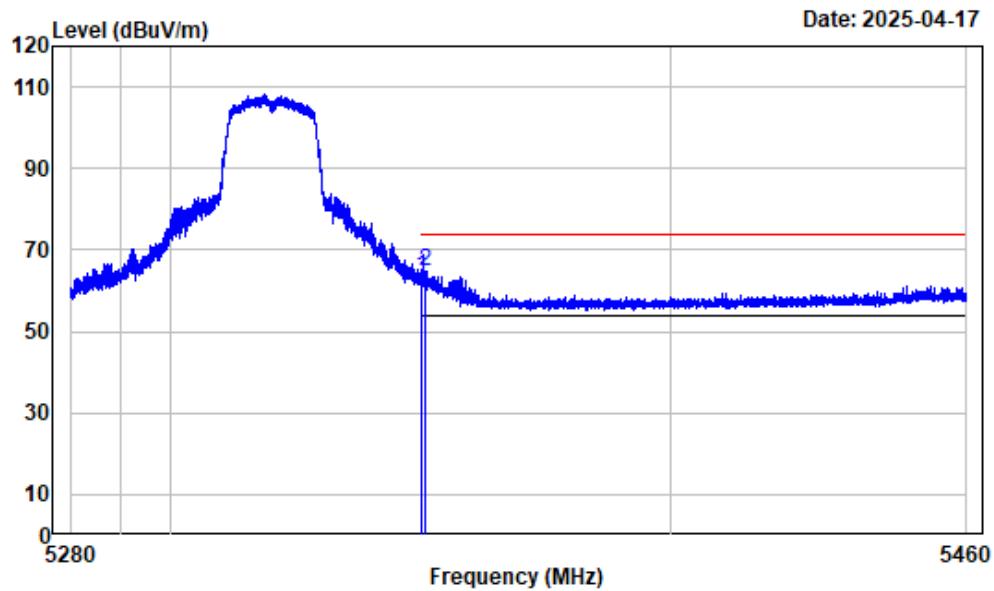

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	70.29	63.55	74.00	-10.45	Peak
2	5350.479	-6.74	71.65	64.91	74.00	-9.09	Peak


Right Bandedge_Vertical_Average_802.11n-HT20_5320MHz_Band 2

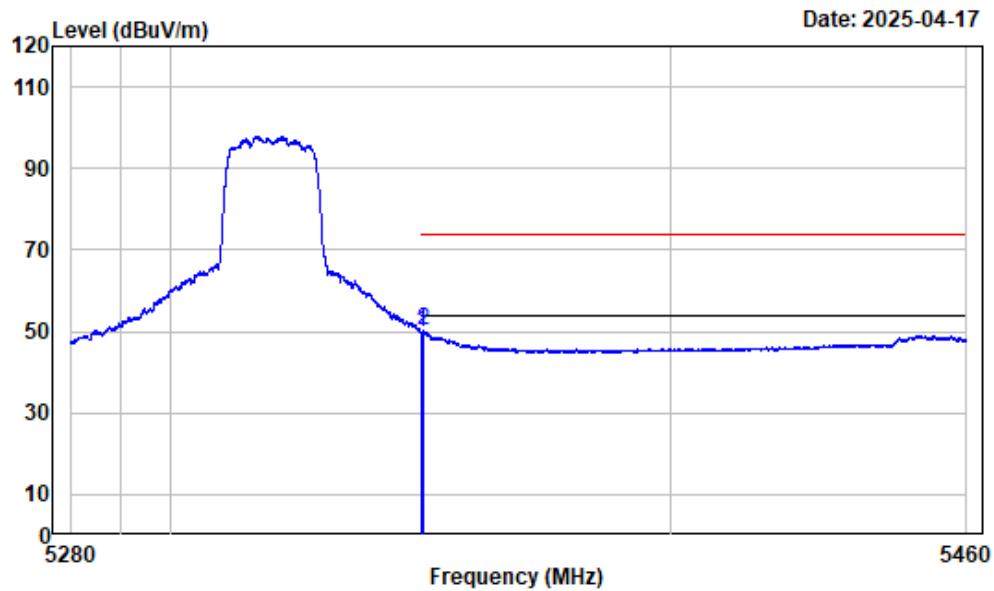

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	56.63	49.89	54.00	-4.11	Average
2	5350.209	-6.74	56.82	50.08	54.00	-3.92	Average


Left Bandedge_Horizontal_Peak_802.11n-HT40_5270MHz_Band 2

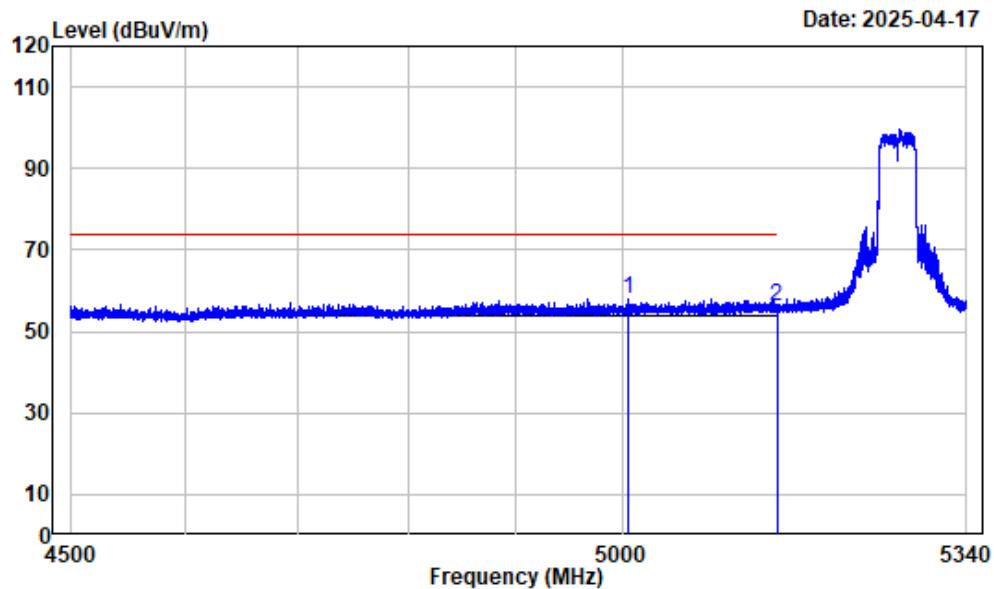

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	dBuV/m		
1	5006.163	-7.33	65.12	57.79	74.00	-16.21	Peak
2	5150.000	-7.46	63.69	56.23	74.00	-17.77	Peak


Left Bandedge_Horizontal_Average_802.11n-HT40_5270MHz_Band 2

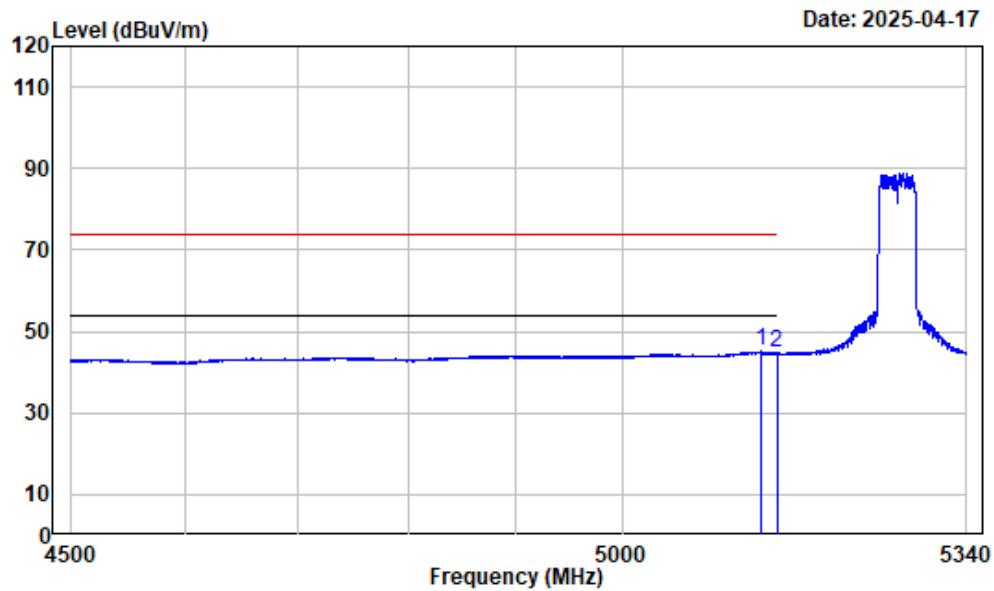

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5134.804	-7.46	52.53	45.07	54.00	-8.93	Average
2	5150.000	-7.46	52.09	44.63	54.00	-9.37	Average


Left Bandedge_Vertical_Peak_802.11n-HT40_5270MHz_Band 2

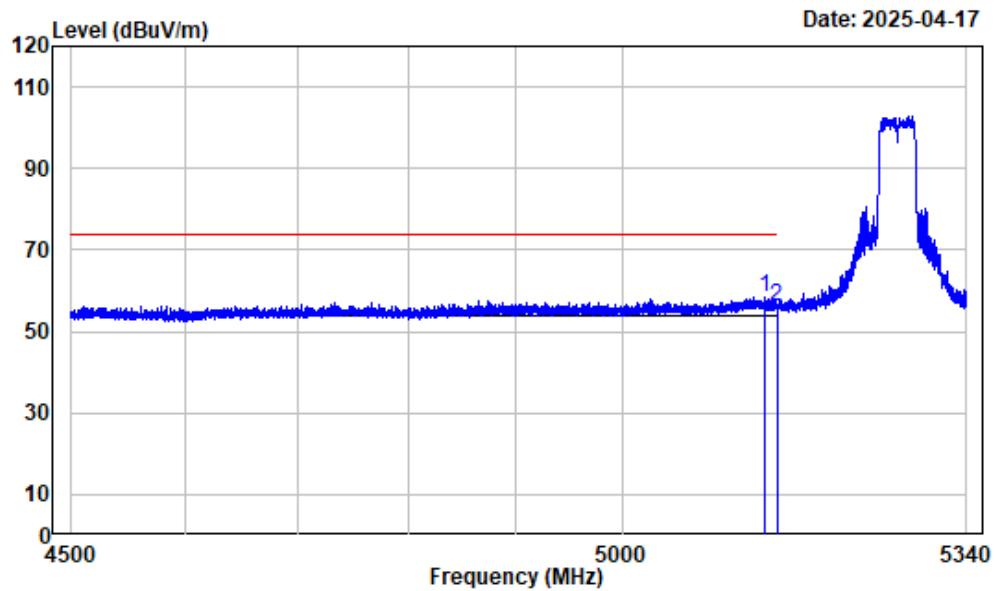

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5138.480	-7.46	66.02	58.56	74.00	-15.44	Peak
2	5150.000	-7.46	63.46	56.00	74.00	-18.00	Peak


Left Bandedge_Vertical_Average_802.11n-HT40_5270MHz_Band 2

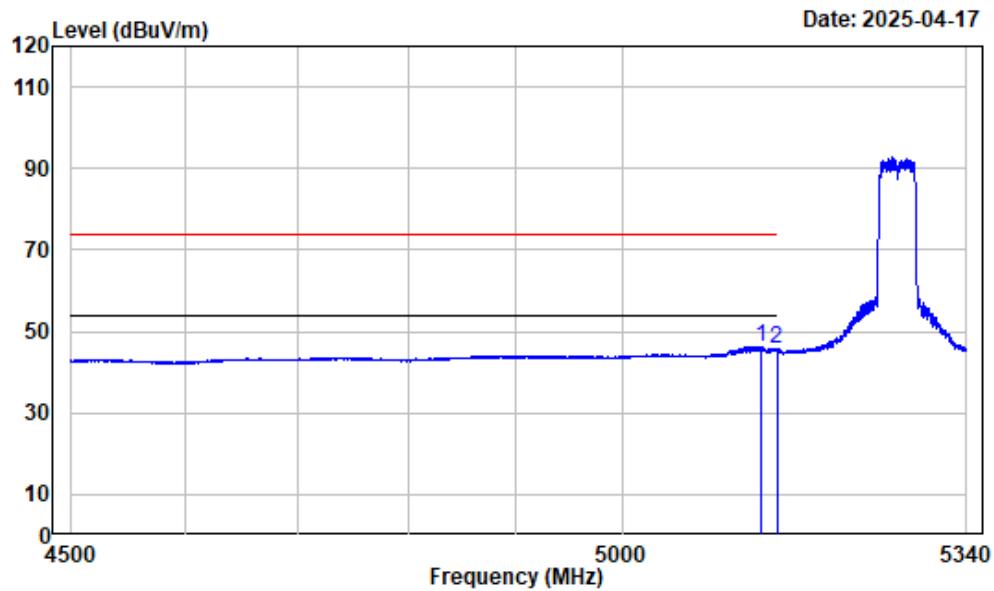

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5134.909	-7.46	53.82	46.36	54.00	-7.64	Average
2	5150.000	-7.46	53.12	45.66	54.00	-8.34	Average


Right Bandedge_Horizontal_Peak_802.11n-HT40_5310MHz_Band 2

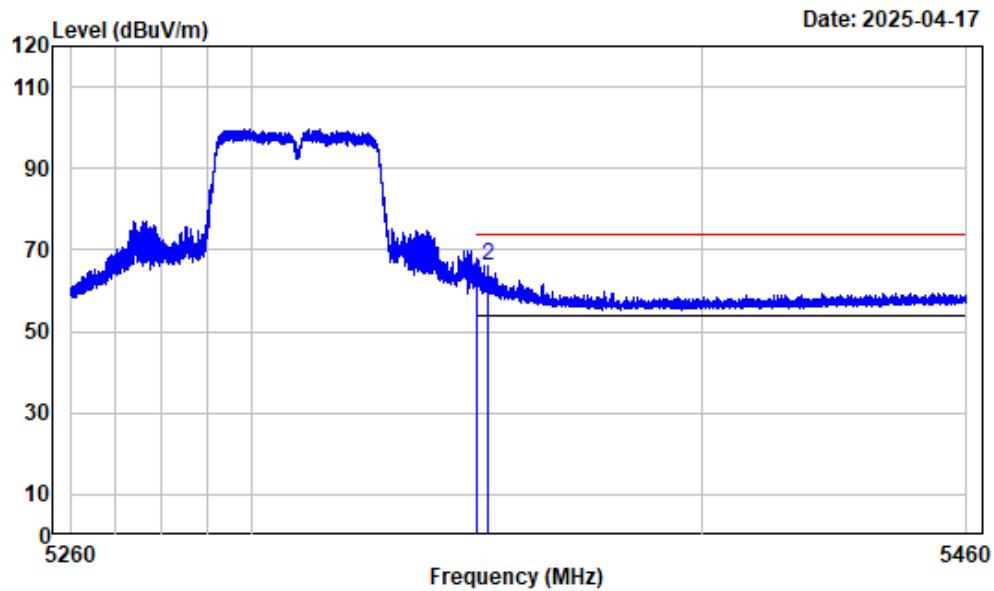

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5350.000	-6.74	68.88	62.14	74.00	-11.86	Peak
2	5352.162	-6.74	72.97	66.23	74.00	-7.77	Peak

Right Bandedge_Horizontal_Average_802.11n-HT40_5310MHz_Band 2

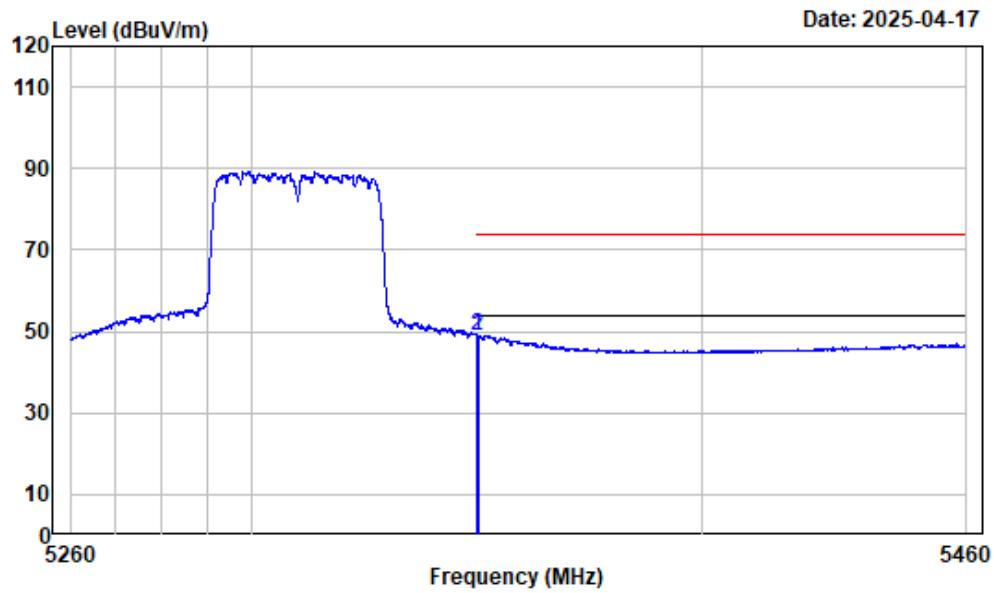

Condition : Horizontal

Project No. : 2501R31585E-RF


Tester : Zenos Qiao

Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak

Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	55.71	48.97	54.00	-5.03	Average
2	5350.027	-6.74	55.82	49.08	54.00	-4.92	Average


Right Bandedge_Vertical_Peak_802.11n-HT40_5310MHz_Band 2

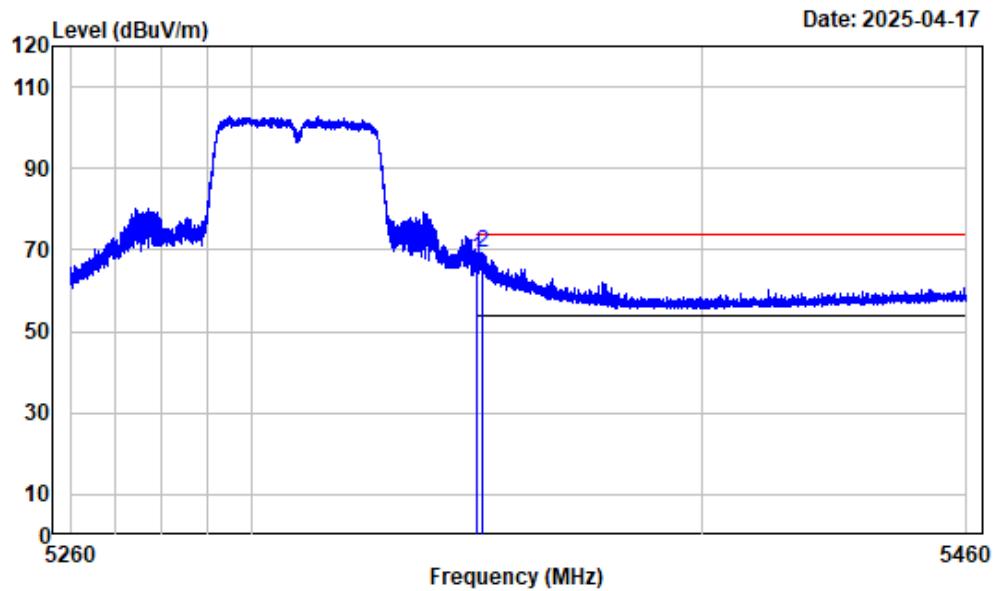

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5350.000	-6.74	74.84	68.10	74.00	-5.90	Peak
2	5350.986	-6.74	76.18	69.44	74.00	-4.56	Peak


Right Bandedge_Vertical_Average_802.11n-HT40_5310MHz_Band 2

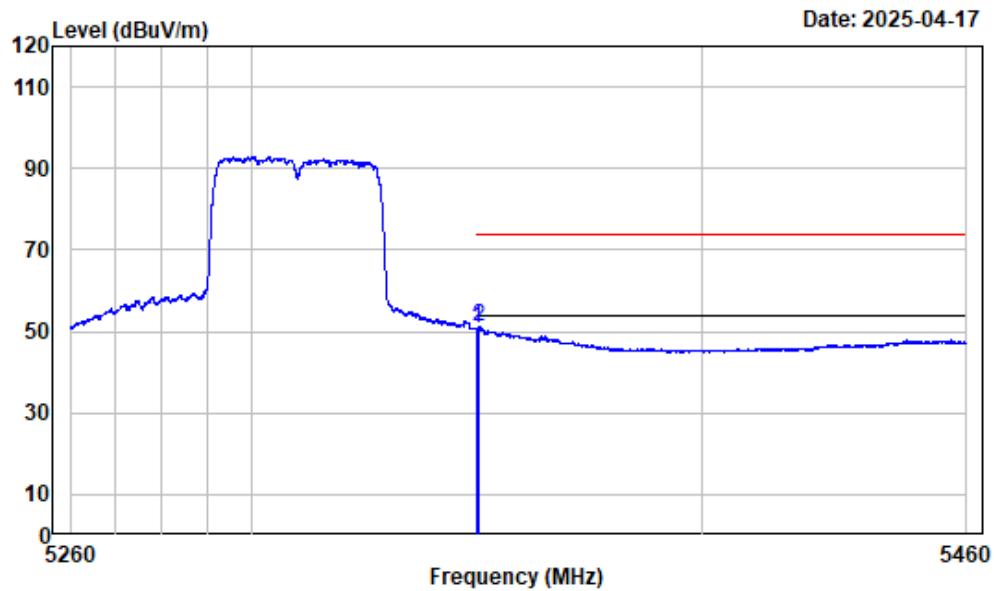

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	57.55	50.81	54.00	-3.19	Average
2	5350.236	-6.74	57.69	50.95	54.00	-3.05	Average


Left Bandedge_Horizontal_Peak_802.11a_5500MHz_Band 3

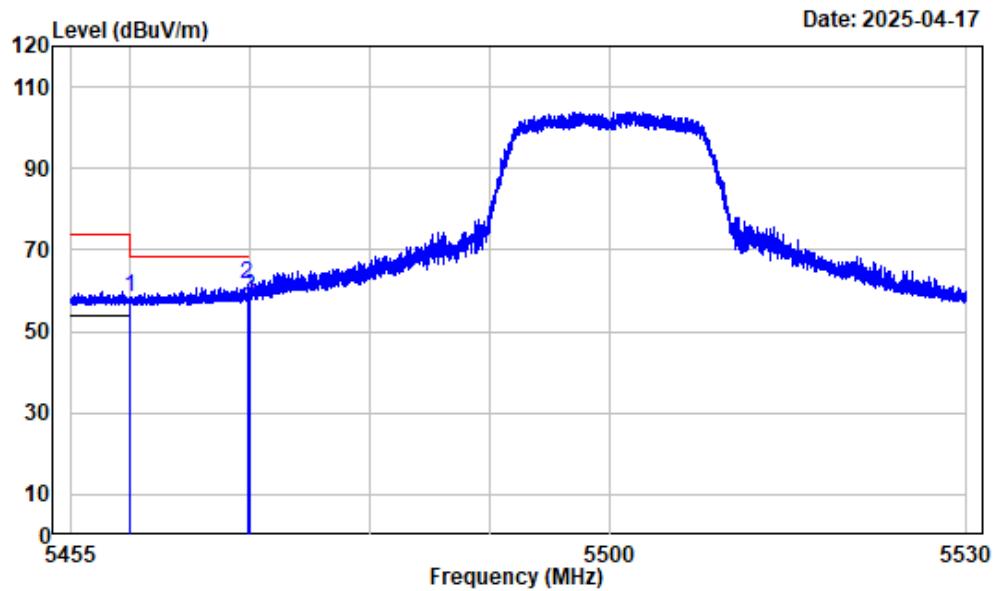

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	64.82	58.53	74.00	-15.47	Peak
2	5469.721	-6.26	67.86	61.60	68.20	-6.60	Peak
3	5470.000	-6.26	64.73	58.47	68.20	-9.73	Peak


Left Bandedge_Horizontal_Average_802.11a_5500MHz_Band 3

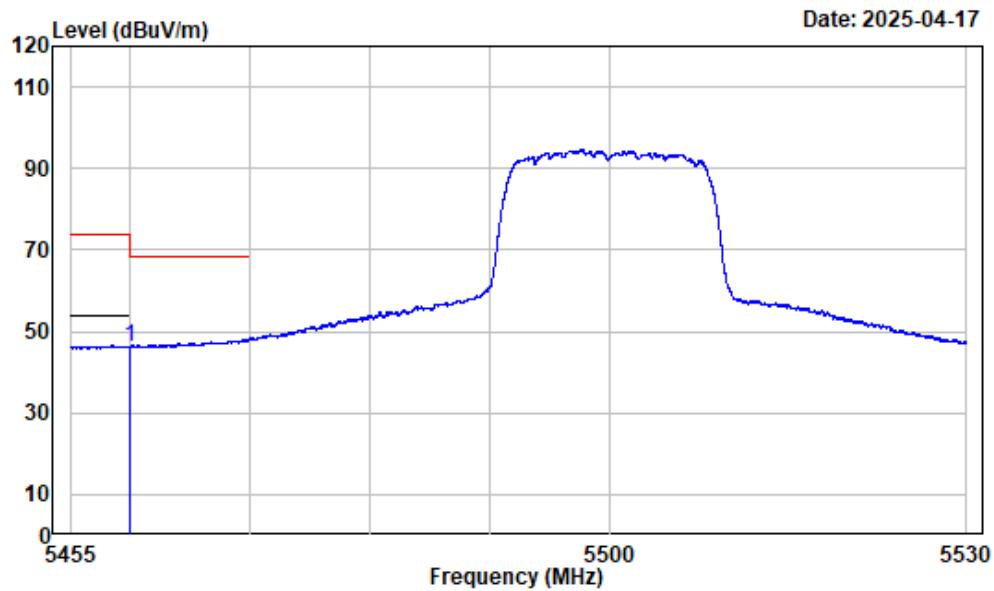

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5460.000	-6.29	52.49	46.20	54.00	-7.80	Average


Left Bandedge_Vertical_Peak_802.11a_5500MHz_Band 3

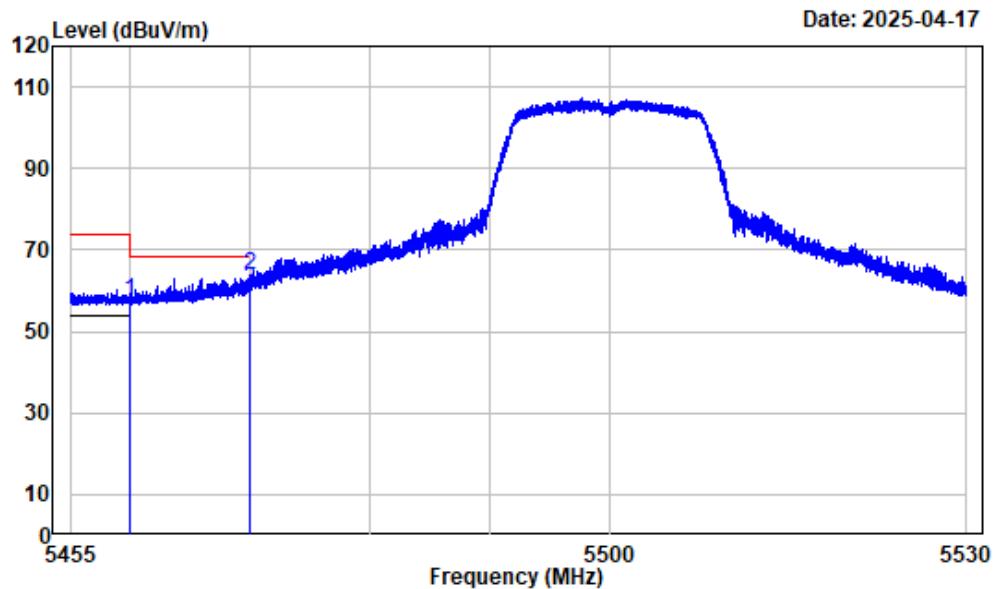

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	63.74	57.45	74.00	-16.55	Peak
2	5469.993	-6.26	70.09	63.83	68.20	-4.37	Peak
3	5470.000	-6.26	66.67	60.41	68.20	-7.79	Peak


Left Bandedge_Vertical_Average_802.11a_5500MHz_Band 3

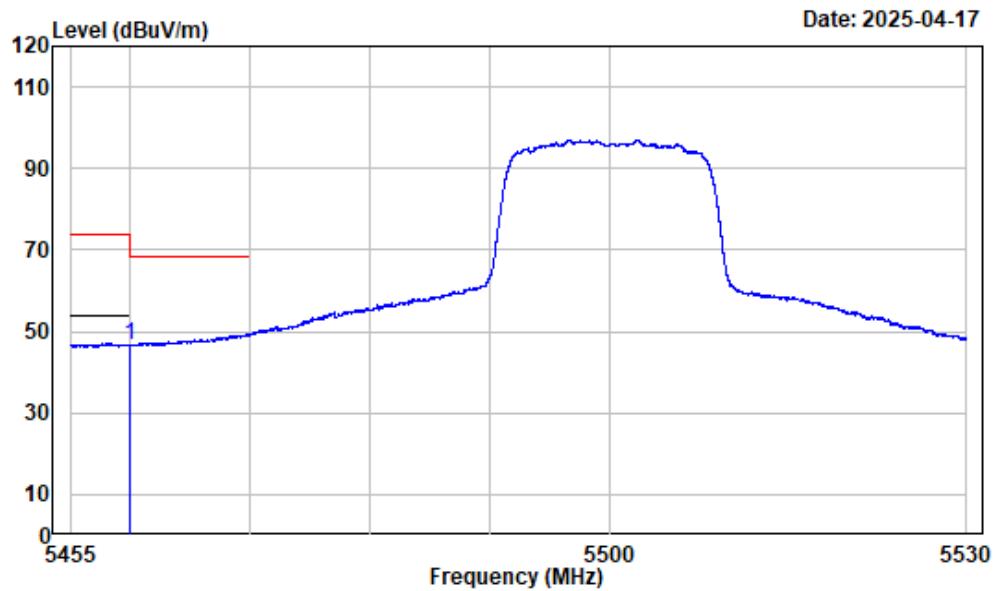

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5460.000	-6.29	53.05	46.76	54.00	-7.24	Average


Right Bandedge_Horizontal_Peak_802.11a_5700MHz_Band 3

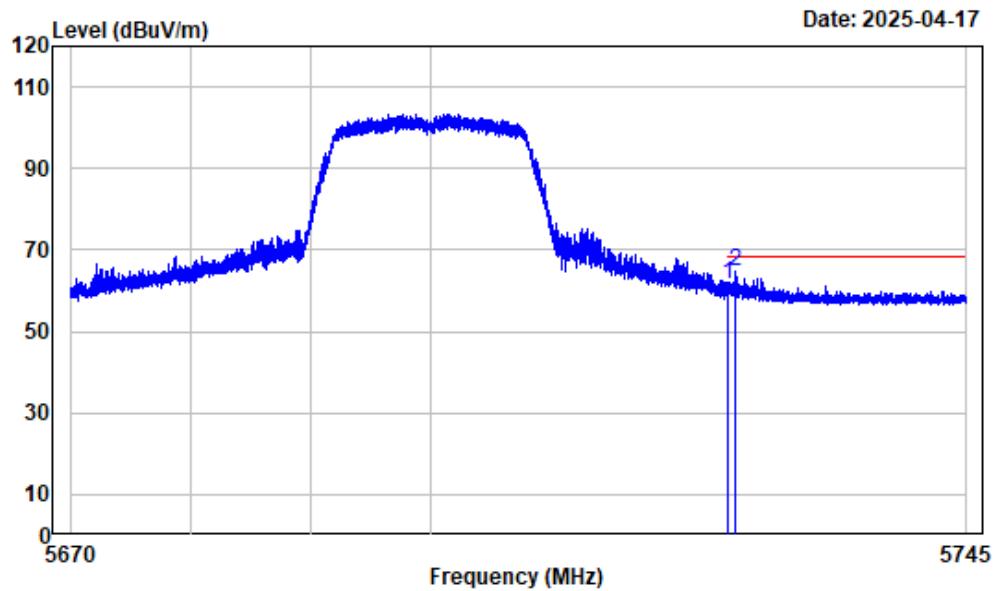

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5725.000	-5.48	67.02	61.54	68.20	-6.66	Peak
2	5725.498	-5.48	70.04	64.56	68.20	-3.64	Peak


Right Bandedge_Vertical_Peak_802.11a_5700MHz_Band 3

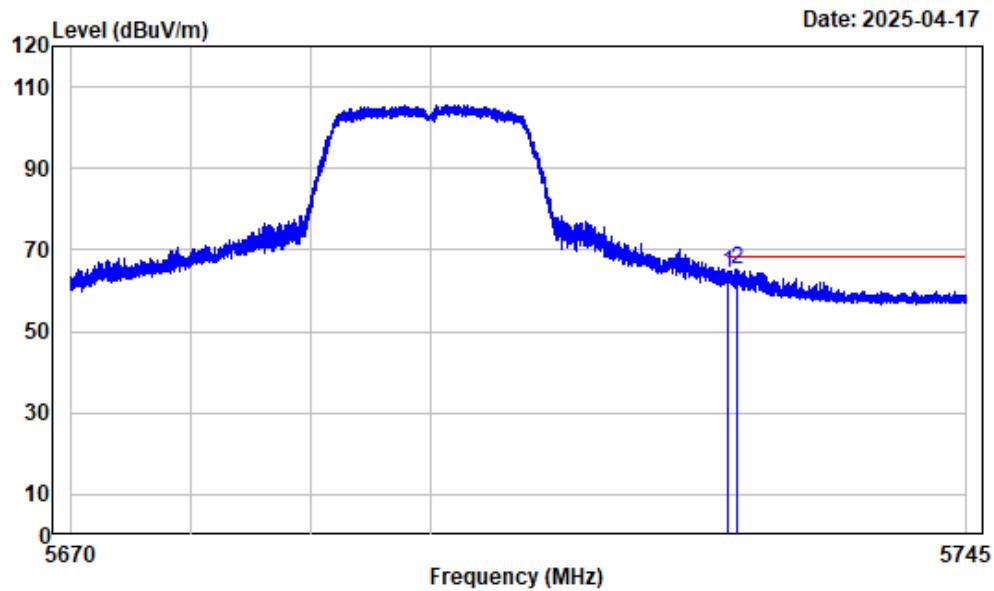

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	5725.000	-5.48	69.68	64.20	68.20	-4.00	Peak
2	5725.704	-5.48	70.60	65.12	68.20	-3.08	Peak


Left Bandedge_Horizontal_Peak_802.11n-HT20_5500MHz_Band 3

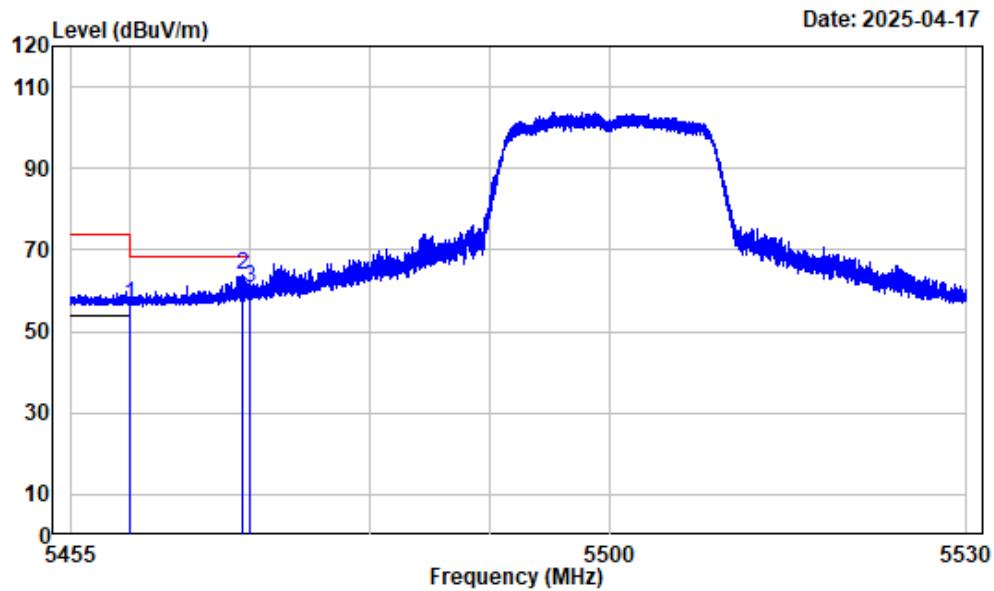

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	62.68	56.39	74.00	-17.61	Peak
2	5469.280	-6.26	70.01	63.75	68.20	-4.45	Peak
3	5470.000	-6.26	67.10	60.84	68.20	-7.36	Peak


Left Bandedge_Horizontal_Average_802.11n-HT20_5500MHz_Band 3

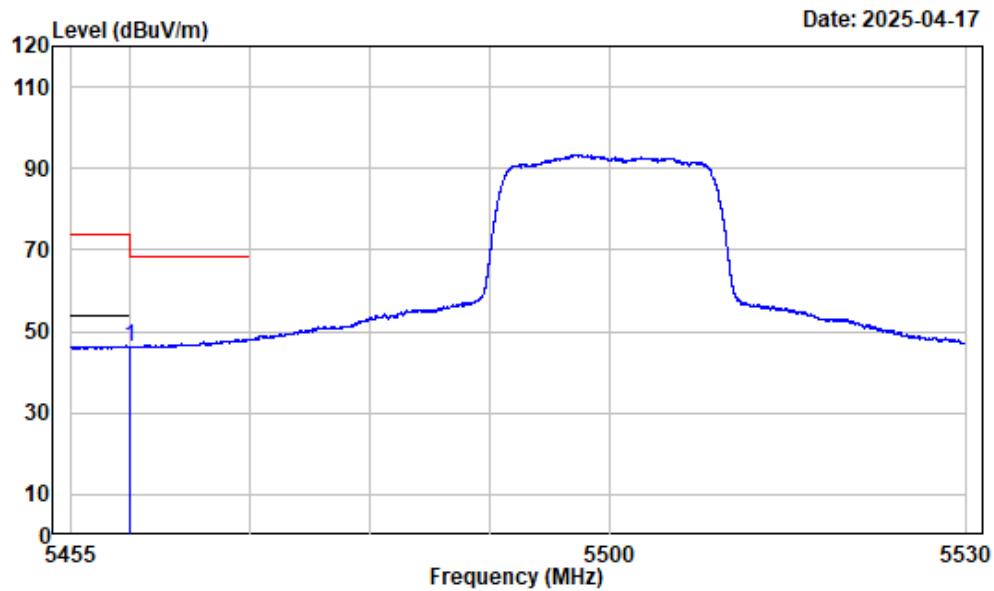

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
1	5460.000	-6.29	52.46	46.17	54.00	-7.83	Average

Left Bandedge_Vertical_Peak_802.11n-HT20_5500MHz_Band 3

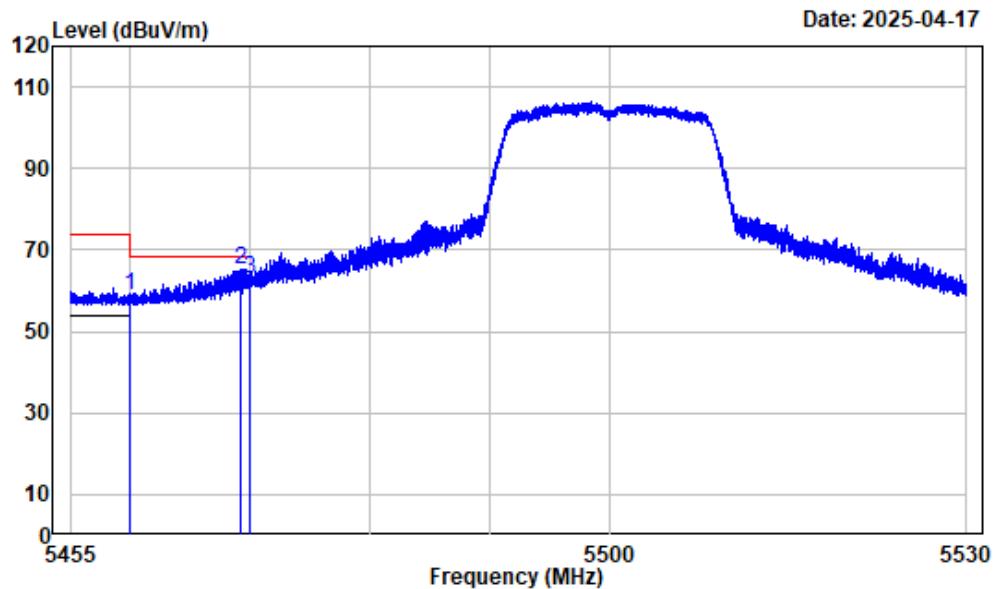

Condition : Vertical

Project No. : 2501R31585E-RF


Tester : Zenos Qiao

Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak

Note : 5GWiFi-Band3-N20-5500

	Freq	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5460.000	-6.29	64.99	58.70	74.00	-15.30 Peak
2	5469.205	-6.26	71.40	65.14	68.20	-3.06 Peak
3	5470.000	-6.26	69.33	63.07	68.20	-5.13 Peak


Left Bandedge_Vertical_Average_802.11n-HT20_5500MHz_Band 3

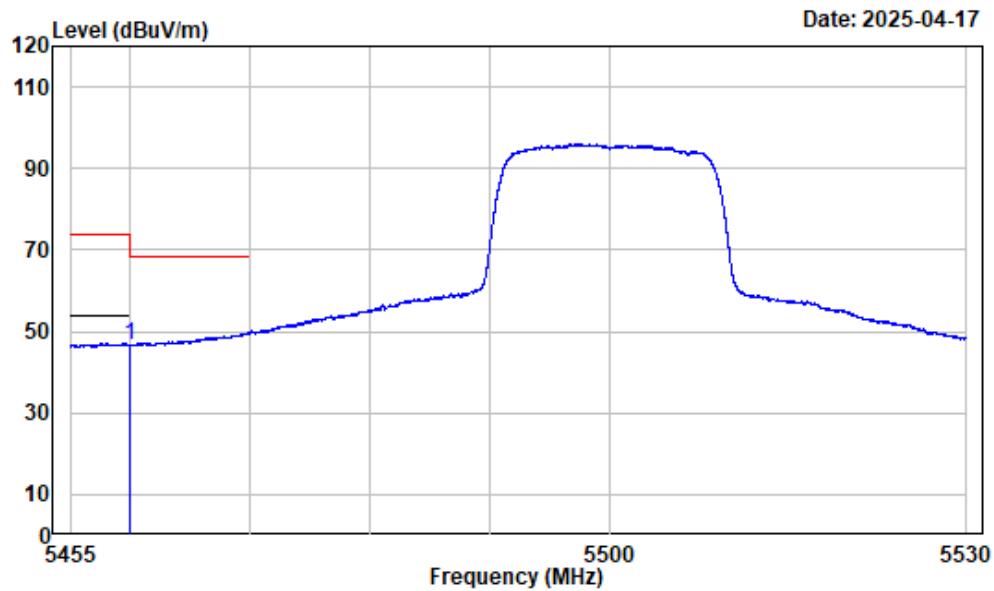

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
1	5460.000	-6.29	52.85	46.56	54.00	-7.44	Average


Right Bandedge_Horizontal_Peak_802.11n-HT20_5700MHz_Band 3

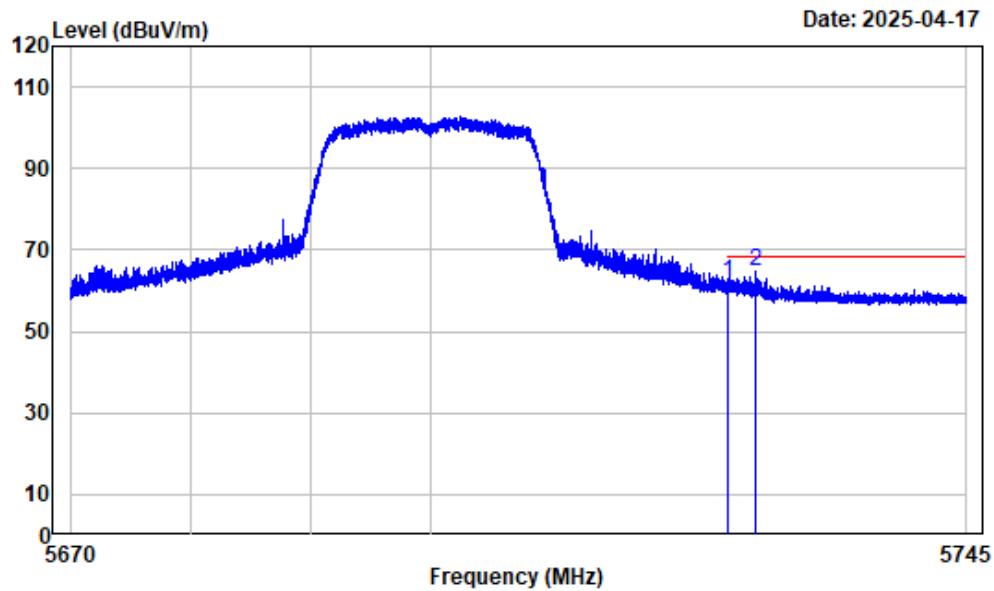

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	67.53	62.05	68.20	-6.15	Peak
2	5727.242	-5.47	70.13	64.66	68.20	-3.54	Peak


Right Bandedge_Vertical_Peak_802.11n-HT20_5700MHz_Band 3

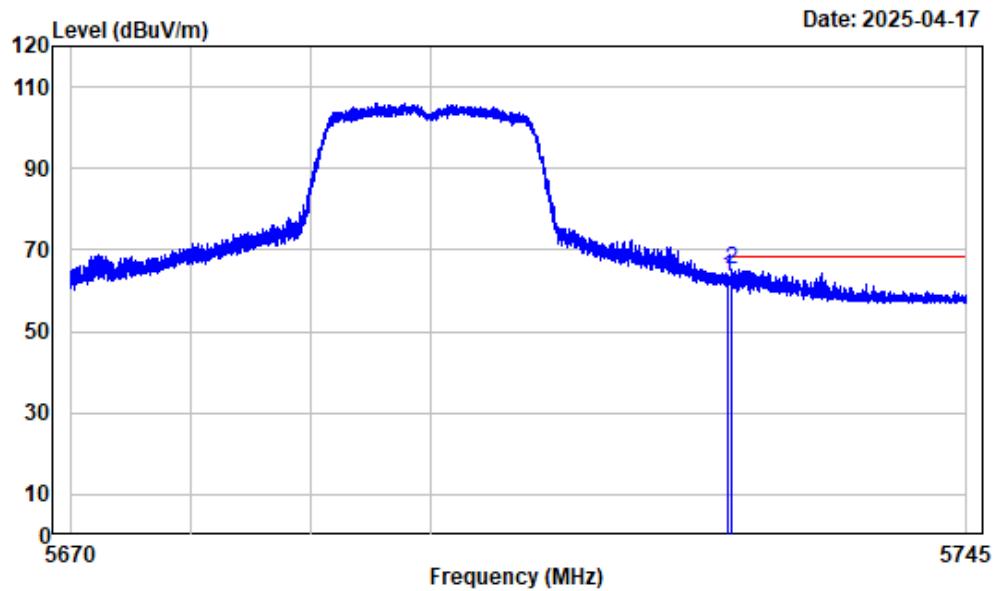

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5725.000	-5.48	68.65	63.17	68.20	-5.03	Peak
2	5725.226	-5.48	70.61	65.13	68.20	-3.07	Peak


Left Bandedge_Horizontal_Peak_802.11n-HT40_5510MHz_Band 3

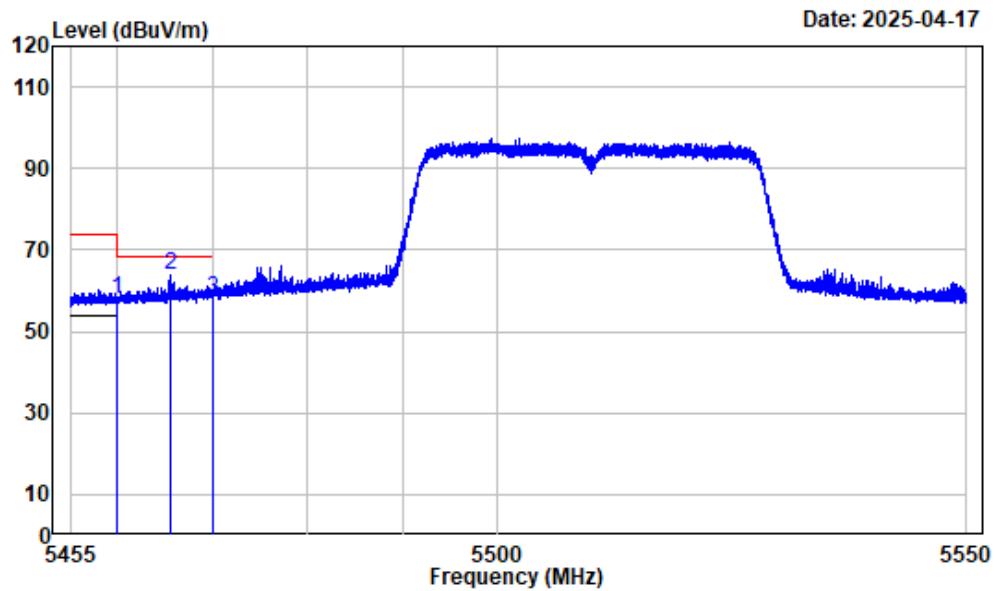

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
		MHz	dB/m	dBuV	dBuV/m
1	5460.000	-6.29	64.32	58.03	74.00 -15.97 Peak
2	5465.618	-6.27	70.15	63.88	68.20 -4.32 Peak
3	5470.000	-6.26	64.26	58.00	68.20 -10.20 Peak


Left Bandedge_Horizontal_Average_802.11n-HT40_5510MHz_Band 3

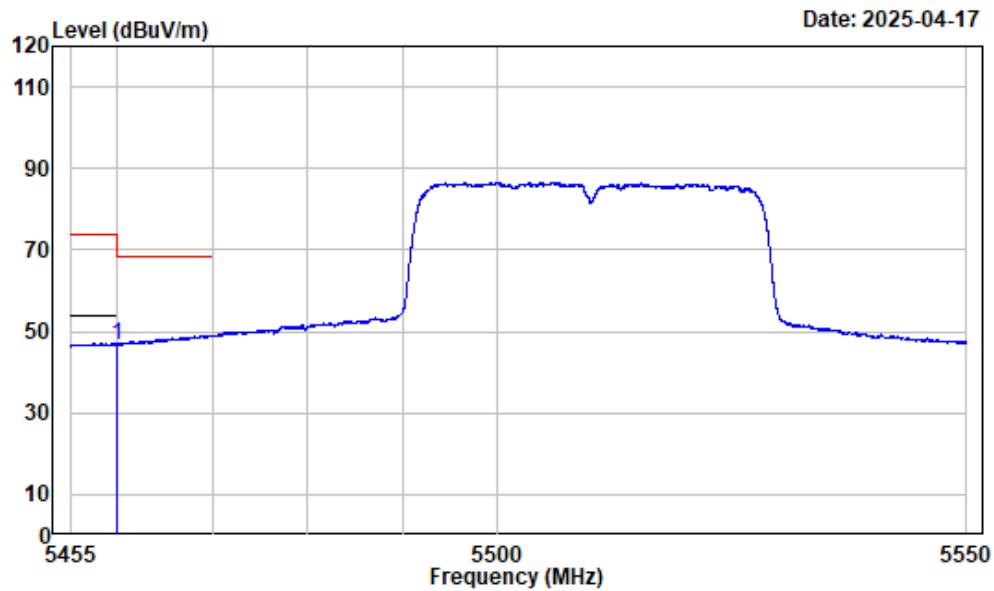

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dB _{uV}	dB _{uV/m}	dB _{uV/m}	dB	
1	5460.000	-6.29	53.14	46.85	54.00	-7.15	Average


Left Bandedge_Vertical_Peak_802.11n-HT40_5510MHz_Band 3

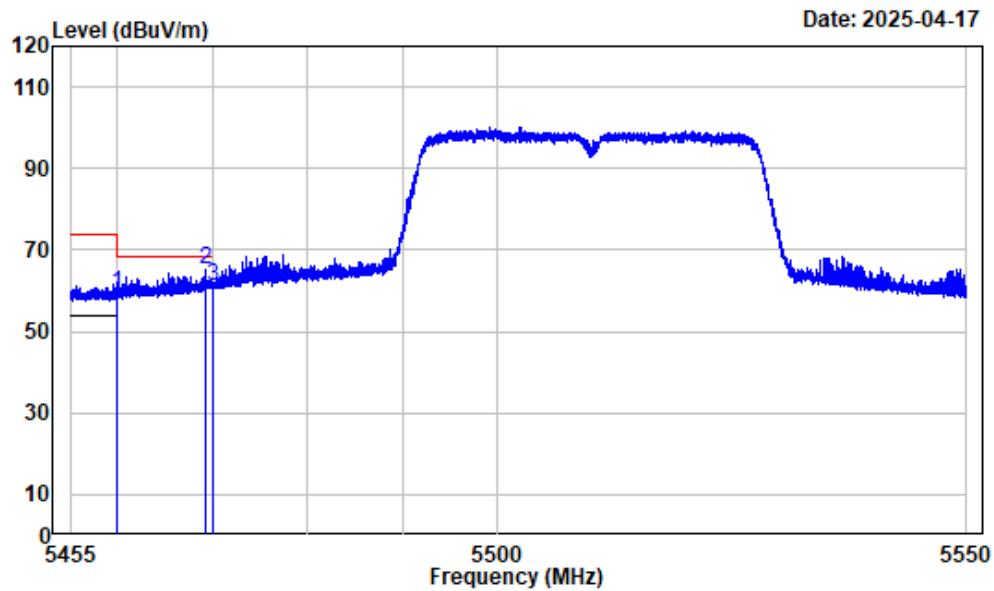

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5460.000	-6.29	65.79	59.50	74.00	-14.50 Peak
2	5469.264	-6.26	71.38	65.12	68.20	-3.08 Peak
3	5470.000	-6.26	67.30	61.04	68.20	-7.16 Peak


Left Bandedge_Vertical_Average_802.11n-HT40_5510MHz_Band 3

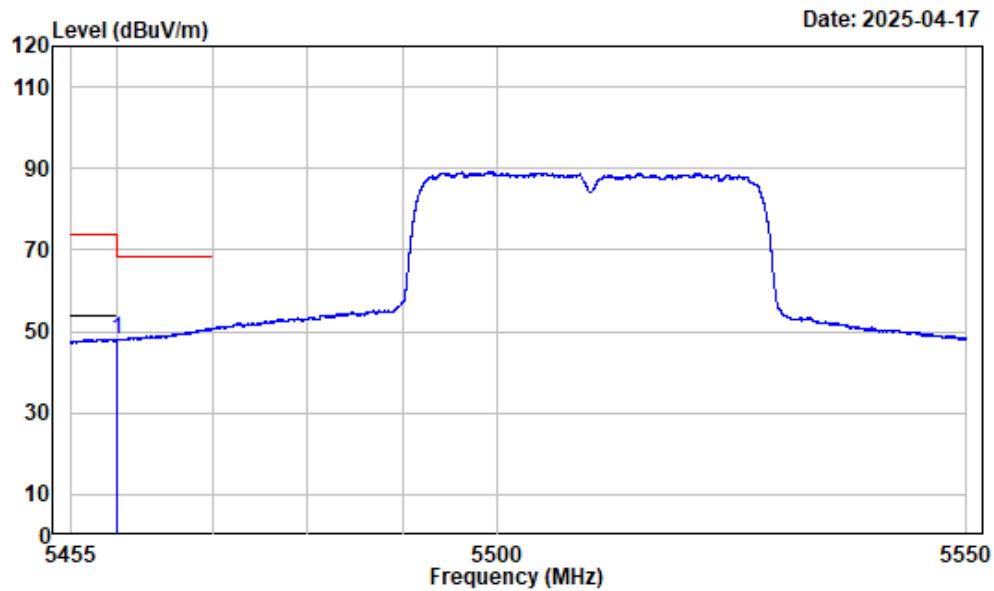

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	5460.000	-6.29	54.31	48.02	54.00	-5.98	Average


Right Bandedge_Horizontal_Peak_802.11n-HT40_5670MHz_Band 3

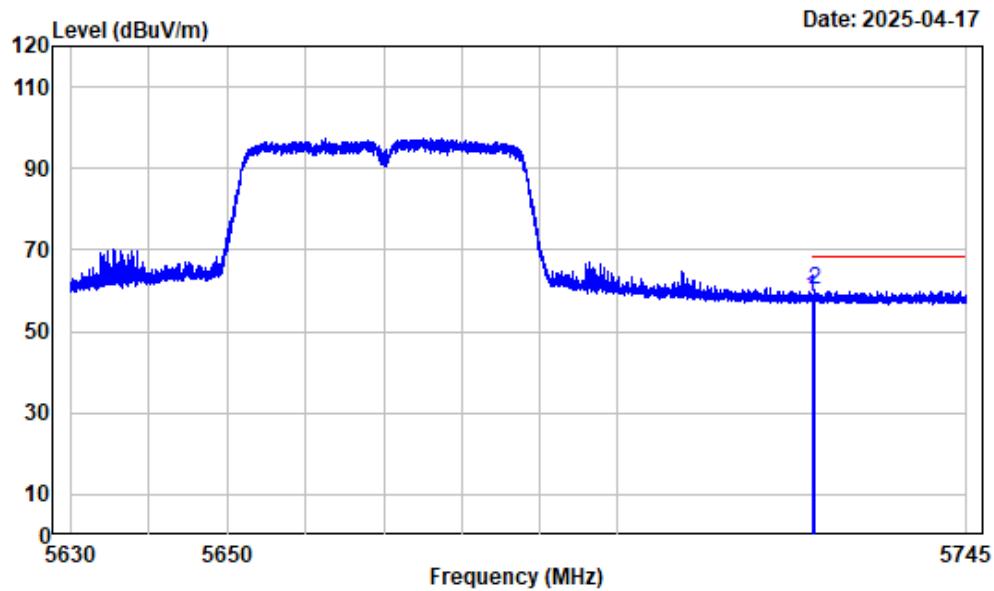

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5725.000	-5.48	63.76	58.28	68.20	-9.92 Peak
2	5725.433	-5.48	65.67	60.19	68.20	-8.01 Peak


Right Bandedge_Vertical_Peak_802.11n-HT40_5670MHz_Band 3

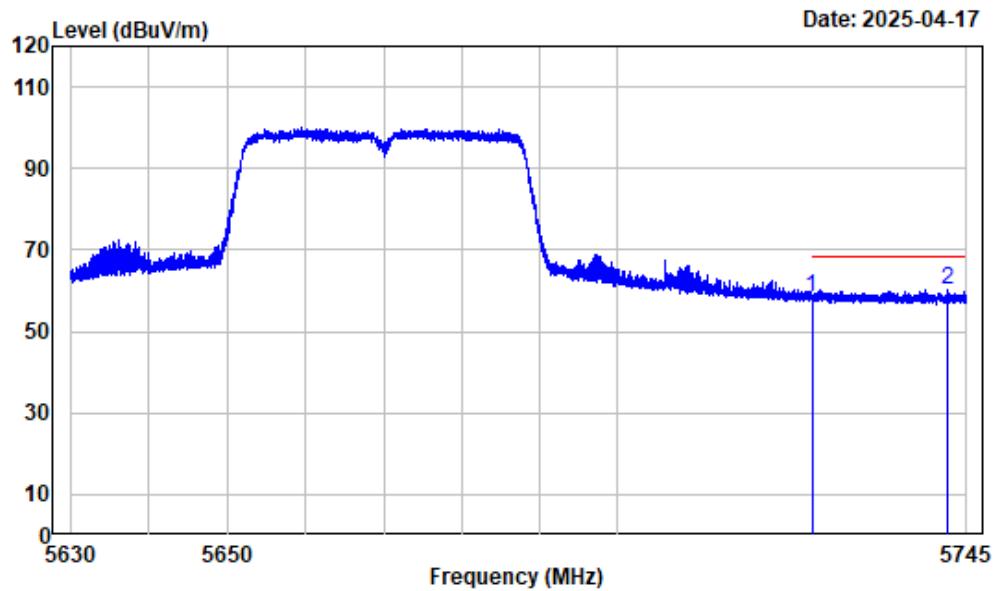

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5725.000	-5.48	63.76	58.28	68.20	-9.92 Peak
2	5742.642	-5.32	65.65	60.33	68.20	-7.87 Peak


Left Bandedge_Horizontal_Peak_802.11a_5745MHz_Band 4

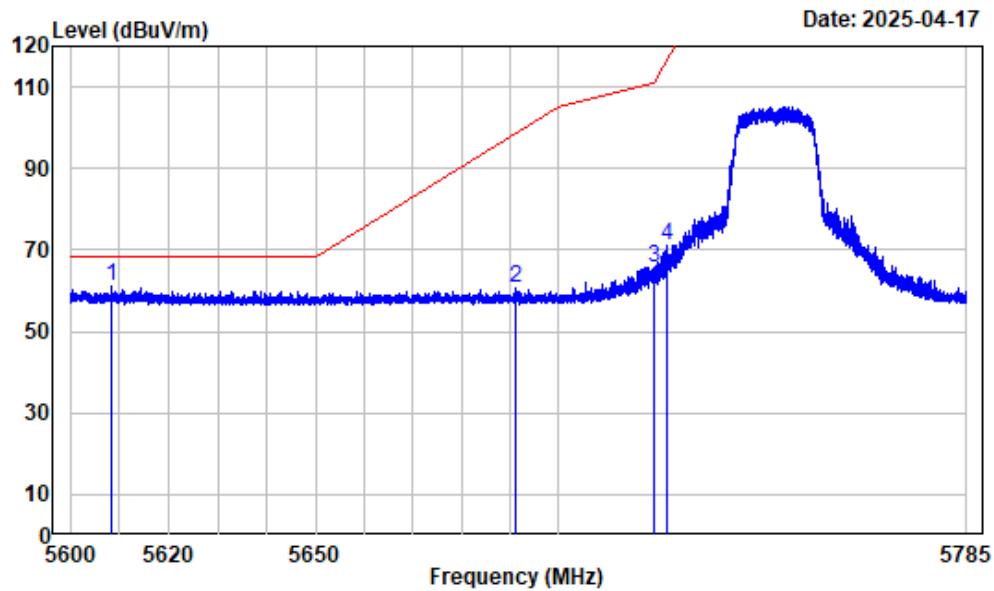

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
1	5608.396	-6.15	67.28	61.13	68.20	-7.07	Peak
2	5691.147	-5.75	66.58	60.83	98.67	-37.84	Peak
3	5719.987	-5.53	71.31	65.78	110.80	-45.02	Peak
4	5722.439	-5.51	76.81	71.30	116.36	-45.06	Peak


Left Bandedge_Vertical_Peak_802.11a_5745MHz_Band 4

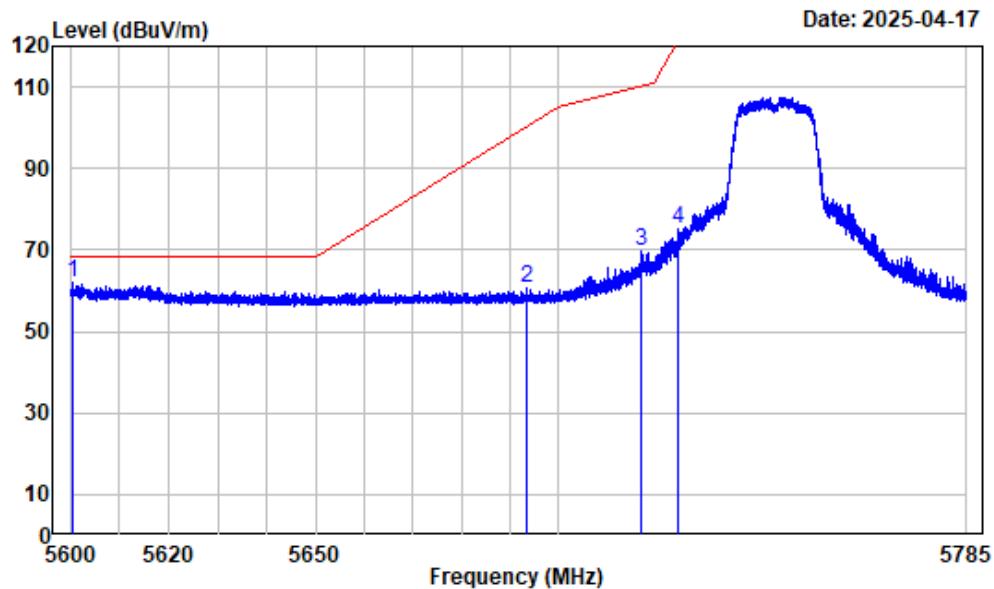

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	5600.393	-6.21	68.13	61.92	68.20	-6.28 Peak
2	5693.552	-5.73	66.42	60.69	100.45	-39.76 Peak
3	5717.143	-5.56	75.16	69.60	110.00	-40.40 Peak
4	5724.868	-5.49	80.74	75.25	121.90	-46.65 Peak


Right Bandedge_Horizontal_Peak_802.11a_5825MHz_Band 4

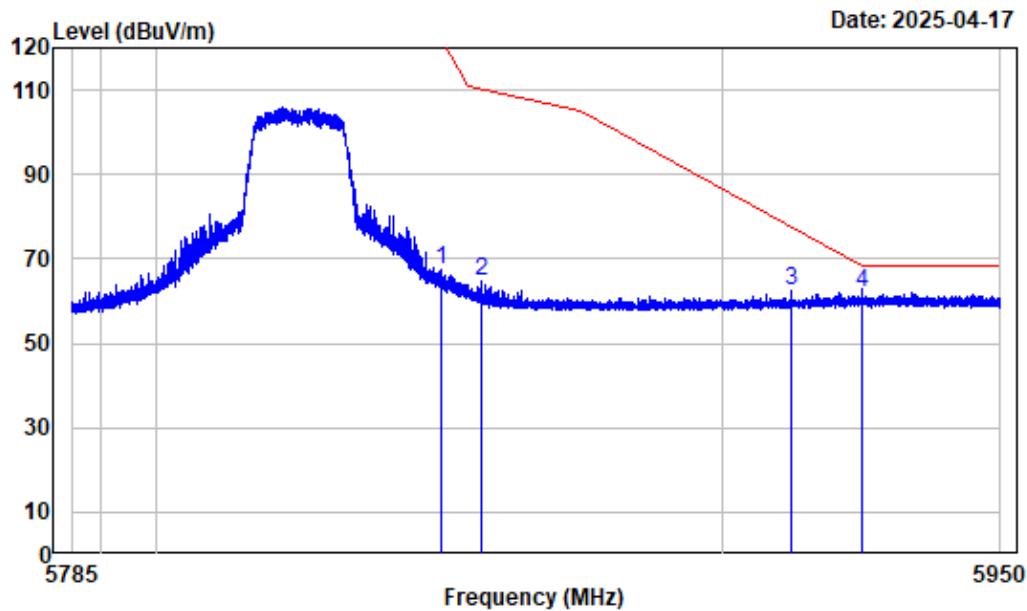

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB _{uV}	dB _{uV/m}		
1	5850.245	-4.68	72.12	67.44	121.64	-54.20	Peak
2	5857.258	-4.65	69.33	64.68	110.17	-45.49	Peak
3	5912.499	-4.45	66.88	62.43	77.42	-14.99	Peak
4	5925.123	-4.45	66.38	61.93	68.20	-6.27	Peak


Right Bandedge_Vertical_Peak_802.11a_5825MHz_Band 4

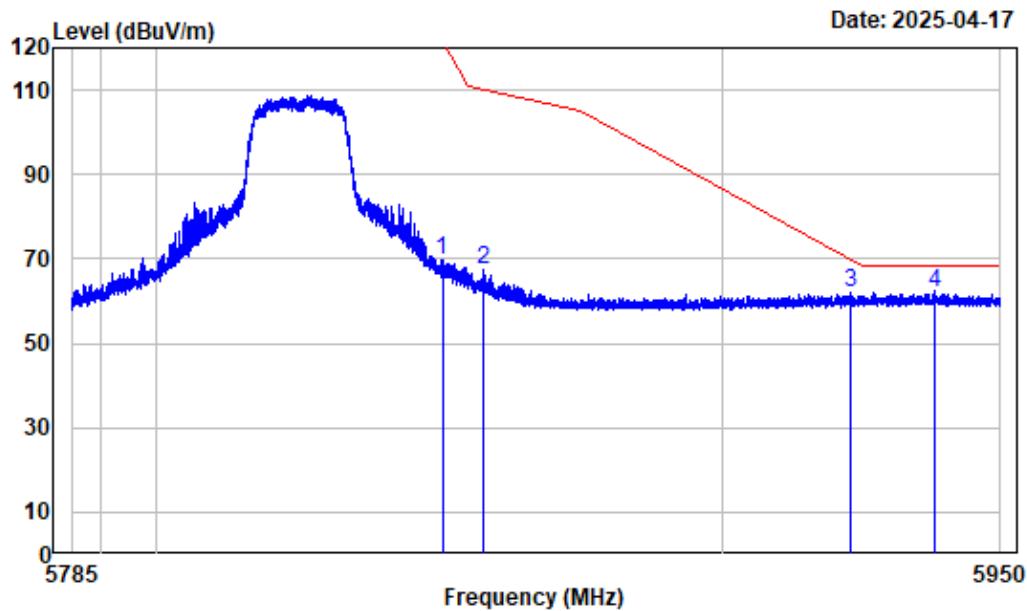

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB _{uV}	dB _{uV/m}		
1	5850.307	-4.68	74.44	69.76	121.50	-51.74	Peak
2	5857.650	-4.65	71.93	67.28	110.06	-42.78	Peak
3	5922.999	-4.46	66.49	62.03	69.67	-7.64	Peak
4	5938.325	-4.46	66.47	62.01	68.20	-6.19	Peak


Left Bandedge_Horizontal_Peak_802.11n-HT20_5745MHz_Band 4

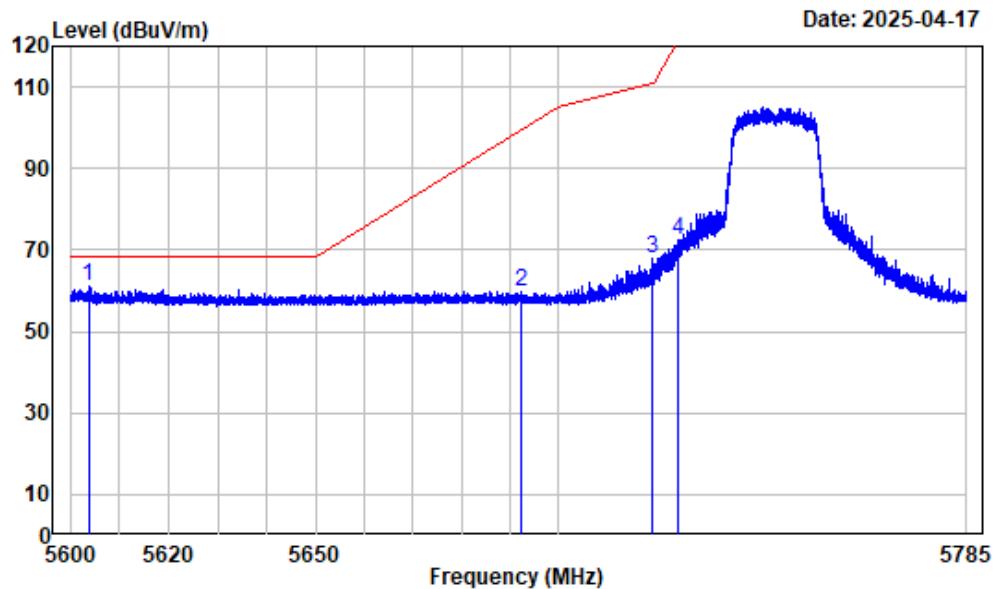

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	5603.677	-6.19	67.20	61.01	68.20	-7.19 Peak
2	5692.373	-5.73	65.53	59.80	99.58	-39.78 Peak
3	5719.456	-5.54	73.54	68.00	110.65	-42.65 Peak
4	5724.983	-5.49	77.79	72.30	122.16	-49.86 Peak


Left Bandedge_Vertical_Peak_802.11n-HT20_5745MHz_Band 4

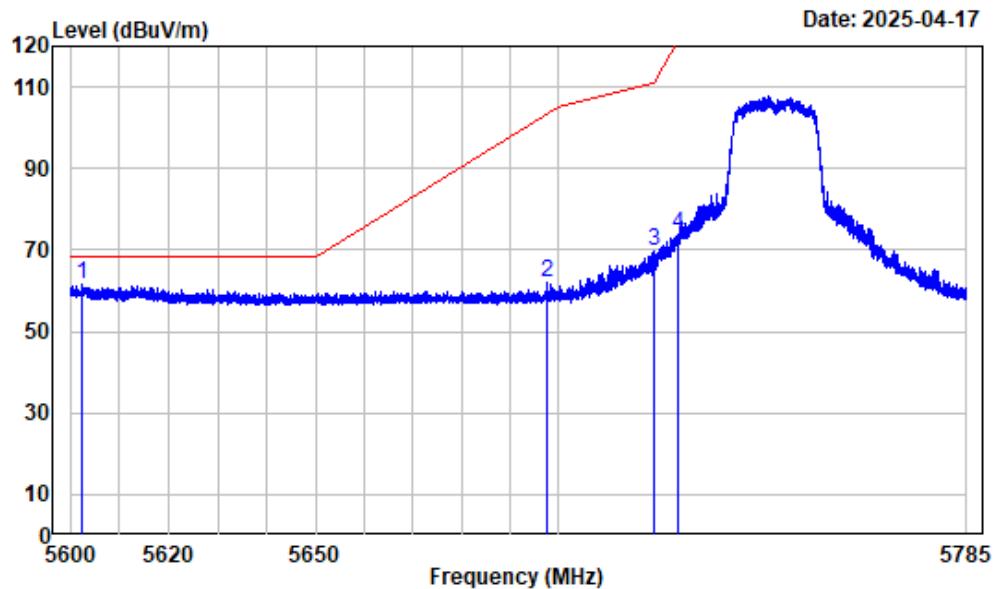

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
1	5602.267	-6.20	67.73	61.53	68.20	-6.67	Peak
2	5697.715	-5.72	67.95	62.23	103.52	-41.29	Peak
3	5719.918	-5.53	75.48	69.95	110.78	-40.83	Peak
4	5724.937	-5.49	79.40	73.91	122.06	-48.15	Peak


Right Bandedge_Horizontal_Peak_802.11n-HT20_5825MHz_Band 4

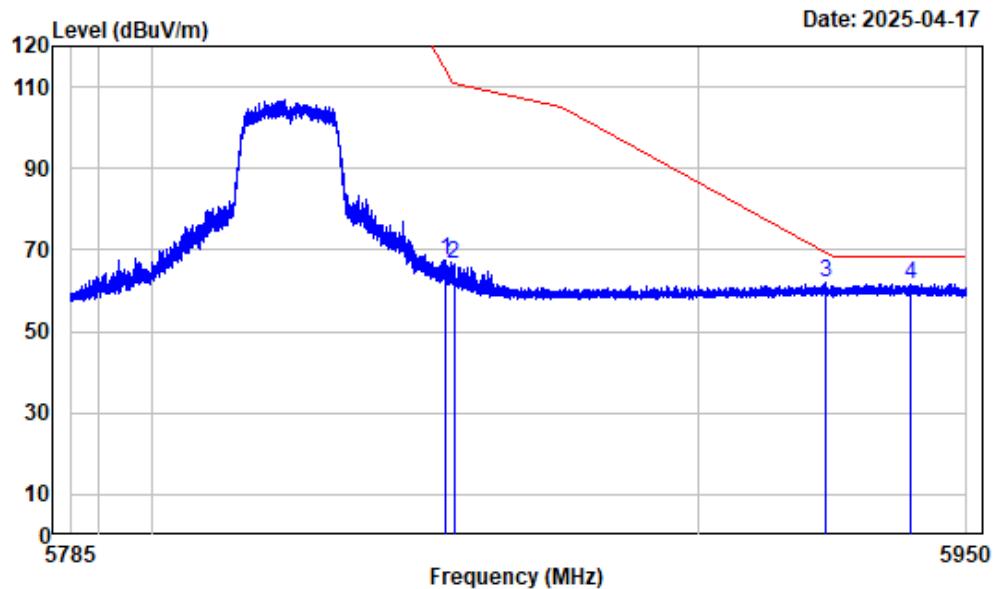

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	5853.504	-4.66	72.33	67.67	114.21	-46.54 Peak
2	5855.051	-4.66	71.29	66.63	110.79	-44.16 Peak
3	5923.824	-4.46	66.40	61.94	69.07	-7.13 Peak
4	5939.521	-4.44	66.18	61.74	68.20	-6.46 Peak


Right Bandedge_Vertical_Peak_802.11n-HT20_5825MHz_Band 4

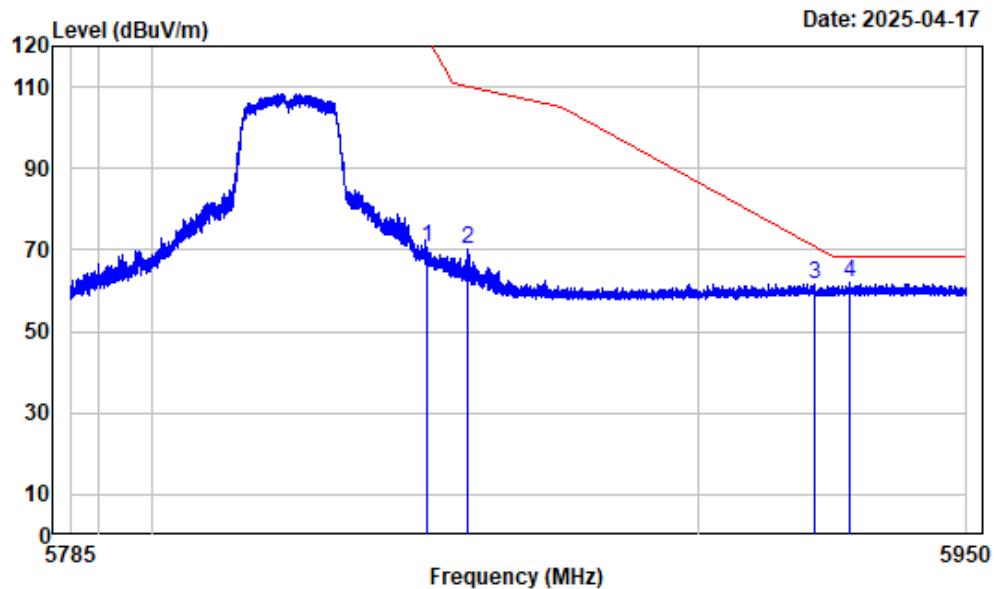

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	5850.060	-4.68	75.14	70.46	122.06	-51.60 Peak
2	5857.671	-4.65	74.71	70.06	110.05	-39.99 Peak
3	5921.781	-4.45	66.16	61.71	70.57	-8.86 Peak
4	5928.320	-4.45	66.29	61.84	68.20	-6.36 Peak


Left Bandedge_Horizontal_Peak_802.11n-HT40_5755MHz_Band 4

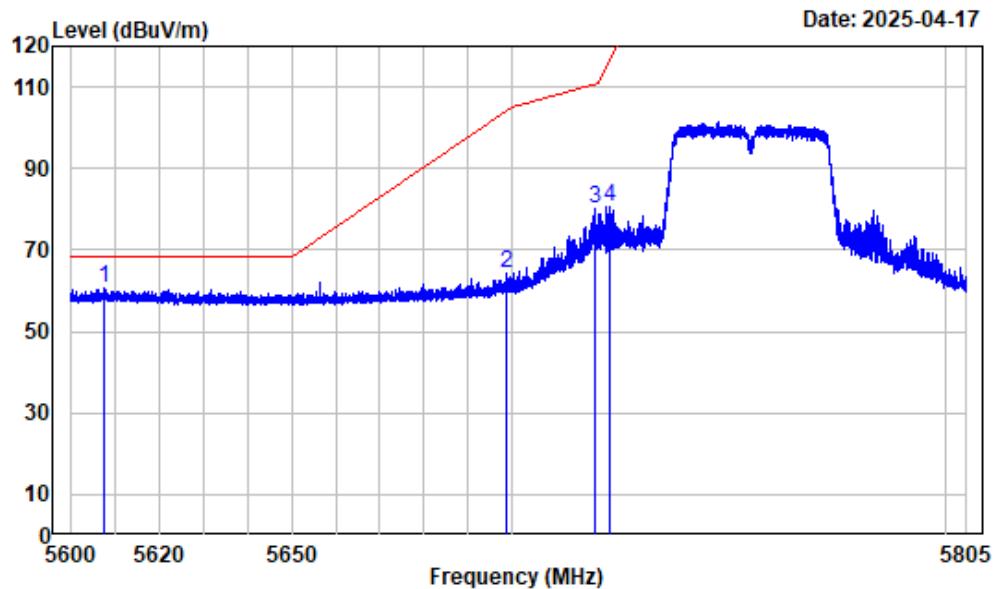

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	5607.432	-6.16	66.99	60.83	68.20	-7.37	Peak
2	5698.976	-5.72	69.95	64.23	104.45	-40.22	Peak
3	5719.299	-5.54	85.47	79.93	110.60	-30.67	Peak
4	5722.528	-5.50	86.03	80.53	116.57	-36.04	Peak


Left Bandedge_Vertical_Peak_802.11n-HT40_5755MHz_Band 4

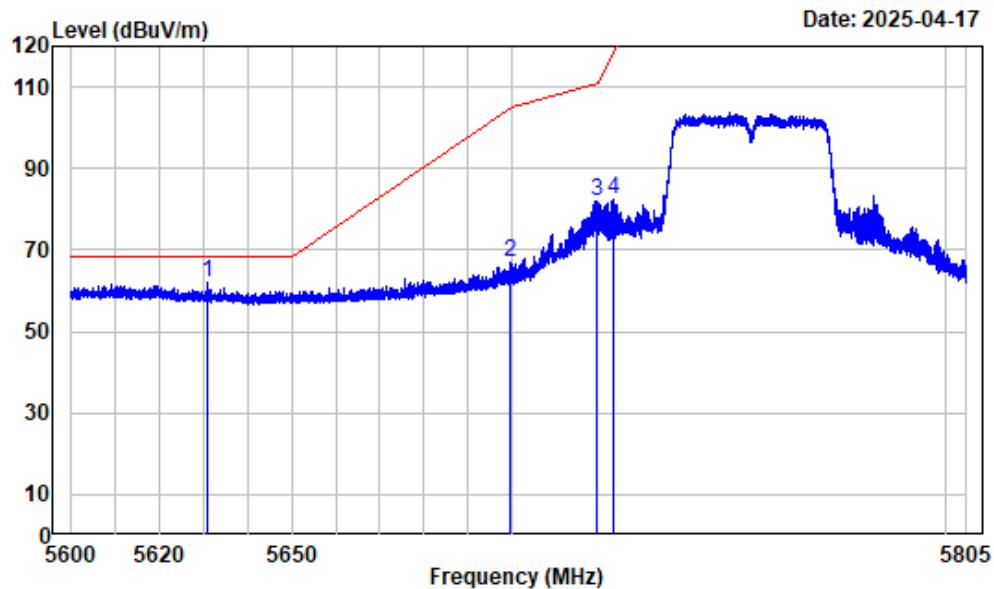

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	5630.779	-5.99	67.90	61.91	68.20	-6.29	Peak
2	5699.591	-5.71	72.89	67.18	104.90	-37.72	Peak
3	5719.632	-5.54	87.50	81.96	110.70	-28.74	Peak
4	5723.528	-5.49	87.81	82.32	118.84	-36.52	Peak


Right Bandedge_Horizontal_Peak_802.11n-HT40_5795MHz_Band 4

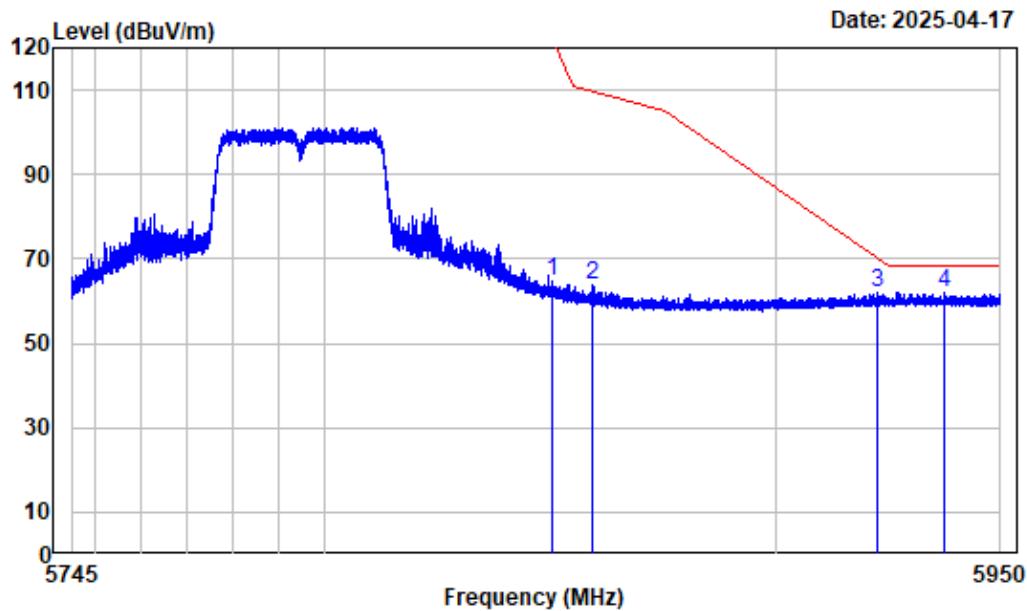

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5850.152	-4.68	69.33	64.65	121.85	-57.20	Peak
2	5859.199	-4.63	68.31	63.68	109.62	-45.94	Peak
3	5922.450	-4.45	66.57	62.12	70.08	-7.96	Peak
4	5937.365	-4.45	66.39	61.94	68.20	-6.26	Peak

Right Bandedge_Vertical_Peak_802.11n-HT40_5795MHz_Band 4

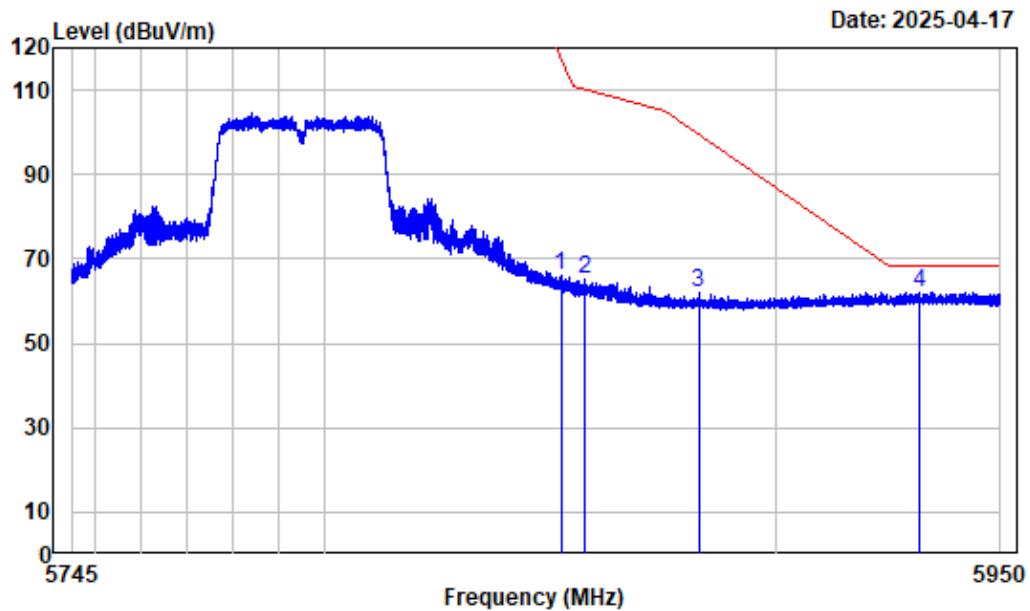


Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5852.100	-4.66	70.91	66.25	117.41	-51.16	Peak
2	5857.200	-4.65	69.83	65.18	110.18	-45.00	Peak
3	5882.598	-4.53	66.66	62.13	99.56	-37.43	Peak
4	5931.830	-4.44	66.47	62.03	68.20	-6.17	Peak

1-18GHz (Listed with the worst harmonic margin test plot)


1-7GHz_Horizontal_802.11a_5240MHz_Band 1

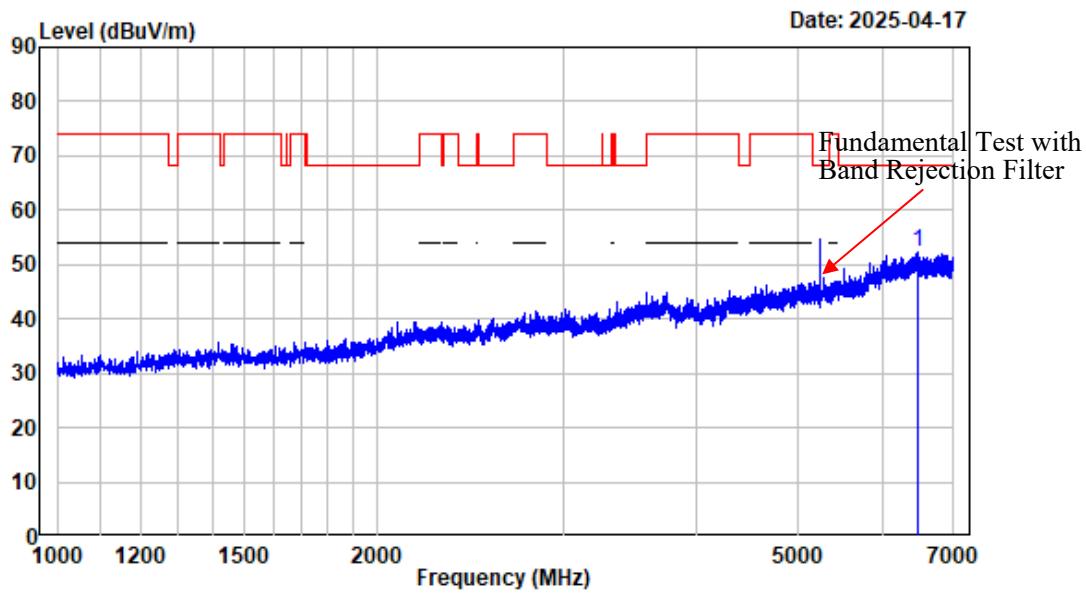

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6476.435	-2.92	55.13	52.21	68.20	-15.99	Peak


1-7GHz_Vertical_802.11a_5240MHz_Band 1

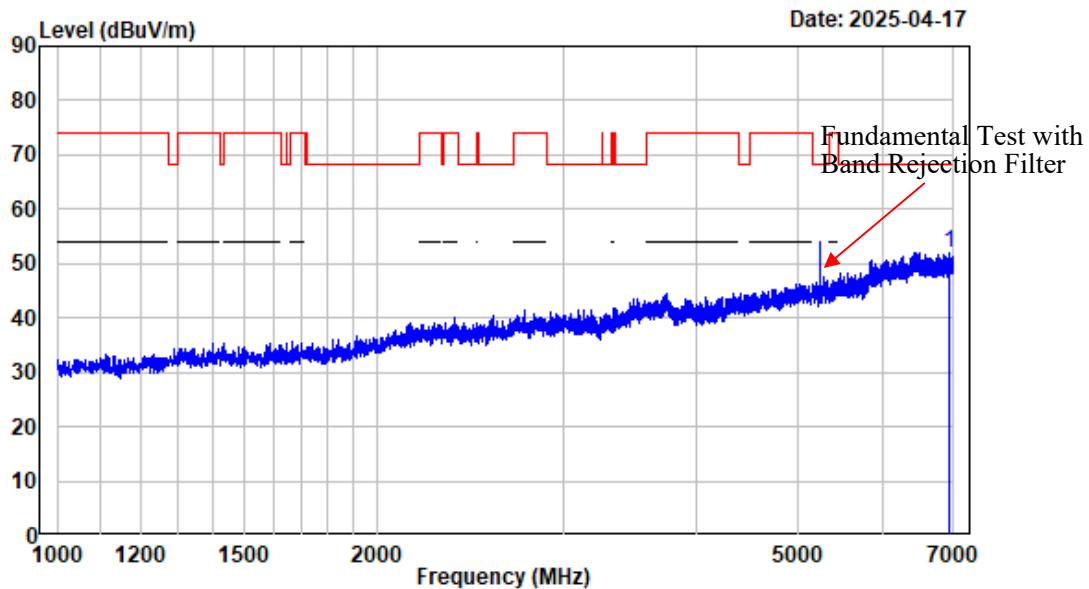

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6943.743	-2.75	54.86	52.11	68.20	-16.09	Peak


7-18GHz_Horizontal_Peak_802.11a_5240MHz_Band 1

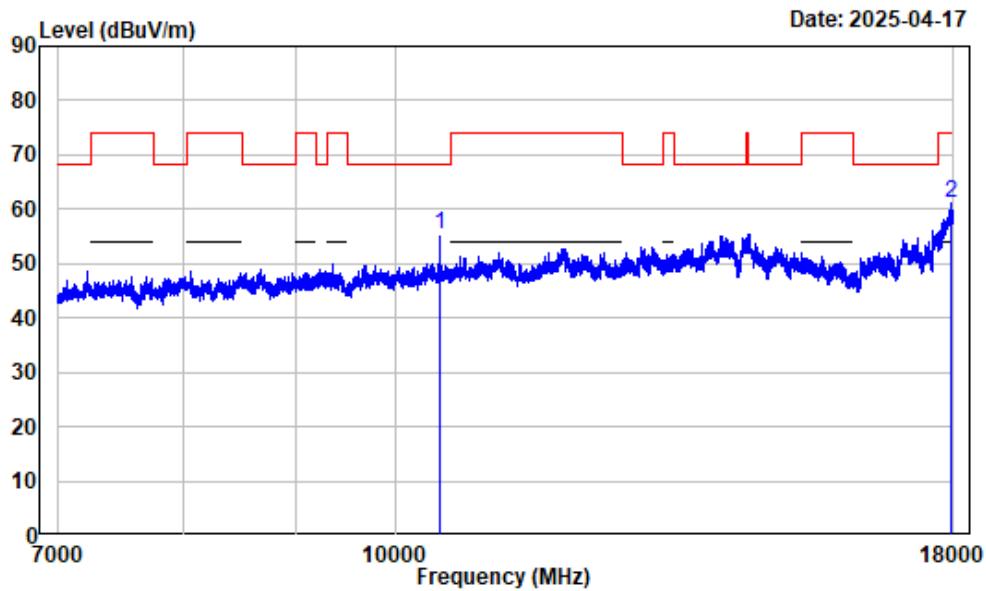

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10480.000	2.25	53.18	55.43	68.20	-12.77 Peak
2 17960.120	13.00	48.17	61.17	74.00	-12.83 Peak


7-18GHz_Horizontal_Average_802.11a_5240MHz_Band 1

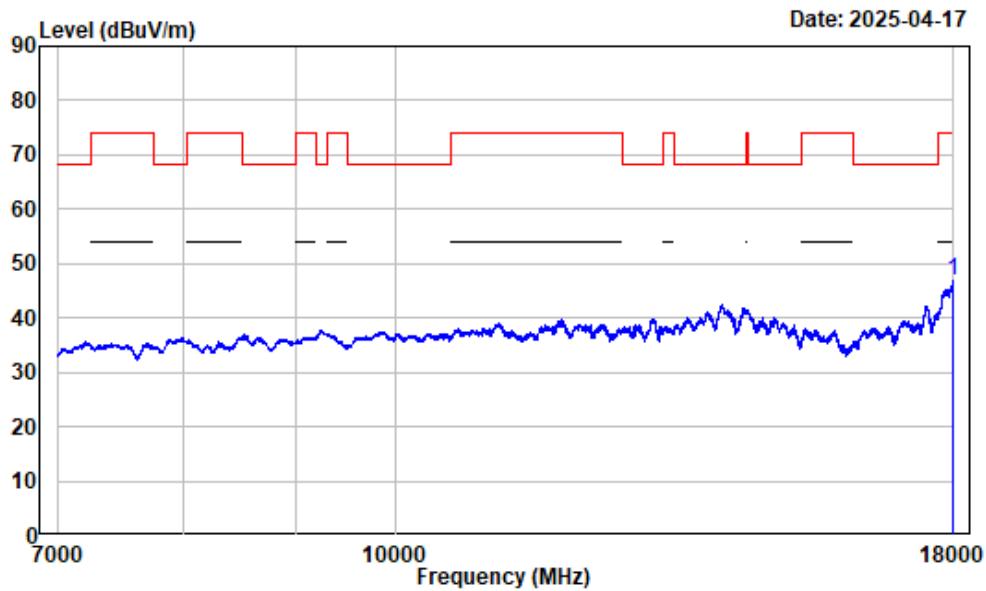

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	17998.630	13.19	33.59	46.78	54.00	-7.22	Average


7-18GHz_Vertical_Peak_802.11a_5240MHz_Band 1

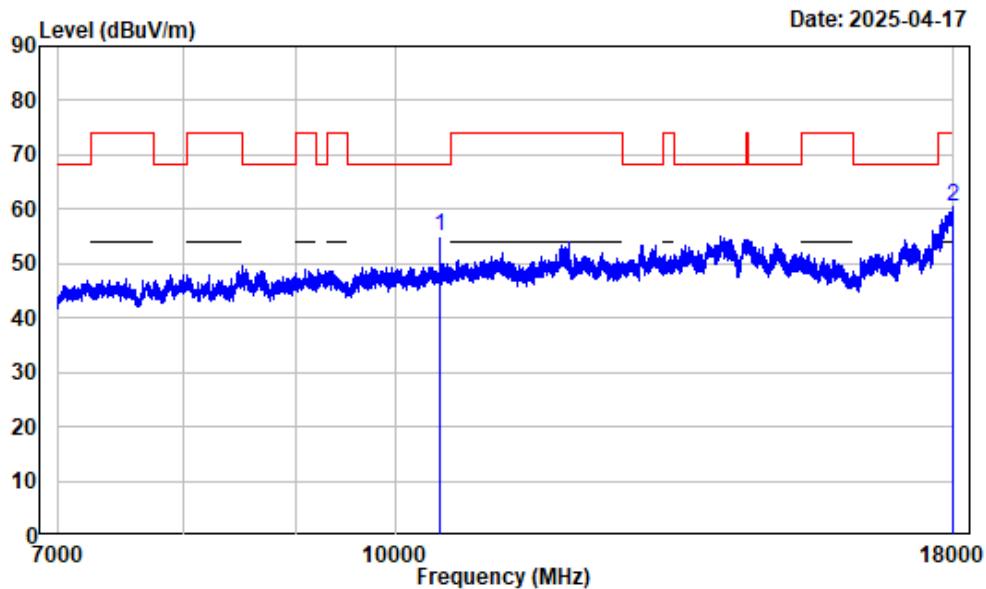

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10480.000	2.25	52.85	55.10	68.20	-13.10 Peak
2 17986.250	13.12	47.20	60.32	74.00	-13.68 Peak


7-18GHz_Vertical_Average_802.11a_5240MHz_Band 1

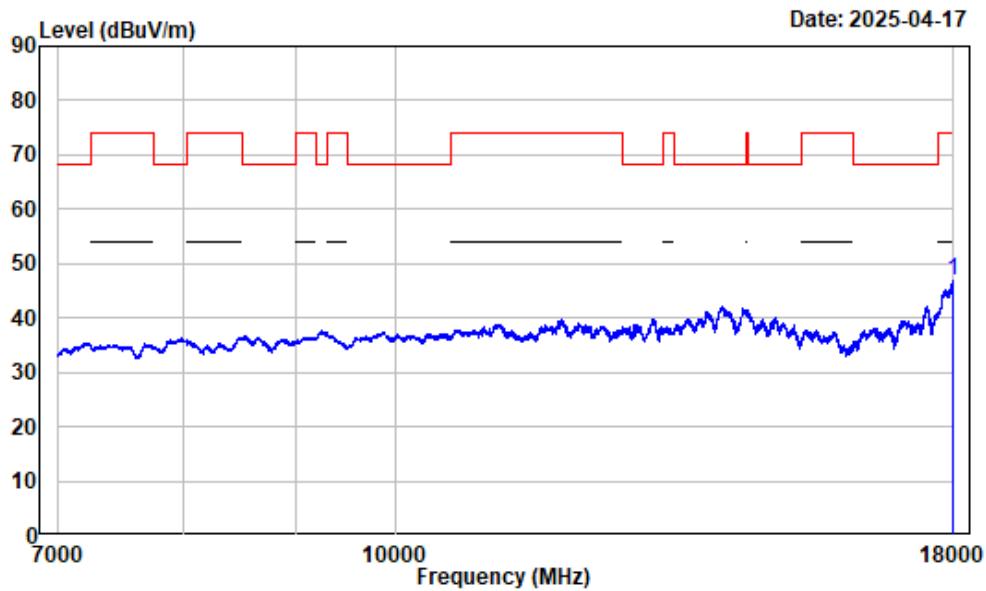

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
1	17995.880	13.18	33.63	46.81	54.00	-7.19	Average


1-7GHz_Horizontal_802.11n-HT20_5240MHz_Band 1

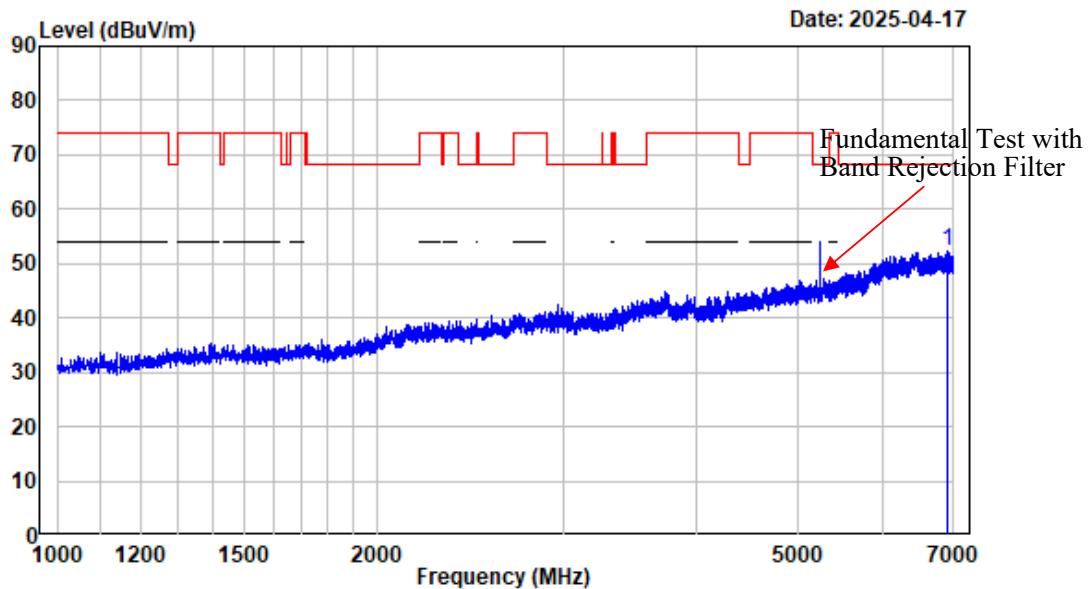

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6906.238	-3.08	55.45	52.37	68.20	-15.83	Peak


1-7GHz_Vertical_802.11n-HT20_5240MHz_Band 1

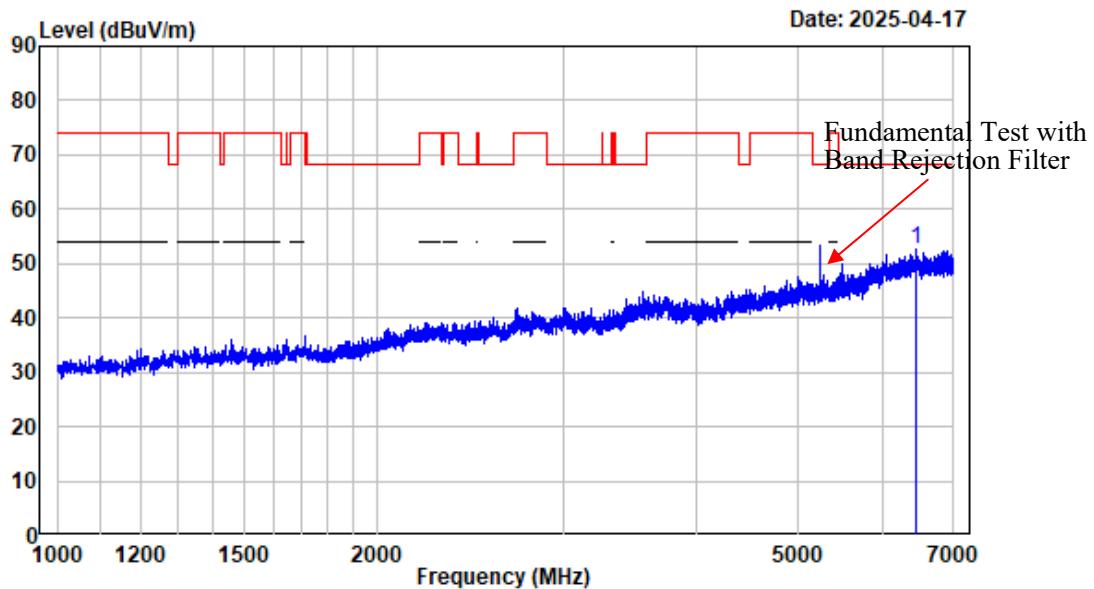

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6459.183	-2.89	55.54	52.65	68.20	-15.55	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20_5240MHz_Band 1

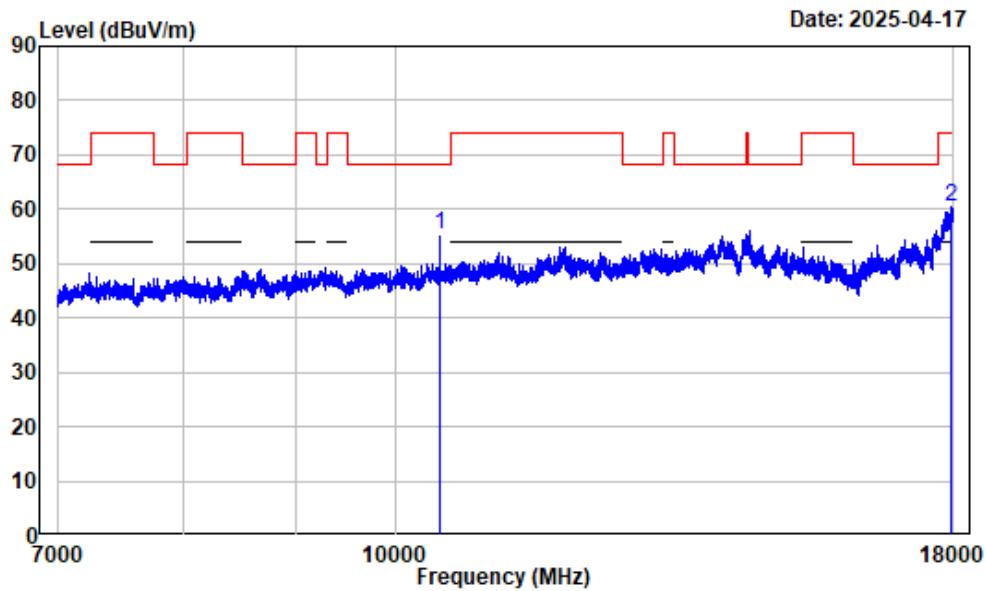

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	2.25	53.07	55.32	68.20	-12.88	Peak
2	17962.870	13.01	47.40	60.41	74.00	-13.59	Peak


7-18GHz_Horizontal_Average_802.11n-HT20_5240MHz_Band 1

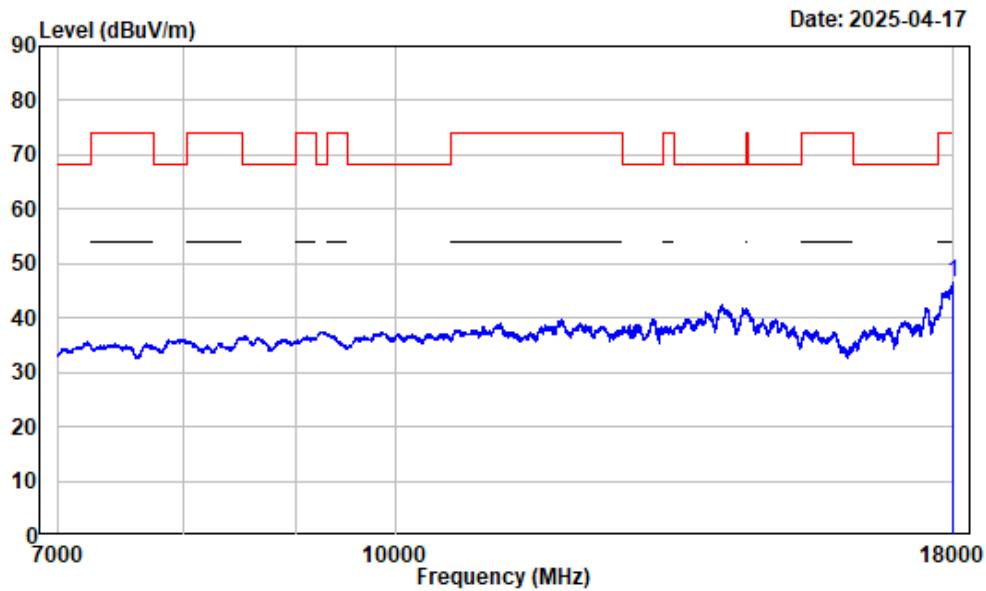

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17997.750	13.20	33.43	46.63	54.00	-7.37	Average


7-18GHz_Vertical_Peak_802.11n-HT20_5240MHz_Band 1

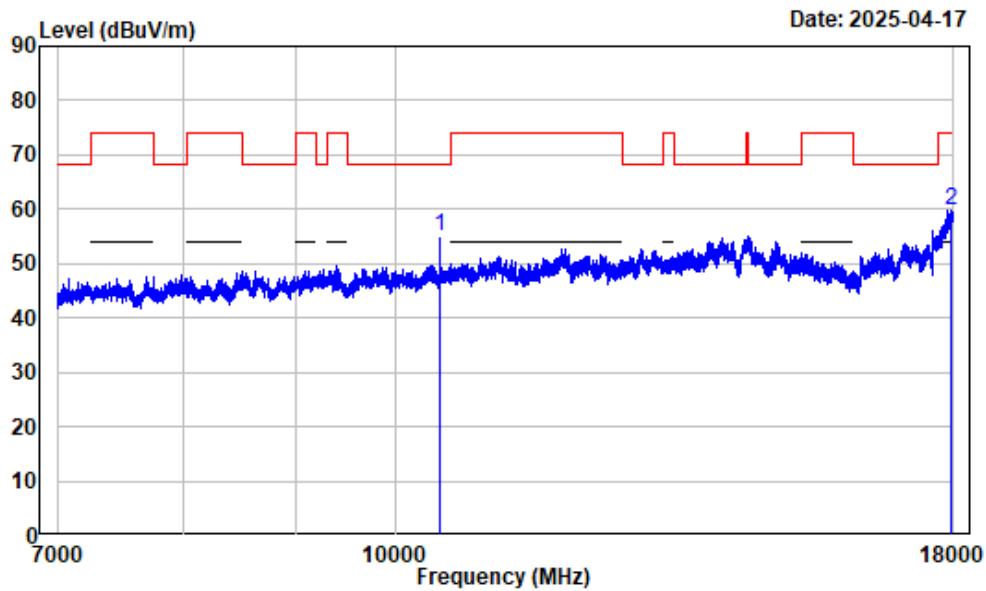

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10480.000	2.25	52.76	55.01	68.20	-13.19 Peak
2 17968.370	13.05	46.88	59.93	74.00	-14.07 Peak


7-18GHz_Vertical_Average_802.11n-HT20_5240MHz_Band 1

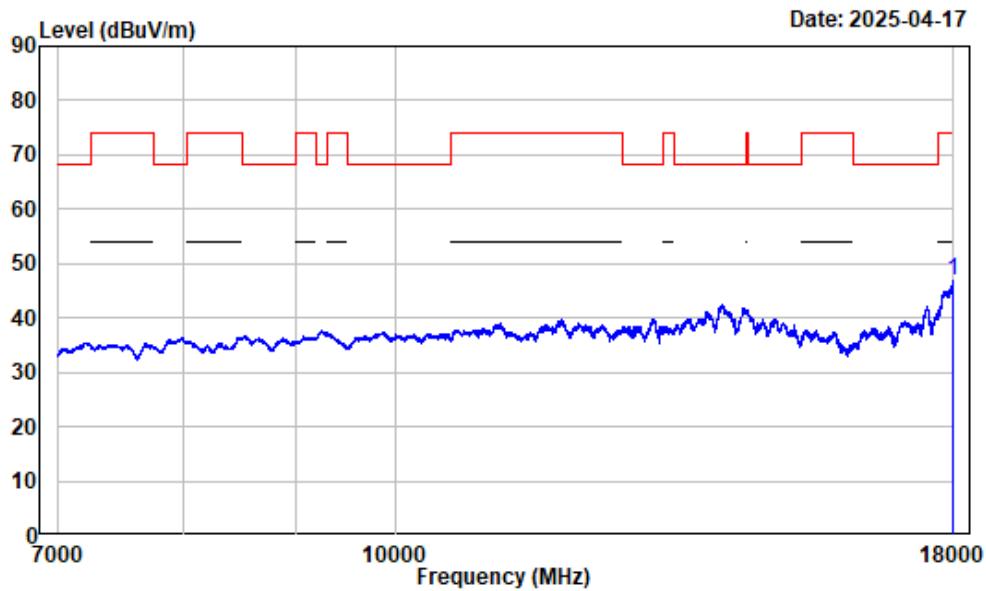

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17989.000	13.14	33.74	46.88	54.00	-7.12	Average


1-7GHz_Horizontal_802.11n-HT40_5230MHz_Band 1

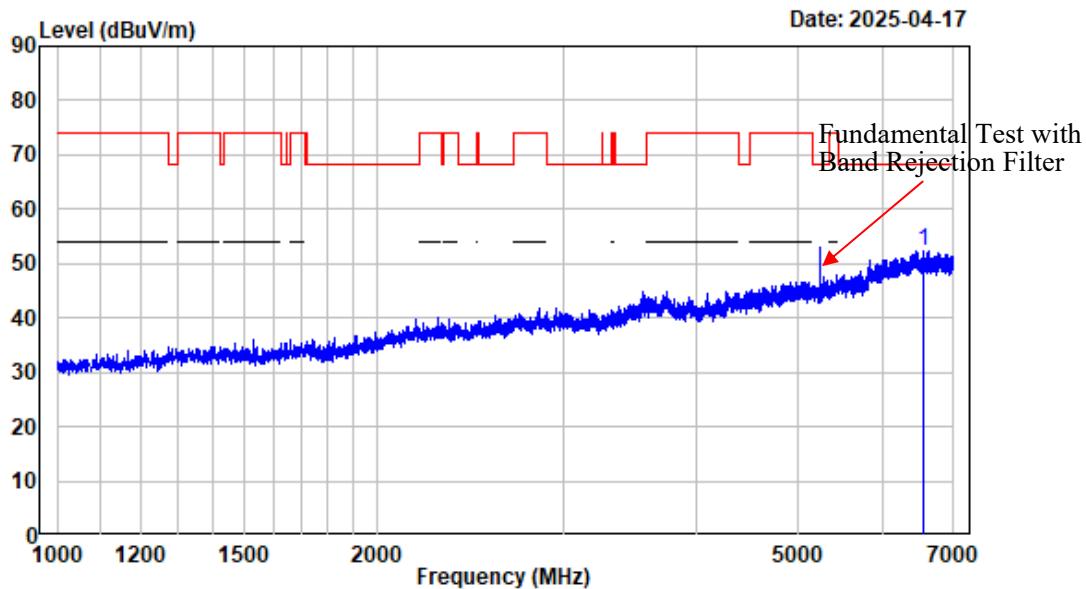

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	6568.696	-3.07	55.43	52.36	68.20 -15.84 Peak


1-7GHz_Vertical_802.11n-HT40_5230MHz_Band 1

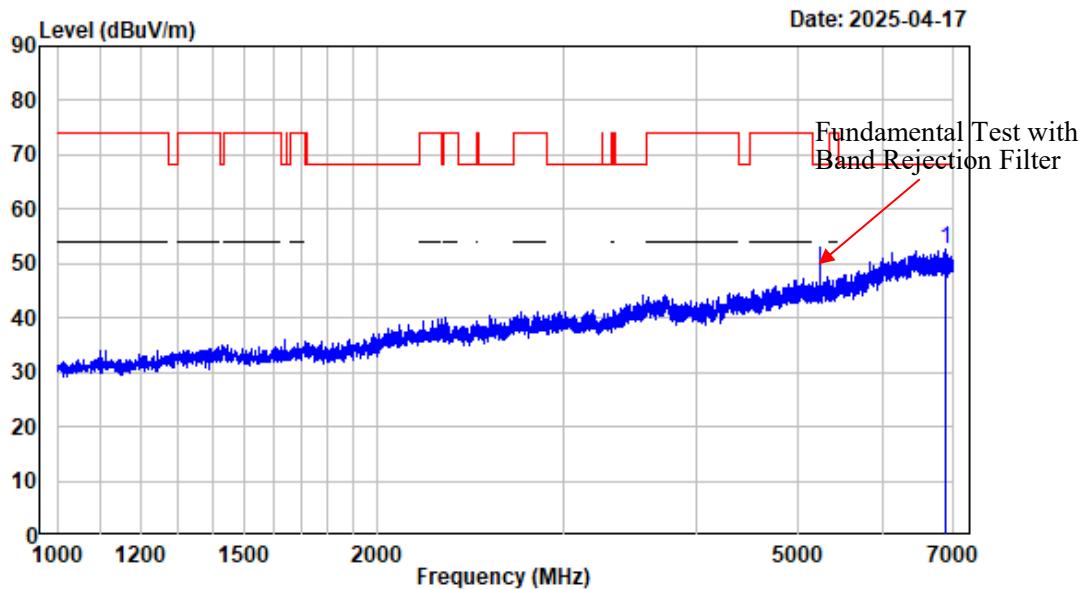

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6891.236	-3.12	55.91	52.79	68.20	-15.41	Peak


7-18GHz_Horizontal_Peak_802.11n-HT40_5230MHz_Band 1

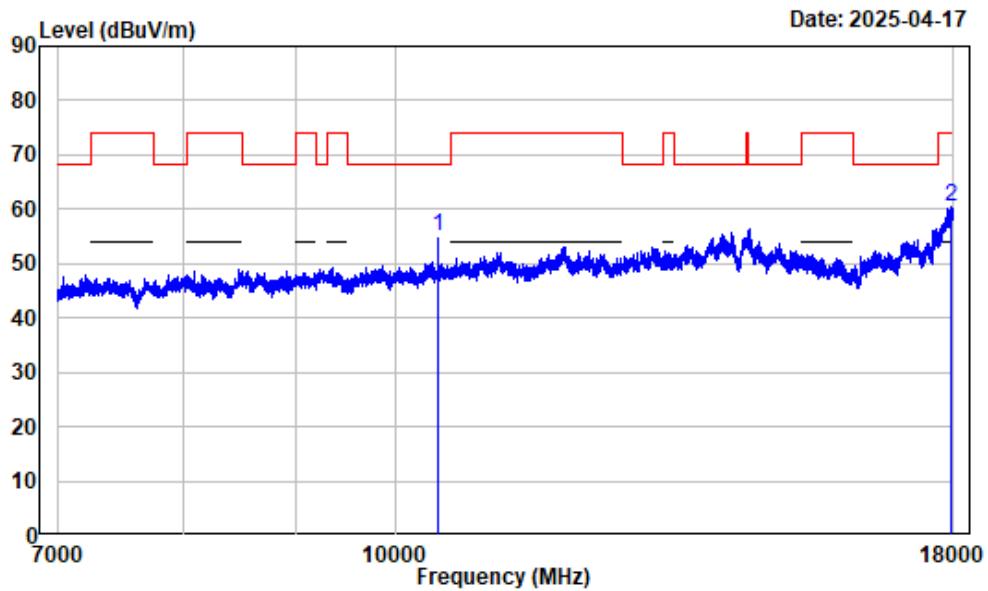

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10460.000	2.32	52.64	54.96	68.20	-13.24 Peak
2 17953.240	12.97	47.45	60.42	74.00	-13.58 Peak


7-18GHz_Horizontal_Average_802.11n-HT40_5230MHz_Band 1

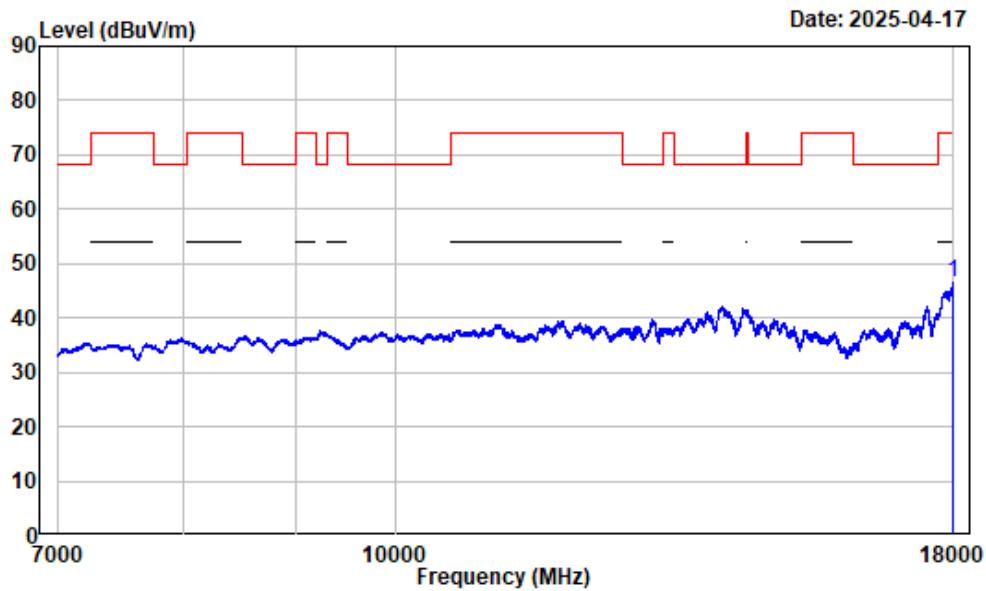

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17989.000	13.14	33.30	46.44	54.00	-7.56	Average


7-18GHz_Vertical_Peak_802.11n-HT40_5230MHz_Band 1

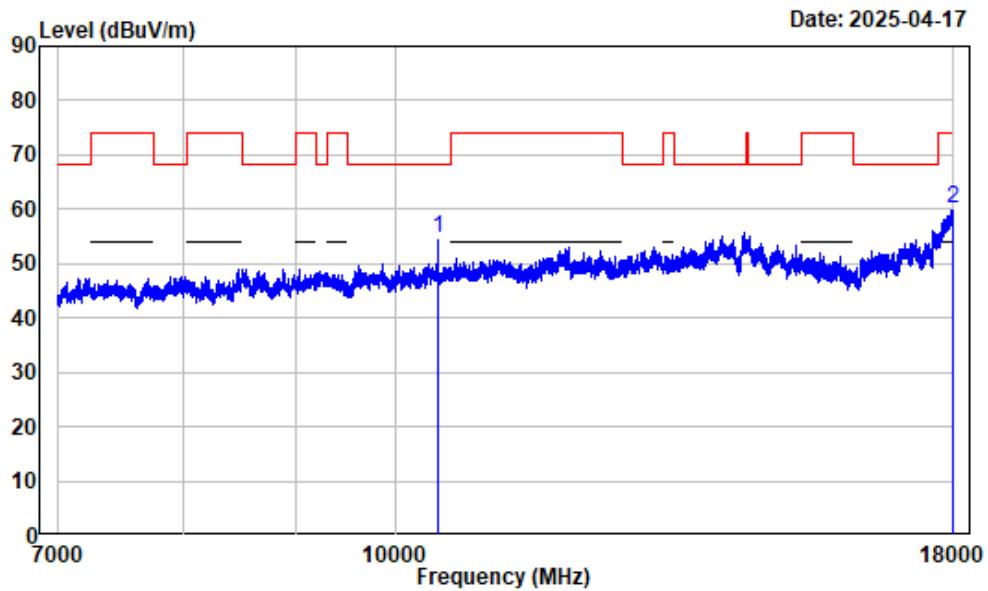

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

	Freq	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	10460.000	2.32	52.29	54.61	68.20	-13.59 Peak
2	17998.630	13.20	46.93	60.13	74.00	-13.87 Peak


7-18GHz_Vertical_Average_802.11n-HT40_5230MHz_Band 1

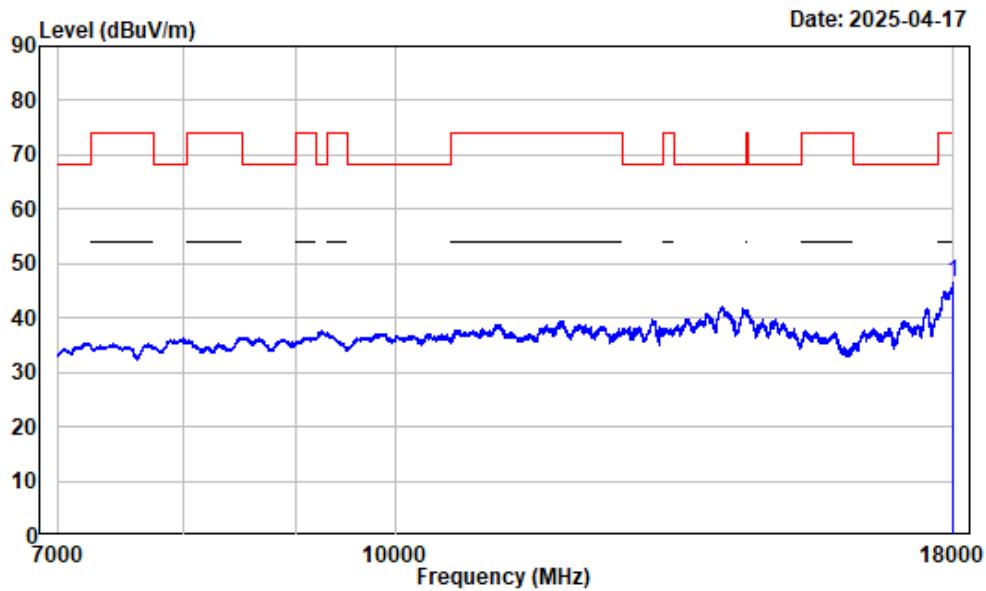

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	dBuV/m		
1 17993.130	13.17	33.28	46.45	54.00	-7.55	Average	


1-7GHz_Horizontal_802.11a_5320MHz_Band 2

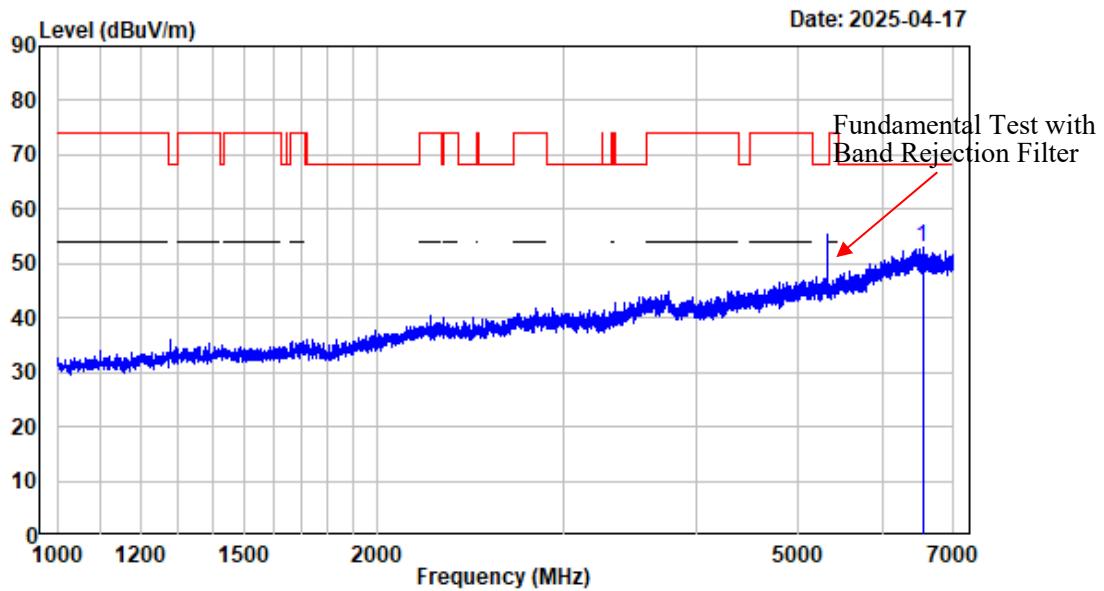

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6545.443	-3.03	55.89	52.86	68.20	-15.34	Peak


1-7GHz_Vertical_802.11a_5320MHz_Band 2

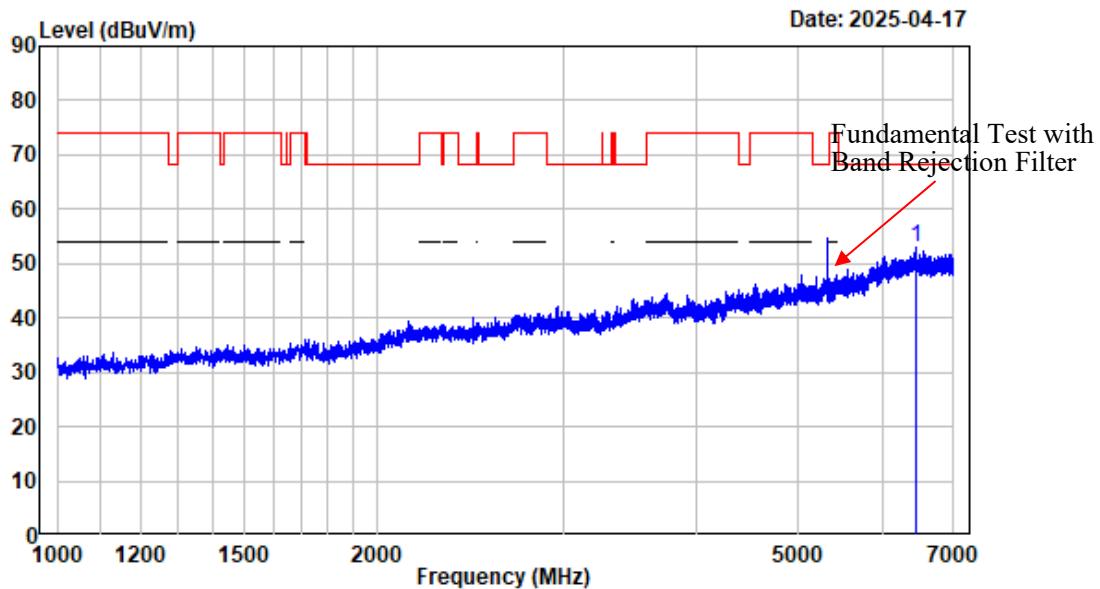

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.181	-2.87	55.96	53.09	68.20	-15.11	Peak


7-18GHz_Horizontal_Peak_802.11a_5320MHz_Band 2

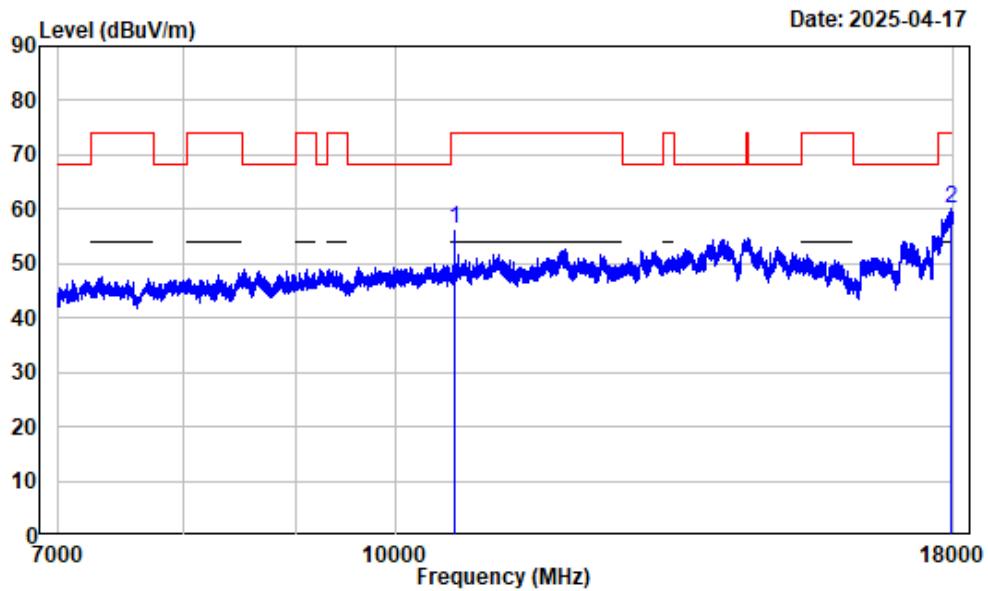

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10640.000	2.59	53.84	56.43	74.00	-17.57 Peak
2 17971.120	13.06	46.89	59.95	74.00	-14.05 Peak


7-18GHz_Horizontal_Average_802.11a_5320MHz_Band 2

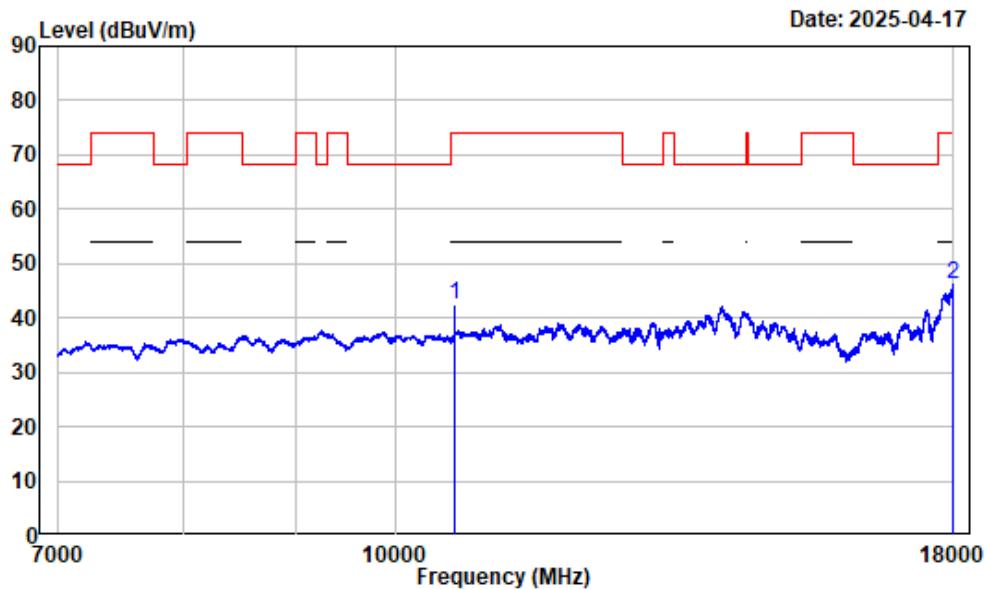

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	10640.000	2.59	39.76	42.35	54.00	-11.65	Average
2	17991.750	13.16	33.13	46.29	54.00	-7.71	Average


7-18GHz_Vertical_Peak_802.11a_5320MHz_Band 2

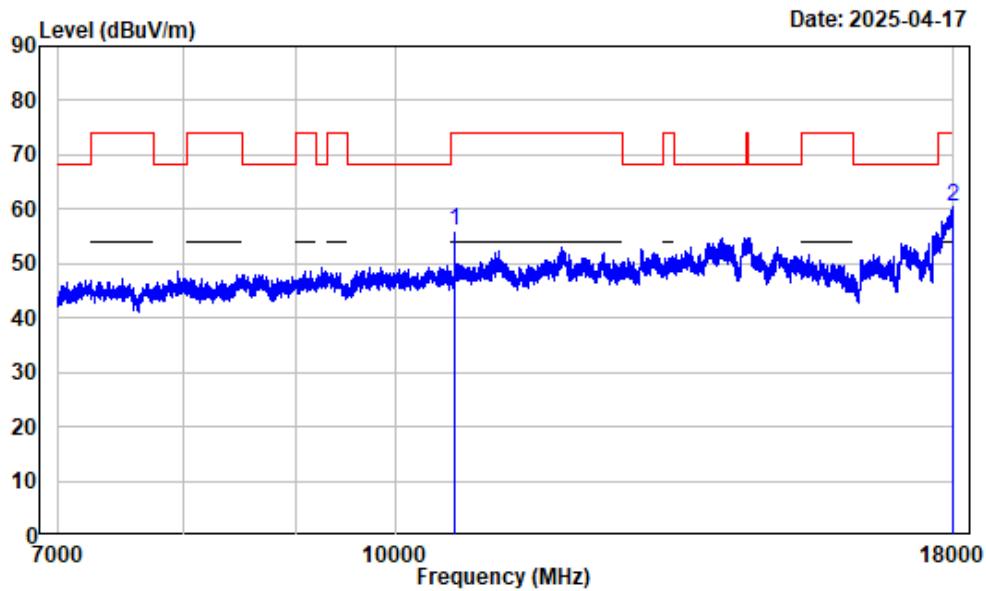

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10640.000	2.59	53.45	56.04	74.00	-17.96 Peak
2 17997.250	13.19	47.27	60.46	74.00	-13.54 Peak


7-18GHz_Vertical_Average_802.11a_5320MHz_Band 2

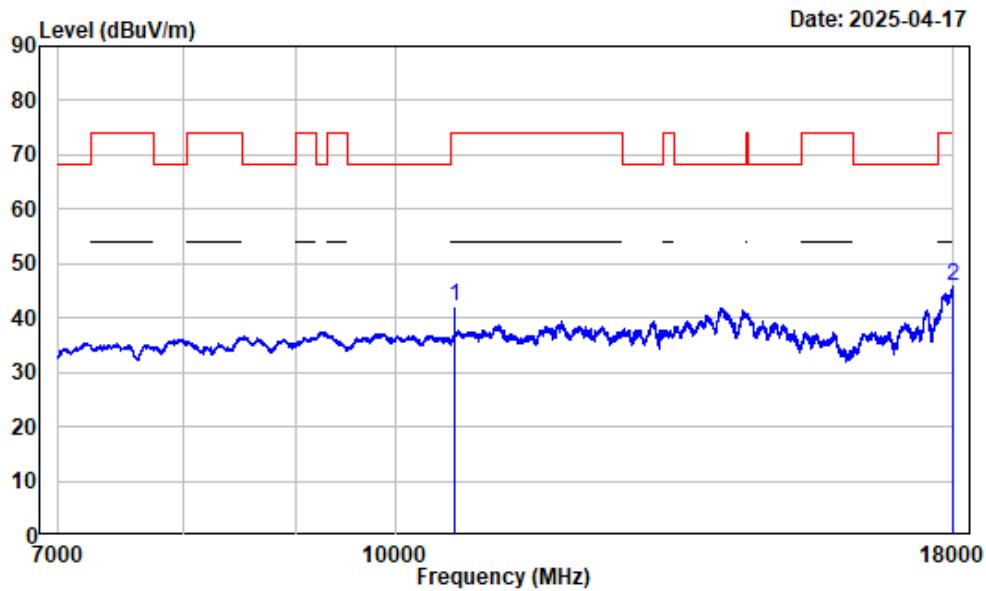

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	10640.000	2.59	39.58	42.17	54.00	-11.83	Average
2	17995.880	13.18	32.77	45.95	54.00	-8.05	Average


1-7GHz_Horizontal_802.11n-HT20_5320MHz_Band 2

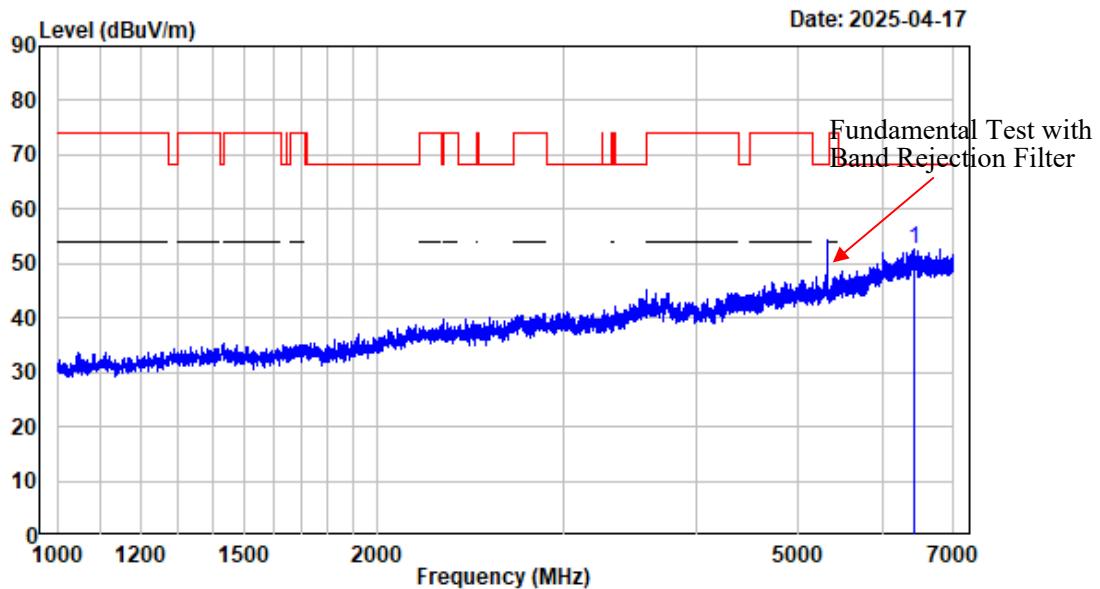

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6437.430	-2.87	55.65	52.78	68.20	-15.42	Peak


1-7GHz_Vertical_802.11n-HT20_5320MHz_Band 2

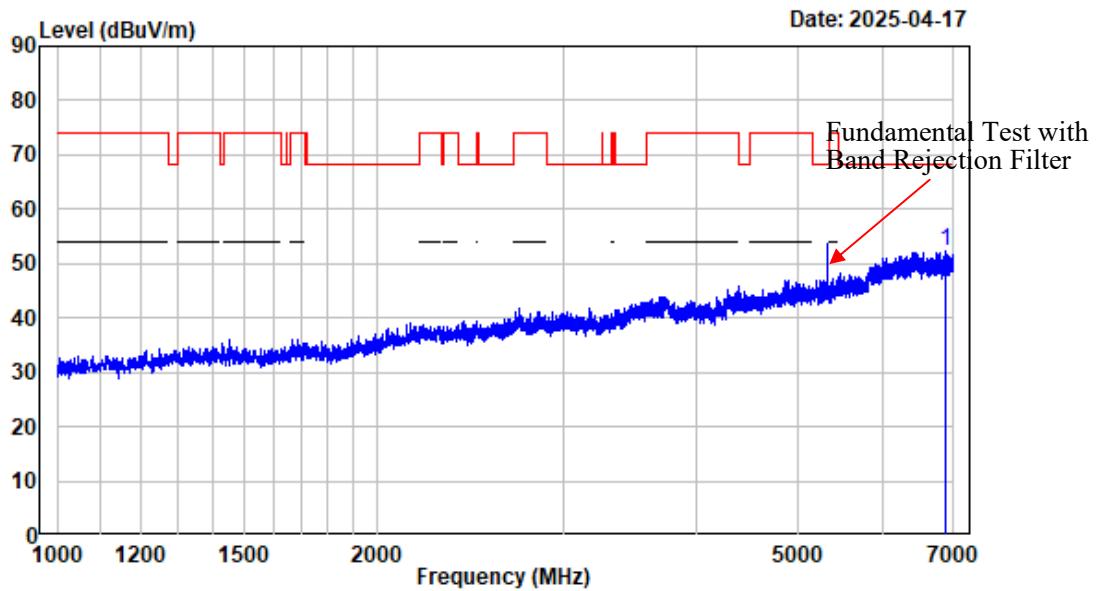

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6888.236	-3.11	55.51	52.40	68.20	-15.80	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20_5320MHz_Band 2

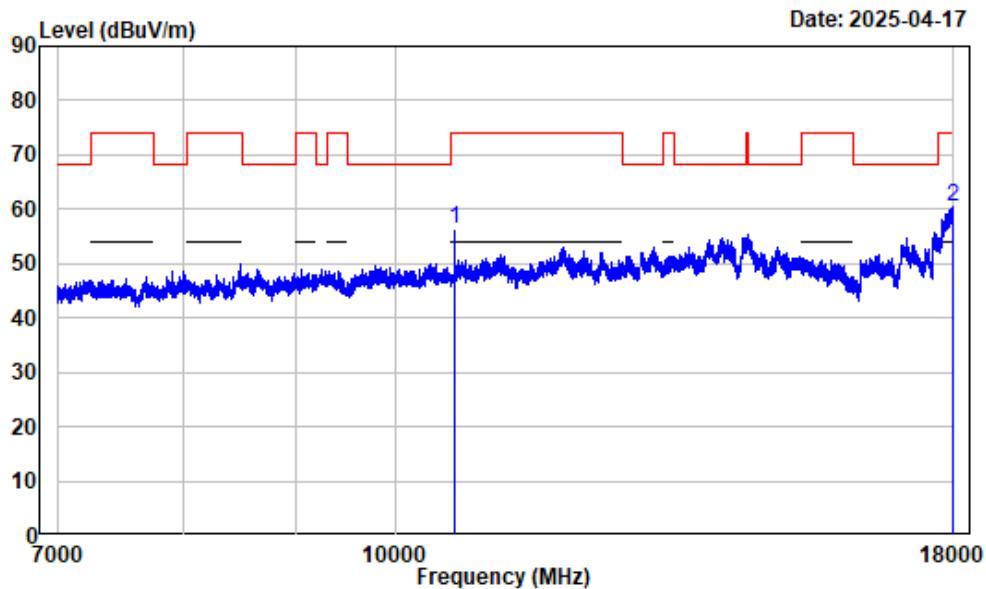

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	10640.000	2.59	53.71	56.30	74.00	-17.70 Peak
2	17986.250	13.12	47.30	60.42	74.00	-13.58 Peak


7-18GHz_Horizontal_Average_802.11n-HT20_5320MHz_Band 2

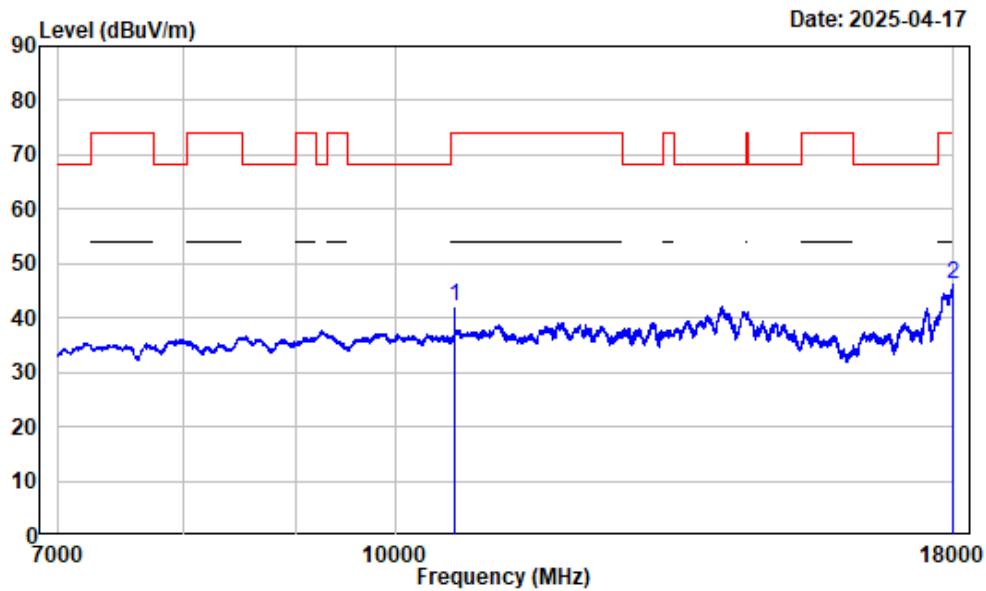

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	39.62	42.21	54.00	-11.79	Average
2	17997.250	13.19	32.98	46.17	54.00	-7.83	Average


7-18GHz_Vertical_Peak_802.11n-HT20_5320MHz_Band 2

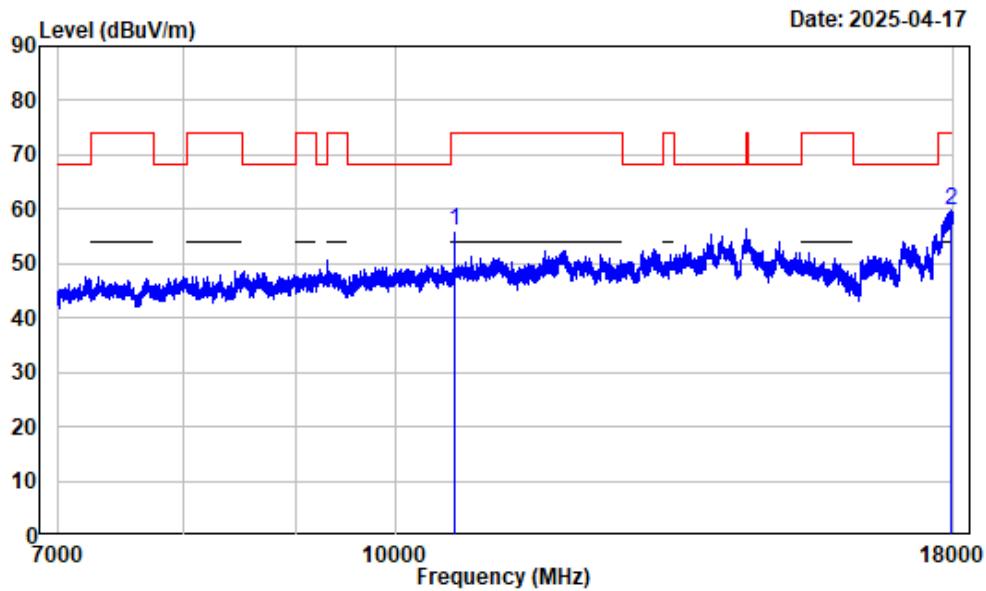

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	53.34	55.93	74.00	-18.07	Peak
2	17940.870	12.91	46.86	59.77	74.00	-14.23	Peak


7-18GHz_Vertical_Average_802.11n-HT20_5320MHz_Band 2

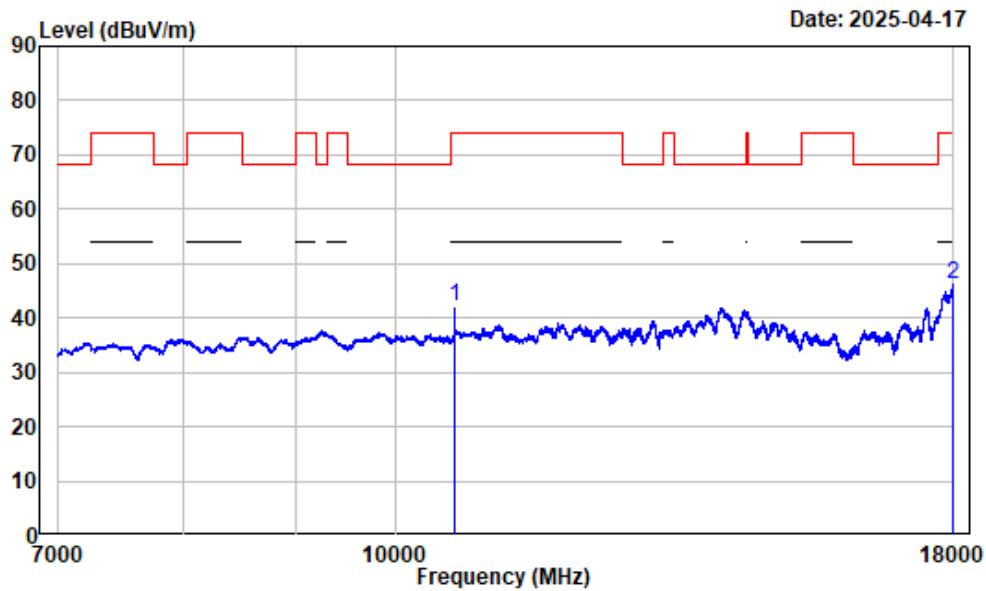

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	2.59	39.46	42.05	54.00	-11.95	Average
2	17998.630	13.19	32.87	46.06	54.00	-7.94	Average


1-7GHz_Horizontal_802.11n-HT40_5310MHz_Band 2

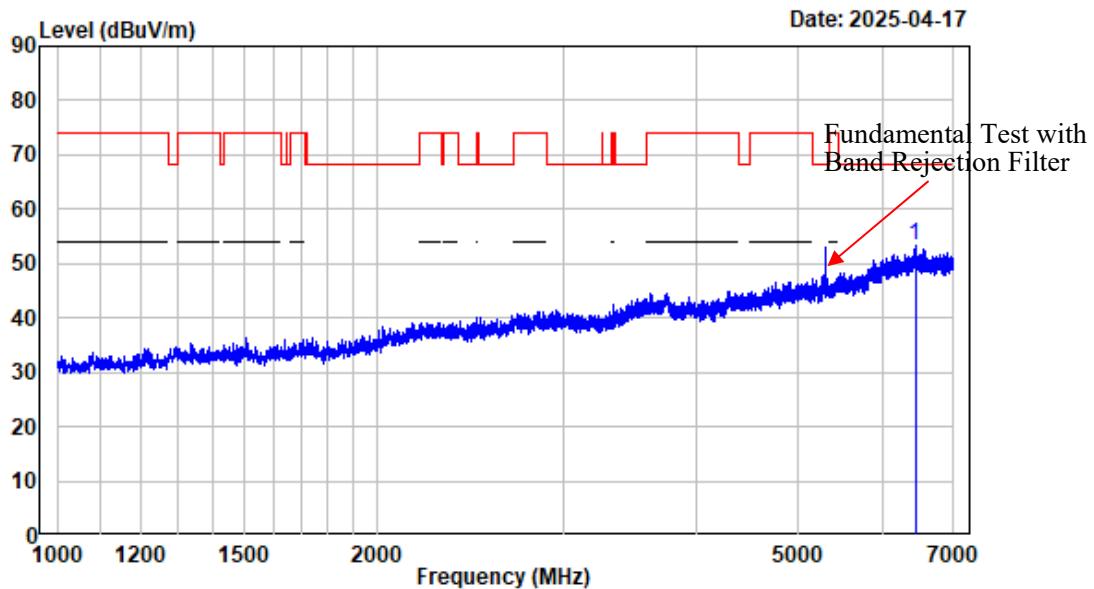

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6441.180	-2.87	56.07	53.20	68.20	-15.00	Peak


1-7GHz_Vertical_802.11n-HT40_5310MHz_Band 2

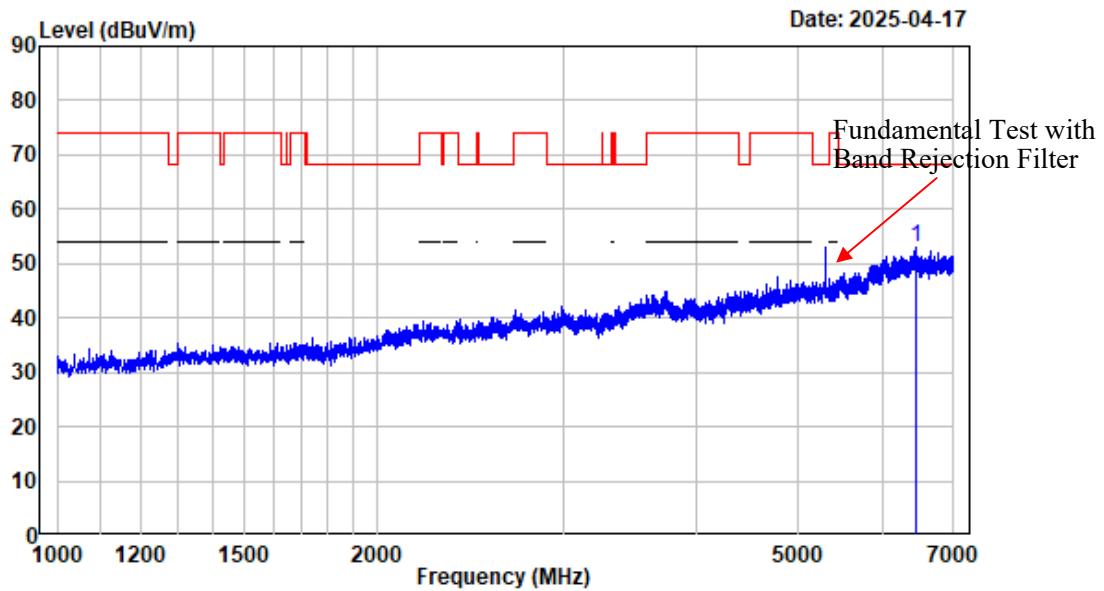

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6449.431	-2.88	55.72	52.84	68.20	-15.36	Peak


7-18GHz_Horizontal_Peak_802.11n-HT40_5310MHz_Band 2

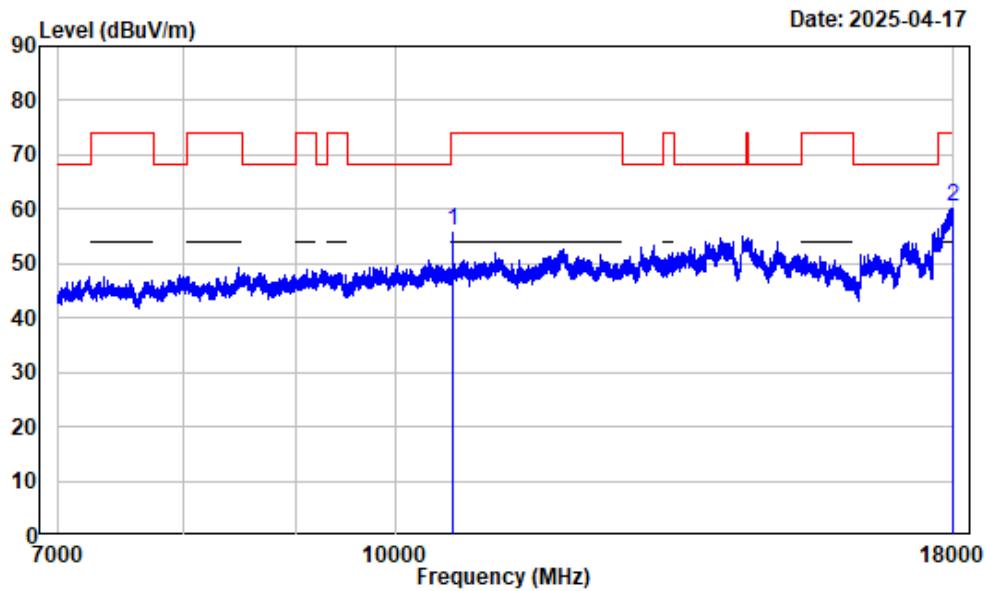

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10620.000	2.37	53.57	55.94	74.00	-18.06 Peak
2 17998.630	13.20	47.38	60.58	74.00	-13.42 Peak


7-18GHz_Horizontal_Average_802.11n-HT40_5310MHz_Band 2

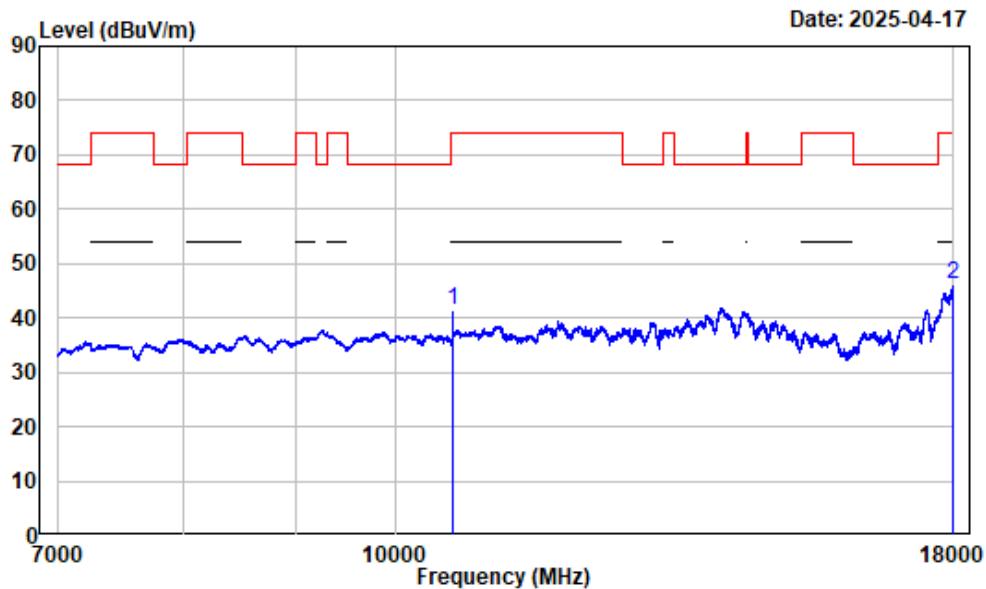

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10620.000	2.37	38.93	41.30	54.00	-12.70 Average
2 17996.750	13.19	32.90	46.09	54.00	-7.91 Average


7-18GHz_Vertical_Peak_802.11n-HT40_5310MHz_Band 2

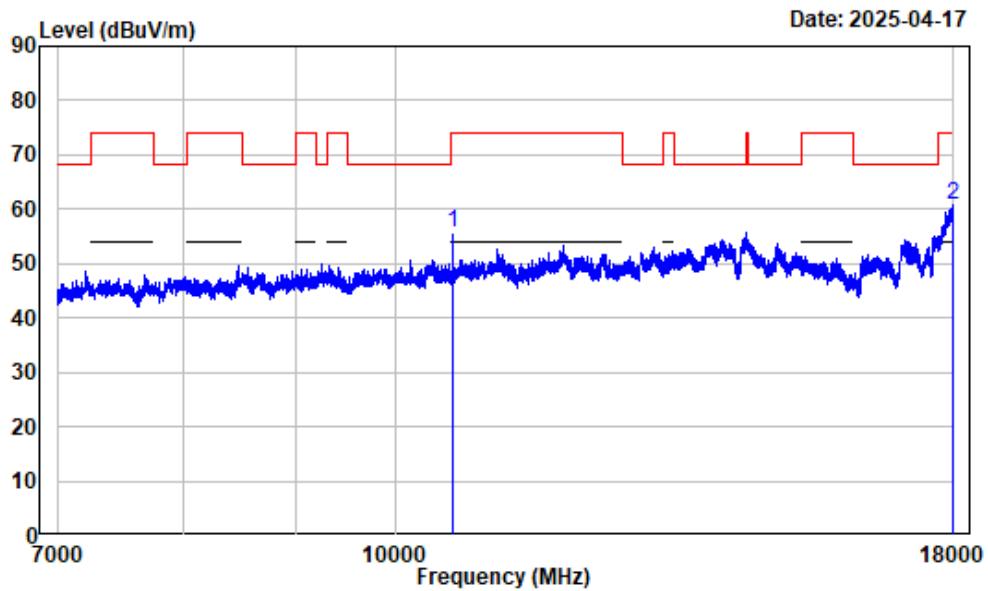

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 10620.000	2.37	53.22	55.59	74.00	-18.41 Peak
2 17987.620	13.13	47.54	60.67	74.00	-13.33 Peak


7-18GHz_Vertical_Average_802.11n-HT40_5310MHz_Band 2

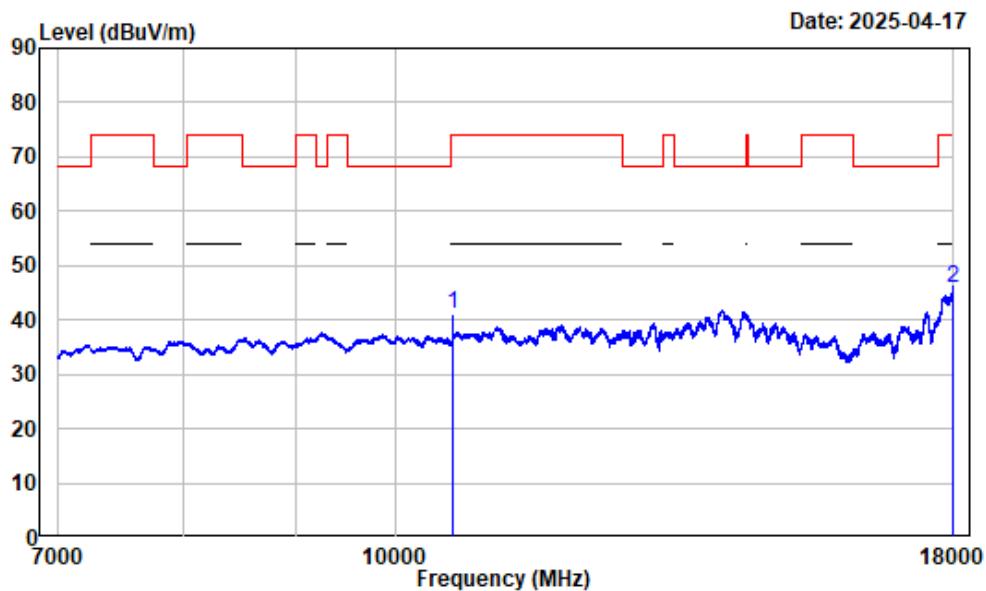

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	2.37	38.75	41.12	54.00	-12.88	Average
2	17997.550	13.19	32.77	45.96	54.00	-8.04	Average


1-7GHz_Horizontal_802.11a_5700MHz_Band 3

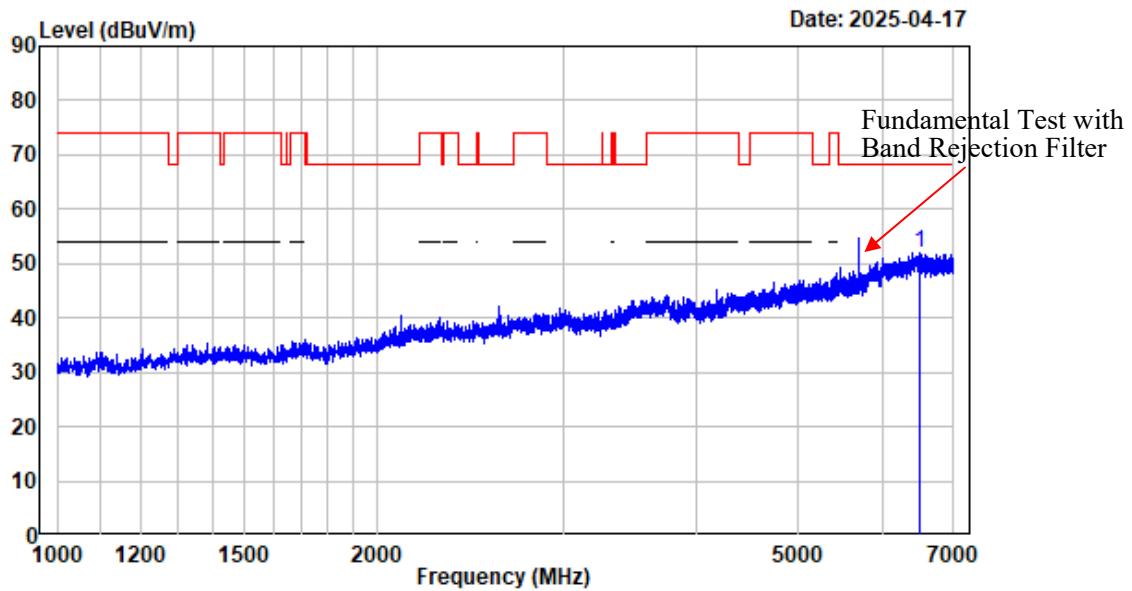

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6498.938	-2.95	54.89	51.94	68.20	-16.26	Peak


1-7GHz_Vertical_802.11a_5700MHz_Band 3

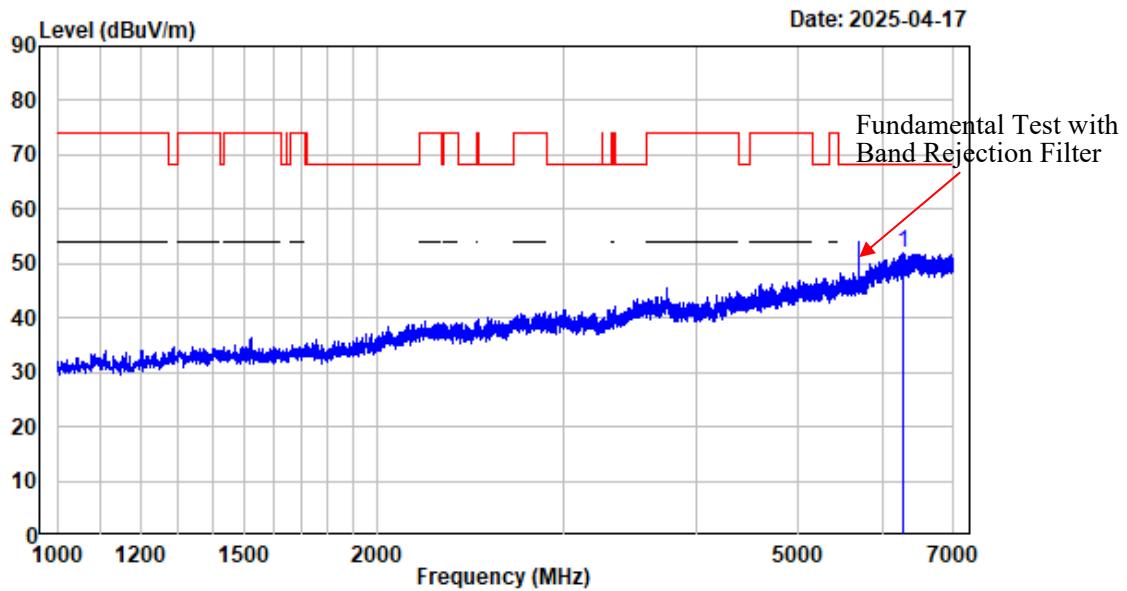

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6277.660	-3.68	55.71	52.03	68.20	-16.17	Peak


7-18GHz_Horizontal_Peak_802.11a_5700MHz_Band 3

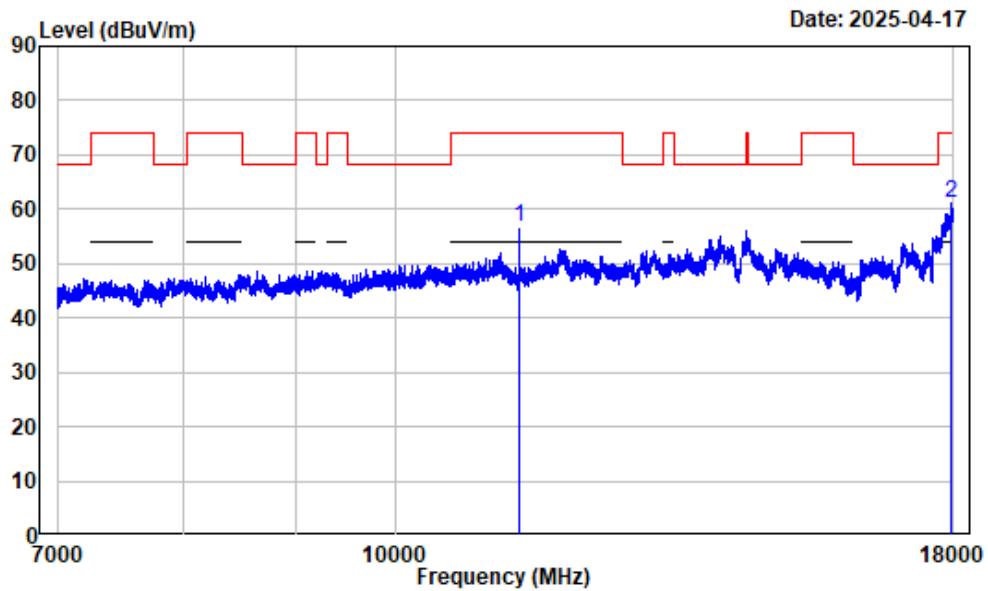

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11400.000	3.32	53.48	56.80	74.00	-17.20 Peak
17957.370	12.99	48.15	61.14	74.00	-12.86 Peak

7-18GHz_Horizontal_Average_802.11a_5700MHz_Band 3

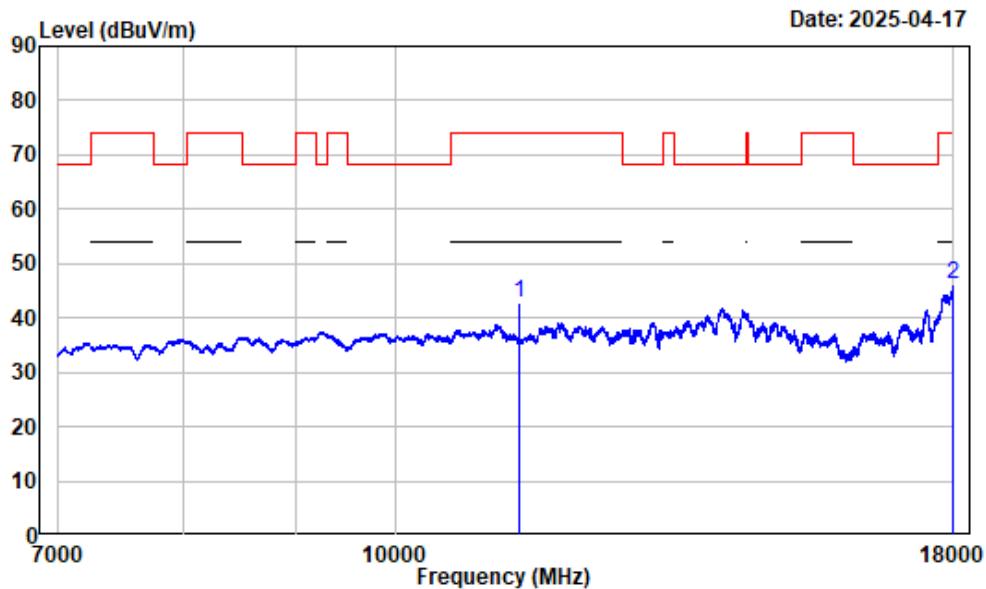

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.34	42.66	54.00	-11.34	Average
2	17994.500	13.17	32.92	46.09	54.00	-7.91	Average


7-18GHz_Vertical_Peak_802.11a_5700MHz_Band 3

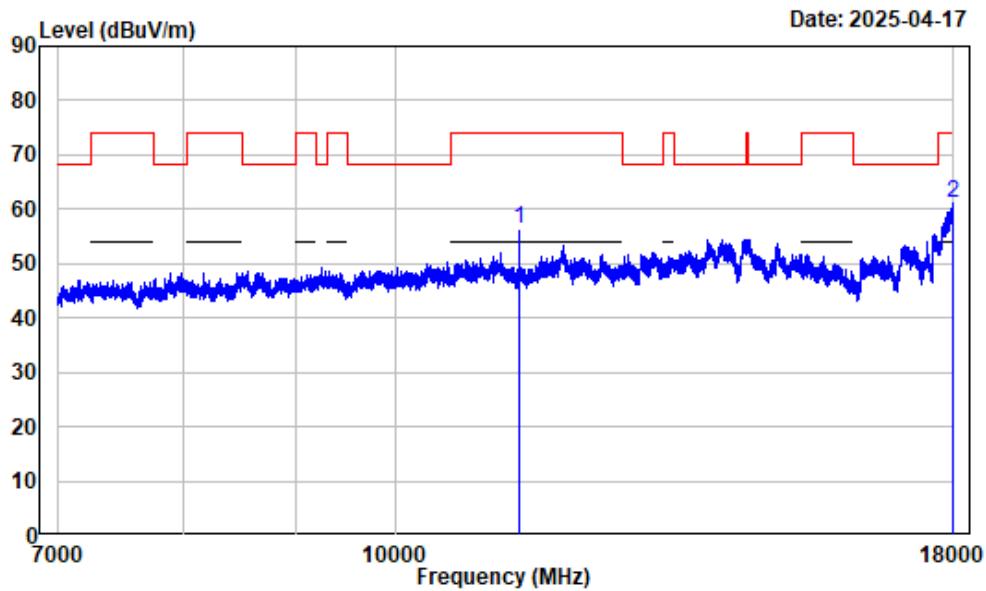

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11400.000	3.32	53.12	56.44	74.00	-17.56 Peak
17980.750	13.11	48.04	61.15	74.00	-12.85 Peak

7-18GHz_Vertical_Average_802.11a_5700MHz_Band 3

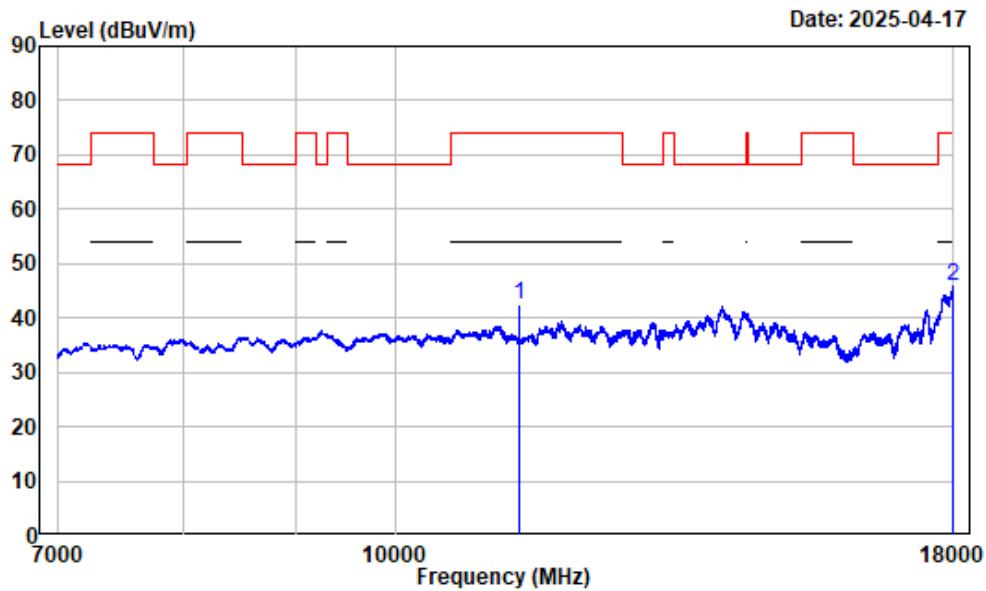

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
1	11400.000	3.32	39.09	42.41	54.00	-11.59	Average
2	17995.880	13.18	32.79	45.97	54.00	-8.03	Average


1-7GHz_Horizontal_802.11n-HT20_5700MHz_Band 3

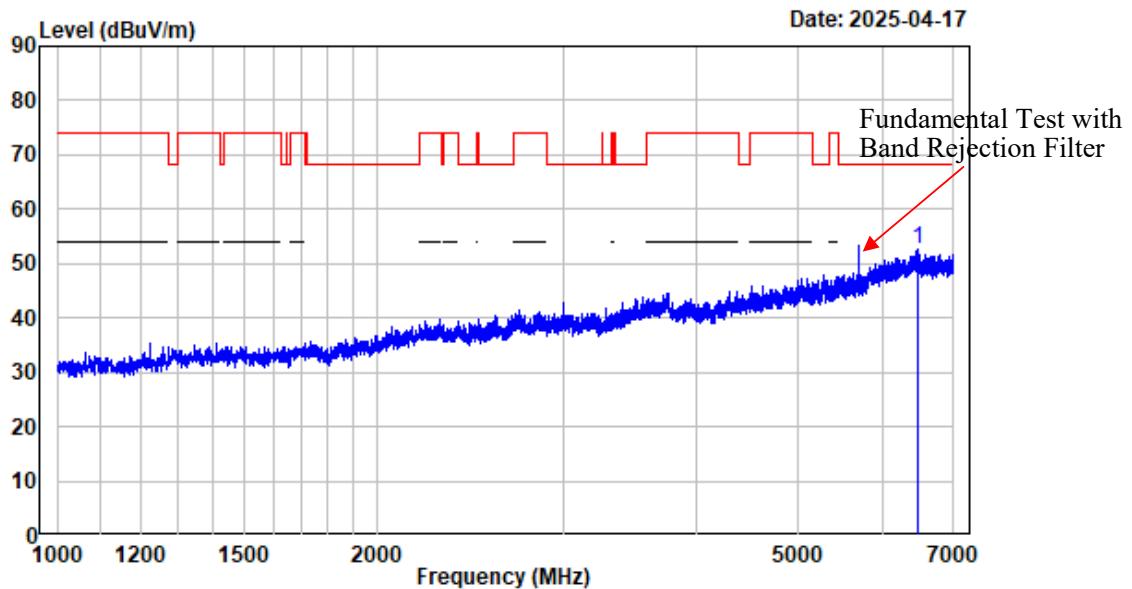

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6470.434	-2.91	55.41	52.50	68.20	-15.70	Peak


1-7GHz_Vertical_802.11n-HT20_5700MHz_Band 3

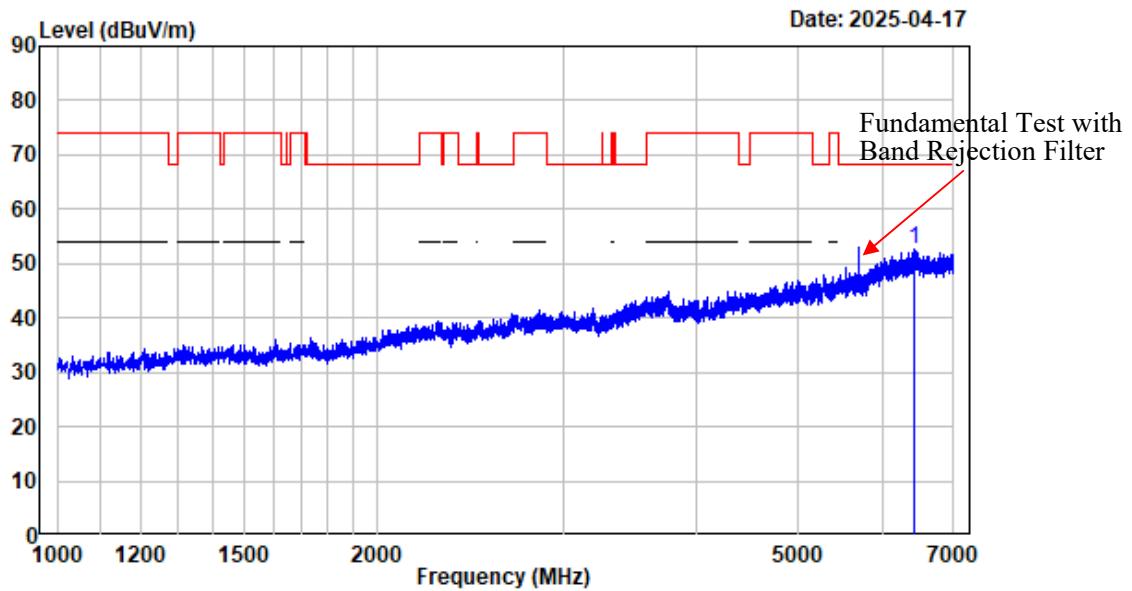

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6438.930	-2.88	55.51	52.63	68.20	-15.57	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20_5700MHz_Band 3

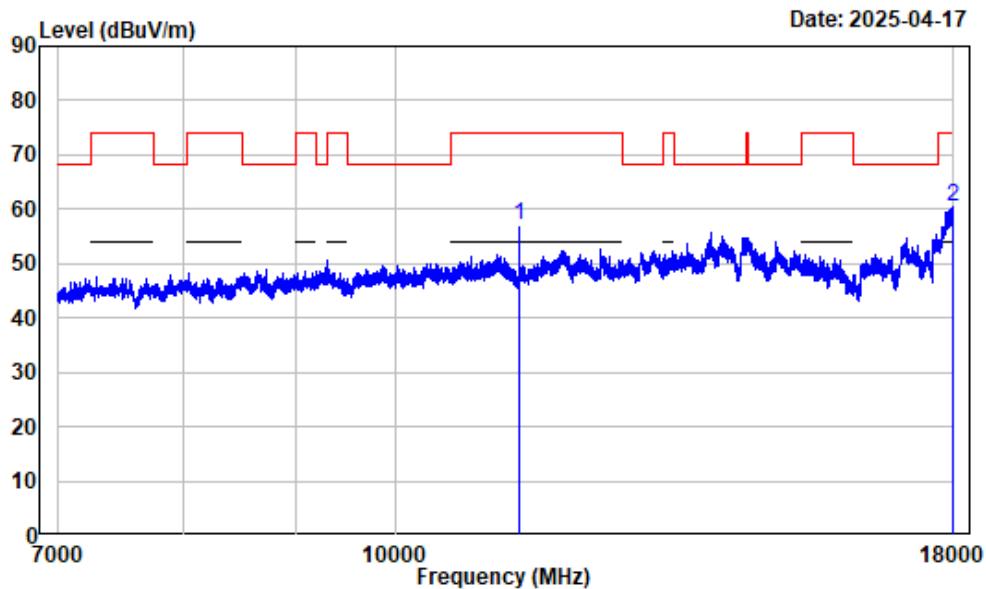

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11400.000	3.32	53.67	56.99	74.00	-17.01 Peak
17990.370	13.15	47.24	60.39	74.00	-13.61 Peak

7-18GHz_Horizontal_Average_802.11n-HT20_5700MHz_Band 3

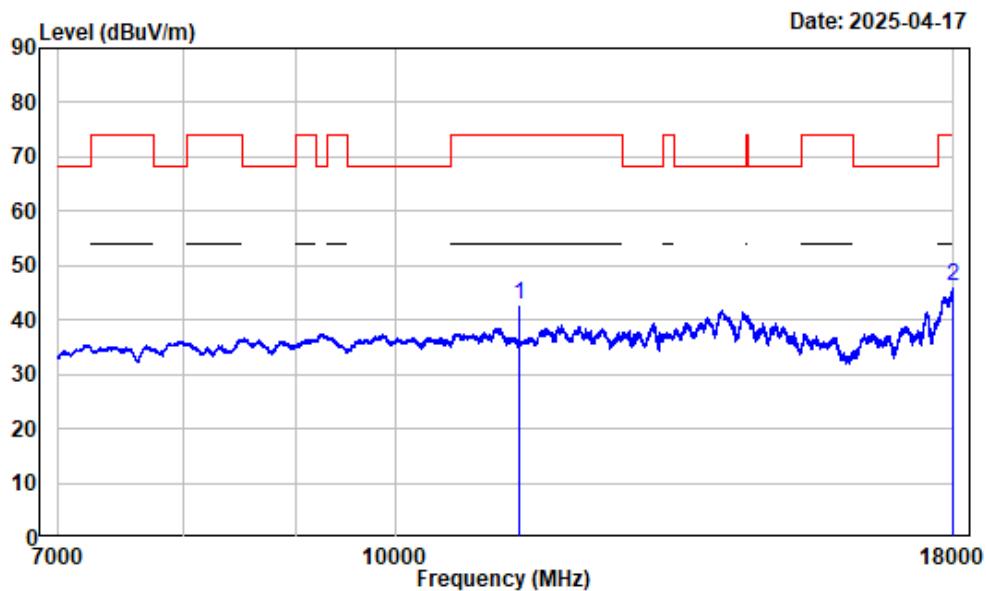

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.49	42.81	54.00	-11.19	Average
2	17991.750	13.16	32.95	46.11	54.00	-7.89	Average


7-18GHz_Vertical_Peak_802.11n-HT20_5700MHz_Band 3

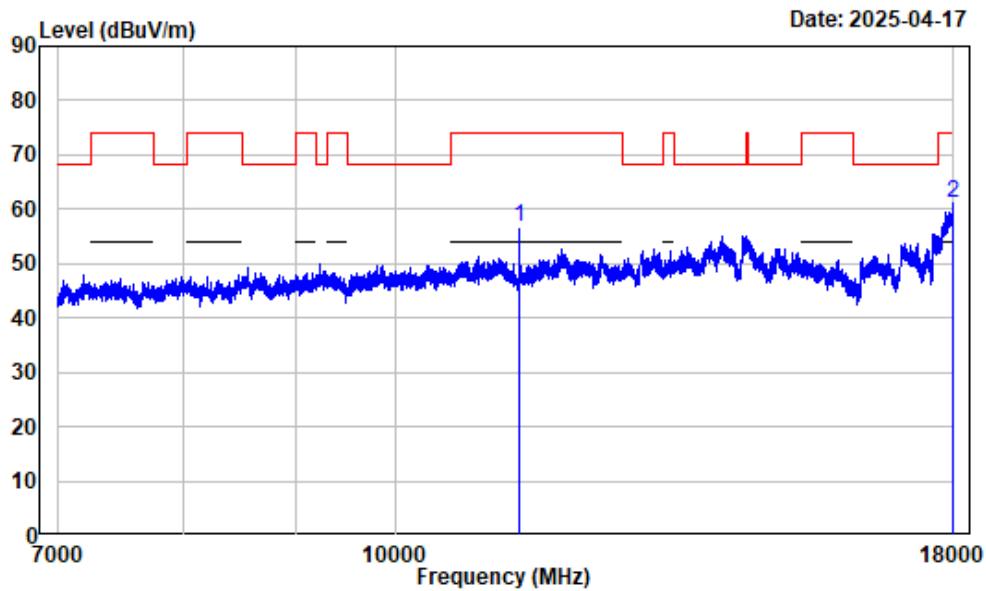

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700


Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Line		
1 11400.000	3.32	53.34	56.66	74.00	-17.34	Peak	
2 17991.750	13.16	47.87	61.03	74.00	-12.97	Peak	

7-18GHz_Vertical_Average_802.11n-HT20_5700MHz_Band 3

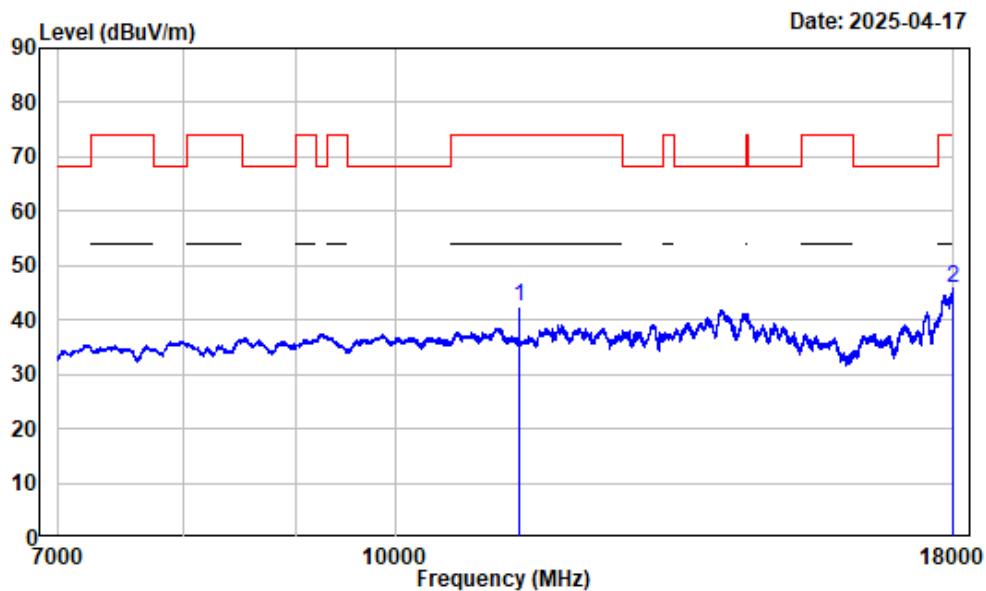

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	3.32	39.28	42.60	54.00	-11.40	Average
2	17995.250	13.18	32.83	46.01	54.00	-7.99	Average


1-7GHz_Horizontal_802.11n-HT40_5670MHz_Band 3

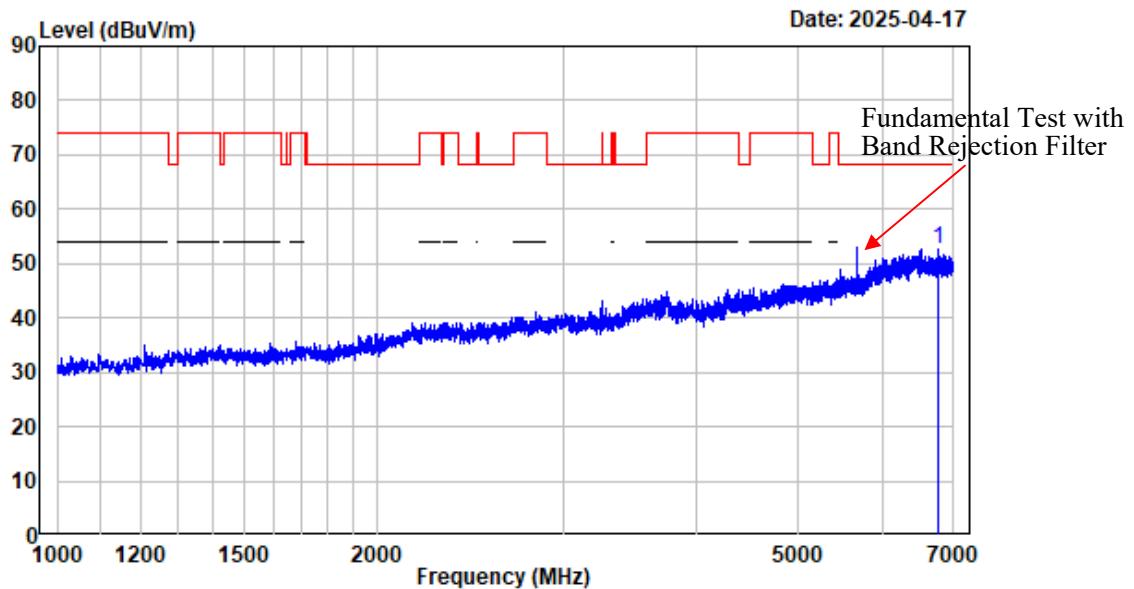

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	MHz	dB/m	dBuV	dBuV/m	dB
1	6770.471	-3.27	55.94	52.67	68.20 -15.53 Peak


1-7GHz_Vertical_802.11n-HT40_5670MHz_Band 3

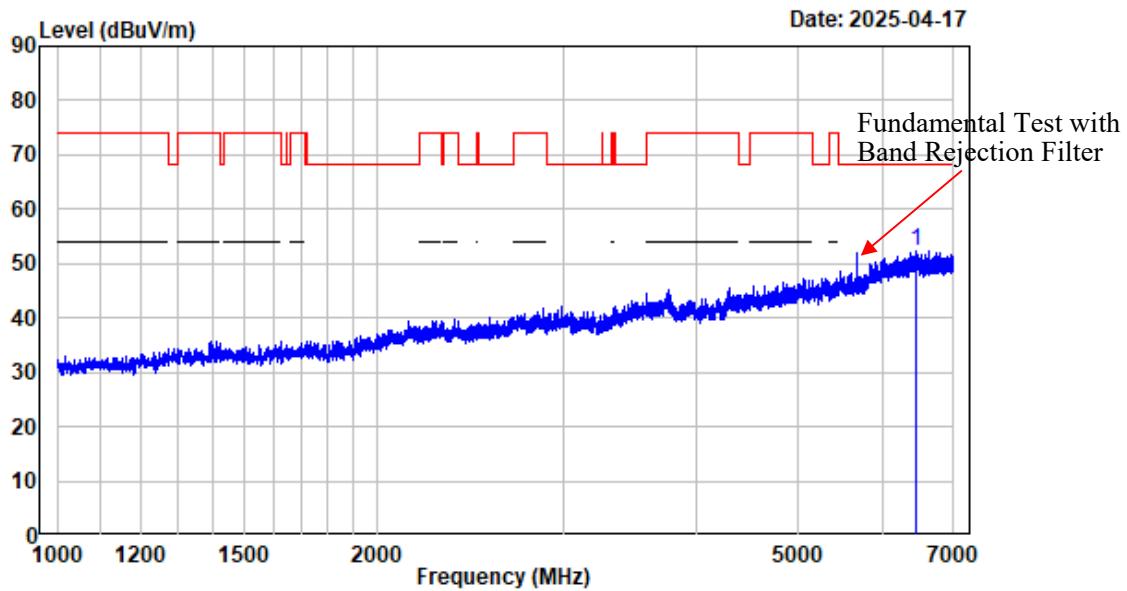

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6461.433	-2.89	55.29	52.40	68.20	-15.80	Peak


7-18GHz_Horizontal_Peak_802.11n-HT40_5670MHz_Band 3

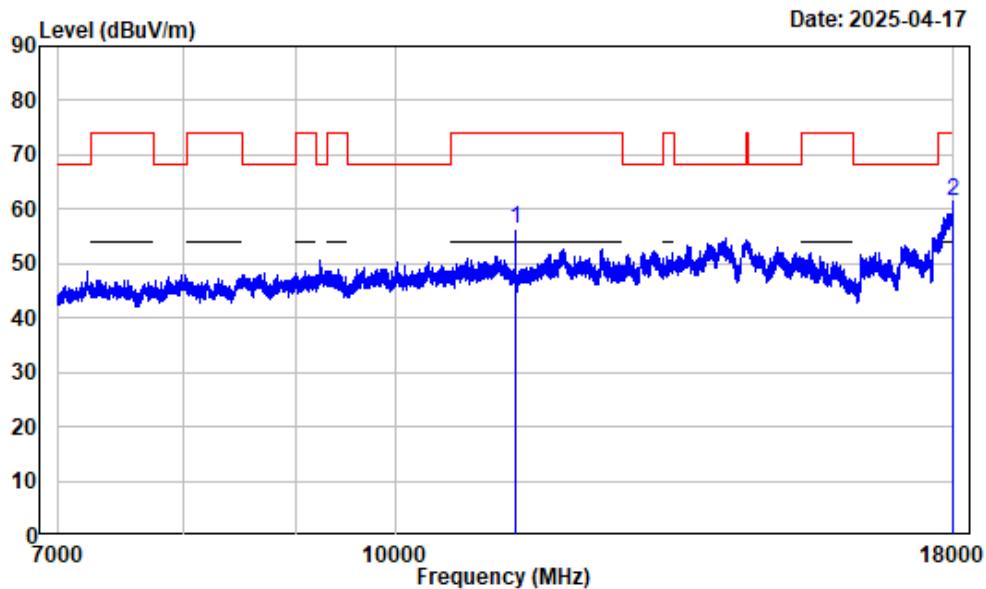

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11340.000	3.46	52.86	56.32	74.00	-17.68 Peak
17986.250	13.12	48.18	61.30	74.00	-12.70 Peak


7-18GHz_Horizontal_Average_802.11n-HT40_5670MHz_Band 3

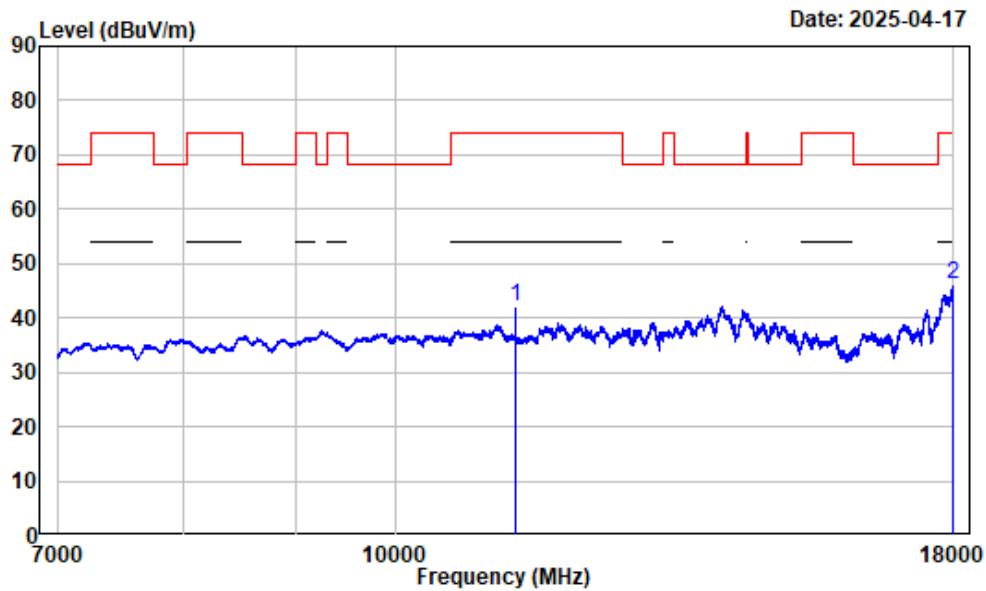

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	38.79	42.25	54.00	-11.75	Average
2	17998.630	13.19	32.86	46.05	54.00	-7.95	Average


7-18GHz_Vertical_Peak_802.11n-HT40_5670MHz_Band 3

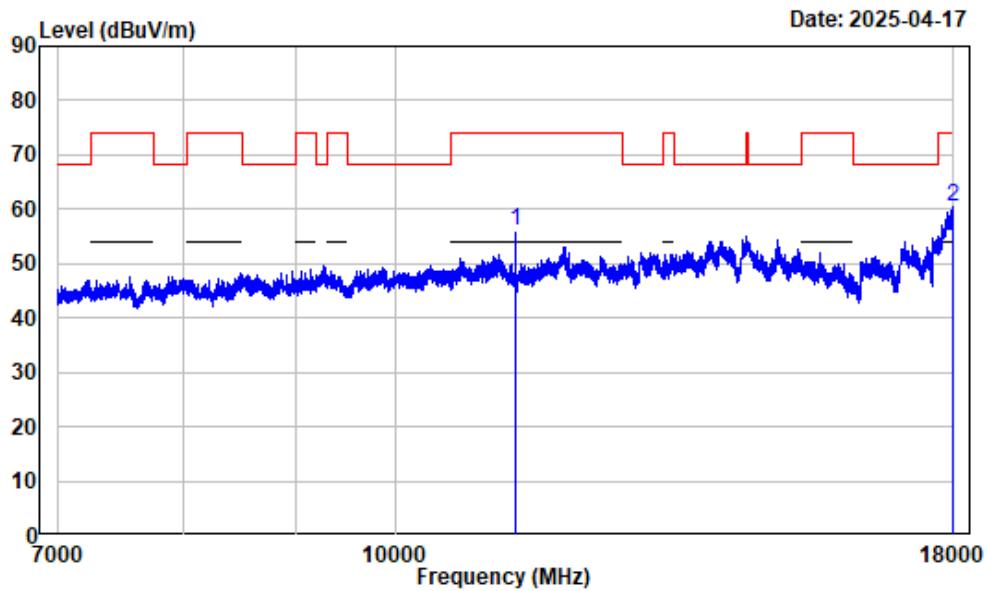

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11340.000	3.46	52.48	55.94	74.00	-18.06 Peak
17979.370	13.10	47.44	60.54	74.00	-13.46 Peak


7-18GHz_Vertical_Average_802.11n-HT40_5670MHz_Band 3

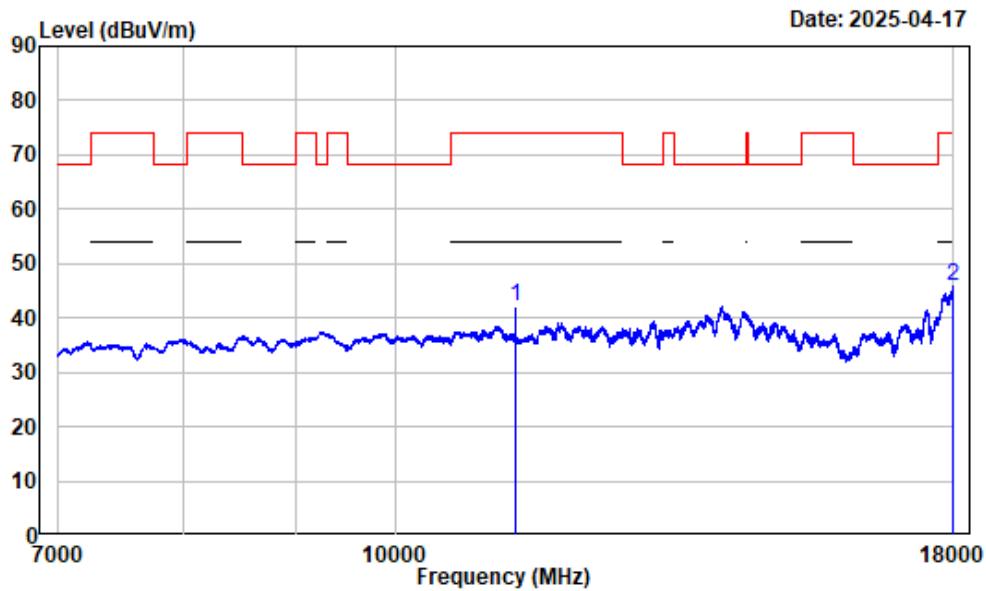

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	3.46	38.57	42.03	54.00	-11.97	Average
2	17989.000	13.14	32.82	45.96	54.00	-8.04	Average


1-7GHz_Horizontal_802.11a_5825MHz_Band 4

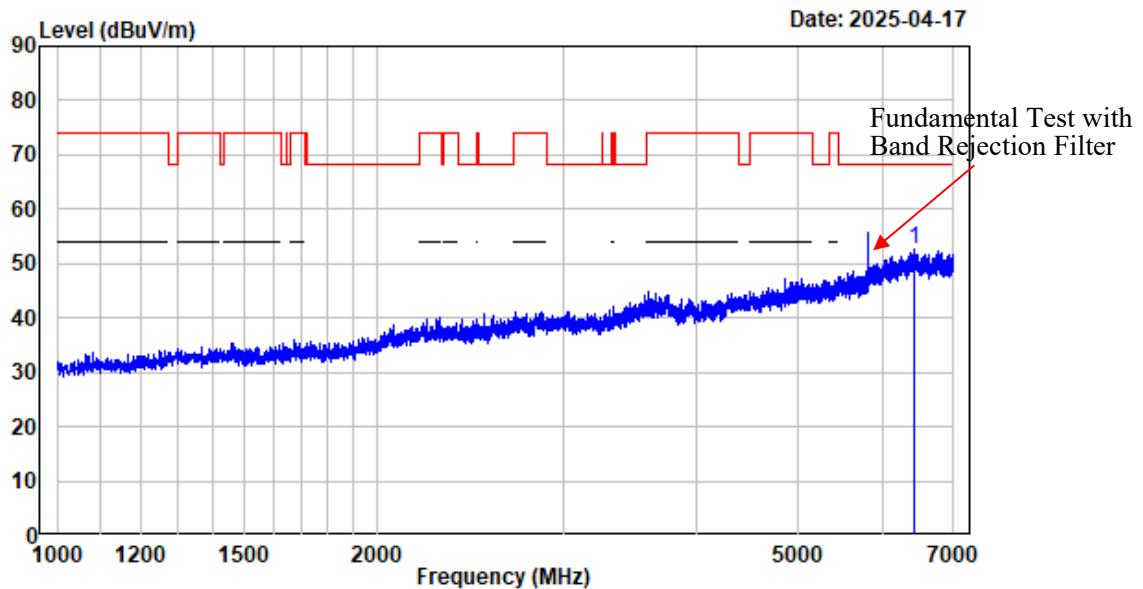

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.929	-2.88	55.46	52.58	68.20	-15.62	Peak


1-7GHz_Vertical_802.11a_5825MHz_Band 4

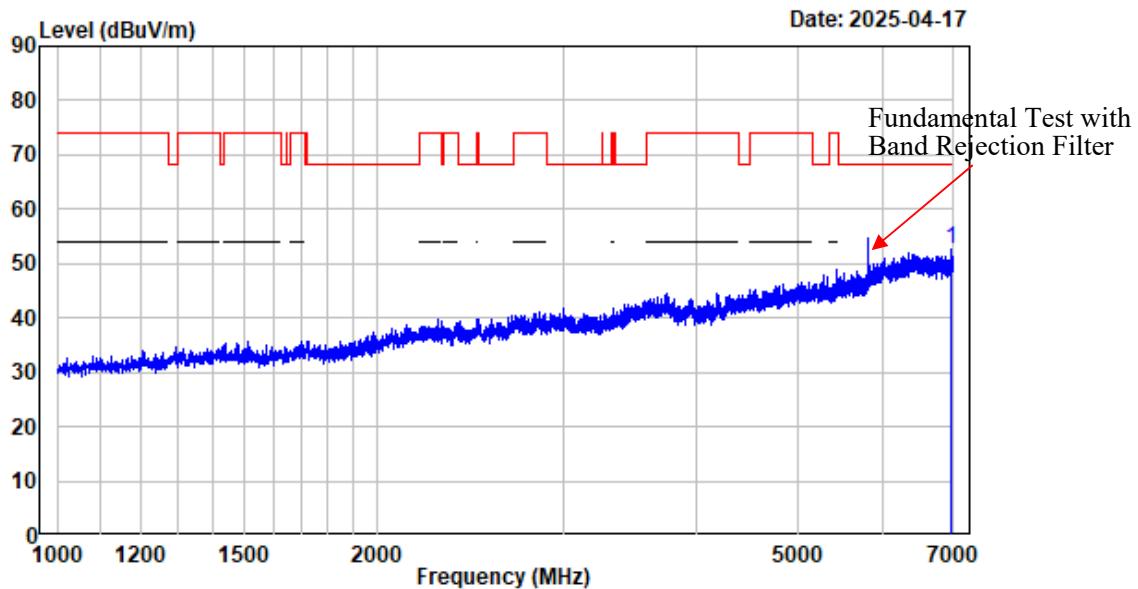

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6966.246	-2.77	55.27	52.50	68.20	-15.70	Peak


7-18GHz_Horizontal_Peak_802.11a_5825MHz_Band 4

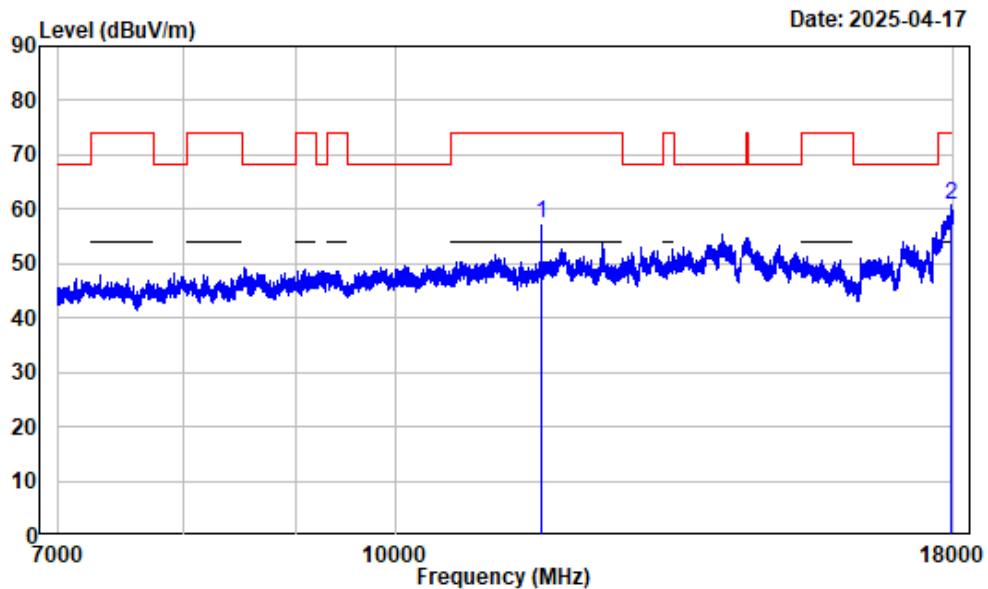

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11650.000	3.42	54.06	57.48	74.00	-16.52 Peak
17955.990	12.98	47.91	60.89	74.00	-13.11 Peak


7-18GHz_Horizontal_Average_802.11a_5825MHz_Band 4

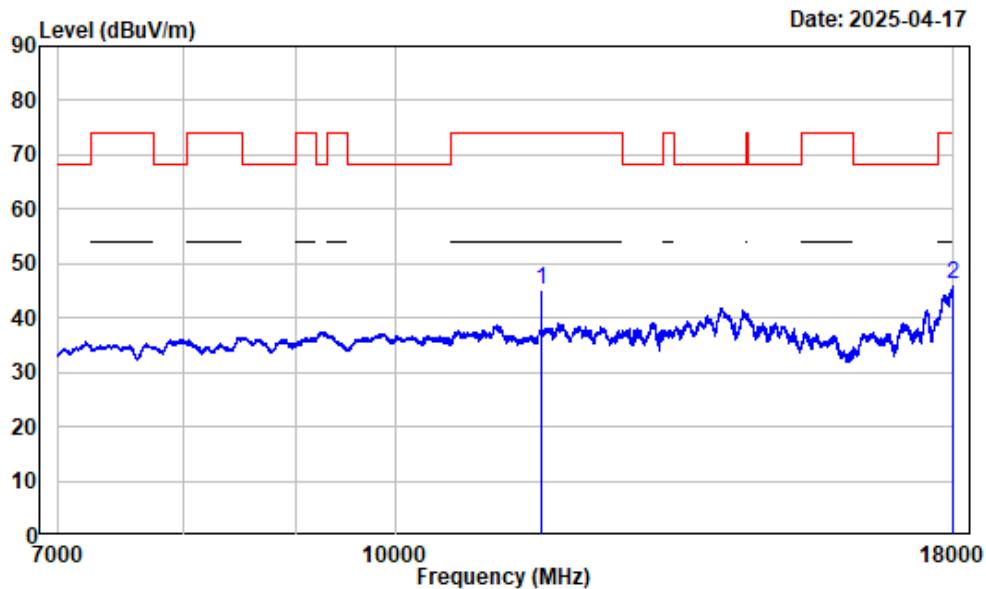

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	41.58	45.00	54.00	-9.00	Average
2	17989.000	13.14	33.01	46.15	54.00	-7.85	Average


7-18GHz_Vertical_Peak_802.11a_5825MHz_Band 4

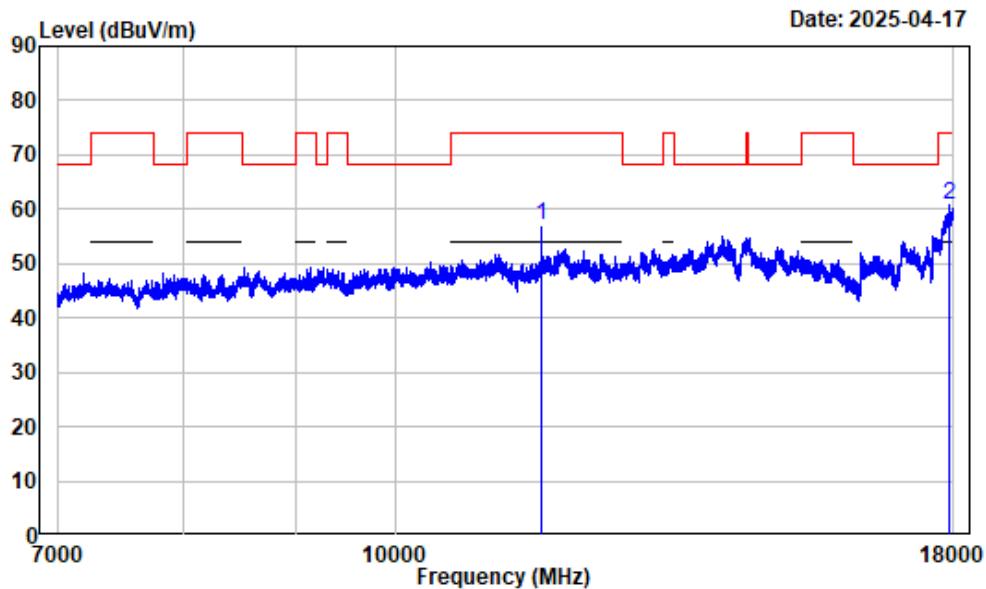

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11650.000	3.42	53.67	57.09	74.00	-16.91 Peak
17909.240	12.75	48.06	60.81	74.00	-13.19 Peak


7-18GHz_Vertical_Average_802.11a_5825MHz_Band 4

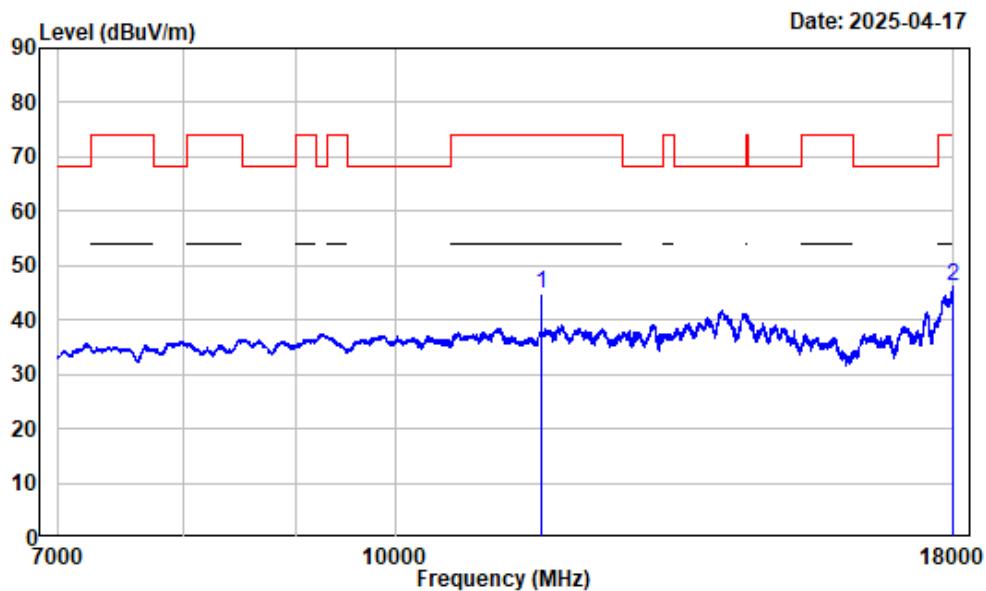

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 11650.000	3.42	41.31	44.73	54.00	-9.27 Average
2 17998.630	13.19	32.84	46.03	54.00	-7.97 Average


1-7GHz_Horizontal_802.11n-HT20_5825MHz_Band 4

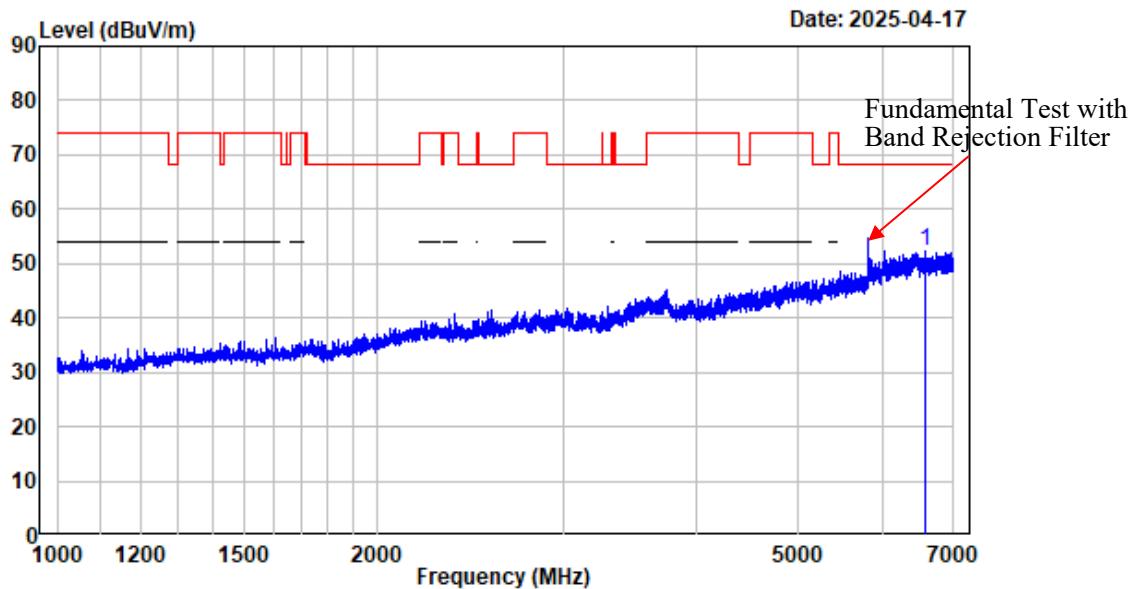

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq	Factor	Read		Limit		Over	Remark
		Level	Level	Line	Limit		
1	6590.449	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
		-3.11	55.35	52.24	68.20	-15.96	Peak


1-7GHz_Vertical_802.11n-HT20_5825MHz_Band 4

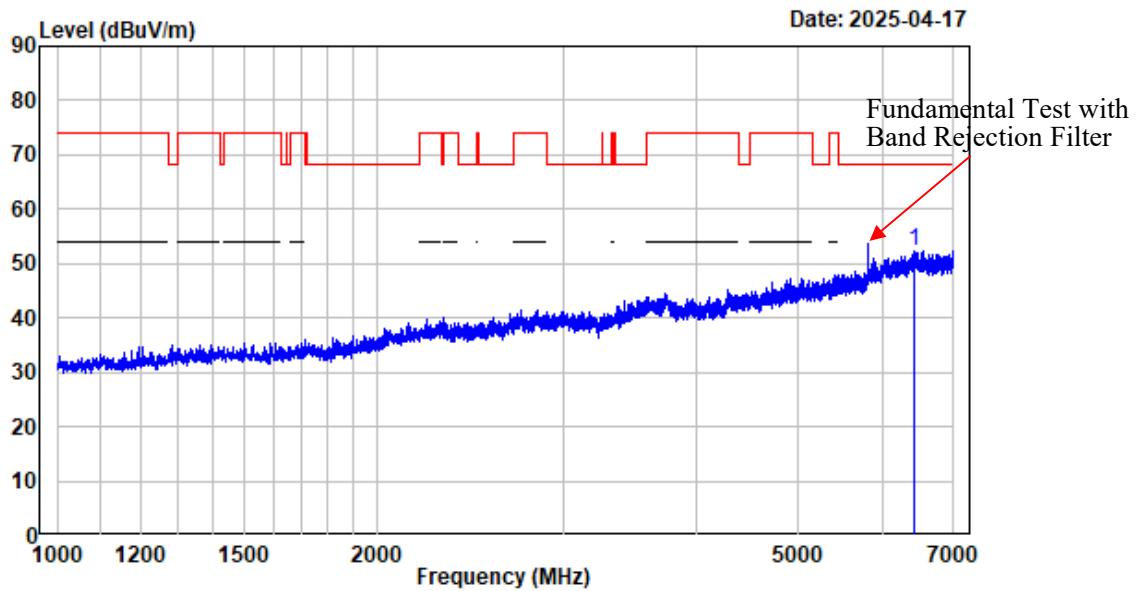

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Over Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.680	-2.87	55.18	52.31	68.20	-15.89	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20_5825MHz_Band 4

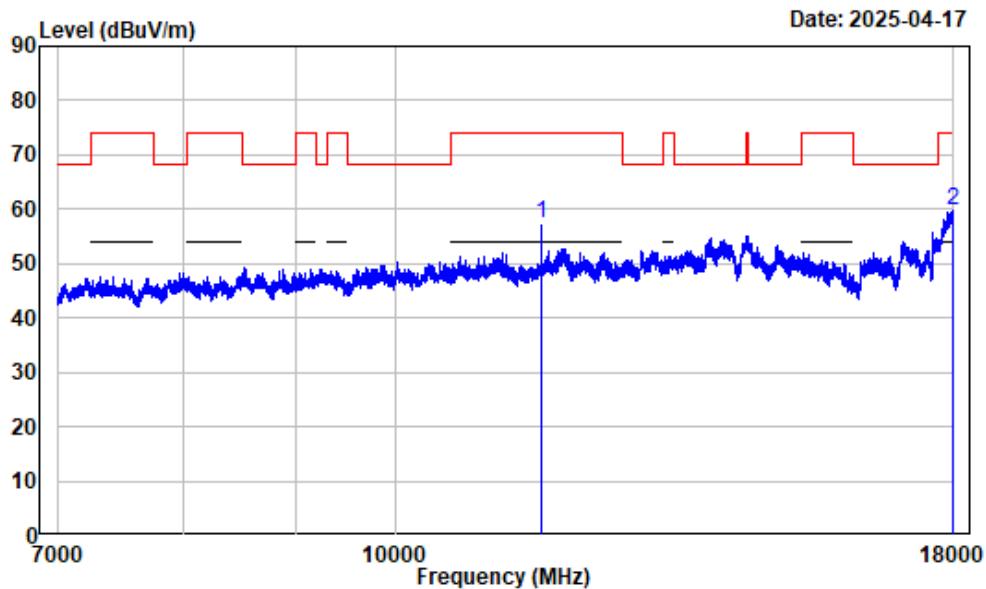

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11650.000	3.42	53.84	57.26	74.00	-16.74 Peak
17975.250	13.08	46.84	59.92	74.00	-14.08 Peak


7-18GHz_Horizontal_Average_802.11n-HT20_5825MHz_Band 4

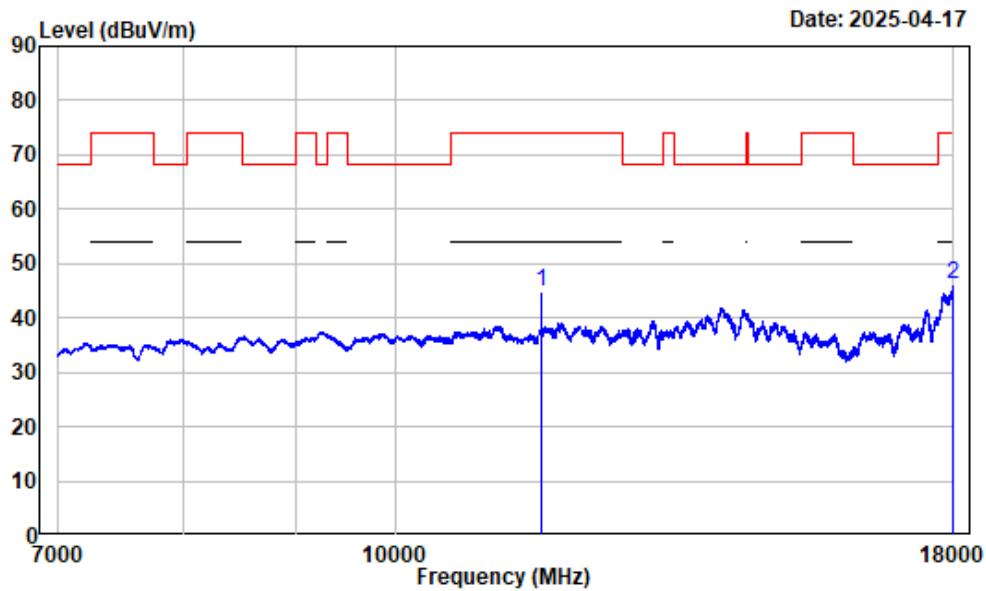

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	41.25	44.67	54.00	-9.33	Average
2	17991.750	13.16	32.96	46.12	54.00	-7.88	Average


7-18GHz_Vertical_Peak_802.11n-HT20_5825MHz_Band 4

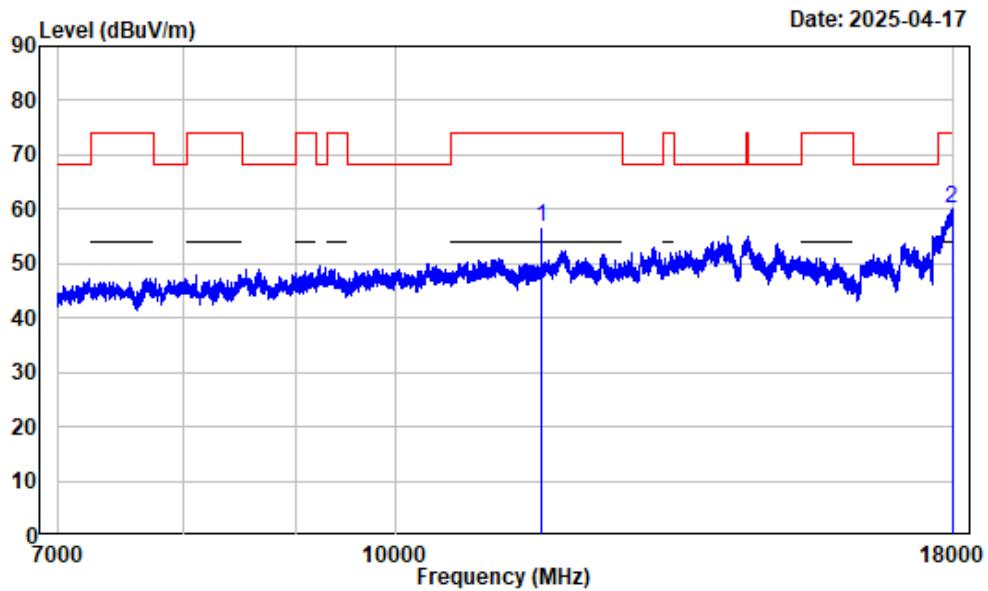

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	11650.000	3.42	53.36	56.78	74.00	-17.22 Peak
2	17973.870	13.08	46.91	59.99	74.00	-14.01 Peak


7-18GHz_Vertical_Average_802.11n-HT20_5825MHz_Band 4

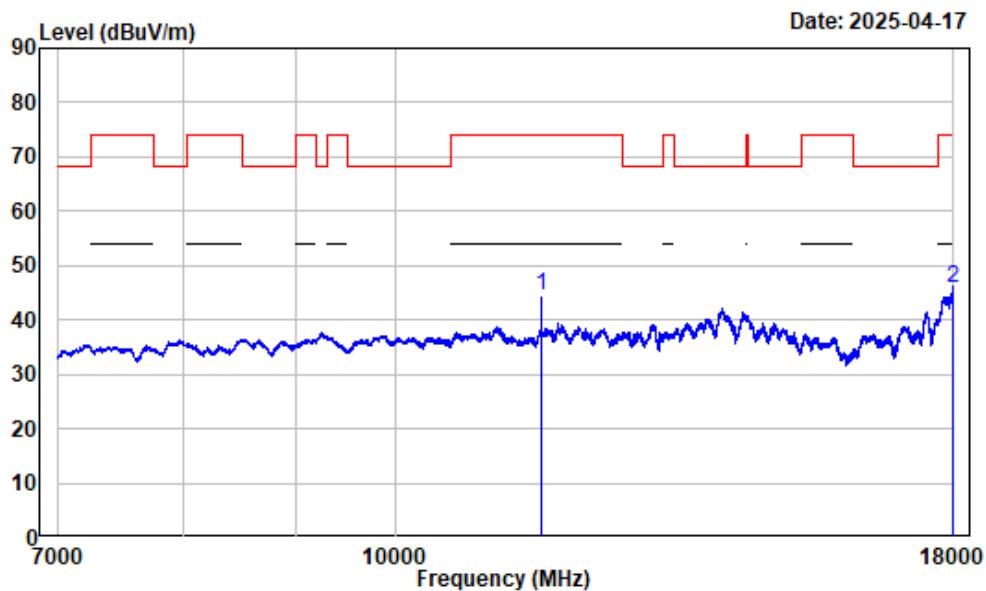

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 11650.000	3.42	40.98	44.40	54.00	-9.60 Average
2 17989.000	13.14	32.85	45.99	54.00	-8.01 Average


1-7GHz_Horizontal_802.11n-HT40_5795MHz_Band 4

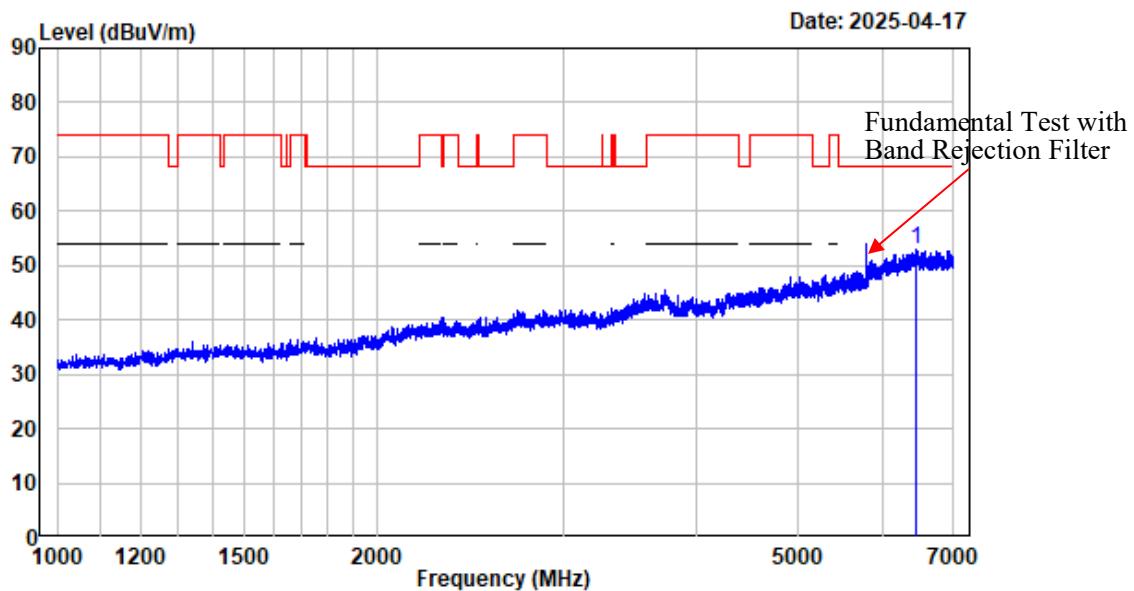

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6465.183	-2.89	55.74	52.85	68.20	-15.35	Peak


1-7GHz_Vertical_802.11n-HT40_5795MHz_Band 4

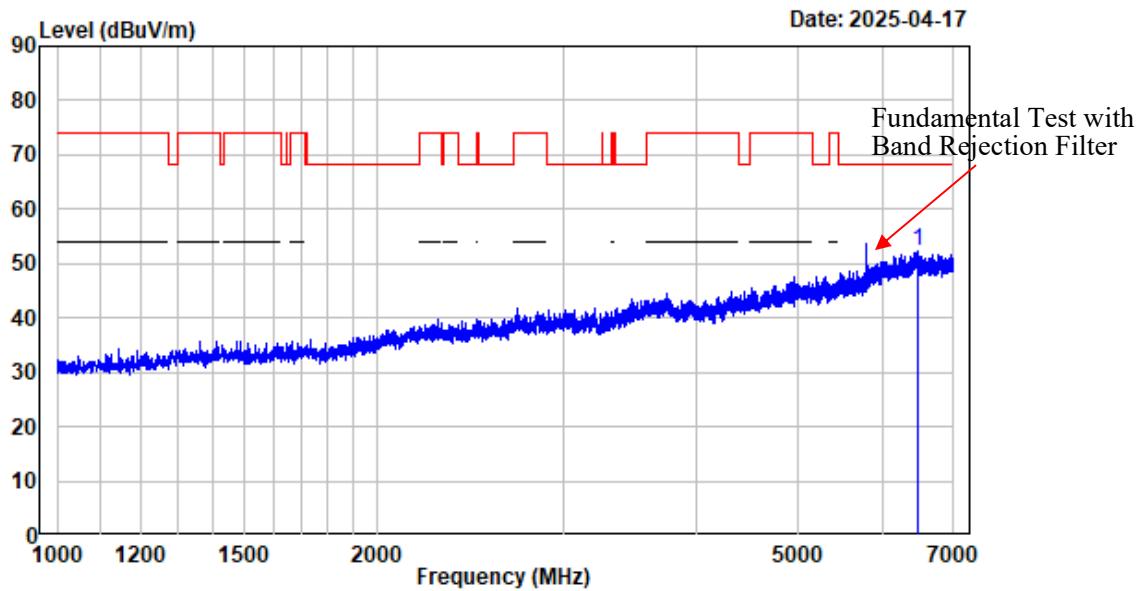

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6483.936	-2.93	55.30	52.37	68.20	-15.83	Peak


7-18GHz_Horizontal_Peak_802.11n-HT40_5795MHz_Band 4

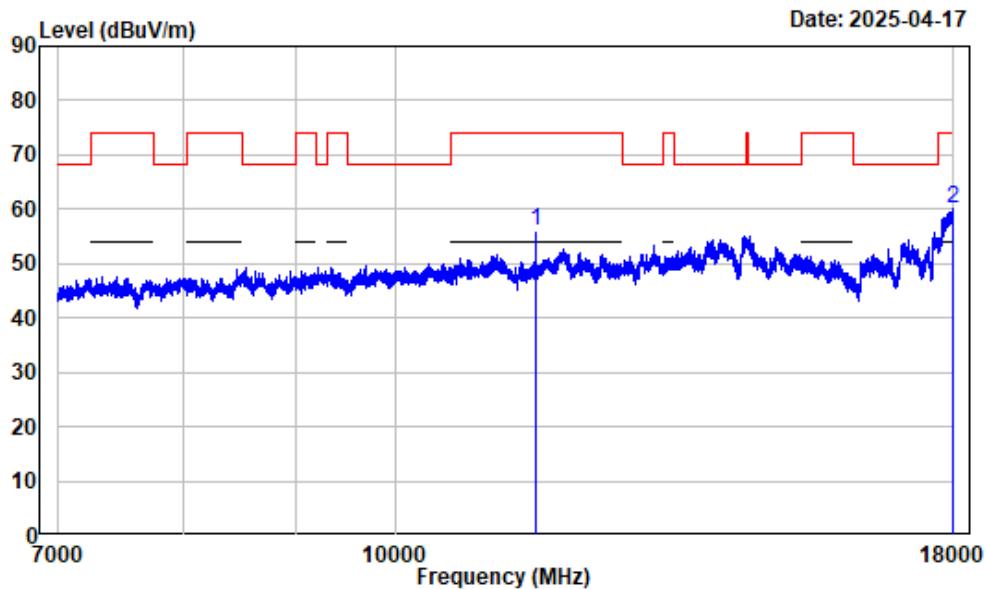

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
11590.000	3.21	52.87	56.08	74.00	-17.92 Peak
17978.000	13.10	47.08	60.18	74.00	-13.82 Peak


7-18GHz_Horizontal_Average_802.11n-HT40_5795MHz_Band 4

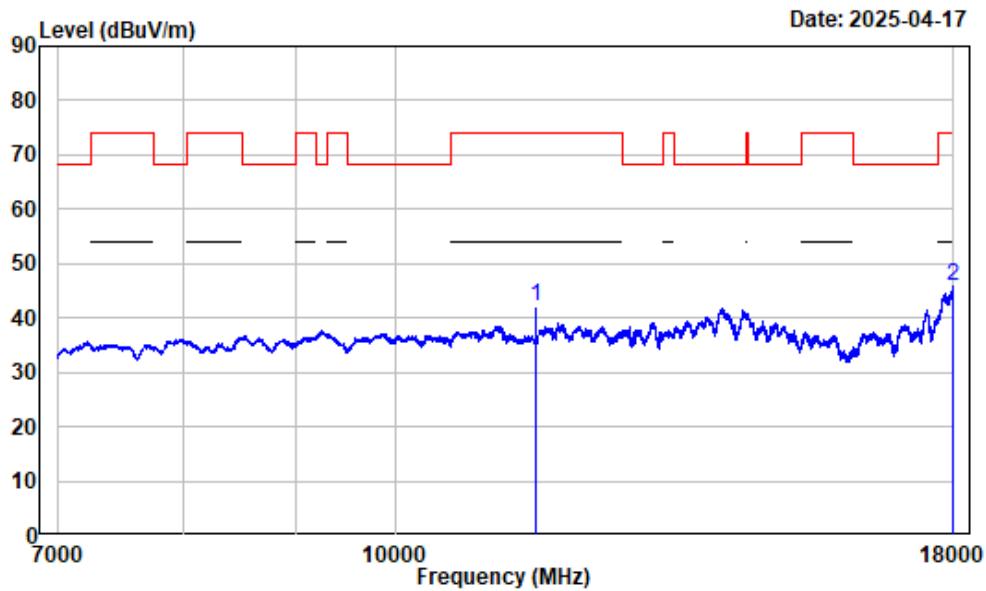

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Read Factor	Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	3.21	38.95	42.16	54.00	-11.84	Average
2	17998.630	13.19	32.72	45.91	54.00	-8.09	Average


7-18GHz_Vertical_Peak_802.11n-HT40_5795MHz_Band 4

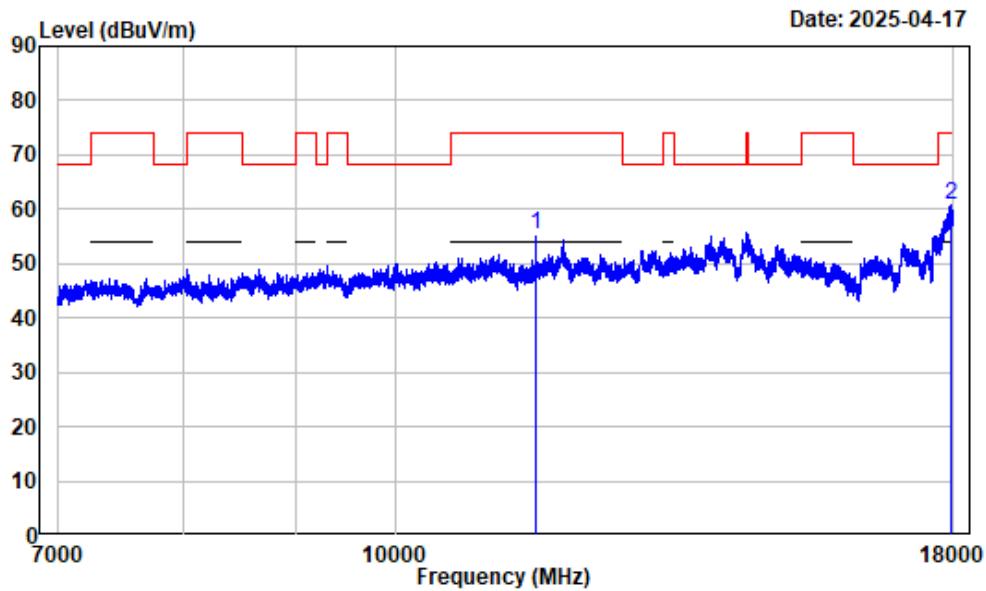

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 11590.000	3.21	52.09	55.30	74.00	-18.70 Peak
2 17940.870	12.91	47.96	60.87	74.00	-13.13 Peak

7-18GHz_Vertical_Average_802.11n-HT40_5795MHz_Band 4

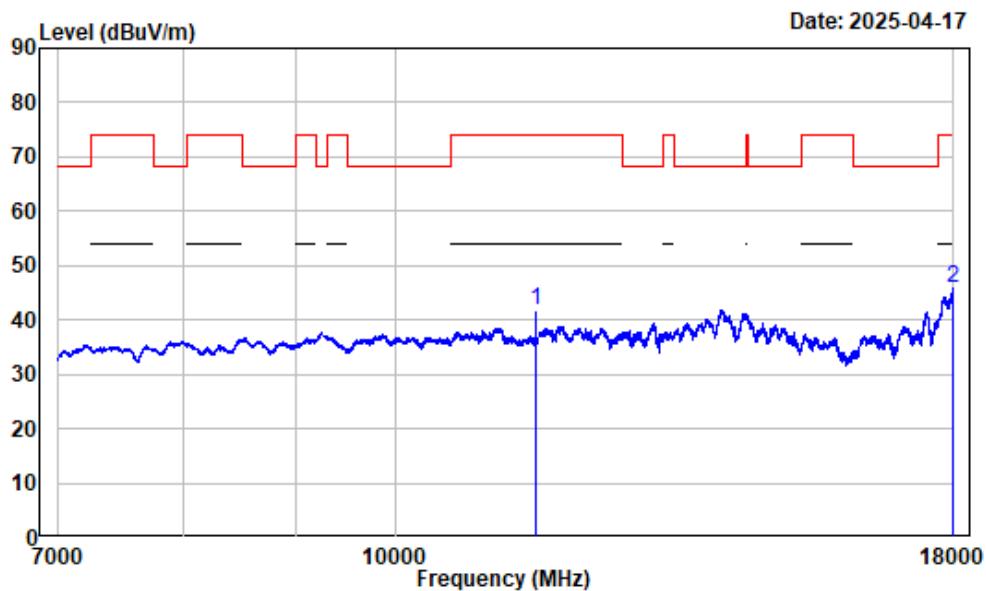


Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1 11590.000	3.21	38.61	41.82	54.00	-12.18 Average
2 17995.880	13.18	32.63	45.81	54.00	-8.19 Average

18-40GHz (Only with worst case margin mode plot): _802.11a_5825MHz_Band 4


18-40GHz_Horizontal_802.11a_5825MHz_Band 4

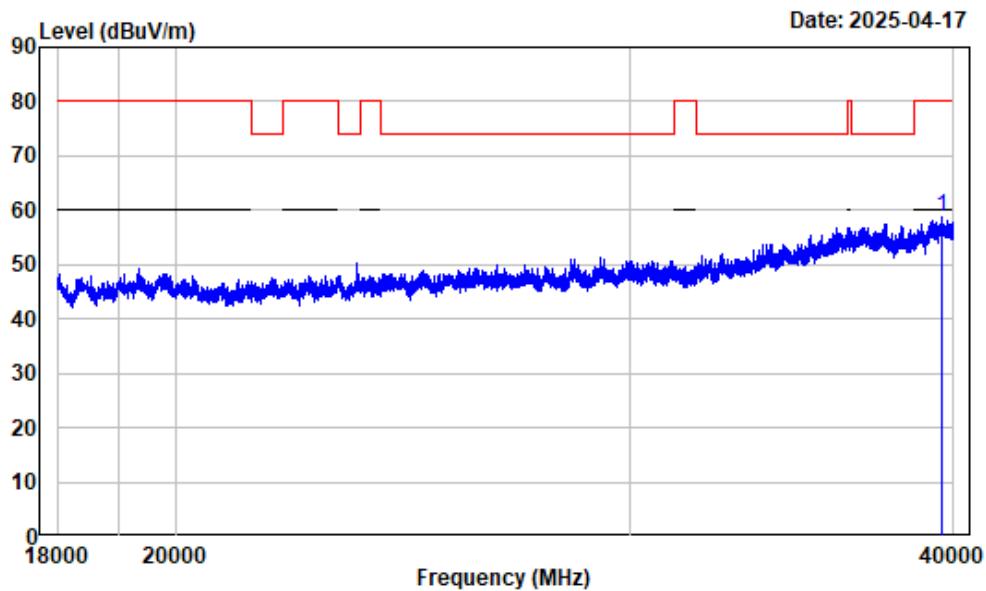

Condition : Horizontal
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	39565.450-524.06	582.86	58.80	80.00	-21.20 Peak

18-40GHz_Vertical_802.11a_5825MHz_Band 4

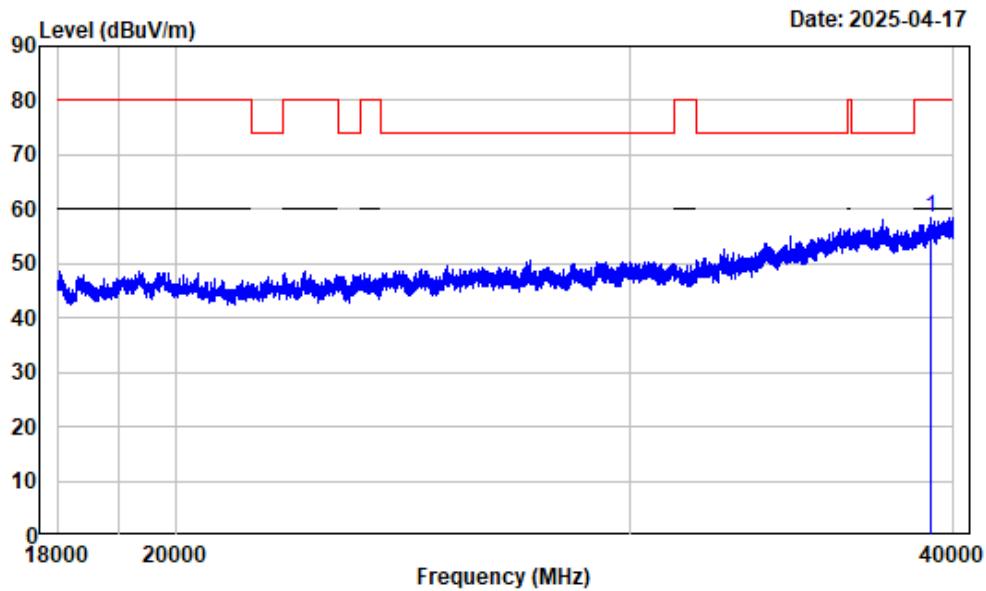

Condition : Vertical
Project No. : 2501R31585E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Read Factor	Level	Limit Level	Over Line	Limit	Remark
1	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	39202.400-523.94	582.46	58.52	80.00	-21.48	Peak

RF Conducted data

Please refer to Annex "Appendix A" for detail test data.

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
5.2G Wi-Fi	5180-5240	15.5	1.45	-0.70	14.80	0.030	0.2	0.768
5.3G Wi-Fi	5260-5320	15.5	1.51	-0.64	14.86	0.031	0.2	0.768
5.6G Wi-Fi	5500-5720	16.0	1.45	-0.70	15.30	0.034	0.2	0.768
5.8G Wi-Fi	5745-5825	16.0	1.49	-0.66	15.34	0.034	0.2	0.768

Note:

1. The tune up conducted power[#] and antenna gain[#] were declared by the applicant.
2. The 2.4G and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

EUT PHOTOGRAPHS

Please refer to the attachment 2501R31585E-RF External photo and 2501R31585E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2501R31585E-RFB Test Setup photo.

***** END OF REPORT *****