



CE MARKING

**ELECTROMAGNETIC COMPATIBILITY
ELECTRICAL SAFETY
LASER SPECTROSCOPY
ENVIRONMENTAL PHYSIC**



Organizzazione con Sistema
di Gestione certificato
Company with Management
System certified
ISO 9001:2008



| | | |
|-----------------------------------|---|---------|
| G.S.D. Srl PISA - Italy | Test Report n. FCC-16516 | Rev. 01 |
| | | |
| | | |
| Manufacturer | Dive Industries srl | |
| Address | Via Amorotti 15 58022 Follonica (GR) Italy | |
| | | |
| | | |
| Test Family Name | iX3M Dive Computer | |
| | | |
| | | |
| Testing Laboratory Name | G.S.D. S.r.l. | |
| Address | Via Marmiceto, 8 56121 Ospedaletto Pisa (PI) Italy | |
| Tel/Fax | +39 050 984254 / +39 050 984262 | |
| P.IVA/VAT | 01343950505 | |
| http – e-mail | www.gsd.it - info@gsd.it | |
| | FCC Listed: Registration Number: 424037 | |
| | | |
| Location and Date of Issue | Pisa, 2016 April 05 | |
| | | |
| | | |
| | | |
| | | |

G.S.D. s.r.l.
Via Marmiceto, 8
56121 OSPEDALETTTO - PISA
Tel. 050.984254 - Fax 050.984262
P. IVA 01343950505

SENIOR EMC TEST MANAGER
Dr. Gian Luca Genovesi

QUALITY MANAGER
Dr. David Bellincia

INDEX

| | |
|---|----|
| 1. MANUFACTURER AND EUT IDENTIFICATION | 3 |
| 2. REFERENCE STANDARDS..... | 5 |
| 3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY..... | 6 |
| 4. RADIATED EMISSIONS..... | 8 |
| 5. POWERLINE CONDUCTED EMISSIONS..... | 11 |
| 6. PHOTO..... | 14 |


1. MANUFACTURER AND EUT IDENTIFICATION¹

| | |
|-------------------------|--|
| Manufacturer | Dive Industries srl. |
| Address | Via Amorotti 15 58022 Follonica (GR) Italy |
| | |
| | |
| Test Family Name | iX3M Dive Computer |
| | |
| | |
| Date of reception | 2016 January 20 |
| | |
| Sampling | Laboratory sample for certification |
| | |
| Test Item Description | Dive Computer |
| | |
| Nominal Input Voltage | Internal and USB Powered |
| | |
| FCC ID | 2AHFQIX3M01 |
| | |

¹A detailed documentation is preserved in the internal fascicle.

This document may be only fully reproduced.

*Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-16516 Rev. 01, page 3 / 15*

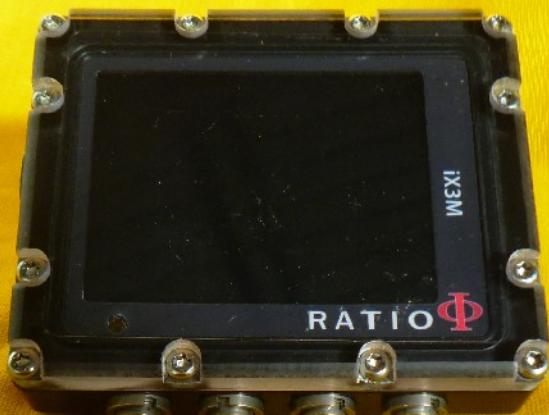

*Fig. 1.1
Equipment Photo*

2. REFERENCE STANDARDS

Tests and measurements are performed accordingly to the reference standards given in the table below:

| <i>TEST</i> | <i>STANDARD</i> |
|---------------------------------------|---|
| Emissions: Radiated – Section 15.109 | FCC Rules ad Regulations, Title 47 Part 15 – Sub part B ANSI C63.4 (2014) – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz |
| Emissions: Conducted – Section 15.107 | FCC Rules ad Regulations, Title 47 Part 15 – Sub part B ANSI C63.4 (2014) – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz |

This document may be only fully reproduced.

*Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-16516 Rev. 01, page 5 / 15*

3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY

Sub-part 2.1033(b)

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts: 15.109; Unintentional Radiators

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing: In accordance with ANSI C63.4-2014, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures.

All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Summary of Test Results

| TEST | RESULT |
|--|--------|
| Emissions: conducted Section 15.107 | Pass |
| Emissions: radiated Section 15.109 | Pass |

Measurement uncertainty


| TEST | EXPANDED UNCERTAINTY |
|---|----------------------|
| Conducted Emission – 50Ω/50µH (150 kHz - 30 MHz) | ± 3.5 dB |
| Radiated Emission – (Semianechoic Room) (30 MHz - 18 GHz) | ± 4.7 dB |

Climatic Conditions

| PARAMETER | VALUE |
|-------------------|-------------|
| Temperature | (293 ± 3) K |
| Relative humidity | (50 ± 5) % |

Extensions

The results refer only to the sampled EUT and under the specified conditions.

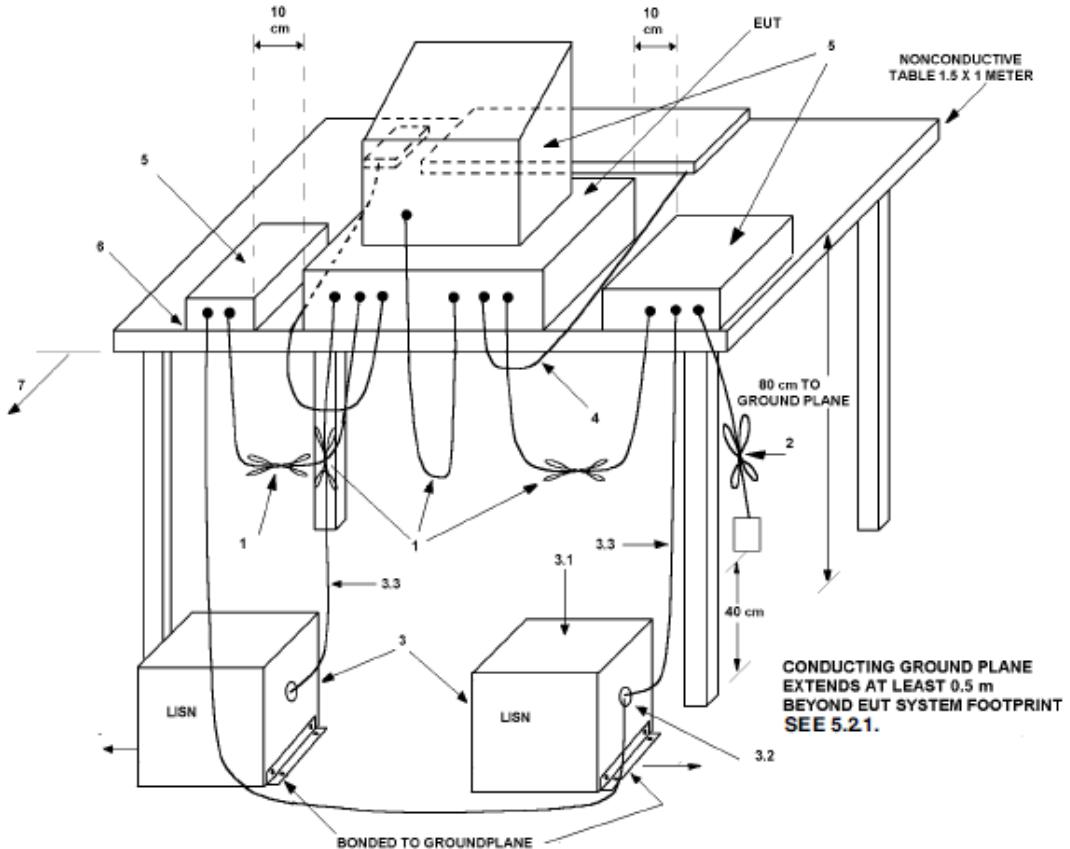

Conducted and Radiated EUT Test Set-up example (ANSI C63.4 2014)

Test Mode: the EUT was used with a personal computer by USB.

4. RADIATED EMISSIONS

In the following table you can find the limits established by the reference standard:

| FREQUENCY RANGE (MHz) | Field Strength QUASI-PEAK LIMITS [dB (μ V/m)] |
|--------------------------|--|
| 30 ÷ 88 | 40 |
| 88 ÷ 216 | 43,5 |
| 216 ÷ 960 | 46 |
| Above 960 | 54 |

Test Equipment

| EQUIPMENT | MANUFACTURER | MODEL | CAL. DUE |
|-----------------------------|--------------|----------|----------|
| EMI Receiver | HP | HP8546A | 01/2017 |
| EMI Receiver Filter Section | HP | HP85460A | 01/2017 |
| Anechoic Chamber | Comtest | CSA01 | 01/2017 |
| Bilog Antenna | Schaffner | CBL6112B | 01/2017 |
| Horn Antenna | EMCO | 3115 | 01/2017 |
| Controller | Deisel | HD100 | 01/2017 |
| Turn Table | Deisel | MA240 | 01/2017 |
| LISN | GSD | NTW06 | 01/2017 |

Test procedure: RE22R02

Notes

Azimuth position EUT-Antenna corresponding to 0° identifies the rotating table orientation (TT) in which the instrument to be tested shows the front part turned towards the antenna. Positive grades individuate clockwise rotations of TT when this one is observed from the top. For negative degrees, TT rotation is anticlockwise.

Antenna height respect to the mass plane is conventionally individuated with: MA=XXX where XXX indicates the height (always positive for e>100) expressed in cm.

Antenna horizontal polarisation is indicated by POL=H.

Antenna vertical polarisation is indicated by POL=V.

EUT was tested in the three orthogonal planes.


Results and conclusions

In all the operative conditions, equipment complied with the standard limits. Graphics in following figures show the most significant registrations of the performed measurements.

This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. FCC-16516 Rev. 01, page 8 / 15

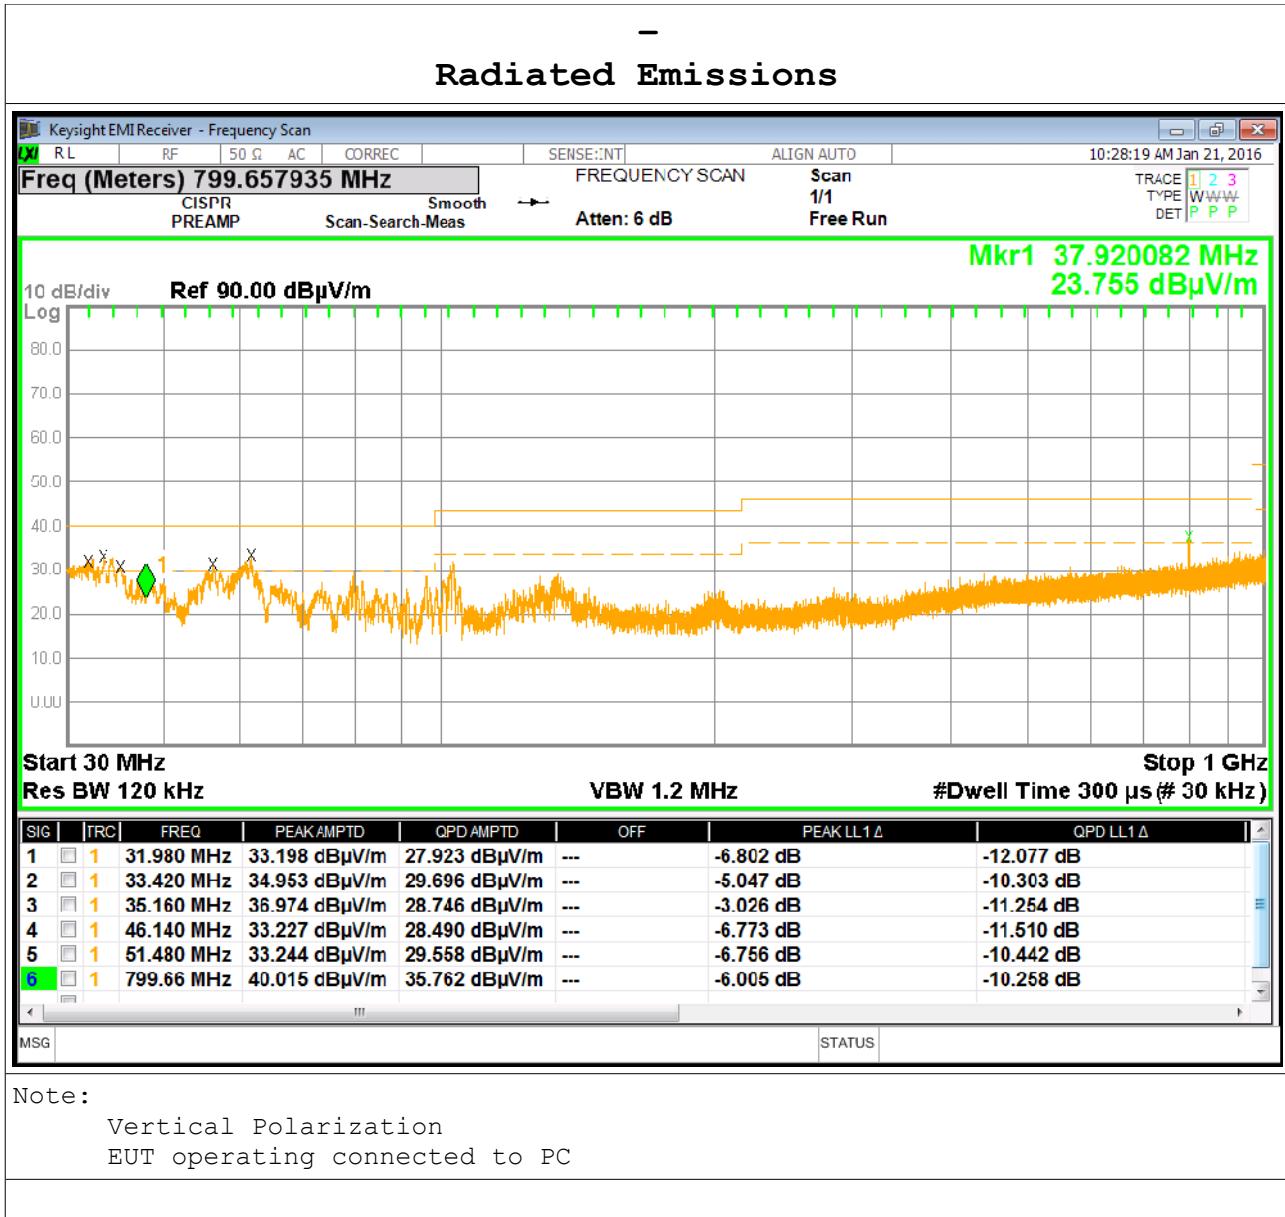

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-16516 Rev. 01, page 9 / 15

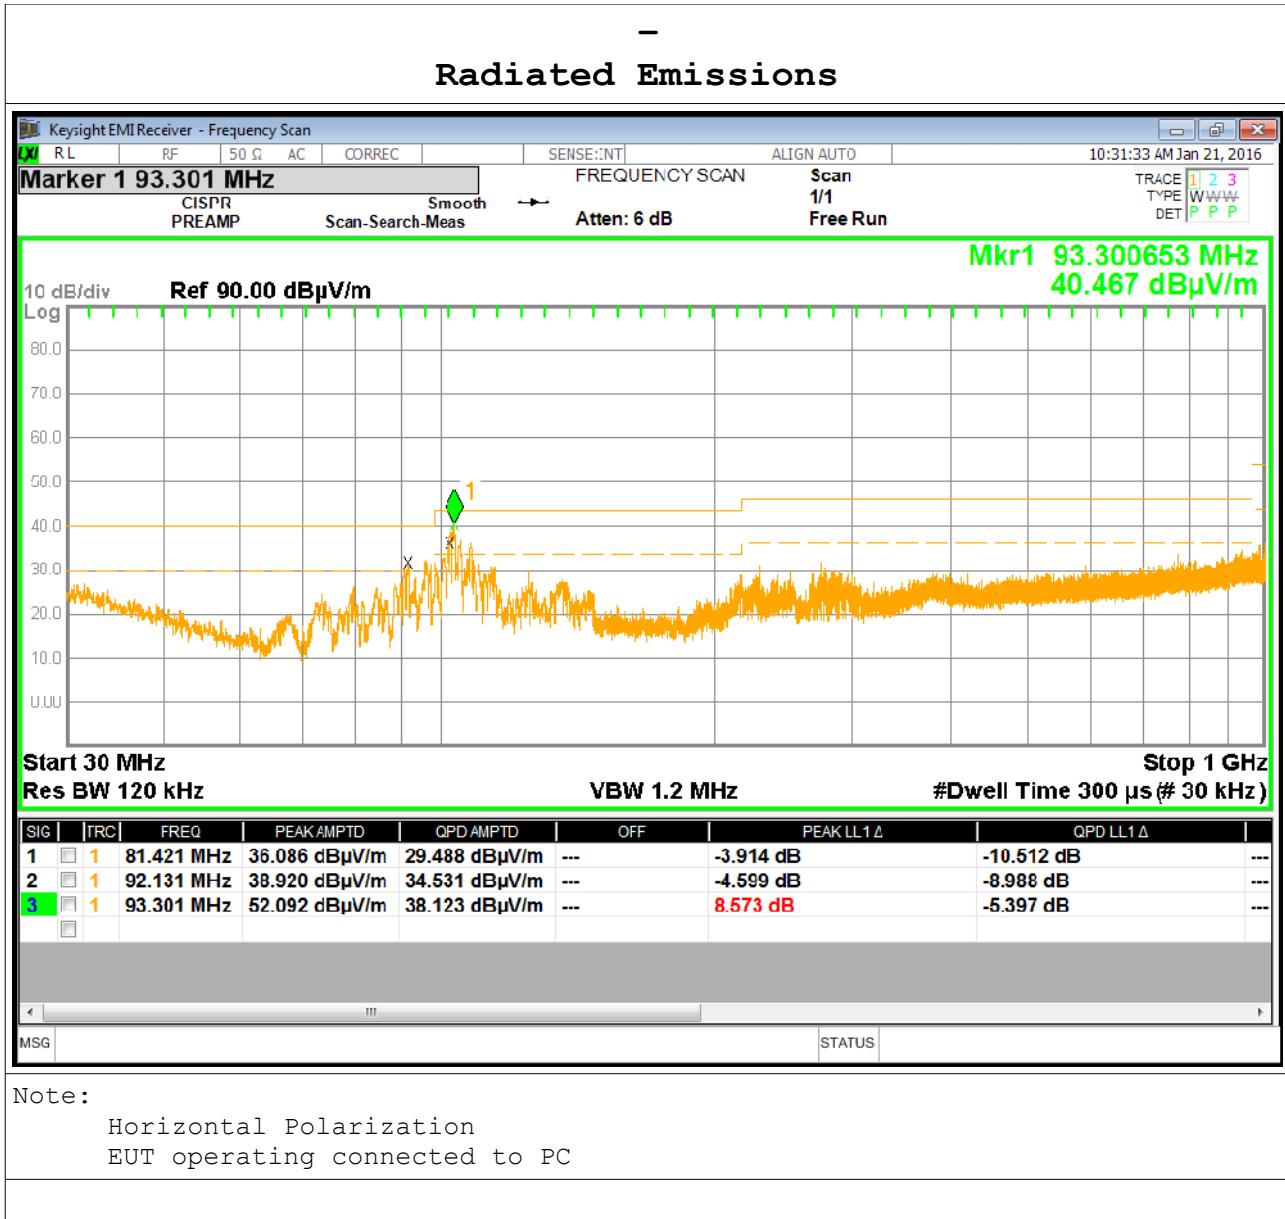

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-16516 Rev. 01, page 10 / 15

5. POWERLINE CONDUCTED EMISSIONS

Equipment shall meet the limits below when using a CISPR16 quasi-peak and average detector receivers.

FCC, 15.107

| FREQUENCY RANGE (MHz) | QUASI-PEAK LIMIT [dB (μV)] | AVERAGE LIMIT [dB (μV)] |
|----------------------------------|--|---|
| 0.15 ÷ 0.50 | 66 ÷ 56 ^(*) | 56 ÷ 46 ^(*) |
| 0.50 ÷ 5 | 56 | 46 |
| 5 ÷ 30 | 60 | 50 |

^(*) Limit decreasing linearly with logarithm of frequency

Test Equipment

| EQUIPMENT | MANUFACTURER | MODEL | CAL. DUE |
|-----------------------------|---------------------|--------------|-----------------|
| EMI Receiver | HP | HP8546A | |
| EMI Receiver Filter Section | HP | HP85460A | |
| Screened Room | GSD | CSC01 | |
| Transient Limiter | HP | 11947A | 01/2017 |
| LISN | GSD | GSDA01 | 01/2017 |

Test procedure: CE22R01

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a spectrum analyzer by a transient limiter. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits

Test method


Test method was in accordance with the reference standard.

EUT modes of operations were tested in order to achieve the maximum level of emission.

Results


Equipment complied with the test specification limits.

Graphics in following figures show some registrations of the frequency spectrum of the conducted emissions.

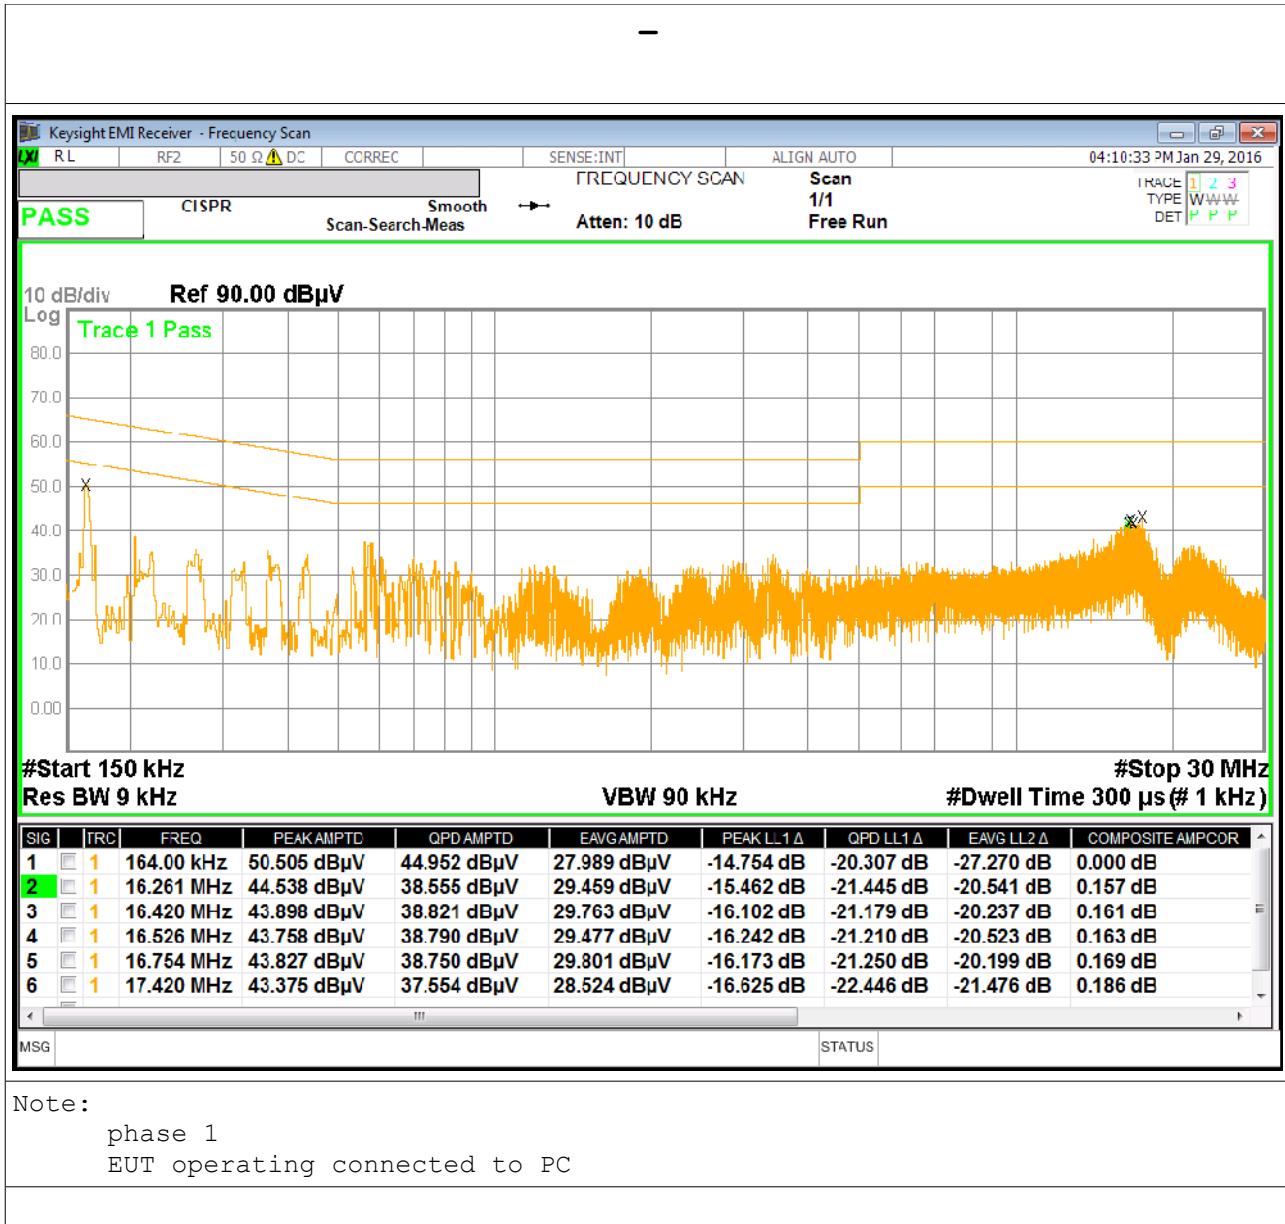

This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.
Report n. FCC-16516 Rev. 01, page 12 / 15

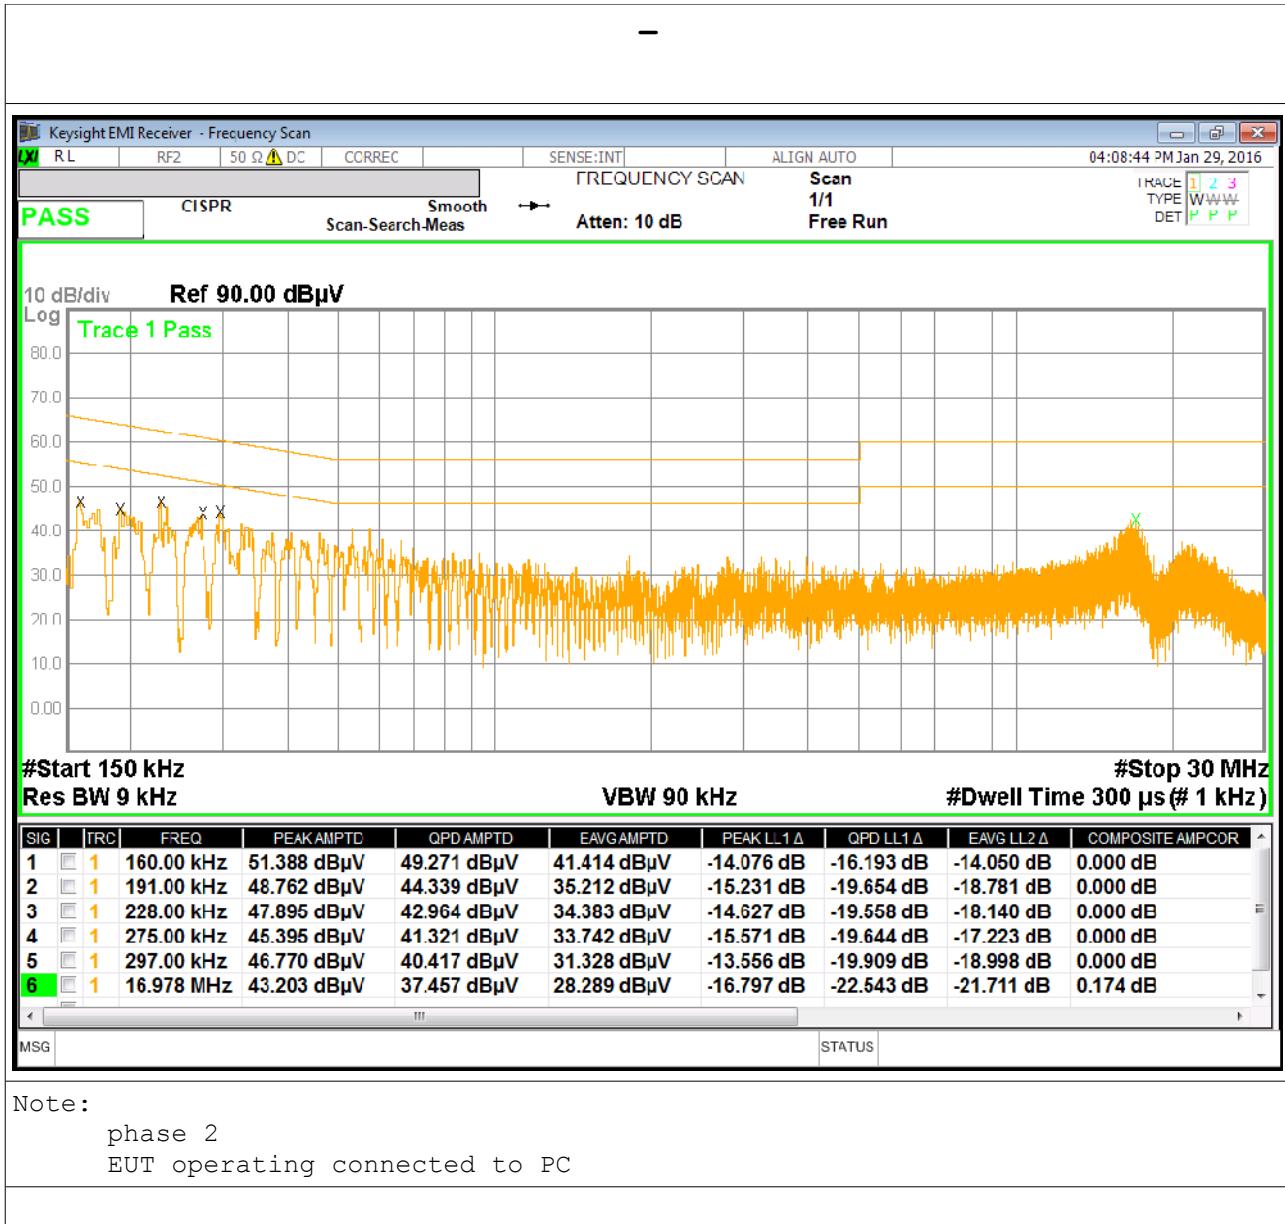

6. PHOTO



*Fig. 6.1
Conducted Emissions Test Set-up*

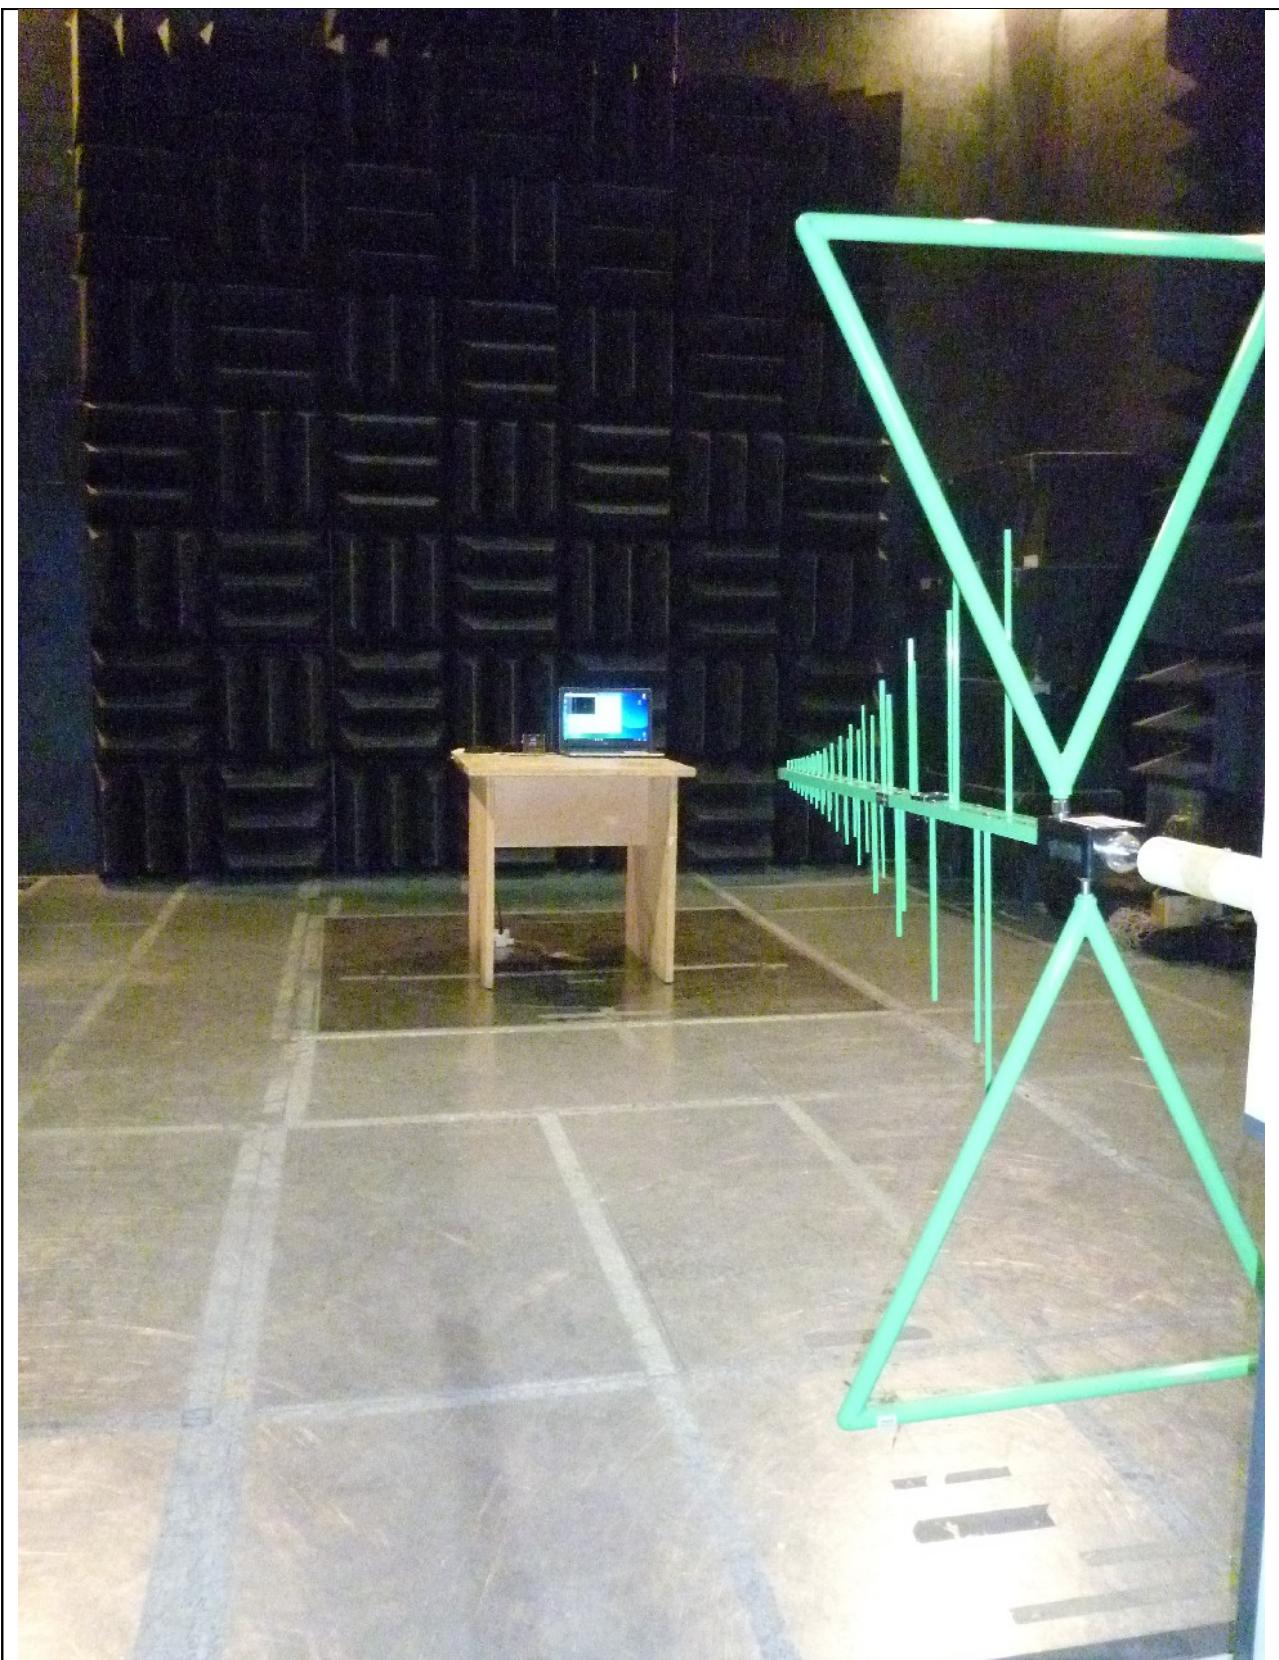

*Fig. 6.2
Radiated Emissions Test Set-up*