



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 74H Test Report

Report Reference No.....: CTL1603040566-WF

Compiled by

(position+printed name+signature)...: File administrators Jacky Chen

Jacky Chen

Name of the organization performing the tests

Test Engineer Tracy Qi

Tracy Qi

(position+printed name+signature)...:

Approved by

(position+printed name+signature)...: Manager Tracy Qi

Tracy Qi

Date of issue.....: Mar. 15, 2016

Testing Laboratory Name: Shenzhen CTL Testing Technology Co., Ltd.

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: Shenzhen DSQN Investment Co., Ltd

Address.....: 703 Room, Rujun Mansion, Banxuegang Road, Longgang District, Shenzhen, Guangdong Province, China

Test specification:

Standard: FCC Part 74 Subpart H—Low Power Auxiliary Stations

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Wireless microphone

Trade Mark:



Model/Type reference.....: SR-WM4C

Modulation.....: FM

Power Supply.....: DC 3.0V from battery(2*AA)

Operating Frequency Range.....: From 203 MHz to 216 MHz

Result.....: Positive

TEST REPORT

| | | |
|--------------------------|-------------------------|---------------|
| Test Report No. : | CTL1603040566-WF | Mar. 15, 2016 |
| | | Date of issue |

Equipment under Test : Wireless microphone

Model /Type : SR-WM4C

Applicant : **Shenzhen DSQN Investment Co., Ltd**

Address : 703 Room, Rujun Mansion, Banxuegang Road, Longgang District, Shenzhen, Guangdong Province, China

Manufacture : **Shenzhen DSQN Investment Co., Ltd**

Address : 703 Room, Rujun Mansion, Banxuegang Road, Longgang District, Shenzhen, Guangdong Province, China

| | |
|--|-----------------|
| Test Result according to the standards on page 4: | Positive |
|--|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | | |
|------------------|--|------------------|
| <u>1.</u> | <u>TEST STANDARDS</u> | <u>4</u> |
| <u>2.</u> | <u>SUMMARY</u> | <u>5</u> |
| 2.1. | General Remarks | 5 |
| 2.2. | Equipment Under Test | 5 |
| 2.3. | Short description of the Equipment under Test (EUT) | 5 |
| 2.4. | EUT operation mode | 6 |
| 2.5. | EUT configuration | 6 |
| 2.6. | Related Submittal(s) / Grant (s) | 6 |
| 2.7. | Modifications | 6 |
| <u>3.</u> | <u>TEST ENVIRONMENT</u> | <u>7</u> |
| 3.1. | Address of the test laboratory | 7 |
| 3.2. | Test Facility | 7 |
| 3.3. | Environmental conditions | 7 |
| 3.4. | Configuration of Tested System | 7 |
| 3.5. | Statement of the measurement uncertainty | 8 |
| 3.6. | Equipments Used during the Test | 9 |
| 3.7. | General Technical Requirements and Summary of Test Results | 10 |
| <u>4.</u> | <u>TEST CONDITIONS AND RESULTS</u> | <u>11</u> |
| 4.1. | OUTPUT POWER MEASUREMENT | 11 |
| 4.2. | MODULATION CHARACTERISTICS | 13 |
| 4.3. | OCCUPIED BANDWIDTH OF EMISSION | 16 |
| 4.4. | FIELD STRENGTH OF EMISSION | 19 |
| 4.5. | FREQUENCY STABILITY MEASUREMENT | 27 |
| <u>5.</u> | <u>TEST SETUP PHOTOS OF THE EUT</u> | <u>29</u> |
| <u>6.</u> | <u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u> | <u>30</u> |

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Part 74 Subpart H—Low Power Auxiliary Stations

TIA-603-C(2004)-Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

ANSI C63.10-2013

ANSI C63.4-2014



2. SUMMARY

2.1. General Remarks

| | | |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Mar. 04, 2016 |
| | | |
| Testing commenced on | : | Mar. 04, 2016 |
| | | |
| Testing concluded on | : | Mar. 15, 2016 |

2.2. Equipment Under Test

Power supply system utilised

| | | | |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V / 60 Hz | <input type="radio"/> 115V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input type="radio"/> 24 V DC |
| | | <input checked="" type="radio"/> Other (specified in blank below) | |

DC 3.0 V from battery (2*AA)

2.3. Short description of the Equipment under Test (EUT)

The Wireless microphone, Model: SR-WM4C or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| | |
|-----------------|-------------------------|
| Name of EUT | Wireless microphone |
| Model Number | SR-WM4C |
| FCC ID | 2AHMBSR-WM4C |
| Modulation Type | FM |
| Antenna Type | External |
| Frequency Range | From 203 MHz to 216 MHz |

Channel list

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1 | 203.65 |
| 2 | 207.75 |
| 3 | 211.55 |
| 4 | 215.35 |

Test frequency list

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1 | 203.65 |
| 2 | 207.75 |
| 3 | 211.55 |
| 4 | 215.35 |

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AHMBSR-WM4C filing to comply with the FCC Part 74H Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|---------------------|
| Temperature: | <u>15-35 ° C</u> |
| Humidity: | <u>30-60 %</u> |
| Atmospheric pressure: | <u>950-1050mbar</u> |

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

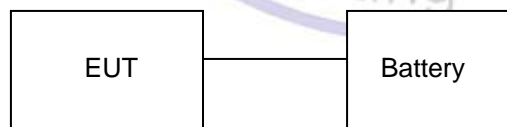

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Electromagnetic Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10dB | (1) |
| Radiated Emission | 1~12.75GHz | 4.32dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.20dB | (1) |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



3.6. Equipments Used during the Test

| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|-----------------------------|----------------------|-----------------------|--------------|------------------|----------------------|
| ULTRA-ROADBAND ANTENNA | Sunol Sciences Corp. | JB1 | A061713 | 2015/06/02 | 2016/06/01 |
| EMI Test Receiver | R&S | ESCI | 103710 | 2015/06/02 | 2016/06/01 |
| Spectrum Analyzer | Agilent | E4407B | MY41440676 | 2015/05/21 | 2016/05/20 |
| Spectrum Analyzer | Agilent | N9020A | US46220290 | 2016/01/17 | 2017/01/16 |
| Controller | EM Electronics | Controller EM 1000 | N/A | 2015/05/21 | 2016/05/20 |
| Horn Antenna | Sunol Sciences Corp. | DRH-118 | A062013 | 2015/05/19 | 2016/05/18 |
| Active Loop Antenna | Daze | ZN30900A | N/A | 2015/05/19 | 2016/05/18 |
| LISN | R&S | ENV216 | 3560.6550.12 | 2015/06/02 | 2016/06/01 |
| LISN | R&S | ESH2-Z5 | 860014/010 | 2015/06/02 | 2016/06/01 |
| ISN | FCC | F-071115-1057-1-09 | 11229 | 2015/05/19 | 2016/05/18 |
| Amplifier | Agilent | 8349B | 3008A02306 | 2015/05/19 | 2016/05/18 |
| Amplifier | Agilent | 8447D | 2944A10176 | 2015/05/19 | 2016/05/18 |
| Transient Limiter | SCHWARZCECK | VTSD 9561F | 9666 | 2015/06/02 | 2016/06/01 |
| Radio Communication Tester | R&S | CMU200 | 115419 | 2015/05/22 | 2016/05/21 |
| Temperature/Humidity Meter | Gangxing | CTH-608 | 02 | 2015/05/20 | 2016/05/19 |
| SIGNAL GENERATOR | Agilent | E4421B | US40051744 | 2015/05/20 | 2016/05/19 |
| Radio Communication Testset | HP | 8920A | 116250 | 2016/01/19 | 2017/01/18 |
| Wideband Peak Power Meter | Anritsu | ML2495A | 220.23.35 | 2015/05/20 | 2016/05/19 |
| Climate Chamber | ESPEC | EL-10KA | A20120523 | 2015/05/20 | 2016/05/19 |
| High-Pass Filter | K&L | 9SH10-2700/X12750-O/O | N/A | 2015/05/20 | 2016/05/19 |
| High-Pass Filter | K&L | 41H10-1375/U12750-O/O | N/A | 2015/05/20 | 2016/05/19 |

3.7. General Technical Requirements and Summary of Test Results

| FCC Rules | Description of Test | Test Result |
|---|--|-------------|
| FCC section 74.861(e)(1), FCC part 2, section 2.1046 | RF Output Power | Complies |
| FCC section 74.861(e)(3) , FCC part 2, section 2.1047 | Modulation Characteristic | Complies |
| FCC section 74.861(e)(5) , FCC part 2, section 2.1049 | Emission Bandwidth | Complies |
| FCC section 74.861(e)(6) , FCC part 2, section 2.1051 | Spurious Emission at Antenna Terminals | Complies |
| FCC section 74.861(e)(6) , FCC part 2, section 2.1053 | Field Strength of Spurious Emission | Complies |
| Frequency Stability | FCC section 74.861(e)(4) , FCC part 2, section 2.1055 | Complies |



4. TEST CONDITIONS AND RESULTS

4.1. OUTPUT POWER MEASUREMENT

Measurement Procedure

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier may be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

Test Configuration

Figure 1 : Frequencies measured below 1 GHz configuration


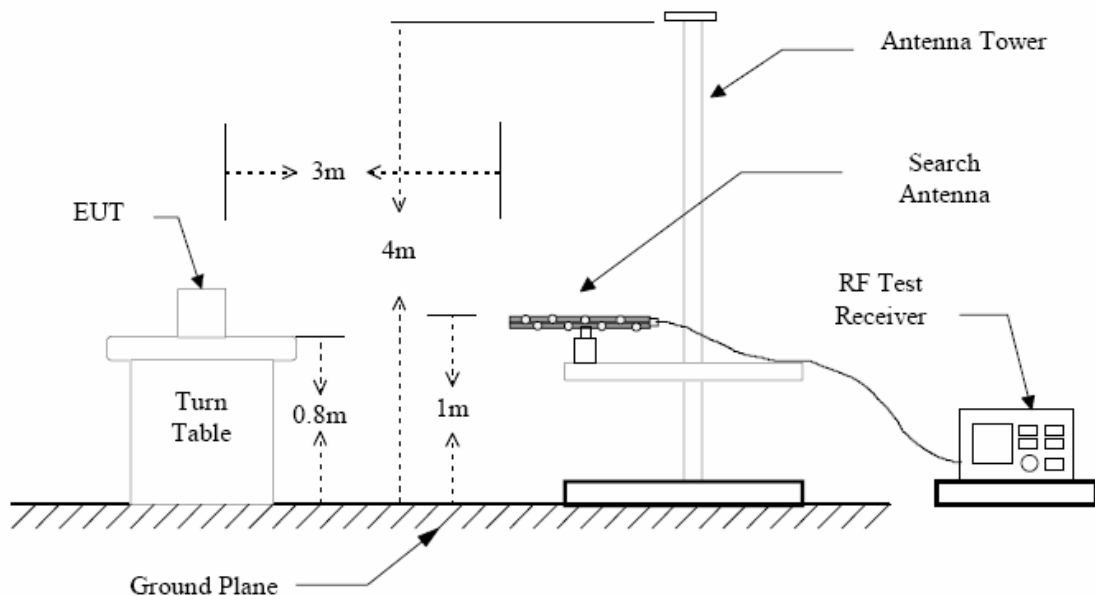


Figure 2 : Frequencies measured above 1 GHz configuration

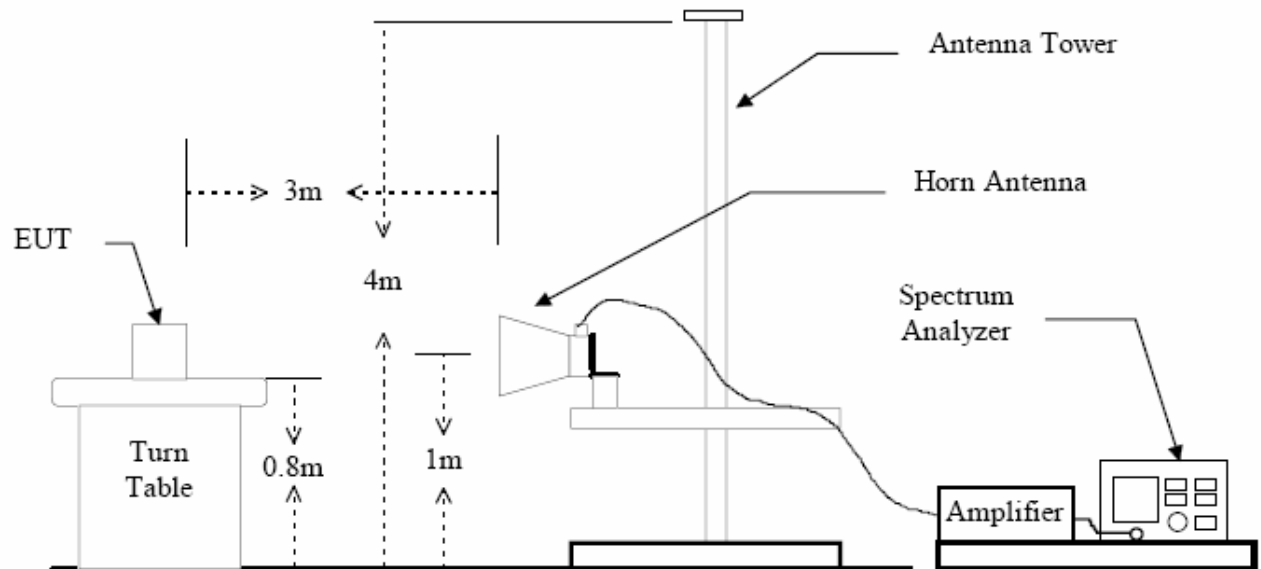

Limit

According to §74.861(e)(1)(i), the output power shall not exceed 50 milliwatts.

TEST RESULTS

Note: 1. The field strength of radiation emission was measured in the following position: EUT stand-up position (Zaxis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis was reported.

| Test Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dBi) | P _{Ag} (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|----------------------|------------------------|----------------------|----------------------------------|----------------------|------------|-------------|-------------|--------------|
| 203.65 | -34.48 | 1.25 | 13.42 | 28.17 | 5.86 | 16.99 | 11.13 | H |
| | -33.13 | 1.25 | 13.42 | 28.17 | 7.21 | 16.99 | 9.78 | V |
| 207.75 | -35.07 | 1.25 | 13.07 | 28.17 | 4.92 | 16.99 | 12.07 | H |
| | -34.35 | 1.25 | 13.07 | 28.17 | 5.64 | 16.99 | 11.35 | V |
| 211.55 | -35.98 | 1.25 | 13.18 | 28.17 | 4.12 | 16.99 | 12.87 | H |
| | -33.75 | 1.25 | 13.18 | 28.17 | 6.35 | 16.99 | 10.64 | V |
| 215.35 | -35.49 | 1.25 | 13.25 | 28.17 | 4.68 | 16.99 | 12.31 | H |
| | -34.05 | 1.25 | 13.25 | 28.17 | 6.12 | 16.99 | 10.87 | V |

Remark:

$$1. \quad EIRP = P_{Mea}(dBm) + P_{Ag}(dB) - P_{cl}(dB) + G_a(dBi)$$

4.2. MODULATION CHARACTERISTICS

Measurement Procedure

A) Modulation Limit


1. Position the EUT as shown in figure 3, adjust the audio input frequency to 100 Hz and the input level from 0V to maximum permitted input voltage with recording each carrier frequency deviation responding to respective input level.
2. Repeat step 1 with changing the input frequency for 200, 500, 1000, 3000, and 5000 Hz in sequence.

B) Frequency response of all circuits

1. Position the EUT as shown in figure 3.
2. Vary the modulating frequency from 100 Hz to 15000 Hz with constant input voltage (derived from 4.3 of this test report), and observe the change in output.

Test Configuration

Figure 3: Modulation characteristic measurement configuration

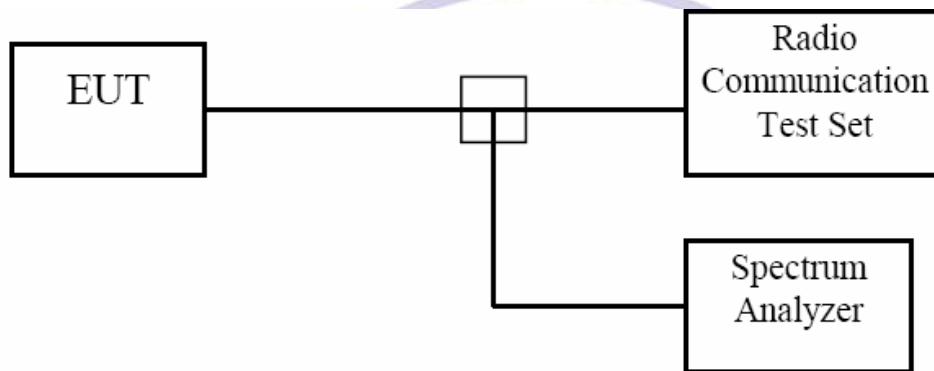

Limit

Test Standard: FCC Part 74.861(e)(3)

Any form of modulation may be used. A maximum deviation of ± 75 kHz is permitted when frequency modulation is employed.

Test Standard: FCC Part 2.1047(a) & (b)


(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.


TEST RESULTS

RF Frequency: 203.65MHz


Frequency response:

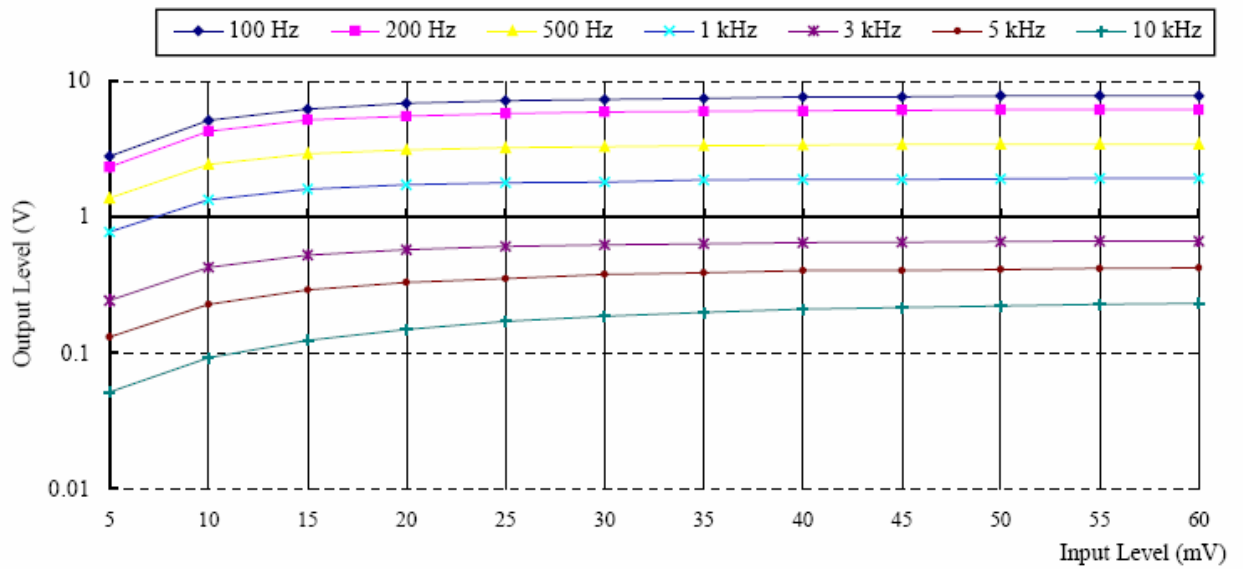

Modulation Limit:

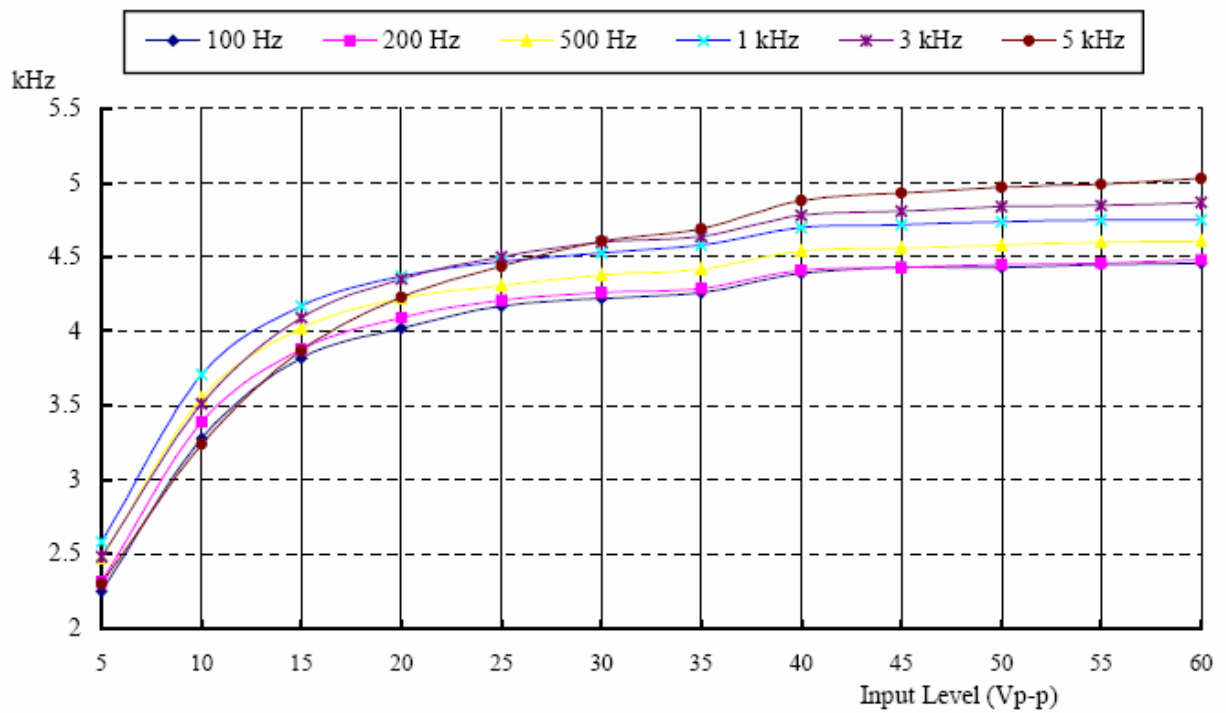

Frequency response of all circuits:

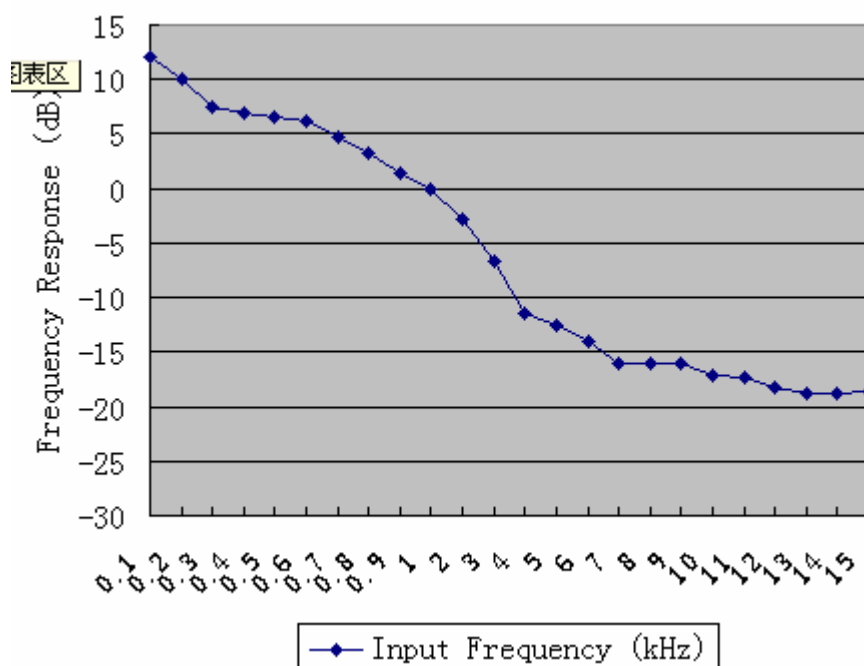


4.3. OCCUPIED BANDWIDTH OF EMISSION

Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4, and Install new batteries in the EUT. Turn on the EUT and set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Apply a 2.5 kHz modulation signal to EUT and measure the frequencies of the modulated signal from the EUT where it is the specified number of dB below the reference level set in step 2. This is the occupied bandwidth specified.

Test Configuration

Figure 4: Occupied bandwidth measurement configuration

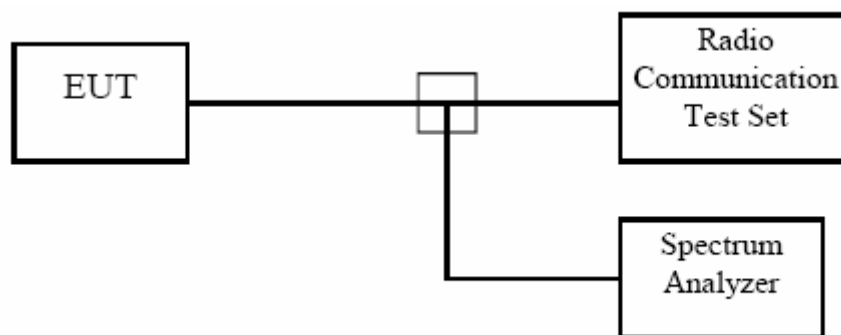


Limit

According to §2.1049 (c)(1), For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. According to §74.861 (e)(5), the frequency emission bandwidth shall not exceed 200 kHz.

TEST RESULTS

RF Frequency : 203.65MHz


Input Audio Frequency: 2.5 kHz, Sine Wave

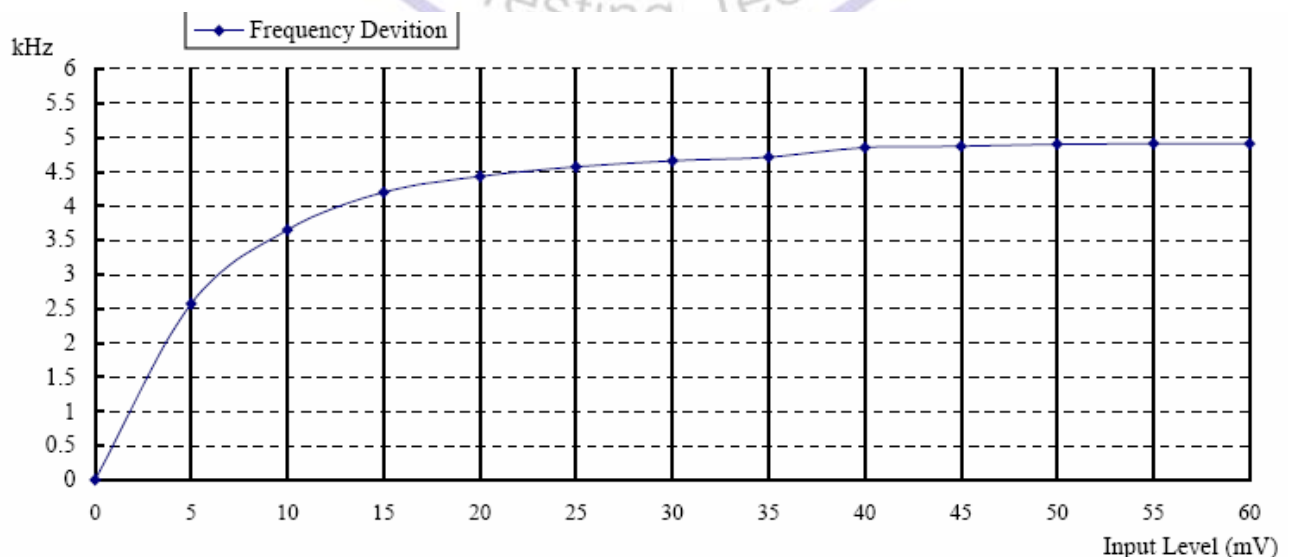


The Level input to produce 50% modulation is 5 mV, therefore the magnitude 16 dB greater than it is 31.6 mV.

| RF Frequency (MHz) | 26 dB Bandwidth (kHz) |
|--------------------|-----------------------|
| 203.65 | 107.20 |
| 207.75 | 107.60 |
| 211.55 | 111.00 |
| 215.35 | 112.40 |


203.65MHz

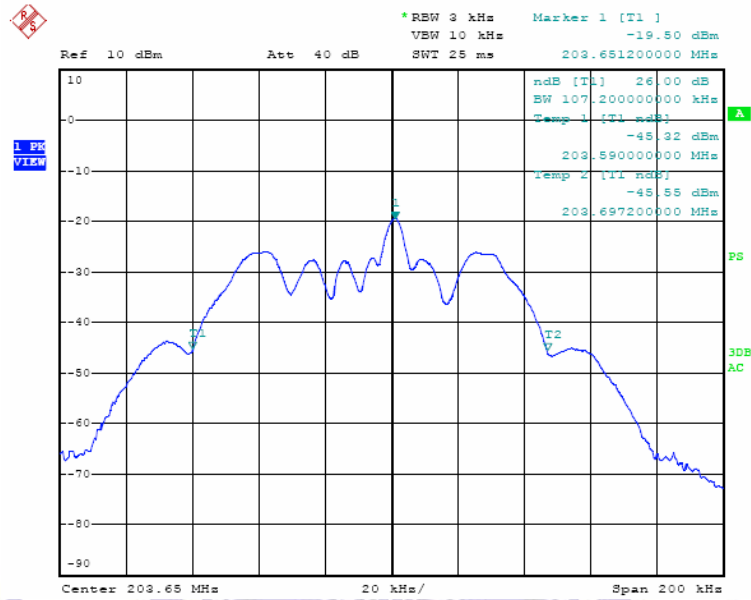


207.75MHz

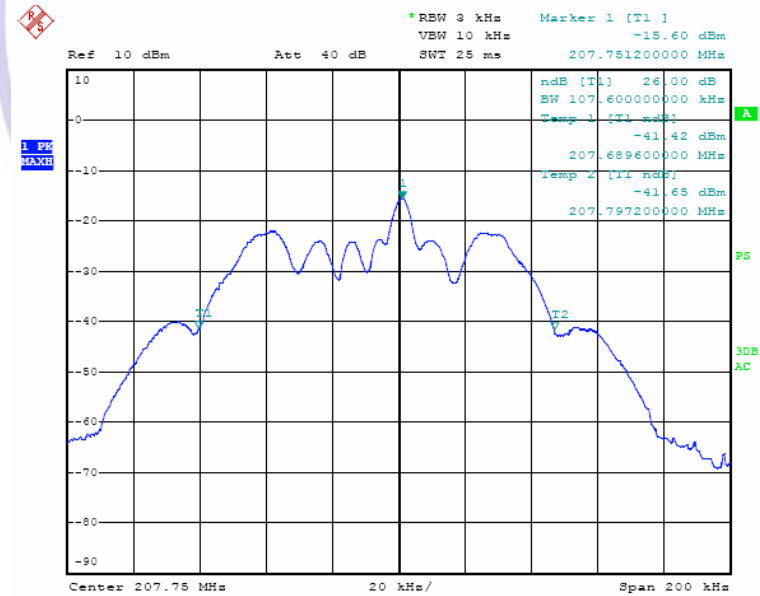

211.55MHz

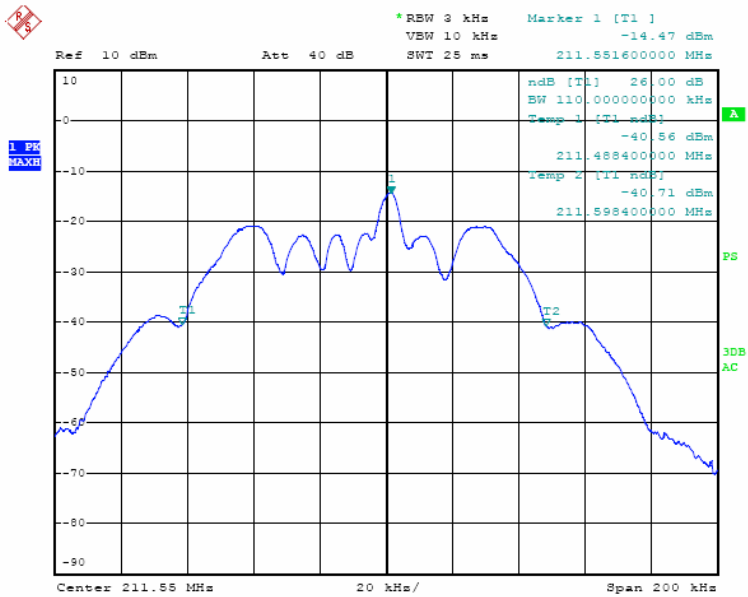

215.35MHz

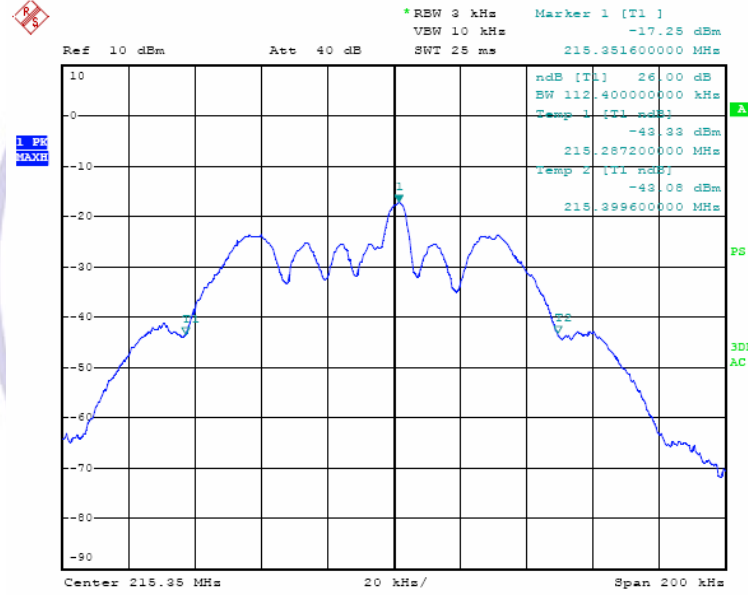

4.4. FIELD STRENGTH OF EMISSION

Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power as measured in chapter 3.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0. to 360 . , and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.
7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

Measuring instrument setup in frequency band measured is as following :

| Frequency Band (MHz) | Instrument | Function | Resolution bandwidth | Video Bandwidth |
|-------------------------|-------------------|----------|-------------------------|--------------------|
| 30 to 1000 | Spectrum Analyzer | Peak | 100 kHz | 100 kHz |
| Above 1000 | Spectrum Analyzer | Peak | 1 MHz | 1 MHz |

Test Configuration

Same as Figure 1 and Figure 2

Limit


According to §2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

According to §74.861(e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule: (i) on any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB. (ii) on any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB. (iii) on any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth shall be attenuated below the unmodulated carrier by at least 43 plus 10 Log(output power in watts) dB.

Unmodulated carrier output power is 7.21 dBm , or 5.26mW (EIRP). The limit of spurious or harmonics is calculated as following : $7.21 - [43 + 10 \log(\text{carrier output power in W})]$, or -13dBm

Emission Test Data:

The Radiated Measurement are performed to the four channels, the datum recorded below is the worst case (channel 1).

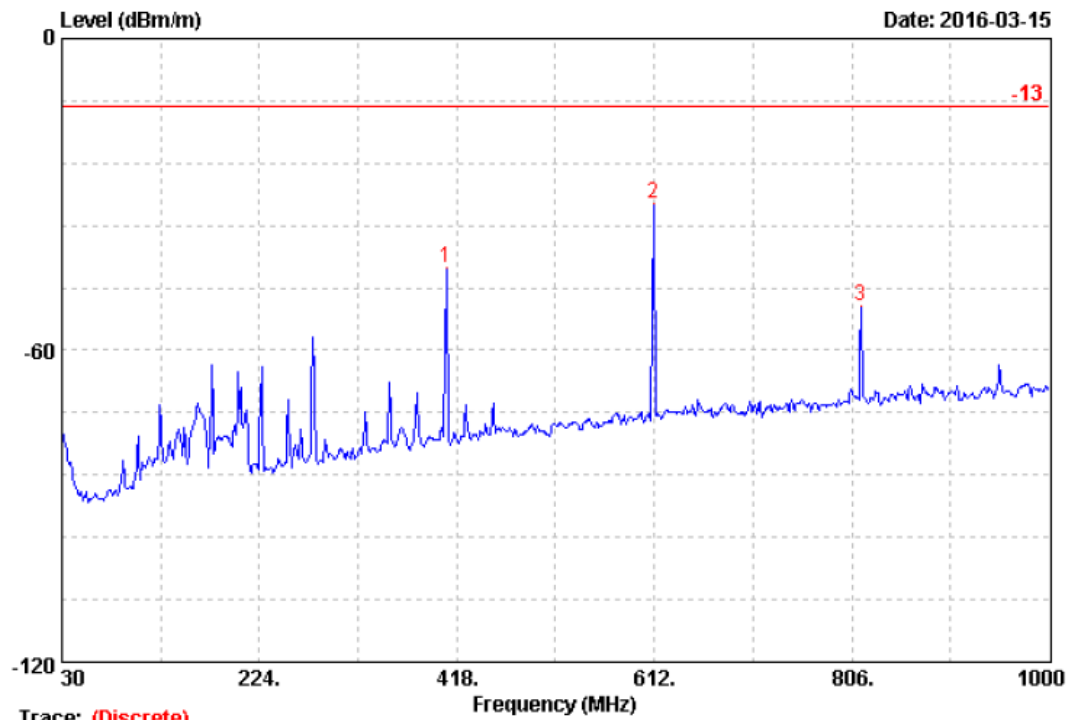


Trace: (Discrete)

| | | | |
|-------------|------------------|-----------|--------------|
| Site no. | : 3m Chamber | Data no. | : 271 |
| Dis. / Ant. | : 3m JB1 | Ant. pol. | : HORIZONTAL |
| Limit | : -13 | | |
| Env. / Ins. | : MKF-2 | | |
| Engineer | : CTL | | |
| EUT | : TX | | |
| Power | : CTL 3m Chamber | | |
| M/N | : Nice | | |
| Test Mode | : / | | |

| | Freq. | Ant. | Cable | Amp | Site | Emission | | | |
|---|--------|--------|-------|--------|---------|----------|--------|--------|--------|
| | (MHz) | Factor | Loss | Factor | Reading | Loss | Level | Limits | Margin |
| | | (dB) | (dB) | (dB) | (dBm) | (dB) | (dBm) | (dBm) | (dB) |
| 1 | 407.33 | 15.96 | 2.13 | 28.59 | -33.46 | 0.00 | -43.96 | -13.00 | 30.96 |
| 2 | 611.03 | 19.11 | 2.88 | 28.41 | -25.49 | 0.00 | -31.91 | -13.00 | 18.91 |
| 3 | 814.73 | 21.41 | 3.39 | 28.23 | -48.00 | 0.00 | -51.43 | -13.00 | 38.43 |

Remarks: 1. Emission Level= Reading+Antenna Factor+Cable Loss-Amp Factor+Site Loss
 2. The emission levels that are 20dB below the official limit are not reported.

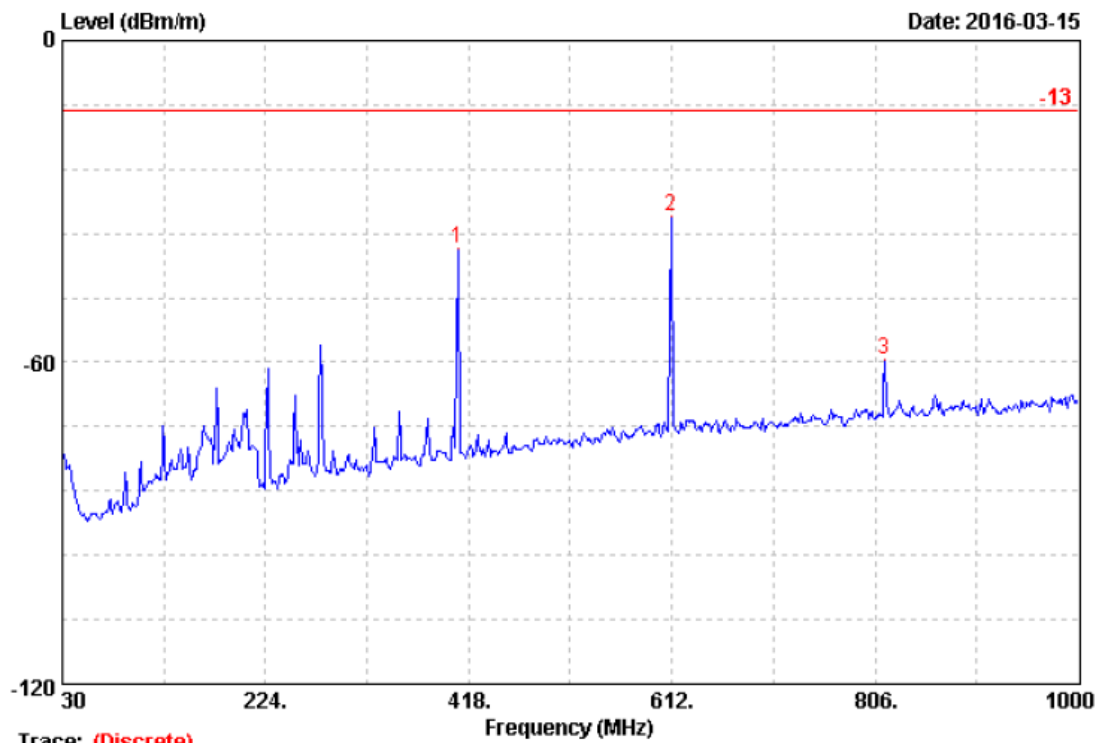

Trace: (Discrete)

Site no. : 3m Chamber

Data no. : 272

Dis. / Ant. : 3m JB1

Ant. pol. : VERTICAL

Limit : -13

Env. / Ins. : MKF-2

Engineer : CTL

EUT : TX

Power : CTL 3m Chamber


M/N : Nice

Test Mode : /

| | Freq. (MHz) | Ant. Factor (dB) | Cable Loss (dB) | Amp Factor (dB) | Reading (dBm) | Site Loss (dB) | Emission Level (dBm) | Limits (dBm) | Margin (dB) |
|---|----------------|------------------------|-----------------------|-----------------------|------------------|----------------------|----------------------------|-----------------|----------------|
| 1 | 407.33 | 15.96 | 2.13 | 28.59 | -28.33 | 0.00 | -38.83 | -13.00 | 25.83 |
| 2 | 611.03 | 19.11 | 2.88 | 28.41 | -26.45 | 0.00 | -32.87 | -13.00 | 19.87 |
| 3 | 814.73 | 21.41 | 3.39 | 28.23 | -56.10 | 0.00 | -59.53 | -13.00 | 46.53 |

Remarks: 1. Emission Level= Reading+Antenna Factor+Cable Loss-Amp Factor+Site Loss

2. The emission levels that are 20dB below the official limit are not reported.

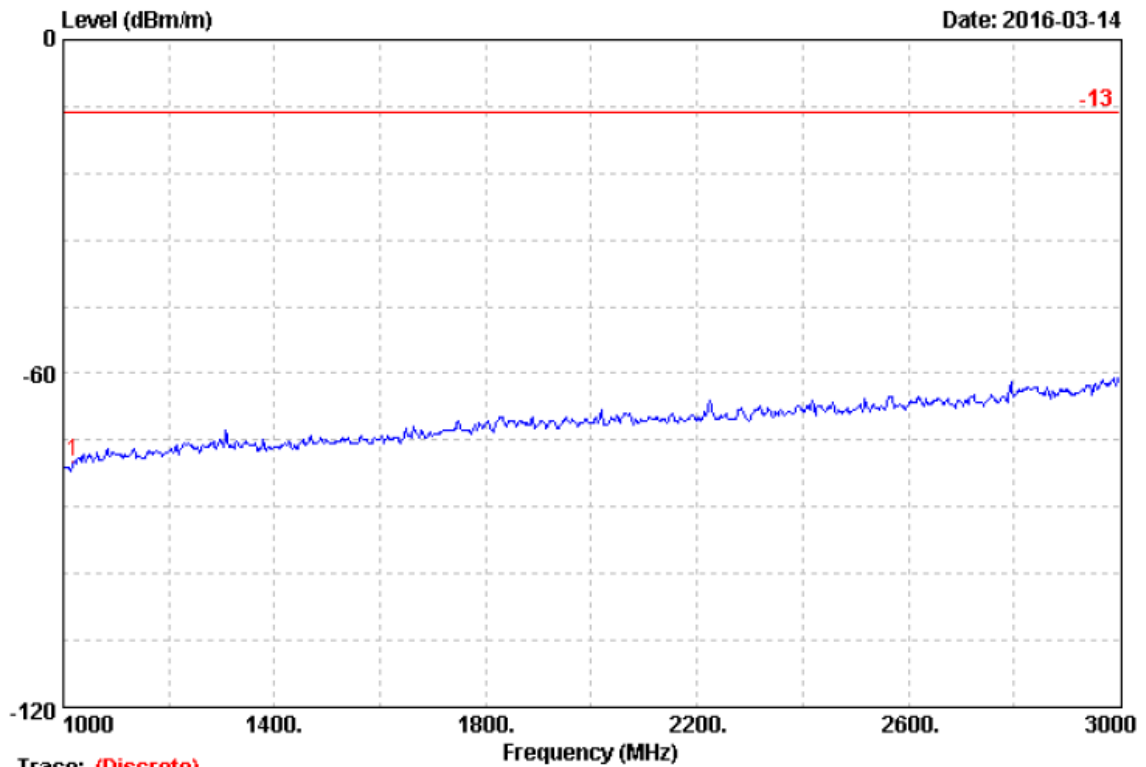


Trace: (Discrete)

Site no. : 3m Chamber
 Dis. / Ant. : 3m DRH-118
 Limit : -13
 Env. / Ins. : MKF
 Engineer : CTL
 EUT : TX
 Power : CTL 3m Chamber
 M/N : Nice
 Test Mode : /
 203.65

Data no. : 267
 Ant. pol. : HORIZONTAL

| | | Ant. | Cable | Amp | | Site | Emission | | |
|-------|---------|-------|--------|---------|--------|-------|----------|--------|-------|
| Freq. | Factor | Loss | Factor | Reading | Loss | Level | Limits | Margin | |
| (MHz) | (dB) | (dB) | (dB) | (dBm) | (dB) | (dBm) | (dBm) | (dB) | |
| 1 | 1018.25 | 24.05 | 2.80 | 36.18 | -66.40 | 0.00 | -75.73 | -13.00 | 62.73 |

Remarks: 1. Emission Level= Reading+Antenna Factor+Cable Loss-Amp Factor+Site Loss
 2. The emission levels that are 20dB below the official limit are not reported.

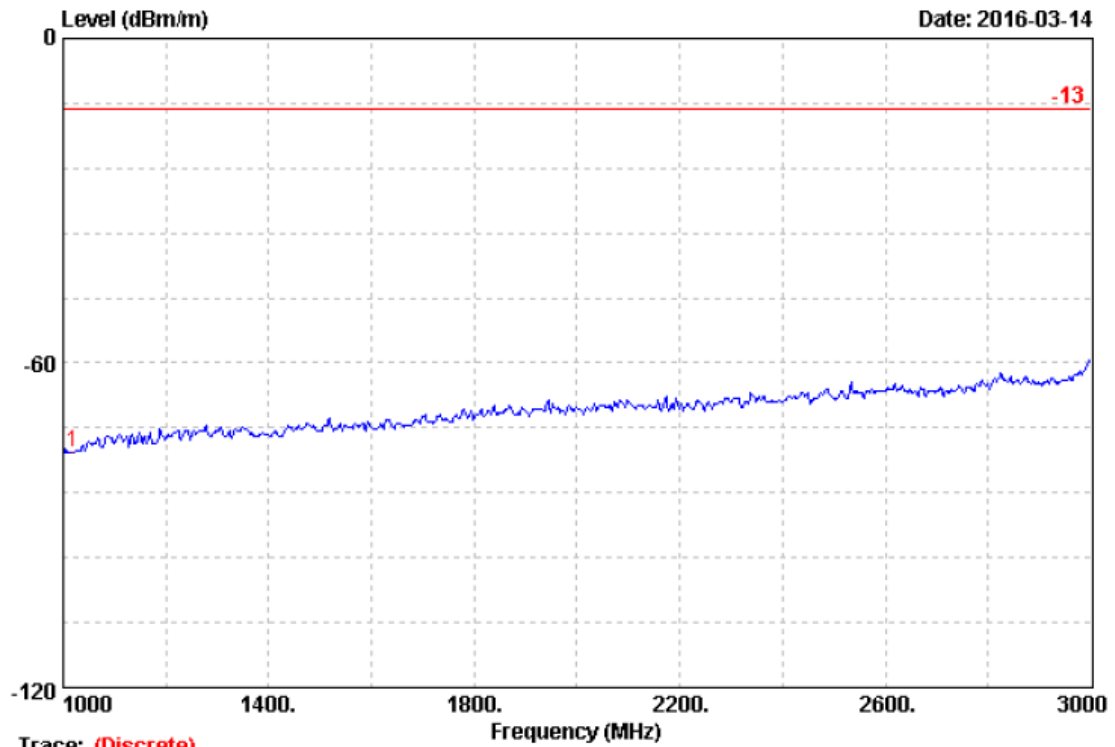




Trace: (Discrete)


| | | | |
|-------------|------------------|-----------|------------|
| Site no. | : 3m Chamber | Data no. | : 268 |
| Dis. / Ant. | : 3m DRH-118 | Ant. pol. | : VERTICAL |
| Limit | : -13 | | |
| Env. / Ins. | : MKF | | |
| Engineer | : CTL | | |
| EUT | : TX | | |
| Power | : CTL 3m Chamber | | |
| M/N | : Nice | | |
| Test Mode | : / | | |
| | 203.65 | | |

| | Freq. | Ant. | Cable | Amp | Site | Emission | | | |
|---|---------|--------|-------|--------|---------|----------|--------|--------|--------|
| | (MHz) | Factor | Loss | Factor | Reading | Loss | Level | Limits | Margin |
| | | (dB) | (dB) | (dB) | (dBm) | (dB) | (dBm) | (dBm) | (dB) |
| 1 | 1018.25 | 24.05 | 2.80 | 36.18 | -67.35 | 0.00 | -76.68 | -13.00 | 63.68 |

Remarks: 1. Emission Level= Reading+Antenna Factor+Cable Loss-Amp Factor+Site Loss
 2. The emission levels that are 20dB below the official limit are not reported.

Emission mask plots:

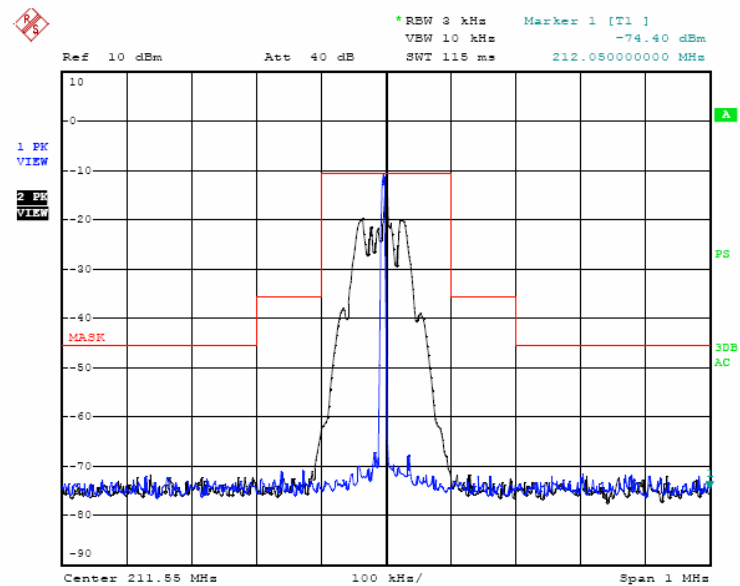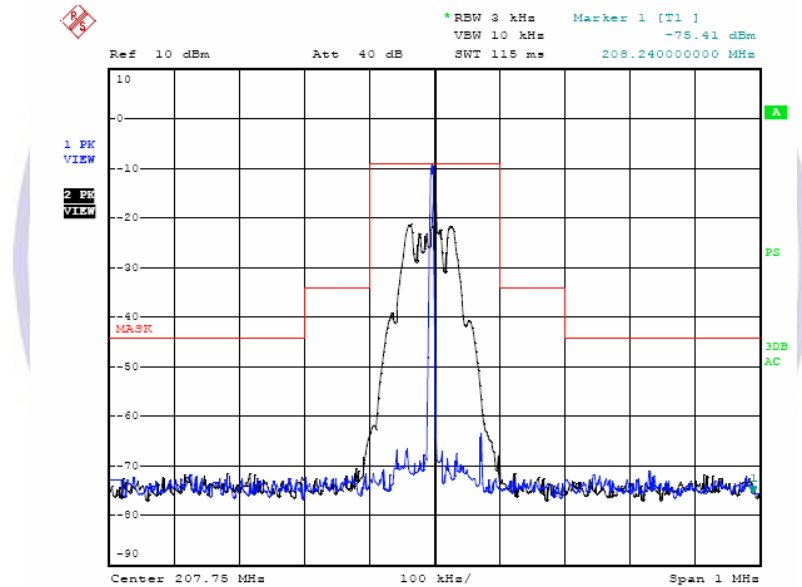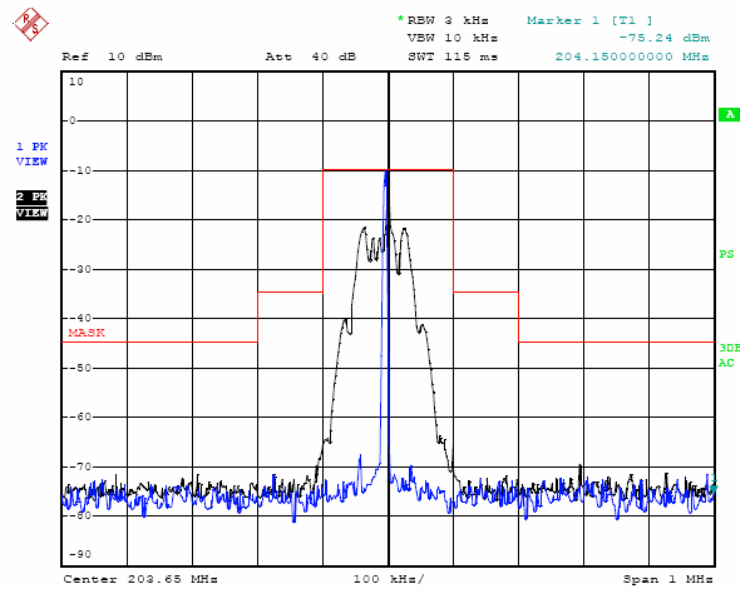

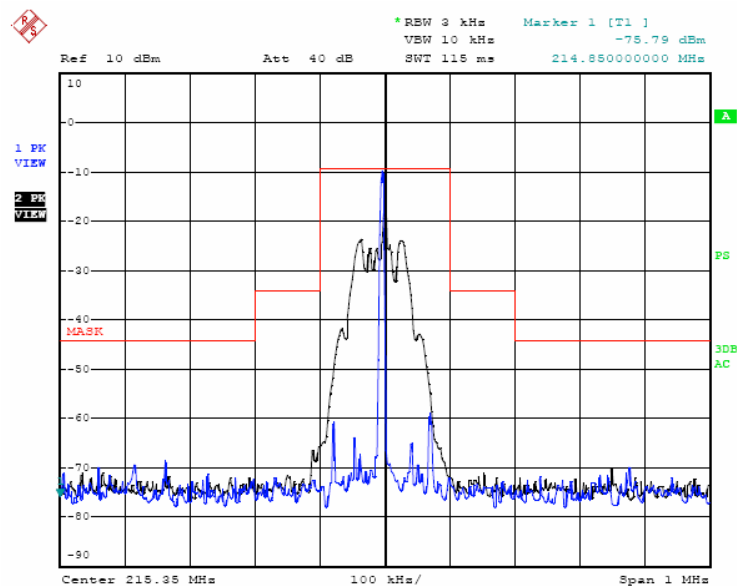


Other Emission:

Emission frequencies below 1 GHz

SWEEP TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | | |
|--------------------|-----------|----------------|----------|---------|------------|
| Start | Stop | Detector | Meas. | IF | Transducer |
| Frequency | Frequency | | Time | Bandw. | |
| 30.0 MHz | 1.0 GHz | MaxPeak | 300.0 ms | 120 kHz | JB1 |

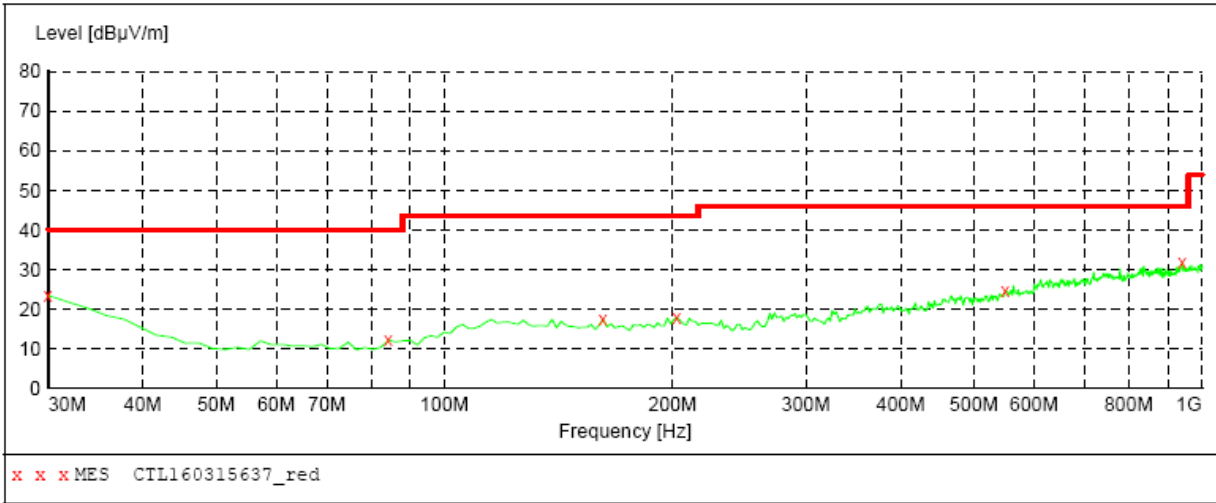


MEASUREMENT RESULT: "CTL160315637_red"

3/15/2016 2:10PM

| Frequency MHz | Level dBuV/m | Transd dB | Limit dBuV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 30.000000 | 23.40 | 20.8 | 40.0 | 16.6 | --- | 0.0 | 0.00 | HORIZONTAL |
| 84.320000 | 12.10 | 8.8 | 40.0 | 27.9 | --- | 0.0 | 0.00 | HORIZONTAL |
| 161.920000 | 17.40 | 13.6 | 43.5 | 26.1 | --- | 0.0 | 0.00 | HORIZONTAL |
| 202.660000 | 17.90 | 14.1 | 43.5 | 25.6 | --- | 0.0 | 0.00 | HORIZONTAL |
| 549.920000 | 24.60 | 21.0 | 46.0 | 21.4 | --- | 0.0 | 0.00 | HORIZONTAL |
| 941.800000 | 31.70 | 26.4 | 46.0 | 14.3 | --- | 0.0 | 0.00 | HORIZONTAL |

SWEEP TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | | |
|--------------------|-------------------|----------------|------------|-----------|------------|
| Start | Stop | Detector | Meas. Time | IF Bandw. | Transducer |
| Frequency 30.0 MHz | Frequency 1.0 GHz | MaxPeak | 300.0 ms | 120 kHz | JB1 |

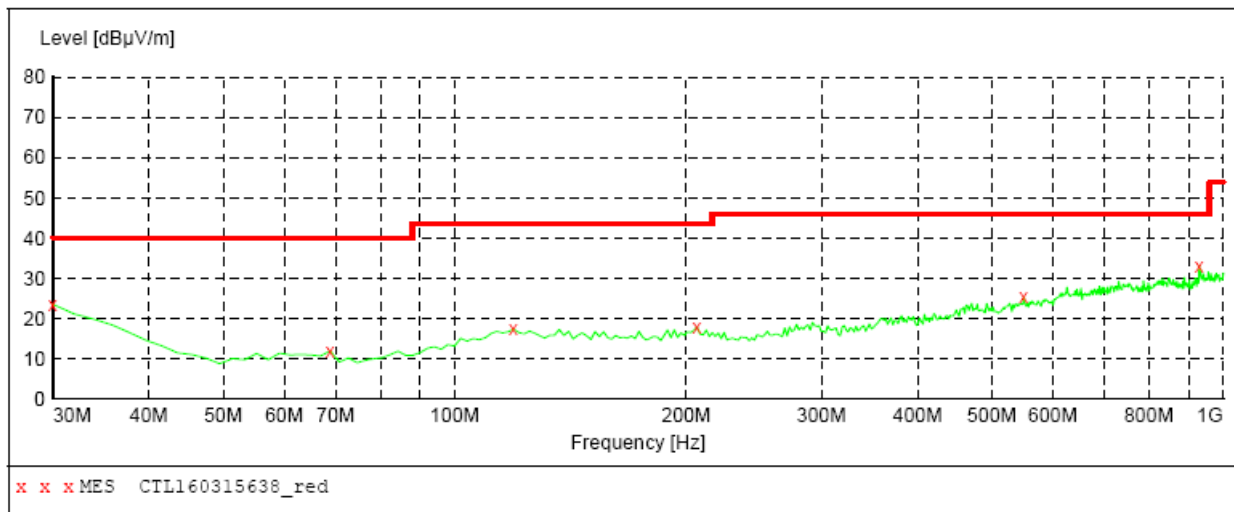***MEASUREMENT RESULT: "CTL160315638_red"***

3/15/2016 2:11PM

| Frequency MHz | Level dBμV/m | Transd dB | Limit dBμV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 30.000000 | 23.50 | 20.8 | 40.0 | 16.5 | --- | 0.0 | 0.00 | VERTICAL |
| 68.800000 | 11.90 | 8.2 | 40.0 | 28.1 | --- | 0.0 | 0.00 | VERTICAL |
| 119.240000 | 17.30 | 14.7 | 43.5 | 26.2 | --- | 0.0 | 0.00 | VERTICAL |
| 206.540000 | 17.90 | 14.1 | 43.5 | 25.6 | --- | 0.0 | 0.00 | VERTICAL |
| 549.920000 | 25.30 | 21.0 | 46.0 | 20.7 | --- | 0.0 | 0.00 | VERTICAL |
| 930.160000 | 33.10 | 26.3 | 46.0 | 12.9 | --- | 0.0 | 0.00 | VERTICAL |

Emission frequencies above 1 GHz:

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5. FREQUENCY STABILITY MEASUREMENT

Measurement Procedure

A) Frequency stability versus environmental temperature


1. Setup the configuration per figure 5 for frequencies measured at ambient temperature if it is within 15°C to 25°C. Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature 0°C is measured, record all measurement frequencies.

B) Frequency stability versus input voltage

1. Setup the configuration per figure 7 for frequencies measured at ambient temperature if it is within 15°C to 25°C. Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration

Figure 5 : Frequency stability measurement configuration

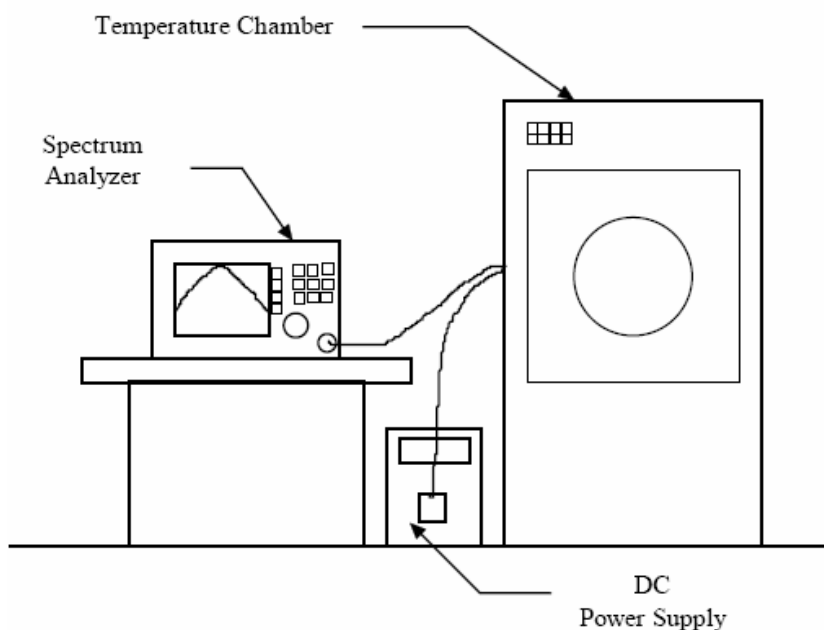

TEST RESULTS

A. Tx Frequency 203.65MHz

A1. Frequency stability versus environment temperature

| Reference Frequency :203.65 MHz Limit: 0.005% | | | | | | | |
|---|----------|--------------------------------------|----------|-----------|----------|------------|----------|
| Environment | Power | Frequency measured with time elapsed | | | | | |
| Temperature | Supplied | 2 minutes | | 5 minutes | | 10 minutes | |
| (°C) | (Vdc) | (MHz) | (%) | (MHz) | (%) | (MHz) | (%) |
| 50 | 3.00 | 203.6547 | 0.002308 | 203.6553 | 0.002603 | 203.6578 | 0.003830 |
| 40 | | 203.6533 | 0.001620 | 203.6537 | 0.001817 | 203.6529 | 0.001424 |
| 30 | | 203.6522 | 0.001080 | 203.6511 | 0.000540 | 203.6517 | 0.000835 |
| 20 | | 203.6508 | 0.000393 | 203.6502 | 0.000098 | 203.6509 | 0.000442 |
| 10 | | 203.6509 | 0.000442 | 203.6552 | 0.002553 | 203.6523 | 0.001129 |
| 0 | | 203.6541 | 0.002013 | 203.6568 | 0.003339 | 203.6574 | 0.003634 |

A2. Frequency stability versus supplied voltage (85% - 115%)

| Reference Frequency : 203.65 MHz Limit: 0.005% | | | | | | | |
|--|----------|--------------------------------------|------------|-----------|-----------|------------|-----------|
| Environment | Power | Frequency measured with time elapsed | | | | | |
| Temperature | Supplied | 2 minutes | | 5 minutes | | 10 minutes | |
| (°C) | (Vdc) | (MHz) | (%) | (MHz) | (%) | (MHz) | (%) |
| 25 | 2.55 | 203.6549 | 0.00240609 | 203.6559 | 0.0028971 | 203.6541 | 0.0020133 |
| 25 | 3.45 | 203.6552 | 0.0025534 | 203.6537 | 0.0018168 | 203.6535 | 0.0017186 |

B. Tx Frequency 215.35 MHz



B1. Frequency stability versus environment temperature

| Reference Frequency :215.35 MHz Limit: 0.005% | | | | | | | |
|---|----------|--------------------------------------|----------|-----------|----------|------------|----------|
| Environment | Power | Frequency measured with time elapsed | | | | | |
| Temperature | Supplied | 2 minutes | | 5 minutes | | 10 minutes | |
| (°C) | (Vdc) | (MHz) | (%) | (MHz) | (%) | (MHz) | (%) |
| 50 | 3.00 | 215.3557 | 0.002647 | 215.3577 | 0.003576 | 215.3583 | 0.003854 |
| 40 | | 215.3549 | 0.002275 | 215.3551 | 0.002368 | 215.3545 | 0.002090 |
| 30 | | 215.3511 | 0.000511 | 215.3519 | 0.000882 | 215.3508 | 0.000371 |
| 20 | | 215.3507 | 0.000325 | 215.3502 | 0.000093 | 215.3506 | 0.000279 |
| 10 | | 215.3538 | 0.001765 | 215.3527 | 0.001254 | 215.3558 | 0.002693 |
| 0 | | 215.3551 | 0.002368 | 215.3568 | 0.003158 | 215.3571 | 0.003297 |

B2. Frequency stability versus supplied voltage (85% - 115%)


| Reference Frequency : 215.35 MHz Limit: 0.005% | | | | | | | |
|--|----------|--------------------------------------|------------|-----------|------------|------------|-----------|
| Environment | Power | Frequency measured with time elapsed | | | | | |
| Temperature | Supplied | 2 minutes | | 5 minutes | | 10 minutes | |
| (°C) | (Vdc) | (MHz) | (%) | (MHz) | (%) | (MHz) | (%) |
| 25 | 2.55 | 215.3544 | 0.00204319 | 215.3553 | 0.00246111 | 215.3541 | 0.0019039 |
| 25 | 3.45 | 215.3572 | 0.00334339 | 215.3532 | 0.0014860 | 215.3559 | 0.0027397 |


5. Test Setup Photos of the EUT

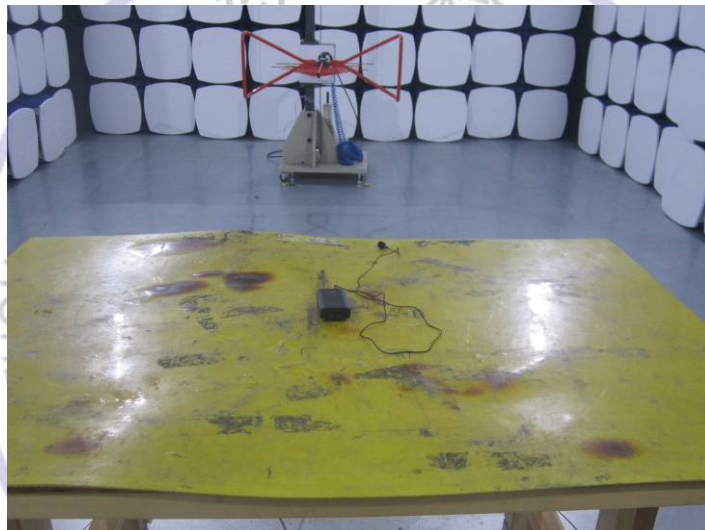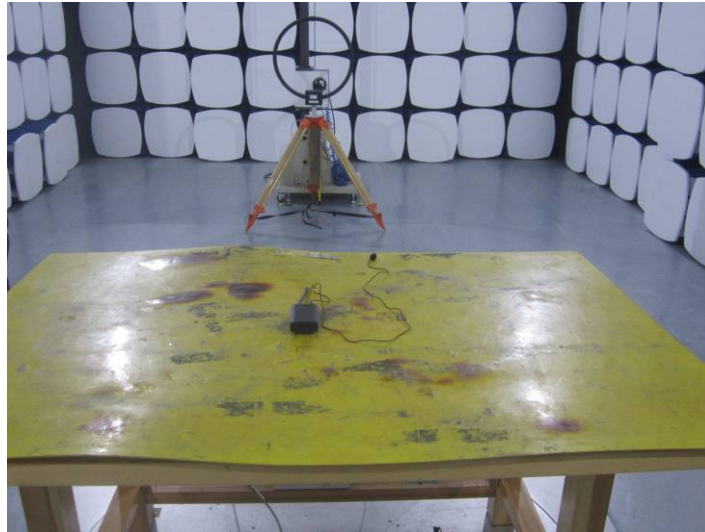




6. External and Internal Photos of the EUT


External Photos

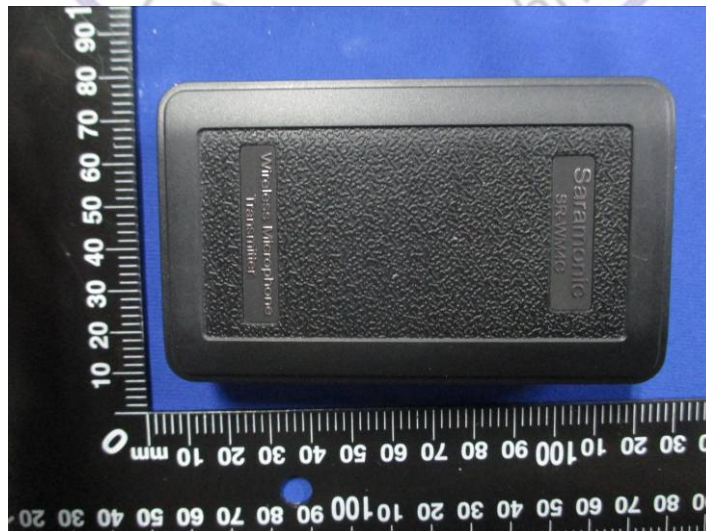

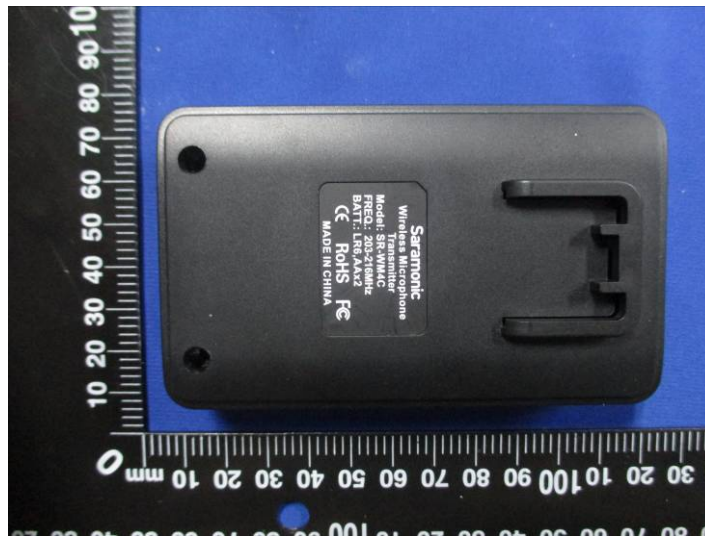

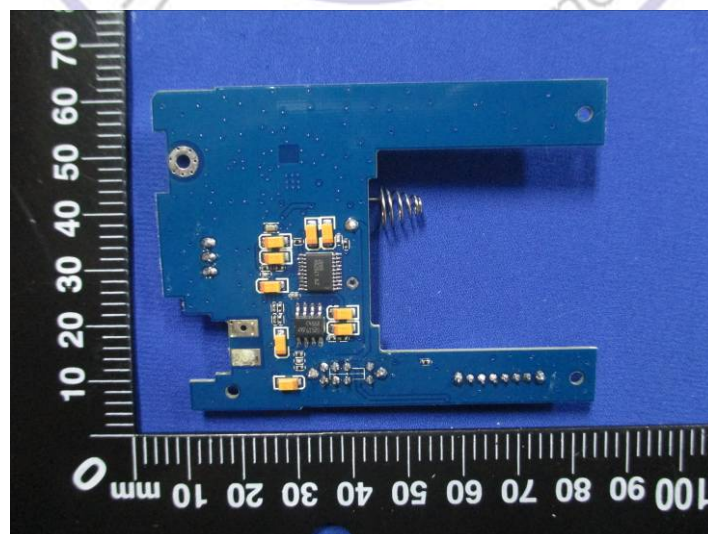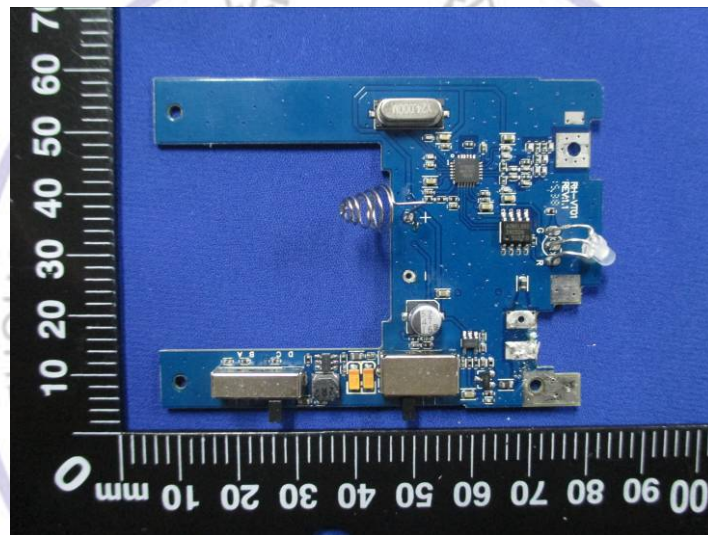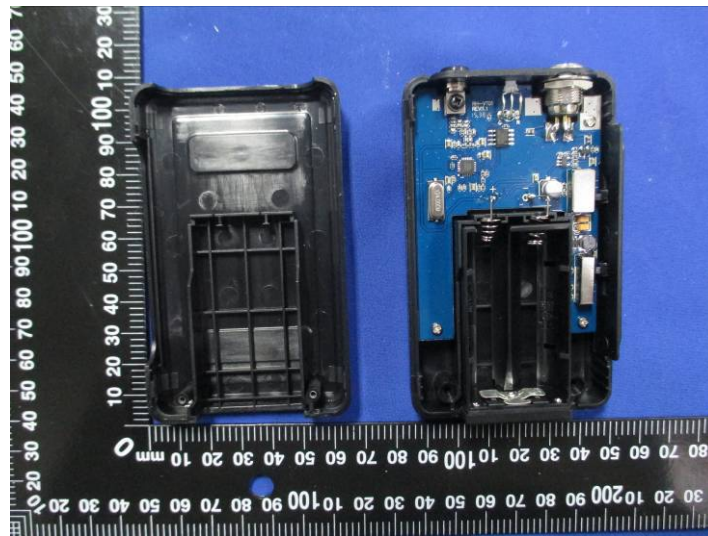

Internal Photos

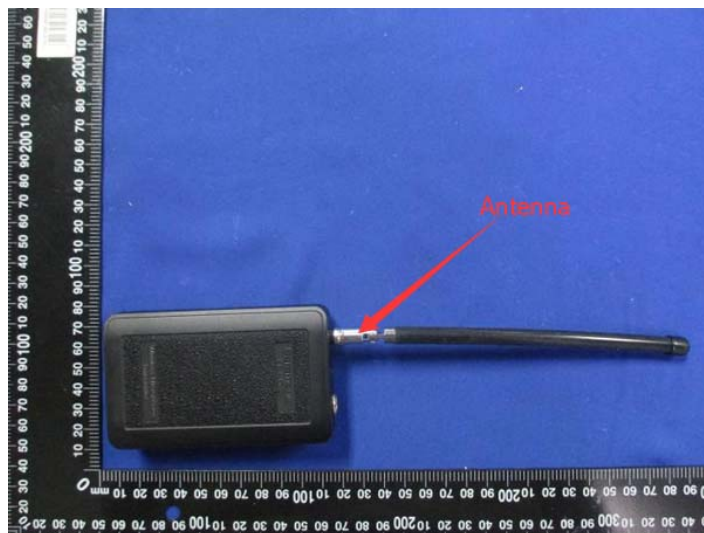

.....End of Report.....

