

RF TEST REPORT



Report No.: 16070893-FCC-R2

Supersede Report No.: N/A

Applicant	Bean Information Technology Co., Ltd	
Product Name	Core+ 10.1,Core+11.6	
Model No.	W1102	
Serial No.	W1001	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	August 05 to September 01, 2016	
Issue Date	October 17, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070893-FCC-R2
Page	3 of 64

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE & RESTRICTED BAND	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	42
ANNEX A. TEST INSTRUMENT.....	48
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	49
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	59
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	63
ANNEX E. DECLARATION OF SIMILARITY	64

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070893-FCC-R2	NONE	Original	September 02, 2016
16070893-FCC-R2	V1	Added the External Photos of EUT	October 17, 2016

2. Customer information

Applicant Name	Bean Information Technology Co., Ltd
Applicant Add	No. 810 of Software Building, Keji RD 1St., Science and Technology Park, Nanshan District, Shenzhen City, Guangdong Province, China
Manufacturer	Dongguan WeiHeng Digital Technology Co.,Ltd.
Manufacturer Add	Build 3, Fengquan Industry Area YaoShan,XieGang Town DongGuan

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Core+ 10.1,Core+11.6

Main Model: W1102

Serial Model: W1001

Date EUT received: August 04, 2016

Test Date(s): August 05 to September 01, 2016

Equipment Category : DSS

Antenna Gain: Bluetooth/ WIFI: 4.36dBi

Antenna Type: PIFA antenna

Type of Modulation: 802.11b/g/n: DSSS, OFDM
 Bluetooth: GFSK, π/4DQPSK, 8DPSK

RF Operating Frequency (ies): WIFI: 802.11b/g/n(20M): 2412-2472 MHz
 Bluetooth: 2402-2480 MHz

Max. Output Power: 7.923dBm

Number of Channels: WIFI :802.11b/g/n(20M): 13CH
 Bluetooth: 79CH

Port: Power Port, Earphone Port, USB Port, USB-C Port, HDMI Port, Docking Port, MIC Port

Test Report	16070893-FCC-R2
Page	7 of 64

Adapter 1:

Model: PS12F050K2000UD

Input: AC100-240V~50/60Hz,0.35A

Output: DC 5.0V,2000mA

Adapter 2:

Model: JK050200-S04USA

Input: AC100-240V~50/60Hz,0.5A

Output: DC 5.0V,2000mA

Battery:

Spec: 3.7V,3500mAh(31.45Wh)

Input Power:

BIT

Trade Name :

BIT

FCC ID:

2AHWT-W1102

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PIFA antenna for Bluetooth/ WIFI, the gain is 4.36dBi for Bluetooth/ WIFI.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2016
Tested By :	Loren Luo

Requirement(s):

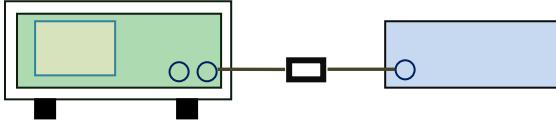Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		


Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below)	<input type="checkbox"/> N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.957	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.002	0.955	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.904	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.002	0.903	Pass
	High Channel	2480			
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.873	Pass
	Adjacency Channel	2403			
	Mid Channel	2440			
	Adjacency Channel	2441	1.002	0.873	Pass
	High Channel	2480			
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

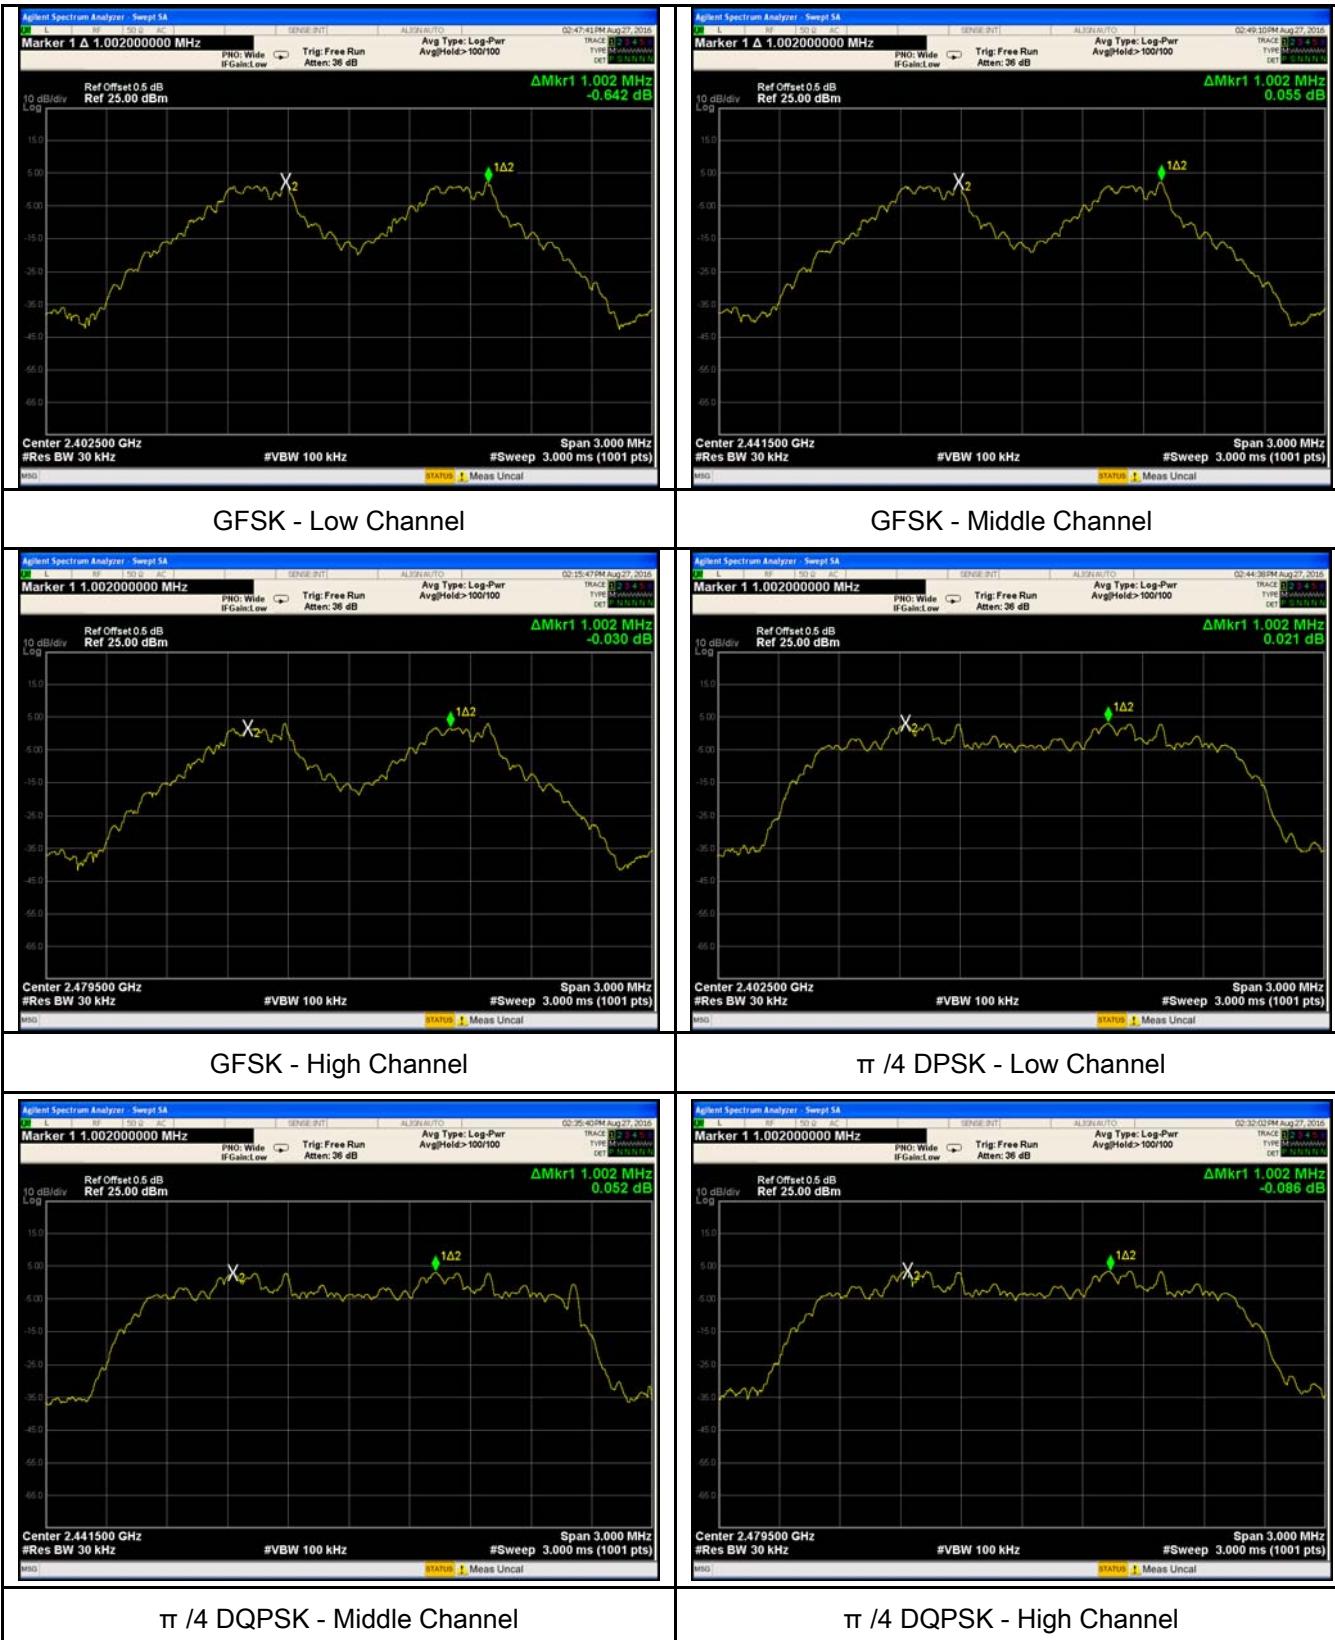



8DPSK - Low Channel

8DPSK - Middle Channel




8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.957	0.8961
	Mid	2441	0.955	0.8956
	High	2480	0.950	0.8942
$\pi/4$ DQPSK	Low	2402	1.356	1.1945
	Mid	2441	1.354	1.1949
	High	2480	1.356	1.1984
8-DPSK	Low	2402	1.309	1.2080
	Mid	2441	1.309	1.2052
	High	2480	1.313	1.2062

Test Plots


20dB Bandwidth measurement result

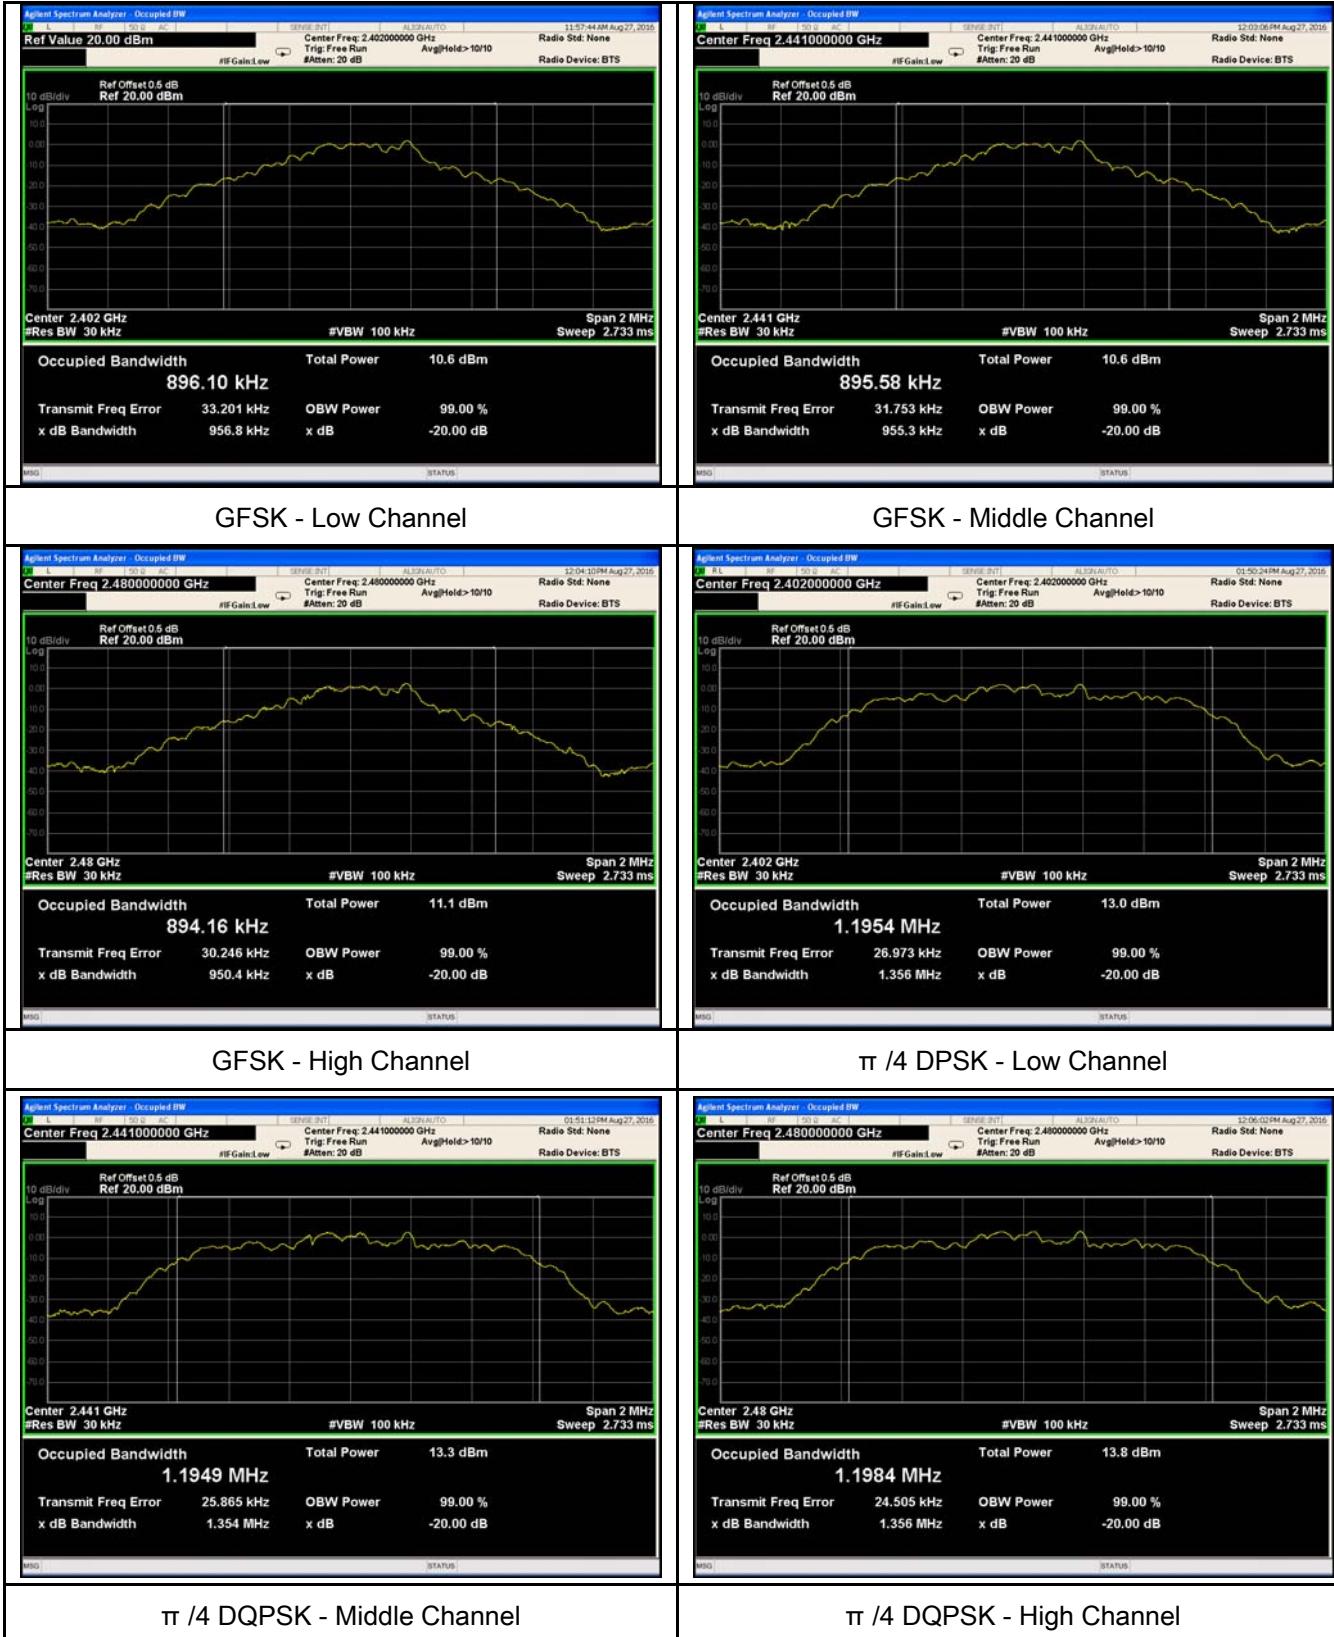

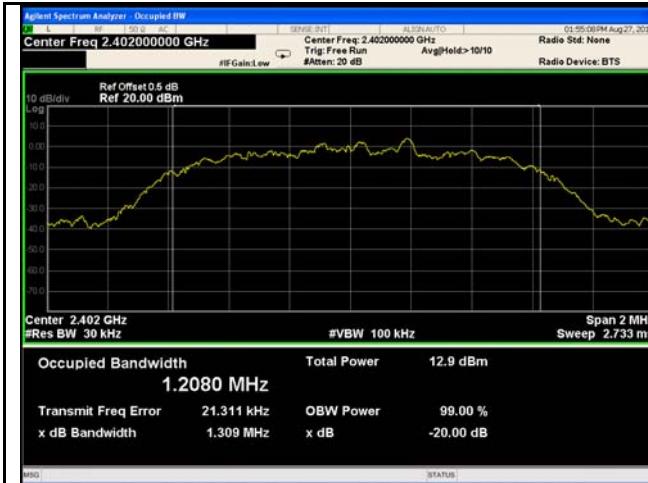

8DPSK - Low Channel

8DPSK - Middle Channel

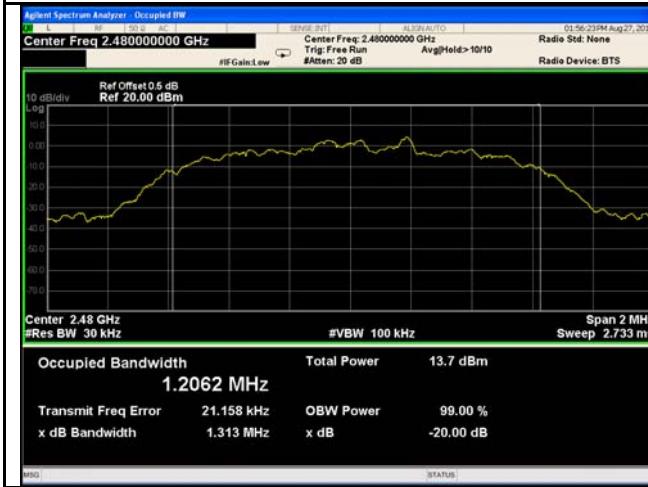


8DPSK - High Channel

6.4 Peak Output Power

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2016
Tested By :	Loren Luo

Requirement(s):

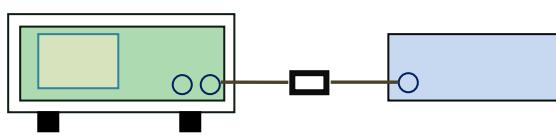Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. 	

	<p>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	3.446	1000	Pass
		Mid	2441	3.459	1000	Pass
		High	2480	4.032	1000	Pass
	$\pi/4$ DQPSK	Low	2402	3.456	125	Pass
		Mid	2441	3.459	125	Pass
		High	2480	4.116	125	Pass
	8-DPSK	Low	2402	7.783	125	Pass
		Mid	2441	7.709	125	Pass
		High	2480	7.923	125	Pass

Test Plots

Output Power measurement result

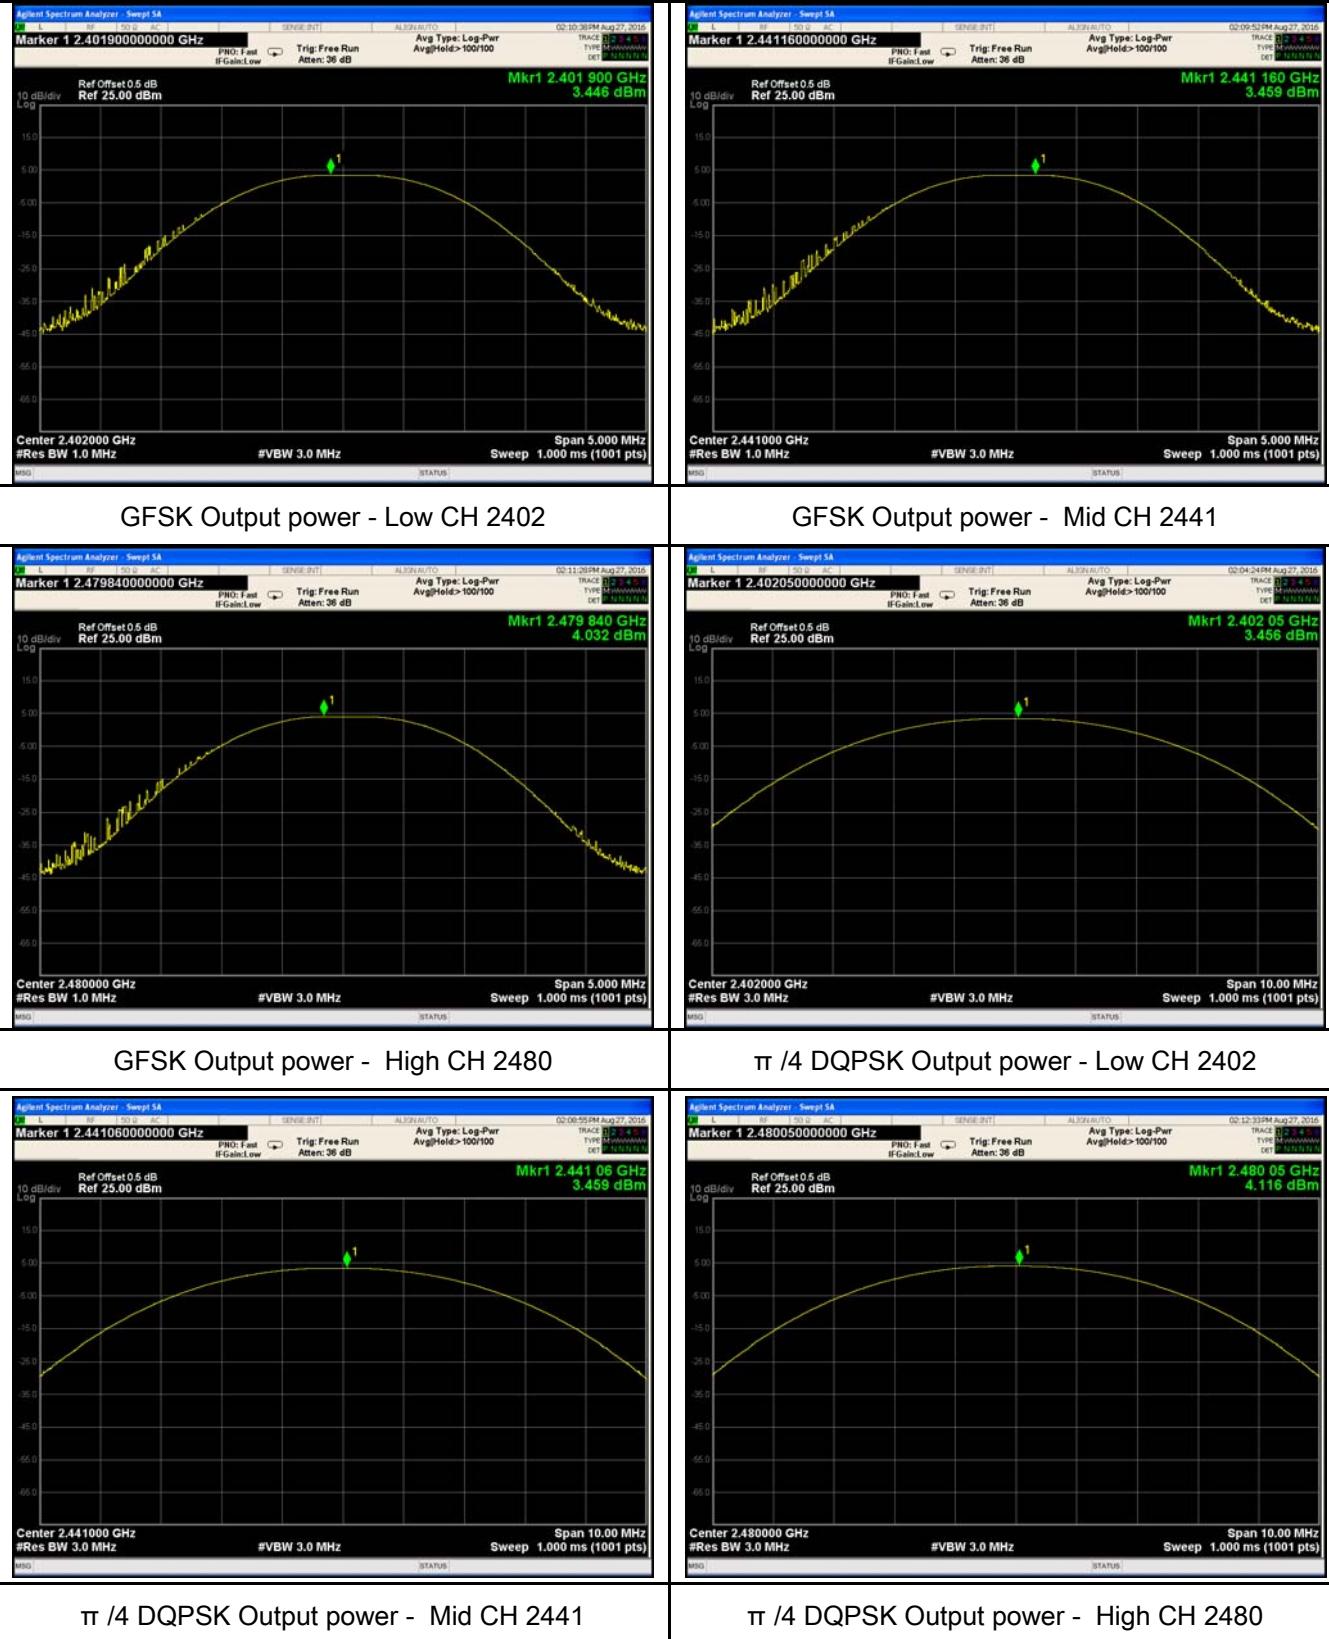


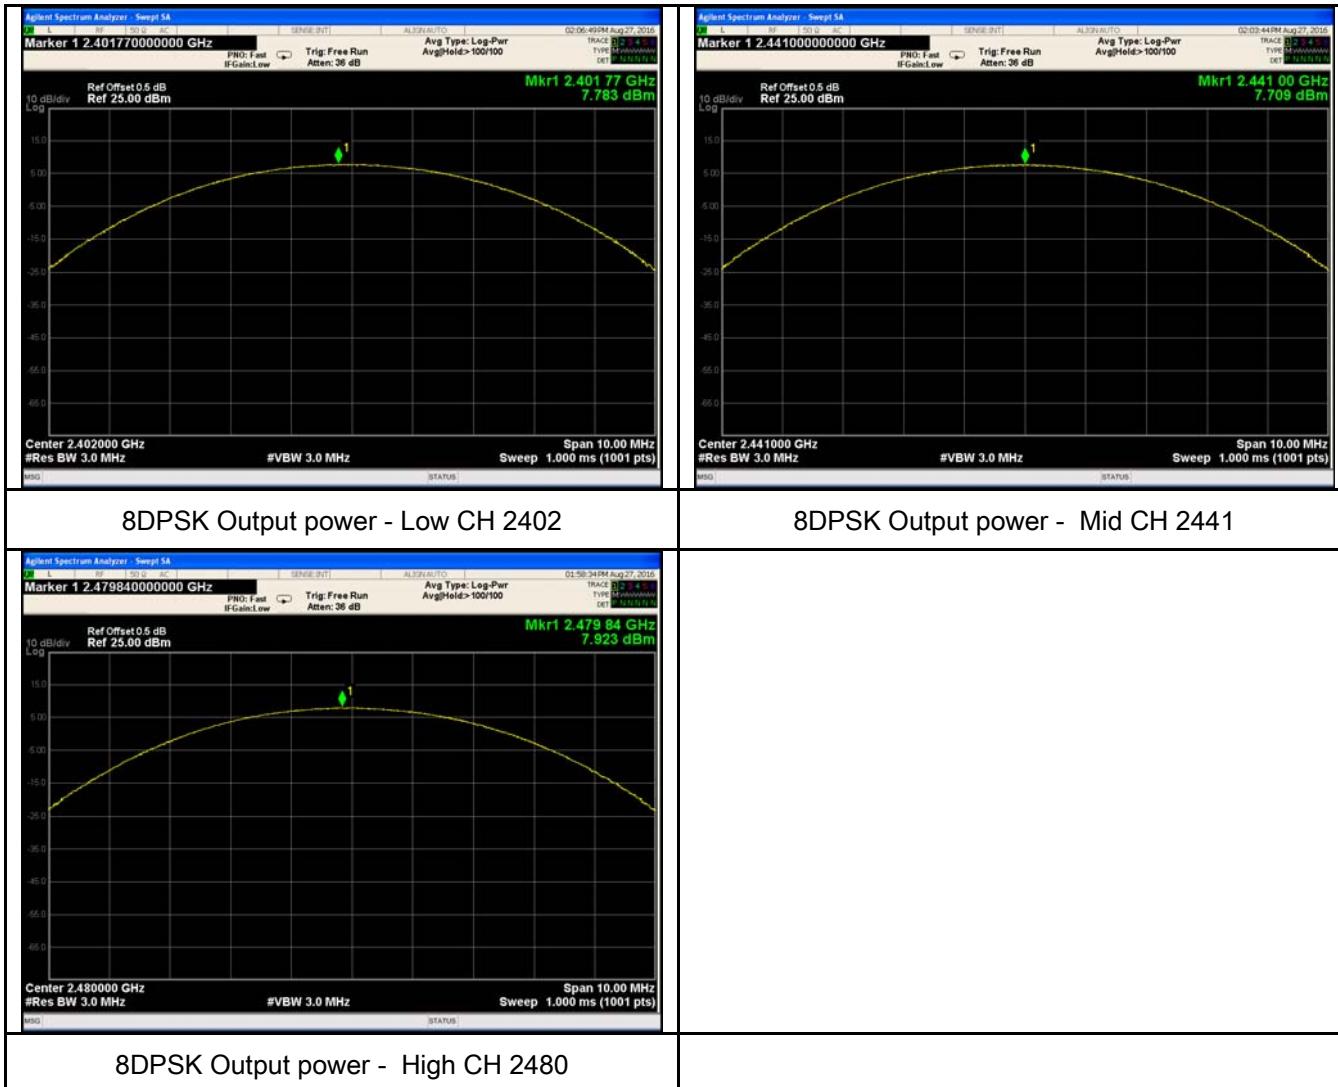

6.5 Number of Hopping Channel

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2016
Tested By :	Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail
Test Data	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	N/A
Test Plot	<input checked="" type="checkbox"/>	Yes (See below)	<input type="checkbox"/>	N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

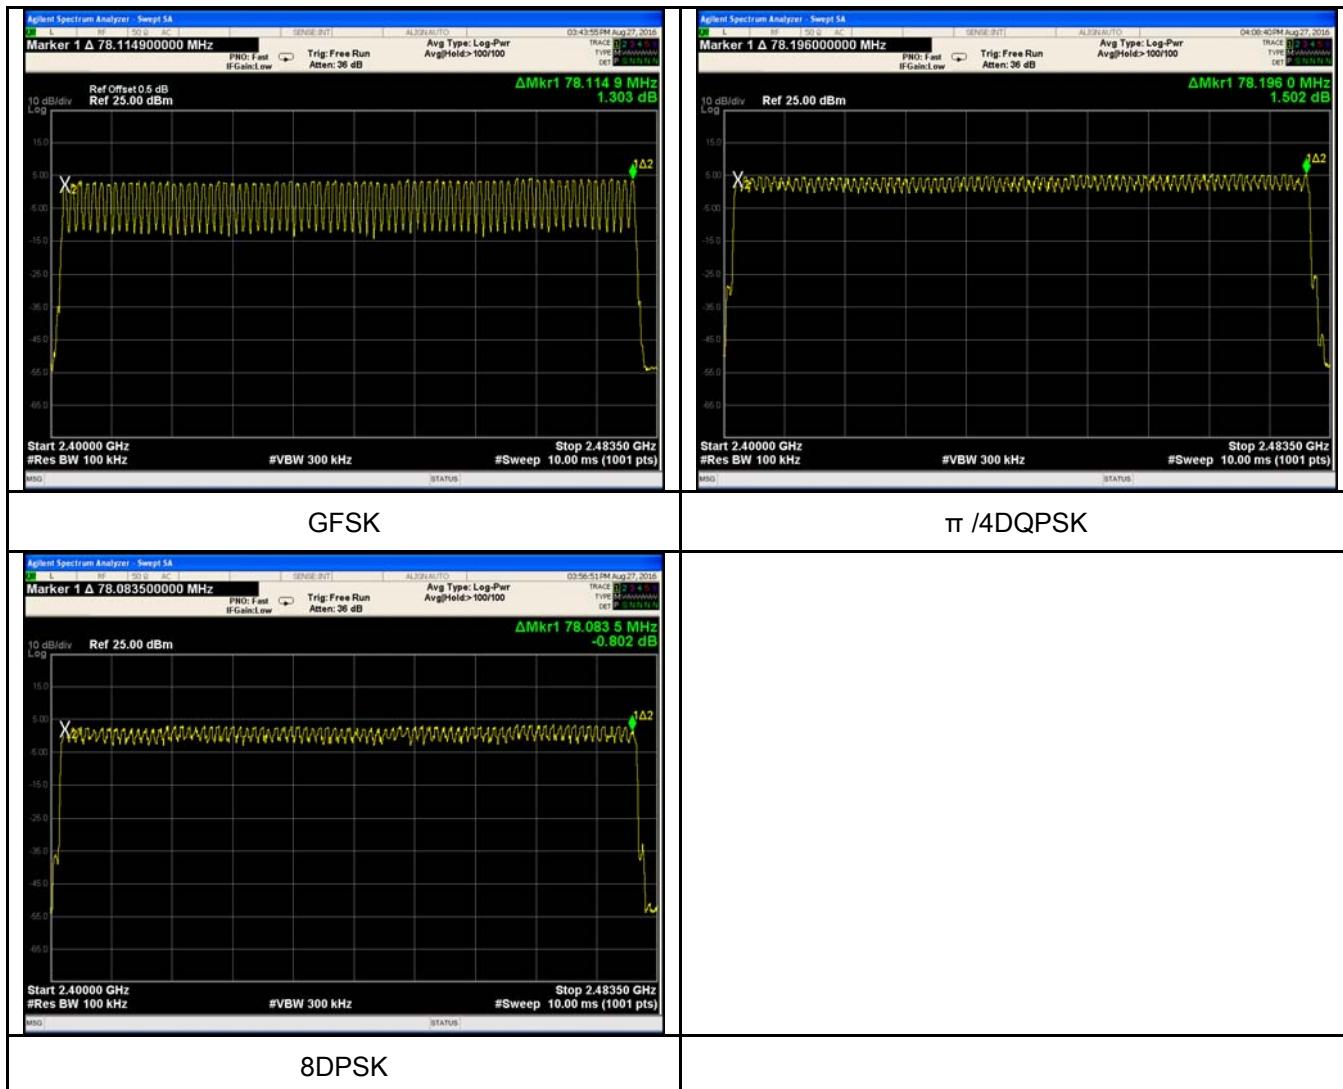

6.6 Time of Occupancy (Dwell Time)

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	August 27, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.200	234.667	400	Pass
		Mid	2.210	235.733	400	Pass
		High	2.200	234.667	400	Pass
	$\pi/4$ DQPSK	Low	1.190	126.933	400	Pass
		Mid	1.180	125.867	400	Pass
		High	1.190	126.933	400	Pass
	8-DPSK	Low	0.850	90.667	400	Pass
		Mid	0.850	90.667	400	Pass
		High	0.850	90.667	400	Pass

Note: Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$

Test Plots


Dwell Time measurement result

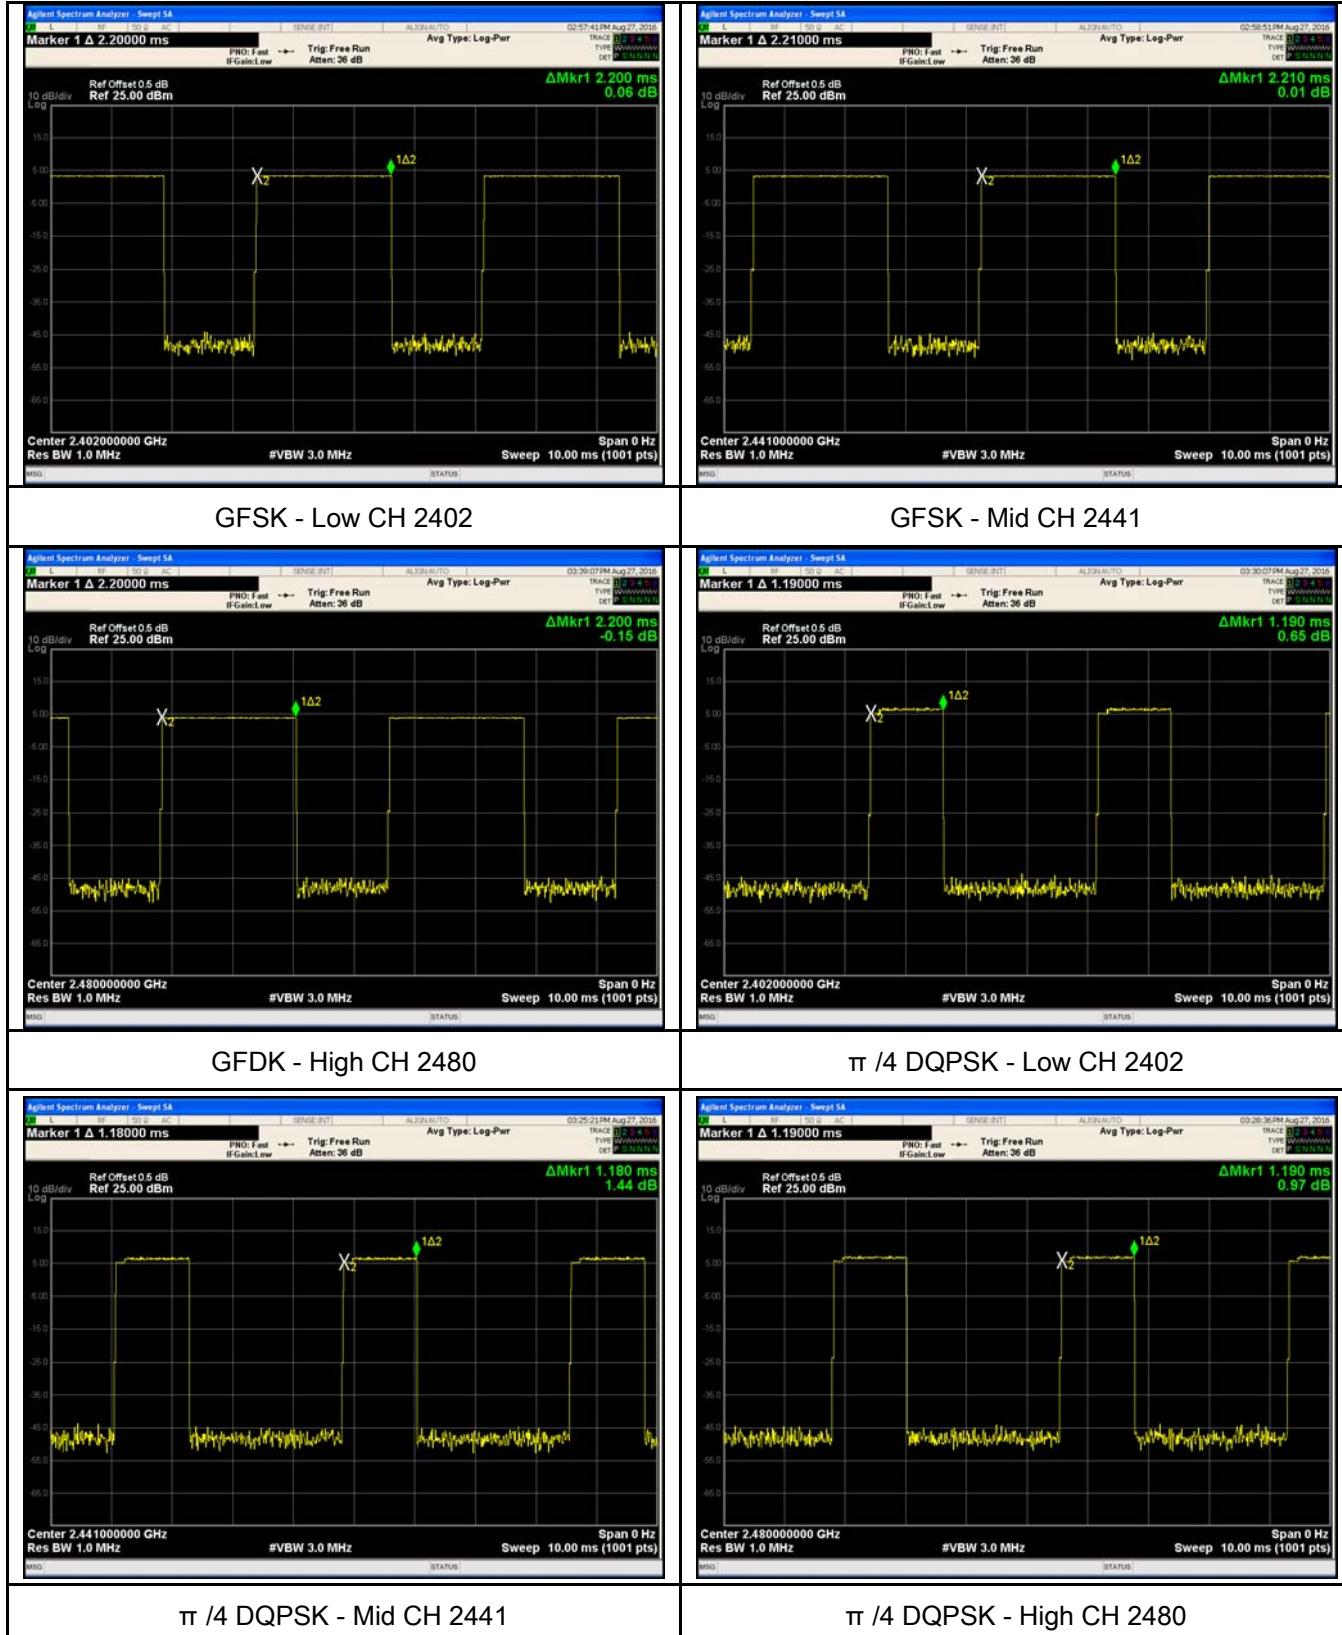

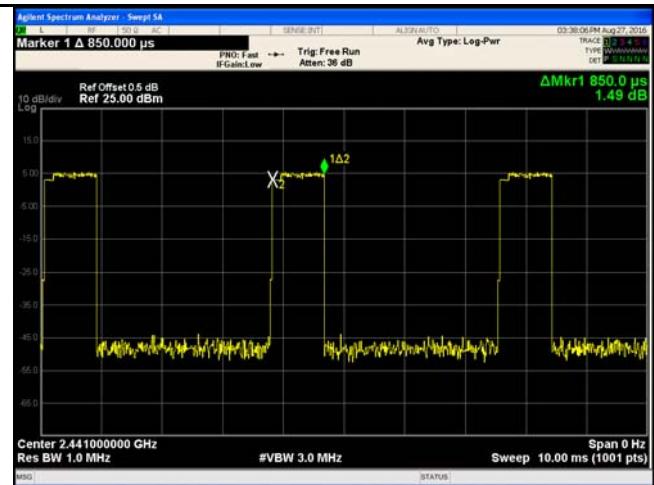

8DPSK - Low CH 2402

8DPSK - Mid CH 2441

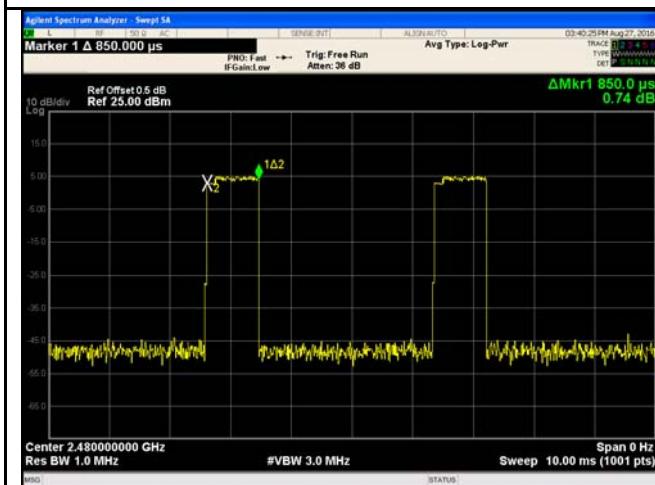


8DPSK - High CH 2480

6.7 Band Edge & Restricted Band

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	August 29, 2016
Tested By :	Loren Luo

Requirement(s):

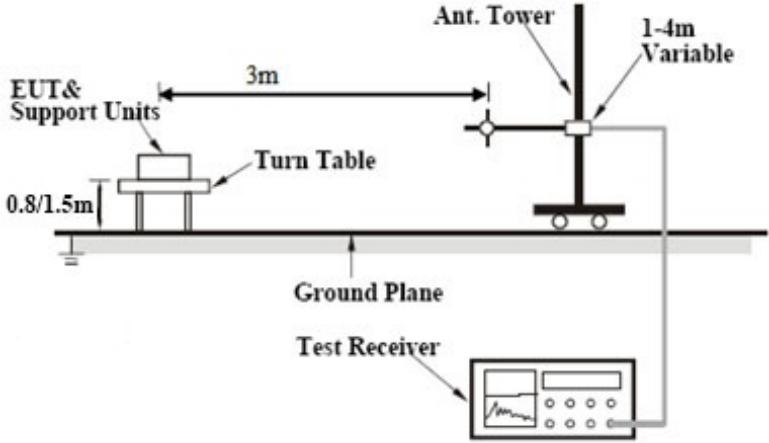Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An 'EUT & Support Units' is positioned on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. A 'Test Receiver' is connected to the EUT. A '1-4m Variable' antenna is mounted on a vertical 'Ant. Tower' located 3m away from the EUT. The entire setup is shown on a horizontal surface.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A



Test Plot Yes (See below) N/A


Test Plots

GFSK Mode:



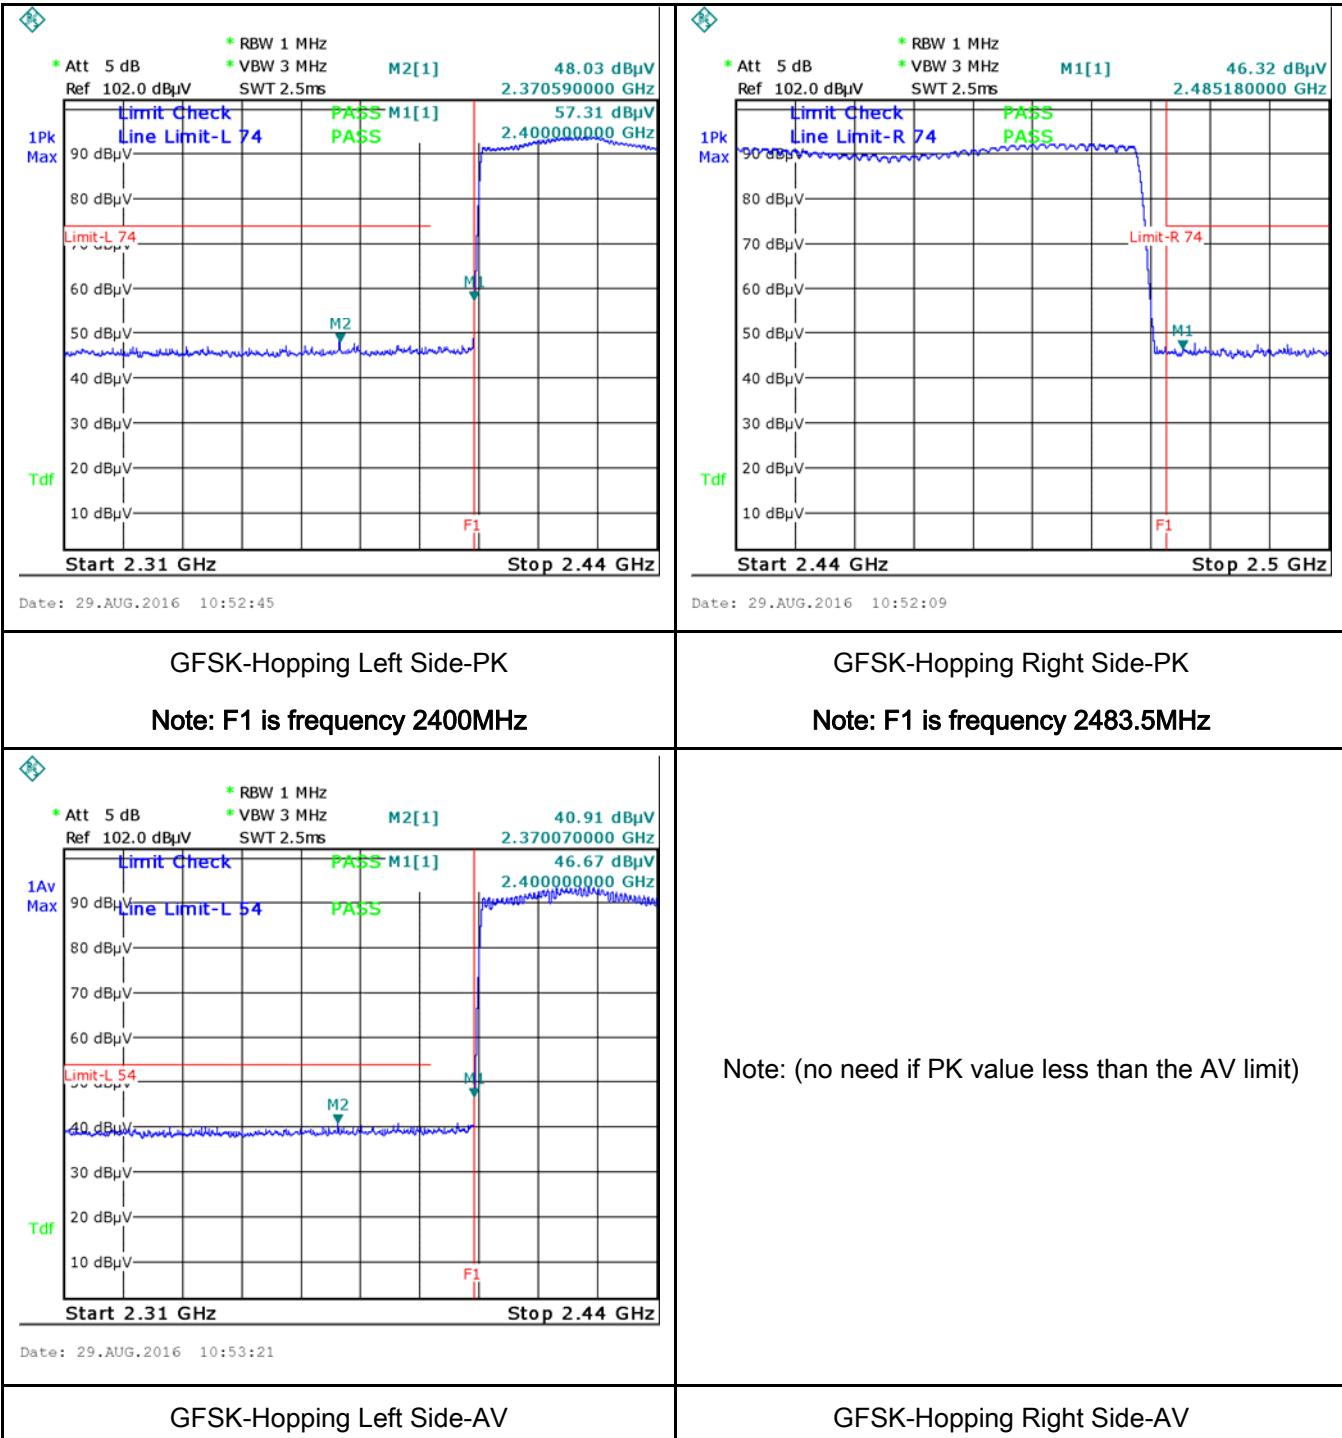


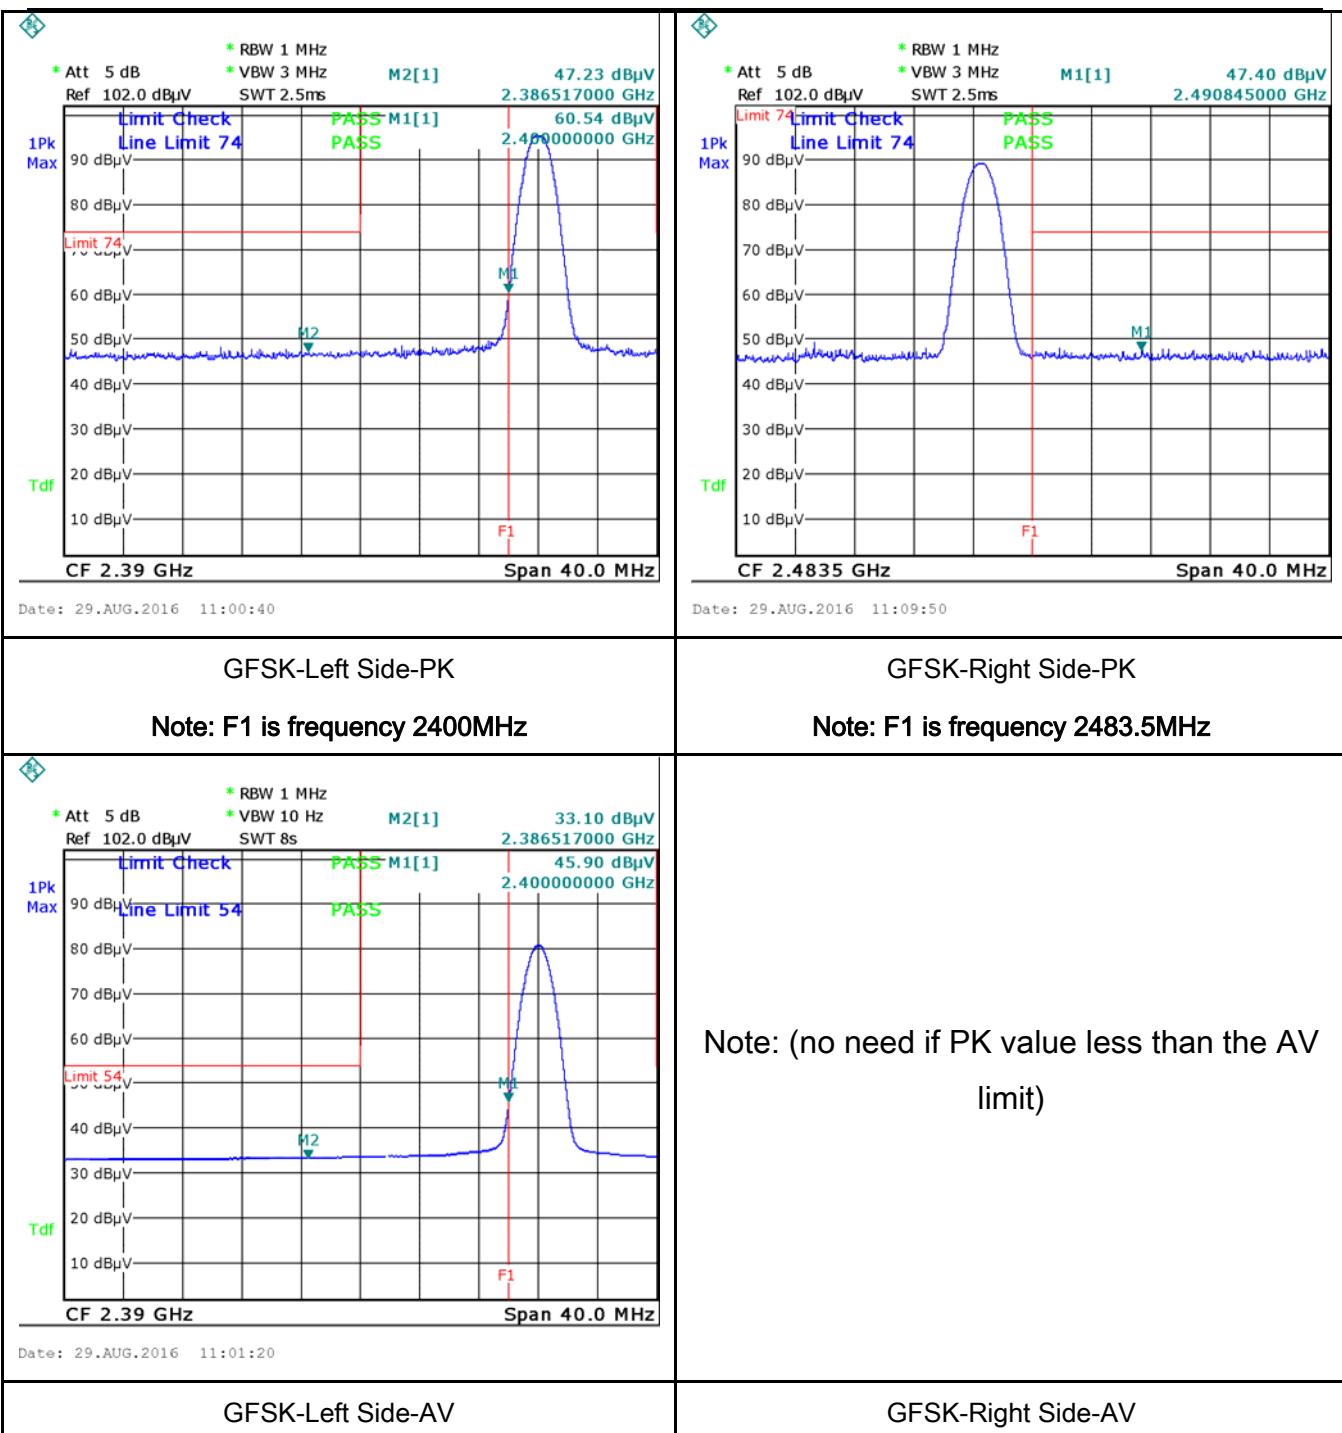


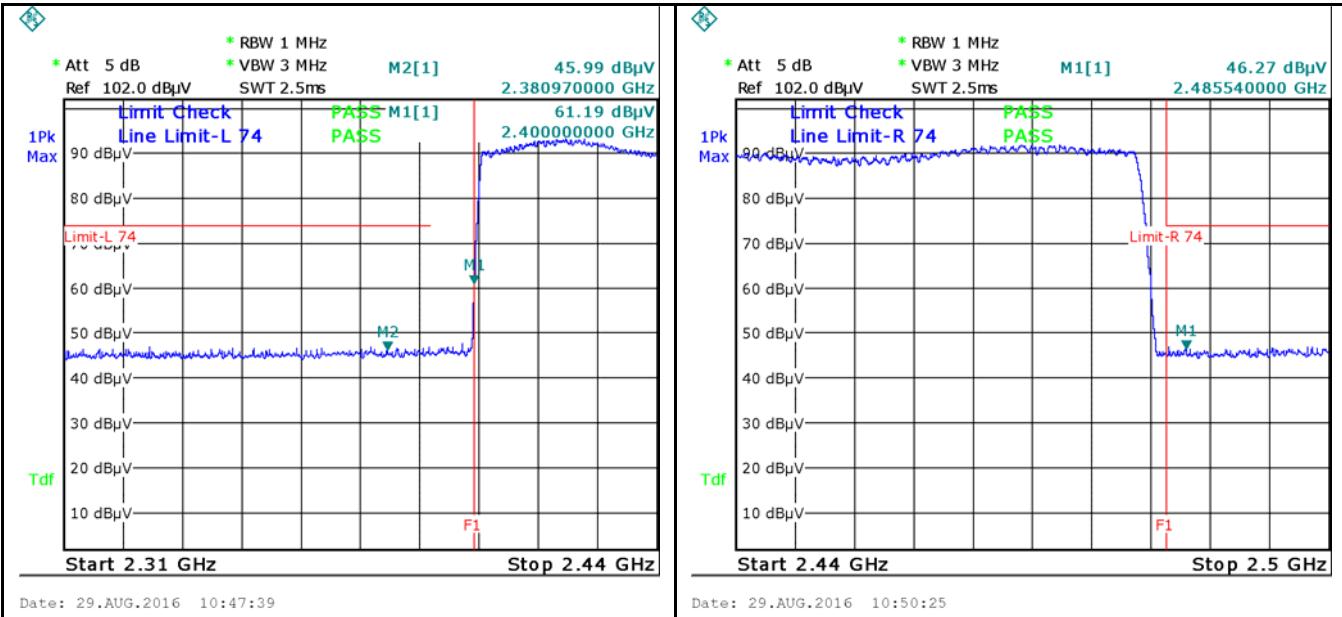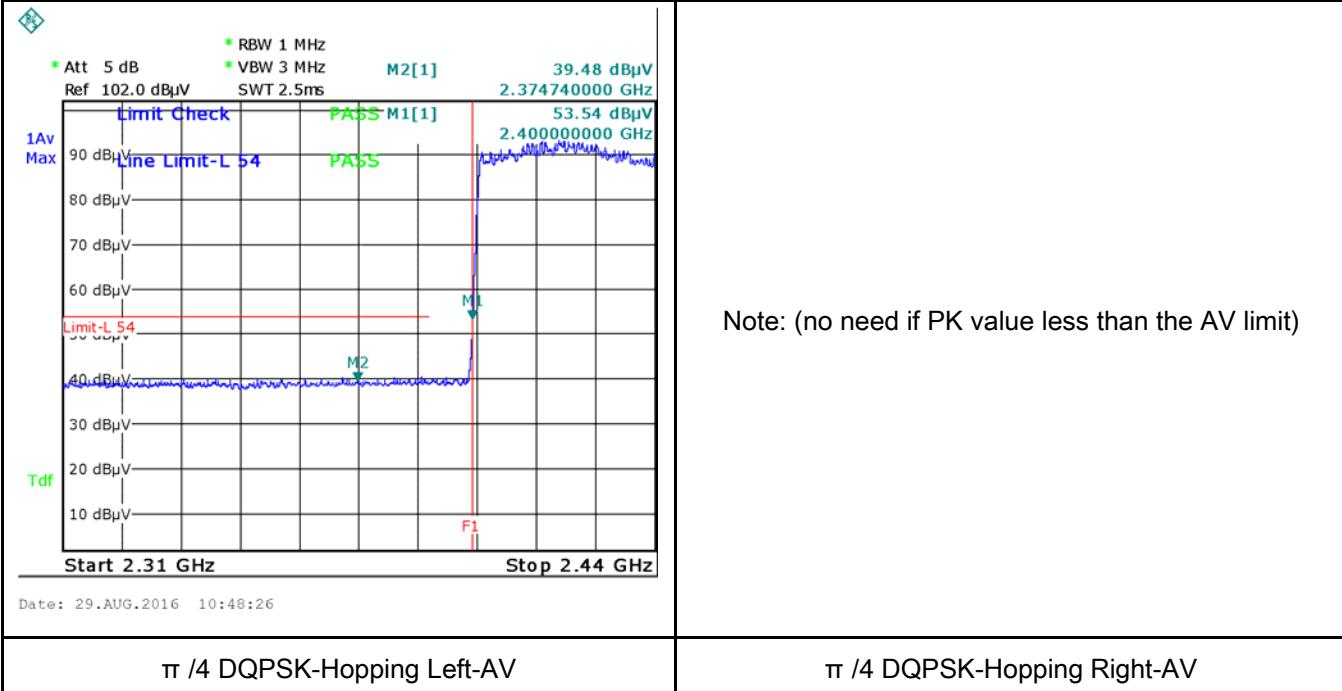π/4 DQPSK Mode:

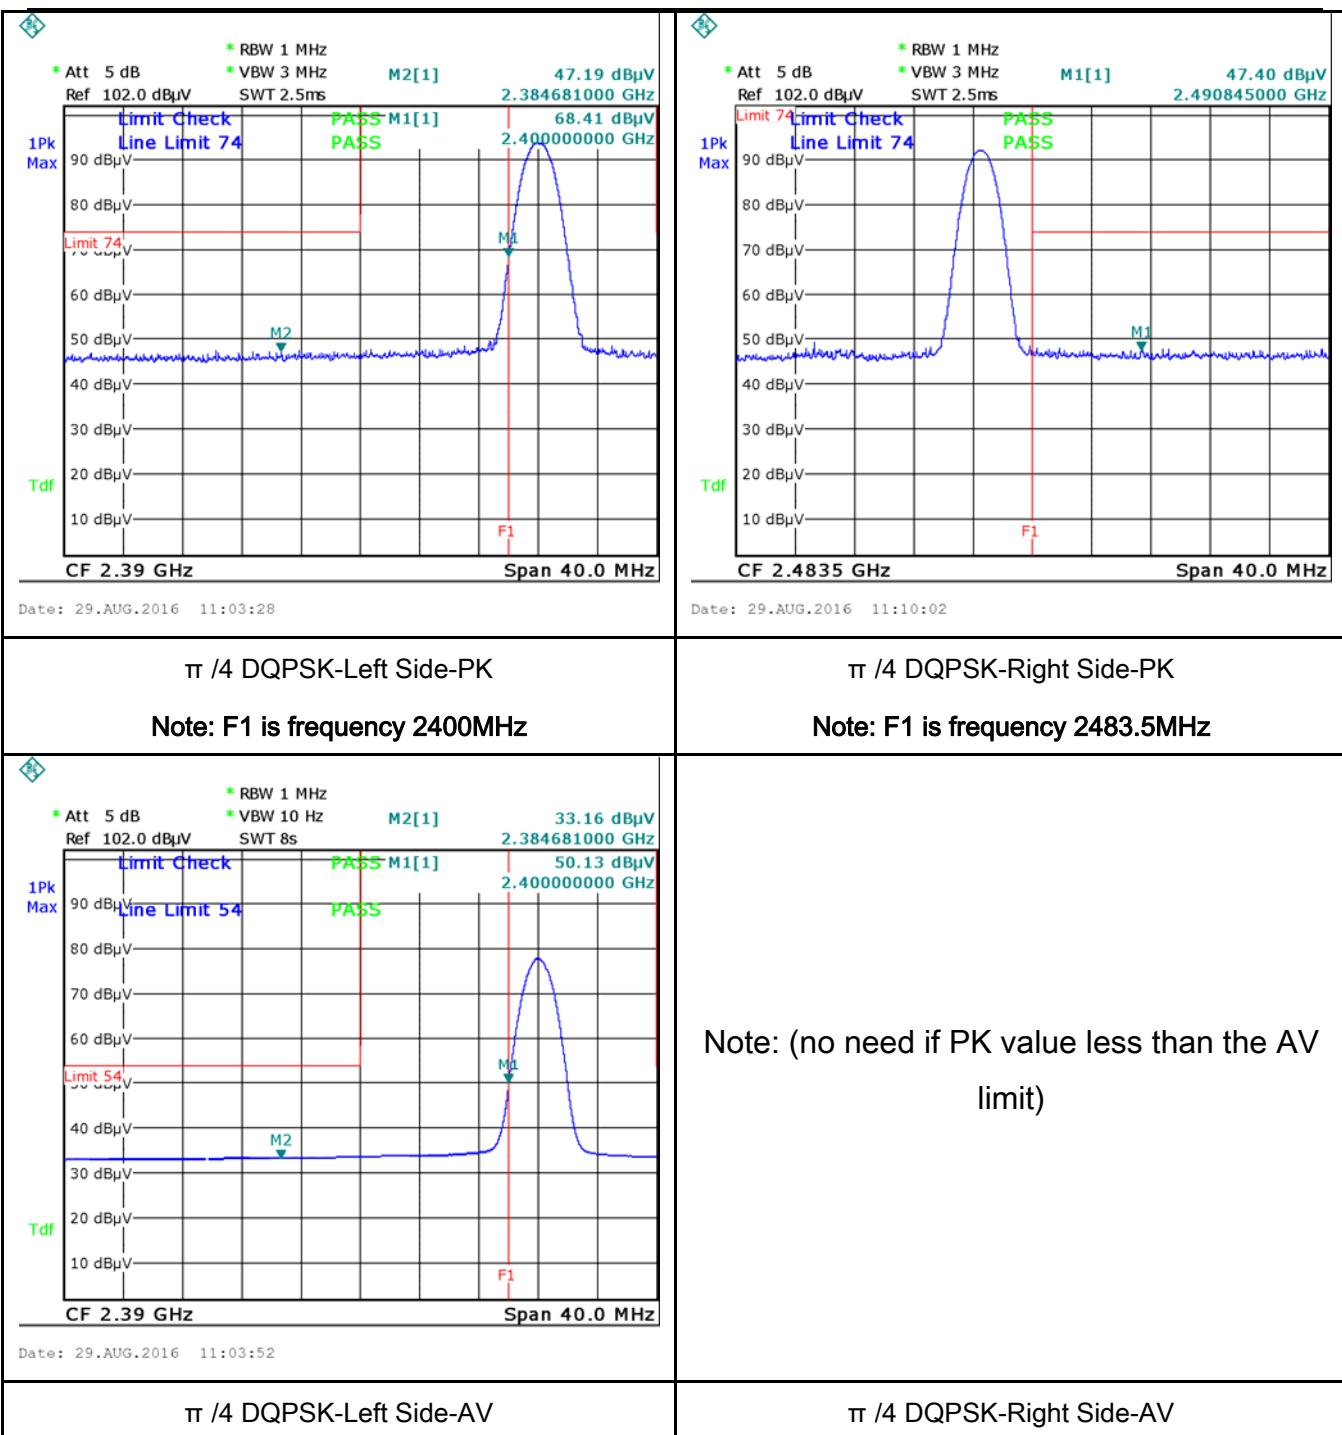π/4 DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz
π/4 DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz

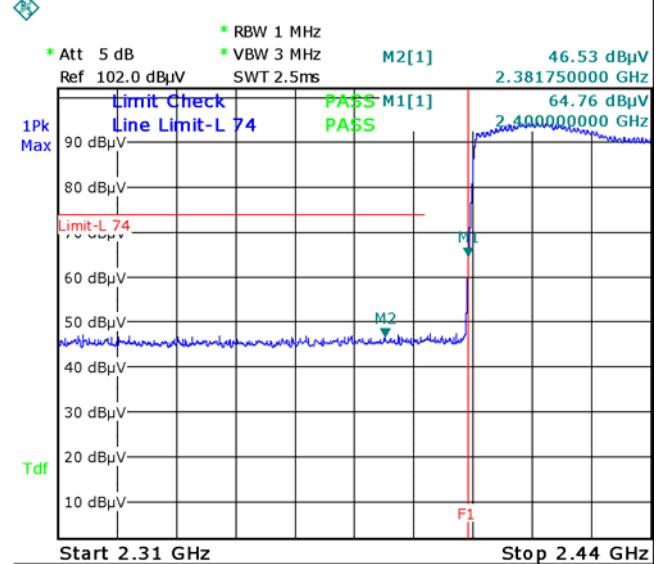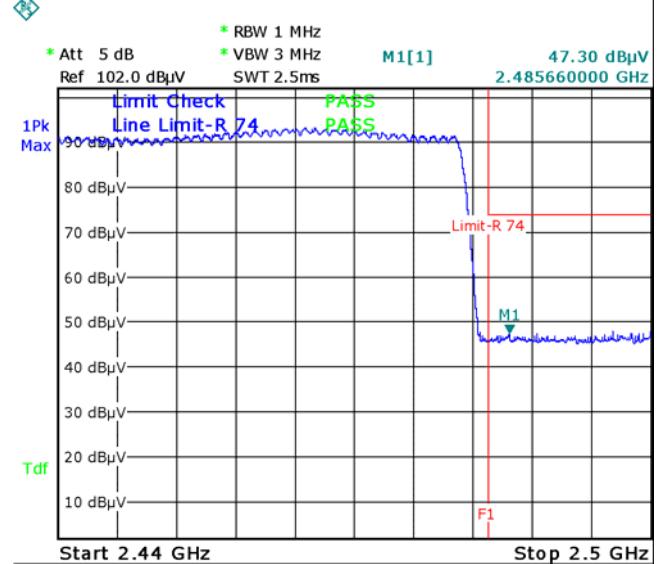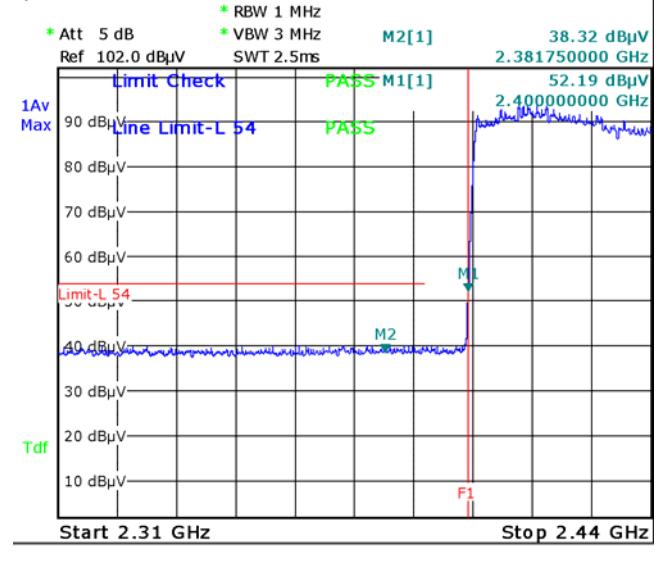


8-DPSK Mode:

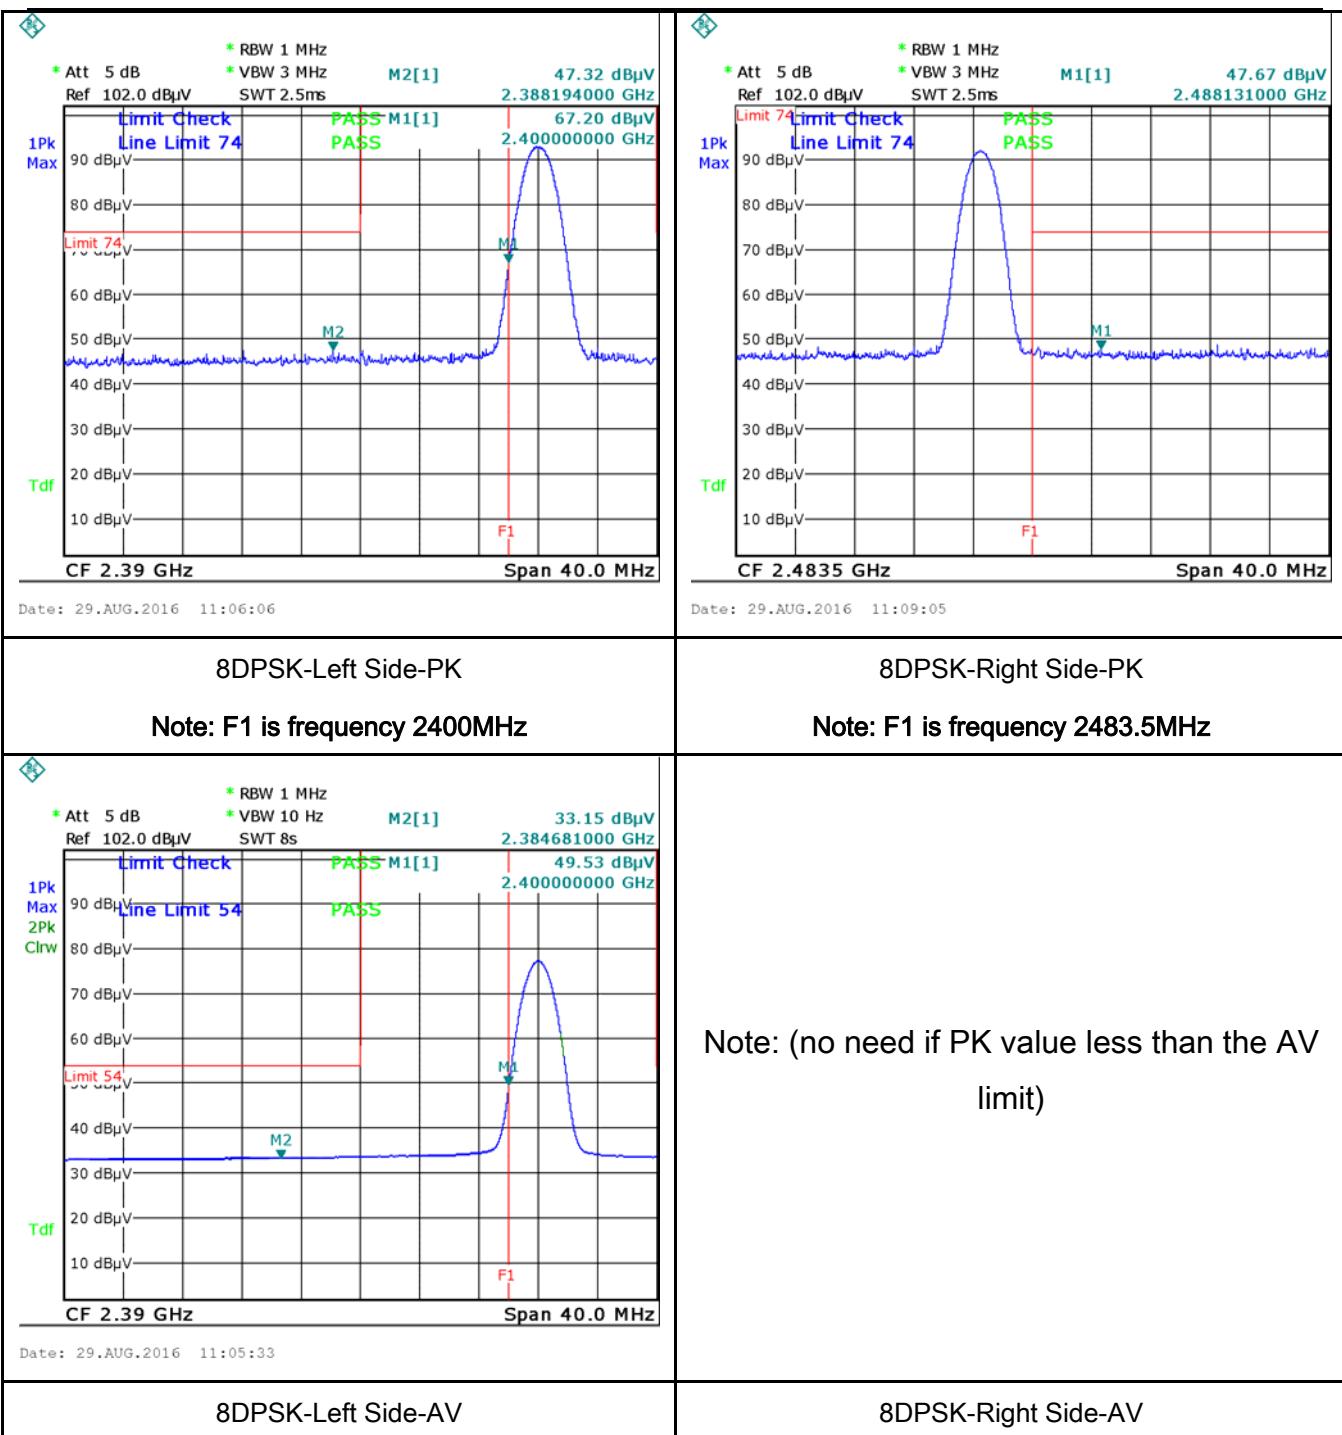 <p>RBW 1 MHz VBW 3 MHz Att 5 dB Ref 102.0 dBμV SWT 2.5ms</p> <p>M2[1] 46.53 dBμV 2.381750000 GHz</p> <p>1Pk Max Tdf</p> <p>Limit Check: Line Limit-L 74 Limit-L 74</p> <p>PASS M1[1] PASS</p> <p>64.76 dBμV 2.400000000 GHz</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 29.AUG.2016 10:43:14</p>	 <p>RBW 1 MHz VBW 3 MHz Att 5 dB Ref 102.0 dBμV SWT 2.5ms</p> <p>M1[1] 47.30 dBμV 2.485660000 GHz</p> <p>1Pk Max Tdf</p> <p>Limit Check: Line Limit-R 74 Limit-R 74</p> <p>PASS M1[1] PASS</p> <p>40 dBμV</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 29.AUG.2016 10:40:48</p>
<p>8DPSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>8DPSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>RBW 1 MHz VBW 3 MHz Att 5 dB Ref 102.0 dBμV SWT 2.5ms</p> <p>M2[1] 38.32 dBμV 2.381750000 GHz</p> <p>1Av Max Tdf</p> <p>Limit Check: Line Limit-L 54 Limit-L 54</p> <p>PASS M1[1] PASS</p> <p>52.19 dBμV 2.400000000 GHz</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 29.AUG.2016 10:44:09</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>8DPSK-Hopping Left-AV</p>	<p>8DPSK-Hopping Right-AV</p>



6.8 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	August 29, 2016
Tested By :	Loren Luo


Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup																	
Procedure	<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																


	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

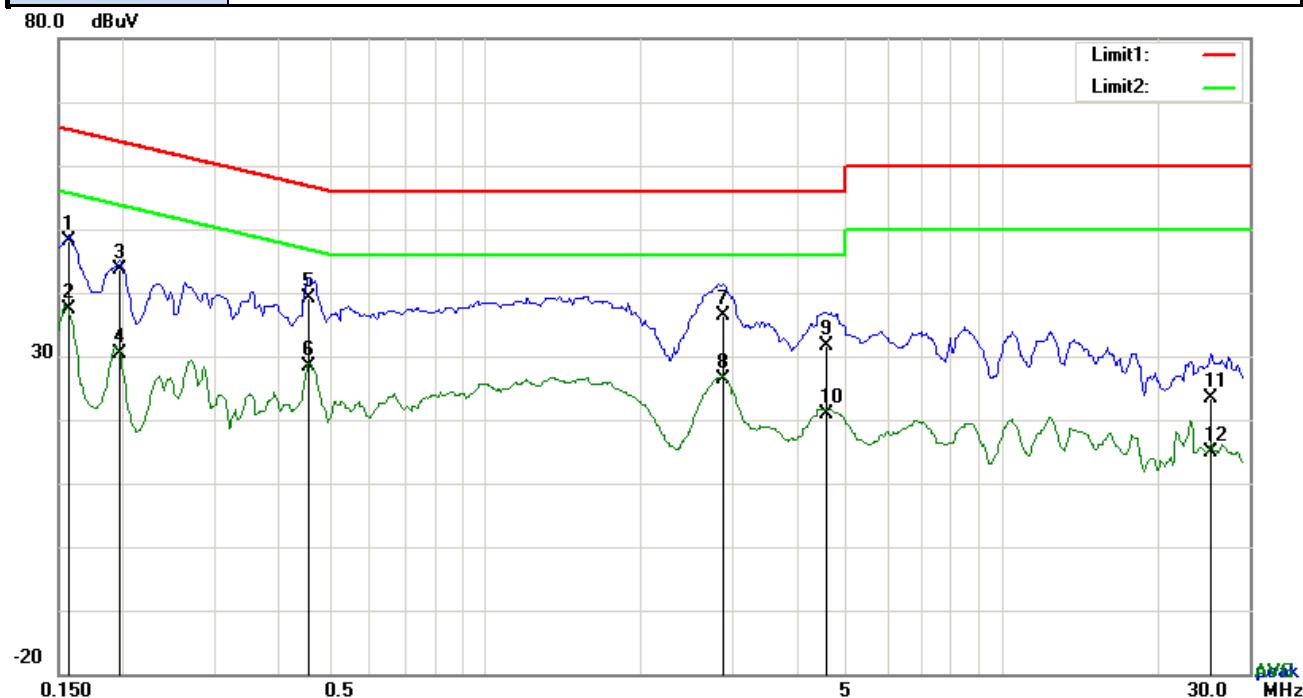Test Mode: Bluetooth Mode

Test Data
Phase Line Plot at 120Vac, 60Hz

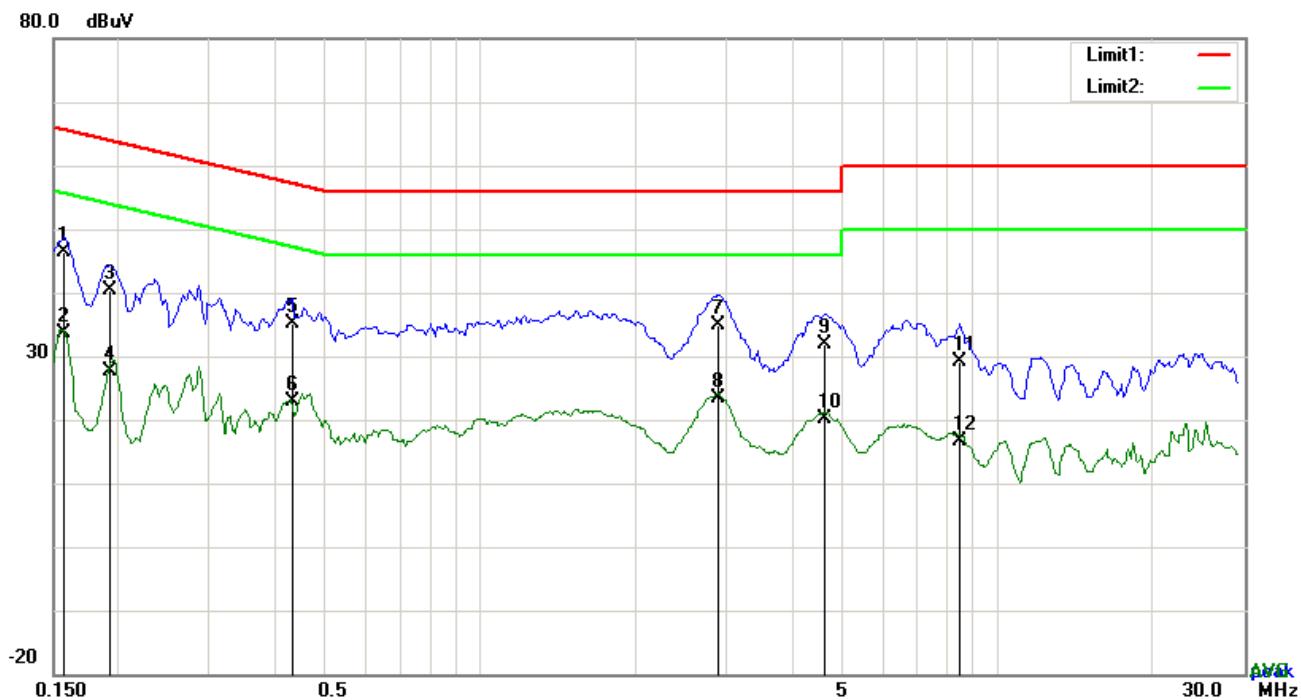No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1578	37.98	QP	10.03	48.01	65.58	-17.57
2	L1	0.1578	27.42	AVG	10.03	37.45	55.58	-18.13
3	L1	0.1968	33.57	QP	10.03	43.60	63.74	-20.14
4	L1	0.1968	20.45	AVG	10.03	30.48	53.74	-23.26
5	L1	0.4581	28.99	QP	10.03	39.02	56.73	-17.71
6	L1	0.4581	18.39	AVG	10.03	28.42	46.73	-18.31
7	L1	2.8917	26.44	QP	10.05	36.49	56.00	-19.51
8	L1	2.8917	16.33	AVG	10.05	26.38	46.00	-19.62
9	L1	4.5736	21.52	QP	10.07	31.59	56.00	-24.41
10	L1	4.5736	10.82	AVG	10.07	20.89	46.00	-25.11
11	L1	25.2300	13.05	QP	10.40	23.45	60.00	-36.55
12	L1	25.2300	4.60	AVG	10.40	15.00	50.00	-35.00


Test Mode: Bluetooth Mode

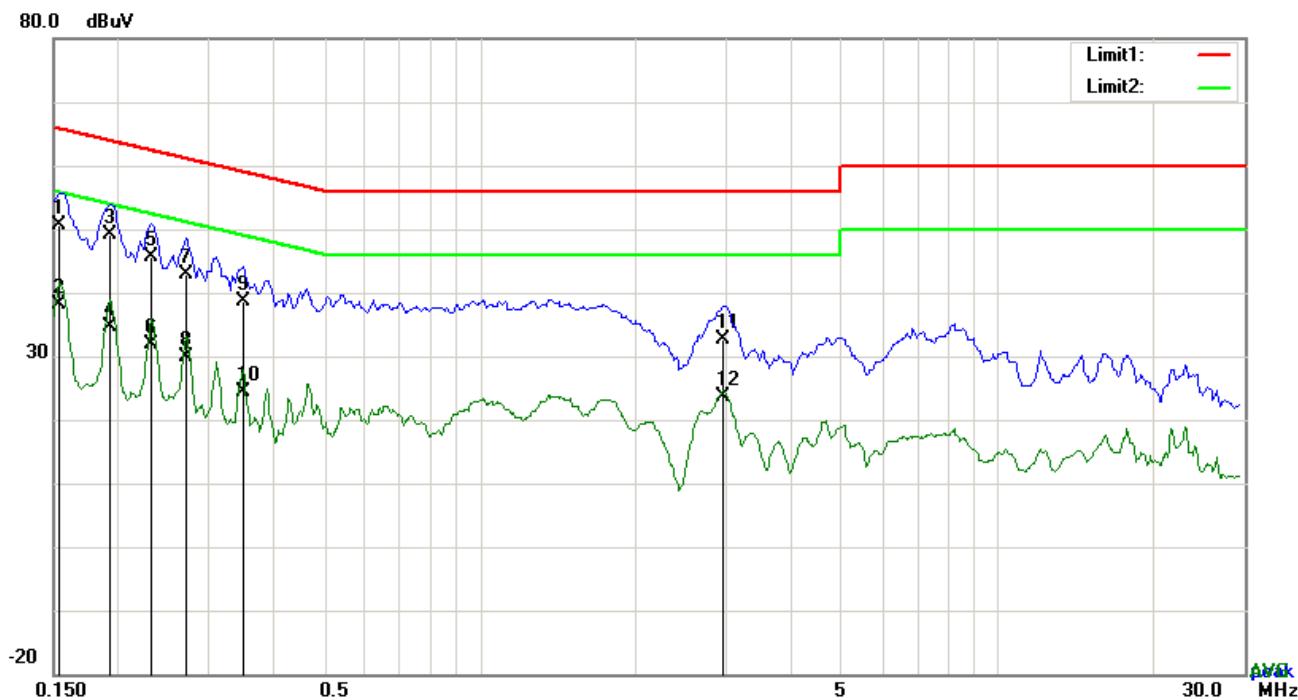Test Data
Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1578	36.45	QP	10.02	46.47	65.58	-19.11
2	N	0.1578	23.57	AVG	10.02	33.59	55.58	-21.99
3	N	0.1929	30.47	QP	10.02	40.49	63.91	-23.42
4	N	0.1929	17.65	AVG	10.02	27.67	53.91	-26.24
5	N	0.4347	25.22	QP	10.02	35.24	57.16	-21.92
6	N	0.4347	12.78	AVG	10.02	22.80	47.16	-24.36
7	N	2.8956	24.93	QP	10.05	34.98	56.00	-21.02
8	N	2.8956	13.41	AVG	10.05	23.46	46.00	-22.54
9	N	4.6419	21.71	QP	10.07	31.78	56.00	-24.22
10	N	4.6419	10.03	AVG	10.07	20.10	46.00	-25.90
11	N	8.4600	19.10	QP	10.12	29.22	60.00	-30.78
12	N	8.4600	6.61	AVG	10.12	16.73	50.00	-33.27

Test Mode: Bluetooth Mode

Test Data
Phase Line Plot at 240Vac, 60Hz

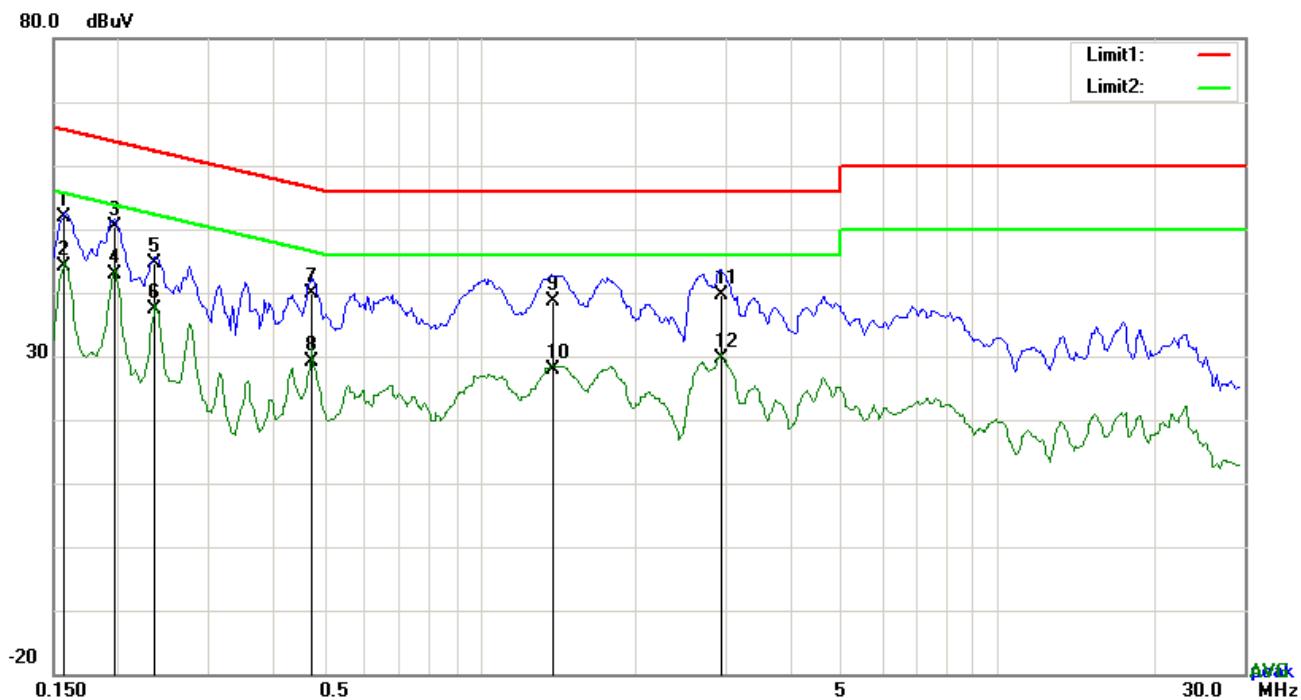No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1539	40.64	QP	10.03	50.67	65.79	-15.12
2	L1	0.1539	28.00	AVG	10.03	38.03	55.79	-17.76
3	L1	0.1929	39.21	QP	10.03	49.24	63.91	-14.67
4	L1	0.1929	24.63	AVG	10.03	34.66	53.91	-19.25
5	L1	0.2319	35.53	QP	10.03	45.56	62.38	-16.82
6	L1	0.2319	21.85	AVG	10.03	31.88	52.38	-20.50
7	L1	0.2709	32.74	QP	10.03	42.77	61.09	-18.32
8	L1	0.2709	19.77	AVG	10.03	29.80	51.09	-21.29
9	L1	0.3489	28.59	QP	10.03	38.62	58.99	-20.37
10	L1	0.3489	14.32	AVG	10.03	24.35	48.99	-24.64
11	L1	2.9541	22.53	QP	10.05	32.58	56.00	-23.42
12	L1	2.9541	13.51	AVG	10.05	23.56	46.00	-22.44

Test Mode: Bluetooth Mode



Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1578	41.91	QP	10.02	51.93	65.58	-13.65
2	N	0.1578	34.10	AVG	10.02	44.12	55.58	-11.46
3	N	0.1968	40.46	QP	10.02	50.48	63.74	-13.26
4	N	0.1968	32.86	AVG	10.02	42.88	53.74	-10.86
5	N	0.2358	34.64	QP	10.02	44.66	62.24	-17.58
6	N	0.2358	27.28	AVG	10.02	37.30	52.24	-14.94
7	N	0.4737	29.82	QP	10.02	39.84	56.45	-16.61
8	N	0.4737	19.18	AVG	10.02	29.20	46.45	-17.25
9	N	1.3811	28.58	QP	10.03	38.61	56.00	-17.39
10	N	1.3811	17.89	AVG	10.03	27.92	46.00	-18.08
11	N	2.9268	29.58	QP	10.05	39.63	56.00	-16.37
12	N	2.9268	19.64	AVG	10.05	29.69	46.00	-16.31

6.9 Radiated Spurious Emissions & Restricted Band

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	August 29, 2016
Tested By :	Loren Luo

Requirement(s):

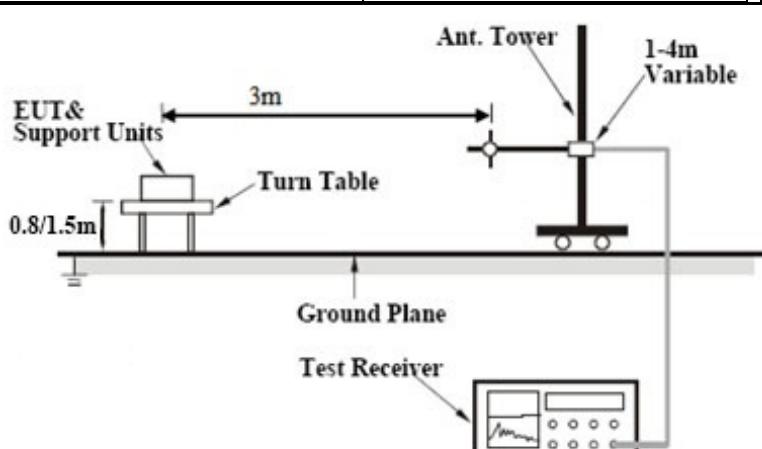Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup for radiated spurious emissions. A 'Turn Table' is positioned on a 'Ground Plane'. A 'EUT & Support Units' is mounted on the turn table. A 'Ant. Tower' is connected to the EUT and is height-adjustable, with a '1-4m Variable' height indicator. A 'Test Receiver' is connected to the tower and is shown with a waveform display. The distance between the EUT and the turn table is 0.8/1.5m, and the distance between the turn table and the antenna tower is 3m.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 											


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

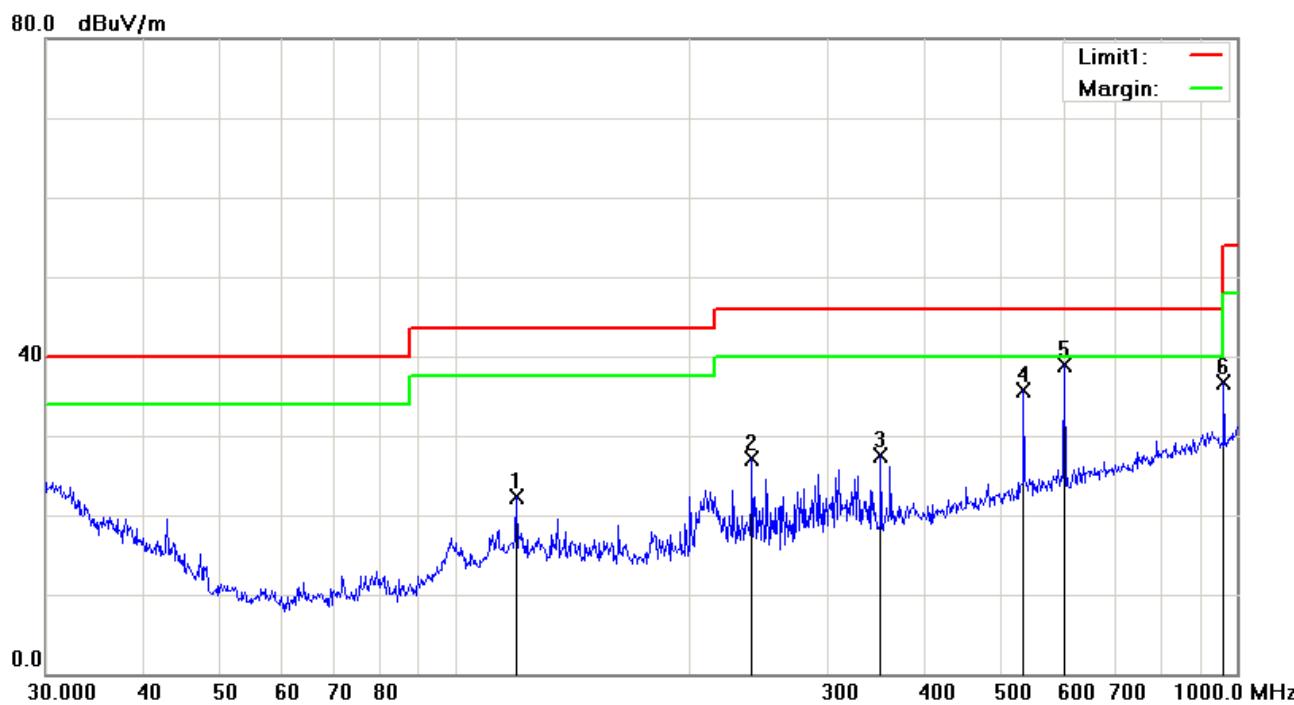


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	119.8556	29.59	peak	-7.33	22.26	43.50	-21.24	100	98
2	H	239.9873	36.19	peak	-9.10	27.09	46.00	-18.91	100	330
3	H	350.4768	33.02	peak	-5.45	27.57	46.00	-18.43	100	256
4	H	533.8321	36.73	peak	-1.10	35.63	46.00	-10.37	100	133
5	H	601.4265	38.80	peak	0.03	38.83	46.00	-7.17	100	169
6	H	962.1623	31.34	peak	5.29	36.63	54.00	-17.37	100	55

Below 1GHz

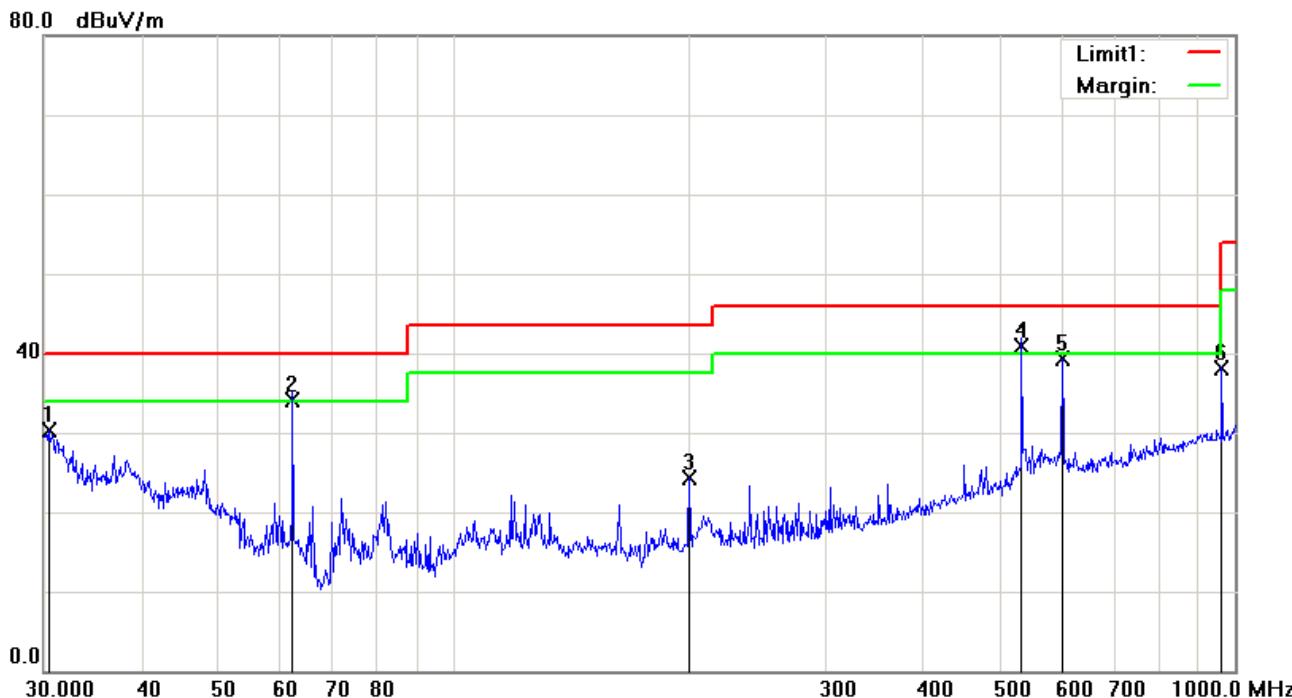

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readin g (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	30.4238	30.89	peak	-0.58	30.31	40.00	-9.69	100	202
2	V	62.4314	48.18	QP	-14.17	34.01	40.00	-5.99	100	29
3	V	200.6881	33.12	peak	-8.75	24.37	43.50	-19.13	100	145
4	V	533.8321	42.01	QP	-1.10	40.91	46.00	-5.09	100	359
5	V	601.4265	39.22	peak	0.03	39.25	46.00	-6.75	100	209
6	V	962.1623	32.91	peak	5.29	38.20	54.00	-15.80	100	259

Above 1GHz

Test Mode:	Transmitting Mode
------------	-------------------

Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	39.04	AV	V	33.67	6.86	32.66	46.91	54	-7.09
4804	38.62	AV	H	33.67	6.86	32.66	46.49	54	-7.51
4804	48.13	PK	V	33.67	6.86	32.66	56	74	-18
4804	47.58	PK	H	33.67	6.86	32.66	55.45	74	-18.55
17834	24.32	AV	V	45.03	11.21	32.38	48.18	54	-5.82
17834	24.15	AV	H	45.03	11.21	32.38	48.01	54	-5.99
17834	41.14	PK	V	45.03	11.21	32.38	65	74	-9
17834	40.76	PK	H	45.03	11.21	32.38	64.62	74	-9.38

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	38.86	AV	V	33.71	6.95	32.74	46.78	54	-7.22
4882	39.65	AV	H	33.71	6.95	32.74	47.57	54	-6.43
4882	47.94	PK	V	33.71	6.95	32.74	55.86	74	-18.14
4882	47.58	PK	H	33.71	6.95	32.74	55.5	74	-18.5
17879	24.68	AV	V	45.15	11.18	32.41	48.6	54	-5.4
17879	24.19	AV	H	45.15	11.18	32.41	48.11	54	-5.89
17879	40.88	PK	V	45.15	11.18	32.41	64.8	74	-9.2
17879	40.69	PK	H	45.15	11.18	32.41	64.61	74	-9.39

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	38.49	AV	V	33.9	6.76	32.74	46.41	54	-7.59
4960	38.27	AV	H	33.9	6.76	32.74	46.19	54	-7.81
4960	47.75	PK	V	33.9	6.76	32.74	55.67	74	-18.33
4960	47.52	PK	H	33.9	6.76	32.74	55.44	74	-18.56
17793	24.68	AV	V	45.22	11.35	32.38	48.87	54	-5.13
17793	24.53	AV	H	45.22	11.35	32.38	48.72	54	-5.28
17793	41.19	PK	V	45.22	11.35	32.38	65.38	74	-8.62
17793	41.04	PK	H	45.22	11.35	32.38	65.23	74	-8.77

Note:

 1, The testing has been conformed to $10*2480\text{MHz}=24,800\text{MHz}$

2, All other emissions more than 30 dB below the limit


3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

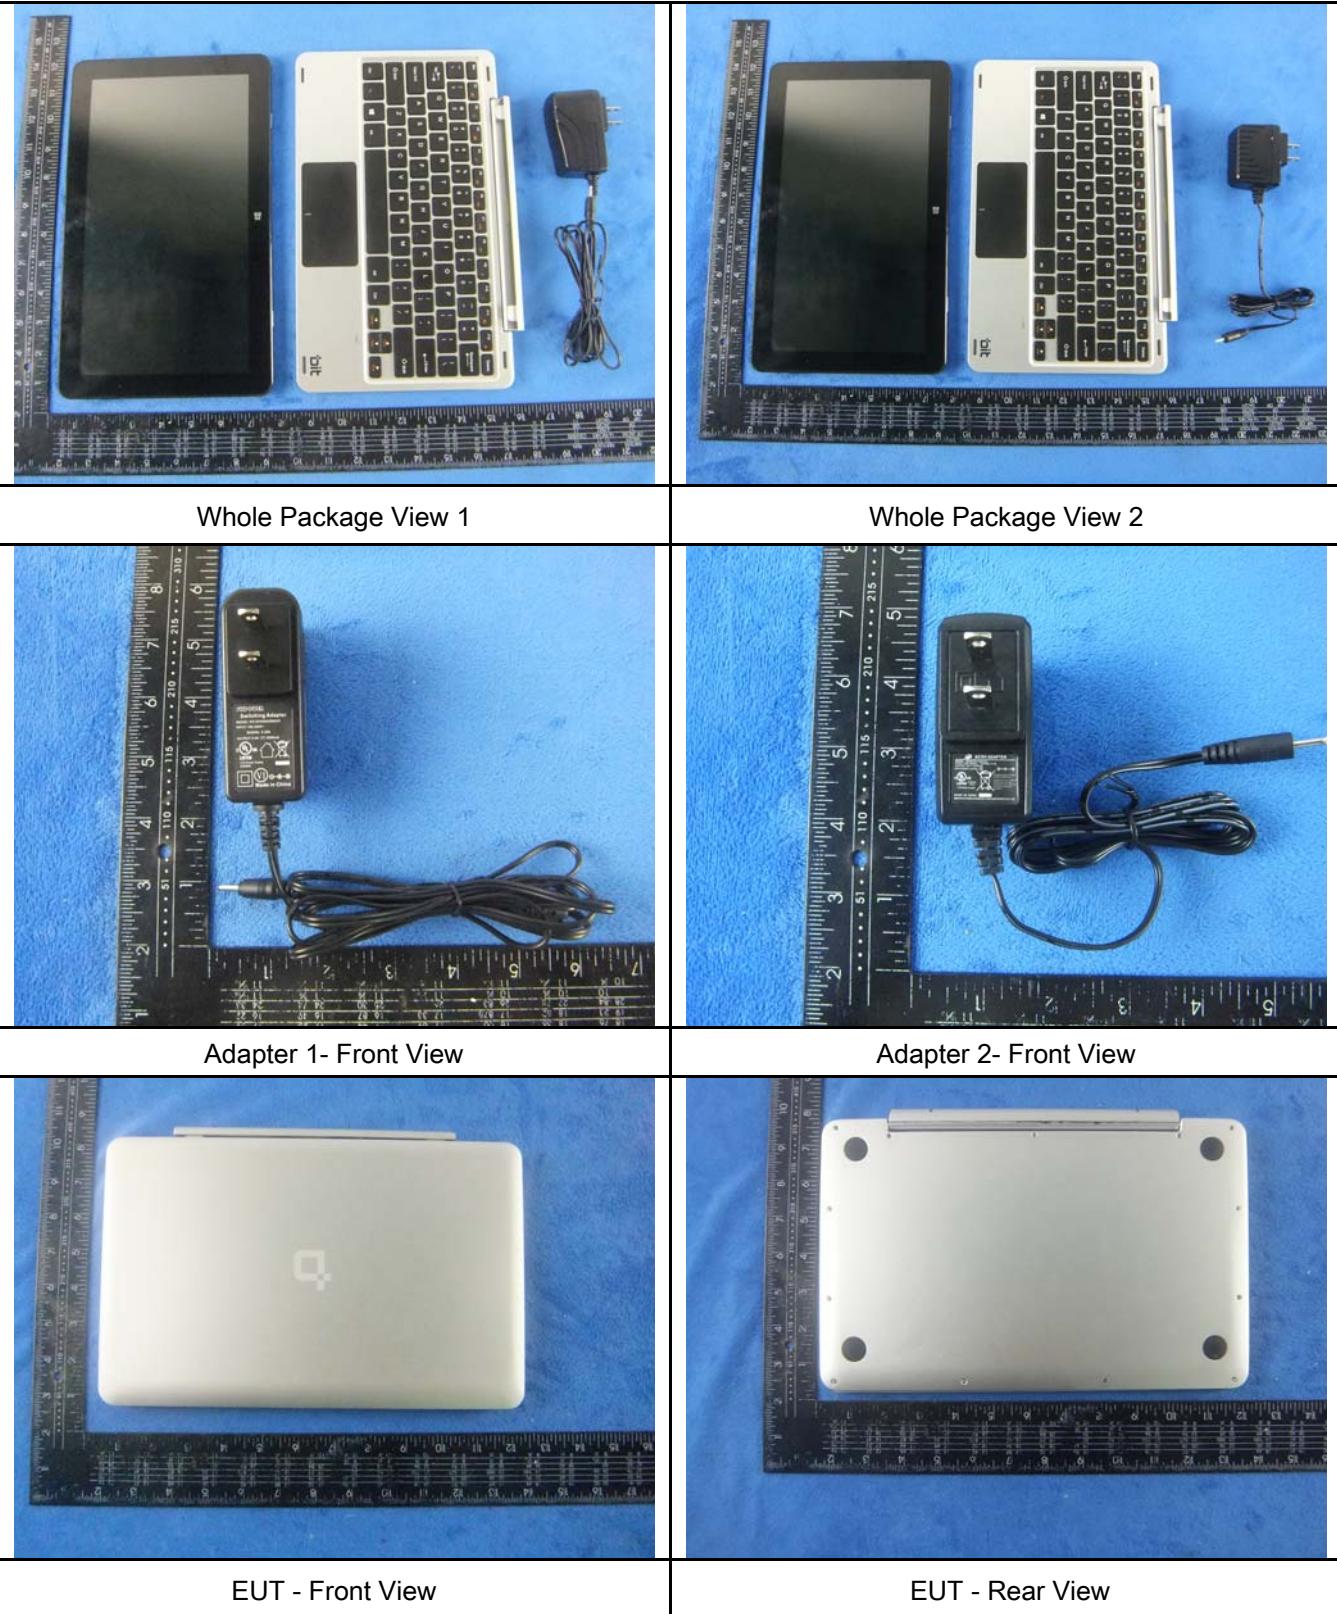

Test Report	16070893-FCC-R2
Page	50 of 64



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



Screen - Front View



Screen - Rear View



Screen - Top View



Screen - Bottom View



Screen - Left View



Screen - Right View



Keyboard - Front View



Keyboard - Rear View



Keyboard - Top View



Keyboard - Bottom View




Keyboard - Left View



Keyboard - Right View

Annex B.ii. Photograph: EUT Internal Photo

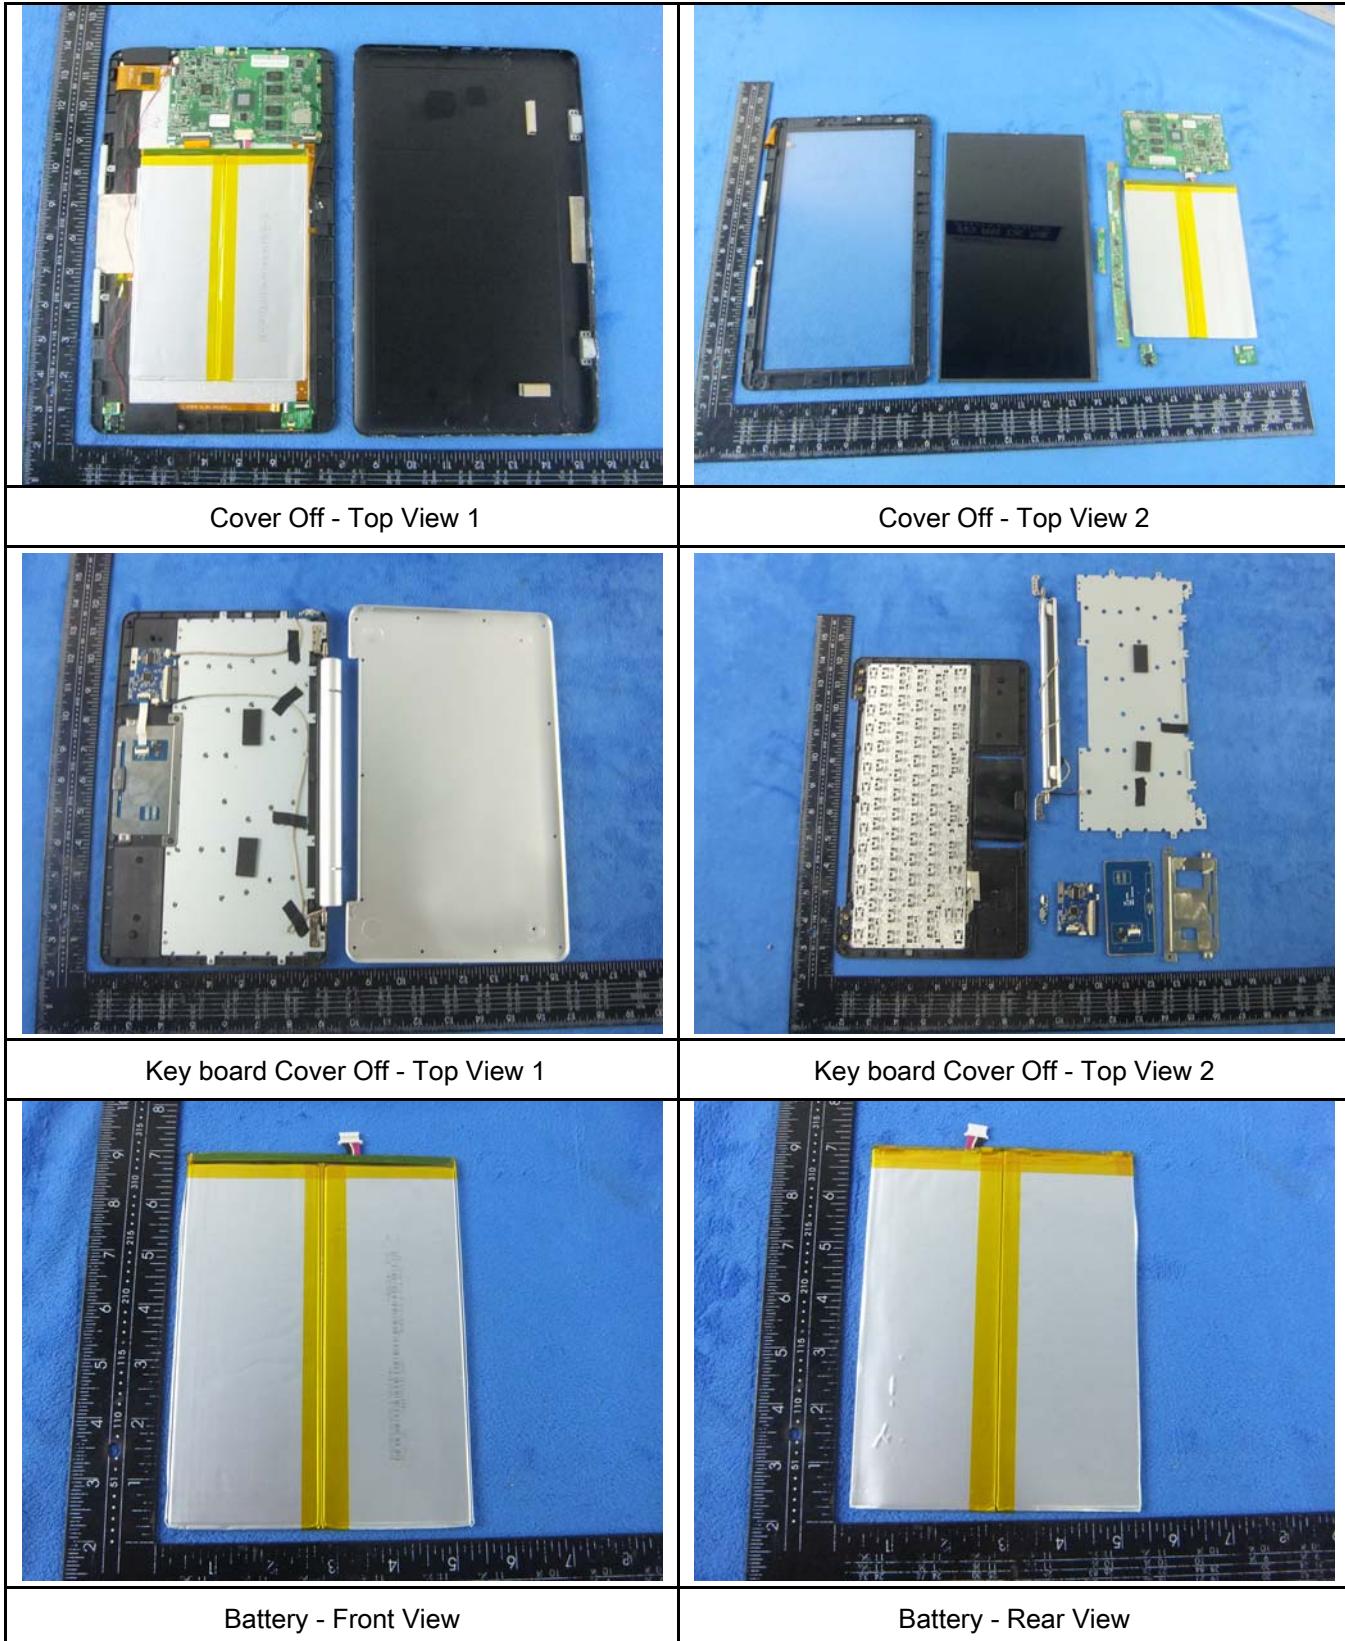





Mainboard with Shielding - Front View




Mainboard without Shielding - Front View

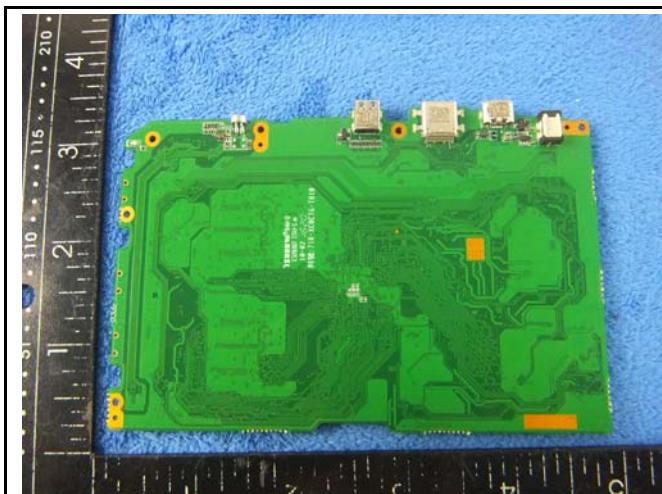


Mainboard - Rear View

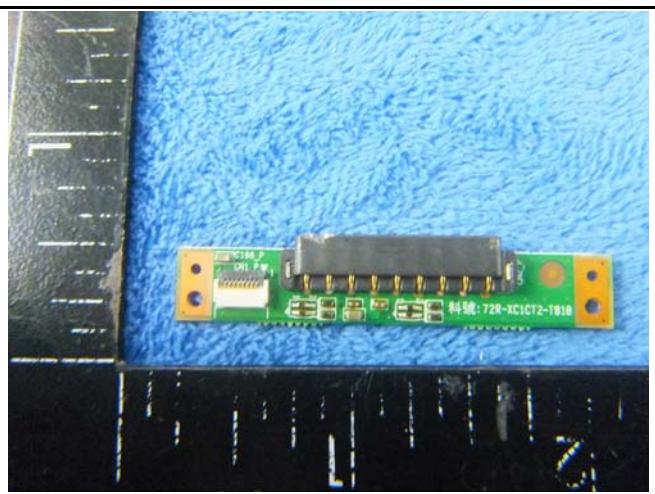


Contact board - Front View

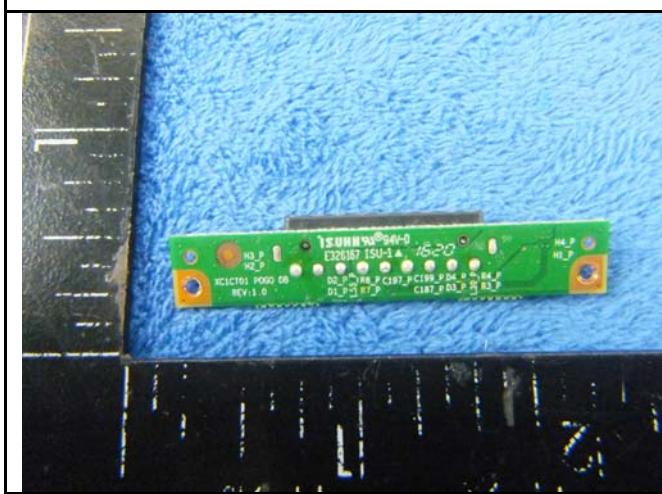


Contact board - Rear View

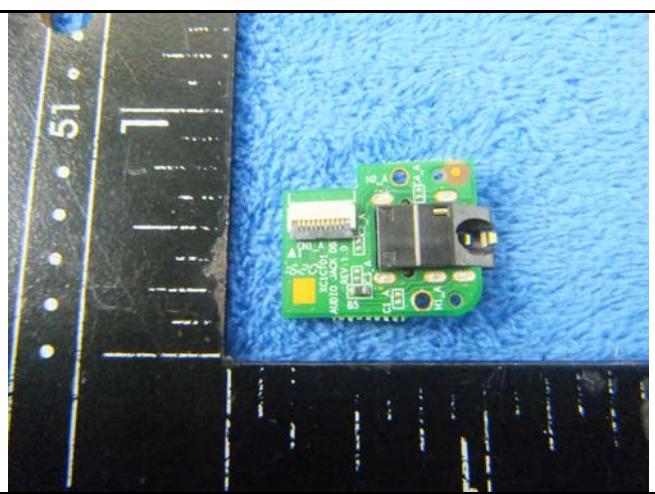


Audio board – Front View

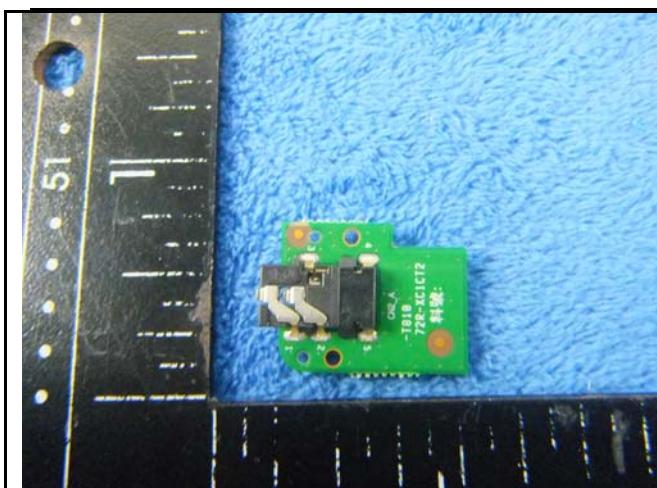


Audio board - Rear View

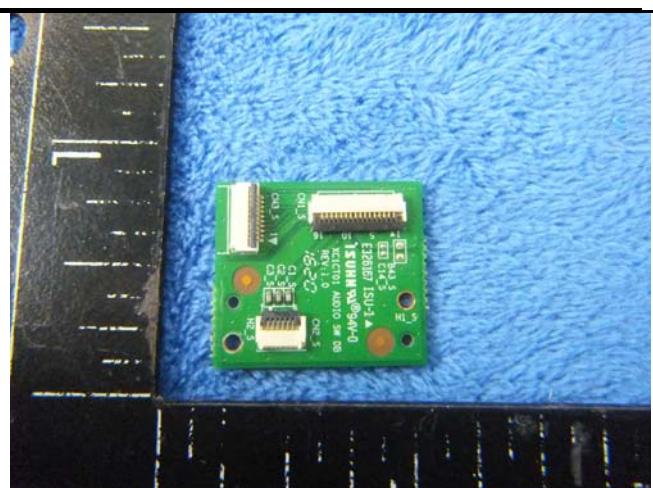


On/off board – Front View

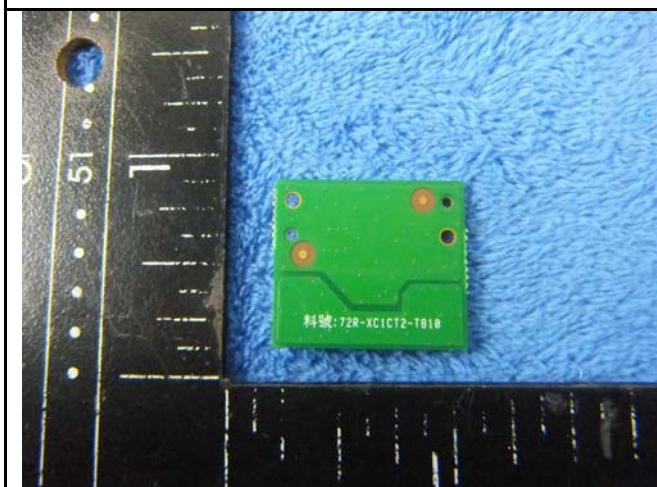

On/off board - Rear View

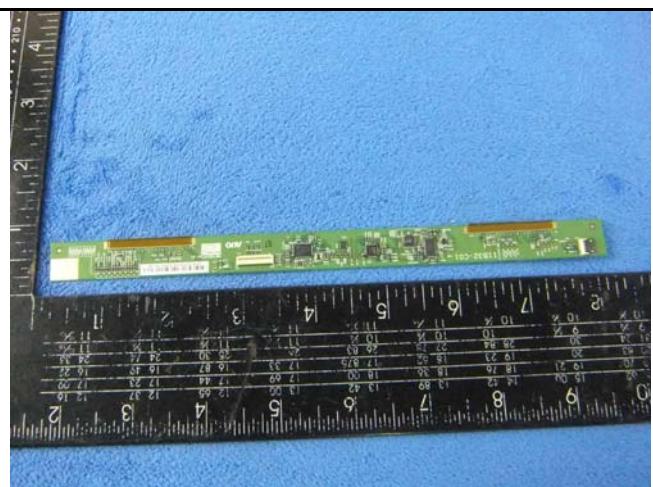


Small board – Front View

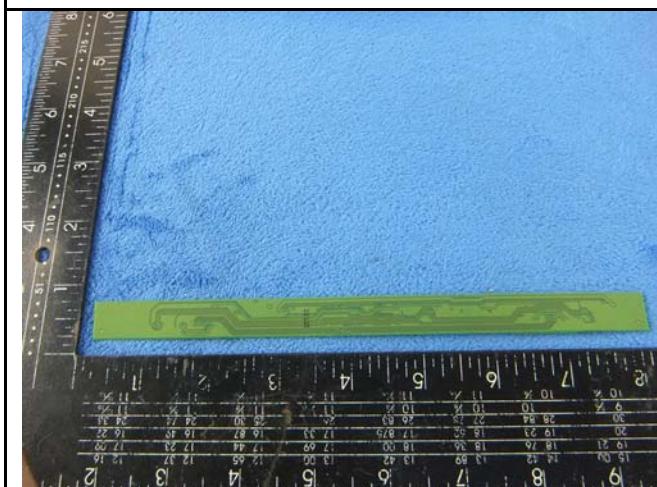


Small board - Rear View




Keyboard board- Front View

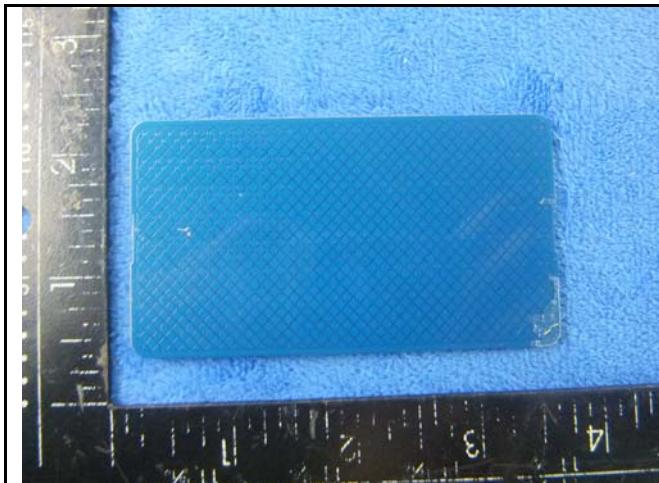


Keyboard board- Rear View

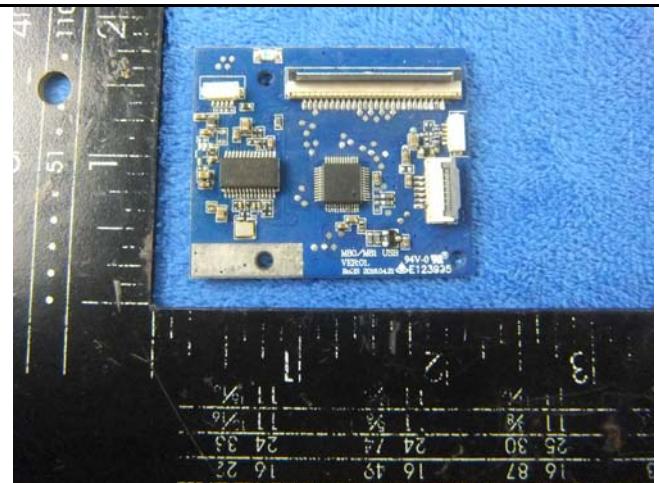

Small Keyboard board- Front View

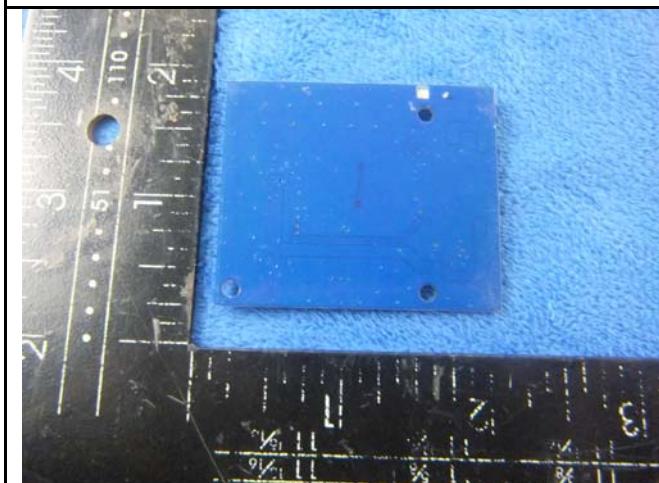


Small Keyboard board- Rear View

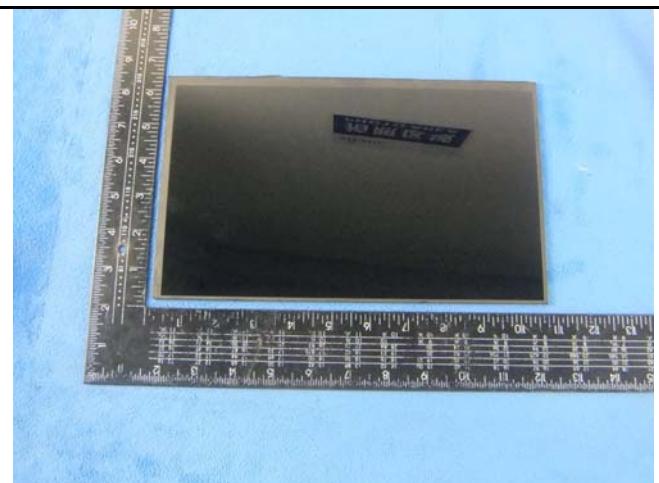


LCD – Front View



LCD – Rear View

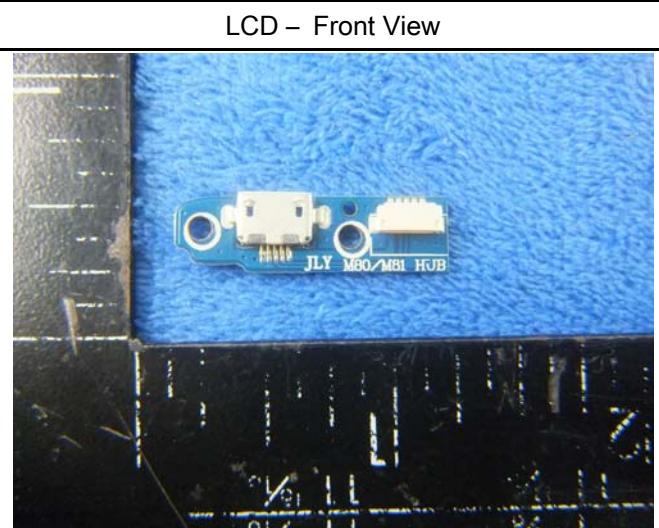

Connect board- Front View

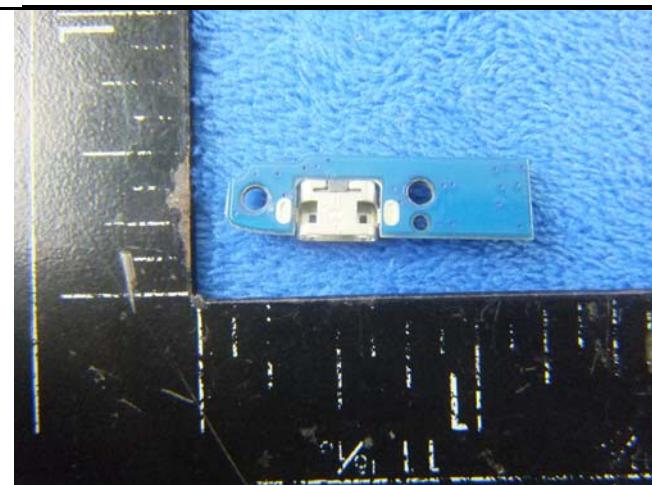

Connect board- Rear View



BT/WIFI Circuit



WIFI/BT - Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

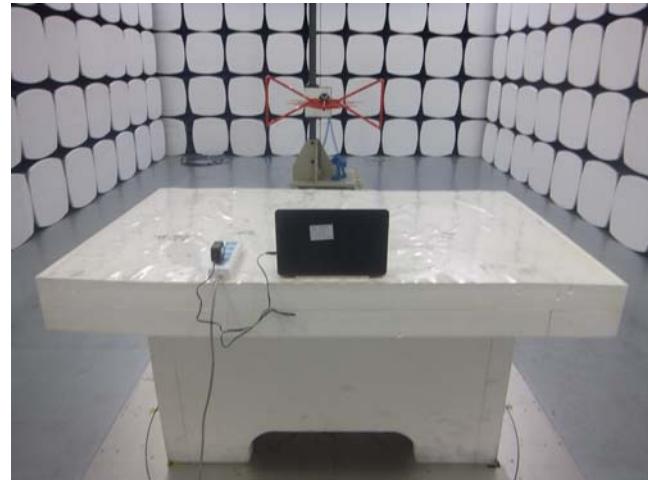

Radiated Spurious Emissions Test Setup Below 1GHz

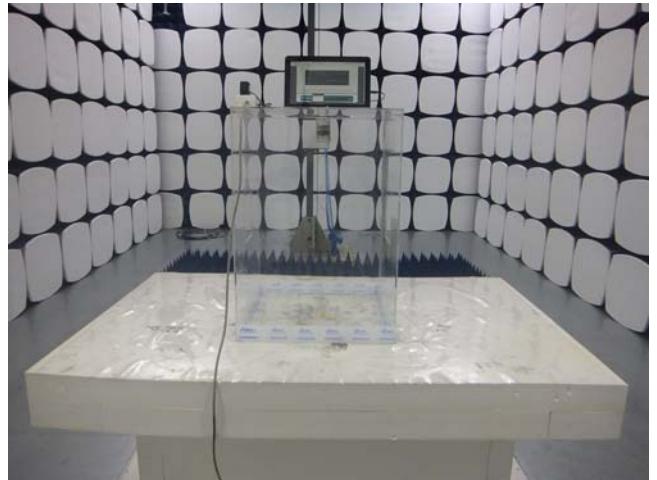


Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

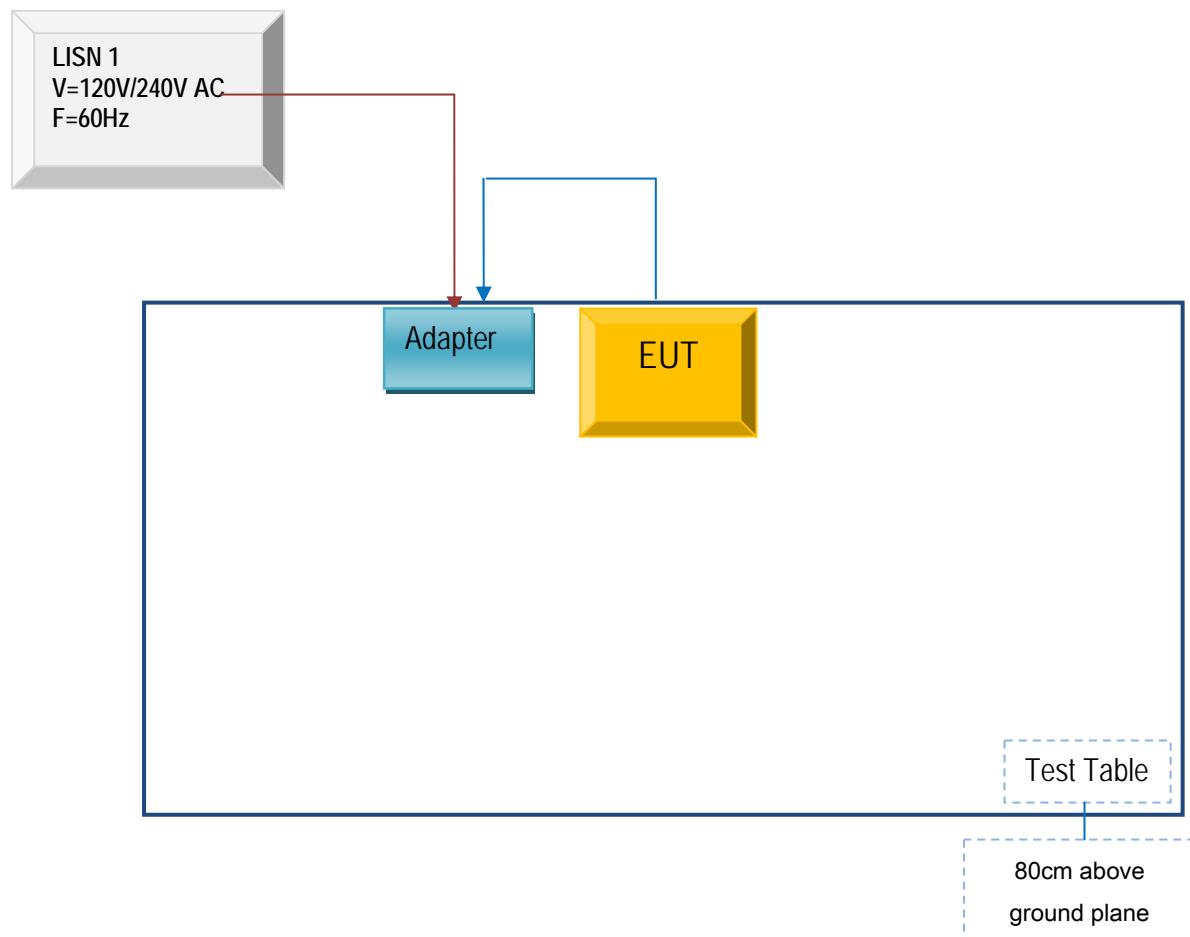

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

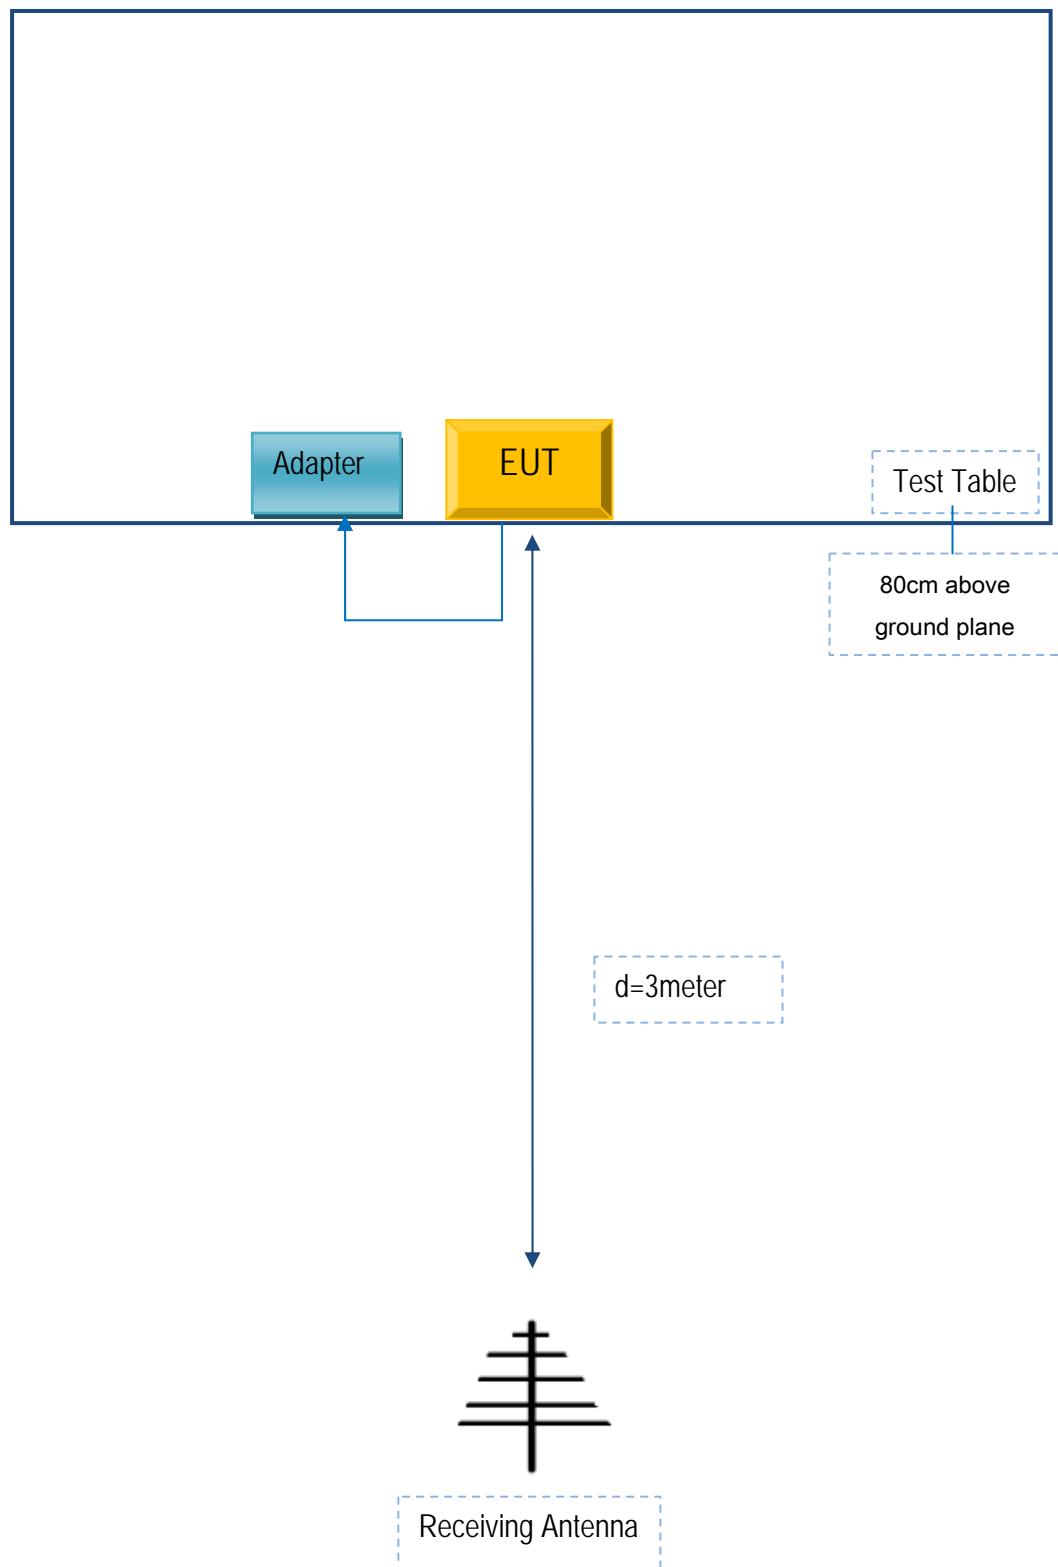

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

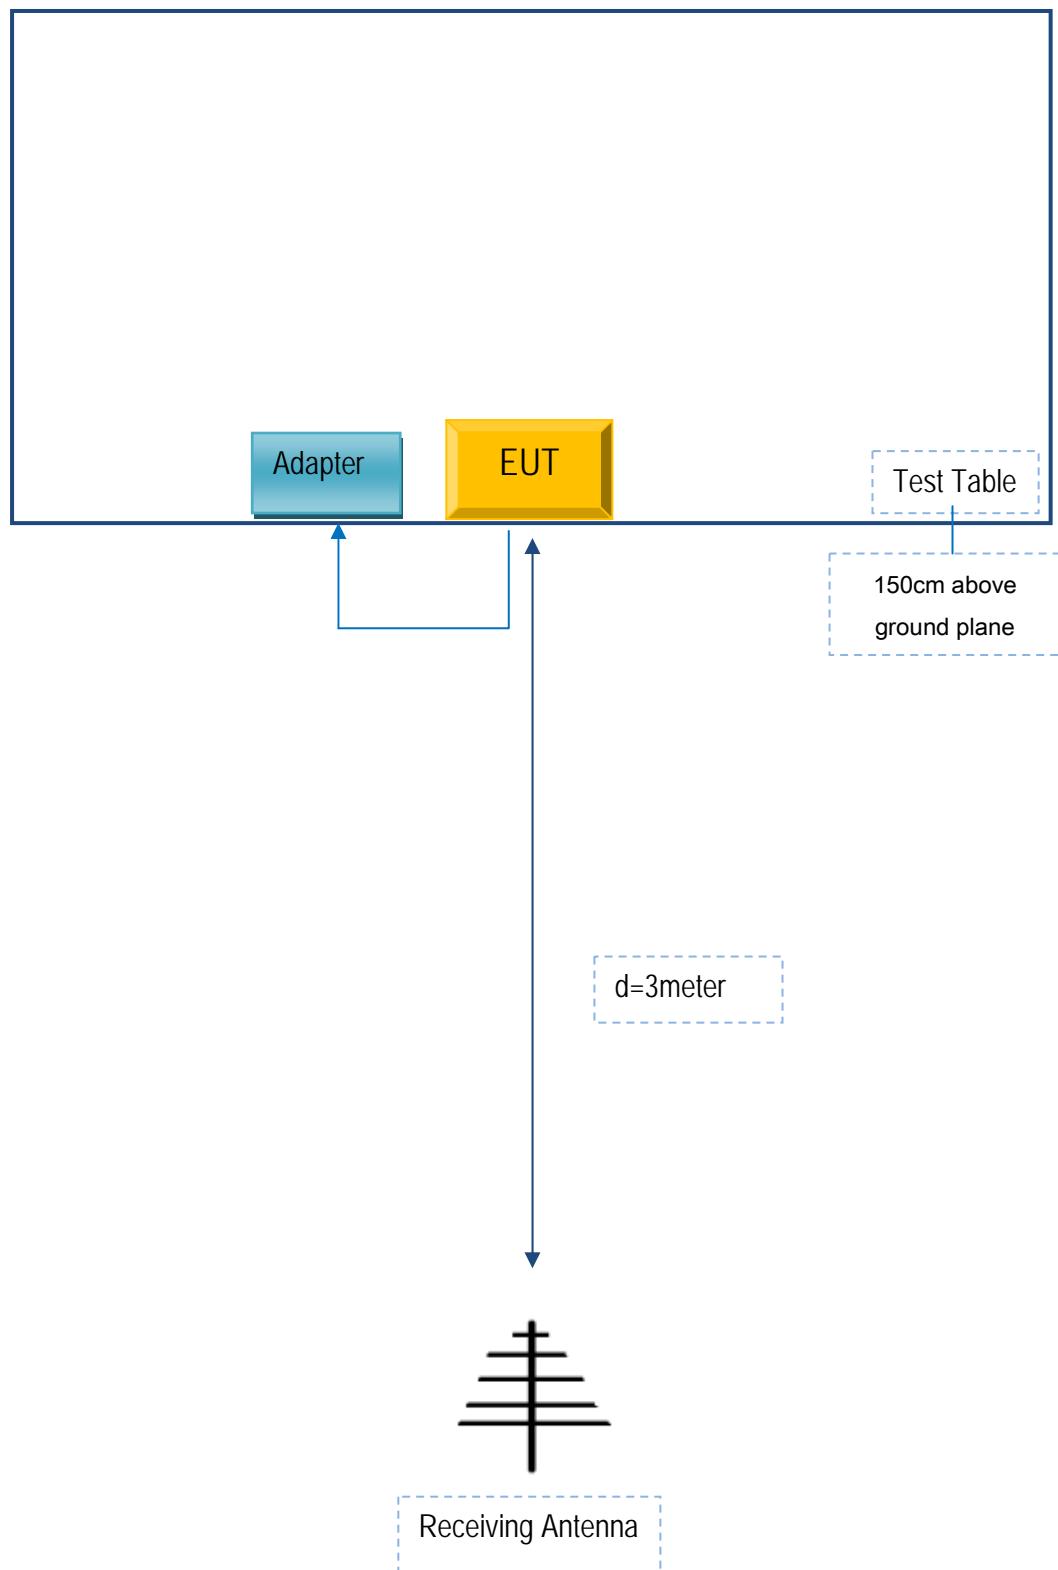

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Bean Information Technology Co., Ltd	Adapter	PS12F050K2000UD	P2016073

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	P2016073

Test Report	16070893-FCC-R2
Page	63 of 64

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

Differences Declaration

To whom concern, We company **Bean Information Technology Co.,ltd** hereby declares: The product models W1001 is identical in the same PCB layout, interior structure and electrical circuits with the model W1102 which tested in SIEMIC (Shenzhen-China) Laboratories, the only differences are the model name and appearance color for commercial purpose.



Authorized signature: Company stamp: _____
Position: PM Date: 20160902