



6. 20dB Occupy Bandwidth Test

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	20dB bandwidth	2400~2483.5

6.2. Test Setup



6.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

6.4. Test Data



Channel Number	Channel Frequency	20dB Bandwidth (MHz)		
		GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402(MHz)	0.8351	1.282	1.259
CH 39	2441(MHz)	0.8283	1.278	1.262
CH 78	2480(MHz)	0.8286	1.281	1.258
Remark: Test plot as follows				



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 23 of 61

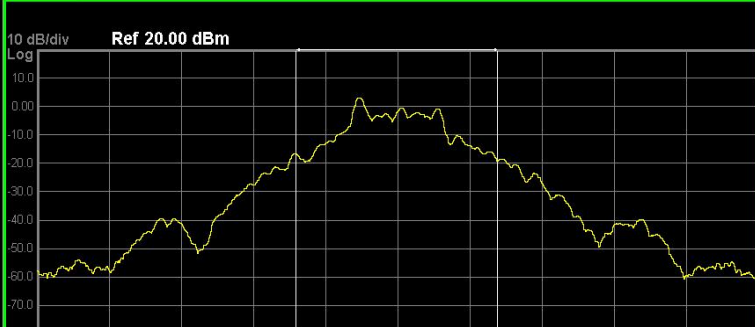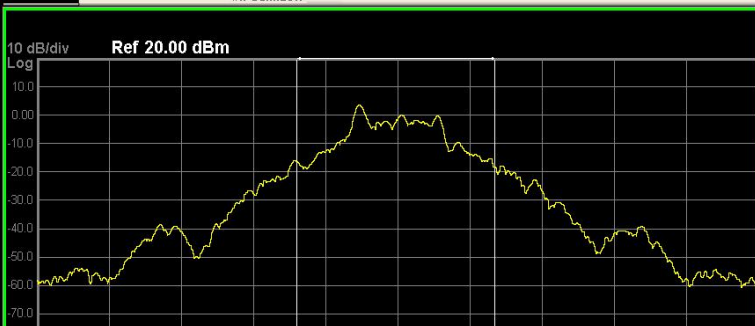Modulation mode		GFSK mode	
2402MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS 10 dB/div Ref 20.00 dBm Log  Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 836.70 kHz Total Power 9.49 dBm Transmit Freq Error -4.467 kHz OBW Power 99.00 % x dB Bandwidth 835.1 kHz x dB -20.00 dB MSG STATUS	
2441MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS 10 dB/div Ref 20.00 dBm Log  Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 823.11 kHz Total Power 9.91 dBm Transmit Freq Error -8.109 kHz OBW Power 99.00 % x dB Bandwidth 828.3 kHz x dB -20.00 dB MSG STATUS	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 24 of 61







ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 25 of 61

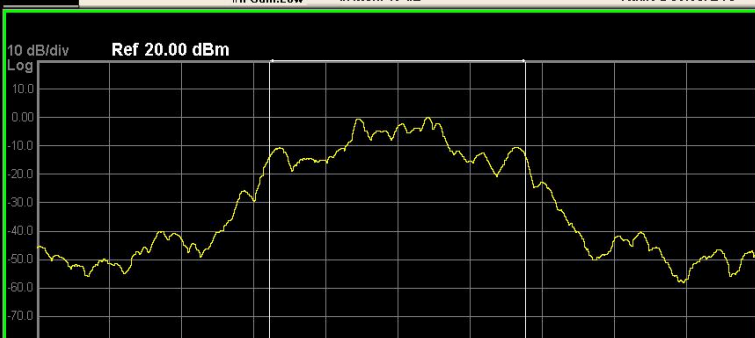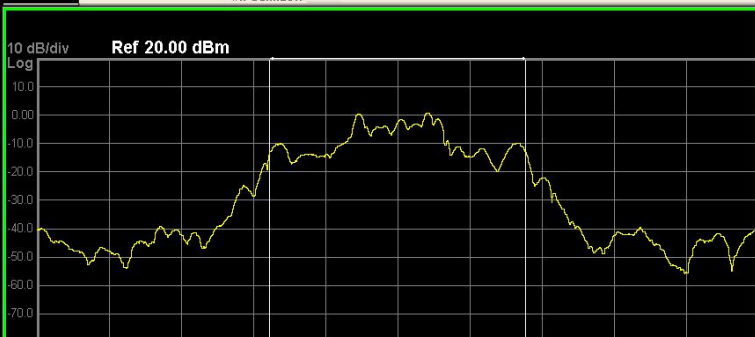Modulation mode		$\pi/4$ -DQPSK	
2402MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Gain: Low #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS  Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.0625 MHz Total Power 8.22 dBm Transmit Freq Error -1.018 kHz OBW Power 99.00 % x dB Bandwidth 1.282 MHz x dB -20.00 dB	Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
2441MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Gain: Low #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS  Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.0589 MHz Total Power 8.89 dBm Transmit Freq Error 1.486 kHz OBW Power 99.00 % x dB Bandwidth 1.278 MHz x dB -20.00 dB	Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 26 of 61







ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 27 of 61

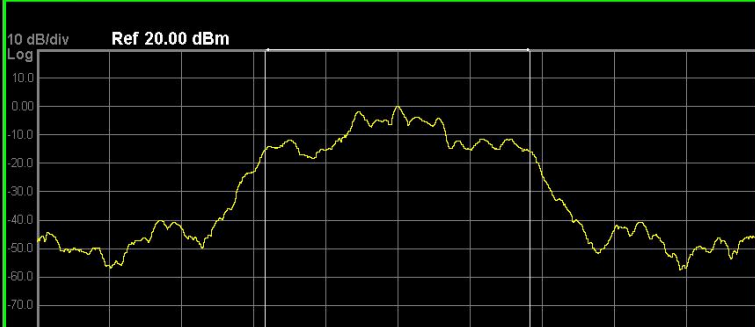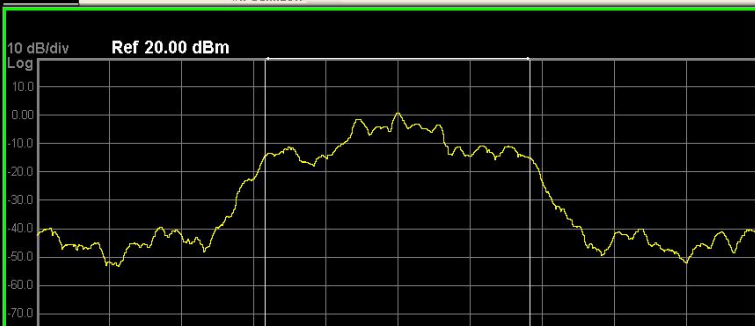
Modulation mode		8DPSK	
2402MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Gain: Low #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS  Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1012 MHz Total Power 7.67 dBm Transmit Freq Error -1.606 kHz OBW Power 99.00 % x dB Bandwidth 1.259 MHz x dB -20.00 dB	Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
2441MHz		Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Gain: Low #Atten: 10 dB Radio Std: None Avg Hold: > 10/10 Radio Device: BTS  Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1012 MHz Total Power 8.37 dBm Transmit Freq Error -1.538 kHz OBW Power 99.00 % x dB Bandwidth 1.262 MHz x dB -20.00 dB	Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 28 of 61

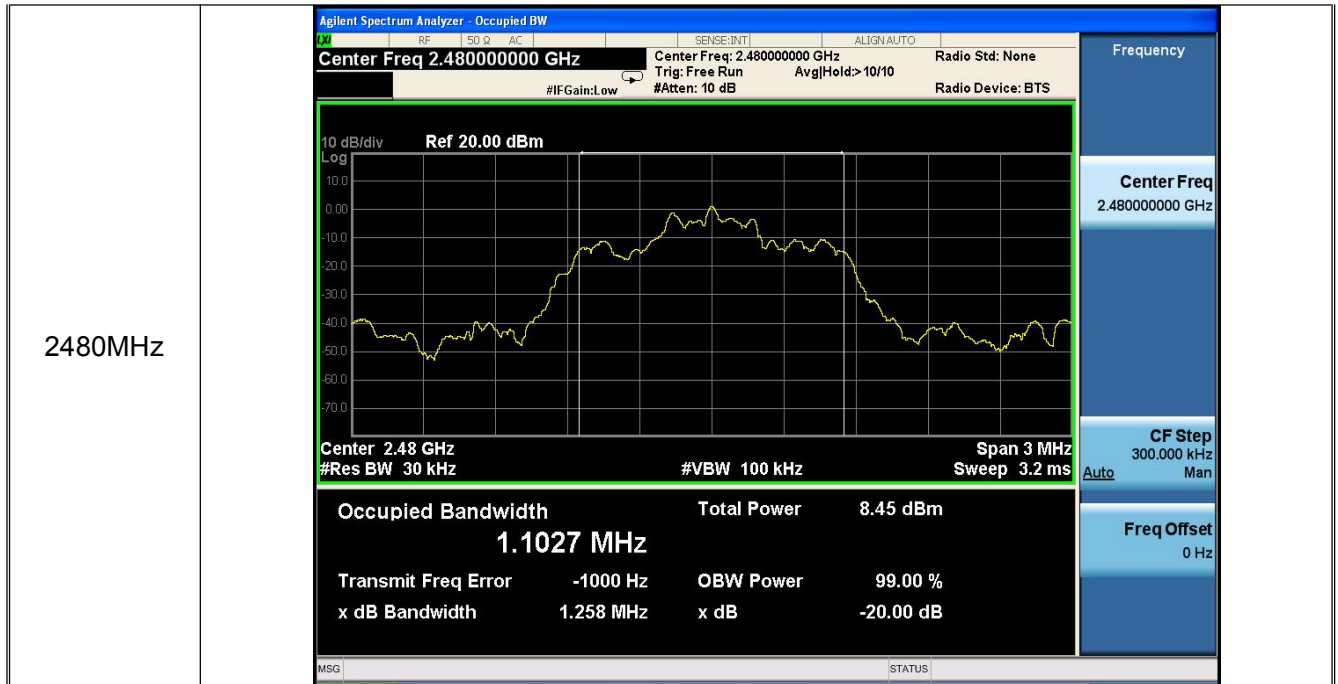



7. Carrier Frequency Separation Test

7.1. Test Standard and Limit


7.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth (Which is greater)	2400~2483.5

7.2. Test Setup



7.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=100 kHz, VBW=300 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

7.4. Test Data



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 30 of 61

GFSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (MHz)	Limit (MHz)	Judgment
CH 39	2441	1.002	0.55	PASSED
$\pi/4$ -DQPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (MHz)	Limit (MHz)	Judgment
CH 39	2441	1.005	0.85	PASSED
8DPSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (MHz)	Limit (MHz)	Judgment
CH 39	2441	1.002	0.84	PASSED
Remark: Test plot as follows				

According to section 6.4


Test Mode	20dB bandwidth (MHz) (worse case)	Limit (MHz) (Carrier Frequency Separation)
GFSK	0.8283	0.55
$\pi/4$ -DQPSK	1.278	0.85
8DPSK	1.262	0.84



ATA Testing Technology Service Co., Ltd.


Report No.: ATA161027011F

Page: 31 of 61

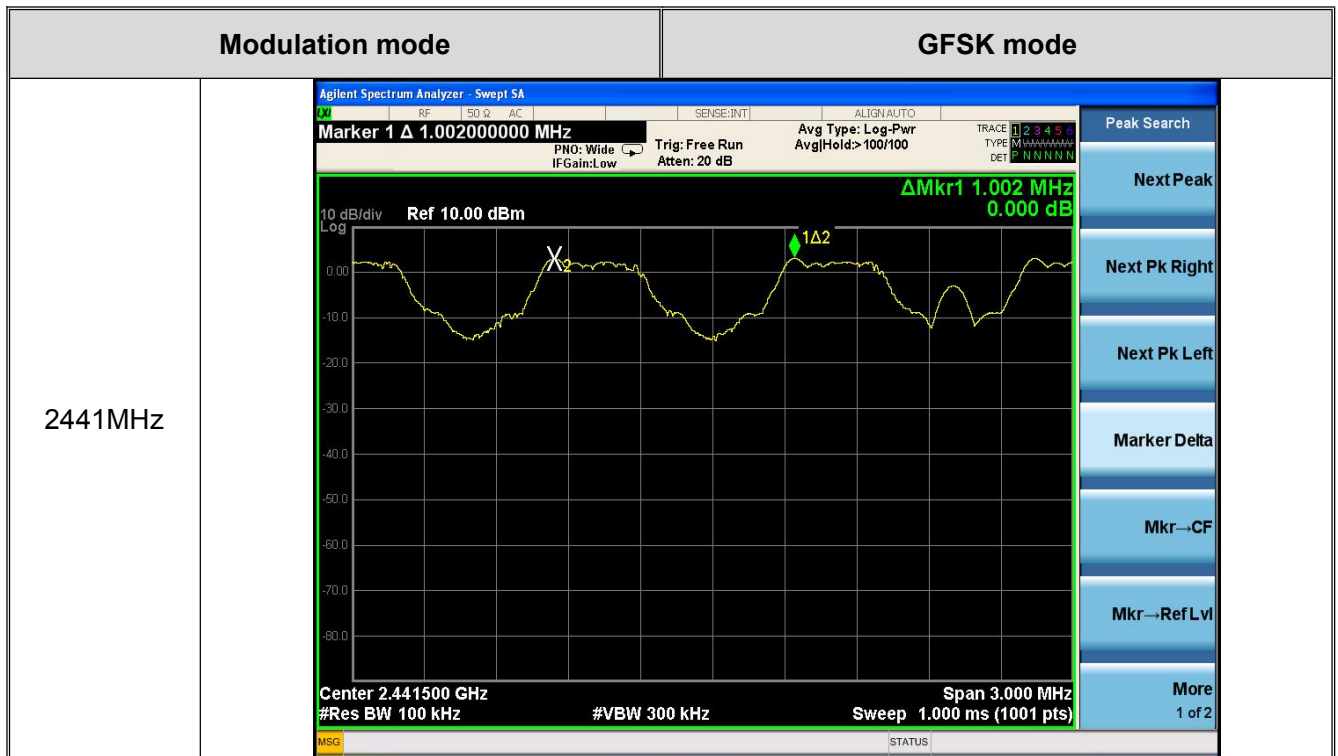



Page: 32 of 61

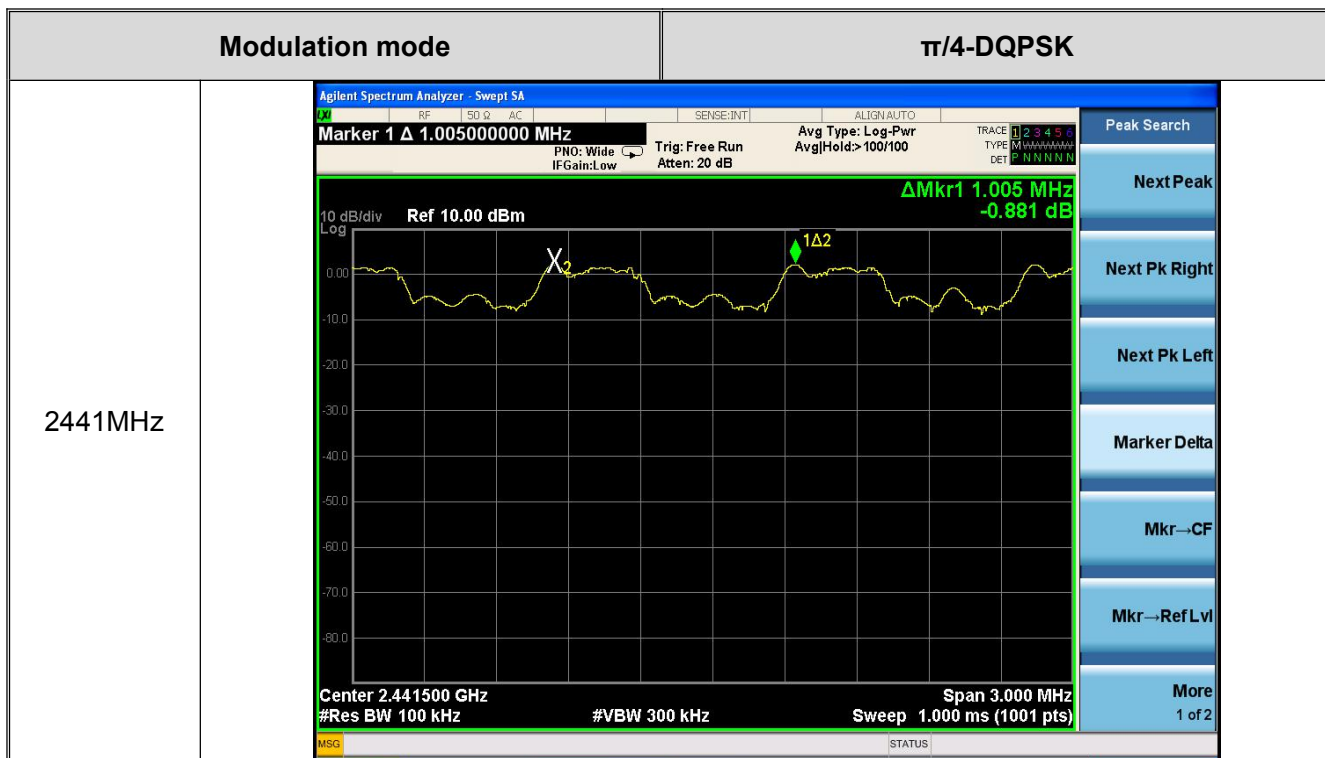




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 33 of 61

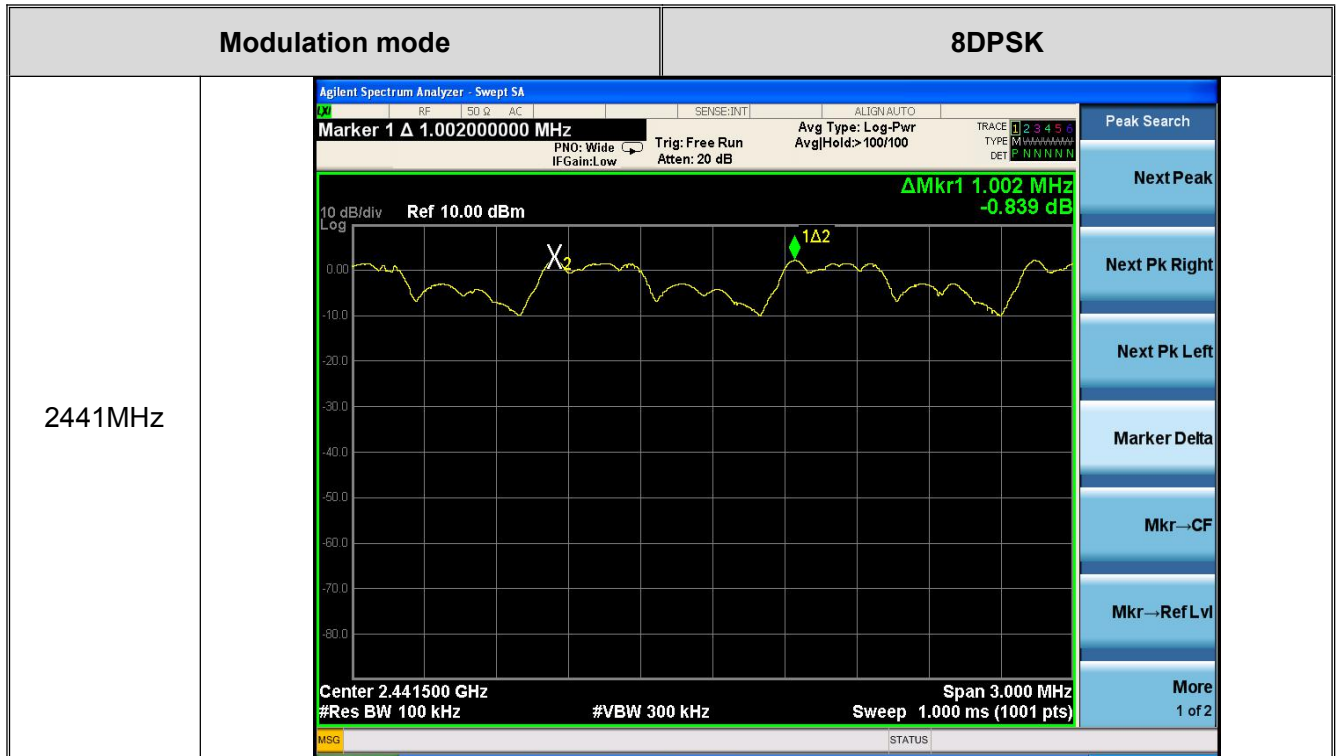



8. Number of Hopping Channel

8.1. Test Standard and Limit


8.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

8.1.2 Test Limit

FCC Part 15 Subpart C (15.247)		
Test Item	Limit	Frequency Range (MHz)
Number of Hopping Channel	>15 channels	2400~2483.5

8.2. Test Setup



8.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak, Sweep time= Auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

8.4. Test Data


Mode	Quantity of Hopping Channel	Limit	Judgment
GFSK, $\pi/4$ -DQPSK, 8DPSK	79	>15	PASSED



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 35 of 61

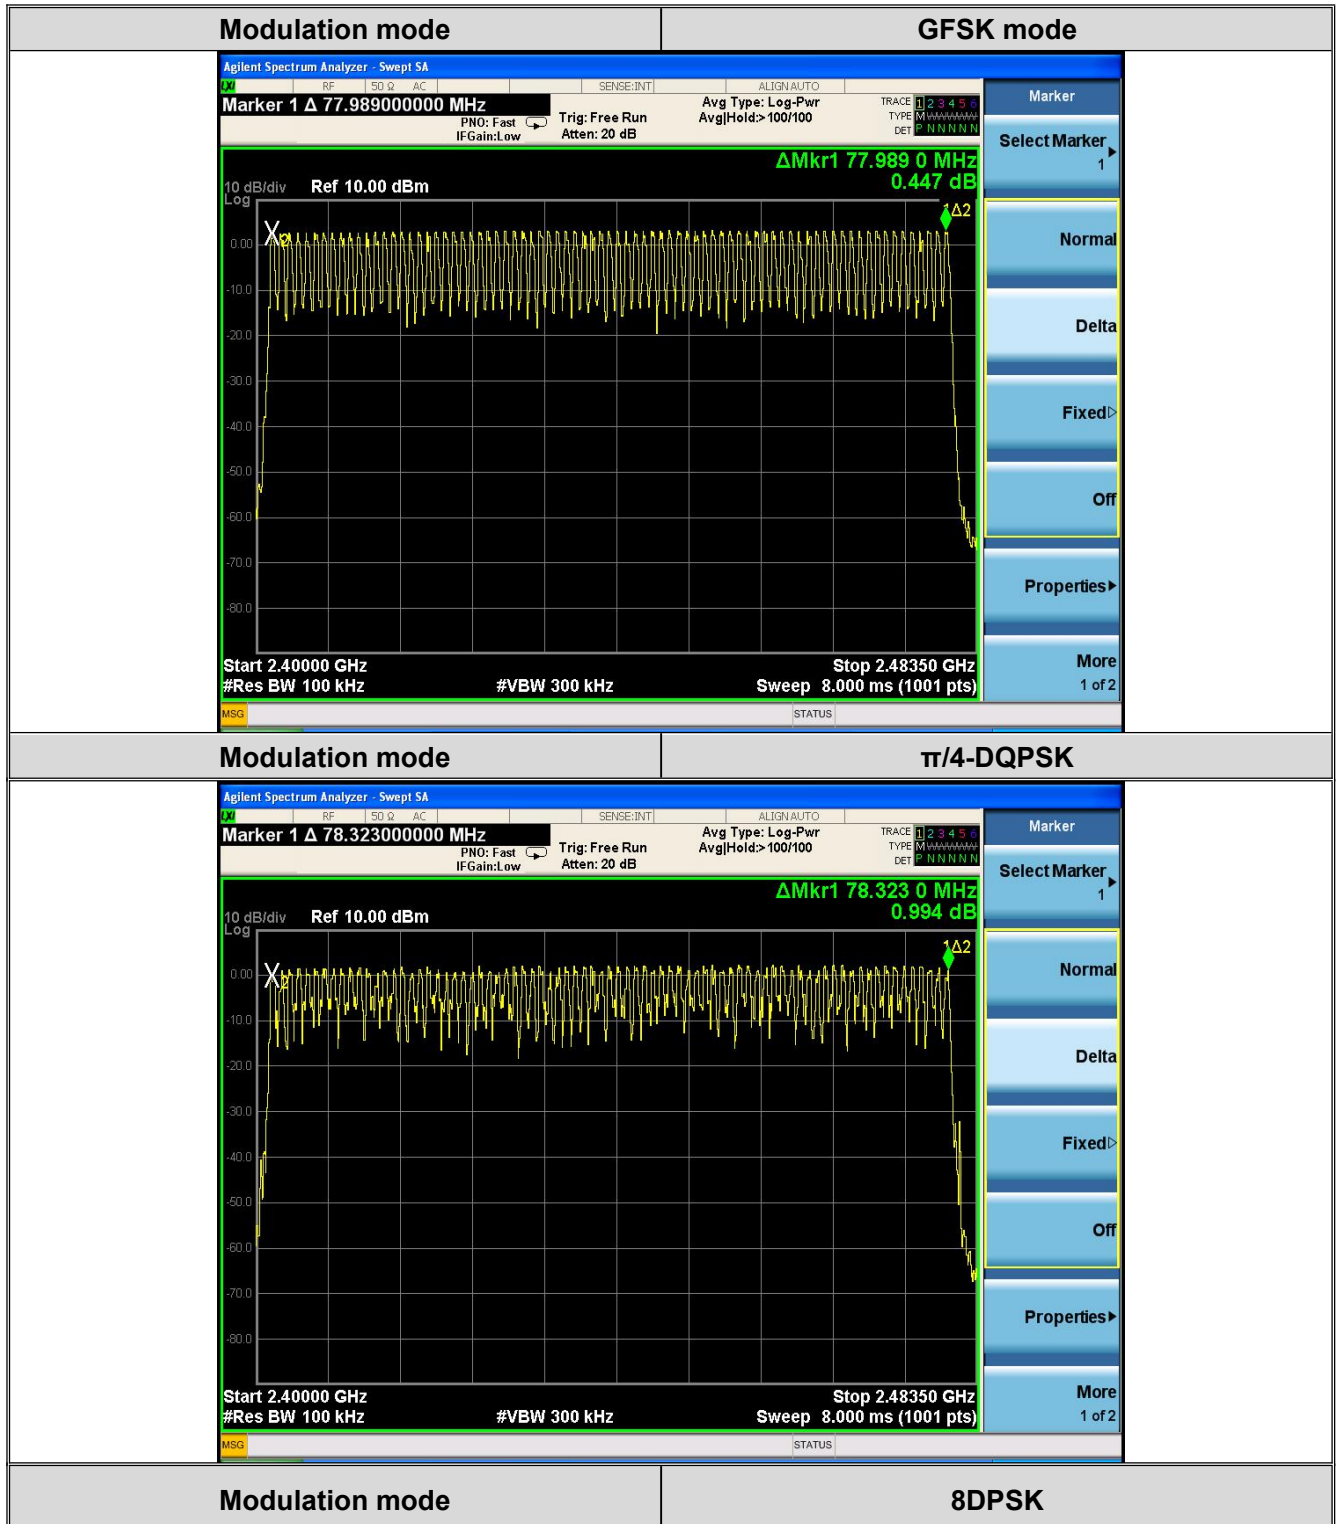




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 36 of 61

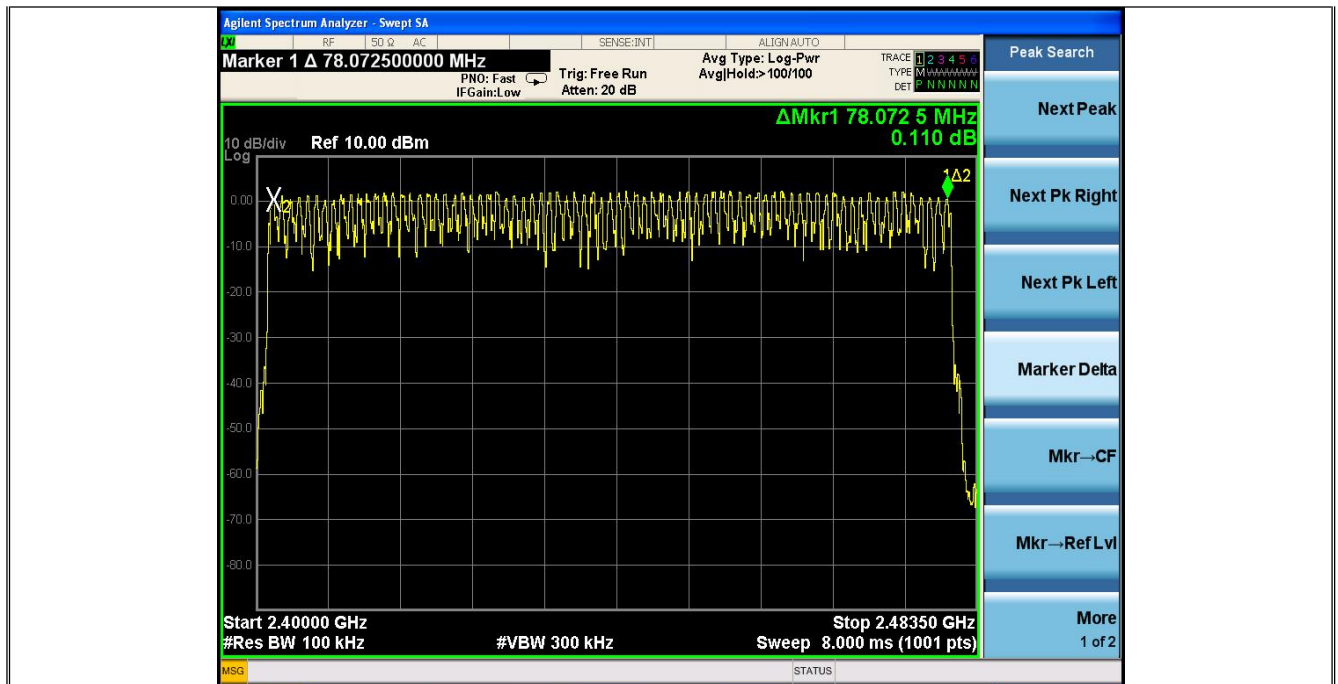



9. Dwell Time Test

9.1. Test Standard and Limit


9.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Section	Test Item	Limit
15.247(a)(1)	Dwell time	0.4 sec

9.2. Test Setup



9.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) The EUT was set to the Hopping Mode for Dwell Time Test

9.4. Test Data



ATA Testing Technology Service Co., Ltd.


Report No.: ATA161027011F

Page: 38 of 61

For GFSK, $\pi/4$ -DQPSK and 8DPSK:


The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$


Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.36	0.115	<0.4	PASS
	DH3	2441	1.616	0.259	<0.4	PASS
	DH5	2441	2.868	0.306	<0.4	PASS
$\pi/4$ DQPSK	DH1	2441	0.376	0.120	<0.4	PASS
	DH3	2441	1.616	0.259	<0.4	PASS
	DH5	2441	2.88	0.307	<0.4	PASS
8- DQPSK	DH1	2441	0.376	0.120	<0.4	PASS
	DH3	2441	1.624	0.260	<0.4	PASS
	DH5	2441	2.864	0.305	<0.4	PASS
Note: 1 A period time = $0.4 \text{ (s)} \times 79 = 31.6 \text{ (s)}$ 2 DH1 time slot = $\text{Pulse Duration} \times (1600/(2 \times 79)) \times \text{A period time}$ DH3 time slot = $\text{Pulse Duration} \times (1600/(4 \times 79)) \times \text{A period time}$ DH5 time slot = $\text{Pulse Duration} \times (1600/(6 \times 79)) \times \text{A period time}$						

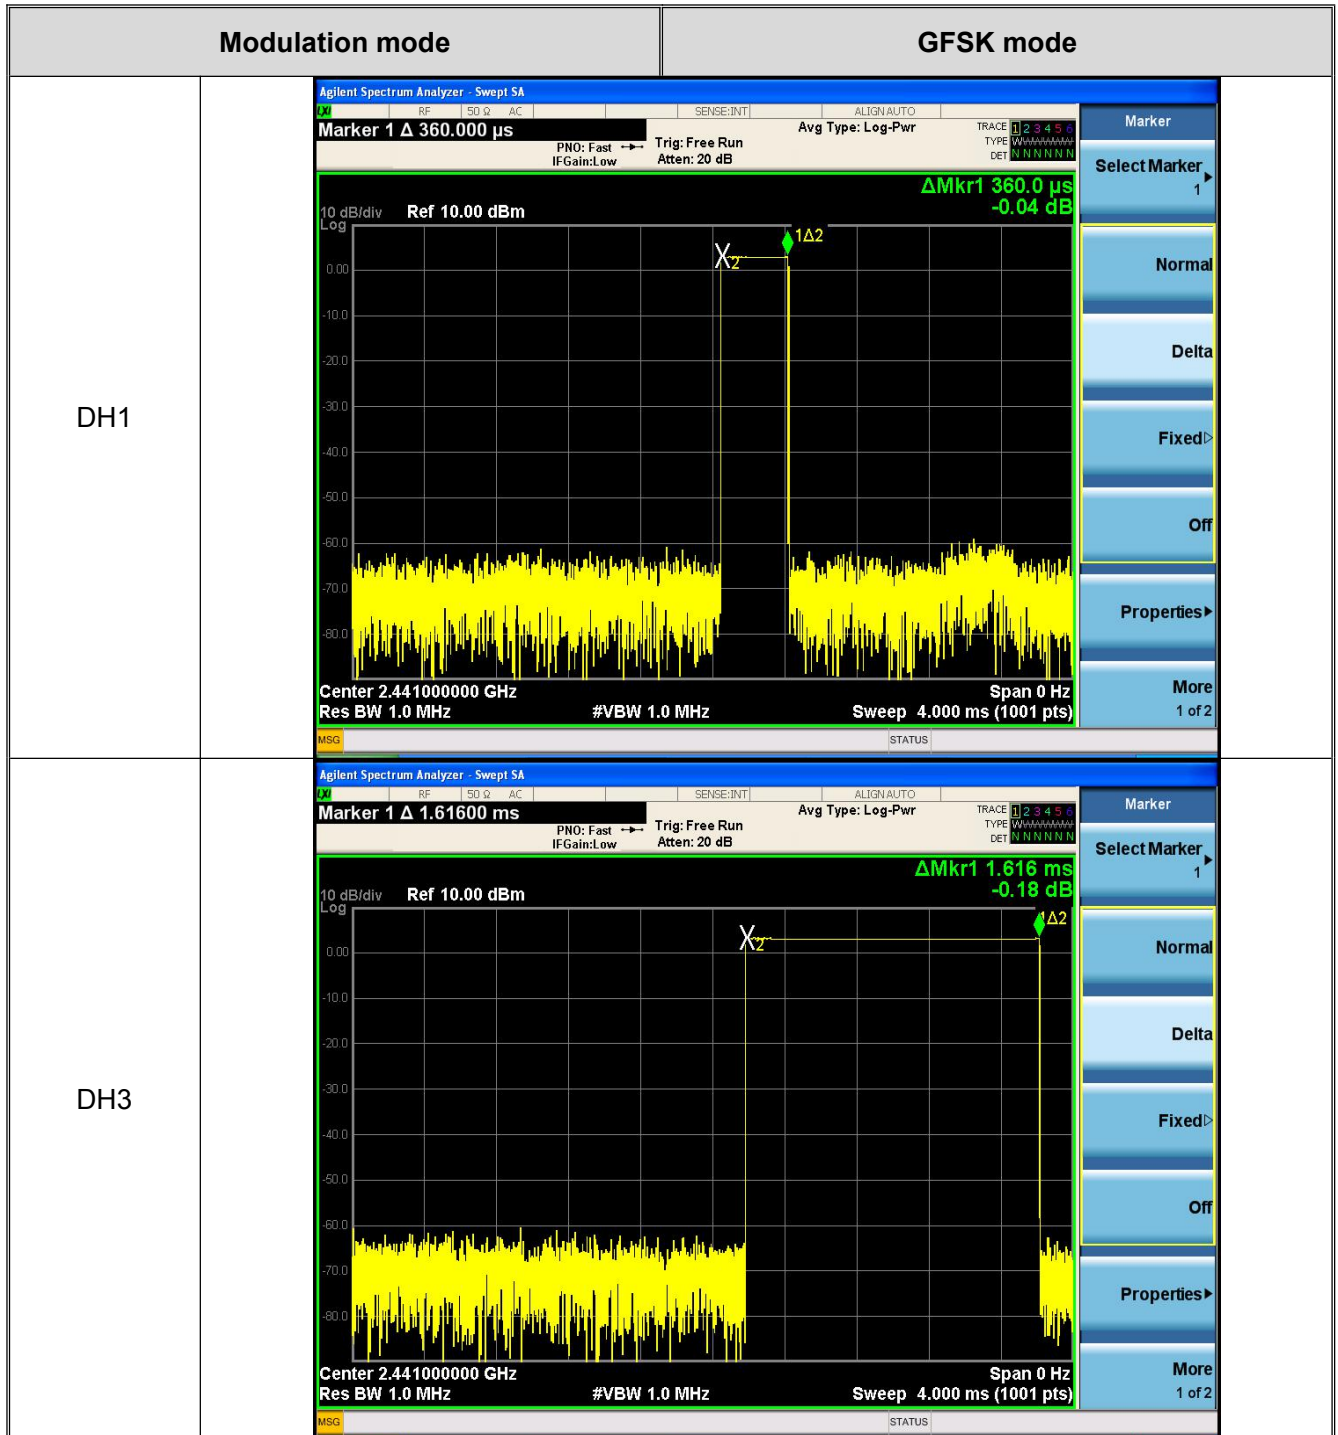




Page: 40 of 61

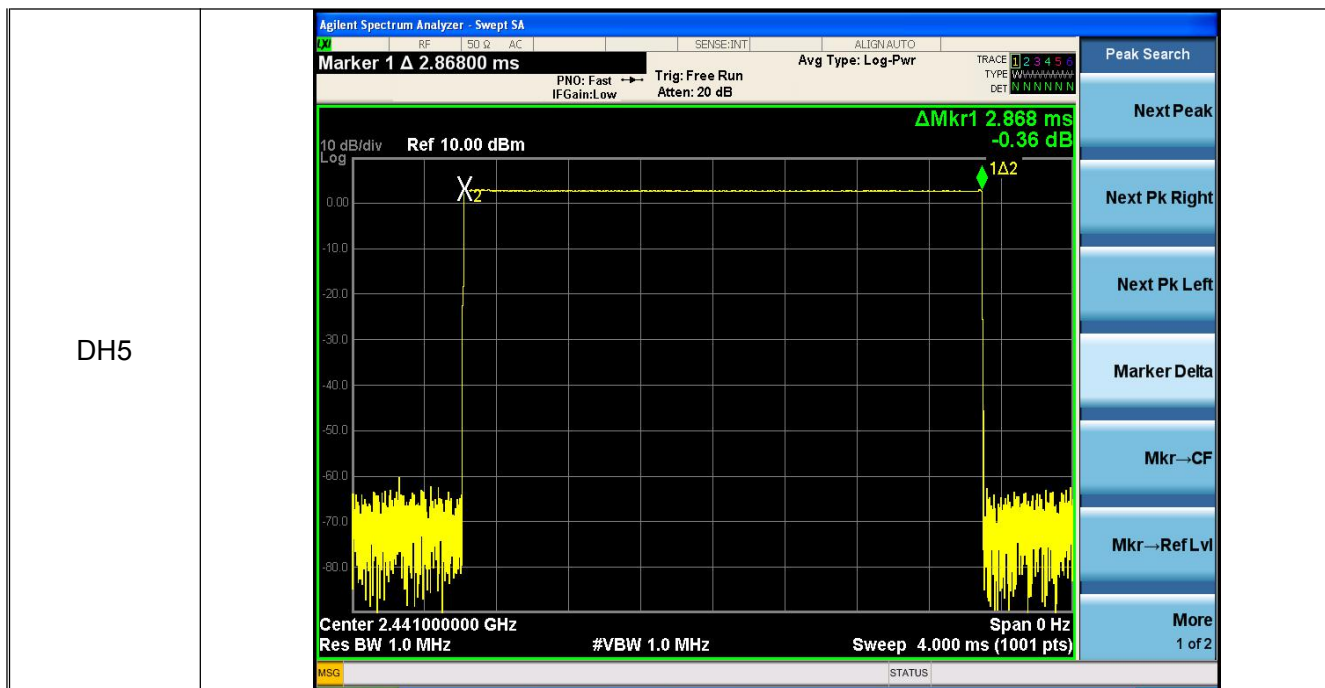


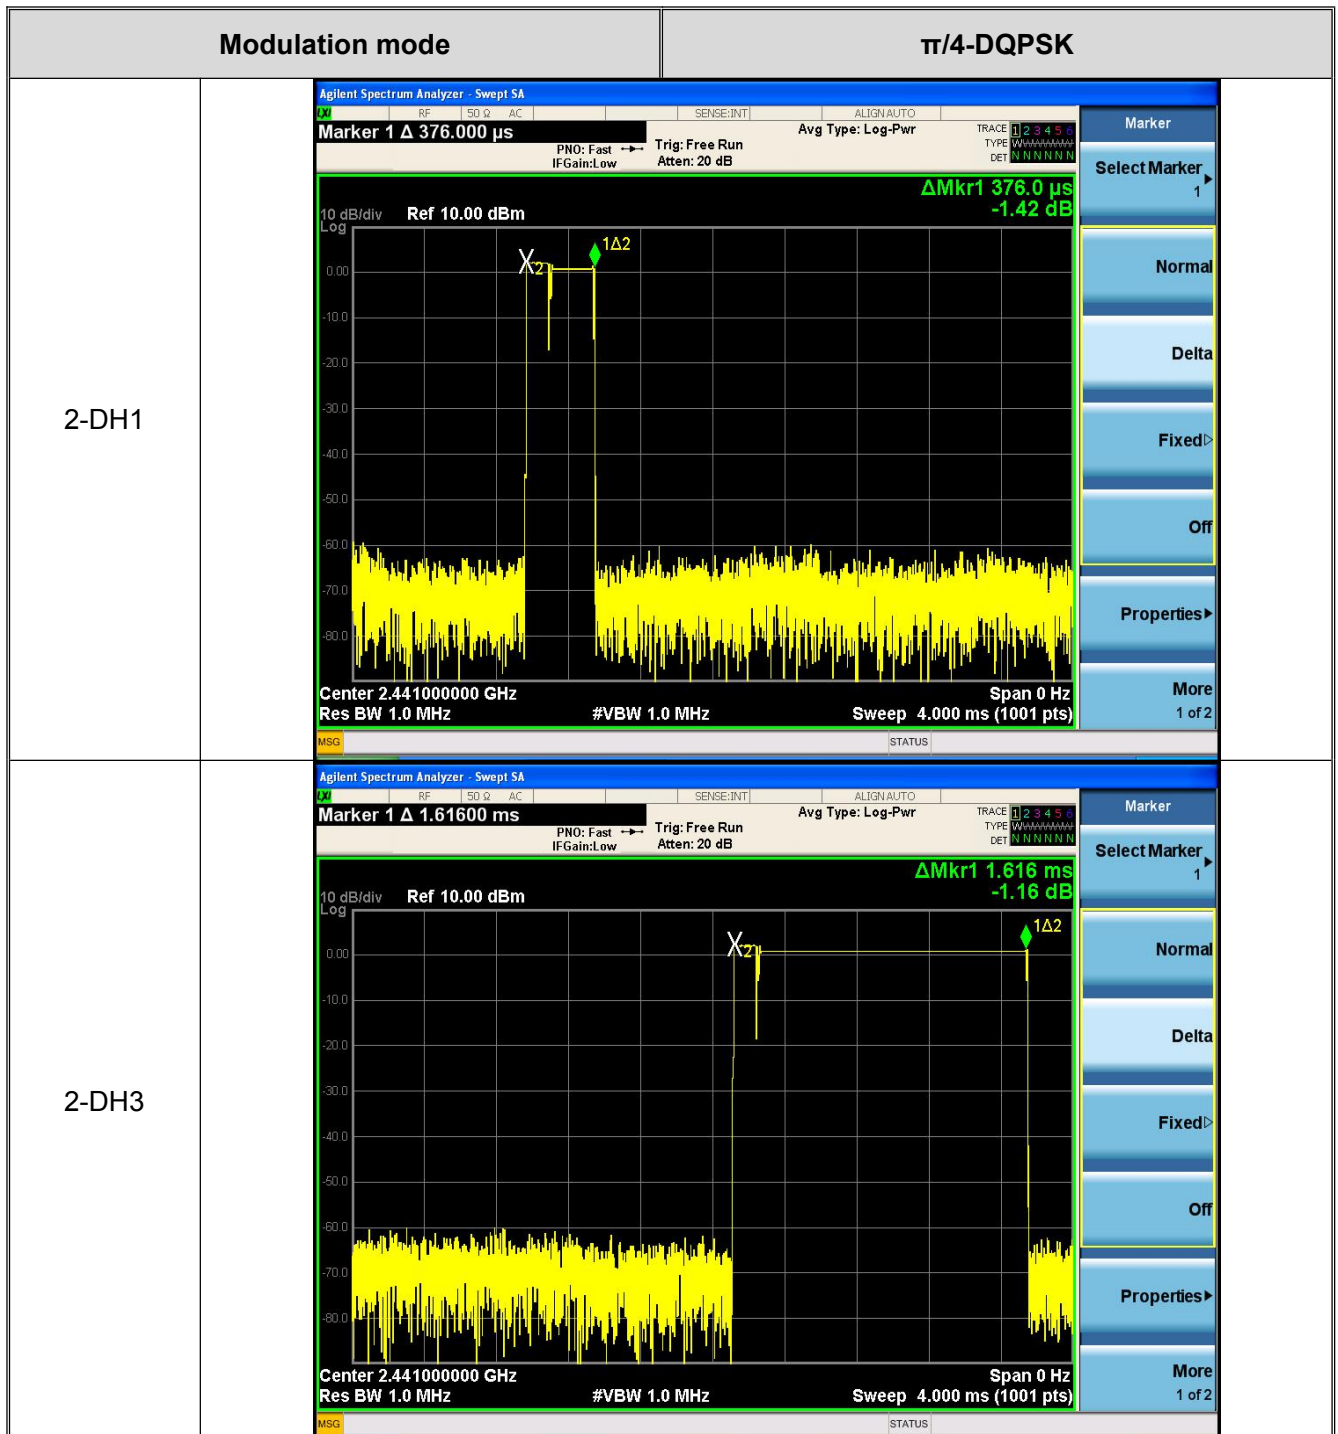

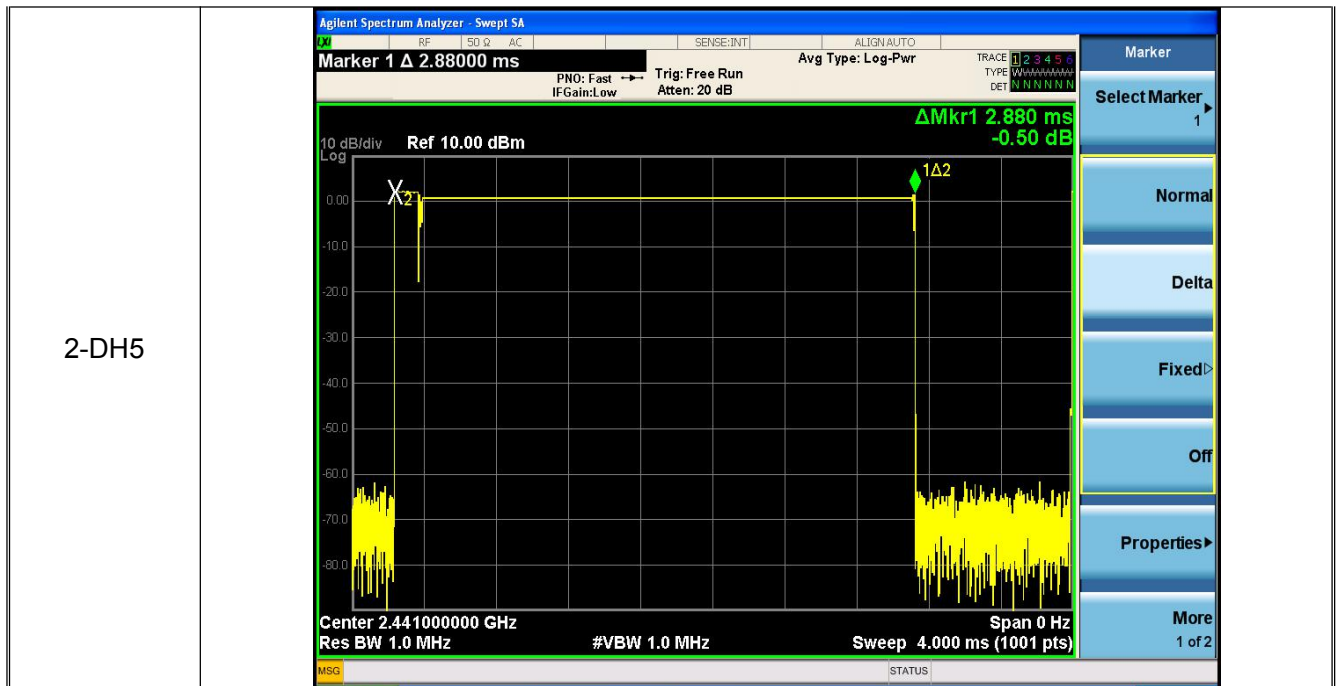



Page: 43 of 61

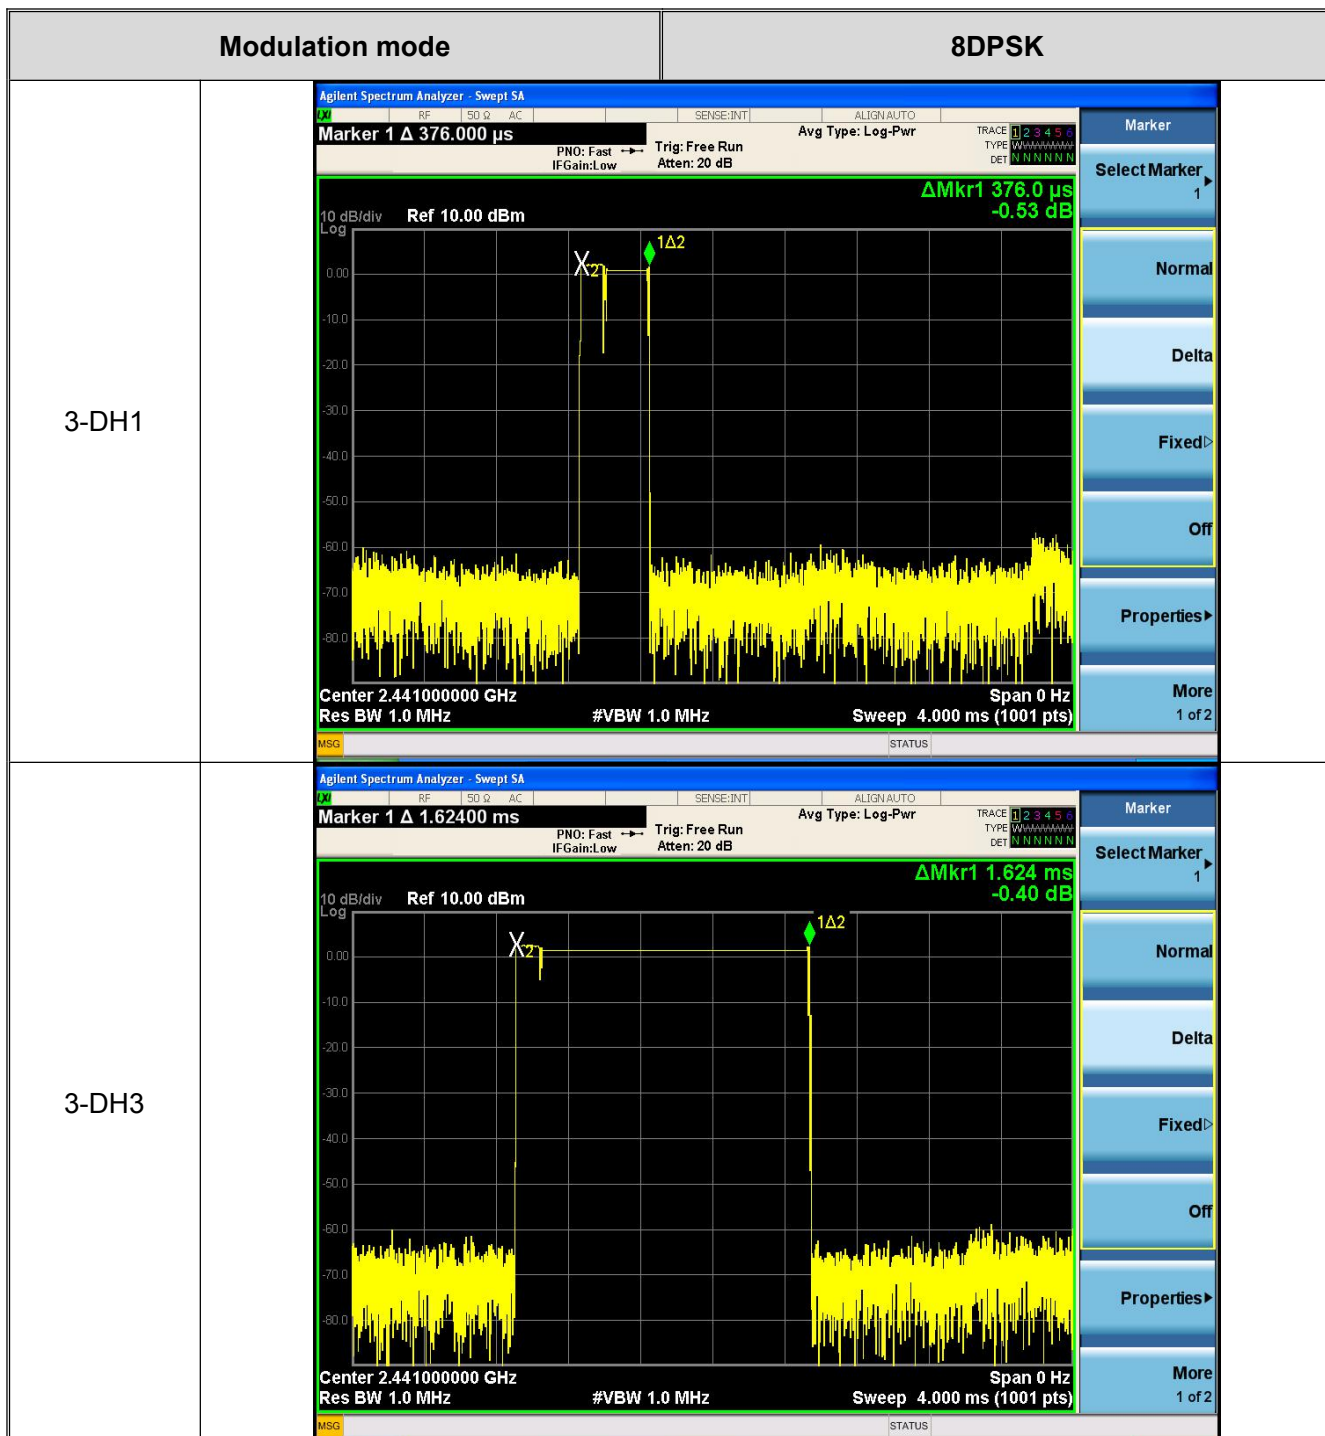




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 44 of 61

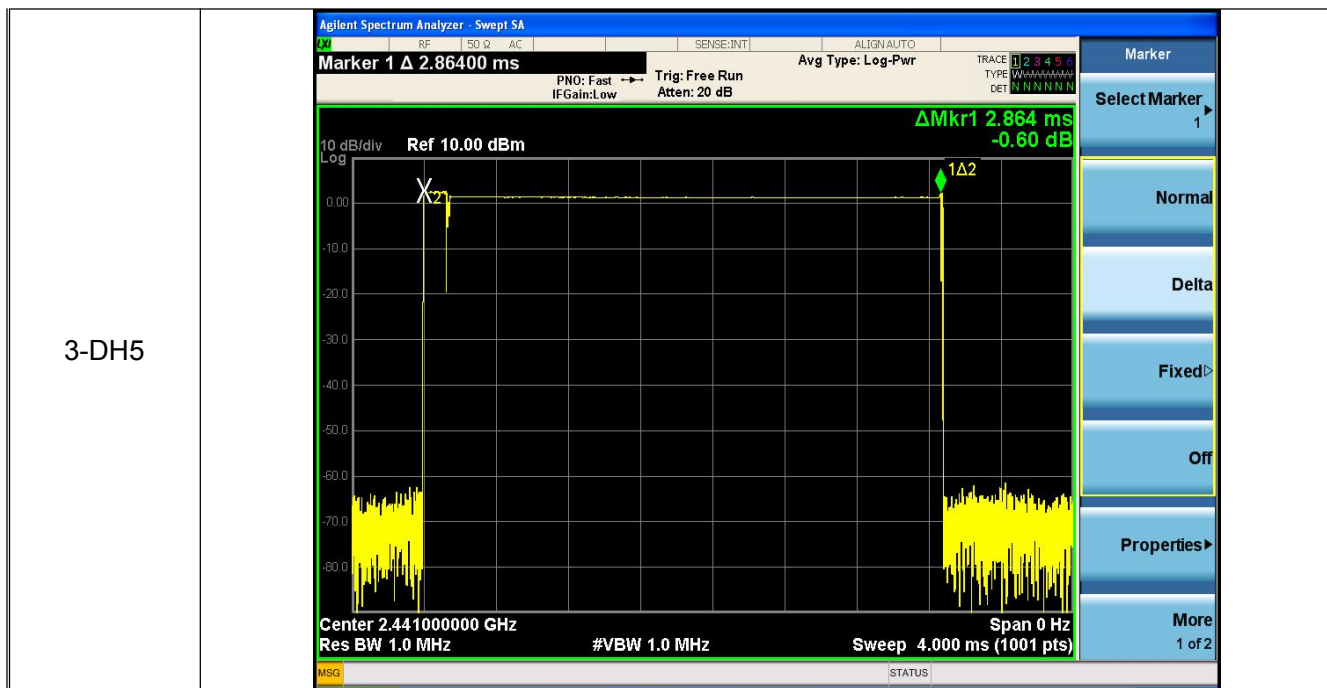



10. Pseudorandom Frequency Hopping Sequence

10.1. Standard Requirement

10.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(1)

10.1.2 Requirement


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

10.2. EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

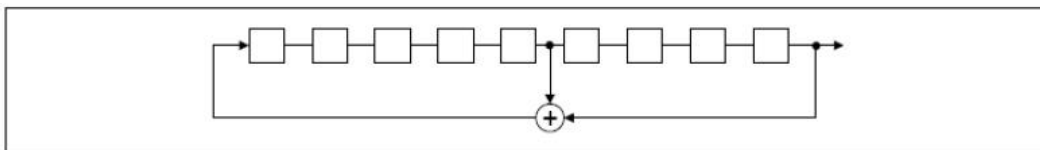

Linear Feedback Shift Register for Generation of the PRBS Sequence.

An example of Pseudorandom Frequency Hopping Sequence as follow:

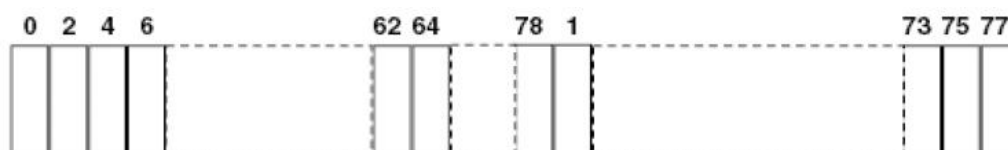

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



11. Band Edge Requirement (Conducted Emission Method)

11.1. Test Standard and Limit


11.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

11.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

11.2. Test Setup



11.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak

11.4. Test Data



Test plot as follows





ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 47 of 61

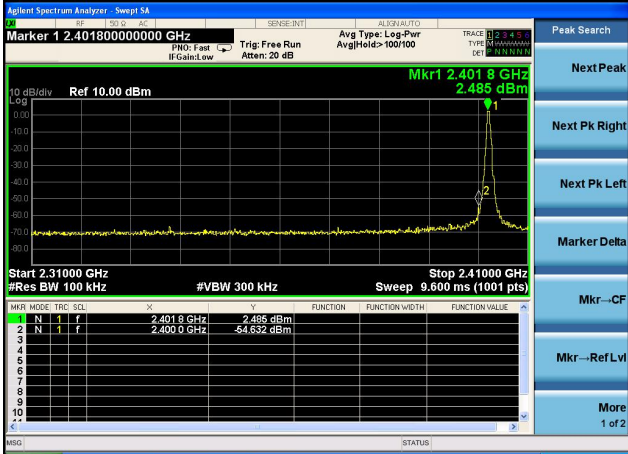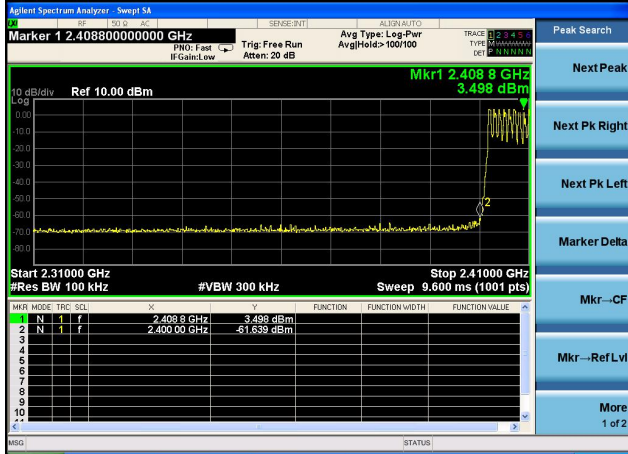Modulation mode	GFSK	Test channel	Lowest
			
No-hopping mode		Hopping mode	

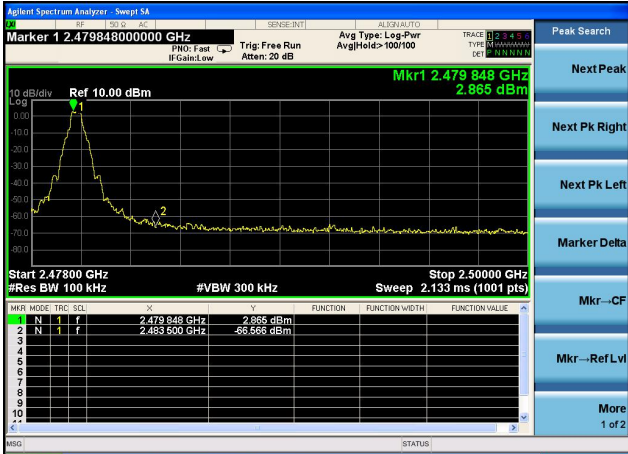
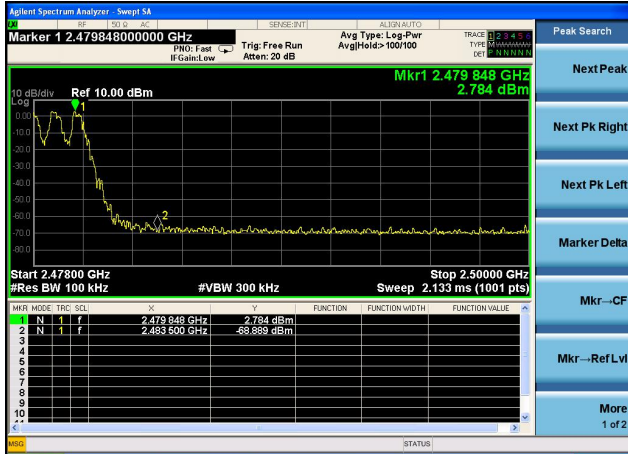
Modulation mode	GFSK	Test channel	Highest
			
No-hopping mode		Hopping mode	



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 48 of 61

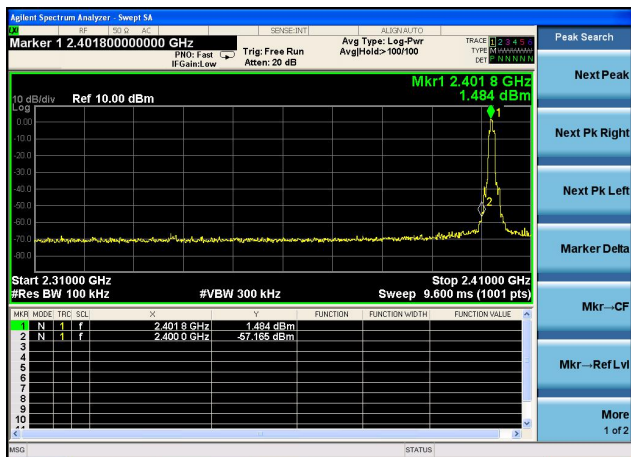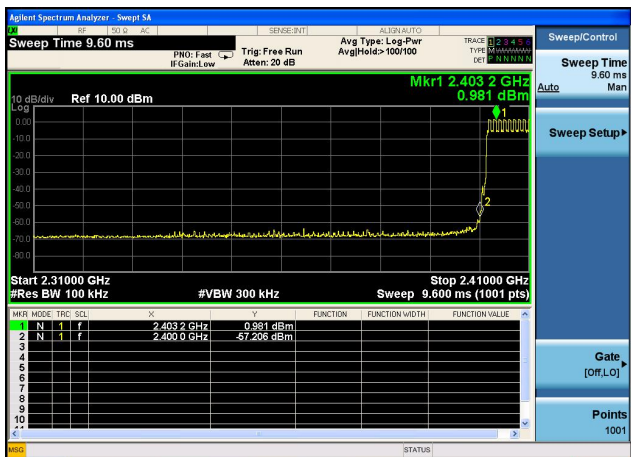Modulation mode	$\pi/4$ -DQPSK	Test channel	Lowest																																																
 <table><tr><th>MKR MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4018 GHz</td><td>1.484 dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-57.165 dBm</td><td></td><td></td></tr></table>		MKR MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018 GHz	1.484 dBm			2	N	1	f	2.4000 GHz	-57.165 dBm			 <table><tr><th>MKR MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4032 GHz</td><td>0.981 dBm</td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-57.206 dBm</td><td></td><td></td></tr></table>		MKR MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4032 GHz	0.981 dBm			2	N	1	f	2.4000 GHz	-57.206 dBm		
MKR MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																												
1	N	1	f	2.4018 GHz	1.484 dBm																																														
2	N	1	f	2.4000 GHz	-57.165 dBm																																														
MKR MODE	TRC	SCL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																												
1	N	1	f	2.4032 GHz	0.981 dBm																																														
2	N	1	f	2.4000 GHz	-57.206 dBm																																														
No-hopping mode		Hopping mode																																																	



Modulation mode	$\pi/4$ -DQPSK	Test channel	Highest																																																																																																																																																																																
Agilent Spectrum Analyzer - Swept SA Marker 1 2.479848000000 GHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr AvgHeld: 100/100 TRACE 1 2 3 4 5 6 TYPE: BW: WARM DET: P: NENNN 10 dB/div Log Ref 10.00 dBm Mkr1 2.479 848 GHz 2.041 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (1001 pts) Stop 2.50000 GHz <table><tr><th>MKR MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 848 GHz</td><td></td><td></td><td>2.041 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td></td><td></td><td>-63.188 dBm</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG (STATUS) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2 No-hopping mode		MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 848 GHz			2.041 dBm	2	N	1	f	2.483 500 GHz			-63.188 dBm	3								4								5								6								7								8								9								10								Agilent Spectrum Analyzer - Swept SA Marker 1 2.480134000000 GHz PRF: Fast IF Gain: Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr AvgHeld: 100/100 TRACE 1 2 3 4 5 6 TYPE: BW: WARM DET: P: NENNN 10 dB/div Log Ref 10.00 dBm Mkr1 2.480 134 GHz 0.871 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (1001 pts) Stop 2.50000 GHz <table><tr><th>MKR MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 134 GHz</td><td></td><td></td><td>0.871 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td></td><td></td><td>-67.413 dBm</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSG (STATUS) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More 1 of 2 Hopping mode		MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 134 GHz			0.871 dBm	2	N	1	f	2.483 500 GHz			-67.413 dBm	3								4								5								6								7								8								9								10							
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																												
1	N	1	f	2.479 848 GHz			2.041 dBm																																																																																																																																																																												
2	N	1	f	2.483 500 GHz			-63.188 dBm																																																																																																																																																																												
3																																																																																																																																																																																			
4																																																																																																																																																																																			
5																																																																																																																																																																																			
6																																																																																																																																																																																			
7																																																																																																																																																																																			
8																																																																																																																																																																																			
9																																																																																																																																																																																			
10																																																																																																																																																																																			
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																												
1	N	1	f	2.480 134 GHz			0.871 dBm																																																																																																																																																																												
2	N	1	f	2.483 500 GHz			-67.413 dBm																																																																																																																																																																												
3																																																																																																																																																																																			
4																																																																																																																																																																																			
5																																																																																																																																																																																			
6																																																																																																																																																																																			
7																																																																																																																																																																																			
8																																																																																																																																																																																			
9																																																																																																																																																																																			
10																																																																																																																																																																																			




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 49 of 61

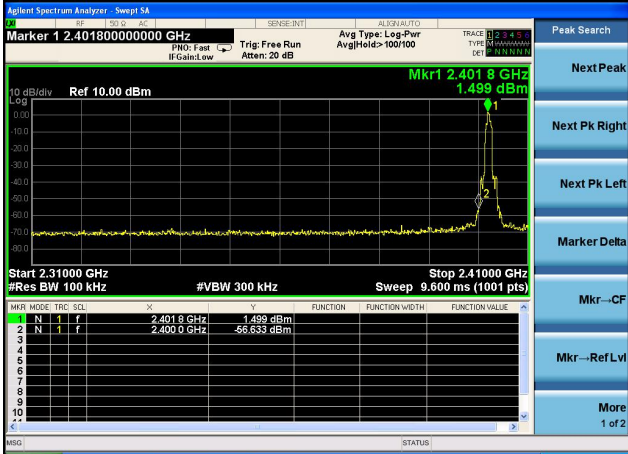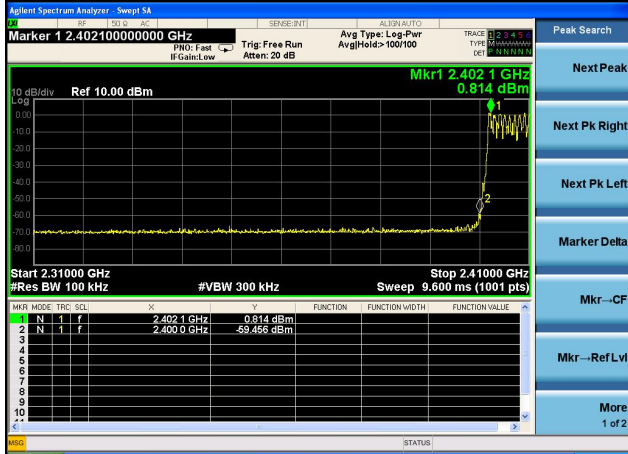Modulation mode	8DPSK	Test channel	Lowest
			
No-hopping mode		Hopping mode	

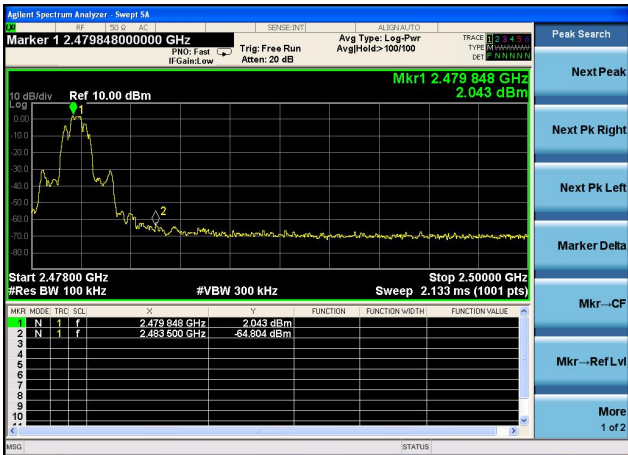Modulation mode	8DPSK	Test channel	Highest
			
No-hopping mode		Hopping mode	

12. Band Edge Requirement (Radiated Emission Method)

12.1. Test Standard and Limit

12.1.1 Test Standard



FCC Part15 C Section 15.209 and 15.205

12.1.2 Test Limit

Radiated Emission Test Limit

Frequency	Limit (dB μ V/m @3m)	Remark
Above 1GHz	54.00	Average value
	74.00	Peak value

12.2. Test Setup

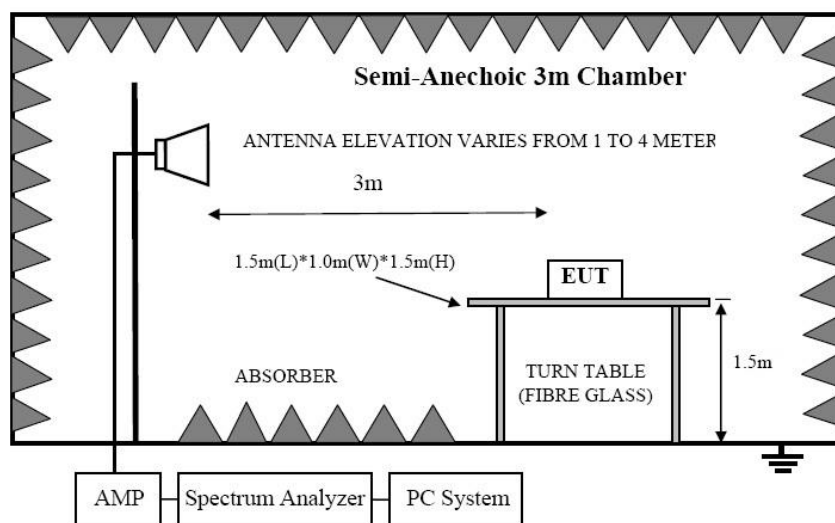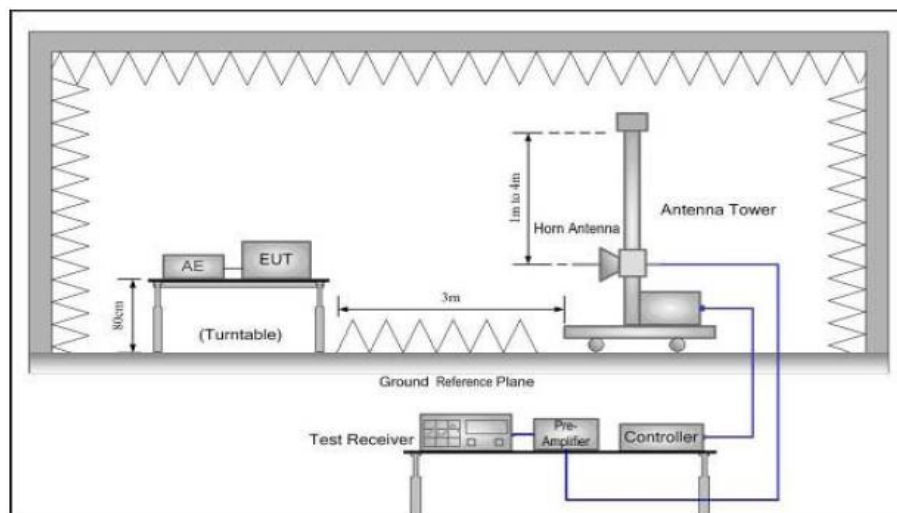



12.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz and 1.5 meters above the ground for above 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Peak Value: RBW=1MHz, VBW=3MHz; Average value: RBW=1MHz, VBW=10Hz
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

12.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK, and all data were shown in the report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 52 of 61

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	22.48	27.58	5.67	0	55.73	74.00	-18.27	H	PEAK
2400.00	22.03	27.58	5.67	0	55.28	74.00	-18.72	V	PEAK
2400.00	10.46	27.58	5.67	0	43.71	54.00	-10.29	H	AVG.
2400.00	10.88	27.58	5.67	0	44.13	54.00	-9.87	V	AVG.
Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	23.08	27.52	5.7	0	56.3	74.00	-17.70	H	PEAK
2483.50	22.51	27.52	5.7	0	55.73	74.00	-18.27	V	PEAK
2483.50	10.88	27.52	5.7	0	44.1	54.00	-9.90	H	AVG.
2483.50	11.22	27.52	5.7	0	44.44	54.00	-9.56	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 53 of 61

Test mode: $\pi/4$ -DQPSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	21.68	27.58	5.67	0	54.93	74.00	-19.07	H	PEAK
2400.00	22.1	27.58	5.67	0	55.35	74.00	-18.65	V	PEAK
2400.00	11.11	27.58	5.67	0	44.36	54.00	-9.64	H	AVG.
2400.00	11.57	27.58	5.67	0	44.82	54.00	-9.18	V	AVG.
Test mode: $\pi/4$ -DQPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	21.46	27.52	5.7	0	54.68	74.00	-19.32	H	PEAK
2483.50	22.35	27.52	5.7	0	55.57	74.00	-18.43	V	PEAK
2483.50	10.13	27.52	5.7	0	43.35	54.00	-10.65	H	AVG.
2483.50	10.47	27.52	5.7	0	43.69	54.00	-10.31	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 54 of 61

Test mode: 8DPSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	22.57	27.58	5.67	0	55.82	74.00	-18.18	H	PEAK
2400.00	22.71	27.58	5.67	0	55.96	74.00	-18.04	V	PEAK
2400.00	10.49	27.58	5.67	0	43.74	54.00	-10.26	H	AVG.
2400.00	10.67	27.58	5.67	0	43.92	54.00	-10.08	V	AVG.
Test mode: 8DPSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	21.19	27.52	5.7	0	54.41	74.00	-19.59	H	PEAK
2483.50	22.33	27.52	5.7	0	55.55	74.00	-18.45	V	PEAK
2483.50	10.44	27.52	5.7	0	43.66	54.00	-10.34	H	AVG.
2483.50	10.69	27.52	5.7	0	43.91	54.00	-10.09	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

13. Spurious Emission (Radiated Emission Method)

14.1. Test Standard and Limit

14.1.1 Test Standard

FCC Part15 C Section 15.209


14.1.2 Test Limit

Frequency (MHz)	Limit (dB μ V/m)	
	At 3m Distance	
30MHz~88MHz	40	Quasi-peak
88MHz~216MHz	43.5	Quasi-peak
216MHz~960MHz	46	Quasi-peak
960MHz~1000MHz	54	Quasi-peak
Above 1000MHz	54	Average
	74	Peak


Remark: 1. The lower limit shall apply at the transition frequency.

14.2. Test Setup

Below 1GHz

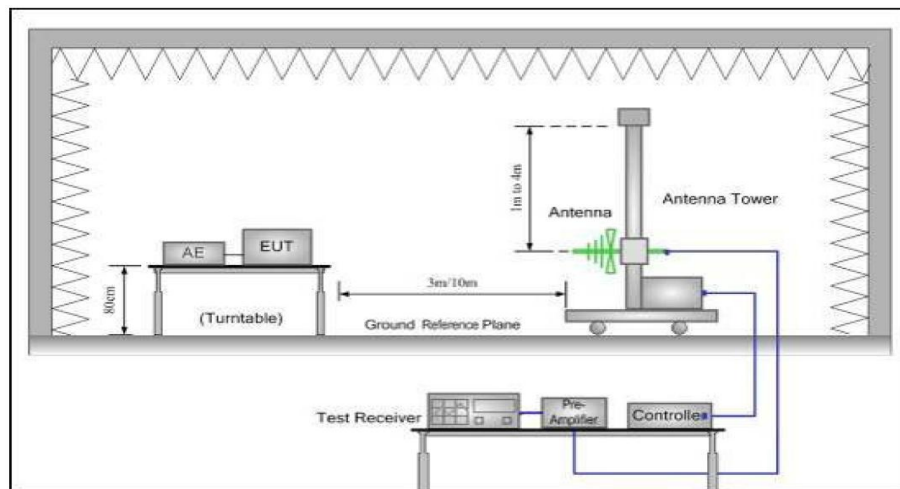

Above 1GHz

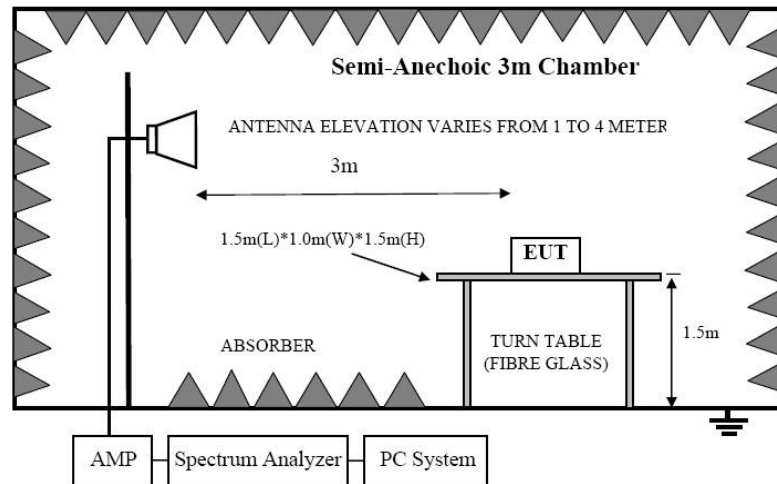

14.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz and 1.5 meters above the ground for above 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 Peak value: RBW=1MHz, VBW=3MHz;
 Average value: RBW=1MHz, VBW=10Hz;
 QP Value: RBW=120kHz, VBW=300kHz
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

14.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
3. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 57 of 61

Radiated Emission Test Data (Below 1GHz)

EUT: Smart TV BOX M/N: X92
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Tom
Test Specification: AC120V/60Hz
Polarization: Horizontal
Note: Tem:23°C Hum:50%

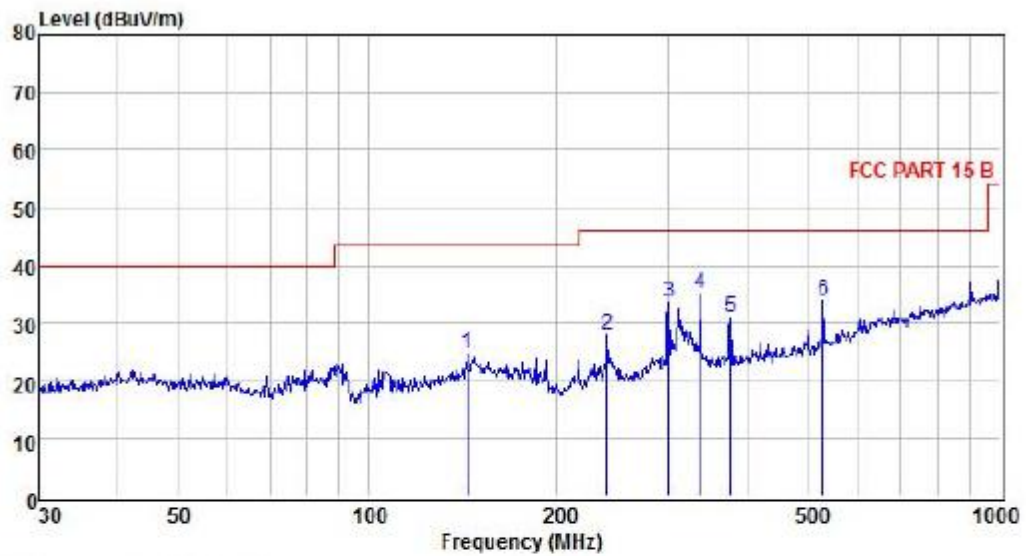

Condition : FCC PART 15 B					POL: HORIZONTAL				
Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	143.83	39.83	13.77	29.39	0.38	24.59	43.50	-18.91	Peak
2	239.99	44.21	11.45	28.25	0.53	27.94	46.00	-18.06	Peak
3	300.37	47.99	12.85	28.02	0.64	33.46	46.00	-12.54	Peak
4	336.04	48.45	13.61	27.84	0.78	35.00	46.00	-11.00	Peak
5	375.94	43.12	14.35	27.42	0.96	31.01	46.00	-14.99	Peak
6	528.25	43.05	17.03	27.20	1.07	33.95	46.00	-12.05	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss




ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 58 of 61

Radiated Emission Test Data (Below 1GHz)

EUT: Smart TV BOX M/N: X92
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Tom
Test Specification: AC120V/60Hz
Polarization: Vertical
Note: Tem:23°C Hum:50%

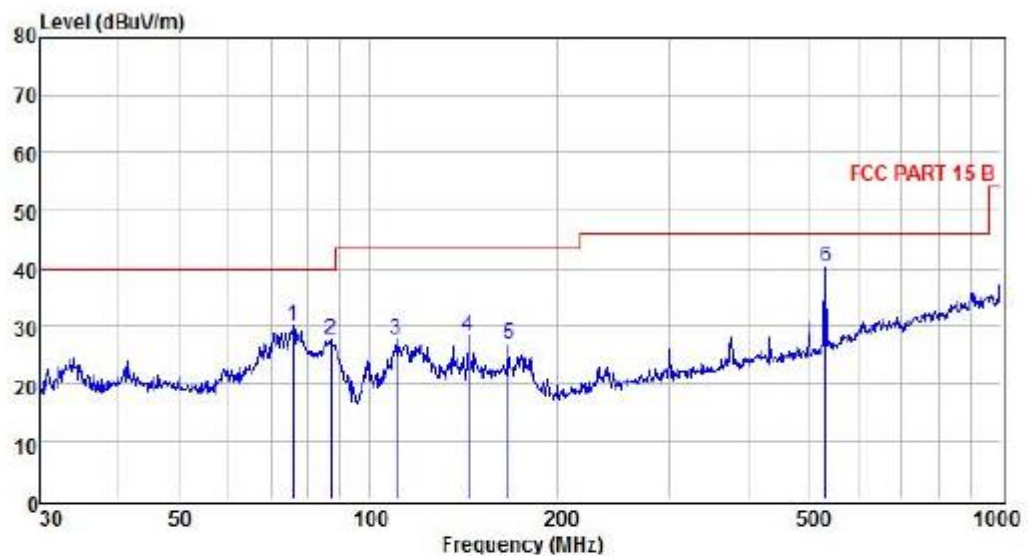

Condition : FCC PART 15 B POL: VERTICAL									
Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	75.71	49.81	9.90	30.06	0.25	29.90	40.00	-10.10	Peak
2	87.11	48.08	9.41	30.14	0.32	27.67	40.00	-12.33	Peak
3	110.57	45.81	11.32	29.93	0.41	27.61	43.50	-15.89	Peak
4	143.83	43.52	13.77	29.39	0.38	28.28	43.50	-15.22	Peak
5	166.65	41.96	13.56	29.13	0.40	26.79	43.50	-16.71	Peak
6	531.96	49.04	17.09	27.14	1.11	40.10	46.00	-5.90	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 59 of 61

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	43.87	31.53	8.9	40.24	44.06	74.00	-29.94	V	PEAK
7206.00	44.69	36.48	12.08	40.15	53.1	74.00	-20.9	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	44.67	31.53	8.9	40.24	44.86	74.00	-29.14	H	PEAK
7206.00	44.71	36.48	12.08	40.15	53.12	74.00	-20.88	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	32.87	31.53	8.9	40.24	33.06	54.00	-20.94	V	AVG.
7206.00	33.74	36.48	12.08	40.15	42.15	54.00	-11.85	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	33.28	31.53	8.9	40.24	33.47	54.00	-20.53	H	AVG.
7206.00	33.98	36.48	12.08	40.15	42.39	54.00	-11.61	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 60 of 61

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Middle				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4882.00	43.87	31.69	9.08	40.03	44.61	74.00	-29.39	V	PEAK
7323.00	44.98	36.57	12.14	40.21	53.48	74.00	-20.52	V	PEAK
9764.00	*					74.00		V	PEAK
12205.00	*					74.00		V	PEAK
14646.00	*					74.00		V	PEAK
17087.00	*					74.00		V	PEAK
4882.00	44.67	31.69	9.08	40.03	45.41	74.00	-25.83	H	PEAK
7323.00	45.31	36.57	12.14	40.21	53.81	74.00	-20.19	H	PEAK
9764.00	*					74.00		H	PEAK
12205.00	*					74.00		H	PEAK
14646.00	*					74.00		H	PEAK
17087.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4882.00	33.43	31.69	9.08	40.03	34.17	54.00	-22.68	V	AVG.
7323.00	33.69	36.57	12.14	40.21	42.19	54.00	-11.81	V	AVG.
9764.00	*					54.00		V	AVG.
12205.00	*					54.00		V	AVG.
14646.00	*					54.00		V	AVG.
17087.00	*					54.00		V	AVG.
4882.00	34.09	31.69	9.08	40.03	34.83	54.00	-19.17	H	AVG.
7323.00	34.35	36.57	12.14	40.21	42.85	54.00	-11.15	H	AVG.
9764.00	*					54.00		H	AVG.
12205.00	*					54.00		H	AVG.
14646.00	*					54.00		H	AVG.
17087.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027011F

Page: 61 of 61

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	44.49	31.69	9.08	40.03	45.23	74.00	-28.77	V	PEAK
7440.00	44.58	36.73	12.59	40.41	53.49	74.00	-20.51	V	PEAK
9920.00	*					74.00		V	PEAK
12400.00	*					74.00		V	PEAK
14880.00	*					74.00		V	PEAK
17360.00	*					74.00		V	PEAK
4960.00	42.69	31.69	9.08	40.03	43.43	74.00	-30.57	H	PEAK
7440.00	45.11	36.73	12.59	40.41	54.02	74.00	-19.98	H	PEAK
9920.00	*					74.00		H	PEAK
12400.00	*					74.00		H	PEAK
14880.00	*					74.00		H	PEAK
17360.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	33.76	31.69	9.08	40.03	34.5	54.00	-19.5	V	AVG.
7440.00	33.95	36.73	12.59	40.41	42.86	54.00	-11.14	V	AVG.
9920.00	*					54.00		V	AVG.
12400.00	*					54.00		V	AVG.
14880.00	*					54.00		V	AVG.
17360.00	*					54.00		V	AVG.
34.29	34.29	31.69	9.08	40.03	35.03	54.00	-18.97	H	AVG.
34.41	34.41	36.73	12.59	40.41	43.32	54.00	-10.68	H	AVG.
9920.00	*					54.00		H	AVG.
12400.00	*					54.00		H	AVG.
14880.00	*					54.00		H	AVG.
17360.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.