



8DPSK\_Low\_3DH1

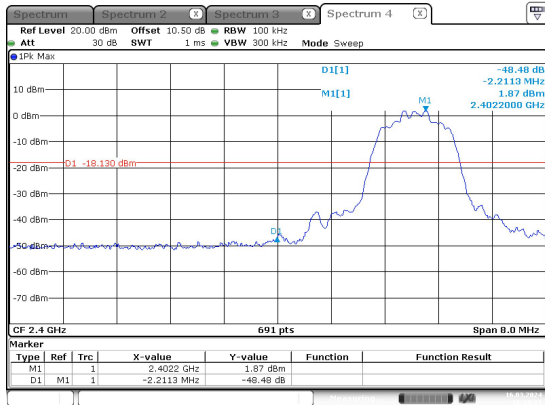


ProjectNo.:DG1240108-01608E Tester: Alice Tan  
Date: 16.MAR.2024 16:14:21

8DPSK\_High\_3DH1

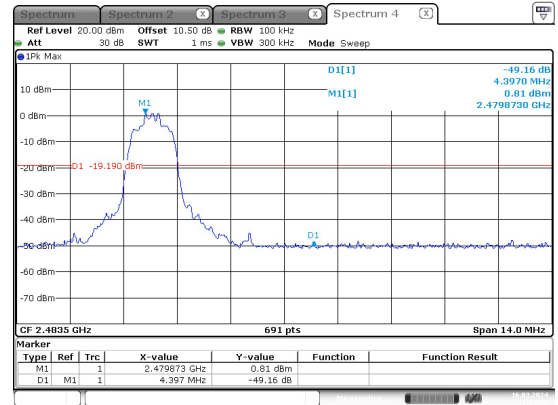


ProjectNo.:DG1240108-01608E Tester: Alice Tan  
Date: 16.MAR.2024 16:15:48

8DPSK\_Hopping\_Lower\_3DH1

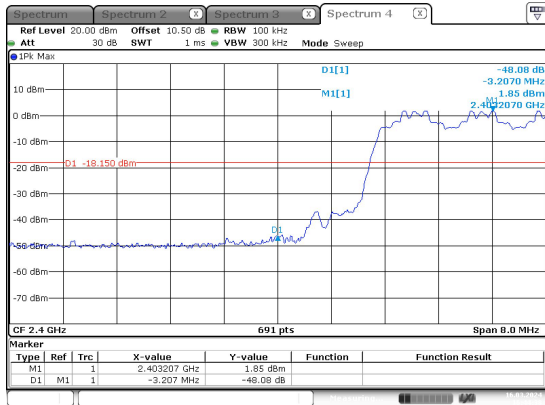

ProjectNo.:DG1240108-01608E Tester: Alice Tan  
Date: 16.MAR.2024 16:14:38

8DPSK\_Hopping\_Upper\_3DH1

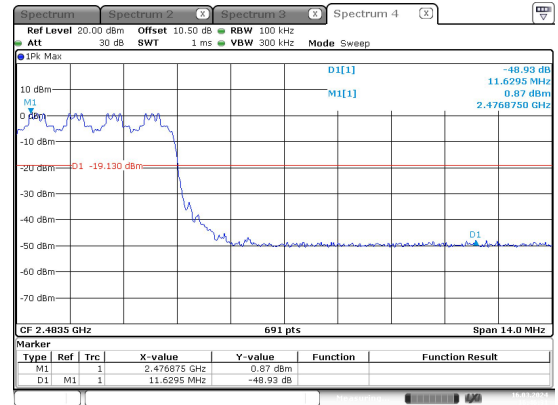

ProjectNo.:DG1240108-01608E Tester: Alice Tan  
Date: 16.MAR.2024 16:14:31

## **APPENDIX A - EUT PHOTOGRAPHS**

---

Please refer to the attachment DG1240108-01608E-RF-EXP EUT external photographs and DG1240108-01608E-RF-INP EUT internal photographs.

---

## **APPENDIX B - TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment DG1240108-01608E-RF-00A-TSP test setup photographs.

## APPENDIX C - RF EXPOSURE EVALUATION

### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq$  50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $<$  5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### Measurement Result

The max conducted power including tune-up tolerance is 4.0 dBm (2.51 mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$   
 $= 2.51 / 5 * (\sqrt{2.480}) = 0.8 < 3.0$

Note: the max conducted power including tune-up tolerance was declared by manufacturer.

**Result: Compliant. The stand-alone SAR evaluation is not necessary.**

\*\*\*\*\* END OF REPORT \*\*\*\*\*