

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 281 von 565  
Page 281 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #: 280

Date:

Time:

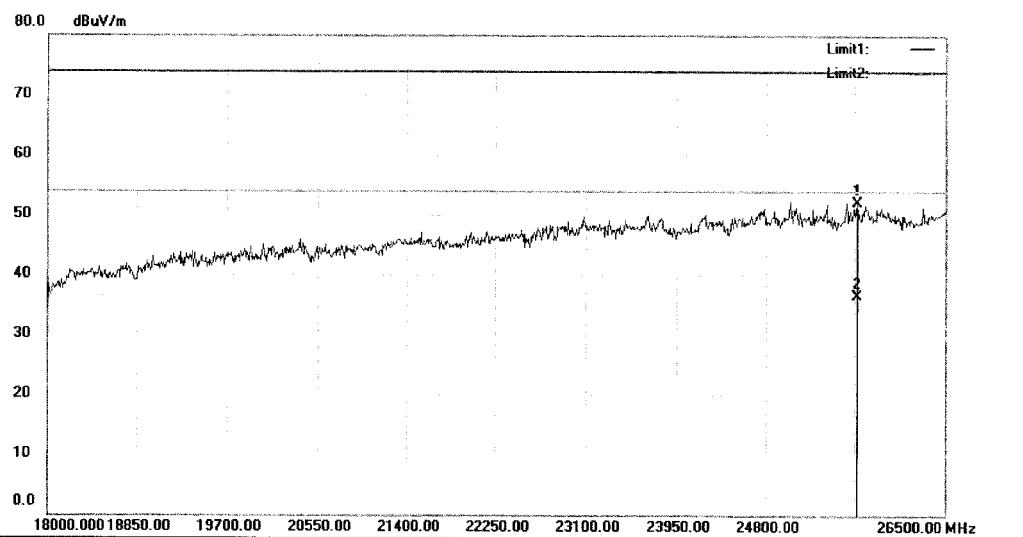

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5600

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25675.50	88.34	-36.19	52.15	74.00	-21.85	peak		
2	*	25675.50	72.79	-36.19	36.60	54.00	-17.40	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#280

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
*Test Report No.*
**Seite 282 von 565**  
*Page 282 of 565*

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



**Radiated Emission Measurement**

File : TUV 2017

Data #281

Date:

Time:

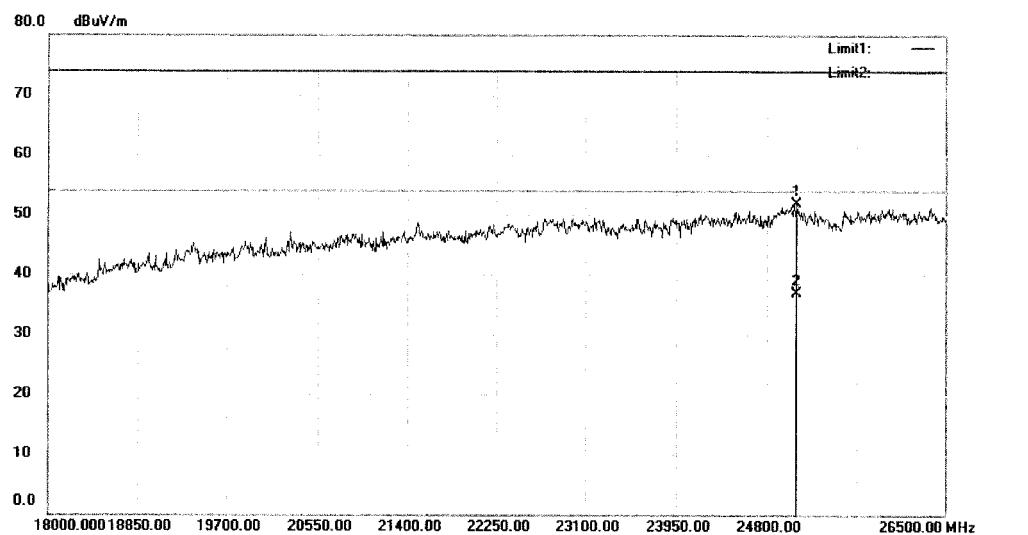

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5600

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25080.50	88.73	-36.91	51.82	74.00	-22.18	peak			
2	*	25080.50	73.81	-36.91	36.90	54.00	-17.10	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data .#281

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 283 von 565  
Page 283 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #: 282

Date:

Time:

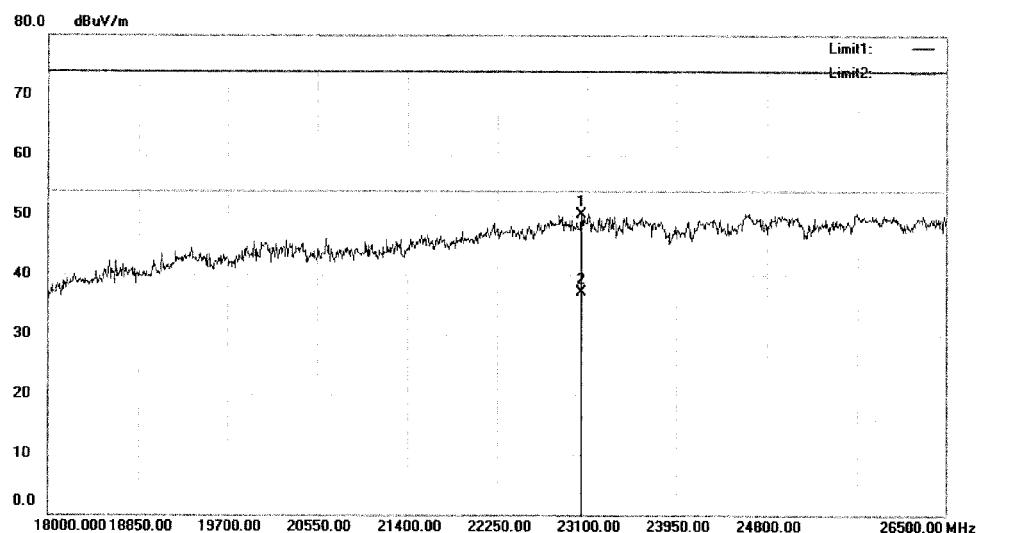

Site: 3m Chamber #3

Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5700

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		23049.00	88.14	-38.13	50.01	74.00	-23.99	peak			
2	*	23049.00	75.33	-38.13	37.20	54.00	-16.80	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data #: 282

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 284 von 565**  
Page 284 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #283

Date:

Time:

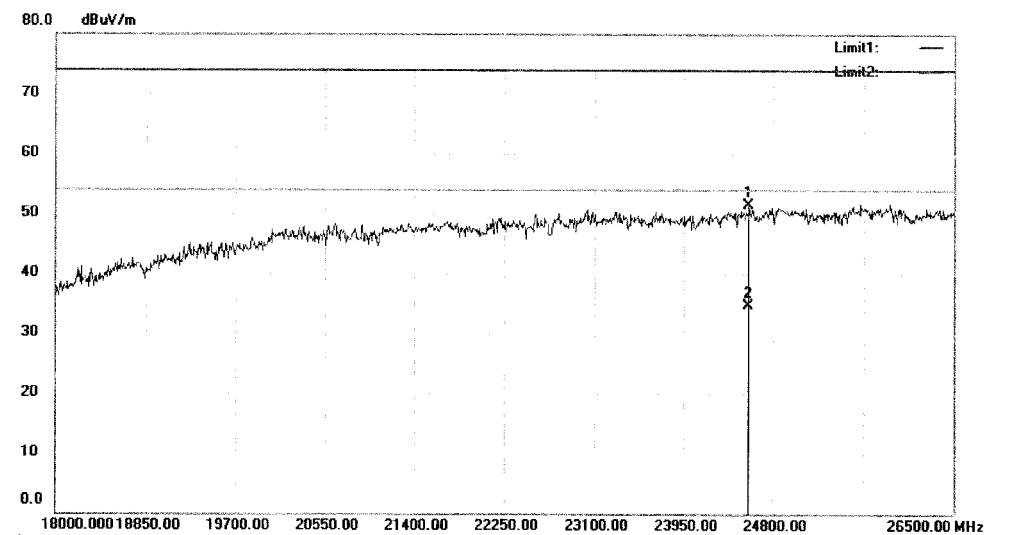

Site 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5700

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24570.50	88.57	-37.06	51.51	74.00	-22.49	peak			
2	*	24570.50	71.86	-37.06	34.80	54.00	-19.20	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data #283

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 285 von 565**  
Page 285 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 284

Date:

Time:

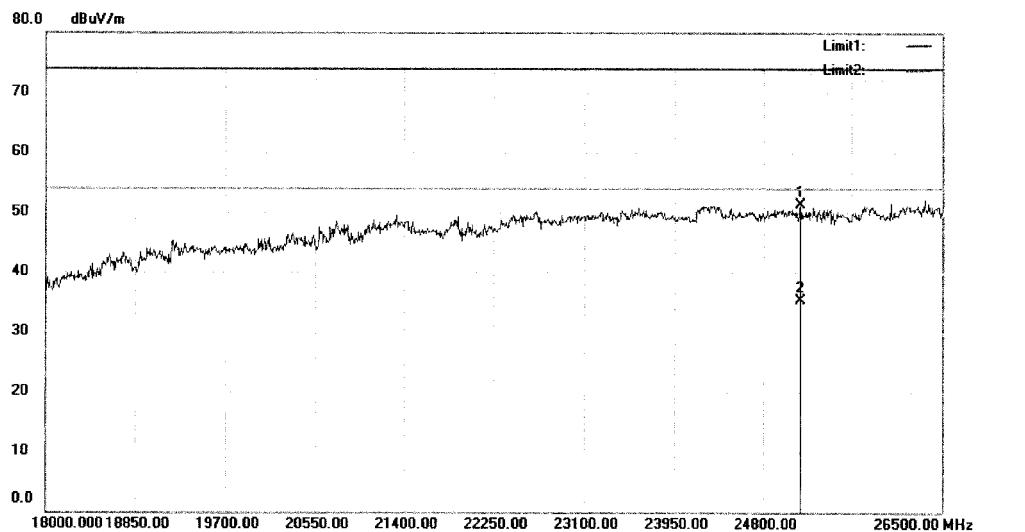

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		25157.00	88.04	-36.82	51.22	74.00	-22.78	peak		
2	*	25157.00	72.12	-36.82	35.30	54.00	-18.70	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#284

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 286 von 565  
Page 286 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File :TUV 2017

Data #:285

Date:

Time:

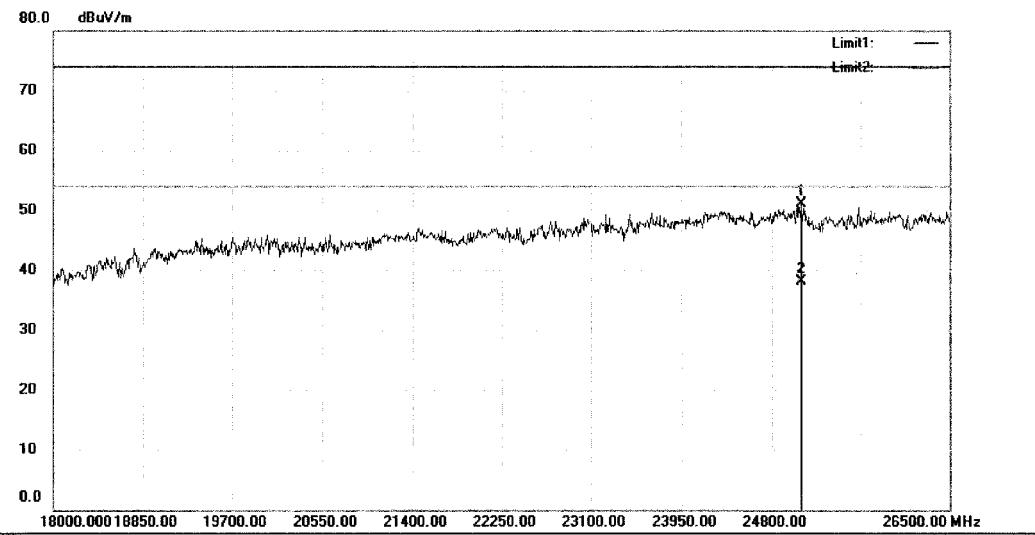

Site: 3m Chamber #3

Polarization: Vertical

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25072.00	88.02	-36.92	51.10	74.00	-22.90	peak		
2	*	25072.00	75.02	-36.92	38.10	54.00	-15.90	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV 2017\Data .#285

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 287 von 565  
Page 287 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #286

Date:

Time:

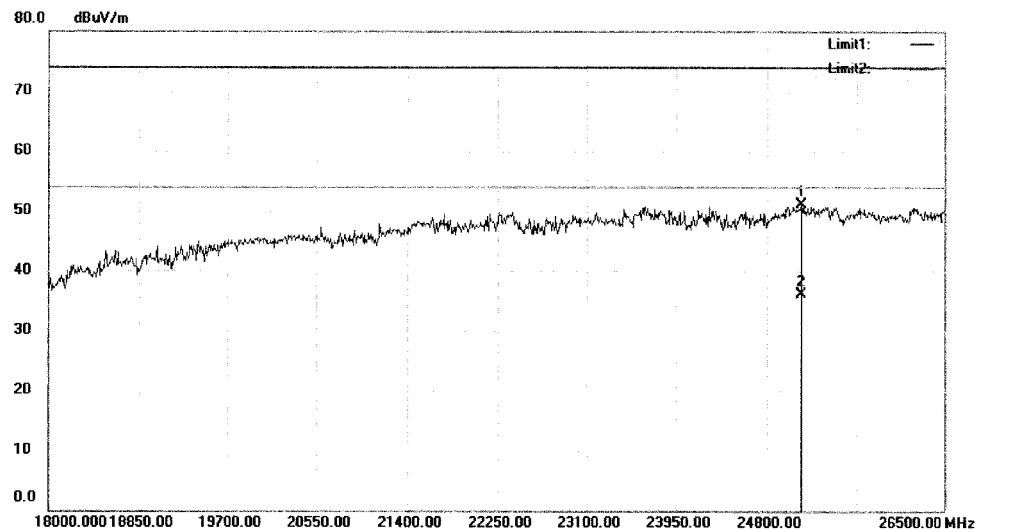

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		25123.00	88.03	-36.86	51.17	74.00	-22.83	peak		
2	*	25123.00	73.06	-36.86	36.20	54.00	-17.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :\#286

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 288 von 565  
Page 288 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #287

Date:

Time:

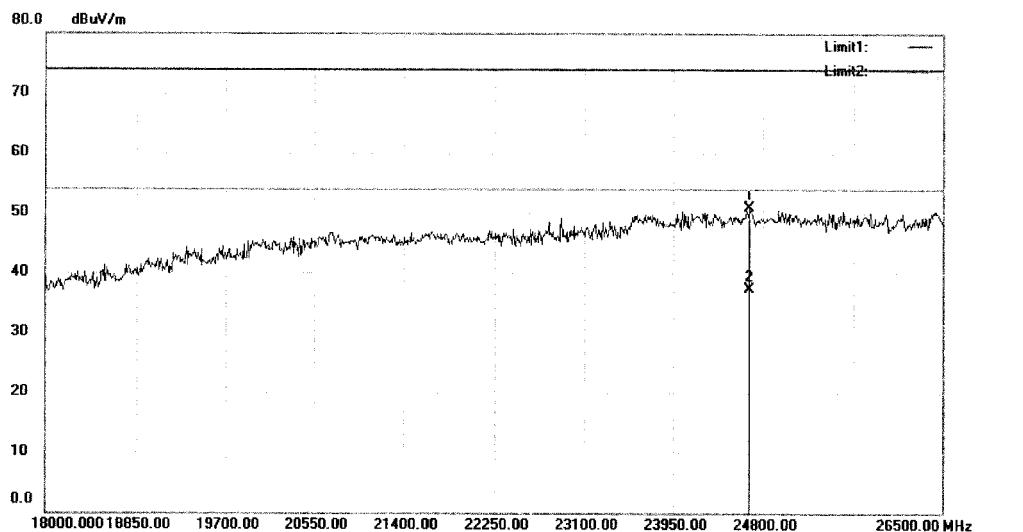

Site: 3m Chamber #3

Polarization: Vertical

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24672.50	87.94	-37.05	50.89	74.00	-23.11	peak			
2	*	24672.50	74.35	-37.05	37.30	54.00	-16.70	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#287

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 289 von 565  
Page 289 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiaolong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Date : #288

Date:

Time:

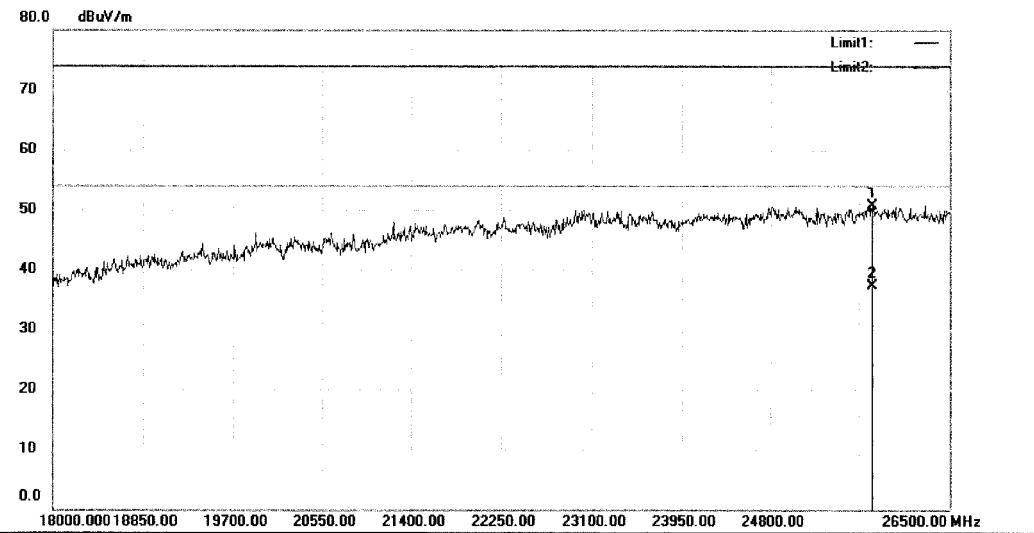

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25777.50	86.73	-36.06	50.67	74.00	-23.33	peak		
2	*	25777.50	73.46	-36.06	37.40	54.00	-16.60	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data .#288

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 290 von 565  
Page 290 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #289

Date:

Time:

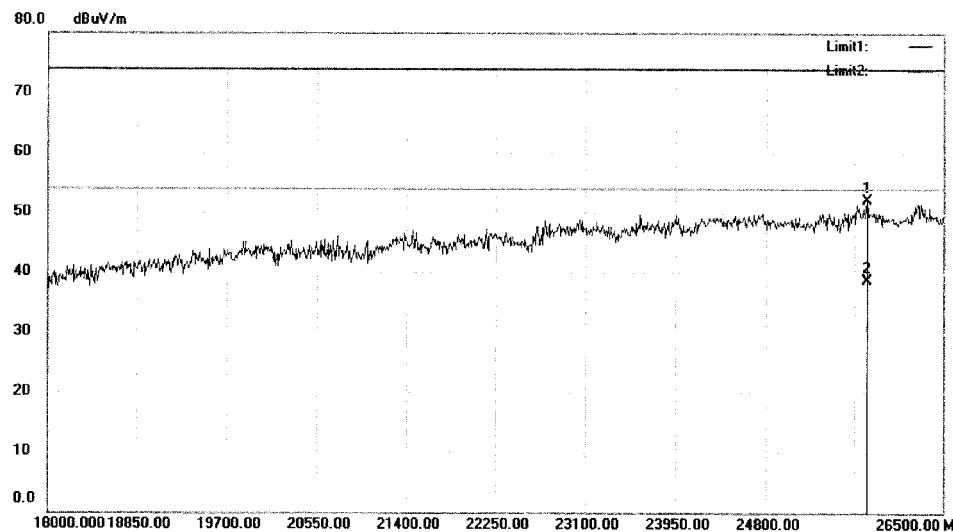

Site 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		25777.50	88.08	-36.06	52.02	74.00	-21.98	peak			
2	*	25777.50	74.76	-36.06	38.70	54.00	-15.30	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#289

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 291 von 565  
Page 291 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File: TUV 2017

Data #: 290

Date:

Time:

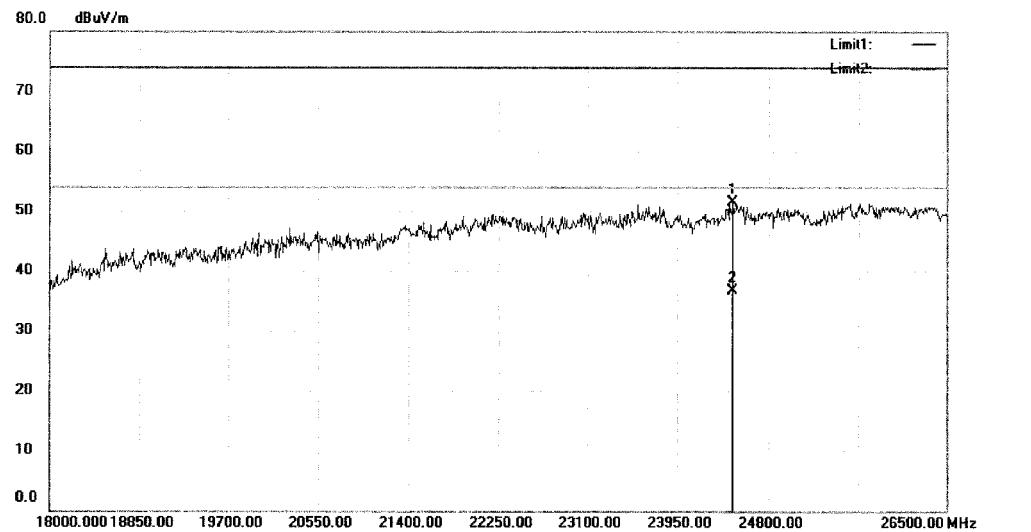

Site: 3m Chamber #3

Polarization: Horizontal

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24468.50	88.54	-37.07	51.47	74.00	-22.53	peak			
2	*	24468.50	73.77	-37.07	36.70	54.00	-17.30	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File: TUV 2017\Data .#290

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 292 von 565**  
Page 292 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #291

Date:

Time:

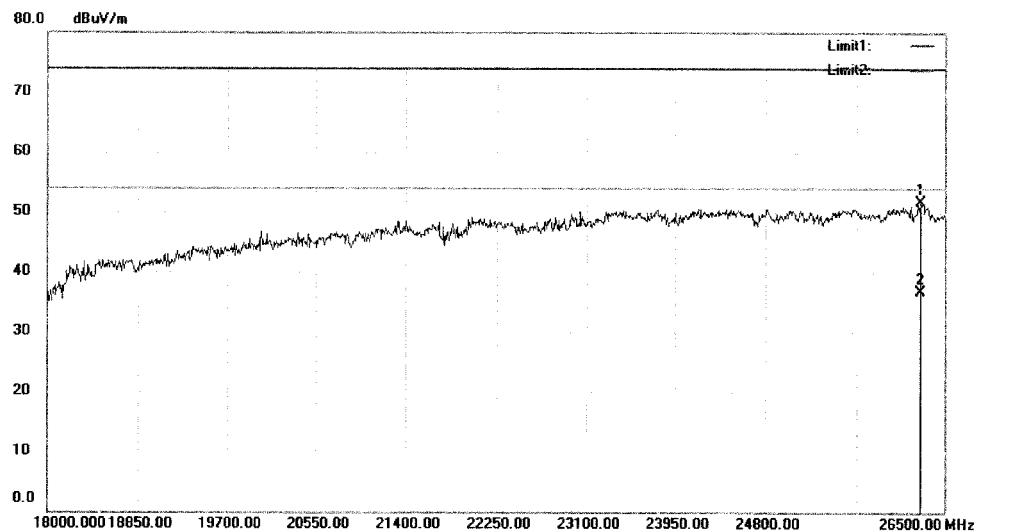

Site: 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26262.00	87.19	-35.47	51.72	74.00	-22.28	peak		
2 *		26262.00	72.27	-35.47	36.80	54.00	-17.20	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\ Data .#291

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 293 von 565  
Page 293 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #292

Date:

Time:

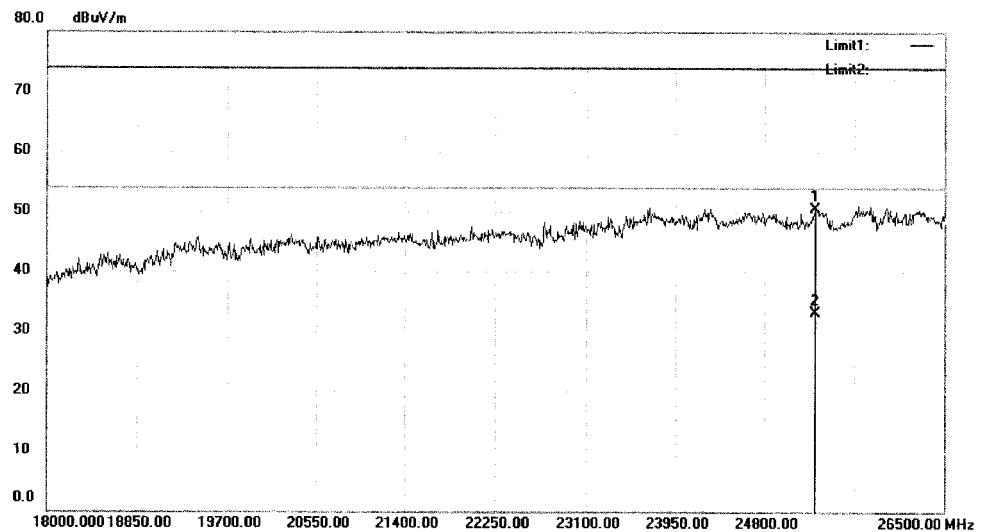

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25284.50	87.24	-36.66	50.58	74.00	-23.42	peak		
2	*	25284.50	69.86	-36.66	33.20	54.00	-20.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :#292

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 294 von 565  
Page 294 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #293

Date:

Time:

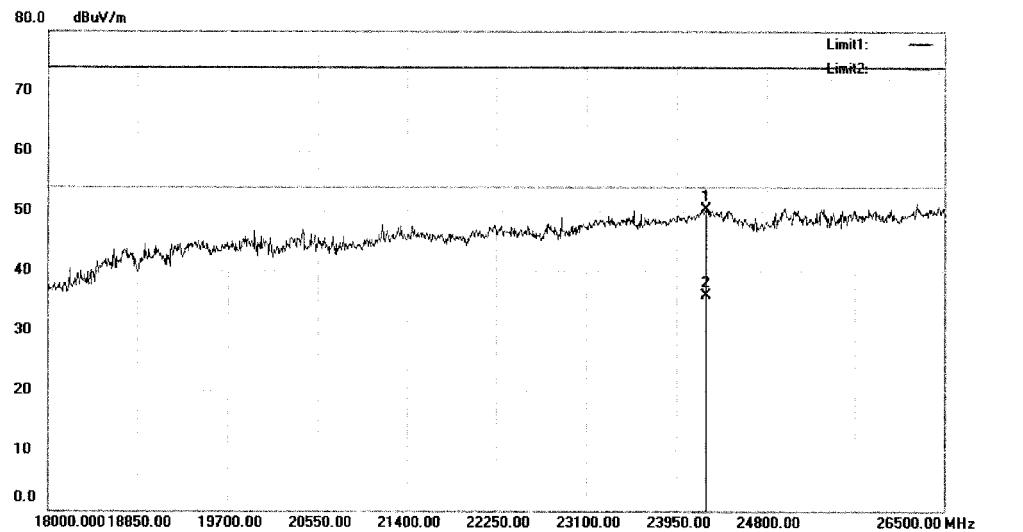

Site: 3m Chamber #3

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24222.00	87.44	-37.10	50.34	74.00	-23.66	peak		
2	*	24222.00	73.00	-37.10	35.90	54.00	-18.10	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :\#293

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 295 von 565**  
Page 295 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 294

Date:

Time:

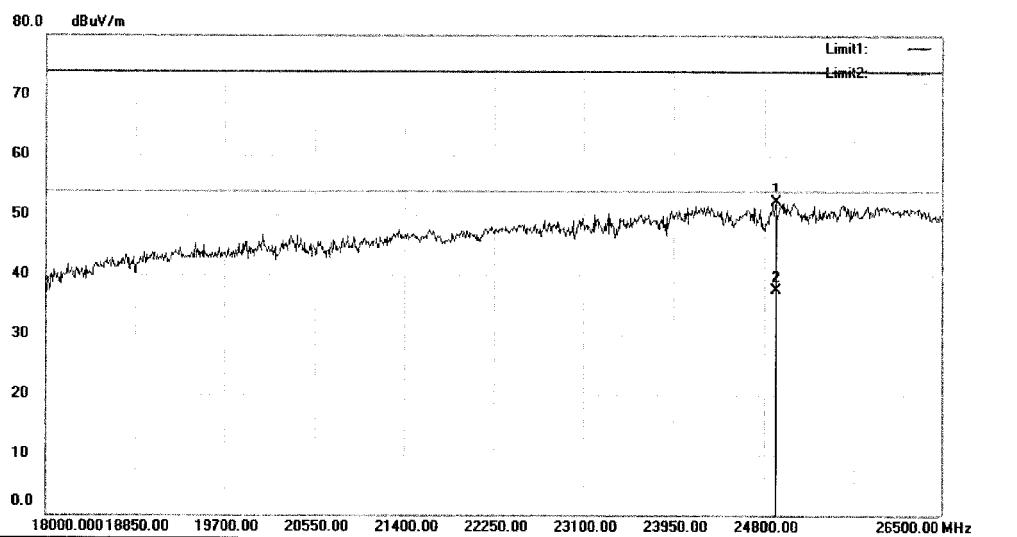

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5270

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24902.00	89.35	-37.02	52.33	74.00	-21.67	peak		
2 *		24902.00	74.52	-37.02	37.50	54.00	-16.50	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data #: 294

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 296 von 565**  
Page 296 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #295

Date:

Time:

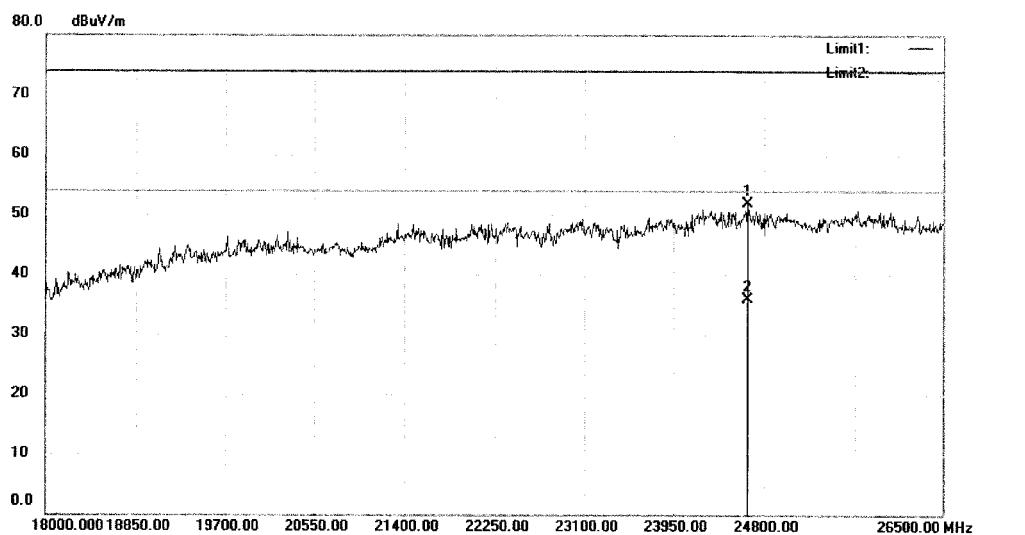

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5270

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24647.00	88.87	-37.05	51.82	74.00	-22.18	peak		
2	*	24647.00	72.95	-37.05	35.90	54.00	-18.10	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #:295

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 297 von 565**  
Page 297 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #296

Date:

Time:

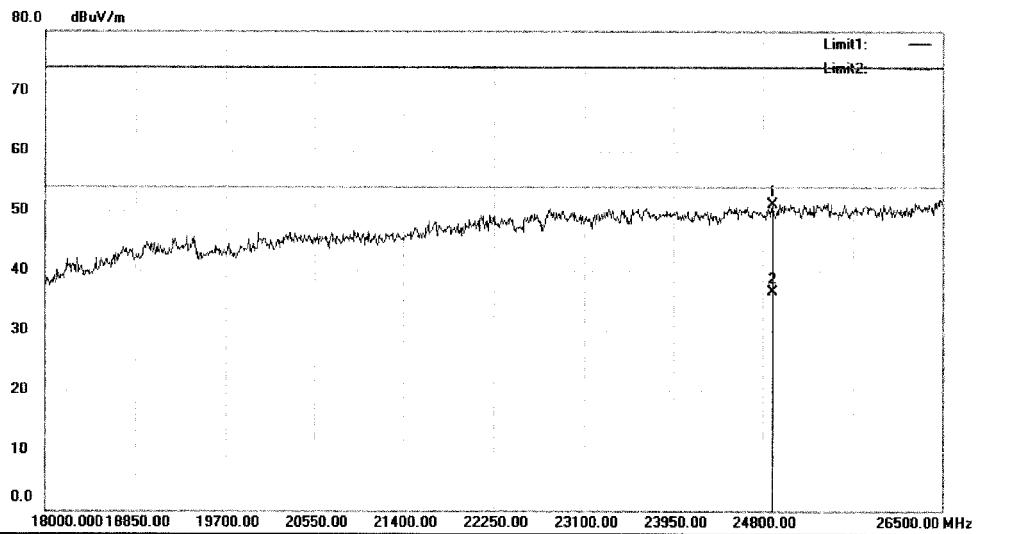

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5310

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		24893.50	88.10	-37.02	51.08	74.00	-22.92	peak		
2	*	24893.50	73.62	-37.02	36.60	54.00	-17.40	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#296

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 298 von 565**  
Page 298 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #297

Date:

Time:

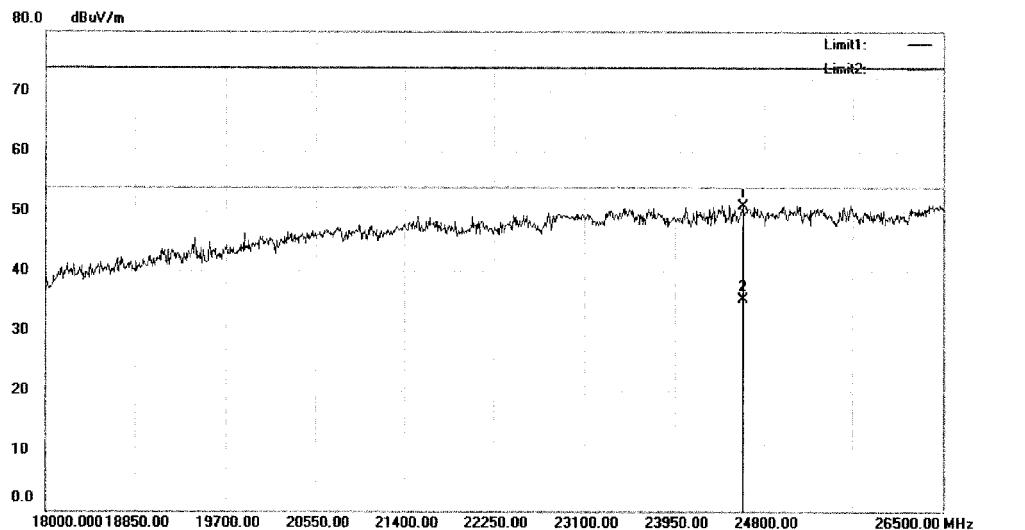

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5310

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24596.00	87.96	-37.06	50.90	74.00	-23.10	peak		
2	*	24596.00	72.36	-37.06	35.30	54.00	-18.70	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data #297

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 299 von 565  
Page 299 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data : #298

Date:

Time:

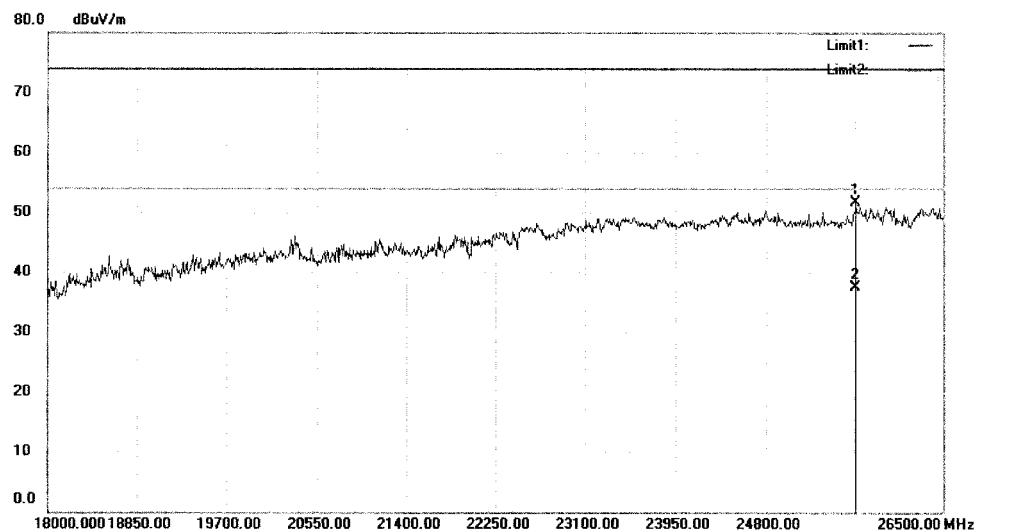

Site: 3m Chamber #3

Polarization: Horizontal

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5510

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25658.50	87.88	-36.21	51.67	74.00	-22.33	peak		
2	*	25658.50	73.71	-36.21	37.50	54.00	-16.50	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :#298

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
*Test Report No.*
**Seite 300 von 565**  
*Page 300 of 565*

**Shenzhen EMTEK Co., Ltd.**  
 Bldg. 69, Majiagang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



**Radiated Emission Measurement**

File : TUV 2017

Data #299

Date:

Time:

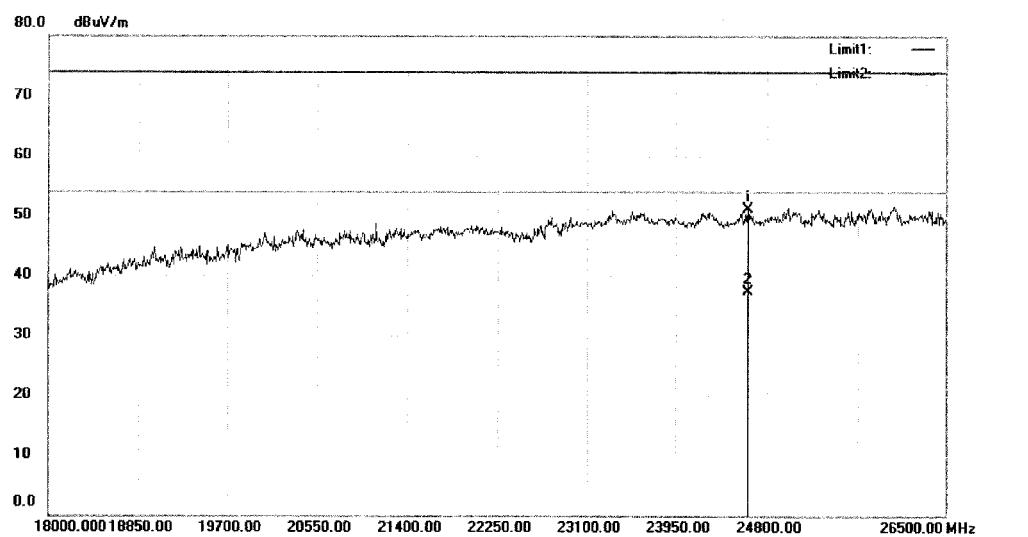

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5510

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24621.50	88.19	-37.06	51.13	74.00	-22.87	peak			
2	*	24621.50	74.36	-37.06	37.30	54.00	-16.70	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\Data #299

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 301 von 565  
Page 301 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data : #300

Date:

Time:

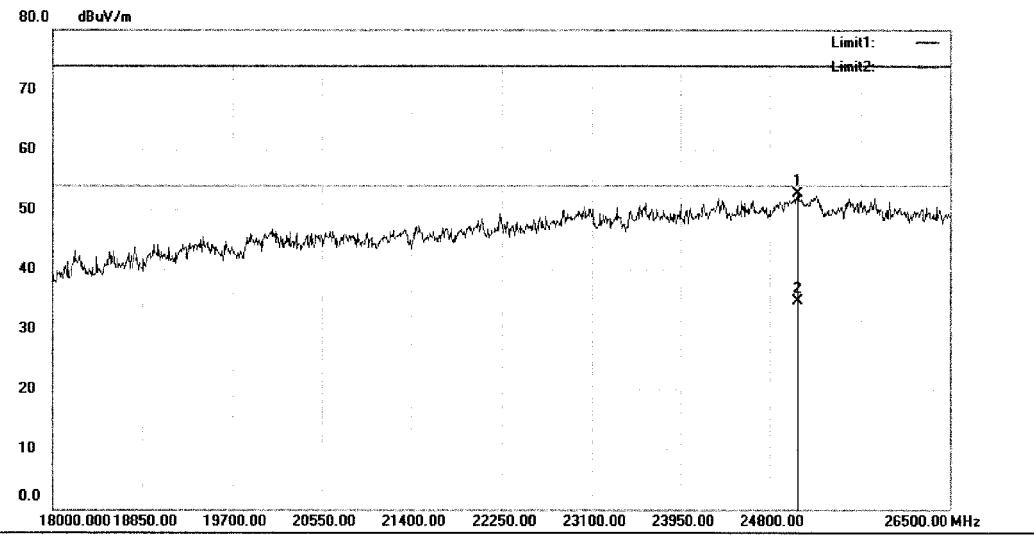

Site: 3m Chamber #3

Polarization: Horizontal

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5590

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25063.50	89.72	-36.93	52.79	74.00	-21.21	peak		
2	*	25063.50	71.63	-36.93	34.70	54.00	-19.30	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#300

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 302 von 565**  
Page 302 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #301

Date:

Time:

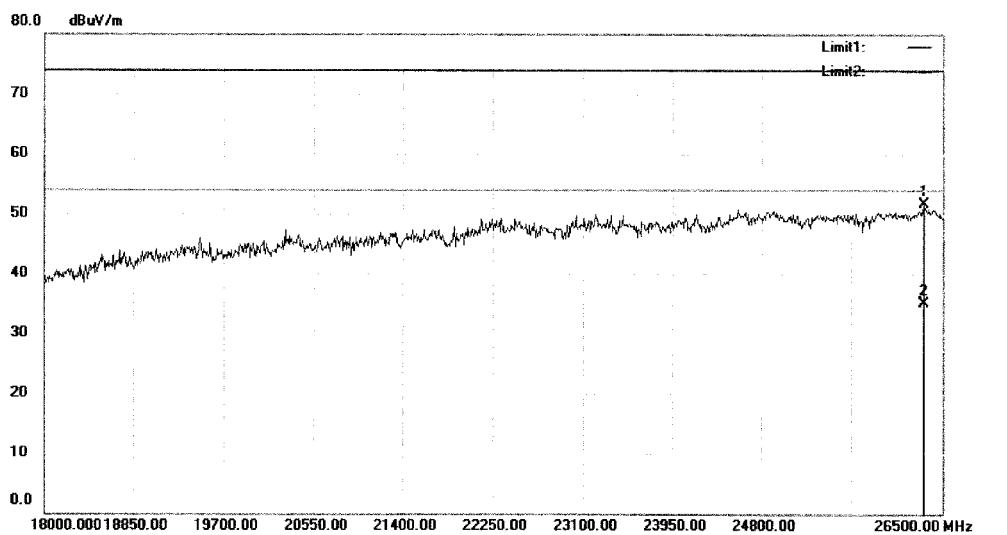

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5590

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		26321.50	87.02	-35.40	51.62	74.00	-22.38	peak		
2	*	26321.50	70.60	-35.40	35.20	54.00	-18.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\#301

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 303 von 565  
Page 303 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #302

Date:

Time:

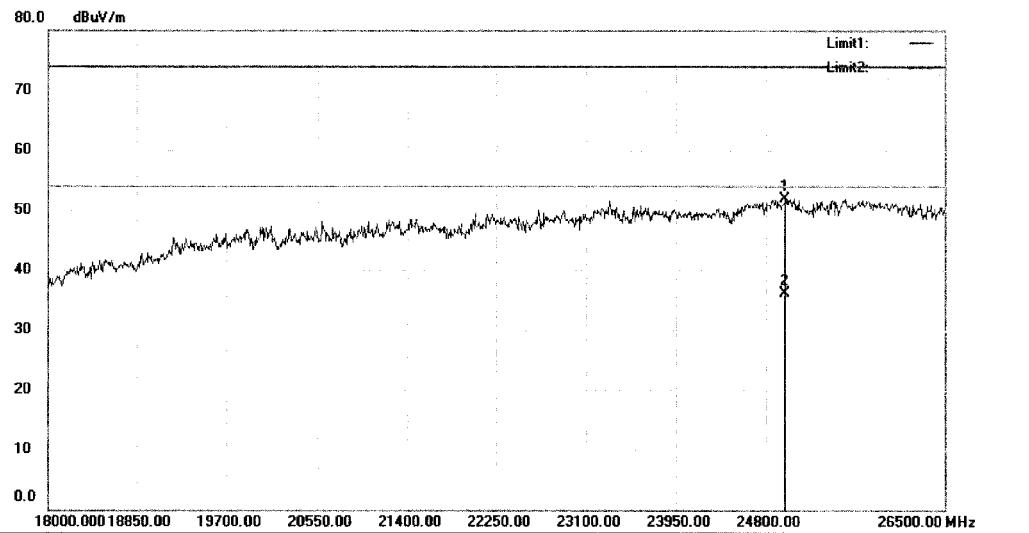

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5670

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		24978.50	88.88	-37.01	51.87	74.00	-22.13	peak		
2	*	24978.50	73.21	-37.01	36.20	54.00	-17.80	AVG		

\*:Maximum data    x:Over limit    l:over margin

Operator: KK

File : TUV 2017\Data #302

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 304 von 565  
Page 304 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #303

Date:

Time:

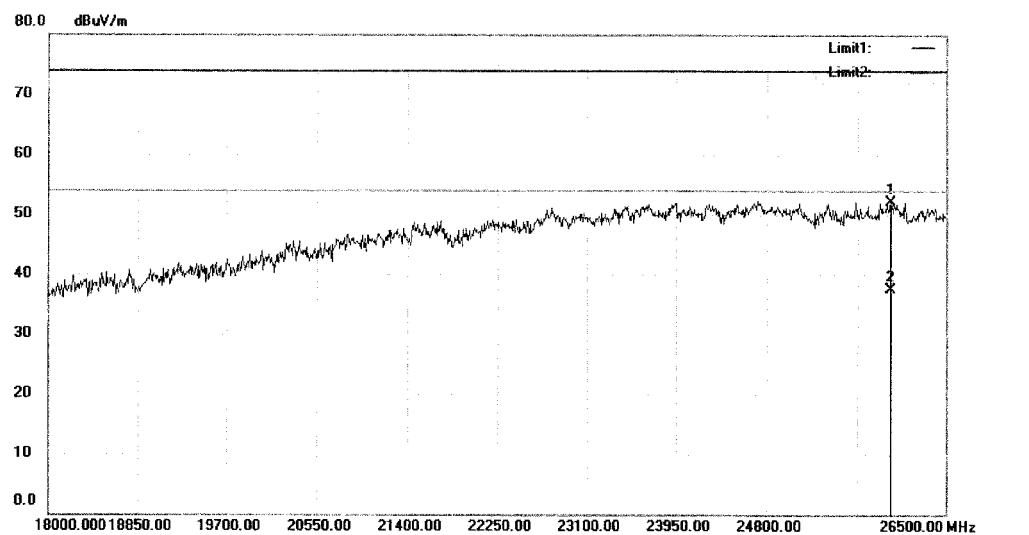

Site: 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5670

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25973.00	88.01	-35.82	52.19	74.00	-21.81	peak		
2	*	25973.00	73.42	-35.82	37.60	54.00	-16.40	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\Data #303

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 305 von 565  
 Page 305 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #304

Date:

Time:

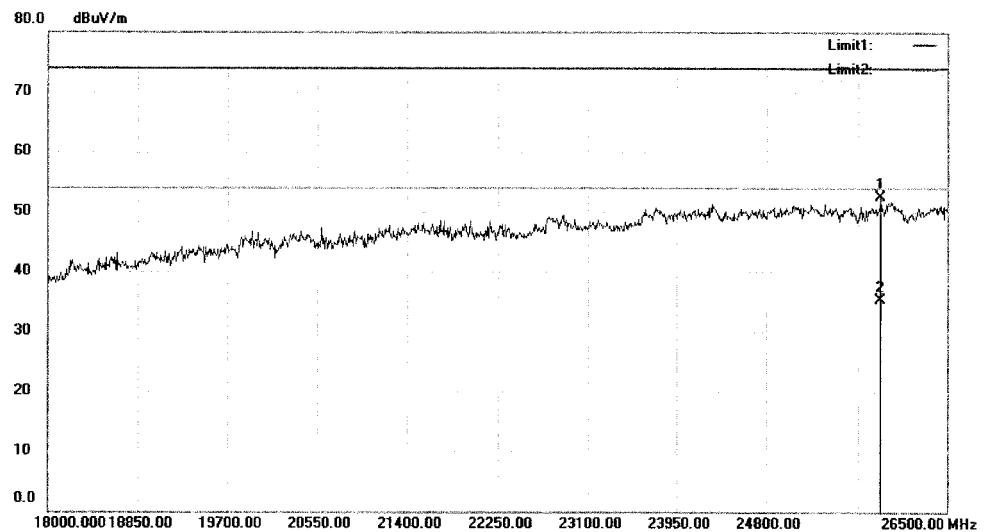

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25862.50	88.47	-35.96	52.51	74.00	-21.49	peak		
2	*	25862.50	71.26	-35.96	35.30	54.00	-18.70	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#304

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 306 von 565  
Page 306 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #305

Date:

Time:

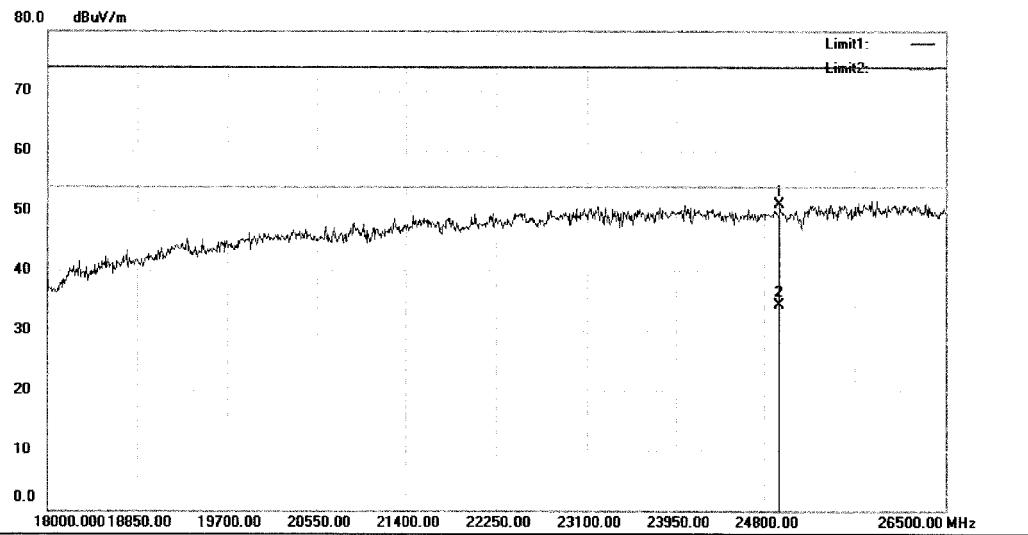

Site: 3m Chamber #3

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5755

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	
								Detector	cm	degree	Comment
1	*	24944.50	88.10	-37.02	51.08	74.00	-22.92	peak			
2	*	24944.50	71.32	-37.02	34.30	54.00	-19.70	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :\#305

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 307 von 565**  
Page 307 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #306

Date:

Time:

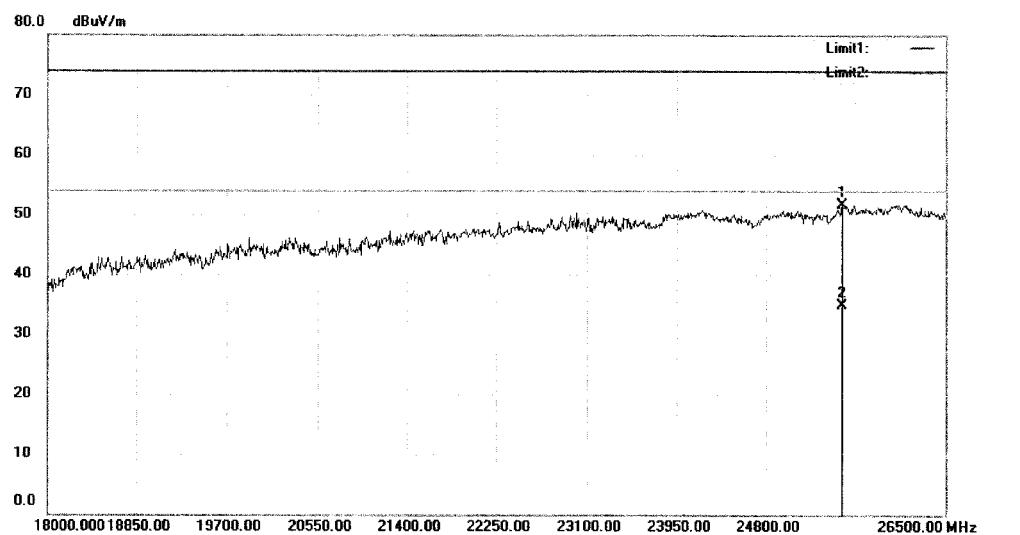

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25531.00	88.13	-36.36	51.77	74.00	-22.23	peak		
2 *		25531.00	71.26	-36.36	34.90	54.00	-19.10	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data .#306

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 308 von 565  
Page 308 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data : #307

Date:

Time:

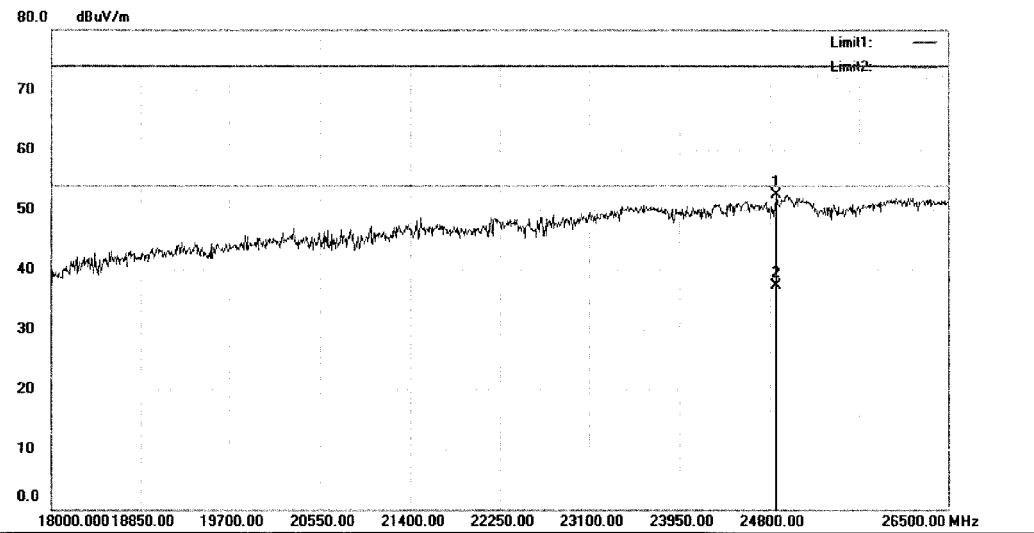

Site: 3m Chamber #3

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5795

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Antenna Height cm	Table Degree	Comment
								Detecto	degree	
1		24859.50	89.45	-37.03	52.42	74.00	-21.58	peak		
2	*	24859.50	74.43	-37.03	37.40	54.00	-16.60	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data : #307

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 309 von 565  
Page 309 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data : #409

Date:

Time:

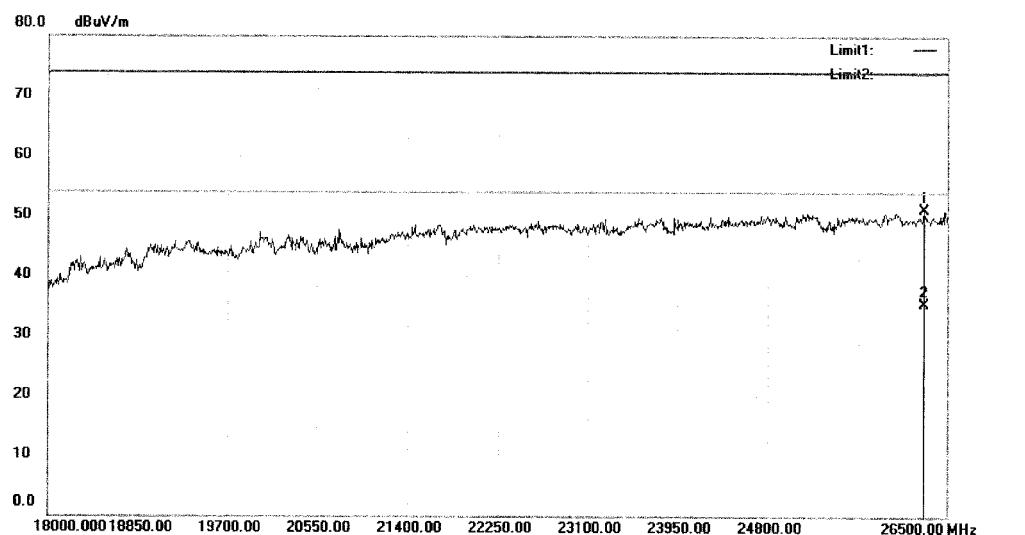

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26279.00	86.48	-35.45	51.03	74.00	-22.97	peak		
2	*	26279.00	70.75	-35.45	35.30	54.00	-18.70	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data : #409

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 310 von 565**  
Page 310 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #410

Date:

Time:

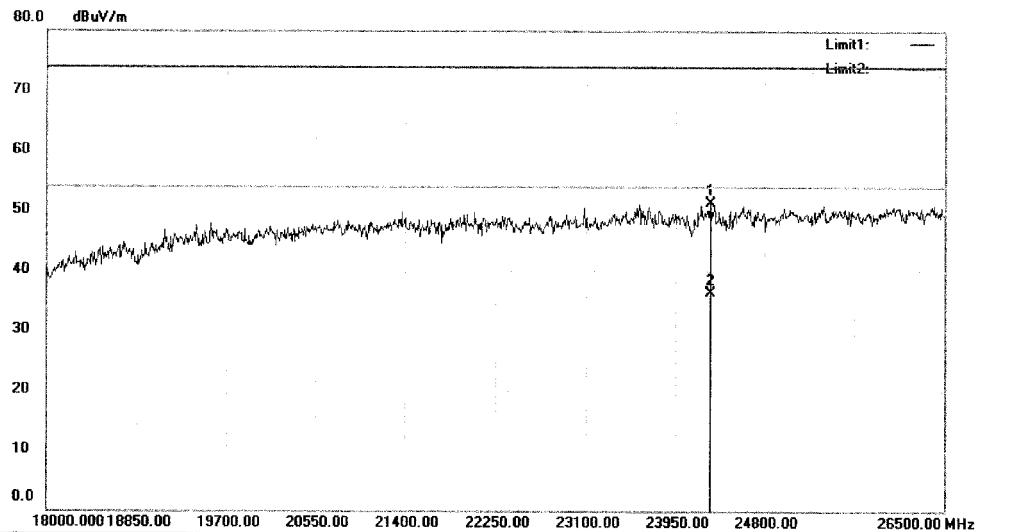

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24281.50	88.32	-37.10	51.22	74.00	-22.78	peak		
2	*	24281.50	73.50	-37.10	36.40	54.00	-17.60	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017>Data :#410

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 311 von 565  
Page 311 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #: 411

Date:

Time:

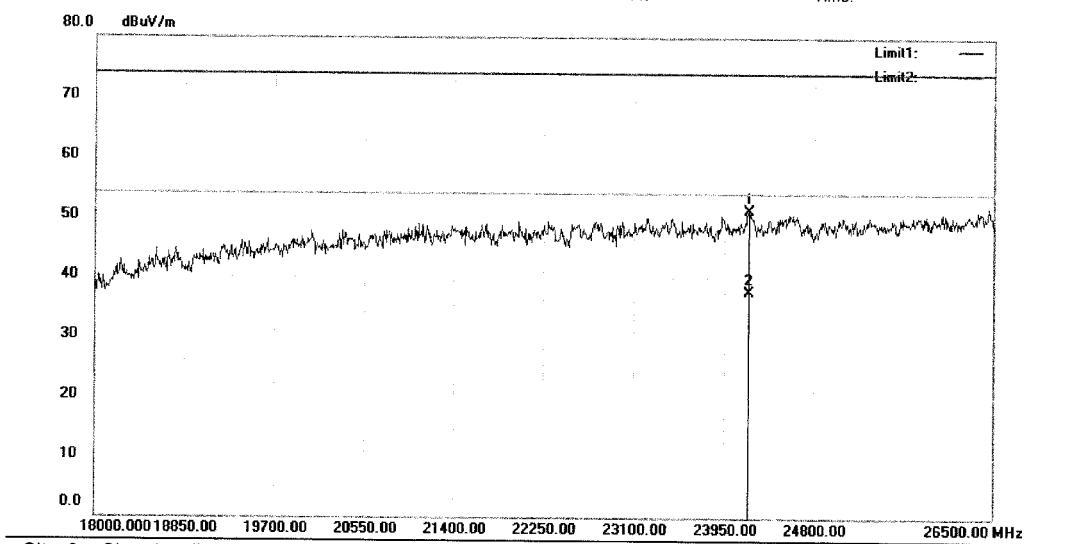

Site: 3m Chamber #2

Polarization: *Horizontal*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5200

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Antenna Height cm		Table Degree
								Detector	degree	
1		24179.50	88.18	-37.11	51.07	74.00	-22.93	peak		
2 *		24179.50	74.61	-37.11	37.50	54.00	-16.50	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 411

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 312 von 565**  
Page 312 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 412

Date:

Time:

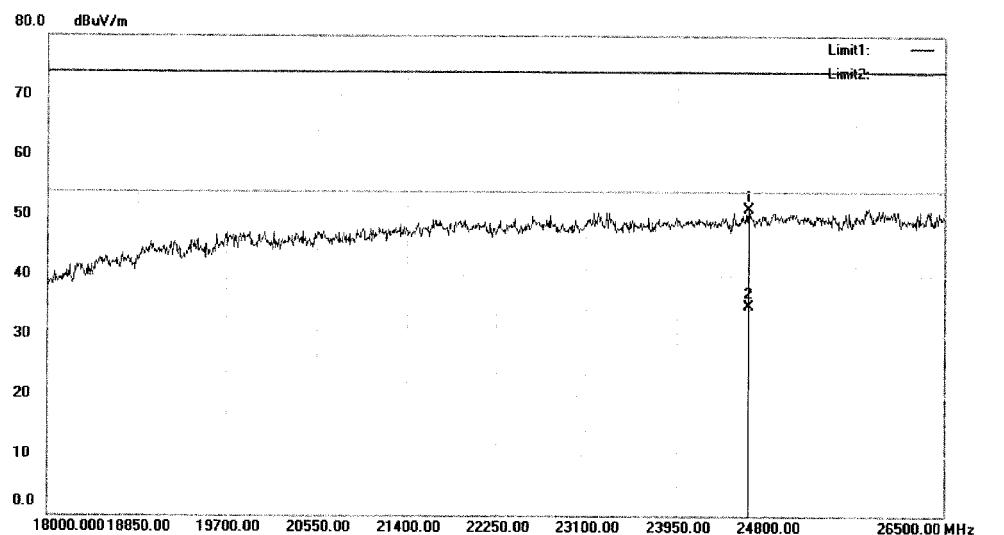

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24621.50	88.19	-37.06	51.13	74.00	-22.87	peak		
2 *		24621.50	71.96	-37.06	34.90	54.00	-19.10	Avg		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 412

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 313 von 565  
Page 313 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 413

Date:

Time:

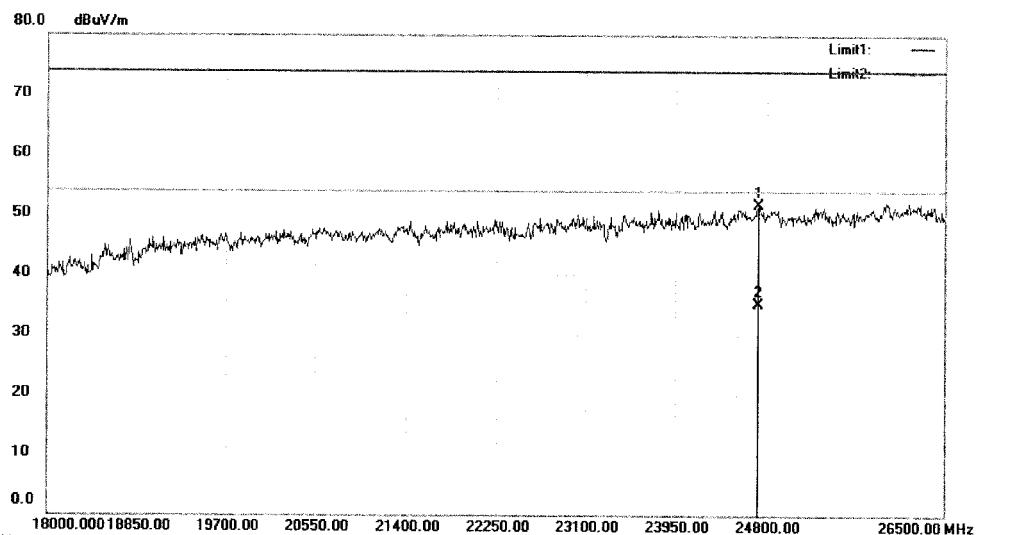

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24723.50	88.74	-37.04	51.70	74.00	-22.30	peak		
2	*	24723.50	72.14	-37.04	35.10	54.00	-18.90	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 413

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 314 von 565**  
Page 314 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majisalong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 414

Date:

Time:

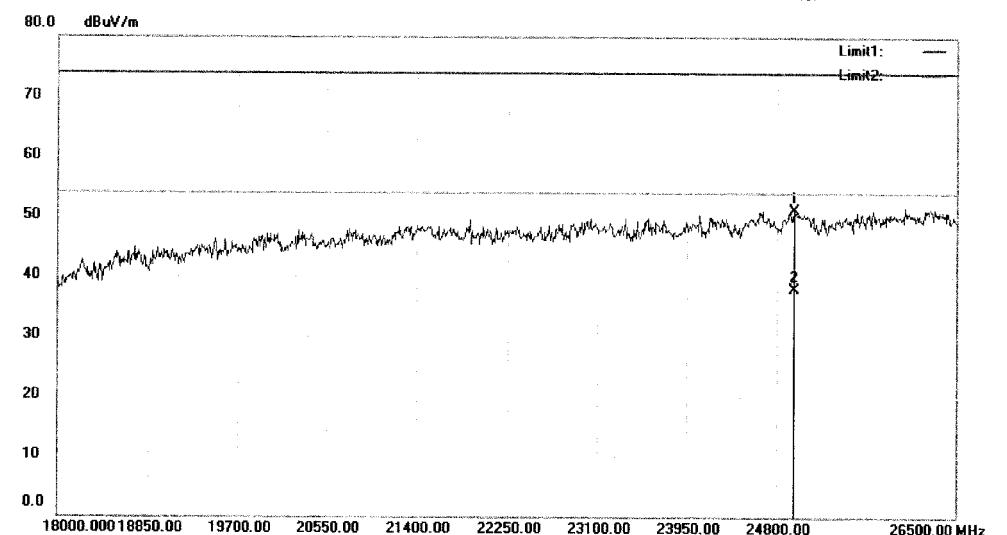

Site: 3m Chamber #2

Polarization: **Vertical**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		24961.50	88.16	-37.01	51.15	74.00	-22.85	peak		
2	*	24961.50	74.91	-37.01	37.90	54.00	-16.10	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 414

Page: 1


**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 315 von 565**  
Page 315 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



**Radiated Emission Measurement**

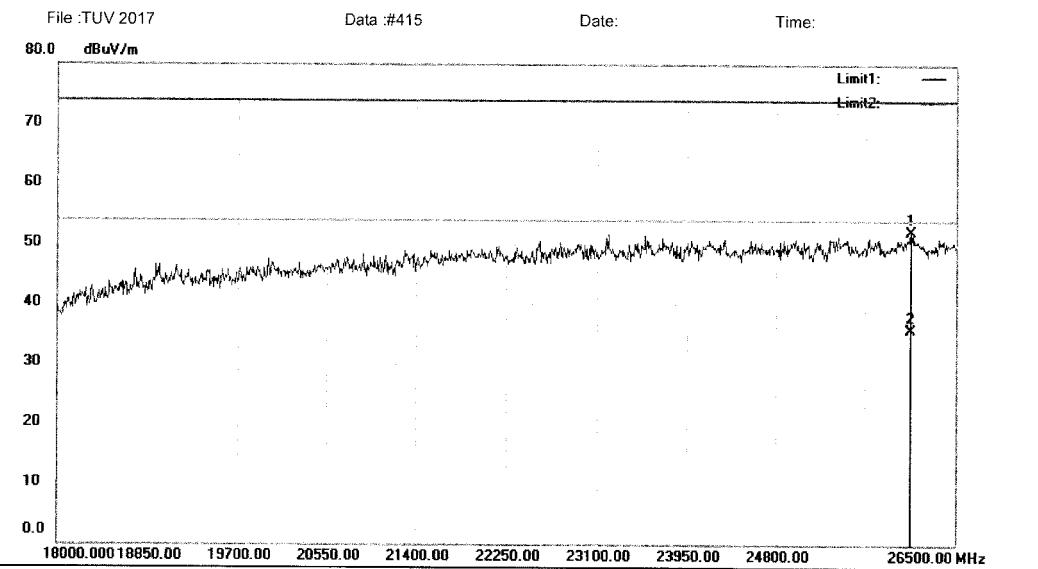

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11A8100  
 Mode:11ac20 5260  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26075.00	87.74	-35.70	52.04	74.00	-21.96	peak		
2	*	26075.00	71.40	-35.70	35.70	54.00	-18.30	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017 Data : #415

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 316 von 565**  
Page 316 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 416

Date:

Time:

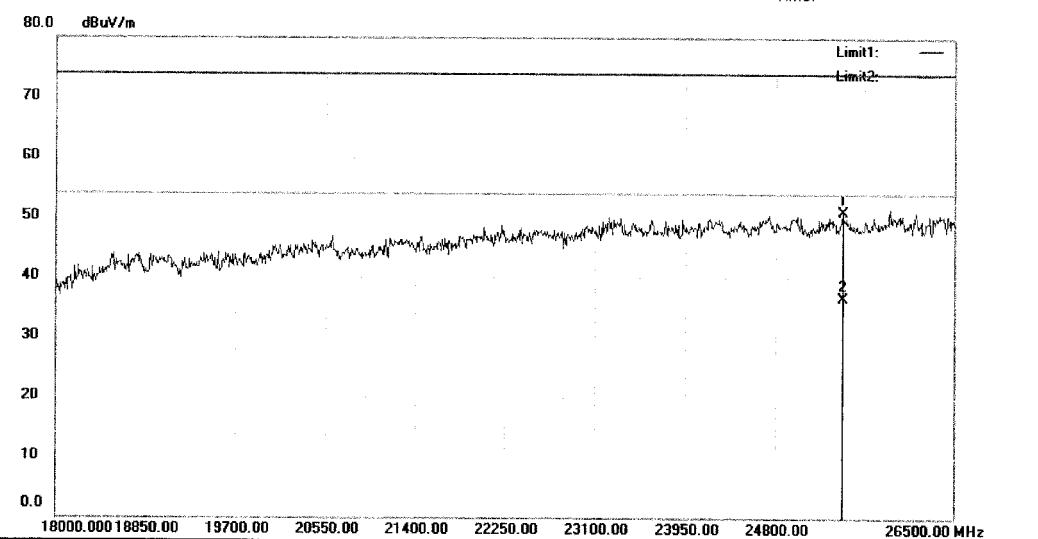

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5260

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB		Detector	cm
1		25446.00	87.41	-36.47	50.94	74.00	-23.06	peak	
2 *		25446.00	73.07	-36.47	36.60	54.00	-17.40	AVG	

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\ Data #: 416

Page: 1

# Prüfbericht - Nr.: 50094373 003


Test Report No.

Seite 317 von 565  
Page 317 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



## Radiated Emission Measurement

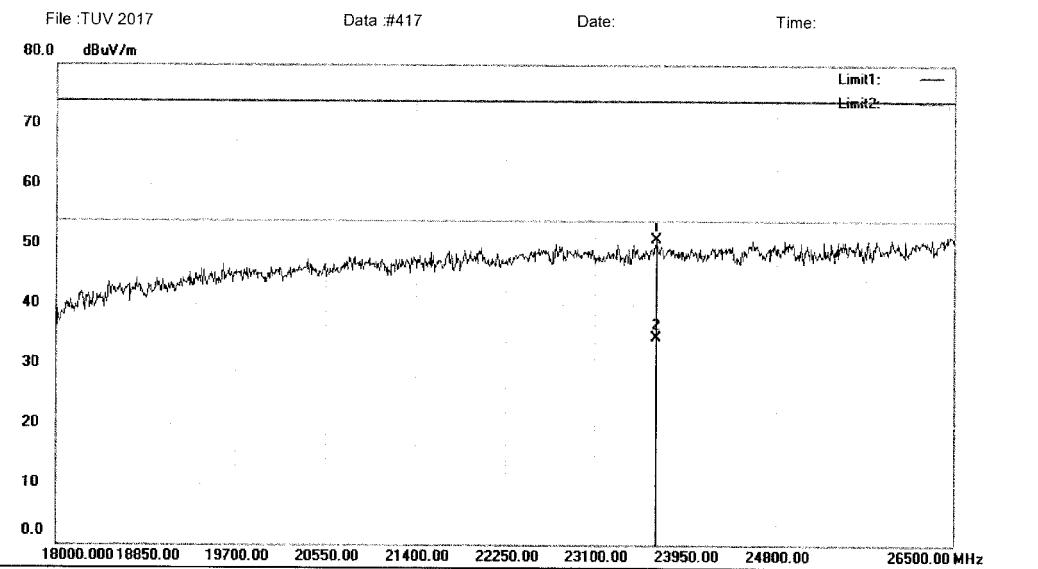

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11A8100  
 Mode:11ac20 5280  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dB <sub>u</sub> V	dB	dB <sub>u</sub> V/m	dB <sub>u</sub> V/m	dB	Detector	cm	degree	Comment
1		23686.50	88.38	-37.46	50.92	74.00	-23.08	peak			
2	*	23686.50	72.06	-37.46	34.60	54.00	-19.40	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017 Data : #417

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 318 von 565  
Page 318 of 565

Shenzhen ENTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #418

Date:

Time:

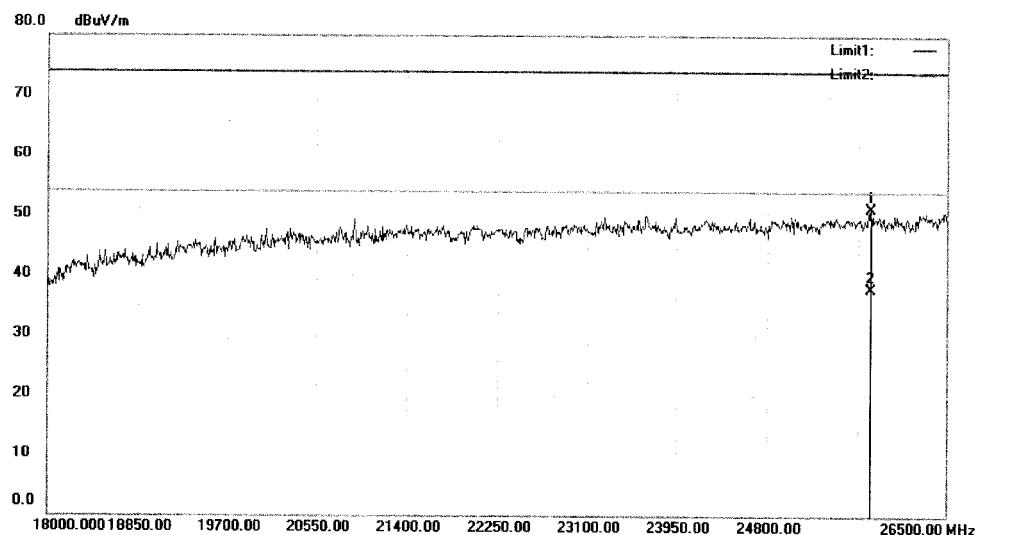

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5280

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25769.00	87.17	-36.07	51.10	74.00	-22.90	peak		
2	*	25769.00	73.87	-36.07	37.80	54.00	-16.20	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #418

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 319 von 565  
Page 319 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #419

Date:

Time:

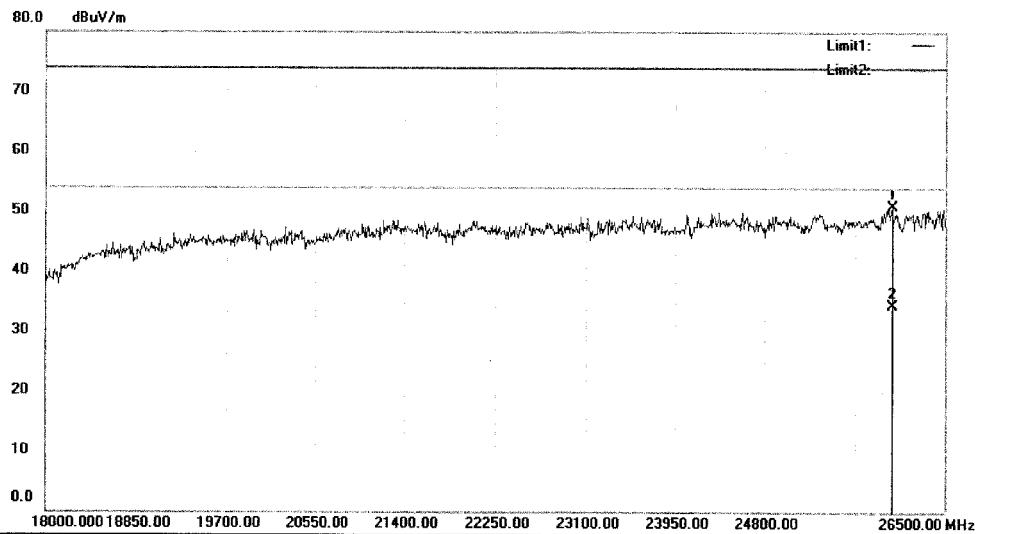

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5320

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25990.00	86.70	-35.80	50.90	74.00	-23.10	peak			
2 *		25990.00	70.20	-35.80	34.40	54.00	-19.60	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #419

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 320 von 565  
 Page 320 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #420

Date:

Time:

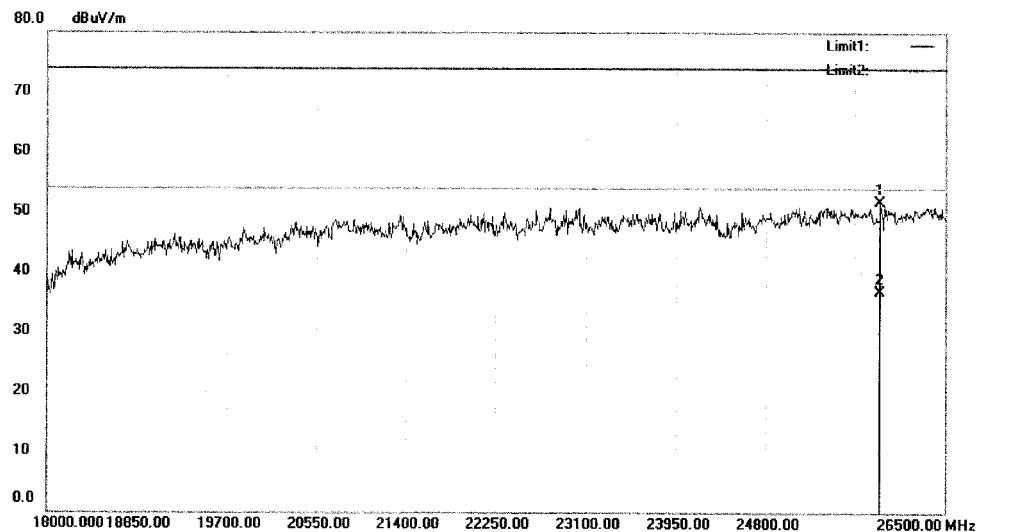

Site 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25896.50	87.54	-35.92	51.62	74.00	-22.38	peak		
2 *		25896.50	72.72	-35.92	36.80	54.00	-17.20	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data :#420

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 321 von 565  
Page 321 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data : #421

Date:

Time:

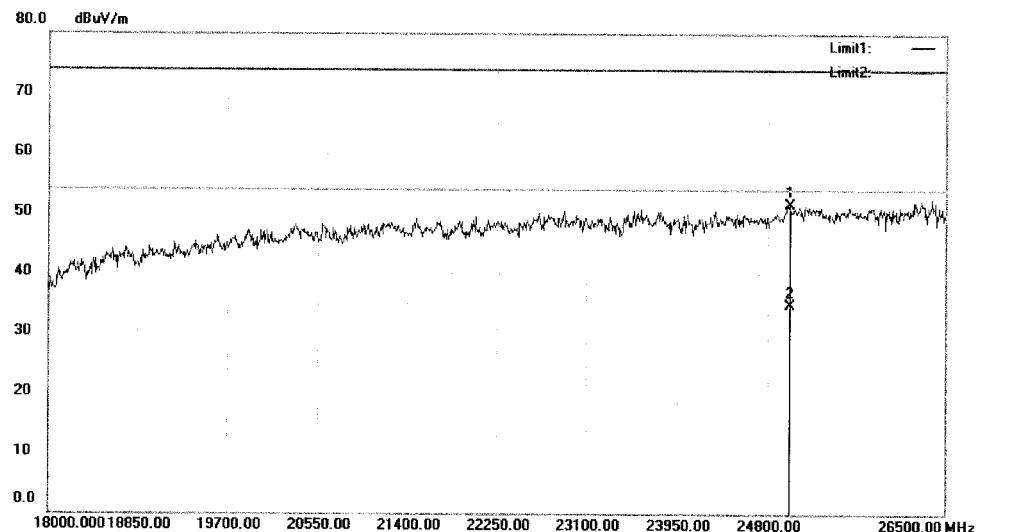

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5500

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25004.00	88.59	-37.01	51.58	74.00	-22.42	peak		
2	*	25004.00	71.81	-37.01	34.80	54.00	-19.20	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data :#421

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 322 von 565**  
Page 322 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 422

Date:

Time:

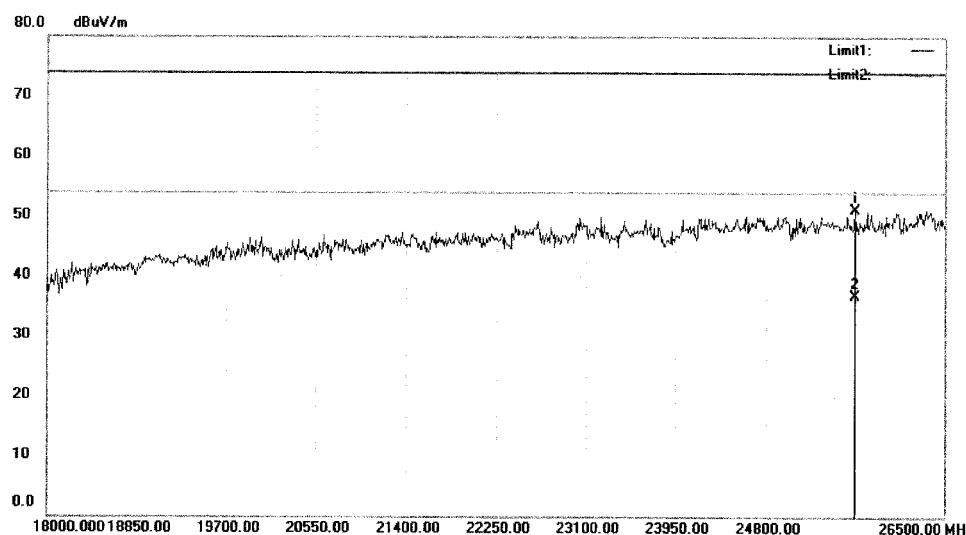

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5500

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25633.00	87.32	-36.24	51.08	74.00	-22.92	peak			
2	*	25633.00	72.94	-36.24	36.70	54.00	-17.30	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 422

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 323 von 565**  
Page 323 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File: TUV 2017

Data #:423

Date:

Time:

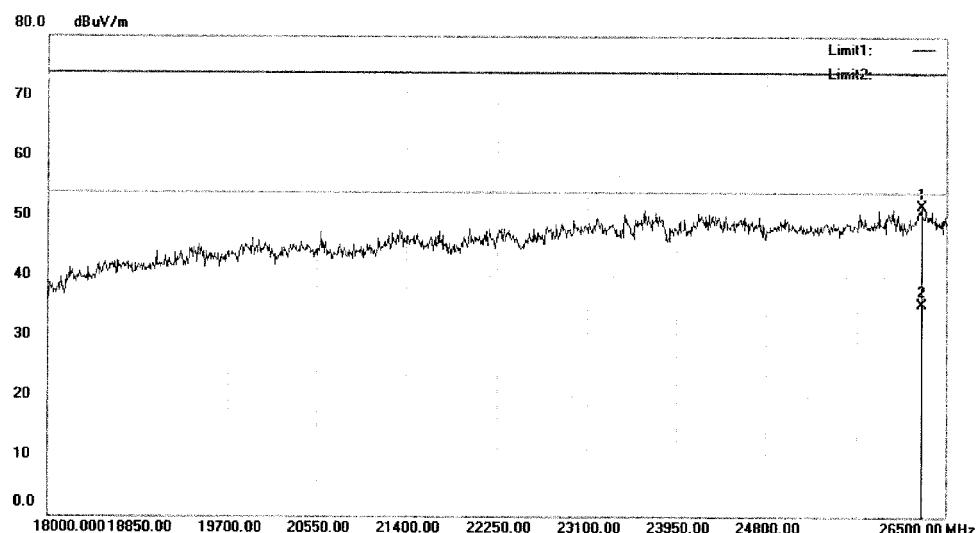

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5600

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		26262.00	87.11	-35.47	51.64	74.00	-22.36	peak			
2	*	26262.00	70.77	-35.47	35.30	54.00	-18.70	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV 2017>Data #:423

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 324 von 565  
 Page 324 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 424

Date:

Time:

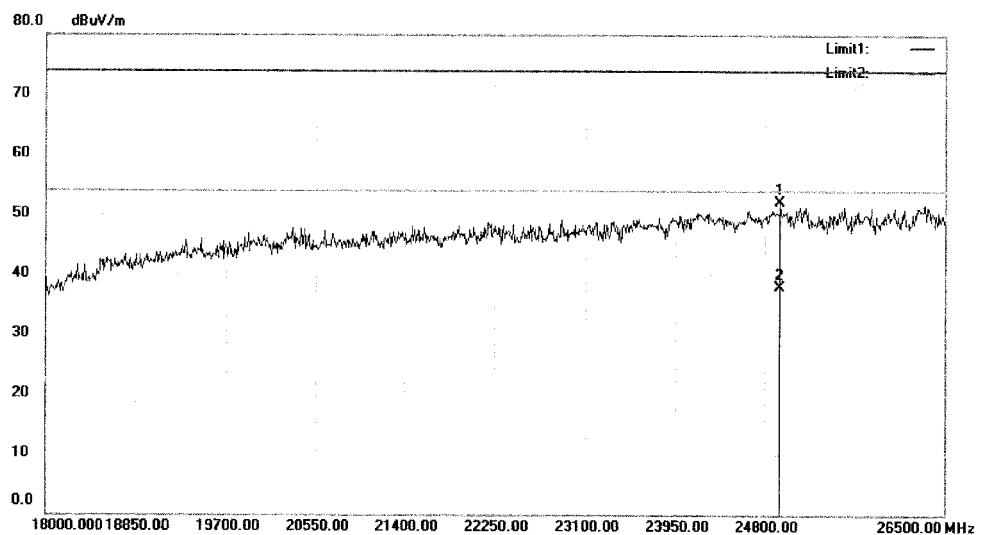

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5600

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24944.50	89.10	-37.02	52.08	74.00	-21.92	peak			
2	*	24944.50	74.92	-37.02	37.90	54.00	-16.10	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 424

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 325 von 565  
Page 325 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data : #425

Date:

Time:

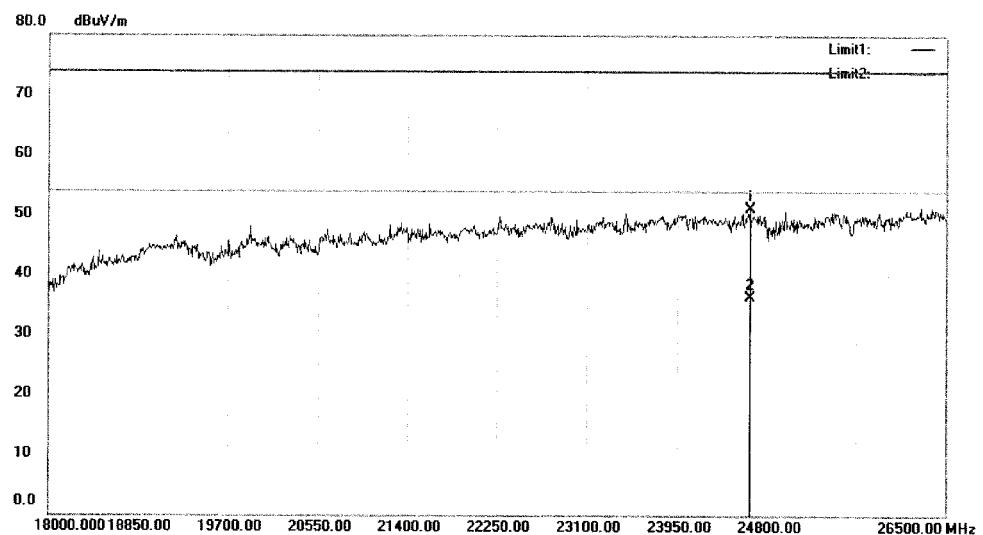

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5700

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Antenna Height cm		Table Degree	
								Detector	Comment	degree	Comment
1		24630.00	88.11	-37.05	51.06	74.00	-22.94	peak			
2	*	24630.00	73.45	-37.05	36.40	54.00	-17.60	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data : #425

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
*Test Report No.*
**Seite 326 von 565**  
*Page 326 of 565*

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



*Access to the World*
**Radiated Emission Measurement**

File : TUV 2017

Data #: 426

Date:

Time:

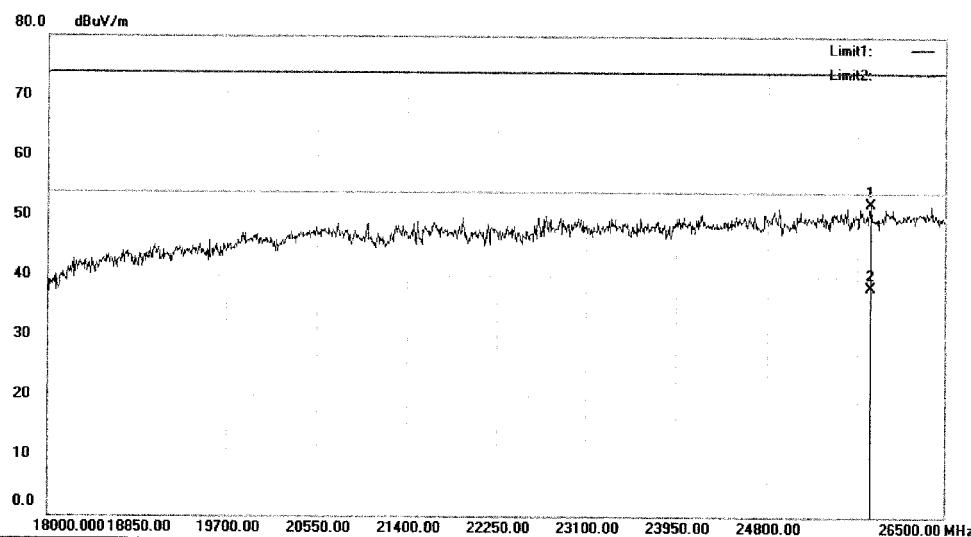

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5700

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25777.50	88.08	-36.06	52.02	74.00	-21.98	peak			
2	*	25777.50	74.26	-36.06	38.20	54.00	-15.80	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 426

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 327 von 565**  
Page 327 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 427

Date:

Time:

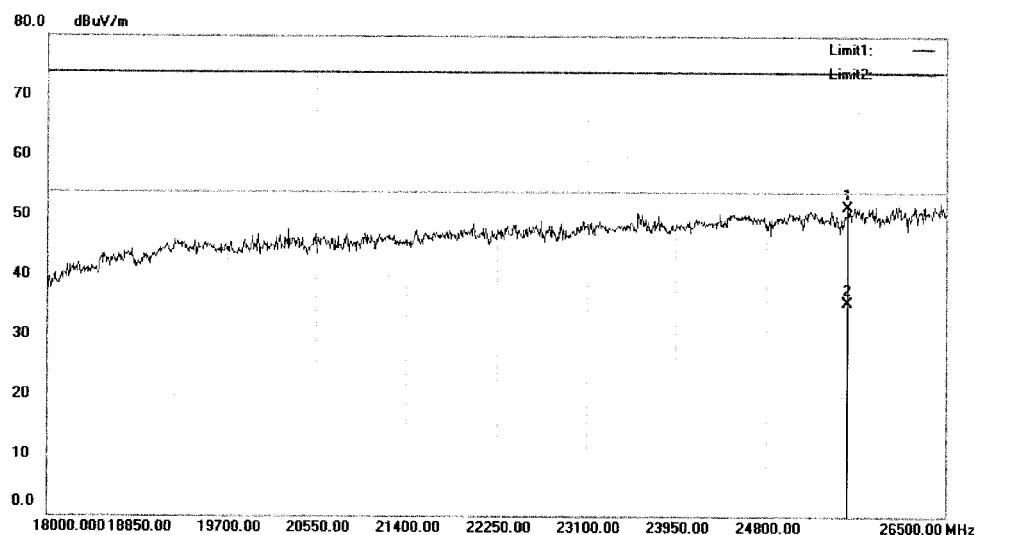

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25556.50	87.80	-36.33	51.47	74.00	-22.53	peak			
2	*	25556.50	71.83	-36.33	35.50	54.00	-18.50	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 427

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 328 von 565  
Page 328 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 428

Date:

Time:

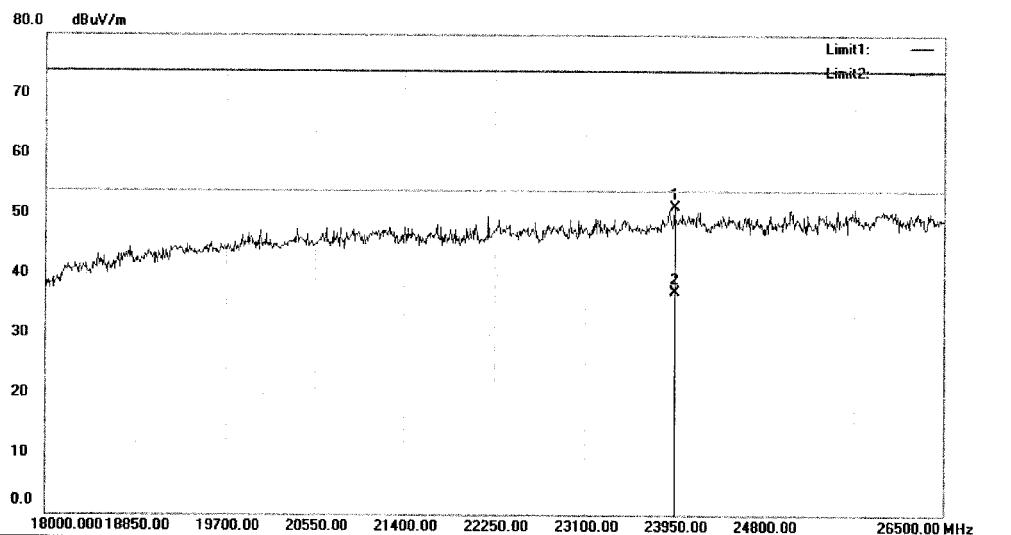

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5745

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree degree	Comment
								Detector			
1		23950.00	88.58	-37.18	51.40	74.00	-22.60	peak			
2	*	23950.00	74.28	-37.18	37.10	54.00	-16.90	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 428

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 329 von 565  
Page 329 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #429

Date:

Time:

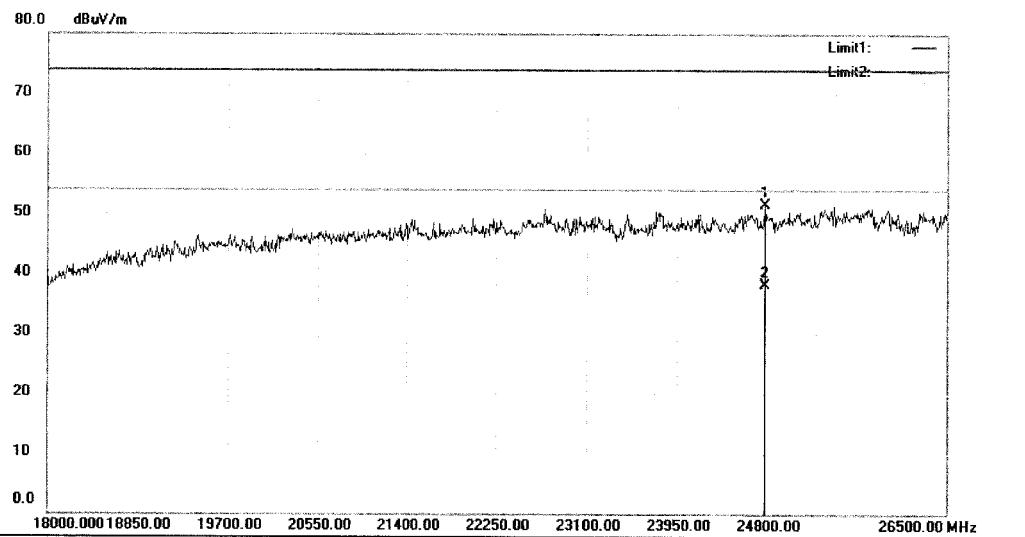

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	24783.00	88.47	-37.04	51.43	74.00	-22.57	peak			
2	*	24783.00	75.24	-37.04	38.20	54.00	-15.80	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #:429

Page: 1

# Prüfbericht - Nr.: 50094373 003


Test Report No.

Seite 330 von 565  
Page 330 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiaolong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



## Radiated Emission Measurement

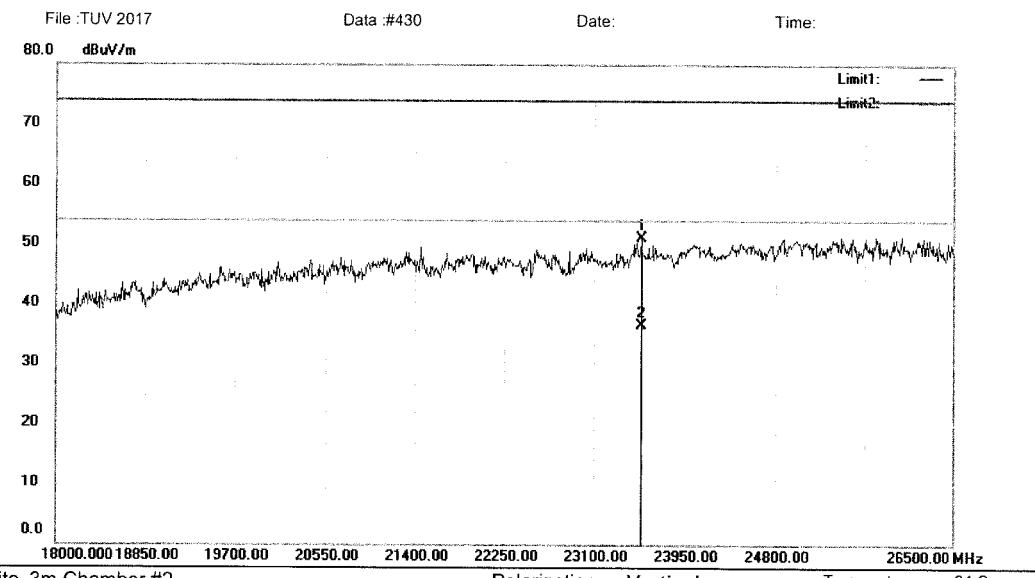

Site: 3m Chamber #2 Polarization: Vertical Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11A8100  
 Mode: 11ac20 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dB <sub>UV</sub>	dB	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m	dB	Detector	cm	degree
1		23542.00	88.66	-37.61	51.05	74.00	-22.95	peak		
2	*	23542.00	74.21	-37.61	36.60	54.00	-17.40	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017 Data #: 430

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 331 von 565**  
Page 331 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 431

Date:

Time:

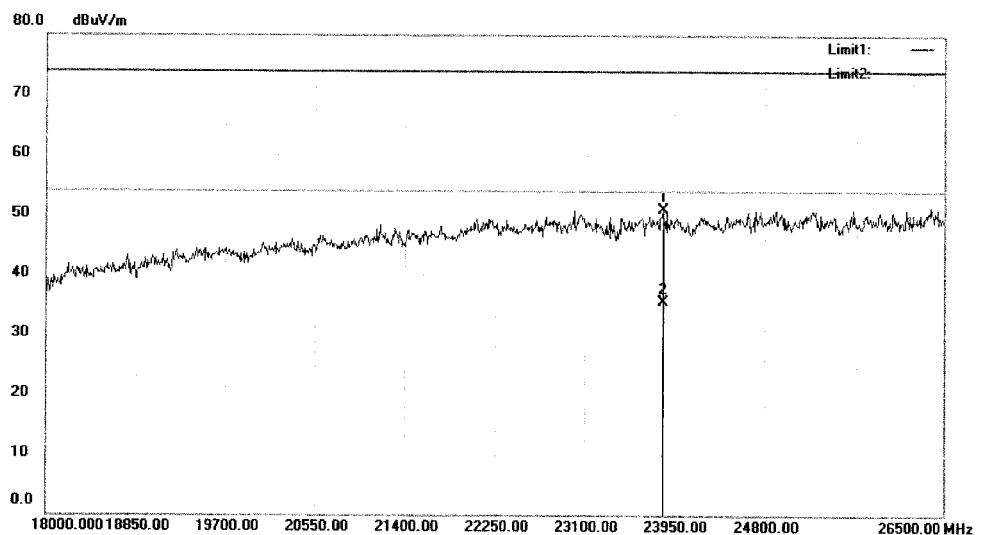

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23848.00	88.29	-37.29	51.00	74.00	-23.00	peak			
2	*	23848.00	72.79	-37.29	35.50	54.00	-18.50	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 431

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 332 von 565**  
Page 332 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 432

Date:

Time:

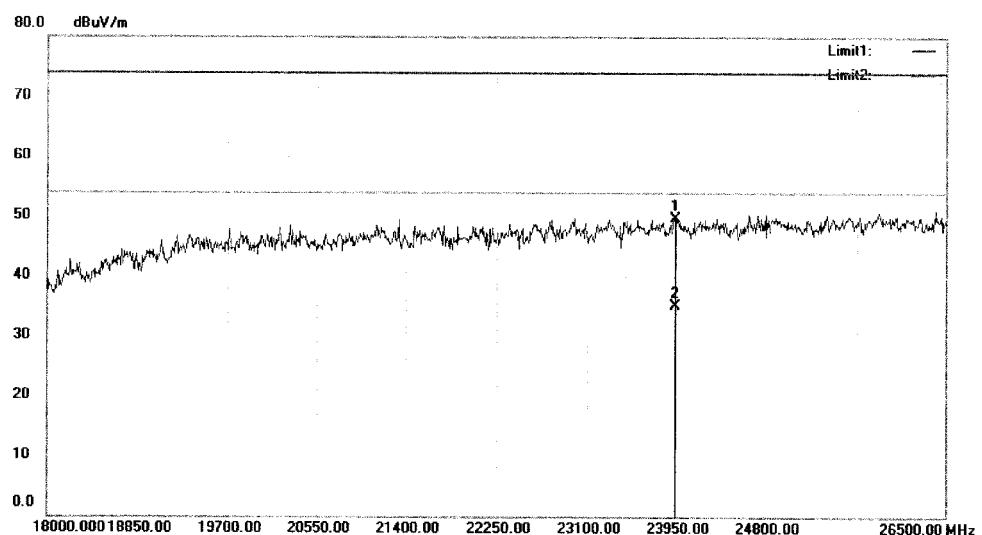

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		23941.50	86.96	-37.19	49.77	74.00	-24.23	peak			
2	*	23941.50	72.39	-37.19	35.20	54.00	-18.80	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017>Data #: 432

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 333 von 565  
Page 333 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #433

Date:

Time:

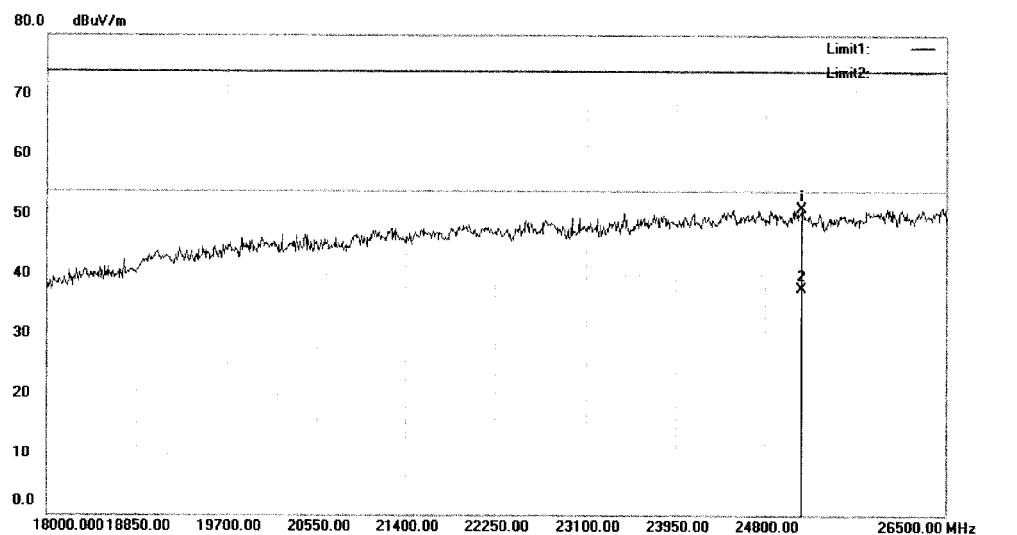

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5190

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25148.50	87.94	-36.83	51.11	74.00	-22.89	peak			
2	*	25148.50	74.63	-36.83	37.80	54.00	-16.20	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #433

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

Seite 334 von 565  
Page 334 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 434

Date:

Time:

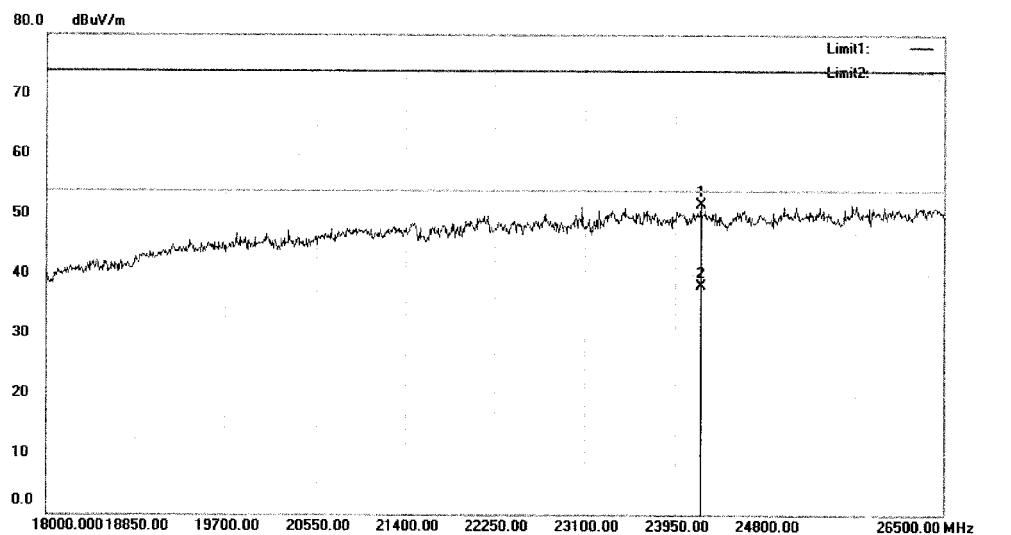

Site: 3m Chamber #2

Polarization: *Vertical*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5190

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Comment
			Level	Factor	ment			Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		24188.00	88.82	-37.11	51.71	74.00	-22.29	peak		
2	*	24188.00	75.31	-37.11	38.20	54.00	-15.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017>Data #: 434

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 335 von 565  
 Page 335 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 435

Date:

Time:

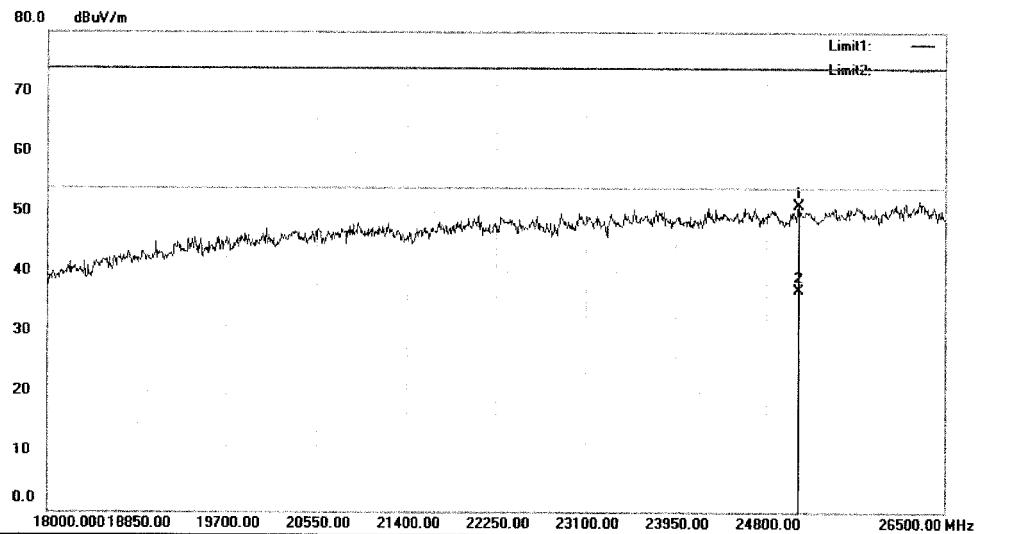

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5230

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25097.50	87.97	-36.89	51.08	74.00	-22.92	peak			
2	*	25097.50	73.79	-36.89	36.90	54.00	-17.10	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 435

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 336 von 565  
Page 336 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data : #436

Date:

Time:

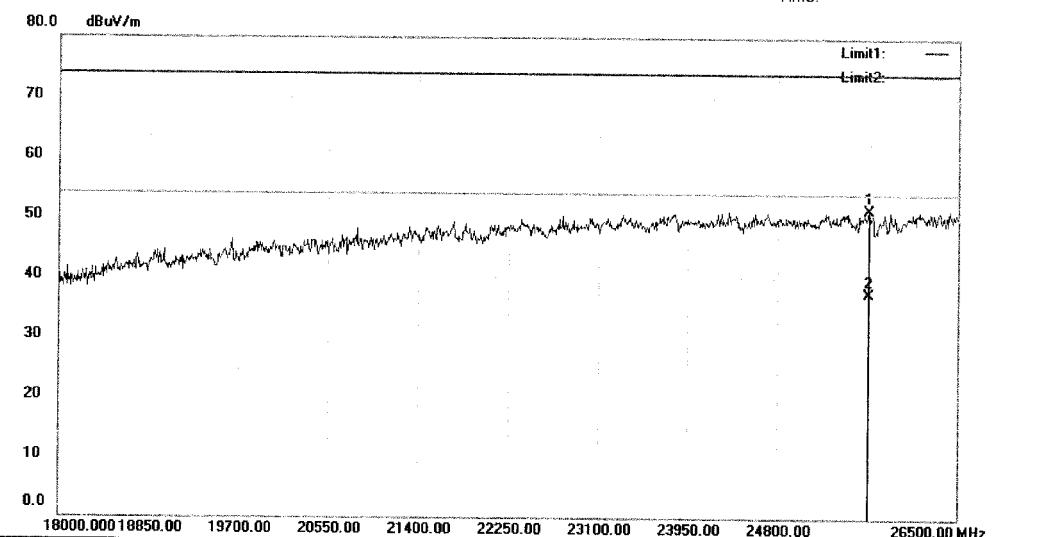

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25641.50	87.48	-36.23	51.25	74.00	-22.75	peak			
2	*	25641.50	73.63	-36.23	37.40	54.00	-16.60	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data : #436

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 337 von 565  
Page 337 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #: 437

Date:

Time:

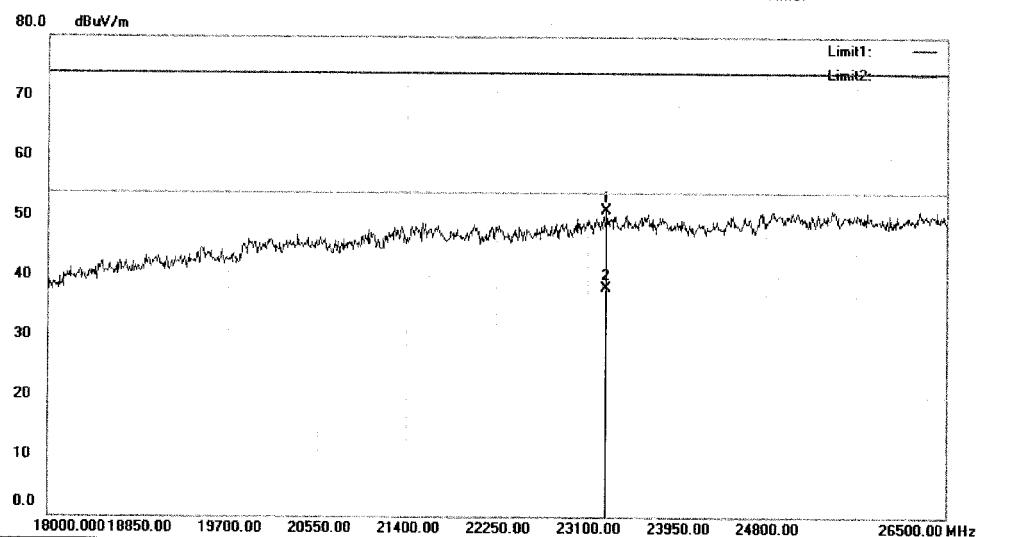

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5270

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		23278.50	89.08	-37.89	51.19	74.00	-22.81	peak		
2 *		23278.50	76.09	-37.89	38.20	54.00	-15.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 437

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 338 von 565**  
Page 338 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 438

Date:

Time:

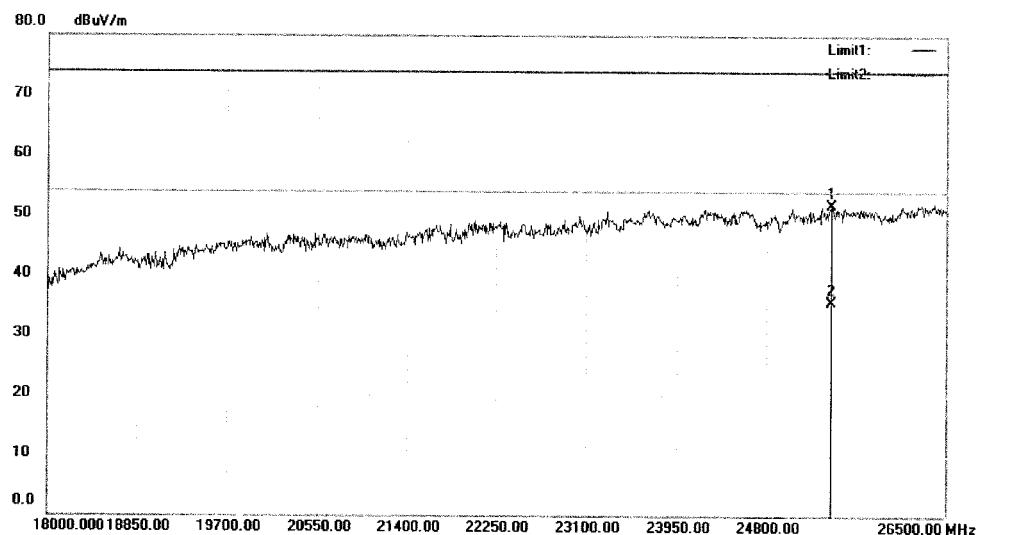

Site: 3m Chamber #2

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5270

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25420.50	88.15	-36.50	51.65	74.00	-22.35	peak		
2	*	25420.50	72.00	-36.50	35.50	54.00	-18.50	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 438

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 339 von 565  
 Page 339 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




### Radiated Emission Measurement

File : TUV 2017

Data #: 439

Date:

Time:

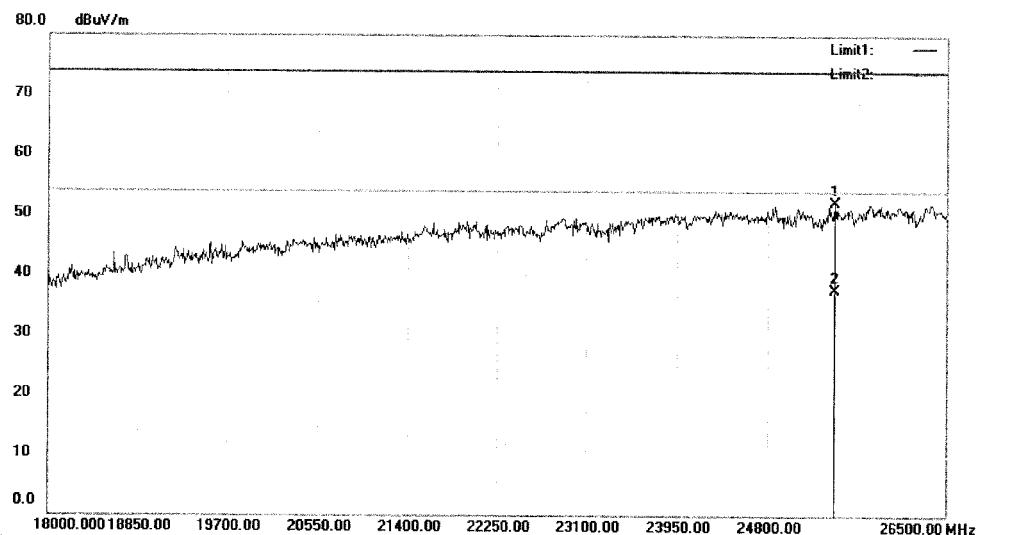

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5310

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		25429.00	88.58	-36.49	52.09	74.00	-21.91	peak			
2	*	25429.00	74.09	-36.49	37.60	54.00	-16.40	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 439

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.


**Seite 340 von 565**  
Page 340 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World

**Radiated Emission Measurement**

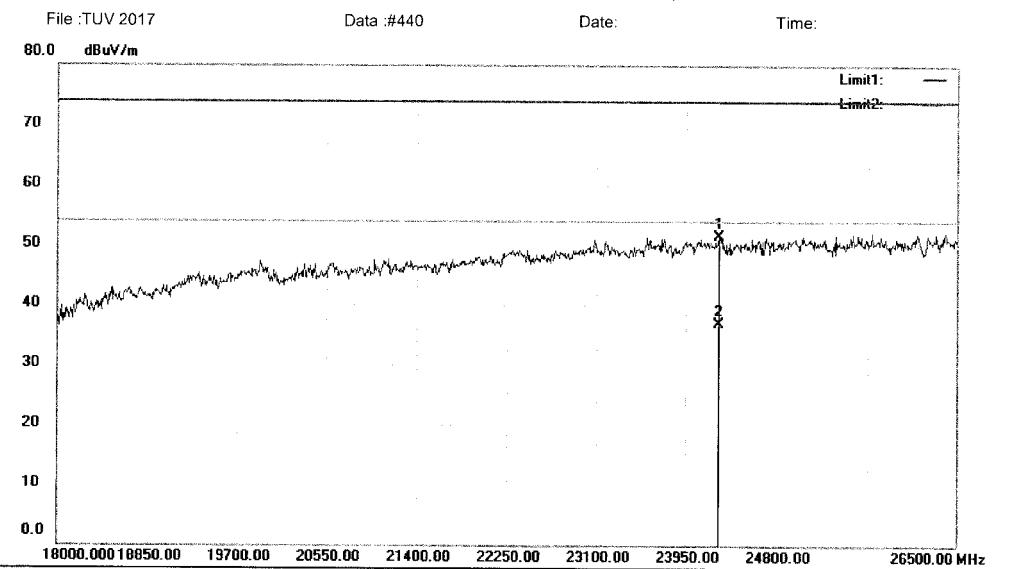

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11A8100  
 Mode: 11ac40 5310  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		24256.00	88.52	-37.10	51.42	74.00	-22.58	peak		
2	*	24256.00	74.00	-37.10	36.90	54.00	-17.10	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data : #440

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 341 von 565**  
Page 341 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 441

Date:

Time:

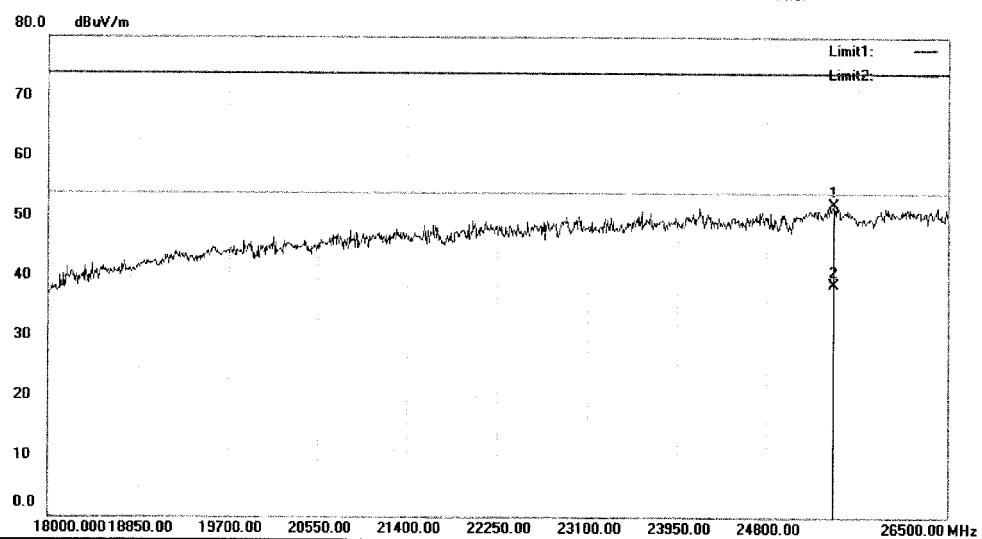

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5510

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment			Height	Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		25429.00	88.64	-36.49	52.15	74.00	-21.85	peak		
2	*	25429.00	75.29	-36.49	38.80	54.00	-15.20	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 441

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 342 von 565  
Page 342 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV 2017

Data #: 442

Date:

Time:

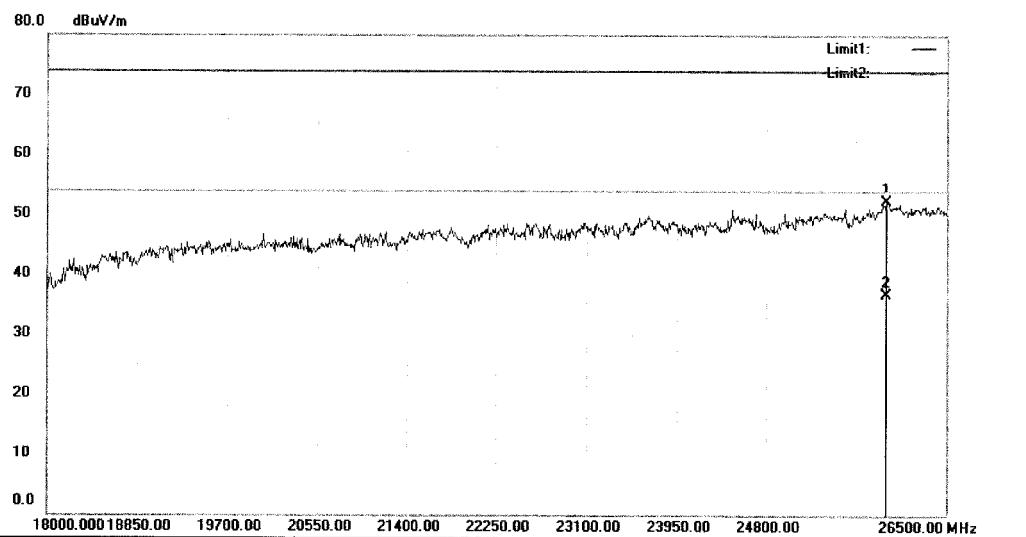

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5510

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25939.00	88.19	-35.86	52.33	74.00	-21.67	peak			
2	*	25939.00	72.66	-35.86	36.80	54.00	-17.20	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 442

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
*Test Report No.*
**Seite 343 von 565**  
*Page 343 of 565*

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



*Access to the World*
**Radiated Emission Measurement**

File : TUV 2017

Data #: 443

Date:

Time:

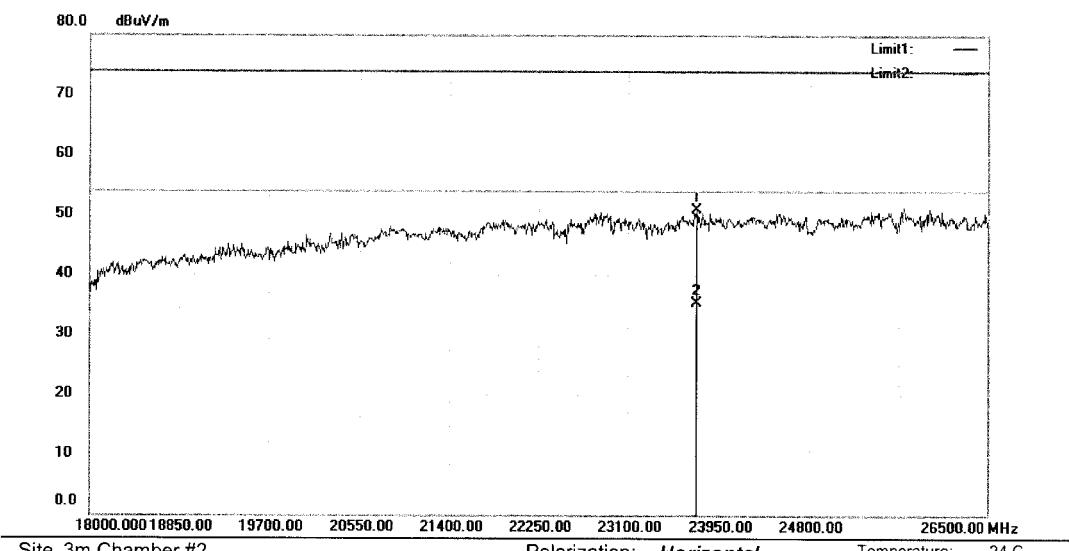

Site 3m Chamber #2

 Polarization: *Horizontal*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5590

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		23737.50	88.23	-37.41	50.82	74.00	-23.18	peak			
2	*	23737.50	72.71	-37.41	35.30	54.00	-18.70	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 443

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 344 von 565**  
Page 344 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiaolong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 444

Date:

Time:

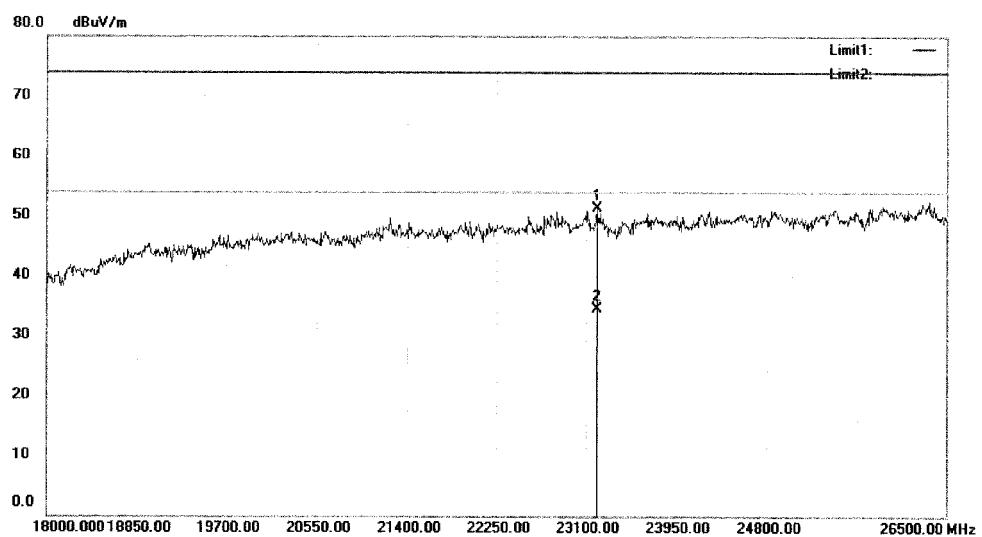

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5590

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23202.00	89.26	-37.97	51.29	74.00	-22.71	peak		
2	*	23202.00	72.57	-37.97	34.60	54.00	-19.40	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 444

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 345 von 565**  
Page 345 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 445

Date:

Time:

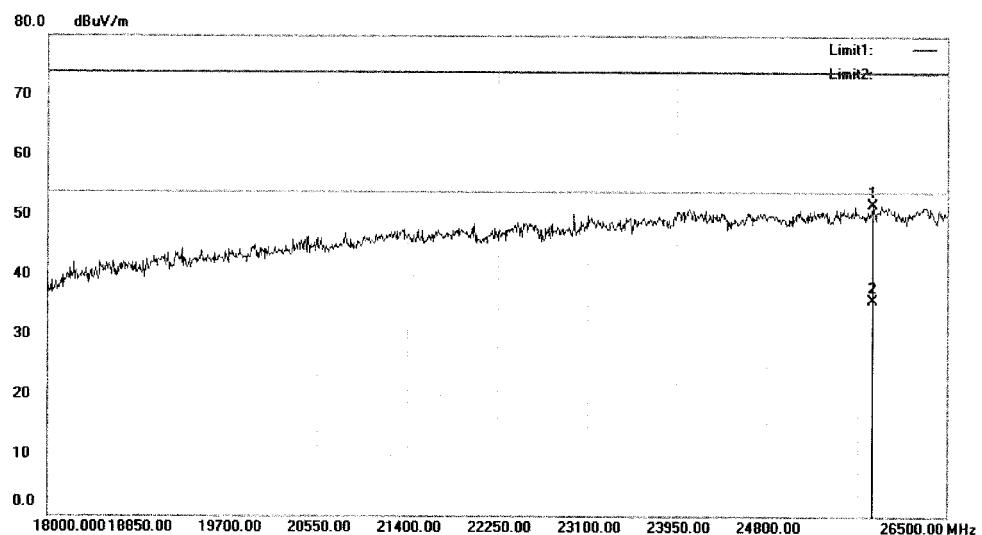

Site: 3m Chamber #2

Polarization: *Horizontal*

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5670

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		25794.50	87.94	-36.04	51.90	74.00	-22.10	peak			
2	*	25794.50	71.94	-36.04	35.90	54.00	-18.10	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017|Data #: 445

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 346 von 565  
Page 346 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 446

Date:

Time:

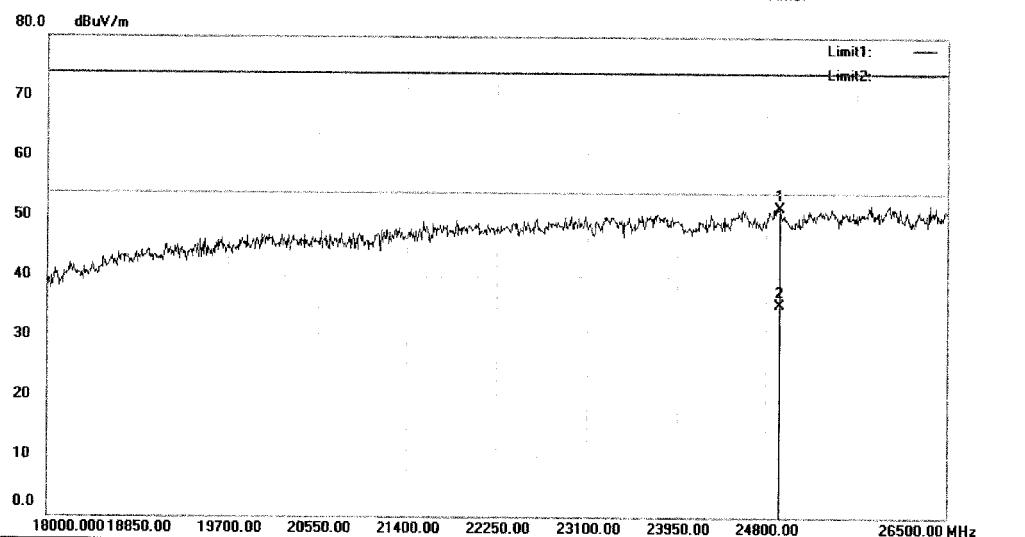

Site: 3m Chamber #2

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5670

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		24927.50	88.44	-37.02	51.42	74.00	-22.58	peak			
2	*	24927.50	72.42	-37.02	35.40	54.00	-18.60	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data :#446

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 347 von 565**  
Page 347 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #: 447

Date:

Time:

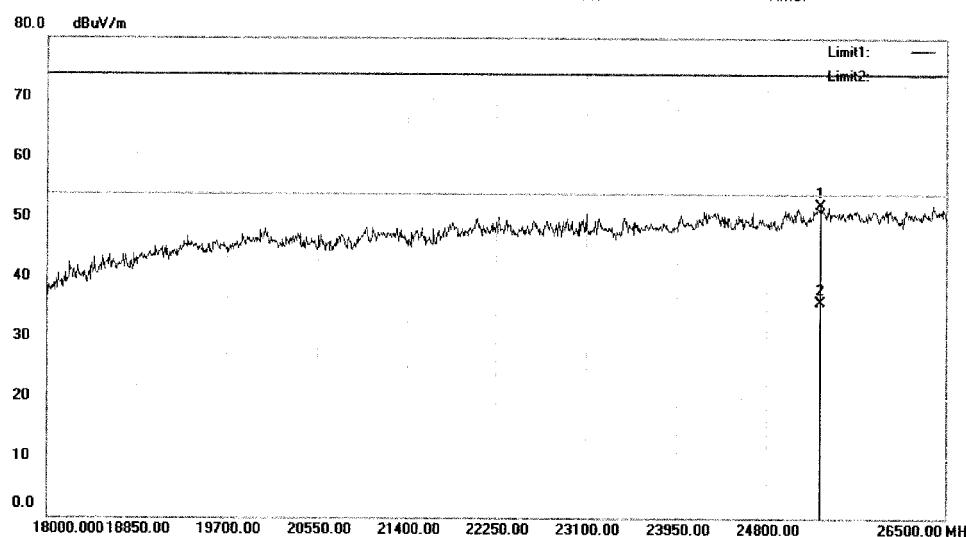

Site 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25318.50	88.71	-36.62	52.09	74.00	-21.91	peak			
2	*	25318.50	72.52	-36.62	35.90	54.00	-18.10	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 447

Page: 1


**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 348 von 565**  
Page 348 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World

**Radiated Emission Measurement**

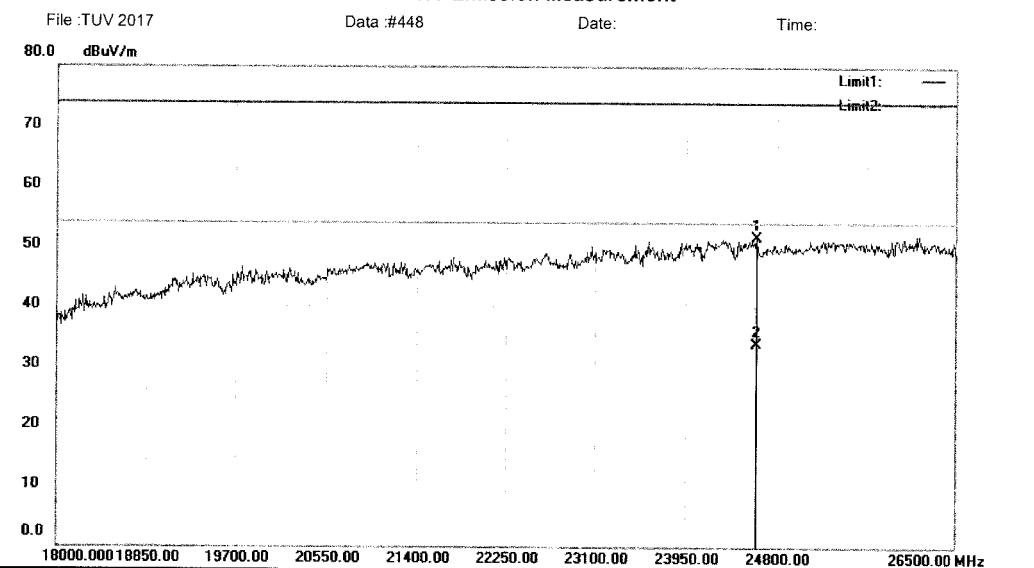

Site: 3m Chamber #2 Polarization: Vertical Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11A8100  
 Mode: 11ac40 5755  
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		24613.00	88.61	-37.06	51.55	74.00	-22.45	peak			
2	*	24613.00	70.86	-37.06	33.80	54.00	-20.20	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017|Data #:448

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 349 von 565  
Page 349 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #: 449

Date:

Time:

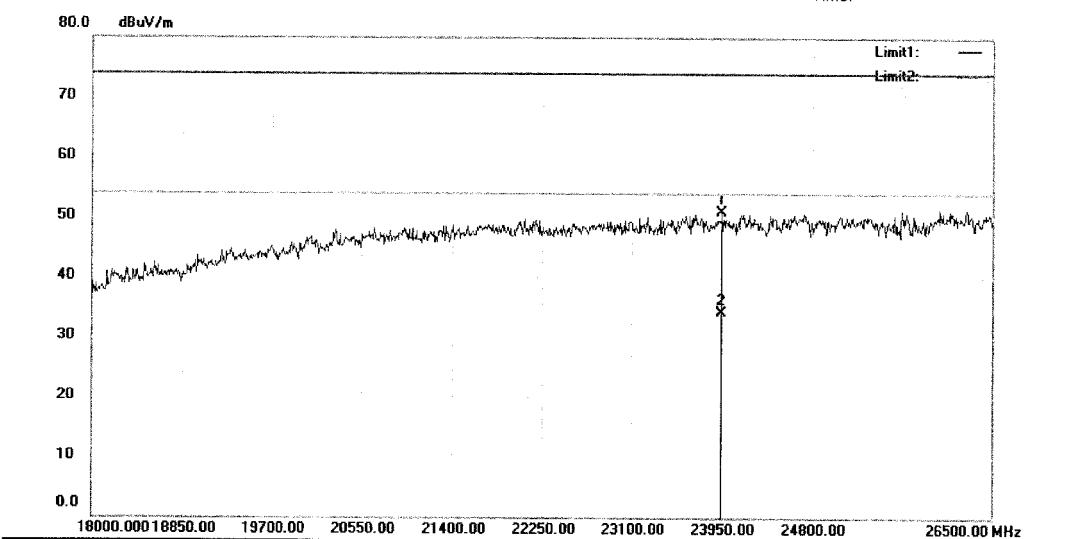

Site: 3m Chamber #2

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1		23958.50	88.09	-37.17	50.92	74.00	-23.08	peak			
2	*	23958.50	71.27	-37.17	34.10	54.00	-19.90	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017 Data #: 449

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 350 von 565**  
Page 350 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV 2017

Data #: 450

Date:

Time:

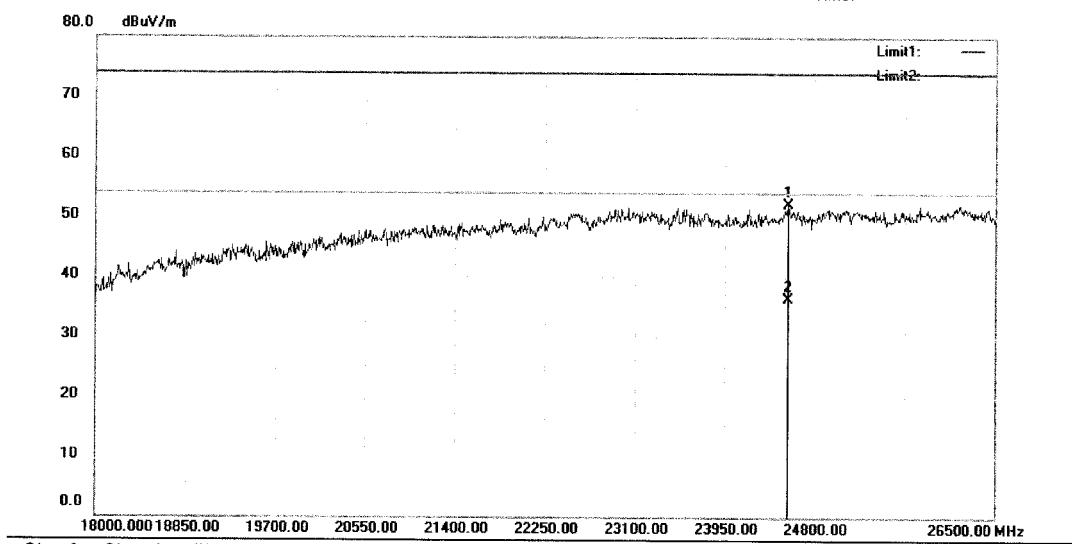

Site 3m Chamber #2

Polarization: **Vertical**

Temperature: 24 C

Limit: ( RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24553.50	89.17	-37.06	52.11	74.00	-21.89	peak		
2 *		24553.50	73.46	-37.06	36.40	54.00	-17.60	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017 Data #: 450

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 351 von 565  
 Page 351 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV 2017

Data #308

Date:

Time:

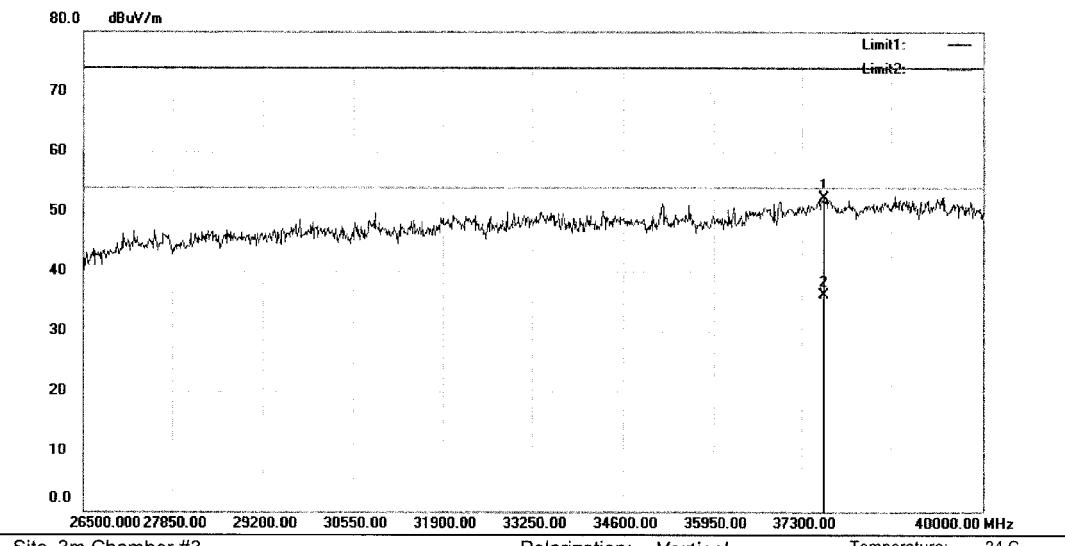

Site: 3m Chamber #3

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15.247

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		37624.00	88.92	-36.63	52.29	74.00	-21.71	peak		
2 *		37624.00	72.73	-36.63	36.10	54.00	-17.90	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data #308

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 352 von 565**  
Page 352 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV 2017

Data #309

Date:

Time:

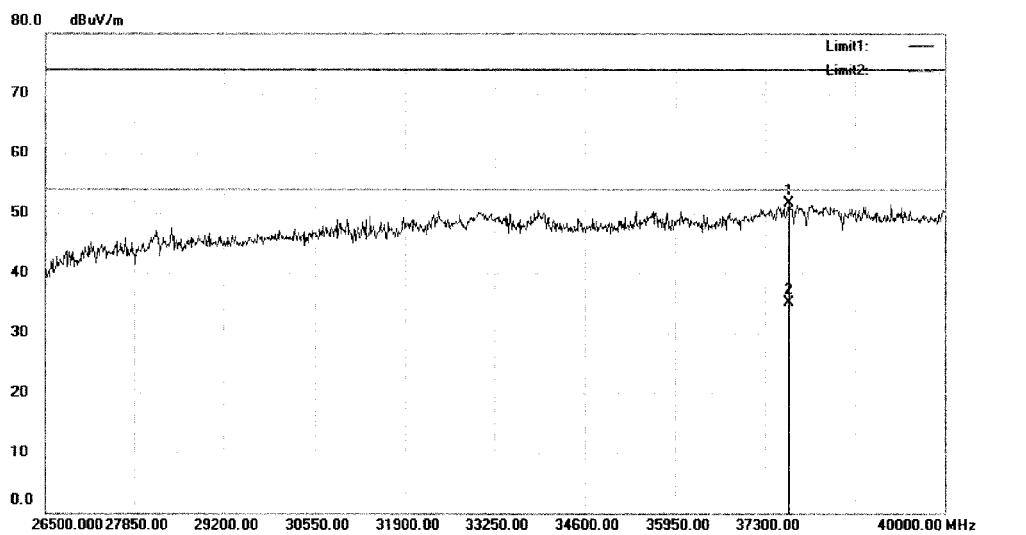

Site: 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15.247

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		37651.00	88.28	-36.61	51.67	74.00	-22.33	peak		
2	*	37651.00	71.81	-36.61	35.20	54.00	-18.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV 2017\Data #309

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 353 von 565  
Page 353 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #2

Date: 2017/05/06

Time:

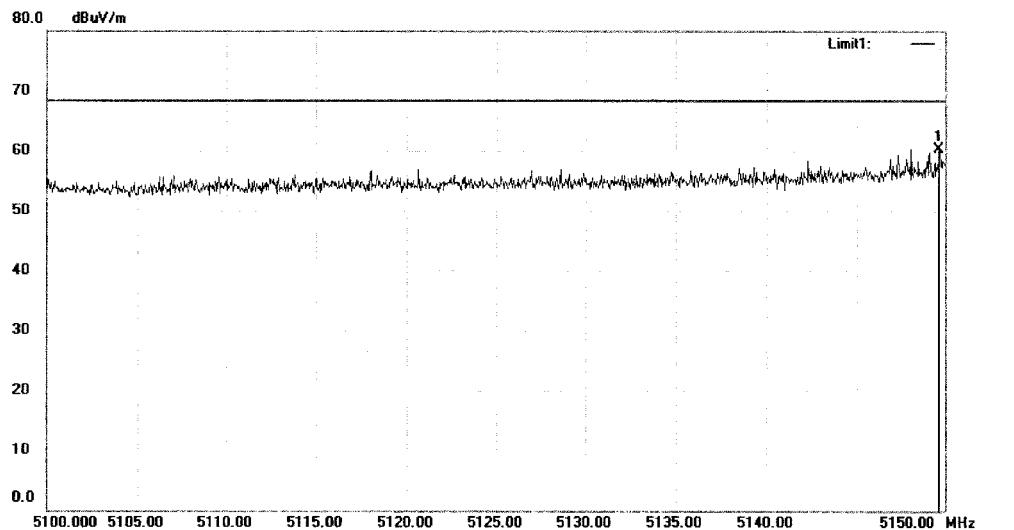

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.650	59.45	0.82	60.27	68.23	-7.96	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#2

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 354 von 565  
Page 354 of 565

Shenzhen EMTEK Co.,Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data : #1

Date: 2017/05/06

Time:

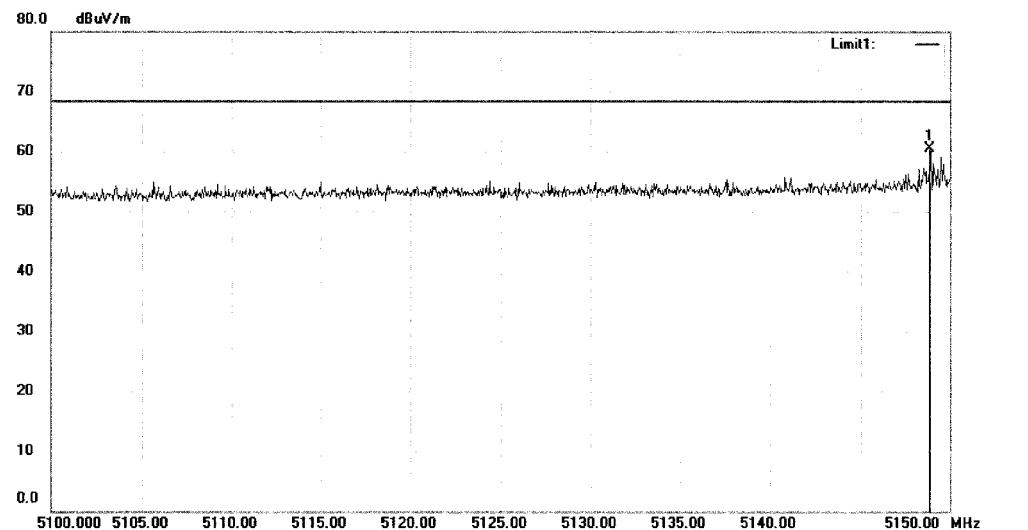

Site 3m Chamber #1

Polarization: Vertical

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5148.850	59.74	0.81	60.55	68.23	-7.68	peak			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data :#1

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 355 von 565**  
Page 355 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #4

Date: 2017/05/06

Time:

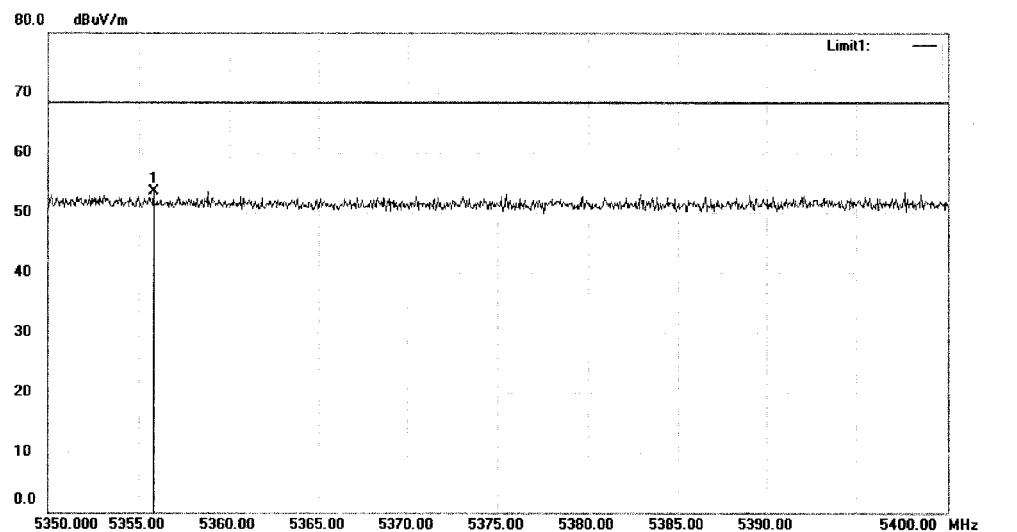

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5355.800	52.35	1.21	53.56	68.23	-14.67	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #4

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 356 von 565**  
Page 356 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File :TUV(HUAKE)

Data :#3

Date: 2017/05/06

Time:

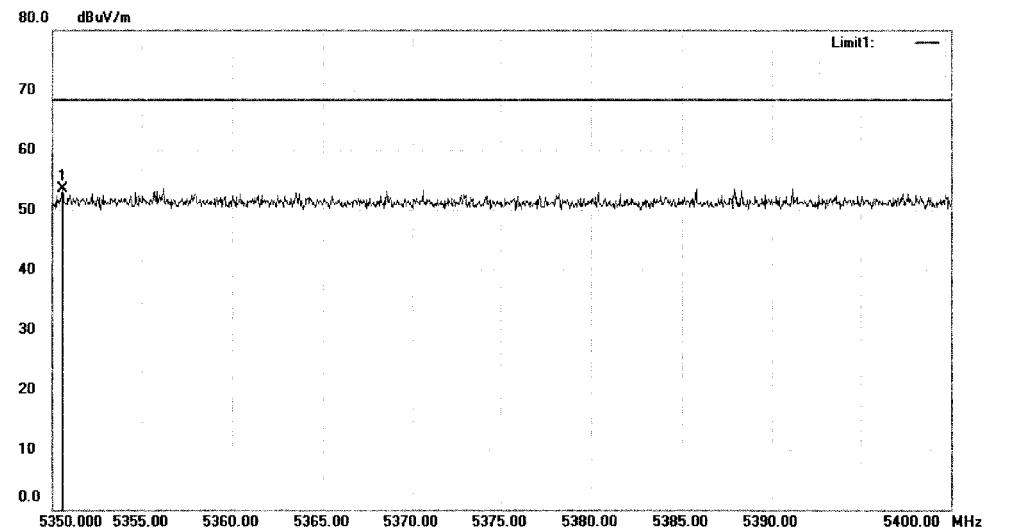

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5240MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Antenna Height cm	Table Degree degree	Comment
								Detector		
1	*	5350.550	52.31	1.20	53.51	68.23	-14.72	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#3

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 357 von 565  
Page 357 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #6

Date: 2017/05/06

Time:

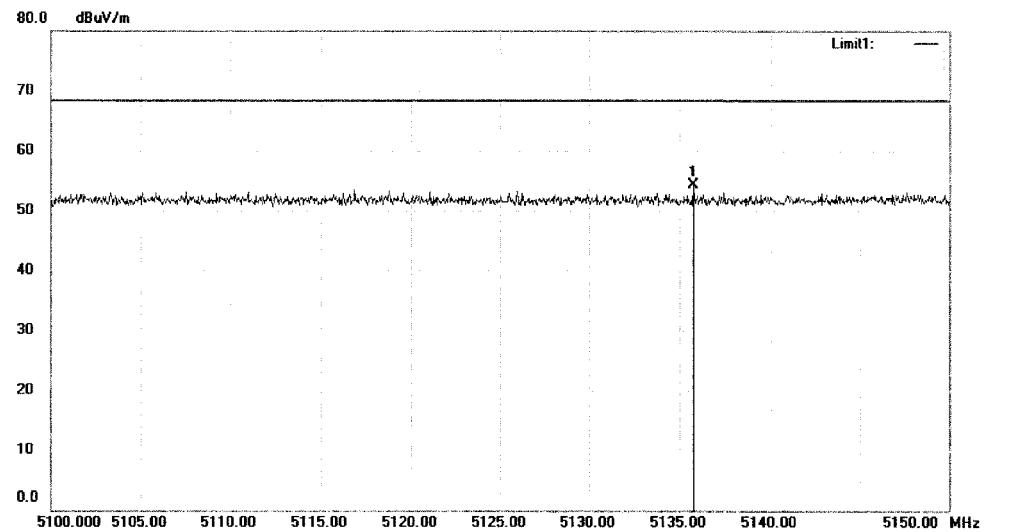

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5260MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over	Antenna Height cm	Table Degree degree	Comment
								Detector		
1	*	5135.750	53.43	0.78	54.21	68.23	-14.02	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #6

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 358 von 565**  
Page 358 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #5

Date: 2017/05/06

Time:

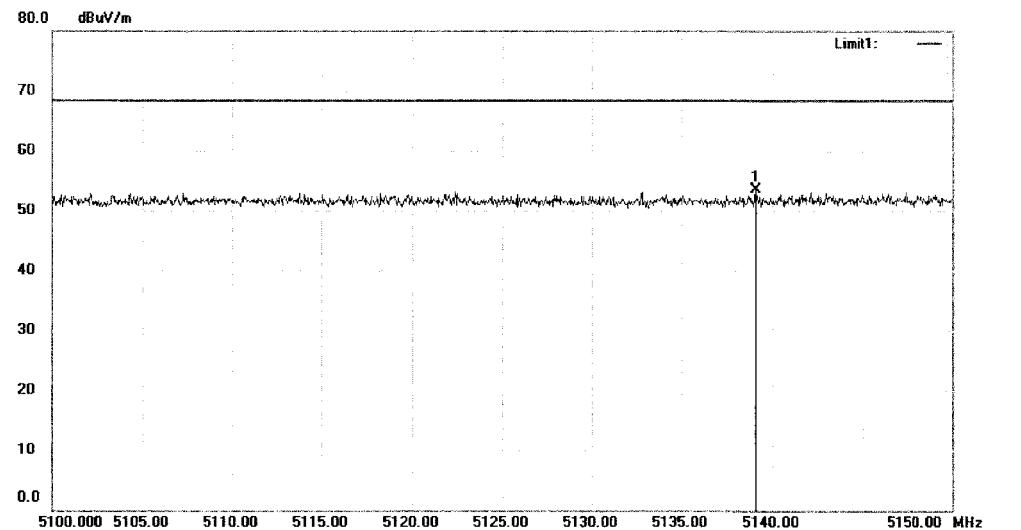

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5260MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	m					Degree
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5139.100	52.64	0.80	53.44	68.23	-14.79	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#5

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 359 von 565  
Page 359 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 8

Date: 2017/05/06

Time:

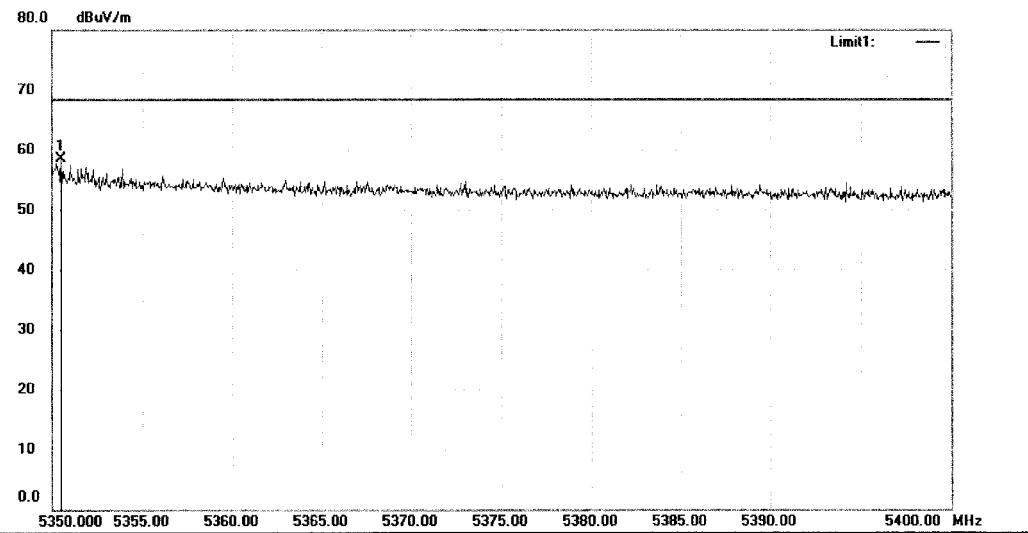

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5320MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	
								Detector	cm	degree	Comment
1	*	5350.500	57.23	1.20	58.43	68.23	-9.80	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#8

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 360 von 565**  
Page 360 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #7

Date: 2017/05/06

Time:

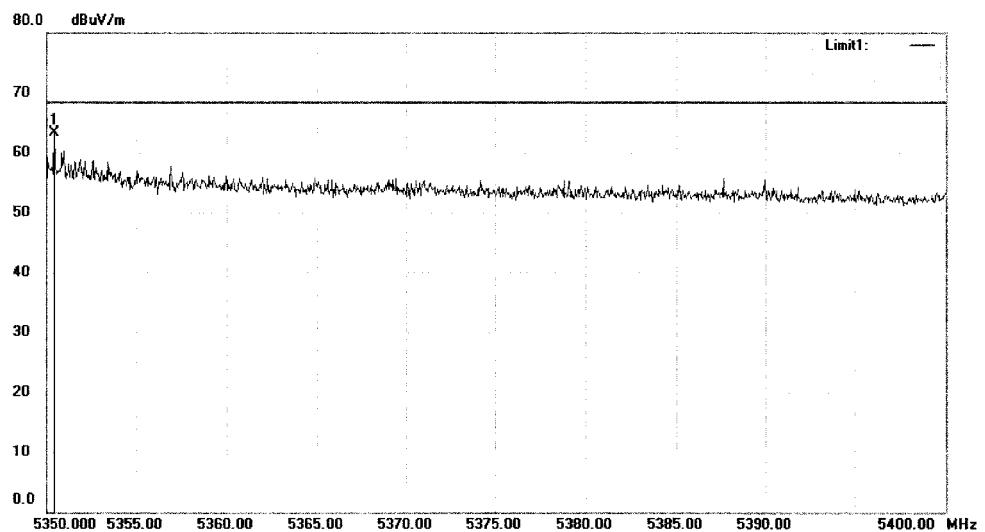

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5350.450	62.08	1.20	63.28	68.23	-4.95	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #7

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 361 von 565**  
Page 361 of 565

Shenzhen EMTEK Co.,Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #10

Date: 2017/05/06

Time:

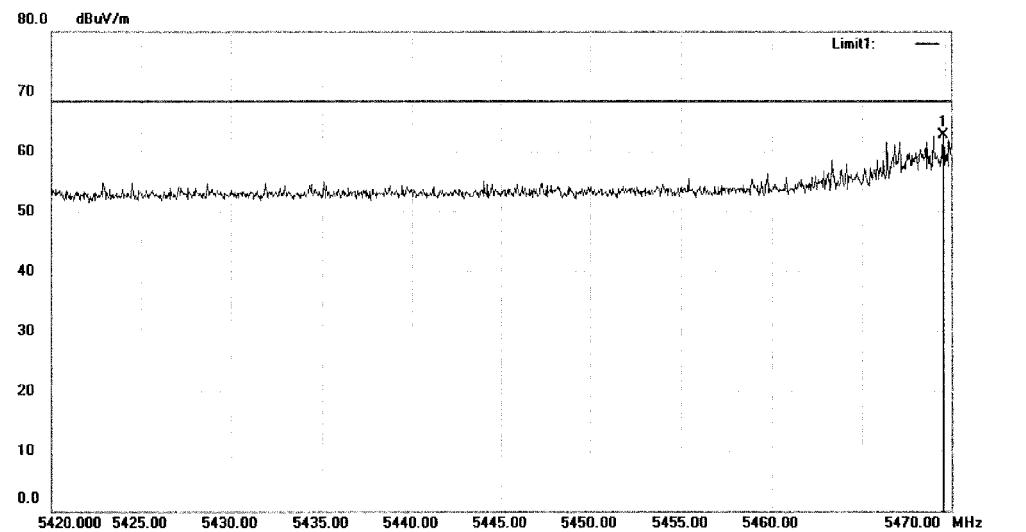

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5469.550	61.32	1.43	62.75	68.23	-5.48	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #10

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 362 von 565**  
Page 362 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #9

Date: 2017/05/06

Time:

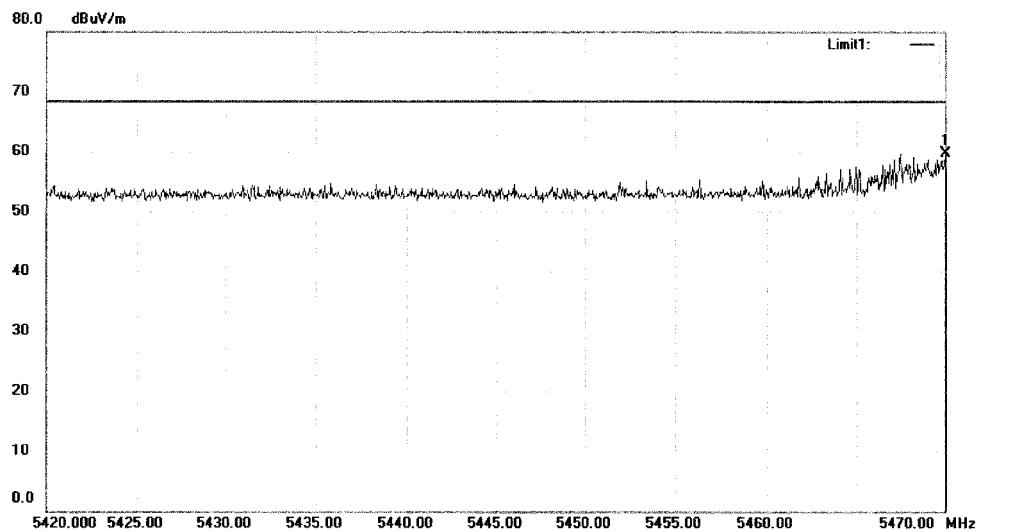

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5470.000	58.35	1.43	59.78	68.23	-8.45	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #9

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 363 von 565  
Page 363 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 11

Date: 2017/05/06

Time:

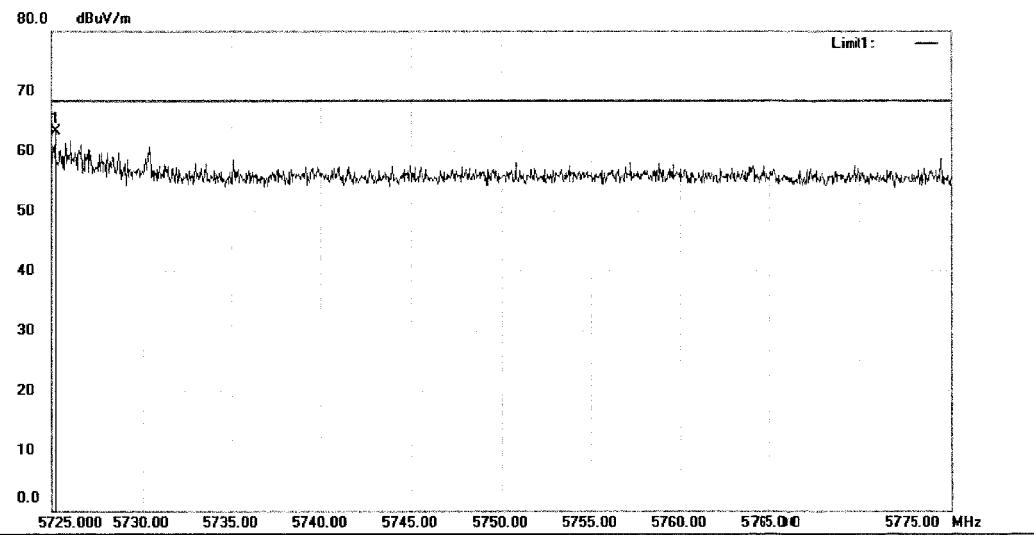

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a(5700MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over	Antenna Height cm	Table Degree degree	Comment
								Detector		
1	*	5725.200	61.31	1.92	63.23	68.23	-5.00	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#11

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 364 von 565**  
Page 364 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #12

Date: 2017/05/06

Time:

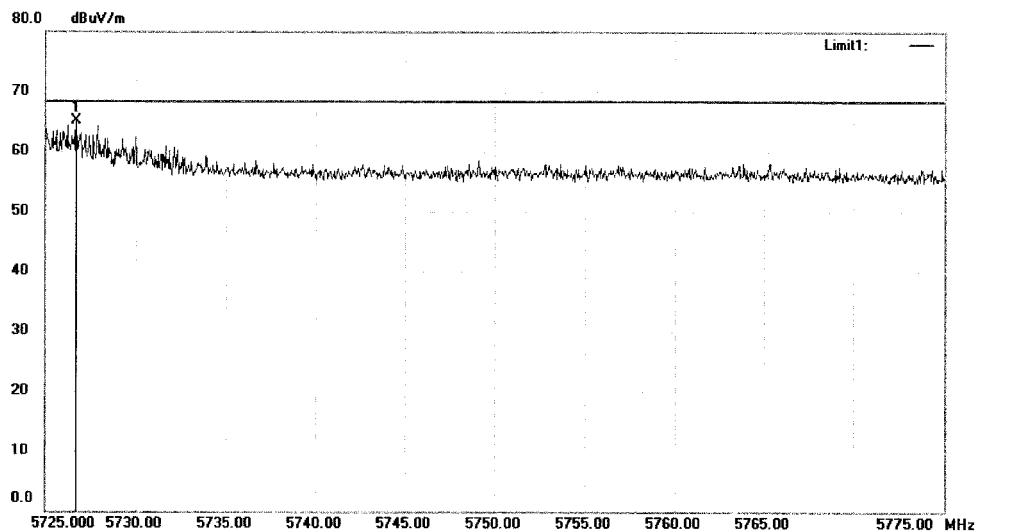

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5700MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5726.700	63.14	1.92	65.06	68.23	-3.17	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #12

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 365 von 565**  
Page 365 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #14

Date: 2017/05/06

Time:

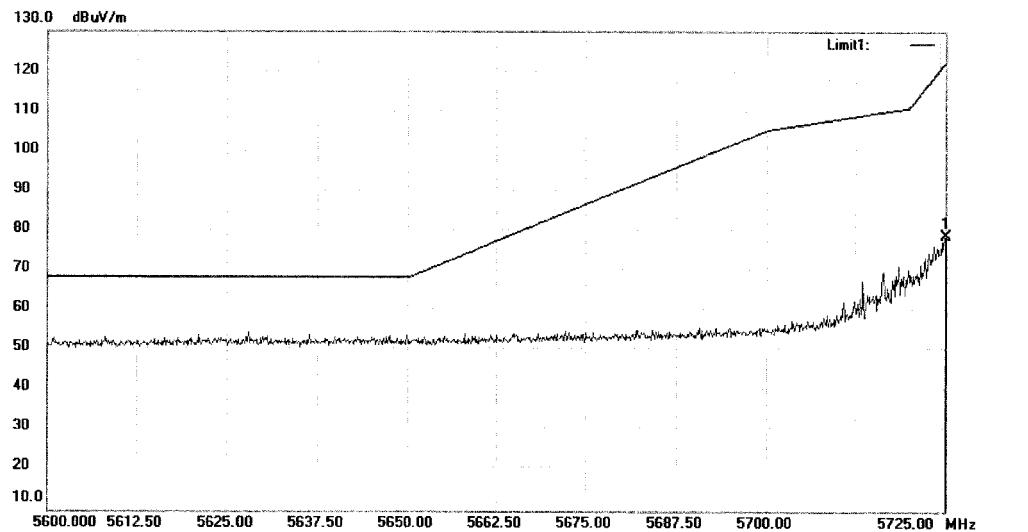

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a(5745MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5725.000	76.87	1.92	78.79	122.23	-43.44	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#14

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 366 von 565  
Page 366 of 565

Shenzhen EMTEK Co.,Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #13

Date: 2017/05/06

Time:

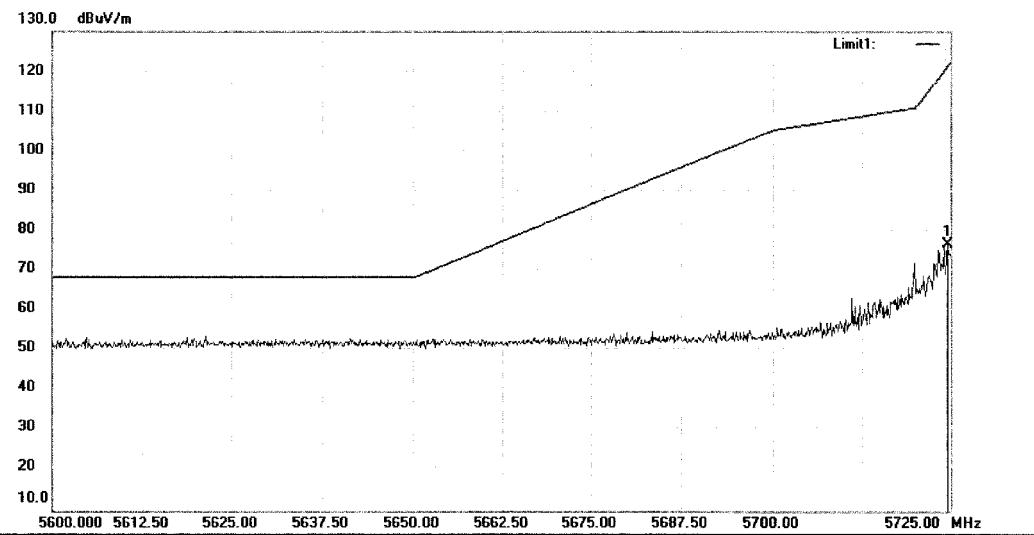

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5745MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree
								Detector	Comment	
1	*	5724.500	74.94	1.92	76.86	121.09	-44.23	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #13

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 367 von 565  
Page 367 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 16

Date: 2017/05/06

Time:

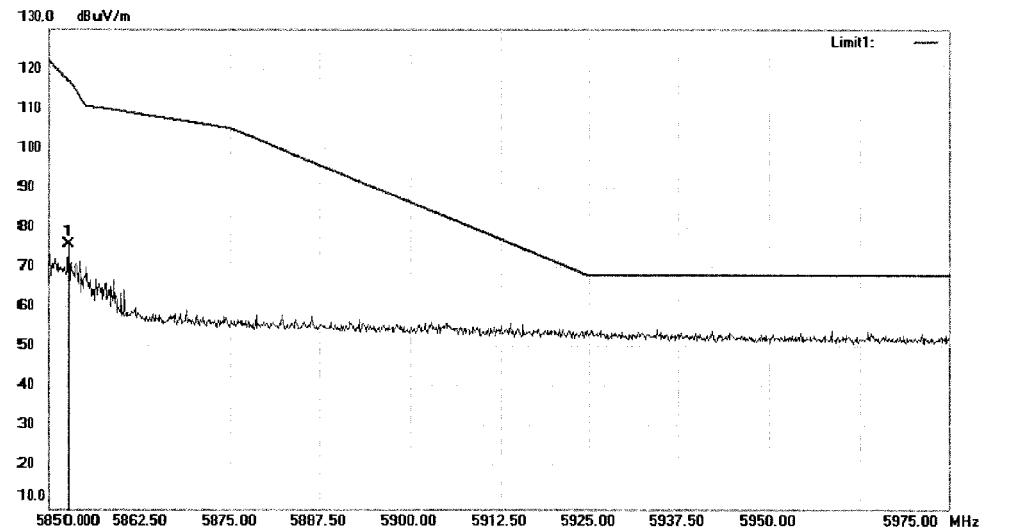

Site: 3m Chamber #1

Polarization: Horizontal

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5852.250	74.00	2.17	76.17	117.10	-40.93	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #: 16

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 368 von 565  
Page 368 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #15

Date: 2017/05/06

Time:

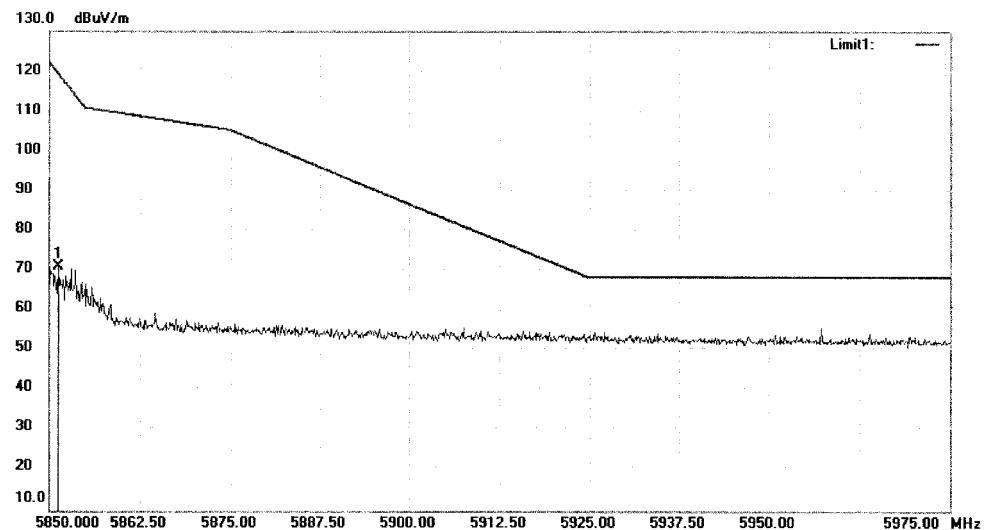

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5825MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree
								Detector	Comment	
1	*	5851.250	68.83	2.17	71.00	119.38	-48.38	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #15

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 369 von 565**  
Page 369 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File: TUV(HUAKE)

Data #29

Date: 2017/05/06

Time:

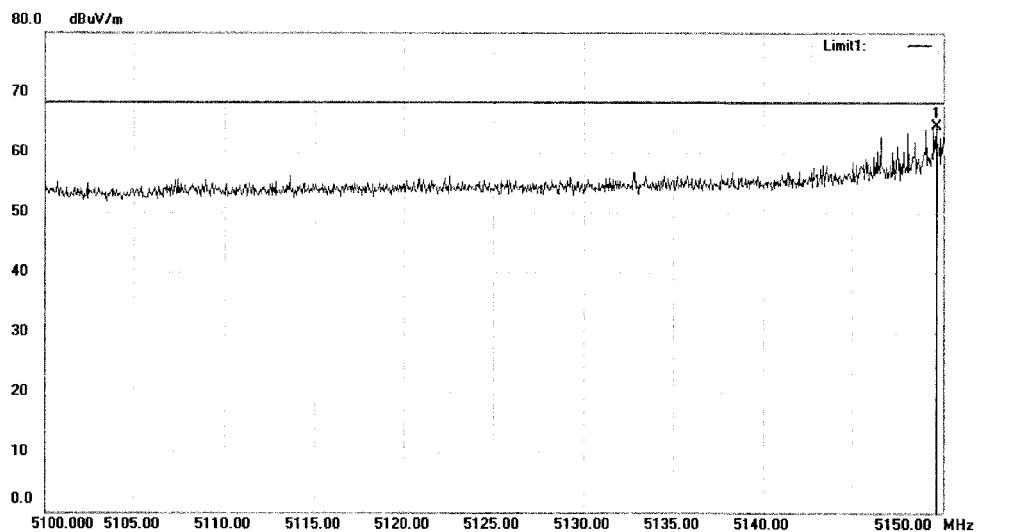

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.600	63.62	0.82	64.44	68.23	-3.79	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#29

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 370 von 565  
 Page 370 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #30

Date: 2017/05/06

Time:

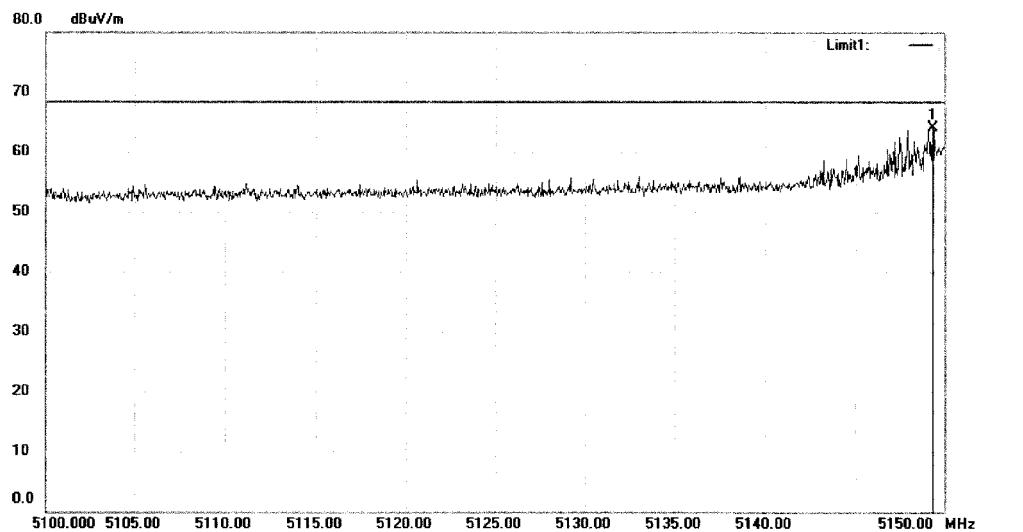

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5180MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.350	63.31	0.81	64.12	68.23	-4.11	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#30

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 371 von 565**  
Page 371 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data : #32

Date: 2017/05/06

Time:

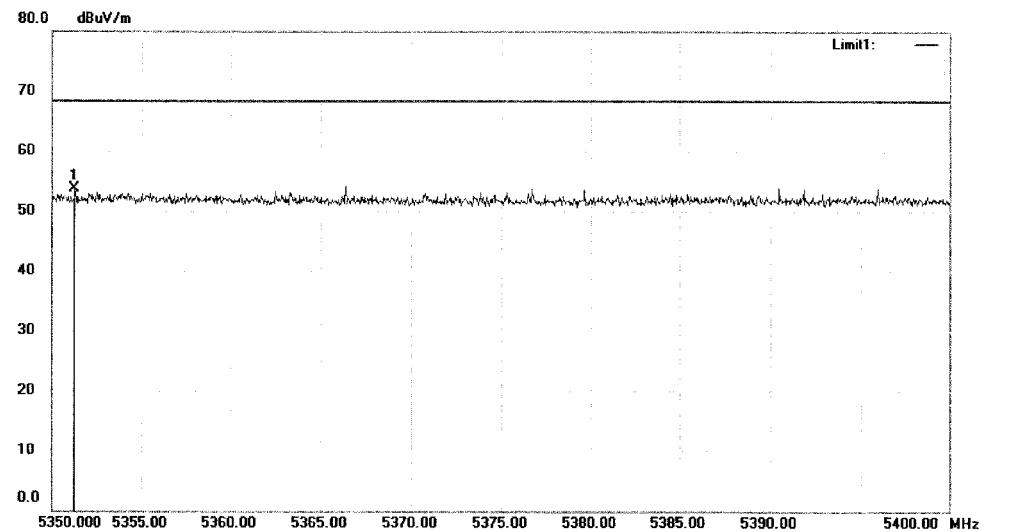

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5351.250	52.41	1.20	53.61	68.23	-14.62	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#32

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 372 von 565**  
Page 372 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 31

Date: 2017/05/06

Time:

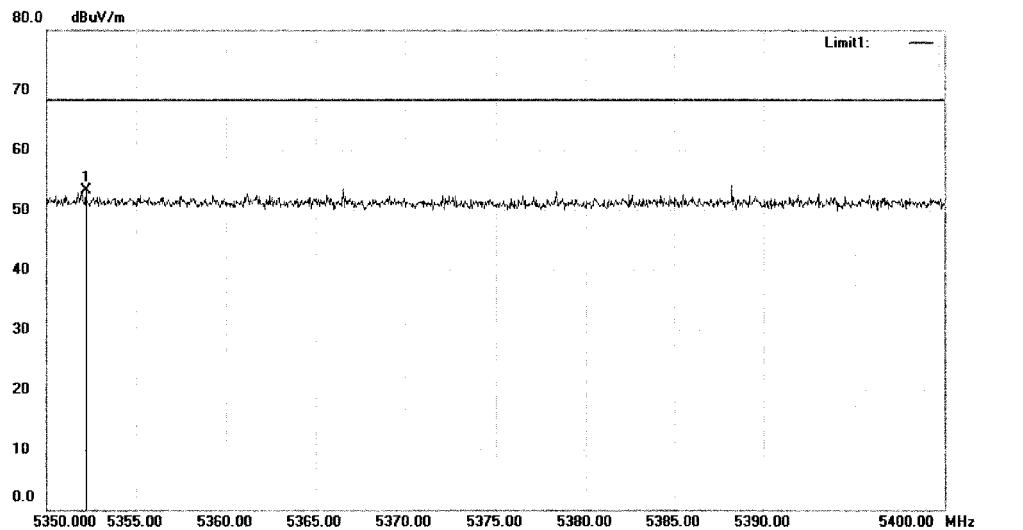

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5352.200	52.07	1.20	53.27	68.23	-14.96	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data\#31

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 373 von 565**  
Page 373 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data :#28

Date: 2017/05/06

Time:

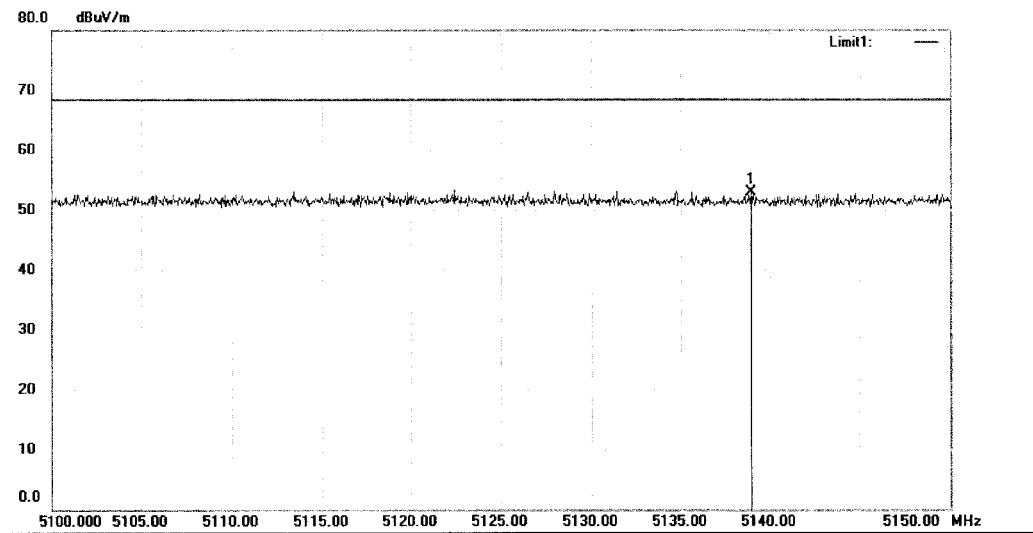

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5260MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5138.950	52.17	0.80	52.97	68.23	-15.26	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data .#28

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 374 von 565**  
Page 374 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #27

Date: 2017/05/06

Time:

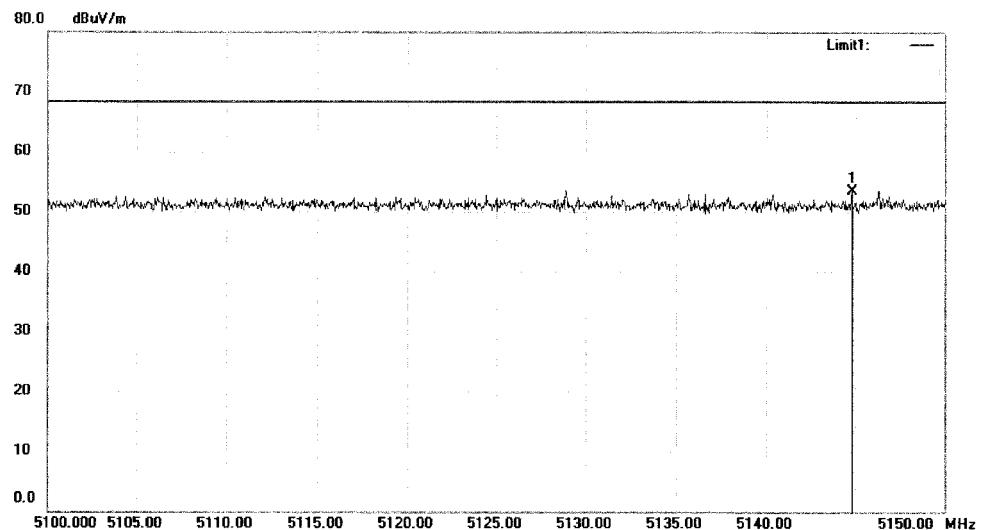

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5260MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5144.800	52.73	0.80	53.53	68.23	-14.70	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #27

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 375 von 565**  
Page 375 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #26

Date: 2017/05/06

Time:

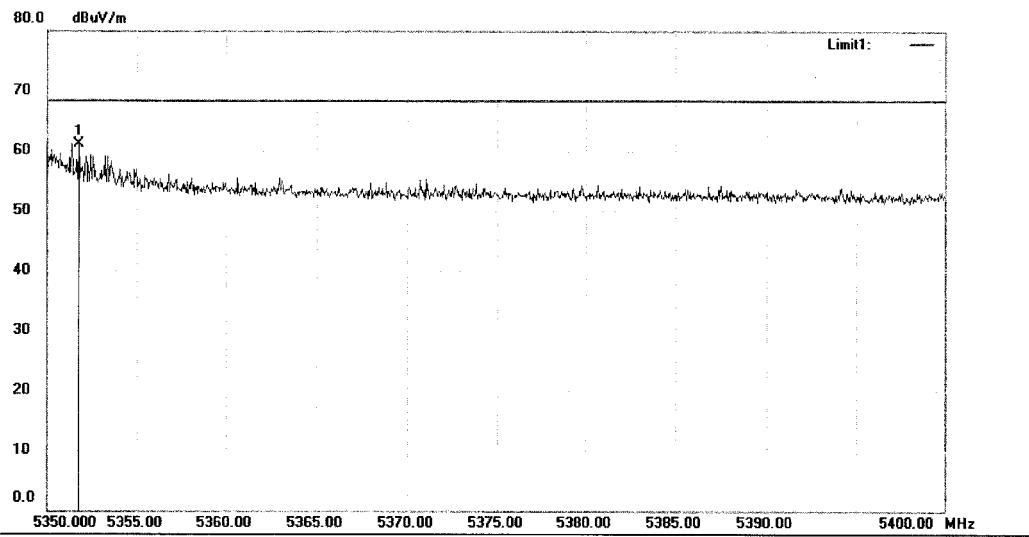

Site 3m Chamber #1

Polarization: *Horizontal*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5351.750	59.89	1.20	61.09	68.23	-7.14	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#26

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 376 von 565**  
Page 376 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data : #25

Date: 2017/05/06

Time:

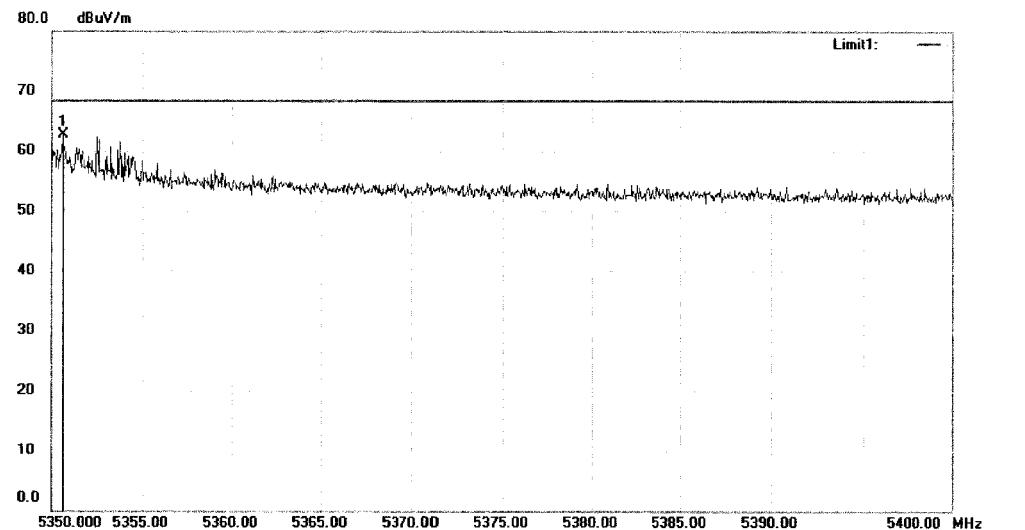

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5320MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
								Detector		
1	*	5350.600	61.53	1.20	62.73	68.23	-5.50	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data :\#25

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 377 von 565**  
Page 377 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #24

Date: 2017/05/06

Time:

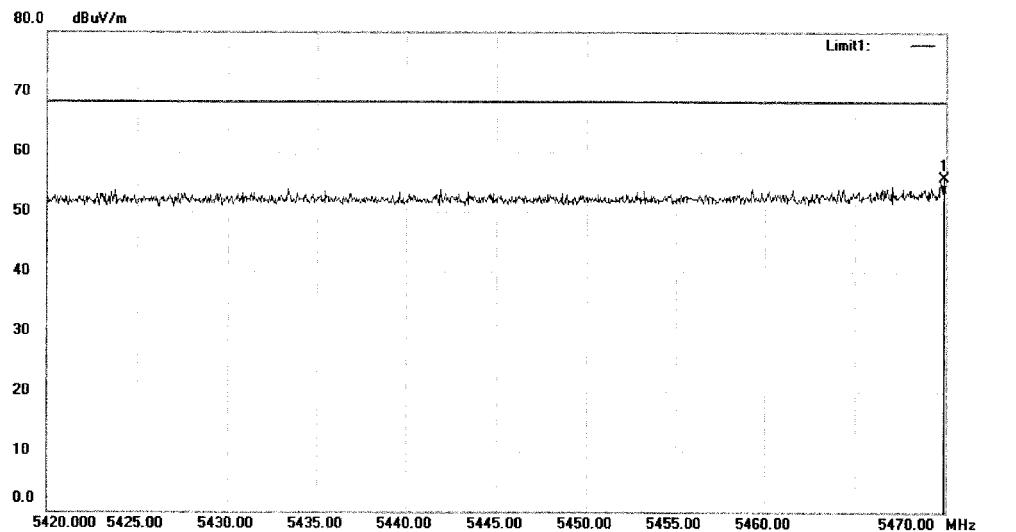

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5469.900	54.22	1.43	55.65	68.23	-12.58	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data\#24

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 378 von 565  
Page 378 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 23

Date: 2017/05/06

Time:

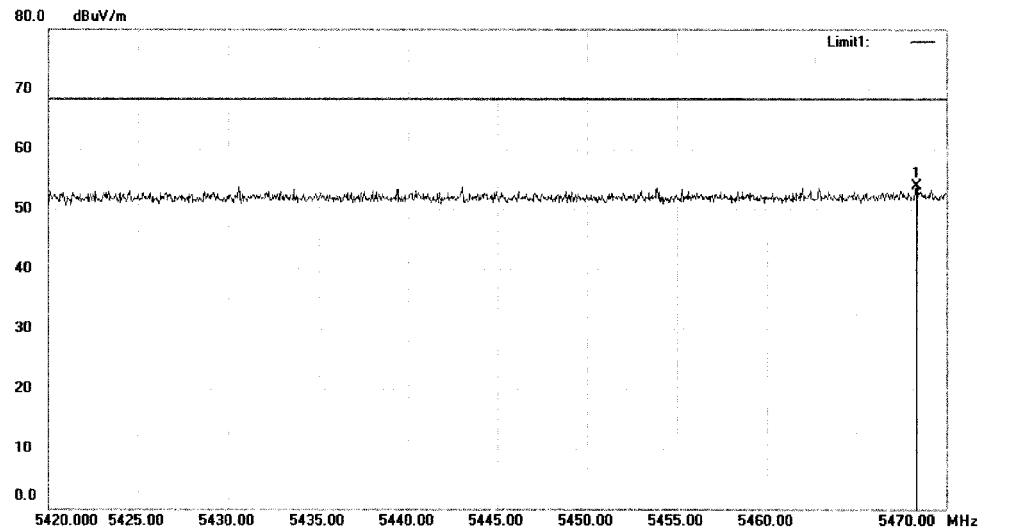

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5468.350	52.40	1.43	53.83	68.23	-14.40	peak			

\*:Maximum data    x:Over limit    l:over margin

Operator: KK

File : TUV(HUAKE)\Data .#23

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 379 von 565**  
Page 379 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 22

Date: 2017/05/06

Time:

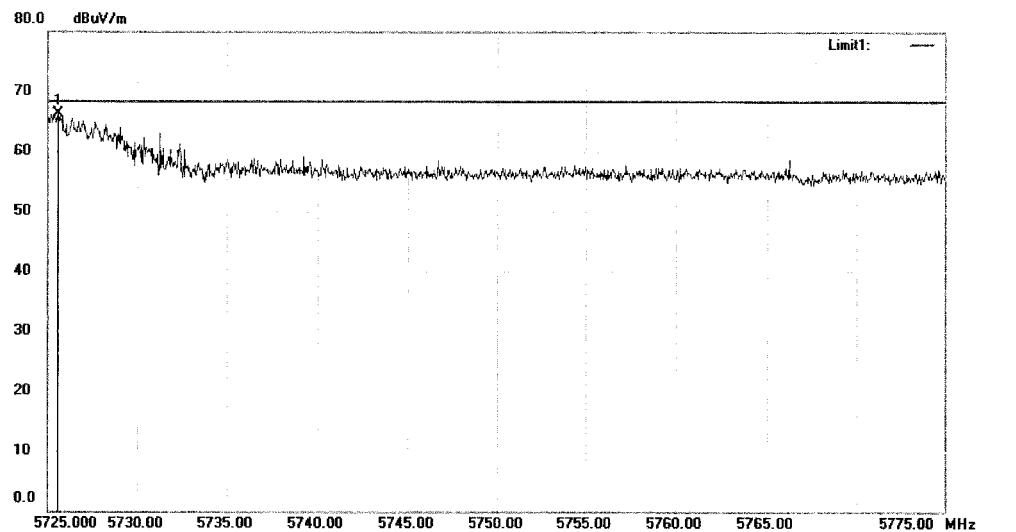

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5700MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5725.550	64.46	1.92	66.38	68.23	-1.85	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#22

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 380 von 565**  
Page 380 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 21

Date: 2017/05/06

Time:

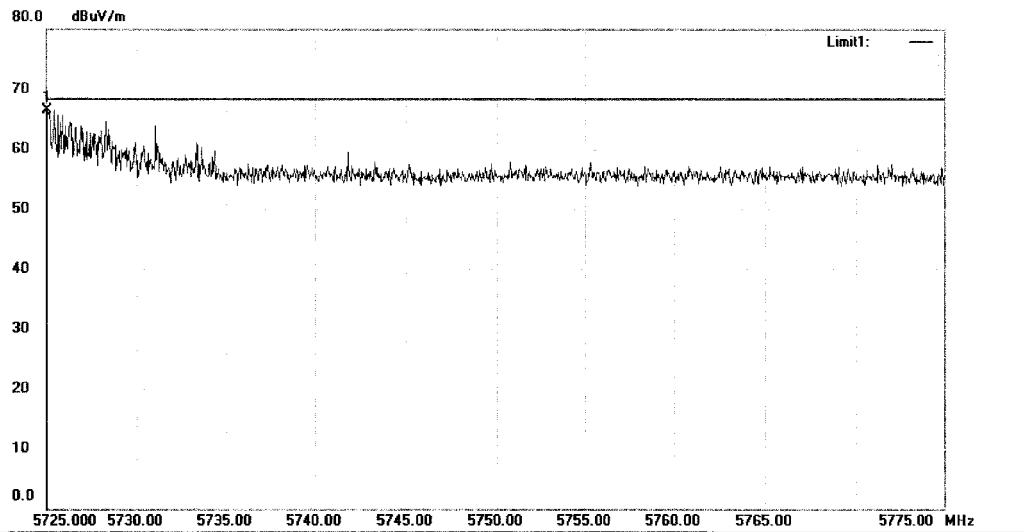

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5700MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5725.050	64.54	1.92	66.46	68.23	-1.77	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#21

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 381 von 565**  
Page 381 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #20

Date: 2017/05/06

Time:

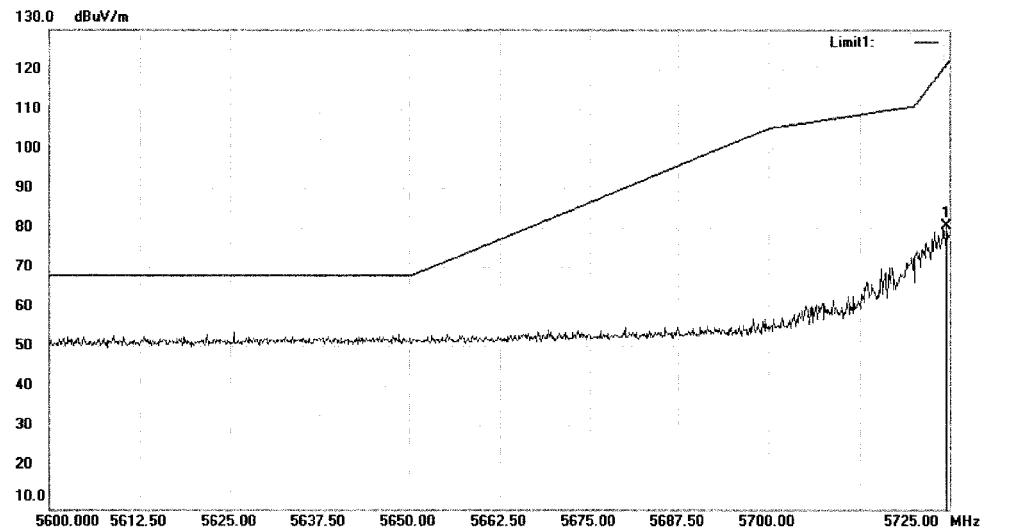

Site 3m Chamber #1

Polarization: *Horizontal*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5745MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5724.625	79.16	1.92	81.08	121.38	-40.30	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #20

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 382 von 565**  
Page 382 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #19

Date: 2017/05/06

Time:

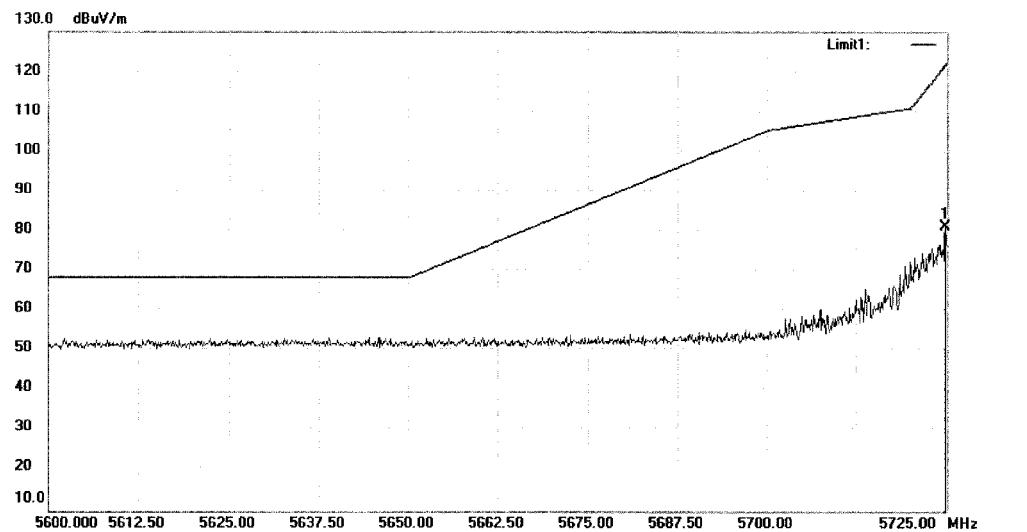

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5745MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5724.750	79.43	1.92	81.35	121.66	-40.31	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #19

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 383 von 565**  
Page 383 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #17

Date: 2017/05/06

Time:

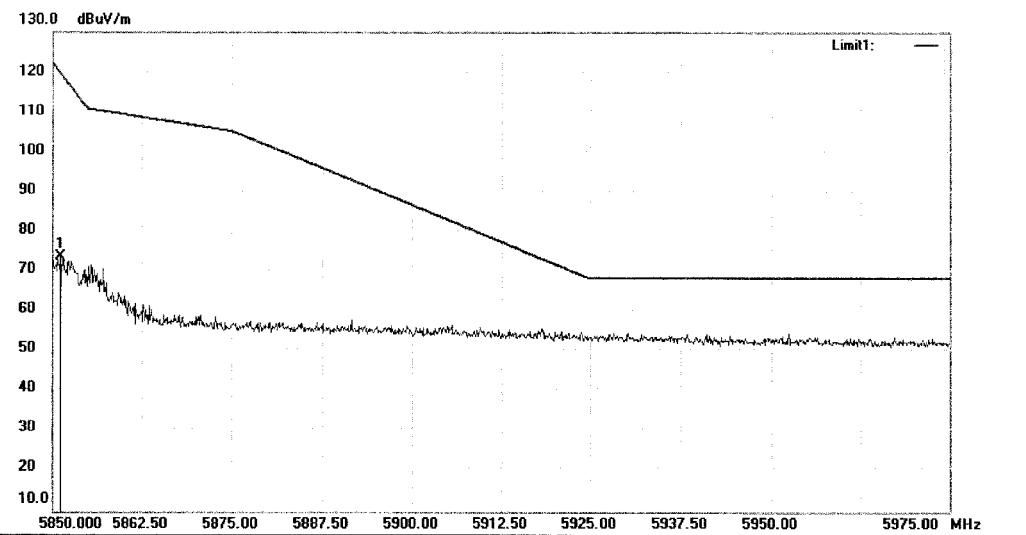

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5851.125	71.47	2.17	73.64	119.67	-46.03	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #17

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 384 von 565**  
Page 384 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 18

Date: 2017/05/06

Time:

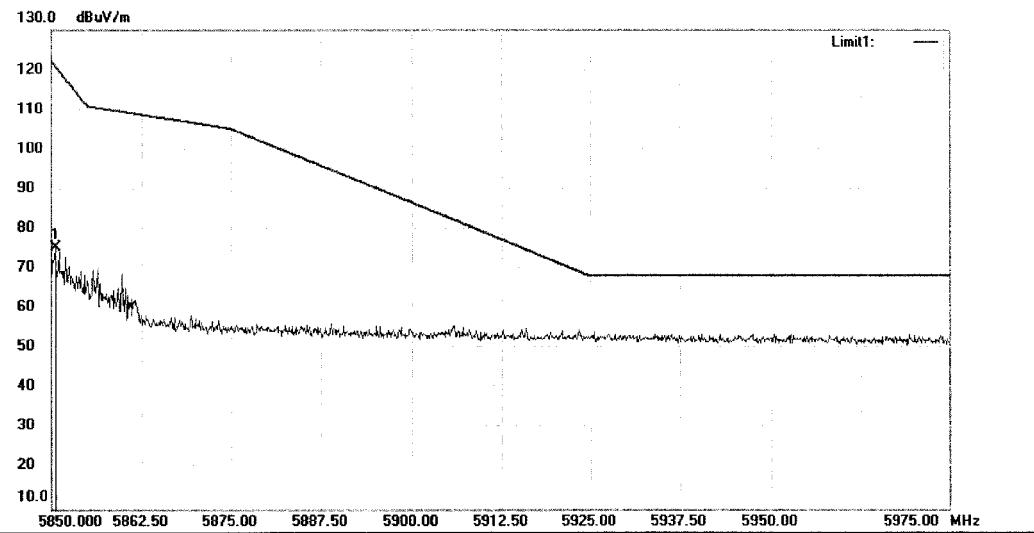

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5825MHz)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5850.500	73.41	2.16	75.57	121.09	-45.52	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data \#18

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 385 von 565**  
Page 385 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 36

Date: 2017/05/06

Time:

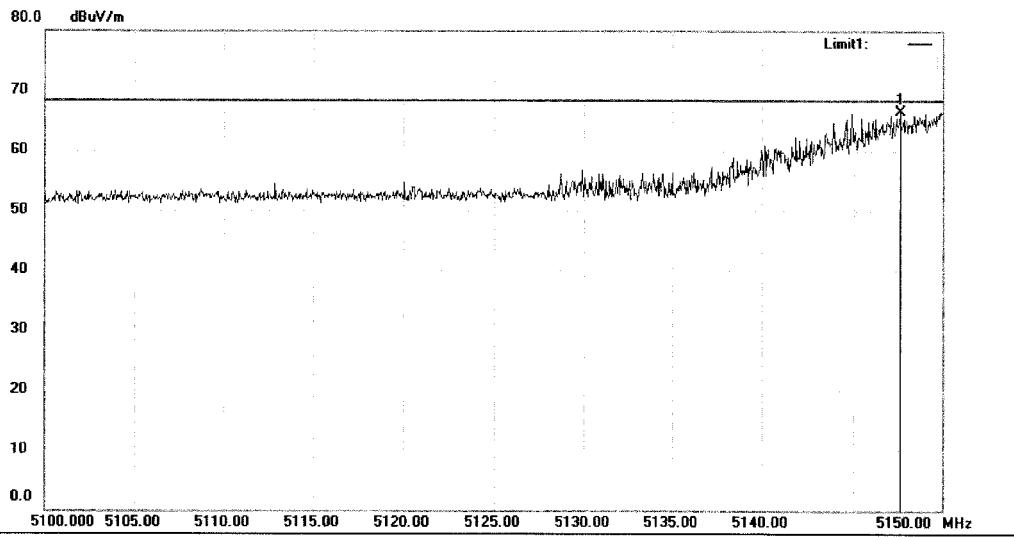

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5190MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5147.600	65.79	0.81	66.60	68.23	-1.63	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#36

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 386 von 565**  
Page 386 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #35

Date: 2017/05/06

Time:

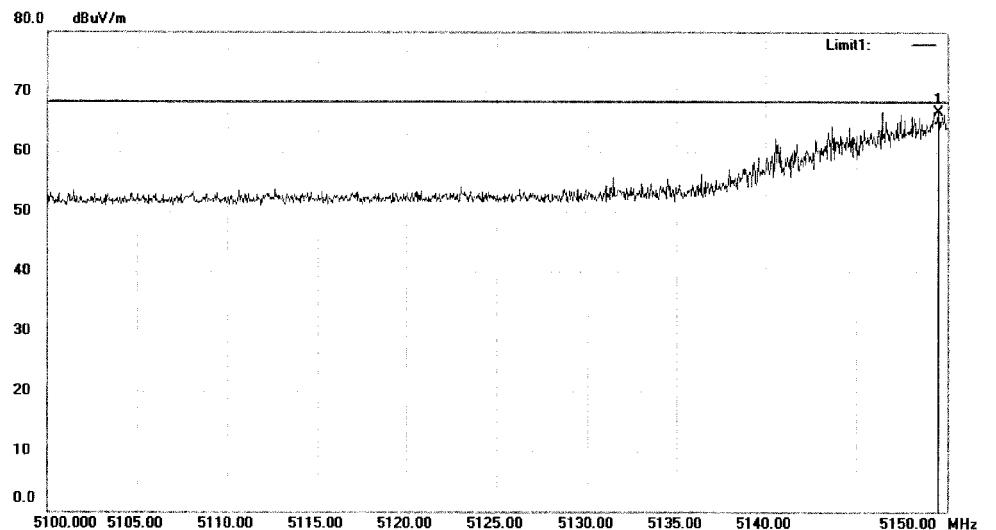

Site: 3m Chamber #1

Polarization: Vertical

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5190MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5149.500	65.88	0.82	66.70	68.23	-1.53	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #35

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 387 von 565  
Page 387 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 37

Date: 2017/05/06

Time:

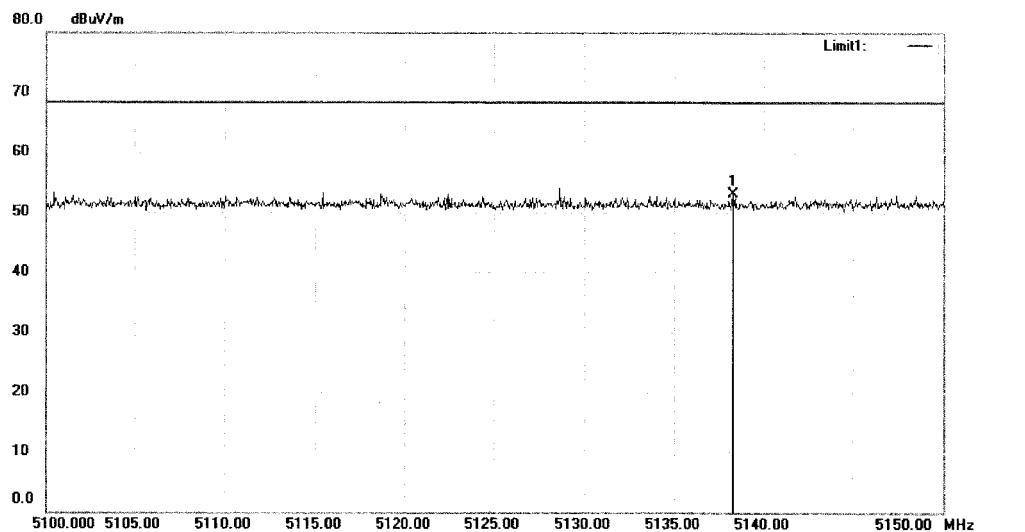

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5270MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5138.300	52.33	0.80	53.13	68.23	-15.10	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #: 37

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 388 von 565**  
Page 388 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #38

Date: 2017/05/06

Time:

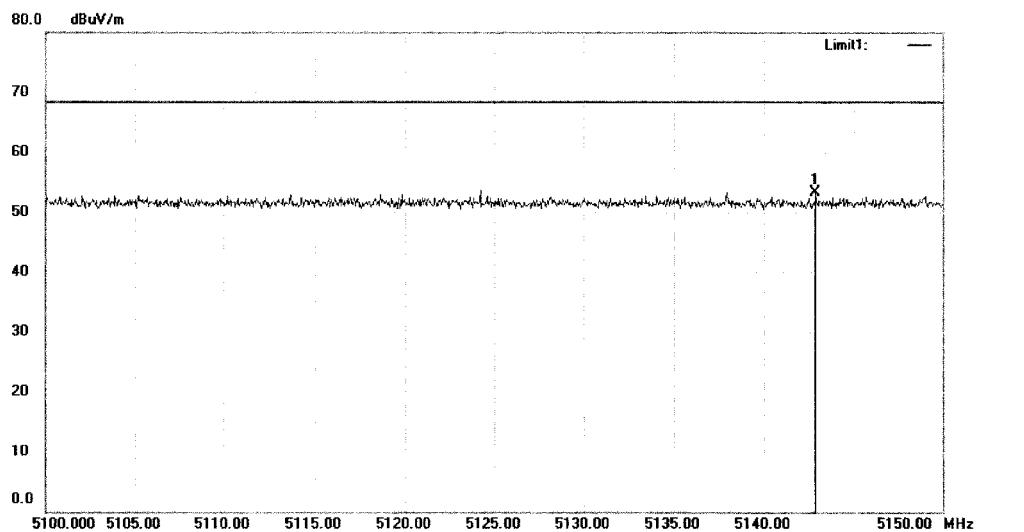

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5270MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5142.850	52.55	0.80	53.35	68.23	-14.88	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #38

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 389 von 565  
Page 389 of 565

Shenzhen EMTEK Co.,Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 33

Date: 2017/05/06

Time:

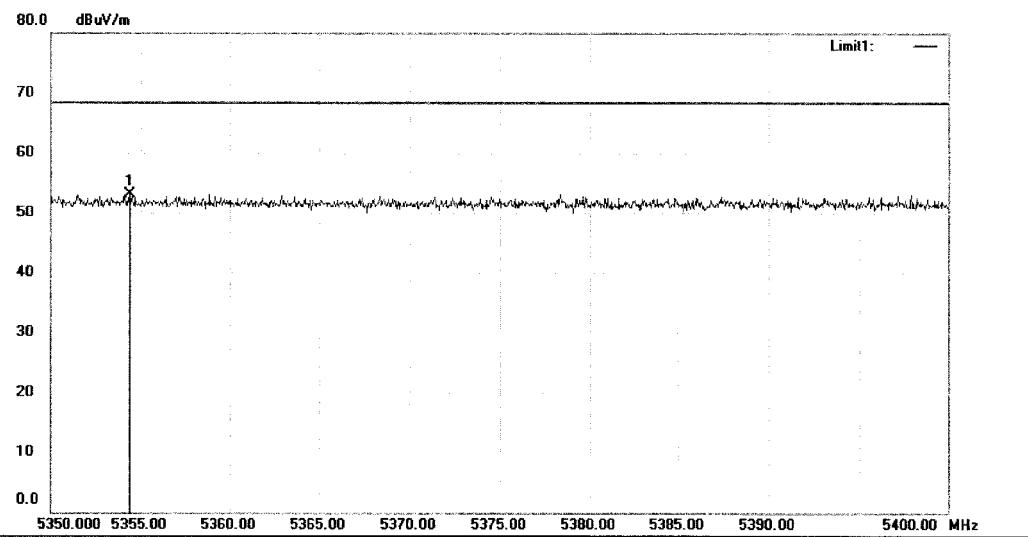

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5230MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5354.350	51.95	1.21	53.16	68.23	-15.07	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#33

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 390 von 565**  
Page 390 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 34

Date: 2017/05/06

Time:

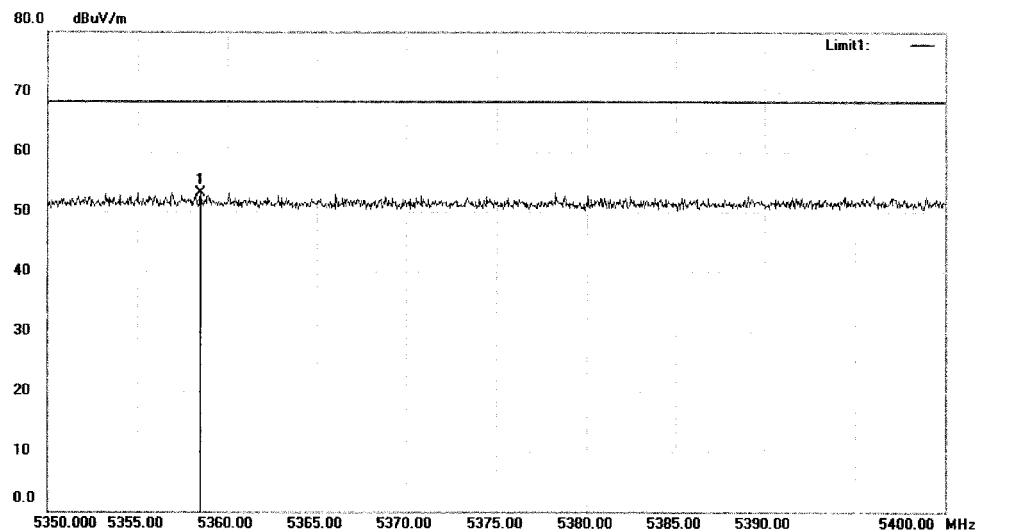

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5230MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5358.500	51.92	1.22	53.14	68.23	-15.09	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#34

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 391 von 565**  
Page 391 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #40

Date: 2017/05/06

Time:

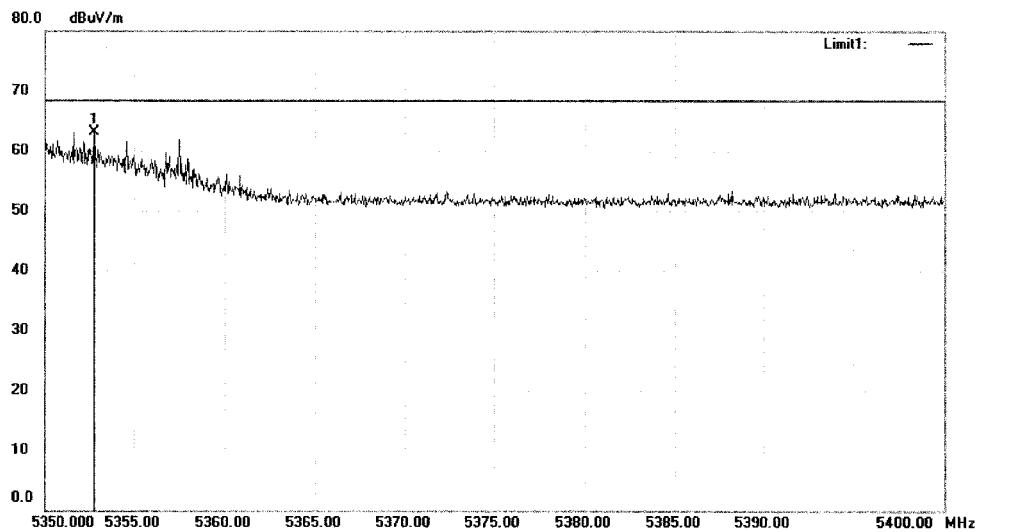

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5310MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5352.750	61.92	1.20	63.12	68.23	-5.11	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #40

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 392 von 565  
Page 392 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #39

Date: 2017/05/06

Time:

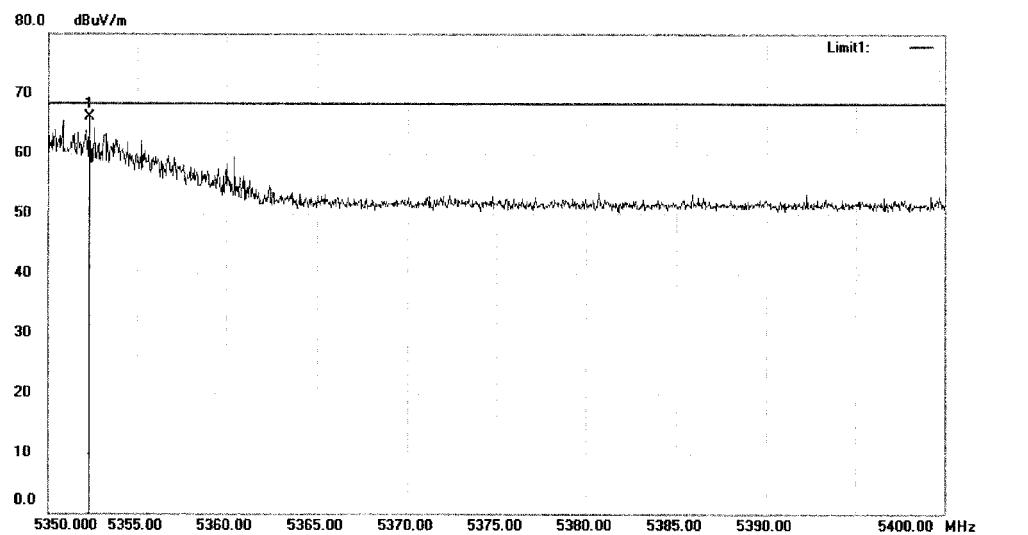

Site: 3m Chamber #1

Polarization: Vertical

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5310MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5352.300	64.82	1.20	66.02	68.23	-2.21	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#39

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 393 von 565**  
Page 393 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #42

Date: 2017/05/06

Time:

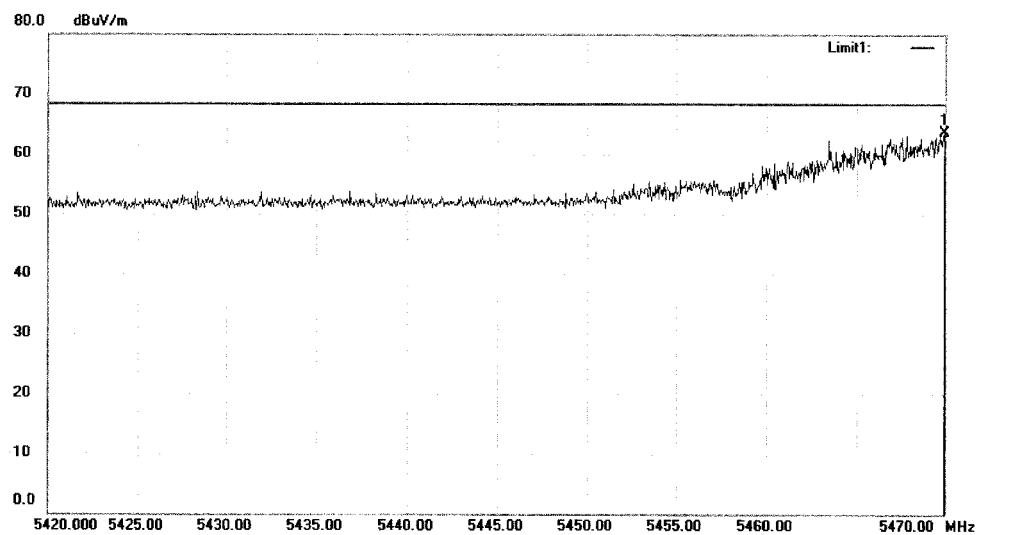

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5510MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5469.950	62.20	1.43	63.63	68.23	-4.60	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#42

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 394 von 565**  
Page 394 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 41

Date: 2017/05/06

Time:

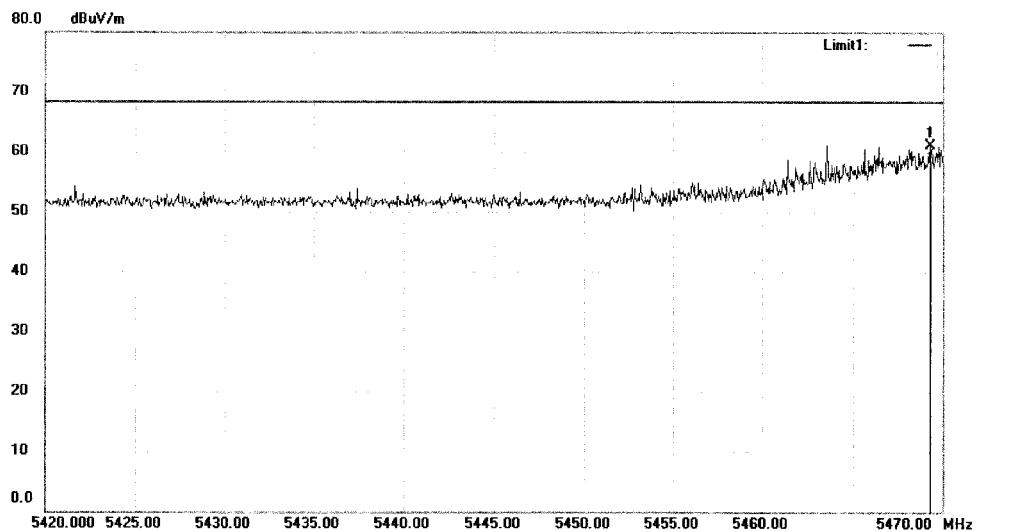

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5510MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5469.300	59.63	1.43	61.06	68.23	-7.17	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #: 41

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 395 von 565**  
Page 395 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #44

Date: 2017/05/06

Time:

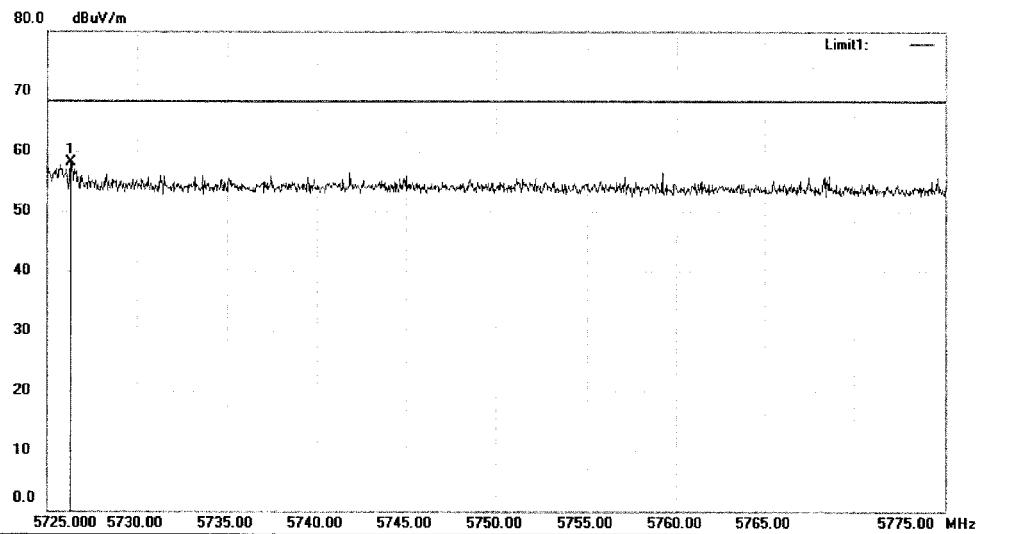

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5670MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5726.300	56.12	1.92	58.04	68.23	-10.19	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#44

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 396 von 565**  
Page 396 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 43

Date: 2017/05/06

Time:

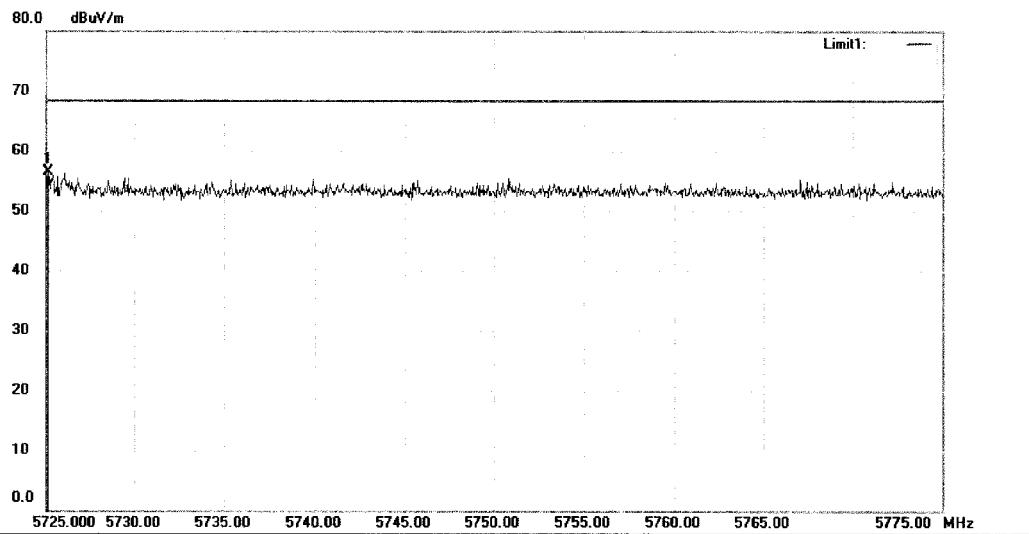

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5670MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5725.100	54.68	1.92	56.60	68.23	-11.63	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#43

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 397 von 565**  
Page 397 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data : #46

Date: 2017/05/06

Time:

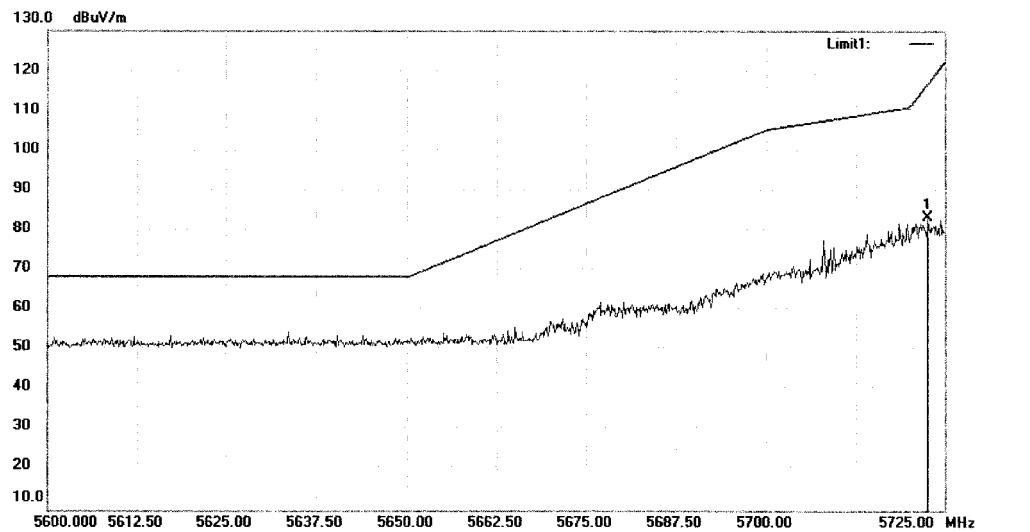

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5755MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5722.625	81.37	1.92	83.29	116.81	-33.52	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data\#46

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 398 von 565**  
Page 398 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 45

Date: 2017/05/06

Time:

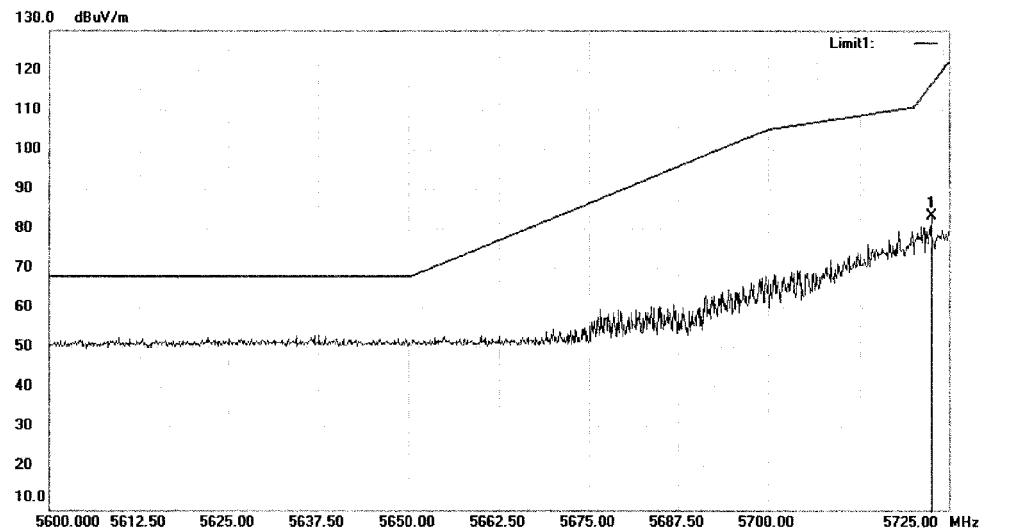

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5755MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5722.500	81.69	1.92	83.61	116.53	-32.92	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data \#45

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 399 von 565**  
Page 399 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #48

Date: 2017/05/06

Time:

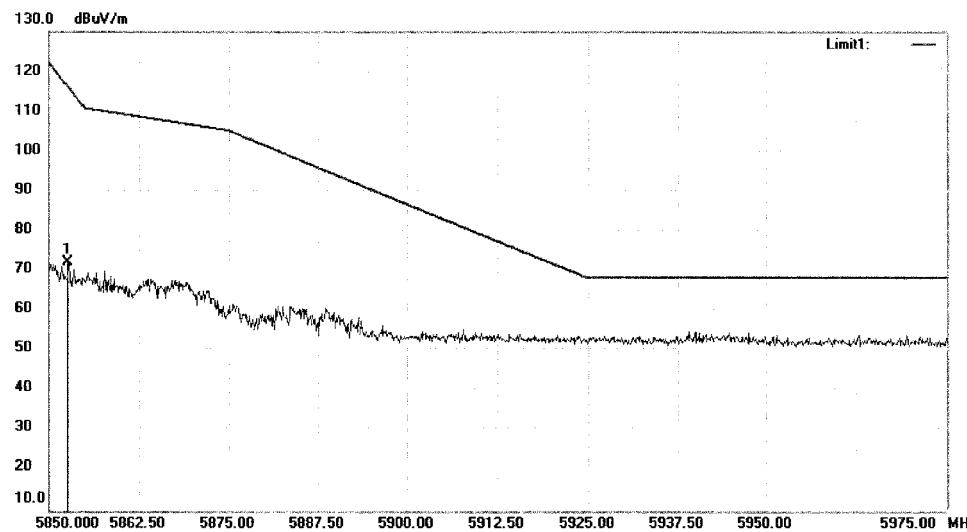

Site: 3m Chamber #1

Polarization: *Horizontal*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5795MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5852.625	70.07	2.17	72.24	116.25	-44.01	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #48

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 400 von 565**  
Page 400 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #:47

Date: 2017/05/06

Time:

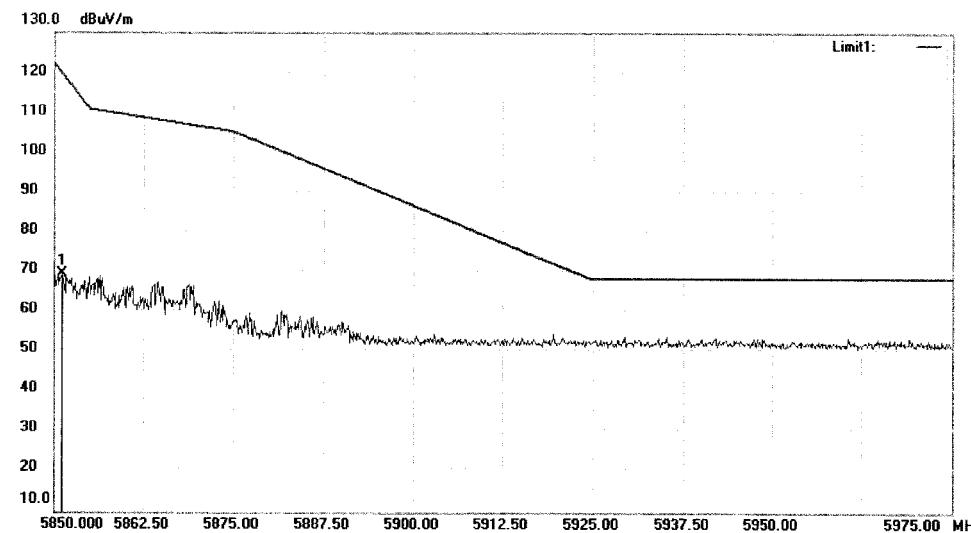

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5795MHz)

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5851.000	67.34	2.17	69.51	119.95	-50.44	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data .#47

Page: 1

# Prüfbericht - Nr.: 50094373 003

Test Report No.

Seite 401 von 565  
Page 401 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #: 121

Date: 2017/05/06

Time:

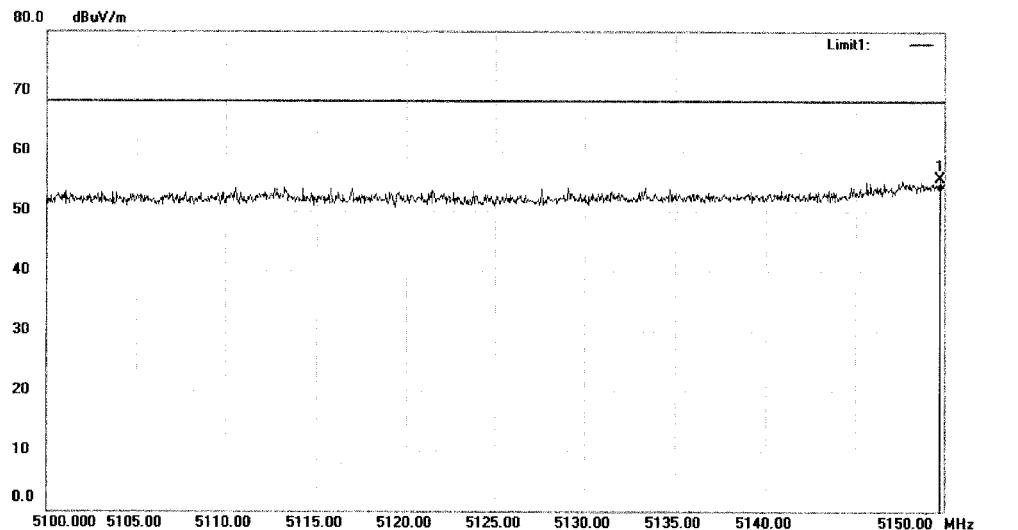

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.750	54.65	0.82	55.47	68.23	-12.76	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#121

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 402 von 565**  
Page 402 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #122

Date: 2017/05/06

Time:

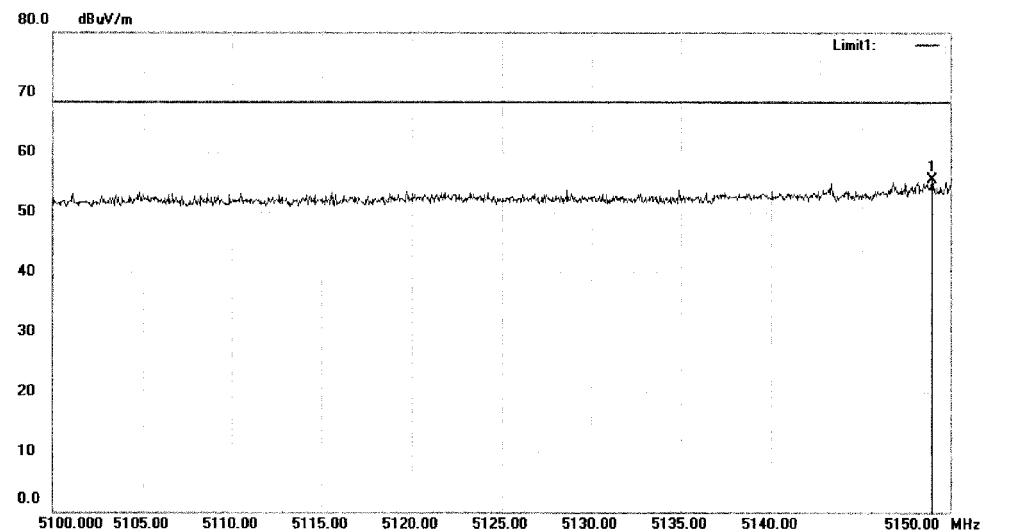

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5148.950	54.69	0.81	55.50	68.23	-12.73	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #122

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 403 von 565**  
Page 403 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 124

Date: 2017/05/06

Time:

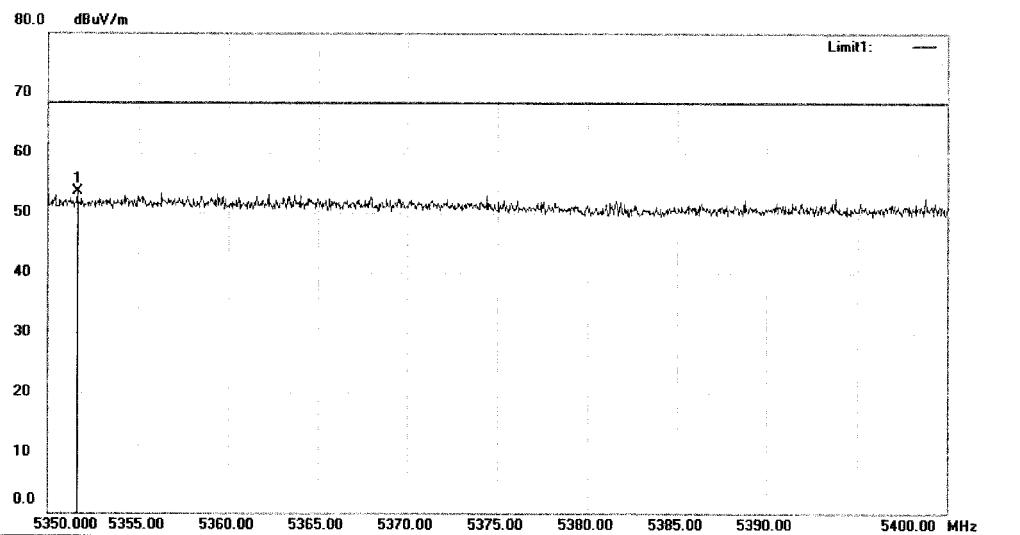

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5351.600	52.38	1.20	53.58	68.23	-14.65	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data :\#124

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 404 von 565**  
Page 404 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #:123

Date: 2017/05/06

Time:

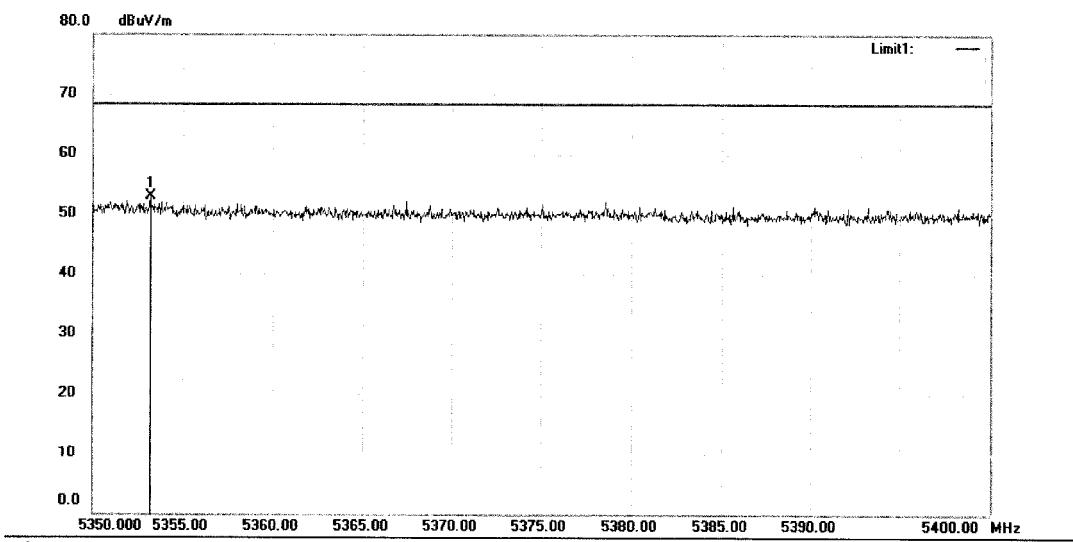

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1	*	5353.200	51.63	1.20	52.83	68.23	-15.40	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data .#123

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 405 von 565**  
Page 405 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #126

Date: 2017/05/06

Time:

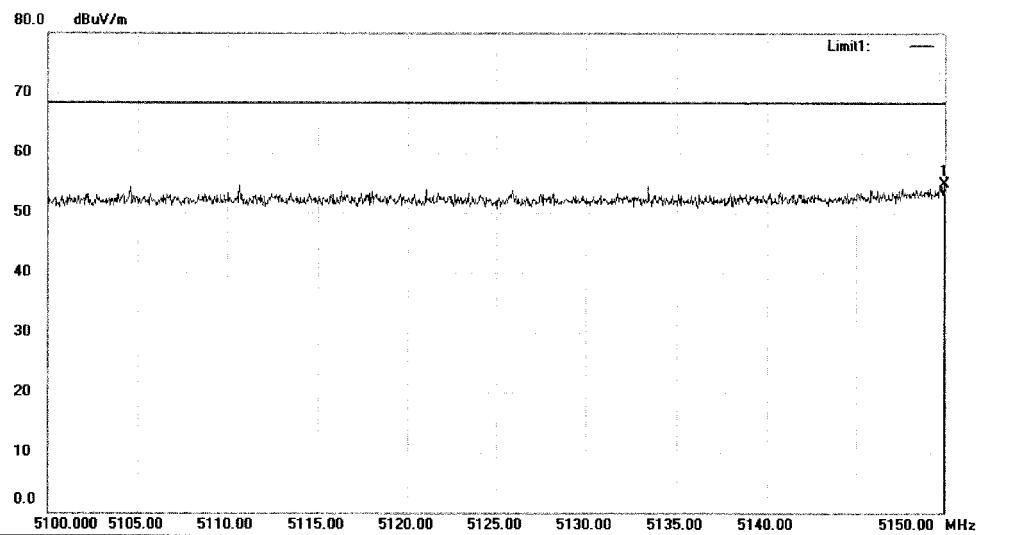

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5260

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.950	54.06	0.82	54.88	68.23	-13.35	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #126

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 406 von 565**  
Page 406 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #125

Date: 2017/05/06

Time:

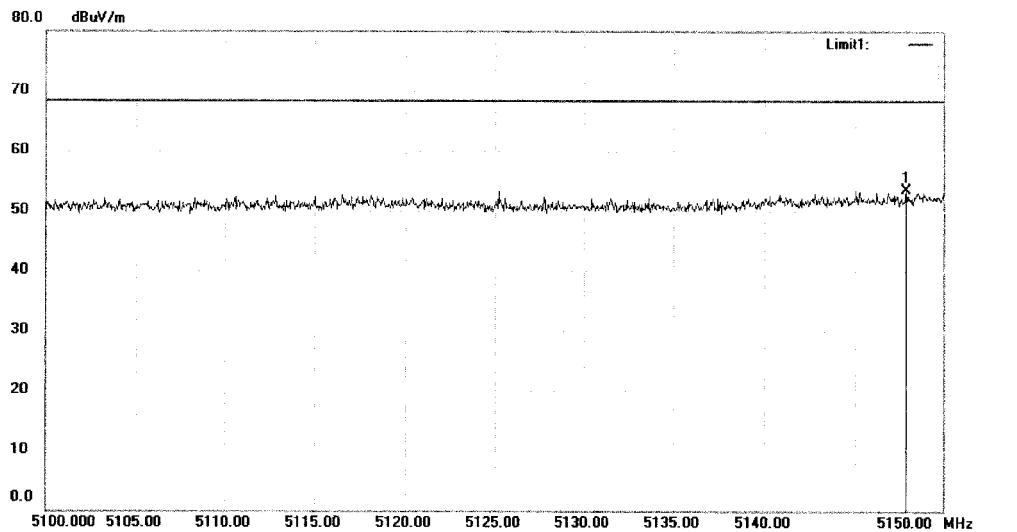

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5260

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5147.900	52.79	0.81	53.60	68.23	-14.63	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #125

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 407 von 565**  
Page 407 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #128

Date: 2017/05/06

Time:

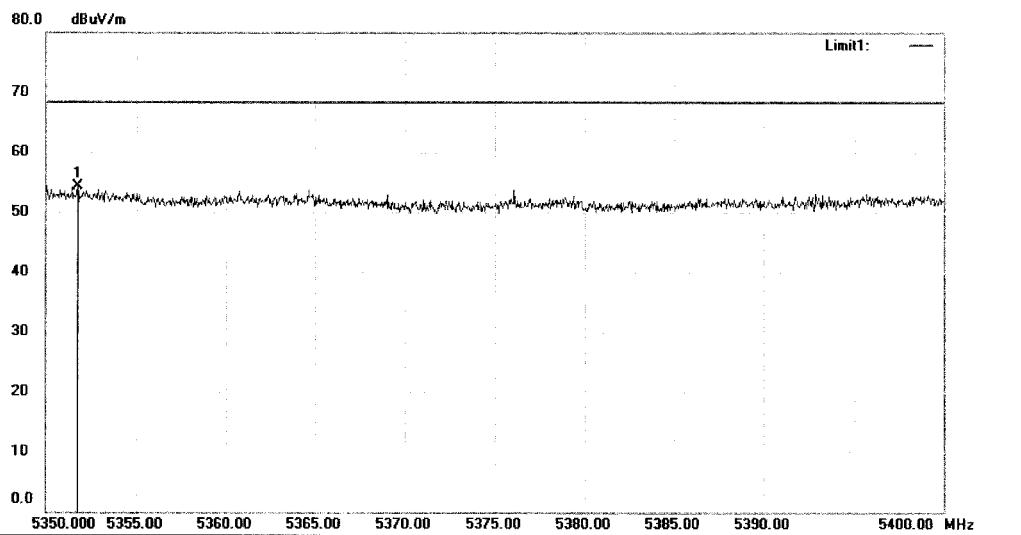

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5351.750	53.10	1.20	54.30	68.23	-13.93	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #128

Page: 1

# Prüfbericht - Nr.: 50094373 003

*Test Report No.*

Seite 408 von 565  
 Page 408 of 565

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
[www.emtek.com.cn](http://www.emtek.com.cn) Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


## Radiated Emission Measurement

File : TUV(HUAKE)

Data #127

Date: 2017/05/06

Time:

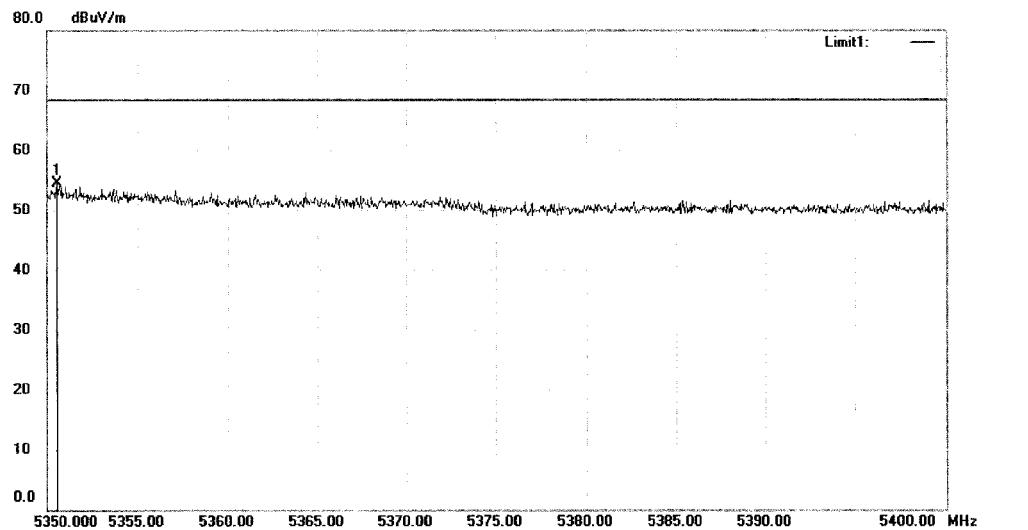

Site: 3m Chamber #1

Polarization: Vertical

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5320

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5350.550	53.34	1.20	54.54	68.23	-13.69	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data :\#127

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 409 von 565**  
Page 409 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #130

Date: 2017/05/06

Time:

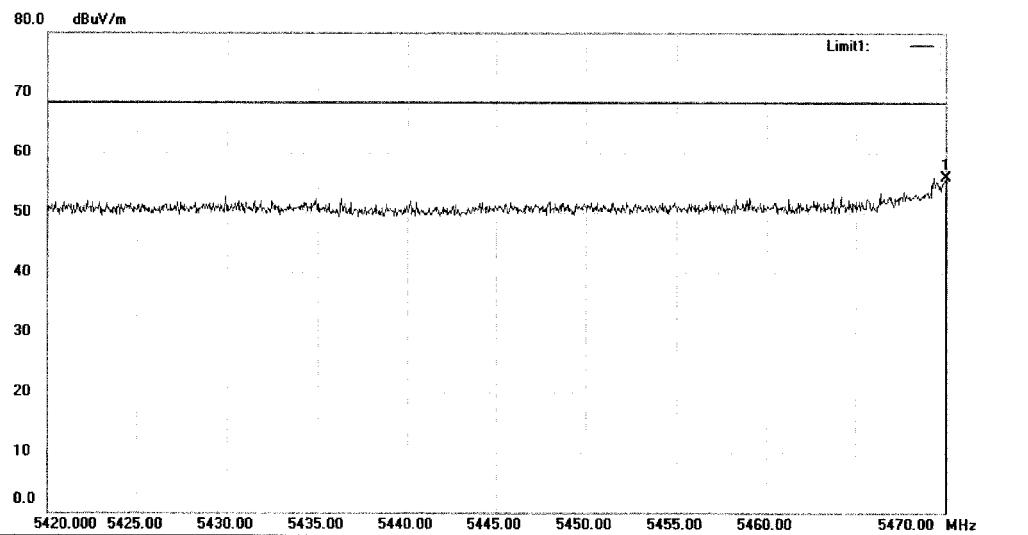

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5500

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5470.000	54.56	1.43	55.99	68.23	-12.24	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #130

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 410 von 565**  
Page 410 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #129

Date: 2017/05/06

Time:

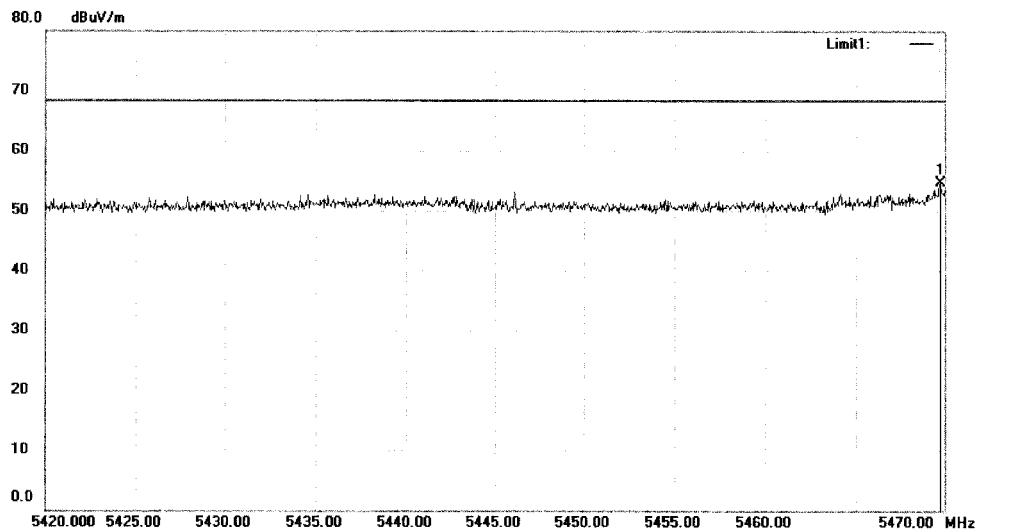

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5500

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5469.750	53.36	1.43	54.79	68.23	-13.44	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #129

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 411 von 565**  
Page 411 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #131

Date: 2017/05/06

Time:

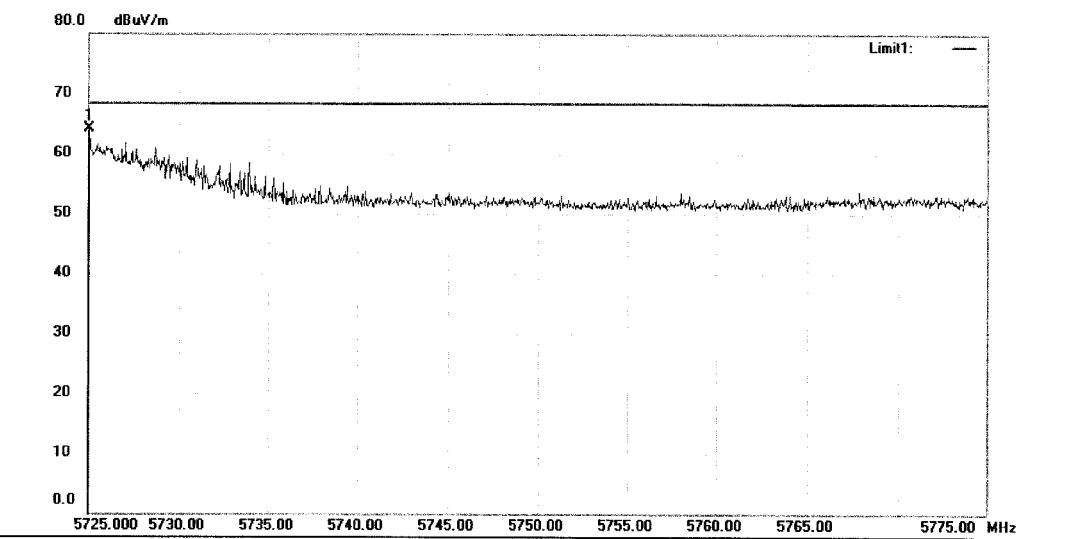

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5700

Note:

No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1	*	5725.050	62.17	1.92	64.09	68.23	-4.14	peak	

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #131

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 412 von 565**  
Page 412 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majiulong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #132

Date: 2017/05/06

Time:

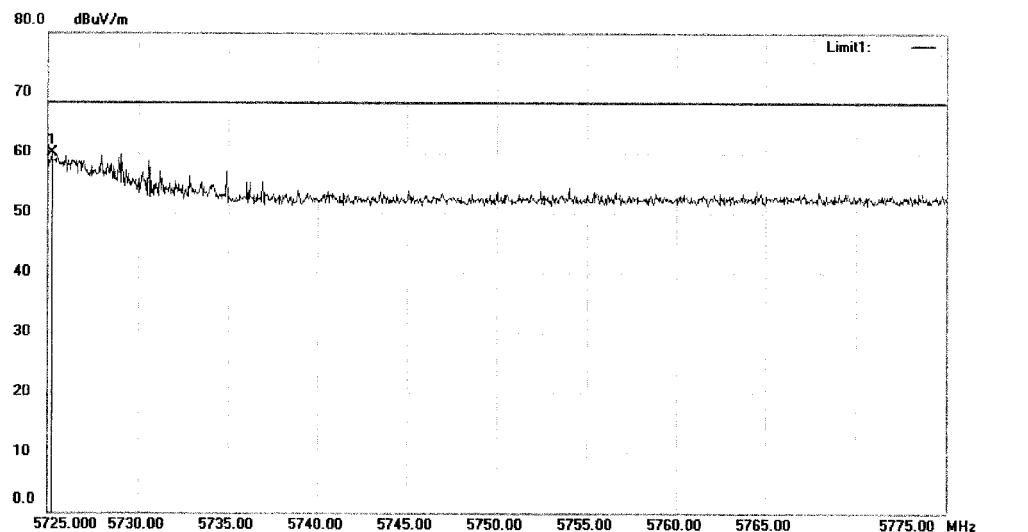

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5700

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	5725.200	58.07	1.92	59.99	68.23	-8.24	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data\#132

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 413 von 565**  
Page 413 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg.69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #:133

Date: 2017/05/06

Time:

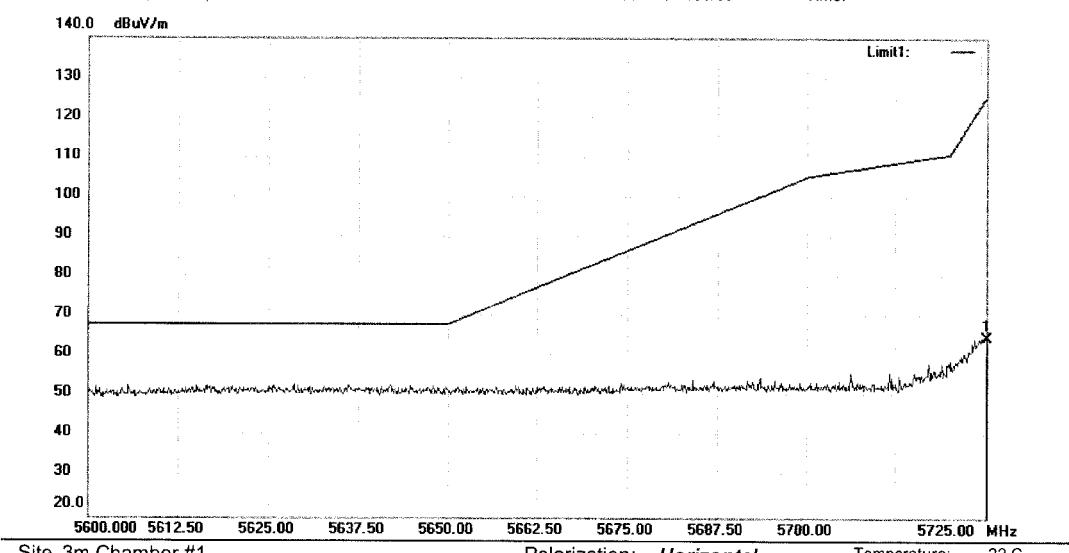

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5725.000	62.95	1.92	64.87	125.23	-60.36	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data .#133

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 414 von 565**  
Page 414 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 134

Date: 2017/05/06

Time:

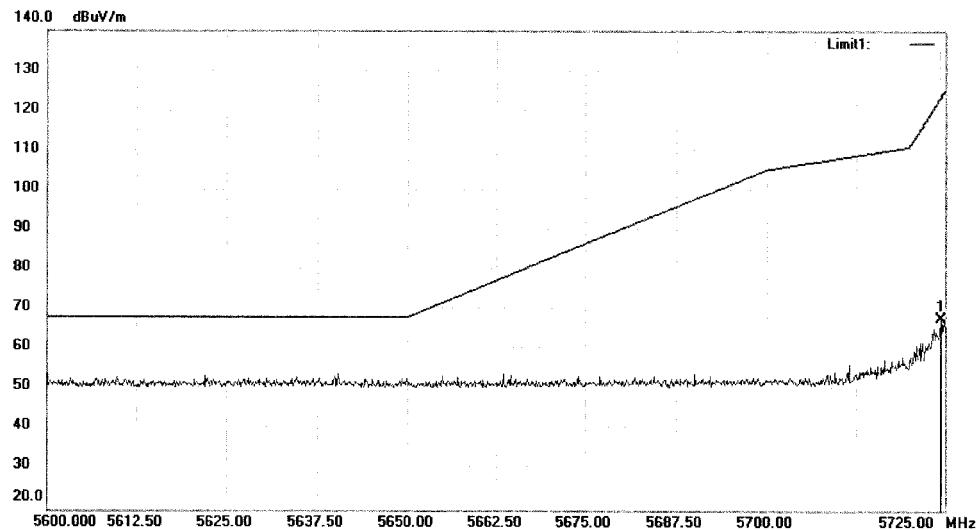

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5724.375	65.90	1.92	67.82	123.43	-55.61	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data .#134

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 415 von 565**  
Page 415 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #135

Date: 2017/05/06

Time:

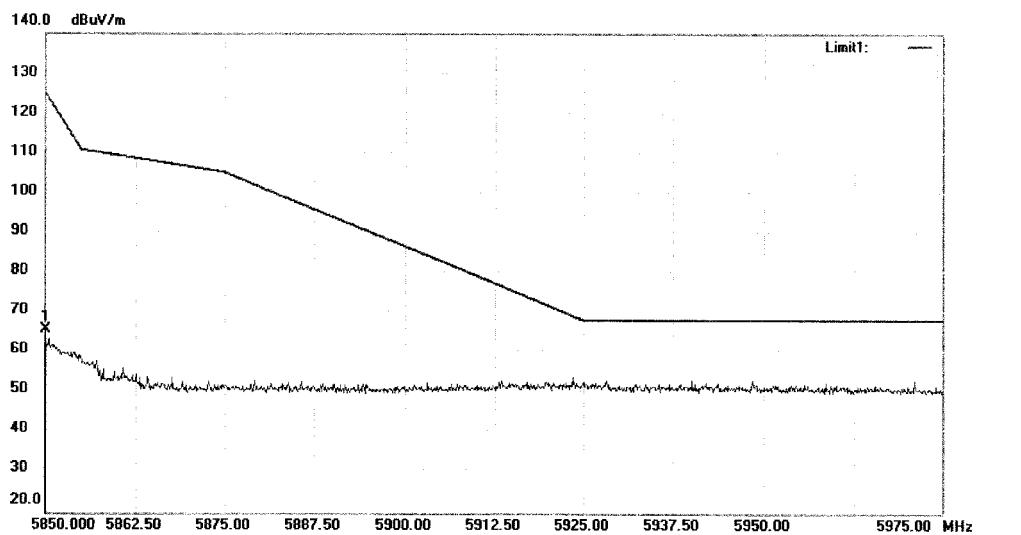

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5850.000	63.61	2.16	65.77	125.23	-59.46	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #135

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 416 von 565**  
Page 416 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #136

Date: 2017/05/06

Time:

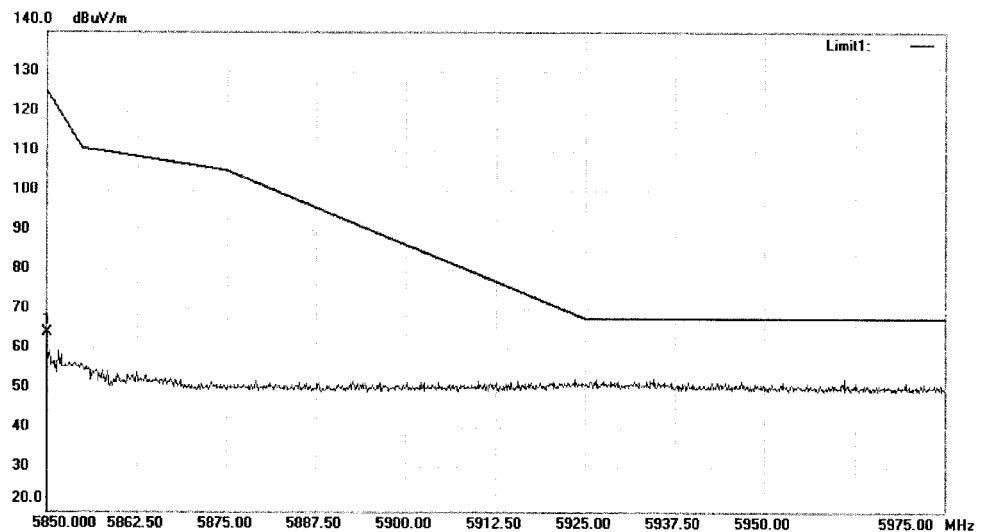

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
								Detector		
1	*	5850.000	62.48	2.16	64.64	125.23	-60.59	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data #136

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

Seite 417 von 565  
Page 417 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File : TUV(HUAKE)

Data #: 152

Date: 2017/05/06

Time:

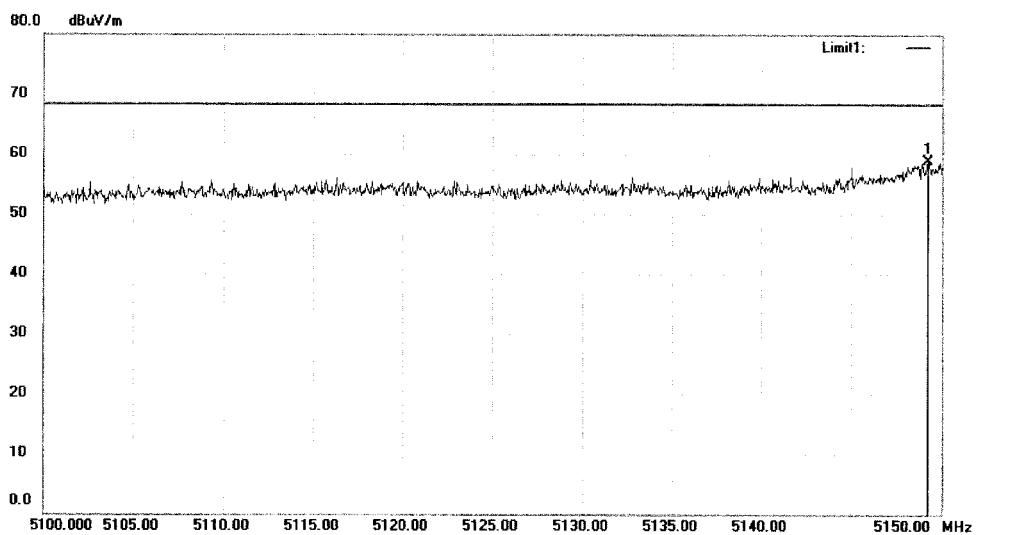

Site: 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac40 5190

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.200	58.17	0.81	58.98	68.23	-9.25	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV(HUAKE)\Data\#152

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 418 von 565**  
Page 418 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #:151

Date: 2017/05/06

Time:

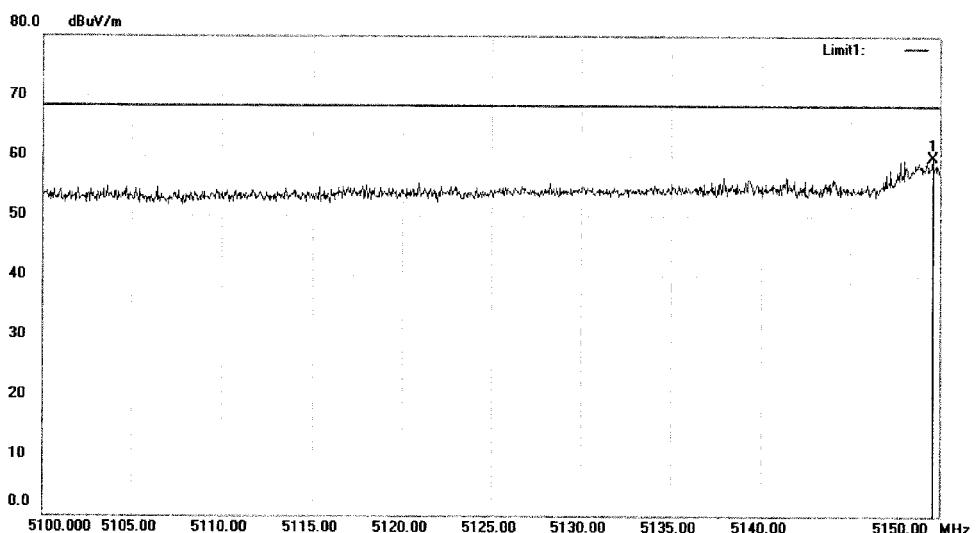

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5149.600	58.79	0.82	59.61	68.23	-8.62	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #:151

Page: 1

**Prüfbericht - Nr.:** **50094373 003**  
Test Report No.

**Seite 419 von 565**  
Page 419 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #:150

Date: 2017/05/06

Time:

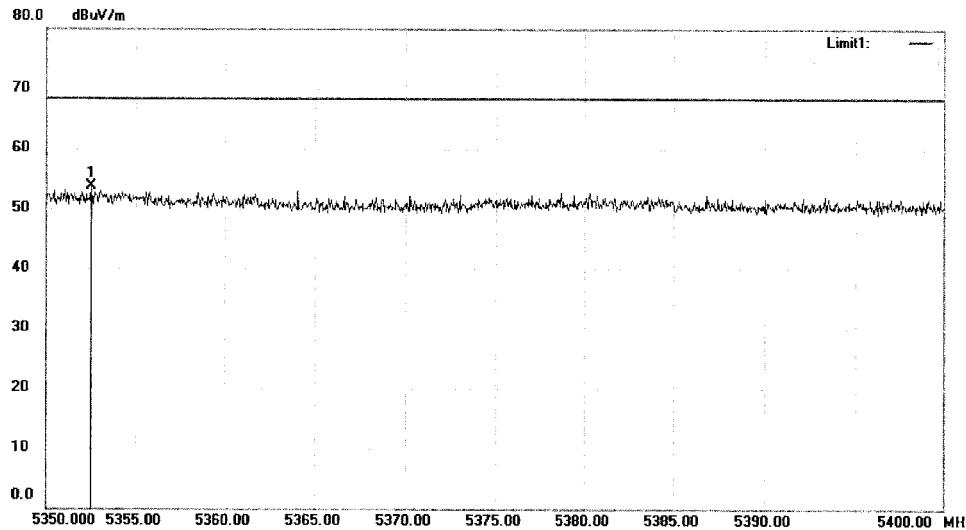

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5352.500	52.53	1.20	53.73	68.23	-14.50	peak			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data .#150

Page: 1

**Prüfbericht - Nr.: 50094373 003**  
Test Report No.

**Seite 420 von 565**  
Page 420 of 565

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**EMTEK**   
Access to the World


**Radiated Emission Measurement**

File :TUV(HUAKE)

Data #149

Date: 2017/05/06

Time:

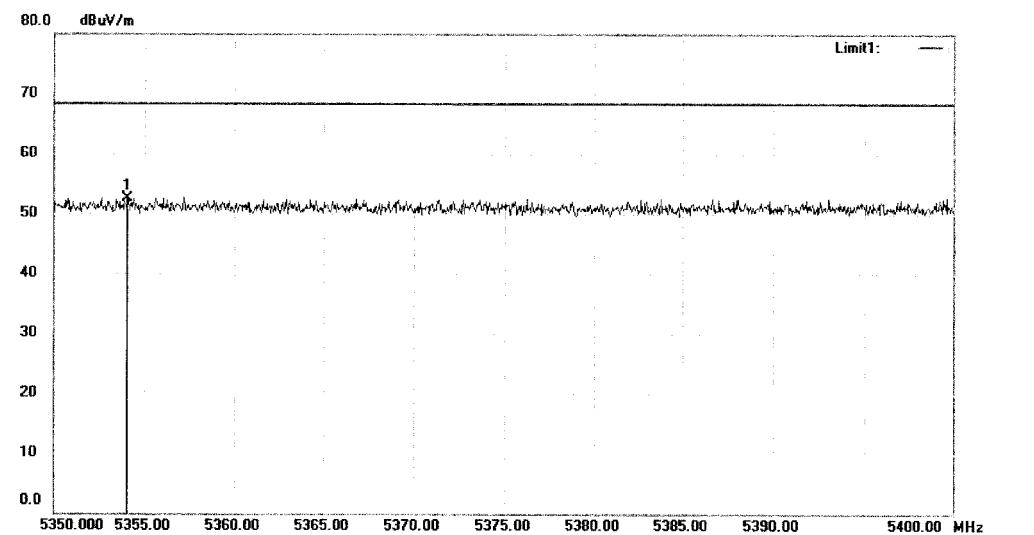

Site: 3m Chamber #1

Polarization: *Vertical*

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5354.050	51.36	1.20	52.56	68.23	-15.67	peak		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV(HUAKE)\Data #149

Page: 1