


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	2.064	2.294	89.97	0.46	0.48
NVNT	a	5300	2.064	2.286	90.29	0.44	0.48
NVNT	a	5320	2.064	2.286	90.29	0.44	0.48
NVNT	n20	5260	1.92	2.114	90.82	0.42	0.52
NVNT	n20	5300	1.92	2.124	90.4	0.44	0.52
NVNT	n20	5320	1.92	2.114	90.82	0.42	0.52
NVNT	n40	5270	0.945	1.139	82.97	0.81	1.06
NVNT	n40	5310	0.945	1.157	81.68	0.88	1.06



Test Graphs



Duty Cycle NVNT a 5260MHz

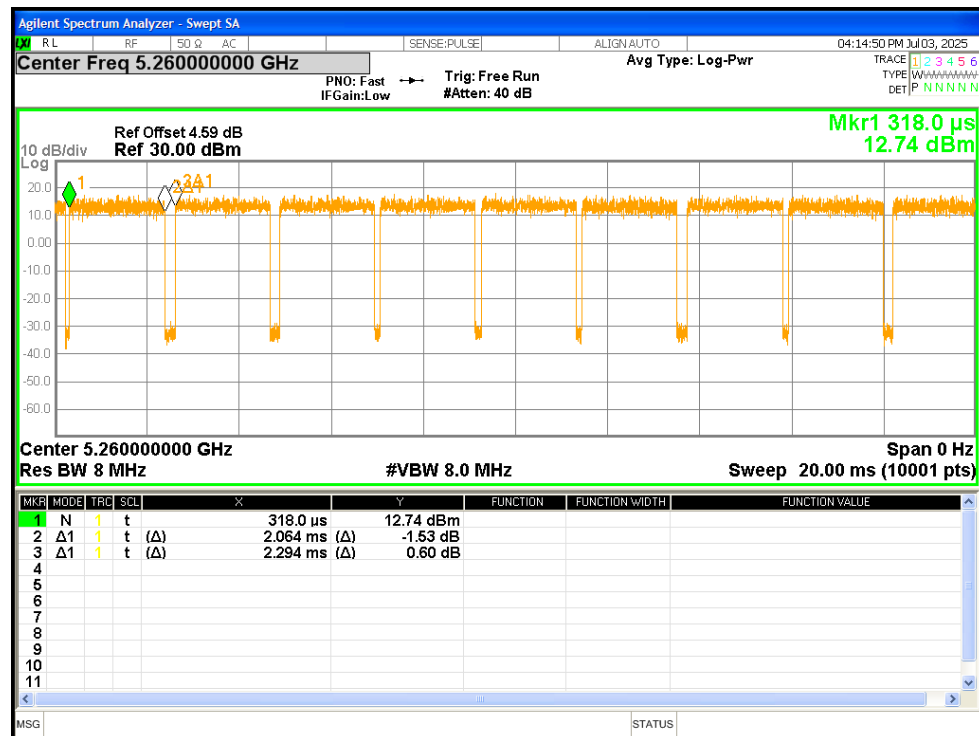

Duty Cycle NVNT a 5300MHz

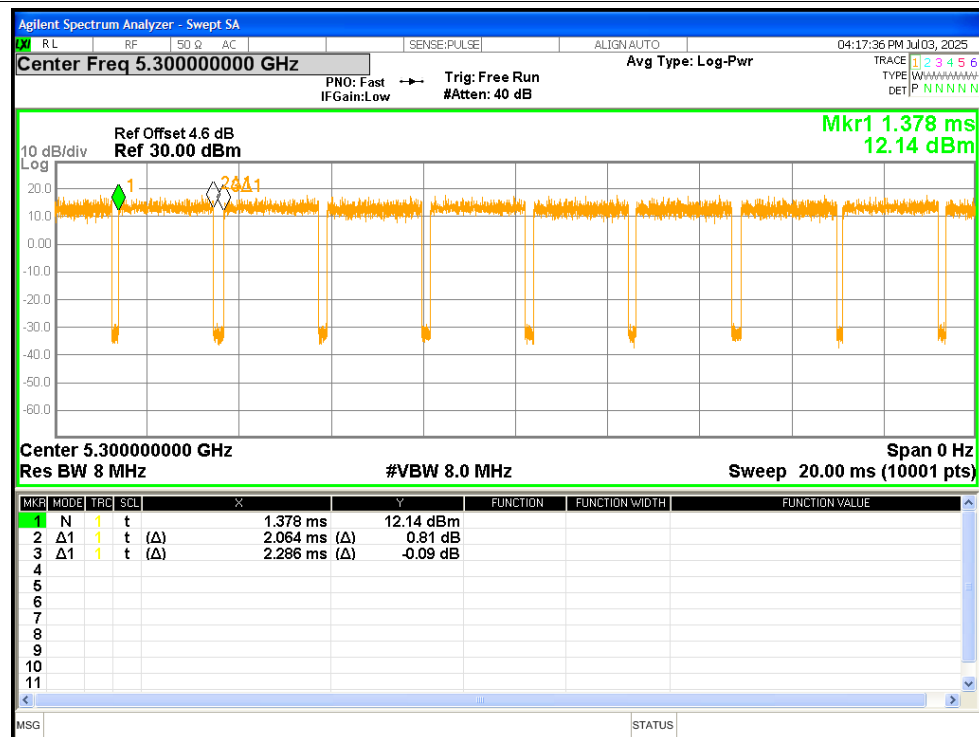

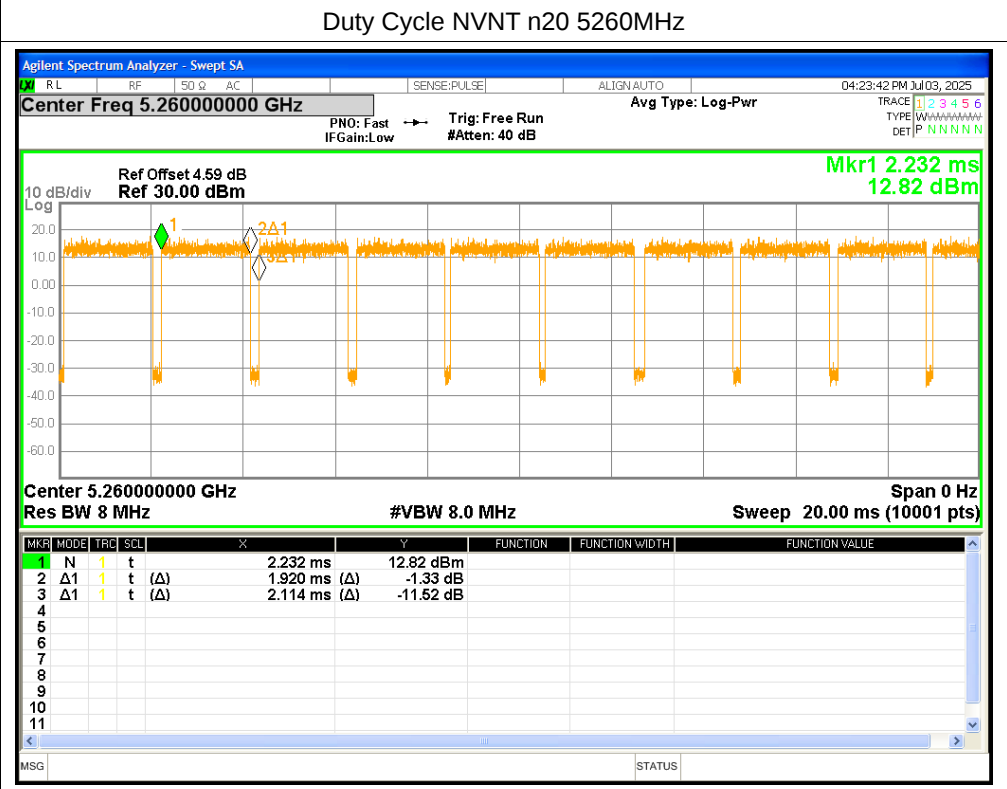
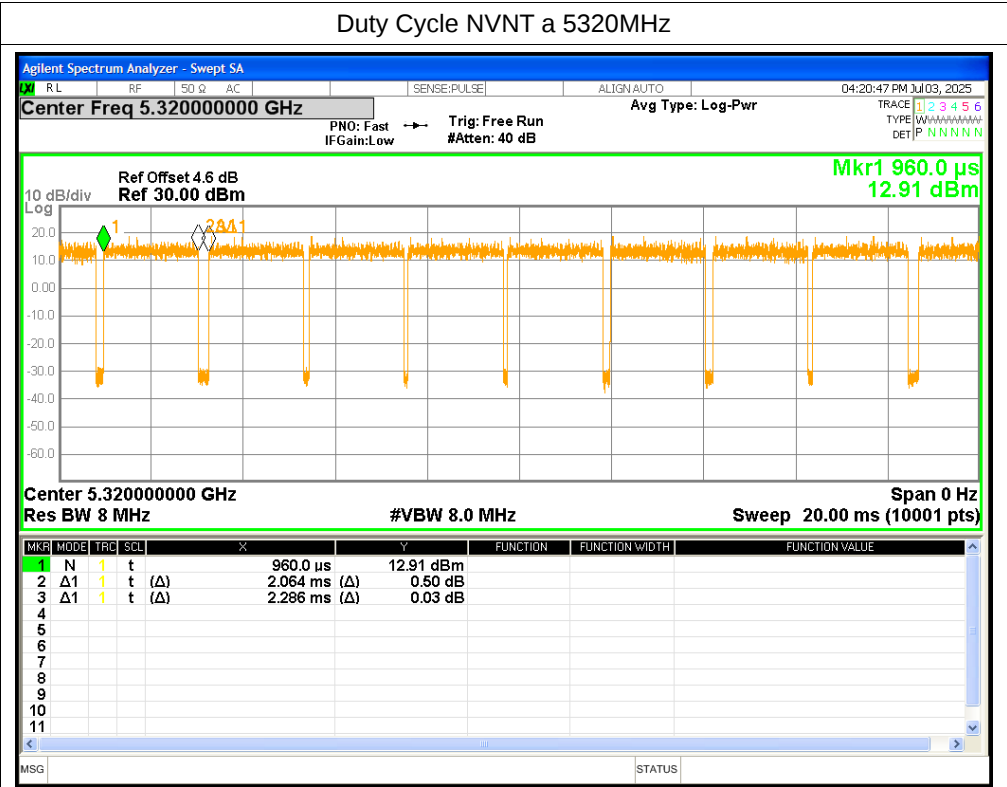


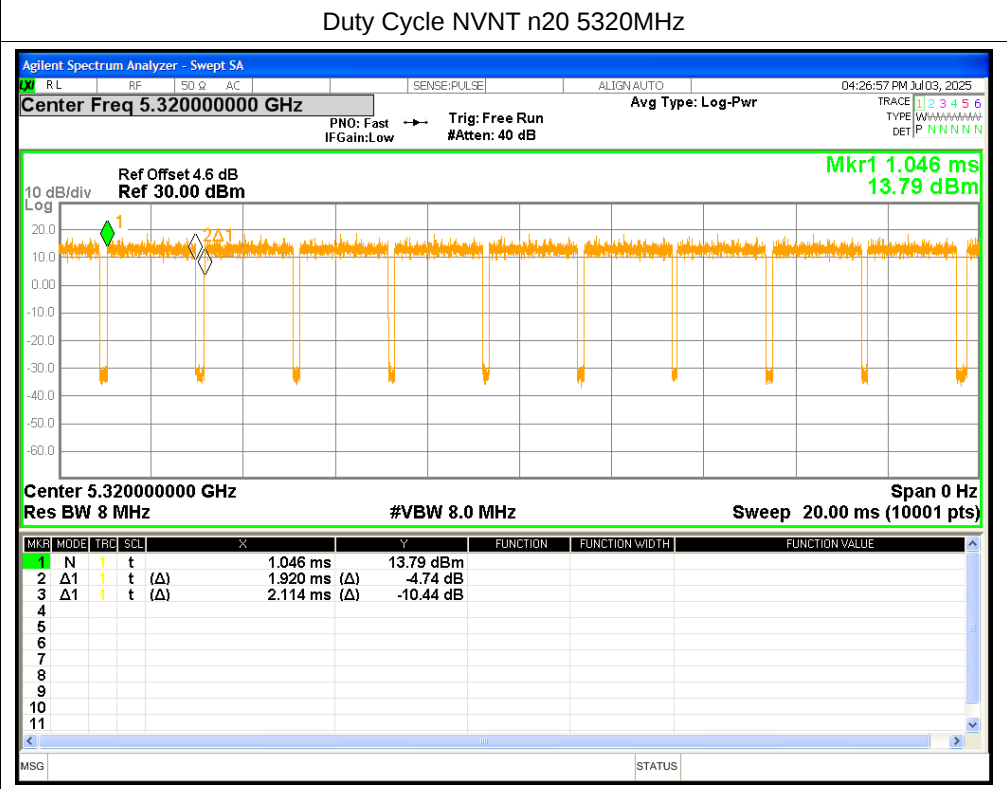
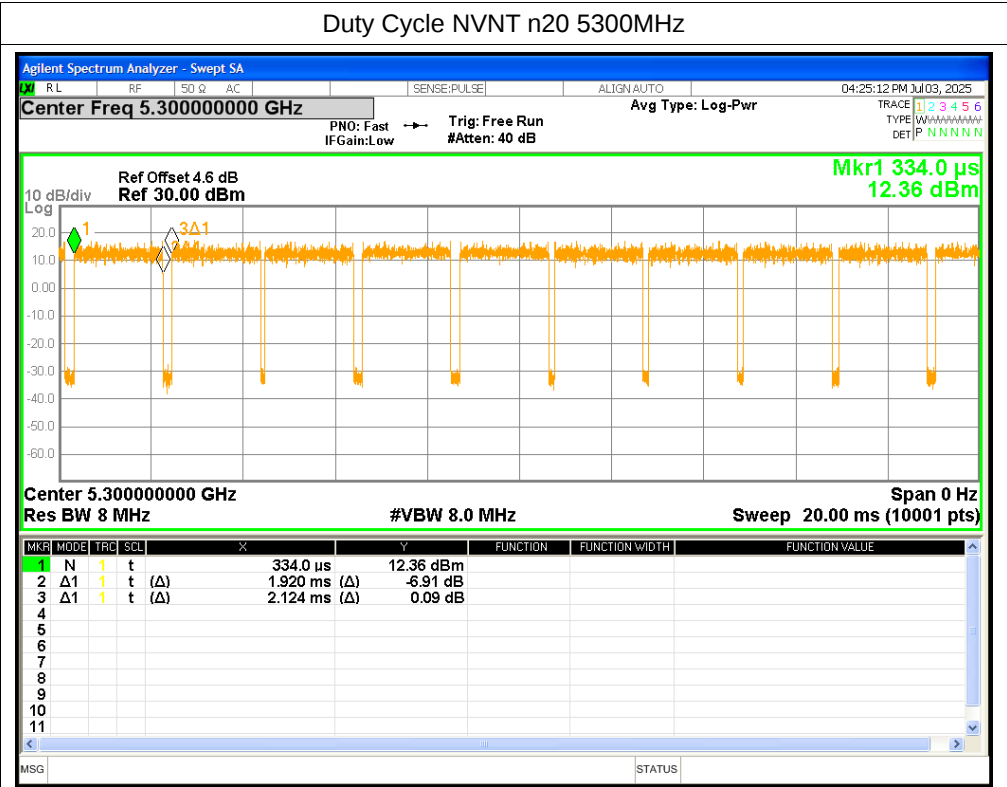




Duty Cycle NVNT n40 5270MHz



Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	10.87	0.46	11.33	<=24	Pass
NVNT	a	5300	10.55	0.44	10.99	<=23.96	Pass
NVNT	a	5320	10.84	0.44	11.28	<=24	Pass
NVNT	n20	5260	10.78	0.42	11.2	<=24	Pass
NVNT	n20	5300	10.43	0.44	10.87	<=24	Pass
NVNT	n20	5320	10.63	0.42	11.05	<=24	Pass
NVNT	n40	5270	10.12	0.81	10.93	<=24	Pass
NVNT	n40	5310	9.97	0.88	10.85	<=24	Pass

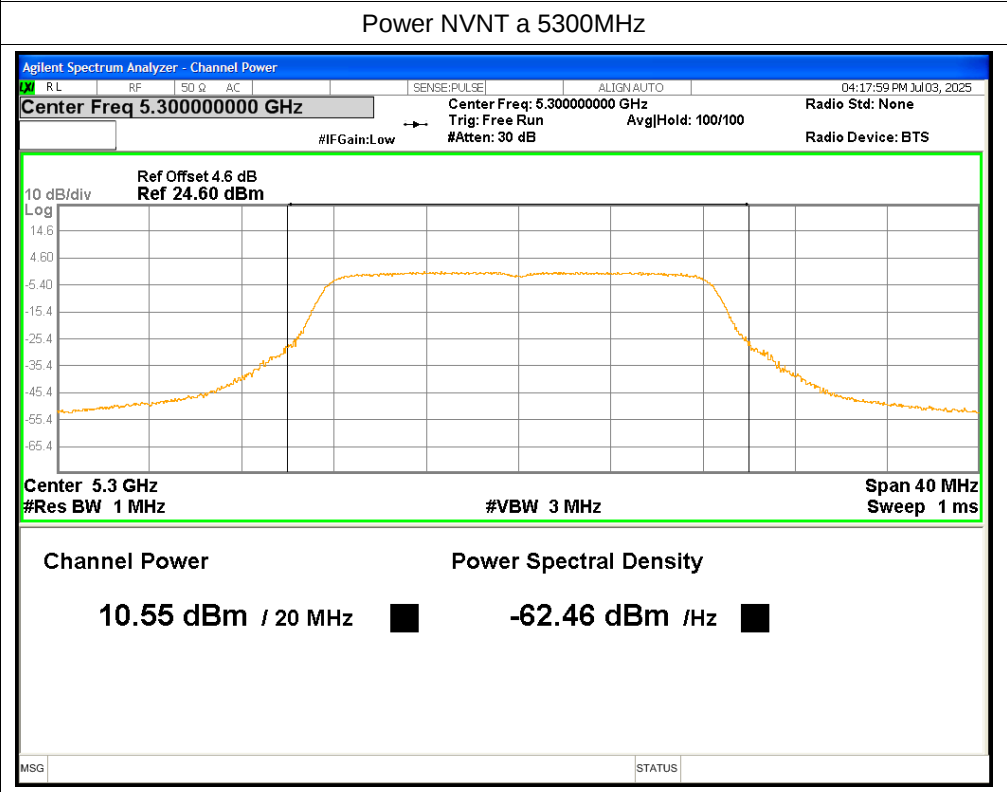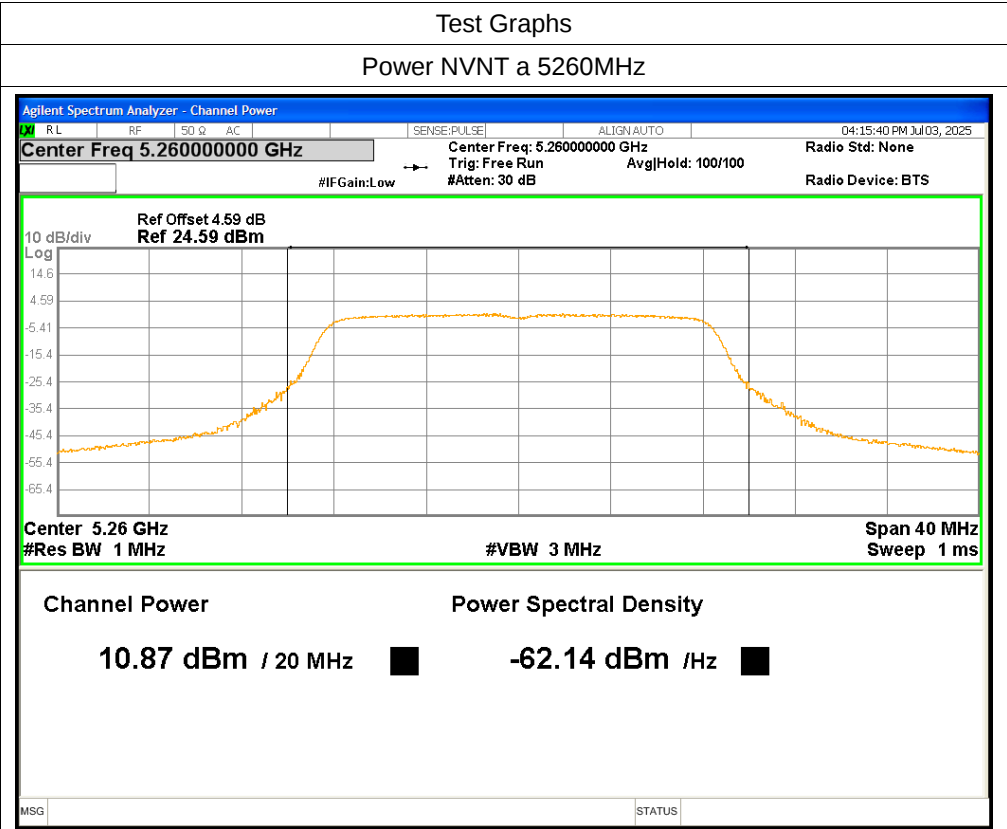

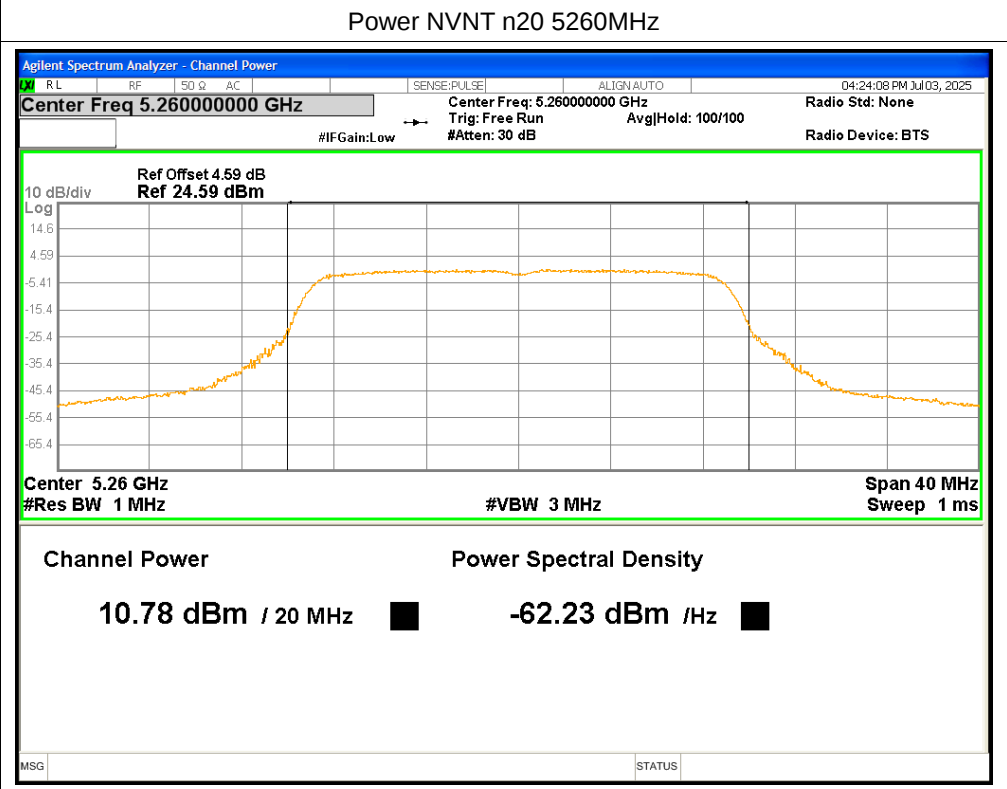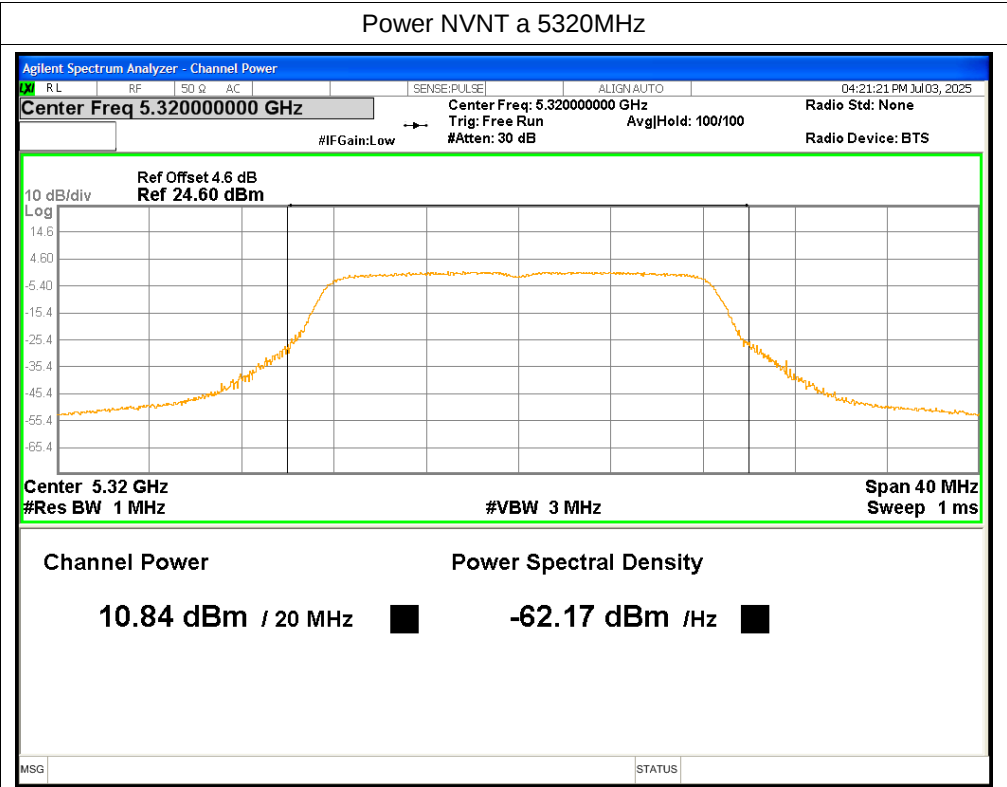

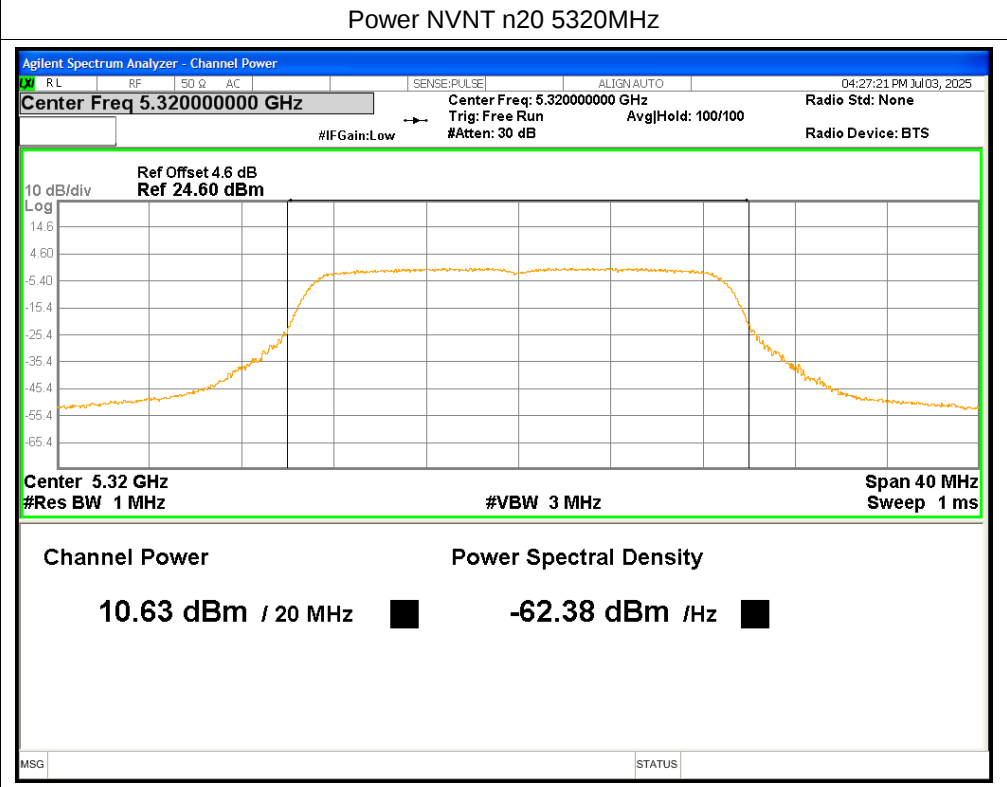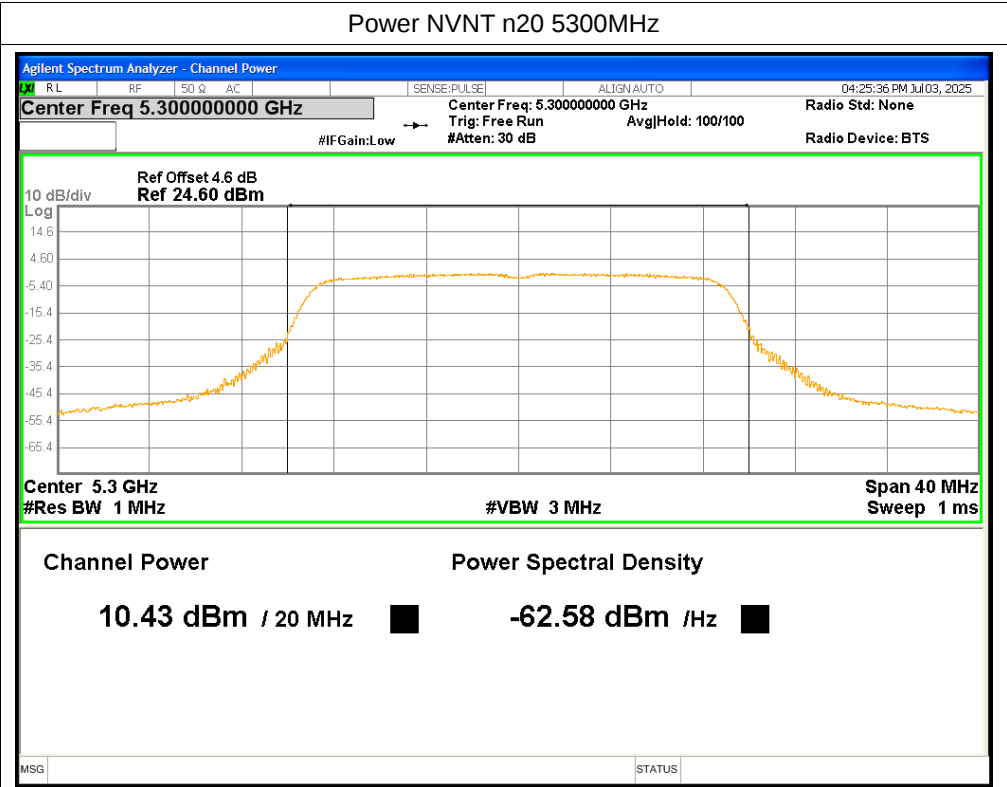

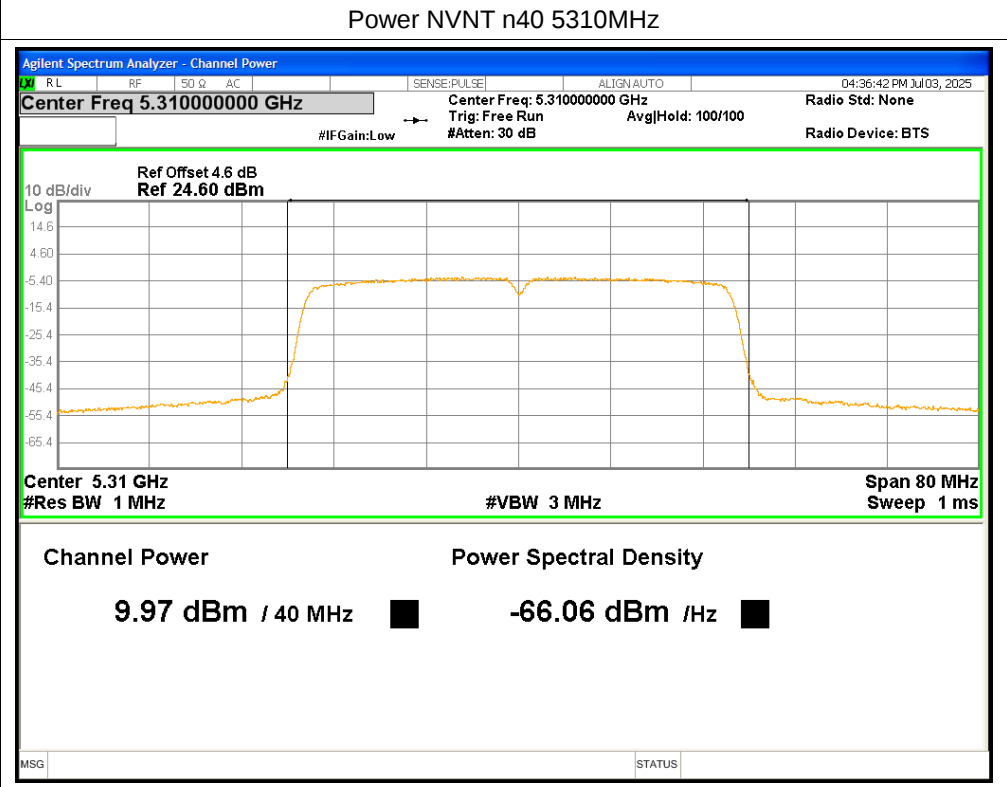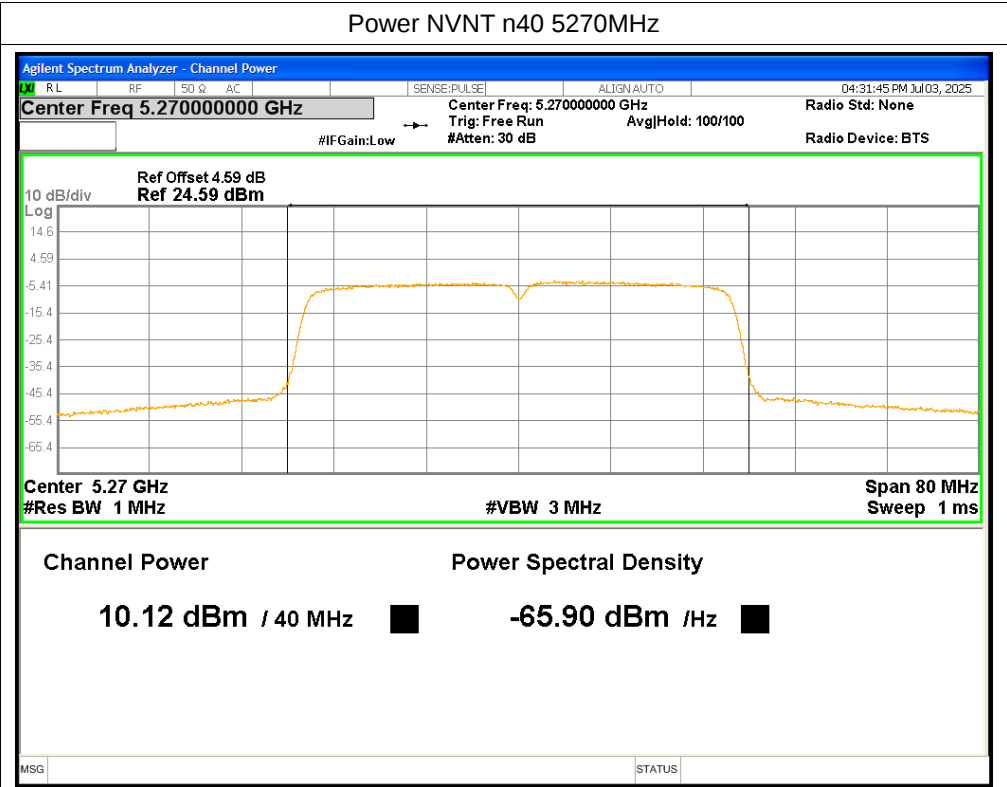


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	19.9827	Pass
NVNT	a	5300	19.7489	Pass
NVNT	a	5320	20.1921	Pass
NVNT	n20	5260	20.6985	Pass
NVNT	n20	5300	20.8939	Pass
NVNT	n20	5320	20.462	Pass
NVNT	n40	5270	38.4298	Pass
NVNT	n40	5310	38.2878	Pass

Test Graphs


-26dB Bandwidth NVNT a 5260MHz

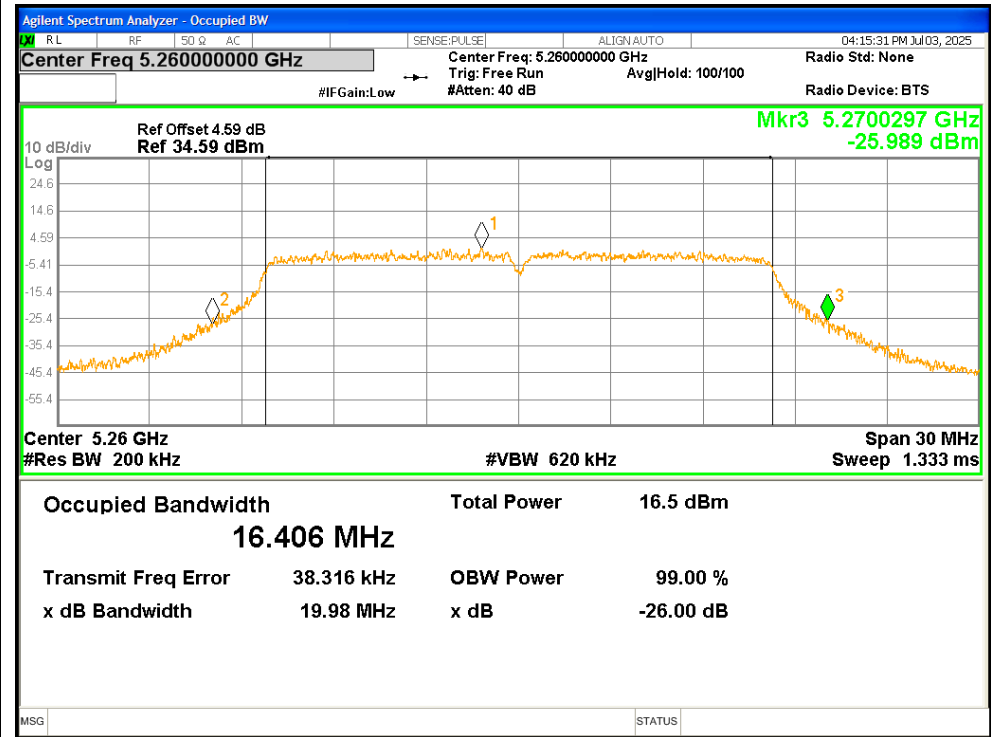


-26dB Bandwidth NVNT a 5300MHz

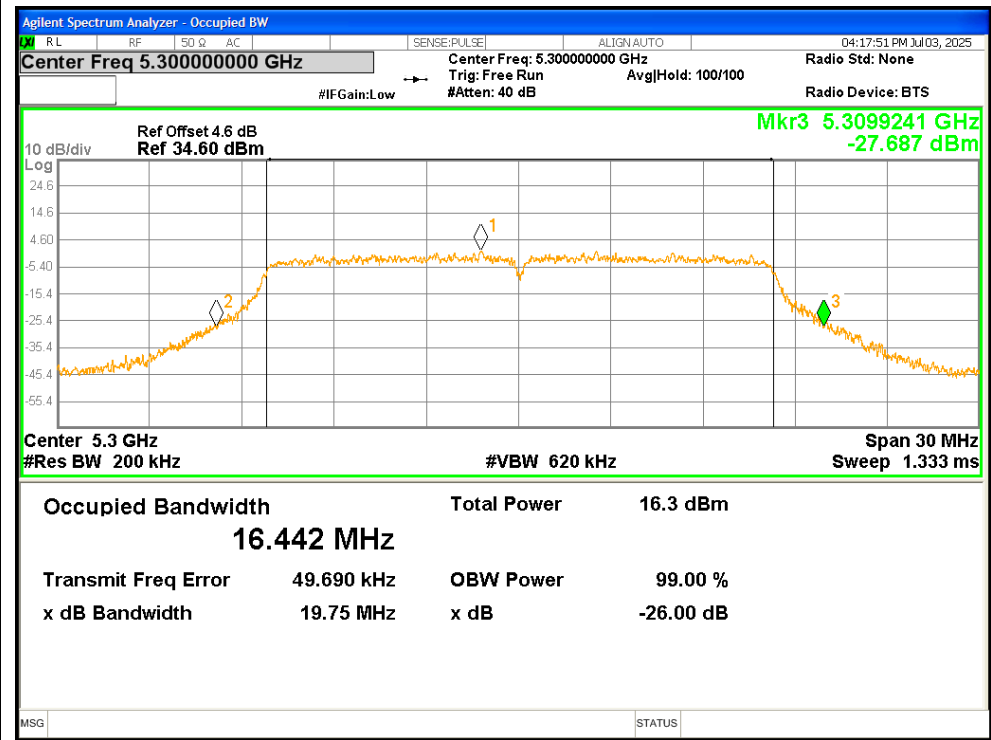


-26dB Bandwidth NVNT a 5320MHz

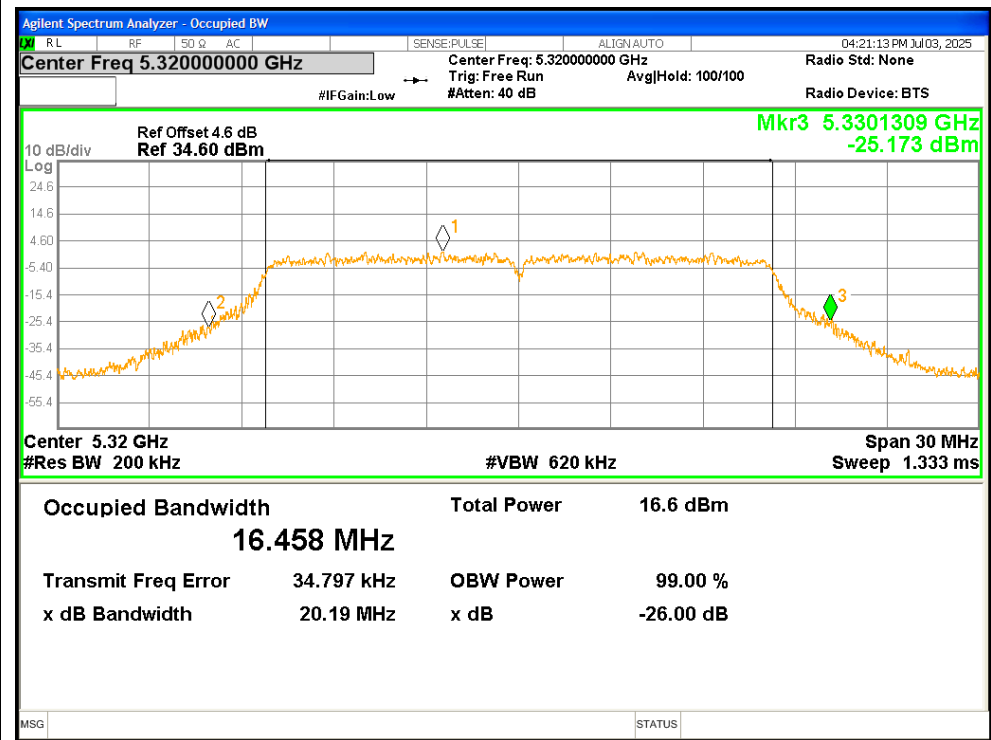


-26dB Bandwidth NVNT n20 5260MHz

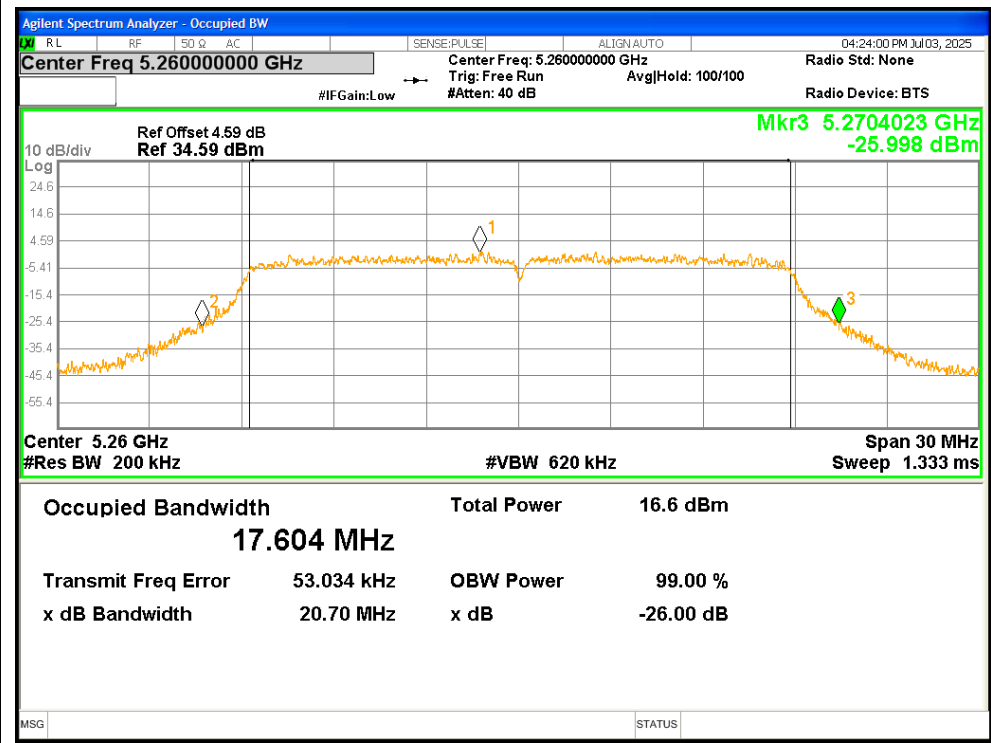


-26dB Bandwidth NVNT n20 5300MHz

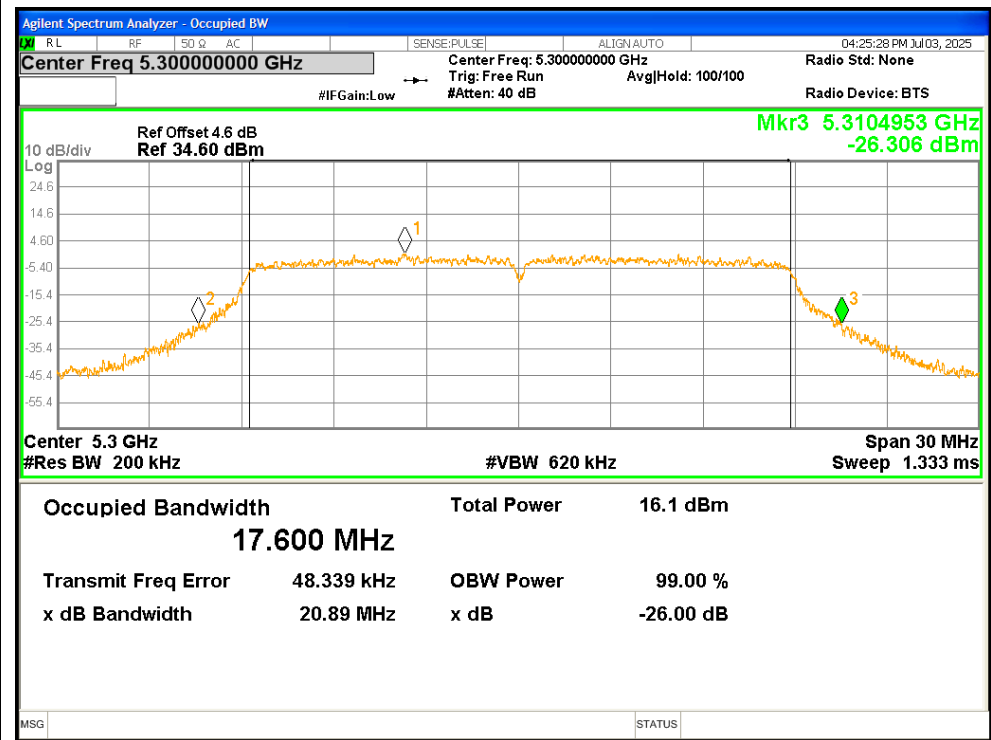


-26dB Bandwidth NVNT n20 5320MHz

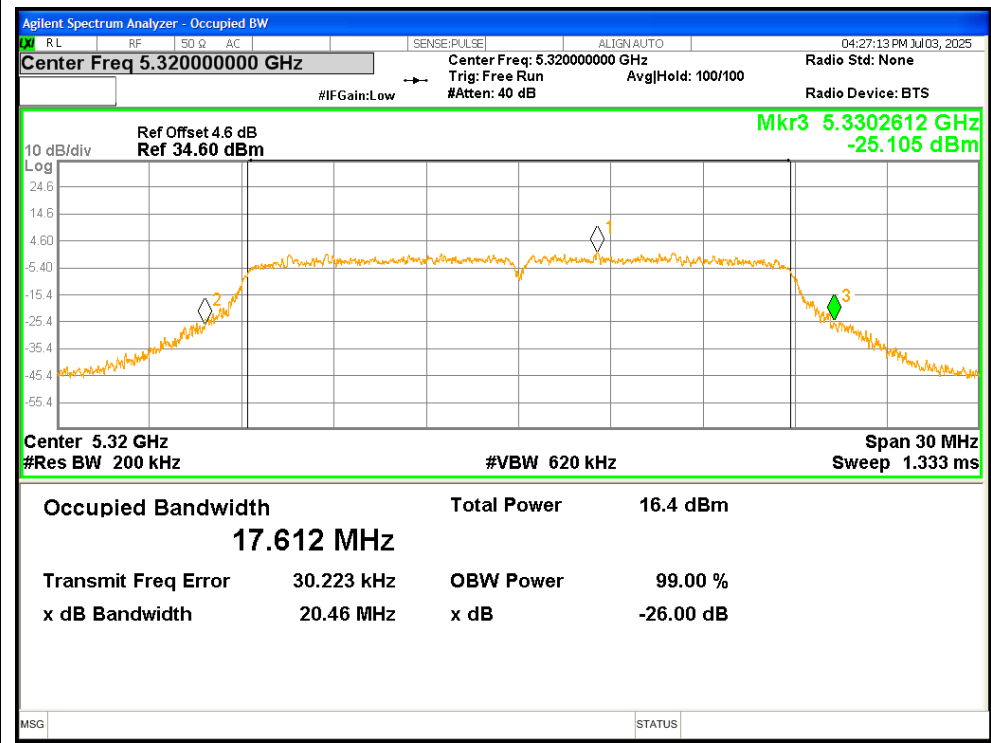

-26dB Bandwidth NVNT n40 5270MHz

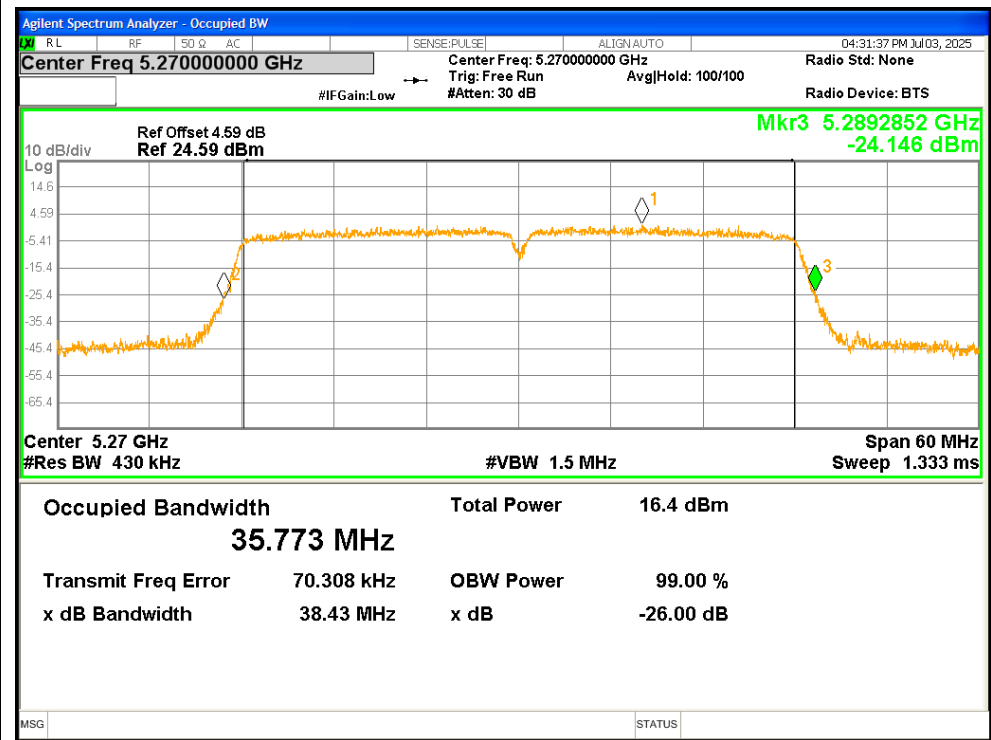




-26dB Bandwidth NVNT n40 5310MHz


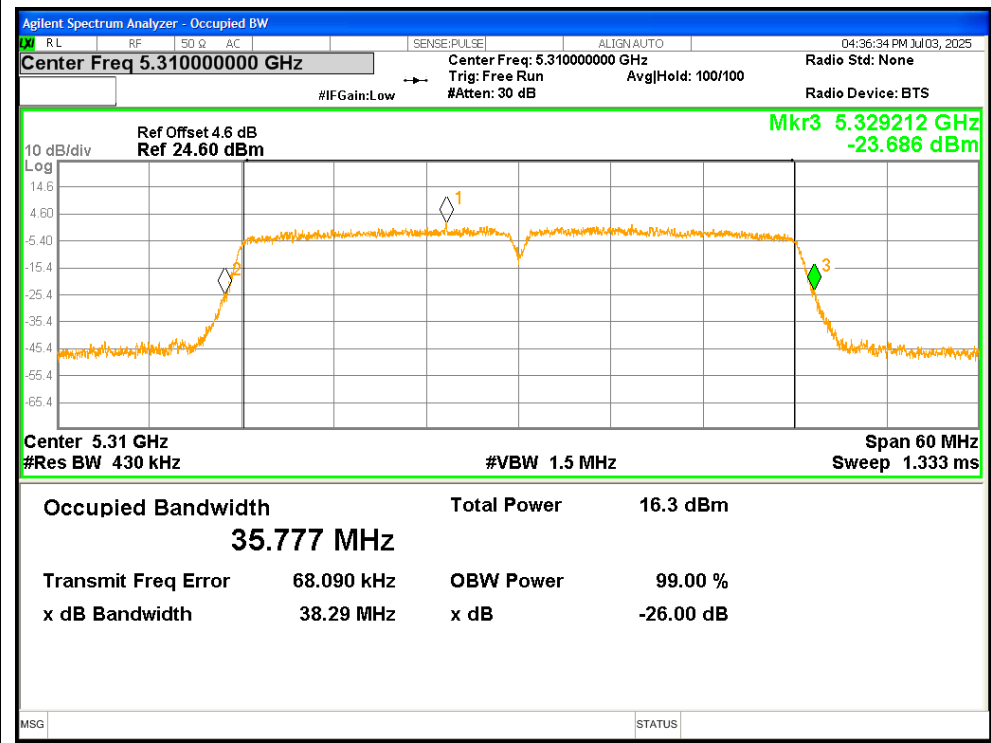




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5260	16.3953
NVNT	a	5300	16.4541
NVNT	a	5320	16.4578
NVNT	n20	5260	17.5971
NVNT	n20	5300	17.5834
NVNT	n20	5320	17.5903
NVNT	n40	5270	35.8124
NVNT	n40	5310	35.7622

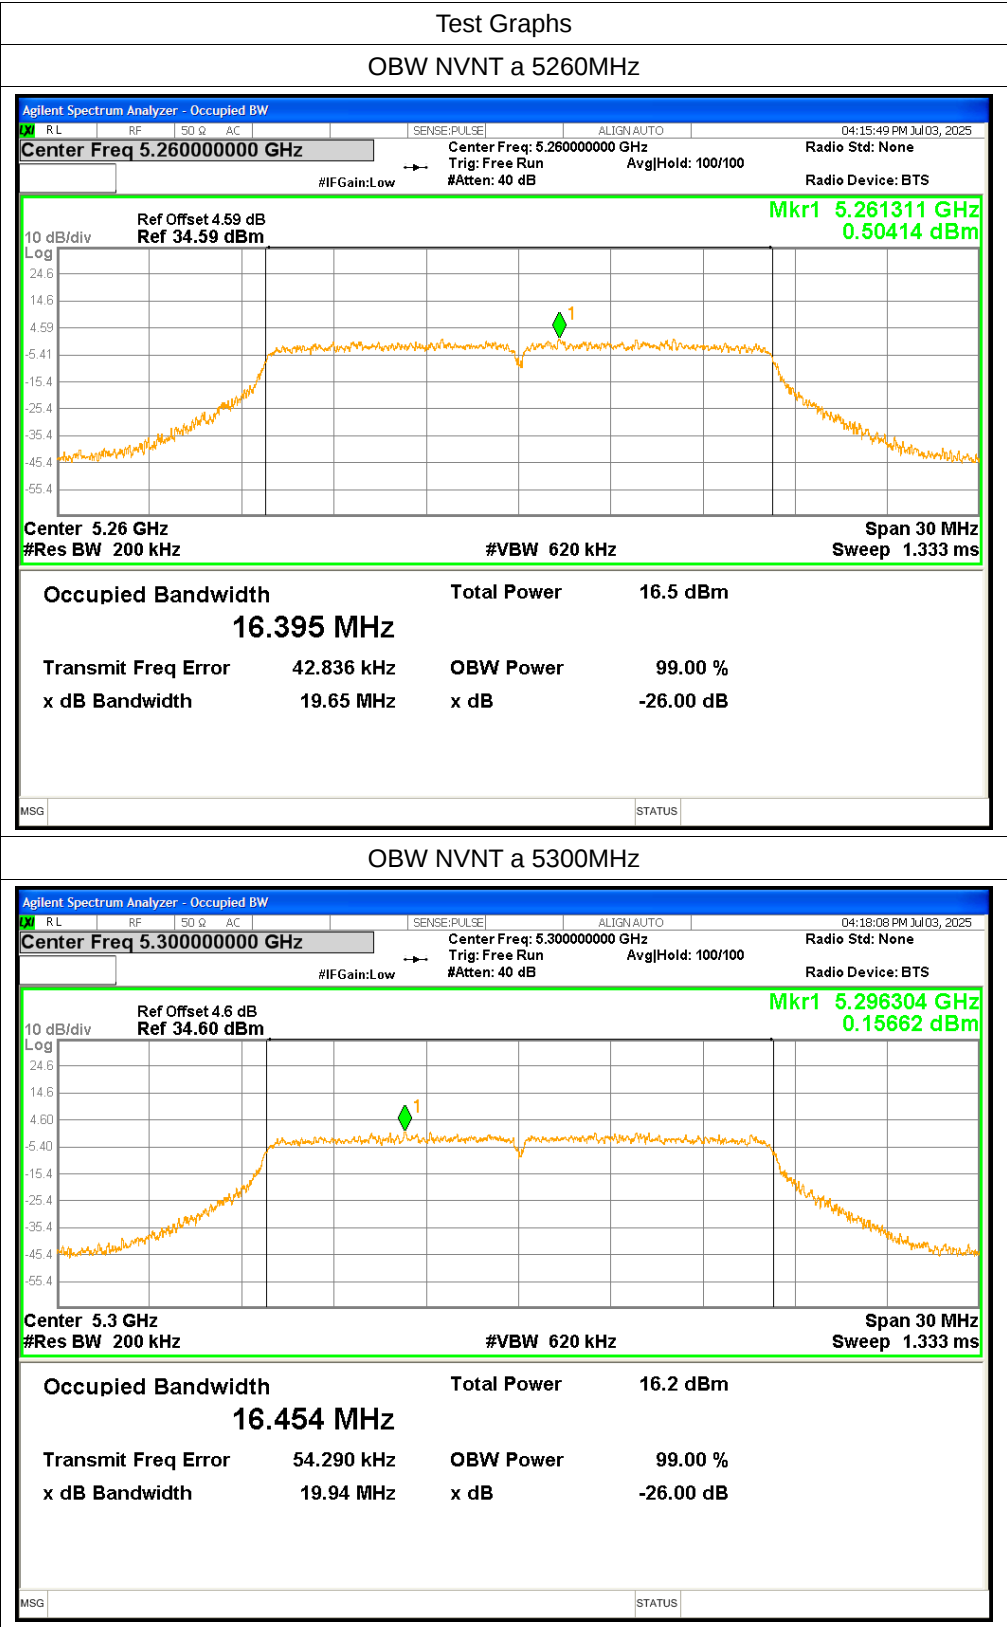

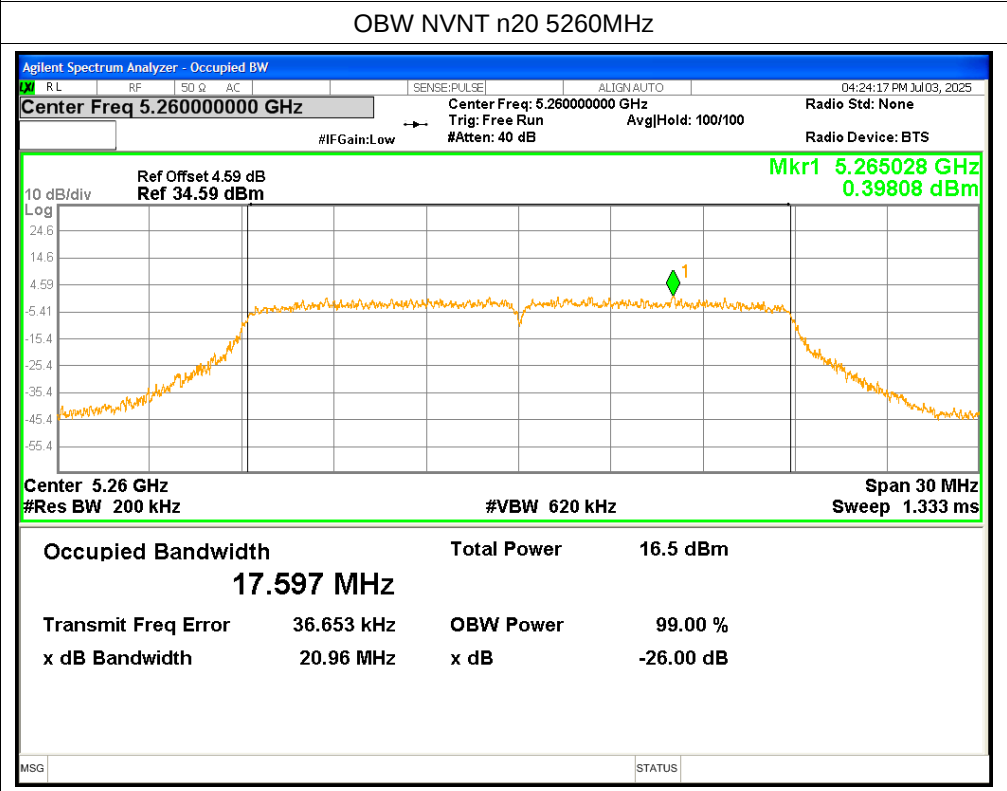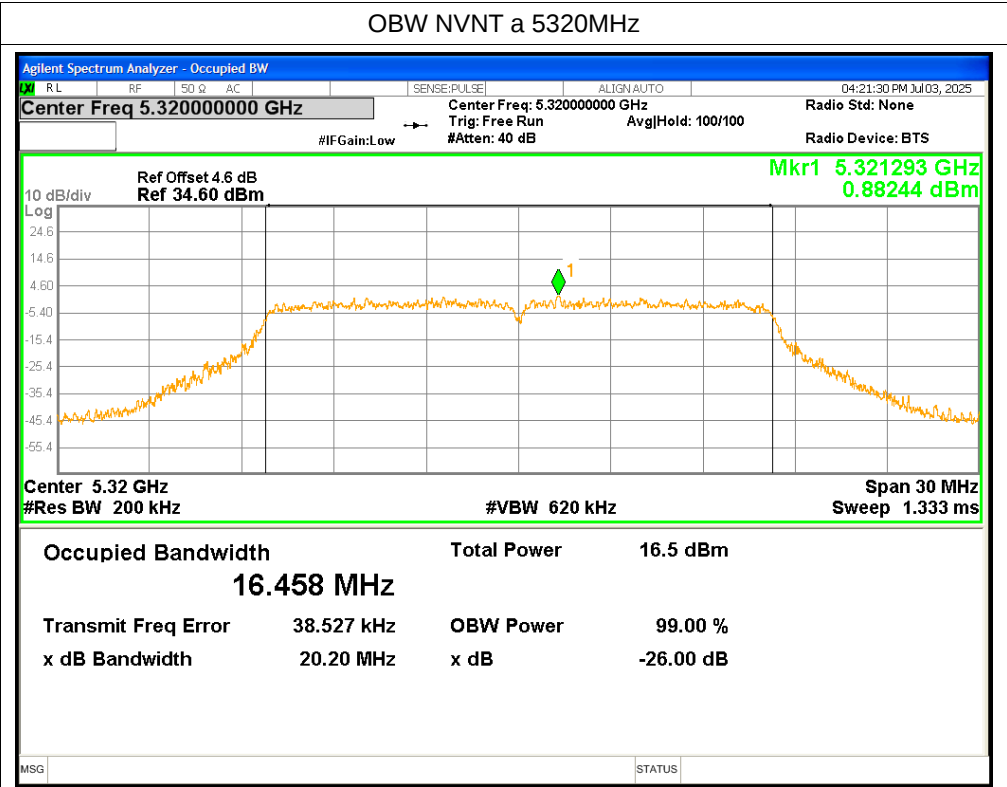


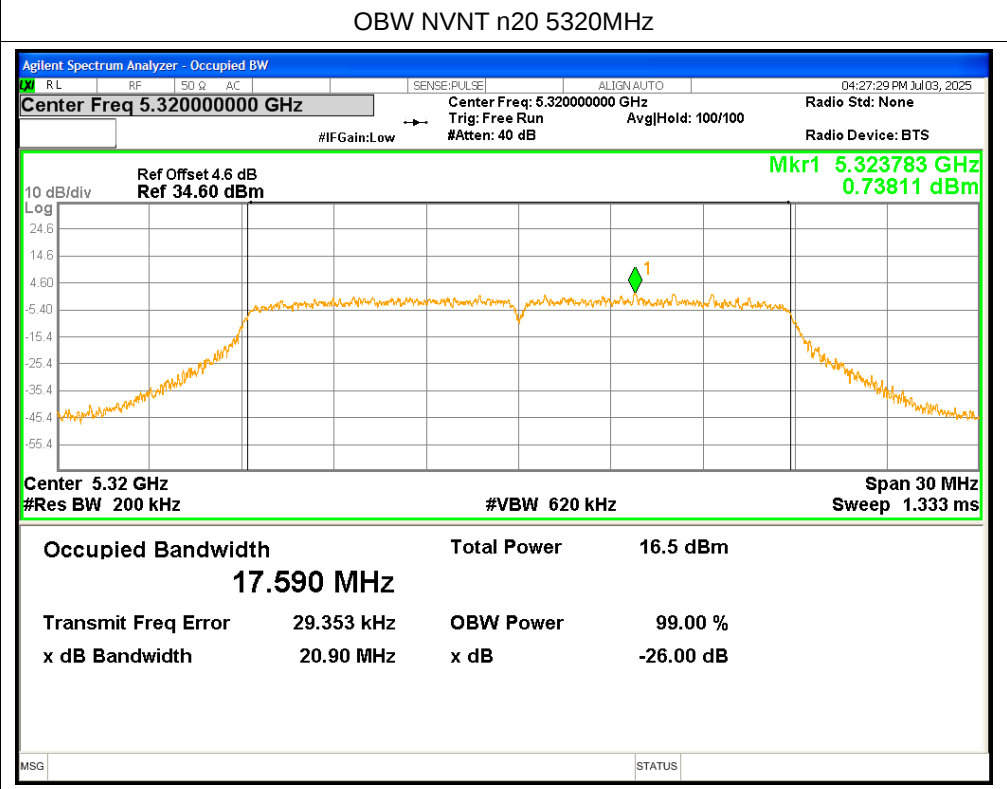
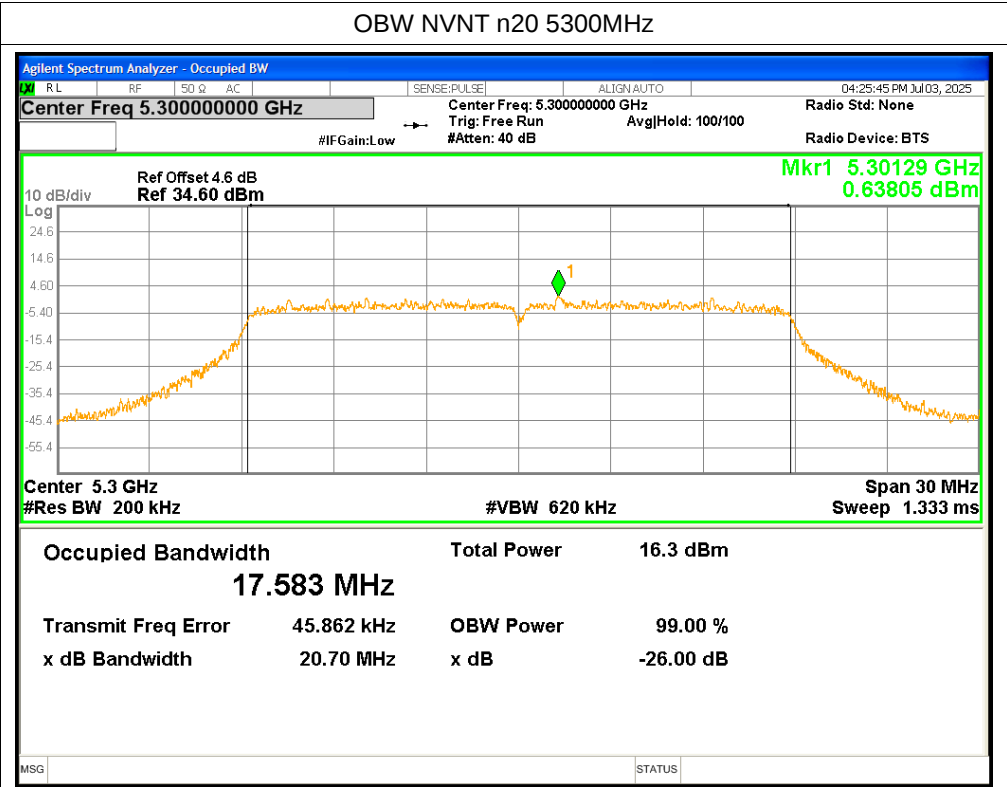


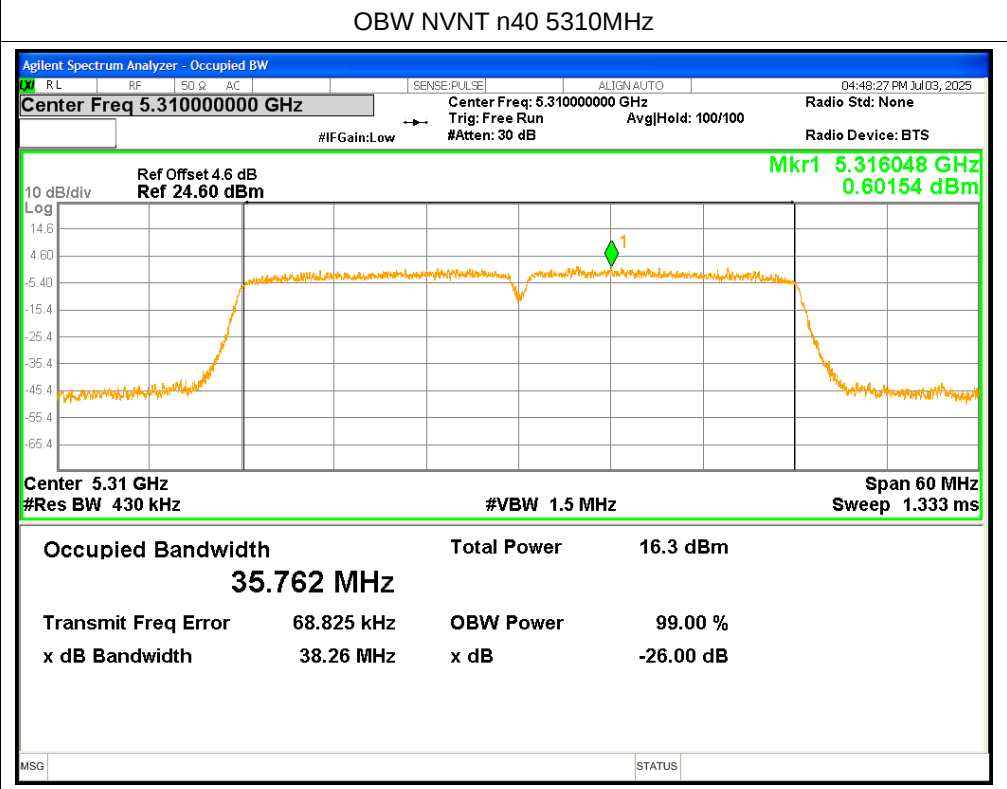
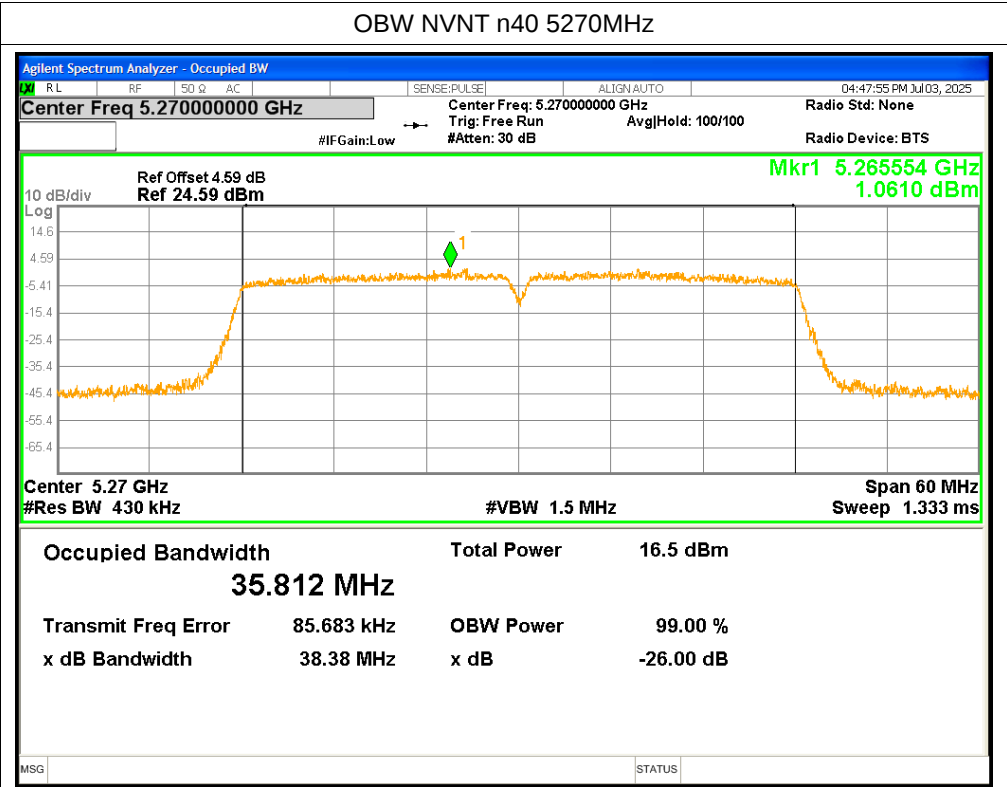




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	0.693	0.46	1.153	<=11	Pass
NVNT	a	5300	0.232	0.44	0.672	<=11	Pass
NVNT	a	5320	0.469	0.44	0.909	<=11	Pass
NVNT	n20	5260	0.244	0.42	0.664	<=11	Pass
NVNT	n20	5300	-0.004	0.44	0.436	<=11	Pass
NVNT	n20	5320	0.255	0.42	0.675	<=11	Pass
NVNT	n40	5270	-2.969	0.81	-2.159	<=11	Pass
NVNT	n40	5310	-3.075	0.88	-2.195	<=11	Pass

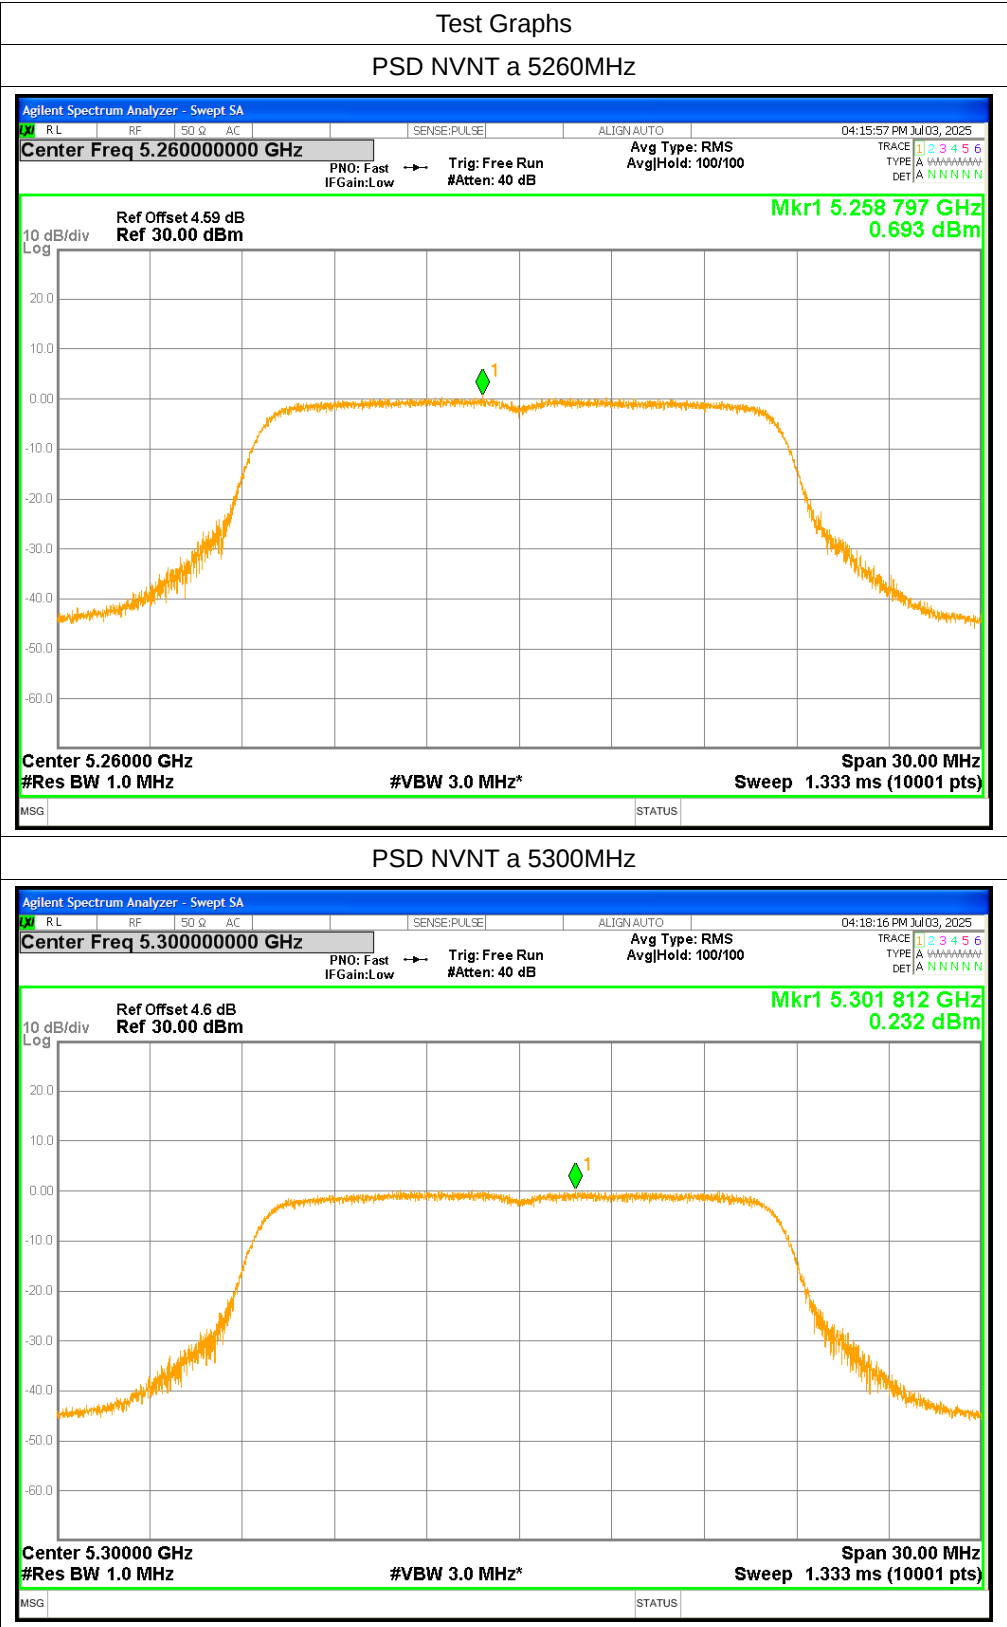

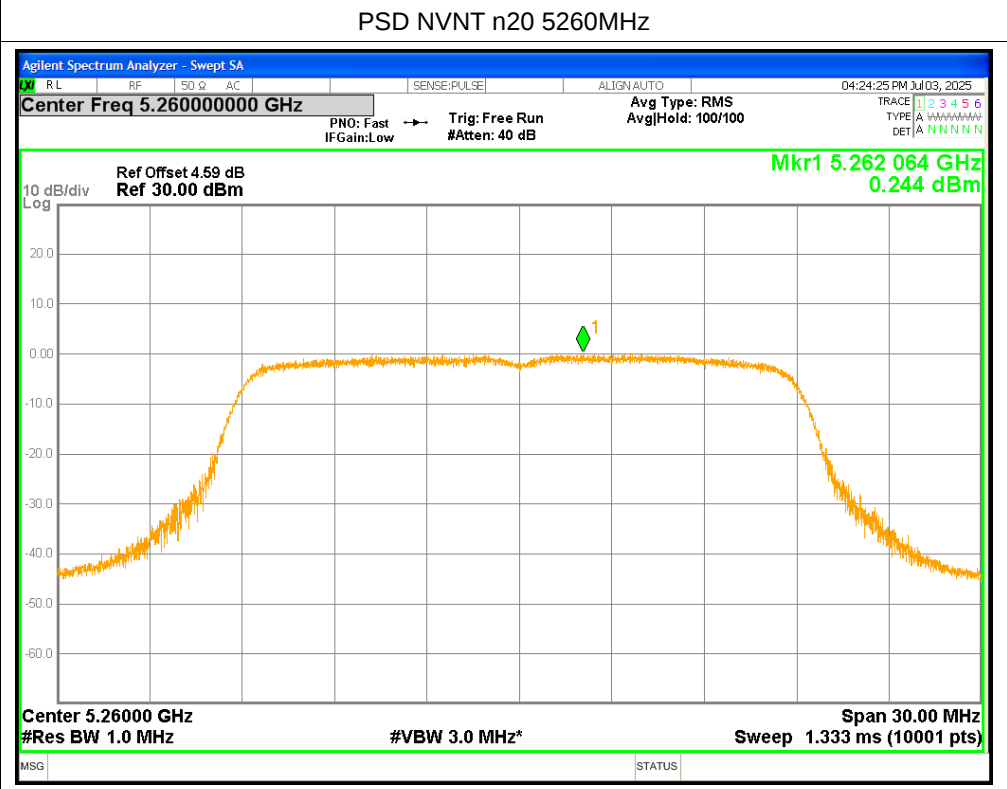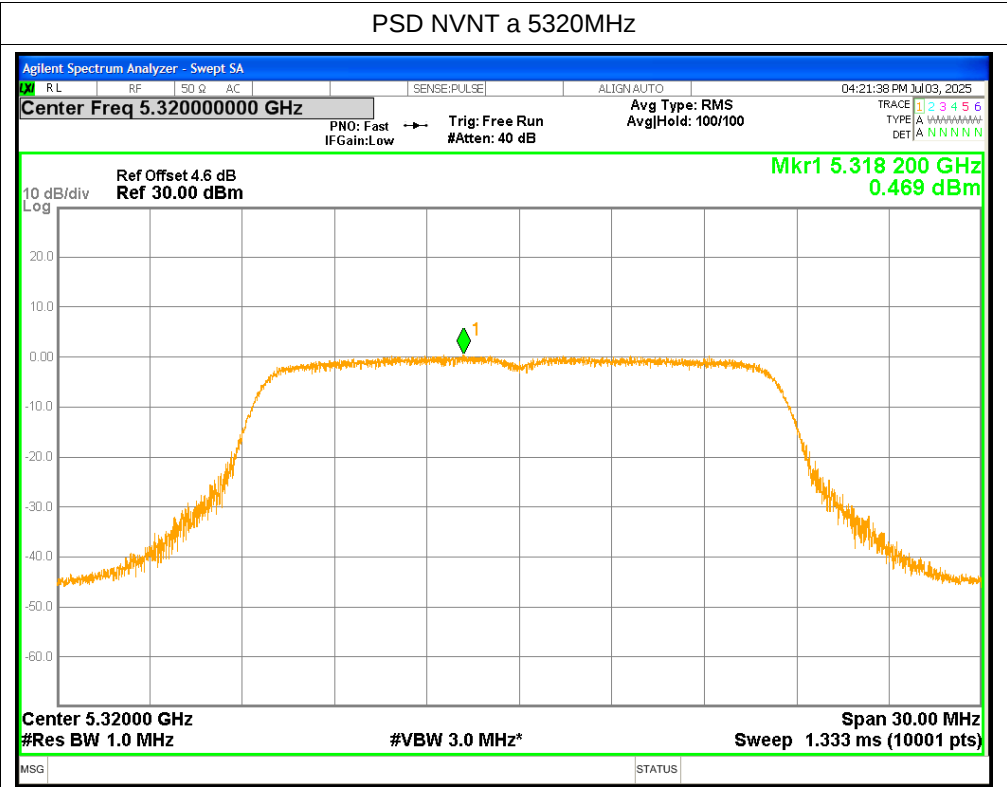

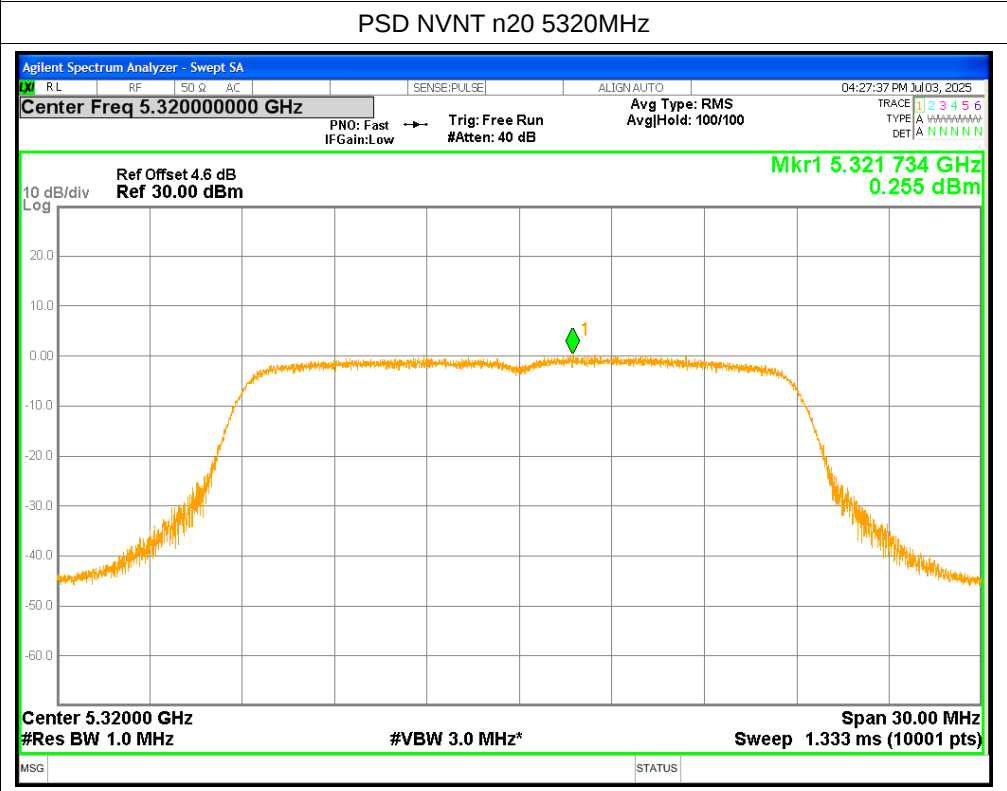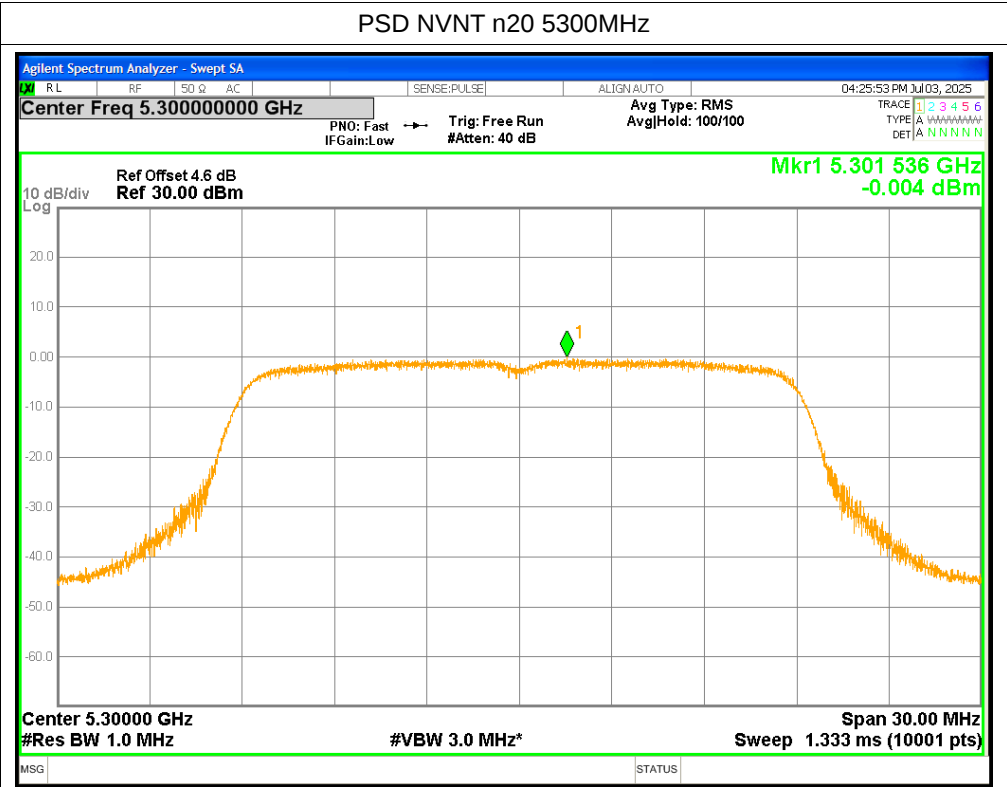

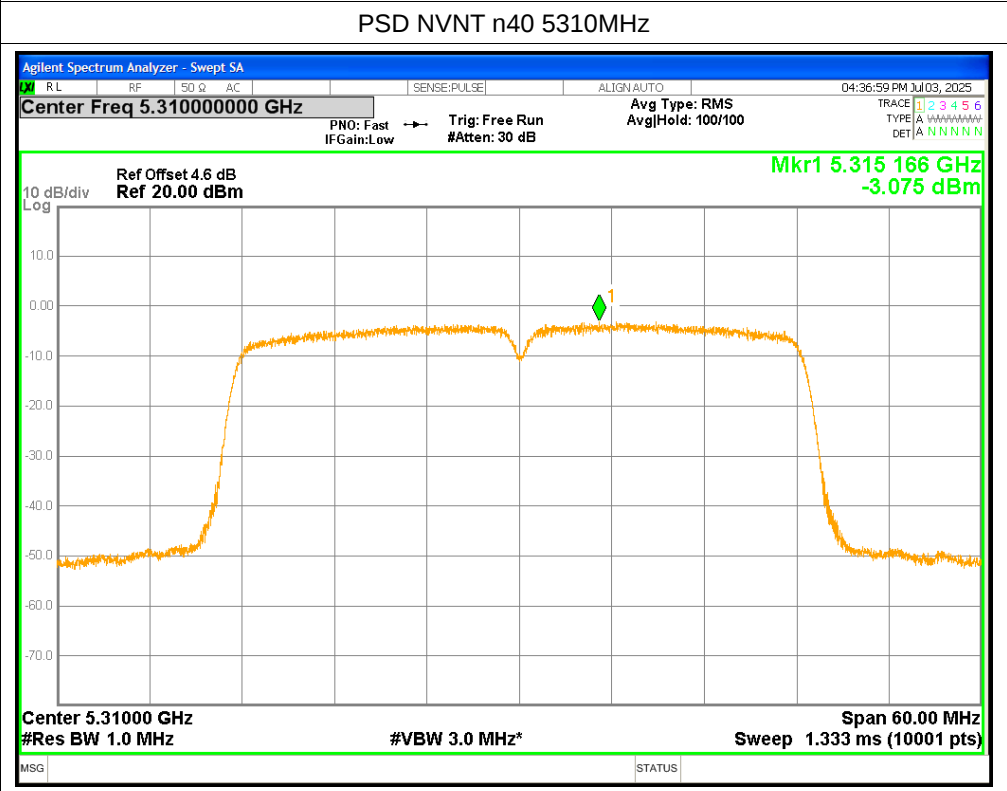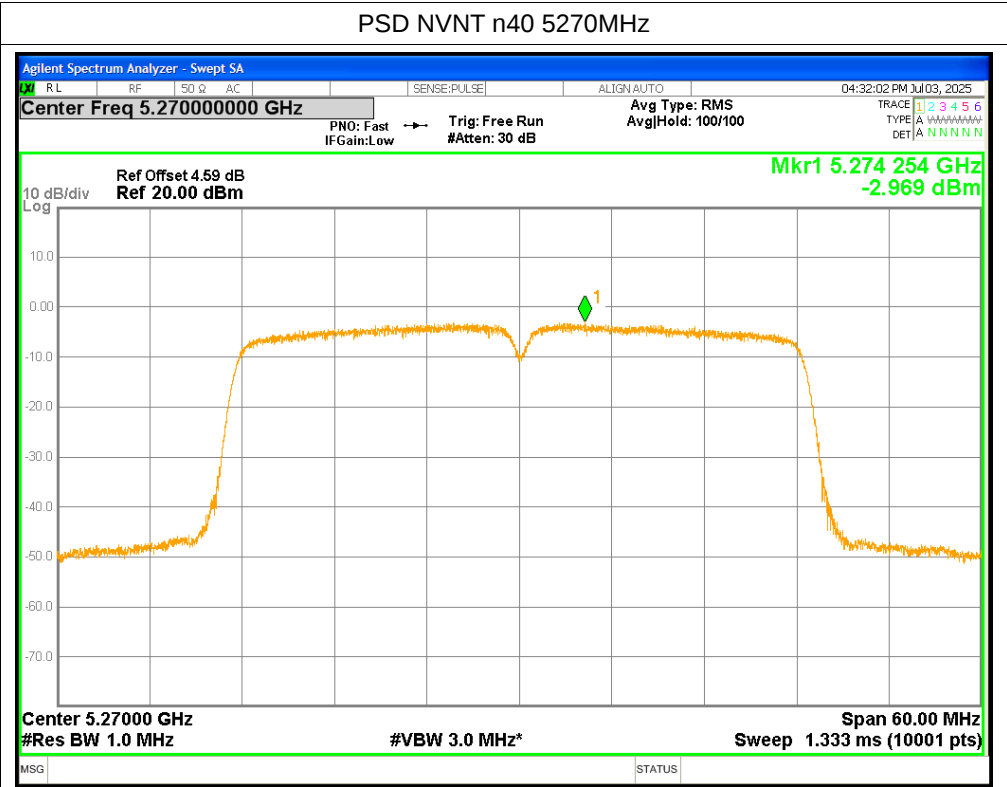


Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5260	-40.5	<=-27	Pass
NVNT	a	5320	-39.08	<=-27	Pass
NVNT	n20	5260	-40.78	<=-27	Pass
NVNT	n20	5320	-39.87	<=-27	Pass
NVNT	n40	5270	-41.31	<=-27	Pass
NVNT	n40	5310	-38.66	<=-27	Pass

Test Graphs

Band Edge NVNT a 5260MHz Low

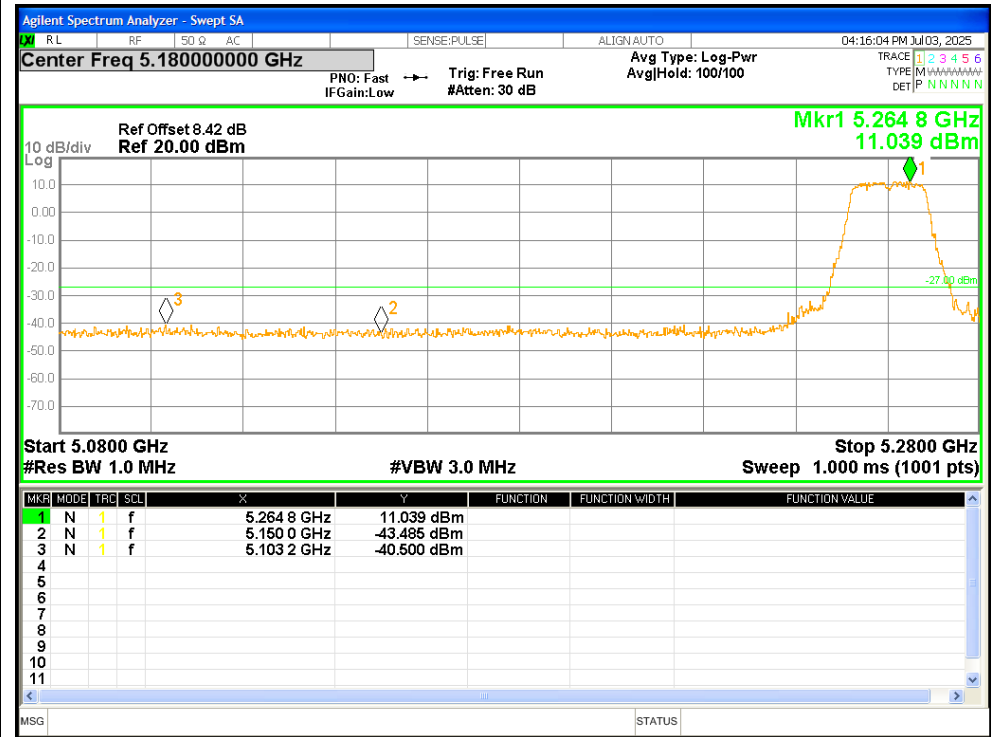

Band Edge NVNT a 5320MHz High

