


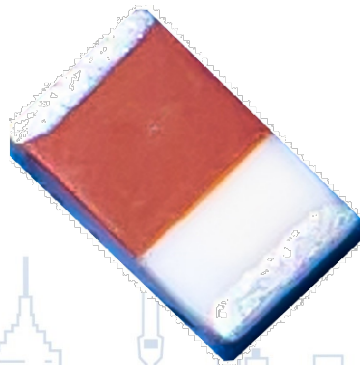

Product Name: WiFi/Bluetooth Chip Antenna – CW201

Part Number: H2U34C1H1B0100

Features:

- Supporting WiFi/Bluetooth, covering 2400 to 2484 MHz
- Surface Mount
- Dimensions: 2.0 x 1.2 x 0.6 mm
- High performance, small size.
- RoHS & REACH & HF Compliant
- AEC-Q200 Compliant

Applications:

- ISM 2.4 GHz applications
- ZigBee/BLE applications
- Bluetooth earphone systems
- Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- IEEE802.11 b/g/n

WiFi/Bluetooth Chip Antenna

MODEL: CW201

Version: A

I. Specifications:


Items	Specifications	
Frequencies (MHz)	2400~2484	
Return loss (dB)	< -10 Typ.	
VSWR	< 2 Typ.	
Efficiency (%)	@2442MHz	62.9
Average Gain (dB)		-2.0
Peak Gain (dBi)		2.4
Test Condition	40 x 20 mm ² (Evaluation board)	
Impedance (Ω)	50	
Polarization	Linear Polarization	

Mechanical Specifications	
Dimensions (mm)	2.0 (L) x 1.2 (W) x 0.6 (H)
Material	Ceramic
Termination	Ag (environmental Pb free)
Environmental Conditions	
Operation & Storage Temperature (° C)	-40 ~ +105
Storage Temperature (° C) (Antenna with packing sealed)	-5 ~ +40
Relative Humidity	10 ~ 70 %

© Unictron Technologies Corp.
All specifications subject to change without notice.

III. Mechanical Dimensions:


a) Antenna Dimensions



TOP View




Bottom View



Side View

Unit: mm


b) PIN Definition

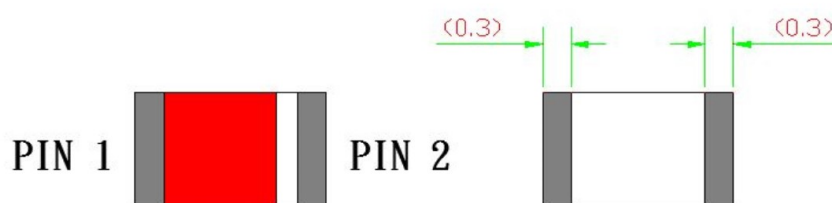

Unit: mm

PIN	1	2
Soldering Pad	Signal Input	Tuning/Signal Output

c) Test Board with Antenna

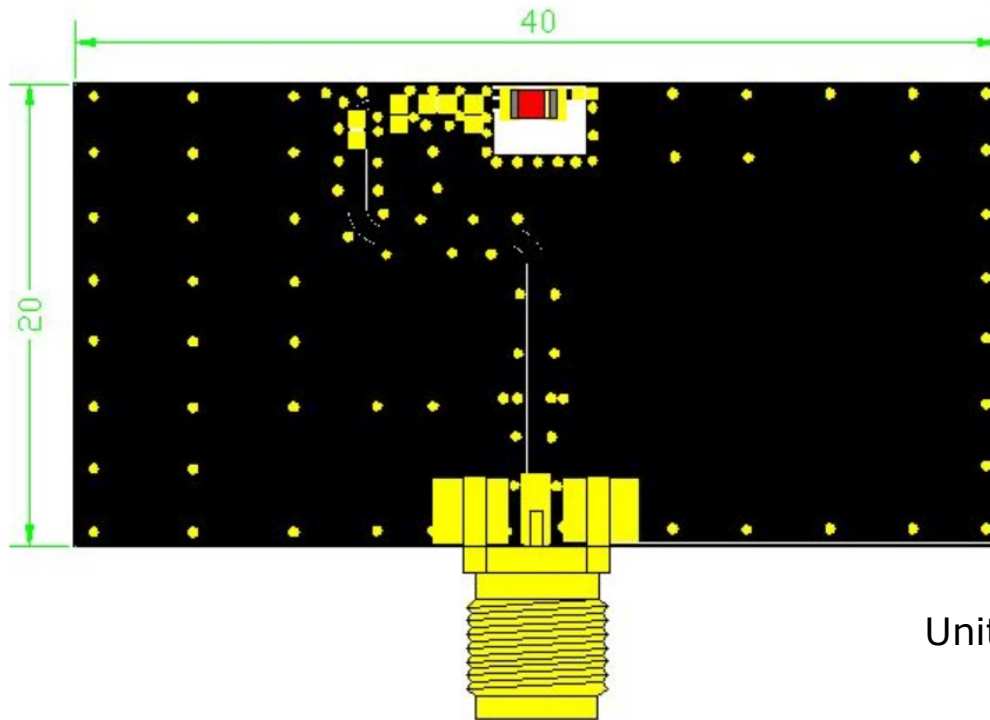


Unit: mm


© Unictron Technologies Corp.
All specifications subject to change without notice.

IV. Properties:

a) Return loss (dB)

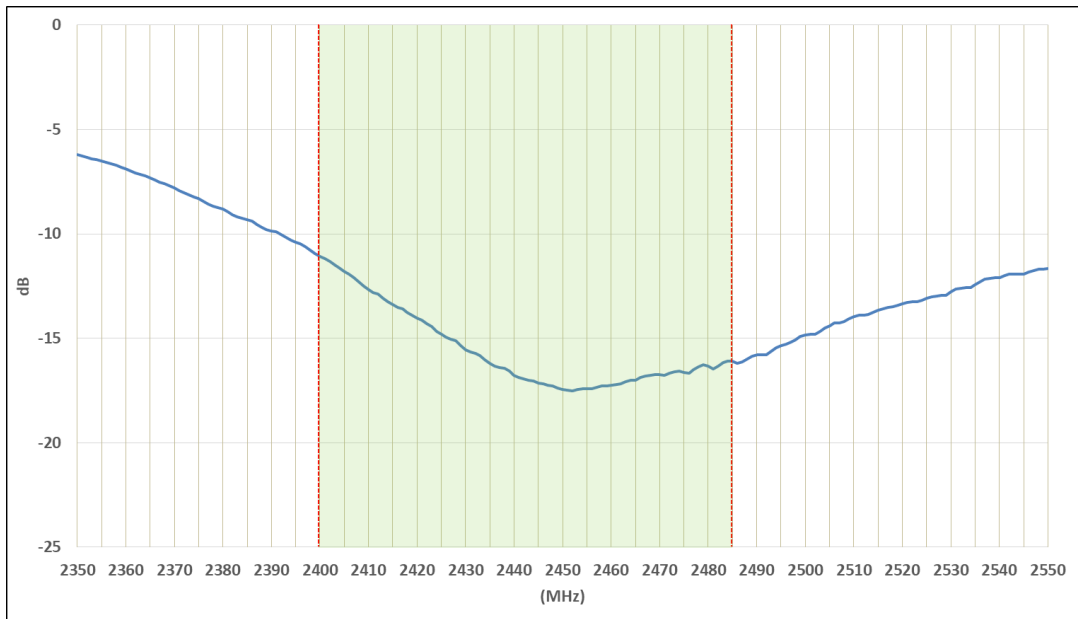


b) VSWR

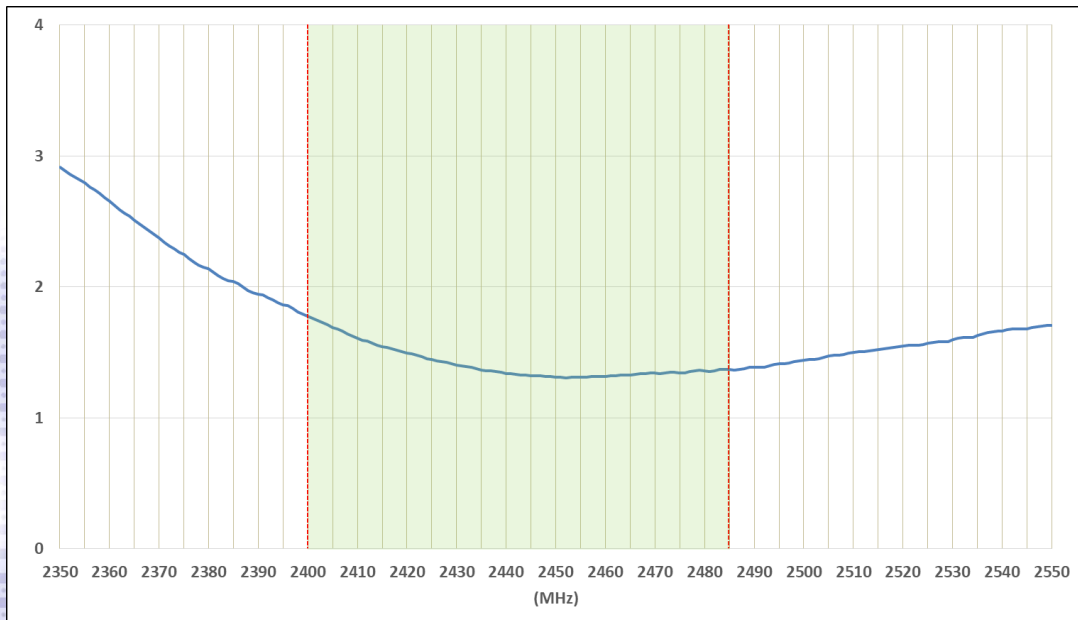


© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Efficiency (%)

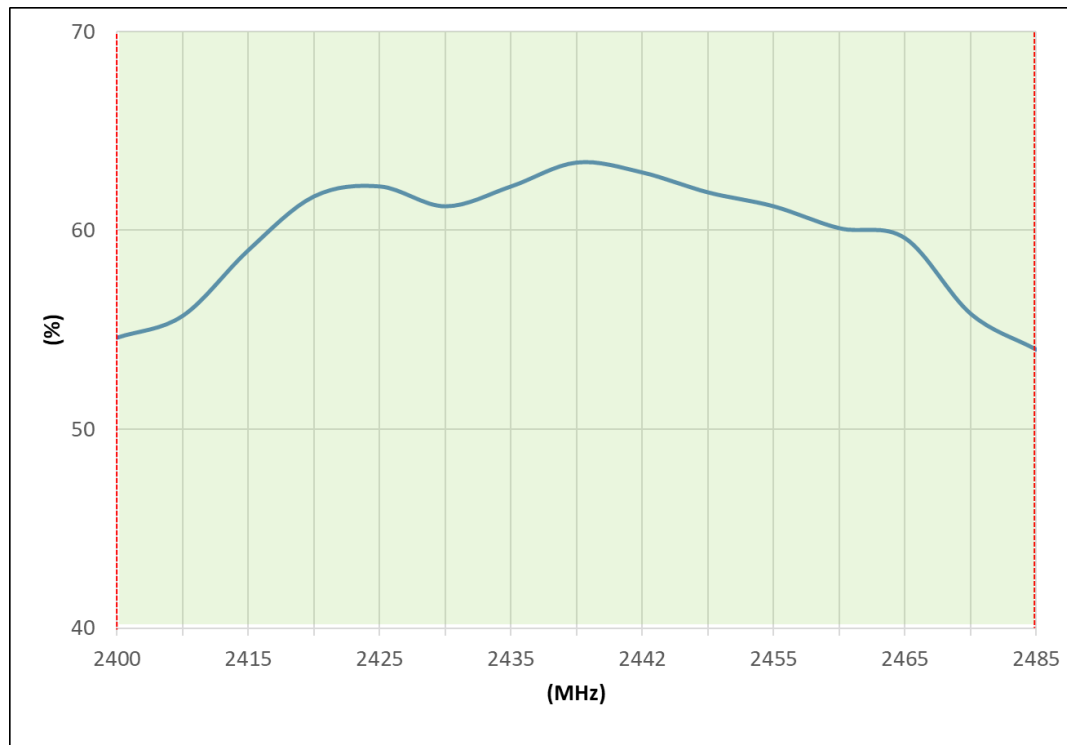


b) Average Gain (dB)

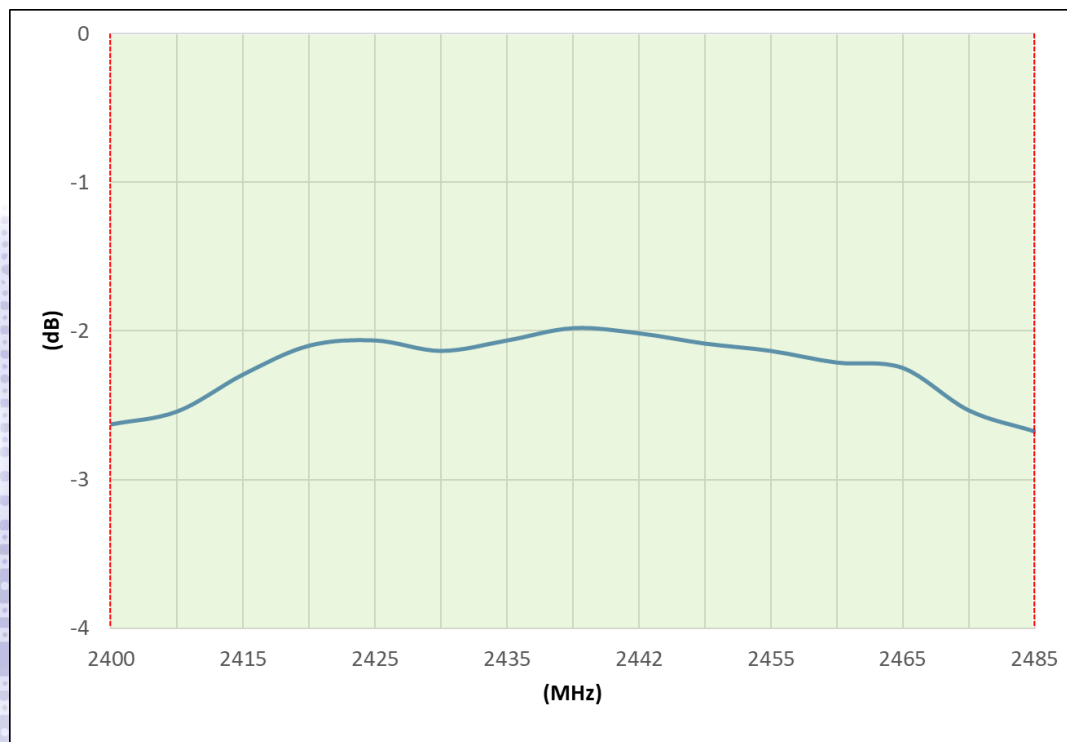

© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Peak Gain (dBi)

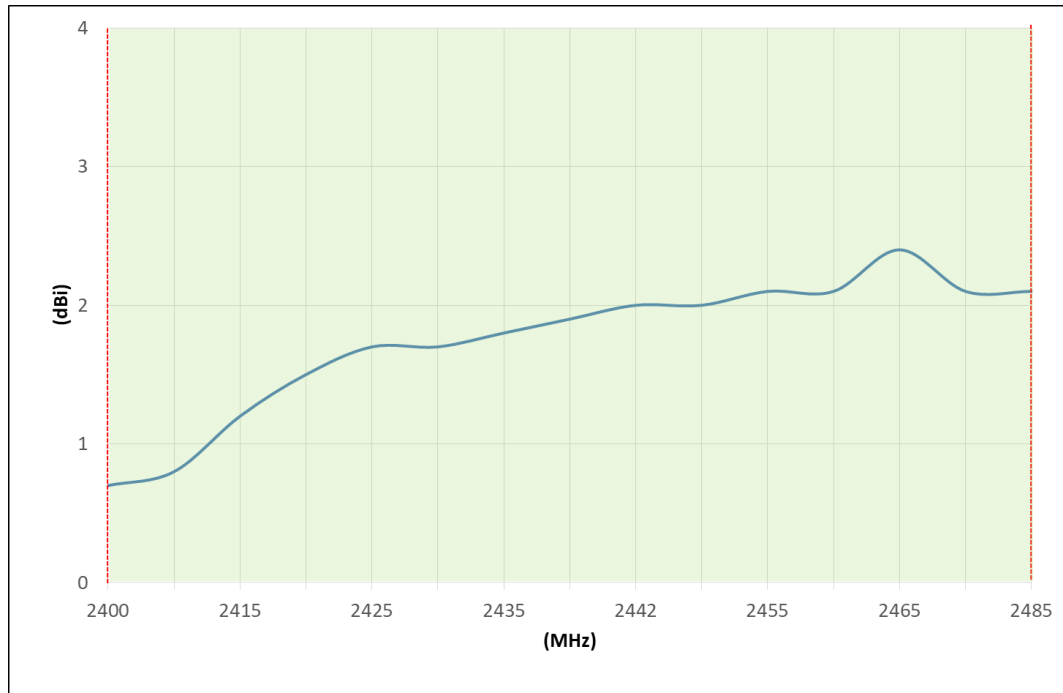

© Unictron Technologies Corp.
All specifications subject to change without notice.



Frequency (MHz)	2400	2410	2415	2420	2425	2430	2435	2440	2442	2450
Average Gain (dB)	-2.6	-2.5	-2.3	-2.1	-2.1	-2.1	-2.1	-2.0	-2.0	-2.1
Efficiency (%)	54.6	55.7	59	61.7	62.2	61.2	62.2	63.4	62.9	61.9
Peak Gain (dBi)	0.7	0.8	1.2	1.5	1.7	1.7	1.8	1.9	2	2

Frequency (MHz)	2455	2460	2465	2470	2475	2480	2485
Average Gain (dB)	-2.1	-2.2	-2.2	-2.4	-2.5	-2.5	-2.7
Efficiency (%)	61.2	60.1	59.6	56.2	55.8	55	54
Peak Gain (dBi)	2.1	2.1	2.4	2.1	2.1	2.1	2.1


V. Antenna Radiation Pattern Measurement:

The antenna radiation patterns are measured in Unictron's 3D Anechoic Chamber. The measurement setup is as show below.

© Unictron Technologies Corp.
All specifications subject to change without notice.

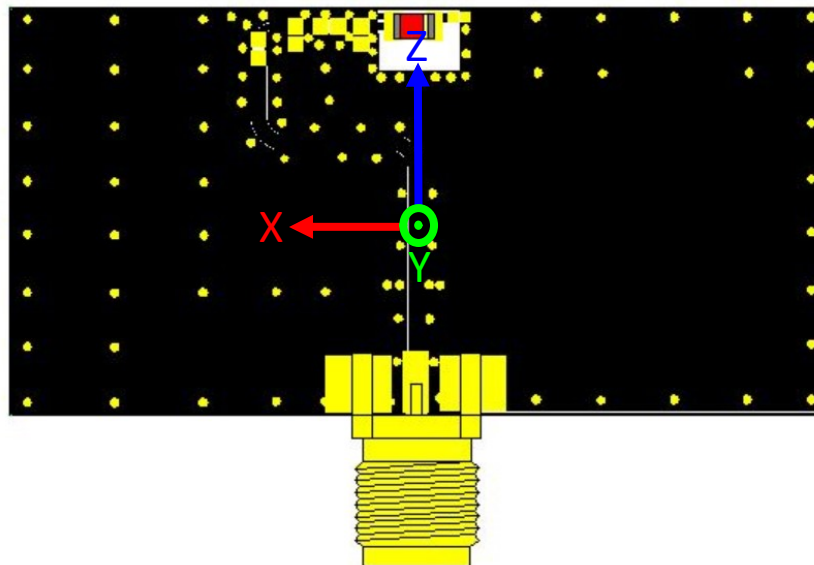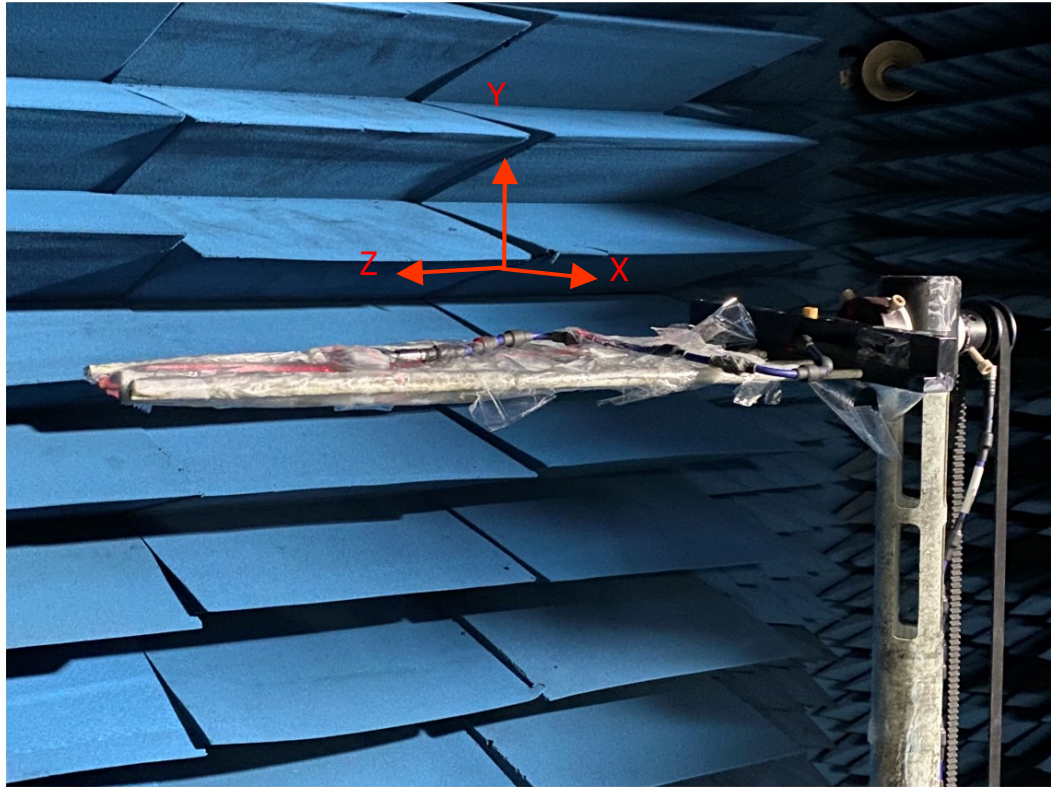


3D Radiation Gain Pattern 2400 MHz (unit: dBi)


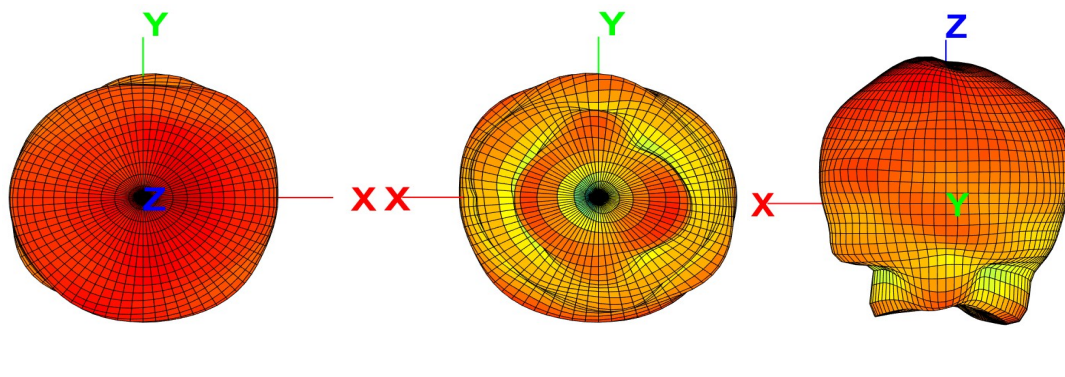


© Unictron Technologies Corp.
All specifications subject to change without notice.


2442 MHz (unit: dBi)

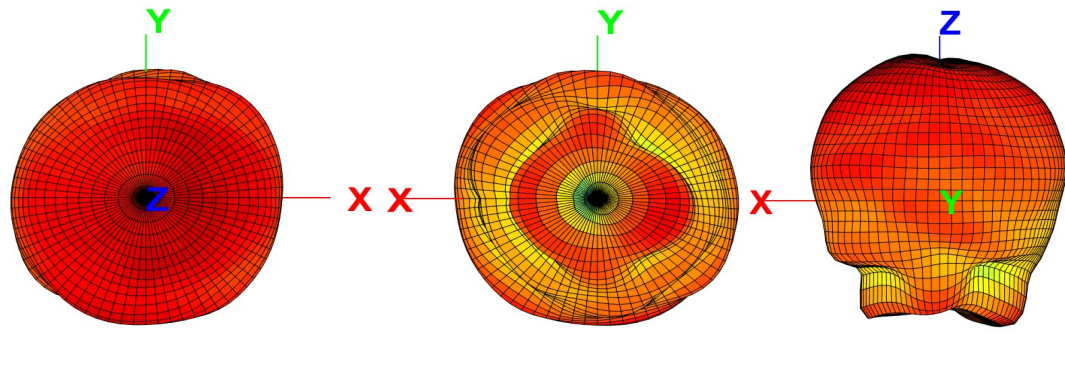


2485 MHz (unit: dBi)

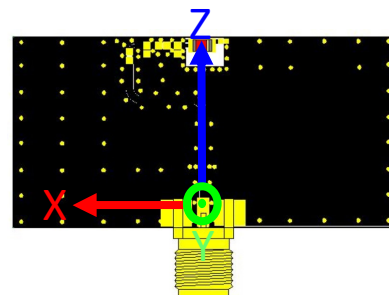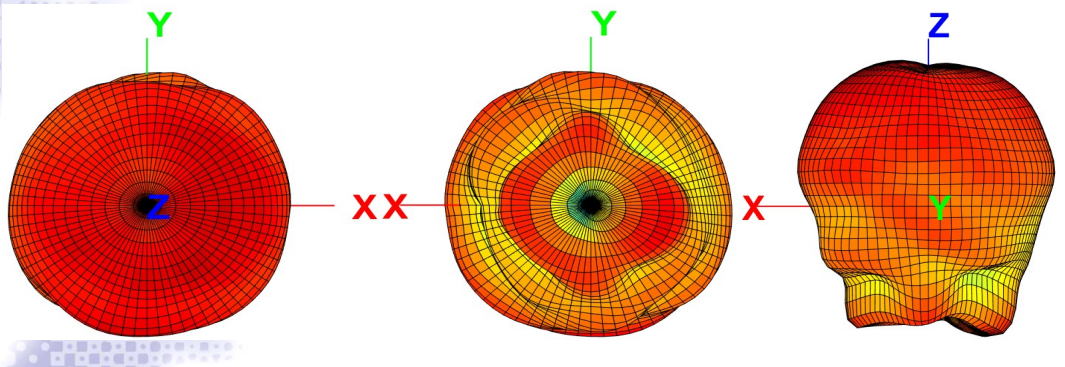


2D Radiation Gain Pattern 2400 MHz (unit: dBi)

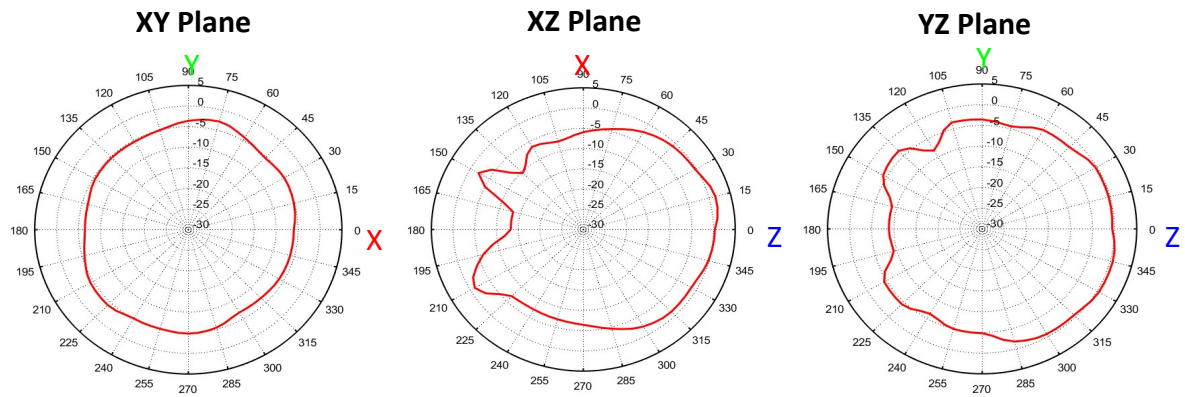

2442 MHz (unit: dBi)


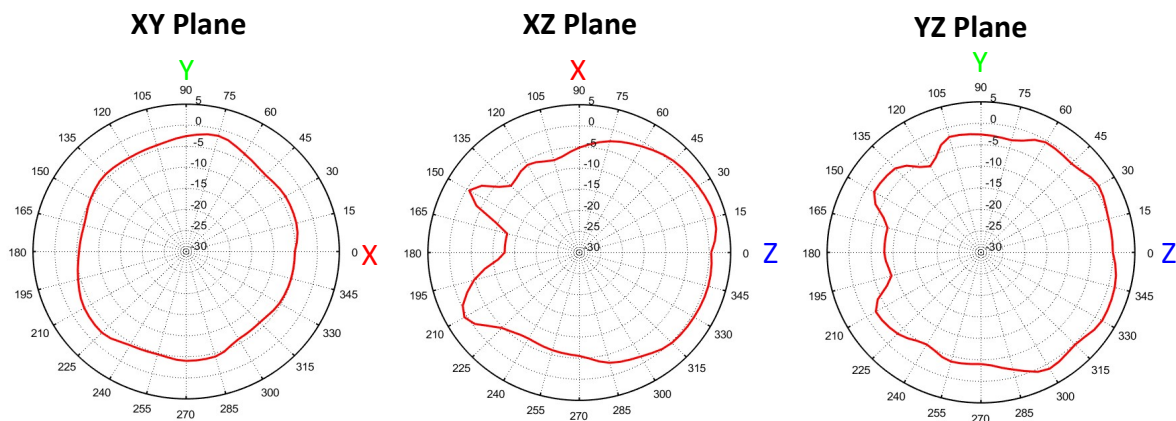


2485 MHz (unit: dBi)

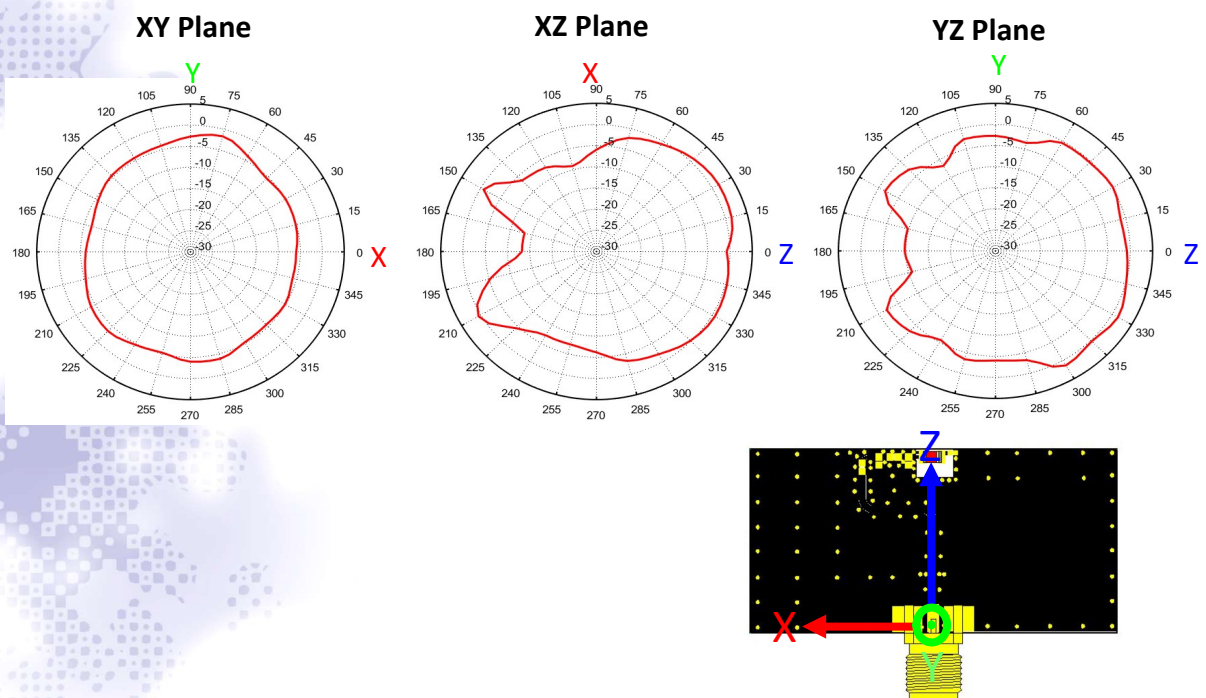

© Unictron Technologies Corp.
All specifications subject to change without notice.

VI. Frequency tuning:

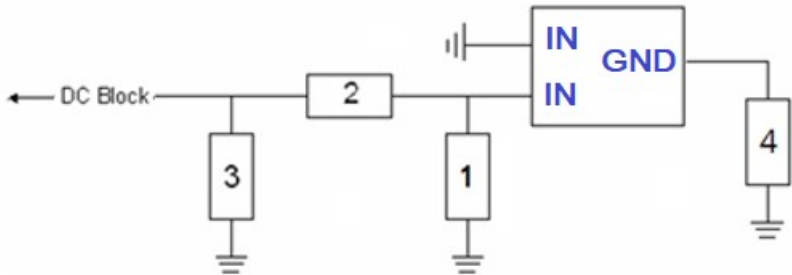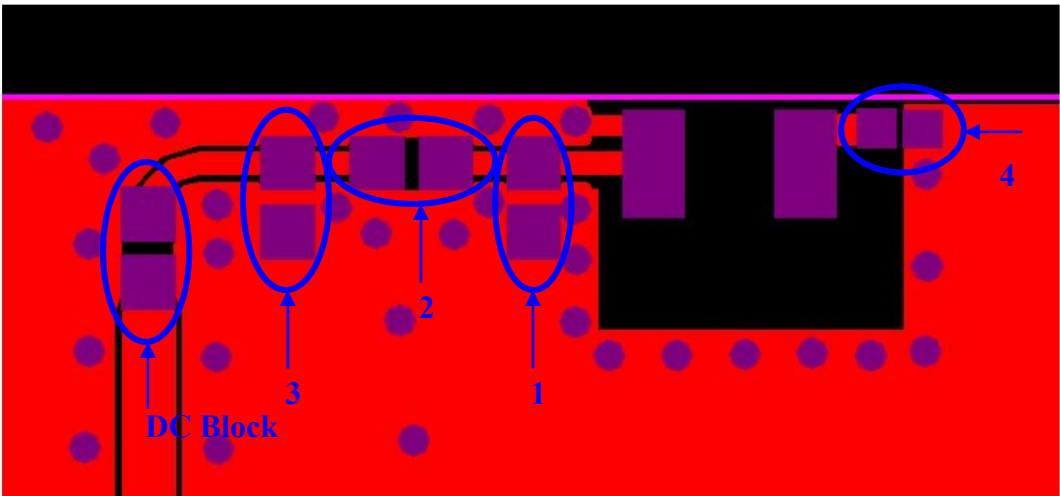


System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/C	-	-
2	5.0 pF (0402)	MURATA	±0.05 pF
3	0.8 pF (0402)	MURATA	±0.05 pF
4	2.7 pF (0201)	MURATA	±0.05 pF
DC Block	22 pF (0402)	MURATA	±5%

© Unictron Technologies Corp.
All specifications subject to change without notice.

VII. Soldering conditions:

Typical Soldering Profile for Lead-free Process

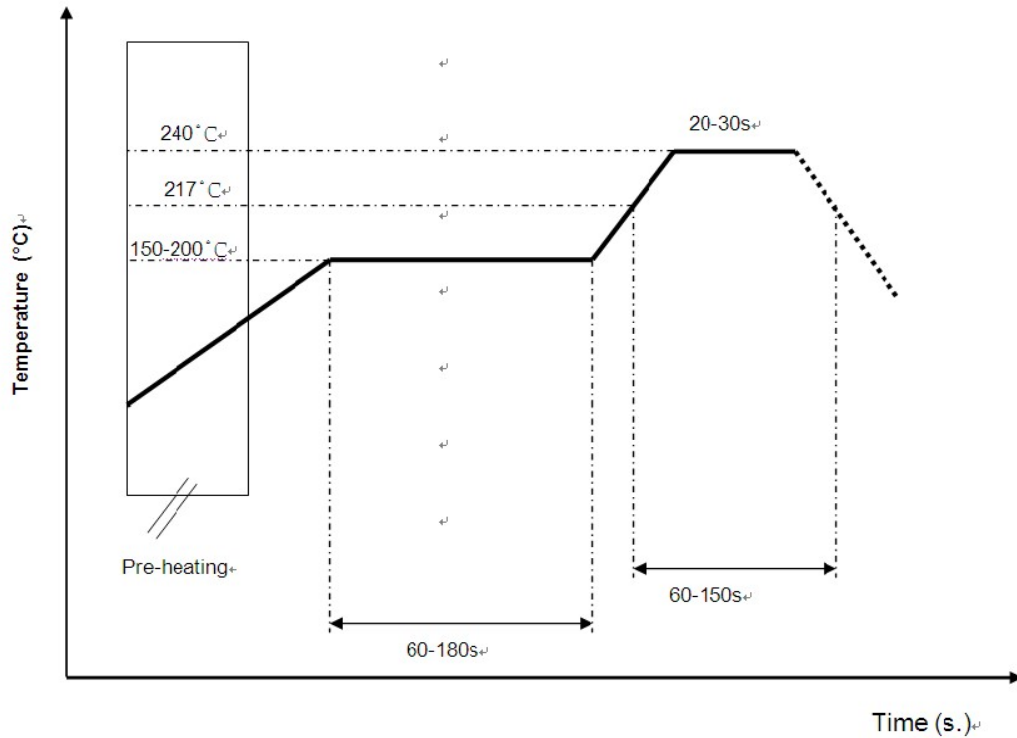

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.

© Unictron Technologies Corp.
All specifications subject to change without notice.

VIII. Reminders for use of Unictron's ceramic chip antennas:

- a) This chip antenna is made of ceramic materials which is relatively more rigid and brittle compared to circuit board materials. Furthermore, the length of this antenna is quite long. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- b) Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- c) Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

IX. Operating & Storage conditions:

a) Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 105°C
- (3) Relative Humidity: 10% to 70%

b) Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

c) Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%

X. Notice

(1) Installation Guide:


Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.


XI. Packing

- (1) Unit Weight: 0.004 ± 0.001 (g) / pcs
- (2) Quantity/Reel: 5000 pcs/Reel
- (3) Plastic tape: Black Conductive Polystyrene.

a. Tape Drawing (unit: mm)

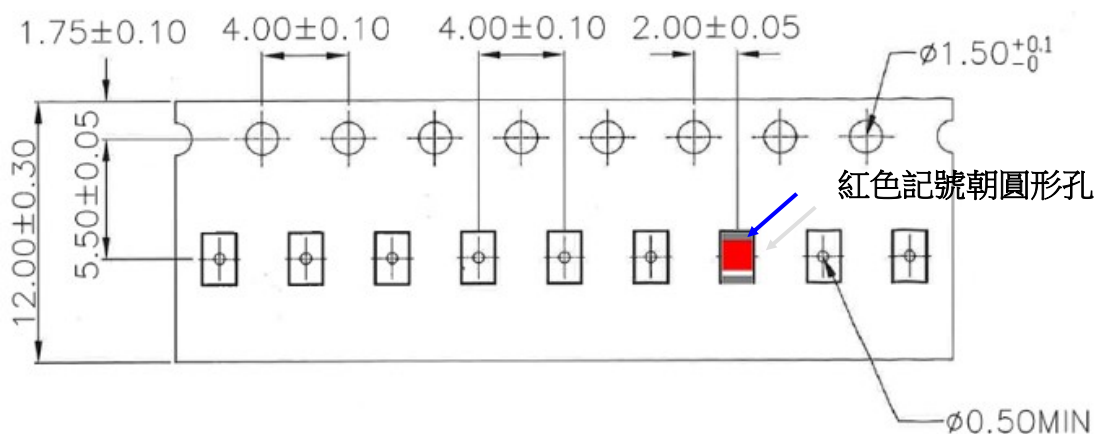

b. Reel Drawing (unit: mm)

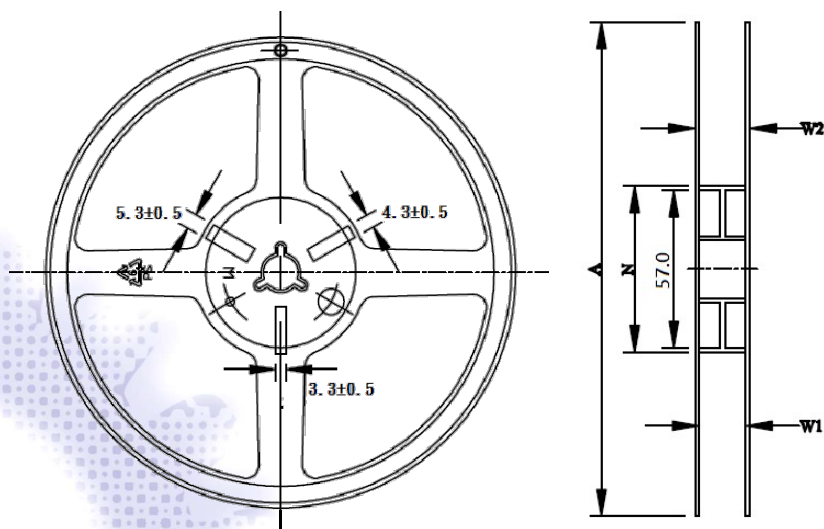

Feature	Specifications	Tolerances
A	178.0	± 1.0
B	2.7	± 0.5
C	13.3	± 0.5
N	60.0	± 0.5
W1	13.7	± 0.5
W2	16.1	± 0.5