

Produkte
Products

Prüfbericht - Nr.: 14044556 001 <i>Test Report No.:</i>		Seite 1 von 15 <i>Page 1 of 15</i>																			
<p>Auftraggeber: Equisense <i>Client:</i> 165 Avenue de Bretagne LILLE (59000) France</p>																					
<p>Gegenstand der Prüfung: Bluetooth Low Energy Motion Tracker <i>Test Item:</i></p>																					
Bezeichnung: <i>Identification:</i>	EQSM01	Serien-Nr.: <i>Serial No.:</i>	Engineering sample																		
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000381733-004 A000381733-005	Eingangsdatum: <i>Date of Receipt:</i>	22.06.2016																		
Prüfort: <i>Testing Location:</i>	<p>TÜV Rheinland Hong Kong Ltd. 8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong</p> <p>Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong</p>																				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>		Test samples are not damaged and suitable for testing.																			
Prüfgrundlage: <i>Test Specification:</i>	<p>FCC Part 15 Subpart C ANSI C63.10-2013</p>																				
Prüfergebnis: <i>Test Results:</i>	<p>Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed.</p>																				
Prüflaboratorium: <i>Testing Laboratory:</i>	<p>TÜV Rheinland Hong Kong Ltd. 8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong</p>																				
geprüft/ tested by:		kontrolliert/ reviewed by:																			
06.09.2016	Mika Chan Project Manager		06.09.2016	Sharon Li Department Manager																	
Datum Date	Name/Stellung Name/Position	Unterschrift Signature	Datum Date	Name/Stellung Name/Position	Unterschrift Signature																
<p>Sonstiges: FCC ID 2AIQJ-EQSM01 <i>Other Aspects</i></p> <table> <tr> <td>Abkürzungen:</td> <td>P(pass) = entspricht Prüfgrundlage</td> <td>Abbreviations:</td> <td>P(pass) = passed</td> </tr> <tr> <td>F(all)</td> <td>= entspricht nicht Prüfgrundlage</td> <td>F(all)</td> <td>= failed</td> </tr> <tr> <td>N/A</td> <td>= nicht anwendbar</td> <td>N/A</td> <td>= not applicable</td> </tr> <tr> <td>N/T</td> <td>= nicht getestet</td> <td>N/T</td> <td>= not tested</td> </tr> </table> <p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugswise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>						Abkürzungen:	P(pass) = entspricht Prüfgrundlage	Abbreviations:	P(pass) = passed	F(all)	= entspricht nicht Prüfgrundlage	F(all)	= failed	N/A	= nicht anwendbar	N/A	= not applicable	N/T	= nicht getestet	N/T	= not tested
Abkürzungen:	P(pass) = entspricht Prüfgrundlage	Abbreviations:	P(pass) = passed																		
F(all)	= entspricht nicht Prüfgrundlage	F(all)	= failed																		
N/A	= nicht anwendbar	N/A	= not applicable																		
N/T	= nicht getestet	N/T	= not tested																		

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants.....	4
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	N/A..... 11
FCC 15.207 – Conducted Emission on AC Mains	Pass..... 11
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement	Pass..... 12
FCC 15.247(b)(3) – Maximum Peak Conducted Output Power	Pass..... 12
FCC 15.247(e) – Power Spectral Density.....	Pass..... 13
FCC 15.247(d) – Spurious Conducted Emissions.....	Pass..... 13
FCC 15.205 – Radiated Emissions in Restricted Frequency Bands.....	Pass..... 14
Appendix 1 – Test protocols	16 pages
Appendix 2 – Test setup	3 pages

Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	5 pages
Appendix 5 – Label, Operational Descriptions, Block Diagram, Schematics, User Manual...	12 pages
Appendix 6 – RF exposure information.....	2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	Chip Antenna
Antenna gain (dBi)	2 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	V_{nor} : 3.7 VDC
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a motion tracker with Bluetooth Low Energy Transceiver operating at 2.4GHz. It is used to link up with smartphone Apps to tracks the rider's training session and the horse's well-being. It operates at the frequency range 2402 – 2480MHz. It has an integral PCB antenna and it is powered by 3.7VDC.

FCC ID 2AIQJ-EQSM01

Models	Product description
EQSM01	Bluetooth Low Energy Motion Tracker

Submitted documents

Circuit Diagram
 Block Diagram
 Bill of material
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- Special software is provided by the applicant to set the device to operate in a fixed frequency channel and maximum RF output power level. The setting of the maximum RF output power shall be fixed on the final product.
- Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

AC/DC power adapter
Brand: Apple
Model: A1399
Input rating: 100-240VAC, 50-60Hz, 0.15A
Output rating: 5VDC, 1.0A

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

The equipment under test (EUT) was placed at the middle of the 80 cm and 1.5m height turntable, and the turntable is 3 meters far from the measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyser to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

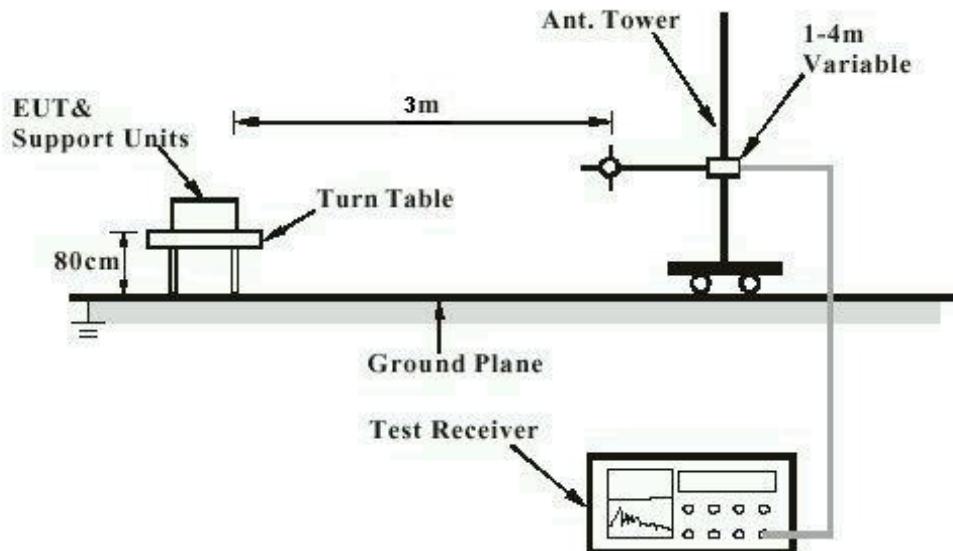

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


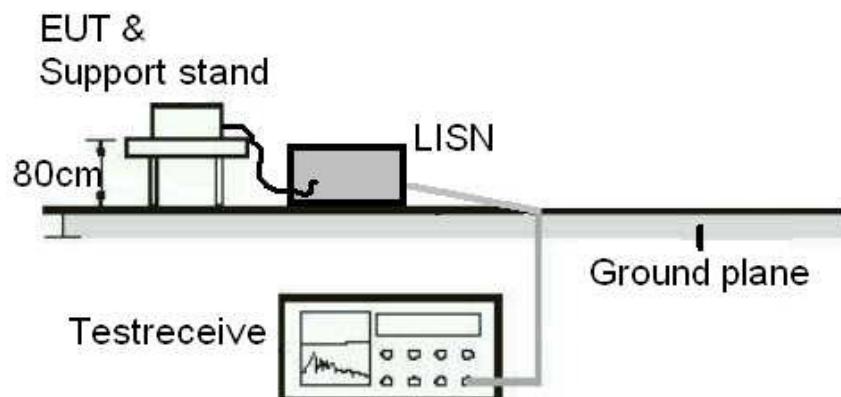


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

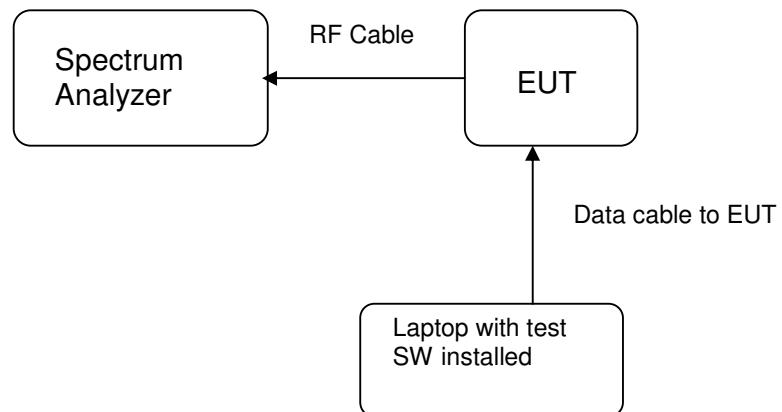

List of Test and Measurement Instruments

Hong Kong Productivity Council (Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	14-Apr-15	25-Apr-17
New Fully Ancheonic Chamber	TDK	N/A	15-Apr-15	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-14	31-Mar-18
Test Receiver	R & S	ESU26	12-Feb-15	07-Dec-16
Bi-conical Antenna	R & S	HK116	01-Sep-15	01-Sep-17
Log Periodic Antenna	R & S	HL223	01-Sep-15	01-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-14	10-Jun-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	17-May-15	15-Aug-16

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESU40	07-Dec-15	07-Dec-16
RF Voltage Probe	Schwarzbeck	TK9416	11-Feb-16	11-Feb-17
LISN	R&S	ESH3-Z5	15-Jun-16	15-Jun-17
Double Shield Cable	Radiall	RG142	14-Sep-15	14-Sep-17
Pulse Limiter	R&S	ESH3-Z2	03-Jun-16	03-Jun-18

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	12-Jan-15	12-Jan-2017

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: b) Manufacturer and model no: c) Peak Gain:	Chip antenna N/A 2.0 dBi
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		Pass									
Test Specification : ANSI C63.10 – 2013											
Mode of operation : TX mode											
Port of testing : AC Mains input port of power supply											
Detector : Quasi-peak and Average											
RBW/VBW : 9KHz											
Supply voltage : 3.7 Vdc											
Temperature : 23°C											
Humidity : 50%											
Requirement: 15.207 (a)											
Results: For test protocols please refer to Appendix 1.											
Live measurement											
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict					
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass					
> 0,5 - 5	0.706	39.7	34.8	56	46	Pass					
> 5 - 30	No peak found	---	---	60	50	Pass					
Neutral measurement											
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict					
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass					
> 0,5 - 5	0.702	37.1	30.7	56	46	Pass					
> 5 - 30	No peak found	---	---	60	50	Pass					

FCC 15.247 (a)(2) – 6dB Bandwidth Measurement		Pass	
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : KDB 558074 D01 DTS Measurement Guidance v03r04 section 8.1 Option 1 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100KHz/ 300KHz Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.620	2402.210	486
2440	2439.724	2440.208	484
2480	2479.722	2480.210	488

FCC 15.247(b)(3) – Maximum Peak Couducted Output Power		Pass	
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : KDB 558074 D01 DTS Measurement Guidance v03r04 section 9.1.1 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1MHz/ 3MHz Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	-1.74	1 / 30.0	Pass
2440	-1.27	1 / 30.0	Pass
2480	-0.80	1 / 30.0	Pass

FCC 15.247(e) – Power Spectral Density		Pass	
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : KDB 558074 D01 DTS Measurement Guidance v03r04 section 10.2 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 KHz / 300KHz Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	-1.58	8.0	Pass
2440	-1.18	8.0	Pass
2480	-0.70	8.0	Pass

FCC 15.247(d) – Spurious Conducted Emissions		Pass			
Test Specification : KDB 558074 D01 DTS Measurement Guidance v03r04 section 11.1 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7 Vdc Temperature : 23 °C Humidity : 50 %					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1.					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	9480.00	-40.49	-1.58	38.91	Pass
2440	4880.00	-39.98	-1.18	38.80	Pass
2480	7440.00	-40.33	-0.70	39.63	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands			Pass
Test Date	:	11-Aug-2016	
Test Specification	:	ANSI C63.10 – 2013	
Mode of operation	:	TX mode	
Port of testing	:	Enclosure	
Detector	:	Peak	
RBW/VBW	:	100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	:	3.7 Vdc	
Temperature	:	23°C	
Humidity	:	50%	
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).			
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.		
Mode: 2402MHz TX	Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4803.711	53.45	74.0 / PK	
4803.951	38.90	54.0 / AV	
Mode: 2402 MHz TX	Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4804.240	54.83	74.0 / PK	
4803.887	43.40	54.0 / AV	
Mode: 2440 MHz TX	Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4879.663	53.60	74.0 / PK	
4879.903	40.73	54.0 / AV	
Mode: 2440 MHz TX	Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4880.240	54.09	74.0 / PK	
4880.000	43.05	54.0 / AV	
Mode: 2480MHz TX	Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4959.759	54.16	74.0 / PK	
4959.951	44.04	54.0 / AV	

Mode: 2480 MHz TX		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4960.192	54.20	74.0 / PK
4959.951	44.46	54.0 / AV